


RETLIF TESTING LABORATORIES

Test Method	FCC 15.249(c) Occupied Bandwidth, 2.4-2.4835GHz		
Customer	Symbol Technologies	Job No.	R-8637-1
Test Sample	Pulsed RF Transmitter		
Model No.	N/A	Serial No.	N/A
Test Specification	FCC Part 15, subpart C	Paragraph	15.249(c)
Operating Mode	EUT Continuously transmitting a RF signal at 2.402GHz		
Technician	Peter Lananna	Date	July 25, 2000
Notes	Spurious emissions outside the band were attenuated to the general radiated emissions limit of 15.209(a). See Spurious data sheets.		


Sheet 1 of 3

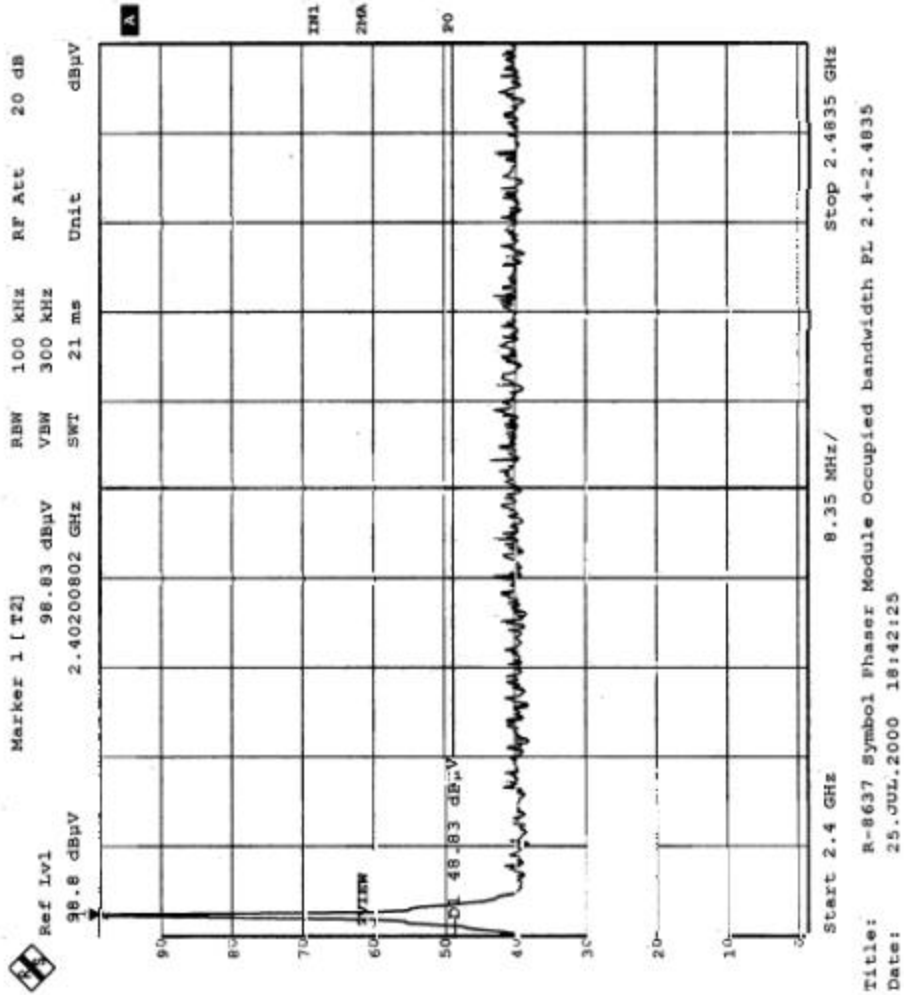

RETLIF TESTING LABORATORIES

Test Method	FCC 15.249(c) Occupied Bandwidth, 2.4-2.4835GHz		
Customer	Symbol Technologies	Job No.	R-8637-1
Test Sample	Pulsed RF Transmitter		
Model No.	N/A	Serial No.	N/A
Test Specification	FCC Part 15, subpart C	Paragraph	15.249(c)
Operating Mode	EUT Continuously transmitting a RF signal at 2.445GHz.		
Technician	Peter Lananna	Date	July 25, 2000
Notes	Spurious emissions outside the band were attenuated to the general radiated emissions limit of 15.209(a). See Spurious data sheets.		

Sheet 2 of 3

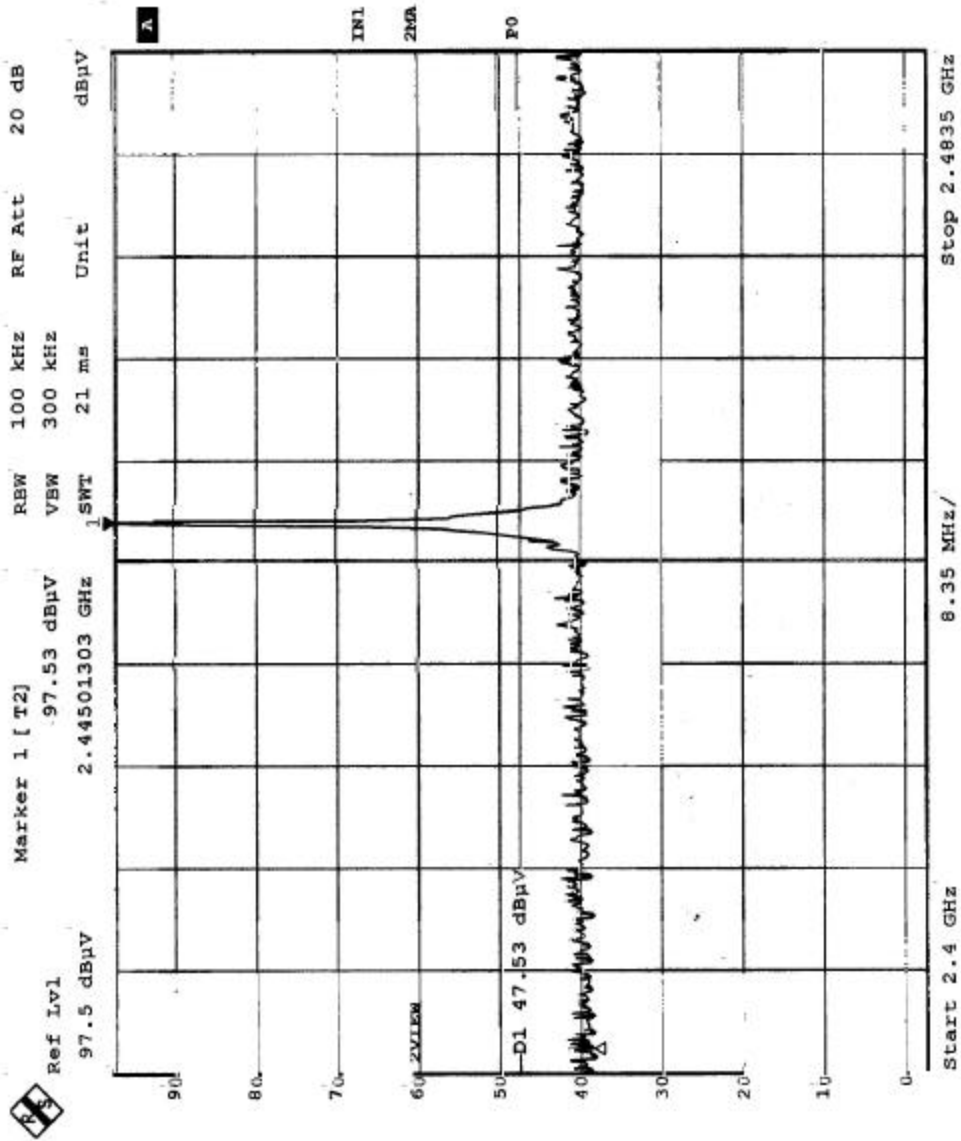

Title: R-8637 Symbol Phaser Module Occupied bandwidth PL 2.4-2.4835
 Date: 25.JUL.2000 18:38:59

RETLIF TESTING LABORATORIES

Test Method	FCC 15.249(c) Occupied Bandwidth, 2.4-2.4835GHz		
Customer	Symbol Technologies	Job No.	R-8637-1
Test Sample	Pulsed RF Transmitter		
Model No.	N/A	Serial No.	N/A
Test Specification	FCC Part 15, subpart C	Paragraph	15.249(c)
Operating Mode	EUT Continuously transmitting a RF signal at 2.482GHz.		
Technician	Peter Lananna	Date	July 26, 2000
Notes	Spurious emissions outside the band were attenuated to the general radiated emissions limit of 15.209(a). See Spurious data sheets.		

Sheet 3 of 3

