

FCC ID: HAP602751T

Exhibit 1 - Test Report



F C C TEST REPORT

REPORT NO : 16125/8/400F



FCC - Test Report

No. 16125/8/400F

Date: <u>1998-03-31</u>

Page 2 of 11

FCC listed testlab acc. to Section 2.948 of the FCC - Rules

in compliance with the requirements of ANSI C63.4 - 1992

Product :

Remote Control Car -- 49 MHz

Transmitter

Model

60-2751

Applicant

ECHO TOYS LTD

Manufacturer:

ECHO ELECTRONIC TOYS

FACTORY



FCC - Test Report

No. 16125/8/400F

Date: 1998-03-31

Page 3 of 11

TABLE OF CONTENTS

1.	Cover	sheet

- 2. Introduction
- 3. Table of Contents
- 4. Laboratory Report
- 5. Summary of Testresults
- Test Equipment List
- Radiated Emission Testprocedure
- 8. Interference Radiation (Datasheet)
- 9. Notes for Radiation Measurement (acc. to ANSI C63.4 1992)
- 10. Measurement of Emissions within Band Edges (Datasheet)
- 11. Notes for Measurement of Emissions within Band Edges



FCC - Test Report

No. 16125/8/400F

Date: <u>1998-03-31</u>

Page 4 of 11

LABORATORY - REPORT

APPLICANT:

ECHO TOYS LTD

ADDRESS:

8 A&B, Block 1, Tai Ping Industrial Centre

57 Ting Kok Road

Taipo, NT HONG KONG

DATE OF SAMPLE RECEIVED:

1998-03-23

DATE OF TESTING:

1998-03-24

DESCRIPTION OF SAMPLE:

Product:

Remote Control Car -- 49 MHz Transmitter

Manufacturer:

ECHO ELECTRONIC TOYS FACTORY

Model number:

60-2751

Rating:

DC 9V ('6F22' Size Battery x 1)

Country of Origin:

P.R. CHINA

INVESTIGATIONS REQUESTED:

Measurements to the relevant clauses of F.C.C. Rules and Regulations

Part 15 Subpart C - Intentional Radiators

RESULTS:

See the attached test sheets

CONCLUSIONS

From the measurement data obtained, the tested sample was considered to have COMPLIED with the requirements for the relevant clauses of Federal Communications Commission Rules as specified above.



Remark: Purpose of those tests in this report is to provide the applicant with the necessary test data of their device for the submission to FCC with application for Equipment Authorization under the FCC Equipment Authorization Program. The tests themselves are not Approval Tests



FCC – Test Report

No. 16125/8/400F

Date: <u>1998-03-31</u>

Page 5 of 11

Summary of Test Results

Interference Radiation:

Test result:

O.K.

Test data:

See attached data sheet

Interference Voltage:

Test result:

N.A.

Test data:

N.A.

Measurement of Emissions within Band Edges

Test result:

O.K.

Test data:

See attached data sheet



FCC – Test Report

No. 16125/8/400F

Date: 1998-03-31

Page 6 of 11

TEST EQUIPMENT LIST

Equipment	Manufacturer	Model	Serial Number	Remark 10KHz – 30MHz		
Test Receiver	Rohde & Schwarz	ESH 3	863497/015			
est Receiver Rohde & Schwarz		ESVP	860688/022	25MHz – 1,300 MHz		
Artificial Mains Network (LISN)	Schwarzbeck	NSLK 8127		2 x 10A, 50Ω, 50μH 10KHz-30MHz		
Antenna System	Schwarzbeck	BBA 9106 / UHALP 9107		30MHz – 1000MHz		
Antenna Mast Schwarzbeck System		AM9104		Max. 4 meters height		
pectrum Tektronix nalyzer with Q. eak		2712	B023006	9KHz – 1.8GHz		
Interface for Spectrum 2712	Tektronix	TD3F14A				
Test Receiver Rohde & Schwarz		ESH 3	892580/006	10KHz – 30MHz		
Test Receiver	Rohde & Schwarz	ESVP	863512/012	25MHz – 1,300 MHz		
Impulse Limiter	Rohde & Schwarz	ESH-3-Z2				
Artificial Mains Network (LISN)	Schwarzbeck	NSLK 8127		2 x 10A, 50Ω, 50μH 10KHz-30MHz		
Antenna System	em Schwarzbeck BBA 9106 / UHALP 9107			30MHz – 1000MHz		
Signal Generator	Rohde & Schwarz	SWS 2	879113/42	100KHz – 1040 MHz		
Digital Multimeter	Digital Multimeter Tektronix		DM- 2510GTW1055 5	10KHz – 30MHz		
Turntable with Controller	Drehtisch	DT312		φ120 cm		




FCC - Test Report

No. 16125/8/400F

Date: 1998-03-31

Page 7 of 11

Radiated Emission Test Procedure

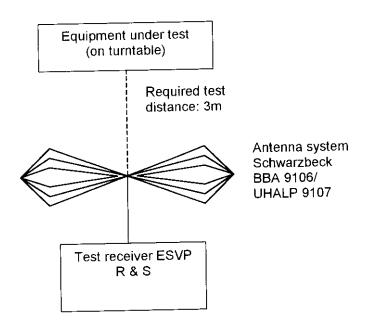



Interference Radiation

Measurement of Radiated Emissions (30MHz-1000MHz)

Acc: FCC Part 15 Subpart C International Electrical Certification Centre Ltd.

IECC Ref:	16125/8/400F	
Model:	60-2751	
Applicant:	ECHO TOYS LTD	
Ser.Nr.:	1	

Remote Control Car

Set under test: Connected sets:


Power "On" Operating mode:

Test Equipment

Receiver: ESVP Rohde & Schwarz Antenna: Schwarzbeck BBA 9106

and UHALP 9107

		Frequency (MHz)	1	teading µV)		Vert. Reading dB(µV)	Antenna Factor (dB)	R	iz. Test esult ıV/m)	Vert. Test Result (μV/m)	Limit (µV/m)
Peak	ł	49.86		54		64.5	7.7		1222	4093	
Av.	ŀ	49.86		52	_	63	7.7		971	3444	
	2	99.72		26.5		24	8.5		57	42	150
	3	149.58		23		22.5	13.0		63	60	
1 100	4	199.44		17.5	<	16	15.1		43		
	5	249.3	1	17.5		16.5	16.7		51	46	
	6	299.16	<	16	<	16	18.0	<	50		
Harm.	7	349.02		17.5	<	16	17.4		55		
	8	398.88		20.5		16	18.3		87	52	
	9	448.74		17		17.5	19.0	<u> </u>	63	67	
	0	498.6	<	16		17.5	19.7	<	61	72	
Harm. 1	1	548.46		16	<u></u>	16	20.2		64		
	2	598.32	<	16	<	16	20.9	<	70		
Harm. 1	3			16.5	<	16	21.6		80		
Harm. 1			<	16	<	16	22.4	<	83		
Harm. 1			<	16	<	16	23.0	<	90		
Harm. 1			<	16	<	16	23.7	<	96		
Harm. 1			<	16	Γ.	17.5	24.3	<	104		
Harm. 1			<	16	<	16	25.0	<	112		
	19		<	16	<	16	25.7	<	122	< 122	200

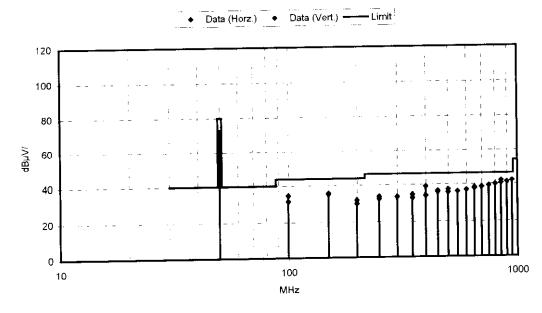

Date:



FCC - Test Report

No. 16125/8/400F

Date: 1998-03-31

Page 9 of 11

Notes for Radiation Measurement

1. Measurement facility:

Measurement facility located at Fanling (Hong Kong), placed on file with the FCC Pursuant to Section 2.948 of the FCC Rules.

2. Distance between the EUT and measuring antenna:

3 meters.

3. Measuring instrumentations:

Rohde & Schwarz ESVP Test Receiver (20 - 1300 MHz) with a CISPR weighting QP detector, 6 dB bandwidth set at 120 KHz.

4. Measuring antenna:

Broad-band antenna for the frequency range 30 - 300 MHz and frequency range 300 - 1000 MHz, connected with 10 meters coaxial cable. Cable loss of the coaxial cable included in the Antenna Factor for measurement data. The antennas are capable of measuring both horizontal and vertical polarizations.

5. Frequency range scanned:

The frequency range 30 - 5000 MHz has been scanned. Readings of the highest emissions relating to the limit were reported as above.

6. Arrangement of EUT:

During the test, the sample was operated at rated supply voltage and arranged for maximum emissions.

7. Measuring Procedure:

In accordance with the relevant sections of the American National Standards Institute (ANSI) C63.4-1992 'Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9KHz to 40GHz'.




Measurement of Emissions within band edges

International Electrical Certification Centre Ltd.

Acc: FCC Part 15 Subpart C

IECC Ref: 16125/8/400F 60-2751 Model: ECHO TOYS LTD Applicant: Ser.Nr.: Remote Control Car Set under test: Connected sets: Power "On" Operating mode:

Test Equipment spectrum Analyzer: Tektronix 2712

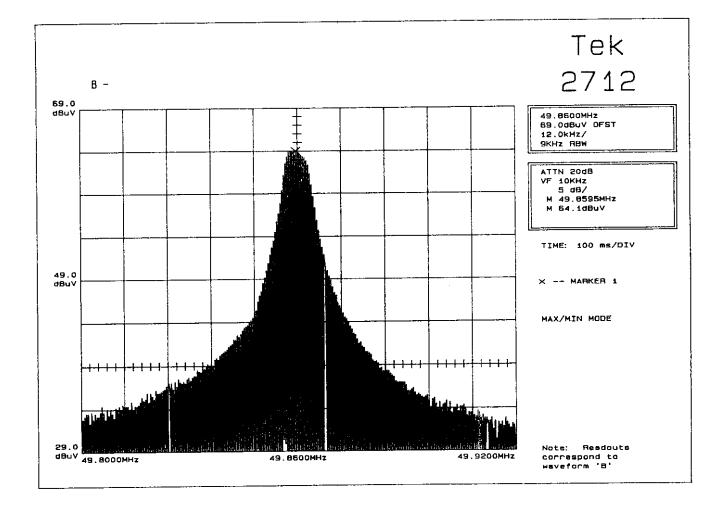



FCC – Test Report

No. 16125/8/400F

Date: 1998-03-31

Page 11 of 11

Notes for Measurement of Emissions within Band Edges

1. Measurement facility:

Measurement facility located at Fanling (Hong Kong) placed on file with the FCC Pursuant to Section 2.948 of the FCC Rules.

2. Measuring instrumentations:

Spectrum Analyzer: Tektronix 2712

3. Frequency range scanned:

The frequency range acc. to FCC rules and regulations part 15 subpart C - Intentional Radiators.

4. Arrangement of EUT:

During the test, the sample was operated.

5. Measuring Procedure:

In accordance with the relevant sections of American National Standards Institute (ANSI) C63.4 - 1992 'Methods of Measurement od Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz'.