



INTERNATIONAL ELECTRICAL CERTIFICATION CENTRE LTD.

**F C C -
TEST REPORT**

REPORT NO.: 19092/9/400F

Units 602-605, 6/F., 31 Lok Yip Road, On Lok Tsuen, Fanling, N.T., Hong Kong
Tel: [852] 2305-2570 Fax: [852] 2756-4480



INTERNATIONAL
ELECTRICAL
CERTIFICATION
CENTRE LTD.

FCC – Test Report

No. 19092/9/400F

Date: 1999-05-29

Page 2 of 9

FCC listed testlab
acc. to Section 2.948 of the FCC - Rules

in compliance with the requirements of
ANSI C63.4 - 1992

Product : Remote Control Car -- 49 MHz
Receiver

Model : 60-4224 (49MHz)

Importer : ECHO TOYS LTD

Manufacturer : ECHO ELECTRONIC TOYS
FACTORY



INTERNATIONAL
ELECTRICAL
CERTIFICATION
CENTRE LTD.

FCC – Test Report

No. 19092/9/400F

Date: 1999-05-29

Page 3 of 9

TABLE OF CONTENTS

1. Cover sheet
2. Introduction
3. Table of Contents
4. Laboratory Report
5. Summary of Testresults
6. Test Equipment List
7. Radiated Emission Testprocedure
8. Interference Radiation (Datasheet)
9. Notes for Radiation Measurement (acc. to ANSI C63.4 - 1992)

 INTERNATIONAL ELECTRICAL CERTIFICATION CENTRE LTD.	FCC – Test Report No. 19092/9/400F	Date: <u>1999-05-29</u> Page 4 of 9
---	---	--

LABORATORY - REPORT

APPLICANT: ECHO TOYS LTD
ADDRESS: 8 A&B, Block 1, Tai Ping Industrial Centre
57 Ting Kok Road
Taipo, NT
HONG KONG

DATE OF SAMPLE RECEIVED: 1999-04-09

DATE OF TESTING: 1999-05-29

DESCRIPTION OF SAMPLE:

Product: Remote Control Car -- 49 MHz Receiver
Manufacturer: ECHO ELECTRONIC TOYS FACTORY
Model number: 60-4224 (49MHz)
Additional model number: --
Rating: DC 9V ('AA' Size Battery x 6)
Country of Origin: P.R. CHINA

INVESTIGATIONS REQUESTED: Measurements to the relevant clauses of F.C.C. Rules and Regulations
Part 15 Subpart B – 'Unintentional Radiators'

RESULTS: See the attached test sheets

CONCLUSIONS From the measurement data obtained, the tested sample was considered to have COMPLIED with the requirements for the relevant clauses of Federal Communications Commission Rules as specified above.

_____**Signed in the original copy**_____

Authorized Signature

Remark: Purpose of those tests in this report is to provide the applicant with the necessary test data of their device for the submission to FCC with application for Equipment Authorization under the FCC Equipment Authorization Program. The tests themselves are not Approval Tests

Summary of Test Results

Interference Radiation:

Test result: O.K.
Test data: See attached data sheet


Interference Voltage:

Test result: N.A.
Test data: N.A.

TEST EQUIPMENT LIST

Equipment	Manufacturer	Model	Serial No.	Remark
Test Receiver	Rohde & Schwarz	ESH 3	863497/015	10KHz – 30MHz
Test Receiver	Rohde & Schwarz	ESVP	860688/022	25MHz – 1,300 MHz
Artificial Mains Network (LISN)	Schwarzbeck	NSLK 8127	--	2 x 10A, 50Ω, 50μH 10KHz-30MHz
Antenna System	Schwarzbeck	BBA 9106 / UHALP 9107	--	30MHz – 1000MHz
Antenna Mast System	Schwarzbeck	AM9104	--	Max. 4 meters height
Spectrum Analyzer with Q. Peak	Tektronix	2712	B023006	9KHz – 1.8GHz
Interface for Spectrum 2712	Tektronix	TD3F14A	--	
Test Receiver	Rohde & Schwarz	ESH 3	892580/006	10KHz – 30MHz
Test Receiver	Rohde & Schwarz	ESVP	863512/012	25MHz – 1,300 MHz
Impulse Limiter	Rohde & Schwarz	ESH-3-Z2	--	
Artificial Mains Network (LISN)	Schwarzbeck	NSLK 8127	--	2 x 10A, 50Ω, 50μH 10KHz-30MHz
Antenna System	Schwarzbeck	BBA 9106 / UHALP 9107	--	30MHz – 1000MHz
Signal Generator	Rohde & Schwarz	SWS 2	879113/42	100KHz – 1040 MHz
Digital Multimeter	Tektronix	DM2510G	DM- 2510GTW105 55	10KHz – 30MHz
Turntable with Controller	Drehtisch	DT312	--	φ120 cm

Radiated Emission Testprocedure

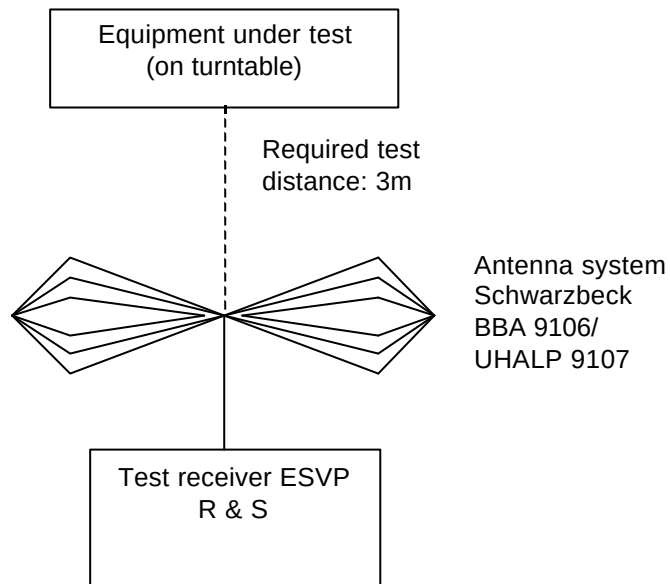




Radiation Measurement Data

Ref: '19092' Receiver

Freq	Horiz.	Vert.	Factor	H. Result	V. Result	Limit
MHz	dB(μV)	dB(μV)	dB	μV/m	μV/m	μV/m
43.0	17	19.5	9.4	21	28	100
51.0	19	19.5	6.8	19	21	100
55.4	21	25	6.2	23	36	100
58.76	20	24.5	5.7	19	32	100
80.0	<16	<16	5.0	<11	<11	100
150.0	<16	<16	13.0	<28	<28	150
189.0	21.5	18	14.8	65	44	150
197.7	23	17.5	15.0	79	42	150
203.9	19.5	16	15.2	54	36	150
232.2	21	18.5	16.2	72	54	200
276.2	19.5	18	17.5	71	60	200
298.0	<16	16.5	18.0	<50	53	200
400.0	<16	<16	18.3	<52	<52	200
500.0	<16	<16	19.7	<61	<61	200
1000.0	<16	<16	26.5	<133	<133	500

Conclusion: All data were within limits

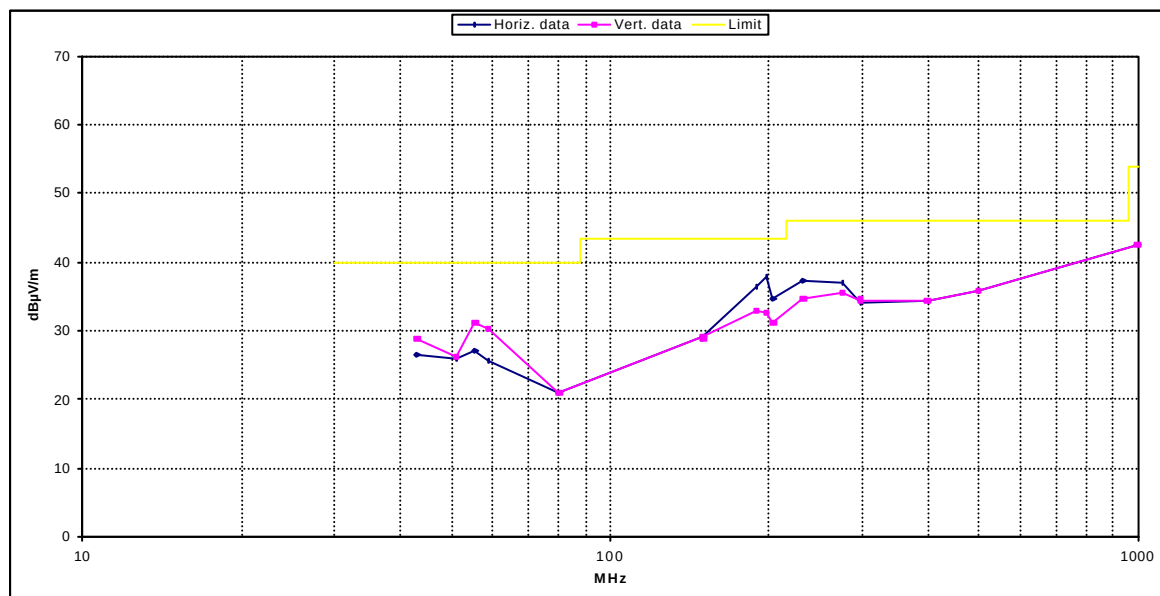

 INTERNATIONAL ELECTRICAL CERTIFICATION CENTRE LTD.	FCC – Test Report No. 19092/9/400F	Date: <u>1999-05-29</u> Page 9 of 9
---	---	--

Notes for Radiation Measurement

1. Measurement facility:

Measurement facility located at Fanling (Hong Kong), placed on file with the FCC Pursuant to Section 2.948 of the FCC Rules.

2. Distance between the EUT and measuring antenna:

3 meters.

3. Measuring instrumentations:

Rohde & Schwarz ESVP Test Receiver (20 - 1300 MHz) with a CISPR weighting QP detector, 6 dB bandwidth set at 120 KHz.

4. Measuring antenna:

Broad-band antenna for the frequency range 30 - 300 MHz and frequency range 300 - 1000 MHz, connected with 10 meters coaxial cable. Cable loss of the coaxial cable included in the Antenna Factor for measurement data. The antennas are capable of measuring both horizontal and vertical polarizations.

5. Frequency range scanned:

The frequency range 30 - 1000 MHz has been scanned. Readings of the highest emissions relating to the limit were reported as above.

6. Arrangement of EUT:

During the test, the sample was operated at rated supply voltage and arranged for maximum emissions.

7. Measuring Procedure:

In **accordance** with the relevant sections of the American National Standards Institute (ANSI) C63.4-1992 'Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9KHz to 40GHz'.