

# **F C C - TEST REPORT**

REPORT NO.: 31558B/2/400F

# **FCC – Test Report**

Date: 2002-09-05

No. 31558B/2/400F

Page 2 of 11

FCC listed testlab  
acc. to Section 2.948 of the FCC - Rules  
in compliance with the requirements of  
ANSI C63.4 - 1992

**Product** : Speed Boat

**Product Class** : Low Power Communication Device  
Receiver

**Model** : 90415

**Importer** : ECHO TOYS LTD

# **FCC – Test Report**

**No. 31558B/2/400F**

Date: 2002-09-05

Page 3 of 11

## **TABLE OF CONTENTS**

1. Cover sheet
2. Introduction
3. Table of Contents
4. Laboratory Report
5. Summary of Testresults
6. Test Equipment List
7. Radiated Emission Testprocedure (> 30MHz)
8. Radiated Emission Testprocedure (9kHz – 30MHz)
9. Interference Radiation (Datasheet)
10. Cohere Plot at Fundamental Frequency
11. Notes for Radiation Measurement (acc. to ANSI C63.4 - 1992)

# FCC – Test Report

Date: 2002-09-05

No. 31558B/2/400F

Page 4 of 11

## LABORATORY - REPORT

**APPLICANT:** ECHO TOYS LTD  
**ADDRESS:** Room 1108 Peninsula Centre  
67 Mody Road  
Tsimshatsui East, Kowloon  
HONG KONG

**DATE OF SAMPLE RECEIVED:** 2002-08-26

**DATE OF TESTING:** 2002-08-28

### DESCRIPTION OF SAMPLE:

Product: Speed Boat  
Product class: Low Power Communication Device Receiver  
Model number: 90415  
Rating: DC 6V ('AA' Size Battery x 4)  
Country of Origin: P.R. CHINA

**INVESTIGATIONS REQUESTED:** Measurements to the relevant clauses of F.C.C. Rules and Regulations  
Part 15 Subpart B – 'Unintentional Radiators'

**RESULTS:** See the attached test sheets

**CONCLUSIONS** From the measurement data obtained, the tested sample was considered to have COMPLIED with the requirements for the relevant clauses of Federal Communications Commission Rules as specified above.

---

Authorized Signature

**Remark:** Purpose of those tests in this report is to provide the applicant with the necessary test data of their device for the submission to FCC with application for Equipment Authorization under the FCC Equipment Authorization Program. The tests themselves are not Approval Tests

# FCC – Test Report

No. 31558B/2/400F

Date: 2002-09-05

Page 5 of 11

## Summary of Test Results

### Interference Radiation:

Test result: O.K.  
Test data: See attached data sheet

### Interference Voltage:

Test result: N.A.  
Test data: N.A.

### PHOTOGRAPH OF THE SAMPLE



# FCC – Test Report

Date: 2002-09-05

No. 31558B/2/400F

Page 6 of 11

## TEST EQUIPMENT LIST

| Equipment                         | Manufacturer    | Model                    | Serial No.              | Remark                            |
|-----------------------------------|-----------------|--------------------------|-------------------------|-----------------------------------|
| Test Receiver                     | Rohde & Schwarz | ESH 3                    | 863497/015              | 10KHz – 30MHz                     |
| Test Receiver                     | Rohde & Schwarz | ESVP                     | 860688/022              | 25MHz – 1,300 MHz                 |
| Artificial Mains Network (LISN)   | Schwarzbeck     | NSLK 8127                | --                      | 2 x 10A, 50Ω, 50μH<br>10KHz-30MHz |
| Antenna System                    | Schwarzbeck     | BBA 9106 /<br>UHALP 9107 | --                      | 30MHz – 1000MHz                   |
| Antenna Mast System               | Schwarzbeck     | AM9104                   | --                      | Max. 4 meters height              |
| Spectrum Analyzer with<br>Q. Peak | Tektronix       | 2712                     | B023006                 | 9KHz – 1.8GHz                     |
| Interface for Spectrum<br>2712    | Tektronix       | TD3F14A                  | --                      |                                   |
| Test Receiver                     | Rohde & Schwarz | ESH 3                    | 892580/006              | 10KHz – 30MHz                     |
| Test Receiver                     | Rohde & Schwarz | ESVP                     | 863512/012              | 25MHz – 1,300 MHz                 |
| Impulse Limiter                   | Rohde & Schwarz | ESH-3-Z2                 | --                      |                                   |
| Artificial Mains Network (LISN)   | Schwarzbeck     | NSLK 8127                | --                      | 2 x 10A, 50Ω, 50μH<br>10KHz-30MHz |
| Antenna System                    | Schwarzbeck     | BBA 9106 /<br>UHALP 9107 | --                      | 30MHz – 1000MHz                   |
| Signal Generator                  | Rohde & Schwarz | SWS 2                    | 879113/42               | 100KHz – 1040 MHz                 |
| Digital Multimeter                | Tektronix       | DM2510G                  | DM-<br>2510GTW105<br>55 | 10KHz – 30MHz                     |
| Turntable with<br>Controller      | Drehtisch       | DT312                    | --                      | φ120 cm                           |


# FCC – Test Report

No. 31558B/2/400F

Date: 2002-09-05

Page 7 of 11

## Radiated Emission Testprocedure (> 30MHz)

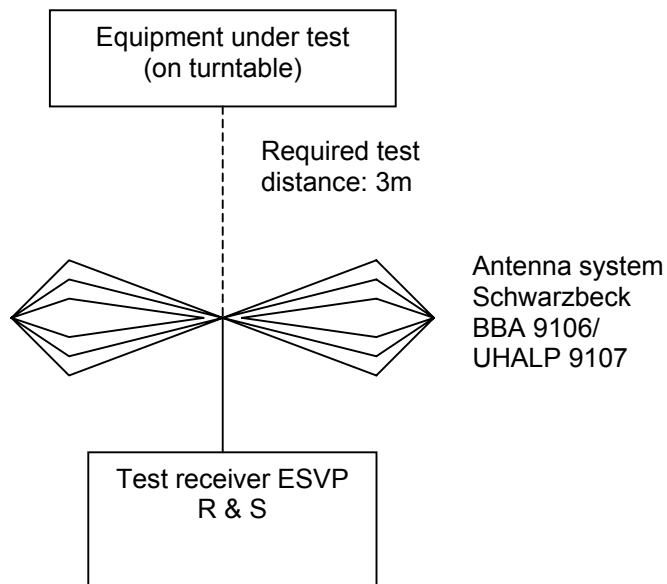


# FCC – Test Report

No. 31558B/2/400F

Date: 2002-09-05

Page 8 of 11

## Radiated Emission Test Procedure ( 9kHz – 30MHz)

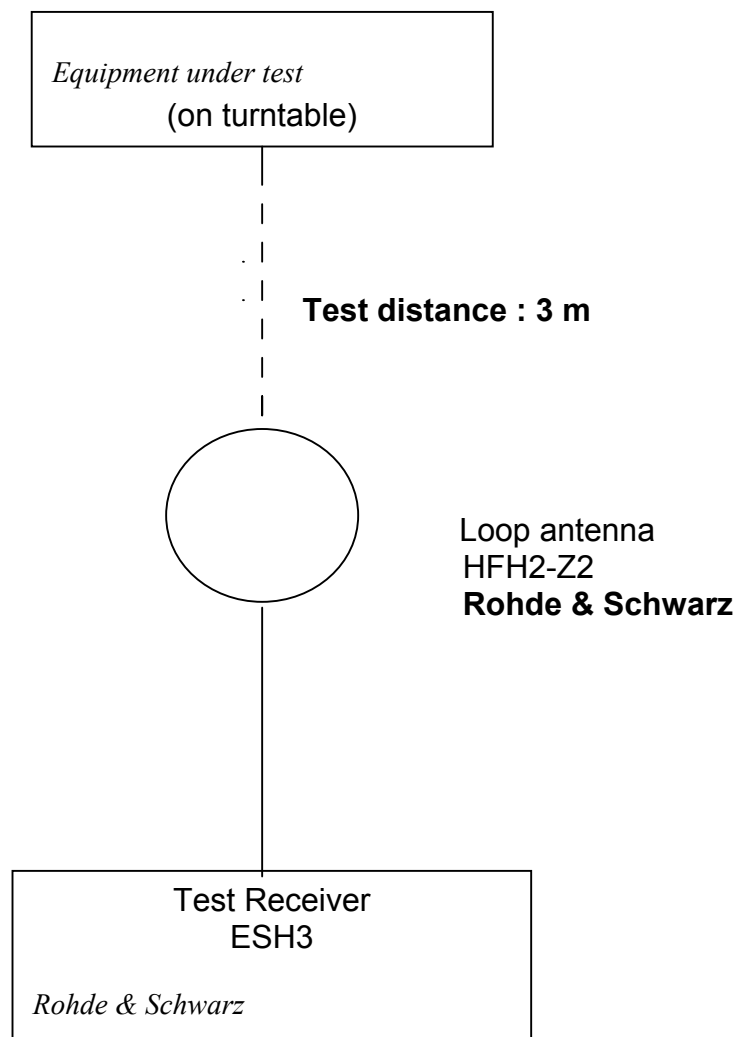

# Unintentional Radiators

Date: 2002-09-05

Measurement of Radiated Emissions

Page: 9 of 11

Acc: FCC Part 15 Subpart B

IECC Ref: 31558B/2/400F  
 Model: 90415  
 Applicant: ECHO TOYS LTD  
 Ser.Nr.: 1  
 Set under test: Speed Boat  
 Connected sets: -  
 Operating mode: Receiver - Power "On"

Test Equipment  
 Receiver: ESVP Rohde & Schwarz  
 Antenna: Schwarzbeck BBA 9106  
 and UHALP 9107

## 1. Standby Mode

| Frequency (MHz) | Horz. Reading<br>dB(μV) | Vert.<br>Reading<br>dB(μV) | Antenna<br>Factor<br>(dB) | Horiz. Test<br>Result<br>dB(μV/m) | Vert. Test<br>Result<br>dB(μV/m) | Limit<br>dB(μV/m) |
|-----------------|-------------------------|----------------------------|---------------------------|-----------------------------------|----------------------------------|-------------------|
| 30              | < 16                    | < 16                       | 18.4                      | < 34.4                            | < 34.4                           | 40.0              |
| 48.7            | < 16                    | < 17                       | 12.1                      | < 28.1                            | < 29.1                           | 40.0              |
| 50.7            | < 16                    | < 18                       | 11.4                      | < 27.4                            | < 29.4                           | 40.0              |
| 54.7            | < 16                    | < 16                       | 10.1                      | < 26.1                            | < 26.1                           | 40.0              |
| 60              | < 16                    | < 16                       | 8.4                       | < 24.4                            | < 24.4                           | 40.0              |
| 100             | < 16                    | < 16                       | 10.3                      | < 26.3                            | < 26.3                           | 43.5              |
| 200             | < 16                    | < 16                       | 16.5                      | < 32.5                            | < 32.5                           | 43.5              |
| 300             | < 16                    | < 16                       | 20.0                      | < 36.0                            | < 36.0                           | 46.0              |
| 500             | < 16                    | < 16                       | 19.7                      | < 35.7                            | < 35.7                           | 46.0              |
| 1000            | < 16                    | < 16                       | 26.5                      | < 42.5                            | < 42.5                           | 54.0              |

## 2. Motor running mode (motor noise measurement only)

| Frequency (MHz) | Horz. Reading<br>dB(μV) | Vert.<br>Reading<br>dB(μV) | Antenna<br>Factor<br>(dB) | Horiz. Test<br>Result<br>dB(μV/m) | Vert. Test<br>Result<br>dB(μV/m) | Limit<br>dB(μV/m) |
|-----------------|-------------------------|----------------------------|---------------------------|-----------------------------------|----------------------------------|-------------------|
| 30              | < 18                    | < 18                       | 18.4                      | < 36.4                            | < 36.4                           | 40.0              |
| 50              | < 18                    | < 18                       | 11.7                      | < 29.7                            | < 29.7                           | 40.0              |
| 100             | < 18                    | < 18                       | 10.3                      | < 28.3                            | < 28.3                           | 43.5              |
| 200             | < 18                    | < 18                       | 16.5                      | < 34.5                            | < 34.5                           | 43.5              |
| 300             | < 18                    | < 18                       | 20.0                      | < 38.0                            | < 38.0                           | 46.0              |
| 500             | < 18                    | < 18                       | 19.7                      | < 37.7                            | < 37.7                           | 46.0              |
| 1000            | < 18                    | < 18                       | 26.5                      | < 44.5                            | < 44.5                           | 54.0              |

**Remark:** All frequencies in the required range have been scanned and only those significant and representative readings are reported above.  
 All emissions not reported above are all well below the limit.

**Note:** Unless otherwise indicated, the recorded readings are in quasi-peak values.

# FCC – Test Report


Date: 2002-09-05

No. 31558B/2/400F

Page 10 of 11

## Cohere Plot at fundamental frequency

**Sample location:** Less than 0.5m from the measuring antenna  
**Applied signal:** - 60dBm (non-modulated, 49.86 MHz)  
**Remark:** Self-cohere

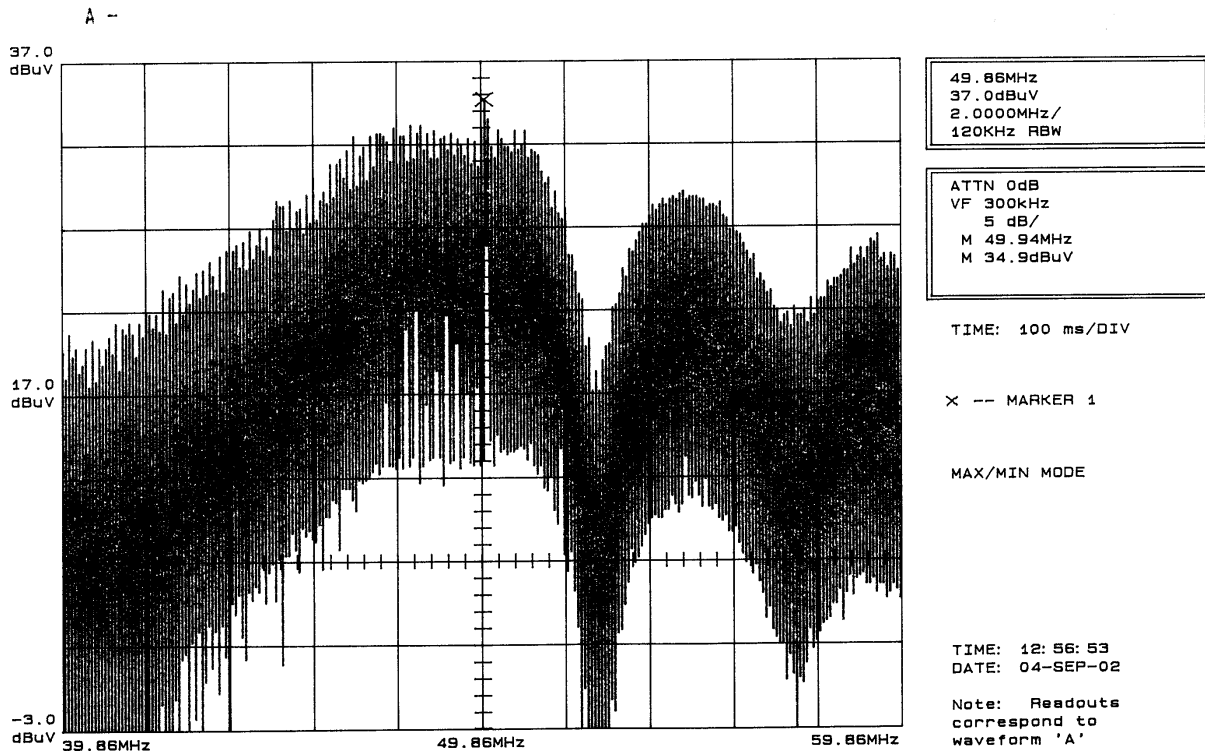

All emissions observed complies with FCC limits.

## Notes for Radiation Measurement

**1. Measurement facility:**

Measurement facility located at Fanling (Hong Kong), placed on file with the FCC Pursuant to Section 2.948 of the FCC Rules.

**2. Distance between the EUT and measuring antenna:**

3 meters.

**3. Measuring instrumentations:**

Rohde & Schwarz ESVP Test Receiver ( 20 - 1300 MHz ) with a CISPR weighting QP detector, 6 dB bandwidth set at 120 KHz.

**4. Measuring antenna:**

Broad-band antenna for the frequency range 30 - 300 MHz and frequency range 300 - 1000 MHz, connected with 10 meters coaxial cable. Cable loss of the coaxial cable included in the Antenna Factor for measurement data. The antennas are capable of measuring both horizontal and vertical polarizations.

Loop antenna for the frequency range 9KHz – 30MHz, connected with 10 meters coaxial cable. Cable loss of the coaxial cable included in the measurement data. The center of the loop 1. m above the ground plane, positioned with its plane vertical at the specified distance and rotated about its vertical axis and placed horizontal for maximum response at each azimuth about the EUT.

**5. Frequency range scanned:**

The frequency range 30 - 1000 MHz has been scanned. Readings of the highest emissions relating to the limit were reported as above.

**6. Arrangement of EUT:**

During the test, the sample was operated at rated supply voltage and arranged for maximum emissions. To find the maximum emission, the antenna was raised from 1 to 4 meters and was stopped at the maximum emission point.

**7. Measuring Procedure:**

In **accordance** with the relevant sections of the American National Standards Institute (ANSI) C63.4-1992 'Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9KHz to 40GHz'.