



### Engineering Test Report No. 2202788-01 Rev. A

Report Date	June 27, 2023	
Manufacturer Name	The Chamberlain Group, Inc.	
Manufacturer Address	576 Lamont Road Elmhurst, IL 60126	
Product Name Model No.	Wall Mount Garage Door Opener 98032, 98032RGD	
Date Received	June 1, 2023	
Test Dates	June 7 – 9 and 16, 2023 July 6, 2023	
Specifications	FCC "Code of Federal Regulations" Title 47 Part 15, Subpart B & C Innovation, Science, and Economic Development Canada ICES-003 Innovation, Science, and Economic Development Canada RSS-GEN & RSS-247	
Test Facility	Elite Electronic Engineering, Inc. 1516 Centre Circle, Downers Grove, IL 60515	FCC Reg. Number: 269750 IC Reg. Number: 2987A CAB Identifier: US0107
Signature		
Tested by	Tylar Jozefczyk	
Signature		
Approved by	Raymond J. Klouda, Registered Professional Engineer of Illinois – 44894	
PO Number	4900084893	

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

This report shall not be reproduced, except in full, without the written approval of Elite Electronic Engineering Inc.

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the test specifications. The data presented in this test report pertains to the EUT on the test dates specified. Any electrical or mechanical modifications made to the EUT subsequent to the specified test date will serve to invalidate the data and void this certification. This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the Federal Government.

## Table of Contents

1.	Report Revision History .....	3
2.	Introduction .....	4
3.	Power Input .....	4
4.	Grounding .....	4
5.	Support Equipment .....	4
6.	Interconnect Leads.....	5
7.	Modifications Made to the EUT .....	5
8.	Modes of Operation.....	5
8.1.	Standby .....	5
8.2.	Tx .....	5
8.3.	Mode 3 .....	5
9.	Test Specifications .....	5
10.	Test Plan .....	6
11.	Deviations, Additions to, or Exclusions from Test Specifications .....	6
12.	Laboratory Conditions .....	6
13.	Summary .....	6
14.	Sample Calculations .....	6
15.	Statement of Conformity .....	7
16.	Certification .....	7
17.	Photographs of EUT.....	8
18.	Equipment List .....	10
19.	Block Diagram of Test Setup .....	11
20.	RF Conducted Emissions (AC Mains) .....	12
21.	RF Radiated Emissions.....	24
22.	Module Integration – Emissions .....	34
23.	Scope of Accreditation .....	48

**This report shall not be reproduced, except in full,  
without the written approval of Elite Electronic Engineering Inc.**

## 1. Report Revision History

Revision	Date	Description
–	27 JUN 2023	Initial Release of Engineering Test Report No. 2202788-01
A	13 JUL 2023 by TMJ	<ul style="list-style-type: none"><li>- Engineering Test Report No. updated from 2202788-01 to 2202788-01 Rev. A throughout report.</li><li>- Title Page: Added “July 6, 2023” to Test Dates row.</li><li>- Section 7: Removed original sentence “No modifications were made to the EUT during the testing” and replaced with current descriptor.</li><li>- Section 8.3: Added Motor On mode.</li><li>- Section 18: Updated the Equipment List.</li><li>- Section 20: Added additional test day specifics to required rows and procedure.</li><li>- Section 20: Added Motor On mode data on pages 20 – 23.</li></ul>

## 2. Introduction

This document presents the results of a series of electromagnetic compatibility (EMC) tests that were performed on one (1) Wall Mount Garage Door Opener (hereinafter referred to as the Equipment Under Test (EUT)).

Additionally, the test series was performed to determine if The Chamberlain Group, Inc. Wall Mount Garage Door Opener meets the Class I Permissive Change requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, §15.247.

The test series was also performed to determine if The Chamberlain Group, Inc. Wall Mount Garage Door Opener meets the Class I Permissive Change requirements of the Innovation, Science, and Economic Development Canada Radio Standards Specification RSS-Gen and RSS-247 for Transmitters.

The following modifications have been made to the original equipment:

- Silicon Labs Gecko BLE radio was removed from RJOA MPP board.

The product is equipped with the following pre-certified radio modules:

- Silicon Labs EFR32BG21 Sub-GHz (Model No. EFR32FG12P231F1024GM68-CR) operating in the 900MHz band.
- Realtek Ameba ZII Series, 1X1 Wi-Fi +Bluetooth, IOT Low-Energy SOC (Model No. RTL8720CM-VH2-CGT) operating in the 2.4GHz band.
- Silicon Labs EFR32BG21 Series 2 Wireless SoC (Model No. EFR32BG21A010F1024IM32-BR) operating in the 2.4GHz band.

The nature of these measurements is to ensure that the radio module and host remain in compliance with the emissions requirements of the FCC and Innovation, Science, and Economic Development Canada after the integration process.

The EUT was identified as follows and was used throughout the test series:

EUT Identification	
Description	Wall Mount Garage Door Opener
Model/Part No.	98032, 98032RGD <sup>1</sup>
Serial No.	N/A
Software/Firmware Version	Security 3.0: bg21 Realtek Wi-Fi/BLE: Ver 7.1 Sub 1GHz: V1.12
Size of EUT	30" x 8" x 8" (enclosure size)
Number of Interconnection Wires	See Section 6
Type of Interconnection Wires	See Section 6
Highest Internal Frequency	2.4GHz
Note 1: Testing was performed with 98032; RGD version is identical (different brand name).	

## 3. Power Input

The EUT obtained 120VAC 60Hz power via a 3 wire, 1.75-meter unshielded power cord. The EUT is also equipped with two (2) 6VDC backup batteries.

## 4. Grounding

The EUT was connected to ground through the third wire of its input power cord.

## 5. Support Equipment

The EUT was submitted for testing along with the following support equipment:

Description	Model #	S/N
Automatic Garage Door Lock	001D8875	---
Smart Control Panel	880LMW	---
Safety Reversing Sensors	041-0136	---
Laptop Computer	Dell Latitude 7480	---

## 6. Interconnect Leads

The following interconnect cables were submitted with the test item:

Item	Description
Micro-USB to USB Cable	Connects laptop to serial boards on the EUT
2 Wire	Connects Automatic Garage Door Lock to EUT
2 Wire	Connects Smart Control Panel to EUT
4 Wire	Connects Safety Reversing Sensors to EUT

## 7. Modifications Made to the EUT

The following modifications were made to the EUT to meet the specification requirements:

- Conducted Emissions: For the Motor On testing only, the EUT is considered passing after internal cable rearrangement was performed by The Chamberlain Group, Inc. personnel.

## 8. Modes of Operation

The EMC tests were performed with the EUT operating in one of the test modes described below. See the specific test section for the applicable test modes.

### 8.1. Standby

This mode was achieved by applying power to the device.

### 8.2. Tx

The EUT was configured to transmit in the following modes:

Mode	Description
Realtek Wi-Fi	802.11n 2412MHz, Power Setting = xx
Realtek BLE	2402MHz, Power Setting = xx
Security 3.0 BLE	2402MHz, Power Setting = 8dBm
900MHz FHSS	902.25MHz, Power Setting = xx

### 8.3. Motor On

This mode was achieved by applying power to the device and running the motor on the EUT.

## 9. Test Specifications

The tests were performed to selected portions of, and in accordance with the following test specifications:

- Federal Communications Commission "Code of Federal Regulations", Title 47, Chapter I, Subchapter A, Part 15, Subpart B – "Unintentional Radiators"
- Federal Communications Commission "Code of Federal Regulations", Title 47, Chapter I, Subchapter A, Part 15, Subpart C – "Intentional Radiators"
- ICES-003, Issue 7, October 15, 2020 – "Information Technology Equipment (including Digital Apparatus)"

- Radio Standards Specifications RSS-Gen Issue 5, Amendment 2 (February 2021) – “General Requirements for Compliance of Radio Apparatus”
- ANSI C63.4-2014 – “American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz”
- ANSI C63.10-2013 – “American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices”
- 996369 D04 Module Integration Guide v02, October 13, 2020 – “Modular Transmitter Integration Guide Guidance for Host Product Manufacturers”

### 10. Test Plan

No test plan was provided. Instructions were provided by personnel from The Chamberlain Group, Inc. and used in conjunction with the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart B, Innovation, Science, and Economic Development Canada ICES-003, FCC “Code of Federal Regulations” Title 47, Part 15, Subpart C, Innovation, Science, and Economic Development Canada RSS-GEN, Innovation, Science, and Economic Development Canada RSS-247, ANSI C63.4-2014, and ANSI C63.10-2013 specifications.

### 11. Deviations, Additions to, or Exclusions from Test Specifications

There were no deviations, additions to, or exclusions from the test specifications during this test series.

### 12. Laboratory Conditions

The following were the laboratory conditions while the EMC tests were performed:

Ambient Parameters	Value
Temperature	24.5°C
Relative Humidity	36%
Atmospheric Pressure	1012.6mb

### 13. Summary

The following EMC tests were performed, and the results are shown below:

Test Description	Test Requirements	Test Method	Equipment Class	Result
RF Conducted Emissions (AC Mains)	FCC 15.107 ICES-003, Section 3.2.1	ANSI C63.4:2014	B	Conforms
RF Radiated Emissions	FCC 15.109 ICES-003, Section 3.2.2	ANSI C63.4:2014	B	Conforms
Module Integration – Emissions	FCC 15.247 RSS-GEN Section 8.9 RSS-247 Section 5.5	ANSI C63.10:2013	---	Conforms

### 14. Sample Calculations

For Powerline Conducted Emissions:

The resultant voltage level (VL) is a summation in decibels (dB) of the receiver meter reading (MTR) and the cable loss factor (CF).

$$\text{Formula 1: } VL \text{ (dB}\mu\text{V)} = \text{MTR (dB}\mu\text{V)} + \text{CF (dB).}$$

For Radiated Emissions:

The resultant field strength (FS) is a summation in decibels (dB) of the receiver meter reading (MTR),

the antenna correction factor (AF), and the cable loss factor (CF). If an external preamplifier is used, the total is reduced by its gain (-PA). If a distance correction (DC) is required, it is added to the total.

$$\text{Formula 1: FS (dB}\mu\text{V/m)} = \text{MTR (dB}\mu\text{V)} + \text{AF (dB/m)} + \text{CF (dB)} + (-\text{PA (dB)}) + \text{DC (dB)}$$

To convert the Field Strength dB $\mu$ V/m term to  $\mu$ V/m, the dB $\mu$ V/m is first divided by 20. The Base 10 AntiLog is taken of this quotient. The result is the Field Strength value in  $\mu$ V/m terms.

$$\text{Formula 2: FS (}\mu\text{V/m)} = \text{AntiLog} [(\text{FS (dB}\mu\text{V/m)})/20]$$


## 15. Statement of Conformity

The Chamberlain Group, Inc. Wall Mount Garage Door Opener (Model No. 98032, 98032RGD) did fully conform to the selected requirements of FCC "Code of Federal Regulations" Title 47 Part 15, Subpart B and Innovation, Science, and Economic Development Canada ICES-003.

## 16. Certification

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart B and Innovation, Science, and Economic Development Canada ICES-003 test specifications. The data presented in this test report pertains to the EUT on the test date specified. Any electrical or mechanical modifications made to the EUT subsequent to the specified test date will serve to invalidate the data and void this certification.

### 17. Photographs of EUT

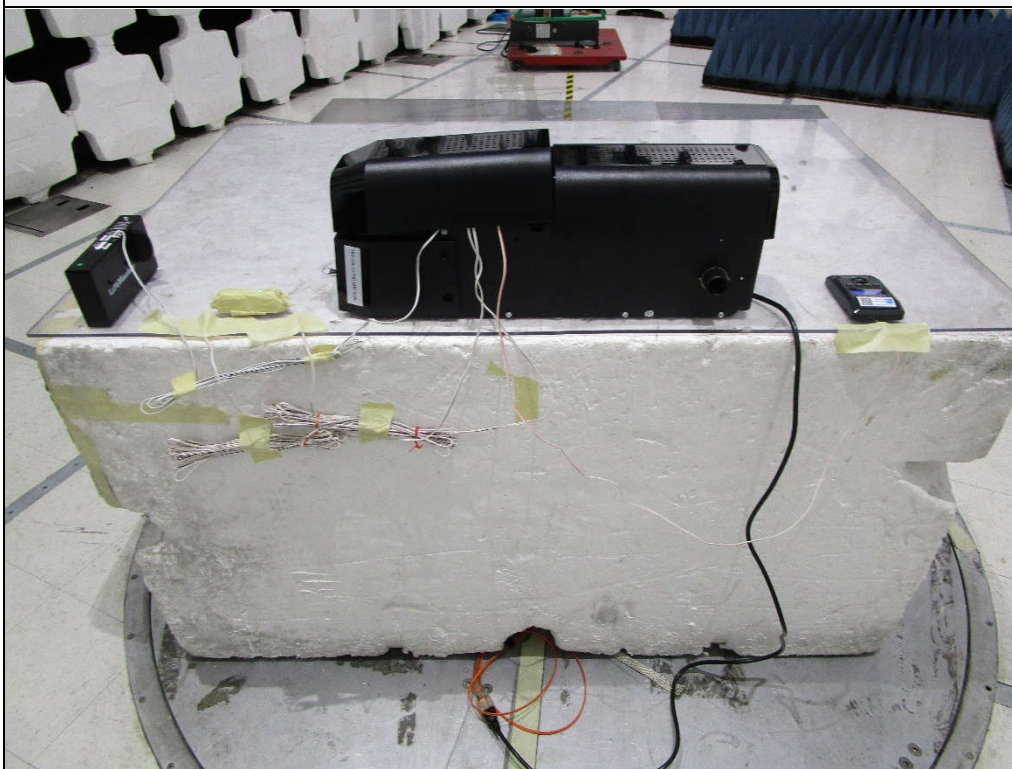





### 18. Equipment List

Eq ID	Equipment Description	Manufacturer	Model No.	Serial No.	Frequency Range	Cal Date	Due Date
APW14	PREAMPLIFIER	PLANAR	PE2-35-120-5R0-10-12-SFF	PL22671	1-20GHz	9/21/2022	9/21/2023
CDW6	DESKTOP COMPUTER	ELITE	PENTIUM 4	007	3.8 GHZ	N/A	
CDZ3	LAB WORKSTATION	ELITE	LWS-10		WINDOWS 10	CNR	
CDZ4	LAB WORKSTATION	ELITE	LWS-10		WINDOWS 10	CNR	
GRB0	1MHZ, LISN SIGNAL CHECKER	ELITE	LISNCHKR1M	1	1MHZ	12/6/2022	12/6/2024
NSDS1	UNIVERSAL SPHERICAL DIPOLE SOURCE	AET	USDS-H	AET-1116		NOTE 1	
NTA4	BILOG ANTENNA	TESEQ	6112D	46660	20-2000GHZ	10/26/2022	10/26/2024
NWQ1	DOUBLE RIDGED WAVEGUIDE ANTENNA	ETS-LINDGREN	3117	66655	1GHZ-18GHZ	5/26/2022	5/26/2024
NWQ2	DOUBLE RIDGED WAVEGUIDE ANTENNA	ETS LINDGREN	3117	66659	1GHZ-18GHZ	4/27/2022	4/27/2024
PLF1	CISPR16 50UH LISN	ELITE	CISPR16/70A	001	.15-30MHz	4/7/2023	4/7/2024
PLF3	CISPR16 50UH LISN	ELITE	CISPR16/70A	003	.15-30MHz	4/7/2023	4/7/2024
R21F	3M ANECHOIC CHAMBER NSA	EMC TEST SYSTEMS	3M ANECHOIC		30MHZ-18GHZ	3/1/2023	3/1/2024
R28A	ROOM 28 ANNUAL CHECKUP	ETS LINDGREN				11/1/2022	11/1/2023
R29F	3M ANECHOIC CHAMBER NSA	EMC TEST SYSTEMS	3M ANECHOIC		30MHZ-18GHZ	6/12/2023	6/12/2024
RBE0	EMI ANALYZER	ROHDE & SCHWARZ	ESU26	100095	20Hz-26GHz	4/27/2023	4/27/2024
RBG2	EMI ANALYZER	ROHDE & SCHWARZ	ESW44	101591	2HZ-44GHZ	4/10/2023	4/10/2024
SES0	24VDC POWER SUPPLY	P-TRANS	FS-32024-1M	001	18-27VDC	NOTE 1	
T1E4	10DB 25W ATTENUATOR (RM 11)	WEINSCHEL	46-10-43	AV5805	DC-18GHZ	3/31/2022	3/31/2024
VBR8	CISPR EN FCC CE VOLTAGE.exe					N/A	
VBV2	CISPR EN FCC ICES RE.EXE	ELITE	CISPR EN FCC ICES RE.EXE	---	---	N/A	
XLTF	5W, 50 OHM TERMINATION	JFW INDUSTRIES	50T-052	---	DC-2GHZ	1/5/2022	1/5/2024
XPQ3	HIGH PASS FILTER	K&L MICROWAVE	4IH30-1804/T10000-0	4	1.8GHZ-10GHZ	9/7/2021	9/7/2023
XPQ4	HIGH PASS FILTER	K&L MICROWAVE	11SH10-4800/X20000-O/O	1	4.8-20GHZ	9/7/2021	9/7/2023


N/A: Not Applicable

I/O: Initial Only

CNR: Calibration Not Required

NOTE 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.

### 19. Block Diagram of Test Setup

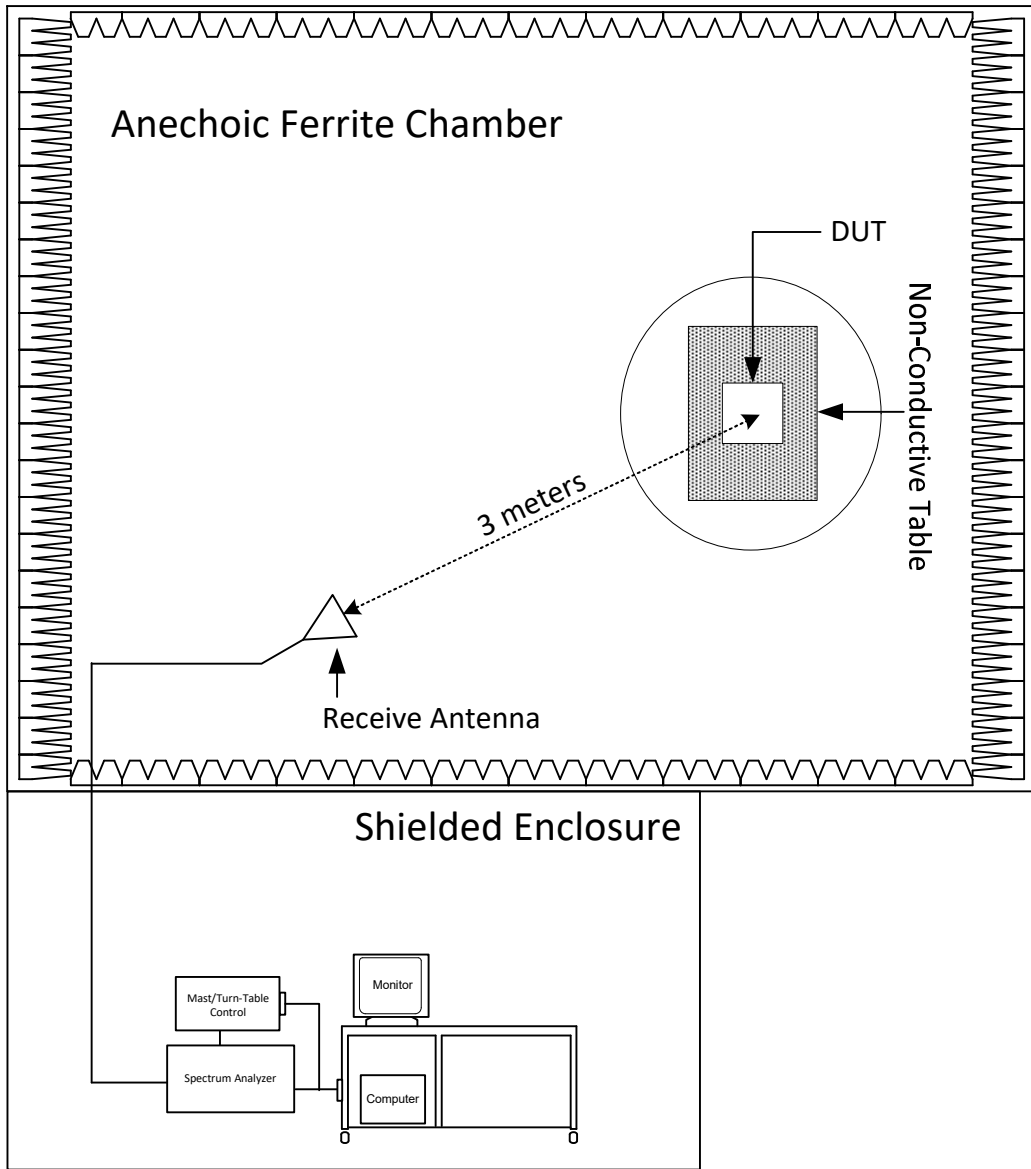

Radiated Measurements Test Setup

20. RF Conducted Emissions (AC Mains)

EUT Information	
Manufacturer	The Chamberlain Group, Inc.
Product	Wall Mount Garage Door Opener
Model No.	98032, 98032RGD
Serial No.	N/A
Mode	Standby, Motor On

Test Site Information	
Setup Format	Tabletop
Height of Support	N/A
Type of Test Site	Semi-Anechoic Chamber Reverberation Chamber
Test Site Used	R21F R28A
Note	See Section 7 for Motor On passing criteria.

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Conducted disturbance (mains port) (150 kHz – 30 MHz)	2.7

Requirements
For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz shall not exceed the limits in the following table.

Conducted Emissions Class B Limits		
Frequency (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15 – 0.5	66 decreasing with logarithm of frequency to 56	56 decreasing with logarithm of frequency to 46
0.5 – 5	56	46
5 – 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.  
 Note 2: If the levels measured using the QP detector meet both the QP and the Average limits, the EUT is considered to have met both requirements and measurements do not need to be performed using the Average detector.


## Procedure

The interference on each power lead of the EUT was measured by connecting the measuring equipment to the appropriate meter terminal of the Line Impedance Stabilization Network (LISN). The meter terminal of the LISN not under test was terminated with 50 ohms.


- 1) The EUT was operated in the Standby mode.
- 2) Measurements were first made on the 120VAC high line.
- 3) The frequency range from 150kHz to 30MHz was broken up into smaller frequency sub-bands.
- 4) Conducted emissions measurements were taken on the first frequency sub-band using a peak detector.
- 5) The data thus obtained was then searched by the computer for the highest levels. Any emissions levels that were within 10dB of the average limit were then measured again using both a quasi-peak detector and an average detector. (If no peak readings were within 10dB of the average limit, quasi-peak and average readings were taken on the highest emissions levels measured during the peak detector scan.)
- 6) Steps (4) and (5) were repeated for the remainder of the frequency sub-bands until the entire frequency range from 150kHz to 30MHz was investigated. The peak trace was automatically plotted. The plot also shows quasi-peak and average readings that were taken on discrete frequencies. A table showing the quasi-peak and average readings was also generated. This tabular data compares the quasi-peak and average conducted emissions to the applicable conducted emissions limits. The resultant voltage level (VL) is a summation in decibels (dB) of the receiver meter reading (MTR) and the cable loss factor (CF).

$$\text{Formula 1: VL (dB}\mu\text{V)} = \text{MTR (dB}\mu\text{V)} + \text{CF (dB)}$$

- 7) Steps (3) through (6) were repeated on the 120VAC return line.
- 8) Steps (2) through (7) were repeated with the EUT operated in the Motor On mode.

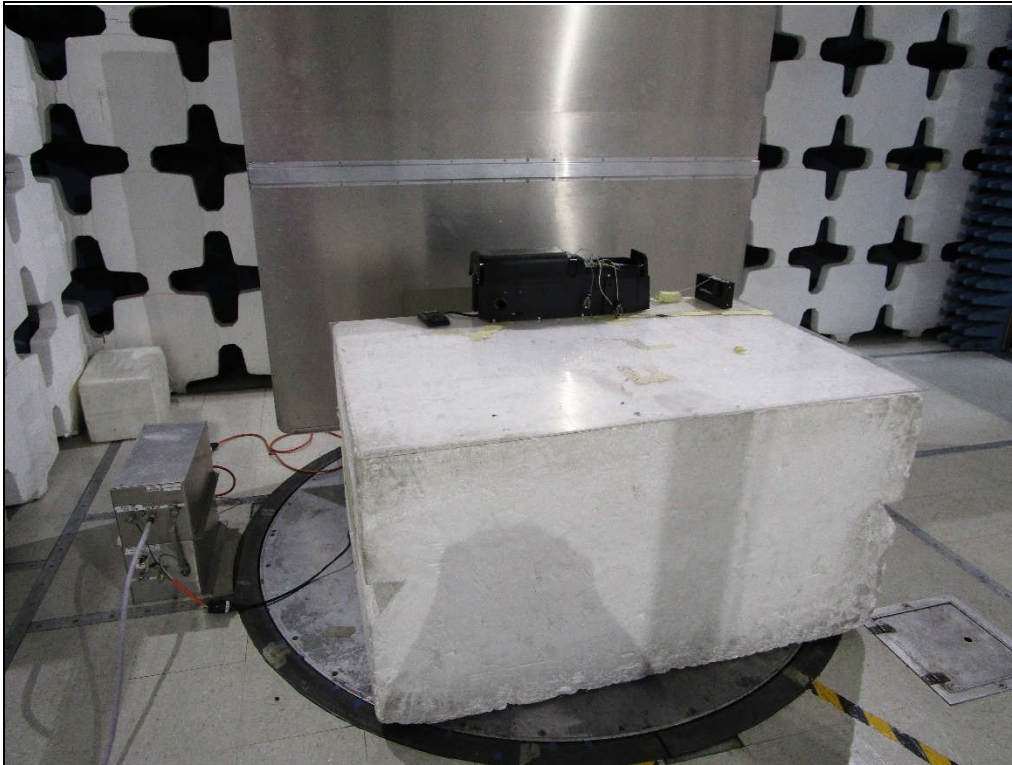


Test Setup for RF Conducted Emissions (AC Mains)

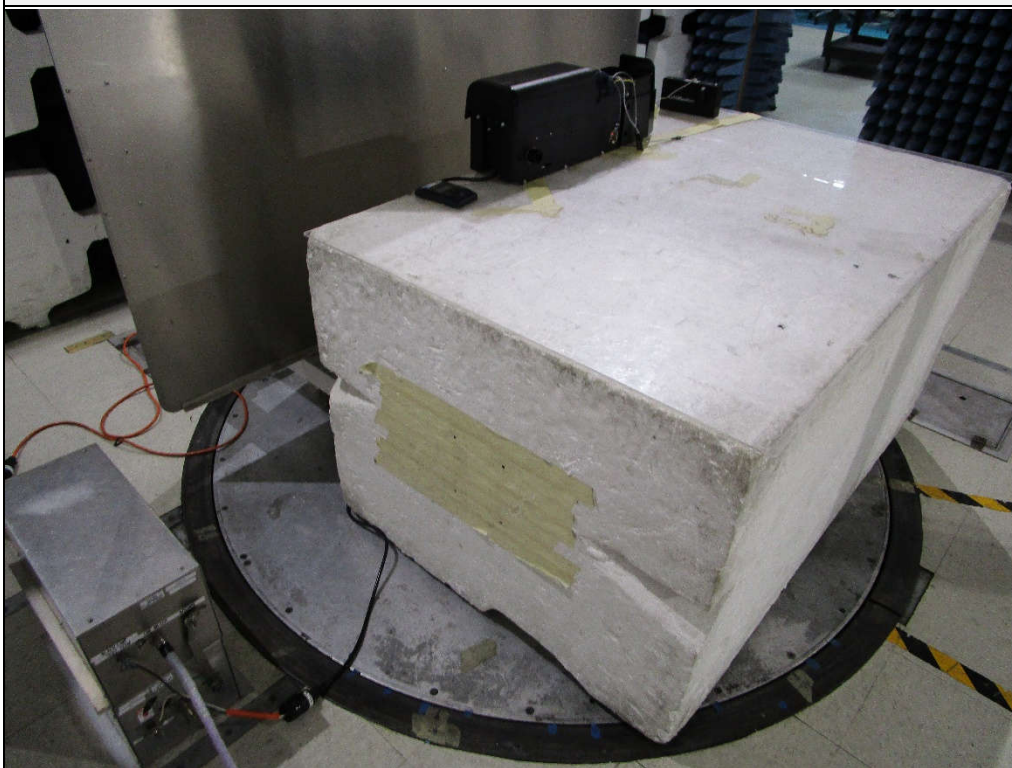

Test Setup for RF Conducted Emissions (AC Mains)



Test Setup for RF Conducted Emissions (AC Mains)

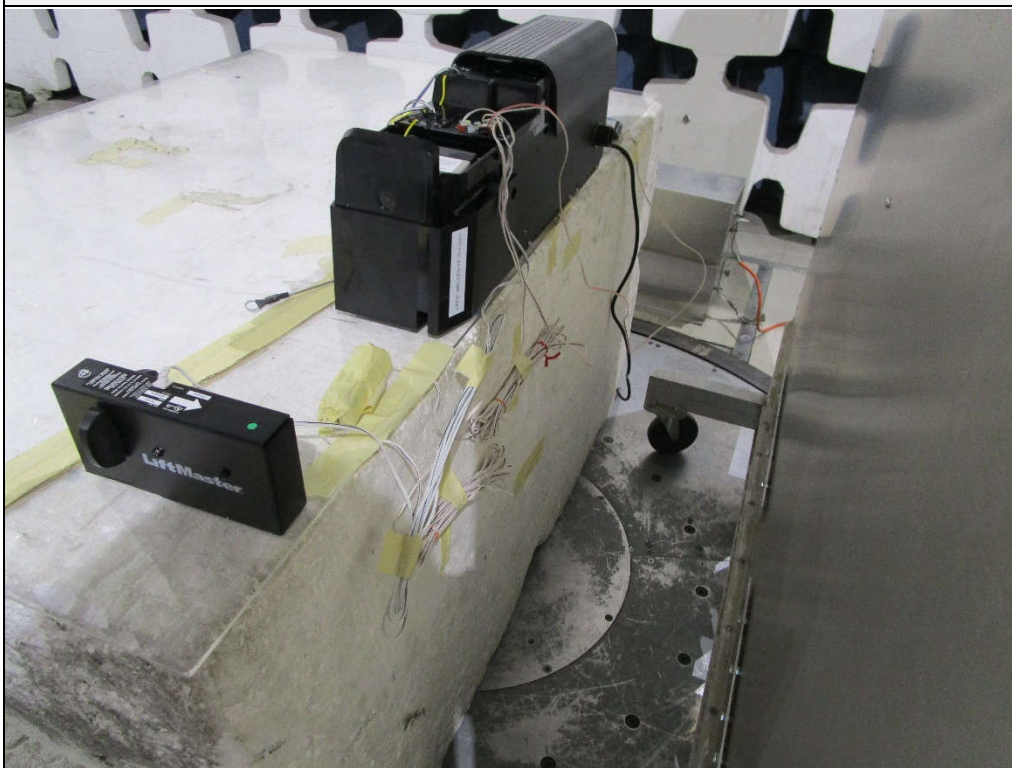

Test Setup for RF Conducted Emissions (AC Mains)

## FCC Part 15 Subpart B 2017-2022 Conducted Emissions Test Significant Emissions Data

VBR8 01/04/2023

Manufacturer : CHAMBERLAIN  
 Model : 98032  
 DUT Revision : 1.0  
 Serial Number :  
 DUT Mode : STANDBY  
 Line Tested : 120VAC 60HZ HIGH LINE  
 Scan Step Time [ms] : 30  
 Meas. Threshold [dB] : -10  
 Notes :  
 Test Engineer : T. Jozefczyk  
 Limit : Class B  
 Test Date : Jun 07, 2023 11:32:46 AM  
 Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 10 dB margin below limit


Freq MHz	Quasi-peak Level dB $\mu$ V	Quasi-peak Limit dB $\mu$ V	Excessive Quasi-peak Emissions	Average Level dB $\mu$ V	Average Limit dB $\mu$ V	Excessive Average Emissions
0.150	51.7	66.0		20.4	56.0	
0.302	44.6	60.2		32.6	50.2	
0.505	21.8	56.0		4.5	46.0	
1.083	25.1	56.0		19.6	46.0	
1.322	20.2	56.0		17.8	46.0	
2.763	14.3	56.0		9.6	46.0	
4.931	12.5	56.0		6.9	46.0	
7.102	9.7	60.0		3.6	50.0	
11.876	10.3	60.0		4.2	50.0	
23.212	8.7	60.0		2.6	50.0	



# FCC Part 15 Subpart B 2017-2022 Conducted Emissions Test Cumulative Data

VBR8 01/04/2023

Manufacturer : CHAMBERLAIN  
 Model : 98032  
 DUT Revision : 1.0  
 Serial Number :  
 DUT Mode : STANDBY  
 Line Tested : 120VAC 60HZ HIGH LINE  
 Scan Step Time [ms] : 30  
 Meas. Threshold [dB] : -10  
 Notes :  
 Test Engineer : T. Jozefczyk  
 Limit : Class B  
 Test Date : Jun 07, 2023 11:32:46 AM

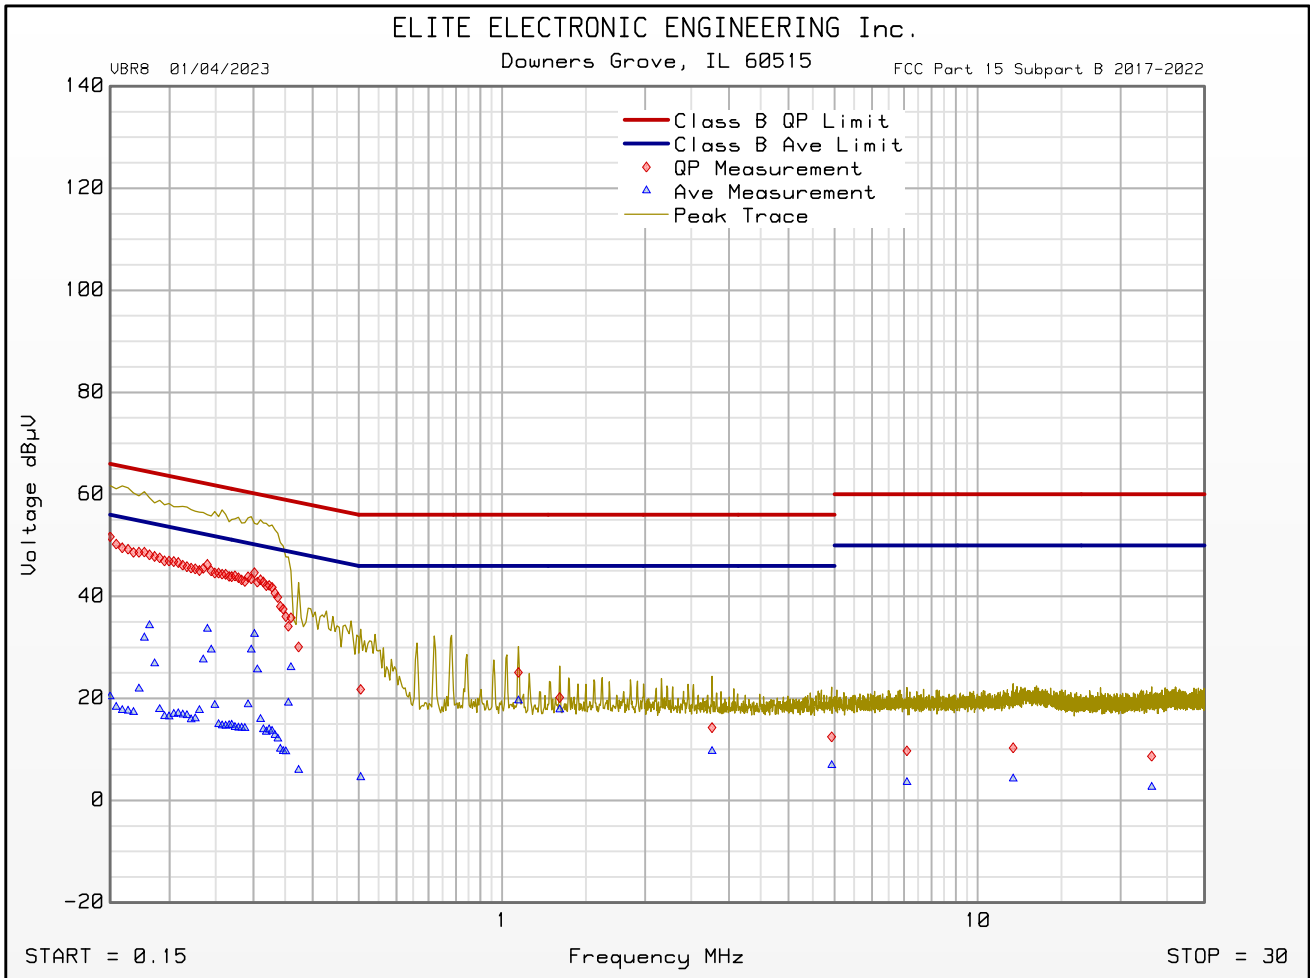

Emissions Meet QP Limit  
 Emissions Meet Ave Limit

## FCC Part 15 Subpart B 2017-2022 Conducted Emissions Test Significant Emissions Data

VBR8 01/04/2023


Manufacturer : CHAMBERLAIN  
 Model : 98032  
 DUT Revision : 1.0  
 Serial Number :  
 DUT Mode : STANDBY  
 Line Tested : 120VAC 60HZ NEUTRAL LINE  
 Scan Step Time [ms] : 30  
 Meas. Threshold [dB] : -10  
 Notes :  
 Test Engineer : T. Jozefczyk  
 Limit : Class B  
 Test Date : Jun 07, 2023 11:40:45 AM  
 Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 10 dB margin below limit

Freq MHz	Quasi-peak Level dB $\mu$ V	Quasi-peak Limit dB $\mu$ V	Excessive Quasi-peak Emissions	Average Level dB $\mu$ V	Average Limit dB $\mu$ V	Excessive Average Emissions
0.155	48.6	65.8		17.5	55.8	
0.302	41.6	60.2		29.2	50.2	
0.505	20.6	56.0		3.8	46.0	
1.024	19.2	56.0		15.5	46.0	
1.322	21.1	56.0		18.4	46.0	
2.165	17.4	56.0		14.3	46.0	
3.185	13.5	56.0		8.1	46.0	
8.560	9.4	60.0		3.4	50.0	
12.974	10.9	60.0		5.0	50.0	
27.523	9.0	60.0		2.8	50.0	

## FCC Part 15 Subpart B 2017-2022 Conducted Emissions Test Cumulative Data

VBR8 01/04/2023

Manufacturer : CHAMBERLAIN  
 Model : 98032  
 DUT Revision : 1.0  
 Serial Number :  
 DUT Mode : STANDBY  
 Line Tested : 120VAC 60HZ NEUTRAL LINE  
 Scan Step Time [ms] : 30  
 Meas. Threshold [dB] : -10  
 Notes :  
 Test Engineer : T. Jozefczyk  
 Limit : Class B  
 Test Date : Jun 07, 2023 11:40:45 AM

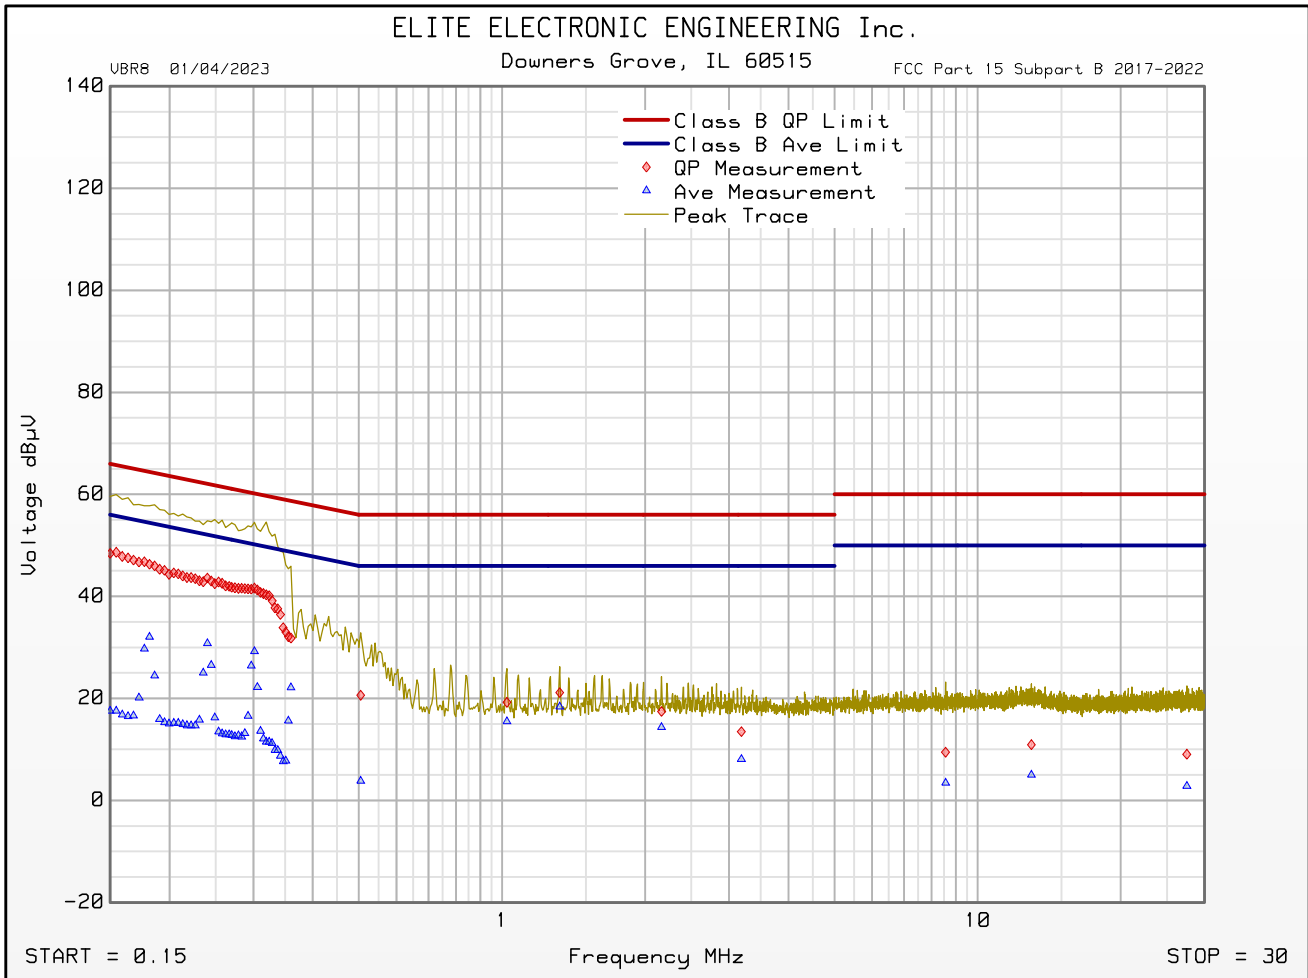

Emissions Meet QP Limit  
 Emissions Meet Ave Limit

## FCC Part 15 Subpart B 2017-2022 Conducted Emissions Test Significant Emissions Data

VBR8 01/04/2023


Manufacturer : CHAMBERLAIN  
 Model : 98032  
 DUT Revision : 1.2  
 Serial Number :  
 DUT Mode : MOTOR RUNNING  
 Line Tested : 120VAC 60HZ HIGH LINE  
 Scan Step Time [ms] : 30  
 Meas. Threshold [dB] : 10  
 Notes : MOTOR CABLES MOVED  
 Test Engineer : T. Jozefczyk  
 Limit : Class B  
 Test Date : Jul 06, 2023 03:30:13 PM  
 Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 10 dB margin above limit

Freq MHz	Quasi-peak Level dB $\mu$ V	Quasi-peak Limit dB $\mu$ V	Excessive Quasi-peak Emissions	Average Level dB $\mu$ V	Average Limit dB $\mu$ V	Excessive Average Emissions
0.159	50.7	65.5		43.3	55.5	
0.302	42.6	60.2		33.5	50.2	
0.739	35.7	56.0		31.3	46.0	
0.840	38.3	56.0		34.6	46.0	
1.939	33.0	56.0		30.3	46.0	
2.102	30.3	56.0		26.9	46.0	
4.756	28.4	56.0		25.1	46.0	
9.059	39.0	60.0		34.8	50.0	
11.498	51.9	60.0		47.4	50.0	
17.641	47.6	60.0		39.8	50.0	

## FCC Part 15 Subpart B 2017-2022 Conducted Emissions Test Cumulative Data

VBR8 01/04/2023

Manufacturer : CHAMBERLAIN  
 Model : 98032  
 DUT Revision : 1.2  
 Serial Number :  
 DUT Mode : MOTOR RUNNING  
 Line Tested : 120VAC 60HZ HIGH LINE  
 Scan Step Time [ms] : 30  
 Meas. Threshold [dB] : 10  
 Notes : MOTOR CABLES MOVED  
 Test Engineer : T. Jozefczyk  
 Limit : Class B  
 Test Date : Jul 06, 2023 03:30:13 PM

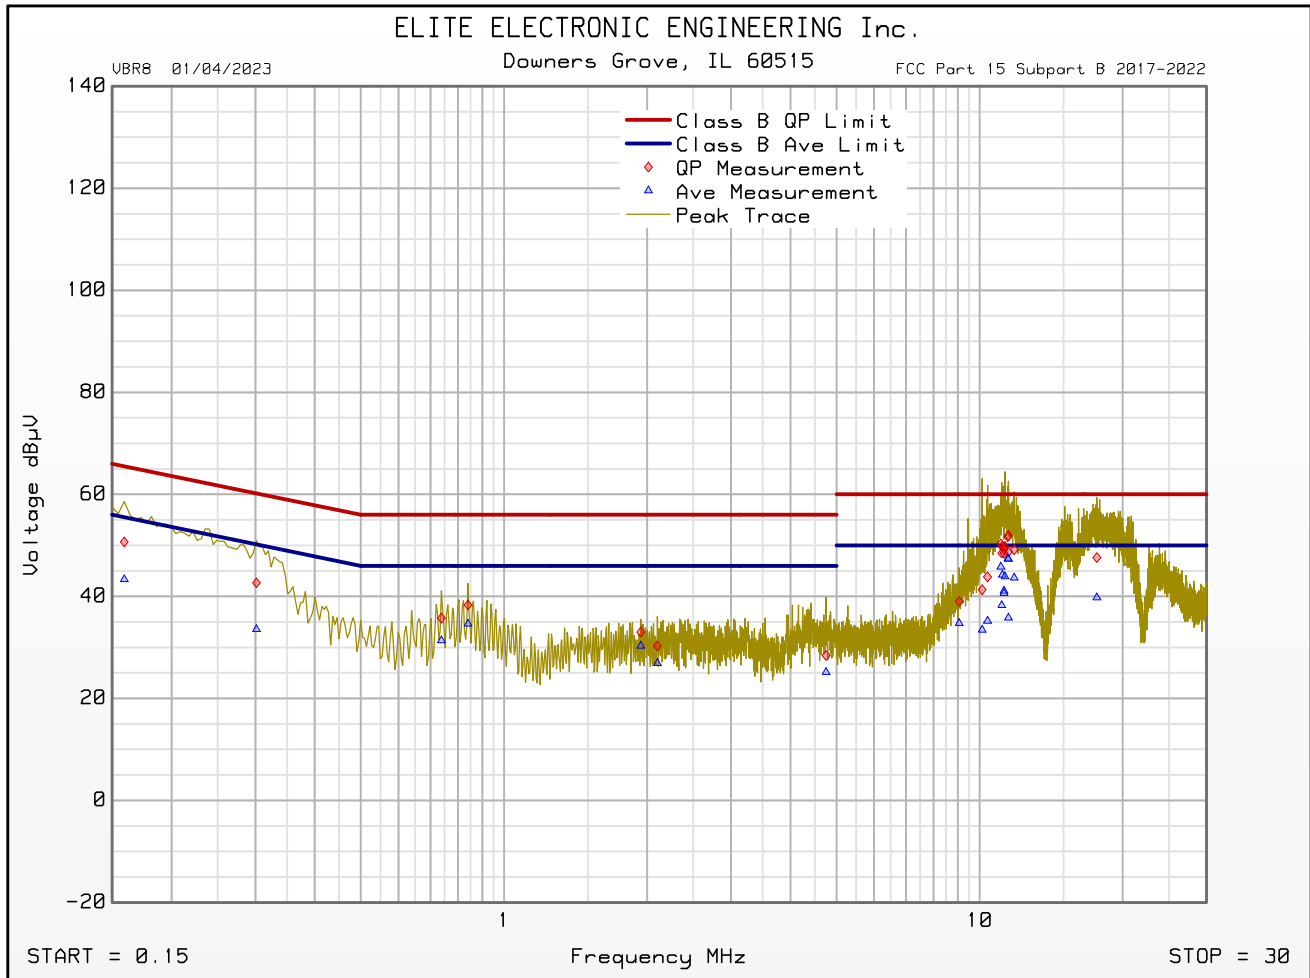

Emissions Meet QP Limit  
 Emissions Meet Ave Limit

## FCC Part 15 Subpart B 2017-2022 Conducted Emissions Test Significant Emissions Data

VBR8 01/04/2023


Manufacturer : CHAMBERLAIN  
 Model : 98032  
 DUT Revision : 1.2  
 Serial Number :  
 DUT Mode : MOTOR RUNNING  
 Line Tested : 120VAC 60HZ NEUTRAL LINE  
 Scan Step Time [ms] : 30  
 Meas. Threshold [dB] : 5  
 Notes : MOTOR CABLES MOVED  
 Test Engineer : T. Jozefczyk  
 Limit : Class B  
 Test Date : Jul 06, 2023 03:04:06 PM  
 Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 5 dB margin above limit

Freq MHz	Quasi-peak Level dB $\mu$ V	Quasi-peak Limit dB $\mu$ V	Excessive Quasi-peak Emissions	Average Level dB $\mu$ V	Average Limit dB $\mu$ V	Excessive Average Emissions
0.159	52.7	65.5		46.3	55.5	
0.320	45.4	59.7		37.1	49.7	
0.721	33.6	56.0		26.3	46.0	
1.060	35.4	56.0		31.7	46.0	
1.561	32.6	56.0		29.6	46.0	
2.651	23.0	56.0		14.3	46.0	
4.661	33.2	56.0		30.7	46.0	
8.987	37.0	60.0		25.1	50.0	
10.980	50.4	60.0		47.4	50.0	
16.660	48.4	60.0		43.8	50.0	

# FCC Part 15 Subpart B 2017-2022 Conducted Emissions Test Cumulative Data

VBR8 01/04/2023

Manufacturer : CHAMBERLAIN  
 Model : 98032  
 DUT Revision : 1.2  
 Serial Number :  
 DUT Mode : MOTOR RUNNING  
 Line Tested : 120VAC 60HZ NEUTRAL LINE  
 Scan Step Time [ms] : 30  
 Meas. Threshold [dB] : 5  
 Notes : MOTOR CABLES MOVED  
 Test Engineer : T. Jozefczyk  
 Limit : Class B  
 Test Date : Jul 06, 2023 03:04:06 PM

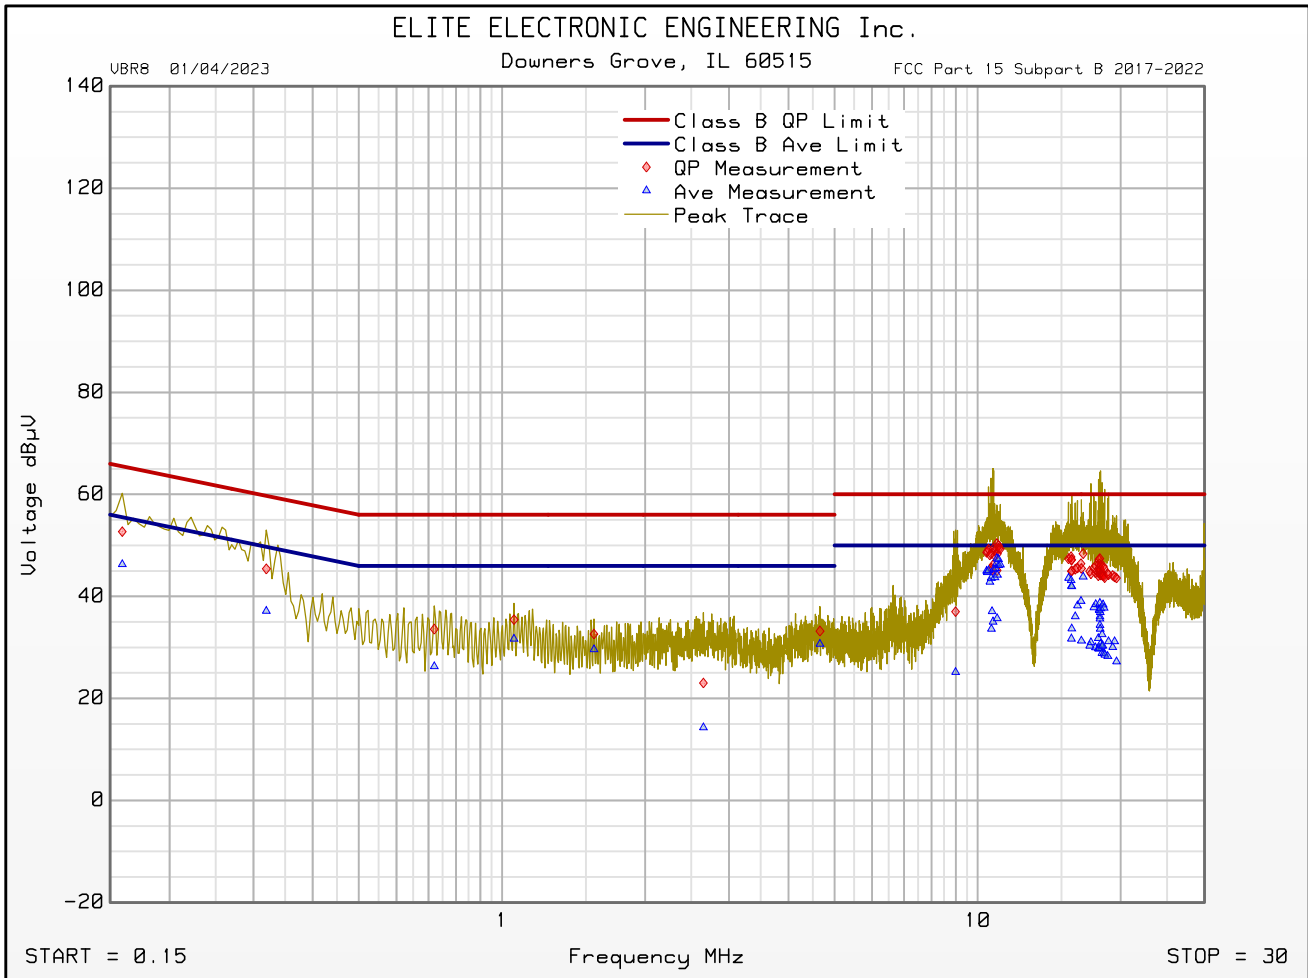

Emissions Meet QP Limit  
 Emissions Meet Ave Limit

## 21. RF Radiated Emissions

EUT Information	
Manufacturer	The Chamberlain Group, Inc.
Product	Wall Mount Garage Door Opener
Model No.	98032, 98032RGD
Serial No.	N/A
Mode	Standby

Test Site Information	
Setup Format	Tabletop
Height of Support	N/A
Type of Test Site	Semi-Anechoic Chamber
Test Site Used	R29F
Antenna Types Used	Below 1GHz: Bilog (or equivalent) Above 1GHz: Double-ridged waveguide (or equivalent)
Highest Internal Frequency	2.4GHz
Highest Measurement Frequency	13GHz
Notes	The cables were manually maximized during the preliminary emissions sweeps. The cable arrangement which resulted in the worst-case emissions was utilized.

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1
Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)	3.2

Requirements
The field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the values in the following tables.


FCC Part 15 Class B Radiated Emissions Limits (30MHz to 1GHz)		
Frequency of Emission (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Field Strength ( $\text{dB}\mu\text{V}/\text{m}$ )
30 – 88	100	40
88 – 216	150	43.5
216 – 960	200	46
Above 960	500	54
FCC Part 15 Class B Radiated Emissions Limits (Above 1GHz)		
Frequency of Emission (MHz)	Peak Limit ( $\text{dB}\mu\text{V}/\text{m}$ )	Average Limit ( $\text{dB}\mu\text{V}/\text{m}$ )
Above 1000	74	54




ICES-003 Class B Radiated Emissions Limits (30MHz to 1GHz)		
Frequency Range (MHz)	Field Strength at 3 meters (dB $\mu$ V/m)	Field Strength at 10 meters (dB $\mu$ V/m)
30 – 88	40	30
88 – 216	43.5	33.1
216 – 230	46	35.6
230 – 960	47	37
960 – 1000	54	43.5
ICES-003 Class B Radiated Emissions Limits (At and Above 1GHz)		
Frequency Range (GHz)	Average (dB $\mu$ V/m)	Peak (dB $\mu$ V/m)
1 – F <sub>M</sub>	54	74

F<sub>M</sub> = highest measurement frequency


Procedure
<p>Since a quasi-peak detector and an average detector require long integration times, it is not practical to automatically sweep through the quasi-peak and average levels. Therefore, radiated emissions from the EUT were first scanned using a peak detector and automatically plotted. The frequencies where significant emission levels were noted were then remeasured using the quasi-peak detector or average detector.</p> <p>The EUT and all peripheral equipment were placed on an 80cm high non-conductive stand. The broadband measuring antenna was positioned at a 3-meter distance from the EUT. The frequency range from 30MHz to 1GHz was investigated using a peak detector function with the bilog antenna at several heights, horizontal and vertical polarization, and with several different orientations of the EUT with respect to the antenna. The frequency range from 1 – 13GHz was investigated using a peak detector function with the double ridged waveguide antenna at several heights, horizontal and vertical polarization, and with several different orientations of the EUT with respect to the antenna. The maximum levels for each antenna polarization were plotted.</p> <p>Final radiated emissions were performed on all significant broadband and narrowband emissions found in the exploratory sweeps using the following methods:</p> <ol style="list-style-type: none"> <li>1) Measurements from 30MHz to 1GHz were made using a quasi-peak detector and a broadband bilog antenna. Measurements above 1GHz were made using an average detector and a broadband double ridged waveguide antenna.</li> <li>2) To ensure that maximum or worst case, emission levels were measured, the following steps were taken: <ol style="list-style-type: none"> <li>a) The EUT was rotated so that all sides were exposed to the receiving antenna.</li> <li>b) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.</li> <li>c) The measuring antenna was raised and lowered from 1 to 4 meters for each antenna polarization to maximize the readings.</li> <li>d) For hand-held or body-worn devices, the EUT was rotated through three orthogonal axes to determine which orientation produces the highest emission relative to the limit.</li> </ol> </li> </ol>

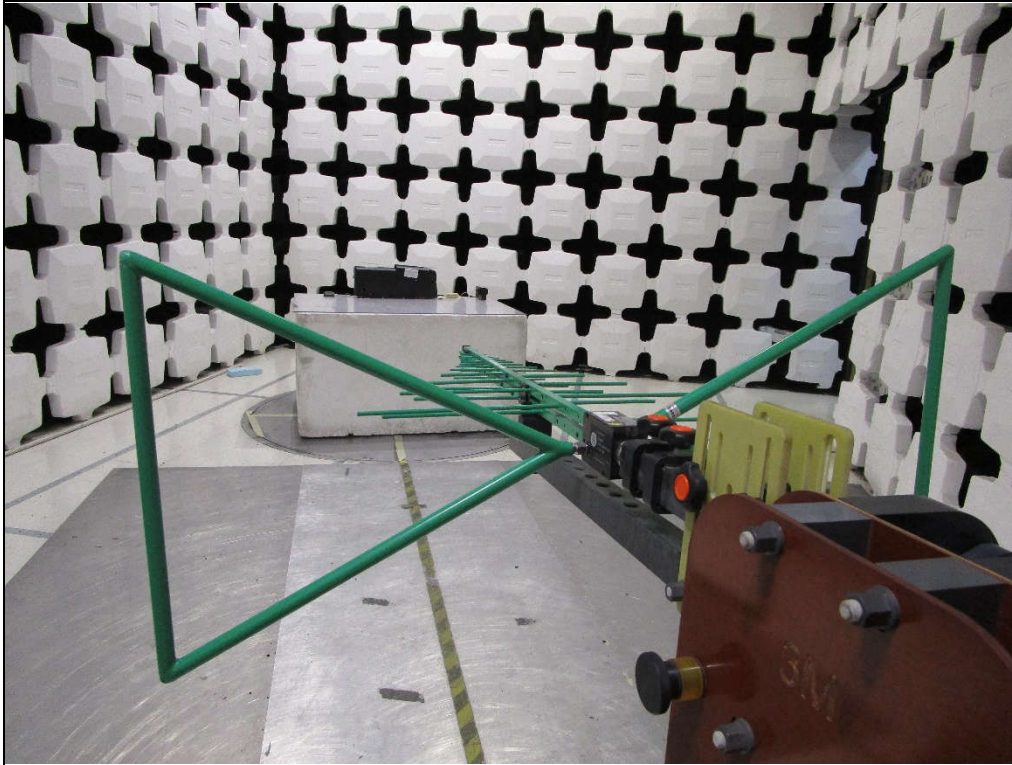


Test Setup for Radiated Emissions: 30MHz to 1GHz, Horizontal Polarization

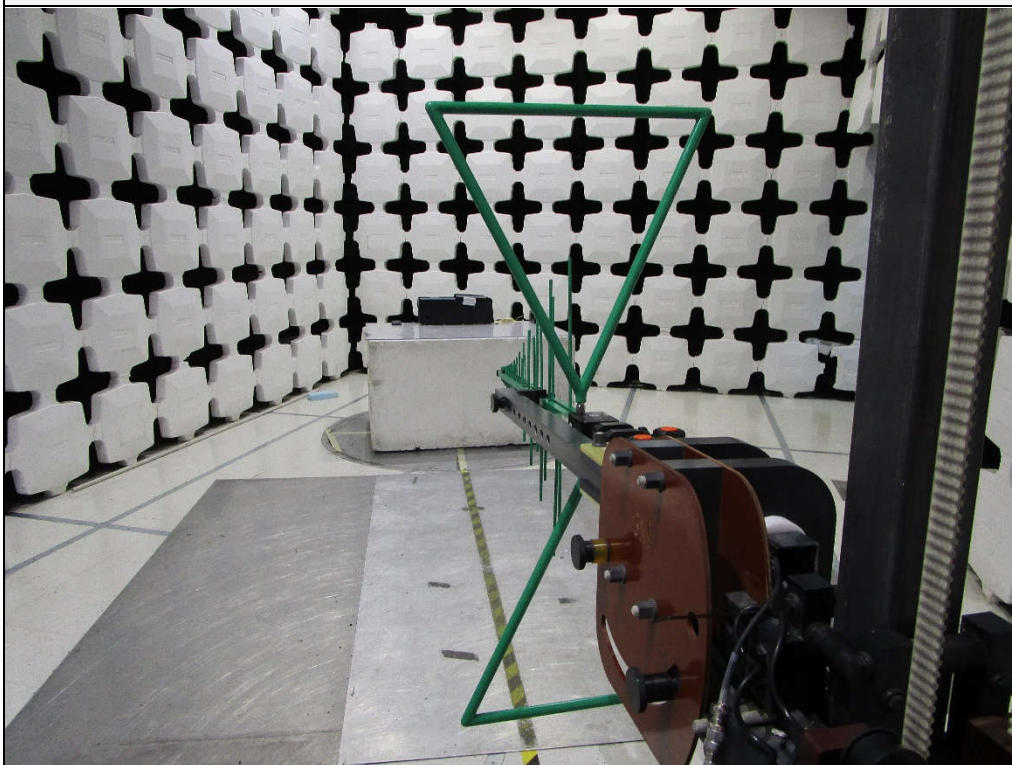

Test Setup for Radiated Emissions: 30MHz to 1GHz, Vertical Polarization

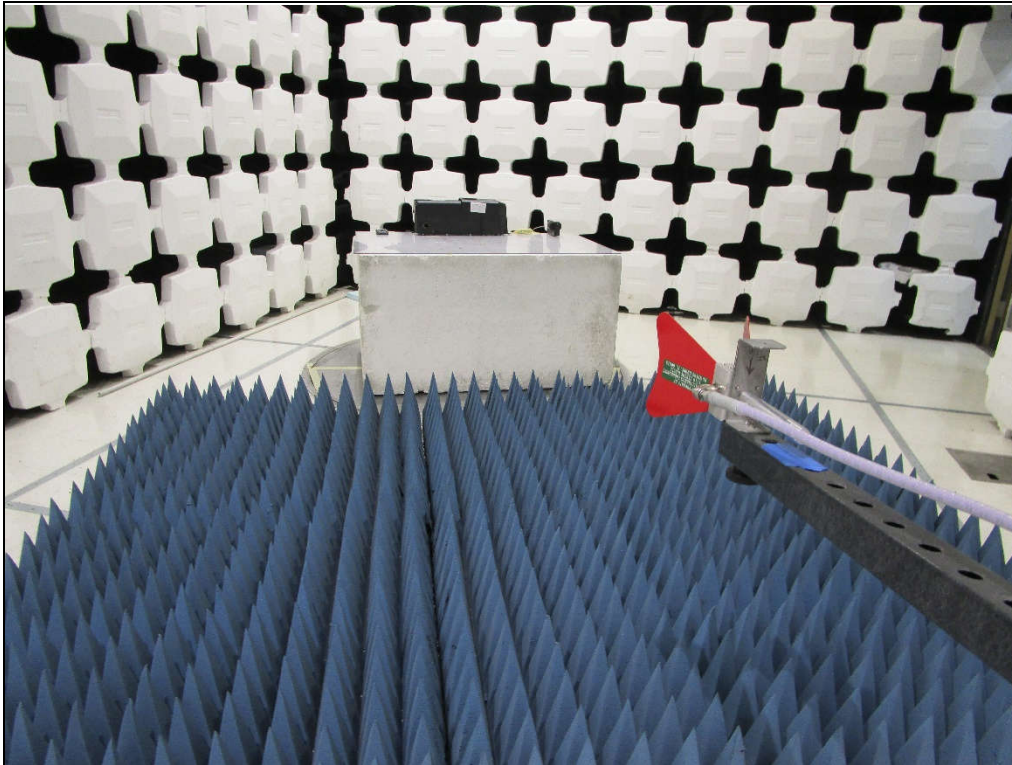

Test Setup for Radiated Emissions: Above 1GHz, Horizontal Polarization

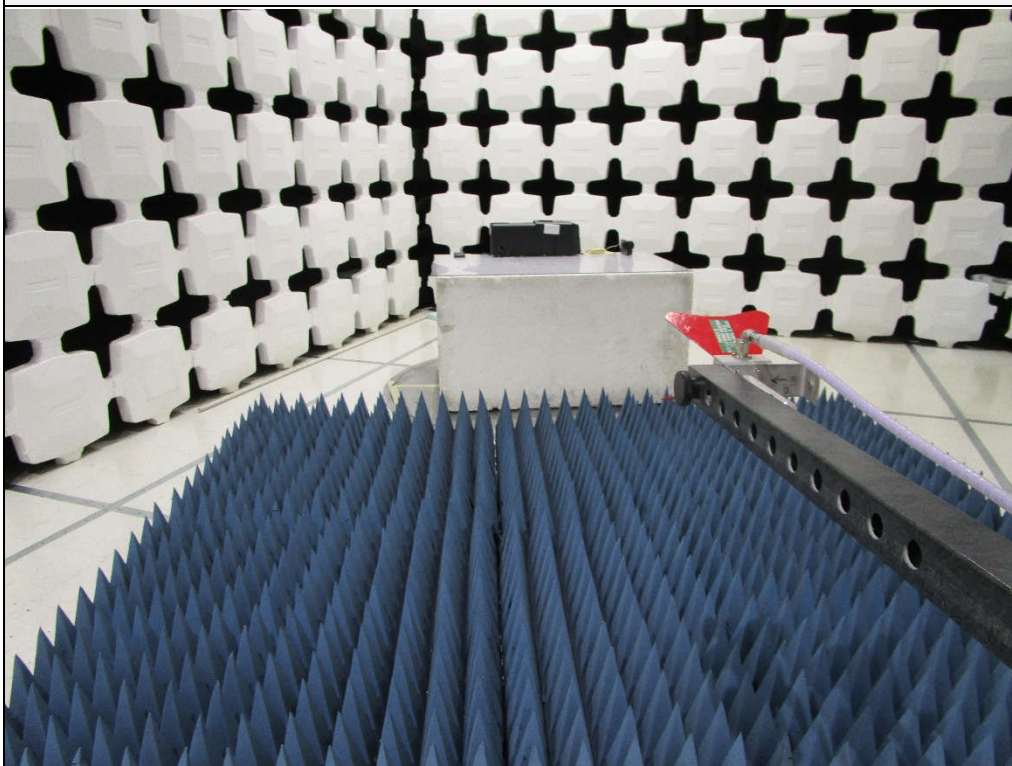

Test Setup for Radiated Emissions: Above 1GHz, Vertical Polarization







# FCC Part 15B Class B Radiated RF Emissions Test

SW ID/Rev: VBV2 04/24/2023

Manufacturer : CHAMBERLAIN  
 Model : 98032  
 Serial Number :  
 DUT Mode : STANDBY  
 Turntable Step Angle (°): 45  
 Mast Positions (cm) : 120, 200, 340  
 Scan Type : Stepped Scan  
 Test RBW : 120 kHz  
 Prelim Dwell Time (s) : 0.0001  
 Notes :  
 Test Engineer : T. Jozefczyk  
 Test Date : Jun 08, 2023 10:27:20 AM


Freq MHz	Peak Mtr Rdg dBuV	QP Mtr Rdg dBuV	Ant Fac dB/m	Amp Fac dB	Cbl Fac dB	Dist Corr dB	Peak Total dBµV/m	QP Total dBµV/m	QP Limit dBµV/m	QP Lim Mrg dB	Ant Pol	Mast Ht cm	Azim °	Excessive QP Level
30.780	4.8	-4.3	24.5	0.0	0.3	0.0	29.6	20.5	40.0	-19.5	Vertical	340	315	
79.980	10.2	7.0	13.3	0.0	0.5	0.0	24.0	20.8	40.0	-19.2	Horizontal	200	180	
160.000	14.7	12.5	17.2	0.0	0.8	0.0	32.7	30.5	43.5	-13.0	Vertical	120	180	
240.000	6.5	1.8	17.3	0.0	0.9	0.0	24.8	20.1	46.0	-25.9	Horizontal	120	0	
537.240	3.9	-6.2	24.8	0.0	1.4	0.0	30.1	20.0	46.0	-26.0	Horizontal	340	135	
799.980	7.8	2.7	26.0	0.0	1.7	0.0	35.5	30.4	46.0	-15.6	Vertical	120	270	



# FCC Part 15B Class B Radiated RF Emissions Test

SW ID/Rev: VBV2 04/24/2023

Manufacturer : CHAMBERLAIN  
Model : 98032  
Serial Number :  
DUT Mode : STANDBY  
Turntable Step Angle (°): 45  
Mast Positions (cm) : 120, 200, 340  
Antenna Polarization : Horizontal  
Scan Type : Stepped Scan  
Test RBW : 1 MHz  
Prelim Dwell Time (s) : 0.0001  
Notes :  
Test Engineer : T. Jozefczyk  
Test Date : Jun 08, 2023 03:50:37 PM

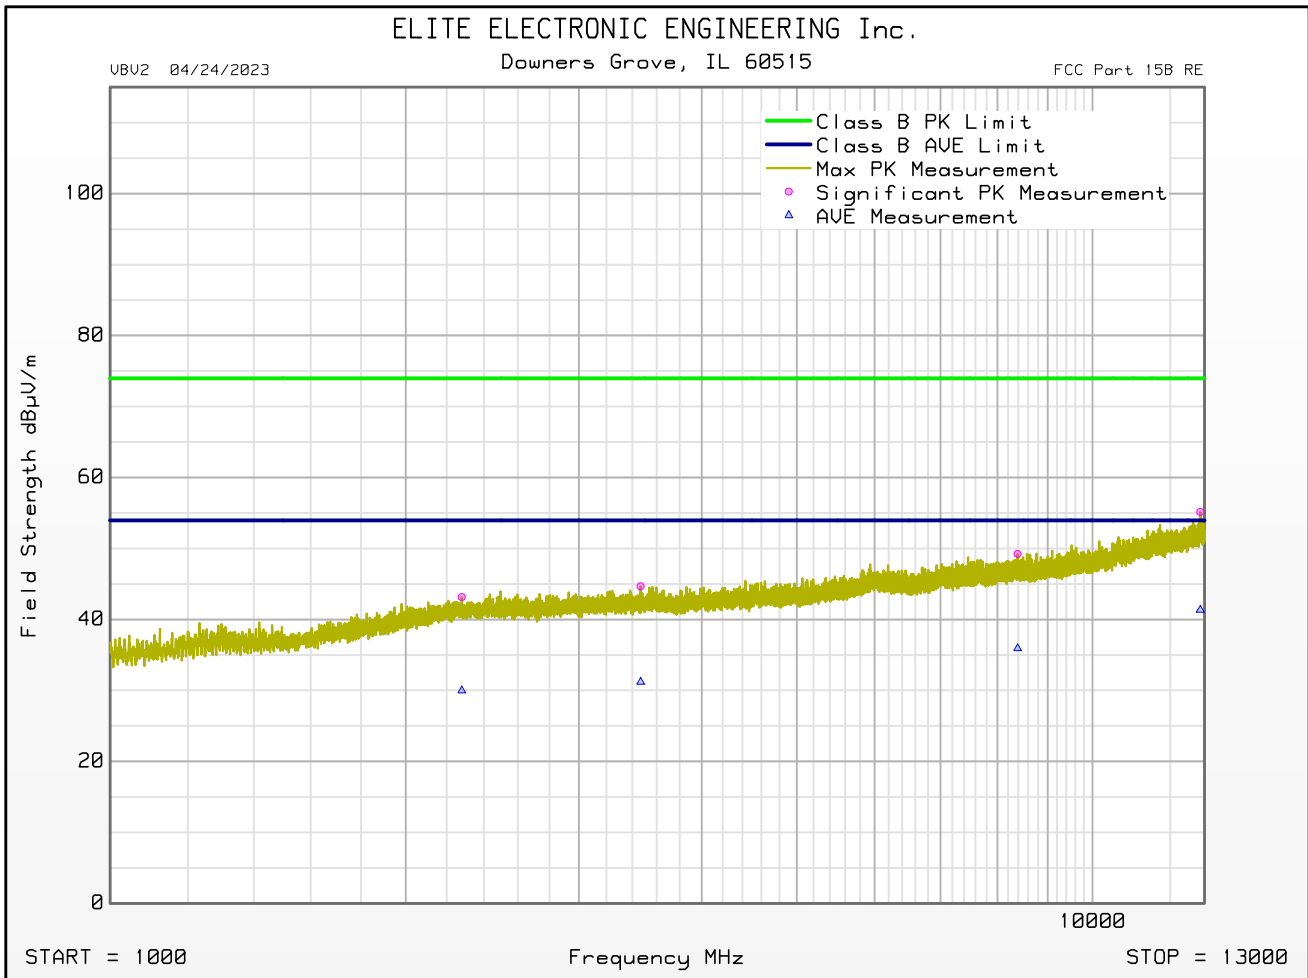




# FCC Part 15B Class B Radiated RF Emissions Test

SW ID/Rev: VBV2 04/24/2023

Manufacturer : CHAMBERLAIN  
Model : 98032  
Serial Number :  
DUT Mode : STANDBY  
Turntable Step Angle (°): 45  
Mast Positions (cm) : 120, 200, 340  
Antenna Polarization : Vertical  
Scan Type : Stepped Scan  
Test RBW : 1 MHz  
Prelim Dwell Time (s) : 0.0001  
Notes :  
Test Engineer : T. Jozefczyk  
Test Date : Jun 08, 2023 03:50:37 PM

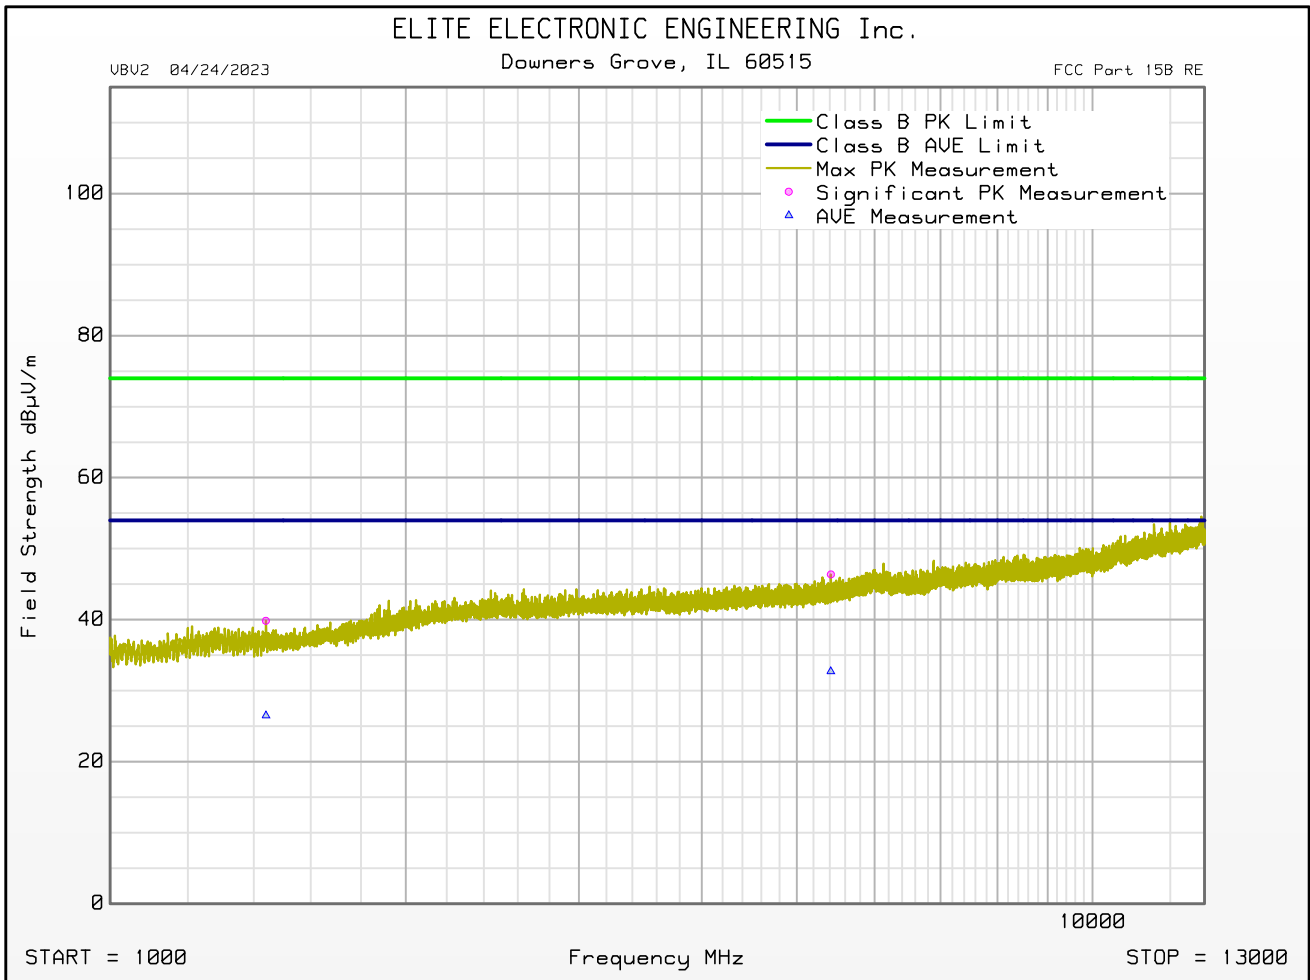



## FCC Part 15B Class B Radiated RF Emissions Test

SW ID/Rev: VBV2 04/24/2023

Manufacturer : CHAMBERLAIN  
 Model : 98032  
 Serial Number :  
 DUT Mode : STANDBY  
 Turntable Step Angle (°): 45  
 Mast Positions (cm) : 120, 200, 340  
 Scan Type : Stepped Scan  
 Test RBW : 1 MHz  
 Prelim Dwell Time (s) : 0.0001  
 Notes :  
 Test Engineer : T. Jozefczyk  
 Test Date : Jun 08, 2023 03:50:37 PM

Freq MHz	Peak Mtr Rdg dBuV	Ant Fac dB/m	Amp Fac dB	Cbl Fac dB	Dist Corr dB	Peak Total dBµV/m	Peak Limit dBµV/m	Peak Lim Mrg dB	Ant Pol	Mast Ht cm	Azim °	Excessive Peak Level
1440.500	49.3	28.6	-40.3	2.2	0.0	39.8	74.0	-34.1	Vertical	120	0	
2279.500	48.0	32.3	-40.0	2.9	0.0	43.2	74.0	-30.8	Horizontal	200	135	
3466.000	47.5	33.2	-39.5	3.5	0.0	44.7	74.0	-29.3	Horizontal	340	45	
5414.000	46.7	34.8	-39.5	4.4	0.0	46.4	74.0	-27.6	Vertical	340	315	
8385.500	46.5	36.6	-39.4	5.6	0.0	49.2	74.0	-24.8	Horizontal	200	225	
12867.500	47.4	39.2	-38.5	7.0	0.0	55.2	74.0	-18.8	Horizontal	340	135	

Freq MHz	Average Mtr Rdg dBuV	Ant Fac dB/m	Amp Fac dB	Cbl Fac dB	Dist Corr dB	Average Total dBµV/m	Average Limit dBµV/m	Average Lim Mrg dB	Ant Pol	Mast Ht cm	Azim °	Excessive Average Level
1440.500	35.9	28.6	-40.3	2.2	0.0	26.5	54.0	-27.5	Vertical	120	0	
2279.500	34.7	32.3	-40.0	2.9	0.0	30.0	54.0	-24.0	Horizontal	200	135	
3466.000	34.0	33.2	-39.5	3.5	0.0	31.2	54.0	-22.8	Horizontal	340	45	
5414.000	33.0	34.8	-39.5	4.4	0.0	32.7	54.0	-21.3	Vertical	340	315	
8385.500	33.2	36.6	-39.4	5.6	0.0	35.9	54.0	-18.1	Horizontal	200	225	
12867.500	33.6	39.2	-38.5	7.0	0.0	41.4	54.0	-12.6	Horizontal	340	135	

## 22. Module Integration – Emissions

EUT Information	
Manufacturer	The Chamberlain Group, Inc.
Product	Wall Mount Garage Door Opener
Model No.	98032, 98032RGD
Serial No.	N/A
Mode	Tx

Test Site Information	
Setup Format	Tabletop
Height of Support	N/A
Type of Test Site	Semi-Anechoic Chamber
Test Site Used	R29F
Antenna Types Used	Below 1GHz: Bilog (or equivalent) Above 1GHz: Double-ridged waveguide (or equivalent)
Notes	Cables were manually maximized during the preliminary emissions sweeps and cable arrangement which resulted in the worst-case emissions was utilized.

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1
Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)	3.2

Requirements
<p><u>Per 996369 D04 Module Integration Guide v01:</u></p> <p>Testing of the host product with all the transmitters installed is recommended, to verify that the host product meets all the applicable FCC rules. The radio spectrum is to be investigated with all the transmitters in the final host product functioning to determine that no emissions exceed the highest limit permitted for any one individual transmitter as required by Section 2.947(f).</p> <p>The testing shall also check for emissions that may occur due to the intermixing of emissions with the other transmitters, digital circuitry, or due to physical properties of the host product (enclosure). This investigation is especially important when integrating multiple modular transmitters where the certification is based on testing each of them in a stand-alone configuration. No emissions exceed the highest limit permitted for any one individual transmitter as required by Section 2.947(f).</p>
<p><u>Per FCC 15.247:</u></p> <p>In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).</p>
<p><u>Per RSS-247:</u></p> <p>In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30dB instead of 20dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.</p>

### Procedures

Radiated measurements were performed in a 32ft. x 20ft. x 18ft. hybrid ferrite-tile/anechoic absorber lined test chamber. The walls and ceiling of the shielded chamber are lined with ferrite tiles and anechoic absorber material is installed over the ferrite tiles. The floor of the chamber is used as the ground plane. The chamber complies with ANSI C63.4-2014 for site attenuation.

The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads.

Preliminary radiated emissions tests were performed to determine the emission characteristics of the EUT. For the preliminary test, a broadband measuring antenna was positioned at a 3-meter distance from the EUT. The entire frequency range from 30MHz to 10/18GHz (10GHz used for 902 – 928MHz range and 18GHz used for 2400 – 2483.5MHz range) was investigated using a peak detector function.


The final open field emission tests were then manually performed over the frequency range of 30MHz to 10/18GHz.

- 1) For all harmonics not in the restricted bands, the following procedure was used:
  - a) The field strength of the fundamental was measured using a double ridged waveguide antenna (bilog antenna for the 902 – 928MHz range). The waveguide antenna (bilog antenna for the 902 – 928MHz range) was positioned at a 3-meter distance from the EUT. The EUT was placed on a 1.5 meter high (80cm high for 902 – 928MHz) non-conductive stand. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.
  - b) The field strengths of all of the harmonics not in the restricted band were then measured using a double-ridged waveguide antenna. The waveguide antenna was positioned at a 3-meter distance from the EUT. The EUT was placed on a non-conductive stand. A peak detector with a resolution bandwidth of 100kHz was used on the spectrum analyzer.
  - c) To ensure that maximum or worst-case emission levels at the fundamental and harmonics were measured, the following steps were taken when measuring the fundamental emissions and the spurious emissions:
    - i. The EUT was rotated so that all of its sides were exposed to the receiving antenna.
    - ii. Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
    - iii. The measuring antenna was raised and lowered for each antenna polarization to maximize the readings.
  - d) All harmonics not in the restricted bands must be at least 20dB below levels measured at the fundamental. However, attenuation below the general limits specified in §15.209(a) is not required.
- 2) For all emissions in the restricted bands, the following procedure was used:
  - a) The field strengths of all emissions below 1GHz were measured using a bi-log antenna. The bilog antenna was positioned at a 3-meter distance from the EUT. The EUT was placed on an 80cm high non-conductive stand. A peak detector with a resolution bandwidth of 100kHz was used on the spectrum analyzer.
  - b) The field strengths of all emissions above 1GHz were measured using a double-ridged waveguide antenna. The waveguide antenna was positioned at a 3-meter distance from the EUT. The EUT was placed on a 1.5-meter-high non-conductive stand. A peak detector with a resolution bandwidth of 1MHz was used on the spectrum analyzer.
  - c) To ensure that maximum (or worst case) emission levels were measured, the following


steps were taken when taking all measurements:

- i. The EUT was rotated so that all of its sides were exposed to the receiving antenna.
  - ii. Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
  - iii. The measuring antenna was raised and lowered for each antenna polarization to maximize the readings.
- d) For all radiated emissions measurements below 1GHz, if the peak reading is below the limits listed in §15.209(a), no further measurements are required. If, however, the peak readings exceed the limits listed in 15.209(a), then the emissions are remeasured using a quasi-peak detector.
- e) For all radiated emissions measurements above 1GHz, the peak readings must comply with the §15.35(b) limits. §15.35(b) states that when average radiated emissions measurements are specified, there also is a limit on the peak level of the radiated emissions. The limit on the peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. Therefore, all peak readings above 1GHz must be no greater than 20dB above the limits specified in §15.209(a).
- f) Next, for all radiated emissions measurements above 1GHz, the resolution bandwidth was set to 1MHz. The analyzer was set to linear mode with a 10Hz video bandwidth in order to simulate an average detector and an average reading was taken.


,

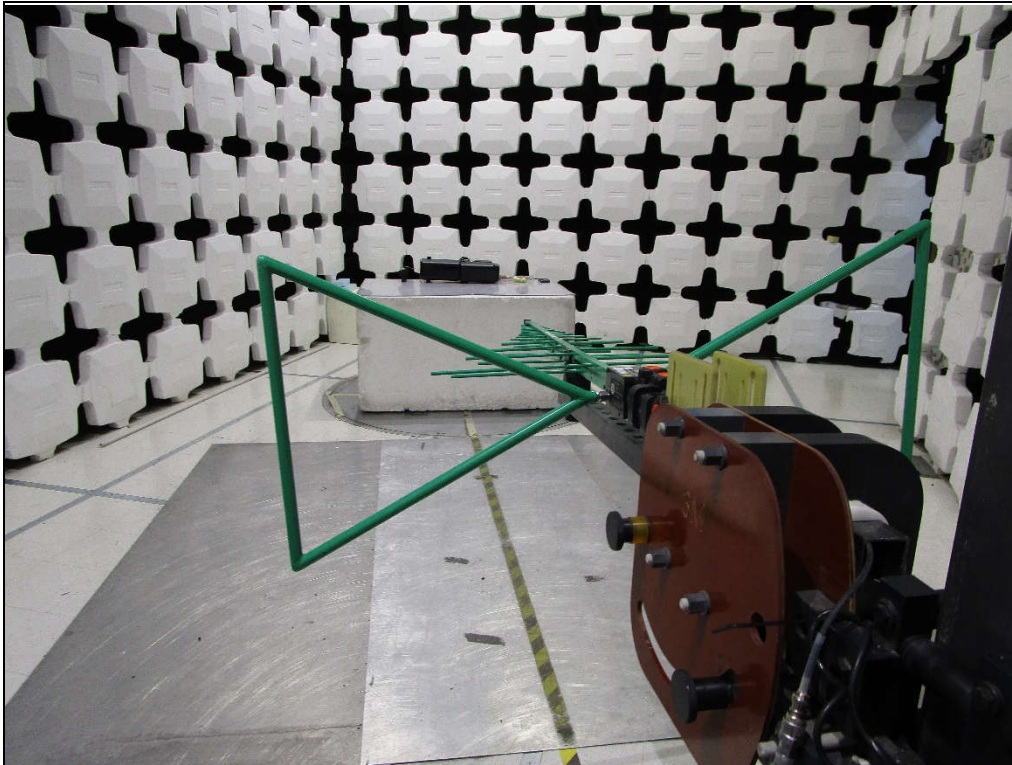


Test Setup for Spurious Emissions: 30MHz to 1GHz, Horizontal Polarization

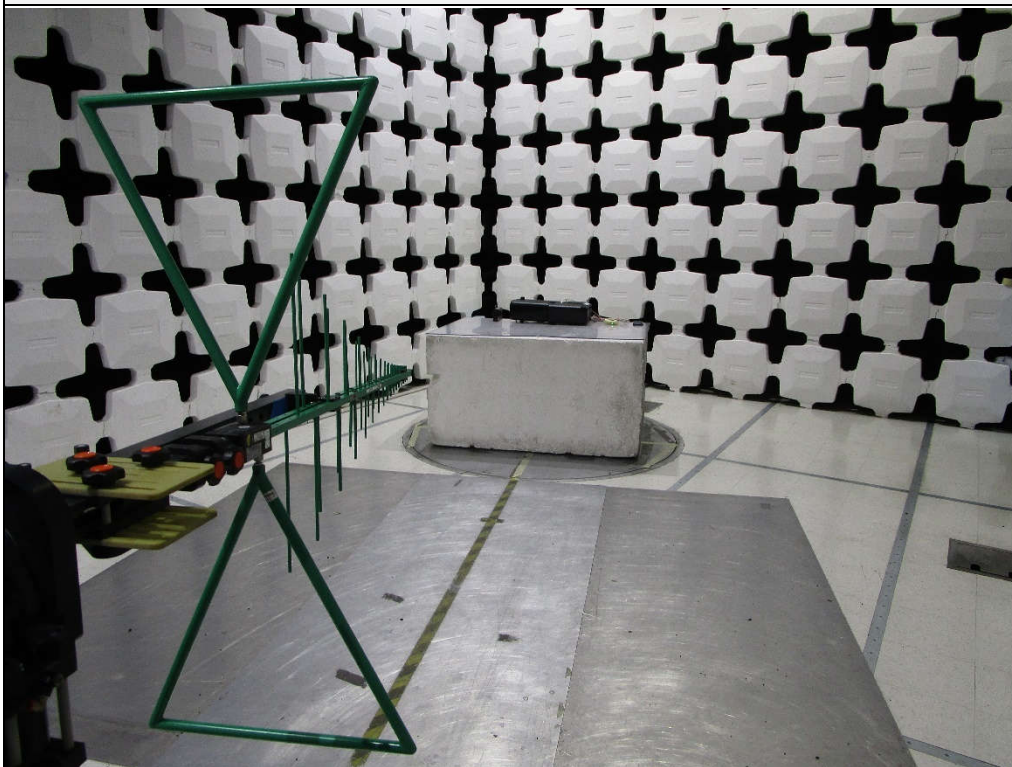

Test Setup for Spurious Emissions: 30MHz to 1GHz, Vertical Polarization

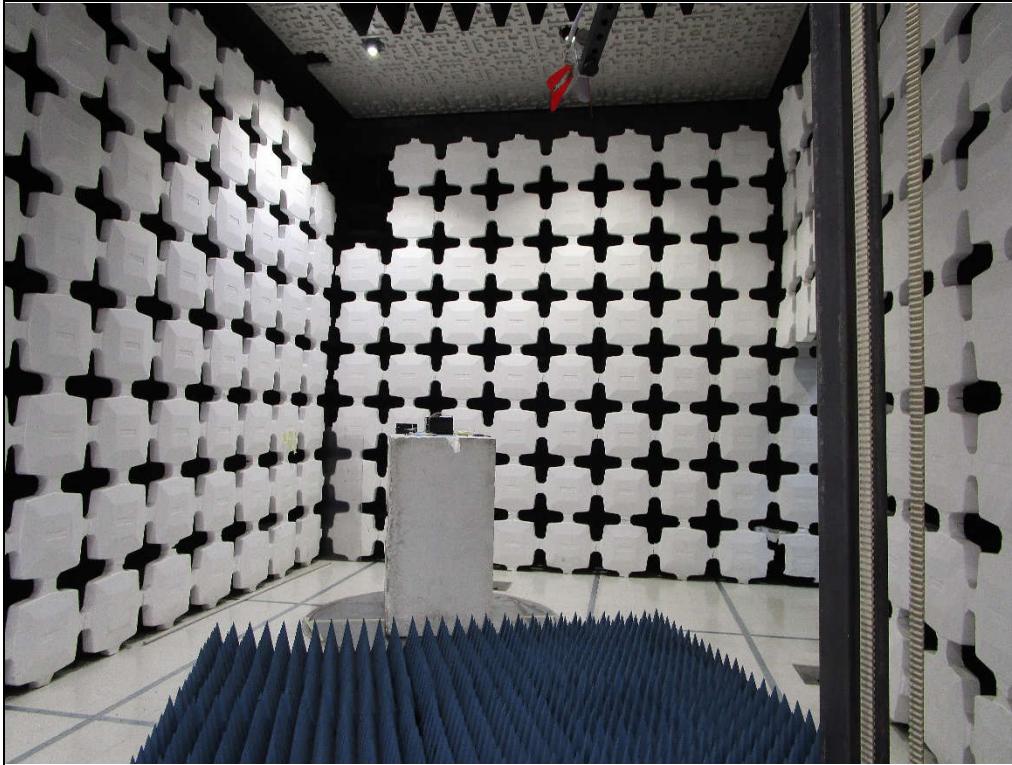

Test Setup for Spurious Emissions: Above 1GHz, Horizontal Polarization

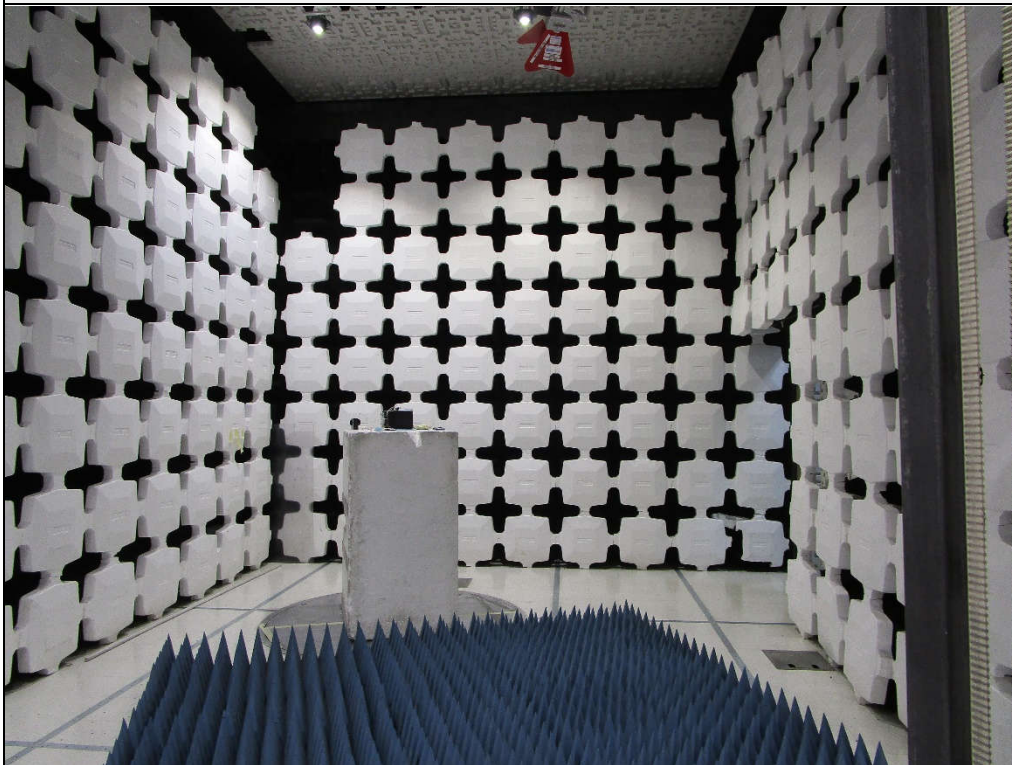

Test Setup for Spurious Emissions: Above 1GHz, Vertical Polarization

Test Details	
Manufacturer	The Chamberlain Group, Inc.
Model No.	98032, 98032RGD
Serial No.	N/A
Test	Host Product Testing – Case Spurious Emissions
Mode	Tx
Frequency Tested	902.25MHz
Notes	Peak and Average Measurements in the Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dB $\mu$ V)	Ambient	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Peak Total at 3m (dB $\mu$ V/m)	Peak Total at 3m ( $\mu$ V/m)	Peak Limit at 3m ( $\mu$ V/m)	Margin (dBm)
2706.75	H	50.67	Ambient	3.68	32.58	-40.21	46.71	216.61	5000.00	-27.27
	V	50.24	Ambient	3.68	32.58	-40.21	46.28	206.15	5000.00	-27.70
3609.00	H	49.22	Ambient	4.76	33.63	-39.51	48.10	254.02	5000.00	-25.88
	V	51.45	Ambient	4.76	33.63	-39.51	50.33	328.37	5000.00	-23.65
4511.25	H	48.75	Ambient	4.80	34.26	-39.60	48.21	257.31	5000.00	-25.77
	V	49.81	Ambient	4.80	34.26	-39.60	49.27	290.71	5000.00	-24.71
5413.50	H	55.29		5.11	34.72	-39.46	55.66	607.03	5000.00	-18.32
	V	55.16		5.11	34.72	-39.46	55.53	598.01	5000.00	-18.45

Freq (MHz)	Ant Pol	Meter Reading (dB $\mu$ V)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle Factor (dB)	Average Total at 3m (dB $\mu$ V/m)	Average Total at 3m ( $\mu$ V/m)	Average Limit at 3m ( $\mu$ V/m)	Margin (dB)
2706.75	H	35.64	Ambient	3.68	32.58	-40.21	-37.87	-6.19	0.49	500.00	-60.17
	V	35.63	Ambient	3.68	32.58	-40.21	-37.87	-6.20	0.49	500.00	-60.18
3609.00	H	34.86	Ambient	4.76	33.63	-39.51	-37.87	-4.13	0.62	500.00	-58.11
	V	37.15	Ambient	4.76	33.63	-39.51	-37.87	-1.84	0.81	500.00	-55.82
4511.25	H	33.83	Ambient	4.80	34.26	-39.60	-37.87	-4.58	0.59	500.00	-58.56
	V	33.82	Ambient	4.80	34.26	-39.60	-37.87	-4.59	0.59	500.00	-58.57
5413.50	H	39.90		5.11	34.72	-39.46	-37.87	2.40	1.32	500.00	-51.58
	V	39.73		5.11	34.72	-39.46	-37.87	2.23	1.29	500.00	-51.75



Test Details	
Manufacturer	The Chamberlain Group, Inc.
Model No.	98032, 98032RGD
Serial No.	N/A
Test	Host Product Testing – Case Spurious Emissions
Mode	Tx
Frequency Tested	902.25MHz
Notes	Peak Measurements in the Non-Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dBμV)	Ambient	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Peak Total at 3m (dBμV/m)	Peak Total at 3m (μV/m)	Peak Limit at 3m (μV/m)	Margin (dBm)
902.25	H	81.97		2.88	26.47	0.00	111.33	368380.55		
	V	82.25		2.88	26.47	0.00	111.61	380449.22		
1804.50	H	65.75		3.25	30.41	-40.12	59.28	920.93	38044.92	-32.32
	V	65.22		3.25	30.41	-40.12	58.75	866.42	38044.92	-32.85
6315.75	H	40.80		5.53	35.75	-39.59	42.49	133.21	38044.92	-49.12
	V	44.61		5.53	35.75	-39.59	46.30	206.55	38044.92	-45.31
7218.00	H	37.68	Ambient	5.88	36.28	-39.66	40.18	102.12	38044.92	-51.42
	V	38.17	Ambient	5.88	36.28	-39.66	40.67	108.05	38044.92	-50.93

Test Details	
Manufacturer	The Chamberlain Group, Inc.
Model No.	98032, 98032RGD
Serial No.	N/A
Test	Host Product Testing – Case Spurious Emissions
Mode	Tx
Frequency Tested	802.11n – 2412MHz
Notes	Peak and Average Measurements in the Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dBµV)	Ambient	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Peak Total at 3m (dBµV/m)	Peak Total at 3m (µV/m)	Peak Limit at 3m (µV/m)	Margin (dBm)
4824.00	H	52.93		4.87	34.28	-39.65	52.43	418.22	5000.00	-21.55
	V	51.30		4.87	34.28	-39.65	50.80	346.66	5000.00	-23.18

Freq (MHz)	Ant Pol	Meter Reading (dBµV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle Factor (dB)	Average Total at 3m (dBµV/m)	Average Total at 3m (µV/m)	Average Limit at 3m (µV/m)	Margin (dB)
4824.00	H	40.00		4.87	34.28	-39.65	0.00	39.50	94.39	500.00	-14.48
	V	37.29		4.87	34.28	-39.65	0.00	36.79	69.09	500.00	-17.19

Test Details	
Manufacturer	The Chamberlain Group, Inc.
Model No.	98032, 98032RGD
Serial No.	N/A
Test	Host Product Testing – Case Spurious Emissions
Mode	Tx
Frequency Tested	802.11n – 2412MHz
Notes	Peak Measurements in the Non-Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dB $\mu$ V)	Ambient	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Peak Total at 3m (dB $\mu$ V/m)	Peak Total at 3m ( $\mu$ V/m)	Peak Limit at 3m ( $\mu$ V/m)	Margin (dBm)
2412.00	H	55.21		3.39	32.59	0.00	91.18	36243.29		
	V	53.82		3.39	32.59	0.00	89.79	30883.57		
7236.00	H	37.29	Ambient	5.87	36.27	-39.66	39.77	97.37	3624.33	-31.42
	V	38.89	Ambient	5.87	36.27	-39.66	41.37	117.06	3624.33	-29.82
9648.00	H	36.56	Ambient	6.30	37.18	-39.29	40.74	108.86	3624.33	-30.45
	V	37.23	Ambient	6.30	37.18	-39.29	41.41	117.58	3624.33	-29.78

Test Details	
Manufacturer	The Chamberlain Group, Inc.
Model No.	98032, 98032RGD
Serial No.	N/A
Test	Host Product Testing – Case Spurious Emissions
Mode	Tx
Frequency Tested	Realtek BLE – 2402MHz
Notes	Peak and Average Measurements in the Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dBµV)	Ambient	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Peak Total at 3m (dBµV/m)	Peak Total at 3m (µV/m)	Peak Limit at 3m (µV/m)	Margin (dBm)
4804.00	H	48.30	Ambient	4.82	34.31	-39.71	47.72	243.22	5000.00	-26.26
	V	48.35	Ambient	4.82	34.31	-39.71	47.77	244.63	5000.00	-26.21

Freq (MHz)	Ant Pol	Meter Reading (dBµV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle Factor (dB)	Average Total at 3m (dBµV/m)	Average Total at 3m (µV/m)	Average Limit at 3m (µV/m)	Margin (dB)
4804.00	H	33.09	Ambient	4.82	34.31	-39.71	0.00	32.51	42.22	500.00	-21.47
	V	33.08	Ambient	4.82	34.31	-39.71	0.00	32.50	42.17	500.00	-21.48

Test Details	
Manufacturer	The Chamberlain Group, Inc.
Model No.	98032, 98032RGD
Serial No.	N/A
Test	Host Product Testing – Case Spurious Emissions
Mode	Tx
Frequency Tested	Realtek BLE – 2402MHz
Notes	Peak Measurements in the Non-Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dB $\mu$ V)	Ambient	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Peak Total at 3m (dB $\mu$ V/m)	Peak Total at 3m ( $\mu$ V/m)	Peak Limit at 3m ( $\mu$ V/m)	Margin (dBm)
2402.00	H	49.32		3.38	32.57	0.00	85.28	18361.32		
	V	50.35		3.38	32.57	0.00	86.31	20673.02		
7206.00	H	37.10	Ambient	5.89	36.29	-39.66	39.62	95.71	2067.30	-26.69
	V	37.23	Ambient	5.89	36.29	-39.66	39.75	97.15	2067.30	-26.56

Test Details	
Manufacturer	The Chamberlain Group, Inc.
Model No.	98032, 98032RGD
Serial No.	N/A
Test	Host Product Testing – Case Spurious Emissions
Mode	Tx
Frequency Tested	Security 3.0 BLE – 2402MHz
Notes	Peak and Average Measurements in the Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dBμV)	Ambient	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Peak Total at 3m (dBμV/m)	Peak Total at 3m (μV/m)	Peak Limit at 3m (μV/m)	Margin (dBm)
4804.00	H	54.44		4.82	34.31	-39.71	53.86	493.18	5000.00	-20.12
	V	55.60		4.82	34.31	-39.71	55.02	563.64	5000.00	-18.96

Freq (MHz)	Ant Pol	Meter Reading (dBμV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle Factor (dB)	Average Total at 3m (dBμV/m)	Average Total at 3m (μV/m)	Average Limit at 3m (μV/m)	Margin (dB)
4804.00	H	44.86		4.82	34.31	-39.71	0.00	44.28	163.68	500.00	-9.70
	V	46.52		4.82	34.31	-39.71	0.00	45.94	198.16	500.00	-8.04

Test Details	
Manufacturer	The Chamberlain Group, Inc.
Model No.	98032, 98032RGD
Serial No.	N/A
Test	Host Product Testing – Case Spurious Emissions
Mode	Tx
Frequency Tested	Security 3.0 BLE – 2402MHz
Notes	Peak Measurements in the Non-Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dBμV)	Ambient	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Peak Total at 3m (dBμV/m)	Peak Total at 3m (μV/m)	Peak Limit at 3m (μV/m)	Margin (dBm)
2402.00	H	60.99		3.38	32.57	0.00	96.95	70372.64		
	V	58.44		3.38	32.57	0.00	94.40	52469.13		
7206.00	H	45.76		5.89	36.29	-39.66	48.28	259.38	7037.26	-28.67
	V	44.76		5.89	36.29	-39.66	47.28	231.17	7037.26	-29.67
9608.00	H	36.95	Ambient	6.27	37.14	-39.30	41.05	112.90	7037.26	-35.89
	V	37.08	Ambient	6.27	37.14	-39.30	41.18	114.60	7037.26	-35.76

## 23. Scope of Accreditation

SCOPE OF ACCREDITATION TO ISO/IEC 17025:2017

ELITE ELECTRONIC ENGINEERING, INC.  
1516 Centre Circle  
Downers Grove, IL 60515  
Robert Bugielski (QA Manager) Phone: 630 495 9770 ext. 168  
Email: [rbugielski@elitetest.com](mailto:rbugielski@elitetest.com)  
Craig Fanning (EMC Lab Manager) Phone: 630 495 9770 ext. 112  
Email: [cfanning@elitetest.com](mailto:cfanning@elitetest.com)  
Brandon Lugo (Automotive Team Leader) Phone: 630 495 9770 ext. 163  
Email: [blugo@elitetest.com](mailto:blugo@elitetest.com)  
Richard King (FCC/Commercial Team Leader) Phone: 630 495 9770 ext. 123  
Email: [reking@elitetest.com](mailto:reking@elitetest.com)  
Website: [www.elitetest.com](http://www.elitetest.com)

## ELECTRICAL

Valid To: August 31, 2023

Certificate Number: 1786.01

In recognition of the successful completion of the A2LA Accreditation Program evaluation process, accreditation is granted to this laboratory to perform the following automotive electromagnetic compatibility and other electrical tests:

**Test Technology:****Test Method(s) <sup>1</sup>:*****Transient Immunity***

ISO 7637-2 (including emissions); ISO 7637-3;  
ISO 16750-2:2012, Sections 4.6.3 and 4.6.4;  
CS-11979, Section 6.4; CS.00054, Section 5.9;  
EMC-CS-2009.1 (CI220); FMC1278 (CI220, CI221, CI222);  
GMW 3097, Section 3.5; SAE J1113-11; SAE J1113-12;  
ECE Regulation 10.06 Annex 10

***Electrostatic Discharge (ESD)***

ISO 10605 (2001, 2008);  
CS-11979 Section 7.0; CS.00054, Section 5.10;  
EMC-CS-2009.1 (CI 280); FMC1278 (CI280); SAE J1113-13;  
GMW 3097 Section 3.6

***Conducted Emissions***

CISPR 25 (2002, 2008), Sections 6.2 and 6.3;  
CISPR 25 (2016), Sections 6.3 and 6.4;  
CS-11979, Section 5.1; CS.00054, Sections 5.6.1 and 5.6.2;  
GMW 3097, Section 3.3.2;  
EMC-CS-2009.1 (CE 420); FMC1278 (CE420, CE421)

***Radiated Emissions Anechoic***

CISPR 25 (2002, 2008), Section 6.4;  
CISPR 25 (2016), Section 6.5;  
CS-11979, Section 5.3; CS.00054, Section 5.6.3;  
GMW 3097, Section 3.3.1;  
EMC-CS-2009.1 (RE 310); FMC1278 (RE310);

(A2LA Cert. No. 1786.01) Revised 06/07/2023

 Page 1 of 8



<u>Test Technology:</u>	<u>Test Method(s) <sup>1</sup>:</u>
<i>Vehicle Radiated Emissions</i>	CISPR 12; CISPR 36; ICES-002; ECE Regulation 10.06 Annex 5
<i>Bulk Current Injection (BCI)</i>	ISO 11452-4; CS-11979, Section 6.1; CS.00054, Section 5.8.1; GMW 3097, Section 3.4.1; SAE J1113-4; EMC-CS-2009.1 (RI112); FMC1278 (RI112); ECE Regulation 10.06 Annex 9
<i>Radiated Immunity Anechoic (Including Radar Pulse)</i>	ISO 11452-2; ISO 11452-5; CS-11979, Section 6.2; CS.00054, Section 5.8.2; GMW 3097, Section 3.4.2; EMC-CS-2009.1 (RI114); FMC1278 (RI114); SAE J1113-21; ECE Regulation 10.06 Annex 9
<i>Radiated Immunity Magnetic Field</i>	ISO 11452-8
<i>Radiated Immunity Reverb</i>	ISO/IEC 61000-4-21; GMW 3097, Section 3.4.3; EMC-CS-2009.1 (RI114); FMC1278 (RI114); ISO 11452-11
<i>Radiated Immunity (Portable Transmitters)</i>	ISO 11452-9; EMC-CS-2009.1 (RI115); FMC1278 (RI115)
<i>Vehicle Radiated Immunity (ALSE)</i>	ISO 11451-2; ECE Regulation 10.06 Annex 6
<i>Vehicle Product Specific EMC Standards</i>	EN 14982; EN ISO 13309; ISO 13766; EN 50498; EC Regulation No. 2015/208; EN 55012
<i>Electrical Loads</i>	ISO 16750-2
<b>Emissions</b> Radiated and Conducted (3m Semi-anechoic chamber, up to 40 GHz)	47 CFR, FCC Part 15 B (using ANSI C63.4:2014); 47 CFR, FCC Part 18 (using FCC MP-5:1986); ICES-001; ICES-003; ICES-005; IEC/CISPR 11, Ed. 4.1 (2004-06); AS/NZS CISPR 11 (2004); IEC/CISPR 11 Ed 5 (2009-05) + A1 (2010); KN 11 (2008-5) with RRL Notice No. 2008-3 (May 20, 2008); CISPR 11; EN 55011; KS C 9811; CNS 13803 (1997, 2003); CISPR 14-1; EN 55014-1; AS/NZS CISPR 14.1; CISPR 16-2-1 (2008); CISPR 16-2-1; KS C 9814-1; KN 14-1; IEC/CISPR 22 (1997); EN 55022 (1998) + A1(2000); EN 55022 (1998) + A1(2000) + A2(2003); EN 55022 (2006); IEC/CISPR 22 (2008-09); AS/NZS CISPR 22 (2004); AS/NZS CISPR 22, 3rd Edition (2006); KN 22 (up to 6 GHz); CNS 13438 (up to 6 GHz); VCCI V-3 (up to 6 GHz); CISPR 32; EN 55032; KS C 9832; KN 32; ECE Regulation 10.06 Annex 7 (Broadband); ECE Regulation 10.06 Annex 8 (Narrowband); ECE Regulation 10.06 Annex 14 (Conducted)

**Test Technology:**

**Test Method(s) <sup>1</sup>:**

**Emissions (cont'd)**

Cellular Radiated Spurious Emissions

ETSI TS 151 010-1 GSM; 3GPP TS 51.010-1, Sec 12;  
ETSI TS 134 124 UMTS; 3GPP TS 34.124;  
ETSI TS 136 124 LTE; E-UTRA; 3GPP TS 36.124

Current Harmonics

IEC 61000-3-2; IEC 61000-3-12;  
EN 61000-3-2; KN 61000-3-2;  
KS C 9610-3-2; ECE Regulation 10.06 Annex 11

Flicker and Fluctuations

IEC 61000-3-3; IEC 61000-3-11;  
EN 61000-3-3; KN 61000-3-3;  
KS C 9610-3-3; ECE Regulation 10.06 Annex 12

**Immunity**

Electrostatic Discharge

IEC 61000-4-2, Ed. 1.2 (2001);  
IEC 61000-4-2 (1995) + A1(1998) + A2(2000);  
EN 61000-4-2 (1995); EN 61000-4-2 (2009-05);  
KN 61000-4-2 (2008-5);  
RRL Notice No. 2008-4 (May 20, 2008);  
IEC 61000-4-2; EN 61000-4-2; KN 61000-4-2;  
KS C 9610-4-2; IEEE C37.90.3 2001

Radiated Immunity

IEC 61000-4-3 (1995) + A1(1998) + A2(2000);  
IEC 61000-4-3, Ed. 3.0 (2006-02);  
IEC 61000-4-3, Ed. 3.2 (2010);  
KN 61000-4-3 (2008-5);  
RRL Notice No. 2008-4 (May 20, 2008);  
IEC 61000-4-3; EN 61000-4-3; KN 61000-4-3;  
KS C 9610-4-3; IEEE C37.90.2 2004

Electrical Fast Transient/Burst

IEC 61000-4-4, Ed. 2.0 (2004-07);  
IEC 61000-4-4, Ed. 2.1 (2011);  
IEC 61000-4-4 (1995) + A1(2000) + A2(2001);  
KN 61000-4-4 (2008-5);  
RRL Notice No. 2008-5 (May 20, 2008);  
IEC 61000-4-4; EN 61000-4-4; KN 61000-4-4;  
KS C 9610-4-4; ECE Regulation 10.06 Annex 15

Surge

IEC 61000-4-5 (1995) + A1(2000);  
IEC 61000-4-5, Ed 1.1 (2005-11);  
EN 61000-4-5 (1995) + A1(2001);  
KN 61000-4-5 (2008-5);  
RRL Notice No. 2008-4 (May 20, 2008);  
IEC 61000-4-5; EN 61000-4-5; KN 61000-4-5;  
KS C 9610-4-5;  
IEEE C37.90.1 2012; IEEE STD C62.41.2 2002;  
ECE Regulation 10.06 Annex 16

**Test Technology:**

**Test Method(s) 1:-**

**Immunity (cont'd)**  
Conducted Immunity

IEC 61000-4-6 (1996) + A1(2000);  
IEC 61000-4-6, Ed 2.0 (2006-05);  
IEC 61000-4-6 Ed. 3.0 (2008);  
KN 61000-4-6 (2008-5);  
RRL Notice No. 2008-4 (May 20, 2008);  
EN 61000-4-6 (1996) + A1(2001); IEC 61000-4-6;  
EN 61000-4-6; KN 61000-4-6; KS C 9610-4-6

Power Frequency Magnetic Field  
Immunity (*Down to 3 A/m*)

IEC 61000-4-8 (1993) + A1(2000); IEC 61000-4-8 (2009);  
EN 61000-4-8 (1994) + A1(2000);  
KN 61000-4-8 (2008-5);  
RRL Notice No. 2008-4 (May 20, 2008);  
IEC 61000-4-8; EN 61000-4-8; KN 61000-4-8; KS C 9610-4-8

Voltage Dips, Short Interrupts, and Line  
Voltage Variations

IEC 61000-4-11, Ed. 2 (2004-03);  
KN 61000-4-11 (2008-5);  
RRL Notice No. 2008-4 (May 20, 2008);  
IEC 61000-4-11; EN 61000-4-11; KN 61000-4-11;  
KS C 9610-4-11

Ring Wave

IEC 61000-4-12, Ed. 2 (2006-09);  
EN 61000-4-12:2006;  
IEC 61000-4-12; EN 61000-4-12; KN 61000-4-12;  
IEEE STD C62.41.2 2002

Generic and Product Specific EMC  
Standards

IEC/EN 61000-6-1; AS/NZS 61000-6-1; KN 61000-6-1;  
KS C 9610-6-1; IEC/EN 61000-6-2; AS/NZS 61000-6-2;  
KN 61000-6-2; KS C 9610-6-2; IEC/EN 61000-6-3;  
AS/NZS 61000-6-3; KN 61000-6-3; KS C 9610-6-3;  
IEC/EN 61000-6-4; AS/NZS 61000-6-4; KN 61000-6-4;  
KS C 9610-6-4; EN 50130-4; EN 61326-1; EN 50121-3-2;  
EN 12895; EN 50270; EN 50491-1; EN 50491-2; EN 50491-3;  
EN 55015; EN 60730-1; EN 60945; IEC 60533;  
EN 61326-2-6; EN 61800-3; IEC/CISPR 14-2; EN 55014-2;  
AS/NZS CISPR 14.2; KN 14-2; KS C 9814-2;  
IEC/CISPR 24; AS/NZS CISPR 24; EN 55024; KN 24;  
IEC/CISPR 35; AS/NZS CISPR 35; EN 55035; KN 35;  
KS C 9835; IEC 60601-1-2; JIS T0601-1-2

***TxRx EMC Requirements***

EN 301 489-1; EN 301 489-3; EN 301 489-9;  
EN 301 489-17; EN 301 489-19; EN 301 489-20

**Test Technology:**

**Test Method(s) <sup>1</sup>:**

*European Radio Test Standards*

ETSI EN 300 086-1; ETSI EN 300 086-2;  
 ETSI EN 300 113-1; ETSI EN 300 113-2;  
 ETSI EN 300 220-1; ETSI EN 300 220-2;  
 ETSI EN 300 220-3-1; ETSI EN 300 220-3-2;  
 ETSI EN 300 330-1; ETSI EN 300 330-2;  
 ETSI EN 300 440-1; ETSI EN 300 440-2;  
 ETSI EN 300 422-1; ETSI EN 300 422-2;  
 ETSI EN 300 328; ETSI EN 301 893;  
 ETSI EN 301 511; ETSI EN 301 908-1;  
 ETSI EN 908-2; ETSI EN 908-13;  
 ETSI EN 303 413; ETSI EN 302 502;  
 EN 303 340; EN 303 345-2; EN 303 345-3; EN 303 345-4

*Canadian Radio Tests*

RSS-102 measurement (RF Exposure Evaluation);  
 RSS-102 measurement (Nerve Stimulation);  
 SPR-002; RSS-111; RSS-112; RSS-117; RSS-119; RSS-123;  
 RSS-125; RSS-127; RSS-130; RSS-131; RSS-132; RSS-133;  
 RSS-134; RSS-135; RSS-137; RSS-139; RSS-140; RSS-141;  
 RSS-142; RSS-170; RSS-181; RSS-182; RSS-191; RSS-192;  
 RSS-194; RSS-195; RSS-196; RSS-197; RSS-199; RSS-210;  
 RSS-211; RSS-213; RSS-215; RSS-216; RSS-220; RSS-222;  
 RSS-236; RSS-238; RSS-243; RSS-244; RSS-247; RSS-248;  
 RSS-251; RSS-252; RSS-287; RSS-288; RSS-310; RSS-GEN

*Mexico Radio Tests*

IFT-008-2015; NOM-208-SCFI-2016

*Japan Radio Tests*

Radio Law No. 131, Ordinance of MPT No. 37, 1981,  
 MIC Notification No. 88:2004, Table No. 22-11;  
 ARIB STD-T66, Regulation 18

*Taiwan Radio Tests*

LP-0002 (July 15, 2020)

*Australia/New Zealand Radio Tests*

AS/NZS 4268; Radiocommunications (Short Range Devices)  
 Standard (2014)

*Hong Kong Radio Tests*

HKCA 1039 Issue 6; HKCA 1042; HKCA 1033 Issue 7;  
 HKCA 1061; HKCA 1008; HKCA 1043; HKCA 1057;  
 HKCA 1073

*Korean Radio Test Standards*

KN 301 489-1; KN 301 489-3; KN 301 489-9;  
 KN 301 489-17; KN 301 489-52; KS X 3124; KS X 3125;  
 KS X 3130; KS X 3126; KS X 3129

*Vietnam Radio Test Standards*

QCVN 47:2015/BTTTT; QCVN 54:2020/BTTTT;  
 QCVN 55:2011/BTTTT; QCVN 65:2013/BTTTT;  
 QCVN 73:2013/BTTTT; QCVN 74:2020/BTTTT;  
 QCVN 112:2017/BTTTT; QCVN 117:2020/BTTTT

*Vietnam EMC Test Standards*

QCVN 18:2014/BTTTT; QCVN 86:2019/BTTTT;  
 QCVN 96:2015/BTTTT; QCVN 118:2018/BTTTT

**Test Technology:**

**Test Method(s) <sup>1</sup>:**

*Unlicensed Radio Frequency Devices  
(3 Meter Semi-Anechoic Room)*

47 CFR FCC Part 15C, 15D, 15E, 15F, 15G, 15H  
(using ANSI C63.10:2013, ANSI C63.17:2013 and  
FCC KDB 905462 D02 (v02))

*Licensed Radio Service Equipment*

47 CFR FCC Parts 20, 22, 24, 25, 27, 30, 73, 74, 80, 87,  
90, 95, 96, 97, 101 (using ANSI/TIA-603-E,  
TIA-102.CAAA-E, ANSI C63.26:2015)

***OIA (Over the Air) Performance***

GSM, GPRS, EGPRS  
UMTS (W-CDMA)  
LTE including CAT M1  
A-GPS for UMTS/GSM  
LTS A-GPS, A-GLONASS,  
SIB8/SIB16  
Large Device/Laptop/Tablet Testing  
Integrated Device Testing  
WiFi 802.11 a/b/g/n/a

CTIA Test Plan for Wireless Device Over-the-Air  
Performance (Method for Measurement for Radiated Power  
and Receiver Performance) V3.8.2;  
CTIA Test Plan for RF Performance Evaluation of WiFi  
Mobile Converged Devices V2.1.0

***Electrical Measurements and  
Simulation***

**AC Voltage / Current**

(1mV to 5kV) 60 Hz  
(0.1V to 250V) up to 500 MHz  
(1µA to 150A) 60 Hz

FAA AC 150/5345-10H  
FAA AC 150/5345-43J  
FAA AC 150/5345-44K

**DC Voltage / Current**

(1mV to 15-kV) / (1µA to 10A)

FAA AC 150/5345-46E  
FAA AC 150/5345-47C

**Power Factor / Efficiency / Crest Factor**

(Power to 30kW)

FAA EB 67D

**Resistance**

(1mΩ to 4000MΩ)

**Surge**

(Up to 10 kV / 5 kA) (Combination  
Wave and Ring Wave)

**On the following products and materials:**

Telecommunications Terminal Equipment (TTE), Radio Equipment, Network Equipment, Information Technology Equipment (ITE), Automotive Electronic Equipment, Automotive Hybrid Electronic Devices, Maritime Navigation and Radio Communication Equipment and Systems, Vehicles, Boats and Internal Combustion Engine Driven Devices, Automotive, Aviation, and General Lighting Products, Medical Electrical Equipment, Motors, Industrial, Scientific and Medical (ISM) Radio-Frequency Equipment, Household Appliances, Electric Tools, Low-voltage Switchgear and Control gear, Programmable Controllers, Electrical Equipment for Measurement, Control and Laboratory Use, Base Materials, Power and Data Transmission Cables and Connectors

<sup>1</sup> When the date, edition, version, etc. is not identified in the scope of accreditation, laboratories may use the version that immediately precedes the current version for a period of one year from the date of publication of the standard measurement method, per part C., Section 1 of A2LA R101 - General Requirements- Accreditation of ISO-IEC 17025 Laboratories.

Testing Activities Performed in Support of FCC Certification in Accordance with 47 Code of Federal Regulations and FCC KDB 974614, Appendix A, Table A.1<sup>2</sup>

<b>Rule Subpart/Technology</b>	<b>Test Method</b>	<b>Maximum Frequency (MHz)</b>
<u>Unintentional Radiators</u> Part 15B	ANSI C63.4:2014	40000
<u>Industrial, Scientific, and Medical Equipment</u> Part 18	FCC MP-5 (February 1986)	40000
<u>Intentional Radiators</u> Part 15C	ANSI C63.10:2013	40000
<u>Unlicensed Personal Communication Systems Devices</u> Part 15D	ANSI C63.17:2013	40000
<u>U-NII without DFS Intentional Radiators</u> Part 15E	ANSI C63.10:2013	40000
<u>U-NII with DFS Intentional Radiators</u> Part 15E	FCC KDB 905462 D02 (v02)	40000
<u>UWB Intentional Radiators</u> Part 15F	ANSI C63.10:2013	40000
<u>BPL Intentional Radiators</u> Part 15G	ANSI C63.10:2013	40000
<u>White Space Device Intentional Radiators</u> Part 15H	ANSI C63.10:2013	40000
<u>Commercial Mobile Services (FCC Licensed Radio Service Equipment)</u> Parts 22 (cellular), 24, 25 (below 3 GHz), and 27	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
<u>General Mobile Radio Services (FCC Licensed Radio Service Equipment)</u> Parts 22 (non-cellular), 90 (below 3 GHz), 95, 97, and 101 (below 3 GHz)	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
<u>Citizens Broadband Radio Services (FCC Licensed Radio Service Equipment)</u> Part 96	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000

Testing Activities Performed in Support of FCC Certification in Accordance with 47 Code of Federal Regulations and FCC KDB 974614, Appendix A, Table A.1<sup>2</sup>

Rule Subpart/Technology	Test Method	Maximum Frequency (MHz)
<u>Maritime and Aviation Radio Services</u> Parts 80 and 87	ANSI/TIA-603-E; ANSI C63.26:2015	40000
<u>Microwave and Millimeter Bands Radio Services</u> Parts 25, 30, 74, 90 (above 3 GHz), 97 (above 3 GHz), and 101	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
<u>Broadcast Radio Services</u> Parts 73 and 74 (below 3 GHz)	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
<u>Signal Boosters</u> Part 20 (Wideband Consumer Signal Boosters, Provider-specific signal boosters, and Industrial Signal Boosters) Section 90.219	ANSI C63.26:2015	40000

<sup>2</sup> Accreditation does not imply acceptance to the FCC equipment authorization program. Please see the FCC website (<https://apps.fcc.gov/oetcf/eas/>) for a listing of FCC approved laboratories.



## Accredited Laboratory

A2LA has accredited

### ELITE ELECTRONIC ENGINEERING INC.

Downers Grove, IL

for technical competence in the field of

### Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 *General requirements for the competence of testing and calibration laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to *Joint ISO-ILAC-IAF Communiqué dated April 2017*).



Presented this 19<sup>th</sup> day of May 2021.



Mr. Trace McInturff, Vice President, Accreditation Services  
For the Accreditation Council  
Certificate Number 1786.01  
Valid to August 31, 2023  
Revised June 7, 2023

*For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.*