





Engineering Test Report No. 2200527-06

Report Date	May 16, 2022	
Manufacturer Name	Chamberlain Group, Inc.	
Manufacturer Address	300 Windsor Dr Oak Brook, IL 60523	
Product Name Brand/Model No.	GDO 003-0454-8 Rev B - GDO 87504-267 GDO 003-0454-8 Rev B - GDO B6753TC	
Date Received	May 2, 2022	
Test Dates	May 2 – 13, 2022	
Specifications	FCC "Code of Federal Regulations" Title 47 Part 15, Subpart B Innovation, Science, and Economic Development Canada, ICES-003	
Test Facility	Elite Electronic Engineering, Inc. 1516 Centre Circle, Downers Grove, IL 60515	FCC Reg. Number: 269750 IC Reg. Number: 2987A CAB Identifier: US0107
Signature		MARK E. LONGINOTTI
Tested by	Javier Cardenas	Mark Longinotti
Signature		
Approved by	Raymond J. Klouda, Registered Professional Engineer of Illinois – 44894	
PO Number	4900081875	

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

This report shall not be reproduced, except in full, without the written approval of Elite Electronic Engineering Inc.

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart B and Innovation, Science, and Economic Development Canada, ICES-003 test specifications. The data presented in this test report pertains to the EUT on the test dates specified. Any electrical or mechanical modifications made to the EUT subsequent to the specified test date will serve to invalidate the data and void this certification. This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the Federal Government.

Table of Contents

1.	Report Revision History	3
2.	Introduction	4
3.	Power Input	4
4.	Grounding	4
5.	Support Equipment	4
6.	Interconnect Leads.....	4
7.	Modifications Made to the EUT	5
8.	Modes of Operation.....	5
8.1.	Standby	5
9.	Test Specifications	5
10.	Test Plan	5
11.	Deviation, Additions to, or Exclusions from Test Specifications	5
12.	Laboratory Conditions	5
13.	Summary	5
14.	Sample Calculations	6
15.	Statement of Conformity	6
16.	Certification	6
17.	Photographs of EUT.....	7
18.	Equipment List	9
19.	Block Diagram of Test Setup	10
20.	RF Conducted Emissions (AC Mains)	11
21.	RF Radiated Emissions.....	23
22.	Scope of Accreditation	33

**This report shall not be reproduced, except in full,
without the written approval of Elite Electronic Engineering Inc.**

1. Report Revision History

Revision	Date	Description
–	03 JUN 2022	Initial Release of Engineering Test Report No. 2200527-06

2. Introduction

This document presents the results of a series of electromagnetic compatibility (EMC) tests that were performed on two (2) Falcon GDO Logic Boards (hereinafter referred to as the Equipment Under Test (EUT)).

The EUTs were identified as follows:

EUT Identification	
EUT #1	
Description	Falcon GDO Logic Board
Model/Part No.	GDO 003-0454-8 Rev B - GDO 87504-267
Serial No.	Sample 1, Sample 2
Software/Firmware Version	Sample 1: Realtek WiFi/BLE: 126A0582 Rev A.1 Sec+3.0 BLELR: Preliminary test image Rev 1 GDO Firmware: 126A0543 Rev 2.9 Sample 2: GDO Firmware: Motor Forever Run 126A0583 Rev A.5
Size of EUT	10.5 in x 10 in x 7.5 in
Number of Interconnection Wires	Twisted pairs x 2
Type of Interconnection Wires	Safety Sensor signal leads Motor control signal leads
Highest Internal Frequency of the EUT	2.4GHz
EUT #2	
Description	Falcon GDO Logic Board
Model/Part No.	GDO 003-0454-8 Rev B - GDO B6753TC
Serial No.	Sample 3
Software/Firmware Version	GDO Firmware: Motor Forever Run 126A0583 Rev A.4
Size of EUT	10.5 in x 10 in x 7.5 in
Number of Interconnection Wires	Twisted pairs x 2
Type of Interconnection Wires	Safety Sensor signal leads Motor control signal leads
Highest Internal Frequency of the EUT	2.4GHz

The EUTs listed above were used throughout the test series.

3. Power Input

The EUTs obtained 115V 60Hz power via a 3 wire, 1-meter, unshielded power cord.

4. Grounding

The EUTs were connected to ground through the third wire of its input power cord.

5. Support Equipment

The EUTs were submitted for testing along with the following support equipment:

Description	Model #	S/N
1 Dell Laptop	Latitude 7480	---

6. Interconnect Leads

The following interconnect cables were submitted with the test item:

Item	Description
1 USB A Cable	Connects laptop to EUT to configure radios
1 Micro-USB Cable	Connects laptop to EUT to configure radios
FTDI UART Bridge	Connects laptop to EUT to configure radios
FT232 UART Bridge	Connects laptop to EUT to configure radios

7. Modifications Made to the EUT

No modifications were made to the EUTs during the testing.

8. Modes of Operation

The EMC tests were performed with the EUTs operating in the test mode described below.

8.1. Standby

This mode was achieved by applying 120VAC to the EUTs. With the support equipment attached, onboard radios were configured to seize transmission.

9. Test Specifications

The tests were performed to selected portions of, and in accordance with the following test specifications:

- Federal Communications Commission "Code of Federal Regulations", Title 47, Chapter I, Subchapter A, Part 15, Subpart B
- ICES-003, Issue 7, October 15, 2020, "Information Technology Equipment (including Digital Apparatus)"
- RSS-Gen, Issue 5, February 2021, Amendment 2, "General Requirements for Compliance of Radio Apparatus"
- ANSI C63.4-2014, "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz"

10. Test Plan

No test plan was provided. Instructions were provided by personnel from Chamberlain Group, Inc. and used in conjunction with the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart B and Innovation, Science, and Economic Development Canada, ICES-003, and ANSI C63.4-2014 specifications.

11. Deviation, Additions to, or Exclusions from Test Specifications

There were no deviations, additions to, or exclusions from the test specifications during this test series.

12. Laboratory Conditions

The following were the laboratory conditions while the EMC tests were performed:

Ambient Parameters	Value
Temperature	23°C
Relative Humidity	25%
Atmospheric Pressure	1007.5mb

13. Summary

The following EMC tests were performed, and the results are shown below:

Test Description	Test Requirements	Test Method	Equipment Class	S/N	Results
RF Conducted Emissions (AC Mains)	FCC 15.107 ICES-003, Section 3.2.1	ANSI C63.4:2014	B	Sample 2 Sample 3	Conforms
RF Radiated Emissions	FCC 15.109 ICES-003, Section 3.2.2	ANSI C63.4:2014	B	Sample 1	Conforms

14. Sample Calculations

For Powerline Conducted Emissions:

The resultant voltage level (VL) is a summation in decibels (dB) of the receiver meter reading (MTR) and the cable loss factor (CF).

$$\text{Formula 1: } VL \text{ (dB}\mu\text{V)} = \text{MTR (dB}\mu\text{V)} + \text{CF (dB)}.$$

For Radiated Emissions:

The resultant field strength (FS) is a summation in decibels (dB) of the receiver meter reading (MTR), the antenna correction factor (AF), and the cable loss factor (CF). If an external preamplifier is used, the total is reduced by its gain (-PA). If a distance correction (DC) is required, it is added to the total.

$$\text{Formula 1: } FS \text{ (dB}\mu\text{V/m)} = \text{MTR (dB}\mu\text{V)} + \text{AF (dB/m)} + \text{CF (dB)} + (-\text{PA (dB)}) + \text{DC (dB)}$$

To convert the Field Strength dB μ V/m term to μ V/m, the dB μ V/m is first divided by 20. The Base 10 AntiLog is taken of this quotient. The result is the Field Strength value in μ V/m terms.

$$\text{Formula 2: } FS \text{ (\mu V/m)} = \text{AntiLog} [(FS \text{ (dB}\mu\text{V/m)})/20]$$


15. Statement of Conformity

The Chamberlain Group, Inc. Falcon GDO Logic Board, Model No. GDO 003-0454-8 Rev B, did fully conform to the selected requirements of FCC "Code of Federal Regulations" Title 47 Part 15, Subpart B and Innovation, Science, and Economic Development Canada, ICES-003.

16. Certification

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart B and Innovation, Science, and Economic Development Canada, ICES-003 test specifications. The data presented in this test report pertains to the EUTs on the test date specified. Any electrical or mechanical modifications made to the EUTs subsequent to the specified test date will serve to invalidate the data and void this certification.

17. Photographs of EUT

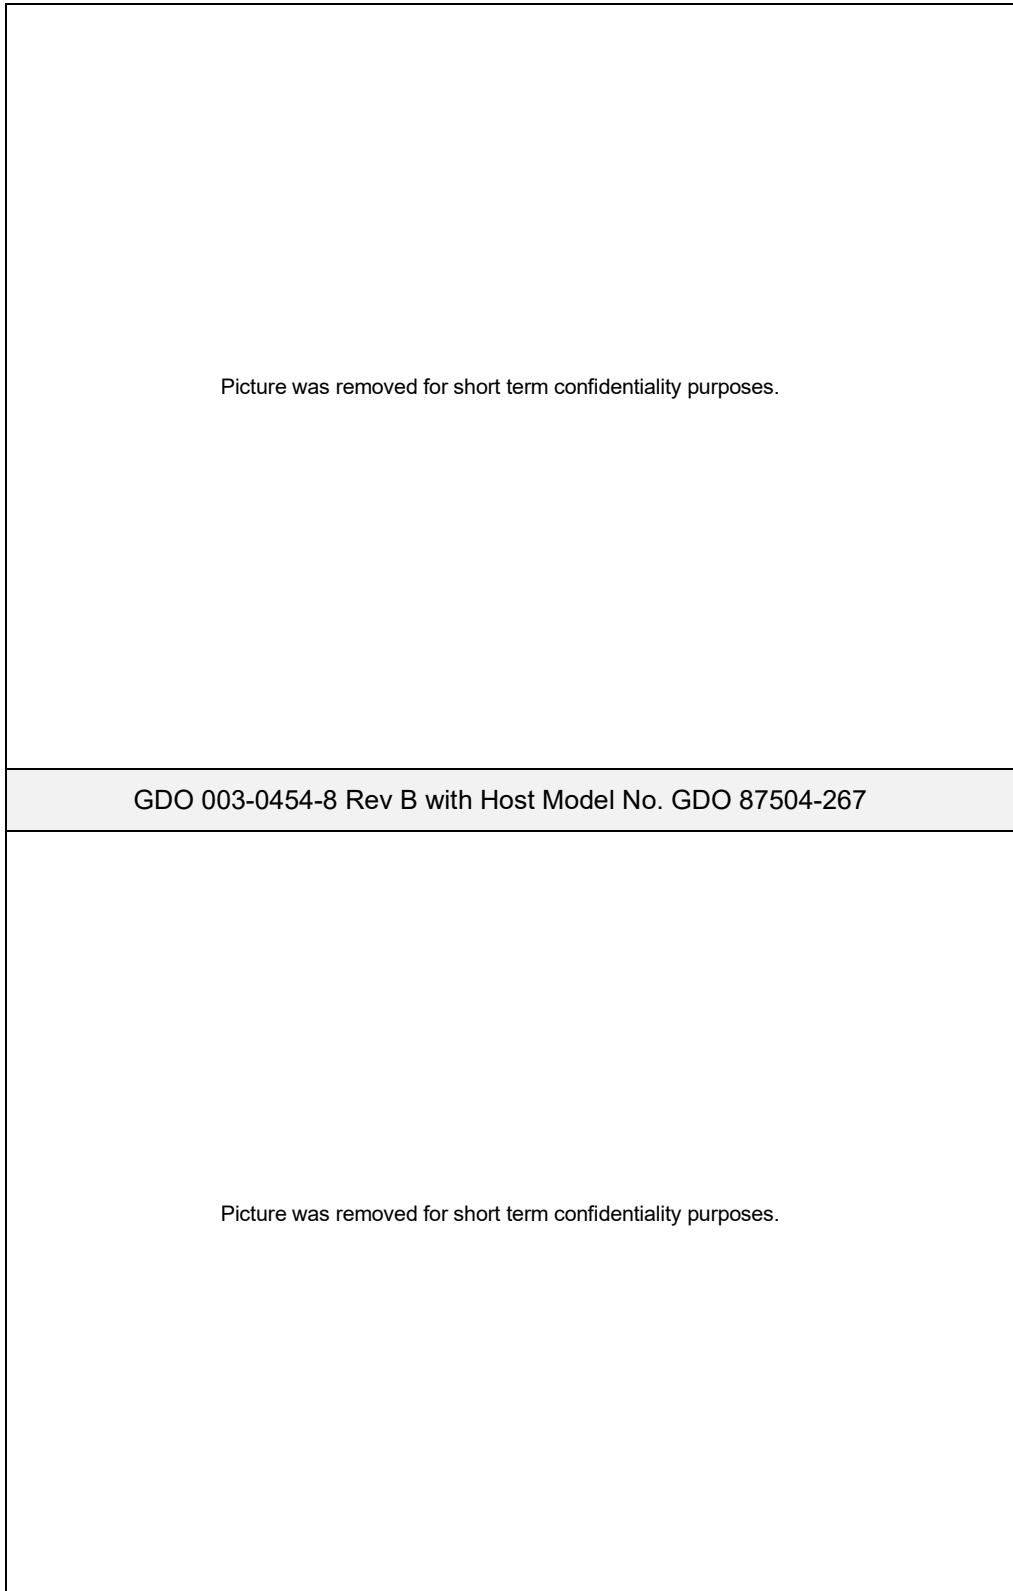

Picture was removed for short term confidentiality purposes.

GDO 003-0454-8 Rev B with Host Model No. GDO B6753TC

Picture was removed for short term confidentiality purposes.

18. Equipment List

Eq ID	Equipment Description	Manufacturer	Model No.	Serial No.	Frequency Range	Cal Date	Due Date
APW14	PREAMPLIFIER	PLANAR	PE2-35-120-5R0-10-12-SFF	PL22671	1-20GHz	9/21/2021	9/21/2022
CDZ3	LAB WORKSTATION	ELITE	LWS-10		WINDOWS 10	CNR	
GRB0	1MHZ, LISN SIGNAL CHECKER	ELITE	LISNCHKR1M	1	1MHZ	6/17/2021	6/17/2023
NTA3	BILOG ANTENNA	TESEQ	6112D	32853	25-1000MHz	10/20/2020	10/20/2022
NWQ0	DOUBLE RIDGED WAVEGUIDE ANTENNA	ETS LINDGREN	3117	66657	1GHZ-18GHZ	5/13/2020	5/13/2022
PLF2	CISPR16 50UH LISN	ELITE	CISPR16/70A	002	.15-30MHz	4/5/2022	4/5/2023
PLF4	CISPR16 50UH LISN	ELITE	CISPR16/70A	003	.15-30MHz	4/5/2022	4/5/2023
RBG3	EMI ANALYZER	ROHDE & SCHWARZ	ESW44	101592	2HZ-44GHZ	4/7/2022	4/7/2023
RBJ0	EMI ANALYZER	ROHDE & SCHWARZ	ESW8	100986	2HZ-8GHZ	12/10/2021	12/10/2022
SES0	24VDC POWER SUPPLY	P-TRANS	FS-32024-1M	001	18-27VDC	NOTE 1	
T1ED	10DB 25W ATTENUATOR	WEINSCHTEL	46-10-34	BN2320	DC-18GHZ	1/6/2022	1/6/2024
VBR8	CISPR EN FCC CE VOLTAGE.exe					N/A	
VBV2	CISPR EN FCC ICES RE.EXE	ELITE	CISPR EN FCC ICES RE.EXE	---	---	N/A	
XLTK	5W, 50 OHM TERMINATION	JFW INDUSTRIES	50T-052	---	DC-2GHZ	1/5/2022	1/5/2024


N/A: Not Applicable

I/O: Initial Only

CNR: Calibration Not Required

NOTE 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.

19. Block Diagram of Test Setup

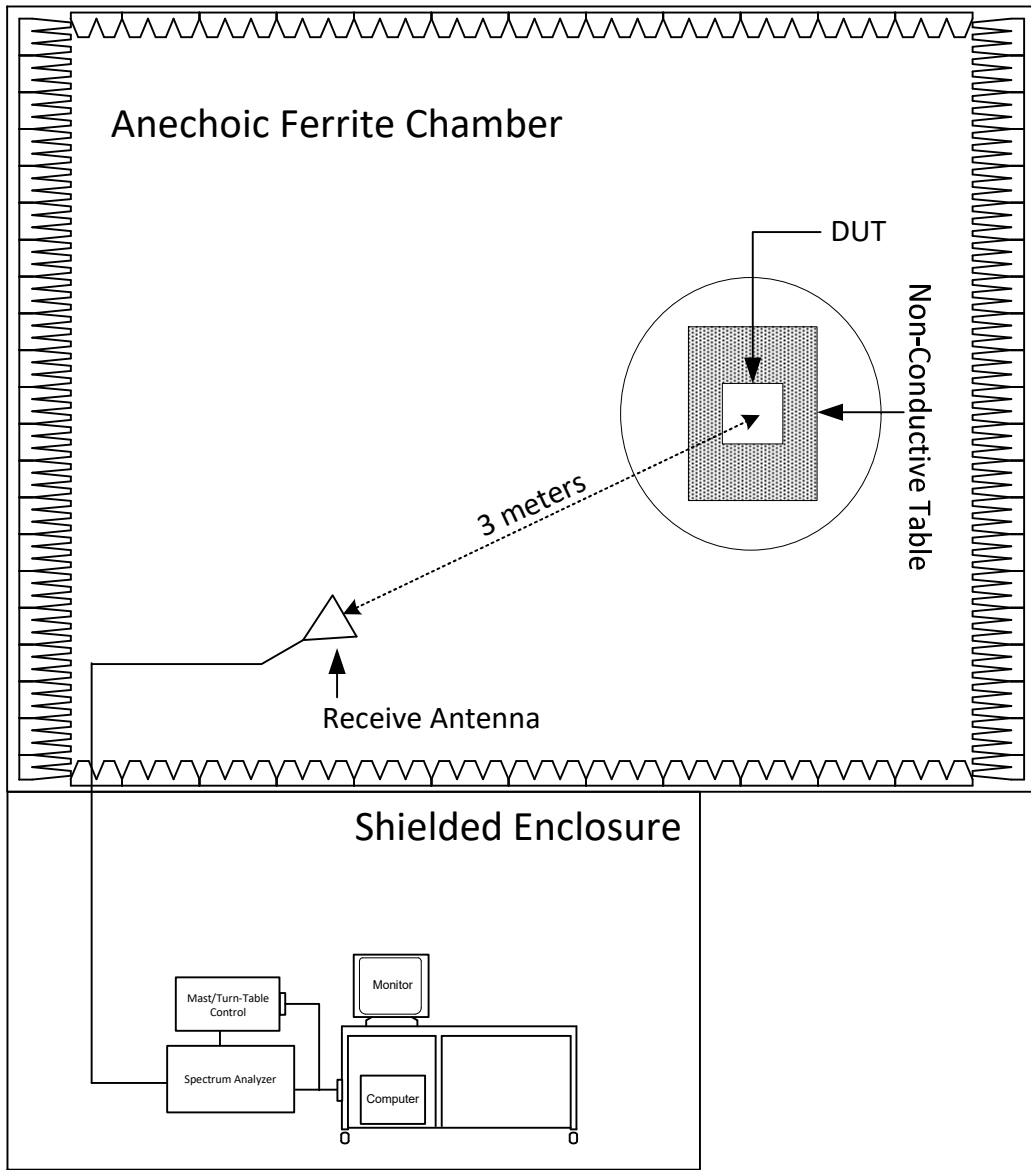

Radiated Measurements Test Setup

20. RF Conducted Emissions (AC Mains)

EUT Information	
Manufacturer	Chamberlain Group, Inc.
Product	Falcon GDO Logic Board
Model No.	GDO 003-0454-8 Rev B - GDO 87504-267 GDO 003-0454-8 Rev B - GDO B6753TC
Serial No.	Sample 2 & Sample 3
Mode	Standby

Test Site Information	
Setup Format	Tabletop
Height of Support	N/A
Type of Test Site	Reverberation Chamber
Test Site Used	Room 28
Note	None

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Conducted disturbance (mains port) (150 kHz – 30 MHz)	2.7

Requirements
For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz shall not exceed the limits in the following table.

Conducted Emissions Class B Limits		
Frequency (MHz)	Conducted limit (dBµV)	
	Quasi-Peak	Average
0.15 – 0.5	66 decreasing with logarithm of frequency to 56	56 decreasing with logarithm of frequency to 46
0.5 – 5	56	46
5 – 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: If the levels measured using the QP detector meet both the QP and the Average limits, the EUT is considered to have met both requirements and measurements do not need to be performed using the Average detector.

Procedure

The interference on each power lead of the EUT was measured by connecting the measuring equipment to the appropriate meter terminal of the Line Impedance Stabilization Network (LISN). The meter terminal of the LISN not under test was terminated with 50 ohms.

- 1) The EUT was operated in the Standby mode.
- 2) Measurements were first made on the 120VAC high line.
- 3) The frequency range from 150kHz to 30MHz was broken up into smaller frequency sub-bands.
- 4) Conducted emissions measurements were taken on the first frequency sub-band using a peak detector.
- 5) The data thus obtained was then searched by the computer for the highest levels. Any emissions levels that were within 10dB of the average limit were then measured again using both a quasi-peak detector and an average detector. (If no peak readings were within 10dB of the average limit, quasi-peak and average readings were taken on the highest emissions levels measured during the peak detector scan.)
- 6) Steps (4) and (5) were repeated for the remainder of the frequency sub-bands until the entire frequency range from 150kHz to 30MHz was investigated. The peak trace was automatically plotted. The plot also shows quasi-peak and average readings that were taken on discrete frequencies. A table showing the quasi-peak and average readings was also generated. This tabular data compares the quasi-peak and average conducted emissions to the applicable conducted emissions limits. The resultant voltage level (VL) is a summation in decibels (dB) of the receiver meter reading (MTR) and the cable loss factor (CF).

$$\text{Formula 1: } VL \text{ (dB}\mu\text{V)} = \text{MTR (dB}\mu\text{V)} + \text{CF (dB)}$$

- 7) Steps (3) through (6) were repeated on the neutral line.

Picture was removed for short term confidentiality purposes.

Test Setup for RF Conducted Emissions (AC Mains), GDO 003-0454-8 Rev B with Host Model No. GDO 87504-267

Picture was removed for short term confidentiality purposes.

Test Setup for RF Conducted Emissions (AC Mains), GDO 003-0454-8 Rev B with Host Model No. GDO 87504-267

Picture was removed for short term confidentiality purposes.

Test Setup for RF Conducted Emissions (AC Mains), GDO 003-0454-8 Rev B with
Host Model No. GDO B6753TC

Picture was removed for short term confidentiality purposes.

Test Setup for RF Conducted Emissions (AC Mains), GDO 003-0454-8 Rev B with
Host Model No. GDO B6753TC

FCC Part 15 Subpart B Conducted Emissions Test Significant Emissions Data

VBR8 05/14/2020


Manufacturer : Chamberlain Group, Inc.
 Model : GDO 003-0454-8 Rev B - GDO 87504-267
 DUT Revision : N/A
 Serial Number : Sample 2
 DUT Mode : Standby
 Line Tested : 115V, 60Hz Line
 Scan Step Time [ms] : 30
 Meas. Threshold [dB] : -1
 Notes : Motor Running Continuously
 Test Engineer : J. Cardenas
 Limit : Class B
 Test Date : May 10, 2022 02:17:28 PM
 Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 1 dB margin below limit

Freq MHz	Quasi-peak Level dB μ V	Quasi-peak Limit dB μ V	Excessive Quasi-peak Emissions	Average Level dB μ V	Average Limit dB μ V	Excessive Average Emissions
0.173	58.1	64.8		49.1	54.8	
0.468	50.5	56.5		45.7	46.5	
0.563	49.4	56.0		43.0	46.0	
0.907	47.3	56.0		40.3	46.0	
1.282	45.3	56.0		37.2	46.0	
1.985	43.2	56.0		35.8	46.0	
4.517	49.6	56.0		41.5	46.0	
5.144	44.3	60.0		41.3	50.0	
10.751	40.1	60.0		36.0	50.0	
21.187	42.9	60.0		29.5	50.0	

FCC Part 15 Subpart B Conducted Emissions Test Cumulative Data

VBR8 05/14/2020

Manufacturer : Chamberlain Group, Inc.
 Model : GDO 003-0454-8 Rev B - GDO 87504-267
 DUT Revision : N/A
 Serial Number : Sample 2
 DUT Mode : Standby
 Line Tested : 115V, 60Hz Line
 Scan Step Time [ms] : 30
 Meas. Threshold [dB] : -1
 Notes : Motor Running Continuously
 Test Engineer : J. Cardenas
 Limit : Class B
 Test Date : May 10, 2022 02:17:28 PM

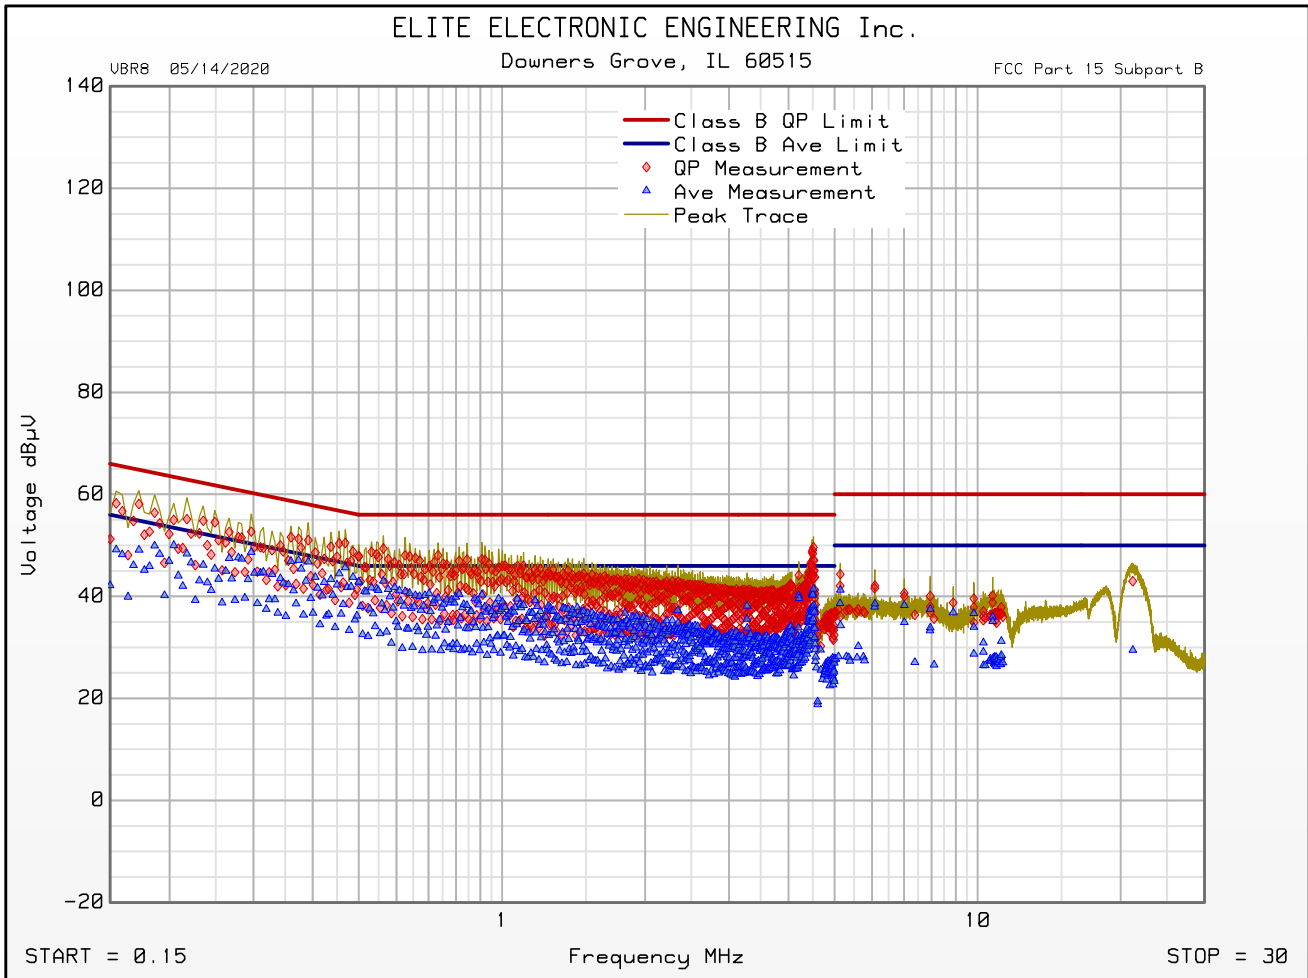

Emissions Meet QP Limit
 Emissions Meet Ave Limit



FCC Part 15 Subpart B Conducted Emissions Test Significant Emissions Data

VBR8 05/14/2020


Manufacturer : Chamberlain Group, Inc.
 Model : GDO 003-0454-8 Rev B - GDO 87504-267
 DUT Revision : N/A
 Serial Number : Sample 2
 DUT Mode : Standby
 Line Tested : Neutral
 Scan Step Time [ms] : 30
 Meas. Threshold [dB] : -1
 Notes : Motor Running Continuously
 Test Engineer : J. Cardenas
 Limit : Class B
 Test Date : May 10, 2022 02:25:27 PM
 Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 1 dB margin below limit

Freq MHz	Quasi-peak Level dBµV	Quasi-peak Limit dBµV	Excessive Quasi-peak Emissions	Average Level dBµV	Average Limit dBµV	Excessive Average Emissions
0.155	58.0	65.8		51.5	55.8	
0.500	50.0	56.0		44.1	46.0	
0.813	46.6	56.0		38.7	46.0	
1.250	44.2	56.0		37.1	46.0	
2.250	41.1	56.0		32.1	46.0	
4.625	47.2	56.0		38.2	46.0	
5.140	44.7	60.0		43.1	50.0	
10.746	41.0	60.0		37.3	50.0	
21.898	39.3	60.0		28.4	50.0	

FCC Part 15 Subpart B Conducted Emissions Test Cumulative Data

VBR8 05/14/2020

Manufacturer : Chamberlain Group, Inc.
 Model : GDO 003-0454-8 Rev B - GDO 87504-267
 DUT Revision : N/A
 Serial Number : Sample 2
 DUT Mode : Standby
 Line Tested : Neutral
 Scan Step Time [ms] : 30
 Meas. Threshold [dB] : -1
 Notes : Motor Running Continuously
 Test Engineer : J. Cardenas
 Limit : Class B
 Test Date : May 10, 2022 02:25:27 PM

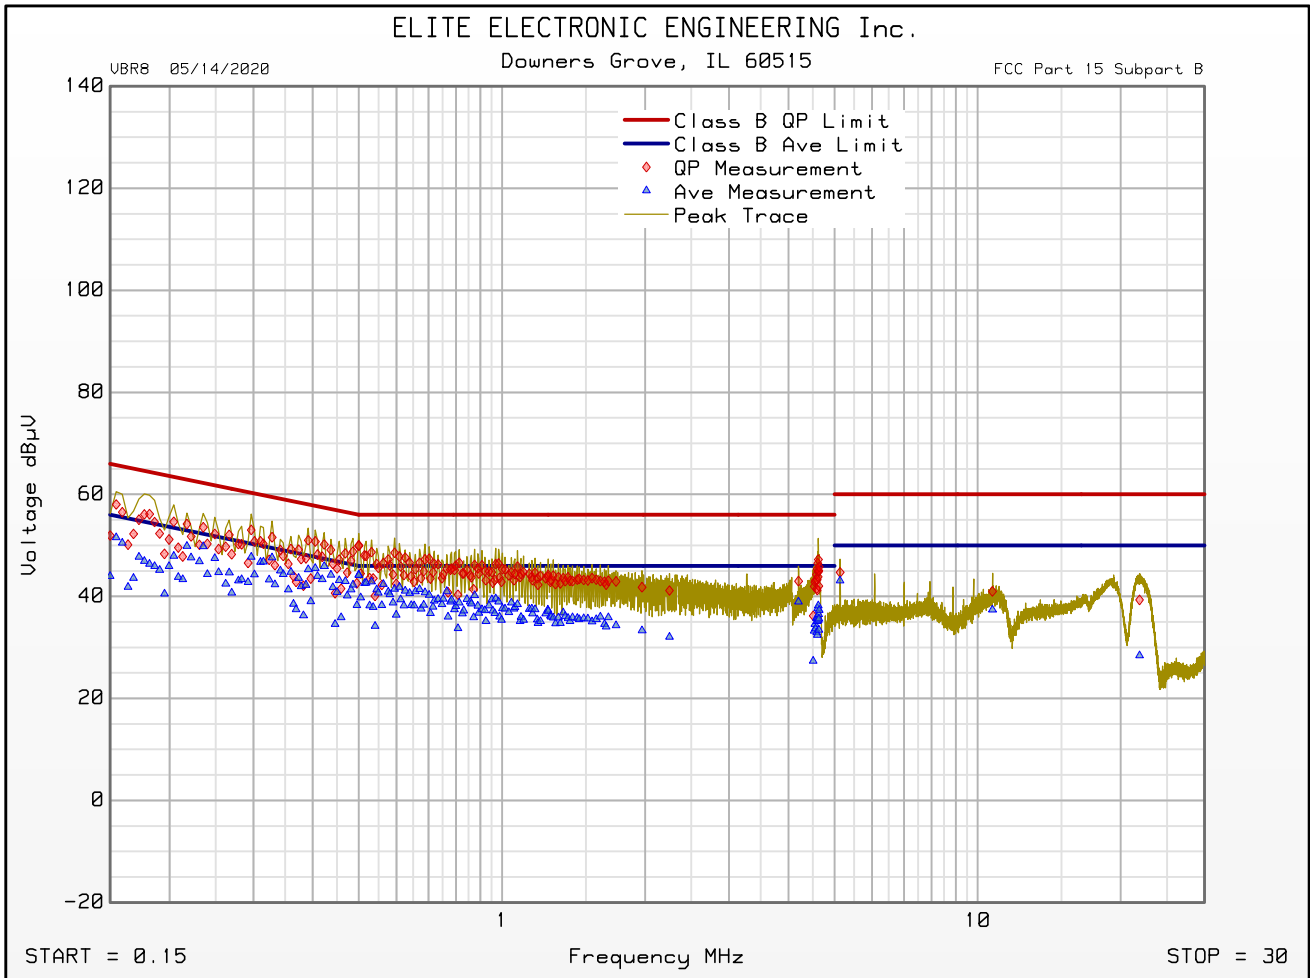

Emissions Meet QP Limit
 Emissions Meet Ave Limit



FCC Part 15 Subpart B Conducted Emissions Test Significant Emissions Data

VBR8 05/14/2020


Manufacturer : Chamberlain Group, Inc.
Model : GDO 003-0454-8 Rev B - GDO B6753TC
DUT Revision : N/A
Serial Number : Sample 3
DUT Mode : Standby
Line Tested : 115V, 60Hz Line
Scan Step Time [ms] : 30
Meas. Threshold [dB] : -1
Notes : Motor Running Continuously
Test Engineer : J. Cardenas
Limit : Class B
Test Date : May 10, 2022 04:30:53 PM
Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 1 dB margin below limit

Freq MHz	Quasi-peak Level dB μ V	Quasi-peak Limit dB μ V	Excessive Quasi-peak Emissions	Average Level dB μ V	Average Limit dB μ V	Excessive Average Emissions
0.177	60.6	64.6		50.3	54.6	
0.297	58.2	60.3		50.1	50.3	
0.500	50.2	56.0		45.2	46.0	
0.532	51.5	56.0		45.3	46.0	
0.813	48.0	56.0		40.7	46.0	
1.421	46.1	56.0		39.1	46.0	
2.187	45.3	56.0		38.6	46.0	
4.531	49.6	56.0		41.6	46.0	
5.000	39.3	56.0		31.8	46.0	
13.014	38.6	60.0		29.6	50.0	
19.666	40.5	60.0		31.3	50.0	

FCC Part 15 Subpart B Conducted Emissions Test Cumulative Data

VBR8 05/14/2020

Manufacturer : Chamberlain Group, Inc.
 Model : GDO 003-0454-8 Rev B - GDO B6753TC
 DUT Revision : N/A
 Serial Number : Sample 3
 DUT Mode : Standby
 Line Tested : 115V, 60Hz Line
 Scan Step Time [ms] : 30
 Meas. Threshold [dB] : -1
 Notes : Motor Running Continuously
 Test Engineer : J. Cardenas
 Limit : Class B
 Test Date : May 10, 2022 04:30:53 PM

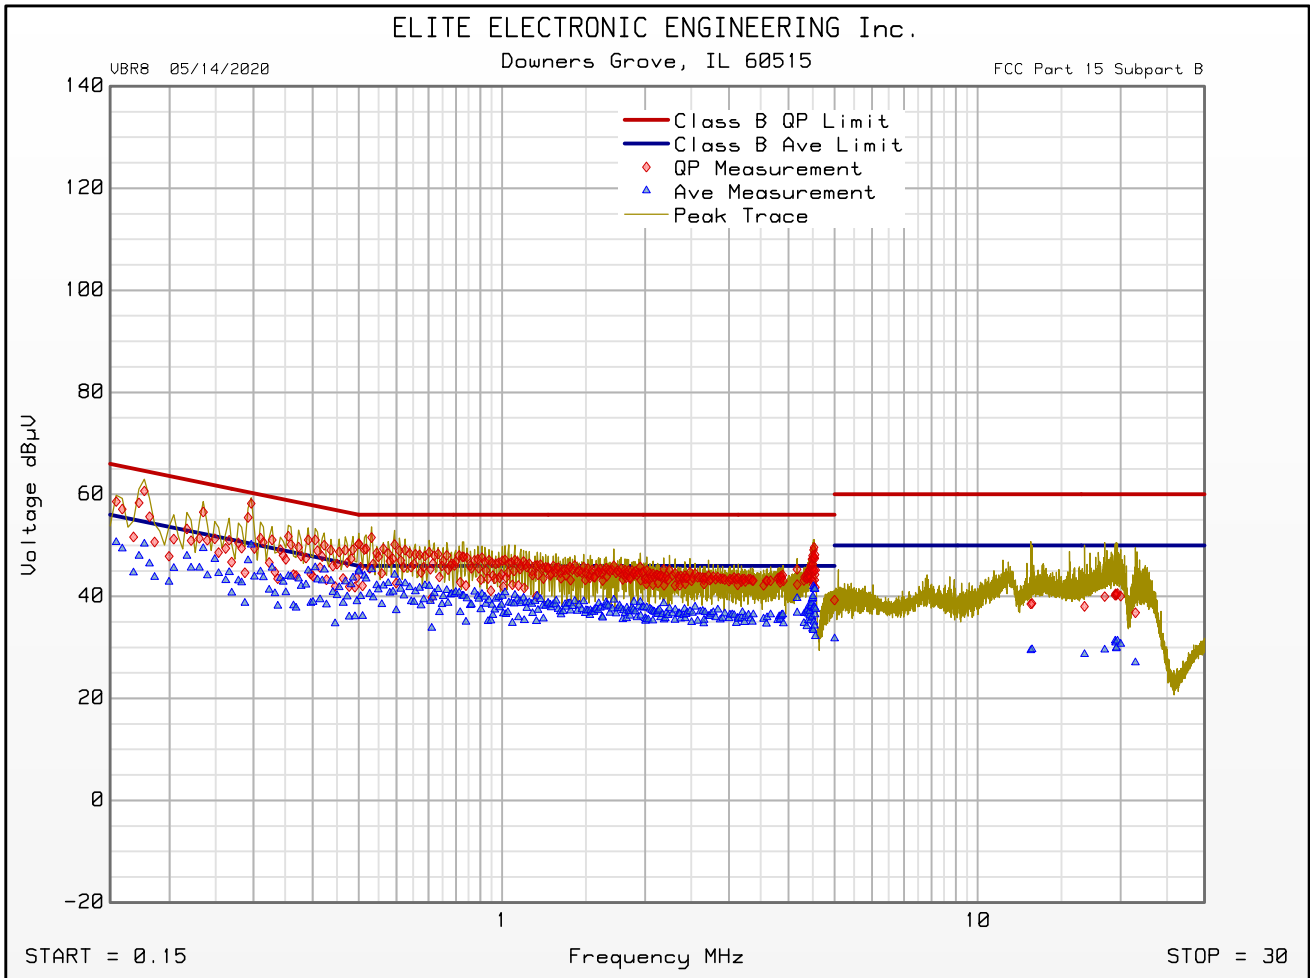

Emissions Meet QP Limit
 Emissions Meet Ave Limit



FCC Part 15 Subpart B Conducted Emissions Test Significant Emissions Data

VBR8 05/14/2020


Manufacturer : Chamberlain Group, Inc.
Model : GDO 003-0454-8 Rev B - GDO B6753TC
DUT Revision : N/A
Serial Number : Sample 3
DUT Mode : Standby
Line Tested : Neutral
Scan Step Time [ms] : 30
Meas. Threshold [dB] : -1
Notes : Motor Running Continuously
Test Engineer : J. Cardenas
Limit : Class B
Test Date : May 10, 2022 04:32:15 PM
Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 1 dB margin below limit

Freq MHz	Quasi-peak Level dB μ V	Quasi-peak Limit dB μ V	Excessive Quasi-peak Emissions	Average Level dB μ V	Average Limit dB μ V	Excessive Average Emissions
0.177	59.8	64.6		49.7	54.6	
0.297	58.3	60.3		50.1	50.3	
0.532	51.1	56.0		43.2	46.0	
0.876	47.7	56.0		40.7	46.0	
1.484	46.3	56.0		39.7	46.0	
2.016	45.7	56.0		37.6	46.0	
4.531	49.5	56.0		42.5	46.0	
8.641	37.5	60.0		28.5	50.0	
13.487	40.1	60.0		30.6	50.0	
19.351	41.2	60.0		30.1	50.0	

FCC Part 15 Subpart B Conducted Emissions Test Cumulative Data

VBR8 05/14/2020

Manufacturer : Chamberlain Group, Inc.
 Model : GDO 003-0454-8 Rev B - GDO B6753TC
 DUT Revision : N/A
 Serial Number : Sample 3
 DUT Mode : Standby
 Line Tested : Neutral
 Scan Step Time [ms] : 30
 Meas. Threshold [dB] : -1
 Notes : Motor Running Continuously
 Test Engineer : J. Cardenas
 Limit : Class B
 Test Date : May 10, 2022 04:32:15 PM

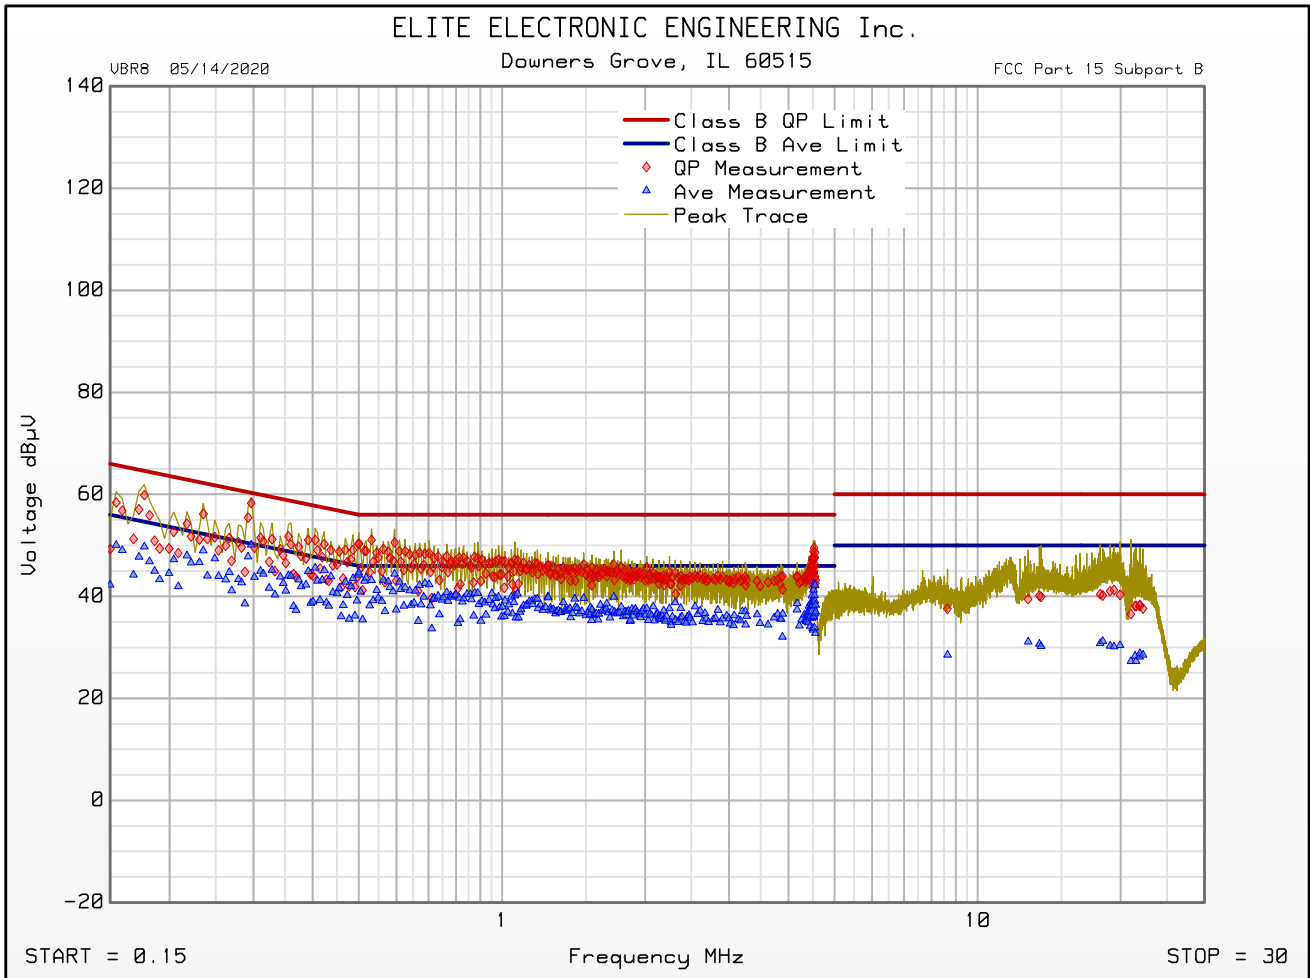

Emissions Meet QP Limit
 Emissions Meet Ave Limit

21. RF Radiated Emissions

EUT Information	
Manufacturer	Chamberlain Group, Inc.
Product	Falcon GDO Logic Board
Model No.	GDO 003-0454-8 Rev B - GDO 87504-267
Serial No.	Sample 1
Mode	Standby

Test Site Information	
Setup Format	Tabletop
Height of Support	N/A
Type of Test Site	Semi-Anechoic Chamber
Test Site Used	R29F
Type of Antennas Used	Below 1GHz: Bilog (or equivalent) Above 1GHz: Double-ridged waveguide (or equivalent)
Highest Internal Frequency	2.4GHz
Highest Measurement Frequency	13GHz
Notes	The cables were manually maximized during the preliminary emissions sweeps. The cable arrangement which resulted in the worst-case emissions was utilized.

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1
Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)	3.2

Requirements
The field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the values in the following tables.

FCC Part 15 Class B Radiated Emissions Limits (30MHz to 1GHz)		
Frequency of Emission (MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)
30 – 88	100	40
88 – 216	150	43.5
216 – 960	200	46
Above 960	500	54
FCC Part 15 Class B Radiated Emissions Limits (Above 1GHz)		
Frequency of Emission (MHz)	Peak Limit (dBµV/m)	Average Limit (dBµV/m)
Above 1000	74	54

ICES-003 Class B Radiated Emissions Limits (30MHz to 1GHz)		
Frequency Range (MHz)	Field Strength at 3 meters (dB μ V/m)	Field Strength at 10 meters (dB μ V/m)
30 – 88	40	30
88 – 216	43.5	33.1
216 – 230	46	35.6
230 – 960	47	37
960 – 1000	54	43.5
ICES-003 Class B Radiated Emissions Limits (At and Above 1GHz)		
Frequency Range (GHz)	Average (dB μ V/m)	Peak (dB μ V/m)
1 – F _M	54	74

F_M = highest measurement frequency

Procedure
<p>Since a quasi-peak detector and an average detector requires long integration times, it is not practical to automatically sweep through the quasi-peak and average levels. Therefore, radiated emissions from the EUT were first scanned using a peak detector and automatically plotted. The frequencies where significant emission levels were noted were then remeasured using the quasi-peak detector or average detector.</p> <p>The EUT and all peripheral equipment were placed on an 80cm high non-conductive stand. The broadband measuring antenna was positioned at a 3-meter distance from the EUT. The frequency range from 30MHz to 1GHz was investigated using a peak detector function with the bilog antenna at several heights, horizontal and vertical polarization, and with several different orientations of the EUT with respect to the antenna. The frequency range from 1GHz to 13GHz was investigated using a peak detector function with the double ridged waveguide antenna at several heights, horizontal and vertical polarization, and with several different orientations of the EUT with respect to the antenna. The maximum levels for each antenna polarization were plotted.</p> <p>Final radiated emissions were performed on all significant broadband and narrowband emissions found in the exploratory sweeps using the following methods:</p> <ol style="list-style-type: none"> 1) Measurements from 30MHz to 1GHz were made using a quasi-peak detector and a broadband bilog antenna. Measurements above 1GHz were made using an average detector and a broadband double ridged waveguide antenna. 2) To ensure that maximum or worst case, emission levels were measured, the following steps were taken: <ol style="list-style-type: none"> a) The EUT was rotated so that all sides were exposed to the receiving antenna. b) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured. c) The measuring antenna was raised and lowered from 1 to 4 meters for each antenna polarization to maximize the readings. d) For hand-held or body-worn devices, the EUT was rotated through three orthogonal axes to determine which orientation produces the highest emission relative to the limit.

Picture was removed for short term confidentiality purposes.

Test Setup for Radiated Emissions: 30MHz to 1GHz, Horizontal Polarization

Picture was removed for short term confidentiality purposes.

Test Setup for Radiated Emissions: 30MHz to 1GHz, Vertical Polarization

Picture was removed for short term confidentiality purposes.

Test Setup for Radiated Emissions: Above 1GHz, Horizontal Polarization

Picture was removed for short term confidentiality purposes.

Test Setup for Radiated Emissions: Above 1GHz, Vertical Polarization

FCC Part 15B Class B Radiated RF Emissions Test

SW ID/Rev: VBV2 03/23/2022

Manufacturer : Chamberlain Group, Inc.
 Model : GDO 003-0454-8 Rev B - GDO 87504-267
 Serial Number : Sample 1
 DUT Mode : Standby
 Turntable Step Angle (°): 45
 Mast Positions (cm) : 120, 200, 340
 Scan Type : Stepped Scan
 Test RBW : 120 kHz
 Prelim Dwell Time (s) : 0.0001
 Notes : With PCB array 014R1573 Rev B
 Test Engineer : M. Longinotti
 Test Date : May 05, 2022 09:42:40 AM

Freq MHz	Peak Mtr Rdg dBuV	QP Mtr Rdg dBuV	Ant Fac dB/m	Amp Fac dB	Cbl Fac dB	Dist Corr dB	Peak Total dBµV/m	QP Total dBµV/m	QP Limit dBµV/m	QP Lim Mrg dB	Ant Pol	Mast Ht cm	Azim °	Excessive QP Level
30.120	4.9	-2.4	25.3	0.0	0.4	0.0	30.6	23.3	40.0	-16.7	Horizontal	120	45	
40.020	20.6	18.9	19.8	0.0	0.4	0.0	40.8	39.1	40.0	-0.9	Vertical	120	45	
42.240	7.9	-2.8	18.8	0.0	0.4	0.0	27.1	16.4	40.0	-23.6	Vertical	200	135	
85.080	2.9	-5.0	16.3	0.0	0.4	0.0	19.5	11.7	40.0	-28.3	Horizontal	200	315	
98.200	7.0	-4.1	18.2	0.0	0.4	0.0	25.5	14.4	43.5	-29.1	Vertical	120	270	
160.000	14.2	12.2	17.2	0.0	0.6	0.0	32.1	30.0	43.5	-13.5	Horizontal	200	0	
240.000	18.7	16.2	17.7	0.0	0.8	0.0	37.2	34.6	46.0	-11.4	Horizontal	120	180	
480.780	6.8	-1.0	23.5	0.0	1.1	0.0	31.4	23.6	46.0	-22.4	Horizontal	200	135	
932.220	4.3	-4.0	27.0	0.0	1.5	0.0	32.8	24.6	46.0	-21.4	Vertical	120	315	



FCC Part 15B Class B Radiated RF Emissions Test

SW ID/Rev: VBV2 03/23/2022

Manufacturer : Chamberlain Group, Inc.
 Model : GDO 003-0454-8 Rev B - GDO 87504-267
 Serial Number : Sample 1
 DUT Mode : Standby
 Turntable Step Angle (°): 45
 Mast Positions (cm) : 120, 200, 340
 Scan Type : Stepped Scan
 Test RBW : 1 MHz
 Prelim Dwell Time (s) : 0.0001
 Notes : With PCB array 014R1573
 Test Engineer : M. Longinotti
 Test Date : May 12, 2022 01:54:25 PM

Freq MHz	Peak Mtr Rdg dBuV	Ant Fac dB/m	Amp Fac dB	Cbl Fac dB	Dist Corr dB	Peak Total dBµV/m	Peak Limit dBµV/m	Peak Lim Mrg dB	Ant Pol	Mast Ht cm	Azim °	Excessive Peak Level
1287.000	50.0	29.6	-40.6	1.8	0.0	40.8	74.0	-33.2	Horizontal	340	180	
2311.000	48.0	33.8	-40.1	2.5	0.0	44.2	74.0	-29.7	Horizontal	120	0	
2417.500	49.7	33.6	-40.2	2.6	0.0	45.7	74.0	-28.2	Horizontal	120	0	
5103.000	46.3	37.7	-39.7	3.8	0.0	48.2	74.0	-25.8	Vertical	120	270	
8090.000	46.8	38.5	-39.6	4.9	0.0	50.6	74.0	-23.3	Vertical	120	225	
12892.500	47.2	41.7	-38.5	6.1	0.0	56.5	74.0	-17.5	Horizontal	340	315	

Freq MHz	Average Mtr Rdg dBuV	Ant Fac dB/m	Amp Fac dB	Cbl Fac dB	Dist Corr dB	Average Total dBµV/m	Average Limit dBµV/m	Average Lim Mrg dB	Ant Pol	Mast Ht cm	Azim °	Excessive Average Level
1287.000	36.4	29.6	-40.6	1.8	0.0	27.3	54.0	-26.7	Horizontal	340	180	
2311.000	34.7	33.8	-40.1	2.5	0.0	31.0	54.0	-23.0	Horizontal	120	0	
2417.500	34.7	33.6	-40.2	2.6	0.0	30.7	54.0	-23.3	Horizontal	120	0	
5103.000	32.7	37.7	-39.7	3.8	0.0	34.6	54.0	-19.4	Vertical	120	270	
8090.000	33.2	38.5	-39.6	4.9	0.0	37.1	54.0	-16.9	Vertical	120	225	
12892.500	33.7	41.7	-38.5	6.1	0.0	43.0	54.0	-11.0	Horizontal	340	315	

22. Scope of Accreditation

SCOPE OF ACCREDITATION TO ISO/IEC 17025:2017

ELITE ELECTRONIC ENGINEERING, INC.
1516 Centre Circle
Downers Grove, IL 60515
Robert Bugielski (QA Manager) Phone: 630 495 9770 ext. 168
Email: rbugielski@elitetest.com
Craig Fanning (EMC Lab Manager) Phone: 630 495 9770 ext. 112
Email: cfanning@elitetest.com
Brandon Lugo (Automotive Team Leader) Phone: 630 495 9770 ext. 163
Email: blugo@elitetest.com
Richard King (FCC/Commercial Team Leader) Phone: 630 495 9770 ext. 123
Email: reking@elitetest.com
Website: www.elitetest.com

ELECTRICAL

Valid To: June 30, 2023

Certificate Number: 1786.01

In recognition of the successful completion of the A2LA Accreditation Program evaluation process, accreditation is granted to this laboratory to perform the following automotive electromagnetic compatibility and other electrical tests:

Test Technology:**Test Method(s) ¹:*****Transient Immunity***

ISO 7637-2 (including emissions); ISO 7637-3;
ISO 16750-2:2012, Sections 4.6.3 and 4.6.4;
CS-11979, Section 6.4; CS.00054, Section 5.9;
EMC-CS-2009.1 (CI220); FMC1278 (CI220, CI221, CI222);
GMW 3097, Section 3.5; SAE J1113-11; SAE J1113-12;
ECE Regulation 10.06 Annex 10

Electrostatic Discharge (ESD)

ISO 10605 (2001, 2008);
CS-11979 Section 7.0; CS.00054, Section 5.10;
EMC-CS-2009.1 (CI 280); FMC1278 (CI280); SAE J1113-13;
GMW 3097 Section 3.6

Conducted Emissions

CISPR 25 (2002, 2008), Sections 6.2 and 6.3;
CISPR 25 (2016), Sections 6.3 and 6.4;
CS-11979, Section 5.1; CS.00054, Sections 5.6.1 and 5.6.2;
GMW 3097, Section 3.3.2;
EMC-CS-2009.1 (CE 420); FMC1278 (CE420, CE421)

Radiated Emissions Anechoic

CISPR 25 (2002, 2008), Section 6.4;
CISPR 25 (2016), Section 6.5;
CS-11979, Section 5.3; CS.00054, Section 5.6.3;
GMW 3097, Section 3.3.1;
EMC-CS-2009.1 (RE 310); FMC1278 (RE310);
ECE Regulation 10.06 Annex 7 (Broadband)
ECE Regulation 10.06 Annex 8 (Narrowband)

(A2LA Cert. No. 1786.01) Revised 12/17/2021



Page 1 of 8

<u>Test Technology:</u>	<u>Test Method(s) 1:</u>
<i>Vehicle Radiated Emissions</i>	CISPR 12; CISPR 36; ICES-002; ECE Regulation 10.06 Annex 5
<i>Bulk Current Injection (BCI)</i>	ISO 11452-4; CS-11979, Section 6.1; CS.00054, Section 5.8.1; GMW 3097, Section 3.4.1; SAE J1113-4; EMC-CS-2009.1 (RI112); FMCI278 (RI112); ECE Regulation 10.06 Annex 9
<i>Radiated Immunity Anechoic (Including Radar Pulse)</i>	ISO 11452-2; ISO 11452-5; CS-11979, Section 6.2; CS.00054, Section 5.8.2; GMW 3097, Section 3.4.2; EMC-CS-2009.1 (RI114); FMCI278 (RI114); SAE J1113-21; ECE Regulation 10.06 Annex 9
<i>Radiated Immunity Magnetic Field</i>	ISO 11452-8
<i>Radiated Immunity Reverb</i>	ISO/TEC 61000-4-21; GMW 3097, Section 3.4.3; EMC-CS-2009.1 (RI114); FMCI278 (RI114); ISO 11452-11
<i>Radiated Immunity (Portable Transmitters)</i>	ISO 11452-9; EMC-CS-2009.1 (RI115); FMCI278 (RI115)
<i>Vehicle Radiated Immunity (ALSE)</i>	ISO 11451-2; ECE Regulation 10.06 Annex 6
<i>Vehicle Product Specific EMC Standards</i>	EN 14982; EN ISO 13309, ISO 13766; EN 50498; EC Regulation No. 2015/208; EN 55012
<i>Electrical Loads</i>	ISO 16750-2
Emissions Radiated and Conducted (3m Semi-anechoic chamber, up to 40 GHz)	47 CFR, FCC Part 15 B (using ANSI C63.4:2014); 47 CFR, FCC Part 18 (using FCC MP-5:1986); ICES-001; ICES-003; ICES-005; IEC/CISPR 11, Ed. 4.1 (2004-06); AS/NZS CISPR 11 (2004); IEC/CISPR 11 Ed 5 (2009-05) + A1 (2010); KN 11 (2008-5) with RRL Notice No. 2008-3 (May 20, 2008); CISPR 11; EN 55011; KS C 9811; CNS 13803 (1997, 2003); CISPR 14-1; EN 55014-1; AS/NZS CISPR 14.1; KS C 9814-1; KN 14-1; IEC/CISPR 22 (1997); EN 55022 (1998) + A1(2000); EN 55022 (1998) + A1(2000) + A2(2003); EN 55022 (2006); IEC/CISPR 22 (2008-09); AS/NZS CISPR 22 (2004); AS/NZS CISPR 22, 3rd Edition (2006); KN 22 (up to 6 GHz); CNS 13438 (up to 6 GHz); VCCI V-3 (up to 6 GHz); CISPR 32; EN 55032; KS C 9832; KN 32; ECE Regulation 10.06 Annex 14
Cellular Radiated Spurious Emissions	ETSI TS 151 010-1 GSM; 3GPP TS 51.010-1, Sec 12; ETSI TS 134 124 UMTS; 3GPP TS 34.124; ETSI TS 136 124 LTE; E-UTRA; 3GPP TS 36.124

Test Technology:

Test Method(s) 1:

Emissions (cont'd)

Current Harmonics

IEC 61000-3-2; EN 61000-3-2; KN 61000-3-2;
KS C 9610-3-2; ECE Regulation 10.06 Annex 11

Flicker and Fluctuations

IEC 61000-3-3; EN 61000-3-3; KN 61000-3-3;
KS C 9610-3-3; ECE Regulation 10.06 Annex 12

Immunity

Electrostatic Discharge

IEC 61000-4-2, Ed. 1.2 (2001);
IEC 61000-4-2 (1995) + A1(1998) + A2(2000);
EN 61000-4-2 (1995); EN 61000-4-2 (2009-05);
KN 61000-4-2 (2008-5);
RRL Notice No. 2008-4 (May 20, 2008);
IEC 61000-4-2; EN 61000-4-2; KN 61000-4-2;
KS C 9610-4-2; IEEE C37.90.3 2001

Radiated Immunity

IEC 61000-4-3 (1995) + A1(1998) + A2(2000);
IEC 61000-4-3, Ed. 3.0 (2006-02);
IEC 61000-4-3, Ed. 3.2 (2010);
KN 61000-4-3 (2008-5);
RRL Notice No. 2008-4 (May 20, 2008);
IEC 61000-4-3; EN 61000-4-3; KN 61000-4-3;
KS C 9610-4-3; IEEE C37.90.2 2004

Electrical Fast Transient/Burst

IEC 61000-4-4, Ed. 2.0 (2004-07);
IEC 61000-4-4, Ed. 2.1 (2011);
IEC 61000-4-4 (1995) + A1(2000) + A2(2001);
KN 61000-4-4 (2008-5);
RRL Notice No. 2008-5 (May 20, 2008);
IEC 61000-4-4; EN 61000-4-4; KN 61000-4-4;
KS C 9610-4-4; ECE Regulation 10.06 Annex 15

Surge

IEC 61000-4-5 (1995) + A1(2000);
IEC 61000-4-5, Ed 1.1 (2005-11);
EN 61000-4-5 (1995) + A1(2001);
KN 61000-4-5 (2008-5);
RRL Notice No. 2008-4 (May 20, 2008);
IEC 61000-4-5; EN 61000-4-5; KN 61000-4-5;
KS C 9610-4-5;
IEEE C37.90.1 2012; IEEE STD C62.41.2 2002;
ECE Regulation 10.06 Annex 16

Conducted Immunity

IEC 61000-4-6 (1996) + A1(2000);
IEC 61000-4-6, Ed 2.0 (2006-05);
IEC 61000-4-6 Ed. 3.0 (2008);
KN 61000-4-6 (2008-5);
RRL Notice No. 2008-4 (May 20, 2008);
EN 61000-4-6 (1996) + A1(2001); IEC 61000-4-6;
EN 61000-4-6; KN 61000-4-6; KS C 9610-4-6

Test Technology:

Test Method(s) 1:

Immunity (cont'd)

Power Frequency Magnetic Field
Immunity (*Down to 3 A/m*)

IEC 61000-4-8 (1993) + A1(2000); IEC 61000-4-8 (2009);
EN 61000-4-8 (1994) + A1(2000);
KN 61000-4-8 (2008-5);
RRL Notice No. 2008-4 (May 20, 2008);
IEC 61000-4-8; EN 61000-4-8; KN 61000-4-8; KS C 9610-4-8

Voltage Dips, Short Interrupts, and Line
Voltage Variations

IEC 61000-4-11, Ed. 2 (2004-03);
KN 61000-4-11 (2008-5);
RRL Notice No. 2008-4 (May 20, 2008);
IEC 61000-4-11; EN 61000-4-11; KN 61000-4-11;
KS C 9610-4-11

Ring Wave

IEC 61000-4-12, Ed. 2 (2006-09);
EN 61000-4-12:2006;
IEC 61000-4-12; EN 61000-4-12; KN 61000-4-12;
IEEE STD C62.41.2 2002

Generic and Product Specific EMC
Standards

IEC/EN 61000-6-1; AS/NZS 61000-6-1; KN 61000-6-1;
KS C 9610-6-1; IEC/EN 61000-6-2; AS/NZS 61000-6-2;
KN 61000-6-2; KS C 9610-6-2; IEC/EN 61000-6-3;
AS/NZS 61000-6-3; KN 61000-6-3; KS C 9610-6-3;
IEC/EN 61000-6-4; AS/NZS 61000-6-4; KN 61000-6-4;
KS C 9610-6-4; EN 50130-4; EN 61326-1; EN 50121-3-2;
EN 12895; EN 50270; EN 50491-1; EN 50491-2; EN 50491-3;
EN 55015; EN 60730-1; EN 60945; IEC 60533;
EN 61326-2-6; EN 61800-3; IEC/CISPR 14-2; EN 55014-2;
AS/NZS CISPR 14.2; KN 14-2; KS C 9814-2;
IEC/CISPR 24; AS/NZS CISPR 24; EN 55024; KN 24;
IEC/CISPR 35; AS/NZS CISPR 35; EN 55035; KN 35;
KS C 9835; IEC 60601-1-2; JIS T0601-1-2

TxRx EMC Requirements

EN 301 489-1; EN 301 489-3; EN 301 489-9; EN 301 489-17;
EN 301 489-19; EN 301 489-20

European Radio Test Standards

ETSI EN 300 086-1; ETSI EN 300 086-2;
ETSI EN 300 113-1; ETSI EN 300 113-2;
ETSI EN 300 220-1; ETSI EN 300 220-2;
ETSI EN 300 220-3-1; ETSI EN 300 220-3-2;
ETSI EN 300 330-1; ETSI EN 300 330-2;
ETSI EN 300 440-1; ETSI EN 300 440-2;
ETSI EN 300 422-1; ETSI EN 300 422-2;
ETSI EN 300 328; ETSI EN 301 893;
ETSI EN 301 511; ETSI EN 301 908-1;
ETSI EN 908-2; ETSI EN 908-13;
ETSI EN 303 413; ETSI EN 302 502;
EN 303 340; EN 303 345-2; EN 303 345-3; EN 303 345-4

Test Technology:

Test Method(s) 1:

Canadian Radio Tests

RSS-102 (RF Exposure Evaluation only); RSS-111; RSS-112; RSS-117; RSS-119; RSS-123; RSS-125; RSS-127; RSS-130; RSS-131; RSS-132; RSS-133; RSS-134; RSS-135; RSS-137; RSS-139; RSS-140; RSS-141; RSS-142; RSS-170; RSS-181; RSS-182; RSS-191; RSS-192; RSS-194; RSS-195; RSS-196; RSS-197; RSS-199; RSS-210; RSS-211; RSS-213; RSS-215; RSS-216; RSS-220; RSS-222; RSS-236; RSS-238; RSS-243; RSS-244; RSS-247; RSS-248; RSS-251; RSS-252; RSS-287; RSS-288; RSS-310; RSS-GEN

Mexico Radio Tests

IFT-008-2015; NOM-208-SCFT-2016

Japan Radio Tests

Radio Law No. 131, Ordinance of MPT No. 37, 1981, MIC Notification No. 88:2004, Table No. 22-11; ARIB STD-T66, Regulation 18

Taiwan Radio Tests

LP-0002 (July 15, 2020)

Australia/New Zealand Radio Tests

AS/NZS 4268; Radiocommunications (Short Range Devices) Standard (2014)

Hong Kong Radio Tests

HKCA 1039 Issue 6; HKCA 1042; HKCA 1033 Issue 7; HKCA 1061; HKCA 1008; HKCA 1043; HKCA 1057; HKCA 1073

Korean Radio Test Standards

KN 301 489-1; KN 301 489-3; KN 301 489-9; KN 301 489-17; KN 301 489-52; KS X 3124; KS X 3125; KS X 3130; KS X 3126; KS X 3129

Vietnam Radio Test Standards

QCVN 47:2015/BTTTT; QCVN 54:2020/BTTTT; QCVN 55:2011/BTTTT; QCVN 65:2013/BTTTT; QCVN 73:2013/BTTTT; QCVN 74:2020/BTTTT; QCVN 112:2017/BTTTT; QCVN 117:2020/BTTTT

Vietnam EMC Test Standards

QCVN 18:2014/BTTTT; QCVN 86:2019/BTTTT; QCVN 96:2015/BTTTT; QCVN 118:2018/BTTTT

*Unlicensed Radio Frequency Devices
(3 Meter Semi-Anechoic Room.)*

47 CFR FCC Part 15C, 15D, 15E, 15F, 15G, 15H (using ANSI C63.10:2013, ANSI C63.17:2013 and FCC KDB 905462 D02 (v02))

Licensed Radio Service Equipment

47 CFR FCC Parts 20, 22, 24, 25, 27, 30, 73, 74, 80, 87, 90, 95, 96, 97, 101 (using ANSI/TIA-603-E, TIA-102.CAAA-E, ANSI C63.26:2015)

Test Technology:

OTA (Over the Air) Performance
 GSM, GPRS, EGPRS
 UMTS (W-CDMA)
 LTE including CAT M1
 A-GPS for UMTS/GSM
 LRS A-GPS, A-GLONASS,
 STB8/STB16
 Large Device/Laptop/Tablet Testing
 Integrated Device Testing
 WiFi 802.11 a/b/g/n/a

Test Method(s) ¹:

CTIA Test Plan for Wireless Device Over-the-Air Performance (Method for Measurement for Radiated Power and Receiver Performance) V3.8.2;
 CTIA Test Plan for RF Performance Evaluation of WiFi Mobile Converged Devices V2.1.0

Electrical Measurements and Simulation

AC Voltage / Current

(1mV to 5kV) 60 Hz
 (0.1V to 250V) up to 500 MHz
 (1µA to 150A) 60 Hz

FAA AC 150/5345-10H
 FAA AC 150/5345-43J
 FAA AC 150/5345-44K

DC Voltage / Current

(1mV to 15-kV) / (1µA to 10A)

FAA AC 150/5345-46E

Power Factor / Efficiency / Crest Factor

(Power to 30kW)

FAA AC 150/5345-47C
 FAA EB 67D

Resistance

(1mΩ to 4000MΩ)

Surge

(Up to 10 kV / 5 kA) (Combination Wave and Ring Wave)

On the following products and materials:

Telecommunications Terminal Equipment (TTE), Radio Equipment, Network Equipment, Information Technology Equipment (ITE), Automotive Electronic Equipment, Automotive Hybrid Electronic Devices, Maritime Navigation and Radio Communication Equipment and Systems, Vehicles, Boats and Internal Combustion Engine Driven Devices, Automotive, Aviation, and General Lighting Products, Medical Electrical Equipment, Motors, Industrial, Scientific and Medical (ISM) Radio-Frequency Equipment, Household Appliances, Electric Tools, Low-voltage Switchgear and Control gear, Programmable Controllers, Electrical Equipment for Measurement, Control and Laboratory Use, Base Materials, Power and Data Transmission Cables and Connectors

¹ When the date, edition, version, etc. is not identified in the scope of accreditation, laboratories may use the version that immediately precedes the current version for a period of one year from the date of publication of the standard measurement method, per part C., Section 1 of A2LA R101 - General Requirements - Accreditation of ISO-IEC 17025 Laboratories.

Testing Activities Performed in Support of FCC Certification in Accordance with 47 Code of Federal Regulations and FCC KDB 974614, Appendix A, Table A.1²

Rule Subpart/Technology	Test Method	Maximum Frequency (MHz)
<u>Unintentional Radiators</u> Part 15B	ANSI C63.4:2014	40000

Testing Activities Performed in Support of FCC Certification in Accordance with 47 Code of Federal Regulations and FCC KDB 974614, Appendix A, Table A.1²

Rule Subpart/Technology	Test Method	Maximum Frequency (MHz)
<u>Industrial, Scientific, and Medical Equipment</u> Part 18	FCC MP-5 (February 1986)	40000
<u>Intentional Radiators</u> Part 15C	ANSI C63.10:2013	40000
<u>Unlicensed Personal Communication Systems Devices</u> Part 15D	ANSI C63.17:2013	40000
<u>U-NII without DFS Intentional Radiators</u> Part 15E	ANSI C63.10:2013	40000
<u>U-NII with DFS Intentional Radiators</u> Part 15E	FCC KDB 905462 D02 (v02)	40000
<u>UWB Intentional Radiators</u> Part 15F	ANSI C63.10:2013	40000
<u>BPL Intentional Radiators</u> Part 15G	ANSI C63.10:2013	40000
<u>White Space Device Intentional Radiators</u> Part 15H	ANSI C63.10:2013	40000
<u>Commercial Mobile Services (FCC Licensed Radio Service Equipment)</u> Parts 22 (cellular), 24, 25 (below 3 GHz), and 27	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
<u>General Mobile Radio Services (FCC Licensed Radio Service Equipment)</u> Parts 22 (non-cellular), 90 (below 3 GHz), 95, 97, and 101 (below 3 GHz)	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
<u>Citizens Broadband Radio Services (FCC Licensed Radio Service Equipment)</u> Part 96	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000

Testing Activities Performed in Support of FCC Certification in Accordance with 47 Code of Federal Regulations and FCC KDB 974614, Appendix A, Table A.1²

Rule Subpart/Technology	Test Method	Maximum Frequency (MHz)
<u>Maritime and Aviation Radio Services</u> Parts 80 and 87	ANSI/TIA-603-E; ANSI C63.26:2015	40000
<u>Microwave and Millimeter Bands Radio Services</u> Parts 25, 30, 74, 90 (above 3 GHz), 97 (above 3 GHz), and 101	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
<u>Broadcast Radio Services</u> Parts 73 and 74 (below 3 GHz)	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
<u>Signal Boosters</u> Part 20 (Wideband Consumer Signal Boosters, Provider-specific signal boosters, and Industrial Signal Boosters) Section 90.219	ANSI C63.26:2015	40000

² Accreditation does not imply acceptance to the FCC equipment authorization program. Please see the FCC website (<https://apps.fcc.gov/oetcf/eas/>) for a listing of FCC approved laboratories.



Accredited Laboratory

A2LA has accredited

ELITE ELECTRONIC ENGINEERING INC.

Downers Grove, IL

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 *General requirements for the competence of testing and calibration laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 19th day of May 2021.



Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 1786.01
Valid to June 30, 2023

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.