


R-8518-1 Chamberlain Occupied Bandwidth PL 5/9/00

REF 79.9 dB μ V ATTEN 0 dB

hp

10 dB/

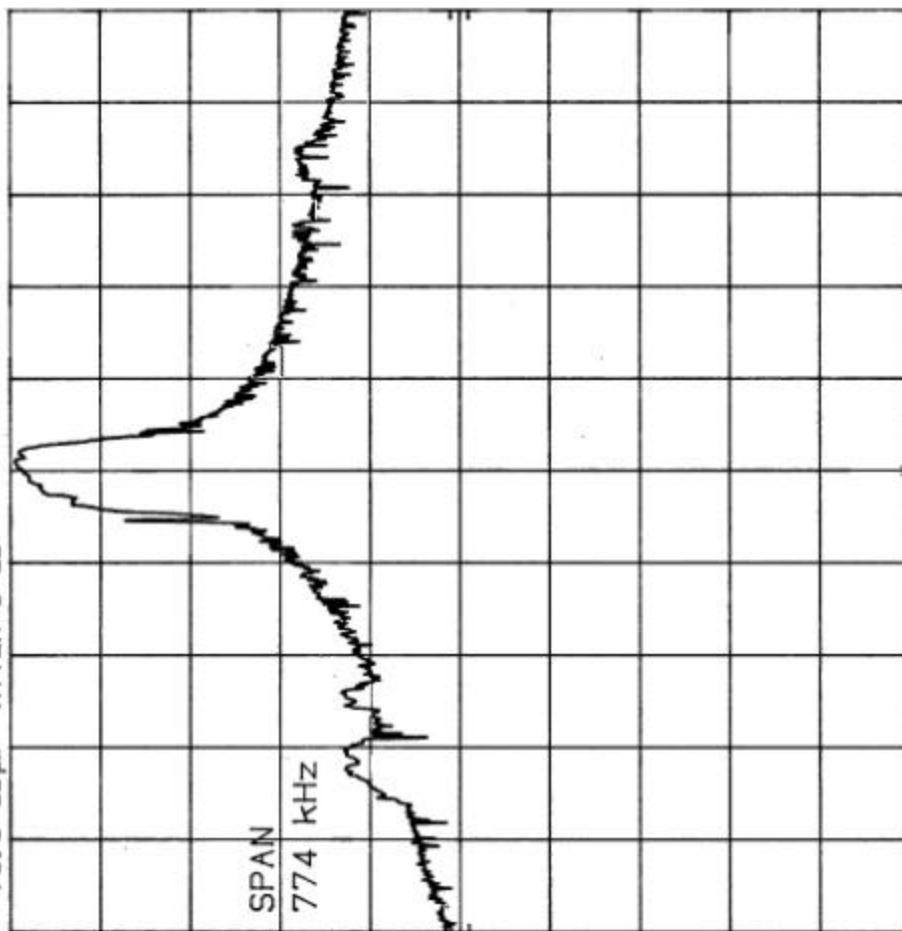

CENTER 309.555 MHz
 RES BW 10 kHz
 VBW 30 kHz
 SWP 30.0 msec
 SPAN 774 kHz

Customer:	Chamberlain
Test Sample:	Pulsed RF Transmitter
Model No.:	Triode TX1
Test Method:	FCC 15.231(c) Occupied Bandwidth
Notes:	The Bandwidth of the emission is not greater than 25% of the center frequency 20dB down from the modulated carrier
Date:	May 9, 2000
Tech:	Peter Lanzetta
Sheet	1 of 2




Retlif Testing Laboratories

Report No. R-8518-1

R-8518-1 Chamberlain Occupied Bandwidth PL 5/9/00

REF 71.5 dBμV ATTEN 0 dB

hp
10 dB/

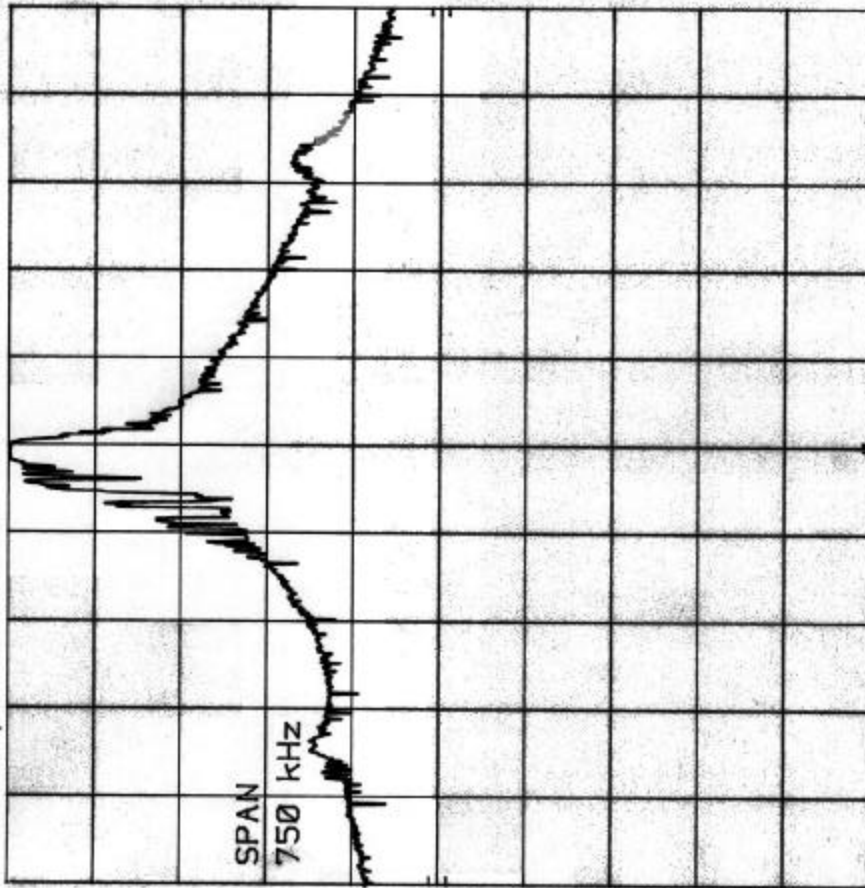

CENTER 299.535 MHz
 RES BW 10 kHz
 VBW 30 kHz
 SWP 30.0 msec
 SPAN 750 kHz

Customer:	Chamberlain
Test Sample:	Pulsed RF Transmitter
Model No.:	Tricorde TX4
Test Method:	FCC 15.231(c) Occupied Bandwidth
Notes:	The Bandwidth of the emission is not greater than .25% of the center frequency 20dB down from the modulated carrier
Date:	May 9, 2000
Tech:	Peter Lanavre
Sheet	2 of 2



Retlif Testing Laboratories

Report No. R-8518-1