





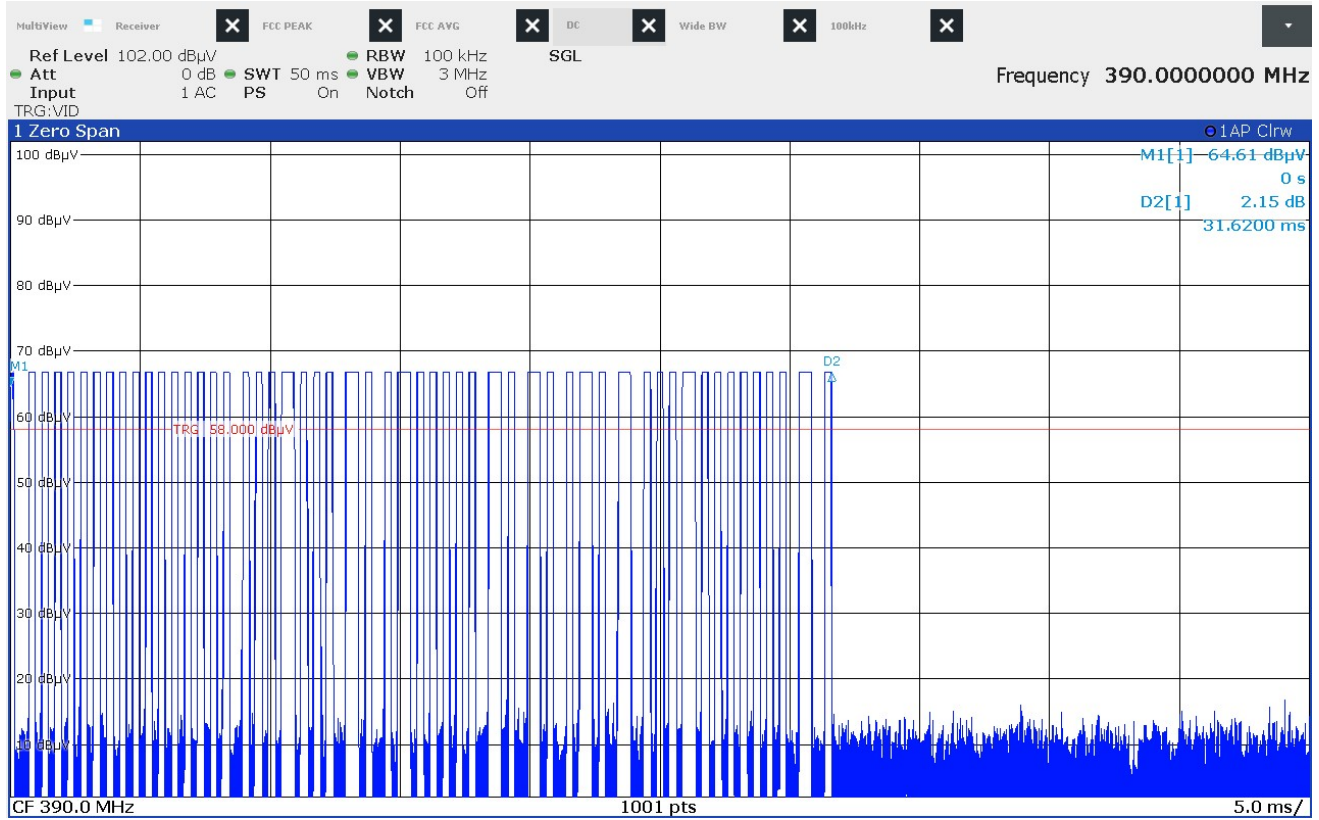

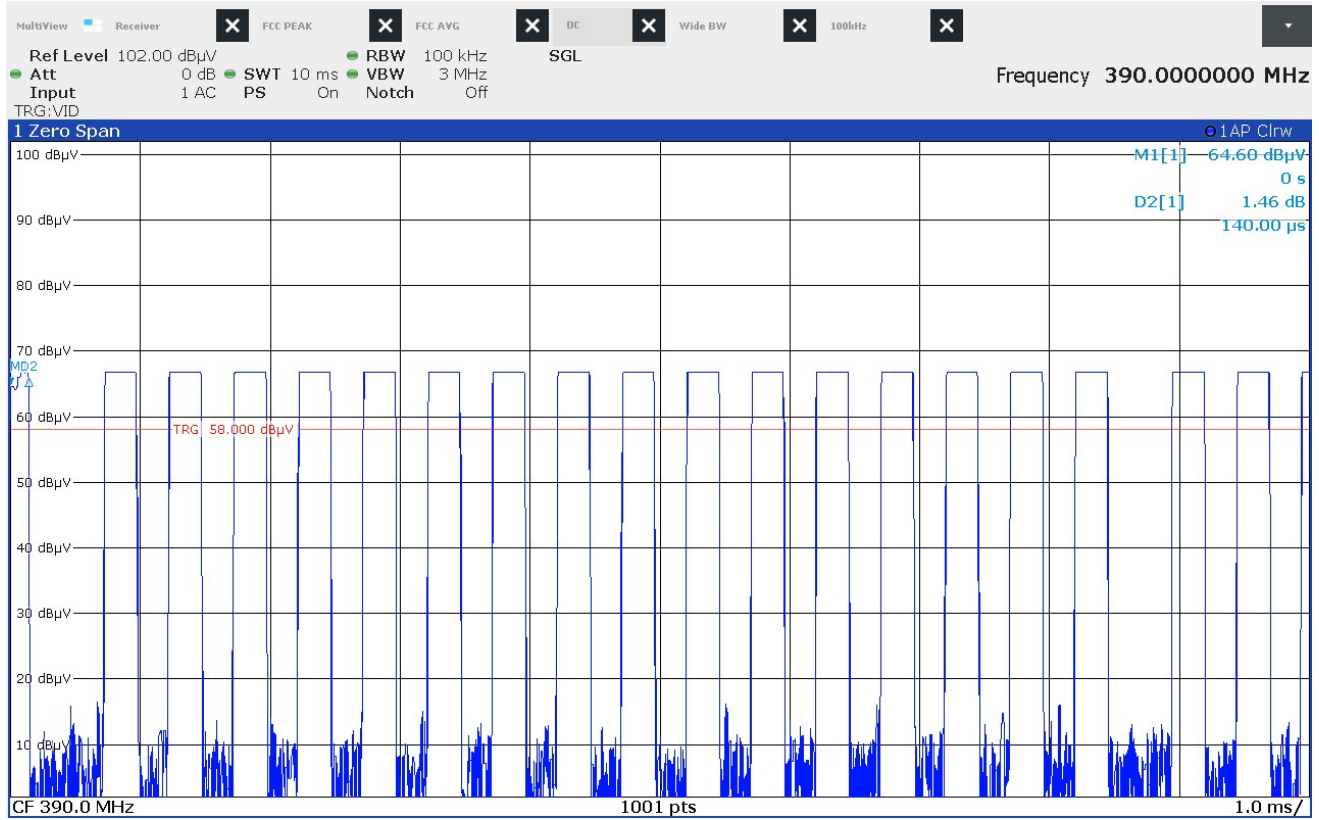


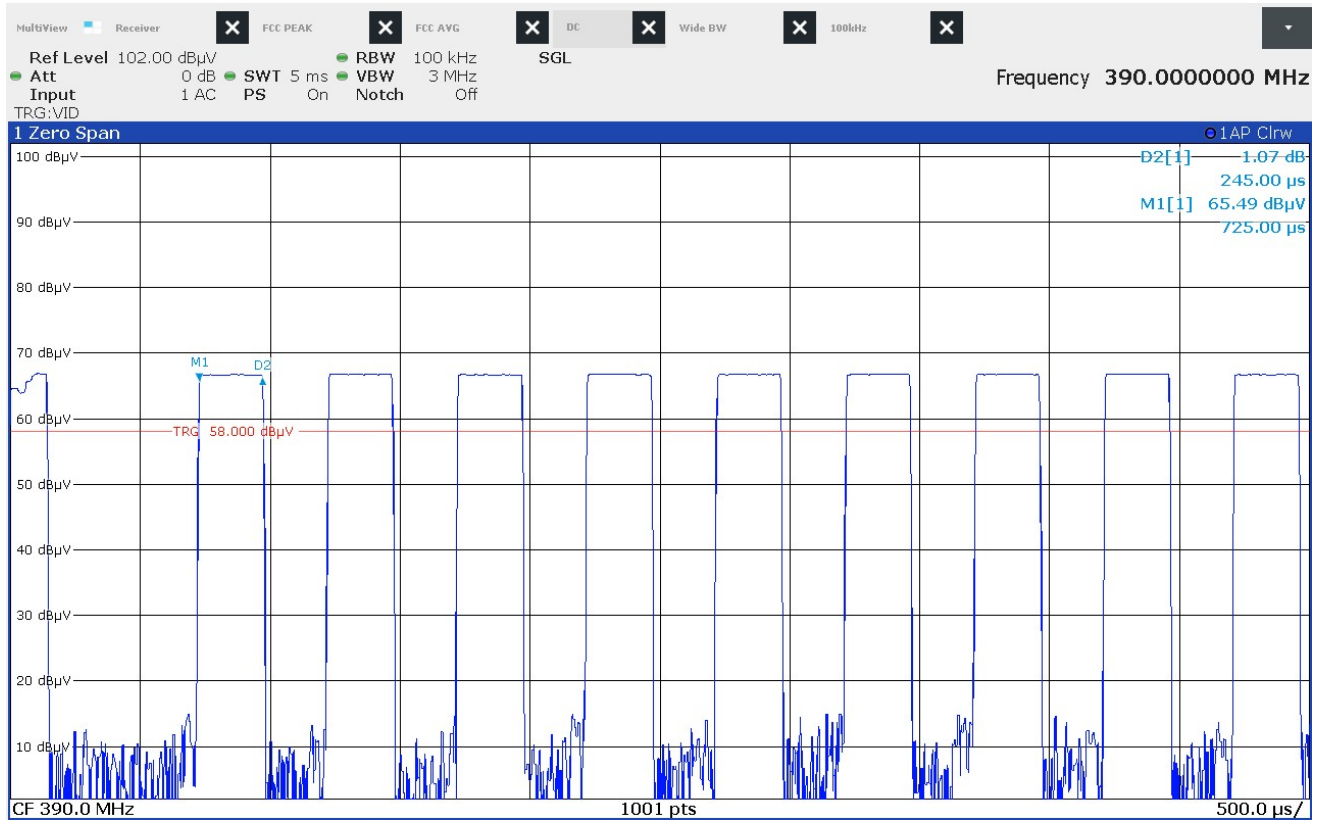


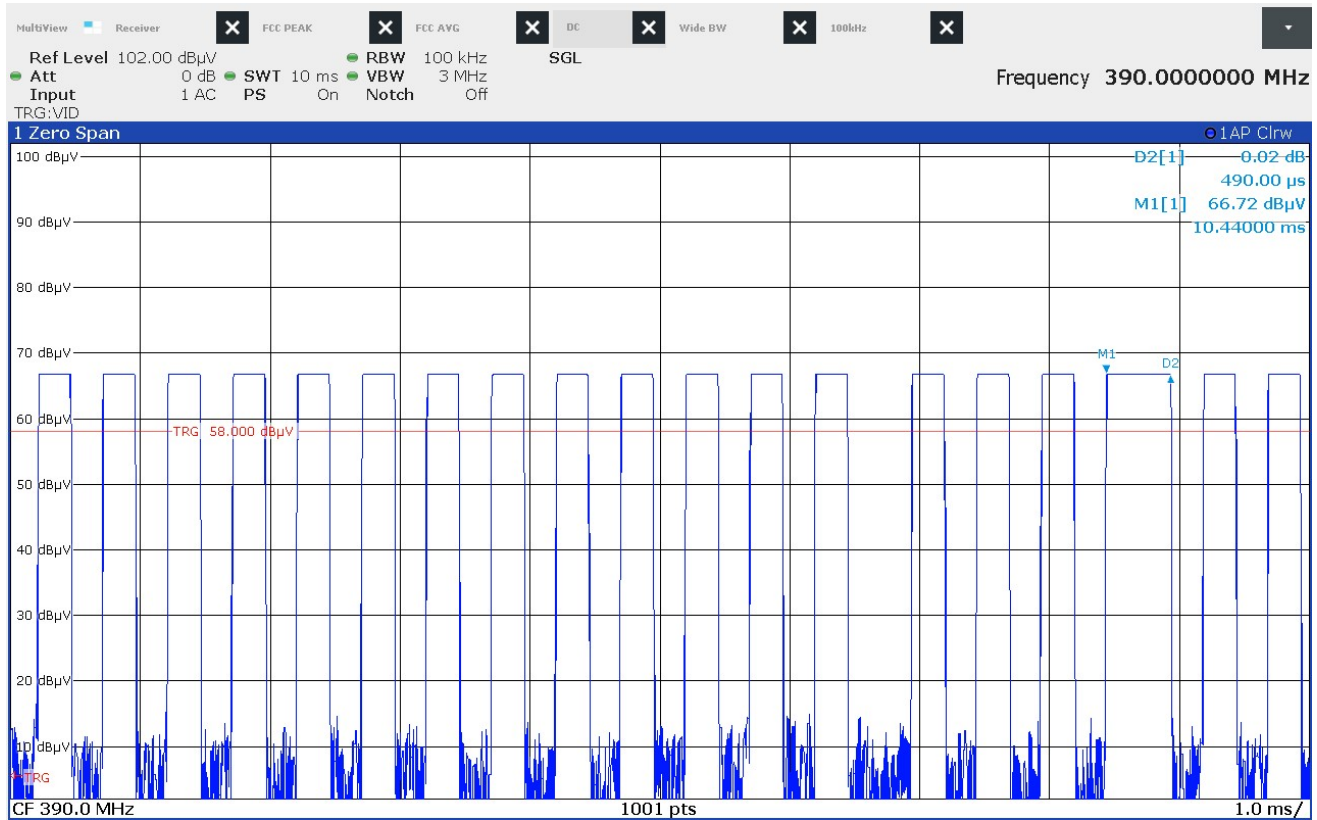



$$\text{Duty Cycle Factor} = 20 \log \left(\frac{(0.14 * 1 + 0.245 * 44 + 0.49 * 9) \text{msec}}{96.92 \text{msec}} \right) = -16.017 \text{dB}$$


Test Details	
Manufacturer	The Chamberlain Group LLC
Model	Q363LA
S/N	Sample E2
Mode	E-Code Tx @ 433.92MHz
Carrier Frequency	433.92MHz
Parameters	On time = 15.46msec Word Length = 96.78msec
Duty Cycle Correction Factor	-15.932dB
Notes	None

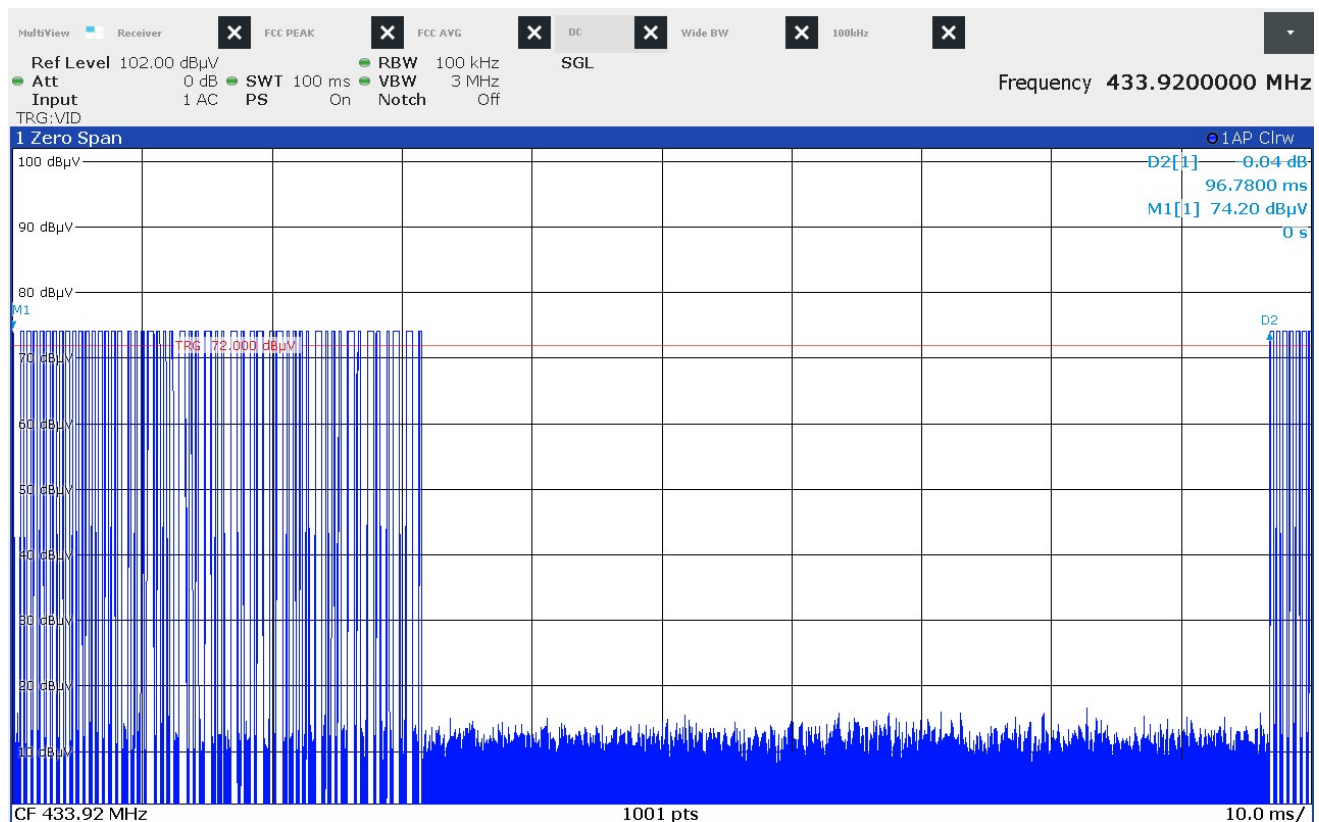

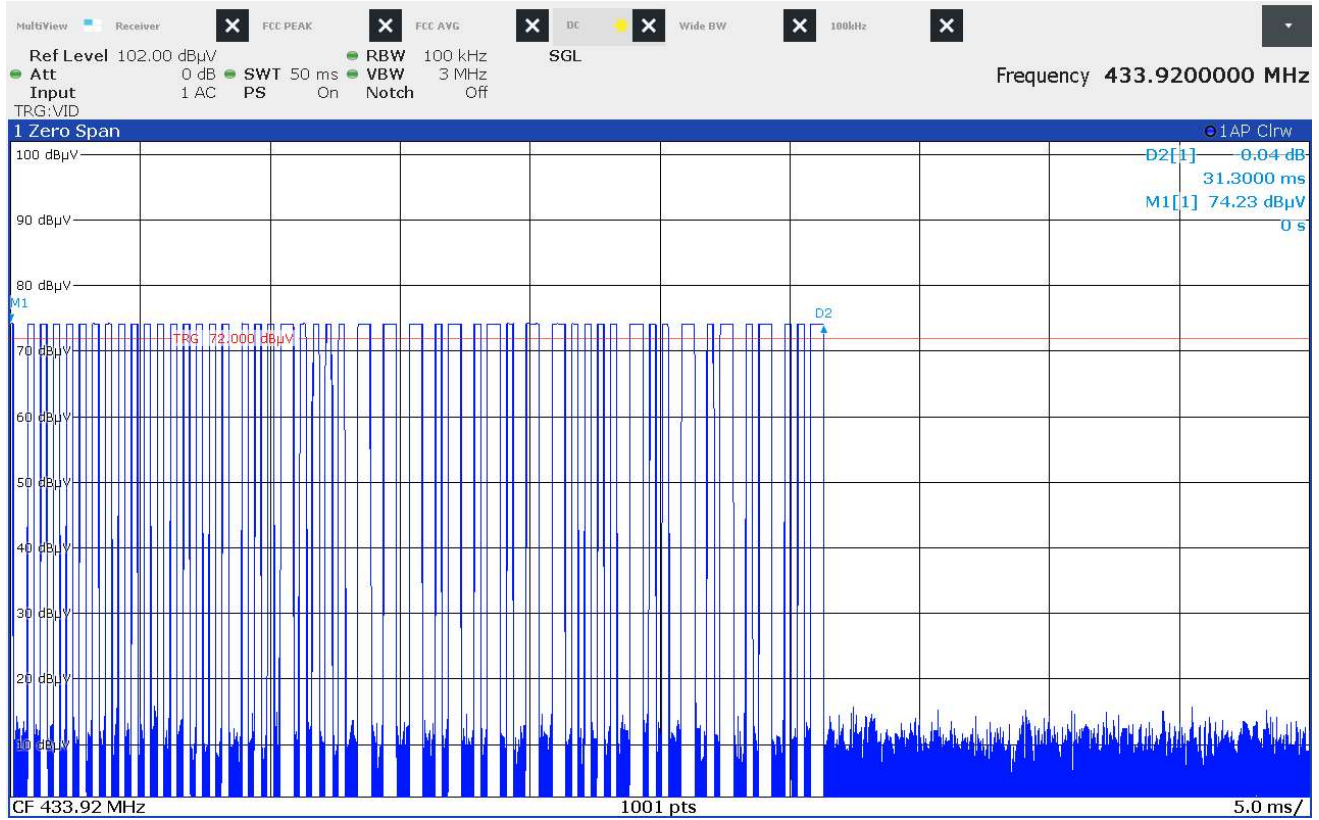

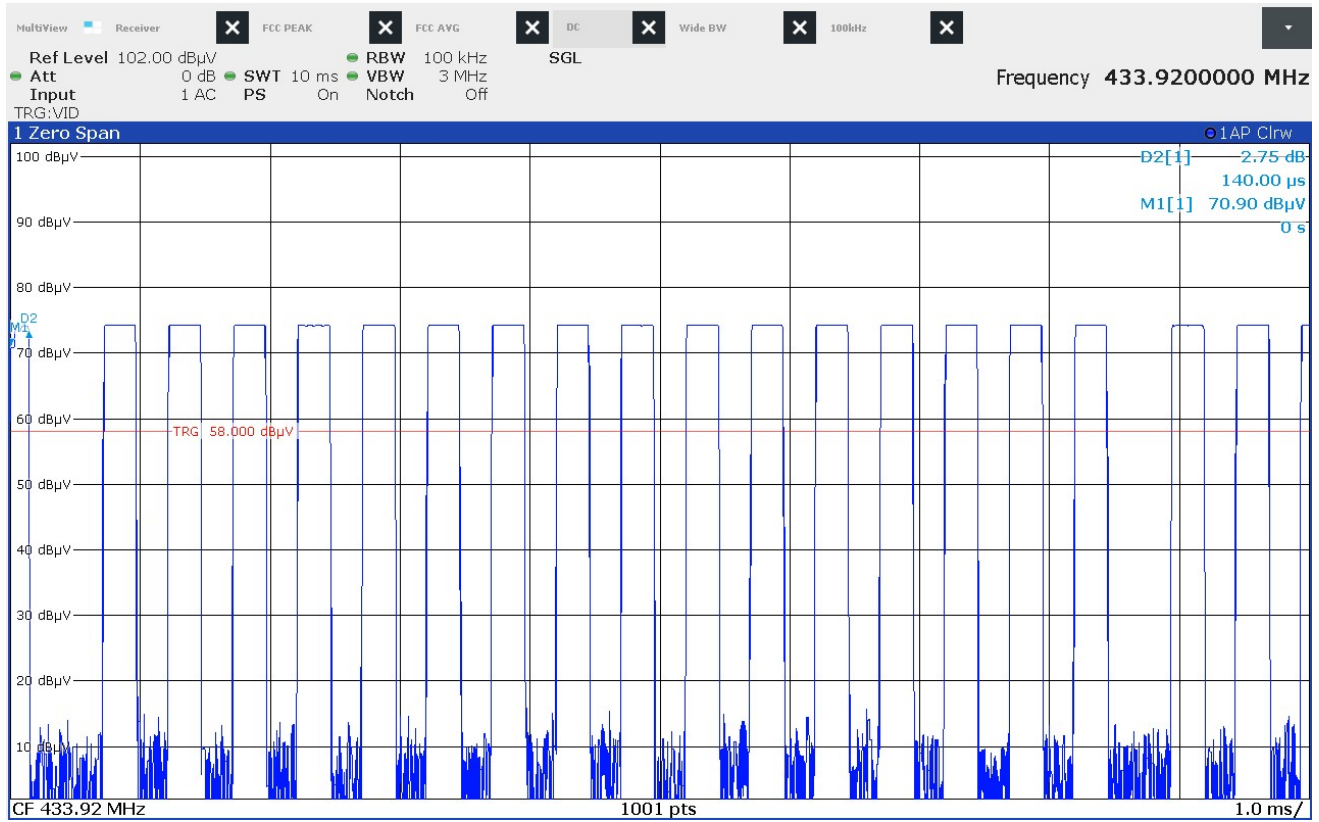

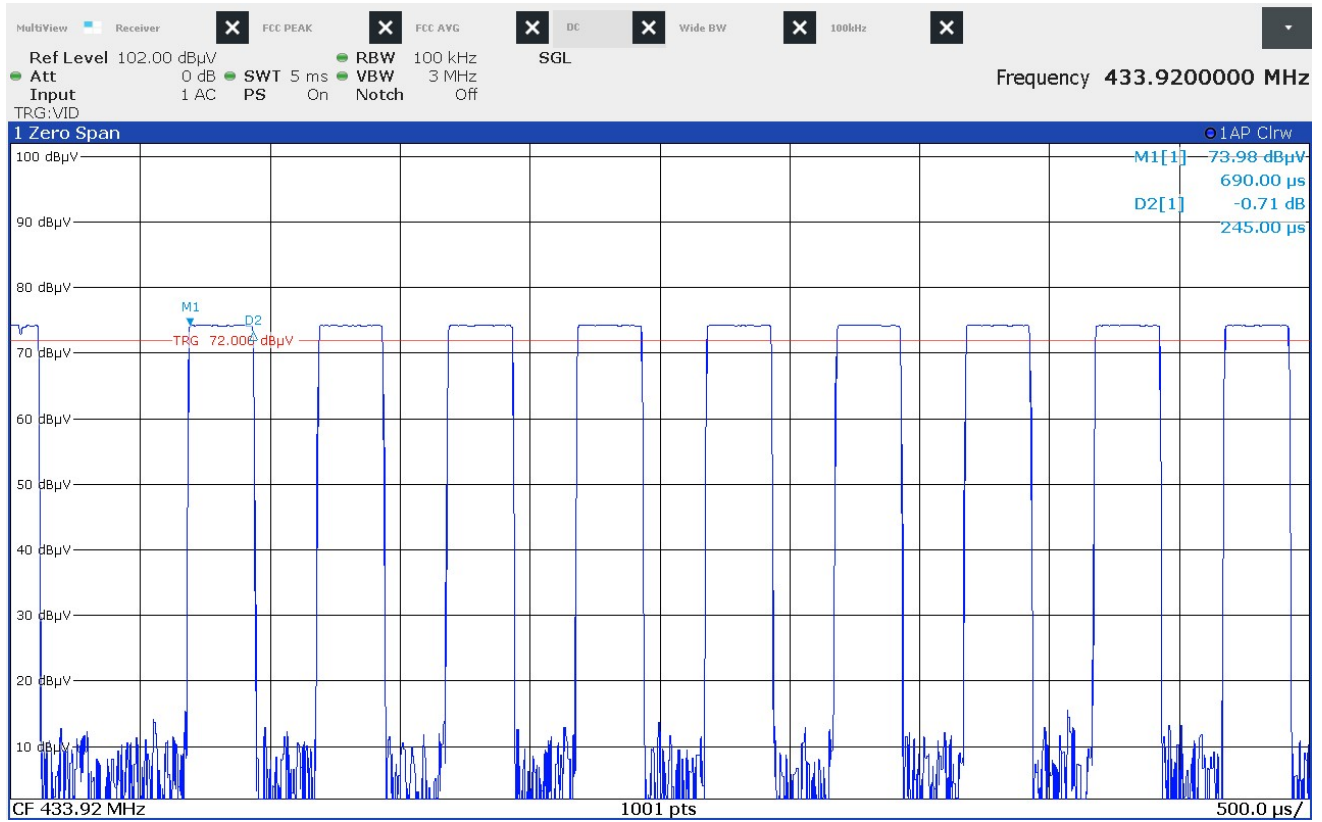

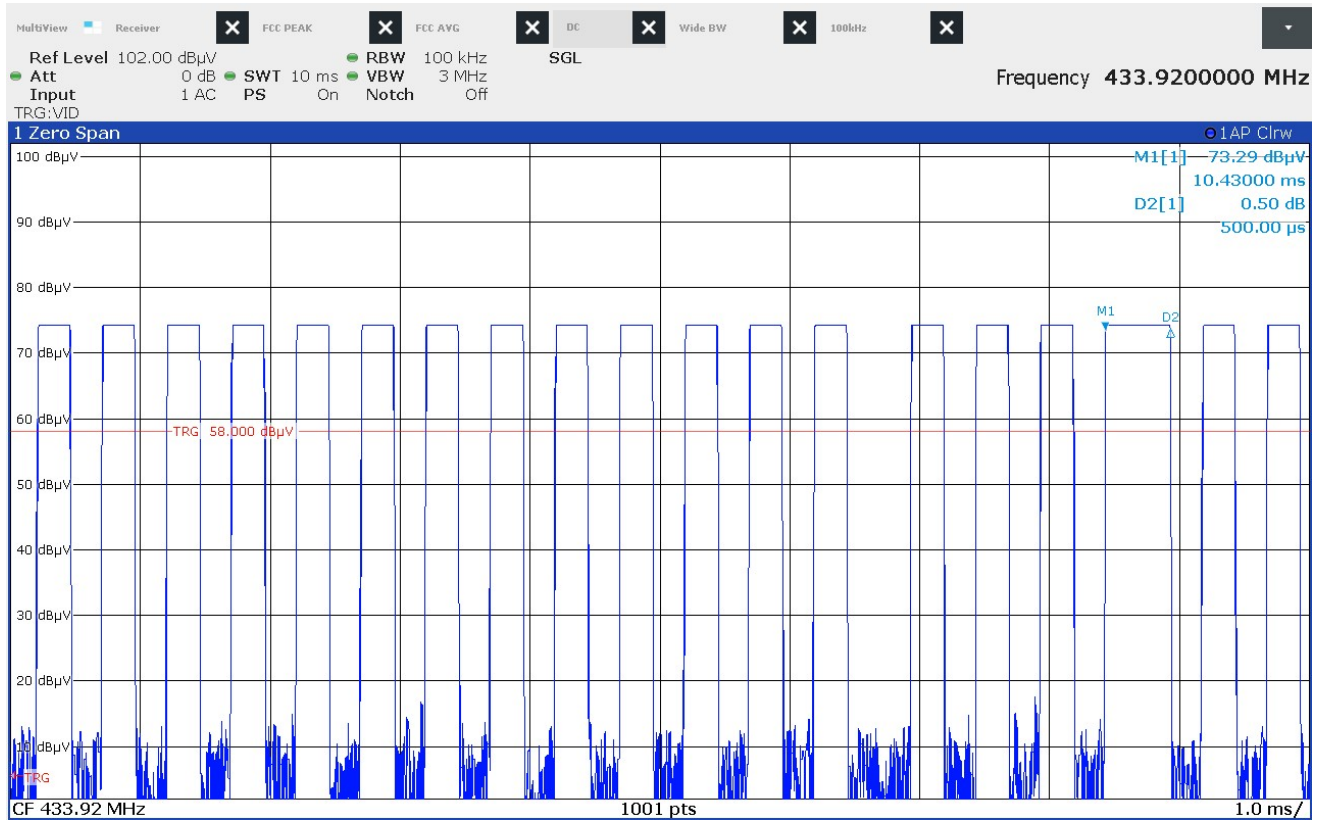

$$\text{Duty Cycle Factor} = 20 \log \left(\frac{(0.14 * 1 + 0.245 * 36 + 0.5 * 13) \text{msec}}{96.78 \text{msec}} \right) = -15.932 \text{dB}$$

22. Spurious Radiated Emissions

Test Information	
Manufacturer	The Chamberlain Group LLC
Product	DeLorean Visor Remote
Model	Q363LA
Serial No	Sample 1
Mode	D-Code Tx @ 315MHz D-Code Tx @ 390MHz E-Code Tx @ 315MHz E-Code Tx @ 390MHz E-Code Tx @ 433.92MHz

Test Setup Details	
Setup Format	Tabletop
Height of Support	NA
Type of Test Site	Semi-Anechoic Chamber
Test site used	R29F
Notes	None

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1
Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)	3.2
Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz)	3.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz)	3.4

Requirements		
The EUT must comply with the requirements of FCC "Code of Federal Regulations Title 47", Part 15, Subpart C, Section 15.205 et seq. as well as the requirements of the RSS-GEN specification Section 8.10.		
Carrier Frequency (MHz)	Field Strength of Carrier (µV/m)	Field Strength of Spurious Emissions (µV/m)
260-470 Above 470	3750 to 12500* 12500	375 to 1250* 1250
*Linear interpolations		

Procedures

All tests were performed in a 32ft. x 20ft. x 18ft. hybrid ferrite-tile/anechoic absorber lined test chamber. The walls and ceiling of the shielded chamber are lined with ferrite tiles. Anechoic absorber material is installed over the ferrite tile. The floor of the chamber is used as the ground plane. The chamber complies with ANSI C63.4-2014 for site attenuation.

The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads.

A preliminary radiated emissions test was performed to determine the emission characteristics of the EUT. For the preliminary test, a broadband measuring antenna was positioned at a 3 meter distance from the EUT. The entire frequency range from 30MHz to 4.5GHz was investigated using a peak detector function. The data was then processed by the computer to calculate equivalent field intensity.

The final emission tests were then manually performed over the frequency range of 30MHz to 4.5GHz. Between 30MHz and 1000MHz, a bi-log antenna was used as the pick-up device. The EUT was placed on an 80cm high non-conductive stand. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.

Above 1GHz, a broadband double ridged waveguide antenna was used as the pick-up device. The EUT was placed on an 150cm high non-conductive stand. A peak detector with a resolution bandwidth of 1 MHz was used on the spectrum analyzer.

The peak detected levels were converted to average levels using a duty cycle factor which was computed from the pulse train.

To ensure that maximum or worst case, emission levels were measured, the following steps were taken:

- 1) The EUT was rotated so that all of its sides were exposed to the receiving antenna.
- 2) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
- 3) The measuring antenna was raised and lowered from 1 to 4 meters for each antenna polarization to maximize the readings.
- 4) For hand-held or body-worn devices, the EUT was rotated through three orthogonal axes to determine which orientation produces the highest emission relative to the limit.

In instances where it was necessary to use a shortened cable between the measuring antenna and the spectrum analyzer and the antenna cannot be raised to 4 meters. The measuring antenna is raised or lowered as much as the cable will allow and the EUT is rotated through all axis to ensure the maximum readings are recorded.

Picture removed for short term confidentiality purposes.

Test Setup for Spurious Radiated Emissions, 30-1000MHz – Antenna Polarization
Horizontal

Picture removed for short term confidentiality purposes.

Test Setup for Spurious Radiated Emissions, 30-1000MHz – Antenna Polarization
Vertical

Picture removed for short term confidentiality purposes.

Test Setup for Spurious Radiated Emissions, Above 1GHz – Antenna Polarization
Horizontal

Picture removed for short term confidentiality purposes.

Test Setup for Spurious Radiated Emissions, Above 1GHz – Antenna Polarization
Vertical

Test Details	
Manufacturer	The Chamberlain Group LLC
Model	Q363LA
S/N	Sample 1
Mode	D-Code Tx @ 315MHz
Carrier Frequency	315MHz
Requirements	Field Strength of Carrier Limit = 6041.7µV/m
Notes	D Code
Test Date(s)	November 14, 2024

Freq. (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle (dB)	Total (dBuV/m)	Total (uV/m)	Limit (uV/m)	Margin (dB)
315.000	H	67.3		1.2	19.3	0.0	-12.7	75.1	5694.2	6041.7	-0.5
315.000	V	47.6		1.2	19.3	0.0	-12.7	55.4	590.1	6041.7	-20.2
630.000	H	23.7		1.7	25.0	0.0	-12.7	37.8	77.6	604.2	-17.8
630.000	V	20.2		1.7	25.0	0.0	-12.7	34.3	51.8	604.2	-21.3
945.000	H	24.4		2.1	27.0	0.0	-12.7	40.7	108.7	604.2	-14.9
945.000	V	18.1		2.1	27.0	0.0	-12.7	34.4	52.7	604.2	-21.2
1260.000	H	59.9		2.5	28.8	-40.5	-12.7	38.1	80.1	604.2	-17.6
1260.000	V	54.1		2.5	28.8	-40.5	-12.7	32.3	41.1	604.2	-23.4
1575.000	H	71.9		2.7	28.7	-40.0	-12.7	50.6	340.1	500.0	-3.3
1575.000	V	66.1		2.7	28.7	-40.0	-12.7	44.9	175.1	500.0	-9.1
1890.000	H	58.5		3.0	30.8	-39.7	-12.7	40.0	99.8	604.2	-15.6
1890.000	V	54.9		3.0	30.8	-39.7	-12.7	36.3	65.3	604.2	-19.3
2205.000	H	57.5		3.3	32.1	-39.6	-12.7	40.6	106.6	500.0	-13.4
2205.000	V	55.2		3.3	32.1	-39.6	-12.7	38.2	81.7	500.0	-15.7
2520.000	H	57.1		3.5	32.8	-39.6	-12.7	41.0	112.7	604.2	-14.6
2520.000	V	51.9		3.5	32.8	-39.6	-12.7	35.9	62.5	604.2	-19.7
2835.000	H	52.1	*	3.8	32.6	-39.4	-12.7	36.4	66.4	500.0	-17.5
2835.000	V	52.1	*	3.8	32.6	-39.4	-12.7	36.4	66.4	500.0	-17.5
3150.000	H	52.6		4.0	33.1	-39.2	-12.7	37.8	77.4	604.2	-17.8
3150.000	V	51.2	*	4.0	33.1	-39.2	-12.7	36.4	66.4	604.2	-19.2

Test Details	
Manufacturer	The Chamberlain Group LLC
Model	Q363LA
S/N	Sample 1
Mode	D-Code Tx @ 315MHz
Carrier Frequency	390MHz
Requirements	Field Strength of Carrier Limit = 9166.7µV/m
Notes	D Code
Test Date(s)	November 14, 2024

Freq. (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle (dB)	Total (dBuV/m)	Total (uV/m)	Limit (uV/m)	Margin (dB)
390.000	H	57.4		1.3	21.5	0.0	-13.7	66.6	2128.1	9166.7	-12.7
390.000	V	41.8		1.3	21.5	0.0	-13.7	50.9	352.8	9166.7	-28.3
780.000	H	35.7		1.9	25.9	0.0	-13.7	49.7	305.0	916.7	-9.6
780.000	V	25.9		1.9	25.9	0.0	-13.7	39.9	98.8	916.7	-19.3
1170.000	H	62.6		2.4	28.0	-40.6	-13.7	38.6	84.8	500.0	-15.4
1170.000	V	58.9		2.4	28.0	-40.6	-13.7	34.9	55.5	500.0	-19.1
1560.000	H	67.6		2.7	28.6	-40.0	-13.7	45.1	180.3	500.0	-8.9
1560.000	V	59.7		2.7	28.6	-40.0	-13.7	37.3	73.4	500.0	-16.7
1950.000	H	62.1		3.0	31.3	-39.6	-13.7	43.0	140.9	916.7	-16.3
1950.000	V	60.9		3.0	31.3	-39.6	-13.7	41.8	123.4	916.7	-17.4
2340.000	H	67.8		3.4	32.5	-39.6	-13.7	50.3	326.4	500.0	-3.7
2340.000	V	63.2		3.4	32.5	-39.6	-13.7	45.7	193.8	500.0	-8.2
2730.000	H	59.1		3.7	32.6	-39.5	-13.7	42.1	127.7	500.0	-11.9
2730.000	V	58.5		3.7	32.6	-39.5	-13.7	41.6	120.1	500.0	-12.4
3120.000	H	57.2		4.0	33.1	-39.2	-13.7	41.3	115.9	916.7	-18.0
3120.000	V	53.0		4.0	33.1	-39.2	-13.7	37.1	71.6	916.7	-22.2
3510.000	H	55.3	*	4.2	33.3	-38.8	-13.7	40.3	103.5	916.7	-18.9
3510.000	V	50.8	*	4.2	33.3	-38.8	-13.7	35.8	61.3	916.7	-23.5
3900.000	H	50.5	*	4.4	33.5	-38.9	-13.7	35.8	61.7	500.0	-18.2
3900.000	V	49.9	*	4.4	33.5	-38.9	-13.7	35.3	58.0	500.0	-18.7

Test Details	
Manufacturer	The Chamberlain Group LLC
Model	Q363LA
S/N	Sample 1
Mode	D-Code Tx @ 315MHz
Carrier Frequency	315MHz
Requirements	Field Strength of Carrier Limit = 6041.7µV/m
Notes	E Code
Test Date(s)	November 13, 2024

Freq. (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle (dB)	Total (dBuV/m)	Total (uV/m)	Limit (uV/m)	Margin (dB)
315.000	H	68.1		1.2	19.3	0.0	-16.6	72.1	4004.3	6041.7	-3.6
315.000	V	49.1		1.2	19.3	0.0	-16.6	53.0	448.3	6041.7	-22.6
630.000	H	25.0		1.7	25.0	0.0	-16.6	35.2	57.4	604.2	-20.4
630.000	V	18.2		1.7	25.0	0.0	-16.6	28.4	26.2	604.2	-27.2
945.000	H	25.7		2.1	27.0	0.0	-16.6	38.2	81.2	604.2	-17.4
945.000	V	17.6		2.1	27.0	0.0	-16.6	30.0	31.7	604.2	-25.6
1260.000	H	61.9		2.5	28.8	-40.5	-16.6	36.2	64.3	604.2	-19.5
1260.000	V	54.9		2.5	28.8	-40.5	-16.6	29.1	28.4	604.2	-26.5
1575.000	H	73.3		2.7	28.7	-40.0	-16.6	48.1	254.8	500.0	-5.9
1575.000	V	67.8		2.7	28.7	-40.0	-16.6	42.6	134.5	500.0	-11.4
1890.000	H	59.3		3.0	30.8	-39.7	-16.6	36.8	69.5	604.2	-18.8
1890.000	V	51.9		3.0	30.8	-39.7	-16.6	29.4	29.6	604.2	-26.2
2205.000	H	57.1		3.3	32.1	-39.6	-16.6	36.2	64.4	500.0	-17.8
2205.000	V	54.2		3.3	32.1	-39.6	-16.6	33.4	46.6	500.0	-20.6
2520.000	H	52.6		3.5	32.8	-39.6	-16.6	32.6	42.7	604.2	-23.0
2520.000	V	51.4	*	3.5	32.8	-39.6	-16.6	31.4	37.3	604.2	-24.2
2835.000	H	51.4	*	3.8	32.6	-39.4	-16.6	31.8	38.9	500.0	-22.2
2835.000	V	51.1	*	3.8	32.6	-39.4	-16.6	31.5	37.5	500.0	-22.5
3150.000	H	53.4		4.0	33.1	-39.2	-16.6	34.7	54.3	604.2	-20.9
3150.000	V	51.4	*	4.0	33.1	-39.2	-16.6	32.7	43.0	604.2	-23.0

Test Details	
Manufacturer	The Chamberlain Group LLC
Model	Q363LA
S/N	Sample 1
Mode	D-Code Tx @ 315MHz
Carrier Frequency	390MHz
Requirements	Field Strength of Carrier Limit = 9166.7µV/m
Notes	E Code
Test Date(s)	November 13, 2024

Freq. (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle (dB)	Total (dBuV/m)	Total (uV/m)	Limit (uV/m)	Margin (dB)
390.000	H	57.4		1.3	21.5	0.0	-16.0	64.3	1640.7	9166.7	-14.9
390.000	V	41.7		1.3	21.5	0.0	-16.0	48.6	269.5	9166.7	-30.6
780.000	H	35.8		1.9	25.9	0.0	-16.0	47.5	238.4	916.7	-11.7
780.000	V	26.1		1.9	25.9	0.0	-16.0	37.9	78.2	916.7	-21.4
1170.000	H	62.4		2.4	28.0	-40.6	-16.0	36.1	63.7	500.0	-17.9
1170.000	V	59.3		2.4	28.0	-40.6	-16.0	33.0	44.9	500.0	-20.9
1560.000	H	67.4		2.7	28.6	-40.0	-16.0	42.7	136.1	500.0	-11.3
1560.000	V	58.4		2.7	28.6	-40.0	-16.0	33.6	48.0	500.0	-20.3
1950.000	H	62.0		3.0	31.3	-39.6	-16.0	40.7	107.9	916.7	-18.6
1950.000	V	61.0		3.0	31.3	-39.6	-16.0	39.6	95.5	916.7	-19.6
2340.000	H	68.5		3.4	32.5	-39.6	-16.0	48.7	273.1	500.0	-5.3
2340.000	V	62.6		3.4	32.5	-39.6	-16.0	42.8	138.8	500.0	-11.1
2730.000	H	59.9		3.7	32.6	-39.5	-16.0	40.7	108.2	500.0	-13.3
2730.000	V	57.9		3.7	32.6	-39.5	-16.0	38.7	86.0	500.0	-15.3
3120.000	H	56.6		4.0	33.1	-39.2	-16.0	38.4	83.5	916.7	-20.8
3120.000	V	52.9		4.0	33.1	-39.2	-16.0	34.7	54.5	916.7	-24.5
3510.000	H	53.5		4.2	33.3	-38.8	-16.0	36.2	64.2	916.7	-23.1
3510.000	V	50.6		4.2	33.3	-38.8	-16.0	33.3	46.0	916.7	-26.0
3900.000	H	50.3		4.4	33.5	-38.9	-16.0	33.4	46.6	500.0	-20.6
3900.000	V	49.8	*	4.4	33.5	-38.9	-16.0	32.9	44.0	500.0	-21.1

Test Details	
Manufacturer	The Chamberlain Group LLC
Model	Q363LA
S/N	Sample 1
Mode	D-Code Tx @ 315MHz
Carrier Frequency	433.92MHz
Requirements	Field Strength of Carrier Limit = 10996.7µV/m
Notes	E Code
Test Date(s)	November 13, 2024

Freq. (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle (dB)	Total (dBuV/m)	Total (uV/m)	Limit (uV/m)	Margin (dB)
433.920	H	49.8		1.4	22.2	0.0	-15.9	57.5	748.8	10996.7	-23.3
433.920	V	35.0		1.4	22.2	0.0	-15.9	42.7	135.9	10996.7	-38.2
867.840	H	35.2		2.0	26.4	0.0	-15.9	47.7	241.8	1099.7	-13.2
867.840	V	26.4		2.0	26.4	0.0	-15.9	38.8	87.3	1099.7	-22.0
1301.760	H	64.6		2.5	28.8	-40.4	-15.9	39.7	96.1	500.0	-14.3
1301.760	V	60.5		2.5	28.8	-40.4	-15.9	35.5	59.5	500.0	-18.5
1735.680	H	74.0		2.9	29.9	-39.8	-15.9	51.0	355.7	1099.7	-9.8
1735.680	V	67.5		2.9	29.9	-39.8	-15.9	44.6	169.3	1099.7	-16.3
2169.600	H	70.6		3.2	31.9	-39.6	-15.9	50.2	322.7	1099.7	-10.6
2169.600	V	69.4		3.2	31.9	-39.6	-15.9	49.0	282.7	1099.7	-11.8
2603.520	H	69.3		3.6	32.7	-39.6	-15.9	50.1	319.2	1099.7	-10.7
2603.520	V	62.3		3.6	32.7	-39.6	-15.9	43.0	141.9	1099.7	-17.8
3037.440	H	58.3		3.9	33.0	-39.3	-15.9	40.0	99.8	1099.7	-20.8
3037.440	V	55.7		3.9	33.0	-39.3	-15.9	37.4	73.8	1099.7	-23.5
3471.360	H	60.3		4.2	33.2	-38.9	-15.9	42.9	139.3	1099.7	-17.9
3471.360	V	54.9		4.2	33.2	-38.9	-15.9	37.5	75.1	1099.7	-23.3
3905.280	H	50.4		4.4	33.6	-38.9	-15.9	33.5	47.5	500.0	-20.4
3905.280	V	50.1		4.4	33.6	-38.9	-15.9	33.2	45.8	500.0	-20.8
4339.200	H	50.3	*	4.6	33.9	-38.9	-15.9	34.0	50.4	500.0	-19.9
4339.200	V	50.1	*	4.6	33.9	-38.9	-15.9	33.9	49.4	500.0	-20.1

23. Occupied Bandwidth Measurements


Test Information	
Manufacturer	The Chamberlain Group LLC
Product	DeLorean Visor Remote
Model	Q363LA
Serial No	Sample E2 Sample E4
Mode	D-Code Tx @ 315MHz D-Code Tx @ 390MHz E-Code Tx @ 315MHz E-Code Tx @ 390MHz E-Code Tx @ 433.92MHz

Test Setup Details	
Setup Format	Tabletop
Height of Support	NA
Type of Test Site	Workbench
Test site used	Elite Work Bench
Notes	None

Requirements
FCC 15.231(c): The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier. RSS-210, Annex A, Section A.1.3: The occupied bandwidth (99% Bandwidth) of momentarily operated devices shall be less than or equal to 0.25% of the center frequency for devices operating between 70 MHz and 900 MHz. For devices operating above 900 MHz, the occupied bandwidth shall be less than or equal to 0.5% of the center frequency.


Procedures
The EUT was placed on an 80cm high non-conductive stand. The unit was set to transmit continuously. With an antenna positioned nearby, occupied bandwidth emissions were displayed on the spectrum analyzer. The resolution bandwidth was set to 10kHz and span was set to 2MHz. A screen capture was taken of the frequency spectrum near the carrier using a screen dump function on the spectrum analyzer.

Test Details	
Manufacturer	The Chamberlain Group LLC
Model	Q363LA
S/N	Sample E4
Mode	D-Code Tx @ 315MHz
Carrier Frequency	315MHz
Parameters	20dB BW = 51.90kHz
Notes	D Code

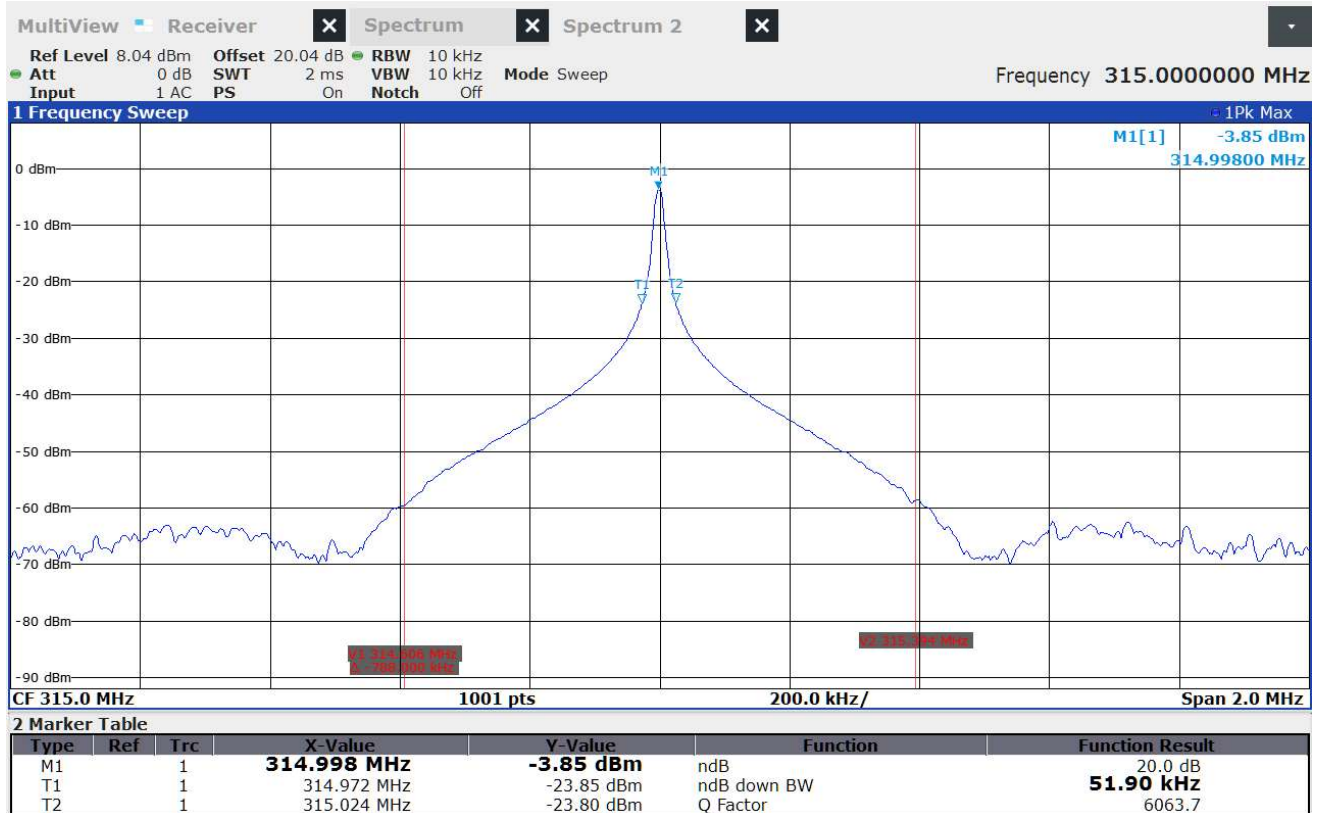


Frequency (MHz)	Lower Bandwidth Frequency (MHz)	Lower Bandwidth Frequency Limit (MHz)	Upper Bandwidth Frequency (MHz)	Upper Bandwidth Frequency Limit (MHz)
315	314.972	314.60625	315.024	315.39375

Test Details	
Manufacturer	The Chamberlain Group LLC
Model	Q363LA
S/N	Sample E4
Mode	D-Code Tx @ 315MHz
Carrier Frequency	315MHz
Parameters	99% BW = 113.588kHz
Notes	D Code

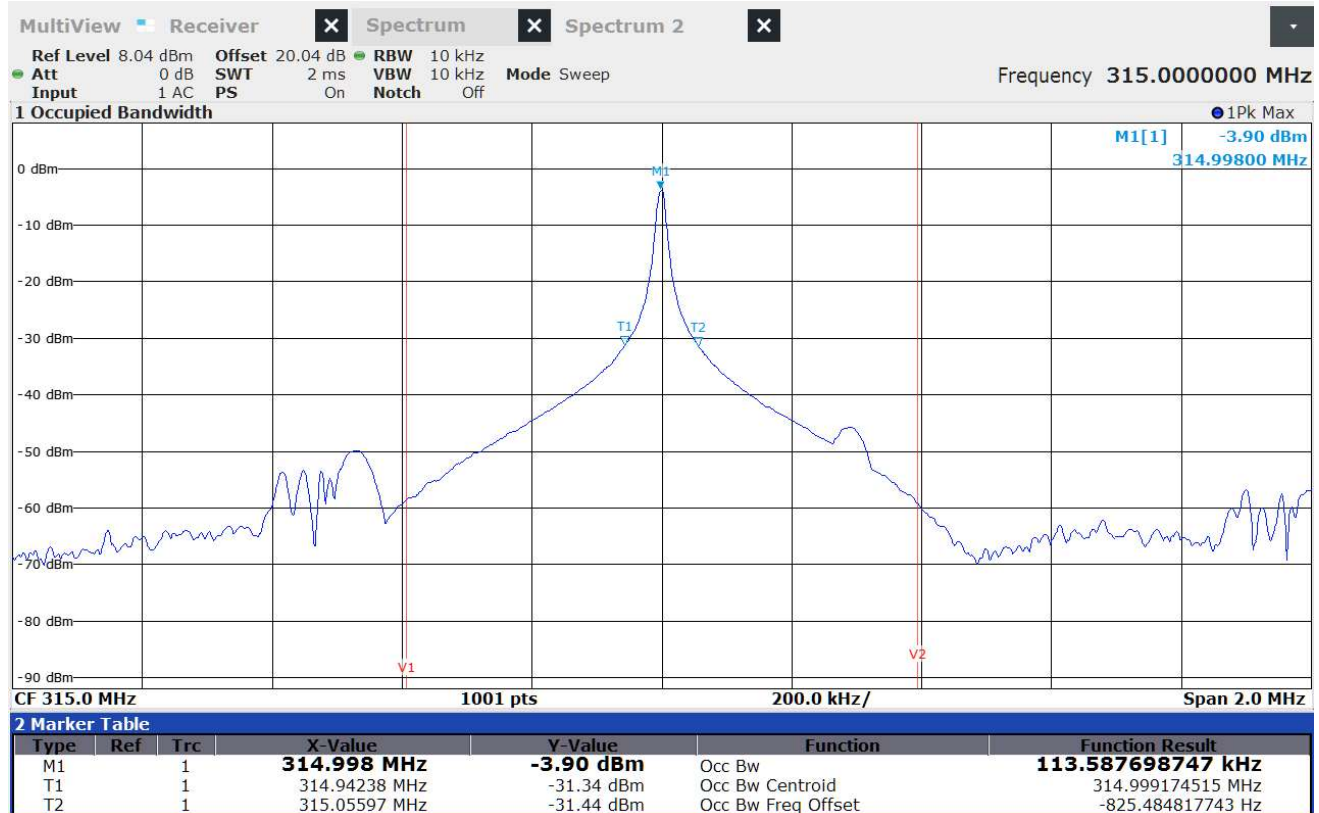


Frequency (MHz)	Lower Bandwidth Frequency (MHz)	Lower Bandwidth Frequency Limit (MHz)	Upper Bandwidth Frequency (MHz)	Upper Bandwidth Frequency Limit (MHz)
315	314.94238	314.60625	315.05597	315.39375

Test Details	
Manufacturer	The Chamberlain Group LLC
Model	Q363LA
S/N	Sample E4
Mode	D-Code Tx @ 390MHz
Carrier Frequency	390MHz
Parameters	20dB BW = 53.90kHz
Notes	D Code

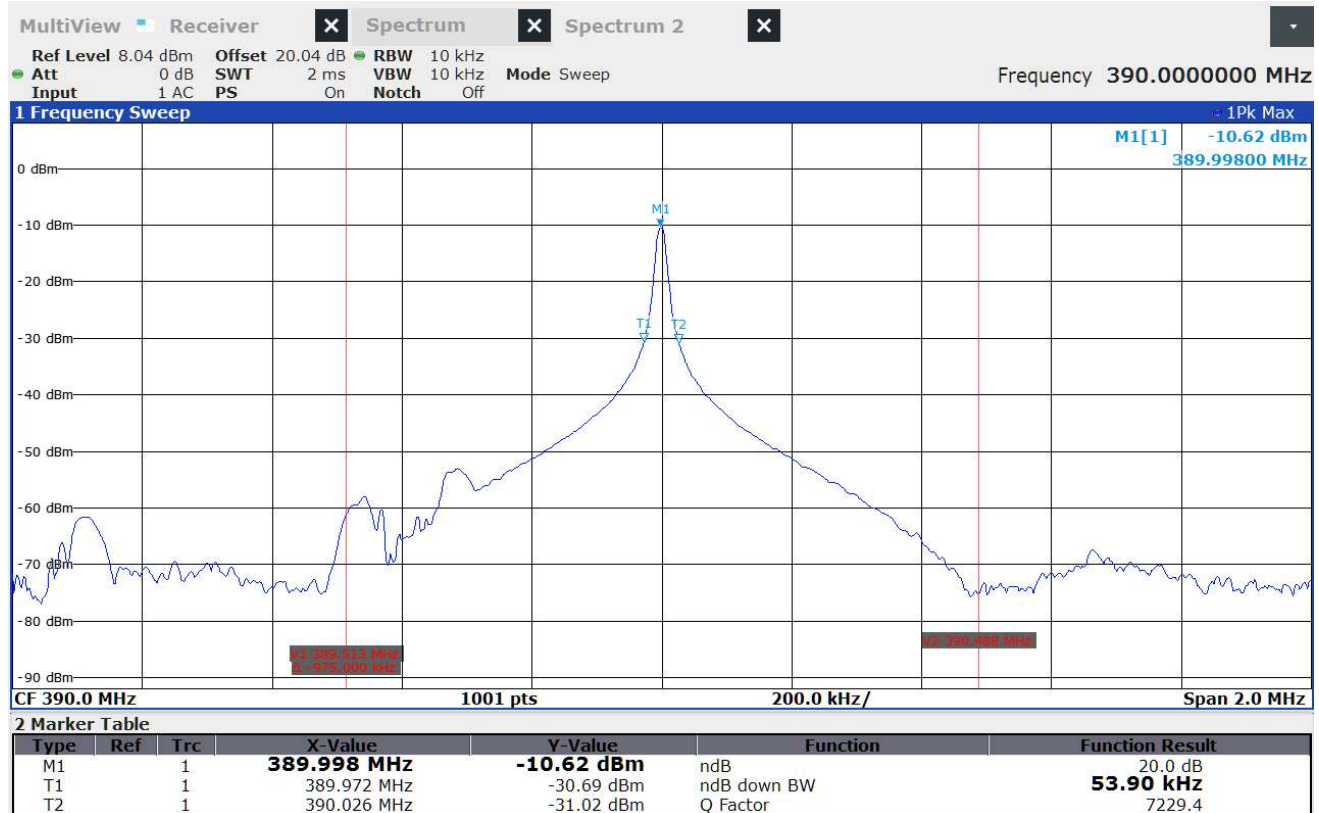


Frequency (MHz)	Lower Bandwidth Frequency (MHz)	Lower Bandwidth Frequency Limit (MHz)	Upper Bandwidth Frequency (MHz)	Upper Bandwidth Frequency Limit (MHz)
390	389.972	389.51250	390.026	390.48750

Test Details	
Manufacturer	The Chamberlain Group LLC
Model	Q363LA
S/N	Sample E4
Mode	D-Code Tx @ 390MHz
Carrier Frequency	390MHz
Parameters	99% BW = 108.828kHz
Notes	D Code

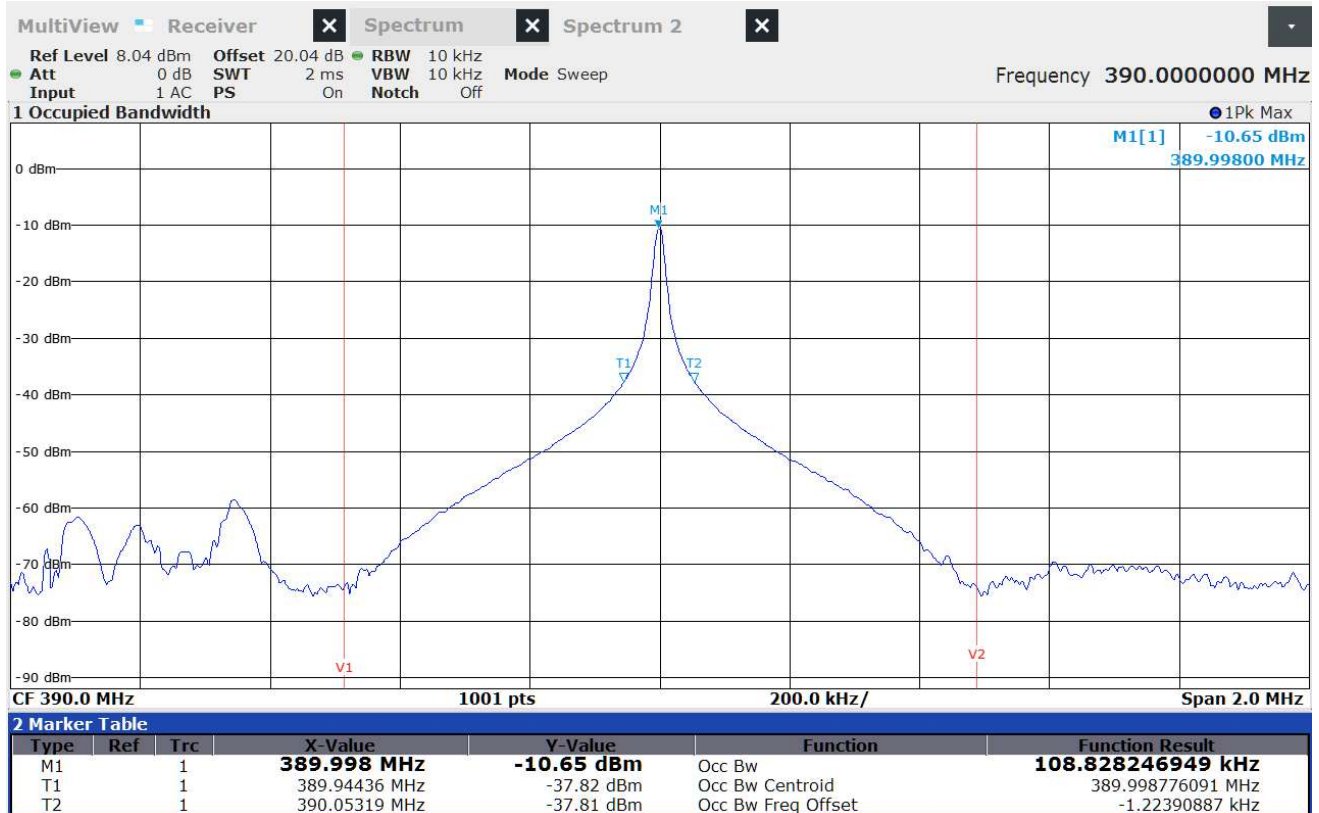


Frequency (MHz)	Lower Bandwidth Frequency (MHz)	Lower Bandwidth Frequency Limit (MHz)	Upper Bandwidth Frequency (MHz)	Upper Bandwidth Frequency Limit (MHz)
390	389.94436	389.51250	390.05319	390.48750

Test Details	
Manufacturer	The Chamberlain Group LLC
Model	Q363LA
S/N	Sample E2
Mode	E-Code Tx @ 315MHz
Carrier Frequency	315MHz
Parameters	20dB BW = 51.90kHz
Notes	E Code

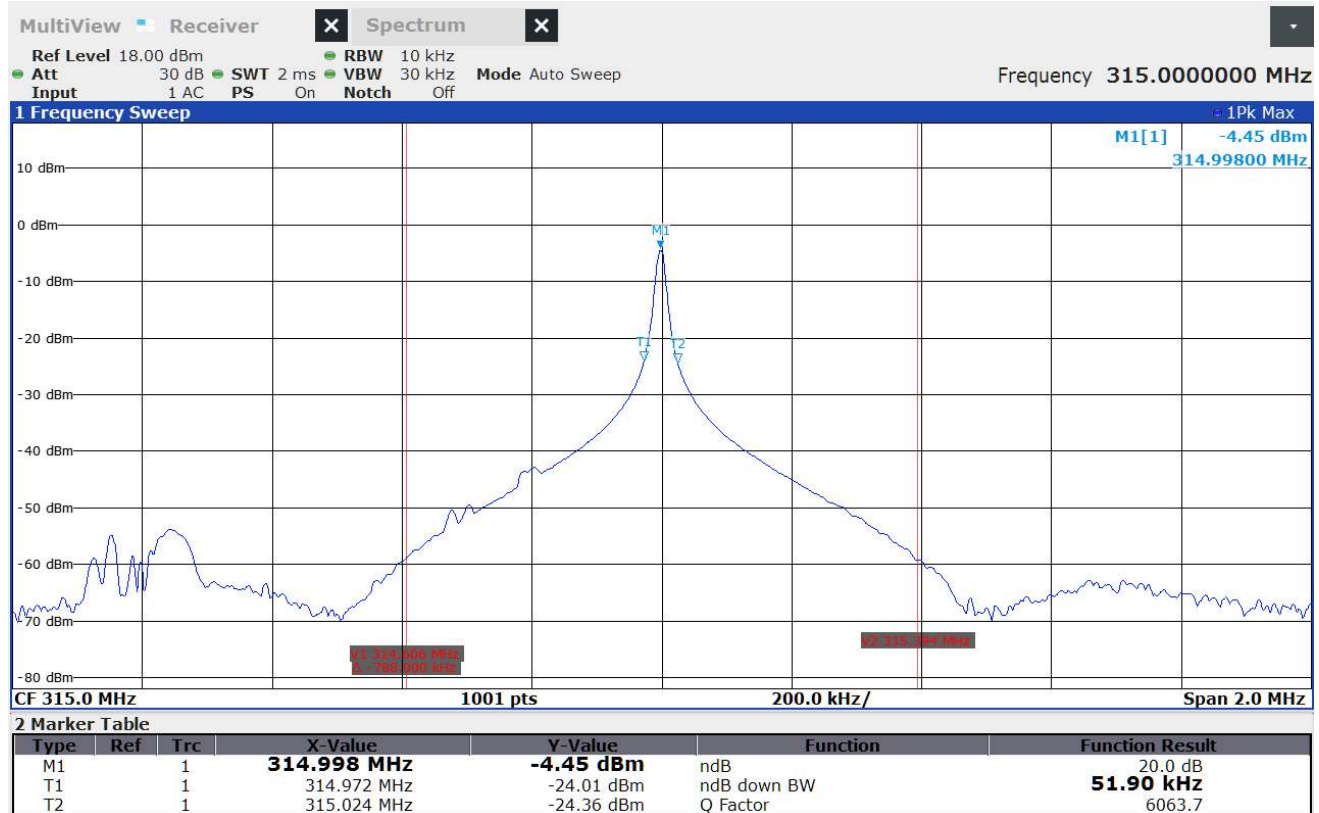


Frequency (MHz)	Lower Bandwidth Frequency (MHz)	Lower Bandwidth Frequency Limit (MHz)	Upper Bandwidth Frequency (MHz)	Upper Bandwidth Frequency Limit (MHz)
315	314.972	314.60625	315.024	315.39375

Test Details	
Manufacturer	The Chamberlain Group LLC
Model	Q363LA
S/N	Sample E2
Mode	E-Code Tx @ 315MHz
Carrier Frequency	315MHz
Parameters	99% BW = 107.309kHz
Notes	E Code

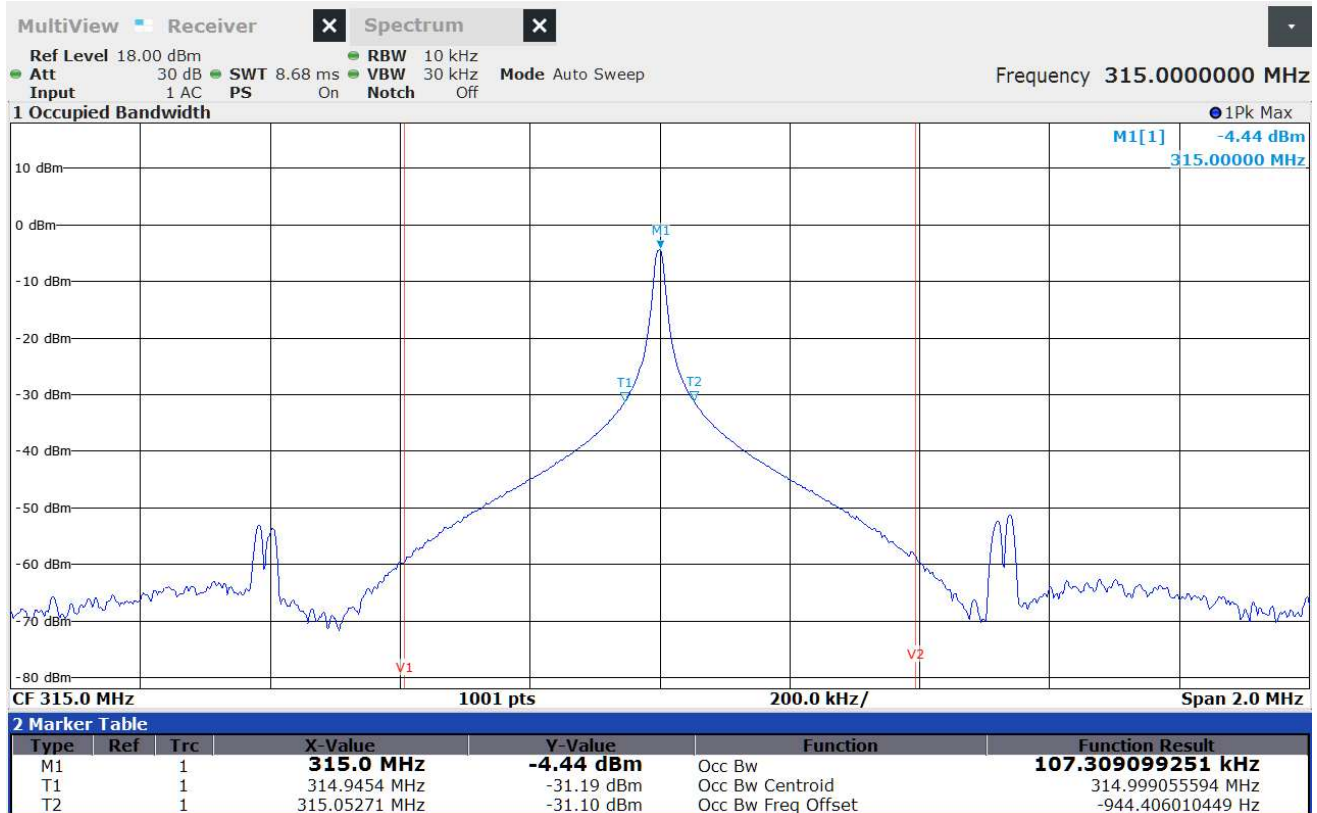


Frequency (MHz)	Lower Bandwidth Frequency (MHz)	Lower Bandwidth Frequency Limit (MHz)	Upper Bandwidth Frequency (MHz)	Upper Bandwidth Frequency Limit (MHz)
315	314.9454	314.60625	315.05271	315.39375

Test Details	
Manufacturer	The Chamberlain Group LLC
Model	Q363LA
S/N	Sample E2
Mode	E-Code Tx @ 390MHz
Carrier Frequency	390MHz
Parameters	20dB BW = 51.90kHz
Notes	E Code

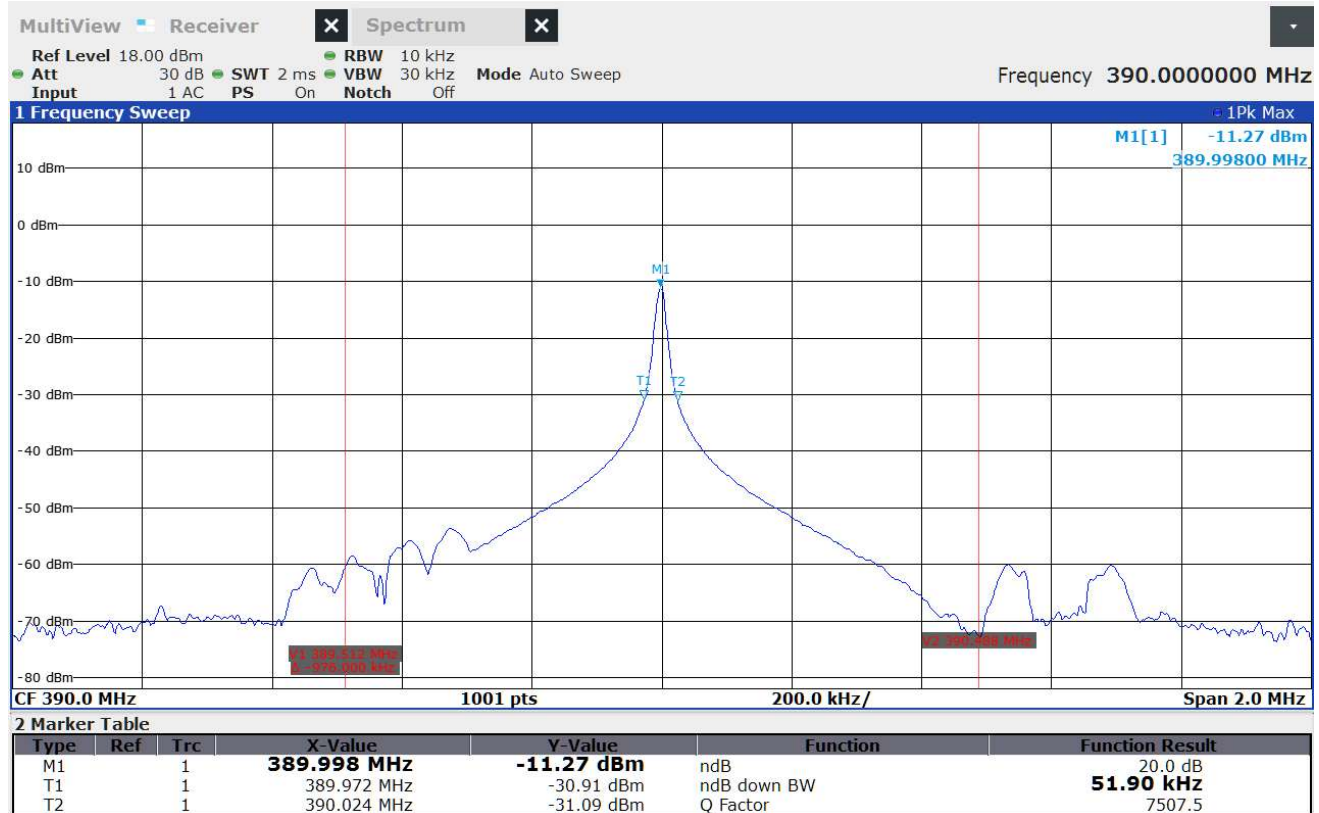


Frequency (MHz)	Lower Bandwidth Frequency (MHz)	Lower Bandwidth Frequency Limit (MHz)	Upper Bandwidth Frequency (MHz)	Upper Bandwidth Frequency Limit (MHz)
390	389.972	389.51250	390.024	390.48750

Test Details	
Manufacturer	The Chamberlain Group LLC
Model	Q363LA
S/N	Sample E2
Mode	E-Code Tx @ 390MHz
Carrier Frequency	390MHz
Parameters	99% BW = 109.690kHz
Notes	E Code

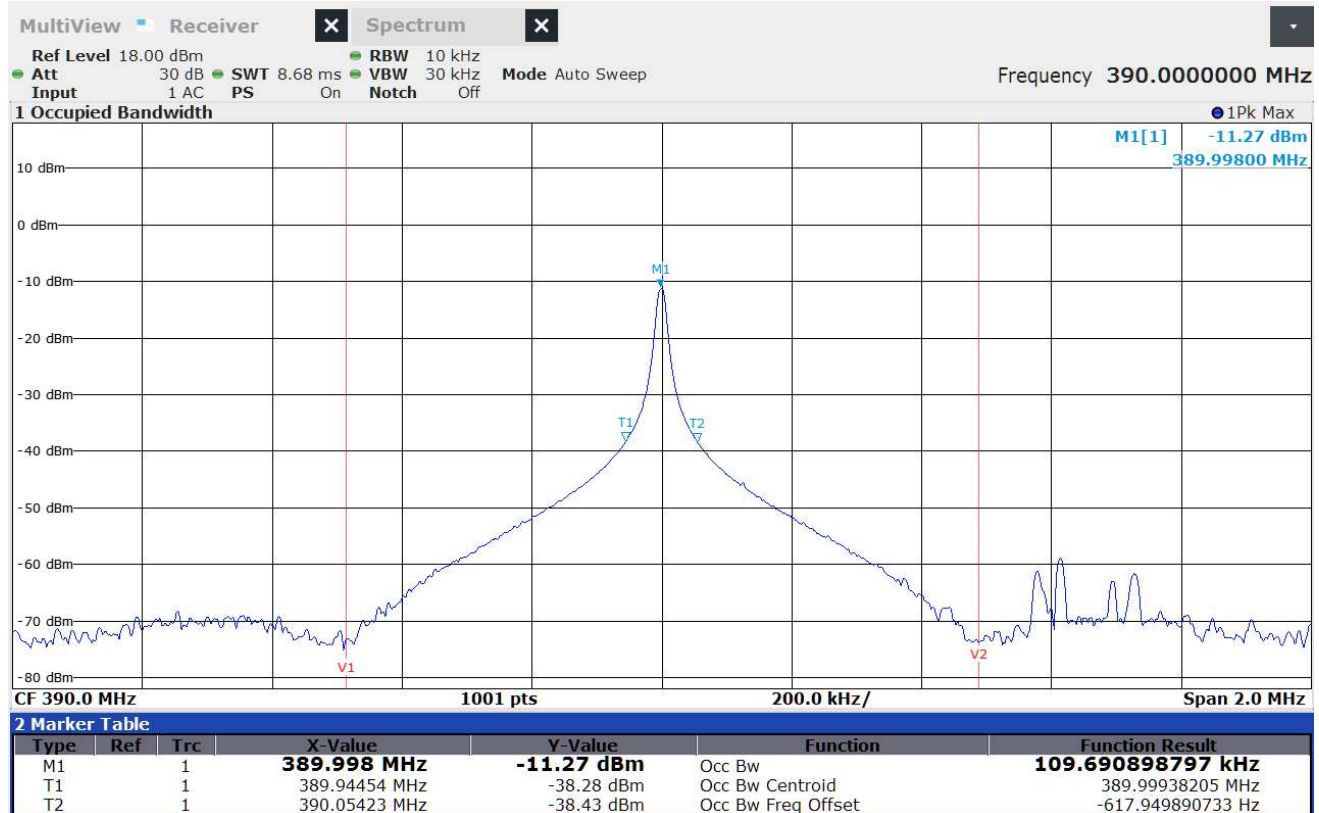


Frequency (MHz)	Lower Bandwidth Frequency (MHz)	Lower Bandwidth Frequency Limit (MHz)	Upper Bandwidth Frequency (MHz)	Upper Bandwidth Frequency Limit (MHz)
390	389.94454	389.51250	390.05423	390.48750

Test Details	
Manufacturer	The Chamberlain Group LLC
Model	Q363LA
S/N	Sample E2
Mode	E-Code Tx @ 433.92MHz
Carrier Frequency	433.92MHz
Parameters	20dB BW = 53.90kHz
Notes	E Code

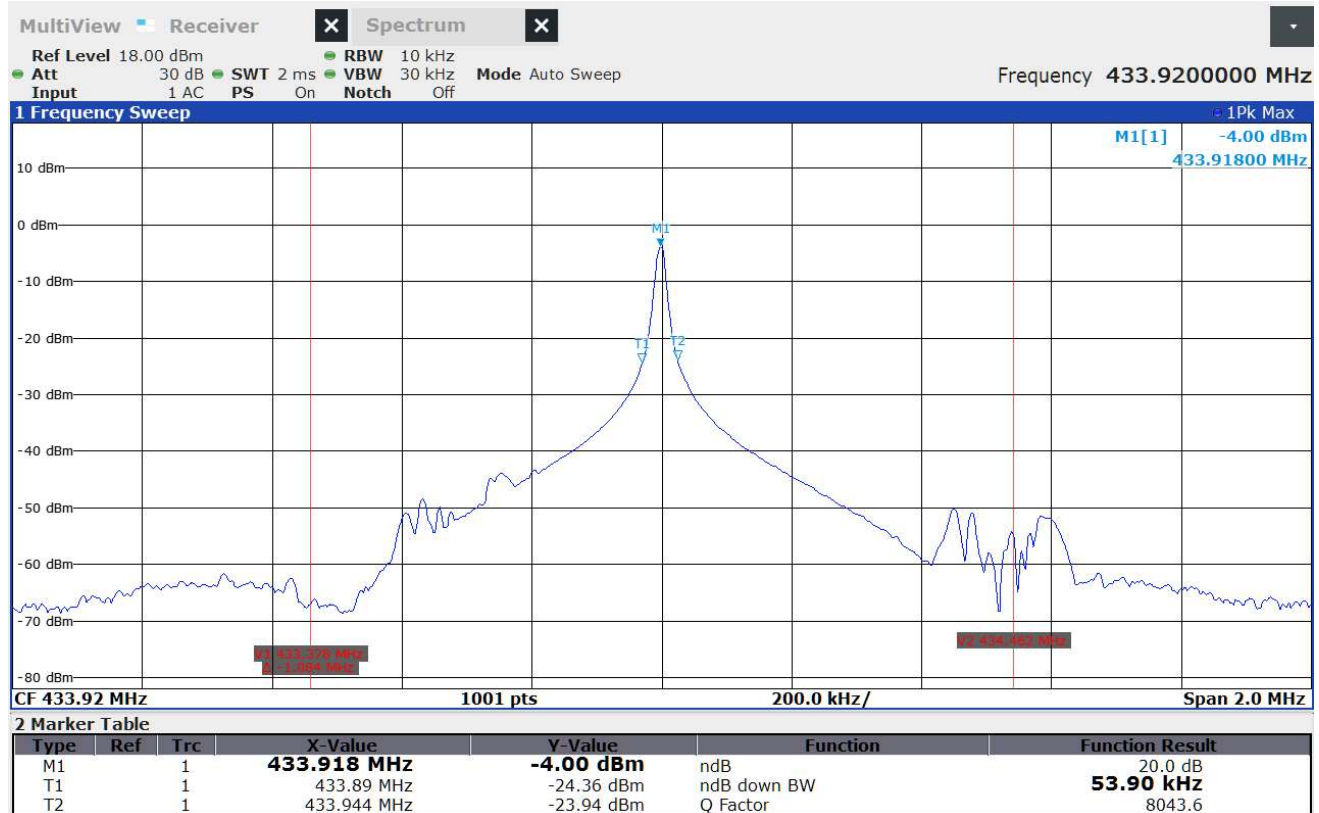

Frequency (MHz)	Lower Bandwidth Frequency (MHz)	Lower Bandwidth Frequency Limit (MHz)	Upper Bandwidth Frequency (MHz)	Upper Bandwidth Frequency Limit (MHz)
433.92	433.89	433.37760	433.944	434.46240

Test Details	
Manufacturer	The Chamberlain Group LLC
Model	Q363LA
S/N	Sample E2
Mode	E-Code Tx @ 433.92MHz
Carrier Frequency	433.92MHz
Parameters	99% BW = 107.848kHz
Notes	E Code

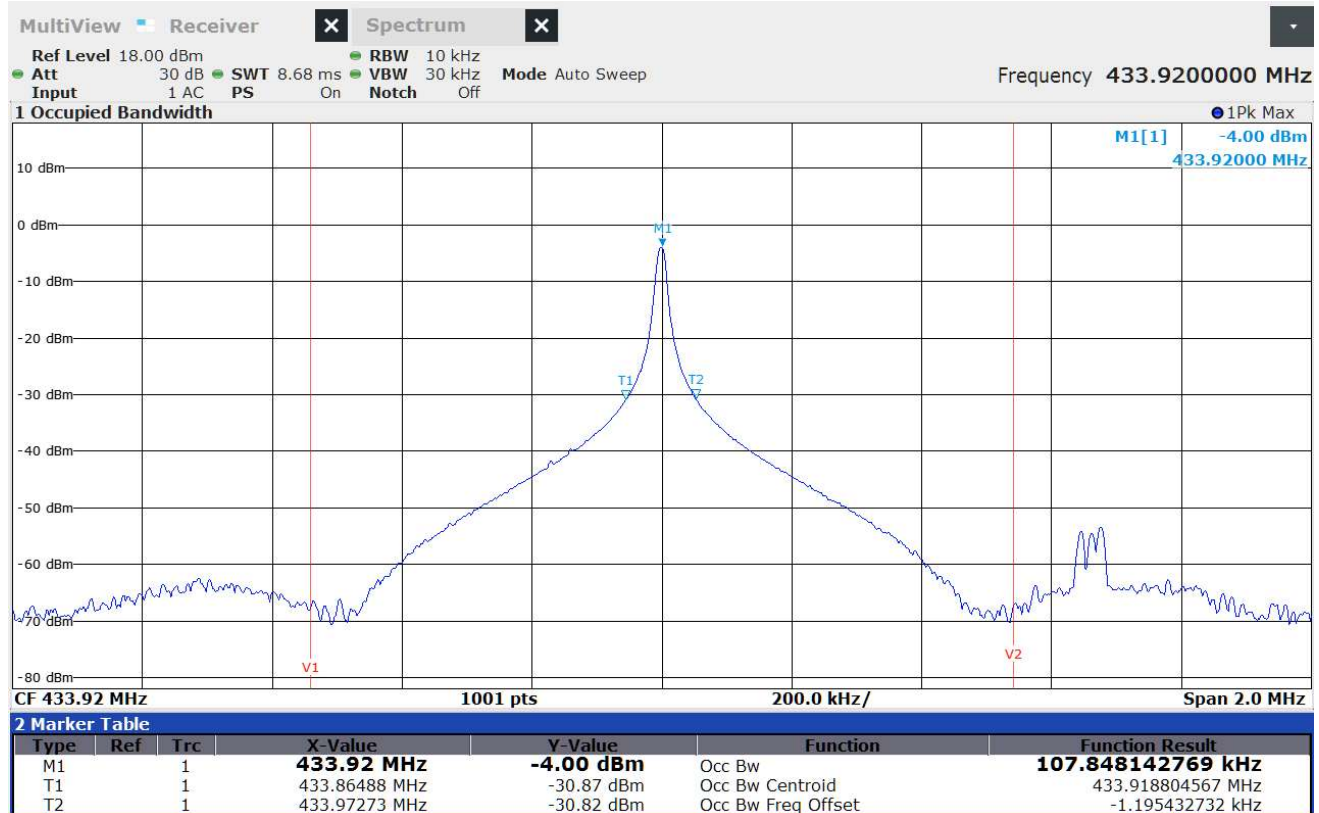

Frequency (MHz)	Lower Bandwidth Frequency (MHz)	Lower Bandwidth Frequency Limit (MHz)	Upper Bandwidth Frequency (MHz)	Upper Bandwidth Frequency Limit (MHz)
433.92	433.86488	433.37760	433.97273	434.46240

24. Scope of Accreditation



SCOPE OF ACCREDITATION TO ISO/IEC 17025:2017

ELITE ELECTRONIC ENGINEERING, INC.
1516 Centre Circle
Downers Grove, IL 60515
Robert Bugielski (QA Manager) Phone: 630 495 9770 ext. 168
Email: rbugielski@elitetest.com
Craig Fanning (EMC Lab Manager) Phone: 630 495 9770 ext. 112
Email: cfanning@elitetest.com
Brandon Lugo (Automotive Team Leader) Phone: 630 495 9770 ext. 163
Email: blugo@elitetest.com
Richard King (FCC/Commercial Team Leader) Phone: 630 495 9770 ext. 123
Email: reking@elitetest.com
Website: www.elitetest.com

ELECTRICAL

Valid To: June 30, 2025

Certificate Number: 1786.01

In recognition of the successful completion of the A2LA Accreditation Program evaluation process, accreditation is granted to this laboratory to perform the following automotive electromagnetic compatibility and other electrical tests:

Test Technology:

Test Method(s)¹:

Transient Immunity
(Max Voltage 60V/Max current 100A)

ISO 7637-2 (including emissions); ISO 7637-3;
ISO 16750-2:2012, Sections 4.6.3 and 4.6.4;
CS-11979, Section 6.4; CS.00054, Section 5.9;
EMC-CS-2009.1 (CI220); FMC1278 (CI220, CI221, CI222);
GMW 3097, Section 3.5; SAE J1113-11; SAE J1113-12;
ECE Regulation 10.06 Annex 10

Electrostatic Discharge (ESD)
(Up to +/-25kV)

ISO 10605 (2001, 2008);
CS-11979 Section 7.0; CS.00054, Section 5.10;
EMC-CS-2009.1 (CI 280); FMC1278 (CI280); SAE J1113-13;
GMW 3097 Section 3.6

Conducted Emissions

CISPR 25 (2002, 2008), Sections 6.2 and 6.3;
CISPR 25 (2016), Sections 6.3 and 6.4;
CS-11979, Section 5.1; CS.00054, Sections 5.6.1 and 5.6.2;
GMW 3097, Section 3.3.2;
EMC-CS-2009.1 (CE 420); FMC1278 (CE420, CE421,
CE 430, CE440)

(A2LA Cert. No. 1786.01) 08/15/2023



Page 1 of 9

5202 Presidents Court, Suite 220 | Frederick, MD 21703-8515 | Phone: 301 644 3248 | Fax: 240 454 9449 | www.A2LA.org

Test Technology:
Test Method(s)¹:

Radiated Emissions Anechoic
(Up to 6GHz)

CISPR 25 (2002, 2008), Section 6.4;
CISPR 25 (2016), Section 6.5;
CS-11979, Section 5.3; CS.00054, Section 5.6.3;
GMW 3097, Section 3.3.1;
EMC-CS-2009.1 (RE 310); FMC1278 (RE310, RE320);

Vehicle Radiated Emissions

CISPR 12; CISPR 36; ICES-002;
ECE Regulation 10.06 Annex 5

Bulk Current Injection (BCI)
(1 to 400MHz 500mA)

ISO 11452-4; CS-11979, Section 6.1; CS.00054, Section 5.8.1;
GMW 3097, Section 3.4.1; SAE J1113-4;
EMC-CS-2009.1 (RI112); FMC1278 (RI112);
ECE Regulation 10.06 Annex 9

Radiated Immunity Anechoic
(Up to 6GHz and 200V/m)
(Including Radar Pulse 600V/m)

ISO 11452-2;
CS-11979, Section 6.2; CS.00054, Section 5.8.2;
GMW 3097, Section 3.4.2;
EMC-CS-2009.1 (RI114); FMC1278 (RI114); SAE J1113-21;
ECE Regulation 10.06 Annex 9

Radiated Immunity Magnetic Field

ISO 11452-8; FMC 1278 (RI140)

Radiated Immunity Reverb
(360MHz to 6GHz and 100V/m)

ISO/IEC 61000-4-21; GMW 3097, Section 3.4.3;
EMC-CS-2009.1 (RI114); FMC1278 (RI114);
ISO 11452-11

Radiated Immunity
(Portable Transmitters)
(Up to 6GHz and 20W)

ISO 11452-9;
EMC-CS-2009.1 (RI115); FMC1278 (RI115);
GMW 3097, Sec 3.4.4

Vehicle Radiated Immunity (ALSE)

ISO 11451-2; ECE Regulation 10.06 Annex 6

Vehicle Product Specific EMC Standards

EN 14982; EN ISO 13309; ISO 13766; EN 50498;
EC Regulation No. 2015/208; EN 55012

Electrical Loads

ISO 16750-2

Stripline

ISO 11452-5

Transverse Electromagnetic (TEM) Cell

ISO 11452-3

Test Technology:
Test Method(s)¹:
Emissions

Radiated and Conducted
(3m Semi-anechoic chamber,
up to 40 GHz)

47 CFR, FCC Part 15 B (using ANSI C63.4:2014);
47 CFR, FCC Part 18 (using FCC MP-5:1986);
ICES-001; ICES-003; ICES-005;
IEC/CISPR 11, Ed. 4.1 (2004-06); AS/NZS CISPR 11 (2004);
IEC/CISPR 11 Ed 5 (2009-05) + A1 (2010);
KN 11 (2008-5) with RRL Notice No. 2008-3 (May 20, 2008);
CISPR 11; EN 55011; KS C 9811; CNS 13803 (1997, 2003);
CISPR 14-1; EN 55014-1; AS/NZS CISPR 14.1;
CISPR 16-2-1 (2008); CISPR 16-2-1; KS C 9814-1; KN 14-1;
IEC/CISPR 22 (1997);
EN 55022 (1998) + A1(2000);
EN 55022 (1998) + A1(2000) + A2(2003); EN 55022 (2006);
IEC/CISPR 22 (2008-09); AS/NZS CISPR 22 (2004);
AS/NZS CISPR 22, 3rd Edition (2006); KN 22 (up to 6 GHz);
CNS 13438 (up to 6 GHz); VCCI V-3 (up to 6 GHz);
CISPR 32; EN 55032; KS C 9832; KN 32;
ECE Regulation 10.06 Annex 7 (Broadband);
ECE Regulation 10.06 Annex 8 (Narrowband);
ECE Regulation 10.06 Annex 14 (Conducted)

Cellular Radiated Spurious Emissions

ETSI TS 151 010-1 GSM; 3GPP TS 51.010-1, Sec 12;
ETSI TS 134 124 UMTS; 3GPP TS 34.124;
ETSI TS 136 124 LTE; E-UTRA; 3GPP TS 36.124

Current Harmonics

IEC 61000-3-2; IEC 61000-3-12;
EN 61000-3-2; KN 61000-3-2;
KS C 9610-3-2; ECE Regulation 10.06 Annex 11

Flicker and Fluctuations

IEC 61000-3-3; IEC 61000-3-11;
EN 61000-3-3; KN 61000-3-3;
KS C 9610-3-3; ECE Regulation 10.06 Annex 12

Immunity

Electrostatic Discharge

IEC 61000-4-2, Ed. 1.2 (2001);
IEC 61000-4-2 (1995) + A1(1998) + A2(2000);
EN 61000-4-2 (1995); EN 61000-4-2 (2009-05);
KN 61000-4-2 (2008-5);
RRL Notice No. 2008-4 (May 20, 2008);
IEC 61000-4-2; EN 61000-4-2; KN 61000-4-2;
KS C 9610-4-2; IEEE C37.90.3 2001

Radiated Immunity

IEC 61000-4-3 (1995) + A1(1998) + A2(2000);
IEC 61000-4-3, Ed. 3.0 (2006-02);
IEC 61000-4-3, Ed. 3.2 (2010);
KN 61000-4-3 (2008-5);
RRL Notice No. 2008-4 (May 20, 2008);
IEC 61000-4-3; EN 61000-4-3; KN 61000-4-3;
KS C 9610-4-3; IEEE C37.90.2 2004

Test Technology:
Test Method(s)¹:
Immunity (cont'd)

Electrical Fast Transient/Burst

IEC 61000-4-4, Ed. 2.0 (2004-07);
IEC 61000-4-4, Ed. 2.1 (2011);
IEC 61000-4-4 (1995) + A1(2000) + A2(2001);
KN 61000-4-4 (2008-5);
RRL Notice No. 2008-5 (May 20, 2008);
IEC 61000-4-4; EN 61000-4-4; KN 61000-4-4;
KS C 9610-4-4; ECE Regulation 10.06 Annex 15

Surge

IEC 61000-4-5 (1995) + A1(2000);
IEC 61000-4-5, Ed 1.1 (2005-11);
EN 61000-4-5 (1995) + A1(2001);
KN 61000-4-5 (2008-5);
RRL Notice No. 2008-4 (May 20, 2008);
IEC 61000-4-5; EN 61000-4-5; KN 61000-4-5;
KS C 9610-4-5;
IEEE C37.90.1 2012; IEEE STD C62.41.2 2002;
ECE Regulation 10.06 Annex 16

Conducted Immunity

IEC 61000-4-6 (1996) + A1(2000);
IEC 61000-4-6, Ed 2.0 (2006-05);
IEC 61000-4-6 Ed. 3.0 (2008);
KN 61000-4-6 (2008-5);
RRL Notice No. 2008-4 (May 20, 2008);
EN 61000-4-6 (1996) + A1(2001); IEC 61000-4-6;
EN 61000-4-6; KN 61000-4-6; KS C 9610-4-6

Power Frequency Magnetic Field
Immunity (*Down to 3 A/m*)

IEC 61000-4-8 (1993) + A1(2000); IEC 61000-4-8 (2009);
EN 61000-4-8 (1994) + A1(2000);
KN 61000-4-8 (2008-5);
RRL Notice No. 2008-4 (May 20, 2008);
IEC 61000-4-8; EN 61000-4-8; KN 61000-4-8; KS C 9610-4-8

Voltage Dips, Short Interrupts, and Line
Voltage Variations

IEC 61000-4-11, Ed. 2 (2004-03);
KN 61000-4-11 (2008-5);
RRL Notice No. 2008-4 (May 20, 2008);
IEC 61000-4-11; EN 61000-4-11; KN 61000-4-11;
KS C 9610-4-11

Ring Wave

IEC 61000-4-12, Ed. 2 (2006-09);
EN 61000-4-12:2006;
IEC 61000-4-12; EN 61000-4-12; KN 61000-4-12;
IEEE STD C62.41.2 2002

Test Technology:

Generic and Product Specific EMC Standards

Test Method(s)¹:

IEC/EN 61000-6-1; AS/NZS 61000-6-1; KN 61000-6-1;
KS C 9610-6-1; IEC/EN 61000-6-2; AS/NZS 61000-6-2;
KN 61000-6-2; KS C 9610-6-2; IEC/EN 61000-6-3;
AS/NZS 61000-6-3; KN 61000-6-3; KS C 9610-6-3;
IEC/EN 61000-6-4; AS/NZS 61000-6-4; KN 61000-6-4;
KS C 9610-6-4; EN 50130-4; EN 61326-1; EN 50121-3-2;
EN 12895; EN 50270; EN 50491-1; EN 50491-2; EN 50491-3;
EN 55015; EN 60730-1; EN 60945; IEC 60533;
EN 61326-2-6; EN 61800-3; IEC/CISPR 14-2; EN 55014-2;
AS/NZS CISPR 14-2; KN 14-2; KS C 9814-2;
IEC/CISPR 24; AS/NZS CISPR 24; EN 55024; KN 24;
IEC/CISPR 35; AS/NZS CISPR 35; EN 55035; KN 35;
KS C 9835; IEC 60601-1-2; JIS T0601-1-2

TxRx EMC Requirements

EN 301 489-1; EN 301 489-3; EN 301 489-9;
EN 301 489-17; EN 301 489-19; EN 301 489-20

European Radio Test Standards

ETSI EN 300 086-1; ETSI EN 300 086-2;
ETSI EN 300 113-1; ETSI EN 300 113-2;
ETSI EN 300 220-1; ETSI EN 300 220-2;
ETSI EN 300 220-3-1; ETSI EN 300 220-3-2;
ETSI EN 300 330-1; ETSI EN 300 330-2;
ETSI EN 300 440-1; ETSI EN 300 440-2;
ETSI EN 300 422-1; ETSI EN 300 422-2;
ETSI EN 300 328; ETSI EN 301 893;
ETSI EN 301 511; ETSI EN 301 908-1;
ETSI EN 908-2; ETSI EN 908-13;
ETSI EN 303 413; ETSI EN 302 502;
EN 303 340; EN 303 345-2; EN 303 345-3; EN 303 345-4

Canadian Radio Tests

RSS-102 measurement (RF Exposure Evaluation);
RSS-102 measurement (Nerve Stimulation);
SPR-002; RSS-111; RSS-112; RSS-117; RSS-119; RSS-123;
RSS-125; RSS-127; RSS-130; RSS-131; RSS-132; RSS-133;
RSS-134; RSS-135; RSS-137; RSS-139; RSS-140; RSS-141;
RSS-142; RSS-170; RSS-181; RSS-182; RSS-191; RSS-192;
RSS-194; RSS-195; RSS-196; RSS-197; RSS-199; RSS-210;
RSS-211; RSS-213; RSS-215; RSS-216; RSS-220; RSS-222;
RSS-236; RSS-238; RSS-243; RSS-244; RSS-247; RSS-248;
RSS-251; RSS-252; RSS-287; RSS-288; RSS-310; RSS-GEN

Mexico Radio Tests

IFT-008-2015; NOM-208-SCFI-2016

Japan Radio Tests

Radio Law No. 131, Ordinance of MPT No. 37, 1981,
MIC Notification No. 88:2004, Table No. 22-11;
ARIB STD-T66, Regulation 18

Taiwan Radio Tests

LP-0002 (July 15, 2020)

Test Technology:
Test Method(s)¹:
Australia/New Zealand Radio Tests

AS/NZS 4268; Radiocommunications (Short Range Devices) Standard (2014)

Hong Kong Radio Tests

HKCA 1039 Issue 6;
HKCA 1042;
HKCA 1033 Issue 7;
HKCA 1061;
HKCA 1008;
HKCA 1043;
HKCA 1057;
HKCA 1073

Korean Radio Test Standards

KN 301 489-1; KN 301 489-3; KN 301 489-9;
KN 301 489-17; KN 301 489-52; KS X 3124; KS X 3125;
KS X 3130; KS X 3126; KS X 3129

Vietnam Radio Test Standards

QCVN 47:2015/BTTTT; QCVN 54:2020/BTTTT;
QCVN 55:2011/BTTTT; QCVN 65:2013/BTTTT;
QCVN 73:2013/BTTTT; QCVN 74:2020/BTTTT;
QCVN 112:2017/BTTTT; QCVN 117:2020/BTTTT

Vietnam EMC Test Standards

QCVN 18:2014/BTTTT; QCVN 86:2019/BTTTT;
QCVN 96:2015/BTTTT; QCVN 118:2018/BTTTT

*Unlicensed Radio Frequency Devices
(3 Meter Semi-Anechoic Room)*

47 CFR FCC Part 15C, 15D, 15E, 15F, 15G, 15H
(using ANSI C63.10:2013, ANSI C63.17:2013 and
FCC KDB 905462 D02 (v02))

Licensed Radio Service Equipment

47 CFR FCC Parts 20, 22, 24, 25, 27, 30, 73, 74, 80, 87,
90, 95, 96, 97, 101 (using ANSI/TIA-603-E,
TIA-102.CAAA-E, ANSI C63.26:2015)

OIA (Over the Air) Performance

GSM, GPRS, EGPRS
UMTS (W-CDMA)
LTE including CAT M1
A-GPS for UMTS/GSM
LTS A-GPS, A-GLONASS,
SIB8/SIB16
Large Device/Laptop/Tablet Testing
Integrated Device Testing
WiFi 802.11 a/b/g/n/a

CTIA Test Plan for Wireless Device Over-the-Air
Performance (Method for Measurement for Radiated Power
and Receiver Performance) V3.8.2;
CTIA Test Plan for RF Performance Evaluation of WiFi
Mobile Converged Devices V2.1.0

Test Technology:
Test Method(s)¹:
Electrical Measurements and Simulation
AC Voltage / Current

(1mV to 5kV) 60 Hz
(0.1V to 250V) up to 500 MHz
(1μA to 150A) 60 Hz

FAA AC 150/5345-10H;
FAA AC 150/5345-43J;
FAA AC 150/5345-44K;
FAA AC 150/5345-46E;
FAA AC 150/5345-47C;
FAA EB 67D

DC Voltage / Current

(1mV to 15 kV) / (1μA to 10A)

Power Factor / Efficiency / Crest Factor

(Power to 30kW)

Resistance

(1mΩ to 4000MΩ)

Surge

(Up to 10 kV / 5 kA) (Combination
Wave and Ring Wave)

On the following products and materials:

Telecommunications Terminal Equipment (TTE), Radio Equipment, Network Equipment, Information Technology Equipment (ITE), Automotive Electronic Equipment, Automotive Hybrid Electronic Devices, Maritime Navigation and Radio Communication Equipment and Systems, Vehicles, Boats and Internal Combustion Engine Driven Devices, Automotive, Aviation, and General Lighting Products, Medical Electrical Equipment, Motors, Industrial, Scientific and Medical (ISM) Radio-Frequency Equipment, Household Appliances, Electric Tools, Low-voltage Switchgear and Control gear, Programmable Controllers, Electrical Equipment for Measurement, Control and Laboratory Use, Base Materials, Power and Data Transmission Cables and Connectors

¹ When the date, edition, version, etc. is not identified in the scope of accreditation, laboratories may use the version that immediately precedes the current version for a period of one year from the date of publication of the standard measurement method, per part C., Section 1 of A2LA R101 - General Requirements - Accreditation of ISO-IEC 17025 Laboratories.

Testing Activities Performed in Support of FCC Certification in Accordance with 47 Code of Federal Regulations and FCC KDB 974614, Appendix A, Table A.1²

Rule Subpart/Technology	Test Method	Maximum Frequency (MHz)
<u>Unintentional Radiators</u>		
Part 15B	ANSI C63.4:2014	40000
<u>Industrial, Scientific, and Medical Equipment</u>		
Part 18	FCC MP-5 (February 1986)	40000
<u>Intentional Radiators</u>		
Part 15C	ANSI C63.10:2013	40000

Testing Activities Performed in Support of FCC Certification in Accordance with 47 Code of Federal Regulations and FCC KDB 974614, Appendix A, Table A.1²

Rule Subpart/Technology	Test Method	Maximum Frequency (MHz)
<u>Unlicensed Personal Communication Systems Devices</u>		
Part 15D	ANSI C63.17:2013	40000
<u>U-NII without DFS Intentional Radiators</u>		
Part 15E	ANSI C63.10:2013	40000
<u>U-NII with DFS Intentional Radiators</u>		
Part 15E	FCC KDB 905462 D02 (v02)	40000
<u>UWB Intentional Radiators</u>		
Part 15F	ANSI C63.10:2013	40000
<u>BPL Intentional Radiators</u>		
Part 15G	ANSI C63.10:2013	40000
<u>White Space Device Intentional Radiators</u>		
Part 15H	ANSI C63.10:2013	40000
<u>Commercial Mobile Services (FCC Licensed Radio Service Equipment)</u>		
Parts 22 (cellular), 24, 25 (below 3 GHz), and 27	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
<u>General Mobile Radio Services (FCC Licensed Radio Service Equipment)</u>		
Parts 22 (non-cellular), 90 (below 3 GHz), 95, 97, and 101 (below 3 GHz)	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
<u>Citizens Broadband Radio Services (FCC Licensed Radio Service Equipment)</u>		
Part 96	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
<u>Maritime and Aviation Radio Services</u>		
Parts 80 and 87	ANSI/TIA-603-E; ANSI C63.26:2015	40000
<u>Microwave and Millimeter Bands Radio Services</u>		
Parts 25, 30, 74, 90 (above 3 GHz), 97 (above 3 GHz), and 101	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000

Testing Activities Performed in Support of FCC Certification in Accordance with 47 Code of Federal Regulations and FCC KDB 974614, Appendix A, Table A.1²

Rule Subpart/Technology	Test Method	Maximum Frequency (MHz)
<u>Broadcast Radio Services</u> Parts 73 and 74 (below 3 GHz)	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
<u>Signal Boosters</u> Part 20 (Wideband Consumer Signal Boosters, Provider-specific signal boosters, and Industrial Signal Boosters) Section 90.219	ANSI C63.26:2015	40000

² Accreditation does not imply acceptance to the FCC equipment authorization program. Please see the FCC website (<https://apps.fcc.gov/oetcf/eas/>) for a listing of FCC approved laboratories.



Accredited Laboratory

A2LA has accredited

ELITE ELECTRONIC ENGINEERING INC.

Downers Grove, IL

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 *General requirements for the competence of testing and calibration laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 15th day of August 2023.



Mr. Trace McInturff, Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 1786.01
Valid to June 30, 2025

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.