

ELITE ELECTRONIC ENGINEERING INCORPORATED
1516 CENTRE CIRCLE
DOWNERS GROVE, ILLINOIS 60515-1082

ELITE PROJECT: 29674

DATE TESTED: March 16, 2001


TEST PERSONNEL: Daniel E. Crowder
NARTE® Certified EMC Engineer - ATL-0152-E


TEST SPECIFICATION: FCC "Code of Federal Regulations" Title 47
Part 15, Subpart C, Section 15.205

ENGINEERING TEST REPORT NO. 23566
MEASUREMENT OF RF INTERFERENCE FROM
A MODEL CK1 TRANSMITTER

FOR: Chamberlain Group
Elmhurst, Illinois

PURCHASE ORDER NO.: 716830

Report By: 
Neil J. Hurley
NARTE® Certified EMC Engineer
ATL-0149-E

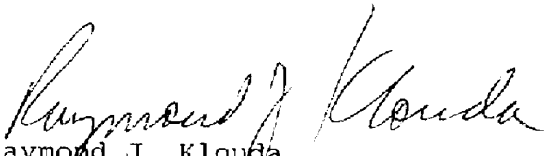Approved By: 
Raymond J. Klouda
Registered Professional
Engineer of Illinois - 44894

ENGINEERING TEST REPORT NO. 23566

ADMINISTRATIVE DATA AND SUMMARY OF TESTS

DESCRIPTION OF TEST ITEM: Transmitter

MODEL NO: CK1

SERIAL NO: None

MANUFACTURER: Chamberlain Group

APPLICABLE SPECIFICATIONS: FCC "Code of Federal Regulations"
Title 47, Part 15, Subpart C

QUANTITY OF ITEMS TESTED: One (1)

TEST PERFORMED BY: ELITE ELECTRONIC ENGINEERING INCORPORATED
Radio Interference Consultants
Downers Grove, Illinois 60515

DATE RECEIVED: March 16, 2001

DATE TESTED: March 16, 2001

PERSONNEL (OPERATORS, OBSERVERS, AND CO-ORDINATORS):

CUSTOMER: No Chamberlain Group personnel were present.

ELITE ELECTRONIC: Daniel E. Crowder

ELITE JOB NO.: 29674

ABSTRACT: The model CK1 transmitter does meet the radiated emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Section 15.205 et seq. for Intentional Radiators, when tested per ANSI C63.4-1992.

The radiated emissions level closest to the limit (worst case) occurred at 2100MHz. The emissions level at this frequency was 0.3dB within the limit. See data pages 21 through 23 for more details.

**THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE
WRITTEN APPROVAL OF ELITE ELECTRONIC ENGINEERING INCORPORATED.**

Page 2 of 26

ENGINEERING TEST REPORT NO. 23566

TABLE OF CONTENTS

PARAGRAPH	DESCRIPTION OF CONTENTS	PAGE NO.
1.0	INTRODUCTION	4
1.1	DESCRIPTION OF TEST ITEM	4
1.2	PURPOSE	4
1.3	DEVIATIONS, ADDITIONS AND EXCLUSIONS	4
1.4	APPLICABLE DOCUMENTS	4
1.5	SUBCONTRACTOR IDENTIFICATION	4
1.6	LABORATORY CONDITIONS	5
2.0	TEST ITEM SETUP AND OPERATION	5
2.1	POWER INPUT	5
2.2	GROUNDING	5
2.3	PERIPHERAL EQUIPMENT	5
2.4	INTERCONNECT CABLES	5
3.0	TEST EQUIPMENT	5
3.1	TEST EQUIPMENT LIST	5
3.2	CALIBRATION TRACEABILITY	6
3.3	MEASUREMENT UNCERTAINTY	6
4.0	REQUIREMENTS, PROCEDURES AND RESULTS	6
4.1	POWERLINE CONDUCTED EMISSIONS	6
4.1.1	REQUIREMENTS	6
4.2	DUTY CYCLE FACTOR MEASUREMENTS	7
4.2.2	PROCEDURES	7
4.2.3	RESULTS	7
4.3	RADIATED MEASUREMENTS	8
4.3.1	REQUIREMENTS	8
4.3.2	PROCEDURES	8
4.3.3	RESULTS	9
4.4	OCCUPIED BANDWIDTH MEASUREMENTS	10
4.4.1	REQUIREMENTS	10
4.4.2	PROCEDURES	10
4.4.3	RESULTS	10
5.0	CONCLUSION	11
6.0	CERTIFICATION	11
7.0	ENDORSEMENT DISCLAIMER	11
	TABLE I - EQUIPMENT LIST	12

TOTAL NUMBER OF PAGES IN THIS DOCUMENT,
(INCLUDING DATA SHEETS): 26

THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE
WRITTEN APPROVAL OF ELITE ELECTRONIC ENGINEERING INCORPORATED.

ENGINEERING TEST REPORT NO. 23566
MEASUREMENT OF RF INTERFERENCE FROM
A MODEL CK1 TRANSMITTER

1.0 INTRODUCTION:

1.1 DESCRIPTION OF TEST ITEM: This document presents the results of a series of radio interference measurements performed on a model CK1 Transmitter, (hereinafter referred to as the test item). No serial number was assigned to the test item. The test item was designed to transmit at 300MHz, 310MHz or 390MHz using an internal antenna. The tests were performed for Chamberlain Group of Elmhurst, Illinois.

1.2 PURPOSE: The test series was performed to determine if the test item meets the radiated RF emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Sections for Intentional Radiators. Testing was performed in accordance with ANSI C63.4-1992.

1.3 DEVIATIONS, ADDITIONS AND EXCLUSIONS: There were no deviations, additions to, or exclusions from the test specification during this test series.

1.4 APPLICABLE DOCUMENTS: The following documents of the exact issue designated form part of this document to the extent specified herein:

- Federal Communications Commission "Code of Federal Regulations", Title 47, Part 15, Subpart C, dated 1 October 1999
- ANSI C63.4-1992, "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz"

1.5 SUBCONTRACTOR IDENTIFICATION: This series of tests was performed by Elite Electronic Engineering Incorporated of Downers Grove, Illinois. The laboratory is accredited by the National Institute of Standards and Technology (NIST) under the National

Voluntary Laboratory Accreditation Program (NVLAP). NVLAP Lab Code: 100278-0.

1.6 LABORATORY CONDITIONS: The temperature at the time of the test was 22°C and the relative humidity was 22%.

2.0 TEST ITEM SETUP AND OPERATION:

A block diagram of the test item setup is included as Figure 1.

2.1 POWER INPUT: The test item received 9VDC power from an internal battery.

2.2 GROUNDING: Since the test item was powered with a 9VDC battery, it was ungrounded during the tests.

2.3 PERIPHERAL EQUIPMENT: There was no peripheral equipment submitted with the test item.

2.4 INTERCONNECT CABLES: There were no interconnect cables submitted with the test item.

2.5 OPERATIONAL MODE: For all tests, the test item was energized and placed on a 80cm high non-conductive stand.

For all tests, the test item's transmit button was held down thereby setting the unit to transmit continuously. The transmitting mechanism automatically deactivated when released. The battery voltage was periodically checked to ensure proper operation at maximum level. For test purposes, the test item was modified to transmit at 300MHz, 310MHz and 390MHz at the same time. In normal usage, only one of the selected frequencies is used at any time.

3.0 TEST EQUIPMENT:

3.1 TEST EQUIPMENT LIST: A list of the test equipment used can be found on Table I. All equipment was calibrated per the instruction manuals supplied by the manufacturer.

The fundamental, harmonics and spurious emissions were measured

with a spectrum analyzer. The spectrum analyzer peak detected readings were converted to average readings using a duty cycle factor. All measurements were taken with the resolution and video bandwidth of the measuring instrument adjusted to 100kHz below 1GHz and 1MHz above 1GHz.

3.2 CALIBRATION TRACEABILITY: Test equipment is maintained and calibrated on a regular basis. All calibrations are traceable to the National Institute of Standards and Technology (NIST).

3.3 MEASUREMENT UNCERTAINTY: All measurements are an estimate of their true value. The measurement uncertainty characterizes, with a specified confidence level, the spread of values which may be possible for a given measurement system.

The measurement uncertainty budgets were based on guidelines in "ISO Guide to the Expression of Uncertainty in Measurements" and NAMAS NIS81 "The Treatment of Uncertainty in EMC Measurements".

The measurement uncertainty for these tests is presented below:

Conducted Emission Measurements:

Combined Standard Uncertainty	1.07	-1.07
Expanded Uncertainty (95% confidence)	2.1	-2.1

Radiated Emission Measurements:

Combined Standard Uncertainty	2.26	-2.18
Expanded Uncertainty (95% confidence)	4.5	-4.4

4.0 REQUIREMENTS, PROCEDURES AND RESULTS:

4.1 POWERLINE CONDUCTED EMISSIONS:

4.1.1 REQUIREMENTS: All radio frequency voltages on the power lines of an intentional radiator shall be below 250uV (quasi-peak) over the frequency range from 0.45MHz to 30MHz. It is also to be noted that if emitted levels in the peak detector function do not exceed the above limits, the test item does meet the intent of these requirements.

Since the test item was powered by internal batteries, no conducted emissions tests were performed.

4.2 DUTY CYCLE FACTOR MEASUREMENTS:

4.2.2 PROCEDURES: The duty cycle factor is used to convert peak detected readings to average readings. This factor is computed from the time domain trace of the pulse modulation signal.

With the transmitter set up to transmit for maximum pulse density, the time domain trace is displayed on the spectrum analyzer. This trace is obtained by tuning center frequency to the transmitter frequency and then setting a zero span width with 10msec/div. The amplitude setting are adjusted so that the on/off transitions clear the 4th division from the bottom of the display. The markers are set at beginning and end of a word period. If the word period exceeds 100 msec the word period is set to 100 msec. The on-time and off-time are then measured. The on-time is the total time the signal level exceeds the 4th division. Off-time is time under for the word period. The duty cycle is then computed as the (On-time/ word period) where the word period = (On-time + Off-time).

4.2.3 RESULTS: Representative plots of the duty cycle at the transmit frequencies are shown on data pages 16 through 18.

With the test item transmitting at 300MHz, the worst case duty cycle would be a 14.885 millisecond Word ON time during a 54.645 millisecond period. The duty cycle factor is $20 \cdot \log(14.885/54.645) = -11.37\text{dB}$.

With the test item transmitting at 310MHz, the worst case duty cycle would be a 15.285 millisecond Word ON time during a 54.516 millisecond period. The duty cycle factor is $20 \cdot \log(15.285/54.516) = -11.06\text{dB}$.

ENGINEERING TEST REPORT NO. 23566

With the test item transmitting at 390MHz, the worst case duty cycle would be a 8.492 millisecond Word ON time during a 54.446 millisecond period. The duty cycle factor is $20 \cdot \log(8.492/54.446) = -15.92\text{dB}$.

4.3 RADIATED MEASUREMENTS:

4.3.1 REQUIREMENTS: The test item must comply with the requirements of FCC "Code of Federal Regulations Title 47", Part 15, Subpart C, Section 15.205 et seq.

Paragraph 15.231(b) has the following radiated emission limits:

Fundamental Frequency MHz	Field Intensity uV/m @ 3 meters	Field Strength Harmonics and Spurious @ 3 meters
260 to 470	3,750 to 12,500*	375 to 1,250*

* - Linear Interpolation

For 300MHz, the limit at the fundamental is 5416.7uV/m @ 3m and the limit on the harmonics is 541.7uV/m @ 3m.

For 310MHz, the limit at the fundamental is 5833.3uV/m @ 3m and the limit on the harmonics is 583.3uV/m @ 3m.

For 390MHz, the limit at the fundamental is 9166.7uV/m @ 3m and the limit on the harmonics is 916.7uV/m @ 3m.

In addition, emissions appearing in the Restricted Bands of Operation listed in paragraph 15.205(a) shall not exceed the general requirements shown in paragraph 15.209.

4.3.2 PROCEDURES: All tests were performed in a 32ft. x 20ft. x 18ft. hybrid ferrite-tile/anechoic absorber lined test chamber. The walls and ceiling of the shielded chamber are lined with ferrite tiles. Anechoic absorber material is installed over the ferrite tile. The floor of the chamber is used as the ground plane.

ENGINEERING TEST REPORT NO. 23566

The chamber complies with ANSI C63.4 1992 for site attenuation.

The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads.

Preliminary radiated emissions measurements were first performed using a peak detector and automatically plotted. The frequencies where significant emission levels were noted were then remeasured.

With the broadband measuring antennas positioned at a 3 meter distance from the test item, the frequency range from 30MHz to 4GHz was investigated using a peak detector function with the antennas set for vertical polarization.

Final radiated emissions were performed on all significant broadband and narrowband emissions found in the preliminary sweeps using the following methods:

- 1) Measurements were made using a peak detector and a dipole or double ridged waveguide antenna.
- 2) To ensure that maximum, or worst case, emission levels were measured, the following steps were taken:
 - (a) The test item was rotated so that all of its sides were exposed to the receiving antenna.
 - (b) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
 - (c) The measuring antenna was raised and lowered from 1 to 4 meters for each antenna polarization to maximize the readings.
 - (d) The fundamental through the 10th harmonic of the transmit frequency were measured.

4.3.3 RESULTS: The preliminary plots, with the test item transmitting at 300MHz, 310MHz and 390MHz are presented on data pages

19 and 20. The plots are presented for a reference only, and are not used to determine compliance.

The final open area radiated levels, with the test item transmitting at 300MHz, is presented on data page 21. The final open area radiated levels, with the test item transmitting at 310MHz, is presented on data page 22. The final open area radiated levels, with the test item transmitting at 390MHz, is presented on data page 23.

As can be seen from the data, all emissions measured from the test item were within the specification limits. The emissions level closest to the limit (worst case) occurred at 2100MHz. The emissions level at this frequency was 0.3dB within the limit. See data pages 21 through 23 for details. Photographs of the test configuration which yielded the highest, or worst case, radiated emission levels are shown on Figures 2 and 3.

4.4 OCCUPIED BANDWIDTH MEASUREMENTS:

4.4.1 REQUIREMENTS: In accordance with paragraph 15.231(c), all emissions within 20dB of the peak amplitude level of the center frequency are required to be within a band less than 0.25% of the center frequency wide.

4.4.2 PROCEDURES: The test item was placed on an 80cm high non-conductive stand. The unit was set to transmit continuously. With an antenna positioned nearby, occupied bandwidth emissions were displayed on the spectrum analyzer. The resolution bandwidth was set to 30 kHz and span was set to 2 MHz. The frequency spectrum near the fundamental was plotted.

4.4.3 RESULTS: The plot of the emissions near the 300MHz fundamental frequency are presented on data page 24. The plot of the emissions near the 310MHz fundamental frequency are presented on data

ENGINEERING TEST REPORT NO. 23566

page 25. The plot of the emissions near the 390MHz fundamental frequency are presented on data page 26. As can be seen from these data pages, the transmitter met the occupied bandwidth requirements.

5.0 CONCLUSION:

It was found that the Chamberlain Group model CK1 Transmitter does meet the radiated emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Section 15.205 et seq. for Intentional Radiators, when tested per ANSI C63.4-1992.

6.0 CERTIFICATION:

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the test specification.

The data presented in this test report pertains only to the test item at the test date. Any electrical or mechanical modification made to the test item subsequent to the specified test date will serve to invalidate the data and void this certification.

7.0 ENDORSEMENT DISCLAIMER:

This report must not be used to claim product endorsement by NVLAP or any agency of the US Government.

ENGINEERING TEST REPORT NO. 23566

TABLE 1: TEST EQUIPMENT LIST


ELITE ELECTRONIC ENG. INC.

Page: 1

Eq ID	Equipment Description	Manufacturer	Model No.	Serial No.	Frequency Range	Cal Date	Cal Inv	Due Date
Equipment Type: ACCESSORIES, MISCELLANEOUS								
XZG0	ATTENUATOR/SWITCH DRIVER	HEWLETT PACKARD	11713A	3439A02724	---	01/31/00	N/A	
Equipment Type: AMPLIFIERS								
APK0	PRE-AMPLIFIER	HEWLETT PACKARD	8449B	3008A00662	1-26.5GHZ	02/15/01	12	02/15/02
Equipment Type: ANTENNAS								
NDP0	TUNED DIPOLE ANTENNA	EMCO	3121C-DB3	311	140-400MHZ	11/29/00	12	11/29/01
NDQ0	TUNED DIPOLE ANTENNA	EMCO	3121C-DB4	311	400-1000MHZ	11/29/00	12	11/29/01
NWF0	RIDGED WAVE GUIDE	EMCO	3105	2035	1-12.4GHZ	08/28/00	12	08/28/01
Equipment Type: CONTROLLERS								
CMA0	MULTI-DEVICE CONTROLLER	EMCO	2090	9701-1213	---		N/A	
Equipment Type: RECEIVERS								
RAC1	SPECTRUM ANALYZER	HEWLETT PACKARD	85660B	3407A08369	100HZ-22GHZ	01/16/01	12	01/16/02
RACB	RF PRESELECTOR	HEWLETT PACKARD	85685A	3506A01491	20HZ-2GHZ	05/10/00	12	05/10/01
RAF3	QUASISPEAK ADAPTER	HEWLETT PACKARD	85650A	3303A01775	0.01-1000MHZ	01/17/01	12	01/17/02

Cal. Interval: Listed in Months I/O: Initial Only N/A: Not Applicable


Note 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.

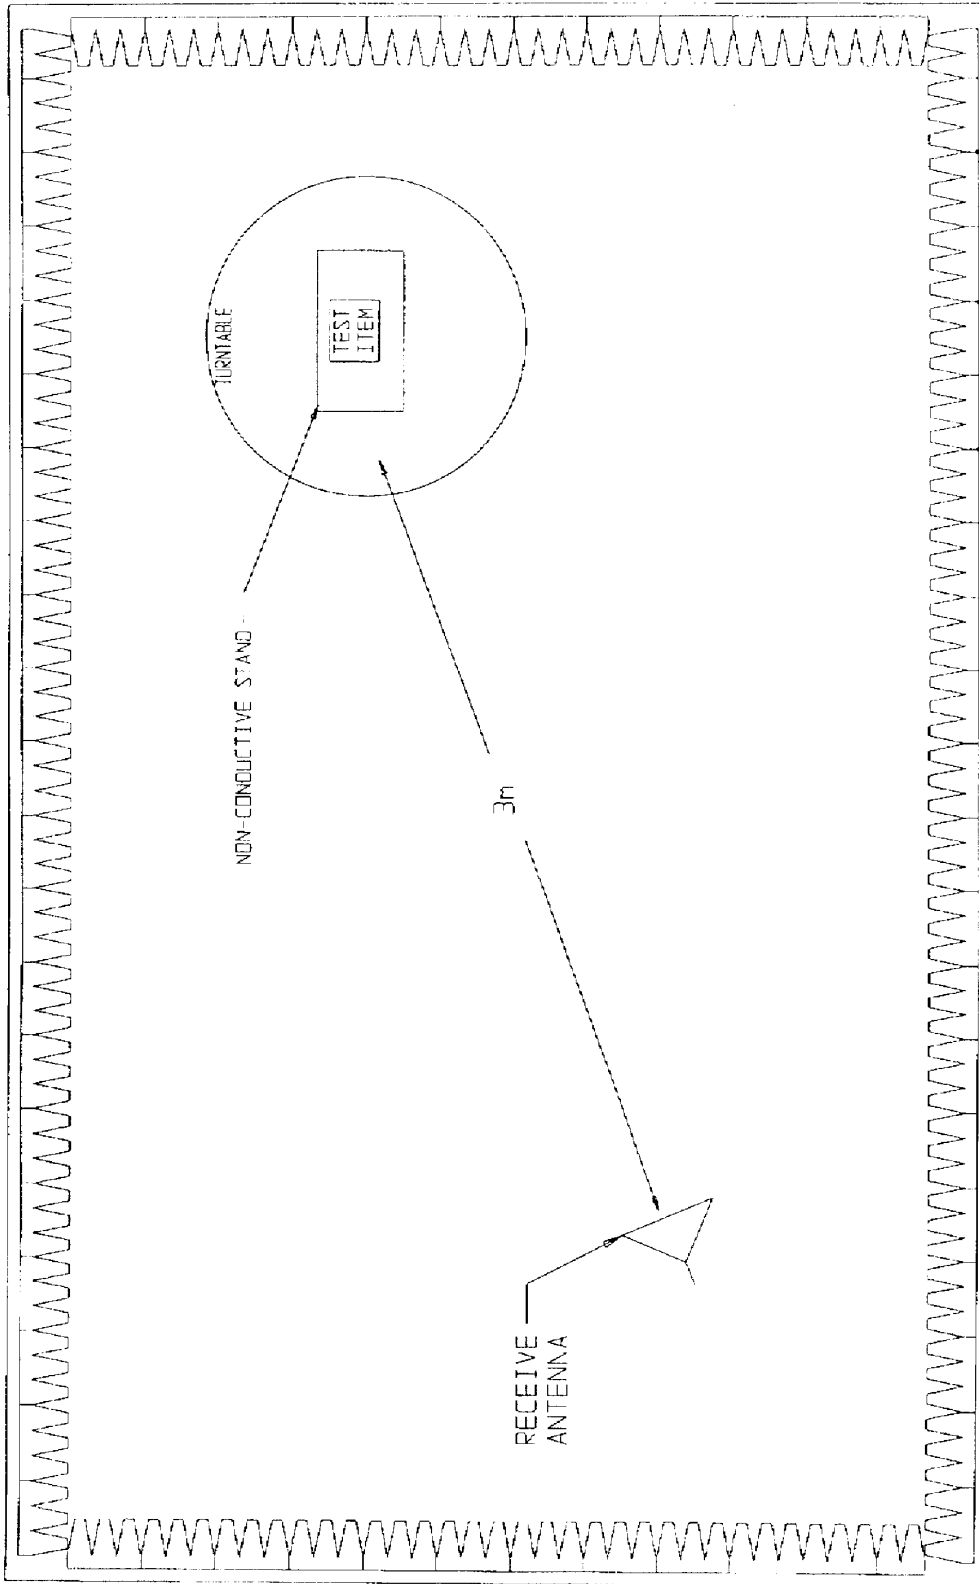


ETR 23566

FIGURE 1 BLOCK DIAGRAM OF TEST ITEM AND PERIPHERAL EQUIPMENT SETUP

FIGURE 2

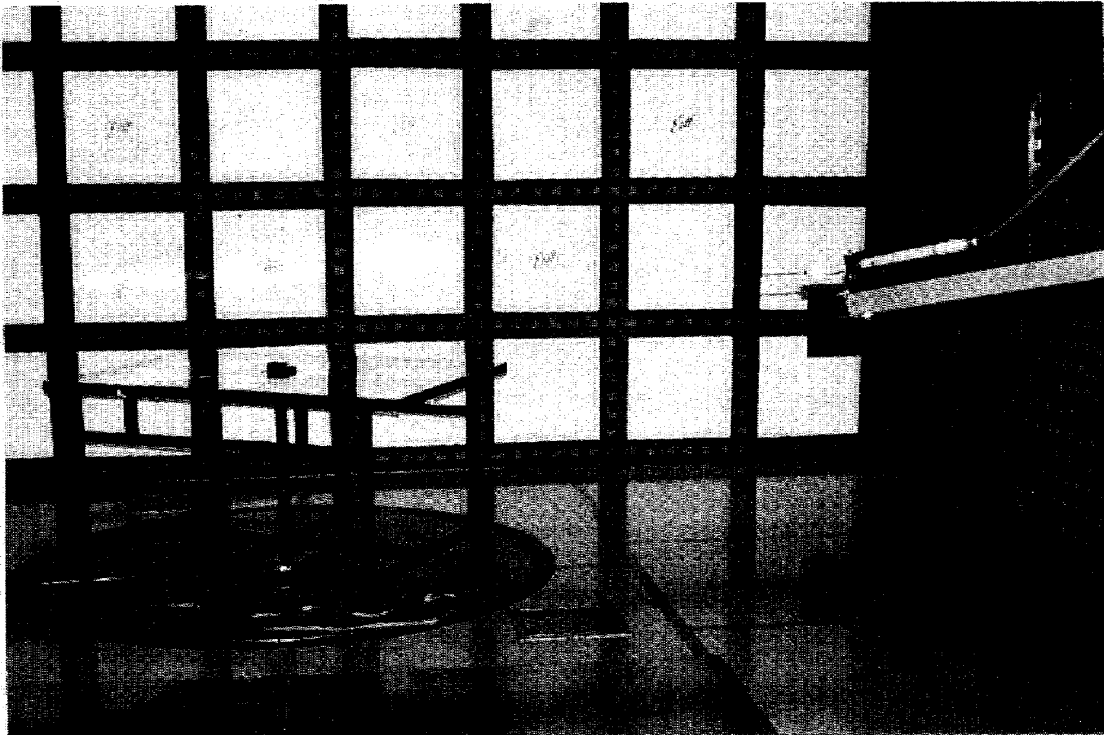


TEST SETUP FOR RADIATED EMISSIONS MEASUREMENTS
MAXIMIZED FOR MEASUREMENT OF WORST CASE EMISSIONS
HORIZONTAL POLARIZATION

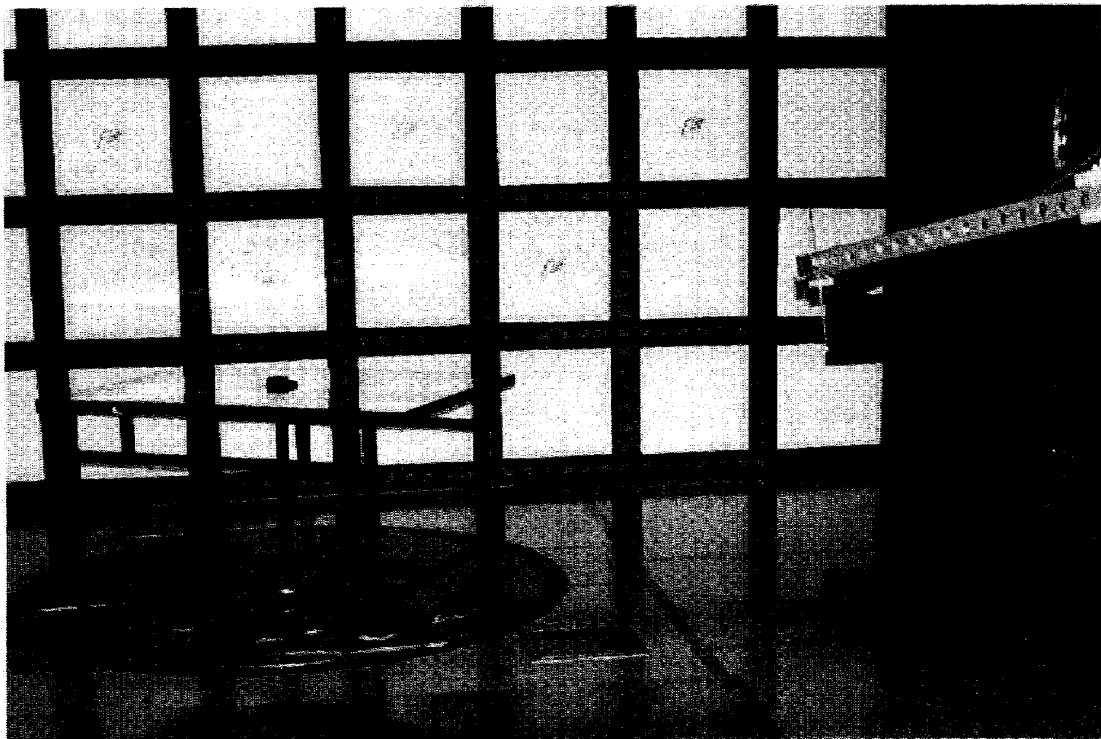


TEST SETUP FOR RADIATED EMISSIONS MEASUREMENTS
MAXIMIZED FOR MEASUREMENT OF WORST CASE EMISSIONS
VERTICAL POLARIZATION

FIGURE 3

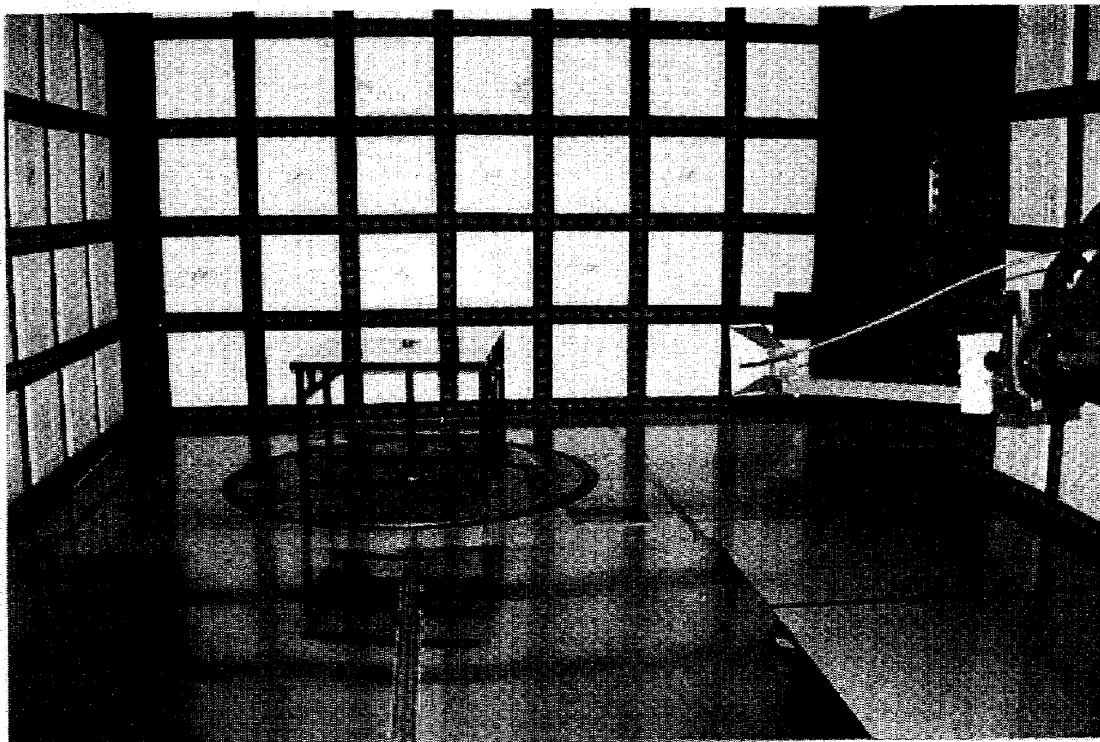


TEST SETUP FOR RADIATED EMISSIONS MEASUREMENTS
MAXIMIZED FOR MEASUREMENT OF WORST CASE EMISSIONS
HORIZONTAL POLARIZATION

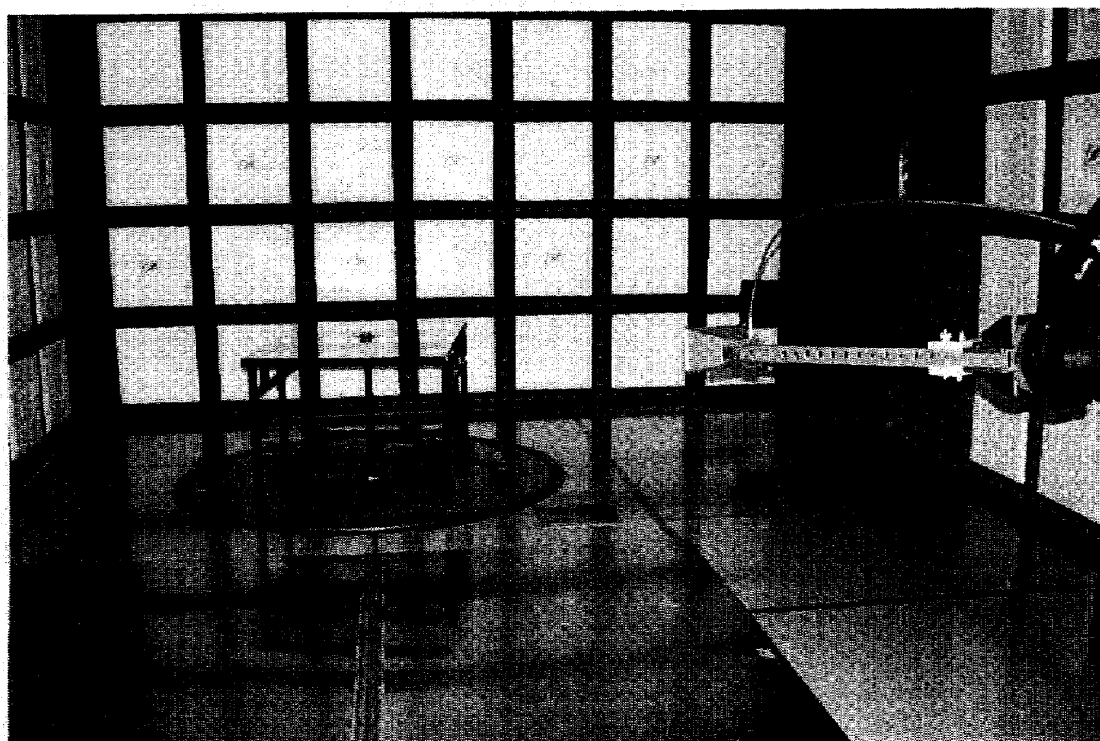

TEST SETUP FOR RADIATED EMISSIONS MEASUREMENTS
MAXIMIZED FOR MEASUREMENT OF WORST CASE EMISSIONS
VERTICAL POLARIZATION

ELITE ELECTRONIC ENGINEERING Co.
Downers Grove, IL 60515

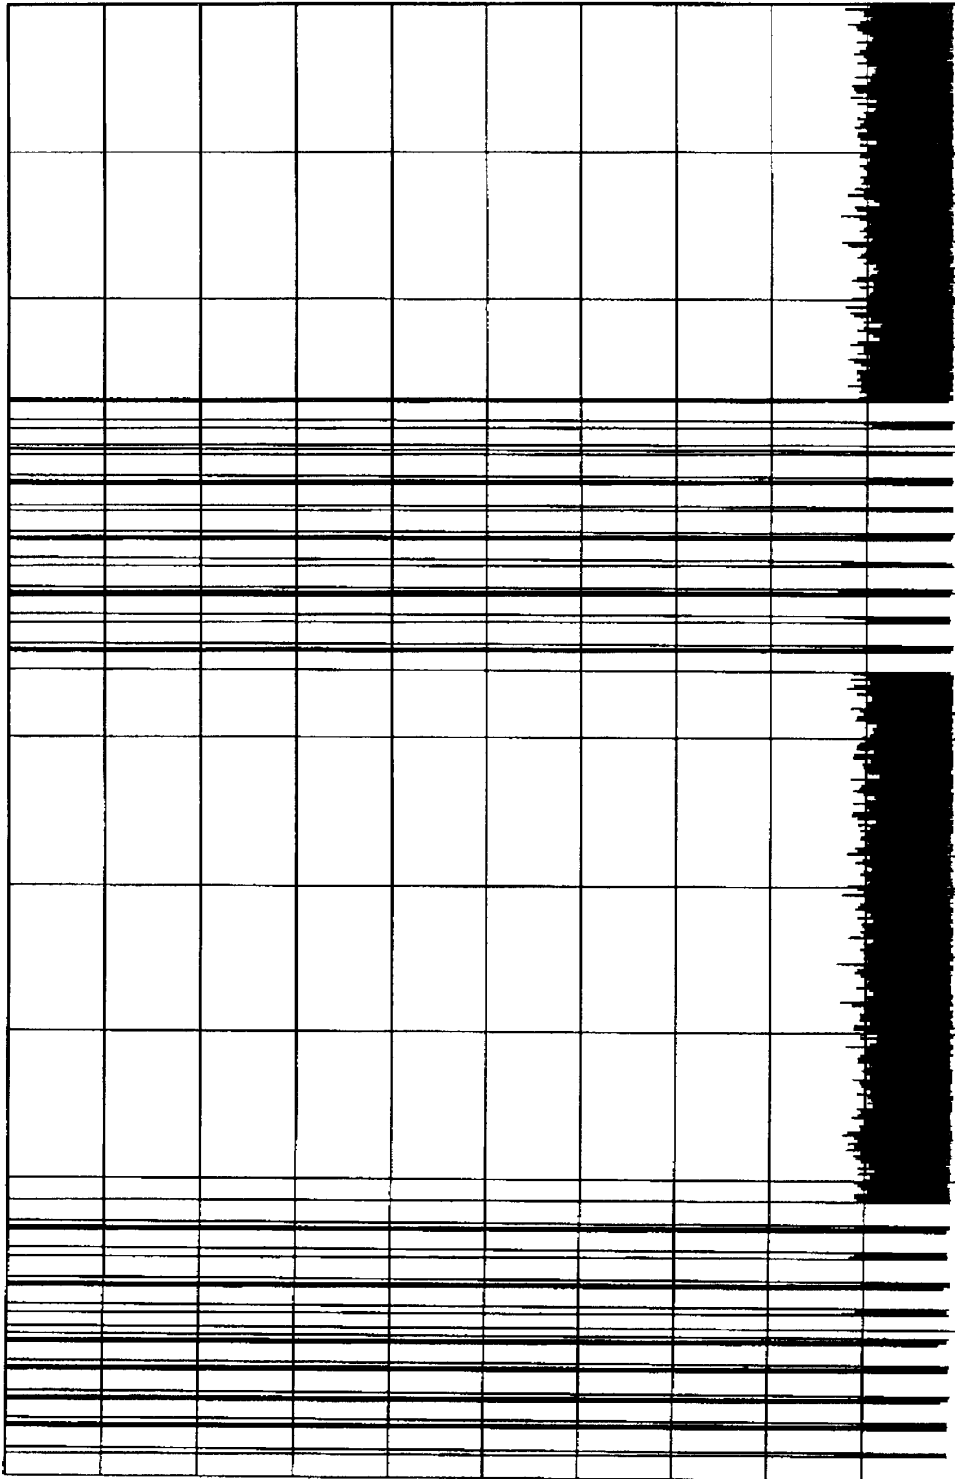


10 mSEC/DIV

TRANSMITTER DUTY CYCLE

FREQUENCY: 299.956 MHz
ON TIME : 14.885 mSEC
OFF TIME : 39.76 mSEC
DUTY CYCLE = .27 or -11.37 dB
COMPUTED OVER 1 DATA WORD

MANUFACTURER : CHAMBERLAIN
MODEL : CK1
S/N : NONE ASSIGNED
TEST DATE : 16 Mar 2001
NOTES

ELITE ELECTRONIC ENGINEERING Co.
Dawners Grove, IL 60515

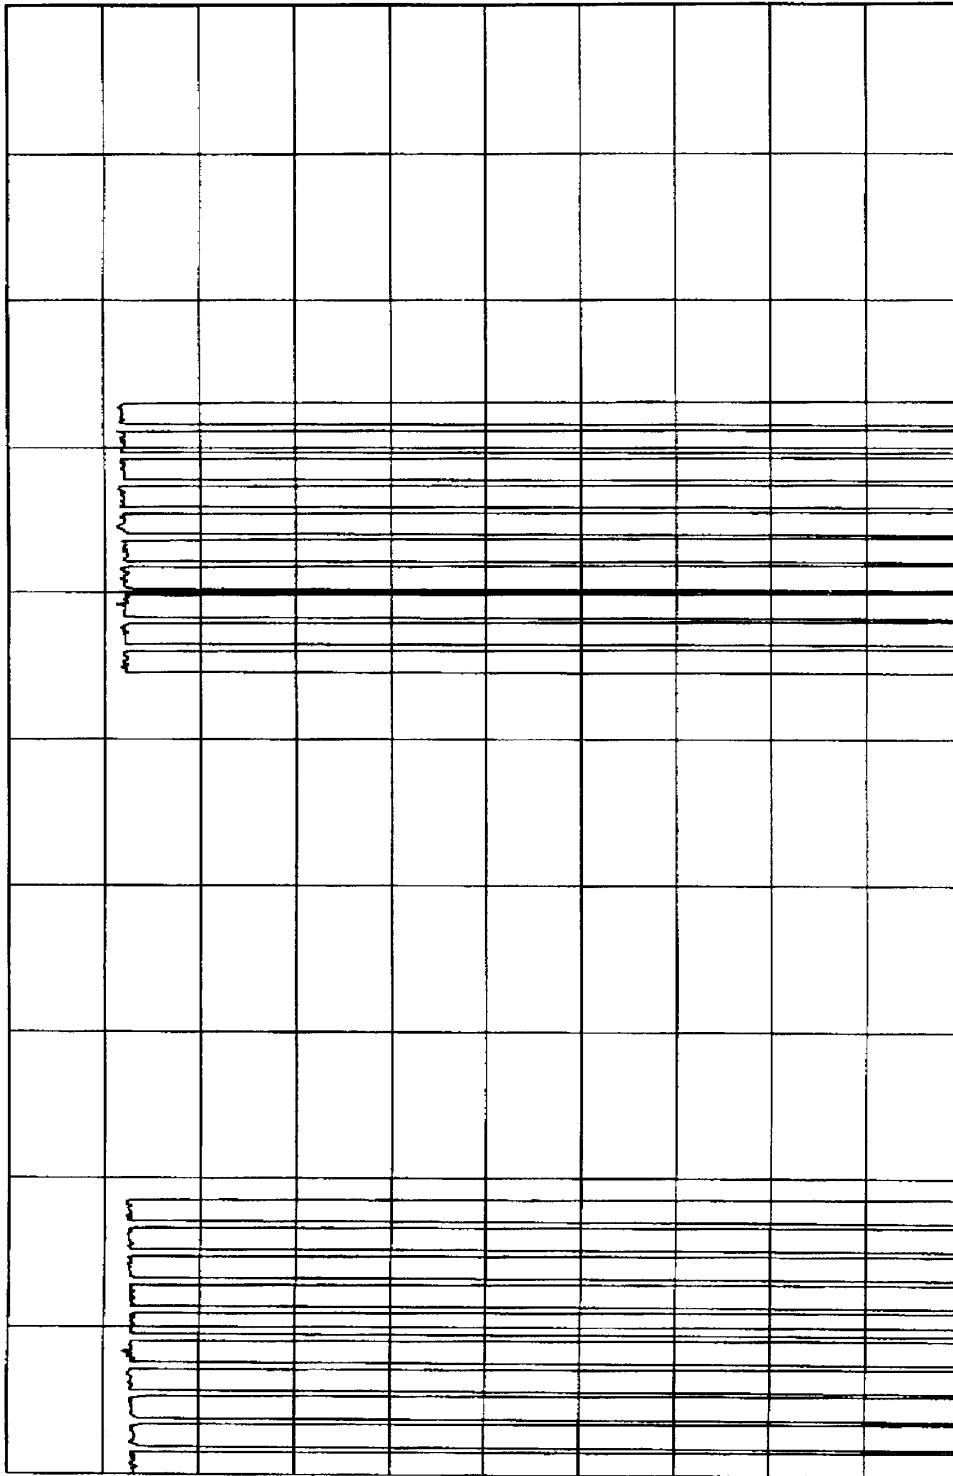


10 mSEC/DIV

TRANSMITTER DUTY CYCLE

FREQUENCY : 309.9307 MHz
ON TIME : 15.285 mSEC
OFF TIME : 39.261 mSEC
DUTY CYCLE = .28 or -11.06 dB
COMPUTED OVER 1 DATA WORD

MANUFACTURER : CHAMBERLAIN
MODEL : CK1
S/N : NONE ASSIGNED
TEST DATE : 16 Mar 2001
NOTES :

ELITE ELECTRONIC ENGINEERING Co.
Downers Grove, IL 60515

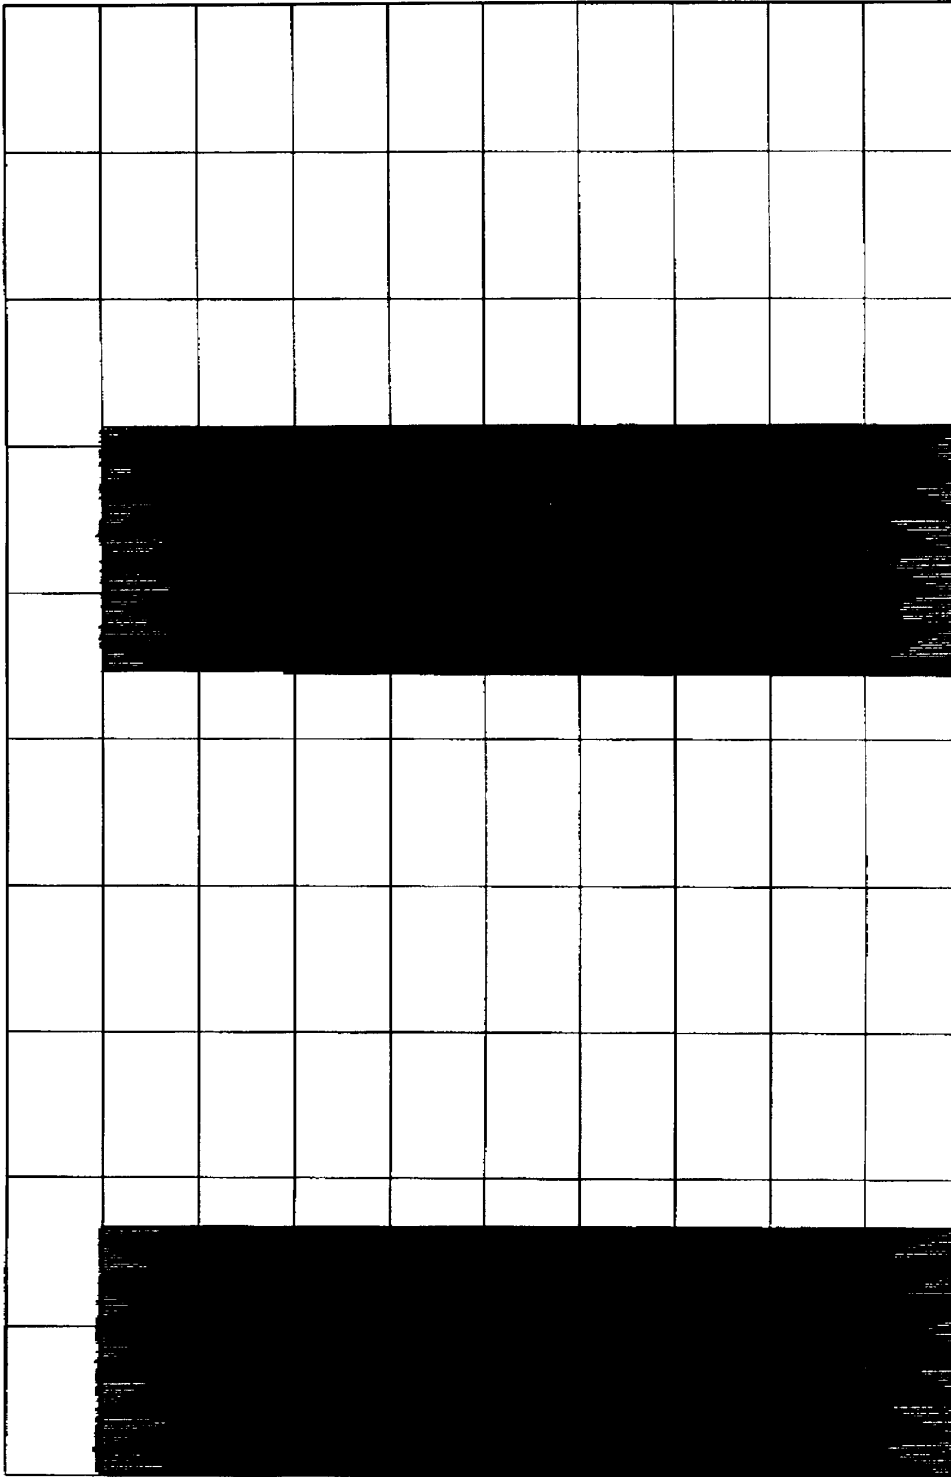

10 mSEC/DIV

TRANSMITTER DUTY CYCLE

FREQUENCY : 389.9936 MHz
ON TIME : 8.492 mSEC
OFF TIME : 45.954 mSEC
DUTY CYCLE = .16 or -15.92 dB
COMPUTED OVER 1 DATA WORD

MANUFACTURER : CHAMBERLAIN
MODEL : CK1
S/N : NONE ASSIGNED
TEST DATE : 16 Mar 2001
NOTES :


ELITE ELECTRONIC ENGINEERING Co.

Downers Grove, Ill. 60515

UNIV_EM_RUN RUN 4

JKAB 01/19/81

EEC

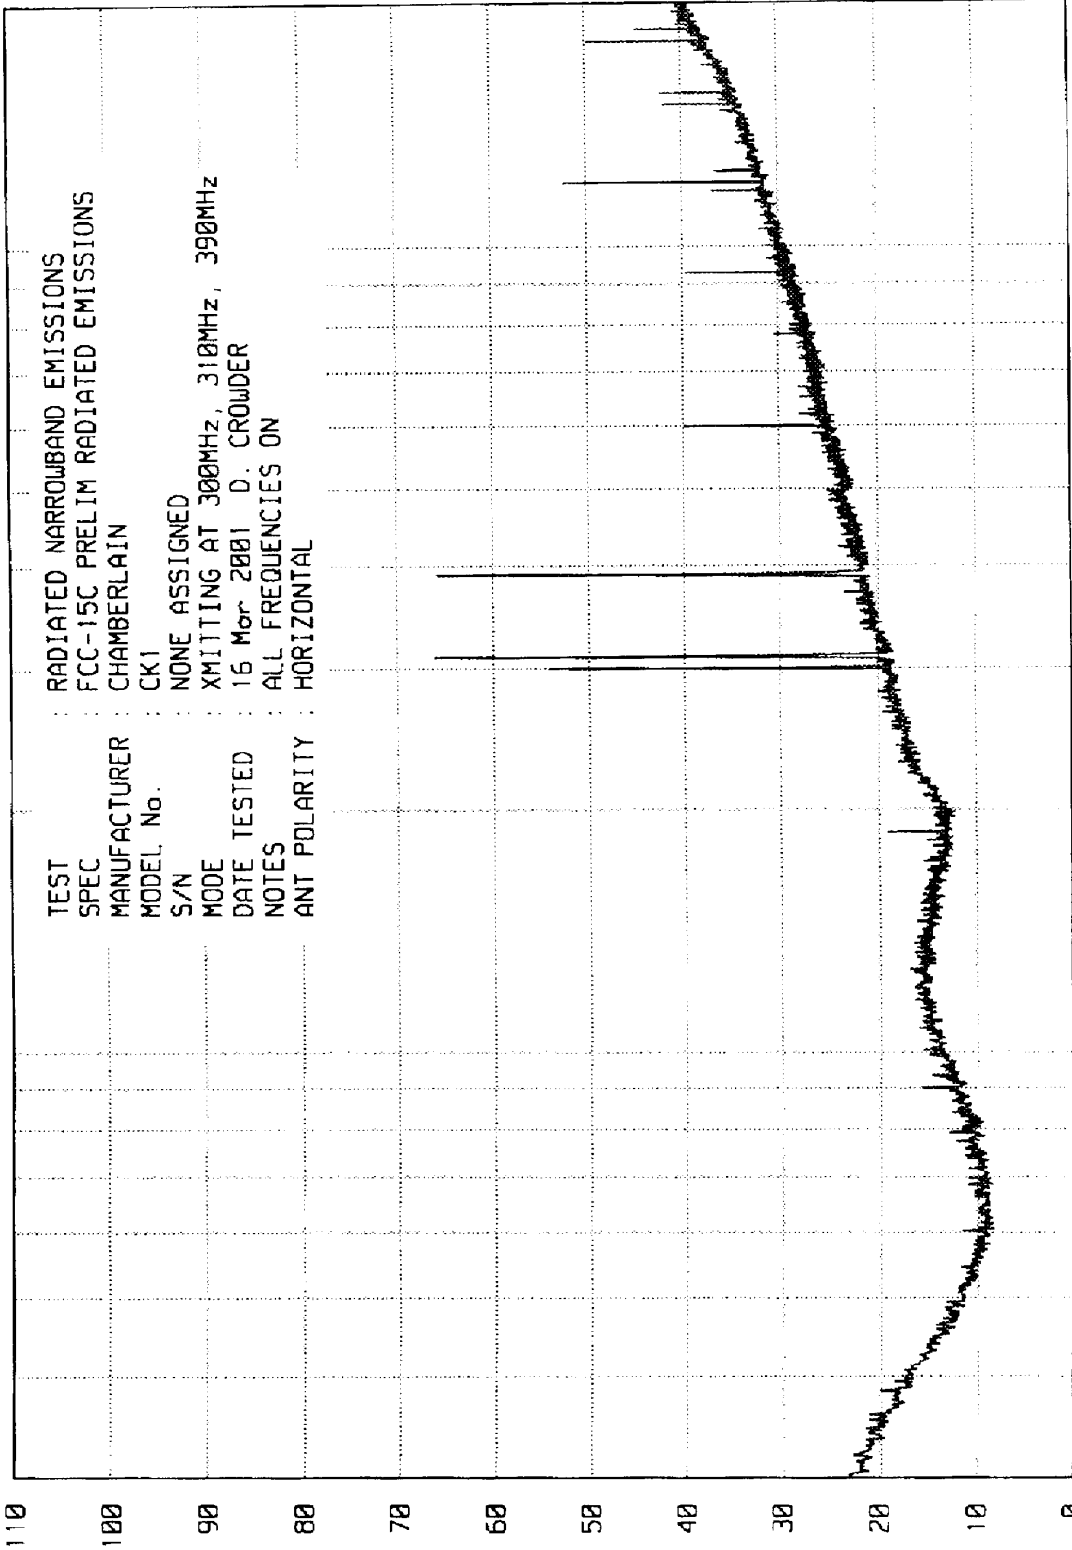

TEST : RADIATED NARROWBAND EMISSIONS
 SPEC : FCC-15C PRELIM RADIATED EMISSIONS
 MANUFACTURER : CHAMBERLAIN
 MODEL No. : CK1
 S/N : NONE ASSIGNED
 MODE : XMITTING AT 300MHz, 310MHz, 390MHz
 DATE TESTED : 15 Mar 2001 D. CROWDER
 NOTES : ALL FREQUENCIES ON
 ANT POLARITY : HORIZONTAL

RADIATED NARROWBAND EMISSIONS - dBu/m

PAGE 6 OF 26

START = 30

FREQUENCY - MHz

1000


STOP = 2000

ELITE ELECTRONIC ENGINEERING Co.

Downer's Grove, Ill. 60515

UNIV_EM_RUN RUN 3

UKK88 01/19/01

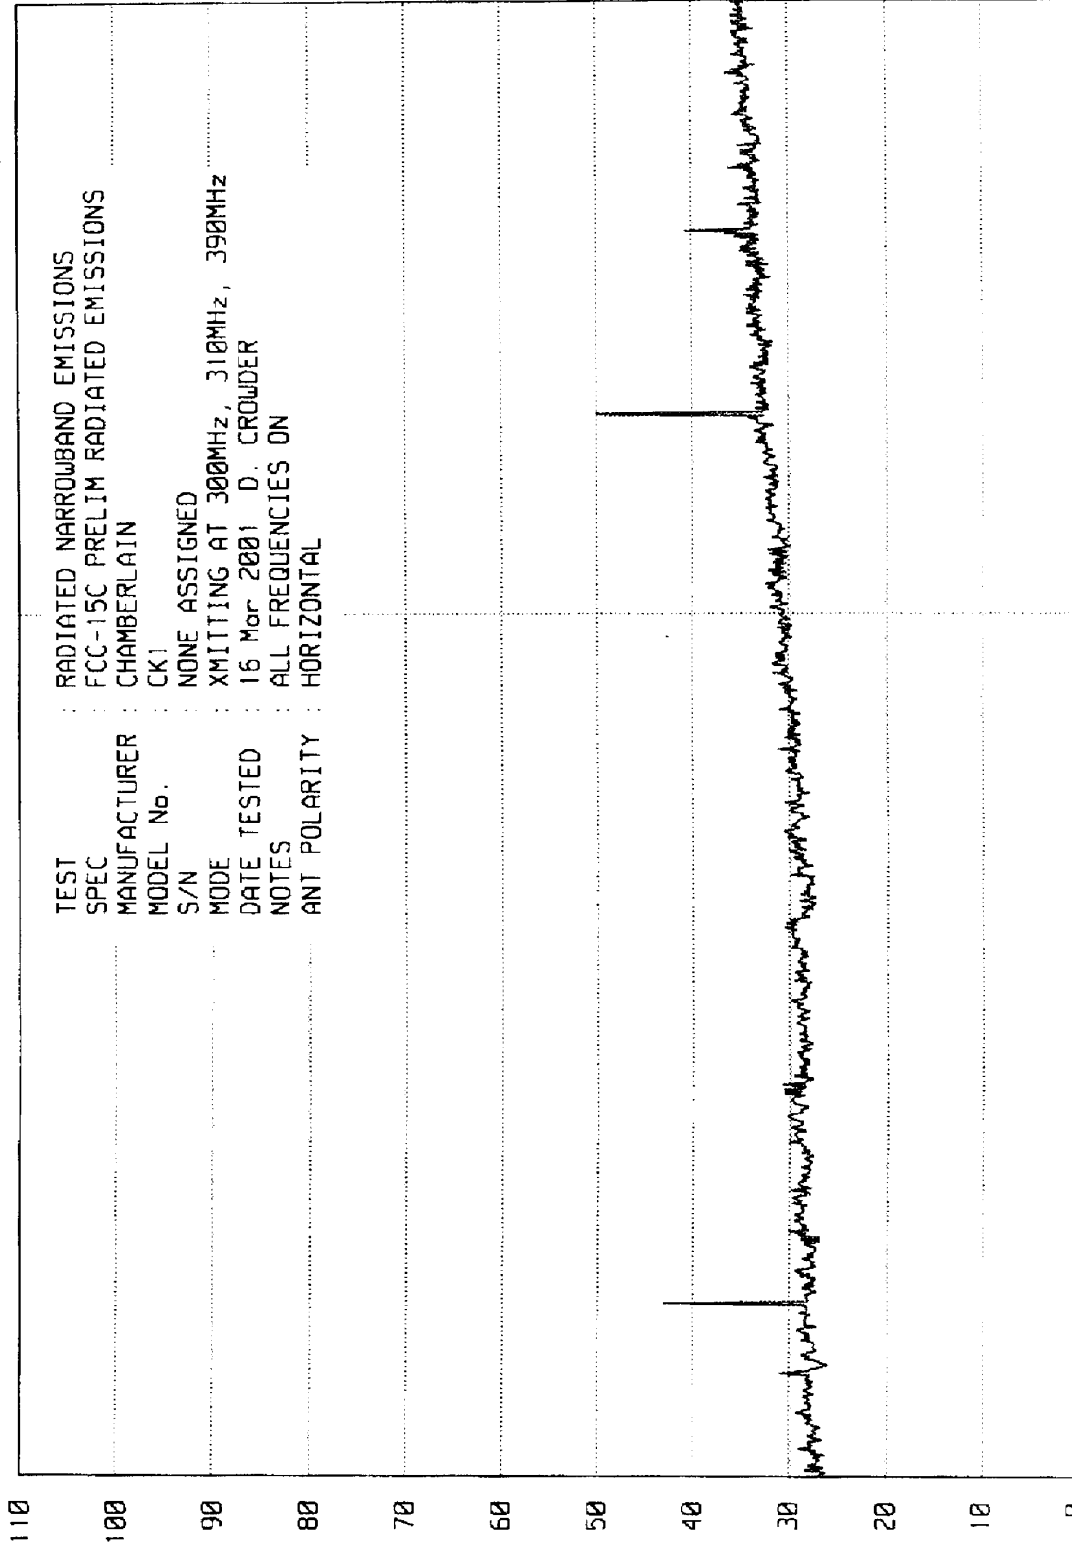

TEST : RADIATED NARROWBAND EMISSIONS
 SPEC : FCC-15C PRELIM RADIATED EMISSIONS
 MANUFACTURER : CHAMBERLAIN
 MODEL No. : CK1
 S/N : NONE ASSIGNED
 MODE : XMITTING AT 300MHZ, 310MHZ, 390MHZ
 DATE TESTED : 16 Mar 2001 D. CROWDER
 NOTES : ALL FREQUENCIES ON
 ANT POLARITY : HORIZONTAL

RADIATED NARROWBAND EMISSIONS - dBu/m

START = 2000

FREQUENCY - MHz

STOP = 4800

ETR No.

DATA PAGE

SPECIFICATION : FCC PART 15C(REV OCT 1, 94) TRANSMITTER OPEN FIELD DATA
 MANUFACTURER : CHAMBERLAIN
 MODEL : CK1
 S/N : NONE ASSIGNED
 TEST DATE : 16 Mar 2001
 NOTES :
 TEST ANTENNA : ROBERTS DIPOLE & DRWG ANTENNAS

FREQUENCY MHz	ANT POL	MTR RDG dBuV	CBL FAC dB	ANT FAC dB	DUTY CYCLE dB	TOTAL dBuV/m @3m	TOTAL uV/m @3m	LIMIT uV/m @3m	NOTES
300.00	H	62.1	1.8	18.3	-11.4	70.8	3451.4	5416.7	
300.00	V	45.8	1.8	18.3	-11.4	54.5	528.4	5416.7	
600.00	H	25.9	2.6	24.3	-11.4	41.4	118.0	541.7	
600.00	V	17.7	2.6	24.3	-11.4	33.2	45.9	541.7	
900.00	H	13.6	3.3	27.7	-11.4	33.2	45.7	541.7	
900.00	V	10.5	3.3	27.7	-11.4	30.1	32.0	541.7	
1200.00	H	32.5	4.0	24.7	-11.4	49.8	308.7	500.0	*
1200.00	V	24.6	4.0	24.7	-11.4	41.9	124.3	500.0	*
1500.00	H	28.7	4.6	25.5	-11.4	47.4	235.0	500.0	*
1500.00	V	24.2	4.6	25.5	-11.4	42.9	140.0	500.0	*
1800.00	H	30.1	5.3	26.8	-11.4	50.8	347.2	541.7	
1800.00	V	25.3	5.3	26.8	-11.4	46.0	199.8	541.7	
2100.00	H	32.0	5.9	27.9	-11.4	54.4	523.6	541.7	
2100.00	V	24.0	5.9	27.9	-11.4	46.4	208.5	541.7	
2400.00	H	18.6	6.4	28.7	-11.4	42.3	130.1	541.7	
2400.00	V	10.4	6.4	28.7	-11.4	34.1	50.6	541.7	
2700.00	H	12.7	7.0	29.5	-11.4	37.8	77.5	500.0	*
2700.00	V	6.0	7.0	29.5	-11.4	31.1	35.8	500.0	*
3000.00	H	13.2	7.5	30.4	-11.4	39.7	96.4	541.7	
3000.00	V	8.9	7.5	30.4	-11.4	35.4	58.7	541.7	

* DENOTES A FREQUENCY CONFLICT WITH RESTRICTED BANDS

checked by:


 D. CROWDER

ENGINEERING TEST REPORT NO. 23566

ETR No.
DATA PAGE

SPECIFICATION : FCC PART 15C (REV OCT 1, 94) TRANSMITTER OPEN FIELD DATA
 MANUFACTURER : CHAMBERLAIN
 MODEL : CK1
 S/N : NONE ASSIGNED
 TEST DATE : 16 Mar 2001
 NOTES :
 TEST ANTENNA : ROBERTS DIPOLE & DRWG ANTENNAS

FREQUENCY MHz	ANT POL	MTR RDC dBuV	CBL FAC dB	ANT FAC dB	DUTY CYCLE dB	TOTAL dBuV/m @3m	TOTAL uV/m @3m	LIMIT uV/m @3m	NOTES
310.00	H	63.9	1.8	18.6	-11.1	73.2	4573.0	5833.3	
310.00	V	48.7	1.8	18.6	-11.1	58.0	794.7	5833.3	
620.00	H	16.8	2.7	24.5	-11.1	32.8	43.9	583.3	
620.00	V	8.1	2.7	24.5	-11.1	24.1	16.1	583.3	
930.00	H	23.1	3.4	28.3	-11.1	43.6	152.2	583.3	
930.00	V	15.7	3.4	28.3	-11.1	36.2	64.9	583.3	
1240.00	H	29.5	4.0	24.8	-11.1	47.3	231.5	500.0	*
1240.00	V	19.6	4.0	24.8	-11.1	37.4	74.1	500.0	*
1240.00	H	29.5	4.0	24.8	-11.1	47.3	231.5	500.0	*
1240.00	V	19.6	4.0	24.8	-11.1	37.4	74.1	500.0	*
1550.00	H	23.1	4.7	25.7	-11.1	42.5	132.9	500.0	*
1550.00	V	20.7	4.7	25.7	-11.1	40.1	100.8	500.0	*
1860.00	H	22.9	5.4	27.1	-11.1	44.3	163.7	583.3	
1860.00	V	16.8	5.4	27.1	-11.1	38.2	81.1	583.3	
2170.00	H	14.8	6.0	28.1	-11.1	37.8	77.6	583.3	
2170.00	V	12.5	6.0	28.1	-11.1	35.5	59.5	583.3	
2480.00	H	11.6	6.6	28.9	-11.1	35.9	62.5	583.3	
2480.00	V	8.6	6.6	28.9	-11.1	32.9	44.2	583.3	
2790.00	H	9.0	7.1	29.8	-11.1	34.8	55.0	500.0	*
2790.00	V	5.7	7.1	29.8	-11.1	31.5	37.6	500.0	*
3100.00	H	7.5	7.7	30.7	-11.1	34.8	54.8	583.3	
3100.00	V	6.2	7.7	30.7	-11.1	33.5	47.2	583.3	

* DENOTES A FREQUENCY CONFLICT WITH RESTRICTED BANDS

checked by:


D. CROWDER


ENGINEERING TEST REPORT NO. 23566

ETR No.
DATA PAGE

SPECIFICATION : FCC PART 15C (REV OCT 1, 94) TRANSMITTER OPEN FIELD DATA
 MANUFACTURER : CHAMBERLAIN
 MODEL : CK1
 S/N : NONE ASSIGNED
 TEST DATE : 16 Mar 2001
 NOTES :
 TEST ANTENNA : ROBERTS DIPOLE & DRWG ANTENNAS

FREQUENCY MHz	ANT POL	MTR RDG dBuV	CBL FAC dB	ANT FAC dB	DUTY CYCLE dB	TOTAL dBuV/m @3m	TOTAL uV/m @3m	LIMIT NOTES uV/m @3m
390.00	H	60.6	2.2	20.9	-15.9	67.8	2442.3	9166.7
390.00	V	43.5	2.2	20.9	-15.9	50.7	341.0	9166.7
780.00	H	11.1	3.0	26.6	-15.9	24.8	17.4	916.7
780.00	V	7.4	3.0	26.6	-15.9	21.1	11.4	916.7
1170.00	H	26.4	3.9	24.6	-15.9	39.0	89.5	500.0 *
1170.00	V	19.3	3.9	24.6	-15.9	31.9	39.5	500.0 *
1560.00	H	18.2	4.8	25.8	-15.9	32.8	43.8	500.0 *
1560.00	V	13.7	4.8	25.8	-15.9	28.3	26.1	500.0 *
1950.00	H	16.0	5.6	27.4	-15.9	33.1	45.3	916.7
1950.00	V	15.8	5.6	27.4	-15.9	32.9	44.3	916.7
2340.00	H	9.2	6.3	28.5	-15.9	28.1	25.5	500.0 *
2340.00	V	7.9	6.3	28.5	-15.9	26.8	22.0	500.0 *
2730.00	H	6.0	7.0	29.6	-15.9	26.7	21.7	500.0 *
2730.00	V	5.4	7.0	29.6	-15.9	26.1	20.3	500.0 *
3120.00	H	6.0	7.7	30.7	-15.9	28.6	26.8	916.7
3120.00	V	5.7	7.7	30.7	-15.9	28.3	25.9	916.7
3510.00	H	6.2	8.6	31.7	-15.9	30.6	34.0	916.7
3510.00	V	6.2	8.6	31.7	-15.9	30.6	34.0	916.7
3900.00	H	6.0	9.5	32.7	-15.9	32.2	40.9	500.0 *
3900.00	V	5.5	9.5	32.7	-15.9	31.7	38.6	500.0 *

* DENOTES A FREQUENCY CONFLICT WITH RESTRICTED BANDS

checked by: 
D. CROWDER

ELITE ELECTRONIC ENGINEERING CO

MKR 299.454 MHz
-48.90 dBm


REF -20.0 dBm ATTN 0 dB

hp

10 dB/

OFFSET

-10.0
dB

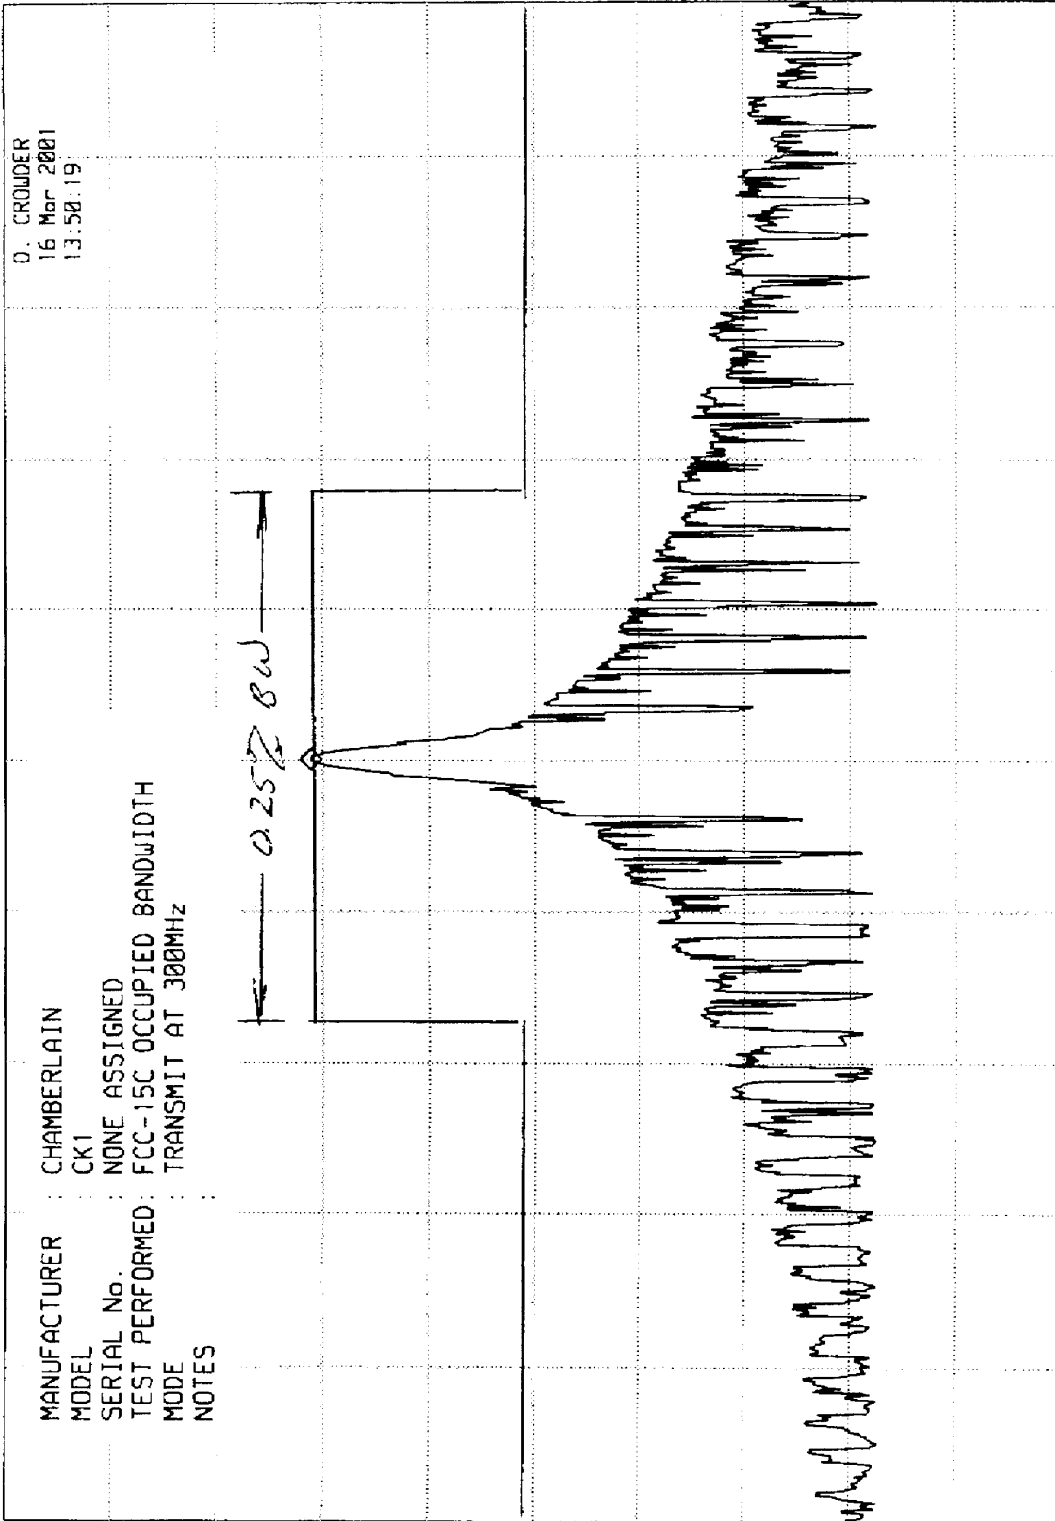

CENTER 299.45 MHz RES BW 30 kHz(i) VBW 300 kHz SPAN 2.00 MHz
SWP 20.0 msec


ELITE ELECTRONIC ENGINEERING CO

MKR 309.710 MHz
-51.60 dBm

hp REF -20.0 dBm ATTN 0 dB

10 dB/
OFFSET -10.0 dB

MANUFACTURER : CHAMBERLAIN
 MODEL : CK1
 SERIAL No. : NONE ASSIGNED
 TEST PERFORMED : FCC-15C OCCUPIED BANDWIDTH
 MODE : TRANSMIT AT 310MHz
 NOTES :

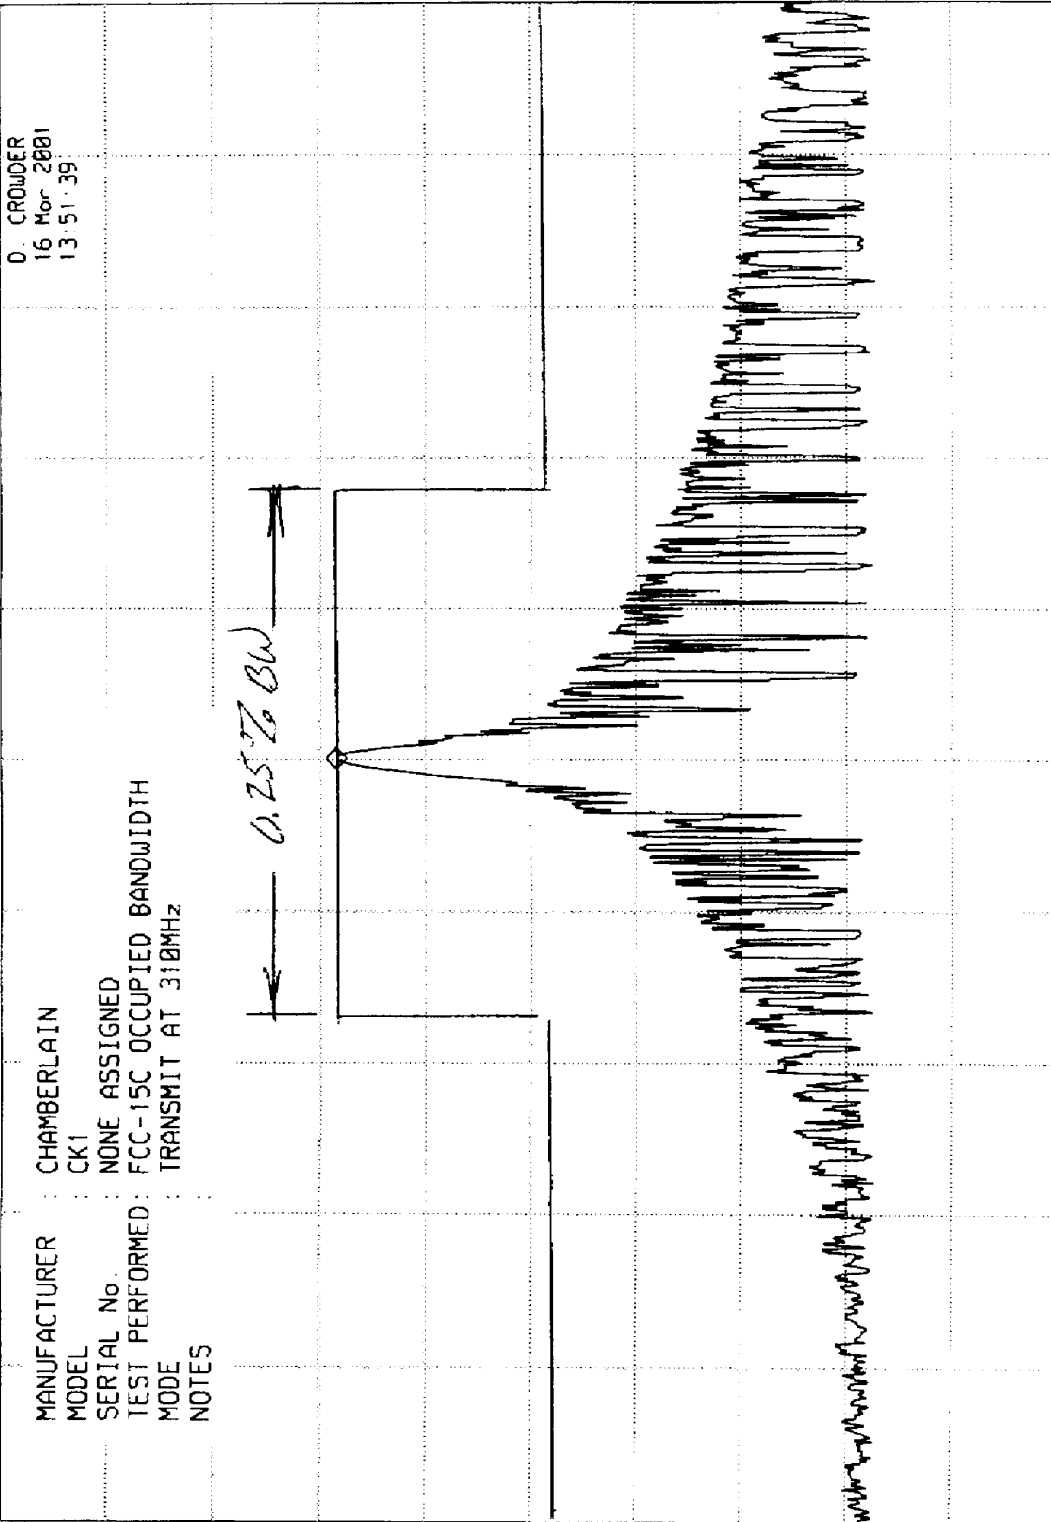

D. CROWDER
16 Mar 2001
13:51:39

SPAN 2.00 MHz
SWP 20.0 msec

UBW 300 kHz

CENTER 309.71 MHz
RES BW 30 kHz(i)

ELITE ELECTRONIC ENGINEERING CO

MKR 389.784 MHz
-53.00 dBm


REF -23.2 dBm

ATTEN 0 dB

hp

10 dB/

OFFSET
-10.0
dB

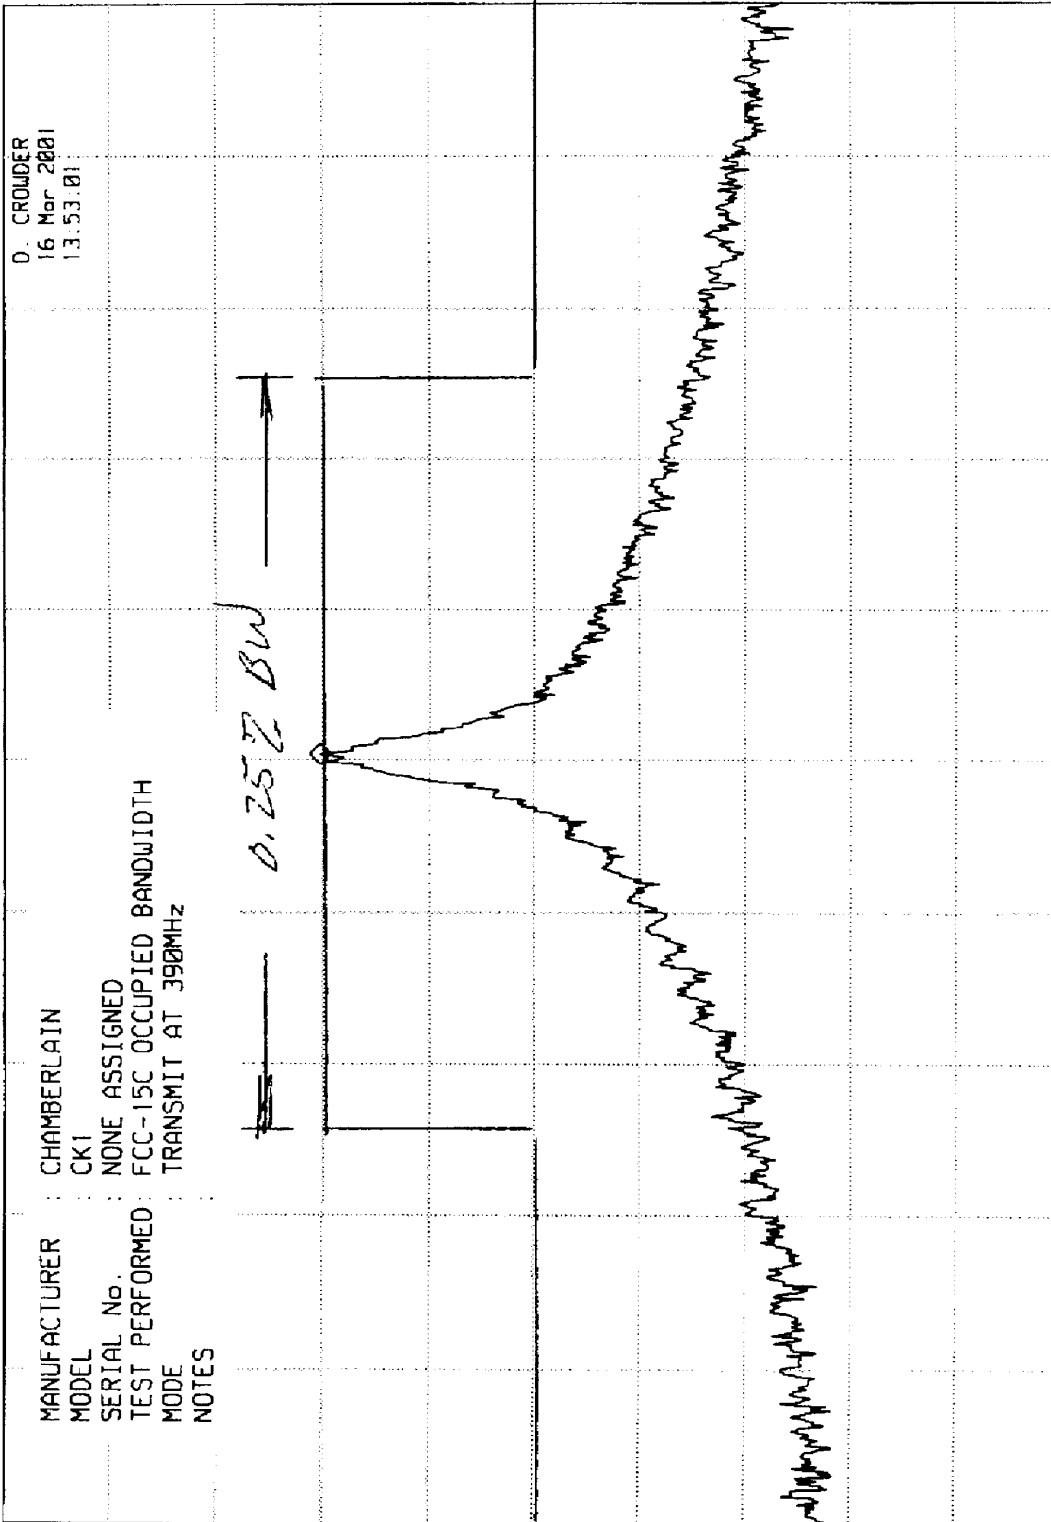

D. CROWDER
16 Mar 2001
13:53:01

MANUFACTURER : CHAMBERLAIN
 MODEL : CK1
 SERIAL No. : NONE ASSIGNED
 TEST PERFORMED : FCC-15C OCCUPIED BANDWIDTH
 MODE : TRANSMIT AT 390MHz
 NOTES :

SPAN 2.00 MHz
SWP 20.0 msec

VBW 300 kHz

CENTER 389.77 MHz
RES BW 30 kHz(1)