


Test Details	
Manufacturer	Chamberlain Group Inc
Model	001D9525-1-IND
S/N	NA
Mode	Continuous Transmission
Carrier Frequency	926.760MHz
Parameters	20dB BW = 150.8kHz
Notes	None

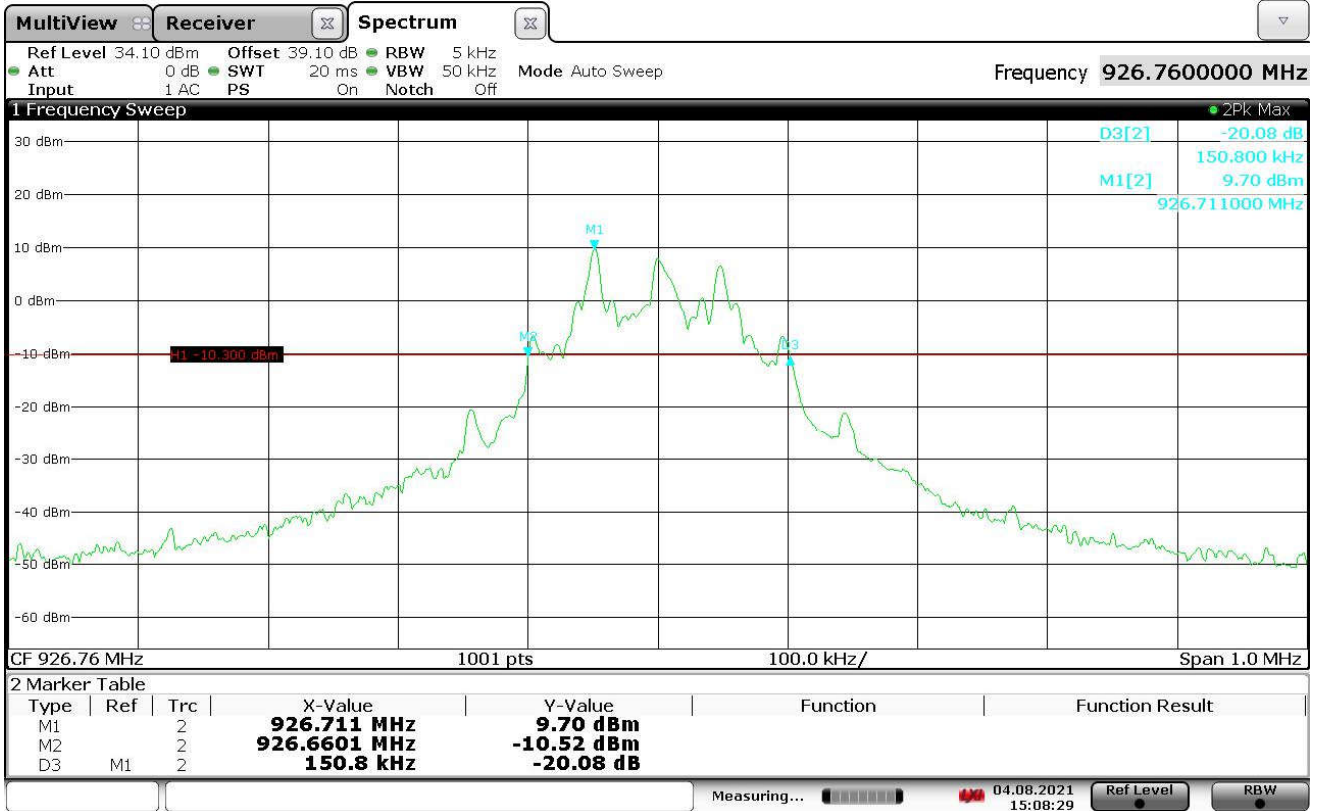

15:08:30 04.08.2021

24. Occupied Bandwidth (99%)


Test Information	
Manufacturer	Chamberlain Group Inc
Product	Main/Control PCB Transceiver
Model	001D9525-1-IND
Serial No	NA
Mode	Continuous Transmission

Test Setup Details	
Setup Format	Tabletop
Height of Support	NA
Measurement Method	Antenna Conducted
Type of Test Site	EMC Workbench
Test site used	NA
Type of Antennas Used	NA
Notes	None

Procedures
<p>The antenna port of the EUT was connected to the spectrum analyzer through 40dB of attenuation.</p> <p>The EUT was allowed to transmit continuously. The transmit channel was set separately to low, middle, and high channels. The resolution bandwidth (RBW) was set to 1% to 5% of the actual occupied bandwidth, the video bandwidth (VBW) was set 3 times greater than the RBW, and the span was set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency.</p> <p>The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined. The analyzer's display was plotted using a 'screen dump' utility.</p>


Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1
Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)	3.2
Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz)	3.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz)	3.4

Test Details	
Manufacturer	Chamberlain Group Inc
Model	001D9525-1-IND
S/N	NA
Mode	Continuous Transmission
Carrier Frequency	902.259MHz
Parameters	OBW = 187.6kHz
Notes	None

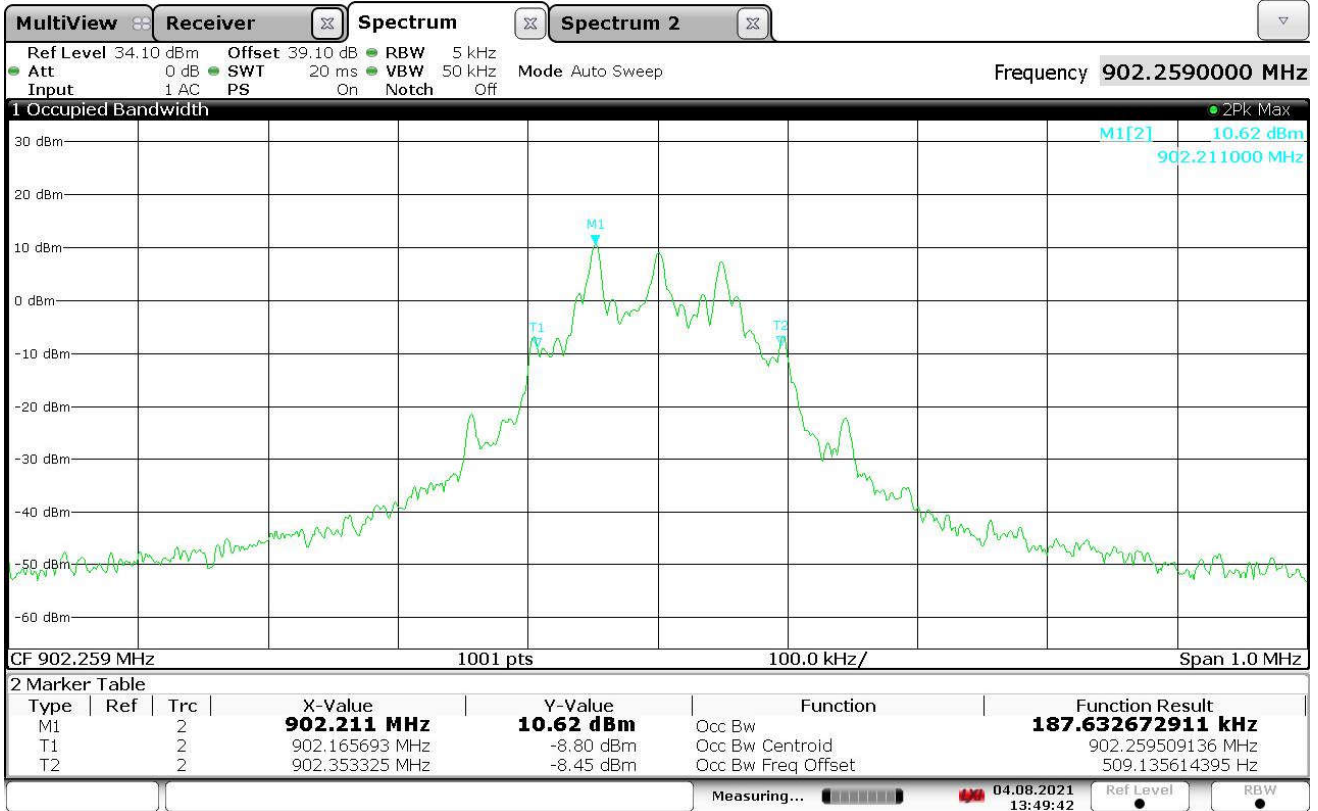


13:49:42 04.08.2021

Test Details	
Manufacturer	Chamberlain Group Inc
Model	001D9525-1-IND
S/N	NA
Mode	Continuous Transmission
Carrier Frequency	914.760MHz
Parameters	OBW = 187.5kHz
Notes	None

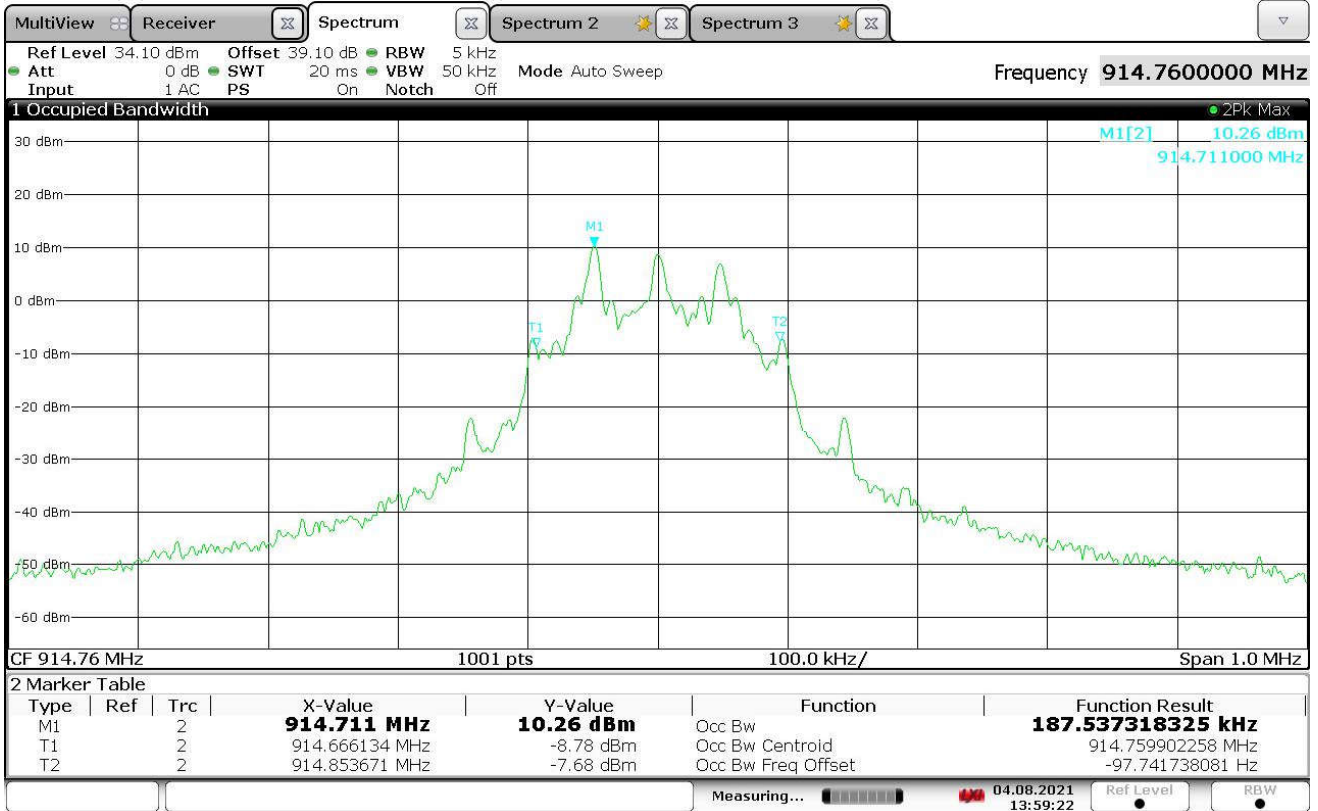

13:59:22 04.08.2021

Test Details	
Manufacturer	Chamberlain Group Inc
Model	001D9525-1-IND
S/N	NA
Mode	Continuous Transmission
Carrier Frequency	926.760MHz
Parameters	OBW = 192.13kHz
Notes	None

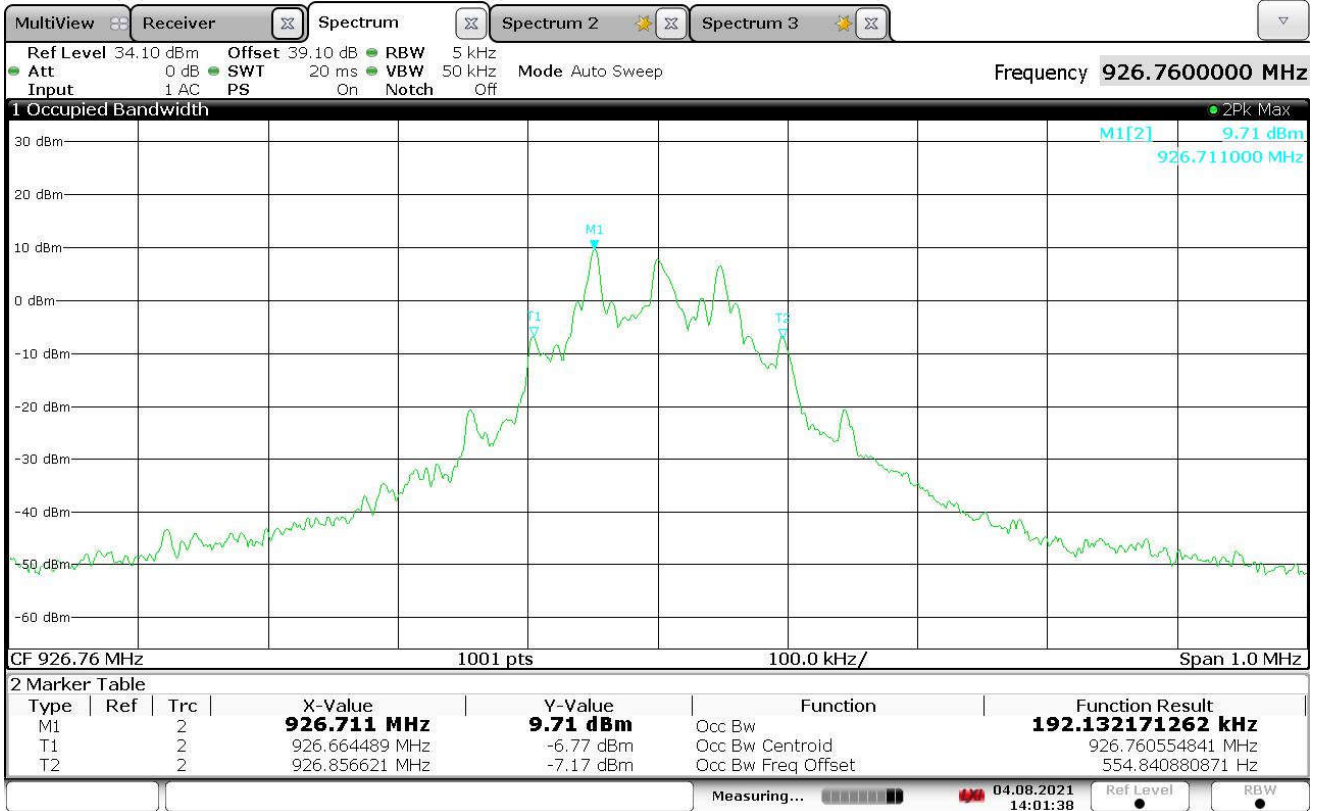

14:01:39 04.08.2021

25. Carrier Frequency Separation

Test Information	
Manufacturer	Chamberlain Group Inc
Product	Main/Control PCB Transceiver
Model	001D9525-1-IND
Serial No	NA
Mode	Frequency Hopping

Test Setup Details	
Setup Format	Tabletop
Height of Support	NA
Measurement Method	Antenna Conducted
Type of Test Site	EMC Workbench
Test site used	NA
Type of Antennas Used	NA
Notes	None

Requirements
Channel carrier frequencies shall be separated by a minimum of 25kHz or the 20dB bandwidth, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Procedures
<p>The antenna port of the EUT was connected to the spectrum analyzer through 40dB of attenuation. With the hopping function enabled, the EUT was allowed to transmit continuously. Span was set wide enough to capture the peaks of two adjacent channels. The resolution bandwidth was set to approximately 30% of the channel spacing. The peak detector and 'Max-Hold' function were engaged. The span was set wide enough to capture the peaks of at least two adjacent channels.</p> <p>When the trace had stabilized after multiple scans, the marker-delta function was used to determine the separation between the peaks of the adjacent channels. The analyzer's display was plotted using a 'screen dump' utility.</p>

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1
Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)	3.2
Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz)	3.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz)	3.4

Test Details	
Manufacturer	Chamberlain Group Inc
Model	001D9525-1-IND
S/N	NA
Mode	Frequency Hopping
Parameters	Separation = 500kHz
Notes	None



15:12:13 04.08.2021

26. Number of Carrier Channels

Test Information	
Manufacturer	Chamberlain Group Inc
Product	Main/Control PCB Transceiver
Model	001D9525-1-IND
Serial No	NA
Mode	Frequency Hopping


Test Setup Details	
Setup Format	Tabletop
Height of Support	NA
Measurement Method	Antenna Conducted
Type of Test Site	EMC Workbench
Test site used	NA
Type of Antennas Used	NA
Notes	None

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1
Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)	3.2
Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz)	3.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz)	3.4

Requirements
The system shall use at least 50 hopping frequencies.

Procedures
<p>The antenna port of the EUT was connected to the spectrum analyzer through 40dB of attenuation. With the hopping function enabled, the EUT was allowed to transmit continuously.</p> <p>The resolution bandwidth (RBW) was set to less than 30% of the channel spacing or the 20dB bandwidth, whichever is smaller. The peak detector and 'Max-Hold' function were engaged. The span was set wide enough to capture the entire frequency band of operation.</p> <p>The EUT's signal was allowed to stabilize after multiple scans. The number of hopping frequencies was counted. The analyzer's display was plotted using a 'screen dump' utility.</p>

Test Details	
Manufacturer	Chamberlain Group Inc
Model	001D9525-1-IND
S/N	NA
Mode	Frequency Hopping
Parameters	50 channels
Notes	None

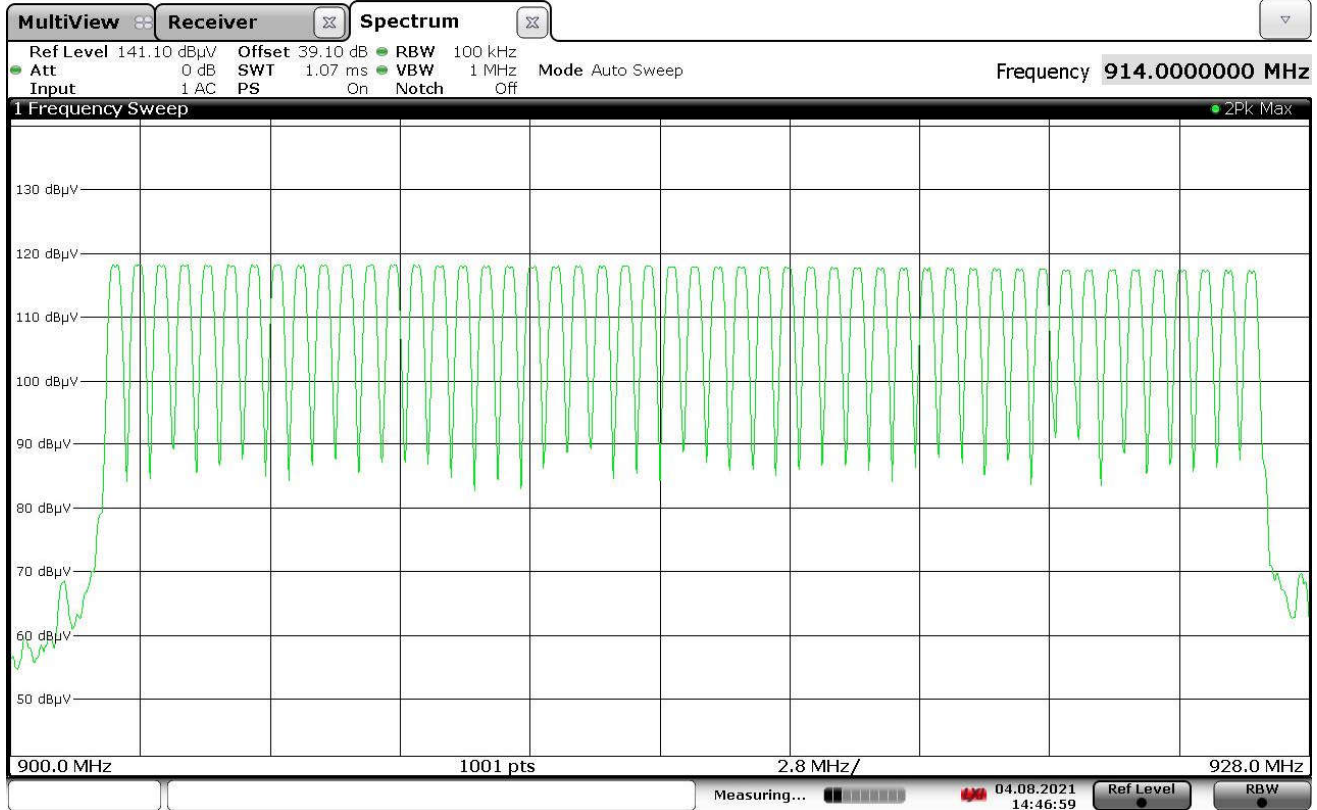

14:46:59 04.08.2021

27. Average Time of Occupancy

Test Information	
Manufacturer	Chamberlain Group Inc
Product	Main/Control PCB Transceiver
Model	001D9525-1-IND
Serial No	NA
Mode	Frequency Hopping

Test Setup Details	
Setup Format	Tabletop
Height of Support	NA
Measurement Method	Antenna Conducted
Type of Test Site	EMC Workbench
Test site used	NA
Type of Antennas Used	NA
Notes	None


Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1
Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)	3.2
Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz)	3.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz)	3.4

Requirements
The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period

Procedures
The antenna port of the EUT was connected to the spectrum analyzer through 40dB of attenuation. With the hopping function enabled, the EUT was allowed to transmit continuously. The spectrum analyzer was set to zero span centered on a hopping channel. The resolution bandwidth (RBW) was set \geq to the channel spacing. The sweep was set to capture the entire dwell time per hopping channel. The peak detector and 'Max-Hold' function were engaged. The analyzer's display was plotted using a 'screen dump' utility.


Test Details	
Manufacturer	Chamberlain Group Inc
Model	001D9525-1-IND
S/N	NA
Mode	Frequency Hopping
Parameters	Average Time of Occupancy Measured = 24×4×1.3msec = 124.8msec
Notes	None

20 Seconds

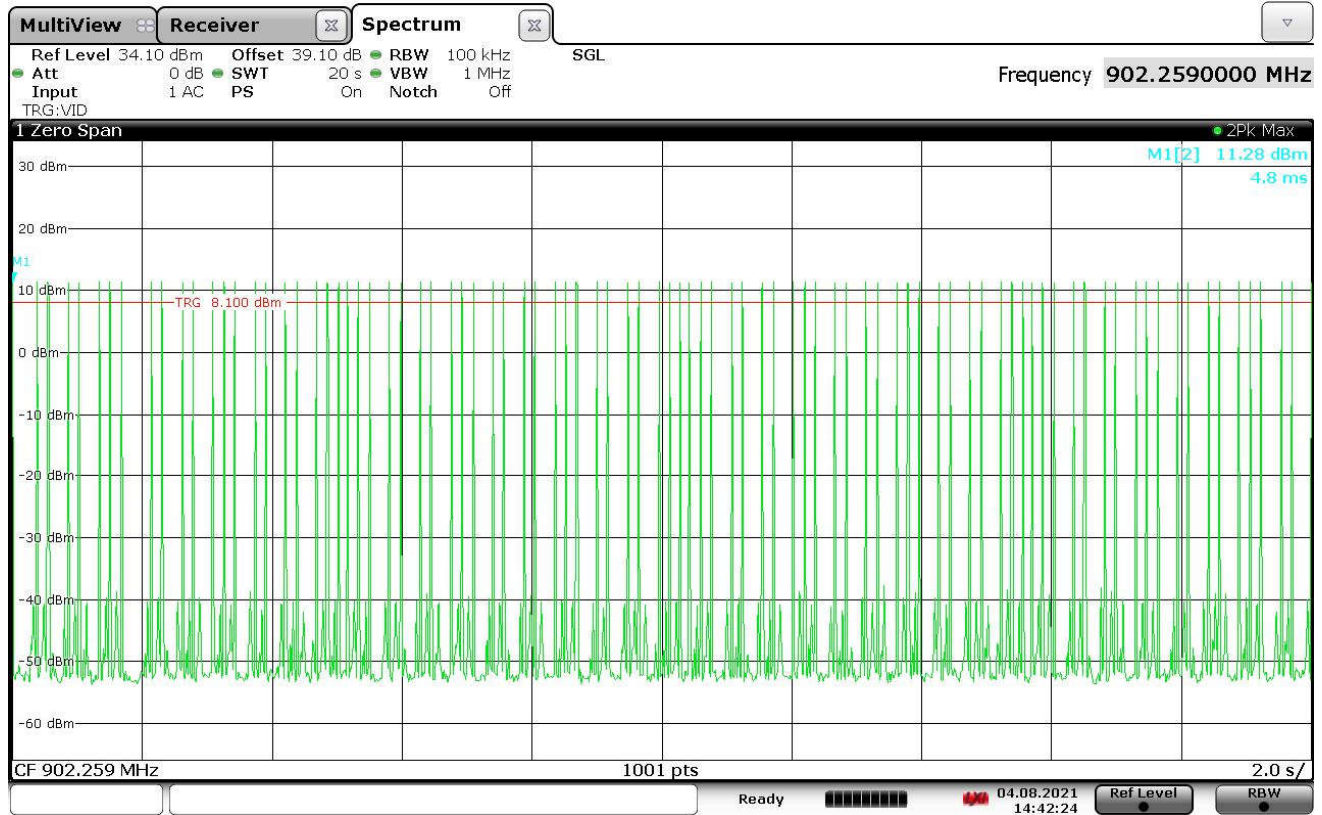


14:42:24 04.08.2021

5 Seconds – 24 pulses in 5 seconds

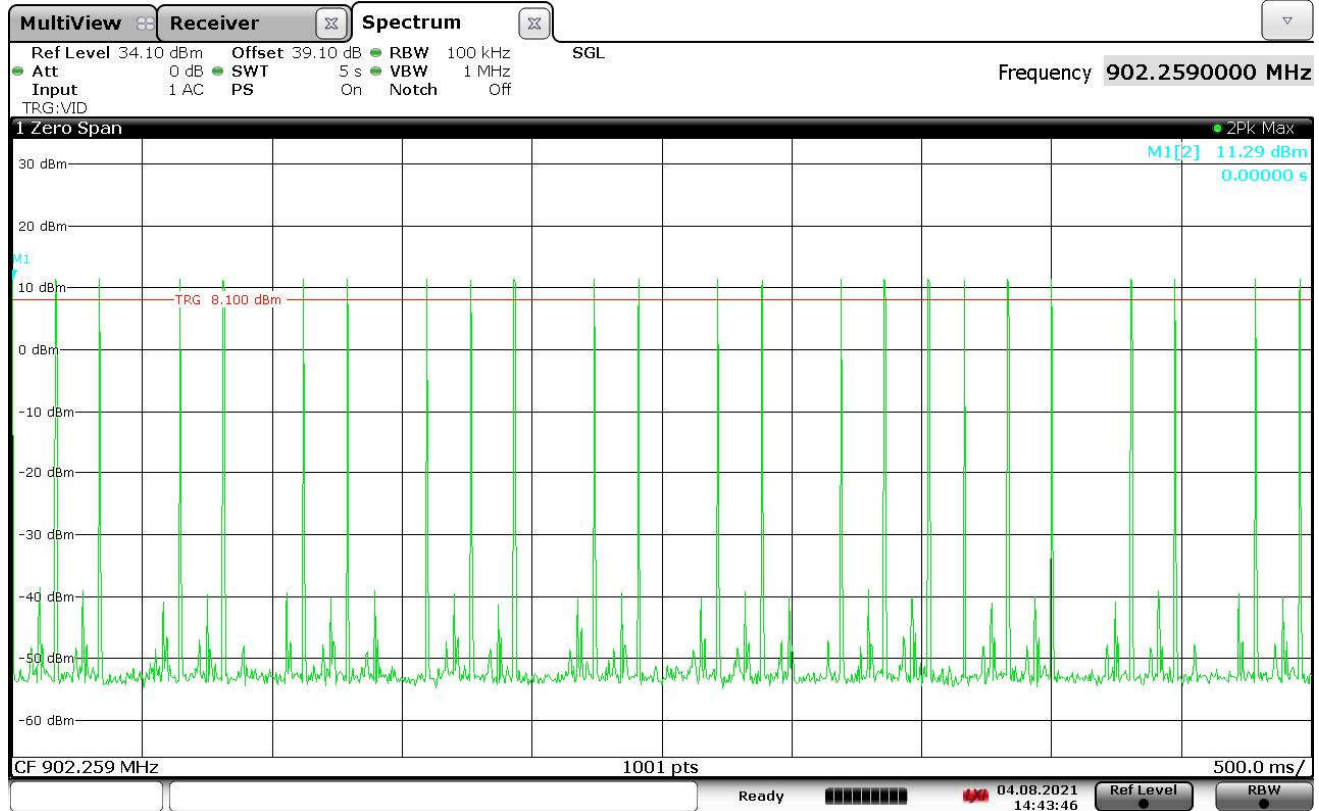

14:43:47 04.08.2021

100msec – length of a pulse = 1.3msec

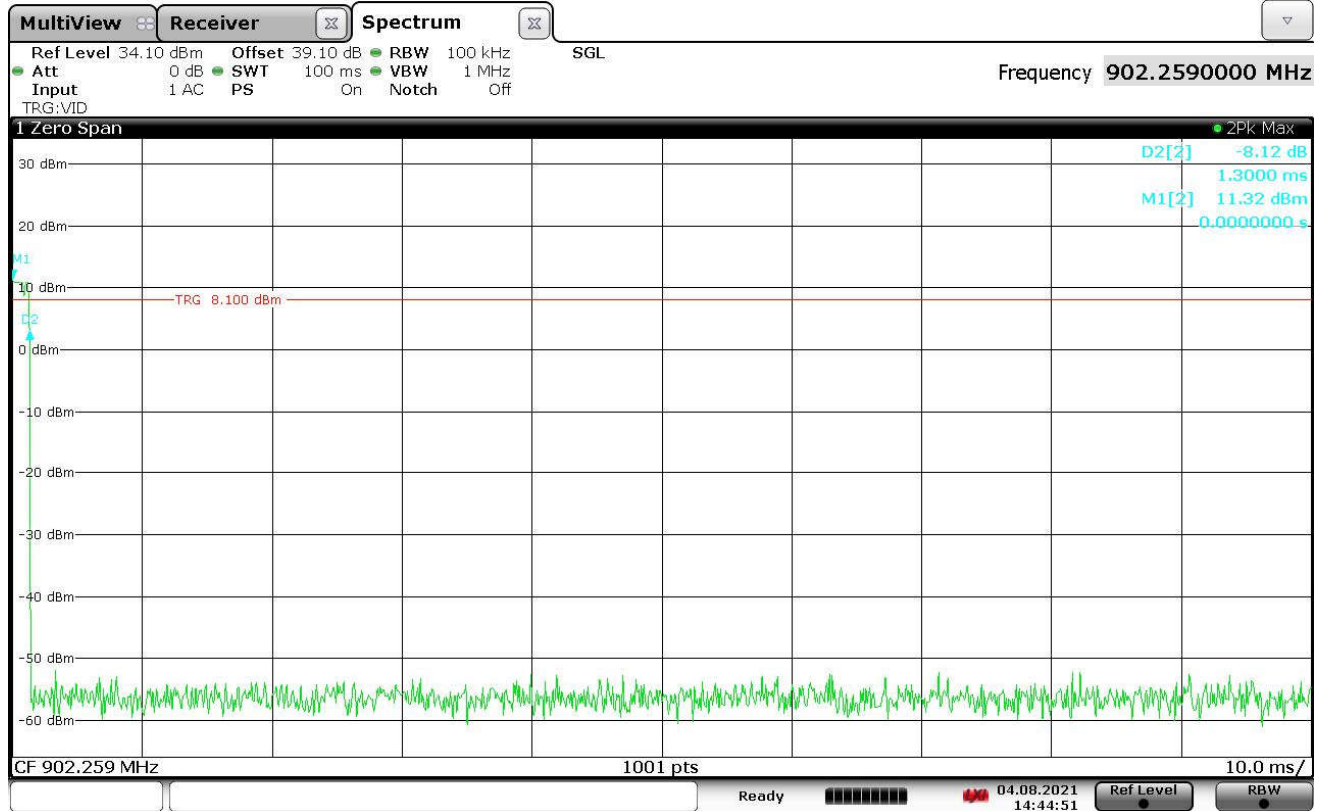

14:44:52 04.08.2021

28. Maximum Peak Conducted Output Power


Test Information	
Manufacturer	Chamberlain Group Inc
Product	Main/Control PCB Transceiver
Model	001D9525-1-IND
Serial No	NA
Mode	Continuous Transmission

Test Setup Details	
Setup Format	Tabletop
Height of Support	NA
Measurement Method	Antenna Conducted
Type of Test Site	EMC Workbench
Test site used	NA
Type of Antennas Used	NA
Notes	None

Requirements
The output power shall not exceed 1W (30dBm)


Procedures
<p>The antenna port of the EUT was connected to the spectrum analyzer through 40dB of attenuation. With the hopping function disabled, the EUT was allowed to transmit continuously. The frequency hopping channel was set separately to low, middle, and high hopping channels. The resolution bandwidth (RBW) was set to greater than the 20dB bandwidth. The span was set to approximately 5 times the 20 dB bandwidth. The 'Max-Hold' function was engaged. The maximum meter reading was recorded. The peak power output was calculated for the low, middle and high hopping frequencies.</p>

Test Details	
Manufacturer	Chamberlain Group Inc
Model	001D9525-1-IND
S/N	NA
Mode	Continuous Transmission
Carrier Frequency	902.259MHz
Parameters	Output Power = 13.3m W (11.24dBm)
Notes	None

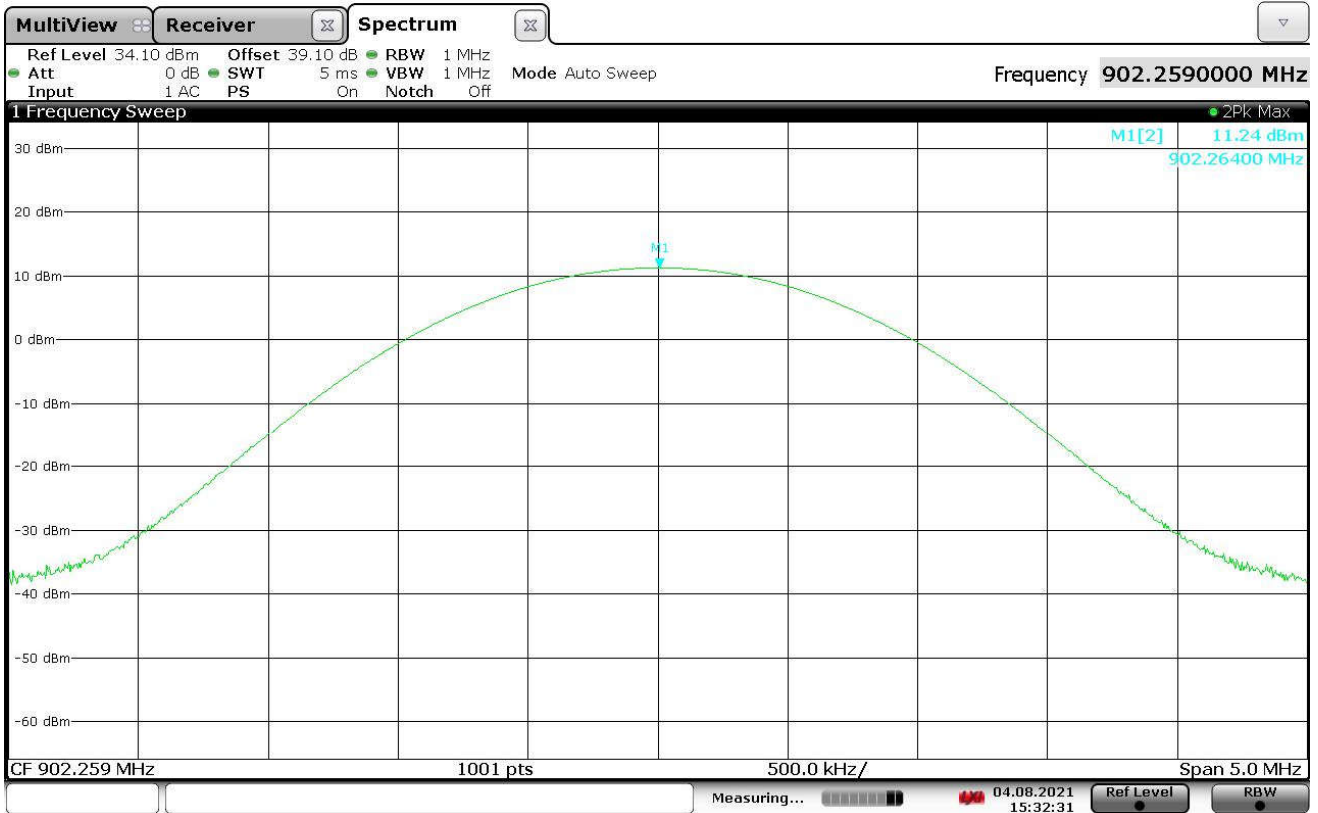

15:32:32 04.08.2021

Test Details	
Manufacturer	Chamberlain Group Inc
Model	001D9525-1-IND
S/N	NA
Mode	Continuous Transmission
Carrier Frequency	914.760MHz
Parameters	Output Power = 12.4mW (10.92dBm)
Notes	None

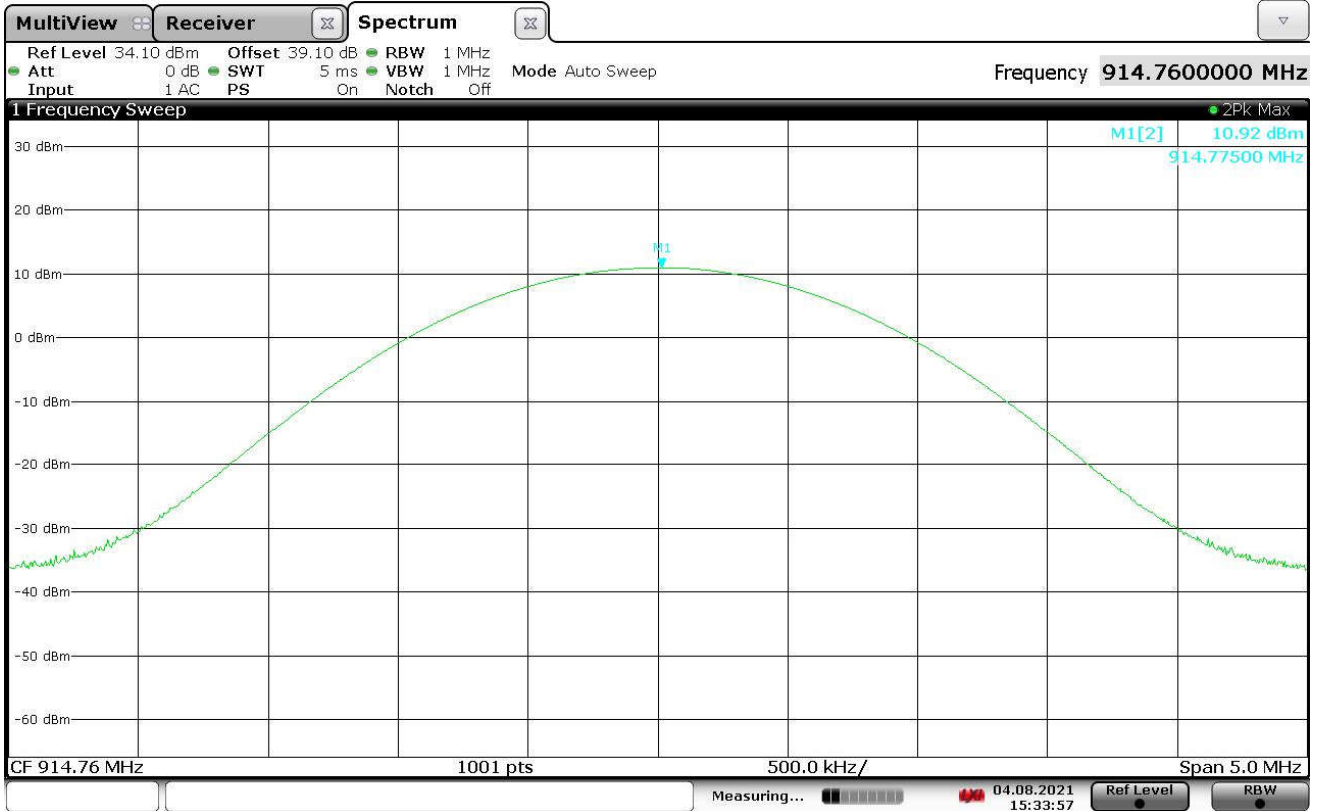

15:33:57 04.08.2021

Test Details	
Manufacturer	Chamberlain Group Inc
Model	001D9525-1-IND
S/N	NA
Mode	Continuous Transmission
Carrier Frequency	926.760MHz
Parameters	Output Power = 10.8mW (10.32dBm)
Notes	None



15:34:35 04.08.2021

29. Effective Isotropic Radiated Power (EIRP)

Test Information	
Manufacturer	Chamberlain Group Inc
Product	Main/Control PCB Transceiver
Model	001D9525-1-IND
Serial No	NA
Mode	Continuous Transmission

Test Setup Details	
Setup Format	Tabletop
Height of Support	NA
Measurement Method	Antenna Conducted
Type of Test Site	EMC Workbench
Test site used	NA
Type of Antennas Used	NA
Notes	None

Requirements
The output power shall not exceed 4W (36dBm).

Procedures
<p>The EUT was placed on the non-conductive stand and set to transmit. A bilog antenna was placed at a test distance of 3 meters from the EUT. The resolution bandwidth (RBW) of the spectrum analyzer was set to greater than the 20dB bandwidth. The span was set to approximately 5 times the 20 dB bandwidth. The EUT was maximized for worst case emissions (or maximum output power) at the measuring antenna. The maximum meter reading was recorded. The peak power output was measured for the low, middle and high hopping frequencies.</p> <p>The equivalent power was determined from the field intensity levels measured at 3 meters using the substitution method. To determine the emission power, a dipole antenna (double ridged waveguide antenna for all measurements above 1GHz) was then set in place of the EUT and connected to a calibrated signal generator. The output of the signal generator was adjusted to match the received level at the spectrum analyzer. The signal level was recorded. The reading was then corrected to compensate for cable loss (and antenna gain for all measurements above 1GHz), as required. The peak power output was calculated for low, middle, and high hopping frequencies.</p>

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1
Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)	3.2
Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz)	3.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz)	3.4

Test Details	
Manufacturer	Chamberlain Group Inc
Model	001D9525-1-IND
S/N	NA
Mode	Continuous Transmission
Carrier Frequency	902.259MHz
Parameters	EIRP = 7.8mW (8.9dBm)
Notes	None

Freq. (MHz)	Ant Pol	Wide BW Meter Reading (dBuV)	Matched Sig. Gen. Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
902.26	H	77.9	8.2	2.2	2.0	8.3	36.0	-27.7
902.26	V	73.9	8.9	2.2	2.0	9.0	36.0	-27.0

Test Details	
Manufacturer	Chamberlain Group Inc
Model	001D9525-1-IND
S/N	NA
Mode	Continuous Transmission
Carrier Frequency	914.760MHz
Parameters	EIRP = 10.5mW (10.2dBm)
Notes	None

Freq. (MHz)	Ant Pol	Wide BW Meter Reading (dBuV)	Matched Sig. Gen. Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
914.76	H	79.3	10.1	2.2	2.1	10.2	36.0	-25.8
914.76	V	75.2	8.7	2.2	2.1	8.8	36.0	-27.2

Test Details	
Manufacturer	Chamberlain Group Inc
Model	001D9525-1-IND
S/N	NA
Mode	Continuous Transmission
Carrier Frequency	926.760MHz
Parameters	EIRP = 11.5mW (10.6dBm)
Notes	None

Freq. (MHz)	Ant Pol	Wide BW Meter Reading (dBuV)	Matched Sig. Gen. Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
926.76	H	80.0	10.5	2.2	2.1	10.6	36.0	-25.4
926.76	V	76.0	9.2	2.2	2.1	9.3	36.0	-26.7

30. Duty Cycle Factor Measurements


Test Information	
Manufacturer	Chamberlain Group Inc
Product	Main/Control PCB Transceiver
Model	001D9525-1-IND
Serial No	NA
Mode	Frequency Hopping

Test Setup Details	
Setup Format	Tabletop
Height of Support	NA
Measurement Method	Antenna Conducted
Type of Test Site	EMC Workbench
Test site used	NA
Notes	None

Procedures
<p>The duty cycle factor is used to convert peak detected readings to average readings when pulsed modulation is employed. This factor is computed from the time domain trace of the pulse modulation signal.</p> <p>With the transmitter set up to transmit for maximum pulse density, the time domain trace is displayed on the spectrum analyzer. This trace is obtained by tuning center frequency to the transmitter frequency and then setting a zero span width with 10msec/div. The amplitude settings are adjusted so that the on/off transitions clear the 4th division from the bottom of the display. The markers are set at the beginning and end of the “on-time”. The trace is recorded.</p> <p>Next the spectrum analyzer center frequency is set to the transmitter frequency with a zero span width and 10msec/div. This shows if the word is longer than 100msec or shorter than 100msec. If the word period is less than 100msec, the display is set to show at least one word. The on-time and off-time are then measured. The on-time is total time signal level exceeds the 4th division. Off-time is time under for the word period. The duty cycle is then computed as the $(\text{On-time} / \text{word period})$ where the word period = $(\text{On-time} + \text{Off-time})$.</p>

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1
Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)	3.2
Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz)	3.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz)	3.4

Test Details	
Manufacturer	Chamberlain Group Inc
Model	001D9525-1-IND
S/N	NA
Mode	Continuous Transmission
Carrier Frequency	902.259MHz
Parameters	On time = 1.3msec
Notes	None

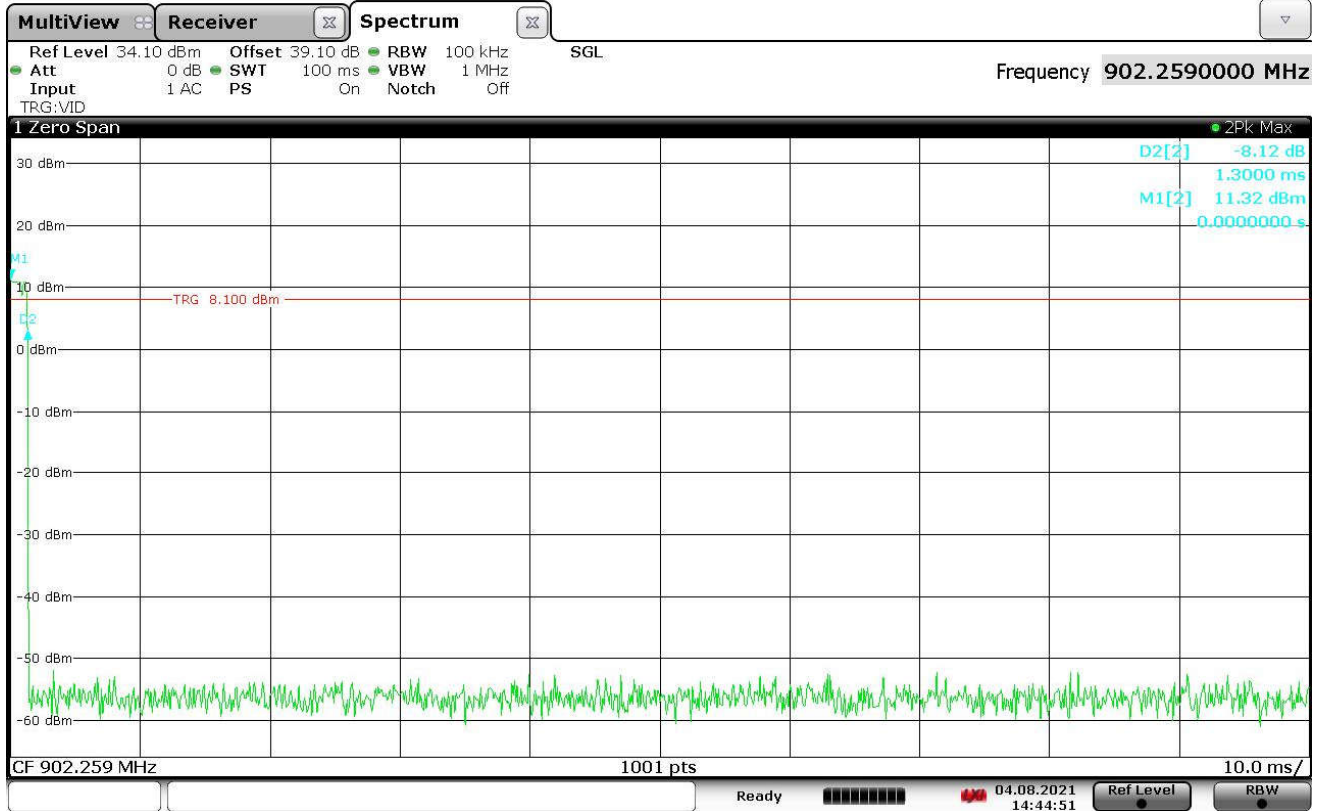

14:44:52 04.08.2021

$$\text{Duty Cycle Factor} = 20 \log \left(\frac{1.3\text{msec}}{100\text{msec}} \right) = -37.7\text{dB}$$

31. Spurious Radiated Emissions

Test Information	
Manufacturer	Chamberlain Group Inc
Product	Main/Control PCB Transceiver
Model	001D9525-1-IND
Serial No	NA
Mode	Continuous Transmission

Test Setup Details	
Setup Format	Tabletop
Height of Support	NA
Measurement Method	Radiated
Type of Test Site	Semi-Anechoic Chamber
Test site used	Room 29
Type of Antennas Used	Below 1GHz: Bilog (or equivalent) Above 1GHz: Double-ridged waveguide (or equivalent)
Notes	The cables were manually maximized during the preliminary emissions sweeps. The cable arrangement which resulted in the worst-case emissions was utilized.

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1
Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)	3.2
Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz)	3.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz)	3.4

Procedures
<p>Radiated measurements were performed in a 32ft. x 20ft. x 14ft. high shielded enclosure. The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads.</p> <p>Preliminary radiated emissions tests were performed to determine the emission characteristics of the EUT. For the preliminary test, a broadband measuring antenna was positioned at a 3 meter distance from the EUT. The entire frequency range from 30MHz to 10.0GHz was investigated using a peak detector function.</p> <p>The final open field emission tests were then manually performed over the frequency range of 30MHz to 10.0GHz.</p> <p>1) For all harmonics not in the restricted bands, the following procedure was used:</p> <p style="padding-left: 20px;">a) The field strength of the fundamental was measured using a bilog antenna. The bilog antenna was</p>


positioned at a 3 meter distance from the EUT. The EUT was placed on a non-conductive stand. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.

- b) The field strengths of all of the harmonics not in the restricted band were then measured using a double-ridged waveguide antenna. The waveguide antenna was positioned at a 3 meter distance from the EUT. The EUT was placed on a non-conductive stand. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.
 - c) To ensure that maximum or worst case emission levels at the fundamental and harmonics were measured, the following steps were taken when measuring the fundamental emissions and the spurious emissions:
 - i) The EUT was rotated so that all of its sides were exposed to the receiving antenna.
 - ii) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
 - iii) The measuring antenna was raised and lowered for each antenna polarization to maximize the readings.
 - iv) In instances where it was necessary to use a shortened cable between the measuring antenna and the spectrum analyzer. The measuring antenna was not raised or lowered to ensure maximized readings, instead the EUT was rotated through all axis to ensure the maximum readings were recorded for the EUT.
 - d) All harmonics not in the restricted bands must be at least 20 dB below levels measured at the fundamental. However, attenuation below the general limits specified in §15.209(a) is not required.
- 2) For all emissions in the restricted bands, the following procedure was used:
- a) The field strengths of all emissions below 1 GHz were measured using a bi-log antenna. The bi-log antenna was positioned at a 3 meter distance from the EUT. The EUT was placed on a non-conductive stand. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.
 - b) The field strengths of all emissions above 1 GHz were measured using a double-ridged waveguide antenna. The waveguide antenna was positioned at a 3 meter distance from the EUT. The EUT was placed on a non-conductive stand. A peak detector with a resolution bandwidth of 1 MHz was used on the spectrum analyzer.
 - c) To ensure that maximum or worst case emission levels were measured, the following steps were taken when taking all measurements:
 - i) The EUT was rotated so that all of its sides were exposed to the receiving antenna.
 - ii) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
 - iii) The measuring antenna was raised and lowered for each antenna polarization to maximize the readings.
 - iv) In instances where it was necessary to use a shortened cable between the measuring antenna and the spectrum analyzer. The measuring antenna was not raised or lowered to ensure maximized readings, instead the EUT was rotated through all axis to ensure the maximum readings were recorded for the EUT.
 - d) For all radiated emissions measurements below 1 GHz, if the peak reading is below the limits listed in 15.209(a), no further measurements are required. If however, the peak readings exceed the limits listed in 15.209(a), then the emissions are remeasured using a quasi-peak detector.
 - e) For all radiated emissions measurements above 1 GHz, the peak readings must comply with the 15.35(b) limits. 15.35(b) states that when average radiated emissions measurements are specified, there also is a limit on the peak level of the radiated emissions. The limit on the peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment


under test. Therefore, all peak readings above 1 GHz must be no greater than 20 dB above the limits specified in 15.209(a).

- f) Next, for all radiated emissions measurements above 1GHz, the resolution bandwidth was set to 1MHz. The analyzer was set to linear mode with a 10Hz video bandwidth in order to simulate an average detector. An average reading was taken.


If the dwell time per channel of the hopping signal is less than 100msec, then the meter reading may be further adjusted by a "duty cycle correction factor", derived from $20 \times \log(\text{On time}/100\text{msec})$. These readings must be no greater than the limits specified in 15.209(a).

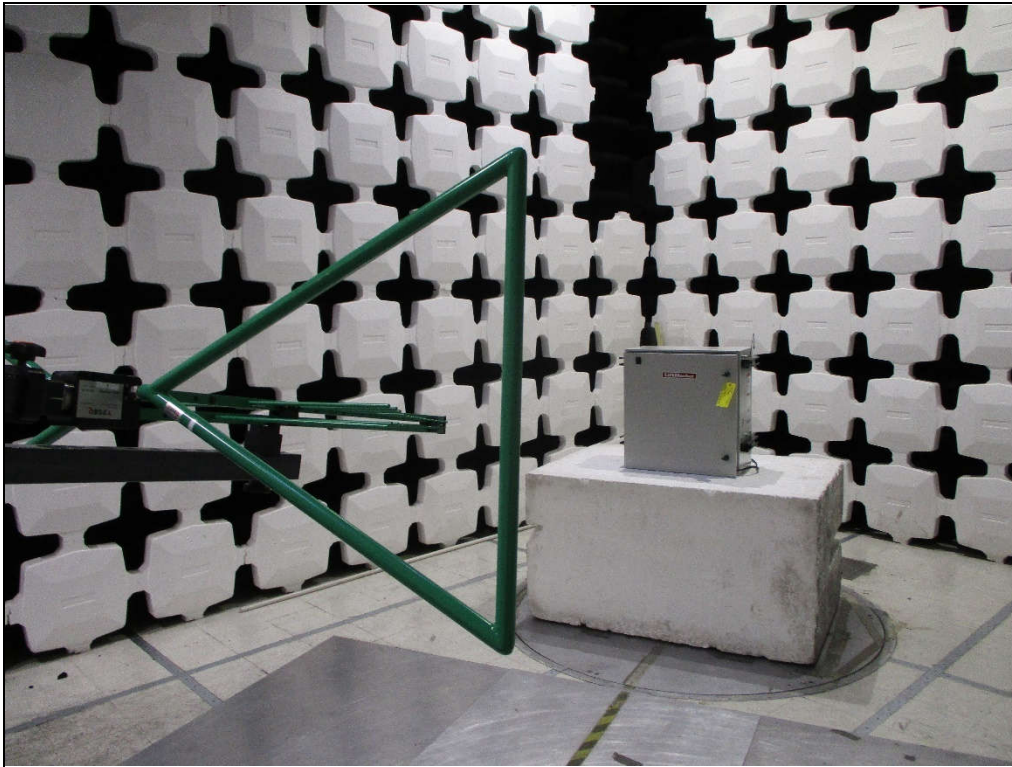


Test Setup for Spurious Radiated Emissions, 30-1000MHz – Antenna Polarization Horizontal

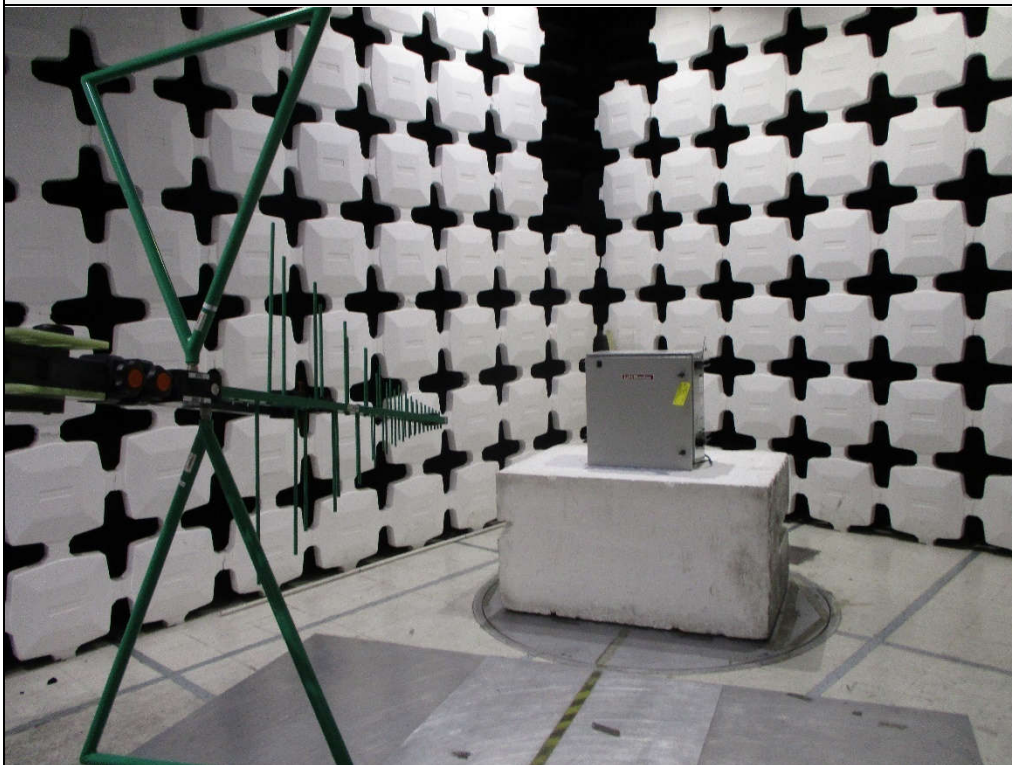

Test Setup for Spurious Radiated Emissions, 30-1000MHz – Antenna Polarization Vertical

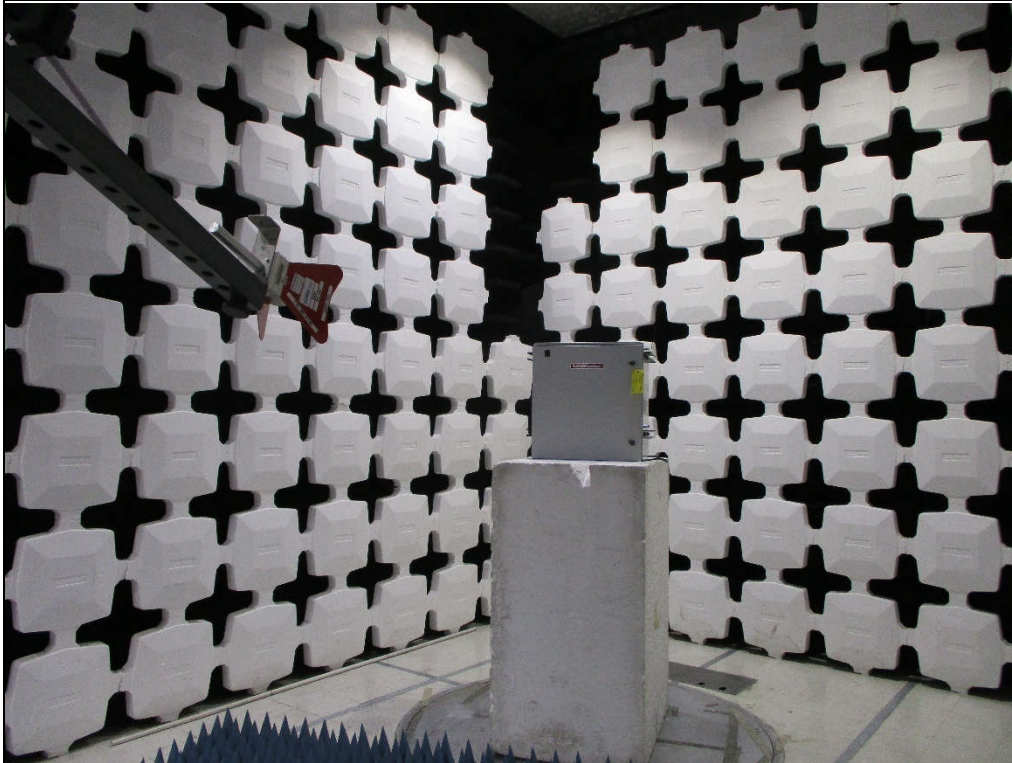

Test Setup for Spurious Radiated Emissions, Above 1GHz – Antenna Polarization
Horizontal

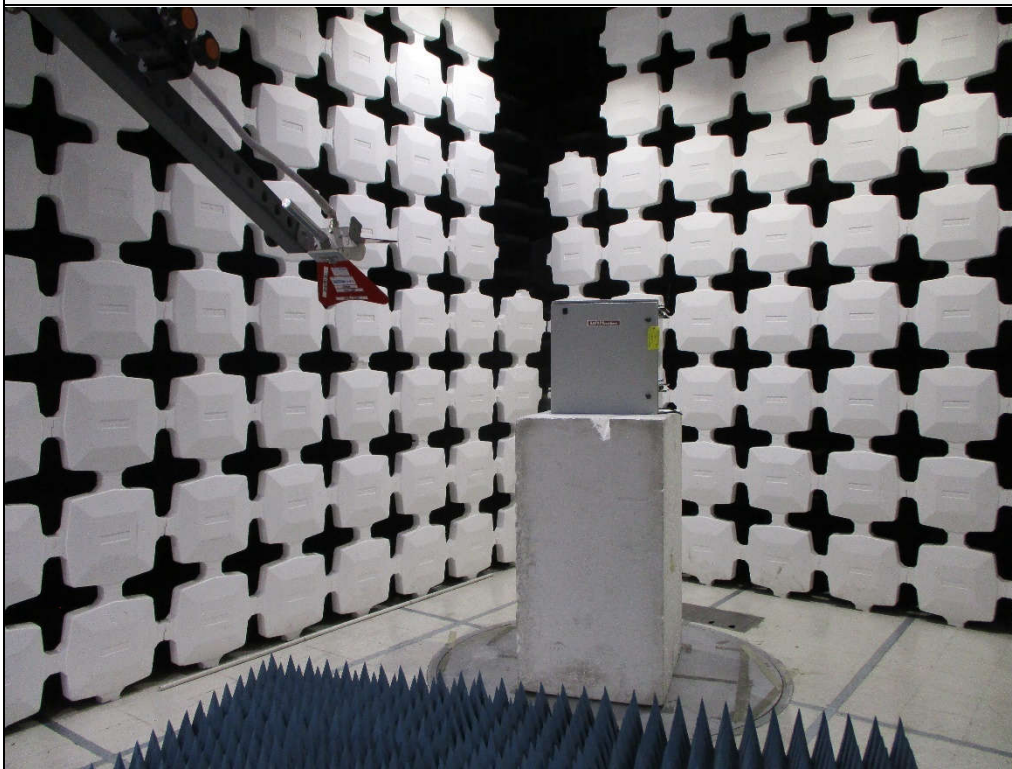

Test Setup for Spurious Radiated Emissions, Above 1GHz – Antenna Polarization
Vertical

Test Details	
Manufacturer	Chamberlain Group Inc
Model	001D9525-1-IND
S/N	NA
Mode	Continuous Transmission
Carrier Frequency	902.259MHz
Parameters	Peak Measurements in the Restricted Bands
Notes	None

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Peak Total dBuV/m at 3m	Peak Total uV/m at 3 m	Peak Limit uV/m at 3 m	Margin (dB)
2706.78	H	59.4		2.8	33.4	-40.2	55.5	592.6	5000.0	-18.5
2706.78	V	58.8		2.8	33.4	-40.2	54.8	549.9	5000.0	-19.2
3609.04	H	49.2		3.2	34.6	-39.5	47.5	238.5	5000.0	-26.4
3609.04	V	48.8		3.2	34.6	-39.5	47.1	227.7	5000.0	-26.8
4511.30	H	63.1		3.6	35.9	-39.6	63.0	1415.4	5000.0	-11.0
4511.30	V	59.5		3.6	35.9	-39.6	59.4	928.7	5000.0	-14.6
5413.55	H	49.7		3.9	36.6	-39.5	50.7	341.3	5000.0	-23.3
5413.55	V	49.3		3.9	36.6	-39.5	50.3	326.7	5000.0	-23.7
8120.33	H	53.2		4.9	38.3	-39.6	56.9	696.3	5000.0	-17.1
8120.33	V	50.8		4.9	38.3	-39.6	54.4	526.4	5000.0	-19.6
9022.59	H	47.2		4.9	38.6	-39.4	51.4	371.1	5000.0	-22.6
9022.59	V	47.1		4.9	38.6	-39.4	51.2	363.9	5000.0	-22.8

Test Details	
Manufacturer	Chamberlain Group Inc
Model	001D9525-1-IND
S/N	NA
Mode	Continuous Transmission
Carrier Frequency	902.259MHz
Parameters	Average Measurements in the Restricted Bands
Notes	None

Freq. MHz	Ant Pol	Meter Reading (dBUV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle (dB)	Average Total dBUV/m at 3m	Average Total uV/m at 3 m	Average Limit uV/m at 3 m	Margin (dB)
2706.78	H	56.78		2.8	33.4	-40.2	-37.7	15.1	5.7	500.0	-38.9
2706.78	V	55.3		2.8	33.4	-40.2	-37.7	13.6	4.8	500.0	-40.3
3609.04	H	38.5		3.2	34.6	-39.5	-37.7	-0.9	0.9	500.0	-54.9
3609.04	V	36.2		3.2	34.6	-39.5	-37.7	-3.2	0.7	500.0	-57.2
4511.30	H	61.5		3.6	35.9	-39.6	-37.7	23.7	15.3	500.0	-30.3
4511.30	V	56.8		3.6	35.9	-39.6	-37.7	19.0	8.9	500.0	-35.0
5413.55	H	35.8		3.9	36.6	-39.5	-37.7	-0.9	0.9	500.0	-54.9
5413.55	V	34.9		3.9	36.6	-39.5	-37.7	-1.8	0.8	500.0	-55.8
8120.33	H	48.6		4.9	38.3	-39.6	-37.7	14.5	5.3	500.0	-39.5
8120.33	V	41.9		4.9	38.3	-39.6	-37.7	7.8	2.5	500.0	-46.2
9022.59	H	34.0		4.9	38.6	-39.4	-37.7	0.4	1.0	500.0	-53.6
9022.59	V	33.8		4.9	38.6	-39.4	-37.7	0.2	1.0	500.0	-53.7

Test Details	
Manufacturer	Chamberlain Group Inc
Model	001D9525-1-IND
S/N	NA
Mode	Continuous Transmission
Carrier Frequency	902.259MHz
Parameters	Peak Measurements not in the Restricted Bands
Notes	None

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Peak Total dBuV/m at 3m	Peak Total uV/m at 3 m	Peak Limit uV/m at 3 m	Margin (dB)
902.26	H	77.5		1.5	26.5	0.0	105.6	189704.6		
902.26	V	73.6		1.5	26.5	0.0	101.6	120386.5		
1804.52	H	50.2		2.2	31.5	-40.1	43.8	154.2	18970.5	-41.8
1804.52	V	45.7		2.2	31.5	-40.1	39.3	92.3	18970.5	-46.3
6315.81	H	51.8		4.3	38.1	-39.6	54.6	536.1	18970.5	-31.0
6315.81	V	55.4		4.3	38.1	-39.6	58.2	814.2	18970.5	-27.3
7218.07	H	43.8		4.6	38.4	-39.7	47.2	229.0	18970.5	-38.4
7218.07	V	44.7		4.6	38.4	-39.7	48.1	254.6	18970.5	-37.4

Test Details	
Manufacturer	Chamberlain Group Inc
Model	001D9525-1-IND
S/N	NA
Mode	Continuous Transmission
Carrier Frequency	914.760MHz
Parameters	Peak Measurements in the Restricted Bands
Notes	None

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Peak Total dBuV/m at 3m	Peak Total uV/m at 3 m	Peak Limit uV/m at 3 m	Margin (dB)
2744.28	H	61.6		2.8	33.2	-40.2	57.5	747.6	5000.0	-16.5
2744.28	V	60.0		2.8	33.2	-40.2	55.8	619.6	5000.0	-18.1
3659.04	H	49.2		3.3	34.8	-39.5	47.8	244.1	5000.0	-26.2
3659.04	V	49.5		3.3	34.8	-39.5	48.0	251.0	5000.0	-26.0
4573.80	H	61.3		3.6	36.4	-39.7	61.5	1194.4	5000.0	-12.4
4573.80	V	59.1		3.6	36.4	-39.7	59.4	930.3	5000.0	-14.6
7318.08	H	48.2		4.7	38.2	-39.6	51.4	373.7	5000.0	-22.5
7318.08	V	50.1		4.7	38.2	-39.6	53.3	462.9	5000.0	-20.7
8232.84	H	48.6		4.9	38.4	-39.5	52.4	418.8	5000.0	-21.5
8232.84	V	48.3		4.9	38.4	-39.5	52.1	404.6	5000.0	-21.8
9147.60	H	47.6		5.0	38.7	-39.4	51.9	393.6	5000.0	-22.1
9147.60	V	47.5		5.0	38.7	-39.4	51.8	389.6	5000.0	-22.2

Test Details	
Manufacturer	Chamberlain Group Inc
Model	001D9525-1-IND
S/N	NA
Mode	Continuous Transmission
Carrier Frequency	914.760MHz
Parameters	Average Measurements in the Restricted Bands
Notes	None

Freq. MHz	Ant Pol	Meter Reading (dBUV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle (dB)	Average Total dBUV/m at 3m	Average Total uV/m at 3 m	Average Limit uV/m at 3 m	Margin (dB)
2744.28	H	59.55		2.8	33.2	-40.2	-37.7	17.7	7.6	500.0	-36.3
2744.28	V	57.7		2.8	33.2	-40.2	-37.7	15.9	6.2	500.0	-38.1
3659.04	H	35.7		3.3	34.8	-39.5	-37.7	-3.5	0.7	500.0	-57.5
3659.04	V	35.9		3.3	34.8	-39.5	-37.7	-3.3	0.7	500.0	-57.3
4573.80	H	58.7		3.6	36.4	-39.7	-37.7	21.3	11.6	500.0	-32.7
4573.80	V	56.4		3.6	36.4	-39.7	-37.7	18.9	8.8	500.0	-35.1
7318.08	H	35.0		4.7	38.2	-39.6	-37.7	0.6	1.1	500.0	-53.4
7318.08	V	35.9		4.7	38.2	-39.6	-37.7	1.4	1.2	500.0	-52.6
8232.84	H	36.7		4.9	38.4	-39.5	-37.7	2.8	1.4	500.0	-51.2
8232.84	V	35.7		4.9	38.4	-39.5	-37.7	1.8	1.2	500.0	-52.2
9147.60	H	34.9		5.0	38.7	-39.4	-37.7	1.5	1.2	500.0	-52.5
9147.60	V	34.8		5.0	38.7	-39.4	-37.7	1.4	1.2	500.0	-52.6

Test Details	
Manufacturer	Chamberlain Group Inc
Model	001D9525-1-IND
S/N	NA
Mode	Continuous Transmission
Carrier Frequency	914.760MHz
Parameters	Peak Measurements not in the Restricted Bands
Notes	None

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Peak Total dBuV/m at 3m	Peak Total uV/m at 3 m	Peak Limit uV/m at 3 m	Margin (dB)
914.76	H	79.2		1.6	26.4	0.0	107.2	228362.9		
914.76	V	75.1		1.6	26.4	0.0	103.1	142110.3		
1829.52	H	45.7		2.2	31.7	-40.1	39.5	94.3	22836.3	-47.7
1829.52	V	42.7		2.2	31.7	-40.1	36.5	67.0	22836.3	-50.7
5488.56	H	38.7		3.9	36.7	-39.4	39.9	99.3	22836.3	-47.2
5488.56	V	38.3		3.9	36.7	-39.4	39.5	94.3	22836.3	-47.7
6403.32	H	49.4		4.3	38.0	-39.5	52.1	403.8	22836.3	-35.0
6403.32	V	49.8		4.3	38.0	-39.5	52.6	425.8	22836.3	-34.6

Test Details	
Manufacturer	Chamberlain Group Inc
Model	001D9525-1-IND
S/N	NA
Mode	Continuous Transmission
Carrier Frequency	926.760MHz
Parameters	Peak Measurements in the Restricted Bands
Notes	None

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Peak Total dBuV/m at 3m	Peak Total uV/m at 3 m	Peak Limit uV/m at 3 m	Margin (dB)
2780.28	H	64.2		2.8	32.9	-40.1	59.8	981.4	5000.0	-14.1
2780.28	V	65.0		2.8	32.9	-40.1	60.6	1073.6	5000.0	-13.4
3707.04	H	51.0		3.3	34.4	-39.5	49.3	290.7	5000.0	-24.7
3707.04	V	50.1		3.3	34.4	-39.5	48.3	261.5	5000.0	-25.6
4633.80	H	55.1		3.6	36.7	-39.6	55.8	615.9	5000.0	-18.2
4633.80	V	55.9		3.6	36.7	-39.6	56.6	674.6	5000.0	-17.4
7414.08	H	49.3		4.7	38.0	-39.6	52.5	421.0	5000.0	-21.5
7414.08	V	49.6		4.7	38.0	-39.6	52.8	436.3	5000.0	-21.2
8340.84	H	50.6		4.9	38.3	-39.5	54.4	523.2	5000.0	-19.6
8340.84	V	49.9		4.9	38.3	-39.5	53.7	485.0	5000.0	-20.3

Test Details	
Manufacturer	Chamberlain Group Inc
Model	001D9525-1-IND
S/N	NA
Mode	Continuous Transmission
Carrier Frequency	926.760MHz
Parameters	Average Measurements in the Restricted Bands
Notes	None

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle (dB)	Average Total dBuV/m at 3m	Average Total uV/m at 3 m	Average Limit uV/m at 3 m	Margin (dB)
2780.28	H	60.56		2.8	32.9	-40.1	-37.7	18.5	8.4	500.0	-35.5
2780.28	V	60.5		2.8	32.9	-40.1	-37.7	18.4	8.4	500.0	-35.5
3707.04	H	44.4		3.3	34.4	-39.5	-37.7	4.9	1.8	500.0	-49.1
3707.04	V	42.5		3.3	34.4	-39.5	-37.7	3.0	1.4	500.0	-50.9
4633.80	H	51.2		3.6	36.7	-39.6	-37.7	14.2	5.1	500.0	-39.8
4633.80	V	53.7		3.6	36.7	-39.6	-37.7	16.7	6.8	500.0	-37.3
7414.08	H	39.8		4.7	38.0	-39.6	-37.7	5.3	1.8	500.0	-48.7
7414.08	V	41.0		4.7	38.0	-39.6	-37.7	6.5	2.1	500.0	-47.5
8340.84	H	40.8		4.9	38.3	-39.5	-37.7	6.9	2.2	500.0	-47.1
8340.84	V	41.2		4.9	38.3	-39.5	-37.7	7.3	2.3	500.0	-46.6

Test Details	
Manufacturer	Chamberlain Group Inc
Model	001D9525-1-IND
S/N	NA
Mode	Continuous Transmission
Carrier Frequency	926.760MHz
Parameters	Peak Measurements not in the Restricted Bands
Notes	None

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Peak Total dBuV/m at 3m	Peak Total uV/m at 3 m	Peak Limit uV/m at 3 m	Margin (dB)
926.76	H	80.0		1.6	26.8	0.0	108.4	261576.2		
926.76	V	75.3		1.6	26.8	0.0	103.6	151914.1		
1853.52	H	40.6		2.3	31.9	-40.1	34.6	53.8	26157.6	-53.7
1853.52	V	40.4		2.3	31.9	-40.1	34.4	52.5	26157.6	-54.0
5560.56	H	43.5		4.0	37.1	-39.4	45.1	180.3	26157.6	-43.2
5560.56	V	44.3		4.0	37.1	-39.4	46.0	199.1	26157.6	-42.4
6487.32	H	51.7		4.3	38.1	-39.5	54.7	542.6	26157.6	-33.7
6487.32	V	48.3		4.3	38.1	-39.5	51.3	365.6	26157.6	-37.1
9267.60	H	40.9		5.0	38.8	-39.4	45.4	186.4	26157.6	-42.9
9267.60	V	38.4		5.0	38.8	-39.4	42.9	139.3	26157.6	-45.5

32. Band-Edge Compliance

Test Information	
Manufacturer	Chamberlain Group Inc
Product	Main/Control PCB Transceiver
Model	001D9525-1-IND
Serial No	NA
Mode	Continuous Transmission and Frequency Hopping


Test Setup Details	
Setup Format	Tabletop
Height of Support	NA
Measurement Method	Antenna Conducted
Type of Test Site	EMC Workbench
Test site used	NA
Notes	None

Procedures	
<p>Low Band Edge</p> <ol style="list-style-type: none"> 1) The antenna port of the EUT was connected to the spectrum analyzer through 40dB of attenuation. 2) The EUT was set to transmit continuously at the channel closest to the low band-edge, hopping function disabled. 3) To determine the band edge compliance, the following spectrum analyzer settings were used: <ol style="list-style-type: none"> a. Center frequency = low band-edge frequency. b. Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation. c. Resolution bandwidth (RBW) \geq 1% of the span. d. The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined. e. The marker was set on the peak of the in-band emissions. A display line was placed 20dB down from the peak of the in-band emissions. All emissions which fall outside of the authorized band of operation must be below the 20dB down display line. (All emissions to the left of the center frequency (band-edge) must be below the display line.) f. The analyzer's display was plotted using a 'screen dump' utility. 4) Step 3) was repeated with the frequency hopping function enabled. <p>High Band Edge</p> <ol style="list-style-type: none"> 1) The antenna port of the EUT was connected to the spectrum analyzer through 40dB of attenuation. 2) The EUT was set to transmit continuously at the channel closest to the high band-edge, hopping function disabled. 3) To determine the band edge compliance, the following spectrum analyzer settings were used: <ol style="list-style-type: none"> a. Center frequency = high band-edge frequency. b. Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the 	

- authorized band of operation.
- c. Resolution bandwidth (RBW) \geq 1% of the span.
 - d. The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined.
 - e. The marker was set on the peak of the in-band emissions. A display line was placed 20dB down from the peak of the in-band emissions. All emissions which fall outside of the authorized band of operation must be below the 20dB down display line. (All emissions to the right of the center frequency (band-edge) must be below the display line.)
 - f. The analyzer's display was plotted using a 'screen dump' utility.
- 4) Step 3) was repeated with the frequency hopping function enabled.


Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1
Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)	3.2
Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz)	3.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz)	3.4

Test Details	
Manufacturer	Chamberlain Group Inc
Model	001D9525-1-IND
S/N	NA
Mode	Continuous Transmission
Carrier Frequency	902.259MHz
Parameters	Low Band-Edge
Notes	None

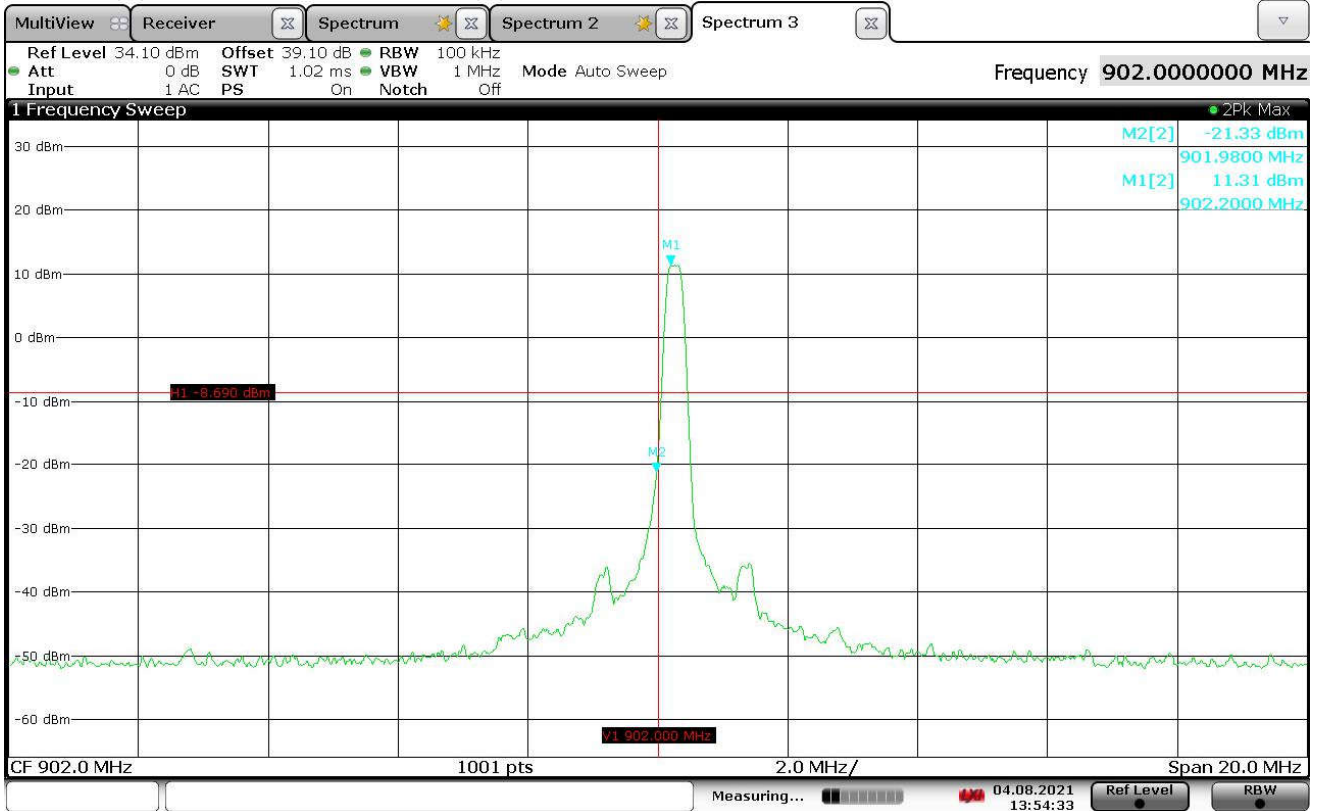


13:54:33 04.08.2021

Test Details	
Manufacturer	Chamberlain Group Inc
Model	001D9525-1-IND
S/N	NA
Mode	Continuous Transmission
Carrier Frequency	926.760MHz
Parameters	High Band-Edge
Notes	None

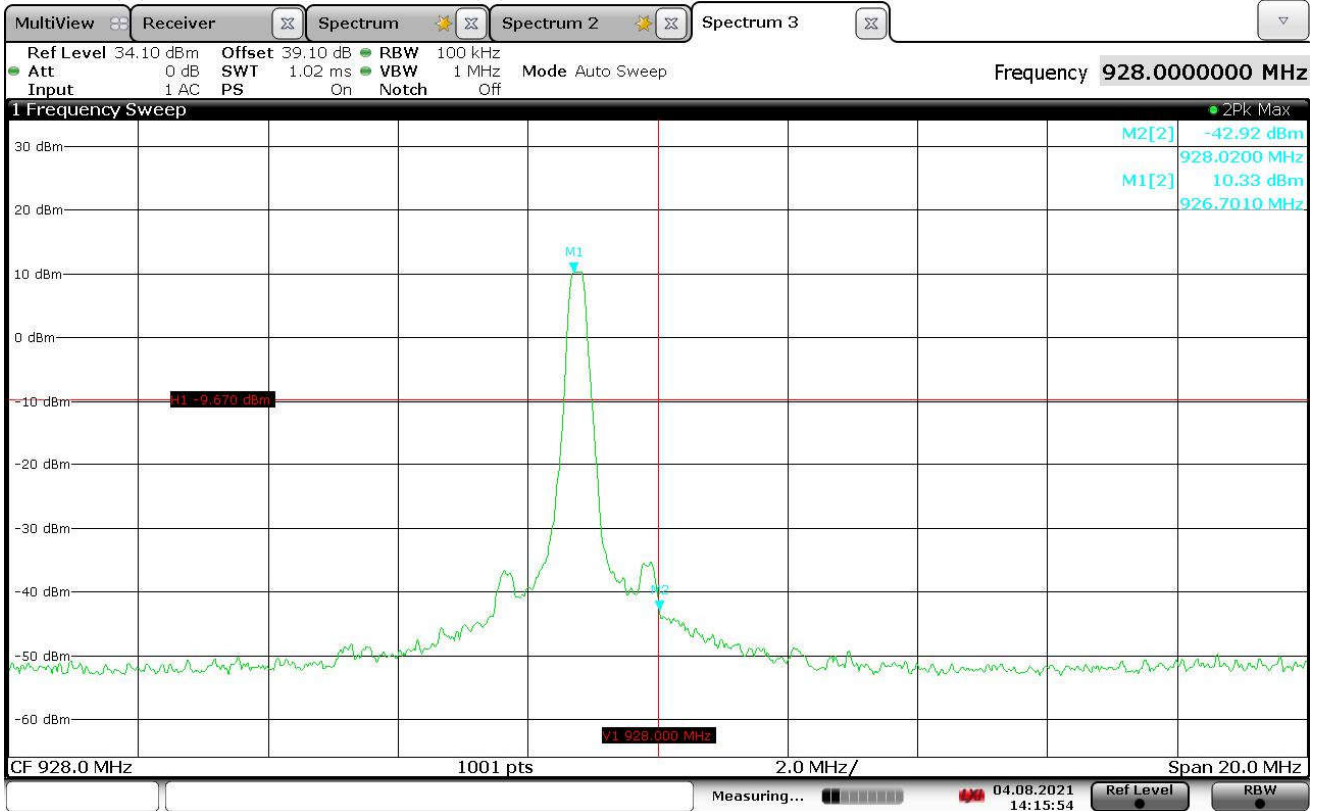


14:15:55 04.08.2021

Test Details	
Manufacturer	Chamberlain Group Inc
Model	001D9525-1-IND
S/N	NA
Mode	Continuous Transmission
Carrier Frequency	902.259MHz
Parameters	Low Band-Edge
Notes	Hopping Enabled

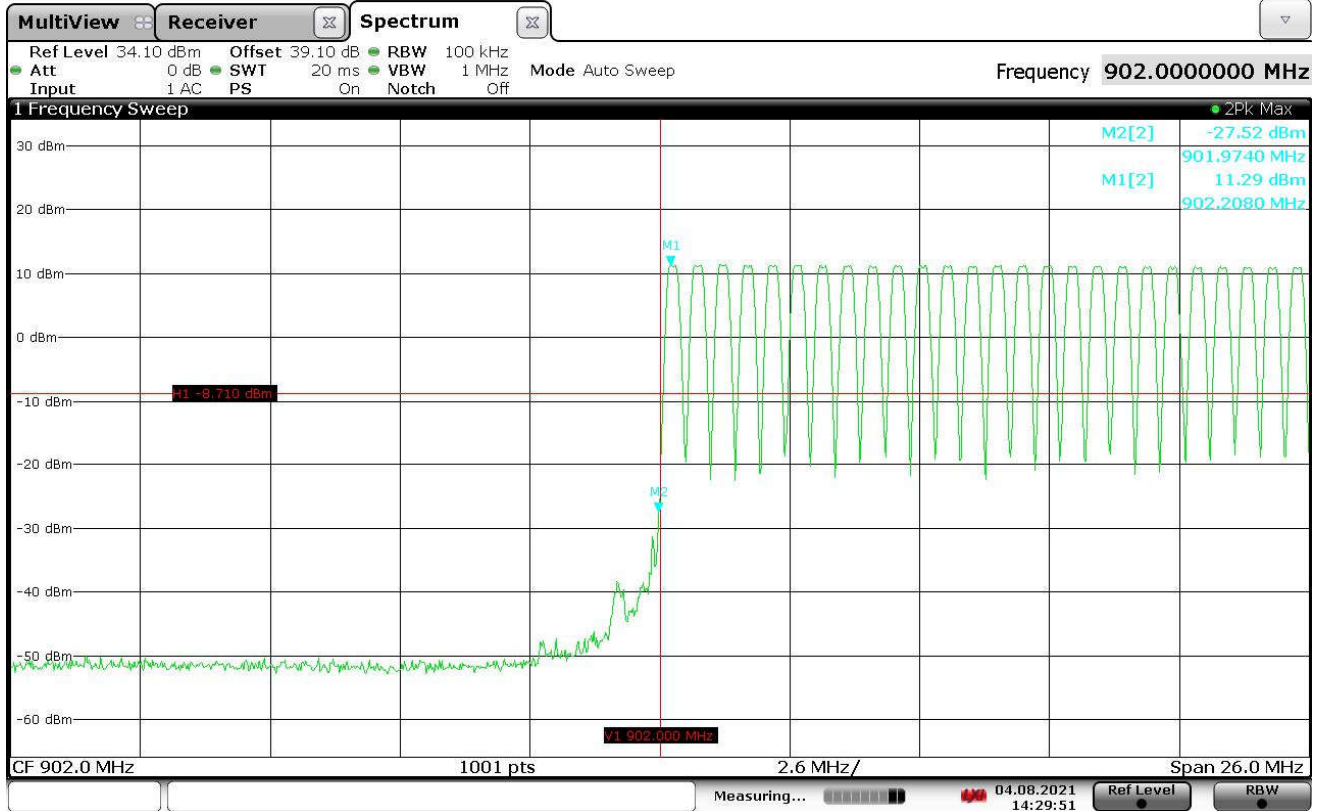

14:29:52 04.08.2021

Test Details	
Manufacturer	Chamberlain Group Inc
Model	001D9525-1-IND
S/N	NA
Mode	Continuous Transmission
Carrier Frequency	926.760MHz
Parameters	High Band-Edge
Notes	Hopping Enabled

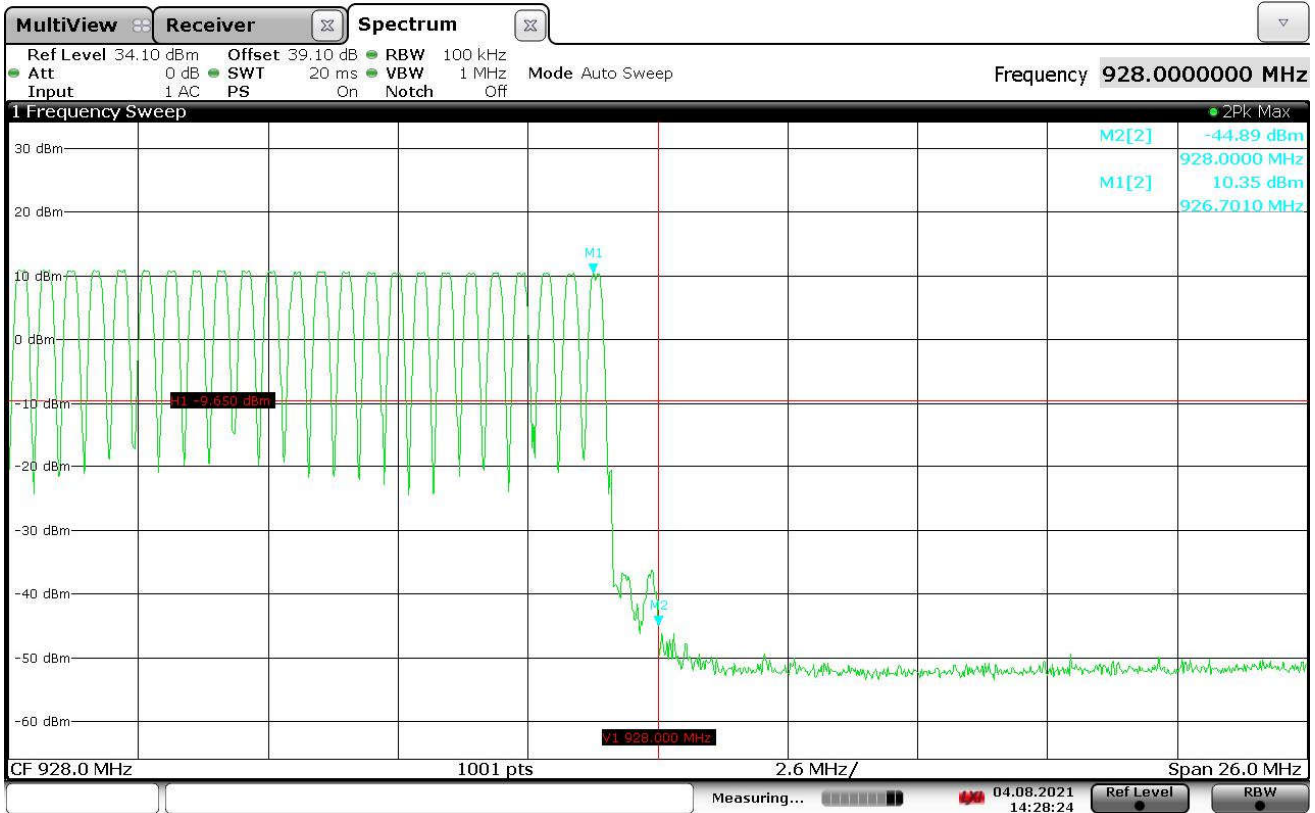

14:28:24 04.08.2021

33. Scope of Accreditation

SCOPE OF ACCREDITATION TO ISO/IEC 17025:2017

ELITE ELECTRONIC ENGINEERING, INC.
1516 Centre Circle
Downers Grove, IL 60515
Robert Bugielski (QA Manager) Phone: 630 495 9770 ext. 168
Email: rbugielski@elitetest.com
Craig Fanning (EMC Lab Manager) Phone: 630 495 9770 ext. 112
Email: cfanning@elitetest.com
Brandon Lugo (Automotive Team Leader) Phone: 630 495 9770 ext. 163
Email: blugo@elitetest.com
Richard King (FCC/Commercial Team Leader) Phone: 630 495 9770 ext. 123
Email: reking@elitetest.com
Website: www.elitetest.com

ELECTRICAL

Valid To: June 30, 2023

Certificate Number: 1786.01

In recognition of the successful completion of the A2LA Accreditation Program evaluation process, accreditation is granted to this laboratory to perform the following automotive electromagnetic compatibility and other electrical tests:

Test Technology:**Test Method(s) ¹:*****Transient Immunity***

ISO 7637-2 (including emissions); ISO 7637-3;
ISO 16750-2:2012, Sections 4.6.3 and 4.6.4;
CS-11979, Section 6.4; CS.00054, Section 5.9;
EMC-CS-2009.1 (CI220); FMC1278 (CI220, CI221, CI222);
GMW 3097, Section 3.5; SAE J1113-11; SAE J1113-12;
ECE Regulation 10.06 Annex 10

Electrostatic Discharge (ESD)

ISO 10605 (2001, 2008);
CS-11979 Section 7.0; CS.00054, Section 5.10;
EMC-CS-2009.1 (CI 280); FMC1278 (CI280); SAE J1113-13;
GMW 3097 Section 3.6

Conducted Emissions

CISPR 25 (2002, 2008), Sections 6.2 and 6.3;
CISPR 25 (2016), Sections 6.3 and 6.4;
CS-11979, Section 5.1; CS.00054, Sections 5.6.1 and 5.6.2;
GMW 3097, Section 3.3.2;
EMC-CS-2009.1 (CE 420); FMC1278 (CE420, CE421)

Radiated Emissions Anechoic

CISPR 25 (2002, 2008), Section 6.4;
CISPR 25 (2016), Section 6.5;
CS-11979, Section 5.3; CS.00054, Section 5.6.3;
GMW 3097, Section 3.3.1;
EMC-CS-2009.1 (RE 310); FMC1278 (RE310);
ECE Regulation 10.06 Annex 7 (Broadband)
ECE Regulation 10.06 Annex 8 (Narrowband)

(A2LA Cert. No. 1786.01) Revised 06/24/2021



Page 1 of 8

<u>Test Technology:</u>	<u>Test Method(s) ¹:</u>
<i>Vehicle Radiated Emissions</i>	CISPR 12; CISPR 36; ICES-002; ECE Regulation 10.06 Annex 5
<i>Bulk Current Injection (BCI)</i>	ISO 11452-4; CS-11979, Section 6.1; CS.00054, Section 5.8.1; GMW 3097, Section 3.4.1; SAE J1113-4; EMC-CS-2009.1 (RI112); FMC1278 (RI112); ECE Regulation 10.06 Annex 9
<i>Radiated Immunity Anechoic (Including Radar Pulse)</i>	ISO 11452-2; ISO 11452-5; CS-11979, Section 6.2; CS.00054, Section 5.8.2; GMW 3097, Section 3.4.2; EMC-CS-2009.1 (RI114); FMC1278 (RI114); SAE J1113-21; ECE Regulation 10.06 Annex 9
<i>Radiated Immunity Magnetic Field</i>	ISO 11452-8
<i>Radiated Immunity Reverb</i>	ISO/IEC 61000-4-21; GMW 3097, Section 3.4.3; EMC-CS-2009.1 (RI114); FMC1278 (RI114); ISO 11452-11
<i>Radiated Immunity (Portable Transmitters)</i>	ISO 11452-9; EMC-CS-2009.1 (RI115); FMC1278 (RI115)
<i>Vehicle Radiated Immunity (ALSE)</i>	ISO 11451-2; ECE Regulation 10.06 Annex 6
<i>Vehicle Product Specific EMC Standards</i>	EN 14982; EN ISO 13309, ISO 13766; EN 50498; EC Regulation No. 2015/208; EN 55012
<i>Electrical Loads</i>	ISO 16750-2
Emissions Radiated and Conducted (3m Semi-anechoic chamber, up to 40 GHz)	47 CFR, FCC Part 15 B (using ANSI C63.4:2014); 47 CFR, FCC Part 18 (using FCC MP-5:1986); ICES-001; ICES-003; ICES-005; IEC/CISPR 11, Ed. 4.1 (2004-06); AS/NZS CISPR 11 (2004); IEC/CISPR 11 Ed 5 (2009-05) + A1 (2010); KN 11 (2008-5) with RRL Notice No. 2008-3 (May 20, 2008); CISPR 11; EN 55011; KS C 9811; CNS 13803 (1997, 2003); CISPR 14-1; EN 55014-1; AS/NZS CISPR 14.1; KS C 9814-1; KN 14-1; IEC/CISPR 22 (1997); EN 55022 (1998) + A1(2000); EN 55022 (1998) + A1(2000) + A2(2003); EN 55022 (2006); IEC/CISPR 22 (2008-09); AS/NZS CISPR 22 (2004); AS/NZS CISPR 22, 3rd Edition (2006); KN 22 (up to 6 GHz); CNS 13438 (up to 6 GHz); VCCI V-3 (up to 6 GHz); CISPR 32; EN 55032; KS C 9832; KN 32; ECE Regulation 10.06 Annex 14
Cellular Radiated Spurious Emissions	ETSI TS 151 010-1 GSM; 3GPP TS 51.010-1, Sec 12; ETSI TS 134 124 UMTS; 3GPP TS 34.124; ETSI TS 136 124 LTE; E-UTRA; 3GPP TS 36.124

<u>Test Technology:</u>	<u>Test Method(s) ¹:</u>
Emissions (cont'd)	
Current Harmonics	IEC 61000-3-2; EN 61000-3-2; KN 61000-3-2; KS C 9610-3-2; ECE Regulation 10.06 Annex 11
Flicker and Fluctuations	IEC 61000-3-3; EN 61000-3-3; KN 61000-3-3; KS C 9610-3-3; ECE Regulation 10.06 Annex 12
Immunity	
Electrostatic Discharge	IEC 61000-4-2, Ed. 1.2 (2001); IEC 61000-4-2 (1995) + A1(1998) + A2(2000); EN 61000-4-2 (1995); EN 61000-4-2 (2009-05); KN 61000-4-2 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); IEC 61000-4-2; EN 61000-4-2; KN 61000-4-2; KS C 9610-4-2; IEEE C37.90.3 2001
Radiated Immunity	IEC 61000-4-3 (1995) + A1(1998) + A2(2000); IEC 61000-4-3, Ed. 3.0 (2006-02); IEC 61000-4-3, Ed. 3.2 (2010); KN 61000-4-3 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); IEC 61000-4-3; EN 61000-4-3; KN 61000-4-3; KS C 9610-4-3; IEEE C37.90.2 2004
Electrical Fast Transient/Burst	IEC 61000-4-4, Ed. 2.0 (2004-07); IEC 61000-4-4, Ed. 2.1 (2011); IEC 61000-4-4 (1995) + A1(2000) + A2(2001); KN 61000-4-4 (2008-5); RRL Notice No. 2008-5 (May 20, 2008); IEC 61000-4-4; EN 61000-4-4; KN 61000-4-4; KS C 9610-4-4; ECE Regulation 10.06 Annex 15
Surge	IEC 61000-4-5 (1995) + A1(2000); IEC 61000-4-5, Ed 1.1 (2005-11); EN 61000-4-5 (1995) + A1(2001); KN 61000-4-5 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); IEC 61000-4-5; EN 61000-4-5; KN 61000-4-5; KS C 9610-4-5; IEEE C37.90.1 2012; IEEE STD C62.41.2 2002; ECE Regulation 10.06 Annex 16
Conducted Immunity	IEC 61000-4-6 (1996) + A1(2000); IEC 61000-4-6, Ed 2.0 (2006-05); IEC 61000-4-6 Ed. 3.0 (2008); KN 61000-4-6 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); EN 61000-4-6 (1996) + A1(2001); IEC 61000-4-6; EN 61000-4-6; KN 61000-4-6; KS C 9610-4-6

<u>Test Technology:</u>	<u>Test Method(s) ¹:</u>
Immunity (cont'd)	
Power Frequency Magnetic Field Immunity (<i>Down to 3 A/m</i>)	IEC 61000-4-8 (1993) + A1(2000); IEC 61000-4-8 (2009); EN 61000-4-8 (1994) + A1(2000); KN 61000-4-8 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); IEC 61000-4-8; EN 61000-4-8; KN 61000-4-8; KS C 9610-4-8
Voltage Dips, Short Interrupts, and Line Voltage Variations	IEC 61000-4-11, Ed. 2 (2004-03); KN 61000-4-11 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); IEC 61000-4-11; EN 61000-4-11; KN 61000-4-11; KS C 9610-4-11
Ring Wave	IEC 61000-4-12, Ed. 2 (2006-09); EN 61000-4-12:2006; IEC 61000-4-12; EN 61000-4-12; KN 61000-4-12; IEEE STD C62.41.2 2002
Generic and Product Specific EMC Standards	IEC/EN 61000-6-1; AS/NZS 61000-6-1; KN 61000-6-1; KS C 9610-6-1; IEC/EN 61000-6-2; AS/NZS 61000-6-2; KN 61000-6-2; KS C 9610-6-2; IEC/EN 61000-6-3; AS/NZS 61000-6-3; KN 61000-6-3; KS C 9610-6-3; IEC/EN 61000-6-4; AS/NZS 61000-6-4; KN 61000-6-4; KS C 9610-6-4; EN 50130-4; EN 61326-1; EN 50121-3-2; EN 12895; EN 50270; EN 50491-1; EN 50491-2; EN 50491-3; EN 55015; EN 60730-1; EN 60945; IEC 60533; EN 61326-2-6; EN 61800-3; IEC/CISPR 14-2; EN 55014-2; AS/NZS CISPR 14.2; KN 14-2; KS C 9814-2; IEC/CISPR 24; AS/NZS CISPR 24; EN 55024; KN 24; IEC/CISPR 35; AS/NZS CISPR 35; EN 55035; KN 35; KS C 9835; IEC 60601-1-2; JIS T0601-1-2
<i>TxRx EMC Requirements</i>	EN 301 489-1; EN 301 489-3; EN 301 489-9; EN 301 489-17; EN 301 489-19; EN 301 489-20
<i>European Radio Test Standards</i>	ETSI EN 300 086-1; ETSI EN 300 086-2; ETSI EN 300 113-1; ETSI EN 300 113-2; ETSI EN 300 220-1; ETSI EN 300 220-2; ETSI EN 300 220-3-1; ETSI EN 300 220-3-2; ETSI EN 300 330-1; ETSI EN 300 330-2; ETSI EN 300 440-1; ETSI EN 300 440-2; ETSI EN 300 422-1; ETSI EN 300 422-2; ETSI EN 300 328; ETSI EN 301 893; ETSI EN 301 511; ETSI EN 301 908-1; ETSI EN 908-2; ETSI EN 908-13; ETSI EN 303 413; ETSI EN 302 502; EN 303 340; EN 303 345-2; EN 303 345-3; EN 303 345-4

<u>Test Technology:</u>	<u>Test Method(s) ¹:</u>
<i>Canadian Radio Tests</i>	RSS-102 (RF Exposure Evaluation only); RSS-111; RSS-112; RSS-117; RSS-119; RSS-123; RSS-125; RSS-127; RSS-130; RSS-131; RSS-132; RSS-133; RSS-134; RSS-135; RSS-137; RSS-139; RSS-140; RSS-141; RSS-142; RSS-170; RSS-181; RSS-182; RSS-191; RSS-192; RSS-194; RSS-195; RSS-196; RSS-197; RSS-199; RSS-210; RSS-211; RSS-213; RSS-215; RSS-216; RSS-220; RSS-222; RSS-236; RSS-238; RSS-243; RSS-244; RSS-247; RSS-251; RSS-252; RSS-287; RSS-288; RSS-310; RSS-GEN
<i>Mexico Radio Tests</i>	IFT-008-2015; NOM-208-SCFI-2016
<i>Japan Radio Tests</i>	Radio Law No. 131, Ordinance of MPT No. 37, 1981, MIC Notification No. 88:2004, Table No. 22-11; ARIB STD-T66, Regulation 18
<i>Taiwan Radio Tests</i>	LP-0002 (July 15, 2020)
<i>Australia/New Zealand Radio Tests</i>	AS/NZS 4268; Radiocommunications (Short Range Devices) Standard (2014)
<i>Hong Kong Radio Tests</i>	HKCA 1039 Issue 6; HKCA 1042; HKCA 1033 Issue 7; HKCA 1061; HKCA 1008; HKCA 1043; HKCA 1057; HKCA 1073
<i>Korean Radio Test Standards</i>	KN 301 489-1; KN 301 489-3; KN 301 489-9; KN 301 489-17; KN 301 489-52; KS X 3124; KS X 3125; KS X 3130; KS X 3126; KS X 3129
<i>Vietnam Radio Test Standards</i>	QCVN 47:2015/BTTTT; QCVN 54:2020/BTTTT; QCVN 55:2011/BTTTT; QCVN 65:2013/BTTTT; QCVN 73:2013/BTTTT; QCVN 74:2020/BTTTT; QCVN 112:2017/BTTTT; QCVN 117:2020/BTTTT
<i>Vietnam EMC Test Standards</i>	QCVN 18:2014/BTTTT; QCVN 86:2019/BTTTT; QCVN 96:2015/BTTTT; QCVN 118:2018/BTTTT
<i>Unlicensed Radio Frequency Devices (3 Meter Semi-Anechoic Room)</i>	47 CFR FCC Part 15C, 15D, 15E, 15F, 15G, 15H (using ANSI C63.10:2013, ANSI C63.17:2013 and FCC KDB 905462 D02 (v02))
<i>Licensed Radio Service Equipment</i>	47 CFR FCC Parts 20, 22, 24, 25, 27, 30, 73, 74, 80, 87, 90, 95, 96, 97, 101 (using ANSI/TIA-603-E, TIA-102.CAAA-E, ANSI C63.26:2015)

Test Technology:

OIA (Over the Air) Performance
 GSM, GPRS, EGPRS
 UMTS (W-CDMA)
 LTE including CAT M1
 A-GPS for UMTS/GSM
 LTS A-GPS, A-GLONASS,
 SIB8/SIB16
 Large Device/Laptop/Tablet Testing
 Integrated Device Testing
 WiFi 802.11 a/b/g/n/a

Test Method(s) ¹:

CTIA Test Plan for Wireless Device Over-the-Air Performance (Method for Measurement for Radiated Power and Receiver Performance) V3.8.2;
 CTIA Test Plan for RF Performance Evaluation of WiFi Mobile Converged Devices V2.1.0

Electrical Measurements and Simulation

AC Voltage / Current

(1mV to 5kV) 60 Hz
 (0.1V to 250V) up to 500 MHz
 (1µA to 150A) 60 Hz

FAA AC 150/5345-10H
 FAA AC 150/5345-43J
 FAA AC 150/5345-44K

DC Voltage / Current

(1mV to 15-kV) / (1µA to 10A)

FAA AC 150/5345-46E
 FAA AC 150/5345-47C

Power Factor / Efficiency / Crest Factor
 (Power to 30kW)

FAA EB 67D

Resistance

(1mΩ to 4000MΩ)

Surge

(Up to 10 kV / 5 kA) (Combination Wave and Ring Wave)

On the following products and materials:

Telecommunications Terminal Equipment (TTE), Radio Equipment, Network Equipment, Information Technology Equipment (ITE), Automotive Electronic Equipment, Automotive Hybrid Electronic Devices, Maritime Navigation and Radio Communication Equipment and Systems, Vehicles, Boats and Internal Combustion Engine Driven Devices, Automotive, Aviation, and General Lighting Products, Medical Electrical Equipment, Motors, Industrial, Scientific and Medical (ISM) Radio-Frequency Equipment, Household Appliances, Electric Tools, Low-voltage Switchgear and Control gear, Programmable Controllers, Electrical Equipment for Measurement, Control and Laboratory Use, Base Materials, Power and Data Transmission Cables and Connectors

¹ When the date, edition, version, etc. is not identified in the scope of accreditation, laboratories may use the version that immediately precedes the current version for a period of one year from the date of publication of the standard measurement method, per part C., Section 1 of A2LA R101 - General Requirements - Accreditation of ISO-IEC 17025 Laboratories.

Testing Activities Performed in Support of FCC Certification in Accordance with 47 Code of Federal Regulations and FCC KDB 974614, Appendix A, Table A.1²

Rule Subpart/Technology	Test Method	Maximum Frequency (MHz)
<u>Unintentional Radiators</u> Part 15B	ANSI C63.4:2014	40000

Testing Activities Performed in Support of FCC Certification in Accordance with 47 Code of Federal Regulations and FCC KDB 974614, Appendix A, Table A.1²

Rule Subpart/Technology	Test Method	Maximum Frequency (MHz)
<u>Industrial, Scientific, and Medical Equipment</u> Part 18	FCC MP-5 (February 1986)	40000
<u>Intentional Radiators</u> Part 15C	ANSI C63.10:2013	40000
<u>Unlicensed Personal Communication Systems Devices</u> Part 15D	ANSI C63.17:2013	40000
<u>U-NII without DFS Intentional Radiators</u> Part 15E	ANSI C63.10:2013	40000
<u>U-NII with DFS Intentional Radiators</u> Part 15E	FCC KDB 905462 D02 (v02)	40000
<u>UWB Intentional Radiators</u> Part 15F	ANSI C63.10:2013	40000
<u>BPL Intentional Radiators</u> Part 15G	ANSI C63.10:2013	40000
<u>White Space Device Intentional Radiators</u> Part 15H	ANSI C63.10:2013	40000
<u>Commercial Mobile Services (FCC Licensed Radio Service Equipment)</u> Parts 22 (cellular), 24, 25 (below 3 GHz), and 27	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
<u>General Mobile Radio Services (FCC Licensed Radio Service Equipment)</u> Parts 22 (non-cellular), 90 (below 3 GHz), 95, 97, and 101 (below 3 GHz)	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
<u>Citizens Broadband Radio Services (FCC Licensed Radio Service Equipment)</u> Part 96	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000

Testing Activities Performed in Support of FCC Certification in Accordance with 47 Code of Federal Regulations and FCC KDB 974614, Appendix A, Table A.1²

Rule Subpart/Technology	Test Method	Maximum Frequency (MHz)
<u>Maritime and Aviation Radio Services</u> Parts 80 and 87	ANSI/TIA-603-E; ANSI C63.26:2015	40000
<u>Microwave and Millimeter Bands Radio Services</u> Parts 25, 30, 74, 90 (above 3 GHz), 97 (above 3 GHz), and 101	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
<u>Broadcast Radio Services</u> Parts 73 and 74 (below 3 GHz)	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
<u>Signal Boosters</u> Part 20 (Wideband Consumer Signal Boosters, Provider-specific signal boosters, and Industrial Signal Boosters) Section 90.219	ANSI C63.26:2015	40000

² Accreditation does not imply acceptance to the FCC equipment authorization program. Please see the FCC website (<https://apps.fcc.gov/oetcf/eas/>) for a listing of FCC approved laboratories.



Accredited Laboratory

A2LA has accredited

ELITE ELECTRONIC ENGINEERING INC.

Downers Grove, IL

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 *General requirements for the competence of testing and calibration laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 19th day of May 2021.



Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 1786.01
Valid to June 30, 2023

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.