



EMC EMISSIONS - TEST REPORT (Full)

Test Report No. **3164931DEN-004B** Issue Date: Wednesday 26/Nov/2008

Model / Serial No. Model: EE/EN Series [Details on Page 3]

Product Type Wireless Temperature Sensors

Client Inovonics Wireless Corporation

Manufacturer Inovonics Wireless Corporation

License holder Inovonics Wireless Corporation

Address 315 CTC Boulevard

Louisville, CO 80027

Test Criteria Applied
Test Result

CISPR 22: 2005 Class B

PASS

Test Project Number
References
Total Pages
Including
Appendices:

3164931

22

INFORMATION TECHNOLOGY
EQUIPMENT - RADIO DISTURBANCE
CHARACTERISTICS - LIMITS AND
METHODS AND MEASUREMENTS
Report Includes: IEC/EN 61000-3-2 and
IEC/EN 61000-3-3 Where applicable

Randy Thompson

Tested By : Randy Thompson

Michael Spataro

Reviewed By : Michael Spataro

REVISION SUMMARY - The following changes have been made to this Report:

Rev.	Revision Statement	Author	Revision Date	Reviewer
	Initial Release of Document	See above	See above	

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. This report must not be used to claim product endorsement by NVLAP, NIST nor any other agency of the U.S. Government. Measurement uncertainty is not incorporated in to the PASS/FAIL results as stated above. A statement of uncertainty is made on page 2 and is for informational purposes.

DIRECTORY

Documentation	Page(s)
Test report	<u>1 - 22</u>
Directory	<u>2</u>
Test Regulations	<u>3</u>
General Remarks	<u>3</u>
Test-setup Photographs	<u>4 - 7</u>
Appendix A	
Test Data Sheets and Test Equipment Used	<u>8 - 15</u>
Appendix B	
Test Plan/Constructional Data Form	<u>16 - 17</u>
Appendix C	
Measurement Protocol/Test Procedures	<u>18 - 22</u>

STATEMENT OF MEASUREMENT UNCERTAINTY

The data and results referenced in this document are true and accurate. The measurement uncertainty for Conducted Emissions in the frequency range of 150kHz – 30MHz is calculated to be ± 3.14 dB and for Radiated Emissions is calculated to be ± 4.4 dB in the frequency range of 10kHz – 1000MHz at 3m and ± 4.9 dB in the frequency range of 1 – 18GHz at 3m. For testing at 10m ± 4.8 dB in the frequency range of 30 – 1000MHz. For Disturbance Power, ± 3.3 dB in the frequency range of 30 – 1000MHz. For Flicker and Harmonics testing the equipment used is calibrated by the manufacture and is with in the tolerances specified in 61000-3-2/3. These uncertainties have been calculated using CISPR 16-4-2:2003 and represent a 95% confidence level (k=2).

EUT Received Date: 28-Oct-2008

Testing Start Date: 28-Oct-2008

Testing End Date: 28-Oct-2008

The tests were performed according to following regulations:

1. EMC Directive 2004/108/EC
2. IEC/CISPR 22: 1997, +A1: 2000, +A2: 2002
3. EN 55022: 1998, +A1: 2000, +A2: 2003
4. FCC CFR47 Part 15
5. AS/NZS CISPR22: 2004/ VCCI-03: 2004
6. ICES-003, Issue-4

Emission Test Results:

Conducted Emissions, Powerline - N/A

Test Result

Minimum limit margin 00.00 dB at 0000.00 MHz

Remarks: Product is 3.3 VDC battery-powered

Radiated Emissions (Electric Field) - PASS

Test Result

Minimum limit margin - 5.8 dB at 145.23 MHz

Remarks: Quasi-peak Measurement - Vertical

GENERAL REMARKS: Product is 3.3 VDC battery-powered; therefore, no AC port testing required.

All Products are wireless temperature sensors

Products tested in a "bundle" per client request:

- | | | |
|-----------------|--------------|----------|
| ▪ Model: EE1723 | S/N: 3921349 | EU Model |
| ▪ Model: EN1723 | S/N: 3791981 | NA Model |
| ▪ Model: EE1702 | S/N: 3949739 | EU Model |
| ▪ Model: EN1702 | S/N: 3972129 | NA Model |

The following models are included per Declaration of Similarity [DoS]. Refer to Appendix B

- Model: EE1722 & Model: EN 1722

Sample:

Production Prototype See Appendix B

Modifications required to pass: None

Test Specification Deviations: Additions to or Exclusions from: None

Test-setup photo(s):
Radiated Emissions




Test-setup photo(s):
Radiated Emissions



Test-setup photo(s):
Radiated Emissions – Product ID



Test-setup photo(s):
Radiated Emissions – Product ID

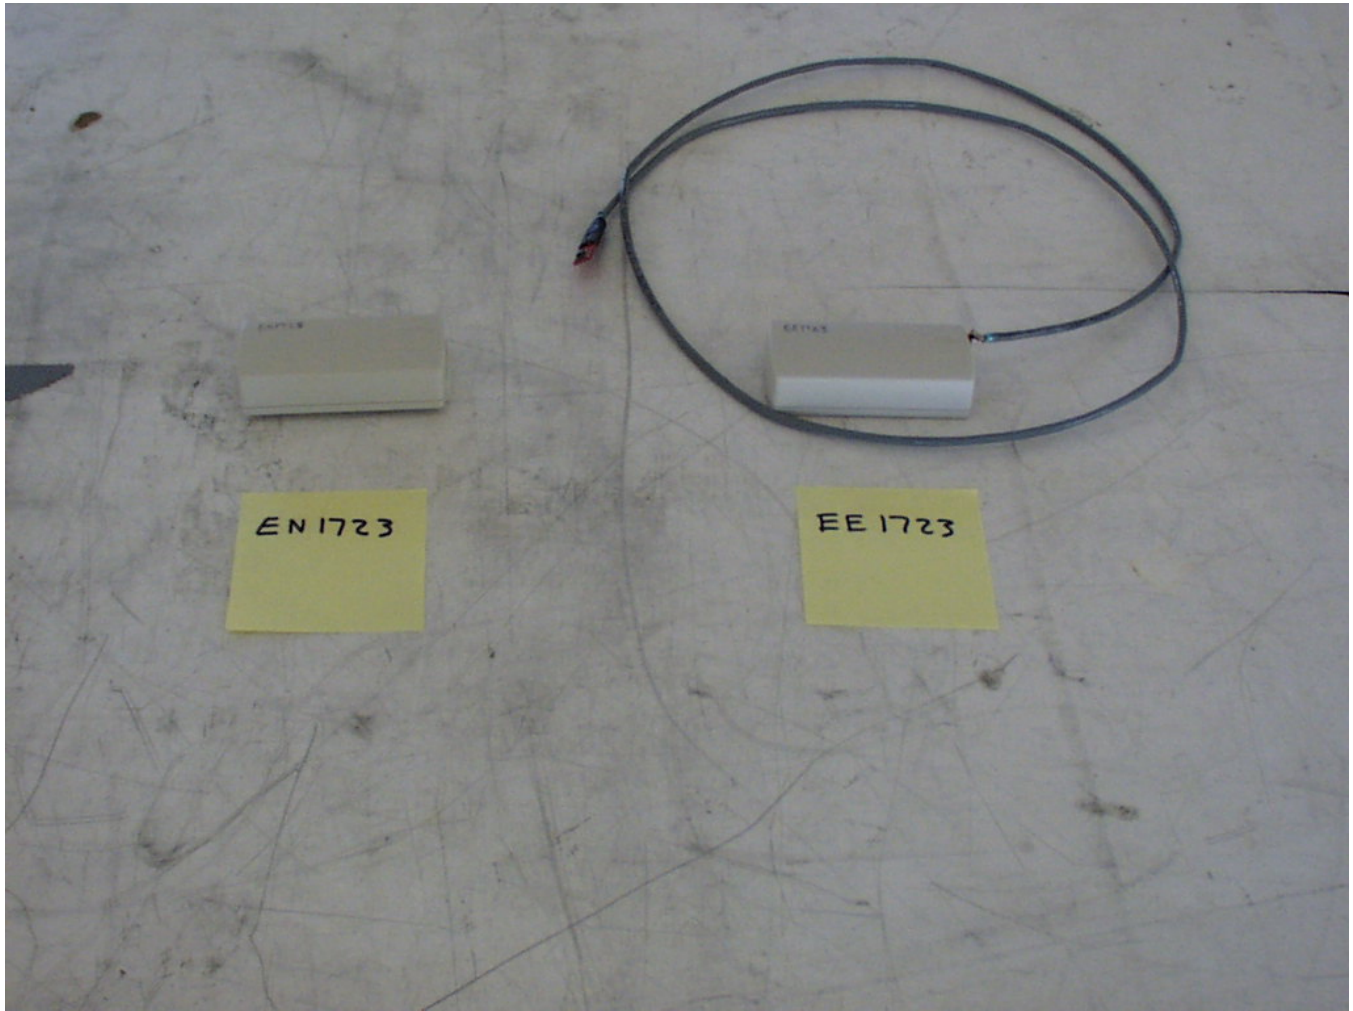

Appendix A

Test Data Sheets
and
Test Equipment Used

Radiated Emissions Data

Where Applicable the Data Flows as Follows:

**30-1000 MHz at 100VAC/50Hz, 110VAC/60Hz, 220VAC/60Hz, 230VAC/50Hz
>1000MHz at 110VAC/60Hz**

Radiated Electromagnetic Emissions

Test Report #: 3164931	Test Area: Pinewood Site 1 (10m)	Temperature: 21.3 °C
Test Method: EN55022	Test Date: 28-Oct-2008	Relative Humidity: 33.8 %
EUT Model #: EE/EN Series [NA & EU]	EUT Power: 3.3VDC Battery	Air Pressure: 98.1 kPa
EUT Serial #: 3968392, 3949739, 3791981, 3921349		

Manufacturer: Inovonics

EUT Description: Wireless Temperature Sensors

Notes: EE1702, EN1702, EE1723, EN1723

No Clocks > 108MHz per client

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ (MHz)	LEVEL (dBuV)	CABLE / ANT / PREAMP (dB) (dB\m) (dB)	FINAL (dBuV/m)	POL / HGT / AZ (m) (DEG)	DELTA1 (dB) EN55022 B	DELTA2 (dB) EN55022 A
200-1000MHz Vertical 0 degrees						
243.73	31.4 Qp	4.2 / 11.2 / 27.2	19.5	V / 1.0 / 0.0	-17.5	-27.5
249.32	29.4 Qp	4.2 / 11.5 / 27.2	17.9	V / 1.0 / 0.0	-19.1	-29.1
251.68	25.4 Qp	4.2 / 11.7 / 27.0	14.2	V / 1.0 / 0.0	-22.8	-32.8
255.25	30.9 Qp	4.3 / 11.8 / 27.1	19.8	V / 1.0 / 0.0	-17.2	-27.2
263.34	25.4 Qp	4.3 / 12.1 / 27.0	14.8	V / 1.0 / 0.0	-22.2	-32.2
456.02	21.7 Qp	6.0 / 17.0 / 28.1	16.6	V / 1.0 / 0.0	-20.4	-30.4
456.44	26.1 Qp	6.0 / 17.0 / 28.1	21.0	V / 1.0 / 0.0	-16.0	-26.0
460.04	23.6 Qp	6.0 / 17.2 / 28.1	18.7	V / 1.0 / 0.0	-18.3	-28.3
626.31	25.9 Qp	7.1 / 18.9 / 28.3	23.6	V / 1.0 / 0.0	-13.4	-23.4
678.84	24.2 Qp	7.5 / 20.5 / 28.2	24.0	V / 1.0 / 0.0	-13.0	-23.0
959.99	25.6 Qp	9.1 / 22.4 / 27.3	29.9	V / 1.0 / 0.0	-7.1	-17.1
200.00	23.2 Qp	3.9 / 11.3 / 27.3	11.1	V / 1.0 / 0.0	-18.9	-28.9
204.00	24.6 Qp	3.9 / 11.1 / 27.4	12.2	V / 1.0 / 0.0	-17.8	-27.8
220.00	23.7 Qp	4.0 / 10.3 / 27.2	10.8	V / 1.0 / 0.0	-19.2	-29.2
240.00	23.6 Qp	4.1 / 10.9 / 27.2	11.5	V / 1.0 / 0.0	-25.5	-35.5
250.06	26.1 Qp	4.2 / 11.6 / 27.2	14.6	V / 1.0 / 0.0	-22.4	-32.4
260.00	23.8 Qp	4.3 / 12.0 / 27.1	12.9	V / 1.0 / 0.0	-24.1	-34.1
267.56	24.6 Qp	4.4 / 12.3 / 27.2	14.1	V / 1.0 / 0.0	-22.9	-32.9
699.25	26.1 Qp	7.6 / 20.6 / 28.1	26.2	V / 1.0 / 0.0	-10.8	-20.8
200-1000MHz Vertical 90 degrees						
240.00	23.5 Qp	4.1 / 10.9 / 27.2	11.4	V / 1.0 / 90.0	-25.6	-35.6
243.84	25.3 Qp	4.2 / 11.2 / 27.2	13.4	V / 1.0 / 90.0	-23.6	-33.6
250.06	26.4 Qp	4.2 / 11.6 / 27.2	14.9	V / 1.0 / 90.0	-22.1	-32.1
267.56	24.9 Qp	4.4 / 12.3 / 27.2	14.4	V / 1.0 / 90.0	-22.6	-32.6
699.25	26.4 Qp	7.6 / 20.6 / 28.1	26.5	V / 1.0 / 90.0	-10.5	-20.5
959.99	25.3 Qp	9.1 / 22.4 / 27.3	29.5	V / 1.0 / 90.0	-7.5	-17.5
200-1000MHz Vertical 180 degrees						
699.25	26.6 Qp	7.6 / 20.6 / 28.1	26.8	V / 1.0 / 180.0	-10.2	-20.2
959.99	25.4 Qp	9.1 / 22.4 / 27.3	29.6	V / 1.0 / 180.0	-7.4	-17.4
No higher signals found: 200-1000MHz Vertical						

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dB/m) (dB)	(dBuV/m)	(m) (DEG)	EN55022 B	EN55022 A
Following signals maximized between 200 & 1000MHz Vertical						
250.06	26.2 Qp	4.2 / 11.6 / 27.2	14.8	V / 1.0 / 186.0	-22.2	-32.2
255.25	28.2 Qp	4.3 / 11.8 / 27.1	17.2	V / 1.0 / 36.0	-19.8	-29.8
699.25	27.9 Qp	7.6 / 20.6 / 28.1	28.0	V / 1.3 / 238.0	-9.0	-19.0
959.99	25.9 Qp	9.1 / 22.4 / 27.3	30.2	V / 1.1 / 12.0	-6.8	-16.8
200-1000MHz Horizontal 0 degrees						
200.00	28.1 Qp	3.9 / 11.3 / 27.3	16.0	H / 2.0 / 0.0	-14.0	-24.0
204.00	29.0 Qp	3.9 / 11.1 / 27.4	16.6	H / 2.0 / 0.0	-13.4	-23.4
220.00	27.1 Qp	4.0 / 10.3 / 27.2	14.2	H / 2.0 / 0.0	-15.8	-25.8
240.00	25.9 Qp	4.1 / 10.9 / 27.2	13.8	H / 2.0 / 0.0	-23.2	-33.2
243.73	24.6 Qp	4.2 / 11.2 / 27.2	12.8	H / 2.0 / 0.0	-24.2	-34.2
243.84	25.2 Qp	4.2 / 11.2 / 27.2	13.3	H / 2.0 / 0.0	-23.7	-33.7
249.32	26.7 Qp	4.2 / 11.5 / 27.2	15.2	H / 2.0 / 0.0	-21.8	-31.8
250.06	27.1 Qp	4.2 / 11.6 / 27.2	15.7	H / 2.0 / 0.0	-21.3	-31.3
251.68	26.6 Qp	4.2 / 11.7 / 27.0	15.5	H / 2.0 / 0.0	-21.5	-31.5
255.25	26.0 Qp	4.3 / 11.8 / 27.1	15.0	H / 2.0 / 0.0	-22.0	-32.0
260.00	25.1 Qp	4.3 / 12.0 / 27.1	14.3	H / 2.0 / 0.0	-22.7	-32.7
263.34	24.2 Qp	4.3 / 12.1 / 27.0	13.6	H / 2.0 / 0.0	-23.4	-33.4
276.00	22.2 Qp	4.4 / 12.6 / 27.1	12.2	H / 2.0 / 0.0	-24.8	-34.8
300.00	23.8 Qp	4.6 / 13.8 / 27.1	15.1	H / 2.0 / 0.0	-21.9	-31.9
456.02	21.6 Qp	6.0 / 17.0 / 28.1	16.5	H / 2.0 / 0.0	-20.5	-30.5
460.04	21.6 Qp	6.0 / 17.2 / 28.1	16.7	H / 2.0 / 0.0	-20.3	-30.3
626.31	26.4 Qp	7.1 / 18.9 / 28.3	24.1	H / 2.0 / 0.0	-12.9	-22.9
699.25	23.9 Qp	7.6 / 20.6 / 28.1	24.1	H / 2.0 / 0.0	-12.9	-22.9
753.24	26.3 Qp	8.2 / 20.3 / 28.1	26.7	H / 2.0 / 0.0	-10.3	-20.3
959.99	21.2 Qp	9.1 / 22.4 / 27.3	25.5	H / 2.0 / 0.0	-11.5	-21.5
200-1000MHz Horizontal 90 degrees						
243.84	25.5 Qp	4.2 / 11.2 / 27.2	13.6	H / 2.0 / 90.0	-23.4	-33.4
251.68	27.2 Qp	4.2 / 11.7 / 27.0	16.1	H / 2.0 / 90.0	-20.9	-30.9
456.02	21.6 Qp	6.0 / 17.0 / 28.1	16.6	H / 2.0 / 90.0	-20.4	-30.4
753.24	26.5 Qp	8.2 / 20.3 / 28.1	26.9	H / 2.0 / 90.0	-10.1	-20.1
200-1000MHz Horizontal 180 degrees						
250.06	25.9 Qp	4.2 / 11.6 / 27.2	14.5	H / 2.0 / 180.0	-22.5	-32.5
251.68	26.5 Qp	4.2 / 11.7 / 27.0	15.3	H / 2.0 / 180.0	-21.7	-31.7
No higher signals found: 200-1000MHz Horizontal 270 degrees						
Following signals maximized between 200 & 1000MHz Horizontal						
200.00	33.1 Qp	3.9 / 11.3 / 27.3	21.0	H / 2.6 / 214.0	-9.0	-19.0
699.25	25.9 Qp	7.6 / 20.6 / 28.1	26.0	H / 1.3 / 238.0	-11.0	-21.0
959.99	21.4 Qp	9.1 / 22.4 / 27.3	25.7	H / 1.0 / 6.0	-11.3	-21.3
30-200MHz Vertical 0 degrees						

FREQ (MHz)	LEVEL (dBuV)	CABLE / ANT / PREAMP (dB) (dB/m) (dB)	FINAL (dBuV/m)	POL / HGT / AZ (m) (DEG)	DELTA1 (dB) EN55022 B	DELTA2 (dB) EN55022 A
32.87	30.6 Qp	1.6 / 12.2 / 28.2	16.3	V / 1.0 / 0.0	-13.7	-23.7
48.00	31.1 Qp	1.8 / 10.1 / 28.2	14.9	V / 1.0 / 0.0	-15.1	-25.1
60.00	33.2 Qp	2.1 / 8.3 / 28.1	15.6	V / 1.0 / 0.0	-14.4	-24.4
65.76	37.8 Qp	2.2 / 8.0 / 28.2	19.8	V / 1.0 / 0.0	-10.2	-20.2
72.01	35.4 Qp	2.3 / 8.0 / 28.1	17.5	V / 1.0 / 0.0	-12.5	-22.5
80.00	37.5 Qp	2.4 / 6.8 / 28.1	18.6	V / 1.0 / 0.0	-11.4	-21.4
112.00	30.6 Qp	2.8 / 10.7 / 27.9	16.2	V / 1.0 / 0.0	-13.8	-23.8
145.23	36.5 Qp	3.1 / 12.3 / 27.7	24.2	V / 1.0 / 0.0	-5.8	-15.8
159.99	32.2 Qp	3.3 / 12.0 / 27.7	19.9	V / 1.0 / 0.0	-10.1	-20.1
180.00	27.4 Qp	3.6 / 12.3 / 27.4	15.9	V / 1.0 / 0.0	-14.1	-24.1
192.00	26.8 Qp	3.8 / 12.9 / 27.4	16.0	V / 1.0 / 0.0	-14.0	-24.0
30-200MHz Vertical 90 degrees						
159.99	32.4 Qp	3.3 / 12.0 / 27.7	20.0	V / 1.0 / 90.0	-10.0	-20.0
30-200MHz Vertical 180 degrees						
48.00	32.5 Qp	1.8 / 10.1 / 28.2	16.3	V / 1.0 / 180.0	-13.7	-23.7
No higher signals found: 30-200MHz Vertical						
Following signals maximized between 30 & 200MHz Vertical						
112.00	38.4 Qp	2.8 / 10.7 / 27.9	23.9	V / 1.0 / 236.0	-6.1	-16.1
145.23	31.1 Qp	3.1 / 12.3 / 27.7	18.8	V / 1.0 / 315.0	-11.2	-21.2
159.99	31.1 Qp	3.3 / 12.0 / 27.7	18.8	V / 1.0 / 118.0	-11.2	-21.2
30-200MHz Horizontal 0 degrees						
32.87	26.6 Qp	1.6 / 12.2 / 28.2	12.2	H / 2.0 / 0.0	-17.8	-27.8
48.00	30.8 Qp	1.8 / 10.1 / 28.2	14.6	H / 2.0 / 0.0	-15.4	-25.4
60.00	29.3 Qp	2.1 / 8.3 / 28.1	11.6	H / 2.0 / 0.0	-18.4	-28.4
65.76	31.4 Qp	2.2 / 8.0 / 28.2	13.5	H / 2.0 / 0.0	-16.5	-26.5
72.01	31.5 Qp	2.3 / 8.0 / 28.1	13.7	H / 2.0 / 0.0	-16.3	-26.3
80.00	37.9 Qp	2.4 / 6.8 / 28.1	19.0	H / 2.0 / 0.0	-11.0	-21.0
112.00	26.9 Qp	2.8 / 10.7 / 27.9	12.4	H / 2.0 / 0.0	-17.6	-27.6
145.23	28.4 Qp	3.1 / 12.3 / 27.7	16.1	H / 2.0 / 0.0	-13.9	-23.9
157.26	26.4 Qp	3.3 / 12.1 / 27.7	14.0	H / 2.0 / 0.0	-16.0	-26.0
159.99	20.9 Qp	3.3 / 12.0 / 27.7	8.5	H / 2.0 / 0.0	-21.5	-31.5
180.00	20.9 Qp	3.6 / 12.3 / 27.4	9.5	H / 2.0 / 0.0	-20.5	-30.5
192.00	22.5 Qp	3.8 / 12.9 / 27.4	11.7	H / 2.0 / 0.0	-18.3	-28.3
30-200MHz Horizontal 90 degrees						
80.00	28.9 Qp	2.4 / 6.8 / 28.1	10.0	H / 2.0 / 90.0	-20.0	-30.0
No higher signals found: 30-200MHz Horizontal, 180 & 270 degrees						

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dB\m) (dB)	(dBuV/m)	(m) (DEG)	EN55022 B	EN55022 A
***** Measurement Summary *****						
145.23	36.5 Qp	3.1 / 12.3 / 27.7	24.2	V / 1.0 / 0.0	-5.8	-15.8
112.00	38.5 Qp	2.8 / 10.7 / 27.9	24.1	V / 1.0 / 0.0	-5.9	-15.9
157.26	36.5 Qp	3.3 / 12.1 / 27.7	24.1	V / 1.0 / 0.0	-5.9	-15.9
959.99	25.9 Qp	9.1 / 22.4 / 27.3	30.2	V / 1.1 / 12.0	-6.8	-16.8
200.00	33.1 Qp	3.9 / 11.3 / 27.3	21.0	H / 2.6 / 214.0	-9.0	-19.0
699.25	27.9 Qp	7.6 / 20.6 / 28.1	28.0	V / 1.3 / 238.0	-9.0	-19.0
159.99	32.4 Qp	3.3 / 12.0 / 27.7	20.0	V / 1.0 / 90.0	-10.0	-20.0
753.24	26.5 Qp	8.2 / 20.3 / 28.1	26.9	H / 2.0 / 90.0	-10.1	-20.1
65.76	37.8 Qp	2.2 / 8.0 / 28.2	19.8	V / 1.0 / 0.0	-10.2	-20.2
80.00	37.9 Qp	2.4 / 6.8 / 28.1	19.0	H / 2.0 / 0.0	-11.0	-21.0
72.01	35.4 Qp	2.3 / 8.0 / 28.1	17.5	V / 1.0 / 0.0	-12.5	-22.5
626.31	26.4 Qp	7.1 / 18.9 / 28.3	24.1	H / 2.0 / 0.0	-12.9	-22.9
678.84	24.2 Qp	7.5 / 20.5 / 28.2	24.0	V / 1.0 / 0.0	-13.0	-23.0
204.00	29.0 Qp	3.9 / 11.1 / 27.4	16.6	H / 2.0 / 0.0	-13.4	-23.4
32.87	30.6 Qp	1.6 / 12.2 / 28.2	16.3	V / 1.0 / 0.0	-13.7	-23.7
48.00	32.5 Qp	1.8 / 10.1 / 28.2	16.3	V / 1.0 / 180.0	-13.7	-23.7
192.00	26.8 Qp	3.8 / 12.9 / 27.4	16.0	V / 1.0 / 0.0	-14.0	-24.0
180.00	27.4 Qp	3.6 / 12.3 / 27.4	15.9	V / 1.0 / 0.0	-14.1	-24.1
60.00	33.2 Qp	2.1 / 8.3 / 28.1	15.6	V / 1.0 / 0.0	-14.4	-24.4
220.00	27.1 Qp	4.0 / 10.3 / 27.2	14.2	H / 2.0 / 0.0	-15.8	-25.8
456.44	26.1 Qp	6.0 / 17.0 / 28.1	21.0	V / 1.0 / 0.0	-16.0	-26.0
255.25	30.9 Qp	4.3 / 11.8 / 27.1	19.8	V / 1.0 / 0.0	-17.2	-27.2
243.73	31.4 Qp	4.2 / 11.2 / 27.2	19.5	V / 1.0 / 0.0	-17.5	-27.5
460.04	23.6 Qp	6.0 / 17.2 / 28.1	18.7	V / 1.0 / 0.0	-18.3	-28.3
249.32	29.4 Qp	4.2 / 11.5 / 27.2	17.9	V / 1.0 / 0.0	-19.1	-29.1
456.02	21.6 Qp	6.0 / 17.0 / 28.1	16.6	H / 2.0 / 90.0	-20.4	-30.4
251.68	27.2 Qp	4.2 / 11.7 / 27.0	16.1	H / 2.0 / 90.0	-20.9	-30.9
250.06	27.1 Qp	4.2 / 11.6 / 27.2	15.7	H / 2.0 / 0.0	-21.3	-31.3
300.00	23.8 Qp	4.6 / 13.8 / 27.1	15.1	H / 2.0 / 0.0	-21.9	-31.9
263.34	25.4 Qp	4.3 / 12.1 / 27.0	14.8	V / 1.0 / 0.0	-22.2	-32.2
267.56	24.9 Qp	4.4 / 12.3 / 27.2	14.4	V / 1.0 / 90.0	-22.6	-32.6
260.00	25.1 Qp	4.3 / 12.0 / 27.1	14.3	H / 2.0 / 0.0	-22.7	-32.7
240.00	25.9 Qp	4.1 / 10.9 / 27.2	13.8	H / 2.0 / 0.0	-23.2	-33.2
243.84	25.5 Qp	4.2 / 11.2 / 27.2	13.6	H / 2.0 / 90.0	-23.4	-33.4
276.00	22.2 Qp	4.4 / 12.6 / 27.1	12.2	H / 2.0 / 0.0	-24.8	-34.8

List of Equipment Utilized for Final Test

Project Report

Begin Date: 10/28/2008 **End Date:** 10/28/2008

Technician Randall Thompson

Project 3164931

Capital Asset ID	Manufacturer	Model #	Serial #	Description	Test Performed	Service Type	Service Date	Service Due
18880	Hewlett-Packard	85650A	2811A01300	Q.P Adapter	R Radiated Emissions	For Cal	11/15/2007	11/15/2008
18882	Hewlett-Packard	8566B	2410A00154	Spectrum Analyzer (dc-22 GHz)	R Radiated Emissions	For Cal	11/13/2007	11/13/2008
18912	Hewlett-Packard	8447F	3113A05545	9 kHz- 1.3GHz Pre Amp	R Radiated Emissions	For Ver	5/2/2008	5/2/2009
18888	EMCO	3146	9203-3376	Log Periodic Antenna 200-1000MHz	R Radiated Emissions	ForCal	11/8/2007	11/8/2008
18889	EMC Test Systems	3109	3142	Biconical Antenna 30-300MHz	R Radiated Emissions	ForCal	11/12/2007	11/12/2008

Appendix B

Test Plan
and
Constructional Data Form
[Provided by Client]



315 CTC Boulevard Louisville, Colorado 80027 USA
phone 303.939.9336 | fax 303.939.8977 | www.inovonics.com

September 30, 2008

Declaration of Similarity

This is to certify that Inovonics' products EN1722 and EN1723 are built on the same PC board and operate with the same core firmware. The only difference lies in the sensor which is onboard for the EN1723, and is attached to the EN1722 via a cable.

Jerry Klintz
Manager, Product Design and Development
Inovonics Wireless Corporation
315 CTC Boulevard

Appendix C

Measurement Protocol

And

Test Procedures

MEASUREMENT PROTOCOL

GENERAL INFORMATION

Test Methodology

Conducted and radiated emission testing is performed according to the procedures in ANSI C63.4 & CNS13438.

Justification

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral into it's characteristic impedance or left unterminated. When appropriate, the cables are manually manipulated with respect to each other to obtain maximum emissions from the unit.

CONDUCTED EMISSIONS

The final level, expressed in dB μ V, is arrived at by taking the reading directly from the EMI receiver. This level is compared directly to the applicable limit.

To convert between dB μ V and μ V, the following conversions apply:

- $\text{dB}\mu\text{V} = 20(\log \mu\text{V})$
- $\mu\text{V} = \text{Inverse log}(\text{dB}\mu\text{V}/20)$

RADIATED EMISSIONS

The final level, expressed in dB μ V/m, is arrived at by taking the reading from the spectrum analyzer (Level dB μ V) and adding the antenna correction factor and cable loss factor (Factor dB) to it. This result then has the applicable limit subtracted from it to provide the Delta which gives the tabular data as shown in the data sheets in Attachment B.

Example: At a Test Frequency of 30 MHz, with a peak reading on the spectrum analyzer or measuring receiver of 14 dB μ V:

Measured Level	+	Transducer & Cable Loss factor	=	Corrected Reading	Specification Limit	-	Corrected Reading	=	Delta Specification
(dB μ V)		(dB)		(dB μ V/m)	(dB μ V/m)		(dB μ V/m)		
14.0		14.9		28.9	40.0		28.9		-11.1

DETAILS OF TEST PROCEDURES

General Standard Information

The test methods used comply with ANSI C63.4-2003 - "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz."

Conducted Emissions

Conducted emissions on the 50 Hz and/or 60 Hz power interface of the EUT are measured in the frequency range of 150 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection, and a Line Impedance Stabilization Network (LISN), with 50 Ω /50 μ H (CISPR 16) characteristics. Table top equipment is placed on a non-conducting table 80 centimeters above the floor and is positioned 40 centimeters from the vertical ground plane (wall) of the screen room. In some cases, a pre-scan using a spectrum analyzer is initially performed on the units comprising the system under test to locate the highest emissions. If the minimum passing margin appears to be less than 20 dB with a peak mode measurement, the emissions are re-measured using a tuned receiver or spectrum analyzer with quasi-peak and average detection and recorded on the data sheets.

Radiated Emissions

Radiated emissions from the EUT are measured in the frequency range of 30 to 22GHz using a spectrum analyzer and appropriate broadband linearly polarized antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection and measurements above 1000 MHz are made with a 1 MHz/6 dB bandwidth and peak detection. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimeters above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. Interface cables that are closer than 40 centimeters to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimeters from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna is positioned 3, 10 or 30 meters horizontally from the EUT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarizations and the EUT are rotated 360 degrees.

Conducted Emissions Diagram:

