

Amended
FCC/ISED Test Report

Prepared for: Inovonics

Address: 397 S. Taylor Ave.
Louisville, CO 80027

Product: EN1723

Test Report No: R20180906-21-01E

Approved by:



Nic S. Johnson, NCE


Technical Manager

iNARTE Certified EMC Engineer #EMC-003337-NE

DATE: 4 November 2019

Total Pages: 48

The Nebraska Center for Excellence in Electronics (NCEE) authorizes the above named company to reproduce this report provided it is reproduced in its entirety for use by the company's employees only. Any use that a third party makes of this report, or any reliance on or decisions made based on it, are the responsibility of such third parties. NCEE accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

	Report Number:	R20180906-21-01	Rev	E
	Prepared for:	Innovonics		

REVISION PAGE

Rev. No.	Date	Description
0	28 September 2018	Original – NJohnson Prepared by KVepuri
A	13 June 2019	Edited band edge table Repeated frequency separation measurement Added additional notes to describe duty cycle plots Includes NCEE Labs test report R20180906-21-01 and its amendment in full -NJ
B	2 October 2019	Updated Section 4.1. Includes NCEE Labs test report R20180906-21-01A and its amendment in full -NJ
C	4 October 2019	Updated Section 4.1. Includes NCEE Labs test report R20180906-21-01B and its amendment in full -NJ
D	4 October 2019	Removed references to duty cycle measurements. Includes NCEE Labs test report R20180906-21-01C and its amendment in full -NJ
E	4 November 2019	Removed timing plots from Page 44 – 47, The duty cycle is derived solely from the operational description and the plot showing only 1 transmission in 10 second period. Includes NCEE Labs test report R20180906-21-01C and its amendment in full -NJ



Report Number: R20180906-21-01

Rev

E

Prepared for: Inovonics

CONTENTS

Revision Page	2
1.0 Summary of test results.....	4
2.0 EUT Description	5
2.1 Equipment under test	5
2.2 Description of test modes	6
2.3 Description of support units.....	6
3.0 Laboratory description.....	7
3.1 Laboratory description.....	7
3.2 Test personnel.....	7
3.3 Test equipment.....	8
4.0 Detailed results.....	9
4.1 Duty Cycle	9
4.2 Radiated emissions.....	10
4.3 Peak Output Power	19
4.4 Bandwidth.....	23
4.5 Bandedges	31
4.6 Carrier frequency seperation, number of hopping channels, time of occupancy	41
Appendix A: Sample Calculation	45
Appendix B – Measurement Uncertainty	47
REPORT END.....	48



Report Number:	R20180906-21-01	Rev	E
Prepared for:	Inovonics		

1.0 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

- (1) US Code of Federal Regulations, Title 47, Part 15
- (2) ISED RSS-Gen, Issue 5
- (3) ISED RSS-247, Issue 2

SUMMARY			
Standard Section	Test Type and Limit	Result	Remark
FCC 15.203	Unique Antenna Requirement	Pass	PCB antenna
FCC 15.35 RSS-Gen, 6.10	Duty cycle of pulsed emissions	Pass	Pulsed emissions duty cycle was applied
FCC 15.209 RSS-Gen, 7.1	Receiver Radiated Emissions	NA	The EUT has no receiver functionality
FCC 15.247(a)(1)(i) RSS-247, 5.1(c)	Minimum Bandwidth, Limit: Min. 250kHz	Pass	Meets the requirement of the limit.
FCC 15.247(b)(1) RSS-247, 5.1	Maximum Peak Output Power, Limit: Max. 24 dBm	Pass	Meets the requirement of the limit.
FCC 15.209 RSS-Gen, 8.9 RSS-247, 5.5	Transmitter Radiated Emissions	Pass	Meets the requirement of the limit.
FCC 15.247(a) (1) (i) RSS-247, 5.1(c)	Frequency hopping system, Limit: Max. 0.4 Seconds in 10 Second Period	Pass	Meets the requirement of the limit.
FCC 15.209, 15.205 RSS-Gen, 8.9 RSS-247, 5.5	Band Edge Measurement, Limit: 20dB less than the peak value of fundamental frequency	Pass	Meets the requirement of the limit.
FCC 15.207 RSS-Gen. 8.8	Conducted AC Emissions	NA	Not applicable. Battery power only, no charger.



Report Number:	R20180906-21-01	Rev	E
Prepared for:	Inovonics		

2.0 EUT DESCRIPTION

2.1 EQUIPMENT UNDER TEST

The Equipment Under Test (EUT) was a wireless FHSS transmitter. It has transmit capabilities only.

EUT	EN1723
EUT Received	9/26/2018
EUT Tested	9/26/2018 - 9/27/2018 6/13/2019 (frequency separation)
Serial No.	NCEETEST1 (used in continuous transmit mode); NCEETEST2 (used for hopping mode)
Operating Band	902.0 – 928.0 MHz
Device Type	FHSS
Power Supply	3 VDC Battery (CR123A) non-rechargeable.

NOTE: For more detailed features description, please refer to the manufacturer's specifications or user's manual.



Report Number:	R20180906-21-01	Rev	E
Prepared for:	Inovonics		

2.2 DESCRIPTION OF TEST MODES

The EUT operates on, and was tested at the frequencies below:

Channel	Frequency
Low	902.4
Middle	914.8
High	927.6

These are the only three representative channels tested in the frequency range according to FCC Part 15.31 and RSS-Gen Table A1. See the operational description for a list of all channel frequency and designations.

This EUT was set to transmit in a worse-case scenario with modulation on. The manufacturer modified the unit to transmit continuously on the lowest, highest and one channel in the middle.

2.3 DESCRIPTION OF SUPPORT UNITS

None

3.0 LABORATORY DESCRIPTION

3.1 LABORATORY DESCRIPTION

All testing was performed at the following Facility:

The Nebraska Center for Excellence in Electronics (NCEE Labs)
 4740 Discovery Drive
 Lincoln, NE 68521

A2LA Certificate Number: 1953.01
 FCC Accredited Test Site Designation No: US1060
 Industry Canada Test Site Registration No: 4294A-1
 CAB MRA Recognition Identification No: US0177

Environmental conditions varied slightly throughout the tests:

Relative humidity of $35 \pm 4\%$
 Temperature of $22 \pm 3^\circ$ Celsius



3.2 TEST PERSONNEL

No.	PERSONNEL	TITLE	ROLE
1	Karthik Vepuri	EMC Test Engineer	Testing
3	Nic Johnson	Technical Manager	Review of Results

Notes:

All personnel are permanent staff members of NCEE Labs. No testing or review was sub-contracted or performed by sub-contracted personnel.

3.3 TEST EQUIPMENT

DESCRIPTION AND MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CALIBRATION DATE	CALIBRATION DUE DATE
Rohde & Schwarz Test Receiver	ES126	100037	30 Jan 2018	30 Jan 2019
EMCO Biconilog Antenna	3142B	1647	02 Aug 2017	02 Aug 2018**
EMCO Horn Antenna	3115	6416	26 Jan 2018	26 Jan 2020
Rohde & Schwarz Preamplifier	TS-PR18	3545700803	16 April 2018*	16 April 2019*
Trilithic High Pass Filter	6HC330	23042	16 April 2018*	16 April 2019*
Mini Circuits 1700 – 5000Mhz High Pass Filter***	15542	31618	16 April 2018*	16 April 2019*
RF Cable (preamplifier to antenna)	MFR-57500	01-07-002	16 April 2018*	16 April 2019*
RF Cable (antenna to 10m chamber bulkhead)	FSCM 64639	01E3872	16 April 2018*	16 April 2019*
RF Cable (10m chamber bulkhead to control room bulkhead)	FSCM 64639	01E3874	16 April 2018*	16 April 2019*
RF Cable (Control room bulkhead to RF switch)	FSCM 64639	01E3871	16 April 2018*	16 April 2019*
RF Cable (RF switch to test receiver)	FSCM 64639	01F1206	16 April 2018*	16 April 2019*
RF switch – Rohde and Schwarz	TS-RSP	1113.5503.14	16 April 2018*	16 April 2019*
N connector bulkhead (10m chamber)	PE9128	NCEEBH1	16 April 2018*	16 April 2019*
N connector bulkhead (control room)	PE9128	NCEEBH2	16 April 2018*	16 April 2019*

*Internal Characterization **Extended Cal

Notes:

All equipment is owned by NCEE Labs and stored permanently at NCEE Labs facilities.



Report Number:	R20180906-21-01	Rev	E
Prepared for:	Inovonics		

4.0 DETAILED RESULTS

4.1 DUTY CYCLE

Since the device featured pulsed emissions, a duty cycle correction factor was applied to peak measurements to calculate the average measurement per ANSI C63.10-2013, Section 7.5.

The manufacturer has declared that the highest possible duty cycle within any 100ms window as defined in FCC Part 15.35 is 22%. The Duty Cycle Correction Factor is calculated to be $20 \cdot \log(0.22) = -13.15 \text{ dB}$

See the Operational Description for details.

4.2 RADIATED EMISSIONS

Test Method: ANSI C63.10-2013, Section 6.5, 6.6

Limits for radiated emissions measurements:

Emissions radiated outside of the specified bands shall be applied to the limits in 15.209 as followed:

FREQUENCIES (MHz)	FIELD STRENGTH ($\mu\text{V/m}$)	MEASUREMENT DISTANCE (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	3
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = $20 * \log * \text{Emission level } (\mu\text{V/m})$.
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits by more than 20dB under any condition of modulation.



Report Number:	R20180906-21-01	Rev	E
Prepared for:	Inovonics		

Test procedures:

- a. The EUT was placed on the top of a rotating table above the ground plane in a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The table was 0.8m high for measurements from 30MHz-1GHz and 1.5m for measurements from 1GHz and higher.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna was a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are used to make the measurement.
- d. For each suspected emission, the EUT was arranged to maximize its emissions and then the antenna height was varied from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum emission reading.
- e. The test-receiver system was set to use a peak detector with a specified resolution bandwidth. For spectrum analyzer measurements, the composite maximum of several analyzer sweeps was used for final measurements.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The EUT was maximized in all 3 orthogonal positions. The results are presented for the axis that had the highest emissions.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequencies below 1GHz.

2. The resolution bandwidth 1 MHz for all measurements and at frequencies above 1GHz, A peak detector was used for all measurements above 1GHz. Measurements were made with an EMI Receiver.

Deviations from test standard:

No deviation.


Test setup:


Figure 1 - Radiated Emissions Test Setup

EUT operating conditions

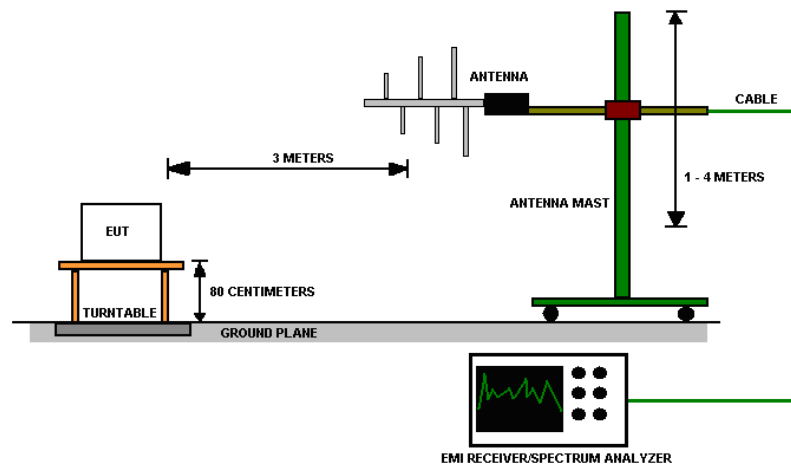The EUT was powered by 3 VDC unless specified and set to transmit continuously on the lowest frequency channel, highest frequency channel and one in the middle of its operating range.

Test results:

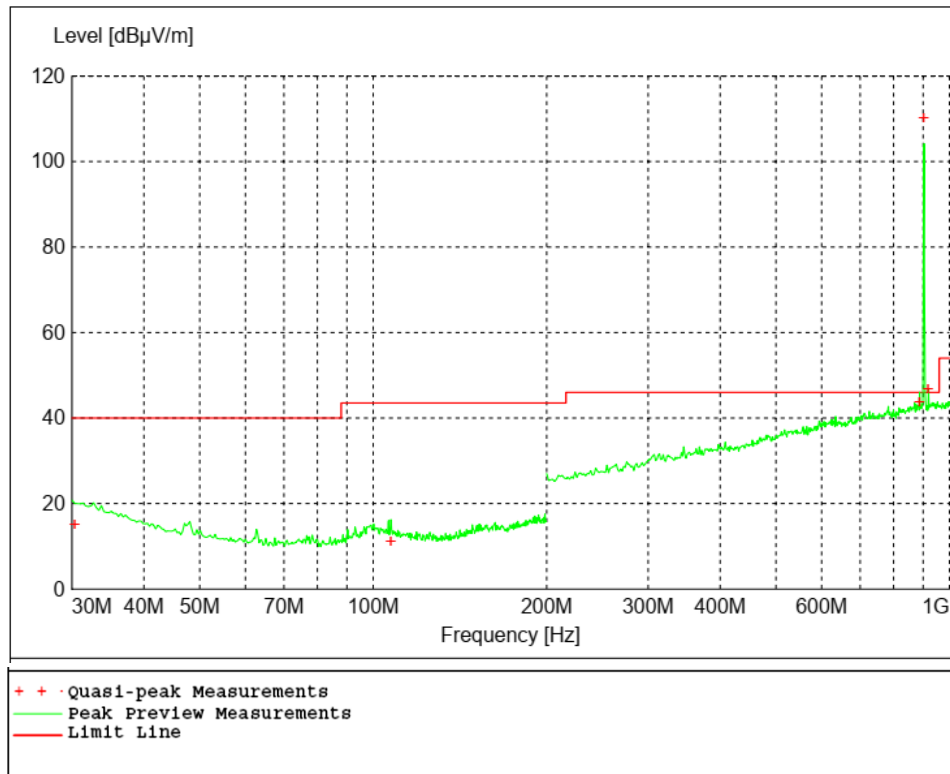


Figure 2 - Radiated Emissions Plot, Low Channel

Table 1 - Radiated Emissions Quasi-peak Measurements, Low Channel

Frequency	Level	Limit	Margin	Height	Angle	Pol	Axis
MHz	dBµV/m	dBµV/m	dB	cm.	deg.		
30.360000	15.02	40.00	24.98	156	294	VERT	X
107.280000	11.19	43.50	32.31	363	339	VERT	X
886.440000*	43.82	90.25	46.43	100	217	HORI	X
902.400000	110.25	NA	NA	100	53	HORI	X
918.420000*	46.84	90.25	43.41	99	50	HORI	X

*Product of transmitter falling under unrestricted band



Report Number:	R20180906-21-01	Rev	E
Prepared for:	Inovonics		

Table 2 - Radiated Emissions Average Measurements, Low Channel

Frequency	Level	Limit	Margin	Height	Angle	Pol	Axis
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.		
1804.800000	42.01	54.00	11.99	150	337	VERT	Z
2707.200000	44.23	54.00	9.77	183	41	VERT	Z
3609.800000	33.62	54.00	20.38	264	344	VERT	Z
5414.600000	41.81	54.00	12.19	160	30	VERT	Z
6317.000000	36.34	54.00	17.66	146	360	VERT	Z
7219.200000	34.48	54.00	19.52	301	316	VERT	Z
9118.400000	33.89	54.00	20.11	319	121	VERT	Z

Note: Average Level = Peak Level – Duty Cycle Correction Factor

Table 3 - Radiated Emissions Peak Measurements, Low Channel

Frequency	Level	Limit	Margin	Height	Angle	Pol	Axis
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.		
1804.800000	55.16	74.00	18.84	150	337	VERT	Z
2707.200000	57.38	74.00	16.62	183	41	VERT	Z
3609.800000	46.77	74.00	27.23	264	344	VERT	Z
5414.600000	54.96	74.00	19.04	160	30	VERT	Z
6317.000000	49.49	74.00	24.51	146	360	VERT	Z
7219.200000	47.63	74.00	26.37	301	316	VERT	Z
9118.400000	47.04	74.00	26.96	319	121	VERT	Z

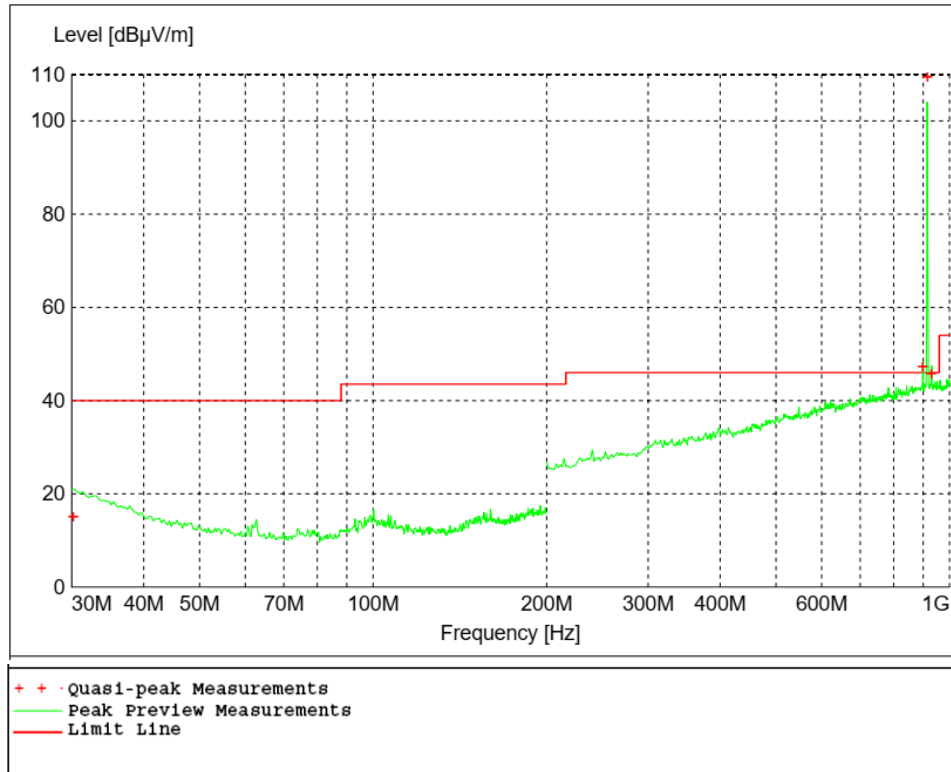


Figure 3 - Radiated Emissions Plot, Mid Channel

Table 4 - Radiated Emissions Quasi-peak Measurements, Mid Channel

Frequency	Level	Limit	Margin	Height	Angle	Pol	Axis
MHz	dBµV/m	dBµV/m	dB	cm.	deg.		
30.180000	15.15	40.00	24.85	399	50	VERT	X
898.800000*	47.23	88.94	41.71	110	50	HORI	X
914.800000	109.42	NA	NA	100	226	HORI	X
930.840000*	45.65	88.94	43.29	99	51	HORI	X

*Product of transmitter falling under unrestricted band

Report Number:	R20180906-21-01	Rev	E
Prepared for:	Inovonics		

Table 5 - Radiated Emissions Average Measurements, Mid Channel

Frequency	Level	Limit	Margin	Height	Angle	Pol	Axis
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.		
1829.600000	42.07	54.00	11.93	170	310	VERT	Z
2744.400000	42.89	54.00	11.11	180	38	VERT	Z
3659.200000	37.27	54.00	16.73	288	23	VERT	Z
4574.000000	30.30	54.00	23.70	400	282	HORI	Z
5488.800000	41.21	54.00	12.79	147	0	VERT	Z
6403.800000	36.20	54.00	17.80	124	15	VERT	Z
7318.600000	33.09	54.00	20.91	100	17	VERT	Z

Note: Average Level = Peak Level – Duty Cycle Correction Factor

Table 6 - Radiated Emissions Peak Measurements, Mid Channel

Frequency	Level	Limit	Margin	Height	Angle	Pol	Axis
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.		
1829.600000	55.22	74.00	18.78	170	310	VERT	Z
2744.400000	56.04	74.00	17.96	180	38	VERT	Z
3659.200000	50.42	74.00	23.58	288	23	VERT	Z
4574.000000	43.45	74.00	30.55	400	282	HORI	Z
5488.800000	54.36	74.00	19.64	147	0	VERT	Z
6403.800000	49.35	74.00	24.65	124	15	VERT	Z
7318.600000	46.24	74.00	27.76	100	17	VERT	Z

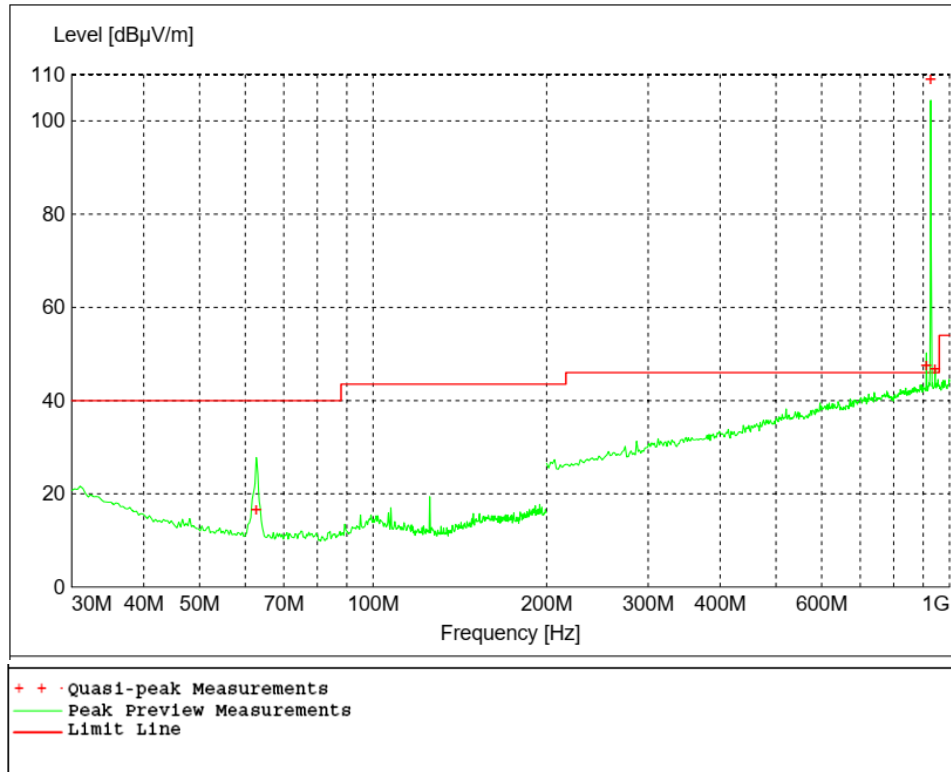


Figure 4 - Radiated Emissions Plot, High Channel

Table 7 - Radiated Emissions Quasi-peak Measurements, High Channel

Frequency	Level	Limit	Margin	Height	Angle	Pol	Axis
MHz	dBµV/m	dBµV/m	dB	cm.	deg.		
62.640000	16.45	40.00	23.55	149	0	VERT	X
911.640000*	47.44	88.94	41.50	100	227	HORI	X
927.600000	108.94	NA	NA	99	195	HORI	X
943.620000*	46.63	88.94	42.31	101	48	HORI	X

*Product of transmitter falling under unrestricted band

Table 8 - Radiated Emissions Average Measurements, High Channel

Frequency	Level	Limit	Margin	Height	Angle	Pol	Axis
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.		
1855.200000	40.79	54.00	13.21	170	6	VERT	Z
2782.800000	43.69	54.00	10.31	167	55	VERT	Z
3710.400000	36.54	54.00	17.46	305	3	VERT	Z
5565.800000	40.83	54.00	13.17	177	28	VERT	Z
6493.200000	36.78	54.00	17.22	140	25	VERT	Z

Note: Average Level = Peak Level – Duty Cycle Correction Factor

Table 9 - Radiated Emissions Peak Measurements, High Channel

Frequency	Level	Limit	Margin	Height	Angle	Pol	Axis
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.		
1855.200000	53.94	74.00	20.06	170	6	VERT	Z
2782.800000	56.84	74.00	17.16	167	55	VERT	Z
3710.400000	49.69	74.00	24.31	305	3	VERT	Z
5565.800000	53.98	74.00	20.02	177	28	VERT	Z
6493.200000	49.93	74.00	24.07	140	25	VERT	Z

REMARKS:

1. Emission level (dB μ V/m) = Raw Value (dB μ V) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The EUT was measured in all 3 orthogonal axis. It was found that the Y-axis produced the highest emissions, and this orientation was used for all testing. See the test setup photo exhibit for details on the orientations.

4.3 PEAK OUTPUT POWER

Test Method: ANSI C63.10, Section(s) 7.8.5

Limits of bandwidth measurements:

For an FHSS system with 25 channels, the output power is required to be less than 250 mW or 24 dBm.

EIRP was calculated from field strength measurements using ANSI C63.10-2013, Section 9.5, Equation (22). The field strength was measured at a 3m distance and maximized.

Test procedures:

All measurements were taken at a distance of 3m from the EUT.

The EUT was maximized in all 3 orthogonal positions in a similar manner as described in Section 4.2.

Deviations from test standard:

No deviation.

Test setup:

See Section 4.2

EUT operating conditions:

The EUT was powered by 3 VDC unless specified and set to transmit continuously on the lowest frequency channel, highest frequency channel and one in the middle of its operating range.


Test results:

Peak Output Power

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK OUTPUT POWER (dBm)	Method	RESULT
Low	902.4	15.09	EIRP	PASS
Middle	914.8	14.45	EIRP	PASS
High	927.6	13.51	EIRP	PASS



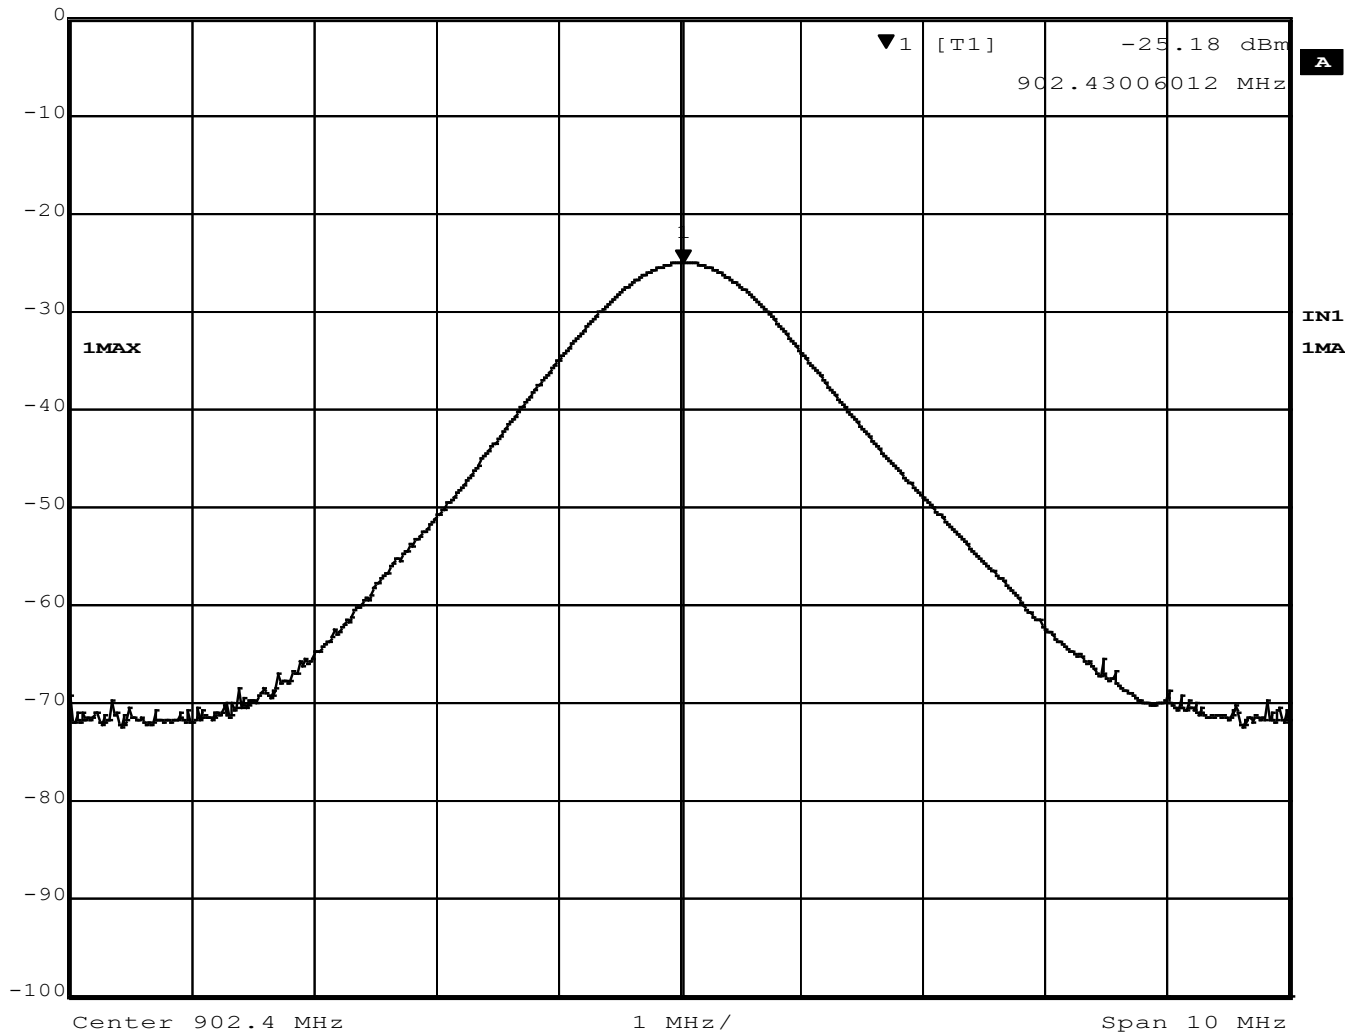
Marker 1 [T1] RBW 1 MHz RF Att 10 dB
 Ref Lvl -25.18 dBm VBW 3 MHz
 0 dBm 902.43006012 MHz SWT 5 ms Unit dBm



Date: 27.SEP.2018 13:18:41

Figure 5 – Output Power, Low Channel

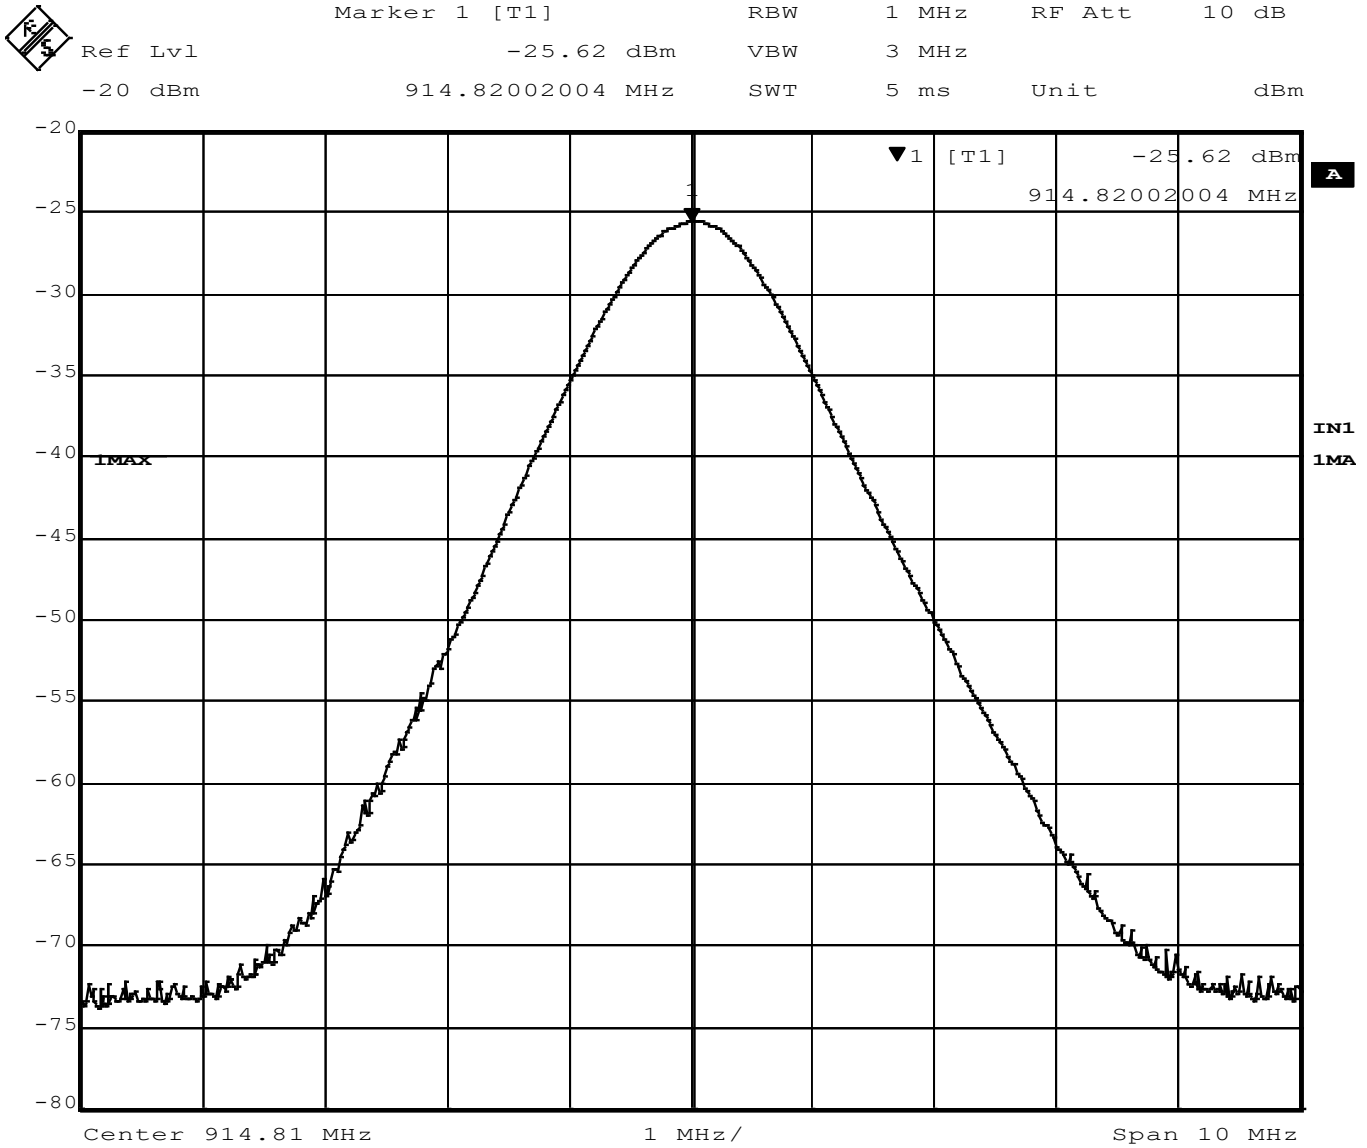Maximum power = $-25.18 \text{ dBm} + 107 + \text{CL} + \text{AF} - 95.23 = 15.09 \text{ dBm}$
 CL = cable loss = 4.70 dB
 AF = antenna factor = 23.80 dB
 107 = conversion from dBm to dB μ V on a 50 Ω measurement system
 -95.23 = Conversion from field strength (dB μ V/m) to EIRP (dBm) at a 3m measurement distance.




Date: 27.SEP.2018 11:46:15

Figure 6 - Output Power, Mid Channel

Maximum power = $-25.62 \text{ dBm} + 107 + \text{CL} + \text{AF} - 95.23 = 14.45 \text{ dBm}$
 CL = cable loss = 4.80 dB
 AF = antenna factor = 23.50 dB
 107 = conversion from dBm to dBμV on a 50Ω measurement system
 -95.23 = Conversion from field strength (dBμV/m) to EIRP (dBm) at a 3m measurement distance.



Marker 1 [T1]	RBW	1 MHz	RF Att	10 dB
Ref Lvl	-27.06 dBm	VBW	3 MHz	
-20 dBm	927.63006012 MHz	SWT	5 ms	Unit dBm

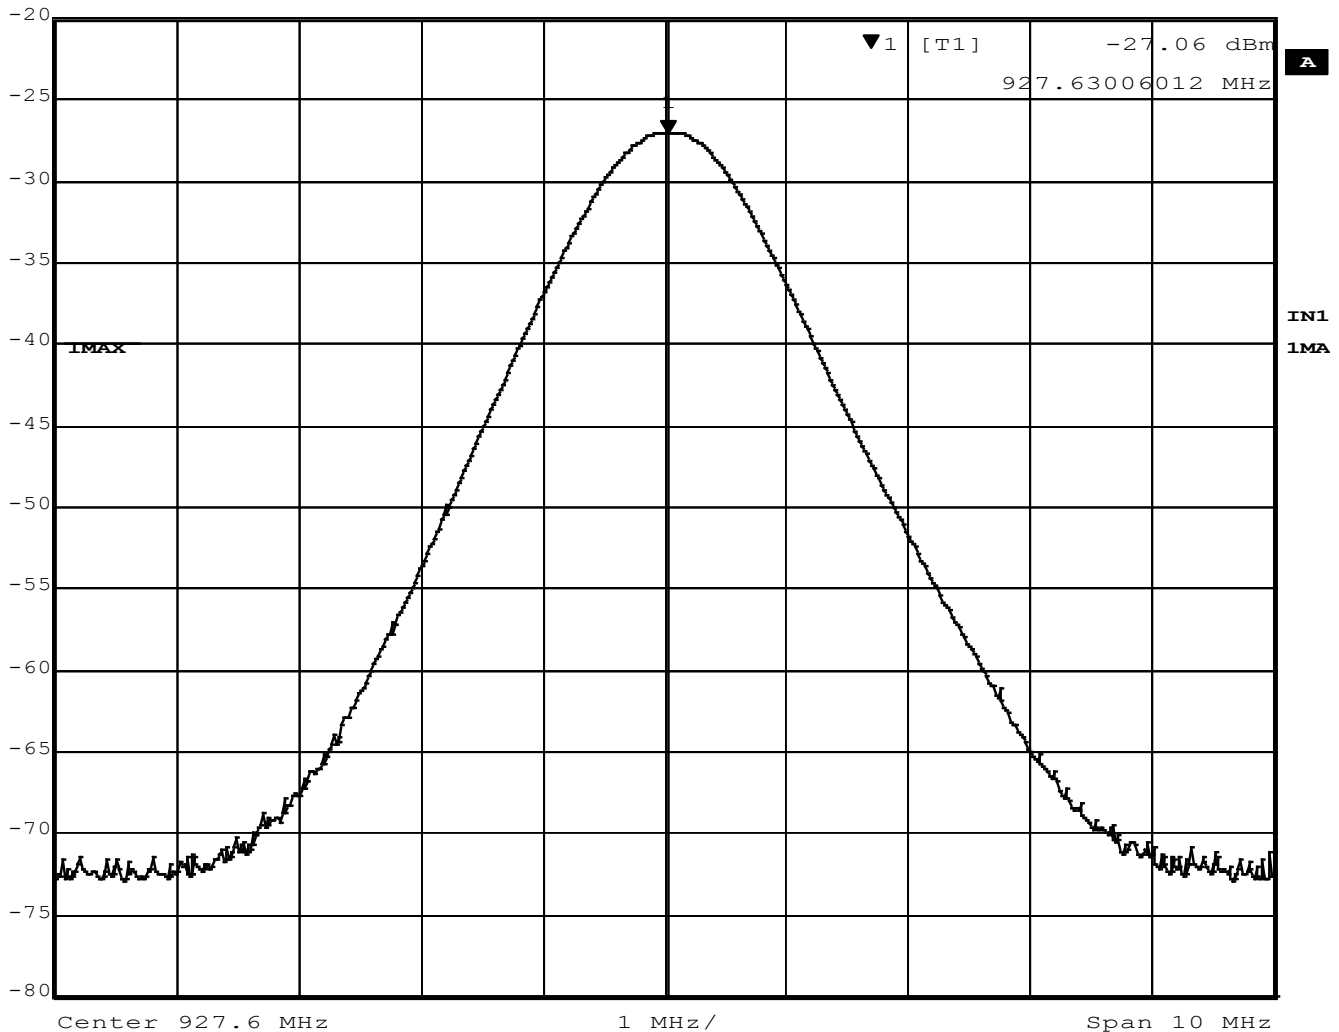

Date: 27.SEP.2018 12:32:04

Figure 7 - Output Power, High Channel

Maximum power = $-27.06 \text{ dBm} + 107 + \text{CL} + \text{AF} - 95.23 = 13.51 \text{ dBm}$

CL = cable loss = 4.90 dB

AF = antenna factor = 23.90 dB

107 = conversion from dBm to dBμV on a 50Ω measurement system

-95.23 = Conversion from field strength (dBμV/m) to EIRP (dBm) at a 3m measurement distance.

4.4 BANDWIDTH

Test Method: ANSI C63.10, Section(s) 6.9.2

Limits of bandwidth measurements:

From FCC Part 15.247 (1) (i) and RSS-247 5.1(c)

The minimum allowed 20 dB bandwidth of the hopping channel is 250 kHz.

Test procedures:

Bandwidth measurement was taken at a distance of 3m from the EUT. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 300 kHz VBW.

The 20 dB bandwidth is defined as the bandwidth of which is higher than peak power minus 20dB. The occupied bandwidth was measured using the test receiver's 99% occupied bandwidth measurement mode.

Test setup:

All the measurements were done at 3m test distance while an operator was trying to activate the hopping sequence manually. See Section 4.3 for more details.

Deviations from test standard:

No deviation.

Test setup:

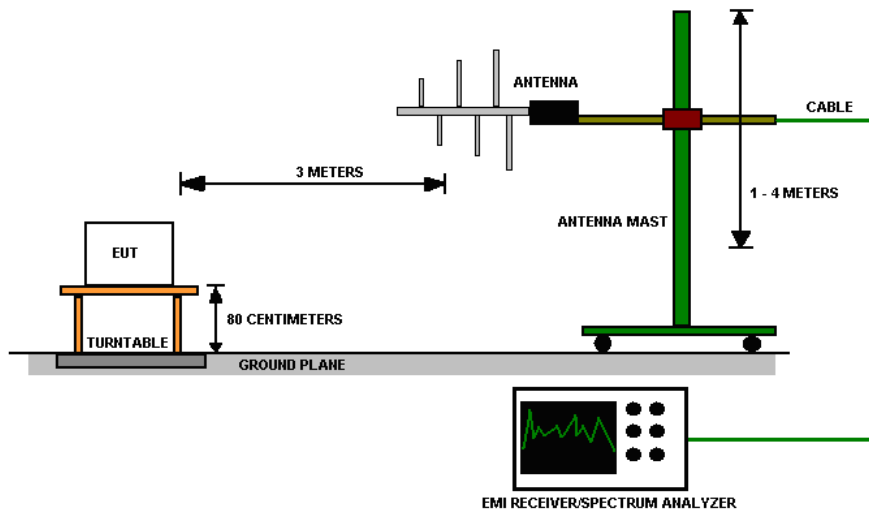


Figure 8 - Bandwidth Measurements Test Setup

EUT operating conditions:

The EUT was powered by 3 VDC unless specified and set to transmit continuously on the lowest frequency channel, highest frequency channel and one in the middle of its operating range.



Report Number:	R20180906-21-01	Rev	E
Prepared for:	Inovonics		

Test results:

20 dB Bandwidth

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BW (kHz)
Low	902.4	332.64
Mid	914.8	328.65
High	927.6	322.65


*The limit is 250 kHz minimum. The measurements were conducted at 100 kHz RBW and 300 kHz VBW according to FCC Report and Order FCC 14-208 from December 30, 2014, Paragraph 83.

Occupied Bandwidth

CHANNEL	CHANNEL FREQUENCY (MHz)	OBW (kHz)
Low	902.4	316.63
Mid	914.8	310.62
High	927.6	298.59



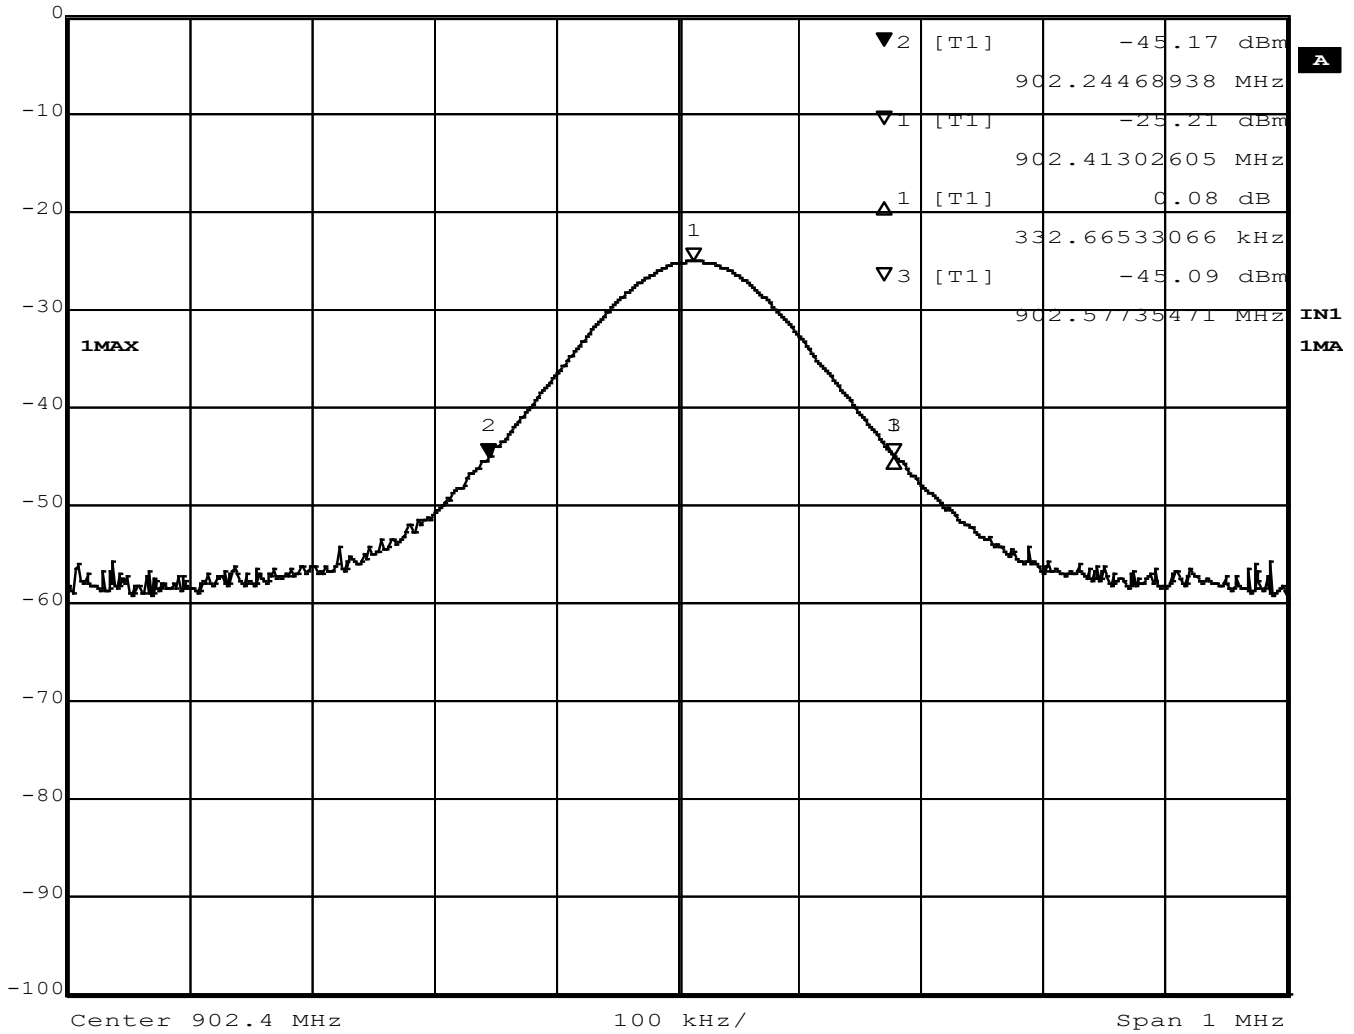Marker 2 [T1] RBW 100 kHz RF Att 10 dB
 -45.17 dBm VBW 300 kHz
 Ref Lvl 0 dBm 902.24468938 MHz SWT 5 ms Unit dBm




Date: 27.SEP.2018 13:20:13

Figure 9 – 20 dB Bandwidth, Low Channel



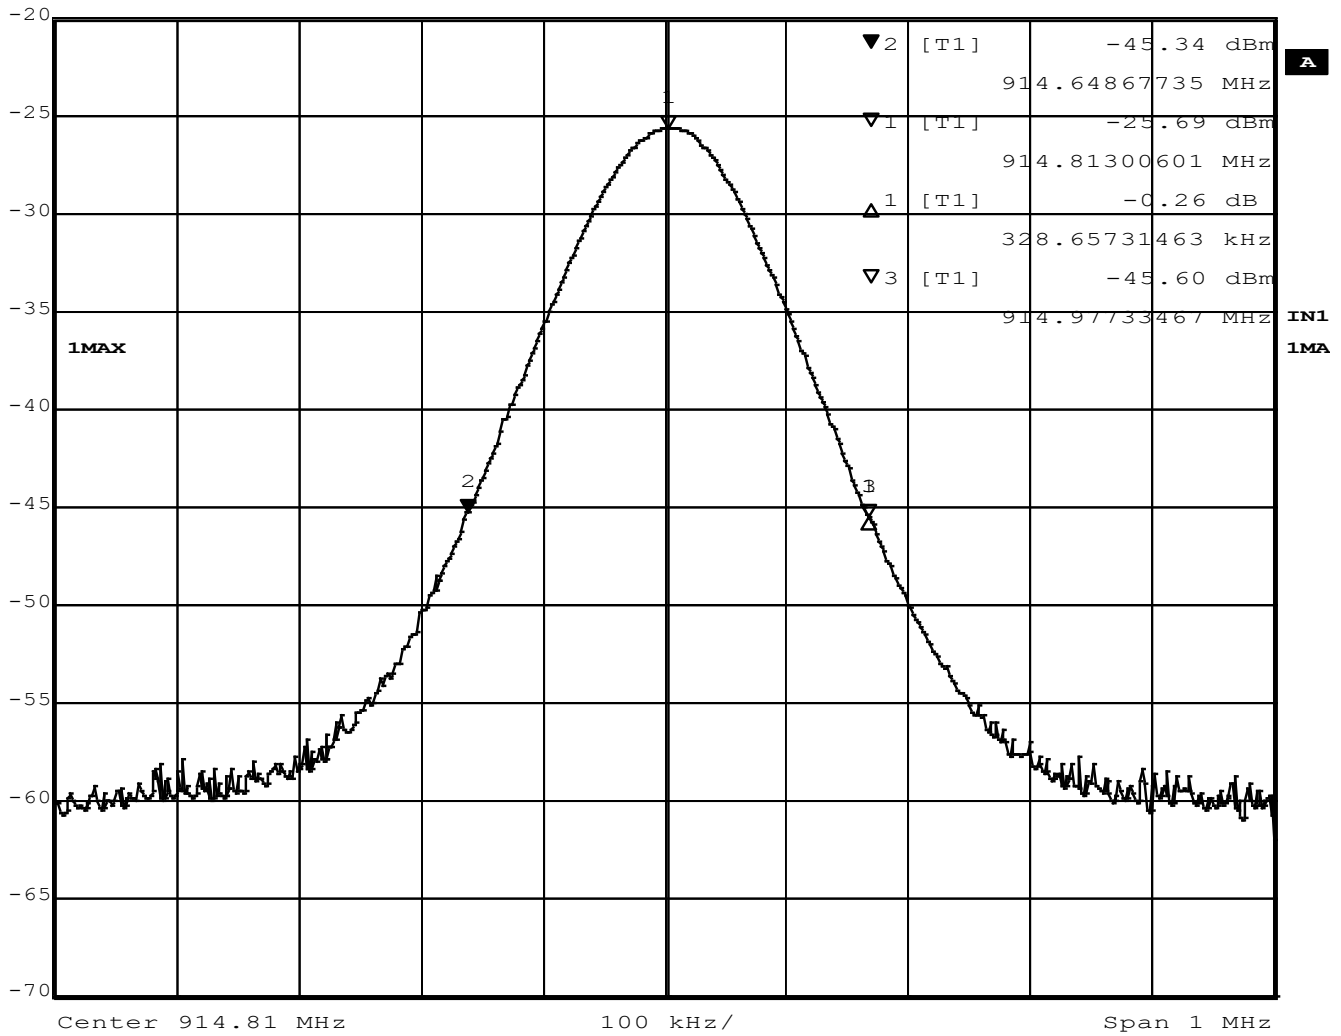Marker 2 [T1] RBW 100 kHz RF Att 10 dB
 Ref Lvl -45.34 dBm VBW 300 kHz
 -20 dBm 914.64867735 MHz SWT 5 ms Unit dBm




Date: 27.SEP.2018 11:43:45

Figure 10 - 20 dB Bandwidth, Mid Channel



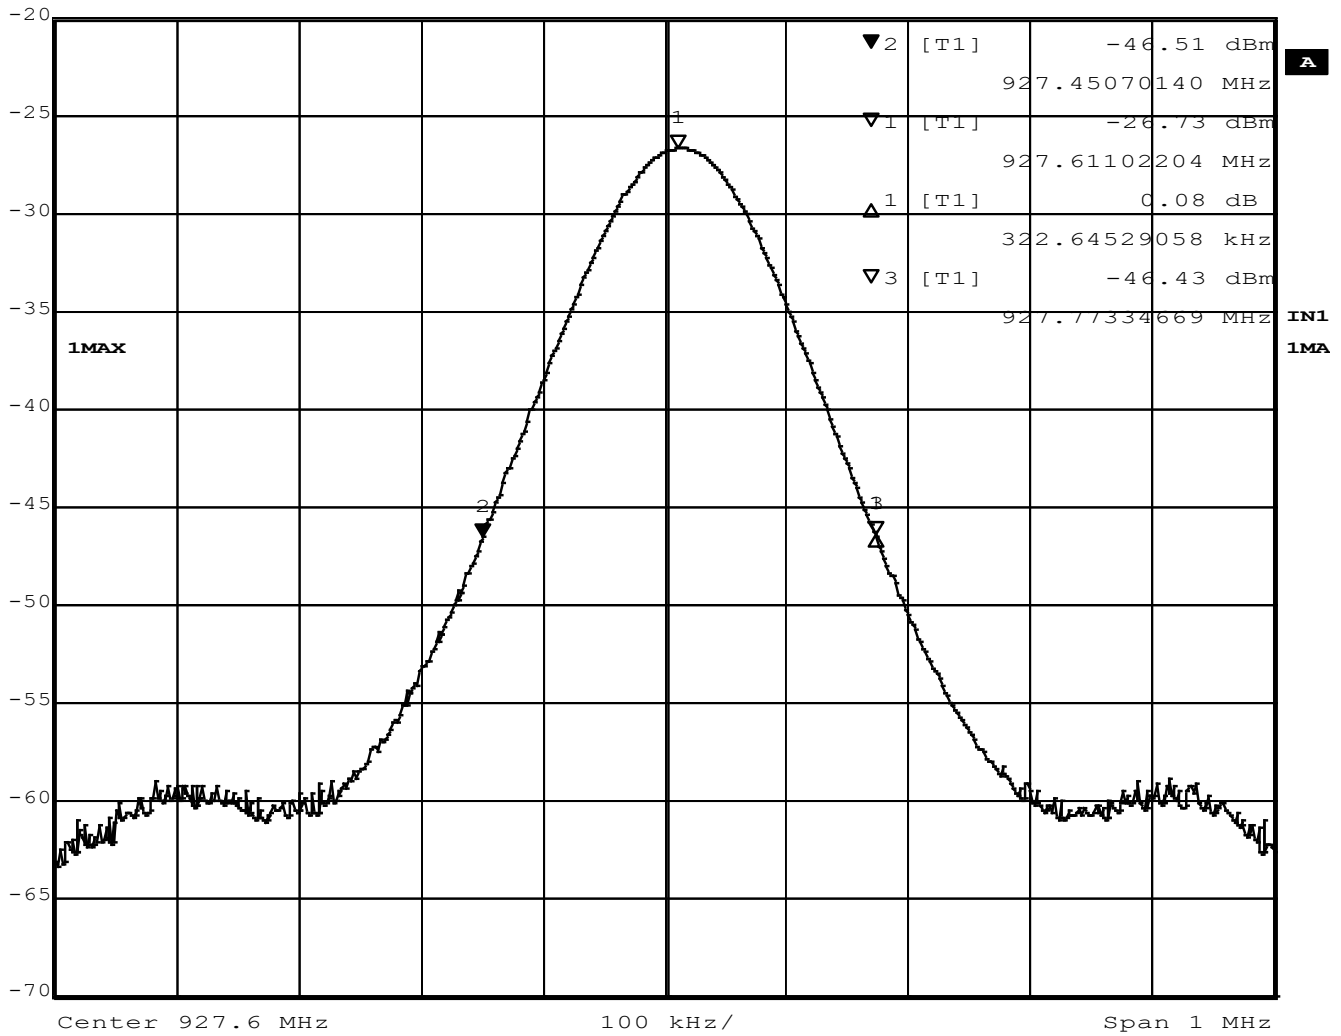Marker 2 [T1] RBW 100 kHz RF Att 10 dB
 Ref Lvl -20 dBm -46.51 dBm VBW 300 kHz
 -20 dBm 927.45070140 MHz SWT 5 ms Unit dBm




Date: 27.SEP.2018 12:27:19

Figure 11 - 20 dB Bandwidth, High Channel



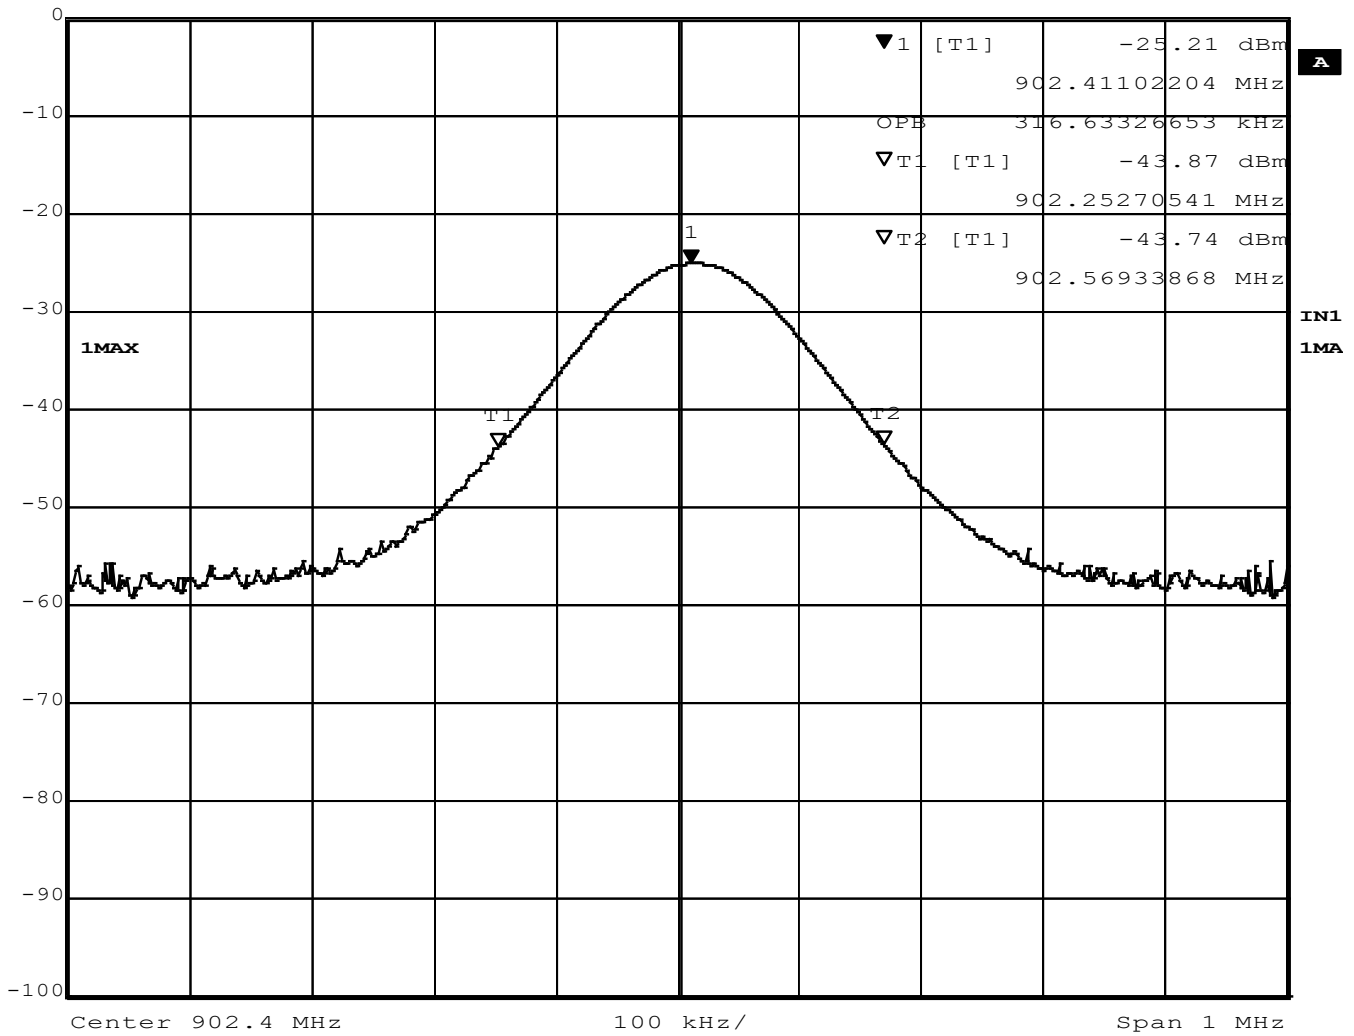Marker 1 [T1] RBW 100 kHz RF Att 10 dB
 -25.21 dBm VBW 300 kHz
 Ref Lvl 0 dBm 902.41102204 MHz SWT 5 ms Unit dBm




Date: 27.SEP.2018 13:21:00

Figure 12 – Occupied Bandwidth, Low Channel



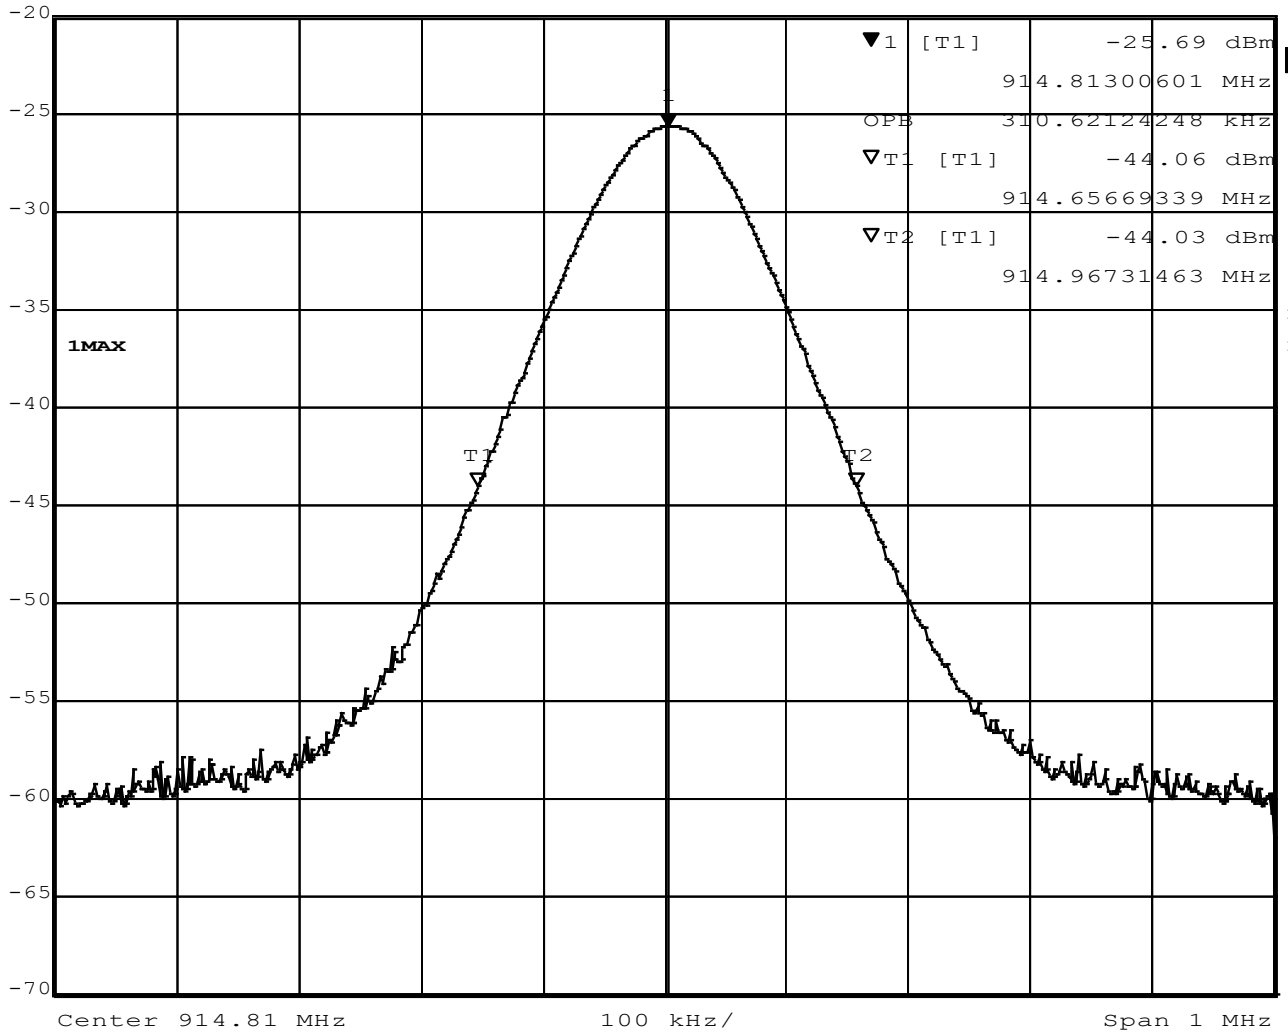Marker 1 [T1] RBW 100 kHz RF Att 10 dB
 Ref Lvl -25.69 dBm VBW 300 kHz
 -20 dBm 914.81300601 MHz SWT 5 ms Unit dBm




Date: 27.SEP.2018 11:44:14

Figure 13 - Occupied Bandwidth, Mid Channel



Ref Lvl	Marker 1 [T1]	RBW	100 kHz	RF Att	10 dB
-20 dBm	-26.73 dBm	VBW	300 kHz		
	927.61102204 MHz	SWT	5 ms	Unit	dBm

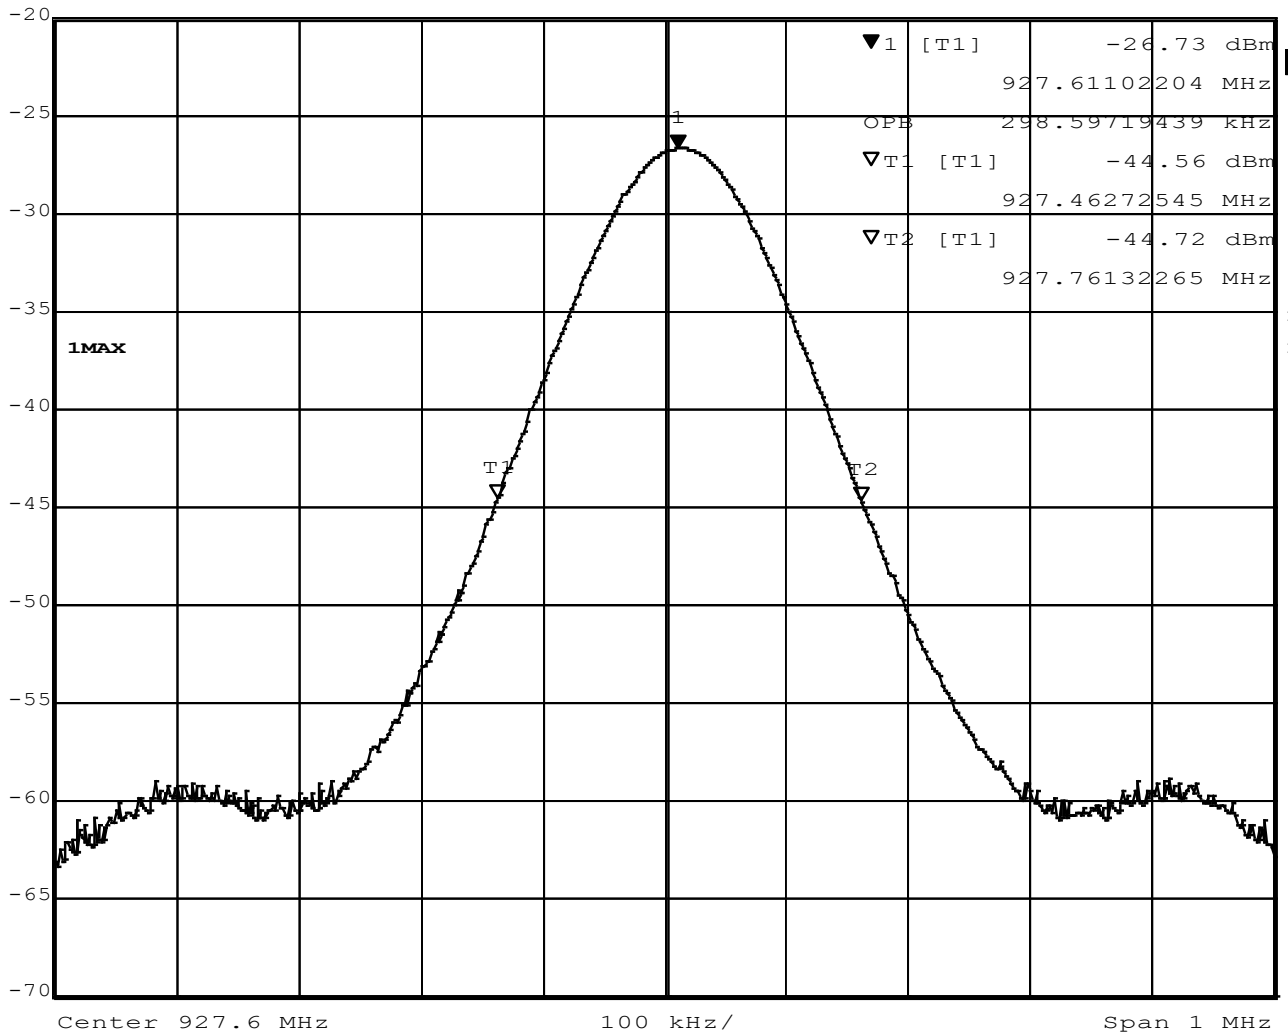

Date: 27.SEP.2018 12:28:01

Figure 14 - Occupied Bandwidth, High Channel



Report Number:	R20180906-21-01	Rev	E
Prepared for:	Inovonics		

4.5 BANDEDGES

Test Method: ANSI C63.10, Section(s) 6.10.6

Limits of bandedge measurements:

For emissions outside of the allowed band of operation (902 – 928MHz), the emission level needs to be 20dB under the maximum fundamental field strength. However, if the emissions fall within one of the restricted bands from 15.205 the field strength levels need to be under that of the limits in 15.209.

Test procedures:

The EUT was tested in the same method as described in section 4.4 - *Bandwidth*. The EUT was oriented as to produce the maximum emission levels. The resolution bandwidth was set to 30kHz and the EMI receiver was used to scan from the bandedge to the fundamental frequency with a quasi-peak detector. The highest emissions level beyond the bandedge was measured and recorded. All band edge measurements were evaluated to the general limits in Part 15.209.

Deviations from test standard:

No deviation.

Test setup:

All the measurements were done at 3m test distance while an operator was trying to activate the hopping sequence manually.

EUT operating conditions:

The EUT was powered by 3 VDC unless specified and set to transmit continuously on the lowest frequency channel, highest frequency channel and one in the middle of its operating range.



Report Number:	R20180906-21-01	Rev	E
Prepared for:	Inovonics		

Test results:

Highest Out of Band Emissions

CHANNEL	Band edge /Measurement Frequency (MHz)	Relative Highest out of band level dBm	Relative Fundamental Level (dBm)	Delta	Min (dBc)	Result
Low, Continuous	614.0	-101.17	-26.38	74.79	64.25	PASS
High, Continuous	960.0	-101.07	-27.10	73.97	62.94	PASS
Low Hopping	614.0	-101.76	-23.10	78.66	64.25	PASS
High, Hopping	960.0	-101.75	-30.71	71.04	62.94	PASS
High, Continuous	928.0	-60.55	-27.10	33.45	20.00	PASS
High, Hopping	928.0	-64.74	-30.71	34.00	20.00	PASS

*Minimum delta = [highest fundamental peak field strength from Section 4.2] – [Part 15.209 radiated emissions limit.]

From Section 4.2

Fundamental average field strength at 902.4MHz for low channel = 110.25 dB μ V/m

Fundamental average field strength at 927.6MHz for high channel = 108.94 dB μ V/m

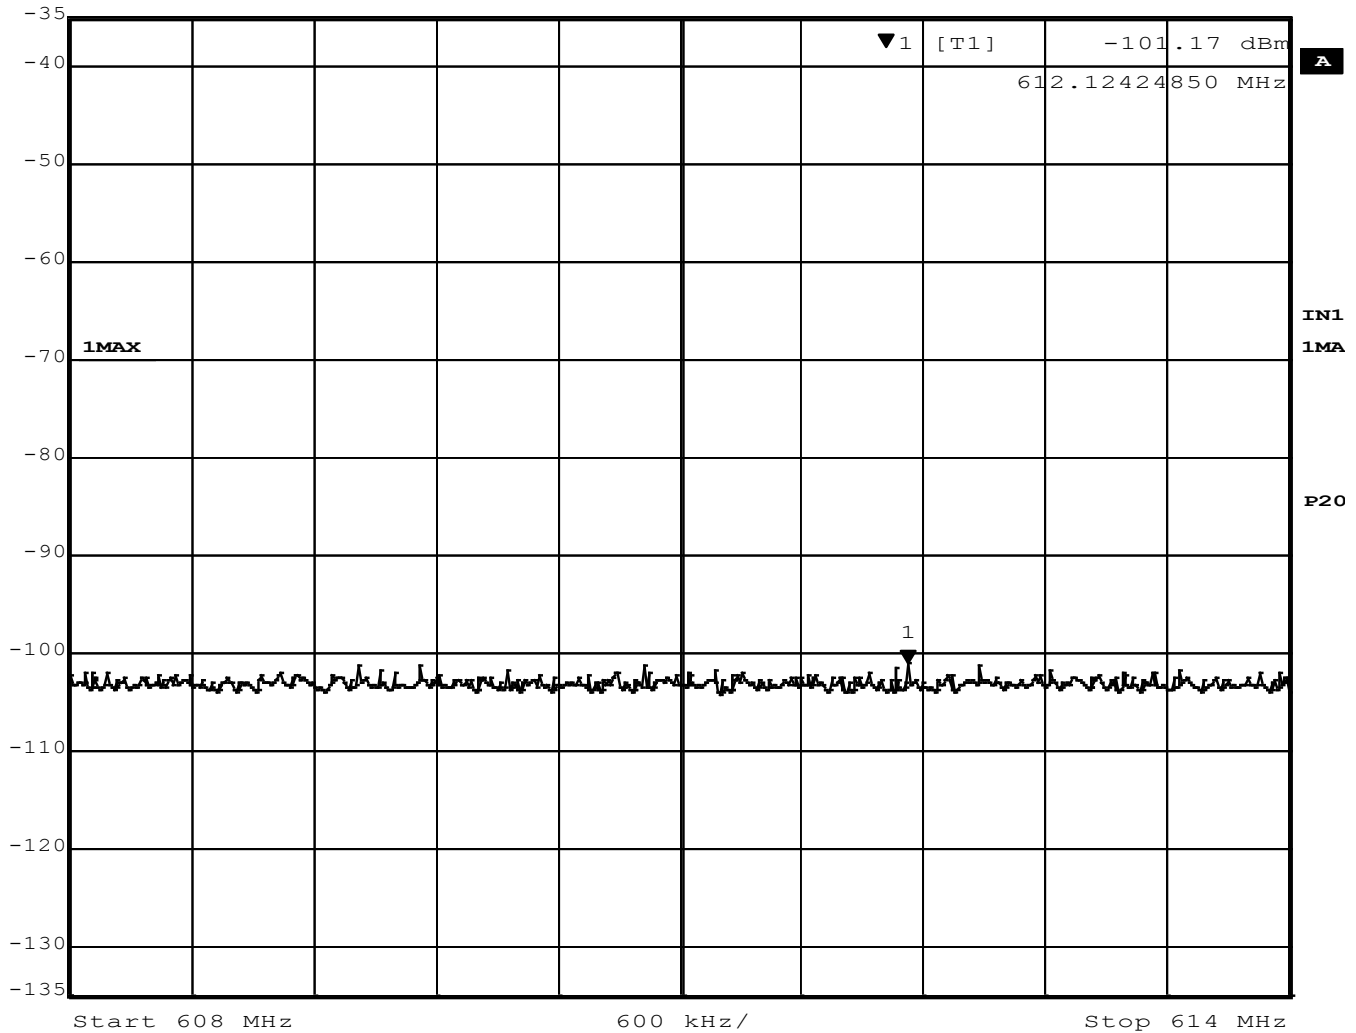
Low channel minimum delta = 110.25 – 46.0 dB μ V/m = 64.25 dBc

High channel minimum delta = 109.23 – 46.0 dB μ V/m = 62.94 dBc

Measurements do not include correction factors and are intended to be relative measurements only.



Marker 1 [T1] RBW 100 kHz RF Att 0 dB
 Ref Lvl -101.17 dBm VBW 300 kHz
 -35 dBm 612.12424850 MHz SWT 5 ms Unit dBm




Date: 27.SEP.2018 12:56:30

Figure 15 - Band-edge Measurement, Low Channel, Restricted Frequency, Continuous Transmit

The plot shows an uncorrected measurement, used for relative measurements only.



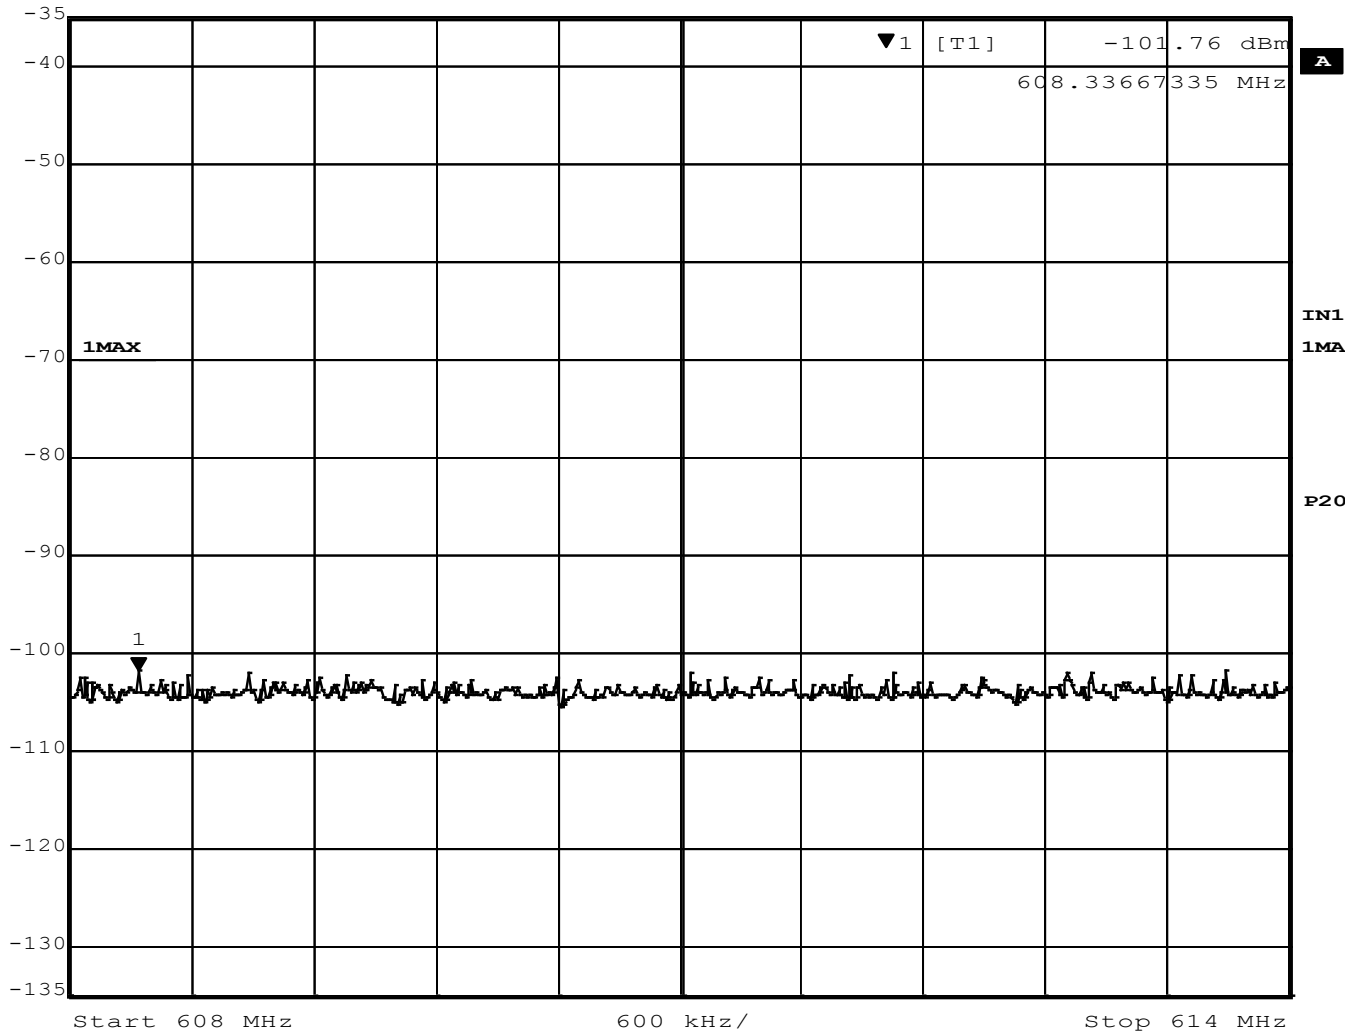Marker 1 [T1] RBW 100 kHz RF Att 0 dB
 Ref Lvl -101.76 dBm VBW 300 kHz
 -35 dBm 608.33667335 MHz SWT 5 ms Unit dBm




Date: 27.SEP.2018 12:57:00

Figure 16 - Band-edge Measurement, Low Channel, Restricted Frequency, Hopping

The plot shows an uncorrected measurement, used for relative measurements only.



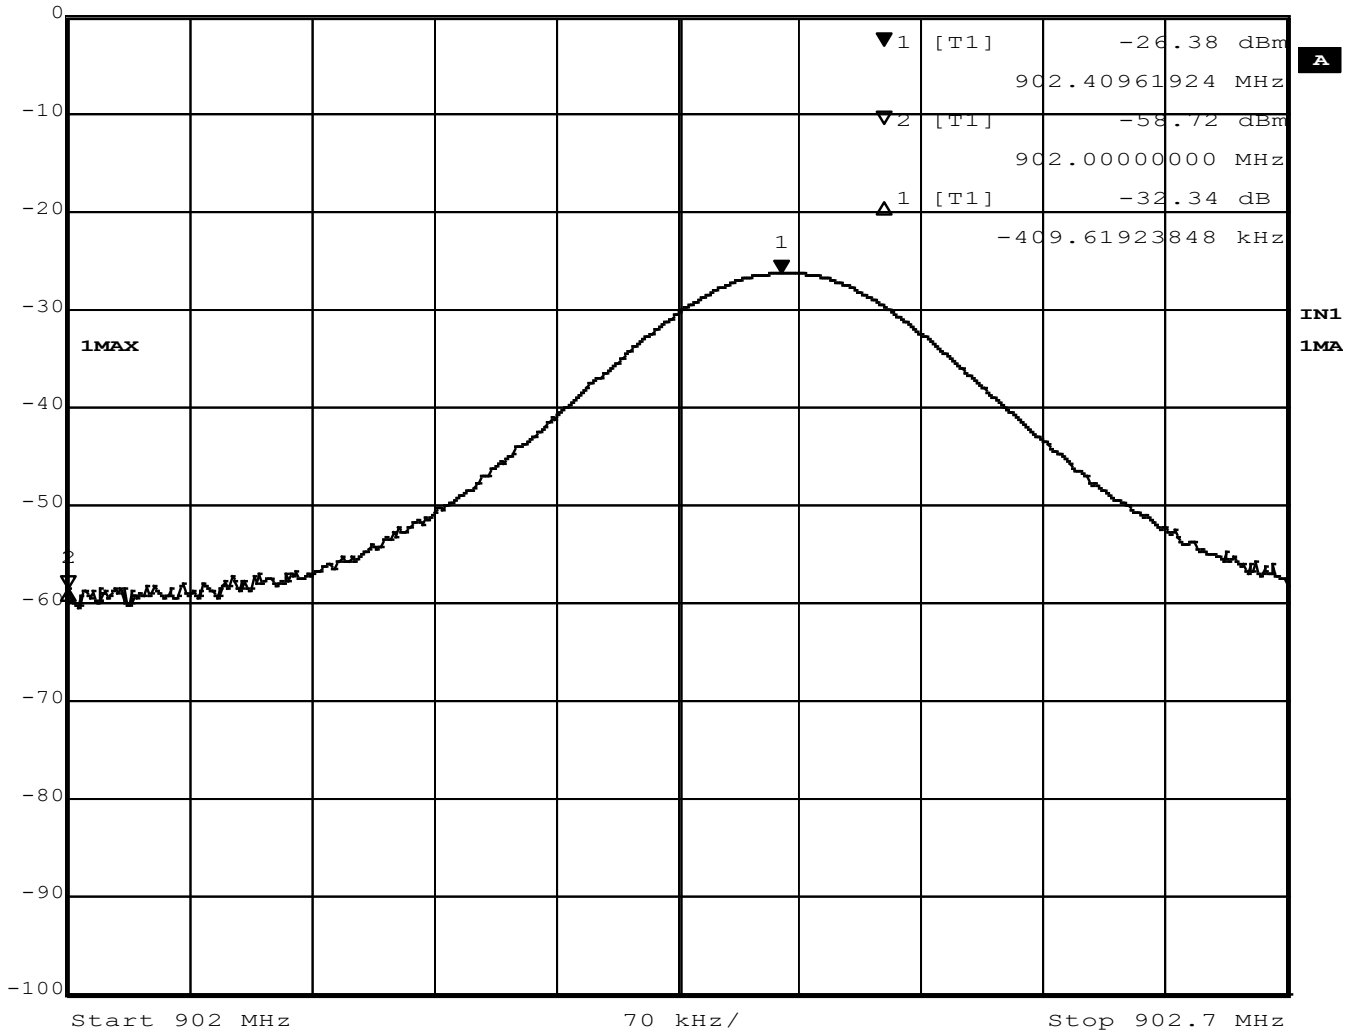Marker 1 [T1] RBW 100 kHz RF Att 10 dB
 Ref Lvl -26.38 dBm VBW 300 kHz
 0 dBm 902.40961924 MHz SWT 5 ms Unit dBm



Date: 27.SEP.2018 13:00:00


Figure 17 - Band-edge Measurement, Low Channel, Fundamental, Continuous Transmit

The plot shows an uncorrected measurement, used for relative measurements only.

Delta = 32.34 dB > 20 dB Passing unrestricted bandedge



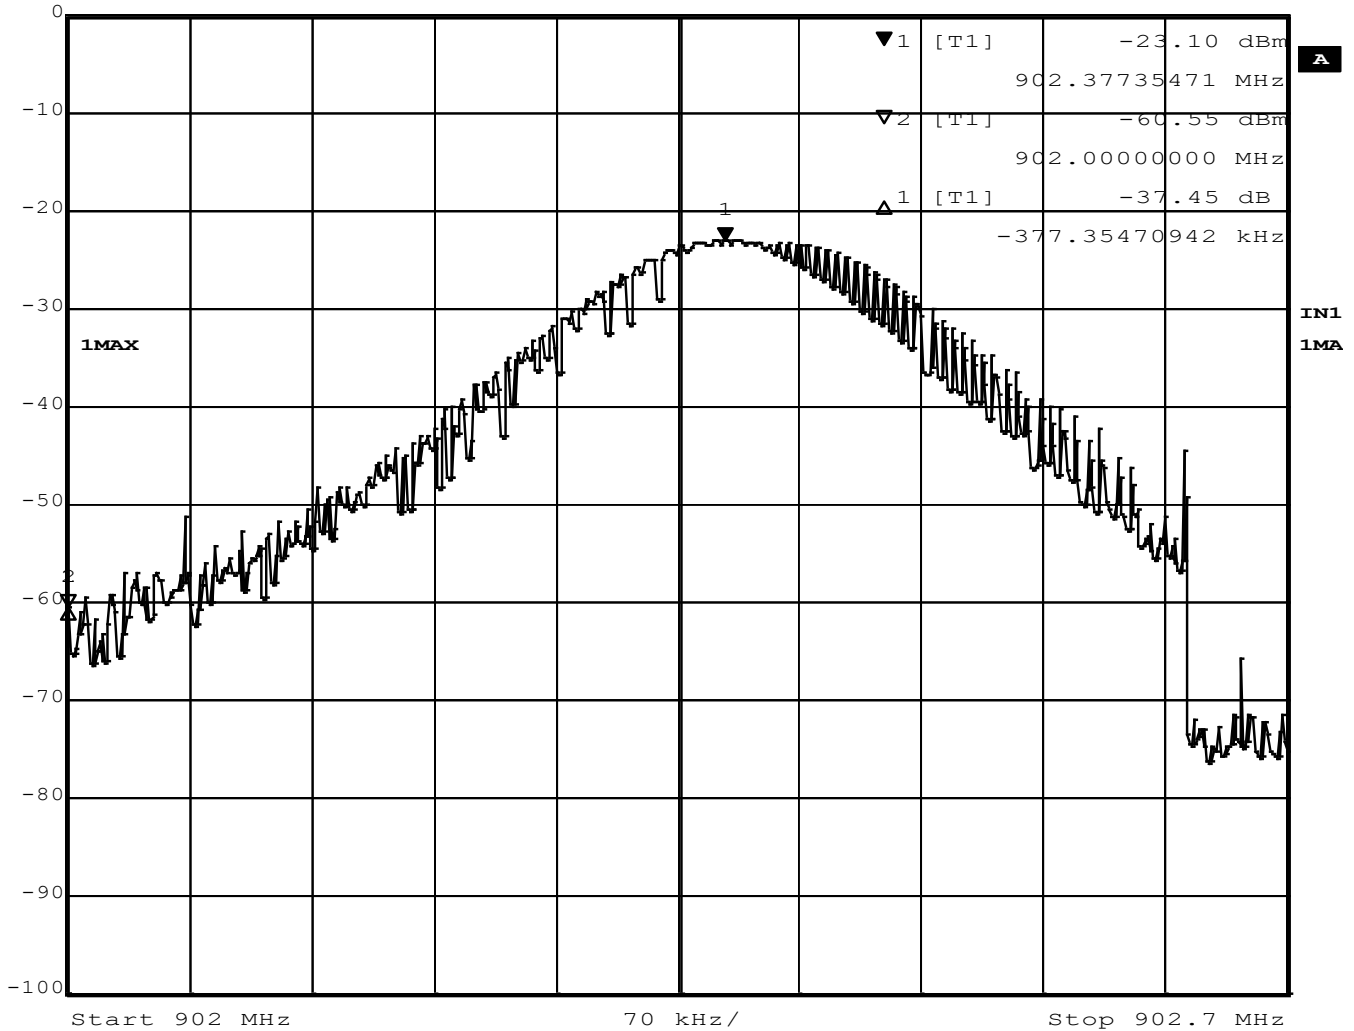Marker 1 [T1] RBW 100 kHz RF Att 10 dB
 Ref Lvl -23.10 dBm VBW 300 kHz
 0 dBm 902.37735471 MHz SWT 5 ms Unit dBm



Date: 27.SEP.2018 13:10:31


Figure 18 - Band-edge Measurement, Low Channel, Fundamental, Hopping Transmit

The plot shows an uncorrected measurement, used for relative measurements only.

Delta = 37.45 dB > 20 dB Passing unrestricted bandedge



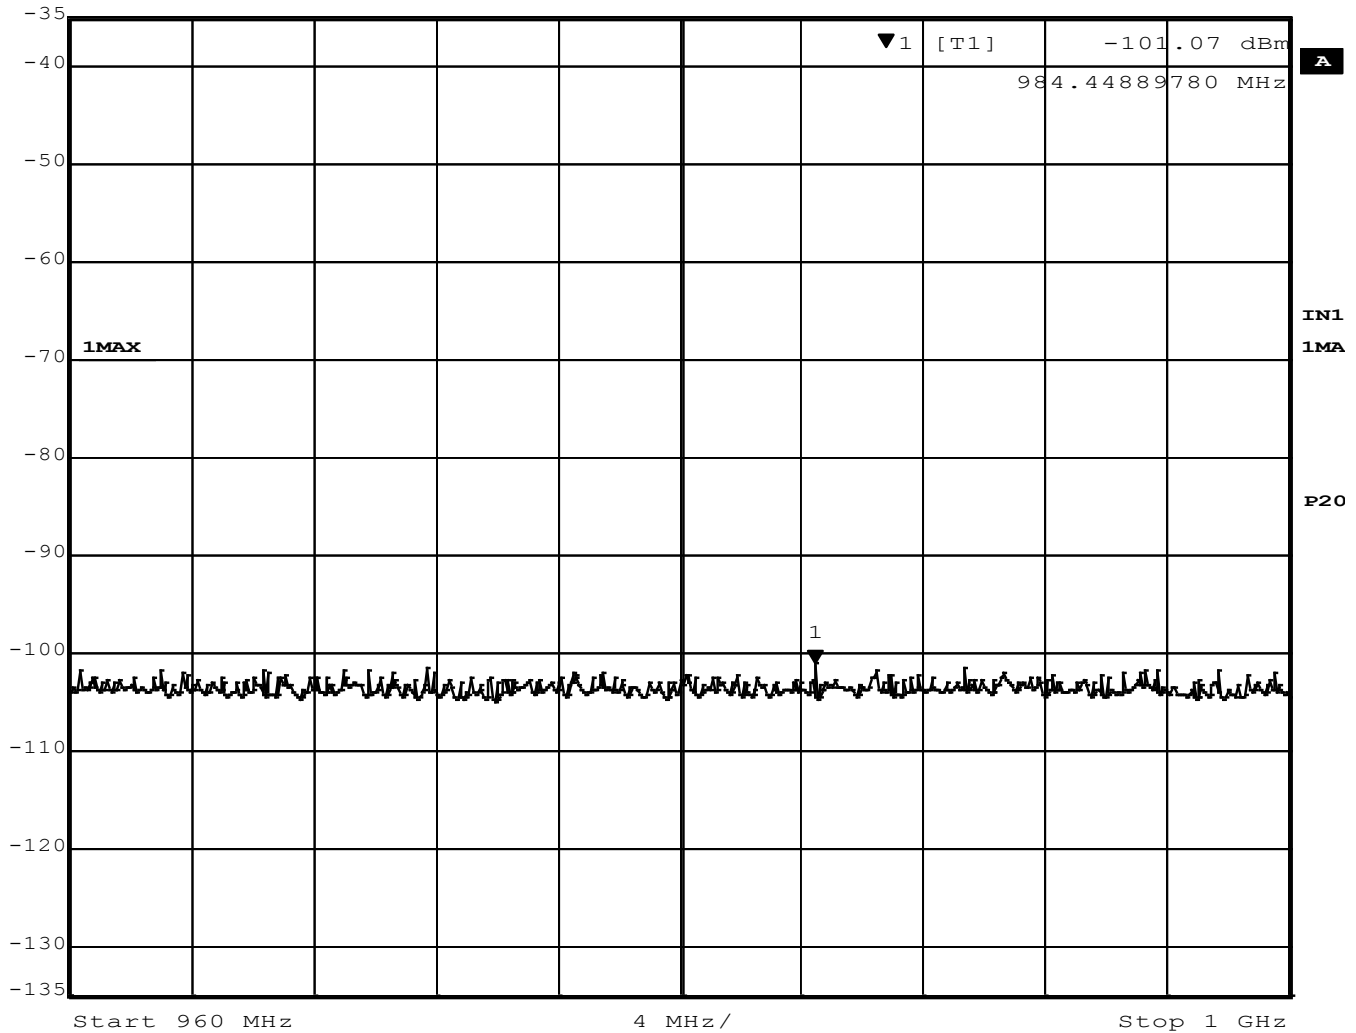Marker 1 [T1] RBW 100 kHz RF Att 0 dB
 Ref Lvl -101.07 dBm VBW 300 kHz
 -35 dBm 984.44889780 MHz SWT 10 ms Unit dBm




Date: 27.SEP.2018 12:41:55

Figure 19 - Band-edge Measurement, High Channel, Restricted Frequency, Continuous Transmit
 The plot shows an uncorrected measurement, used for relative measurements only.



Marker 1 [T1]	RBW	100 kHz	RF Att	0 dB
Ref Lvl	-101.75 dBm	VBW	300 kHz	
-35 dBm	964.32865731 MHz	SWT	10 ms	Unit dBm

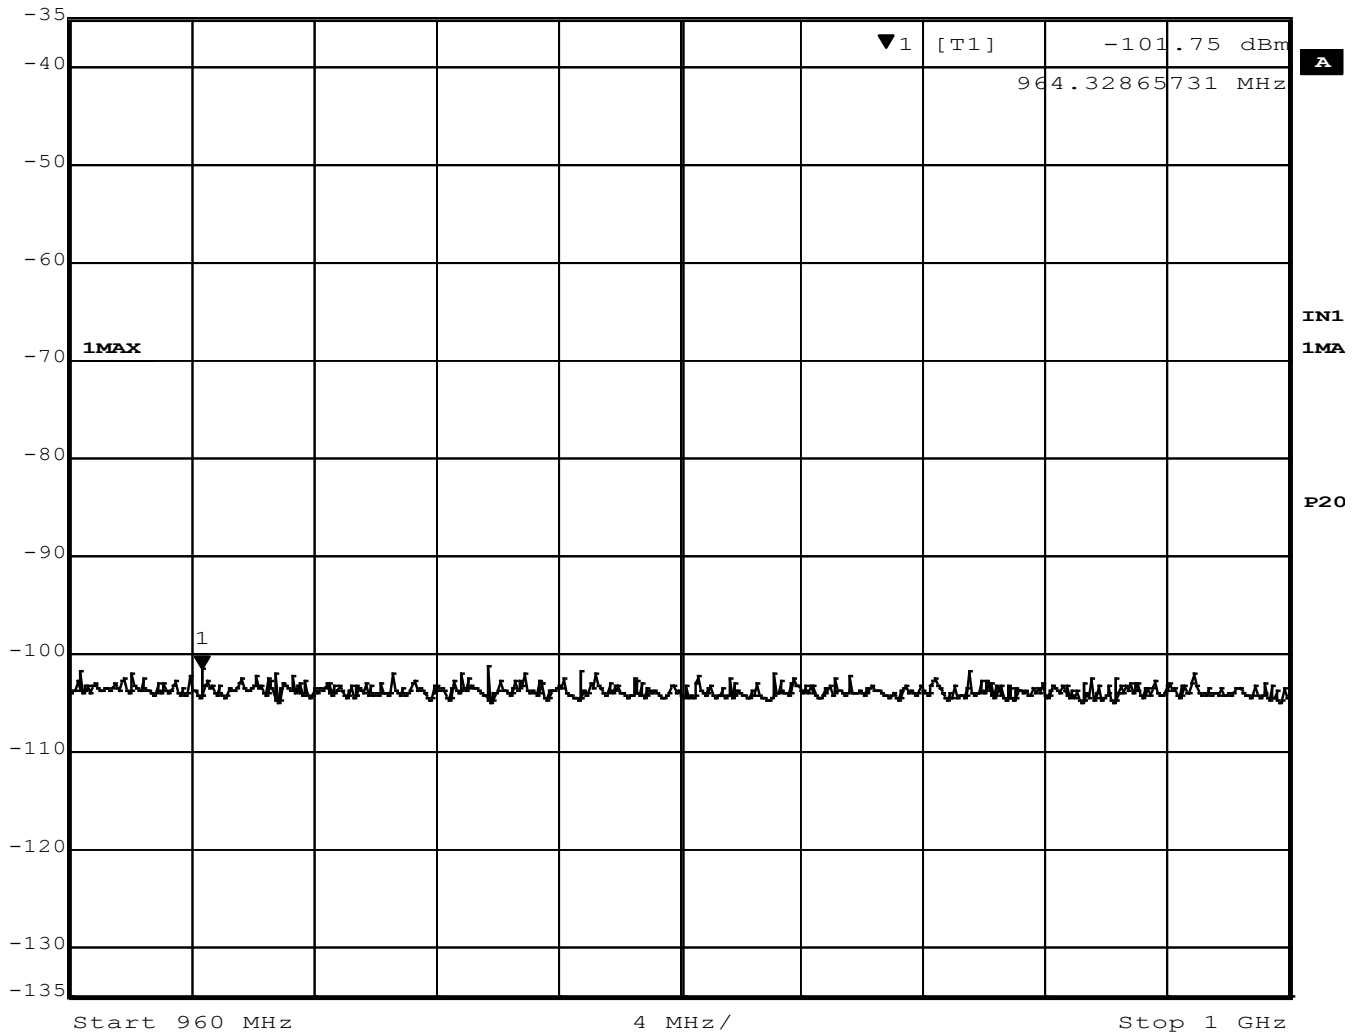


Date: 27.SEP.2018 12:41:13

Figure 20 - Band-edge Measurement, High Channel, Restricted Frequency, Hopping

The plot shows an uncorrected measurement, used for relative measurements only.



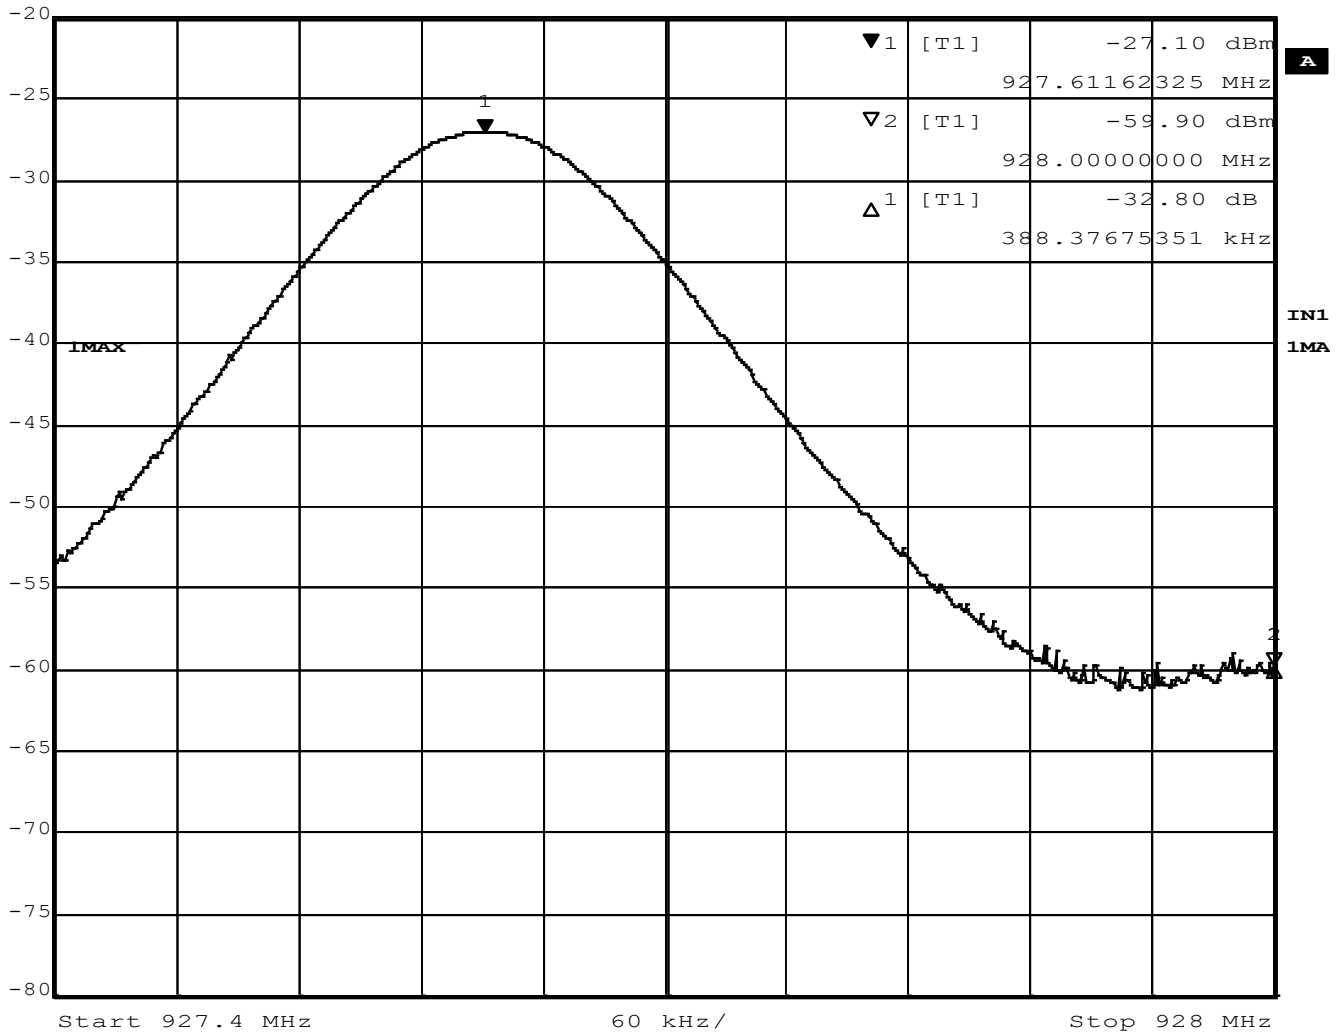Marker 1 [T1] RBW 100 kHz RF Att 10 dB
 Ref Lvl -27.10 dBm VBW 300 kHz
 -20 dBm 927.61162325 MHz SWT 5 ms Unit dBm



Date: 27.SEP.2018 12:33:37

Figure 21 - Band-edge Measurement, High Channel, Fundamental, Continuous Transmit

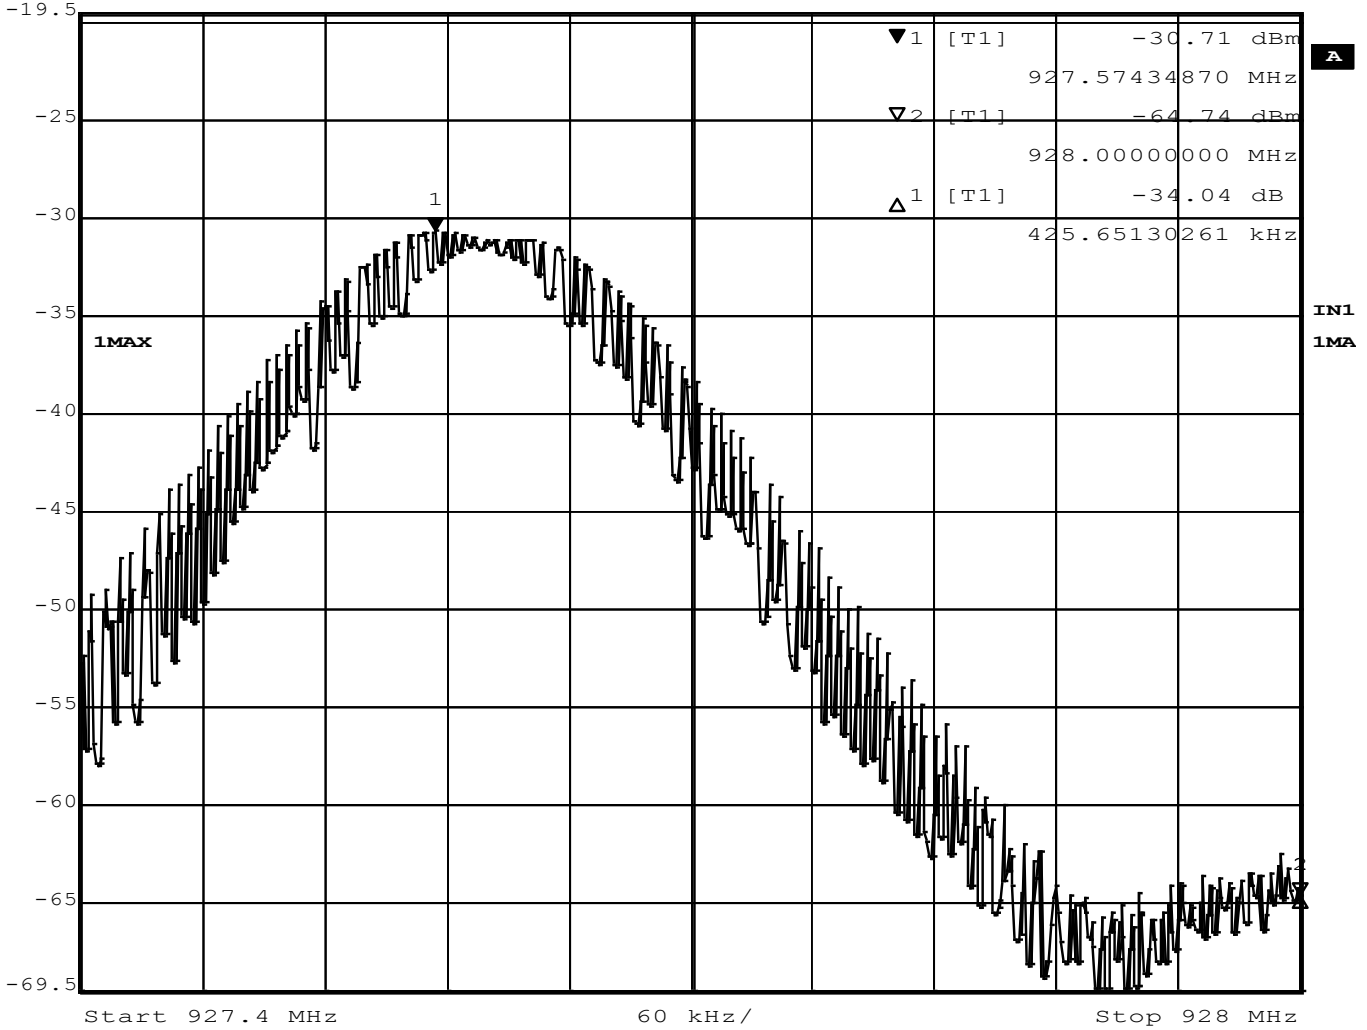
The plot shows an uncorrected measurement, used for relative measurements only.

Delta = 32.80 dB > 20 dB Passing unrestricted bandedge



Marker 1 [T1] RBW 100 kHz RF Att 10 dB

Ref Lvl -30.71 dBm VBW 300 kHz
 -19.5 dBm 927.57434870 MHz SWT 5 ms Unit dBm



Date: 27.SEP.2018 12:39:05

Figure 22 - Band-edge Measurement, High Channel, Fundamental, Hopping Transmit

The plot shows an uncorrected measurement, used for relative measurements only.

Delta = 34.04 dB > 20 dB Passing unrestricted bandedge



Report Number:	R20180906-21-01	Rev	E
Prepared for:	Inovonics		

4.6 CARRIER FREQUENCY SEPERATION, NUMBER OF HOPPING CHANNELS, TIME OF OCCUPANCY

Test Method: ANSI C63.10, Section 7.8.2, 7.8.3, 7.8.4

Limits for Time of Occupancy

Average time of occupancy on any frequency, not to exceed 0.4 seconds within a 10 second period.

Test procedures:

The method from KDB 558074 D01 v05

All measurements were taken at a distance of 3m from the EUT.

Test setup:

All the measurements were done at 3m test distance while an operator was trying to activate the hopping sequence manually.


EUT operating conditions:

The EUT was powered by 3VDC unless specified and set to transmit while hopping. For figure 31-33 a tamper switch was used to activate the EUT to enable operator to capture pulses in real time.

Test results:



Marker 1 [T1]	RBW	100 kHz	RF Att	10 dB
Ref Lvl	65.46 dB μ V/m	VBW	300 kHz	
87 dB*	917.58617234 MHz	SWT	5 ms	Unit dB μ V/m

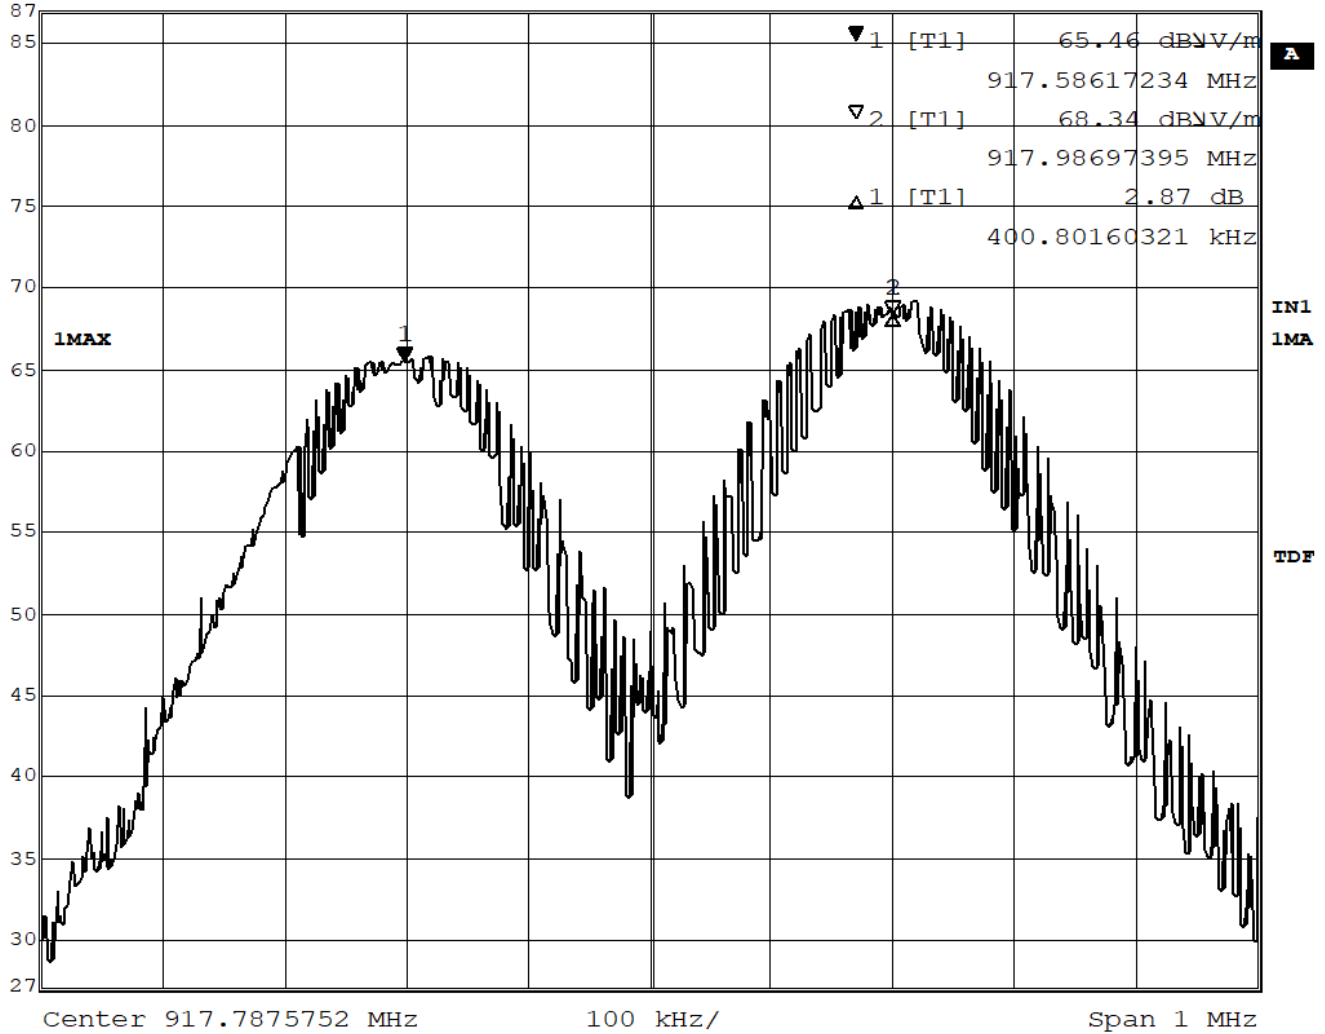


Date: 13.JUN.2019 13:06:03

Figure 23 – Frequency Separation

400.8 kHz minimum frequency separation



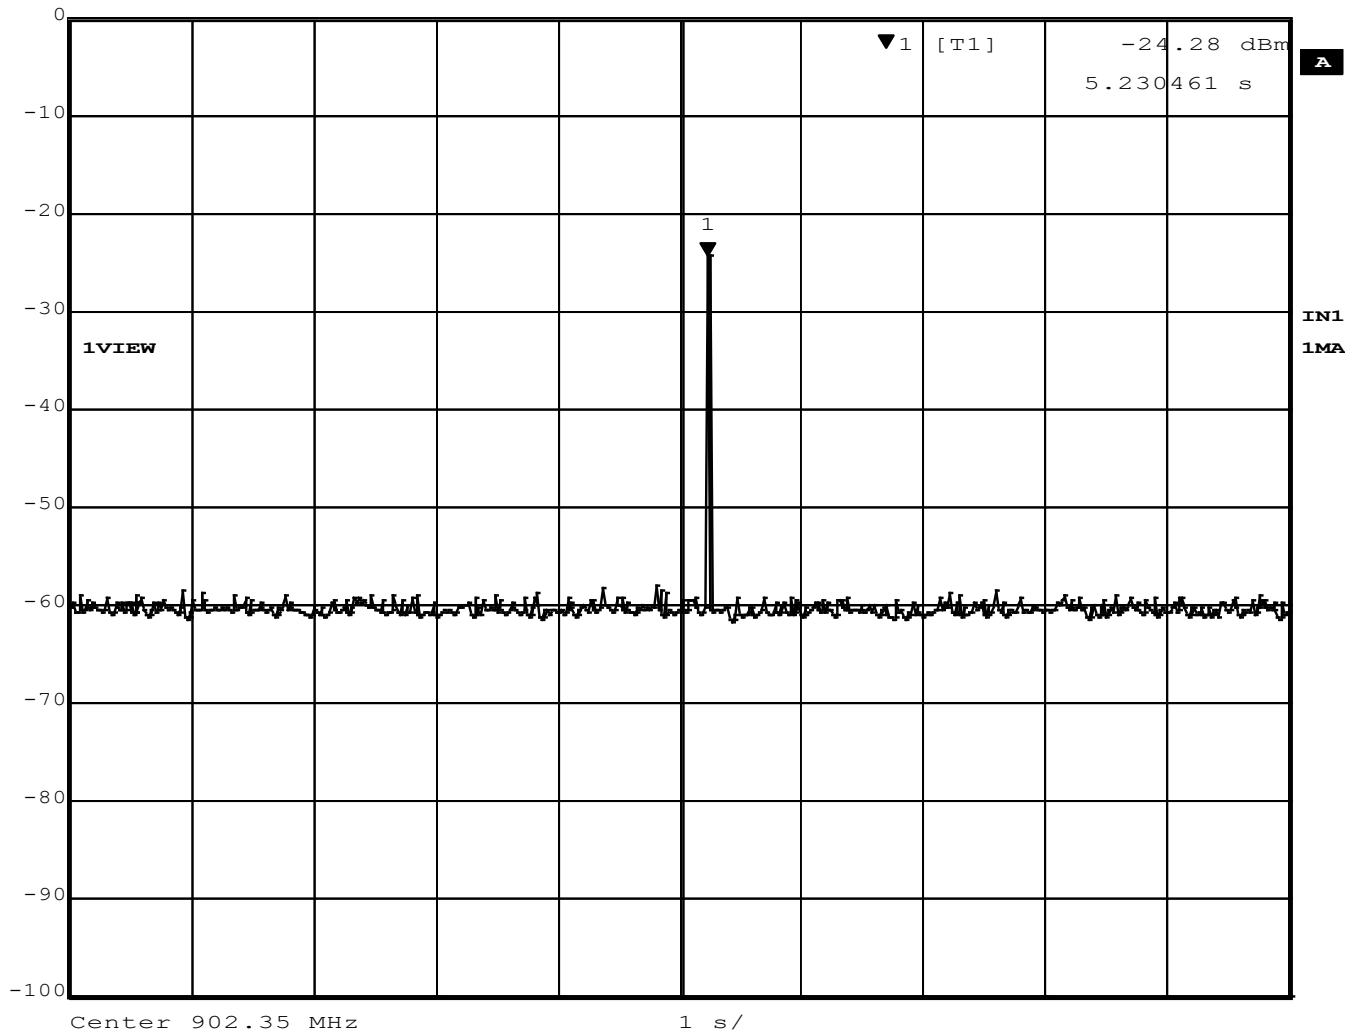Marker 1 [T1] RBW 10 MHz RF Att 10 dB
 Ref Lvl -24.28 dBm VBW 10 MHz
 0 dBm 5.230461 s SWT 10 s Unit dBm



Date: 27.SEP.2018 13:14:56

Figure 25 – Time of Occupancy, Period

Plot shows only 1 transmission in 10 s window. Per Section 4.1, the dwell time per channel is 22% in any 100ms window. $22\% \text{ per } (100\text{ms} \times 10\text{ms}/10\text{sec}) = 2.2\% \text{ per } 10 \text{ sec window} = 0.22 \text{ sec} < 0.4 \text{ sec}.$



Report Number:	R20180906-21-01	Rev	E
Prepared for:	Inovonics		

APPENDIX A: SAMPLE CALCULATION

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF - (-CF + AG) + AV$$

where FS = Field Strength

- RA = Receiver Amplitude
- AF = Antenna Factor
- CF = Cable Attenuation Factor
- AG = Amplifier Gain
- AV = Averaging Factor (if applicable)

Assume a receiver reading of 55 dB μ V is obtained. The Antenna Factor of 12 and a Cable Factor of 1.1 is added. The Amplifier Gain of 20 dB is subtracted, giving a field strength of 48.1 dB μ V/m.

$$FS = 55 + 12 - (-1.1 + 20) + 0 = 48.1 \text{ dB}\mu\text{V/m}$$

The 48.1 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(48.1 \text{ dB}\mu\text{V/m})/20] = 254.1 \mu\text{V/m}$$

AV is calculated by the taking the $20 \cdot \log(T_{on}/100)$ where T_{on} is the maximum transmission time in any 100ms window.



Report Number:	R20180906-21-01	Rev	E
Prepared for:	Inovonics		

EIRP Calculations

In cases where direct antenna port measurement is not possible or would be inaccurate, output power is measured in EIRP. The maximum field strength is measured at a specified distance and the EIRP is calculated using the following equation;

$$EIRP (Watts) = [Field Strength (V/m) \times antenna distance (m)]^2 / 30$$

$$Power (watts) = 10^{[Power (dBm)/10]} / 1000$$

$$Voltage (dB\mu V) = Power (dBm) + 107 \text{ (for } 50\Omega \text{ measurement systems)}$$

$$Field Strength (V/m) = 10^{[Field Strength (dB\mu V/m) / 20]} / 10^6$$

$$Gain = 1 \text{ (numeric gain for isotropic radiator)}$$

Conversion from 3m field strength to EIRP (d=3):

$$EIRP = [FS(V/m) \times d^2]/30 = FS [0.3] \quad \text{for } d = 3$$

$$EIRP(dBm) = FS(dB\mu V/m) - 10(\log 10^9) + 10\log[0.3] = FS(dB\mu V/m) - 95.23$$

10log(10^9) is the conversion from micro to milli



Report Number:	R20180906-21-01	Rev	E
Prepared for:	Inovonics		

APPENDIX B – MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been for tests performed in this test report:

Test	Frequency Range	Uncertainty Value (dB)
Radiated Emissions, 3m	30MHz - 1GHz	3.82
Radiated Emissions, 3m	1GHz - 18GHz	4.44
Emissions limits, conducted	30MHz – 18GHz	±3.30 dB

Expanded uncertainty values are calculated to a confidence level of 95%.



Report Number:	R20180906-21-01	Rev	E
Prepared for:	Inovonics		

REPORT END