


Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Frank Xue	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz		

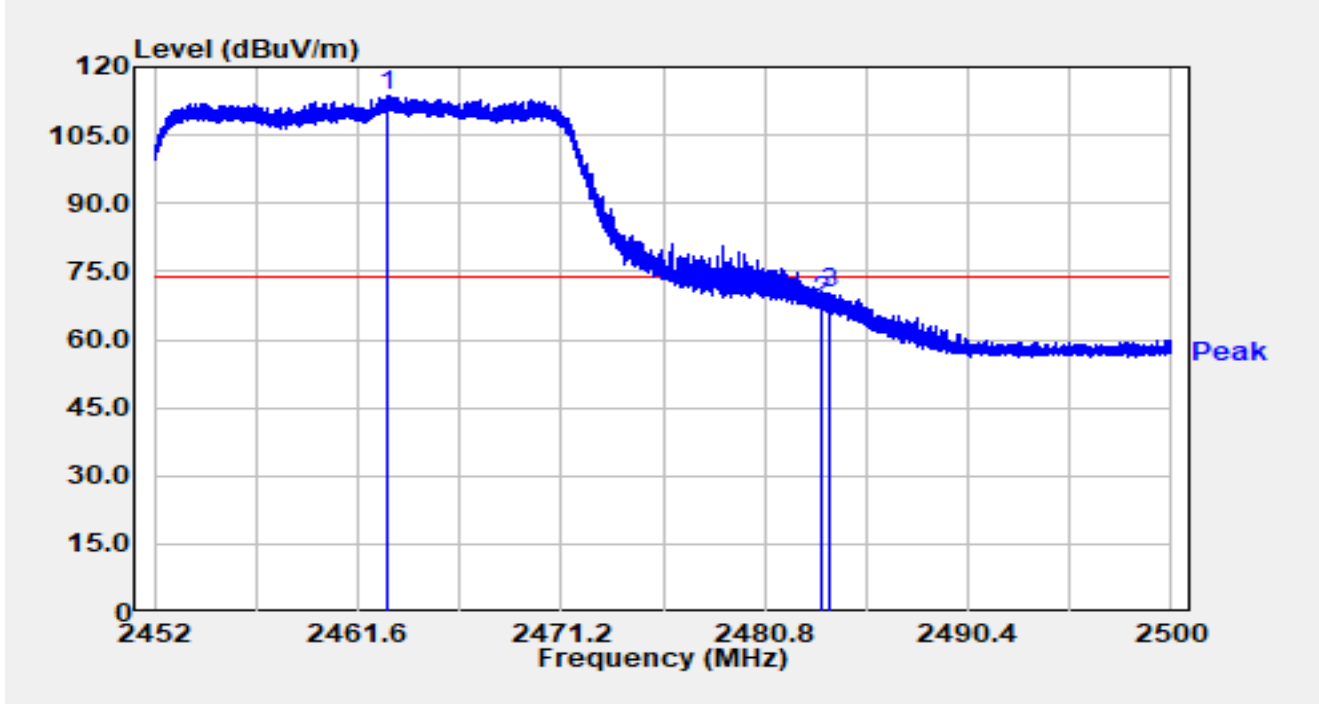


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	2462.968	81.41	32.36	113.77	N/A	N/A	Peak
2		2483.502	35.82	32.38	68.20	-5.80	74.00	Peak
3		2483.805	37.90	32.38	70.28	-3.72	74.00	Peak

## Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Frank Xue	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz		

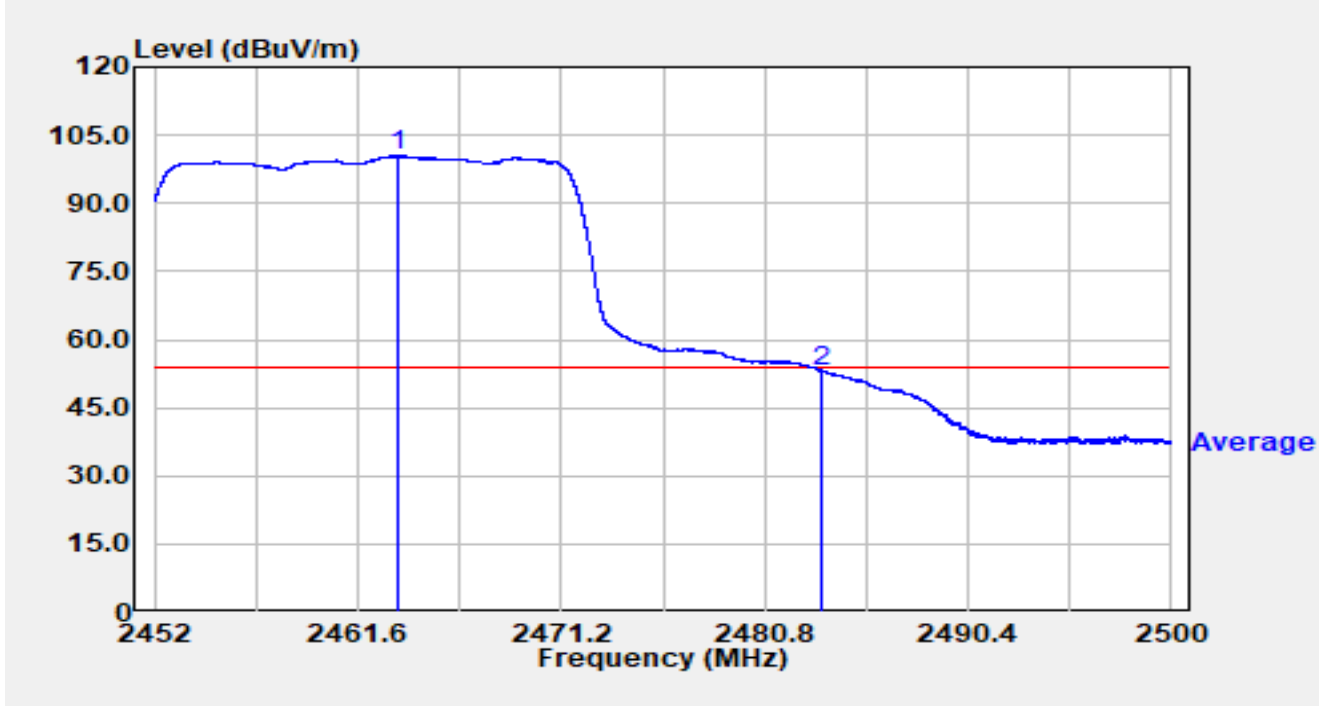


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	2463.477	68.00	32.37	100.36	N/A	N/A	Average
2		2483.502	20.82	32.38	53.20	-0.80	54.00	Average

## Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Frank Xue	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz		

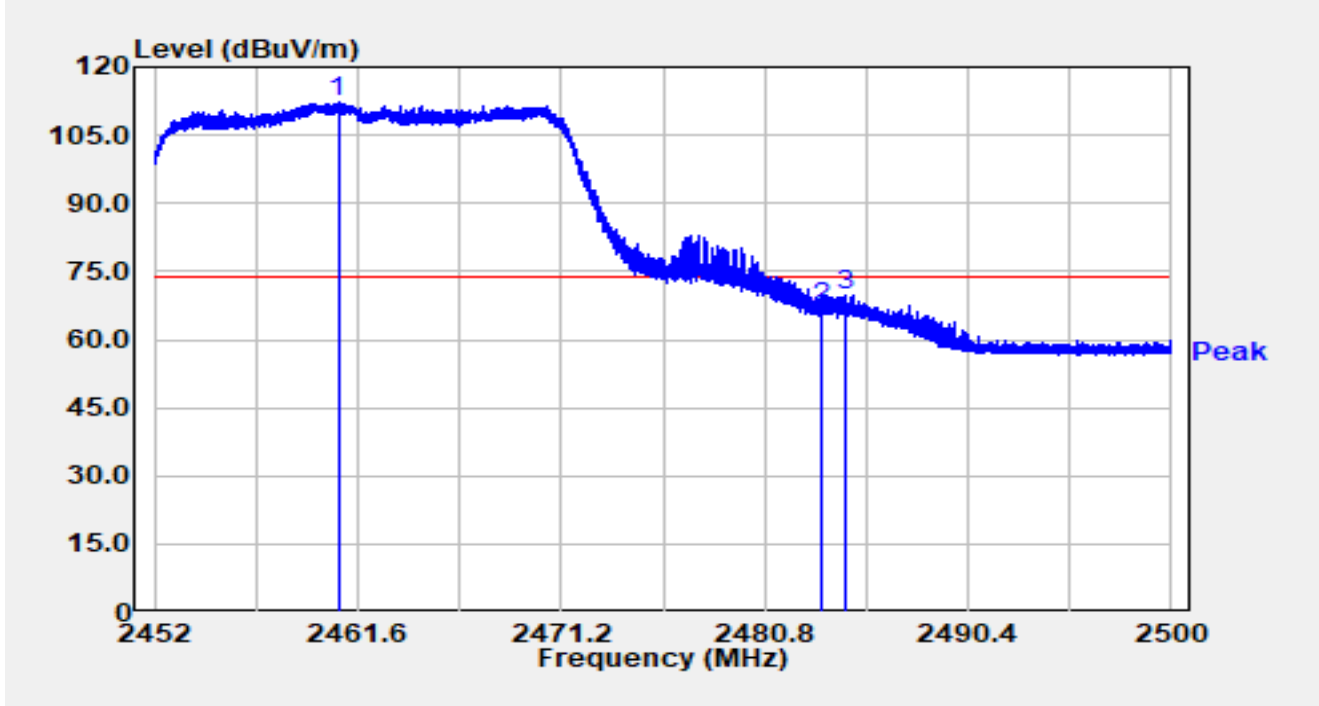


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	2460.664	79.82	32.36	112.18	N/A	N/A	Peak
2		2483.502	34.67	32.38	67.05	-6.95	74.00	Peak
3		2484.611	37.34	32.38	69.72	-4.28	74.00	Peak

## Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Frank Xue	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz		

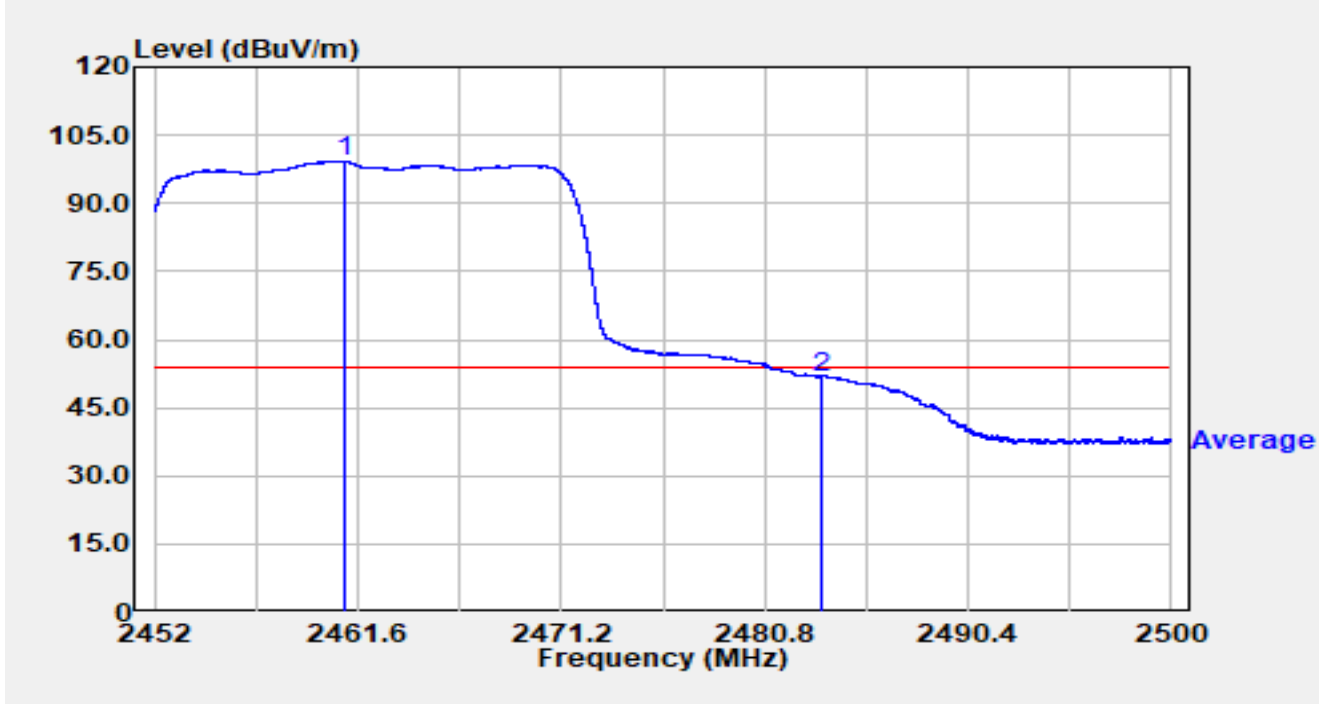


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	2460.938	67.03	32.36	99.39	N/A	N/A	Average
2		2483.500	19.41	32.38	51.79	-2.21	54.00	Average

Notes:

1. "\*" , means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Frank Xue	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2422MHz		

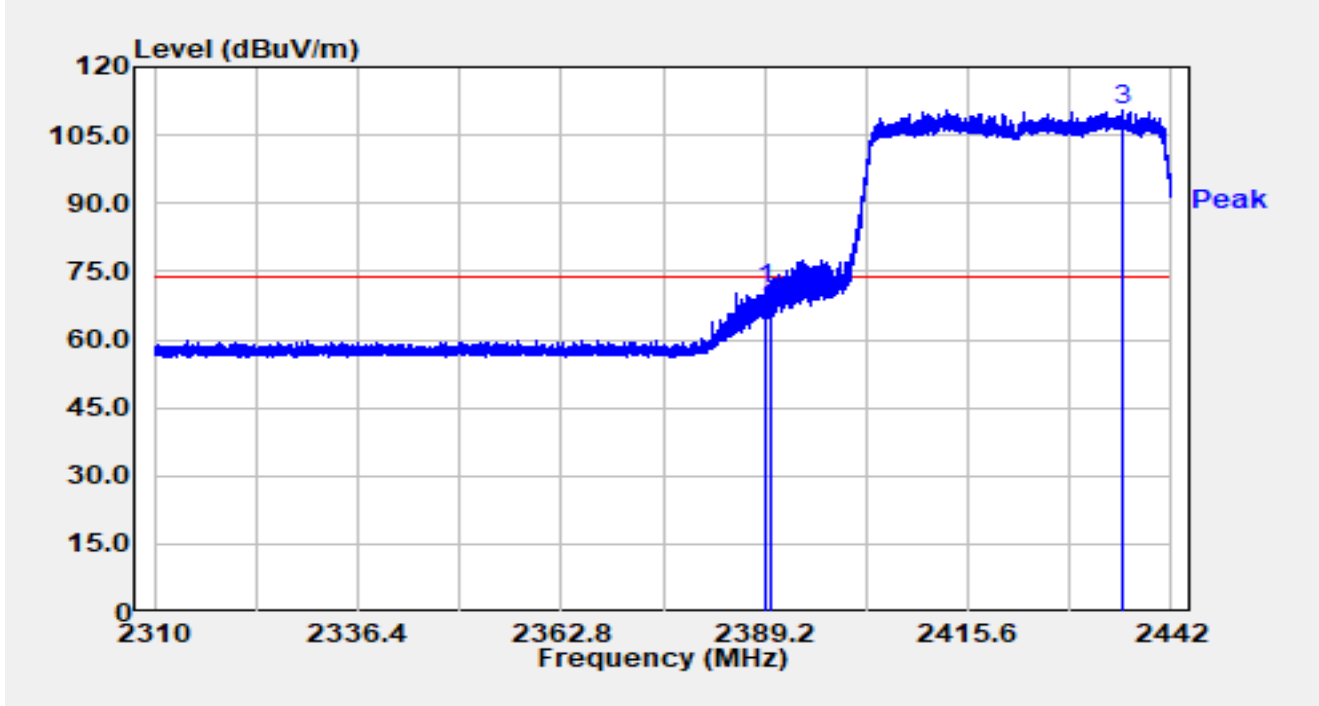


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1		2389.187	38.72	32.53	71.24	-2.76	74.00	Peak
2		2390.000	34.24	32.53	66.77	-7.23	74.00	Peak
3	*	2435.519	78.07	32.40	110.47	N/A	N/A	Peak

## Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Frank Xue	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2422MHz		

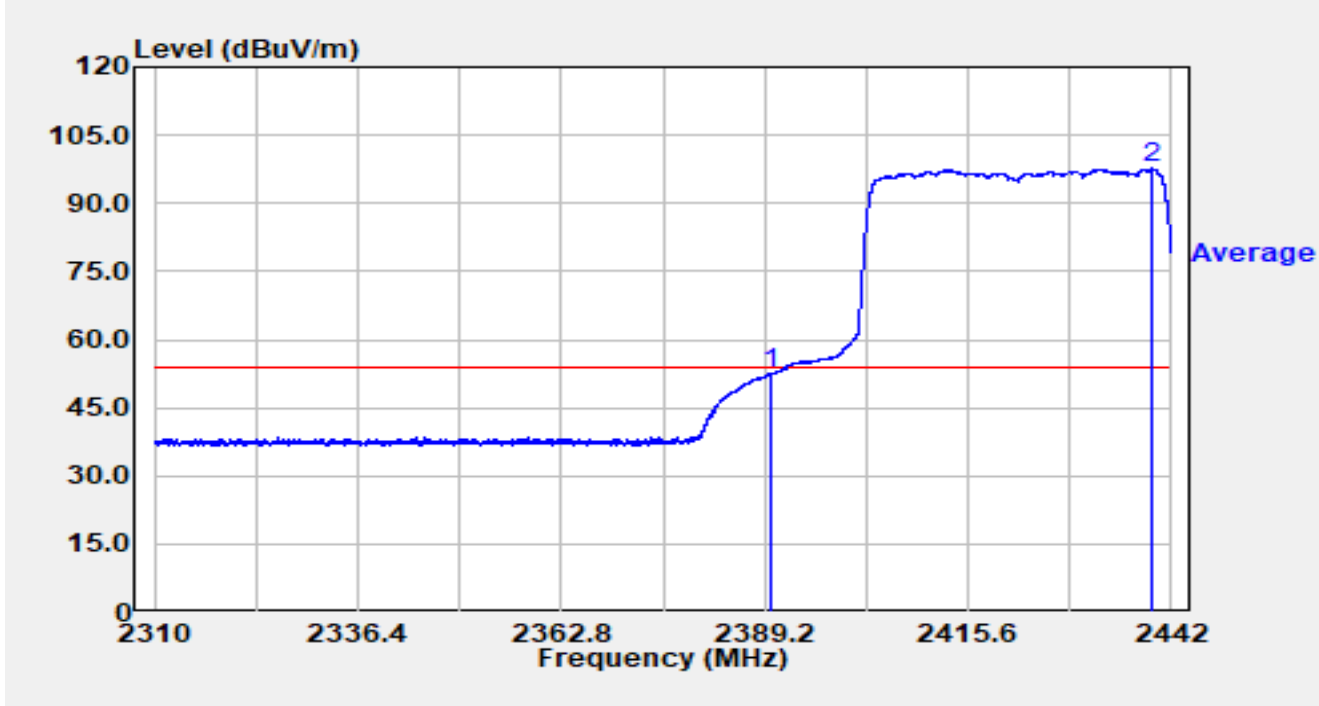


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1		2390.005	19.81	32.53	52.34	-1.66	54.00	Average
2	*	2439.333	65.24	32.39	97.63	N/A	N/A	Average

## Notes:

1. "\*" , means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Frank Xue	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2422MHz		

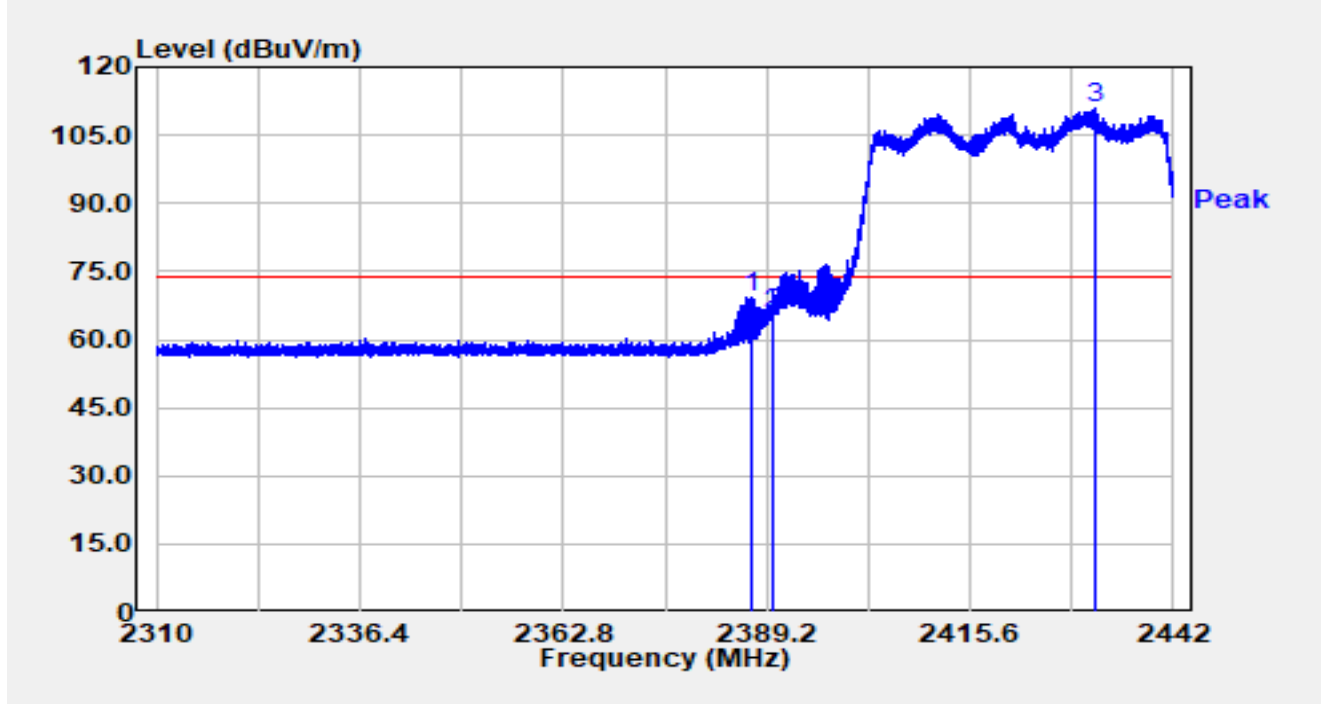


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2387.260	36.75	32.54	69.28	-4.72	74.00	Peak
2		2390.000	33.01	32.53	65.53	-8.47	74.00	Peak
3	*	2431.717	78.48	32.41	110.89	N/A	N/A	Peak

## Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Frank Xue	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2422MHz		

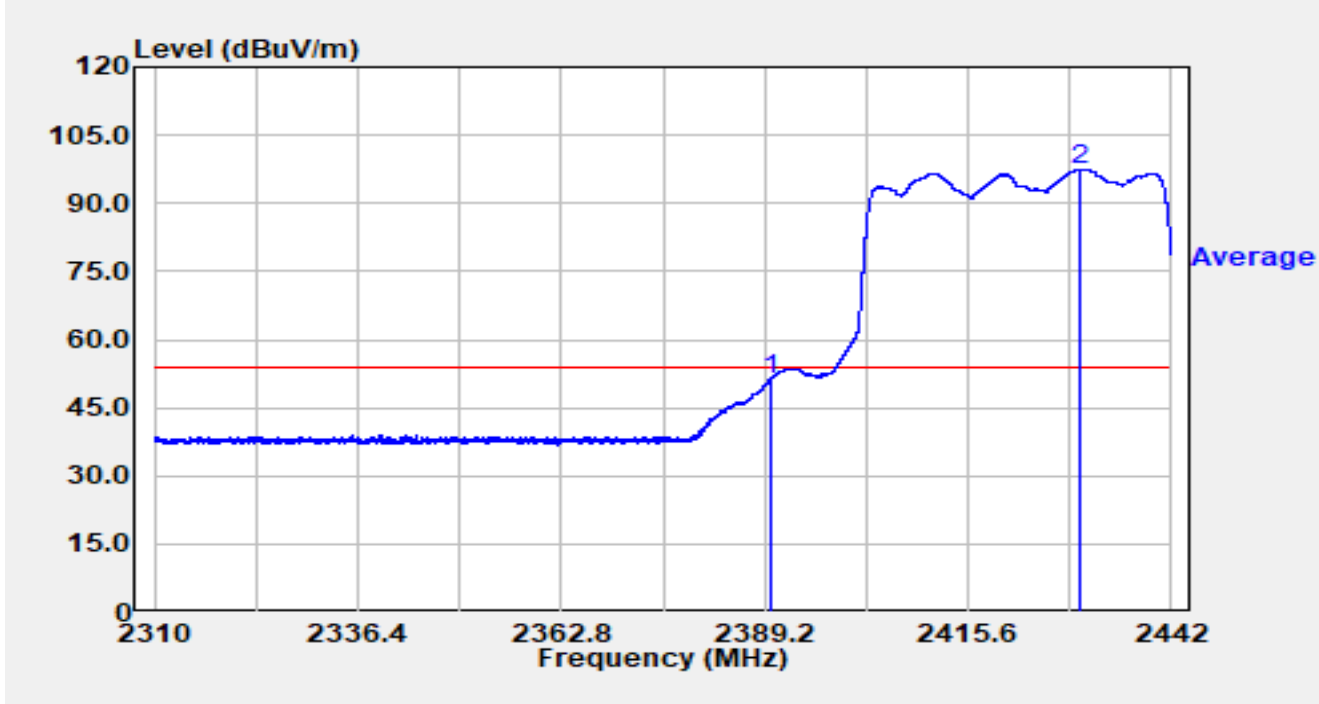


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2390.005	18.82	32.53	51.34	-2.66	54.00	Average
2	*	2430.212	65.16	32.41	97.57	N/A	N/A	Average

## Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).



Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Frank Xue	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2452MHz		

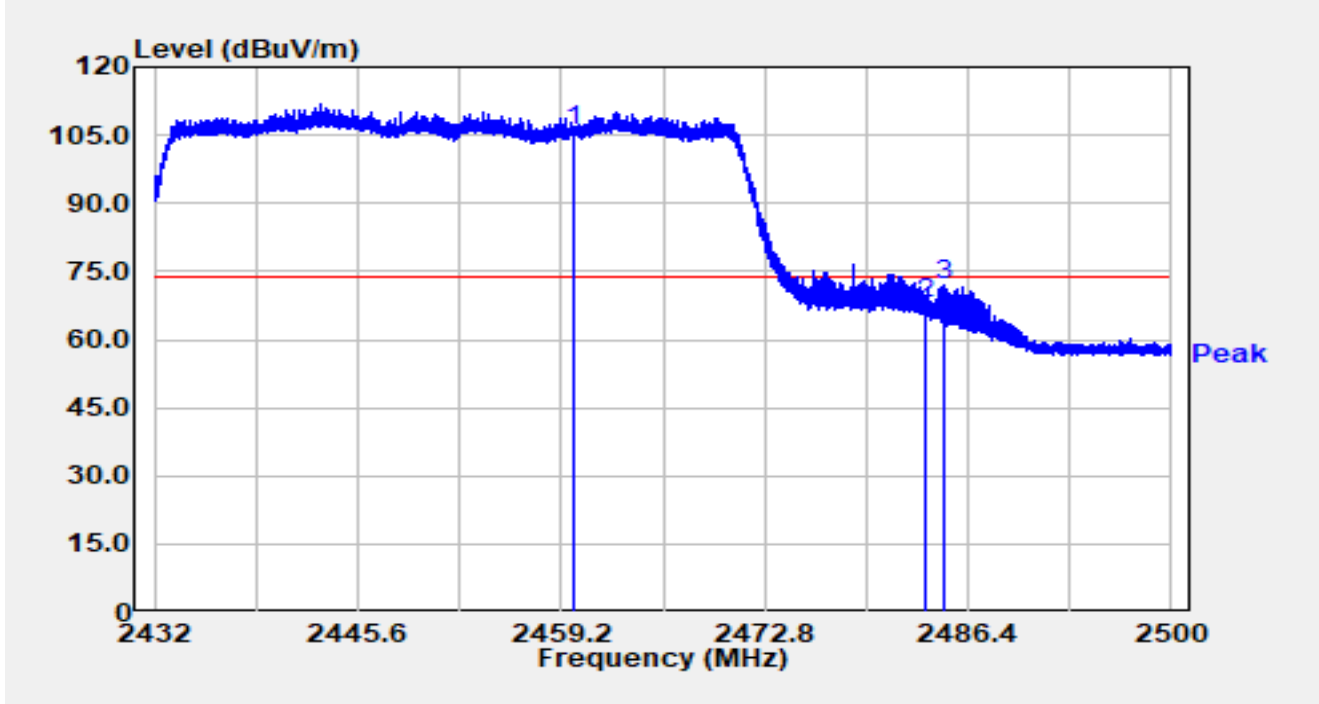


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	2460.077	73.64	32.36	106.00	N/A	N/A	Peak
2		2483.503	35.63	32.38	68.01	-5.99	74.00	Peak
3		2484.714	39.72	32.38	72.10	-1.90	74.00	Peak

## Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Frank Xue	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2452MHz		

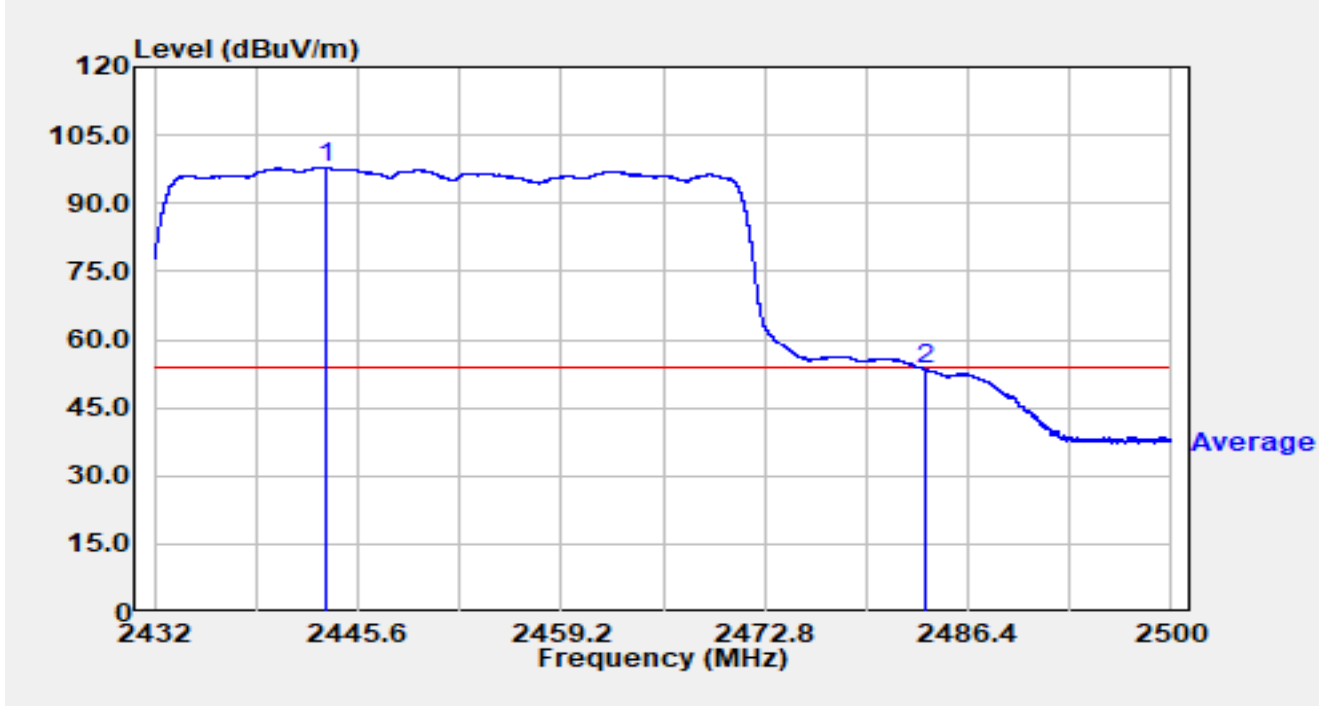


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	2443.410	65.41	32.39	97.79	N/A	N/A	Average
2		2483.503	21.01	32.38	53.39	-0.61	54.00	Average

Notes:

1. "\*" , means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Frank Xue	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2452MHz		

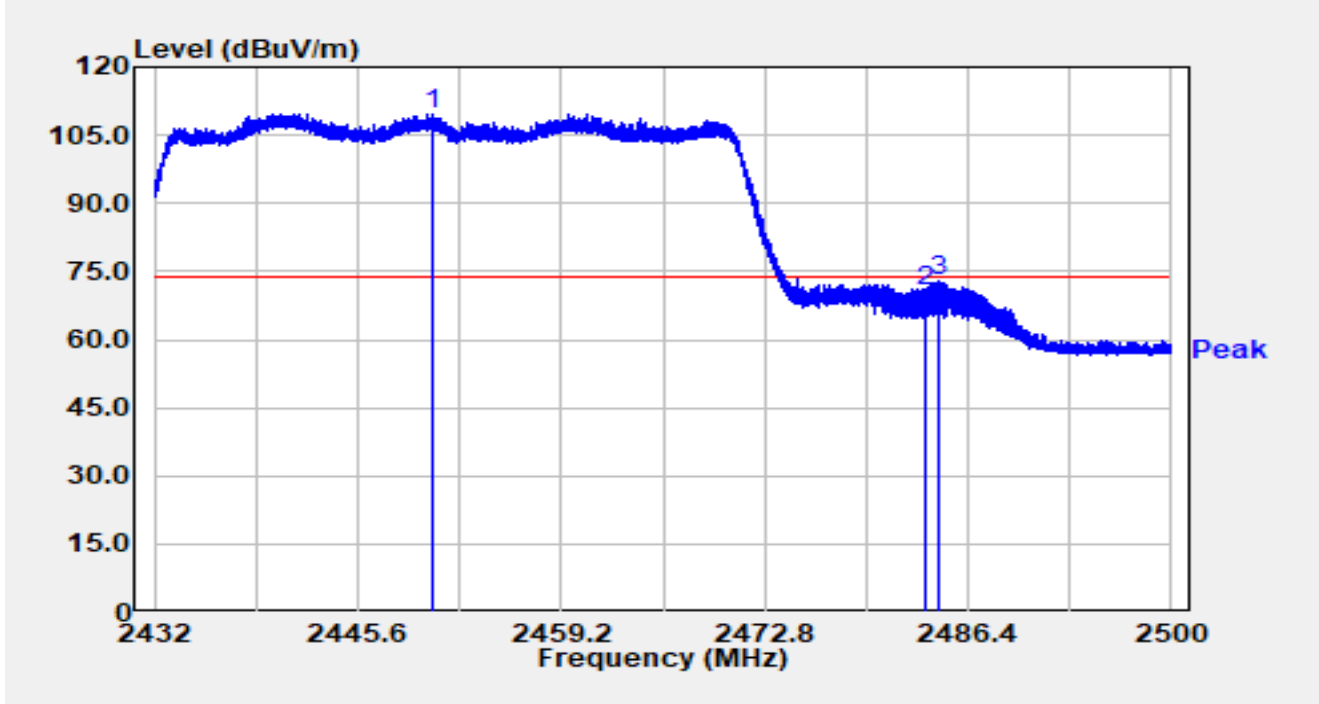


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	2450.510	77.43	32.37	109.80	N/A	N/A	Peak
2		2483.500	38.08	32.38	70.47	-3.53	74.00	Peak
3		2484.414	40.32	32.38	72.70	-1.30	74.00	Peak

## Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Frank Xue	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2452MHz		

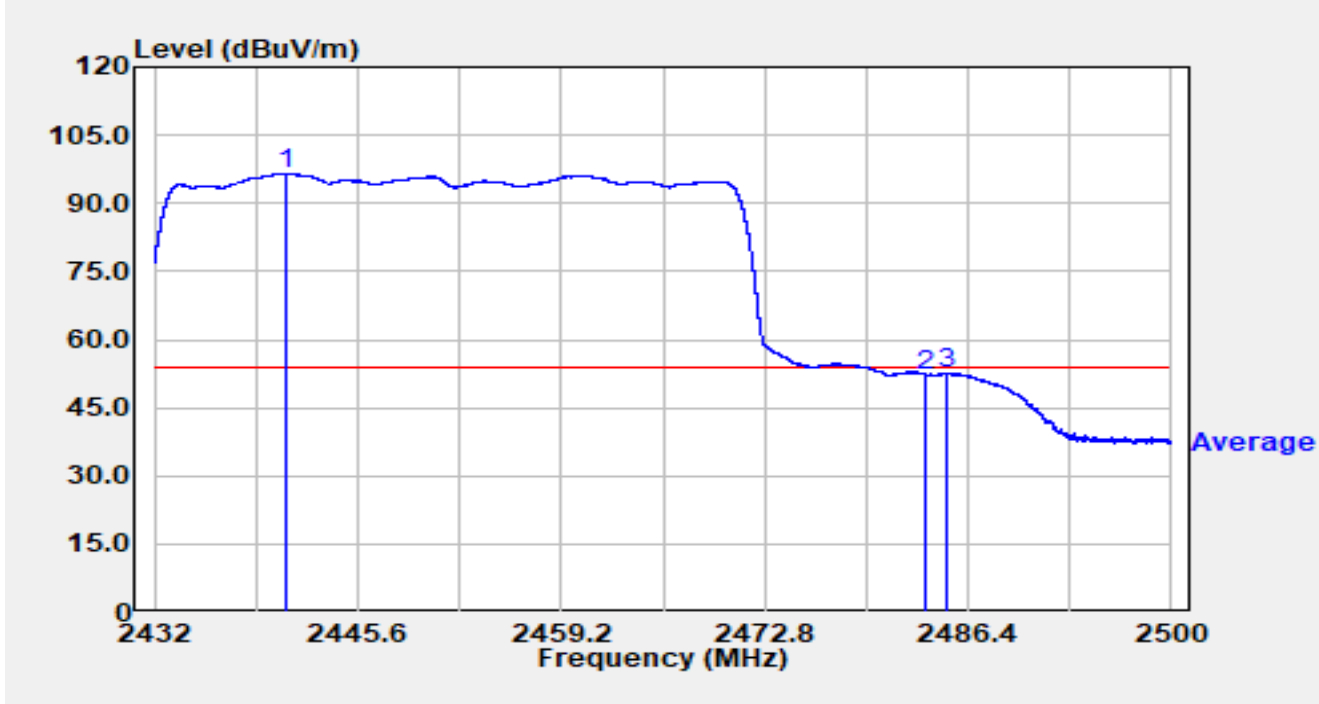


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	2440.813	64.09	32.39	96.48	N/A	N/A	Average
2		2483.503	19.87	32.38	52.25	-1.75	54.00	Average
3		2484.952	20.27	32.38	52.65	-1.35	54.00	Average

## Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Frank Xue	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT20 at 2412MHz		

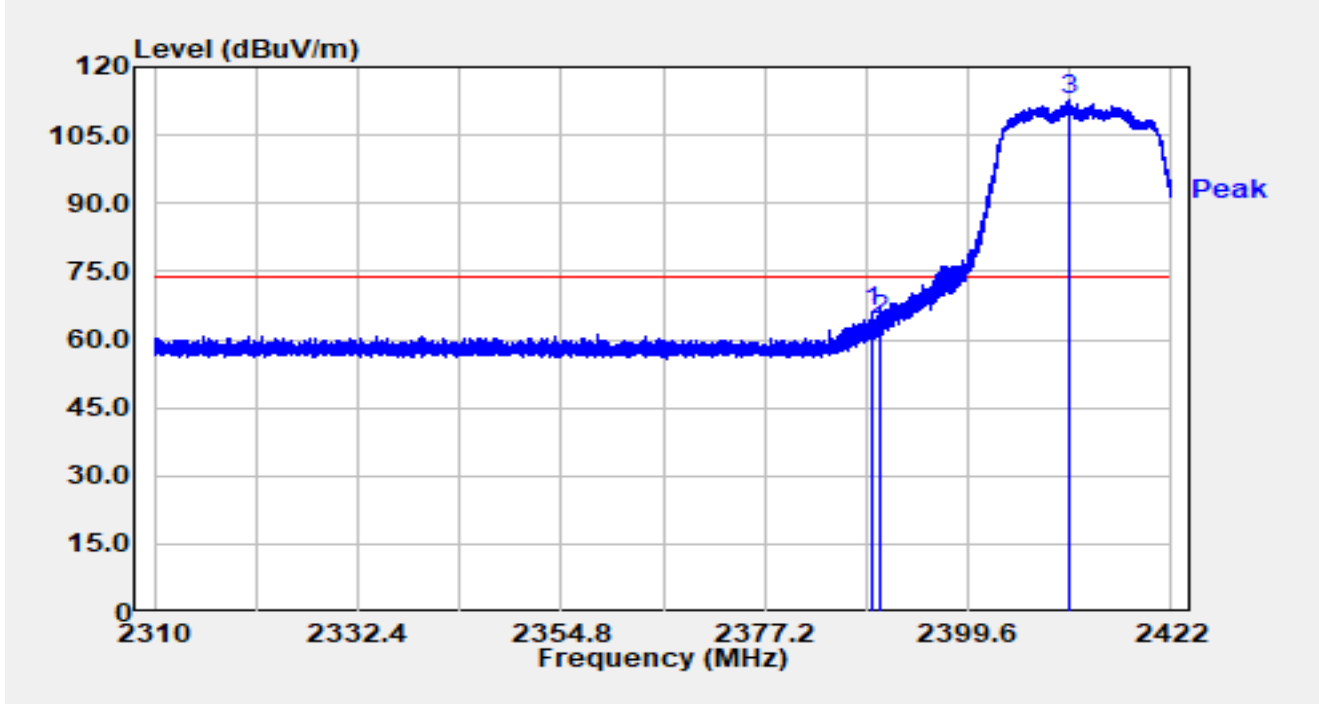


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1		2389.072	33.67	32.53	66.20	-7.80	74.00	Peak
2		2390.000	31.98	32.53	64.50	-9.50	74.00	Peak
3	*	2410.621	80.24	32.47	112.71	N/A	N/A	Peak

**Notes:**

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Frank Xue	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT20 at 2412MHz		

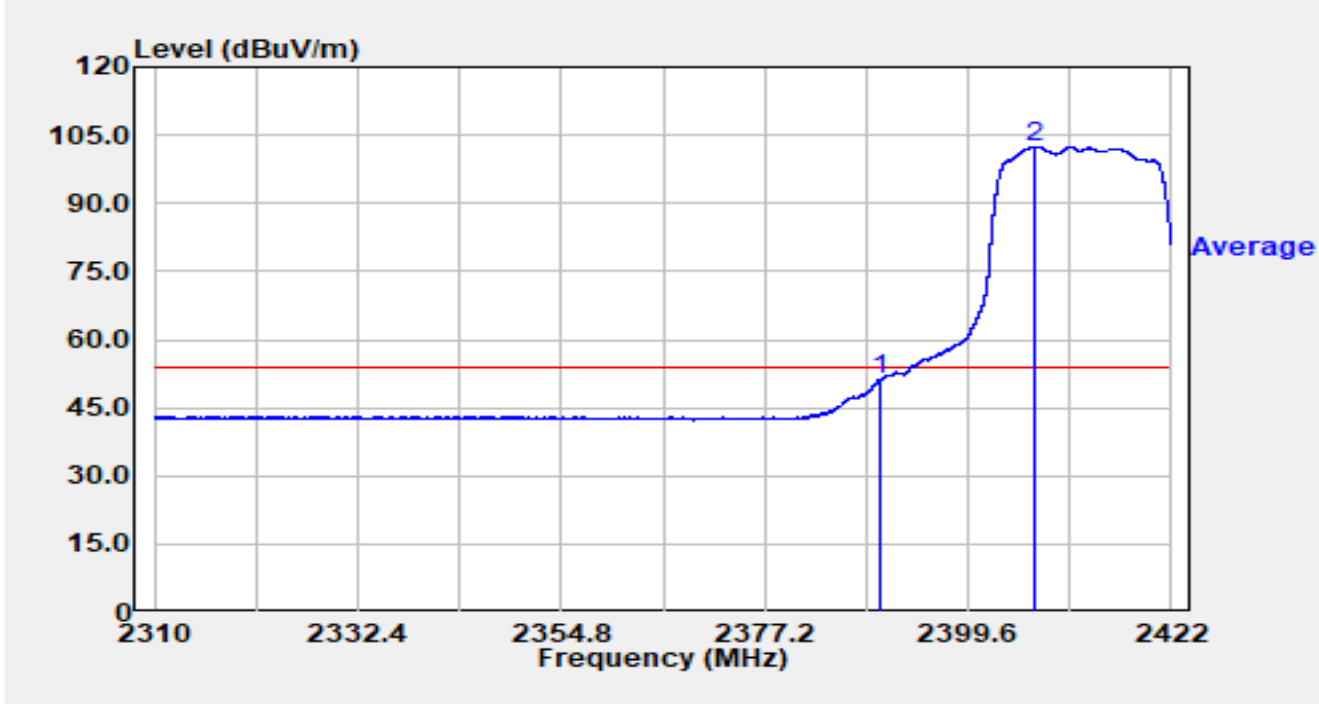


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1		2390.000	18.59	32.53	51.12	-2.88	54.00	Average
2	*	2406.969	69.86	32.48	102.34	N/A	N/A	Average

## Notes:

- "\*" means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Frank Xue	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT20 at 2412MHz		

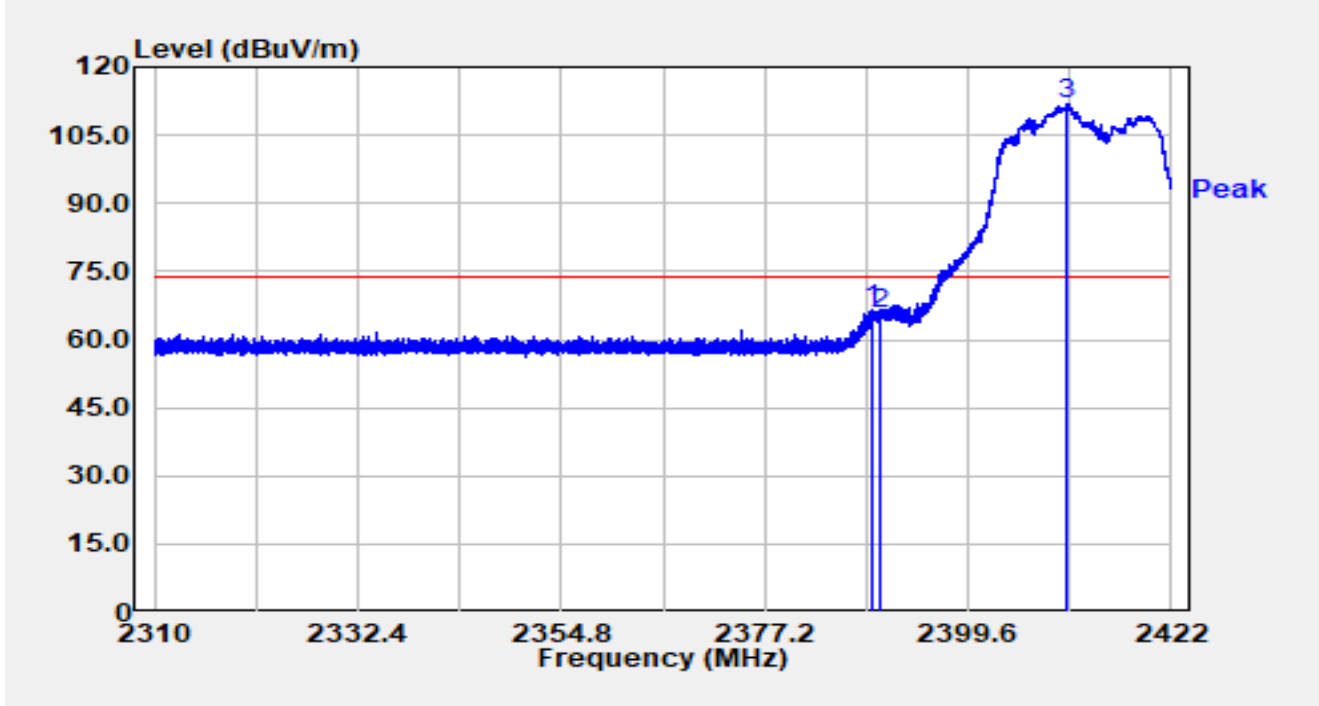


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1		2389.038	34.05	32.53	66.58	-7.42	74.00	Peak
2		2390.000	33.07	32.53	65.59	-8.41	74.00	Peak
3	*	2410.587	79.39	32.47	111.85	N/A	N/A	Peak

## Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Frank Xue	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT20 at 2412MHz		

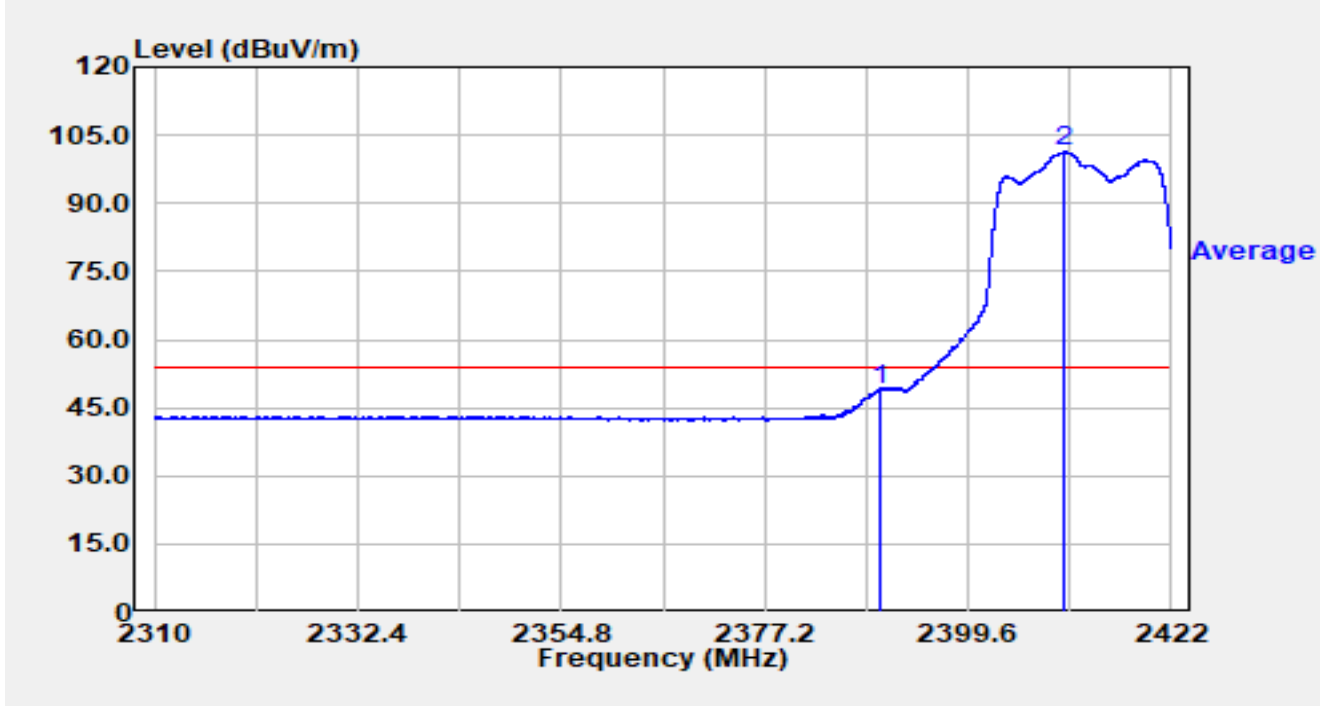


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1		2390.000	16.49	32.53	49.01	-4.99	54.00	Average
2	*	2410.296	68.77	32.47	101.24	N/A	N/A	Average

## Notes:

- "\*" means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).



Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Frank Xue	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT20 at 2462MHz		

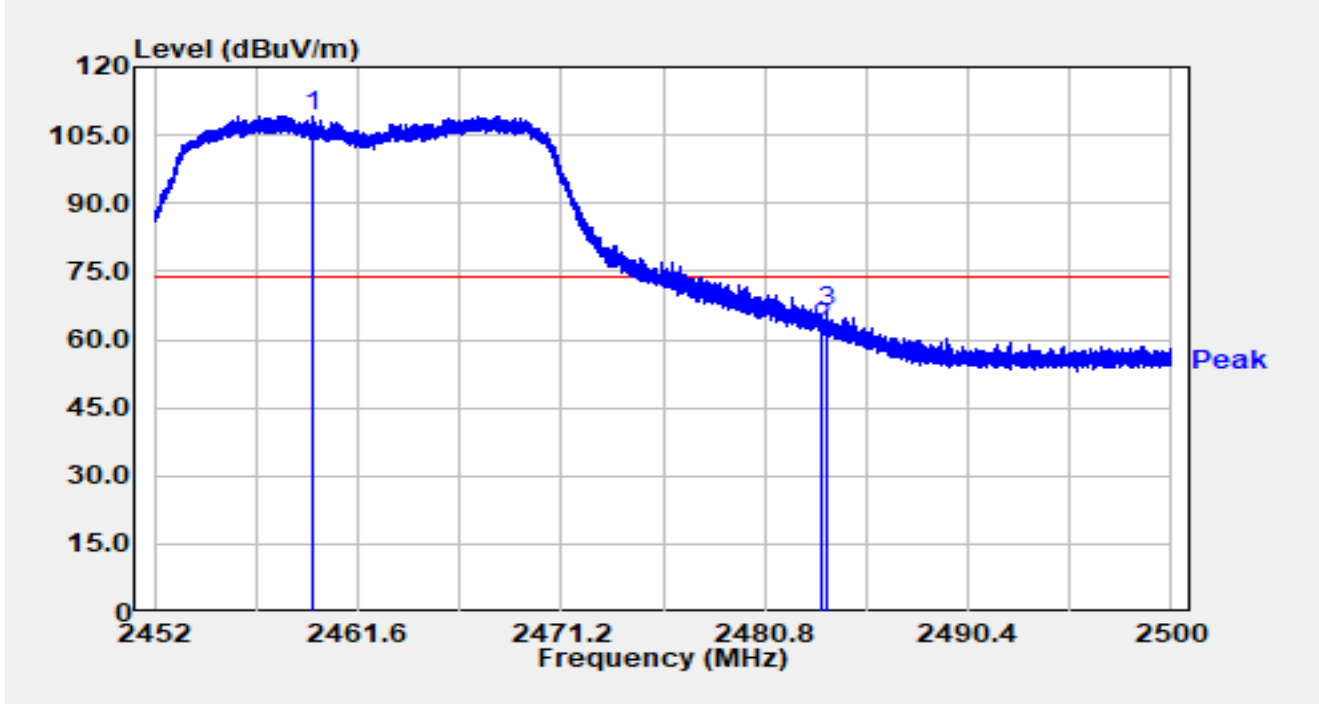


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	2459.421	76.93	32.36	109.29	N/A	N/A	Peak
2		2483.500	30.20	32.38	62.59	-11.41	74.00	Peak
3		2483.728	33.59	32.38	65.97	-8.03	74.00	Peak

**Notes:**

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Frank Xue	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT20 at 2462MHz		

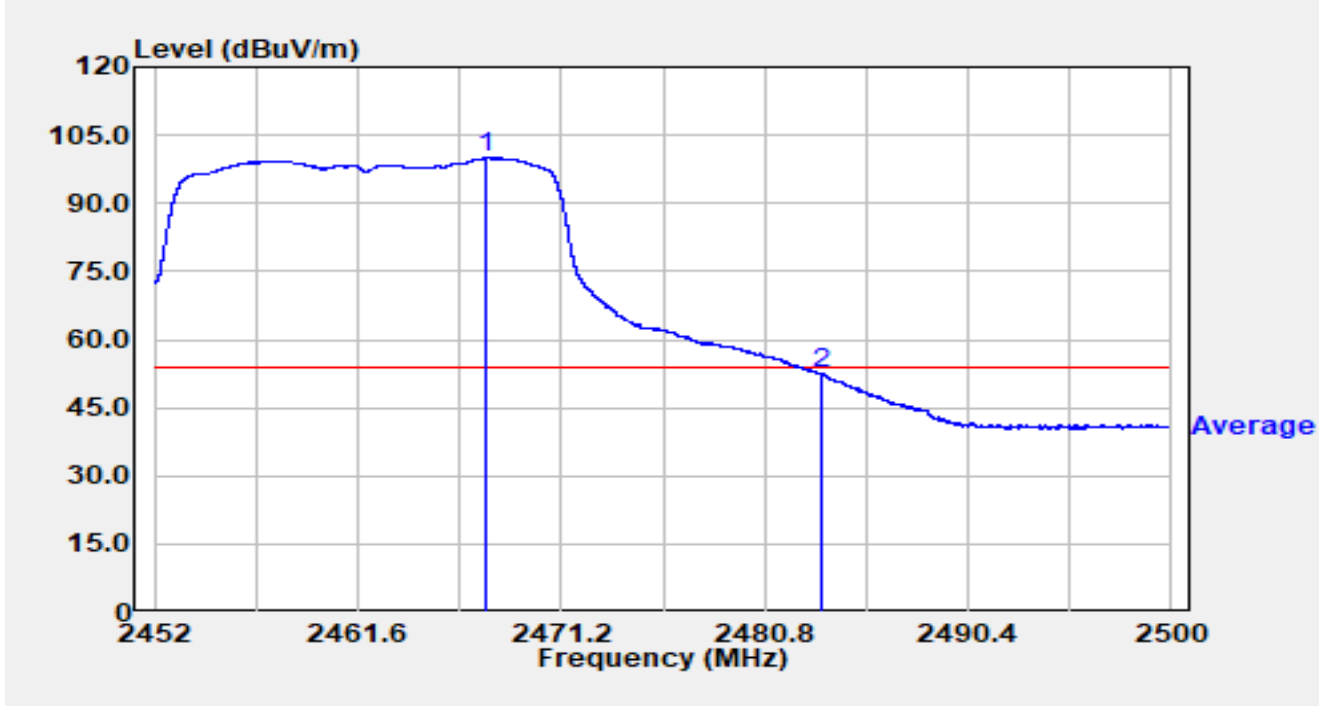


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	2467.638	67.56	32.37	99.94	N/A	N/A	Average
2		2483.502	19.94	32.38	52.33	-1.67	54.00	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Frank Xue	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT20 at 2462MHz		

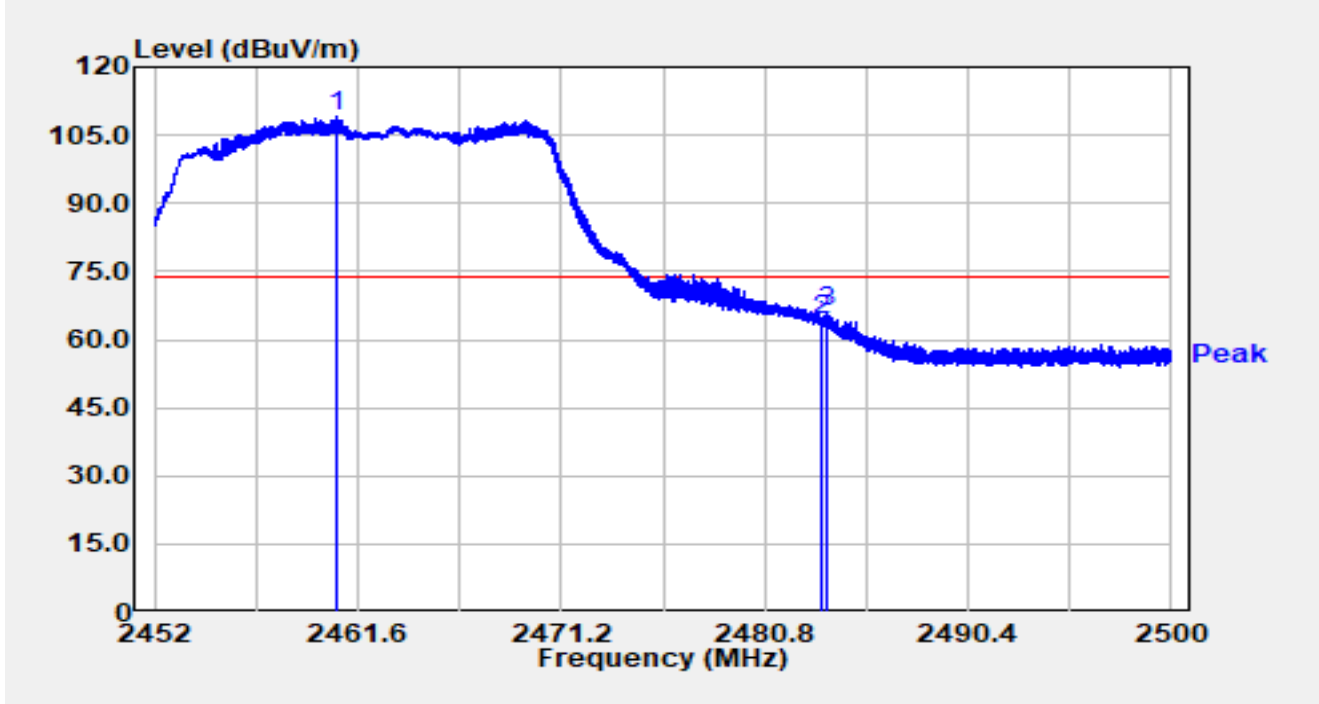


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	2460.597	76.54	32.36	108.91	N/A	N/A	Peak
2		2483.500	31.93	32.38	64.31	-9.69	74.00	Peak
3		2483.680	33.53	32.38	65.91	-8.09	74.00	Peak

## Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Frank Xue	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT20 at 2462MHz		

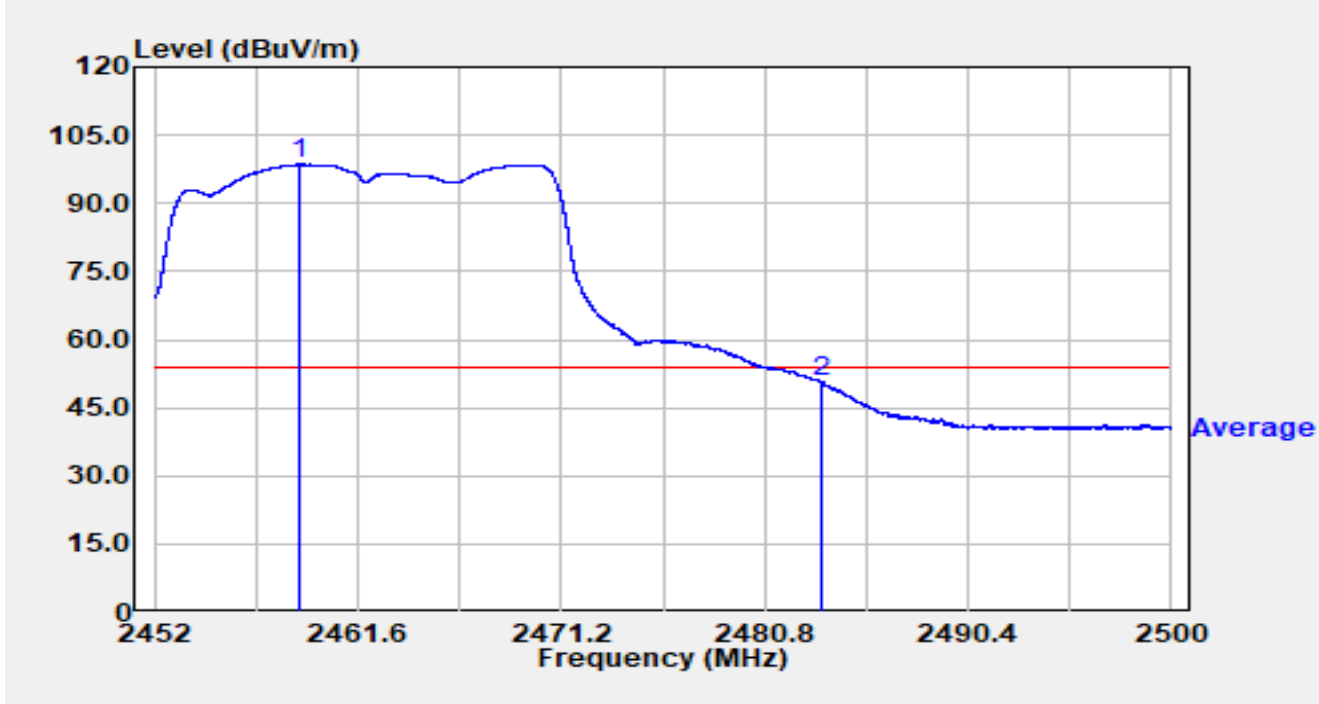


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	2458.888	66.23	32.36	98.59	N/A	N/A	Average
2		2483.502	18.22	32.38	50.60	-3.40	54.00	Average

Notes:

1. "\*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Frank Xue	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT40 at 2422MHz		

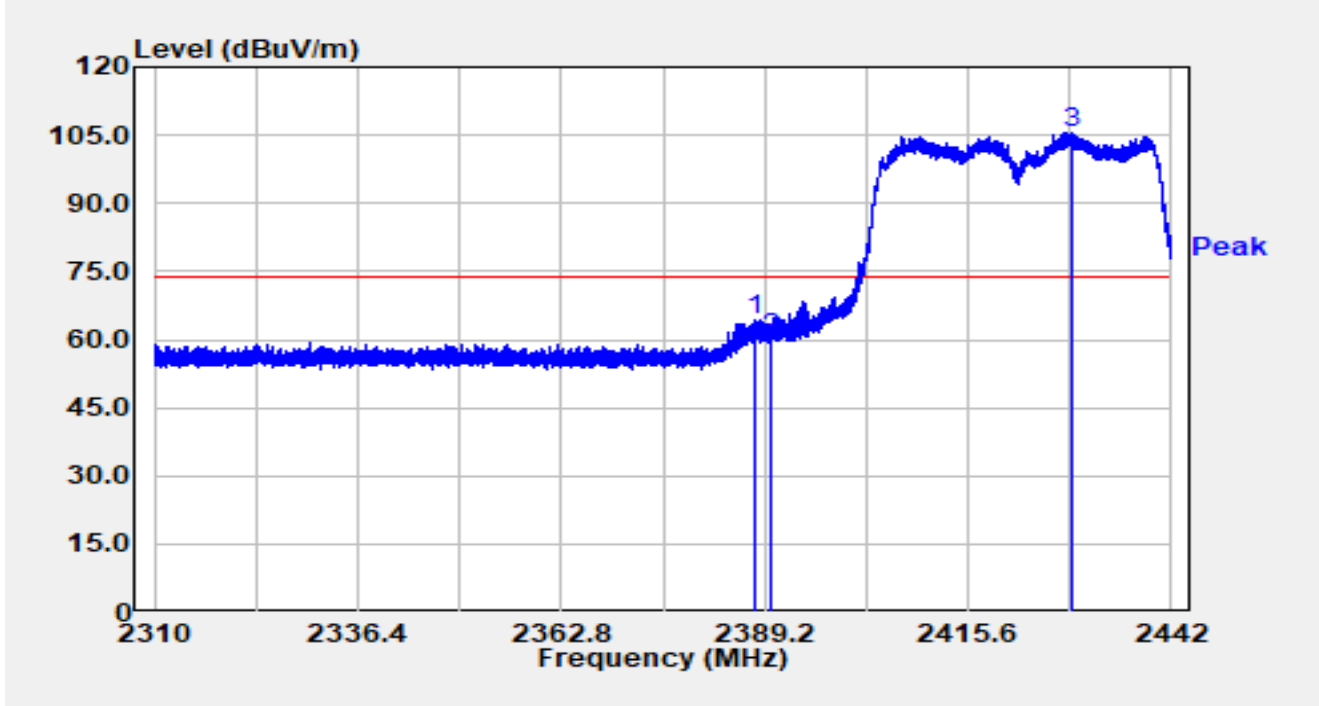


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1		2387.840	31.88	32.53	64.41	-9.59	74.00	Peak
2		2390.005	27.81	32.53	60.34	-13.66	74.00	Peak
3	*	2429.130	73.30	32.42	105.72	N/A	N/A	Peak

**Notes:**

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Frank Xue	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT40 at 2422MHz		

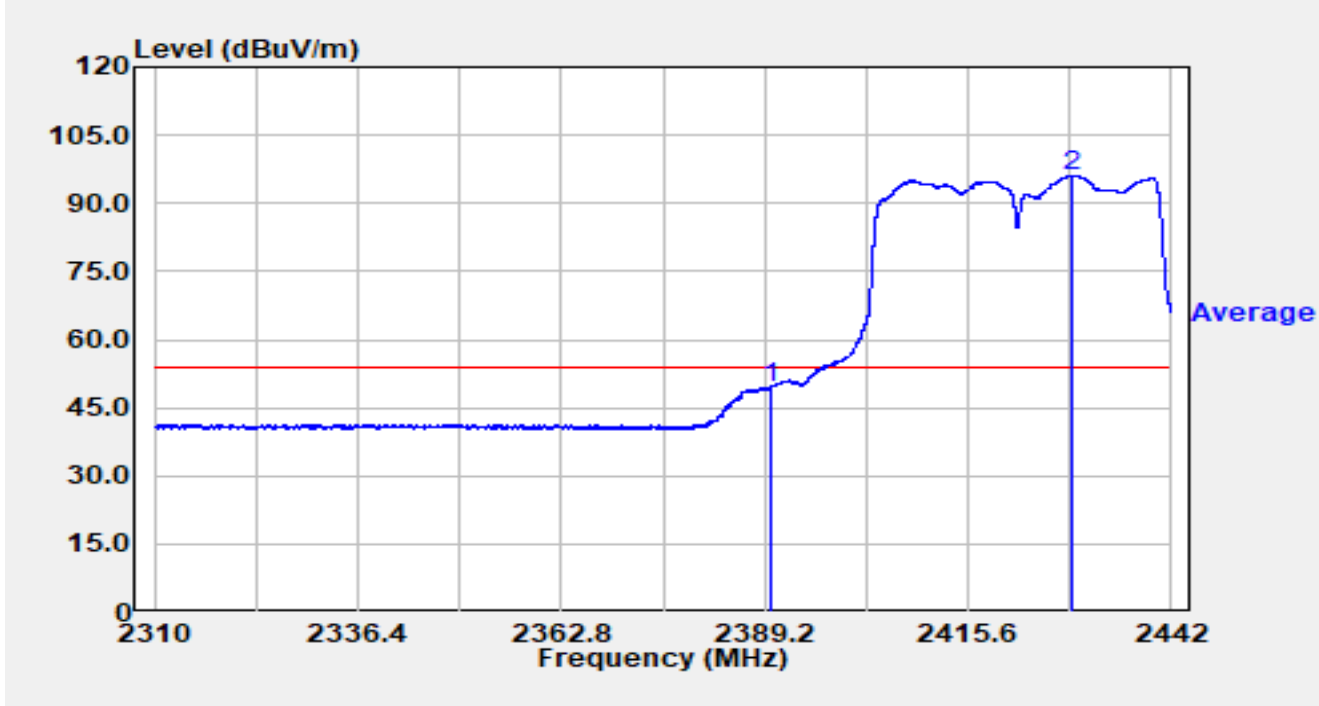


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1		2390.000	16.89	32.53	49.42	-4.58	54.00	Average
2	*	2429.011	63.72	32.42	96.13	N/A	N/A	Average

## Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Frank Xue	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT40 at 2422MHz		

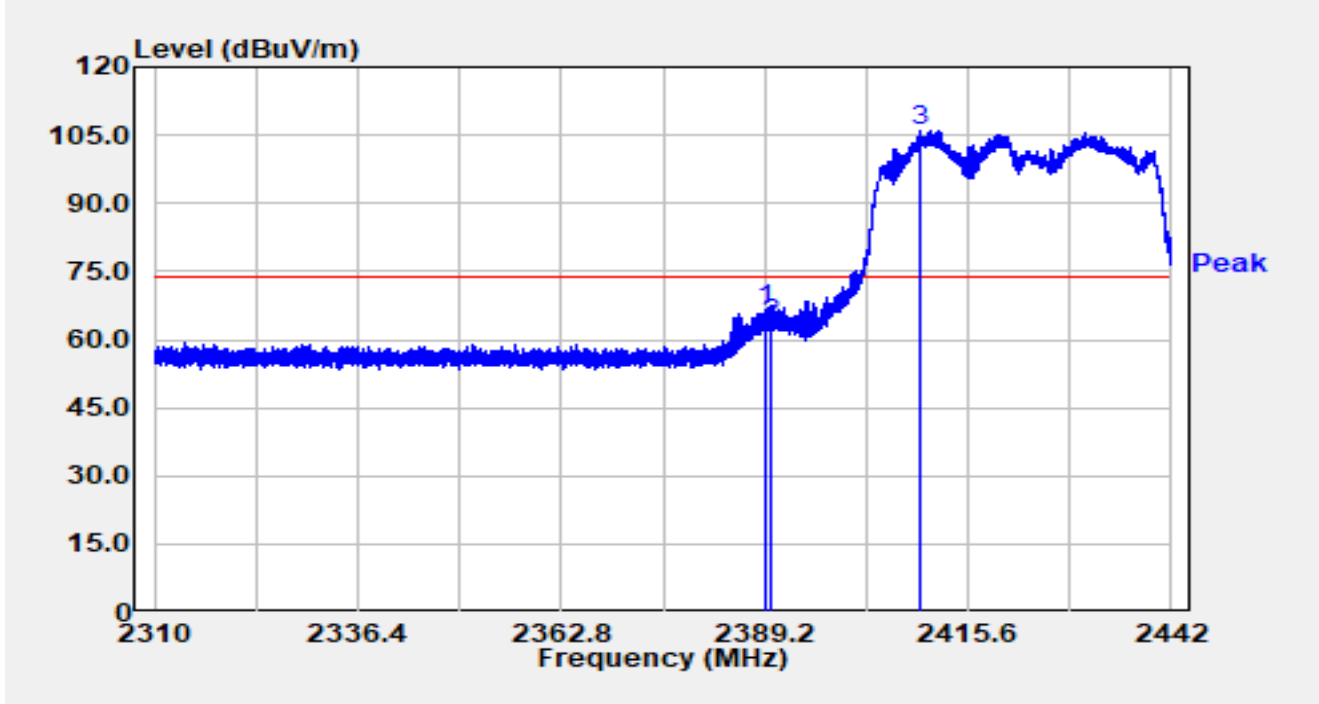


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1		2389.398	33.94	32.53	66.47	-7.53	74.00	Peak
2		2390.000	30.79	32.53	63.31	-10.69	74.00	Peak
3	*	2409.396	73.30	32.47	105.77	N/A	N/A	Peak

**Notes:**

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Frank Xue	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT40 at 2422MHz		

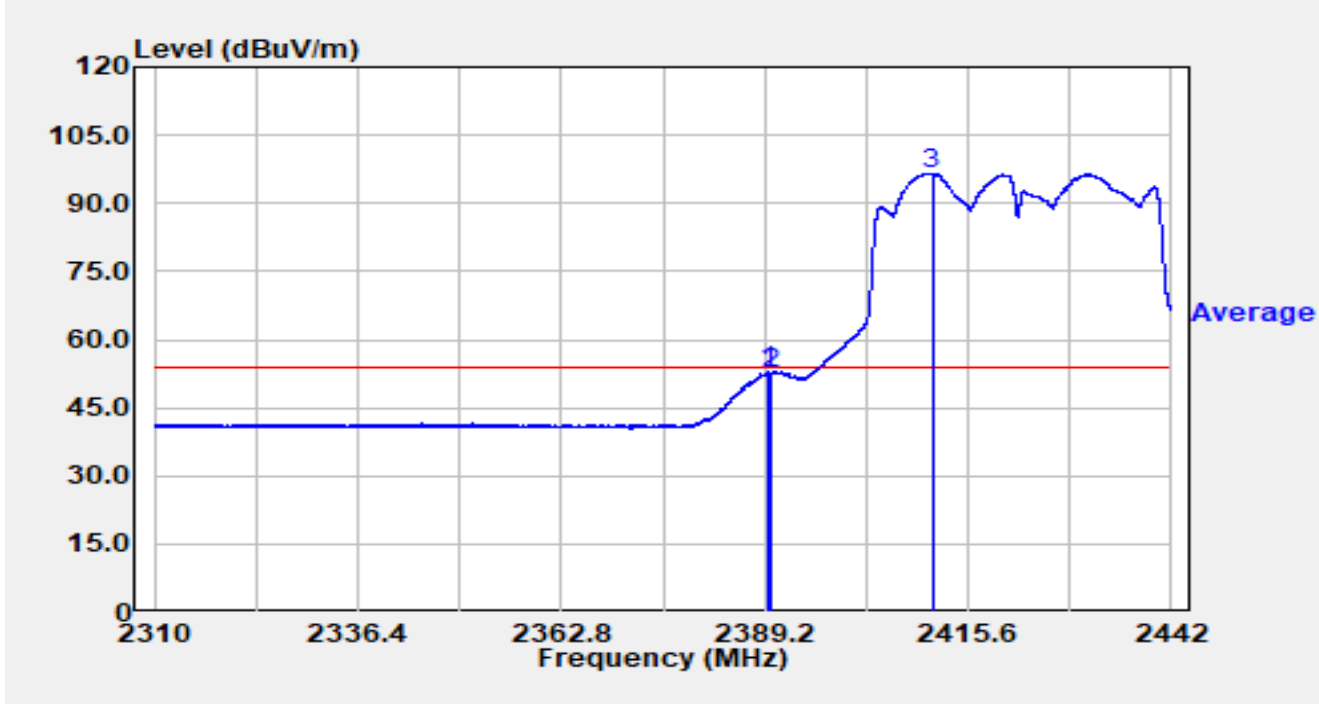


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2389.635	20.26	32.53	52.79	-1.21	54.00	Average
2		2390.000	19.97	32.53	52.49	-1.51	54.00	Average
3	*	2410.927	64.19	32.47	96.65	N/A	N/A	Average

## Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).



Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Frank Xue	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT40 at 2452MHz		

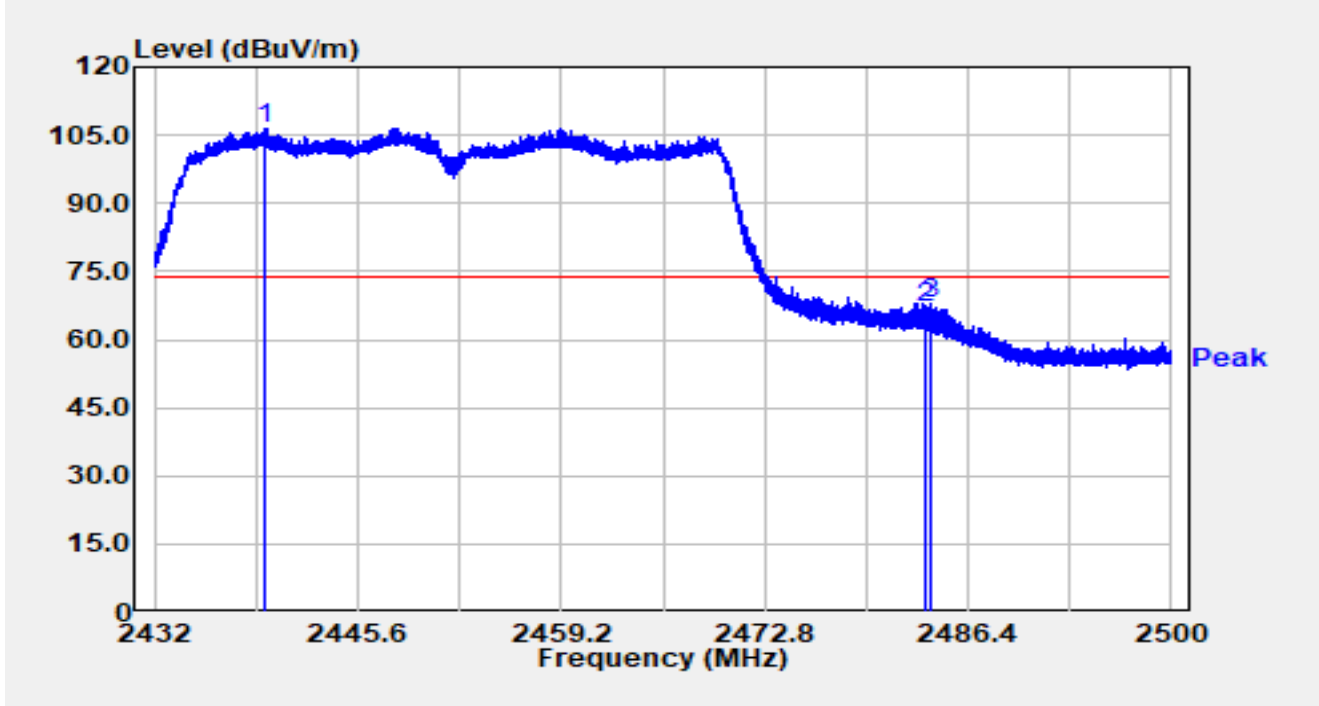


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	2439.358	74.21	32.39	106.61	N/A	N/A	Peak
2		2483.500	34.53	32.38	66.91	-7.09	74.00	Peak
3		2483.823	35.33	32.38	67.72	-6.28	74.00	Peak

## Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Frank Xue	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT40 at 2452MHz		

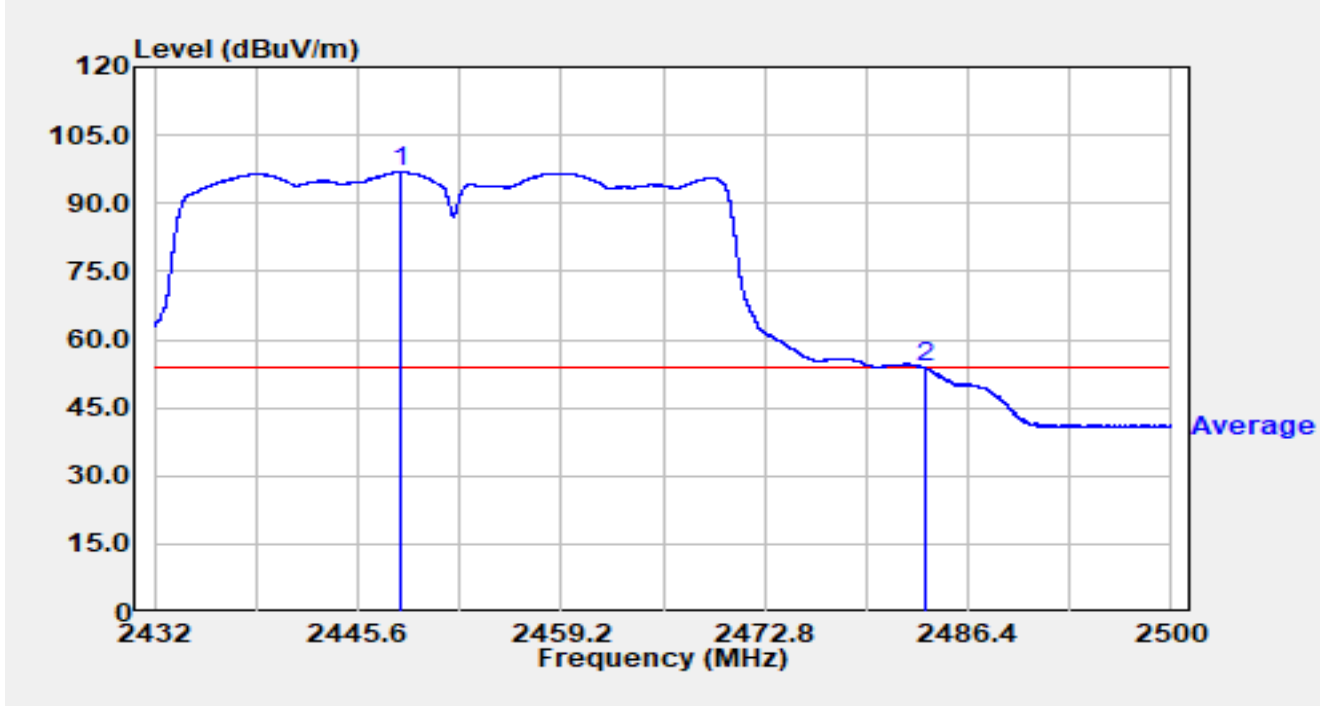


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	2448.456	64.47	32.38	96.85	N/A	N/A	Average
2		2483.500	21.33	32.38	53.71	-0.29	54.00	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Frank Xue	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT40 at 2452MHz		

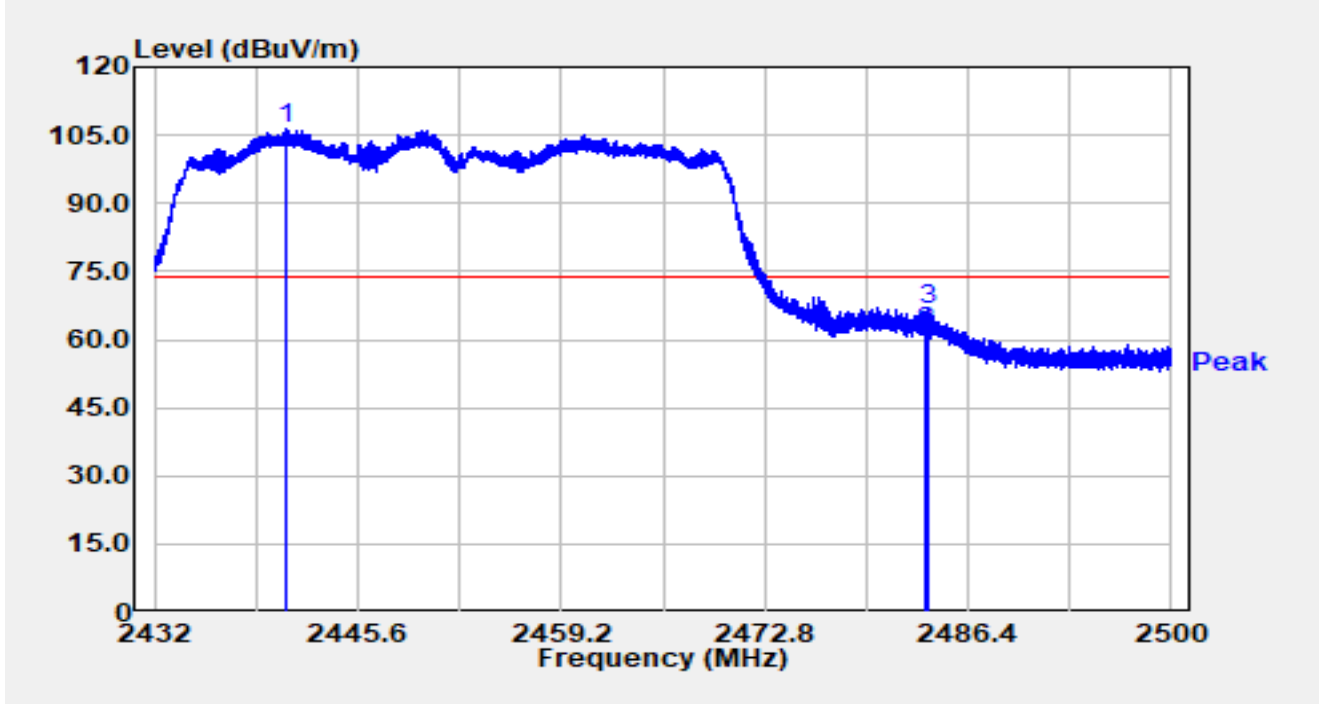


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	2440.792	73.92	32.39	106.31	N/A	N/A	Peak
2		2483.500	29.34	32.38	61.72	-12.28	74.00	Peak
3		2483.660	34.12	32.38	66.50	-7.50	74.00	Peak

## Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Frank Xue	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT40 at 2452MHz		

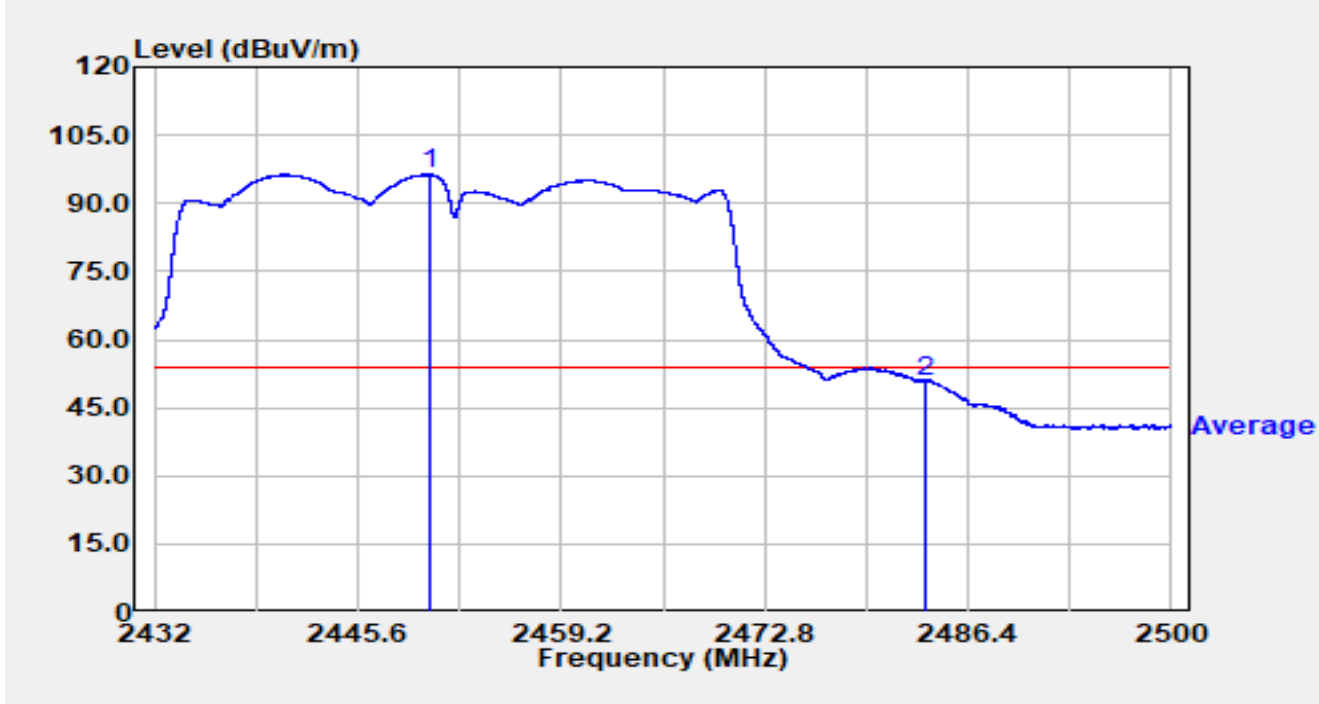


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	2450.387	63.96	32.37	96.33	N/A	N/A	Average
2		2483.500	18.44	32.38	50.83	-3.17	54.00	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

**Partial RU**

Site	WZ-AC2	Test Date	2024-07-16
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz RU26/0		

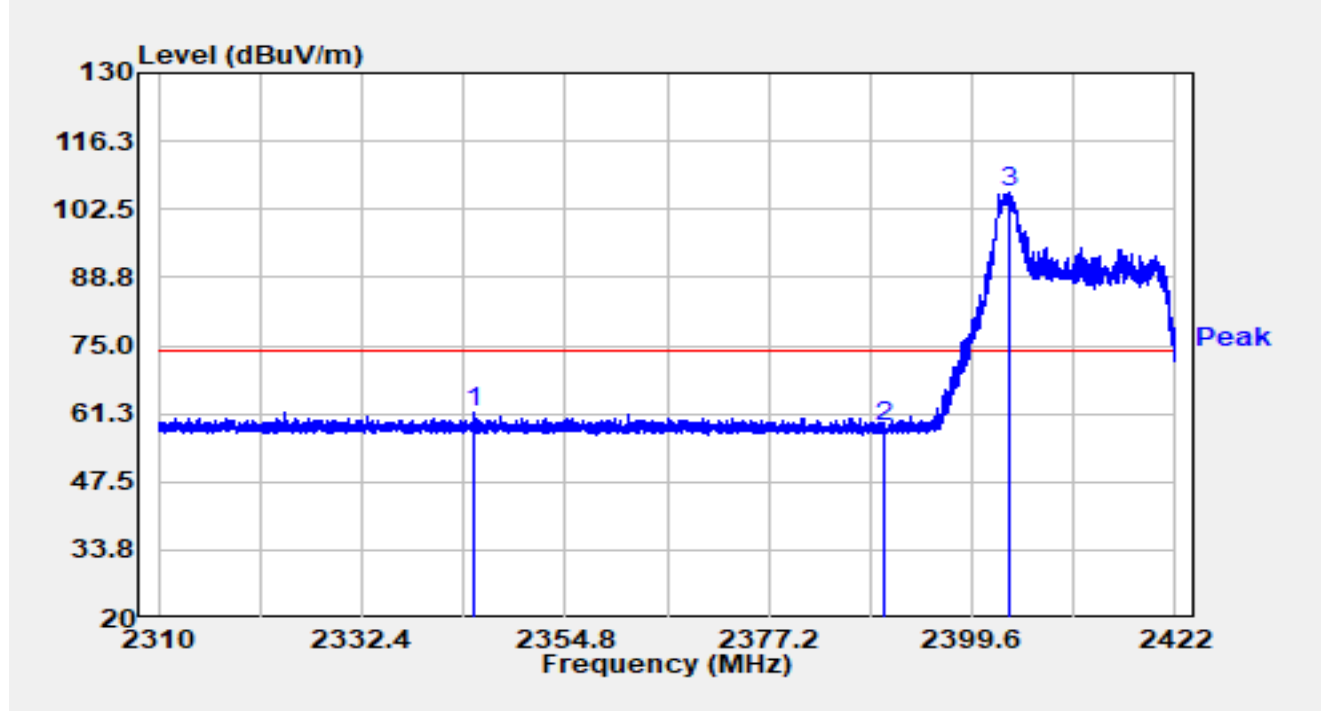


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2344.787	28.71	32.78	61.49	-12.51	74.00	Peak
2		2390.000	25.99	32.53	58.51	-15.49	74.00	Peak
3	*	2403.778	73.43	32.48	105.91	N/A	N/A	Peak

**Notes:**

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-16
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz RU26/0		

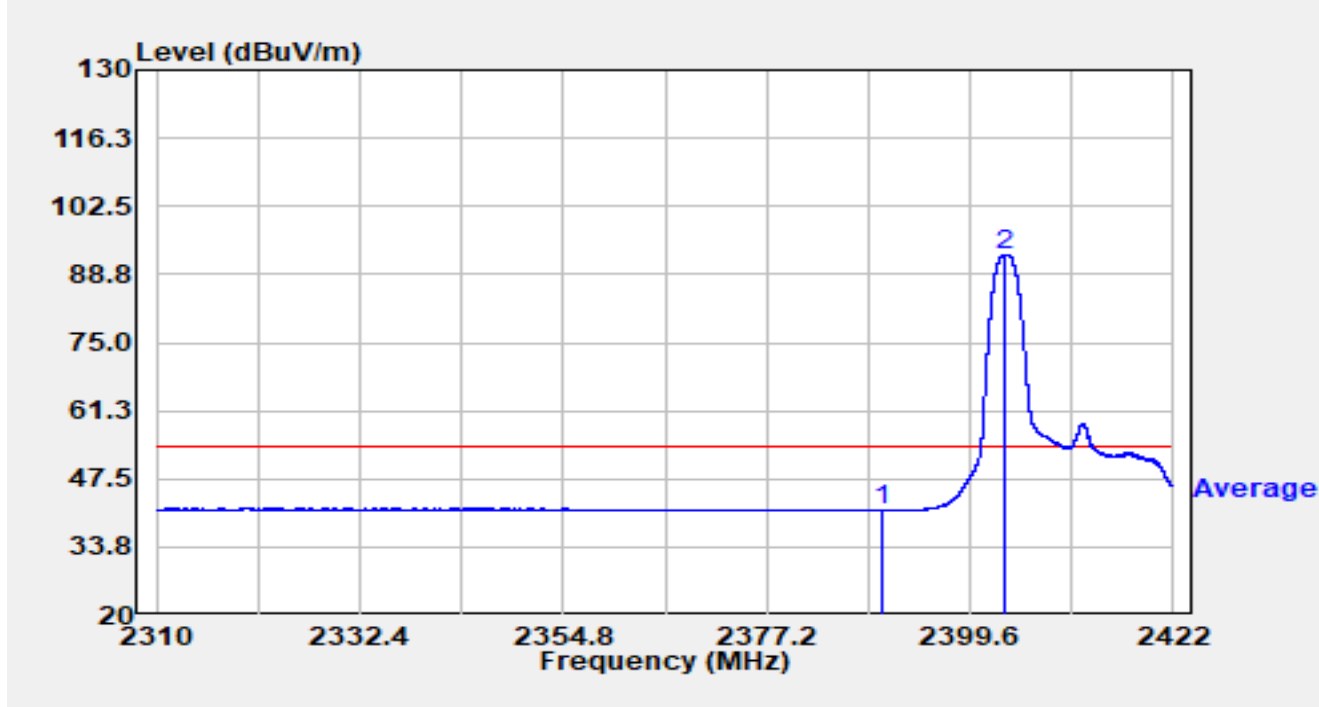


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2390.000	8.68	32.53	41.21	-12.79	54.00	Average
2	*	2403.531	60.36	32.48	92.84	N/A	N/A	Average

## Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-16
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz RU26/0		

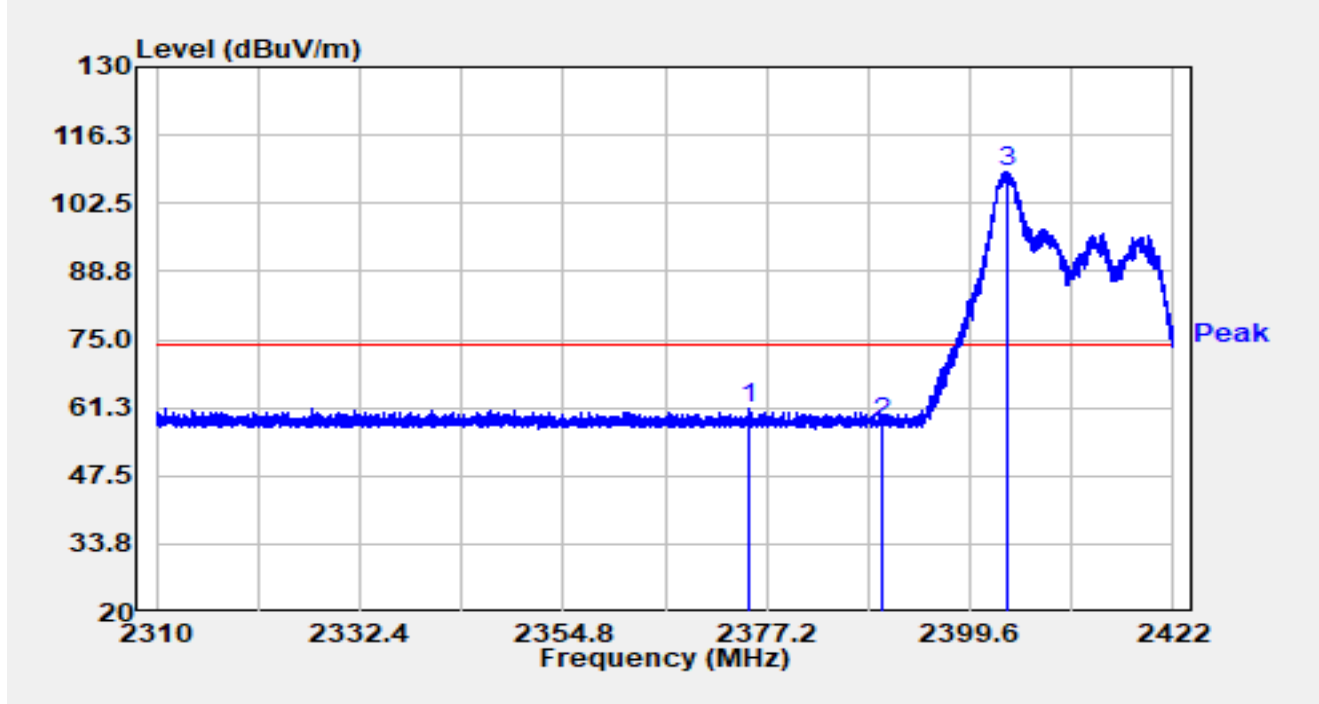


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2375.330	28.65	32.59	61.24	-12.76	74.00	Peak
2		2390.000	25.53	32.53	58.06	-15.94	74.00	Peak
3	*	2403.598	76.38	32.48	108.86	N/A	N/A	Peak

**Notes:**

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-16
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz RU26/0		

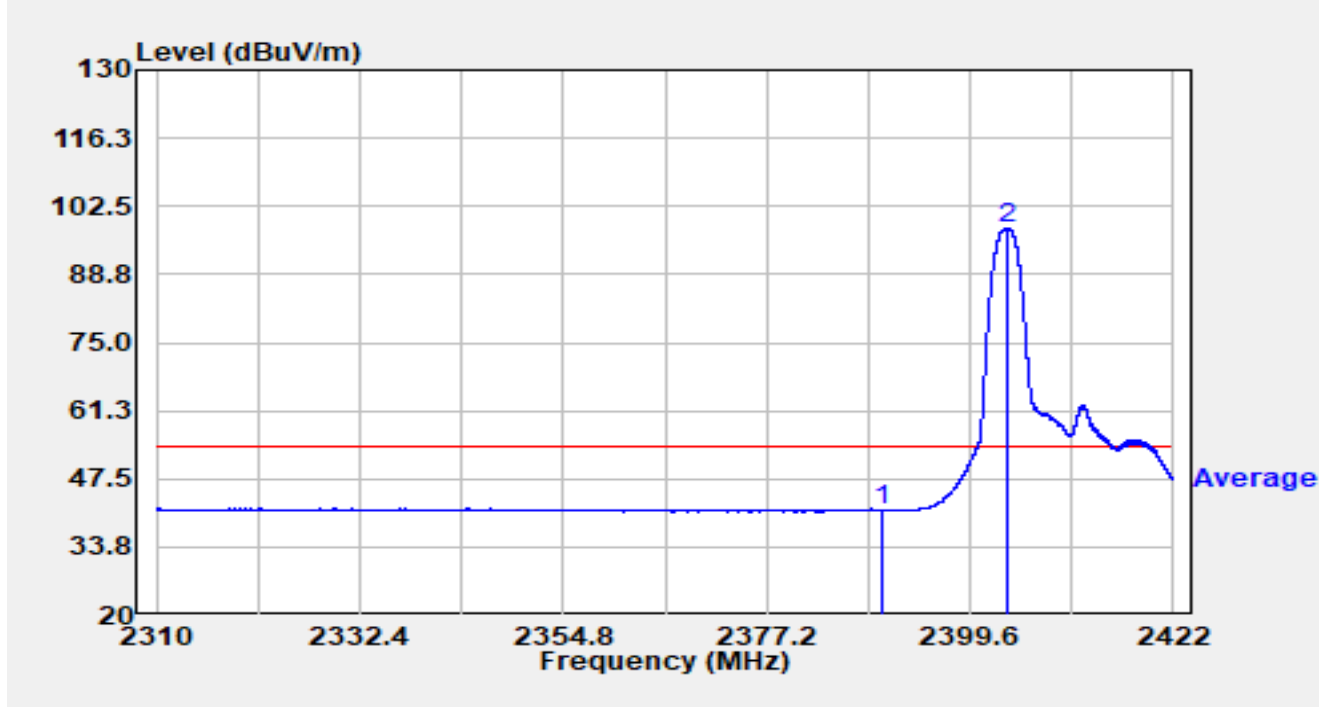


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2390.000	8.76	32.53	41.29	-12.71	54.00	Average
2	*	2403.733	65.75	32.48	98.24	N/A	N/A	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).



Site	WZ-AC2	Test Date	2024-07-16
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz RU52/37		

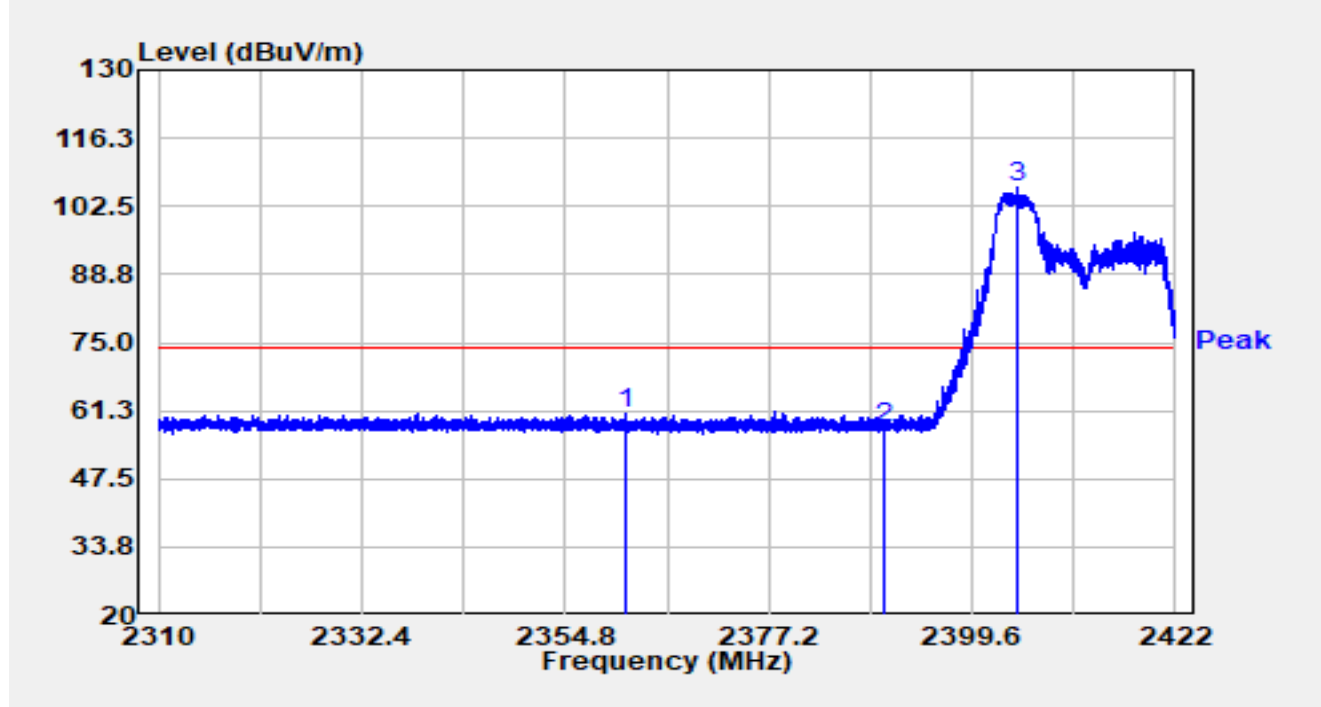


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1		2361.486	27.81	32.69	60.49	-13.51	74.00	Peak
2		2390.000	25.23	32.53	57.76	-16.24	74.00	Peak
3	*	2404.640	73.66	32.48	106.15	N/A	N/A	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-16
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz RU52/37		

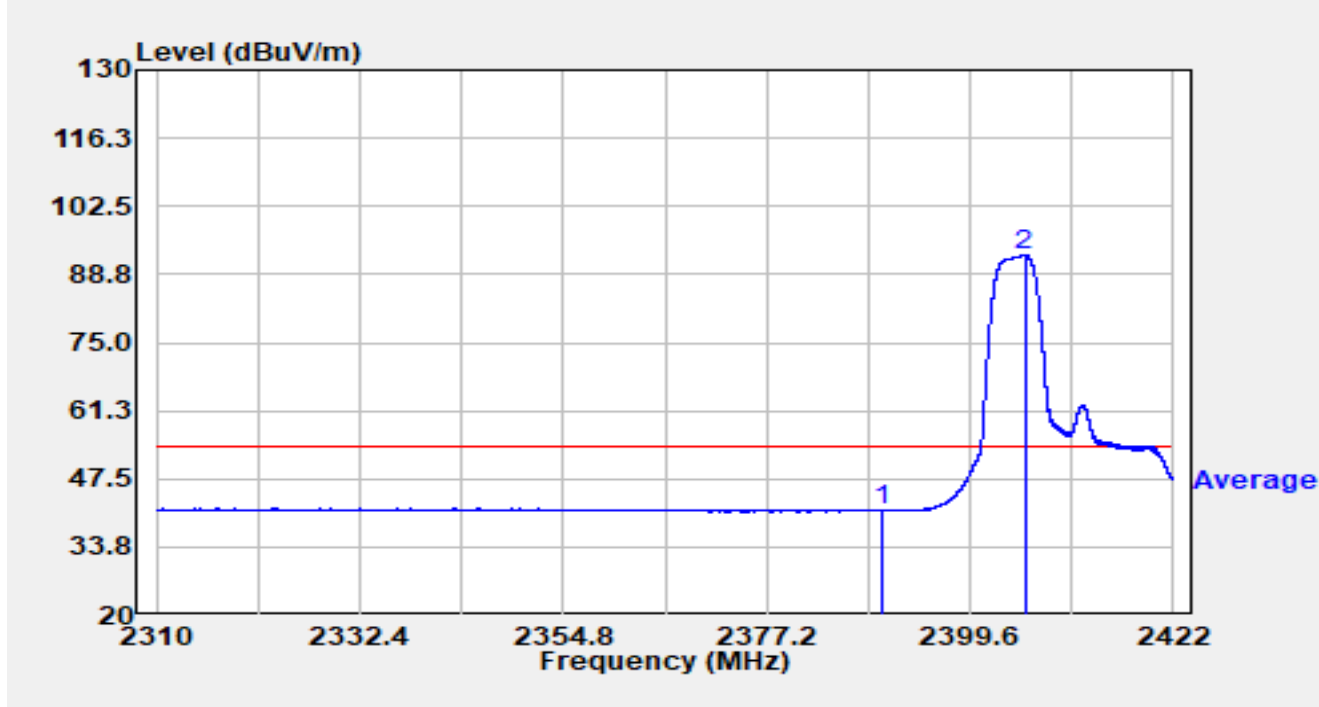


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2390.000	8.81	32.53	41.33	-12.67	54.00	Average
2	*	2405.615	60.09	32.48	92.57	N/A	N/A	Average

## Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-16
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz RU52/37		

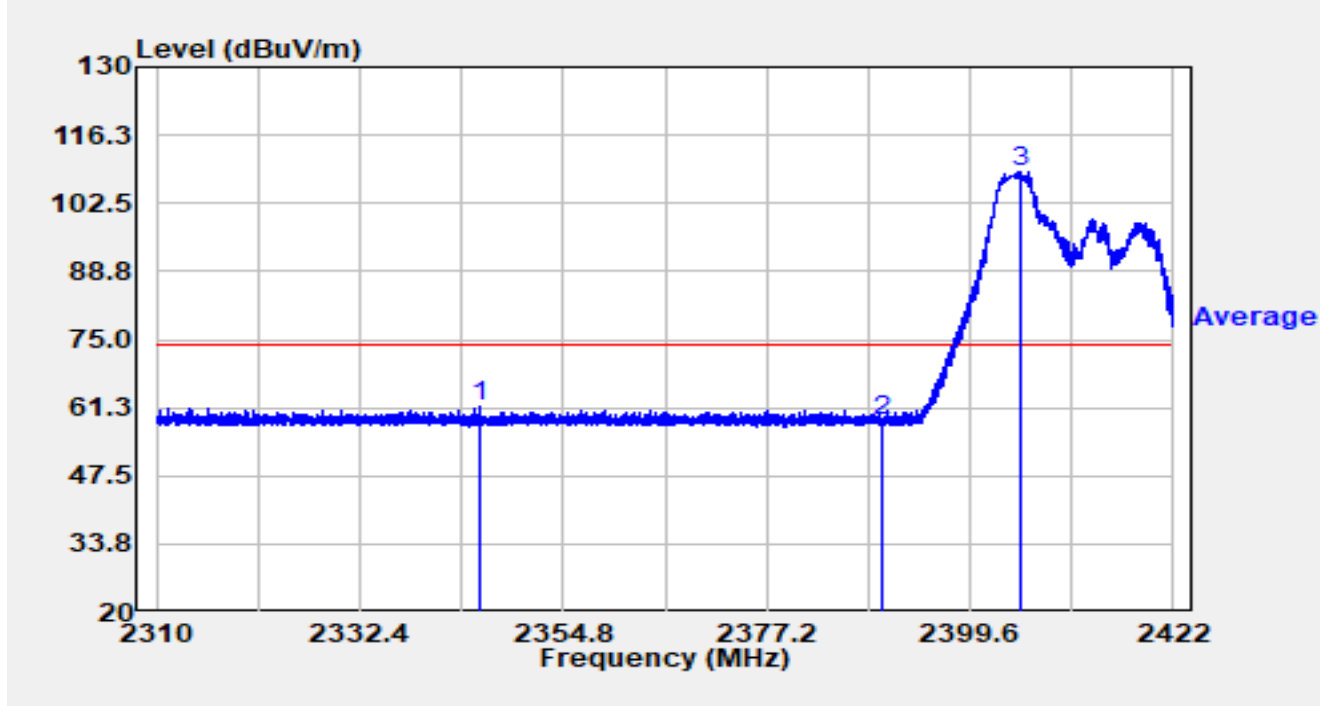


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1		2345.560	28.76	32.78	61.54	-12.46	74.00	Peak
2		2390.000	25.94	32.53	58.47	-15.53	74.00	Peak
3	*	2405.290	76.33	32.48	108.81	N/A	N/A	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-16
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz RU52/37		

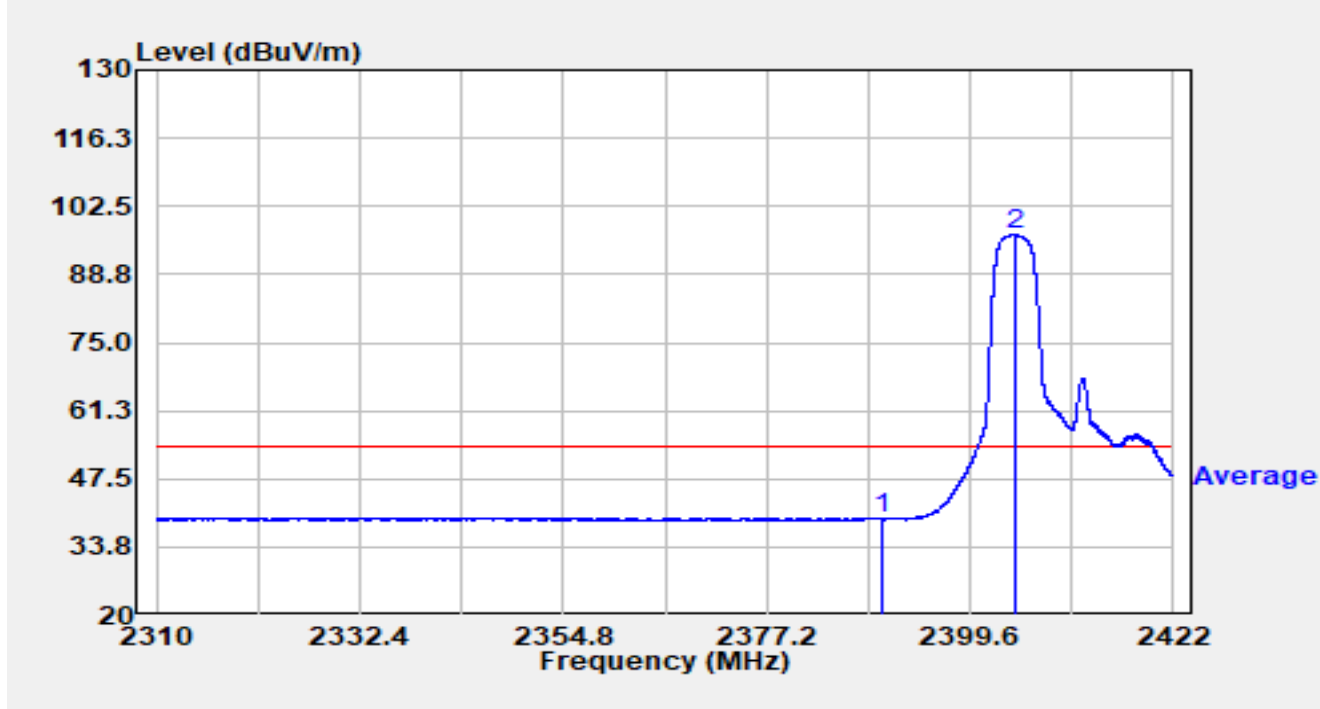


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2390.000	6.96	32.53	39.48	-14.52	54.00	Average
2	*	2404.573	64.20	32.48	96.68	N/A	N/A	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-16
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz RU106/53		

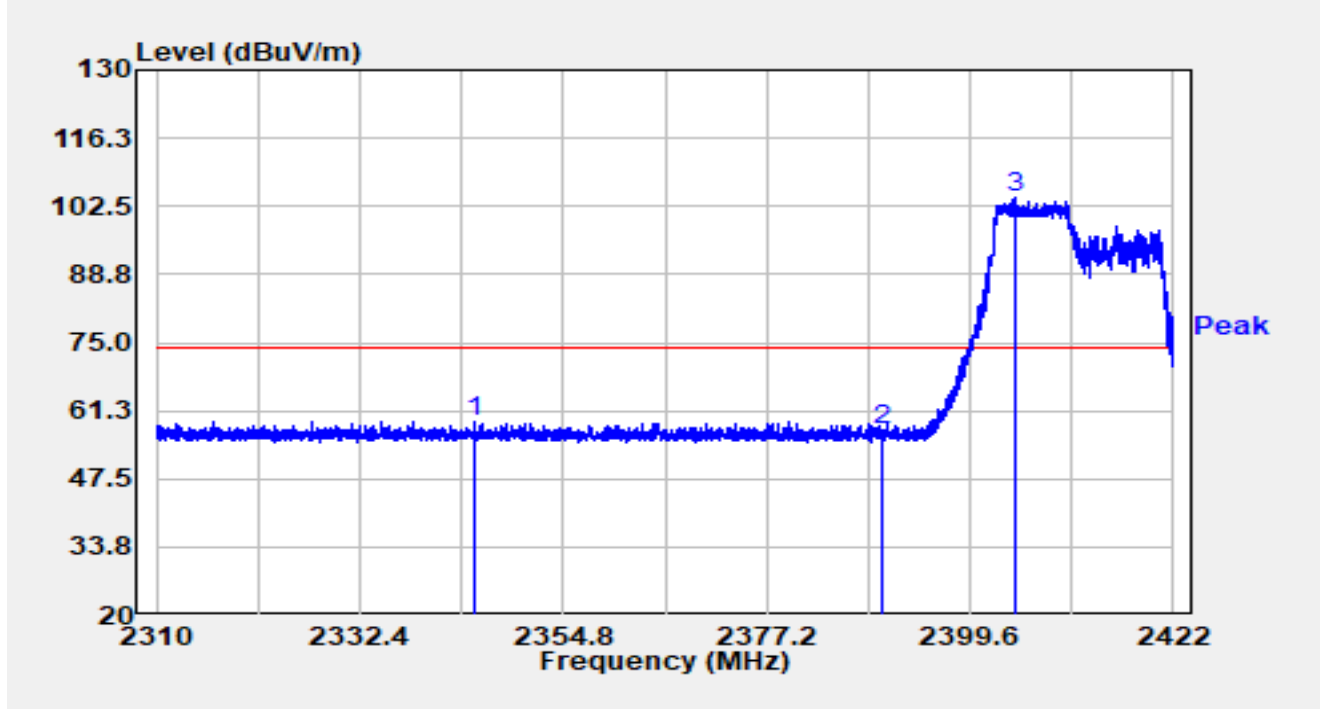


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1		2345.034	26.13	32.78	58.91	-15.09	74.00	Peak
2		2390.000	24.83	32.53	57.36	-16.64	74.00	Peak
3	*	2404.528	71.80	32.48	104.28	N/A	N/A	Peak

## Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-16
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz RU106/53		

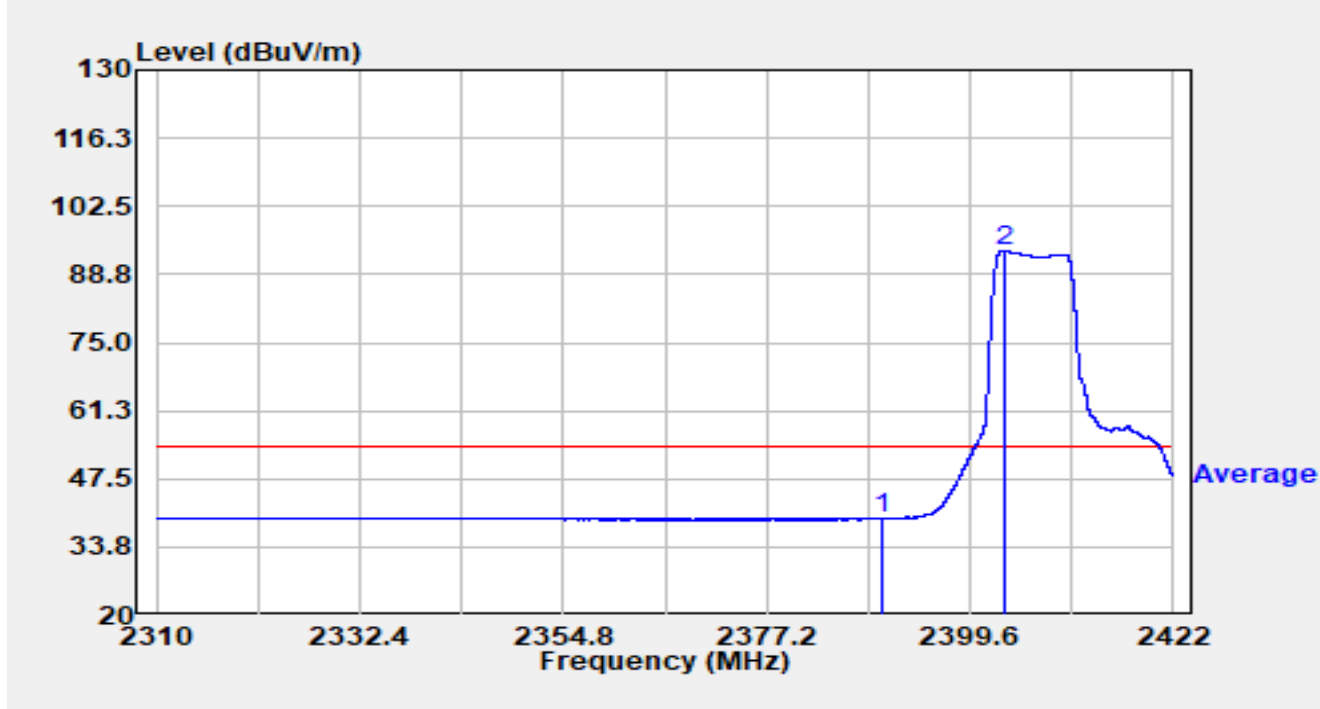


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2390.000	6.87	32.53	39.40	-14.60	54.00	Average
2	*	2403.307	60.98	32.48	93.46	N/A	N/A	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-16
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz RU106/53		

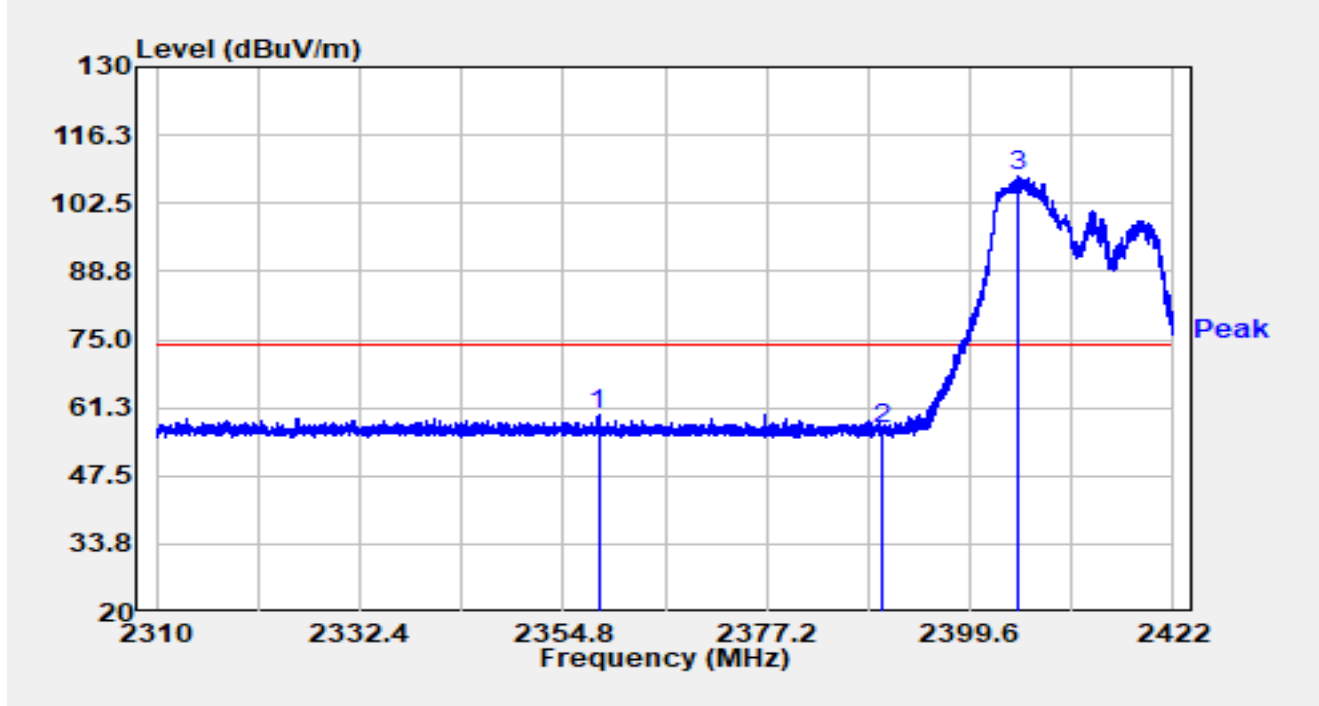


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1		2358.675	26.98	32.71	59.69	-14.31	74.00	Peak
2		2390.000	24.50	32.53	57.02	-16.98	74.00	Peak
3	*	2404.931	75.34	32.48	107.82	N/A	N/A	Peak

## Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-16
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz RU106/53		

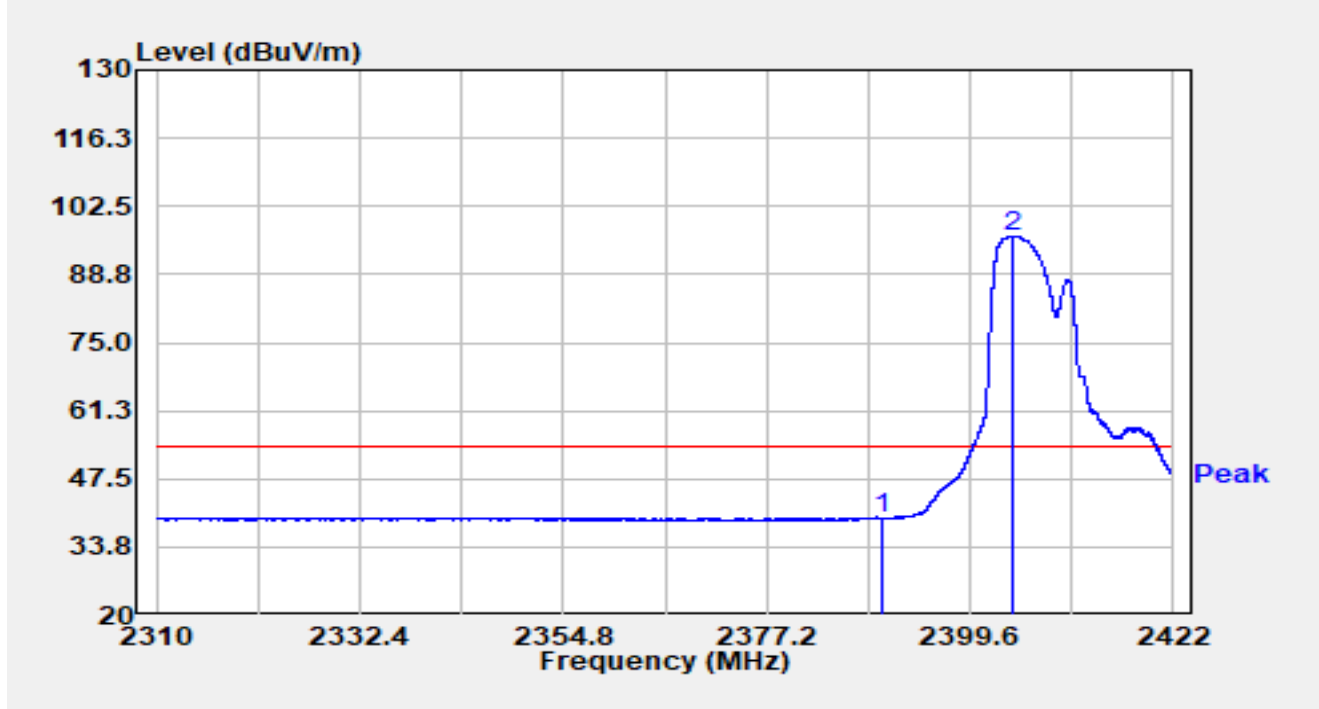


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2390.000	7.13	32.53	39.66	-14.34	54.00	Average
2	*	2404.382	64.09	32.48	96.57	N/A	N/A	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).



Site	WZ-AC2	Test Date	2024-07-17
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz RU26/8		

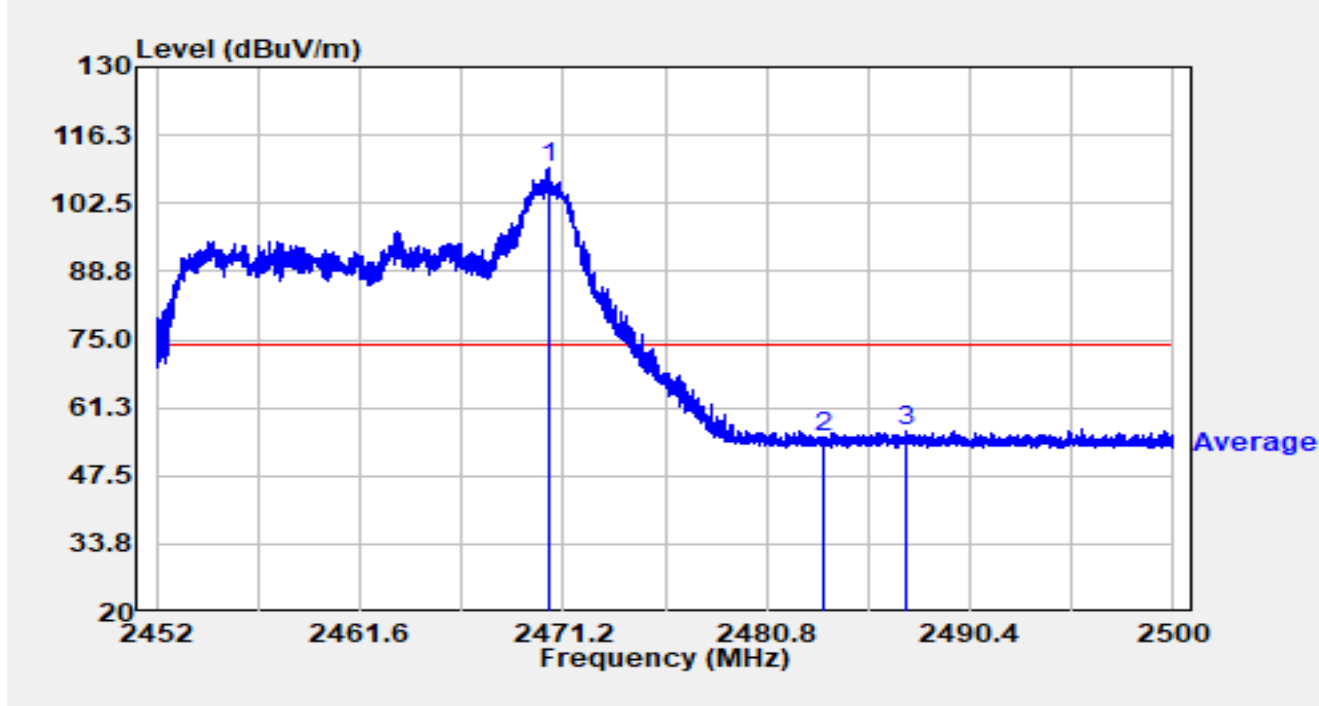


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2470.475	77.15	32.38	109.53	N/A	N/A	Peak
2		2483.500	22.80	32.38	55.18	-18.82	74.00	Peak
3		2487.419	23.99	32.38	56.37	-17.63	74.00	Peak

## Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-17
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz RU26/8		

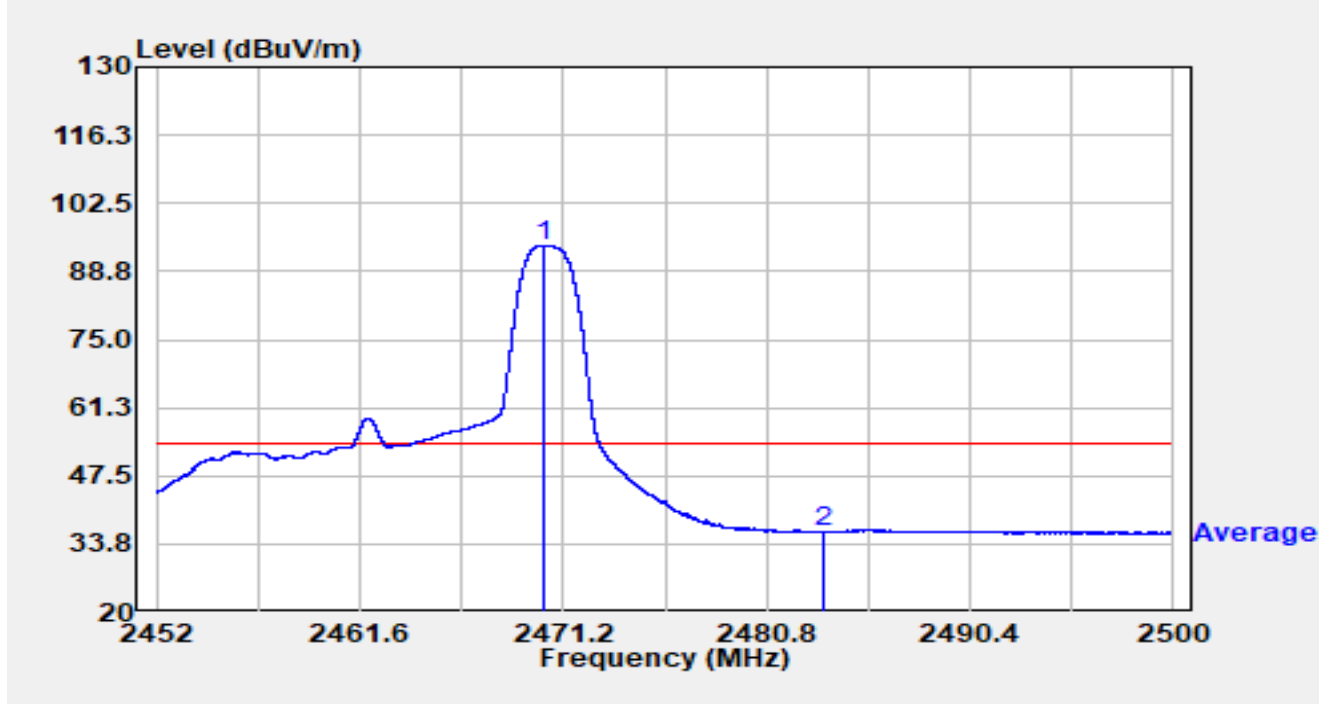


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	2470.240	61.63	32.38	94.01	N/A	N/A	Average
2		2483.500	3.91	32.38	36.30	-17.70	54.00	Average

## Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-17
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz RU26/8		

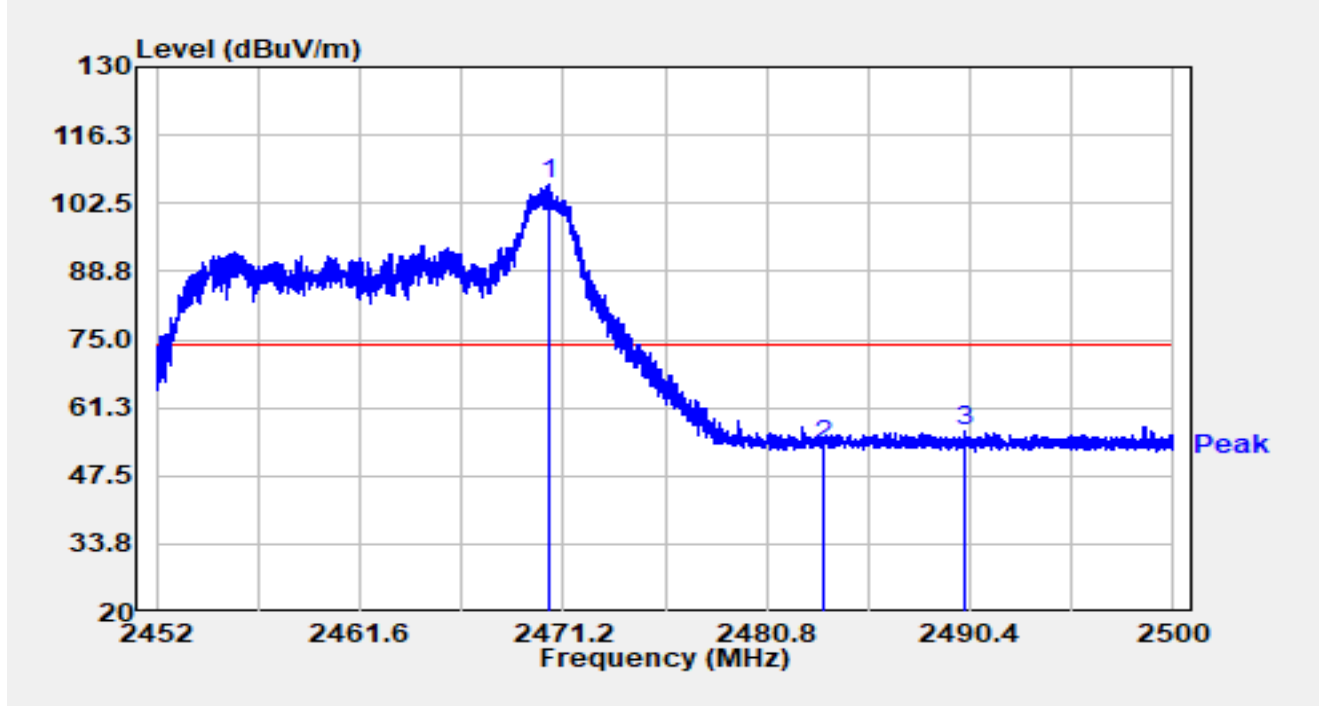


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	2470.514	73.78	32.38	106.16	N/A	N/A	Peak
2		2483.500	21.12	32.38	53.51	-20.49	74.00	Peak
3		2490.107	24.17	32.38	56.55	-17.45	74.00	Peak

**Notes:**

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-17
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz RU26/8		

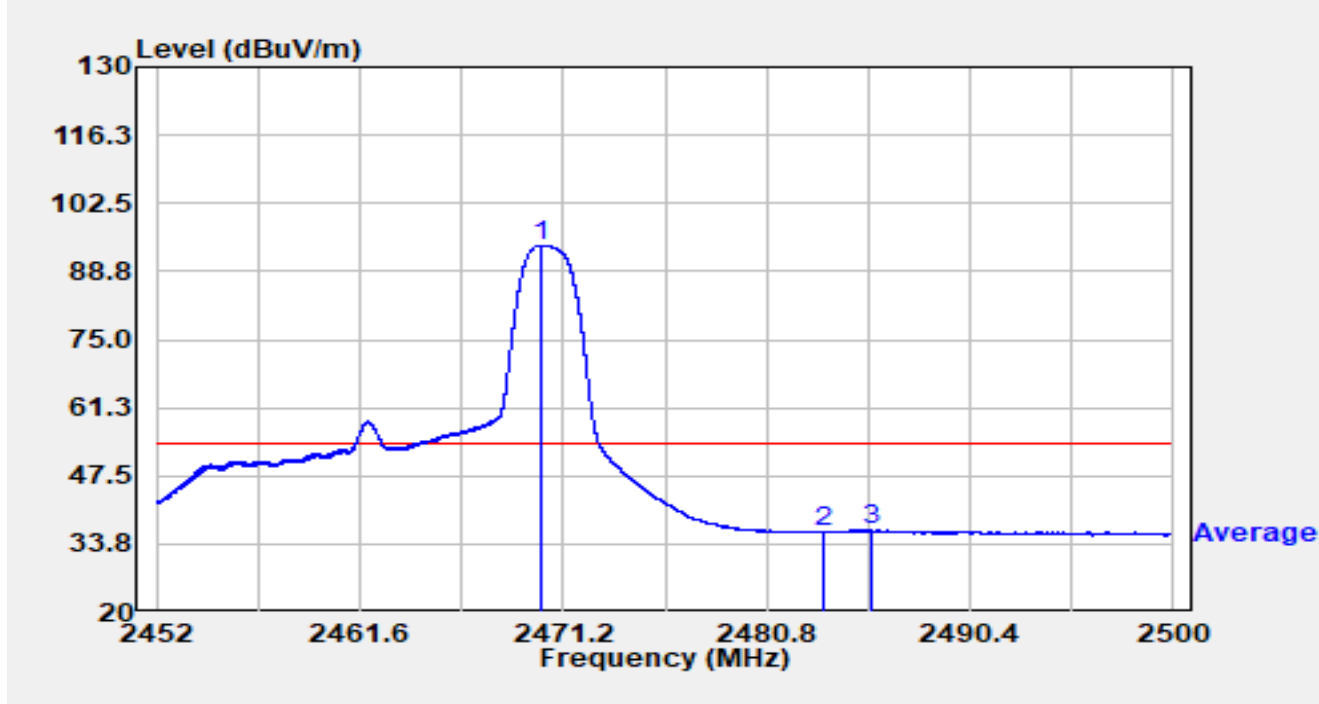


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	2470.096	61.58	32.38	93.96	N/A	N/A	Average
2		2483.500	3.74	32.38	36.12	-17.88	54.00	Average
3		2485.701	4.17	32.38	36.55	-17.45	54.00	Average

**Notes:**

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-16
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz RU52/40		

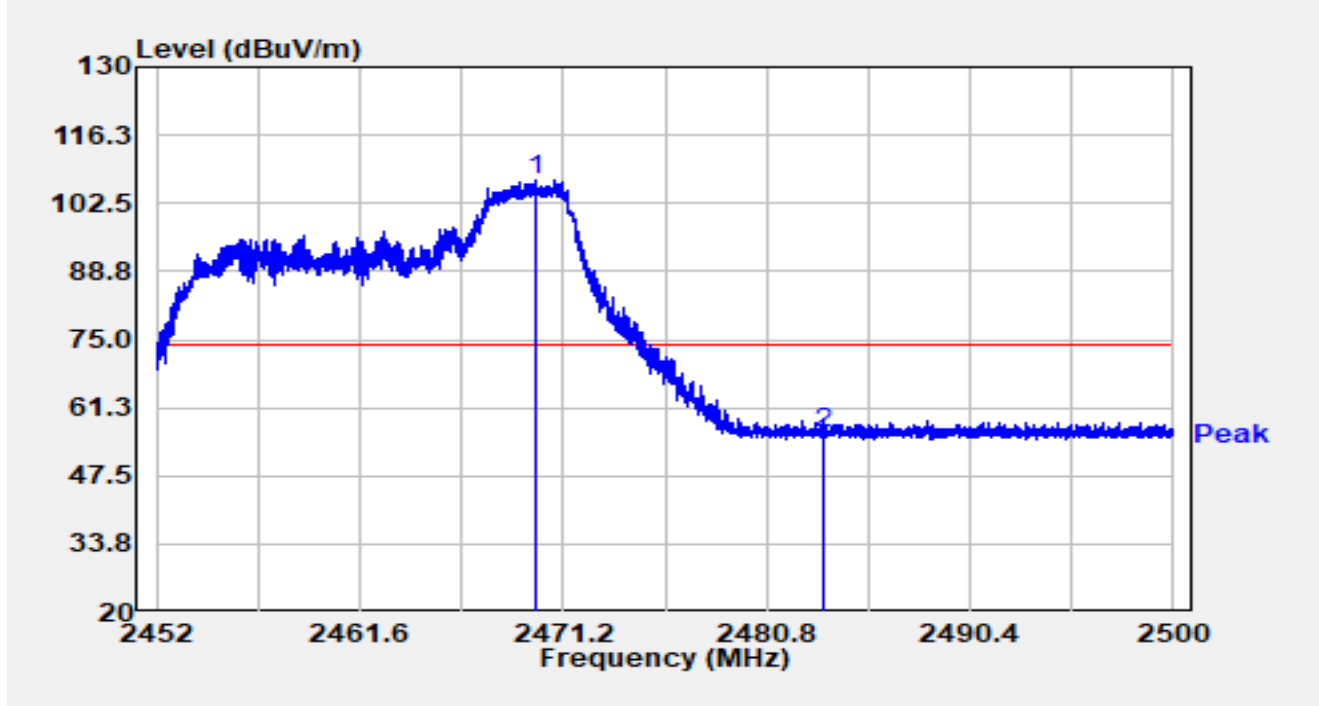


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	2469.853	74.69	32.38	107.07	N/A	N/A	Peak
2		2483.500	23.82	32.38	56.20	-17.80	74.00	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-16
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz RU52/40		

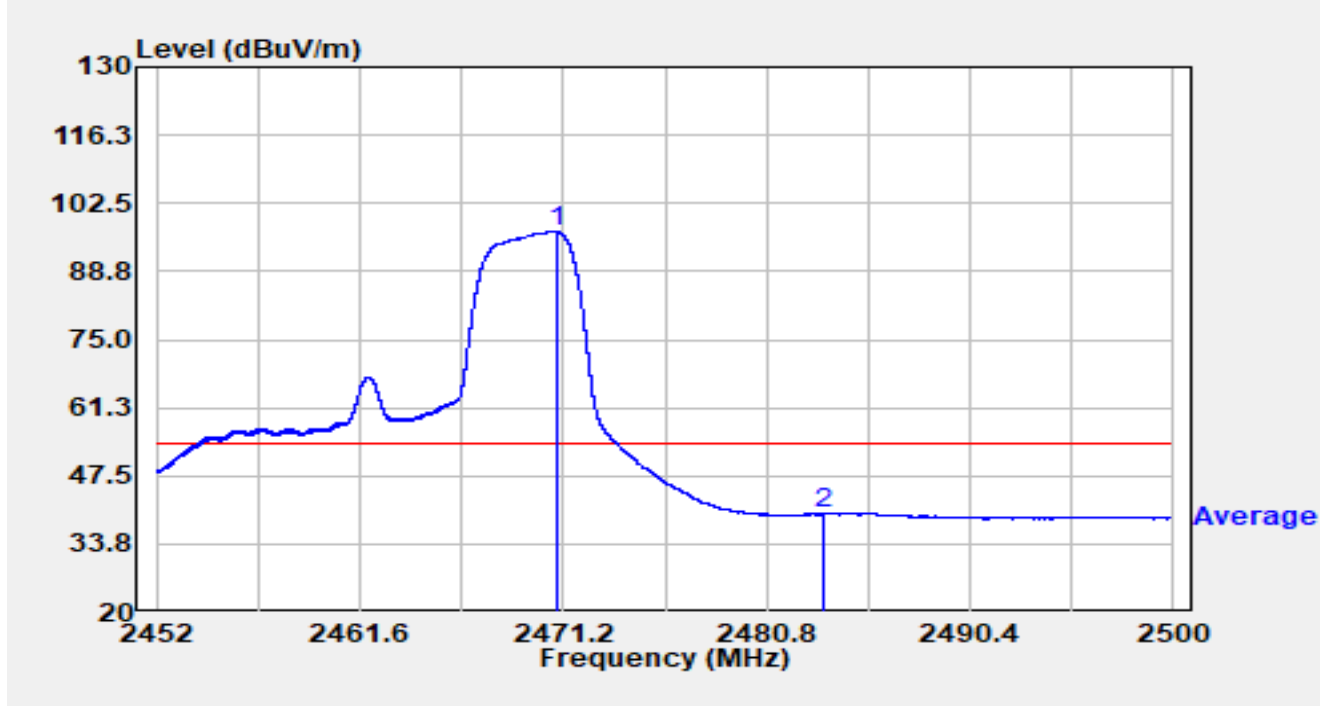


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2470.850	64.34	32.38	96.72	N/A	N/A	Average
2		2483.500	7.39	32.38	39.77	-14.23	54.00	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-16
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz RU52/40		

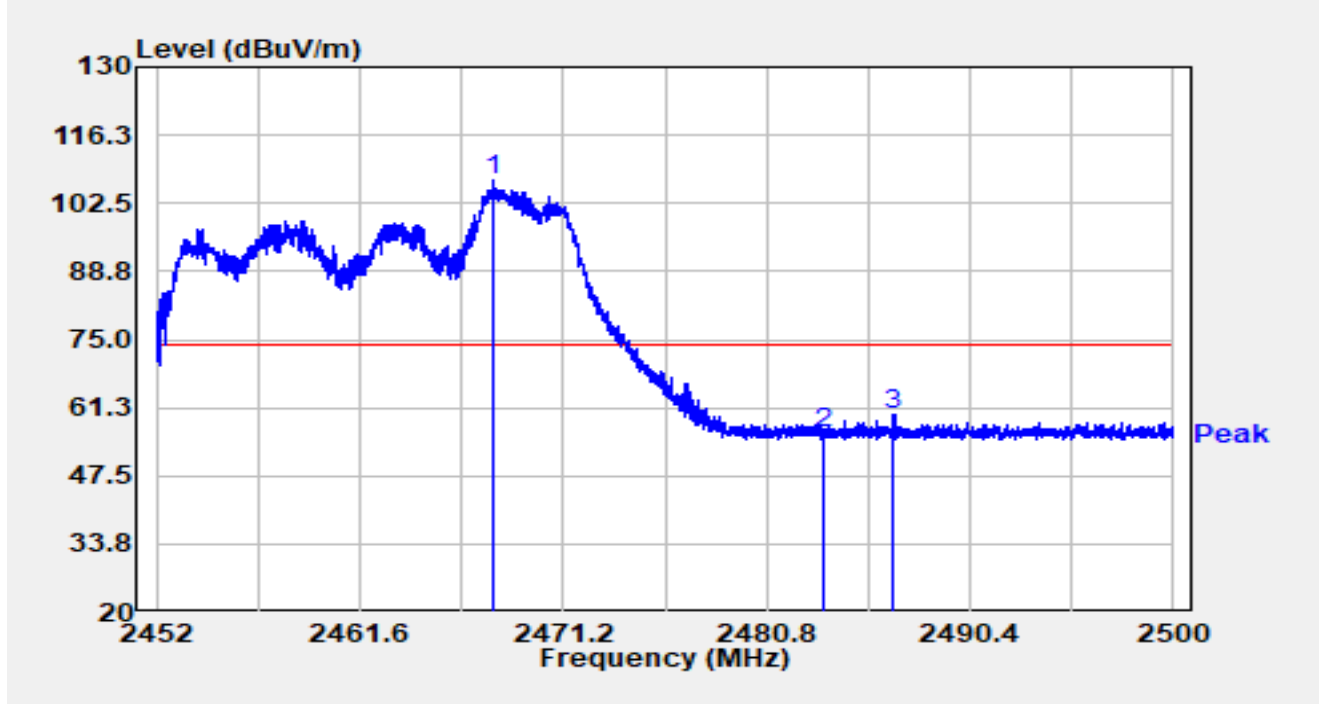


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	2467.854	74.80	32.37	107.17	N/A	N/A	Peak
2		2483.500	23.65	32.38	56.03	-17.97	74.00	Peak
3		2486.810	27.38	32.38	59.77	-14.23	74.00	Peak

## Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-16
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz RU52/40		

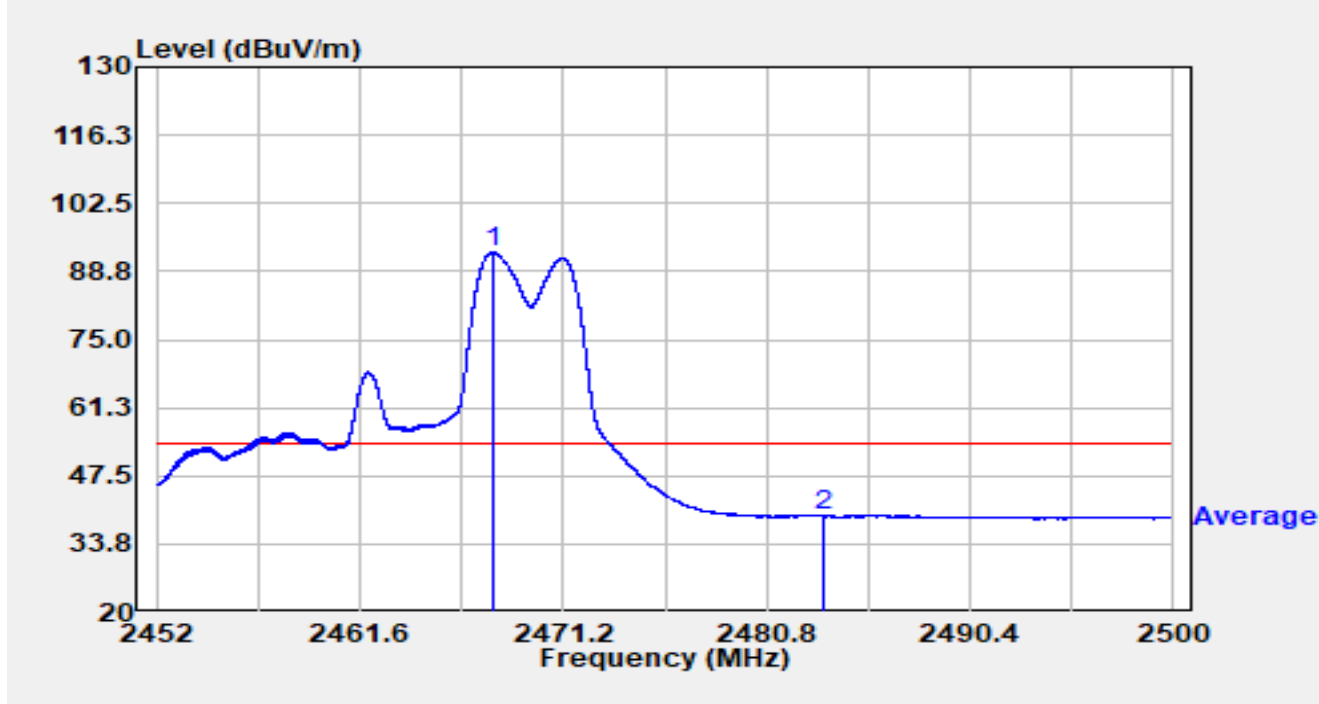


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	2467.848	60.15	32.37	92.52	N/A	N/A	Average
2		2483.500	6.93	32.38	39.31	-14.69	54.00	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (dB/m).



Site	WZ-AC2	Test Date	2024-07-16
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz RU106/54		

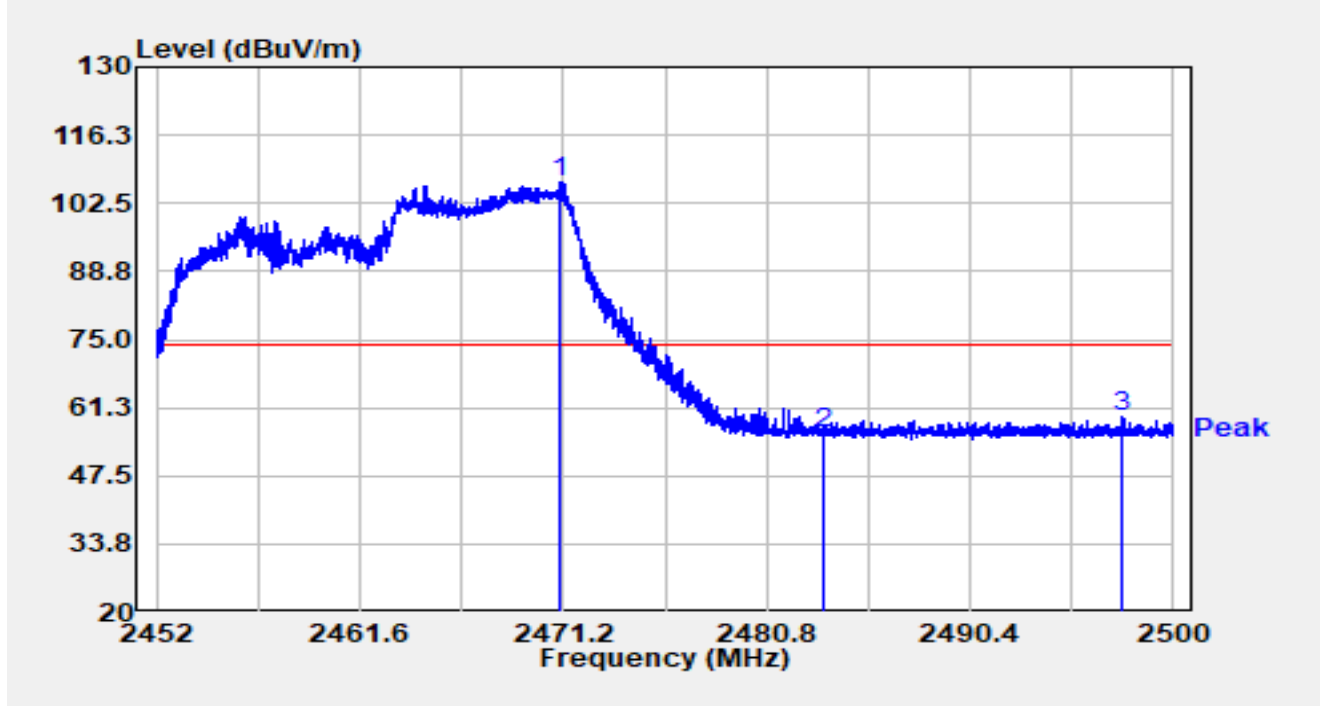


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2471.034	74.46	32.38	106.85	N/A	N/A	Peak
2		2483.500	23.61	32.38	56.00	-18.00	74.00	Peak
3		2497.618	26.94	32.40	59.34	-14.66	74.00	Peak

## Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-16
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz RU106/54		

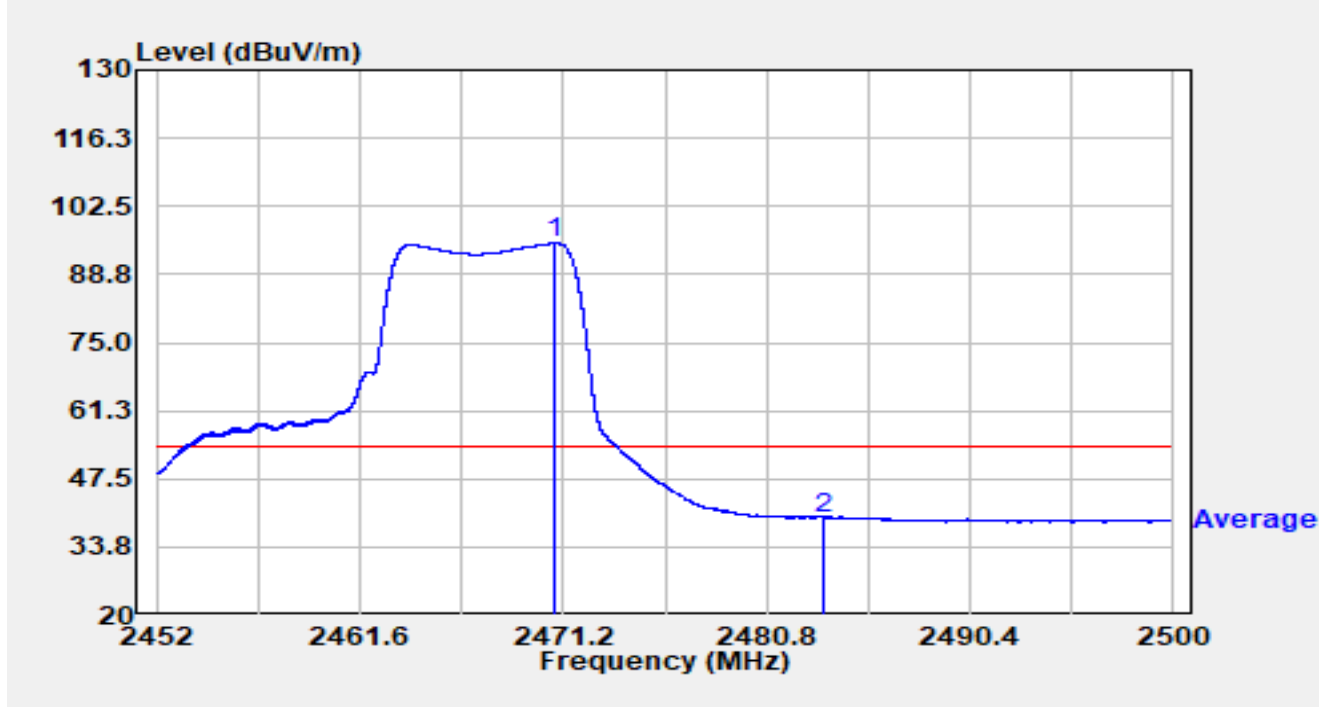


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2470.833	62.64	32.38	95.02	N/A	N/A	Average
2		2483.500	7.31	32.38	39.69	-14.31	54.00	Average

## Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-16
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz RU106/54		

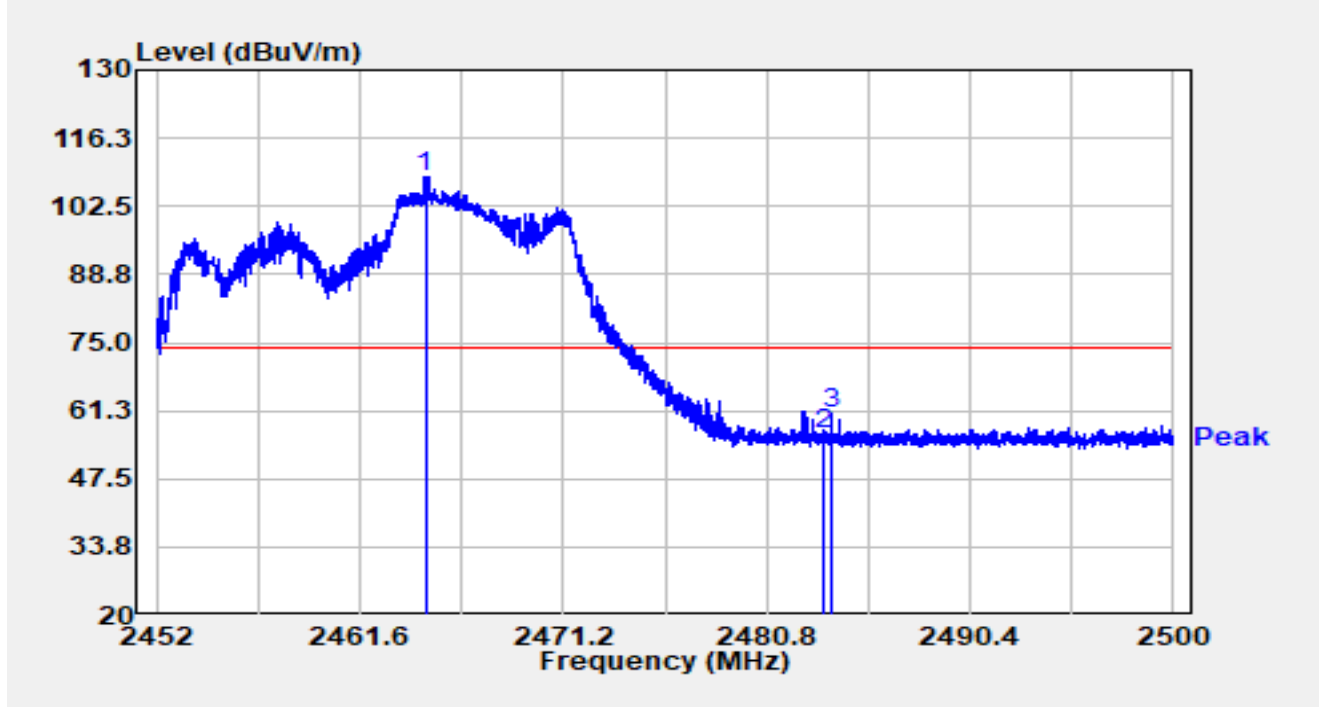


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	2464.684	76.23	32.37	108.60	N/A	N/A	Peak
2		2483.500	24.32	32.38	56.70	-17.30	74.00	Peak
3		2483.898	28.10	32.38	60.48	-13.52	74.00	Peak

## Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-16
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz RU106/54		

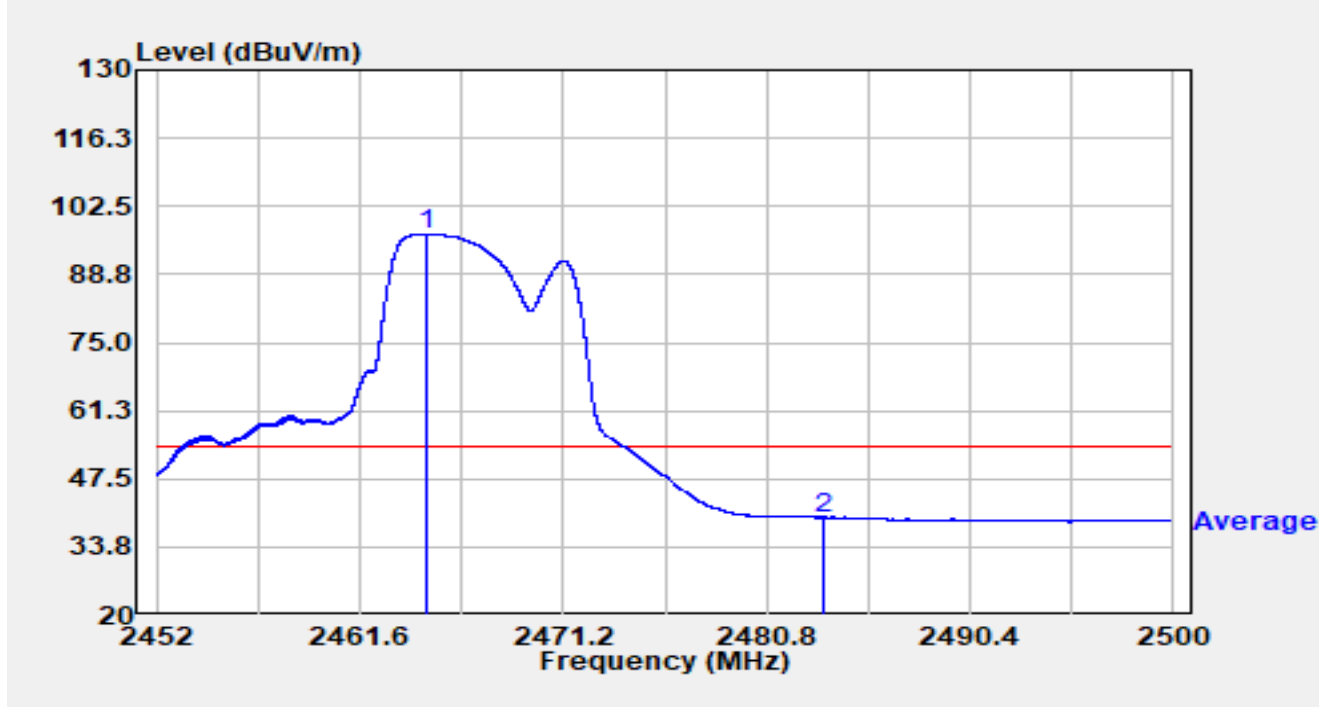


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	2464.762	64.51	32.37	96.88	N/A	N/A	Average
2		2483.500	7.28	32.38	39.67	-14.33	54.00	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-24
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C/53.1%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2422MHz RU242/61		

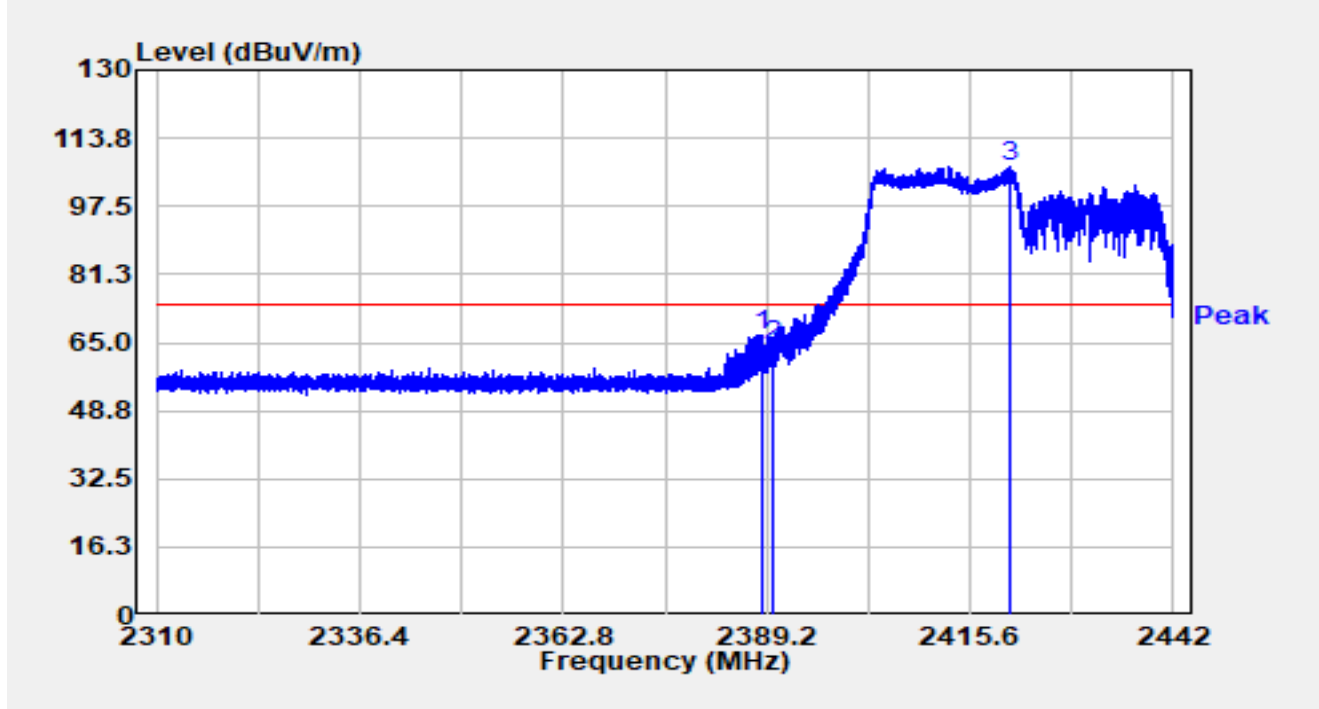


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2388.606	34.80	31.88	66.68	-7.32	74.00	Peak
2		2390.000	32.63	31.87	64.50	-9.50	74.00	Peak
3	*	2420.920	75.26	31.76	107.02	N/A	N/A	Peak

## Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-24
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C/53.1%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2422MHz RU242/61		

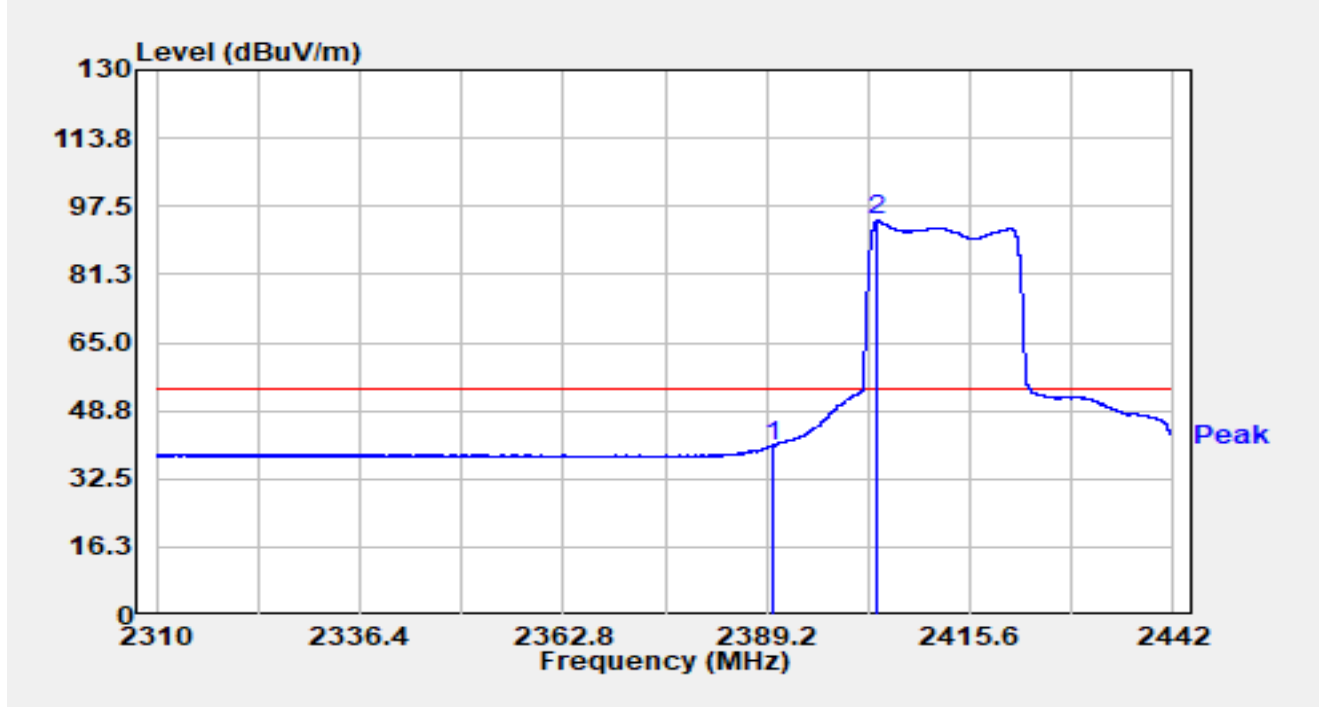


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1		2390.000	8.53	31.87	40.40	-13.60	54.00	Average
2	*	2403.628	62.13	31.81	93.95	N/A	N/A	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-24
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C/53.1%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2422MHz RU242/61		

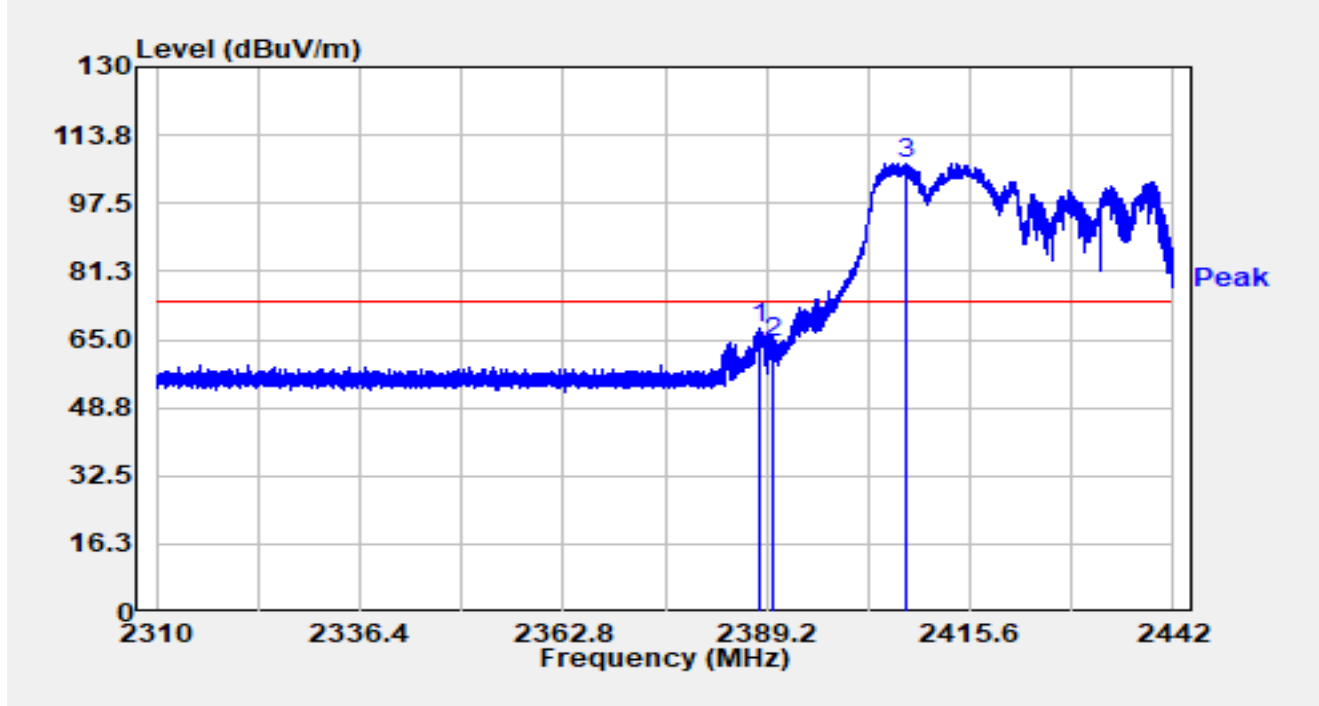


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1		2388.223	35.73	31.88	67.61	-6.39	74.00	Peak
2		2390.000	32.45	31.87	64.32	-9.68	74.00	Peak
3	*	2407.178	75.11	31.80	106.91	N/A	N/A	Peak

**Notes:**

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-24
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C/53.1%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2422MHz RU242/61		

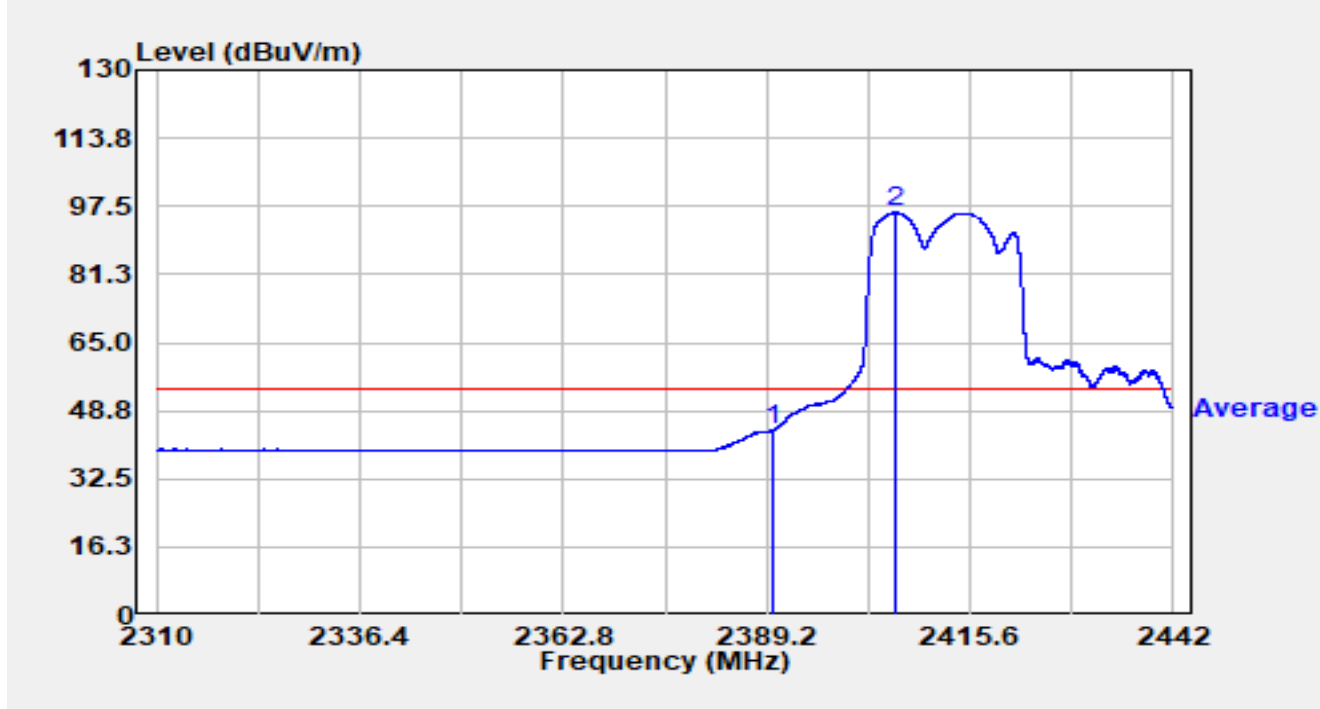


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1		2390.005	12.27	31.87	44.15	-9.85	54.00	Average
2	*	2405.819	64.19	31.81	95.99	N/A	N/A	Average

## Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (dB/m).



Site	WZ-AC1	Test Date	2024-07-24
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C/53.1%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2452MHz RU242/62		

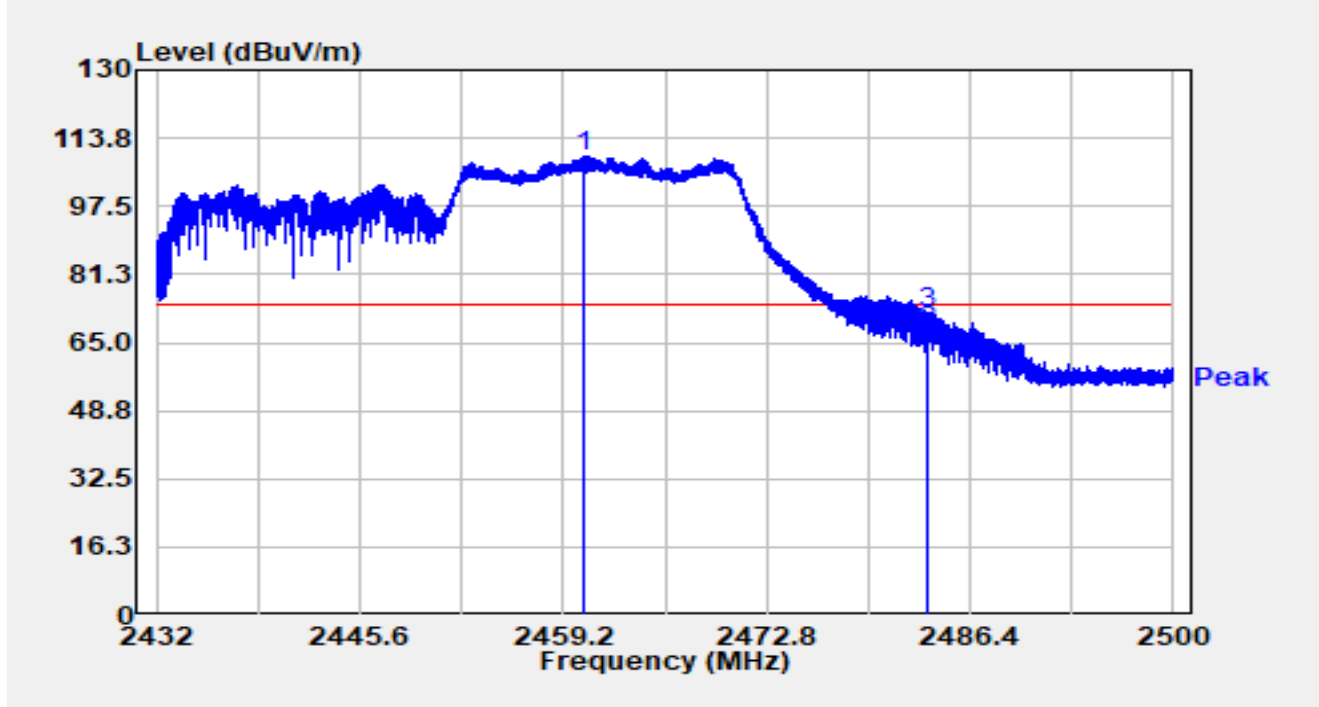


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	2460.628	77.68	31.67	109.36	N/A	N/A	Peak
2		2483.503	36.12	31.66	67.77	-6.23	74.00	Peak
3		2483.517	40.43	31.66	72.09	-1.91	74.00	Peak

## Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-24
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C/53.1%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2452MHz RU242/62		

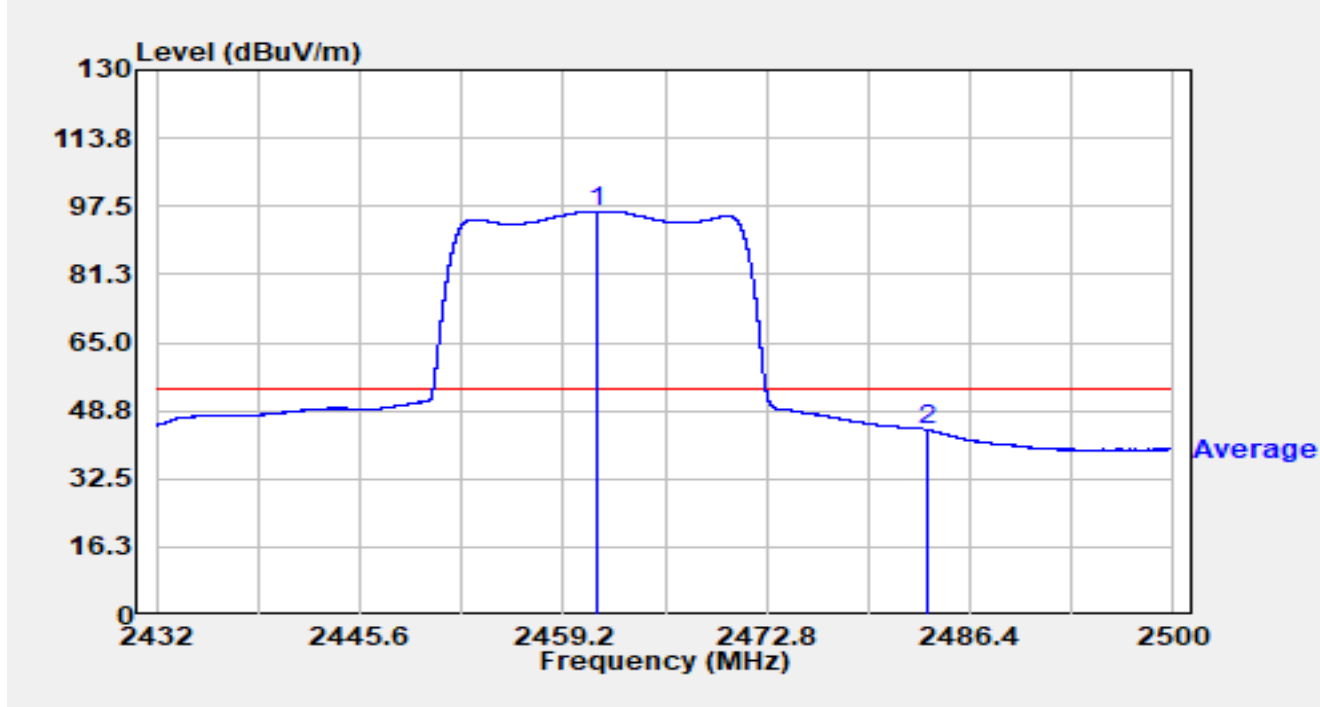


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2461.485	64.72	31.67	96.40	N/A	N/A	Average
2		2483.500	12.54	31.66	44.20	-9.80	54.00	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-24
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C/53.1%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2452MHz RU242/62		

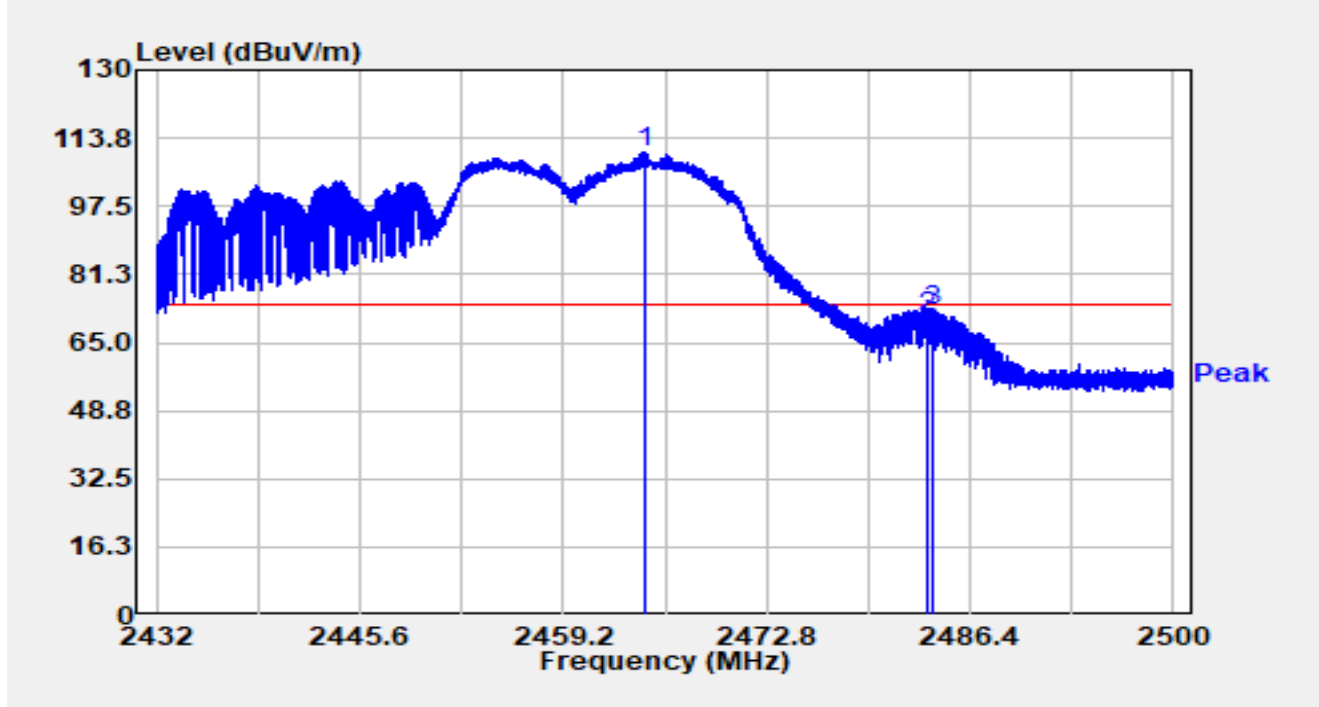


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	2464.647	78.64	31.66	110.30	N/A	N/A	Peak
2		2483.503	39.55	31.66	71.20	-2.80	74.00	Peak
3		2483.945	41.14	31.66	72.80	-1.20	74.00	Peak

## Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-24
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C/53.1%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2452MHz RU242/62		

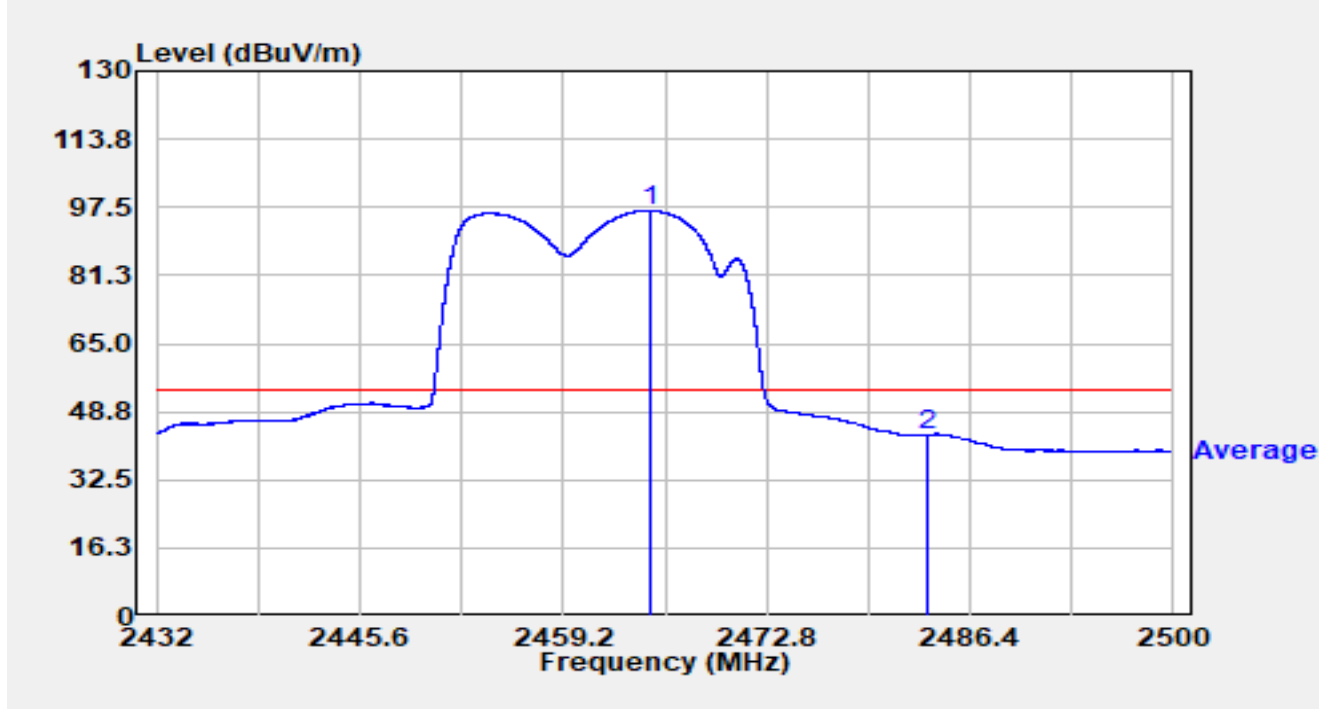


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2465.007	65.02	31.66	96.68	N/A	N/A	Average
2		2483.500	11.52	31.66	43.18	-10.82	54.00	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

**Test Data of Engine S0803/N6803**

Site	WZ-AC2	Test Date	2024-07-18
Test Engineer	Frank Xue	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11n-HT40 at 2452MHz		

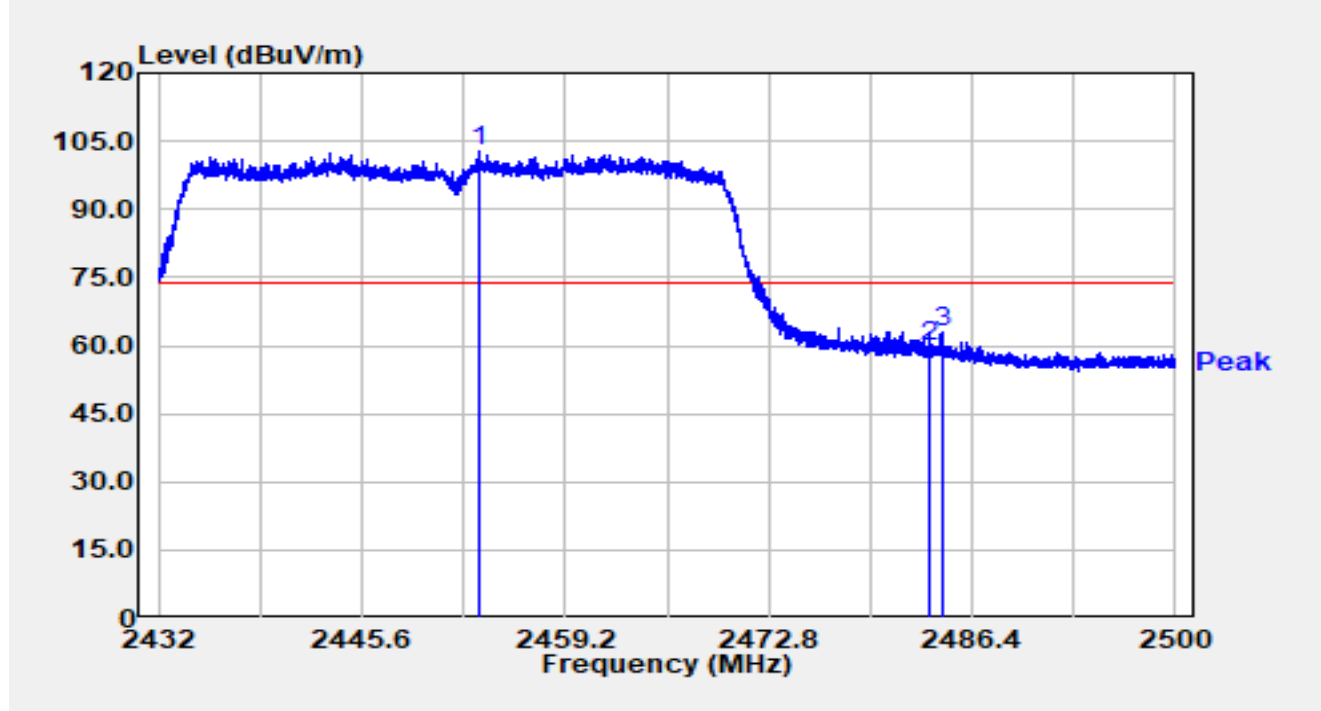


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2453.515	70.44	32.36	102.81	N/A	N/A	Peak
2		2483.500	27.31	32.38	59.69	-14.31	74.00	Peak
3		2484.435	30.58	32.38	62.96	-11.04	74.00	Peak

**Notes:**

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-18
Test Engineer	Frank Xue	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11n-HT40 at 2452MHz		

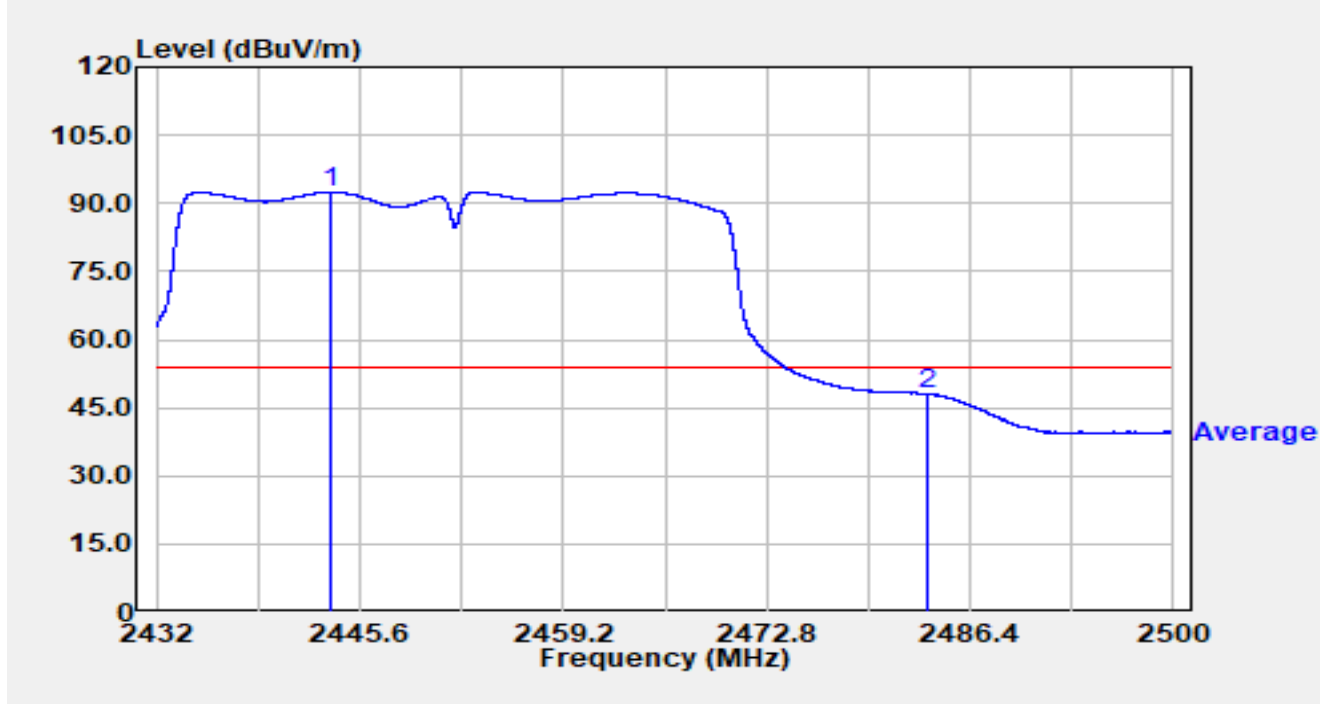


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	2443.642	60.05	32.39	92.43	N/A	N/A	Average
2		2483.500	15.65	32.38	48.03	-5.97	54.00	Average

Notes:

1. "\*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-18
Test Engineer	Frank Xue	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11n-HT40 at 2452MHz		

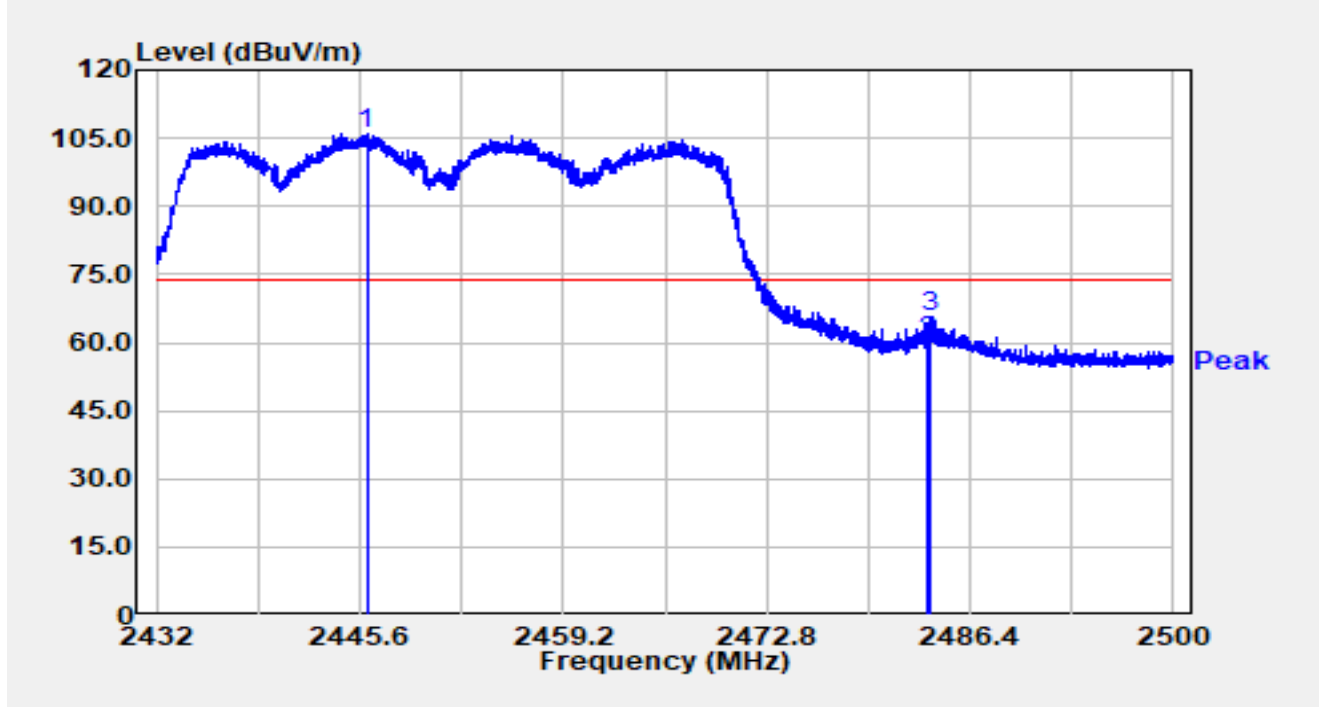


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	2446.049	73.40	32.38	105.79	N/A	N/A	Peak
2		2483.500	27.73	32.38	60.12	-13.88	74.00	Peak
3		2483.707	33.44	32.38	65.83	-8.17	74.00	Peak

## Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-18
Test Engineer	Frank Xue	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11n-HT40 at 2452MHz		

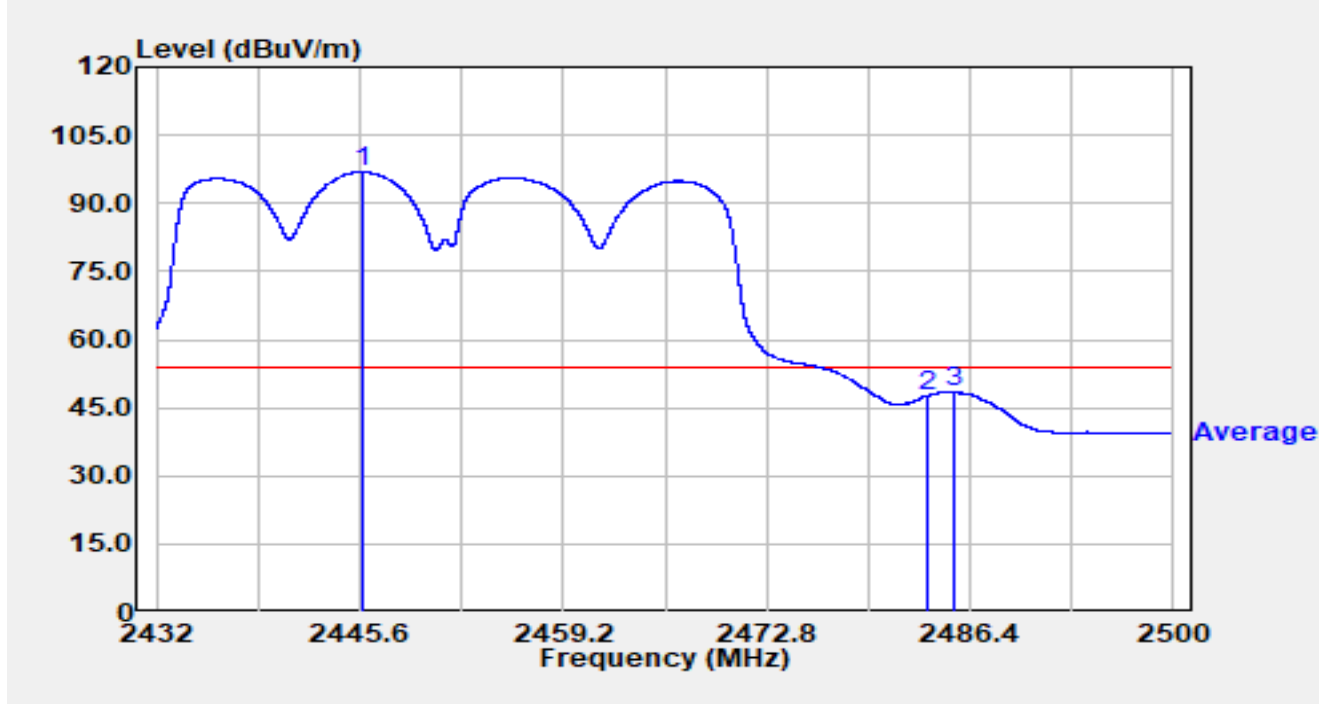

No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	2445.790	64.48	32.38	96.86	N/A	N/A	Average
2		2483.500	15.19	32.38	47.58	-6.42	54.00	Average
3		2485.346	16.13	32.38	48.51	-5.49	54.00	Average


## Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).



**A.8 AC Conducted Emissions Test Result**

Site	WZ-SR2	Test Date	2024-07-12
Test Engineer	Linda Wei	Temp./Humidity	24.0°C /63.3%
Factor	ENV216_101683_L1_Filter Off_E	Polarity	Line
EUT	Mobile Computer	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11b at 2412MHz		

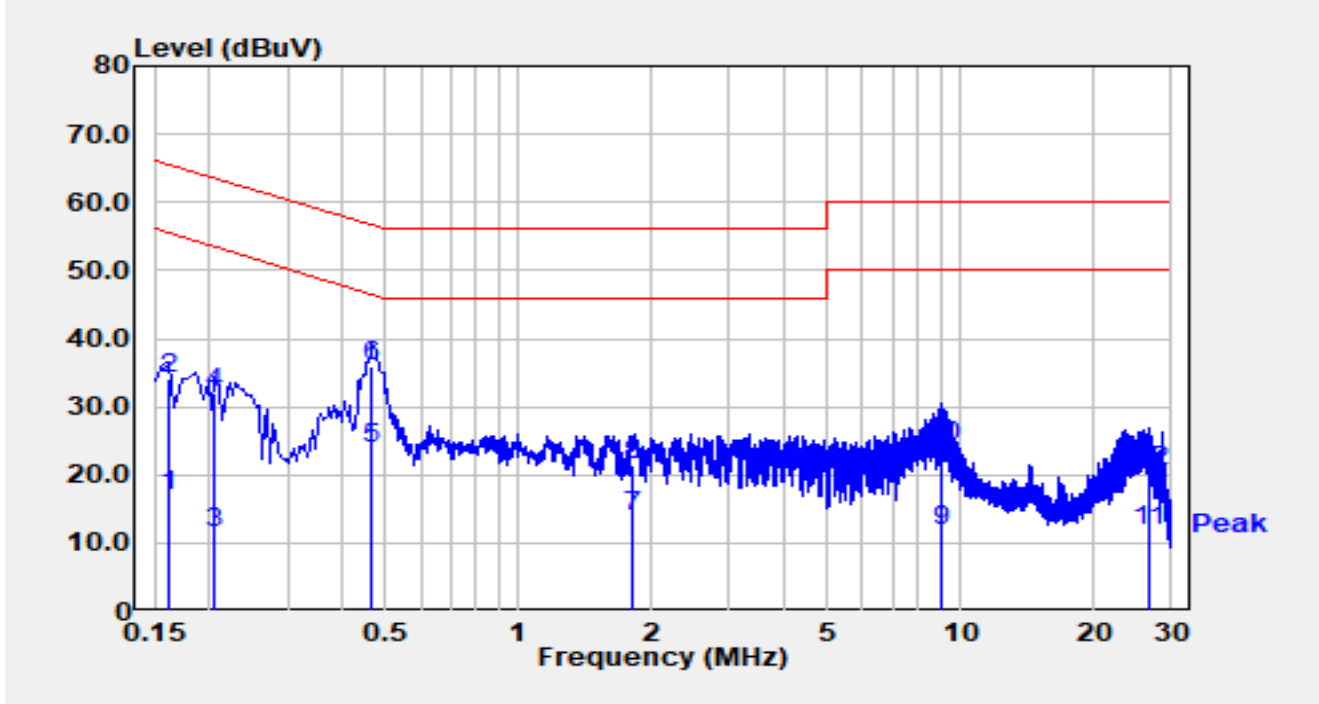


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.162	7.10	9.77	16.87	-38.49	55.36	Average
2		0.162	24.30	9.77	34.07	-31.29	65.36	QP
3		0.206	1.60	9.80	11.40	-41.97	53.37	Average
4		0.206	22.20	9.80	32.00	-31.37	63.37	QP
5		0.466	14.00	9.91	23.91	-22.67	46.58	Average
6	*	0.466	26.10	9.91	36.01	-20.57	56.58	QP
7		1.820	3.60	10.27	13.87	-32.13	46.00	Average
8		1.820	11.10	10.27	21.37	-34.63	56.00	QP
9		9.040	0.80	10.90	11.70	-38.30	50.00	Average
10		9.040	13.30	10.90	24.20	-35.80	60.00	QP
11		26.740	0.40	11.50	11.90	-38.11	50.00	Average
12		26.740	8.90	11.50	20.40	-39.61	60.00	QP

Notes:

1. " \*", means this data is the worst emission level.

2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement(dB $\mu$ V) = Reading(dB $\mu$ V) + C.F (dB).

Site	WZ-SR2	Test Date	2024-07-12
Test Engineer	Linda Wei	Temp./Humidity	24.0°C /63.3%
Factor	ENV216_101683_N_Filter Off_E	Polarity	Neutral
EUT	Mobile Computer	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11b at 2412MHz		

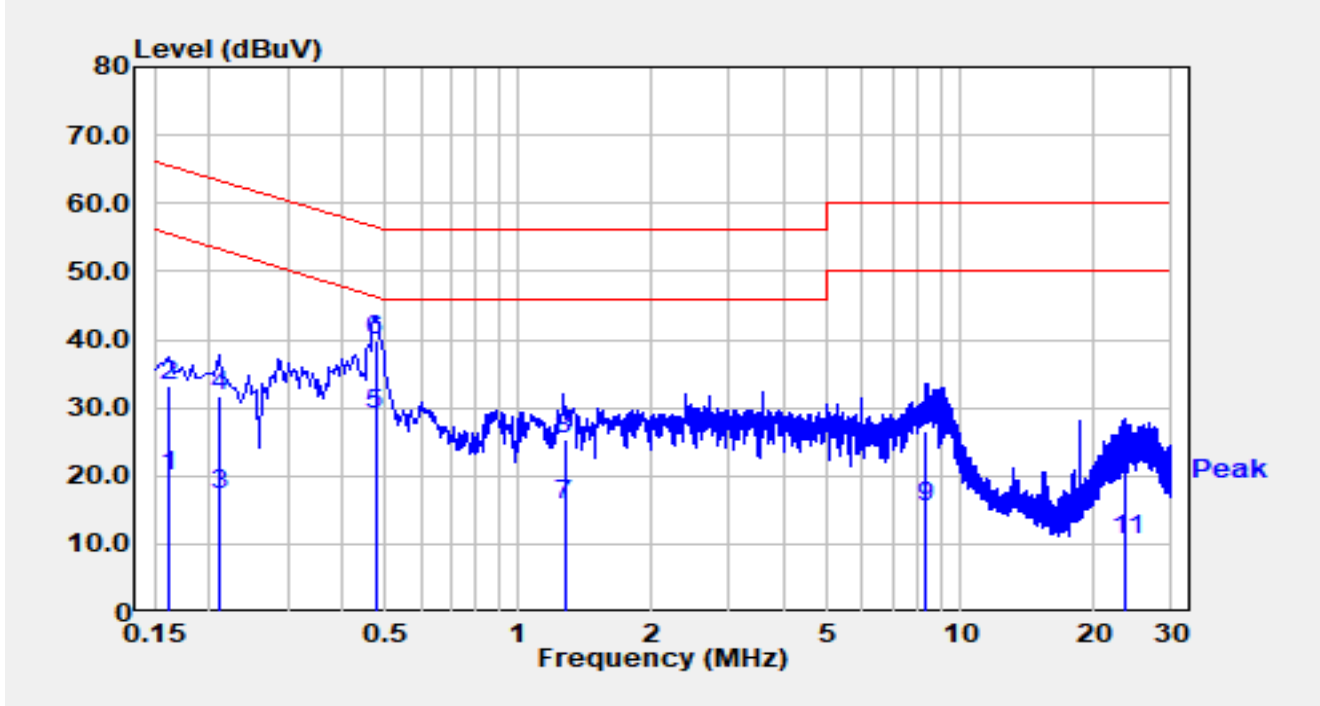

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.162	10.20	9.76	19.96	-35.40	55.36	Average
2		0.162	23.60	9.76	33.36	-32.00	65.36	QP
3		0.210	7.40	9.78	17.18	-36.03	53.21	Average
4		0.210	21.90	9.78	31.68	-31.53	63.21	QP
5		0.474	19.20	9.90	29.10	-17.35	46.44	Average
6	*	0.474	30.10	9.90	40.00	-16.45	56.44	QP
7		1.270	5.40	10.20	15.60	-30.40	46.00	Average
8		1.270	15.20	10.20	25.40	-30.60	56.00	QP
9		8.370	4.50	10.88	15.38	-34.62	50.00	Average
10		8.370	15.70	10.88	26.58	-33.42	60.00	QP
11		23.630	-0.90	11.56	10.66	-39.34	50.00	Average
12		23.630	10.10	11.56	21.66	-38.34	60.00	QP

## Notes:

- "\*", means this data is the worst emission level.
- C.F (dB) = LISN Factor (dB) + Cable Loss (dB).

3. Measurement(dB $\mu$ V) = Reading(dB $\mu$ V) + C.F (dB).

## Appendix B – Test Setup Photograph

Refer to “2406RSU006-UT” file.

## Appendix C – EUT Photograph

Refer to “2406RSU006-UE” file.

————— The End —————