


Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5180MHz		

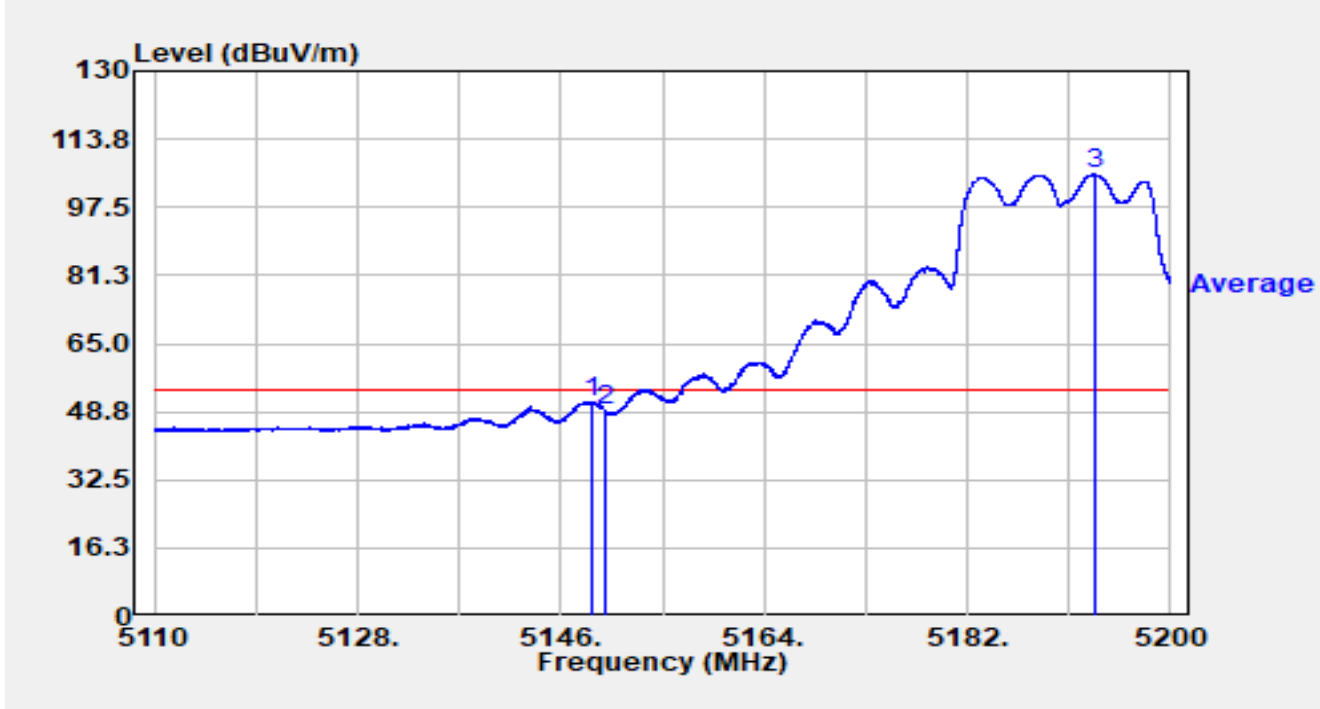


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1		5148.664	31.48	19.77	51.25	-2.75	54.00	Average
2		5150.000	29.10	19.78	48.88	-5.12	54.00	Average
3	*	5193.214	85.88	19.41	105.29	N/A	N/A	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5180MHz		

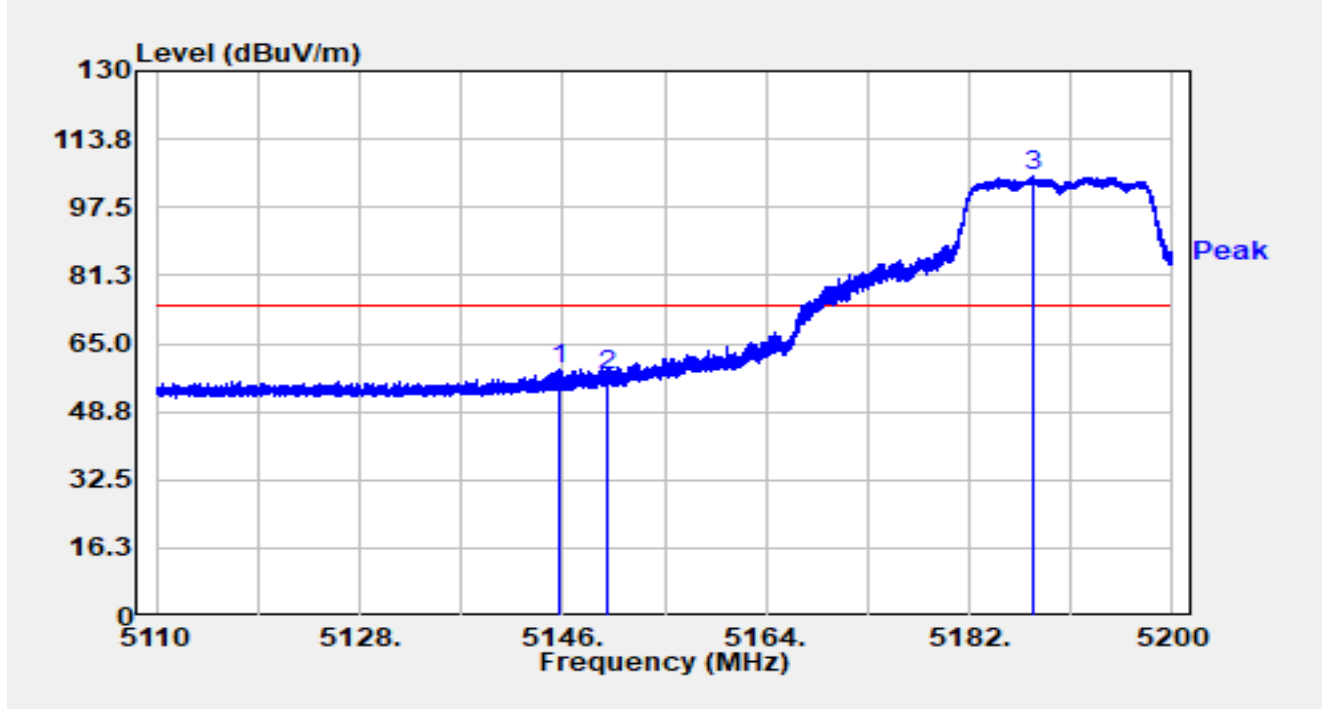


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5145.748	39.35	19.74	59.09	-14.91	74.00	Peak
2		5150.000	37.62	19.78	57.40	-16.60	74.00	Peak
3	*	5187.652	85.29	19.53	104.82	N/A	N/A	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5180MHz		

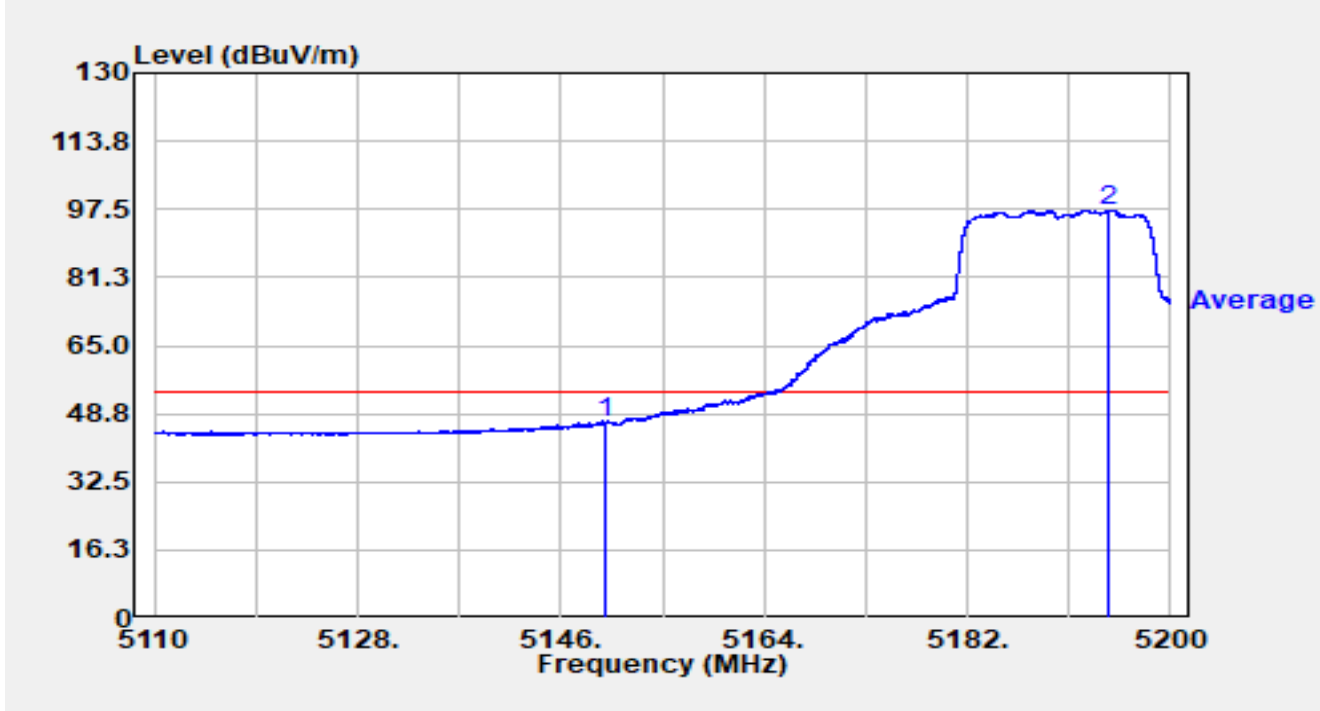


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5150.000	26.85	19.78	46.63	-7.37	54.00	Average
2	*	5194.591	77.90	19.38	97.29	N/A	N/A	Average

**Notes:**

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5320MHz		

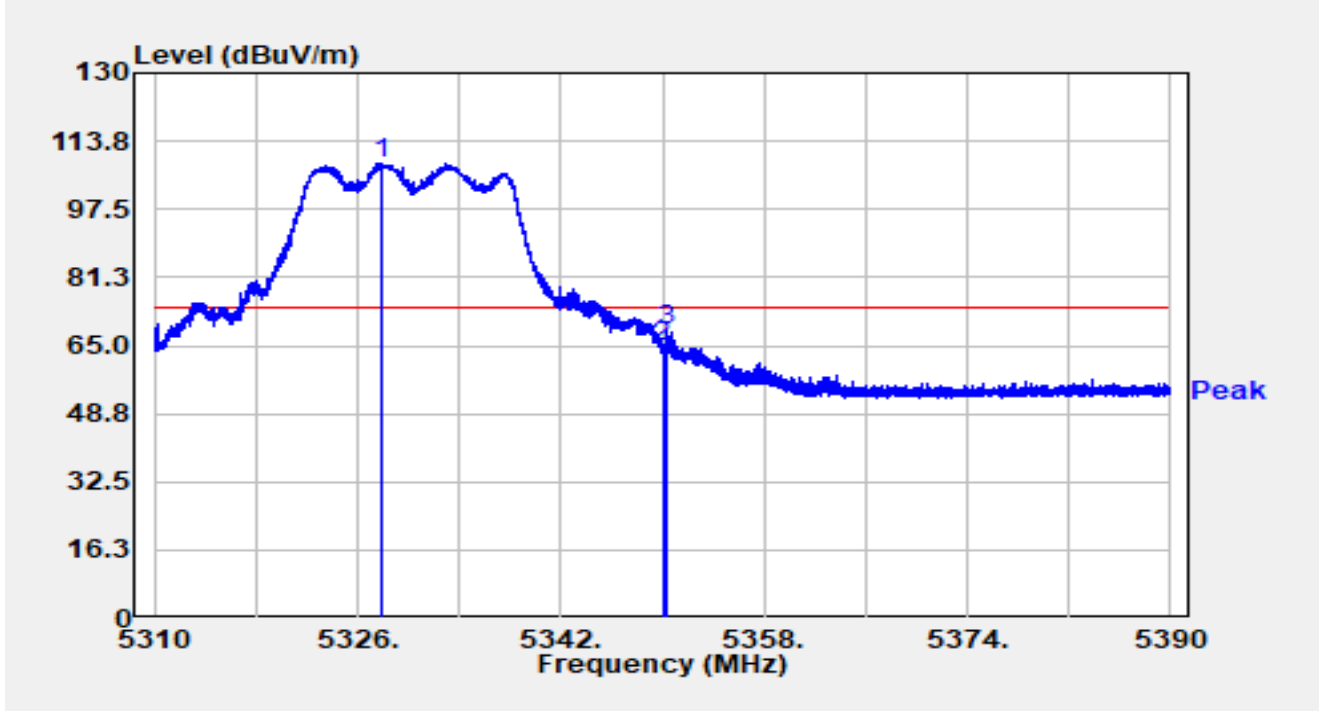


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5327.968	88.74	19.76	108.49	N/A	N/A	Peak
2		5350.000	45.63	19.32	64.96	-9.04	74.00	Peak
3		5350.384	49.56	19.31	68.87	-5.13	74.00	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5320MHz		

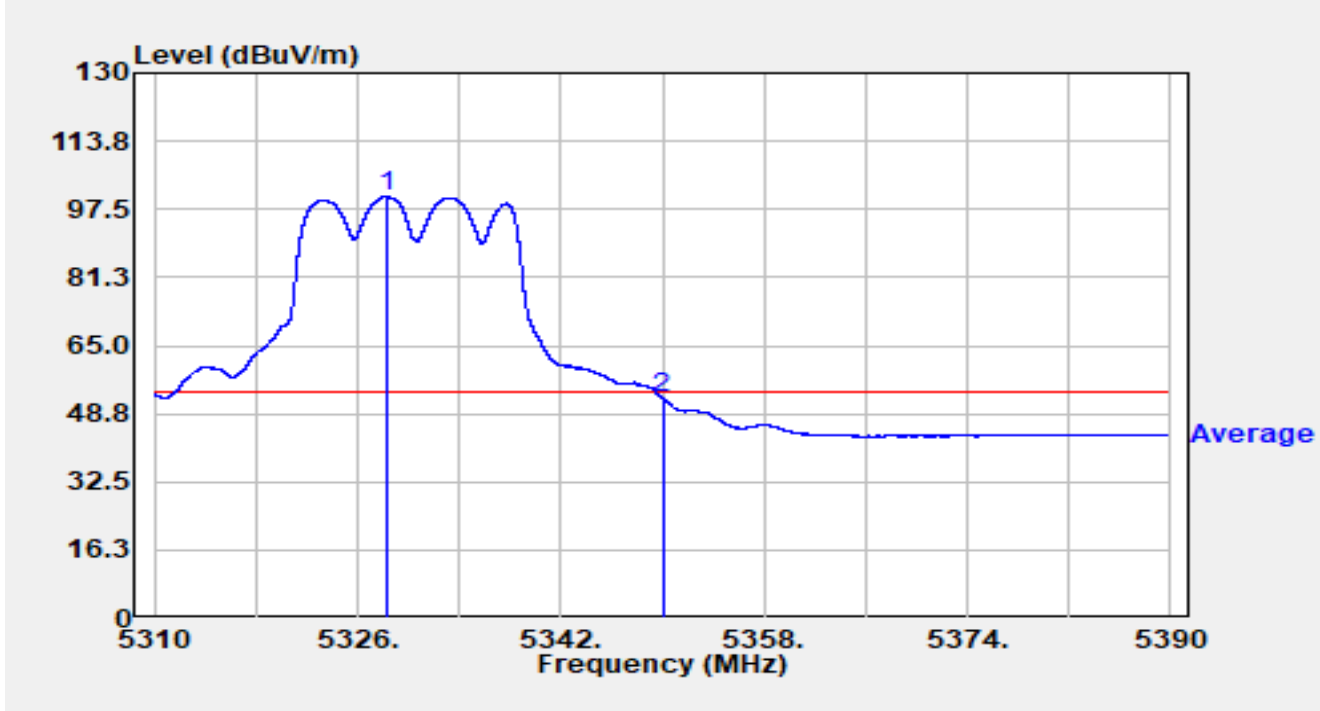


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5328.272	80.70	19.76	100.45	N/A	N/A	Average
2		5350.000	33.16	19.32	52.49	-1.51	54.00	Average

Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5320MHz		

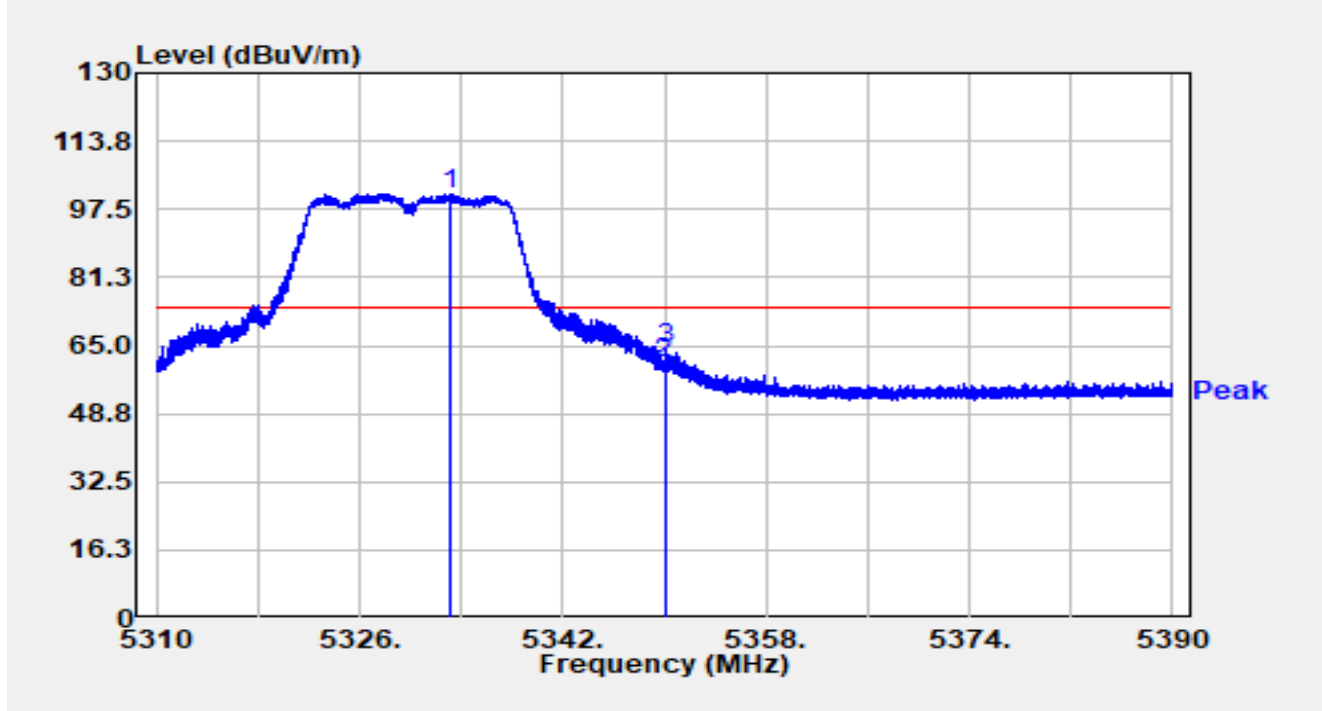


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5333.160	81.49	19.75	101.23	N/A	N/A	Peak
2		5350.000	41.61	19.32	60.94	-13.06	74.00	Peak
3		5350.176	44.94	19.32	64.26	-9.74	74.00	Peak

Notes:

1. "\*" , means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5320MHz		

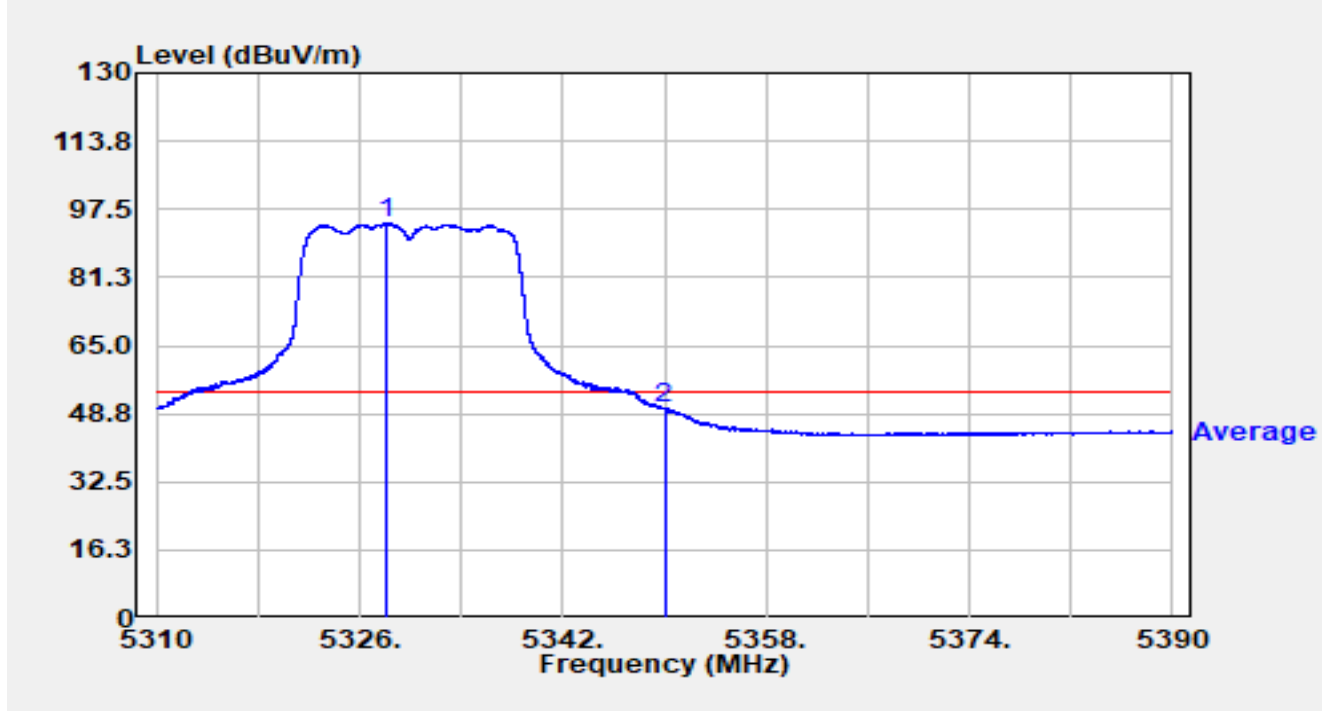


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5328.024	74.49	19.76	94.24	N/A	N/A	Average
2		5350.000	30.58	19.32	49.90	-4.10	54.00	Average

Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5500MHz		

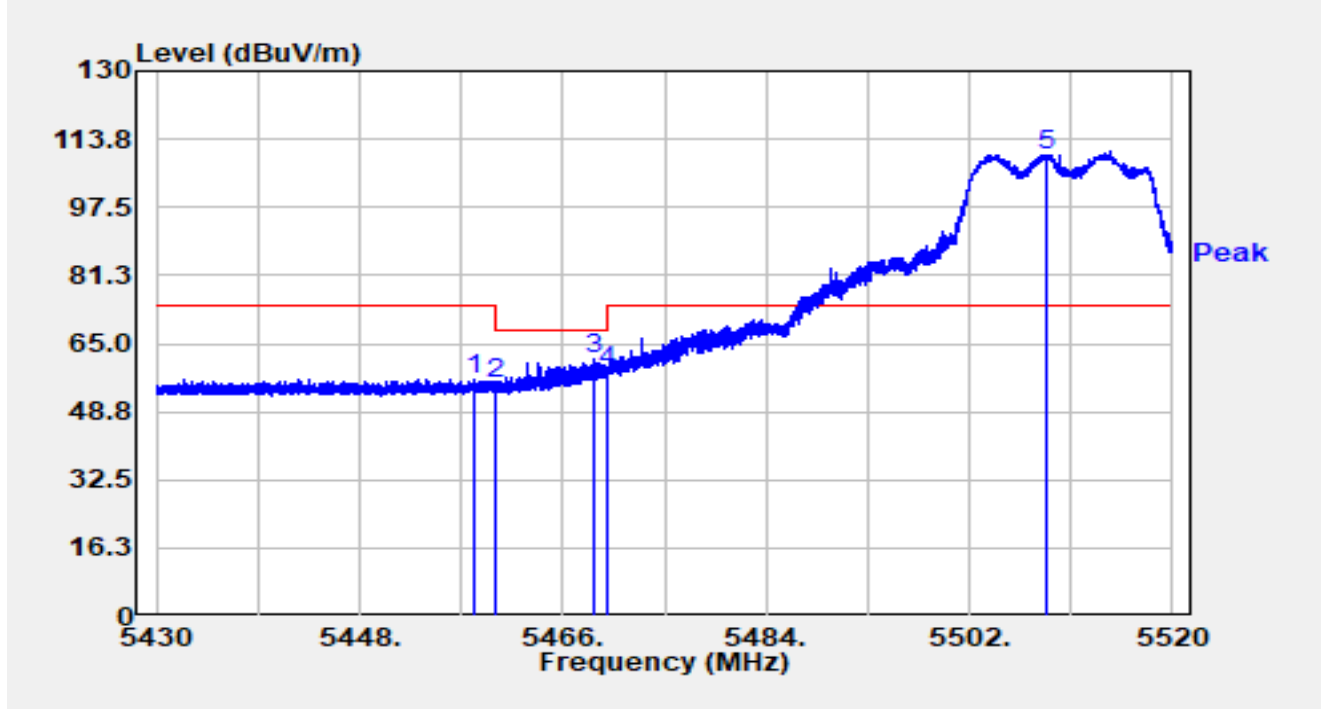


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.233	36.84	19.58	56.41	-17.59	74.00	Peak
2		5460.000	36.04	19.61	55.65	-12.55	68.20	Peak
3		5468.772	41.32	19.77	61.10	-7.10	68.20	Peak
4		5470.000	38.50	19.80	58.30	-9.90	68.20	Peak
5	*	5508.921	90.62	19.50	110.12	N/A	N/A	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).



Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5500MHz		

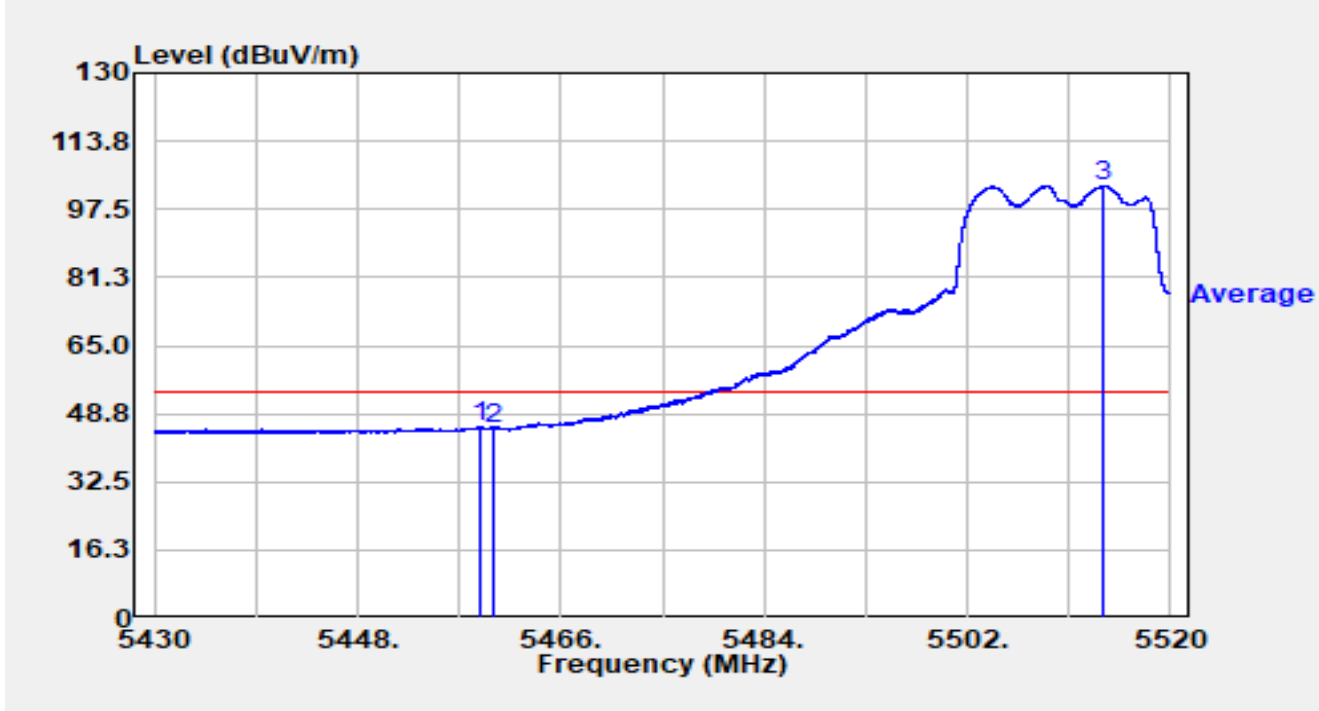


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1		5458.746	25.95	19.59	45.54	-8.46	54.00	Average
2		5460.000	25.45	19.61	45.06	-8.94	54.00	Average
3	*	5513.943	83.64	19.45	103.09	N/A	N/A	Average

## Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5500MHz		

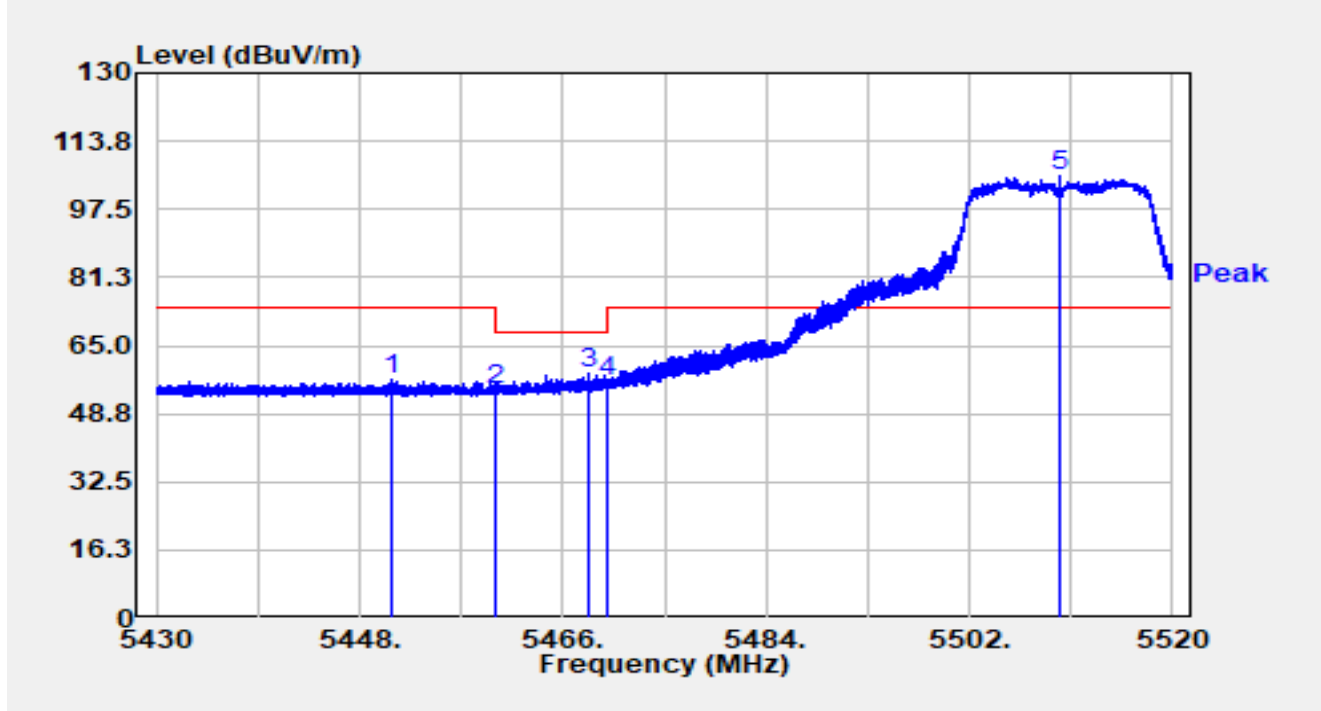


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5450.736	37.56	19.50	57.06	-16.94	74.00	Peak
2		5460.000	35.05	19.61	54.66	-13.54	68.20	Peak
3		5468.250	38.69	19.77	58.45	-9.75	68.20	Peak
4		5470.000	36.42	19.80	56.22	-11.98	68.20	Peak
5	*	5510.019	86.15	19.49	105.63	N/A	N/A	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5500MHz		

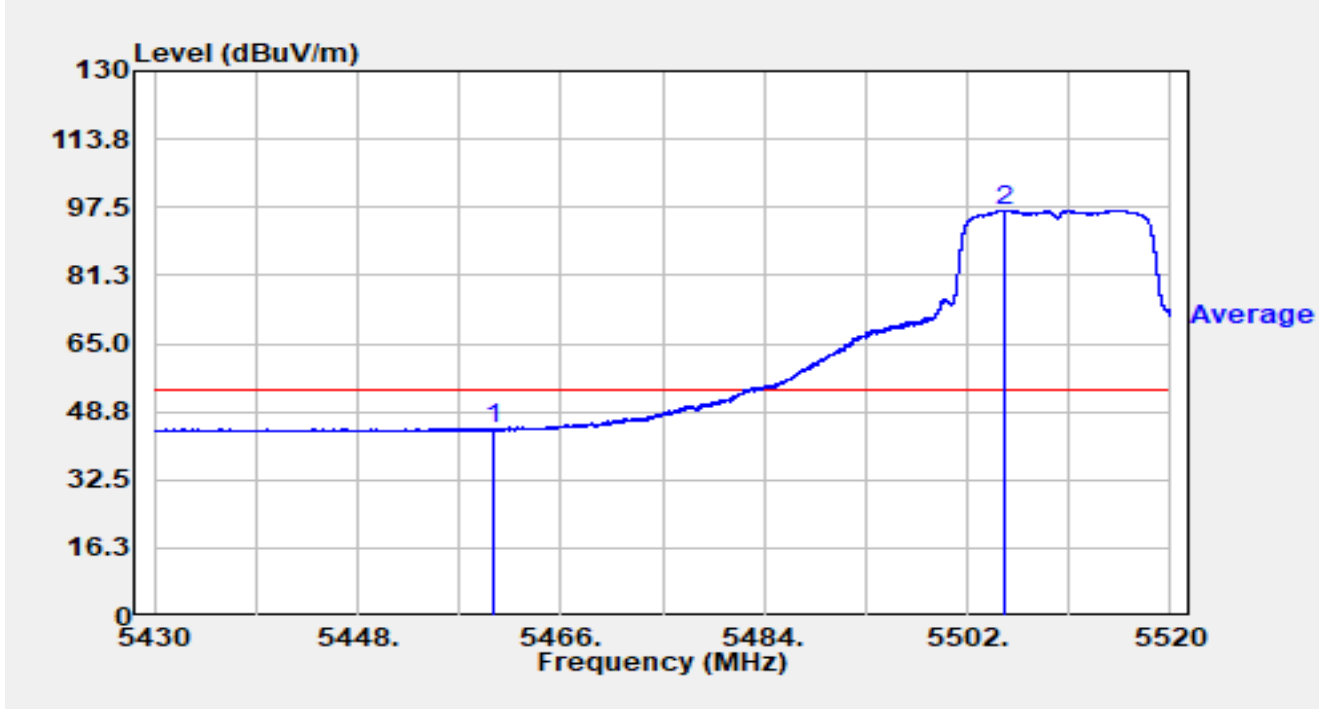


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1		5460.000	24.83	19.61	44.44	-9.56	54.00	Average
2	*	5505.348	77.25	19.56	96.81	N/A	N/A	Average

Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5700MHz		

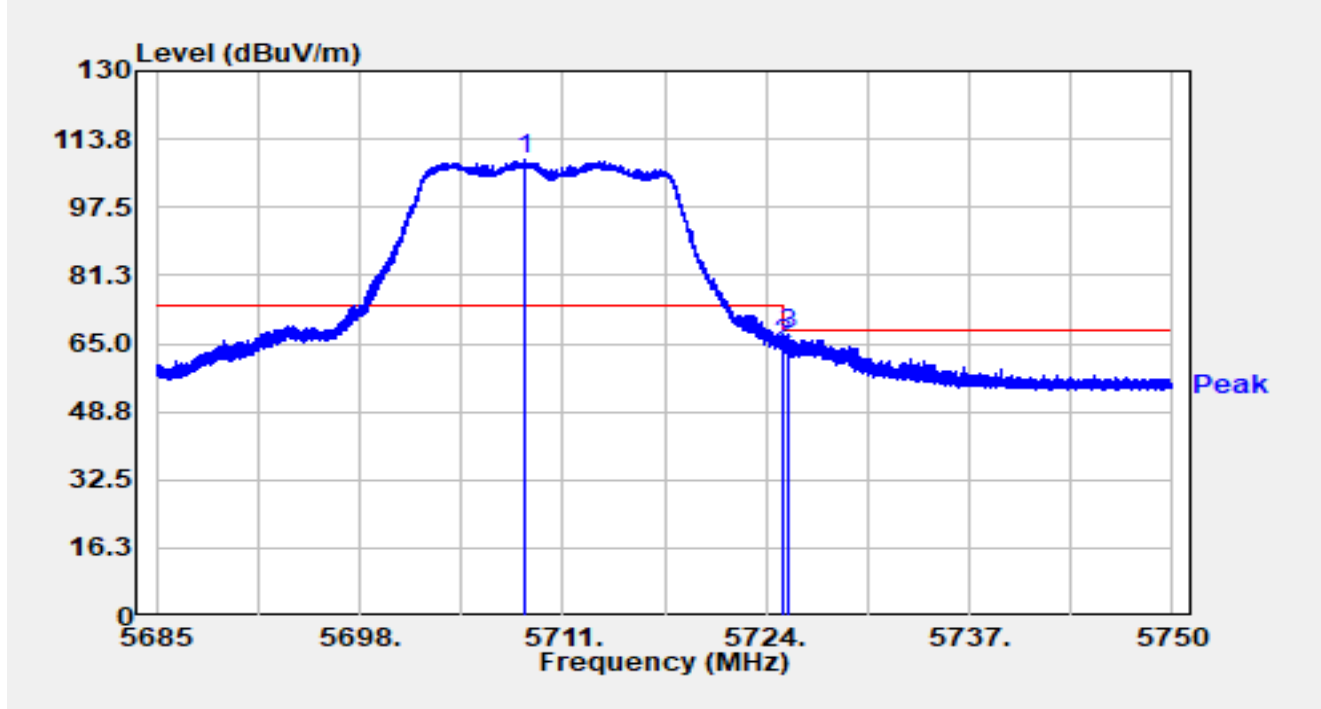


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5708.602	87.94	20.99	108.93	N/A	N/A	Peak
2		5725.000	43.85	21.13	64.98	-3.22	68.20	Peak
3		5725.437	46.04	21.14	67.18	-1.02	68.20	Peak

## Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5700MHz		

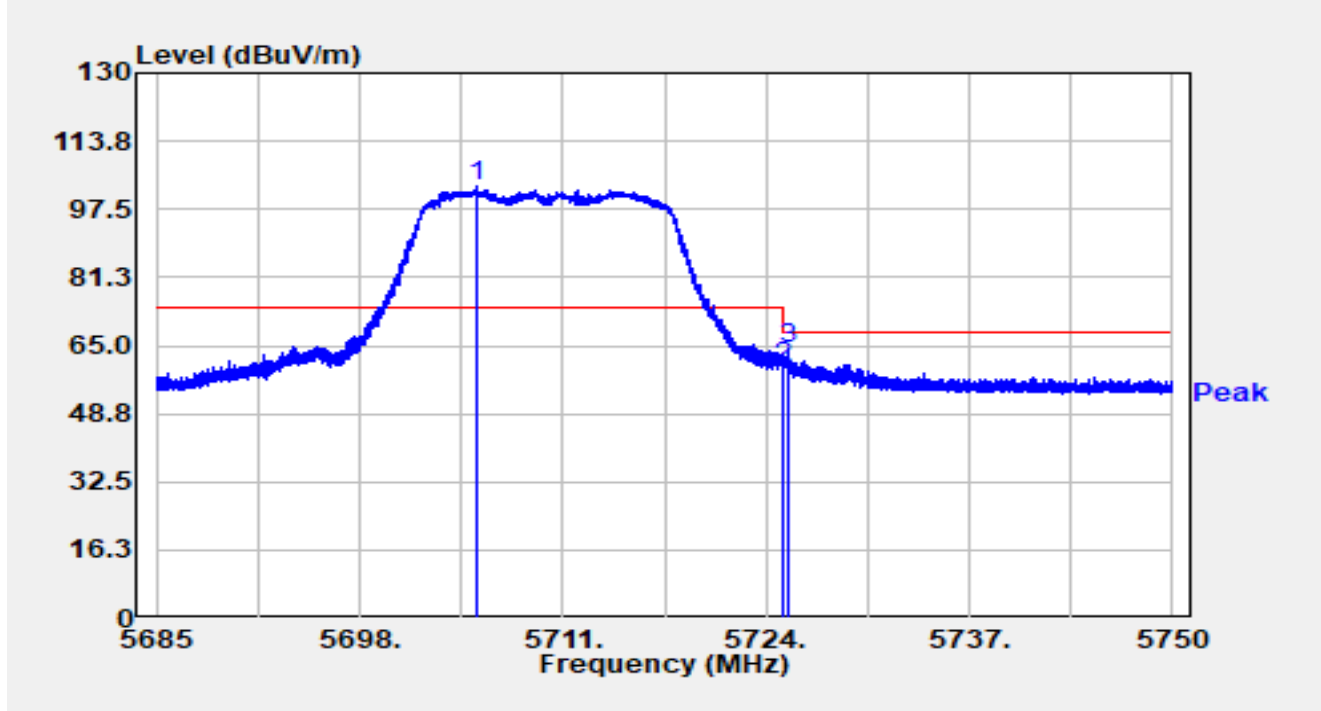


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5705.507	82.04	20.95	102.98	N/A	N/A	Peak
2		5725.000	38.74	21.13	59.88	-8.32	68.20	Peak
3		5725.423	42.99	21.14	64.13	-4.07	68.20	Peak

## Notes:

1. "\*" , means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5745MHz		

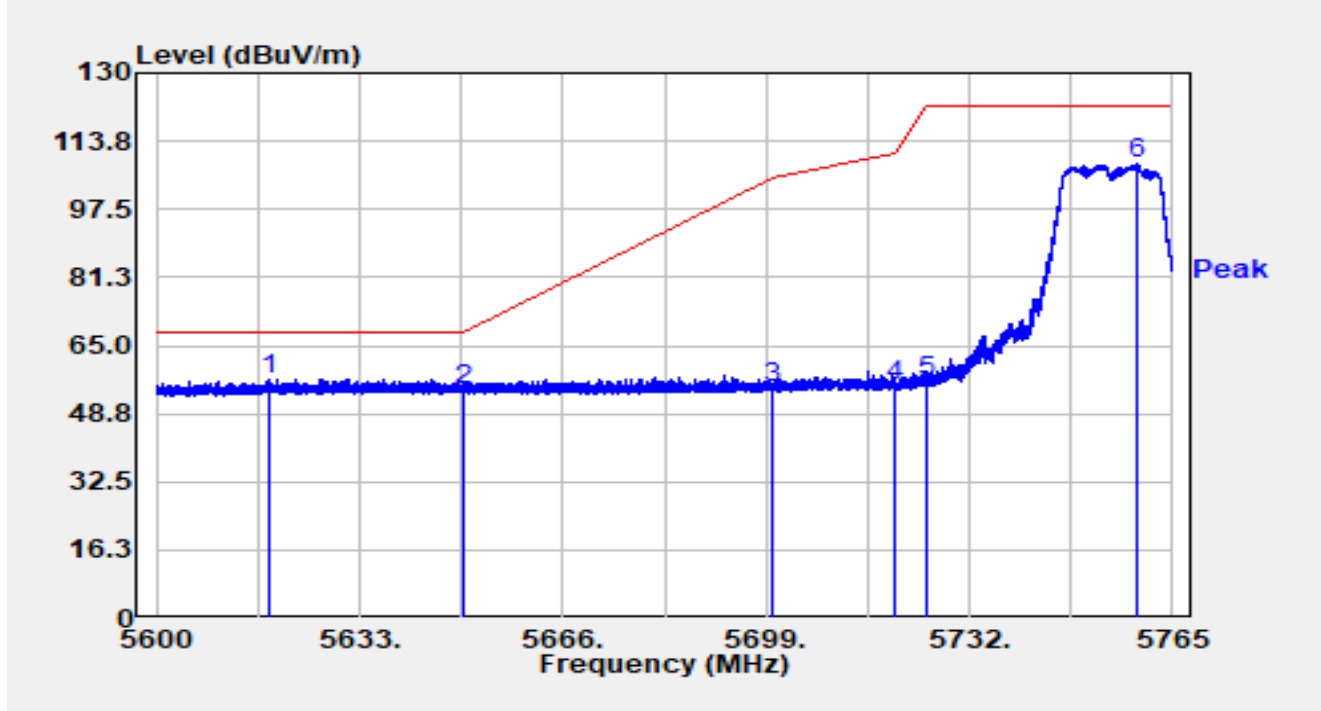


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5618.282	36.74	20.28	57.02	-11.18	68.20	Peak
2		5650.000	33.84	20.50	54.35	-13.85	68.20	Peak
3		5700.000	34.21	20.86	55.08	-50.12	105.20	Peak
4		5720.000	34.13	21.09	55.22	-55.58	110.80	Peak
5		5725.000	35.48	21.13	56.62	-65.58	122.20	Peak
6		5759.242	87.36	21.03	108.38	N/A	N/A	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5745MHz		

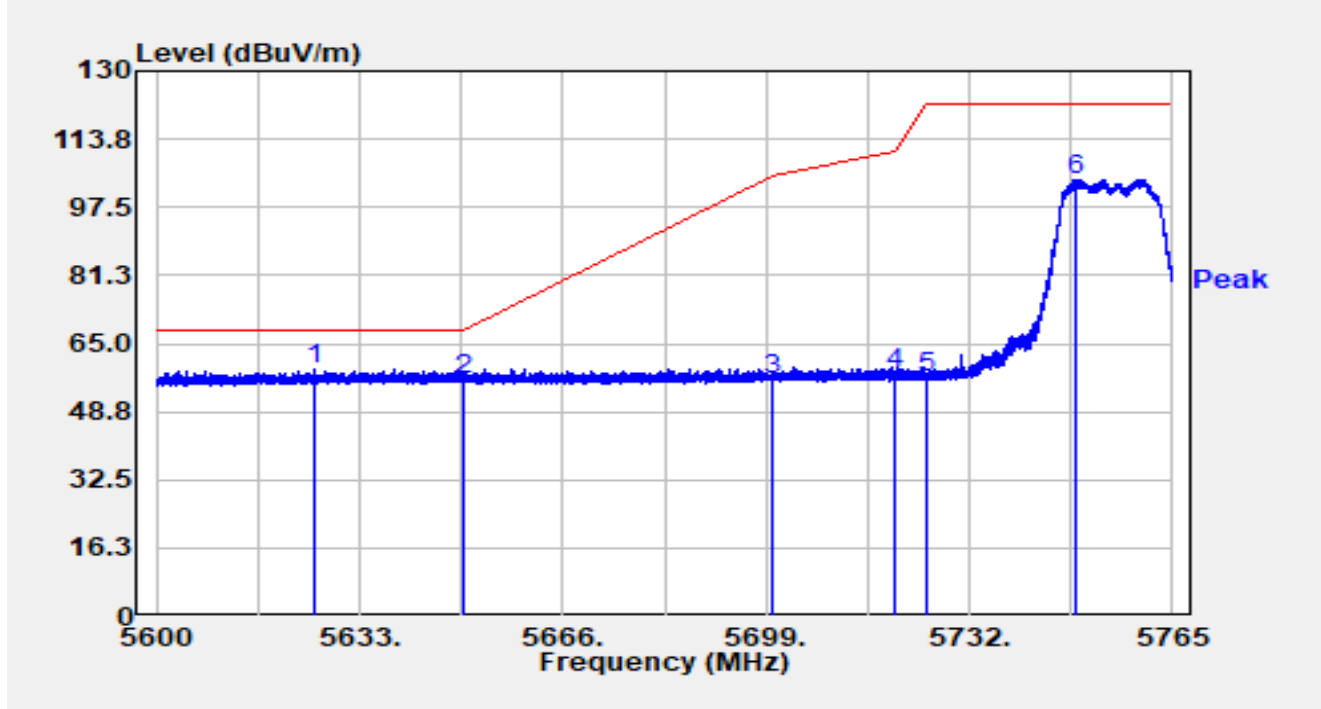


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5625.542	38.26	20.44	58.70	-9.50	68.20	Peak
2		5650.000	35.68	20.50	56.19	-12.01	68.20	Peak
3		5700.000	35.55	20.86	56.41	-48.79	105.20	Peak
4		5720.000	36.74	21.09	57.83	-52.97	110.80	Peak
5		5725.000	35.99	21.13	57.12	-65.08	122.20	Peak
6		5749.243	83.13	20.99	104.12	N/A	N/A	Peak

**Notes:**

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5825MHz		

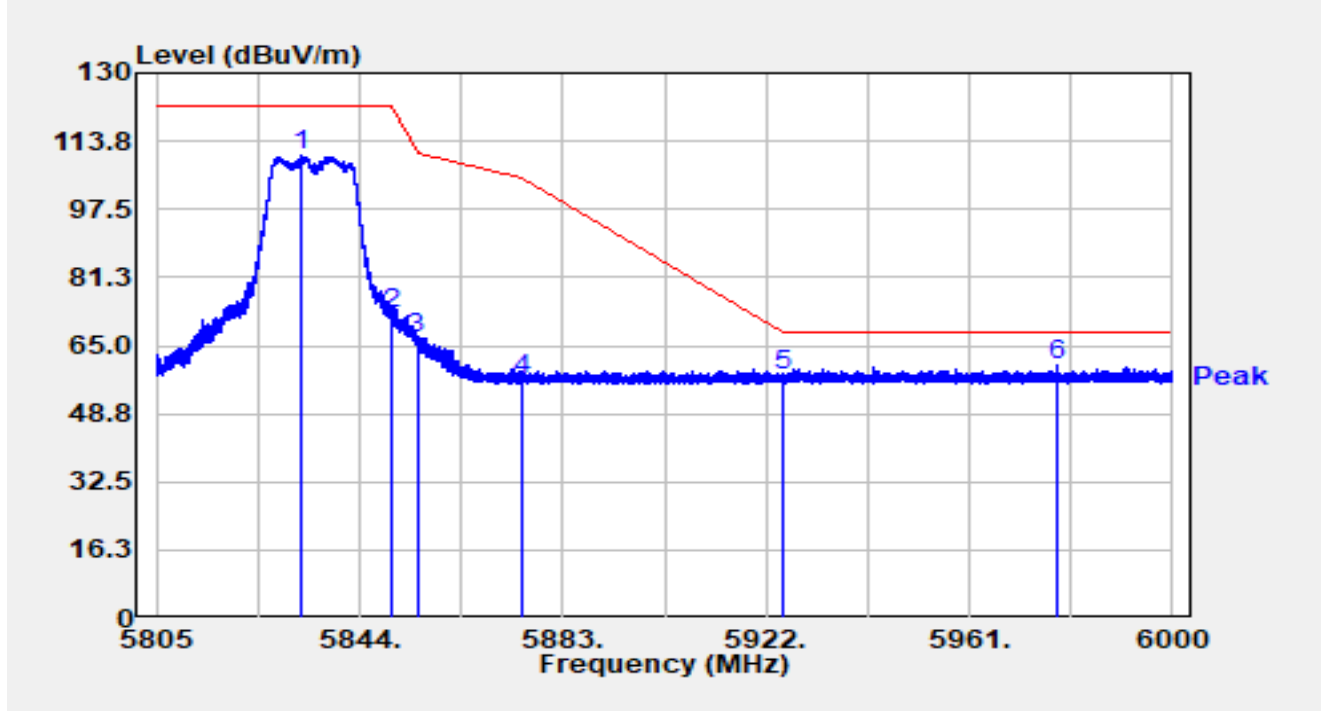


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5832.866	88.85	21.31	110.16	N/A	N/A	Peak
2		5850.000	51.00	21.41	72.42	-49.78	122.20	Peak
3		5855.000	45.21	21.46	66.67	-44.13	110.80	Peak
4		5875.000	35.40	21.51	56.91	-48.29	105.20	Peak
5		5925.000	36.28	21.51	57.78	-10.42	68.20	Peak
6	*	5977.672	38.70	21.60	60.30	-7.90	68.20	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).



Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5825MHz		

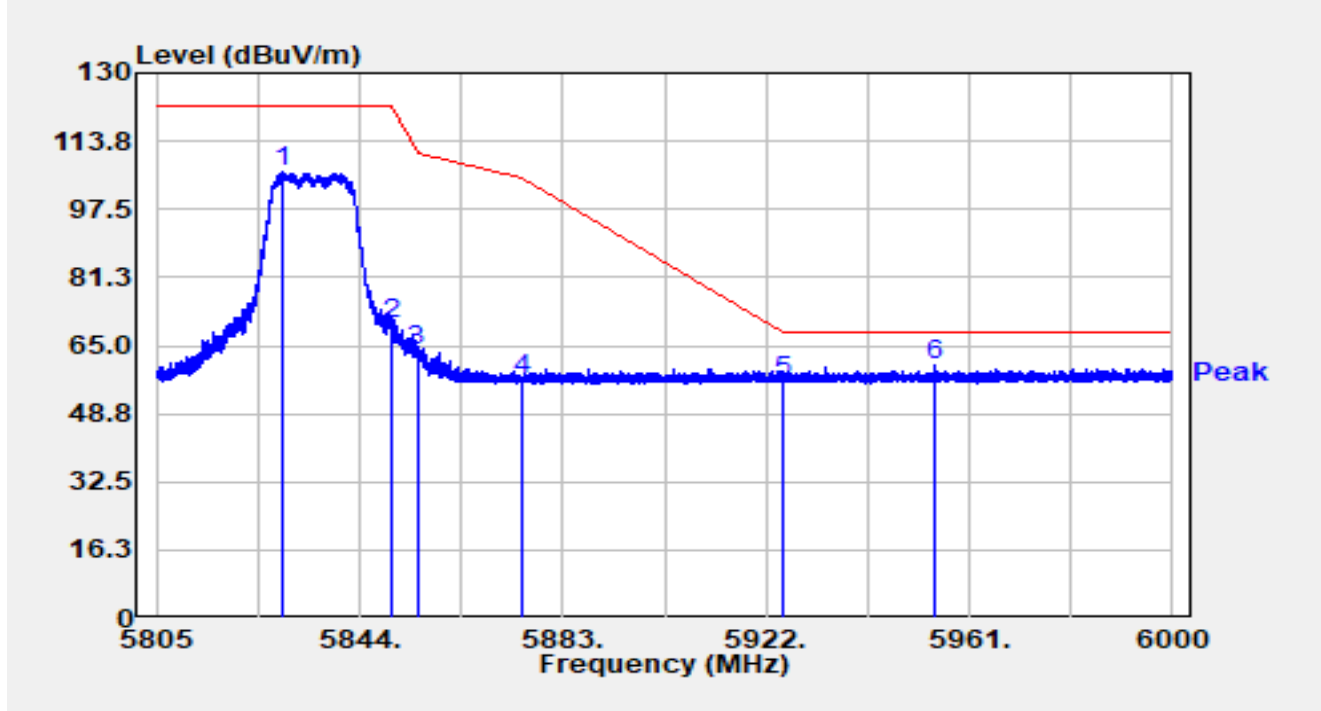


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5829.238	84.93	21.28	106.21	N/A	N/A	Peak
2		5850.000	48.50	21.41	69.91	-52.29	122.20	Peak
3		5855.000	42.19	21.46	63.65	-47.15	110.80	Peak
4		5875.000	35.37	21.51	56.88	-48.32	105.20	Peak
5		5925.000	35.15	21.51	56.66	-11.54	68.20	Peak
6	*	5954.351	38.65	21.59	60.24	-7.96	68.20	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5180MHz		

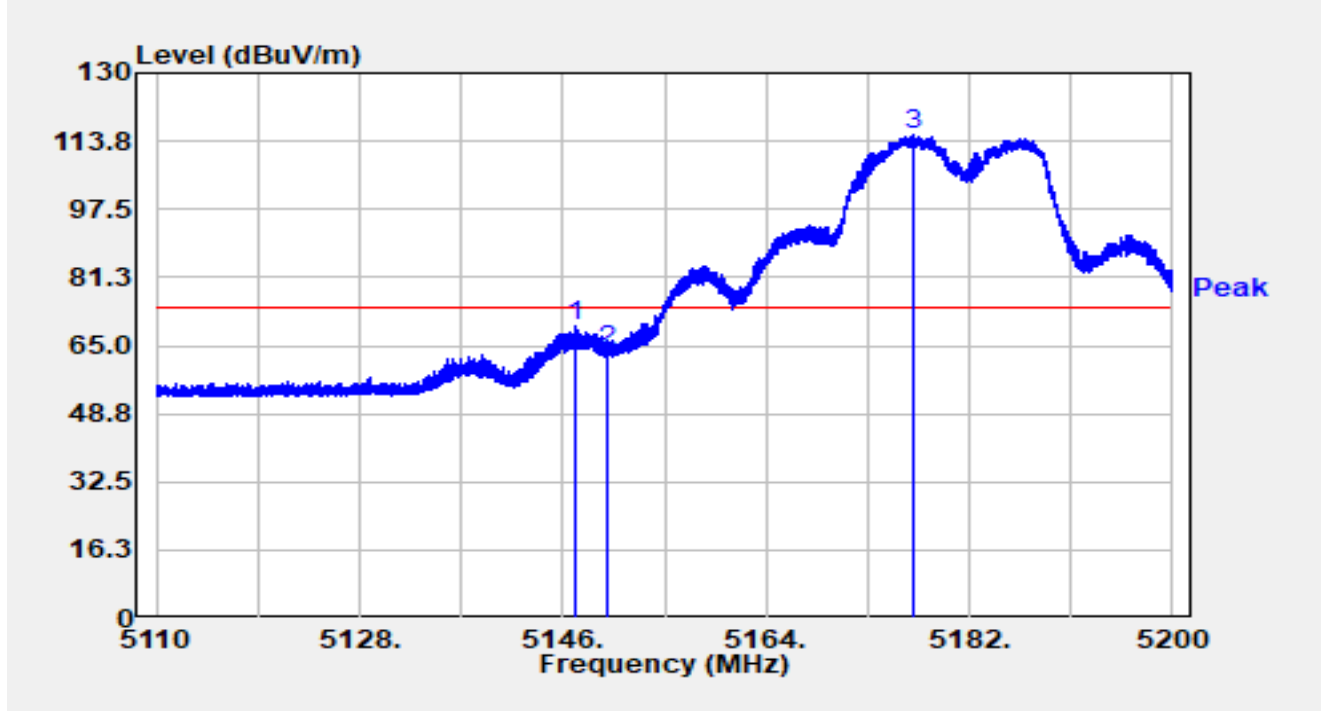


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5146.999	49.73	19.76	69.49	-4.51	74.00	Peak
2		5149.996	43.91	19.78	63.69	-10.31	74.00	Peak
3	*	5177.050	95.33	19.71	115.04	N/A	N/A	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5180MHz		

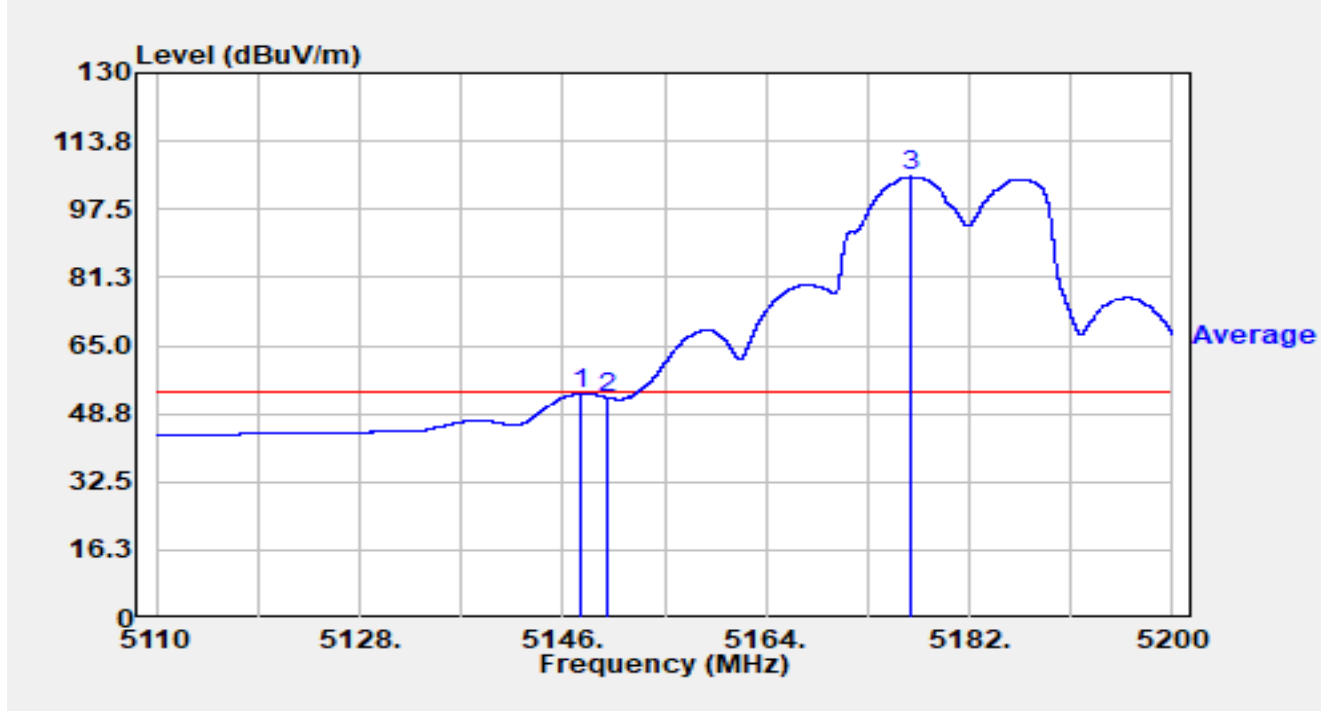


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5147.674	33.79	19.77	53.56	-0.44	54.00	Average
2		5150.000	32.77	19.78	52.55	-1.45	54.00	Average
3	*	5176.843	85.52	19.71	105.23	N/A	N/A	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5180MHz		

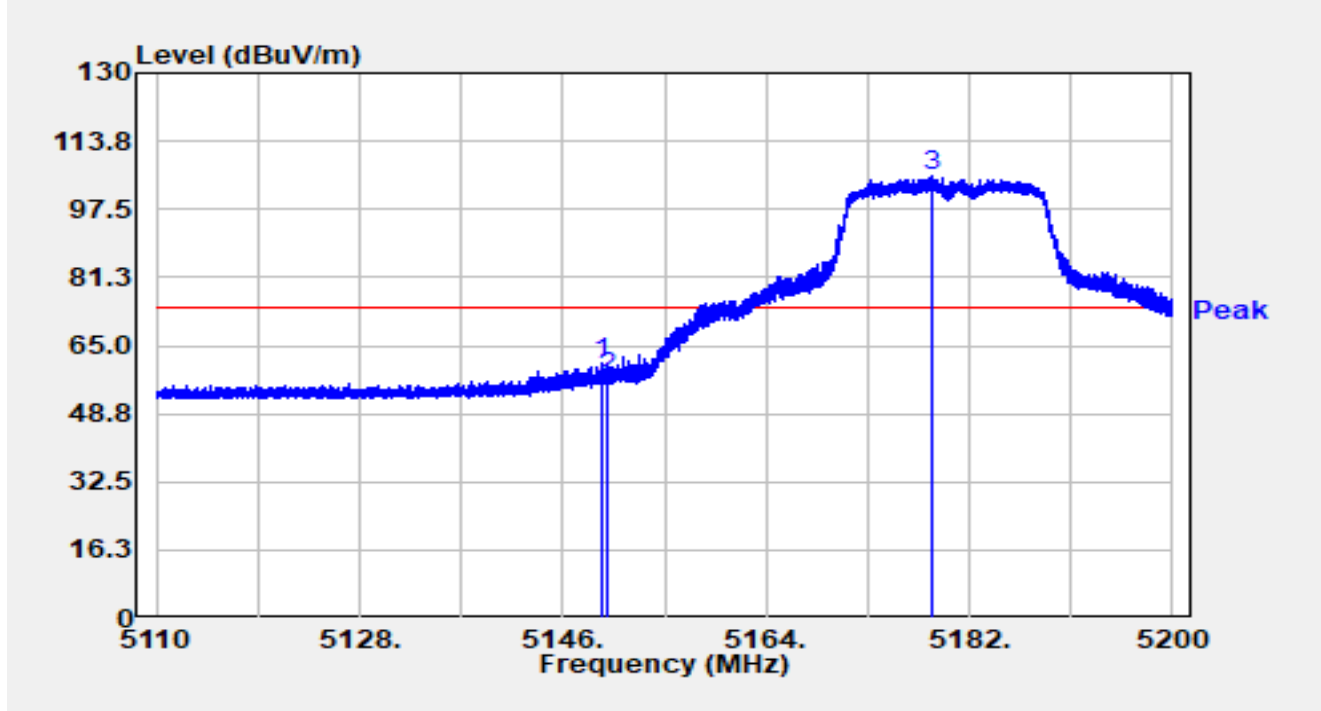


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5149.483	41.20	19.78	60.97	-13.03	74.00	Peak
2		5150.000	37.41	19.78	57.19	-16.81	74.00	Peak
3	*	5178.706	85.83	19.68	105.51	N/A	N/A	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5180MHz		

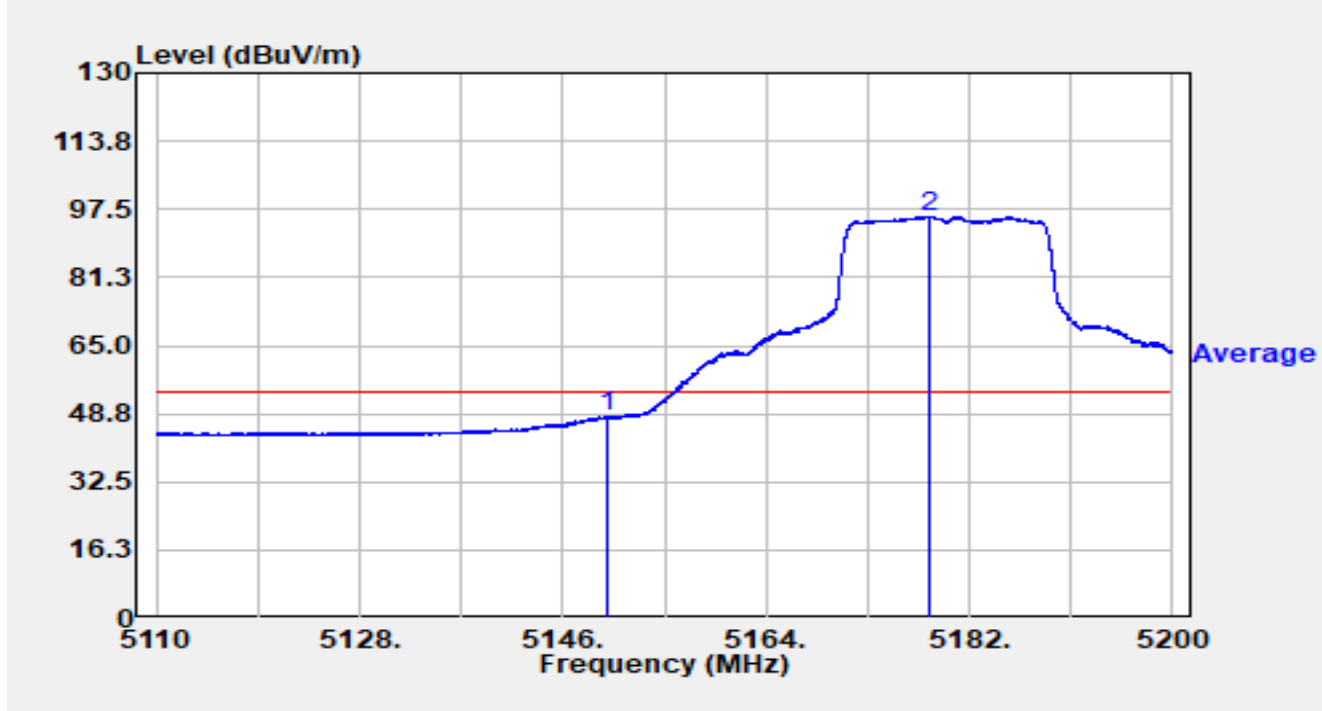


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1		5150.000	28.09	19.78	47.87	-6.13	54.00	Average
2	*	5178.553	76.11	19.69	95.79	N/A	N/A	Average

## Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5320MHz		

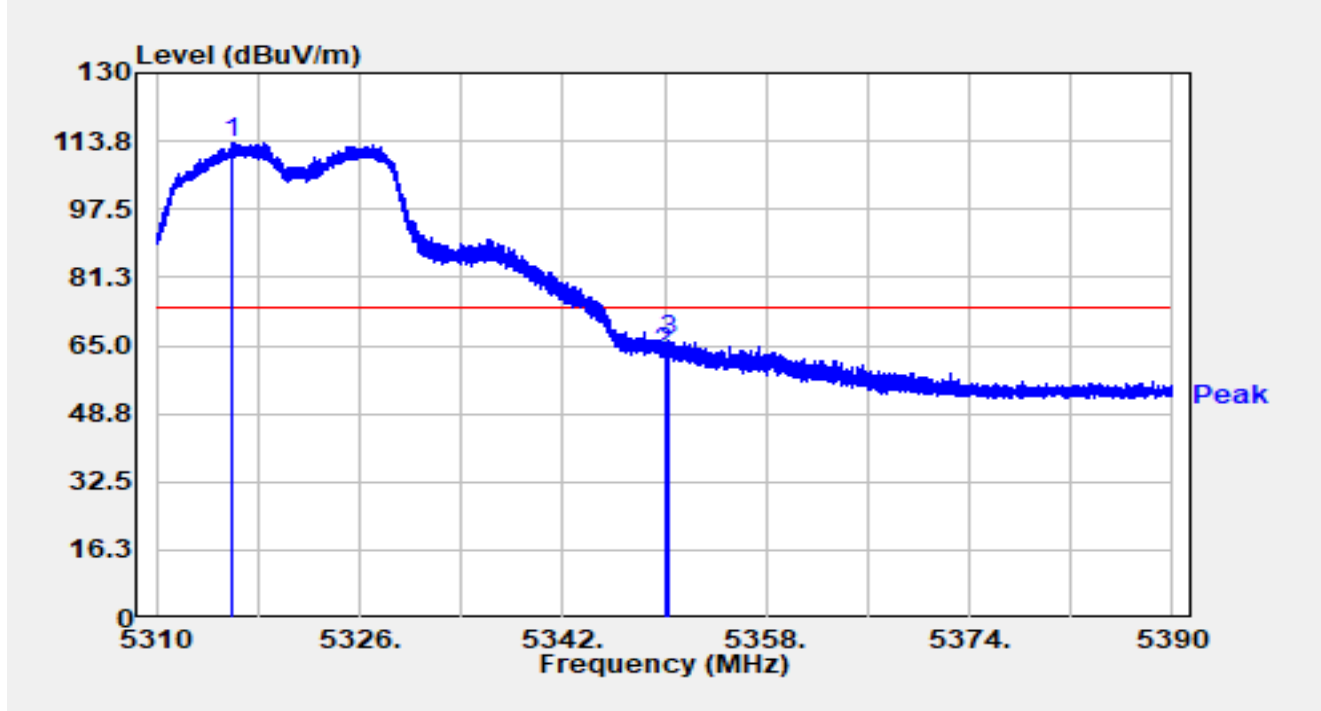


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5315.960	93.59	19.65	113.23	N/A	N/A	Peak
2		5350.000	44.18	19.32	63.51	-10.49	74.00	Peak
3		5350.336	46.96	19.31	66.28	-7.72	74.00	Peak

Notes:

1. "\*" , means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5320MHz		

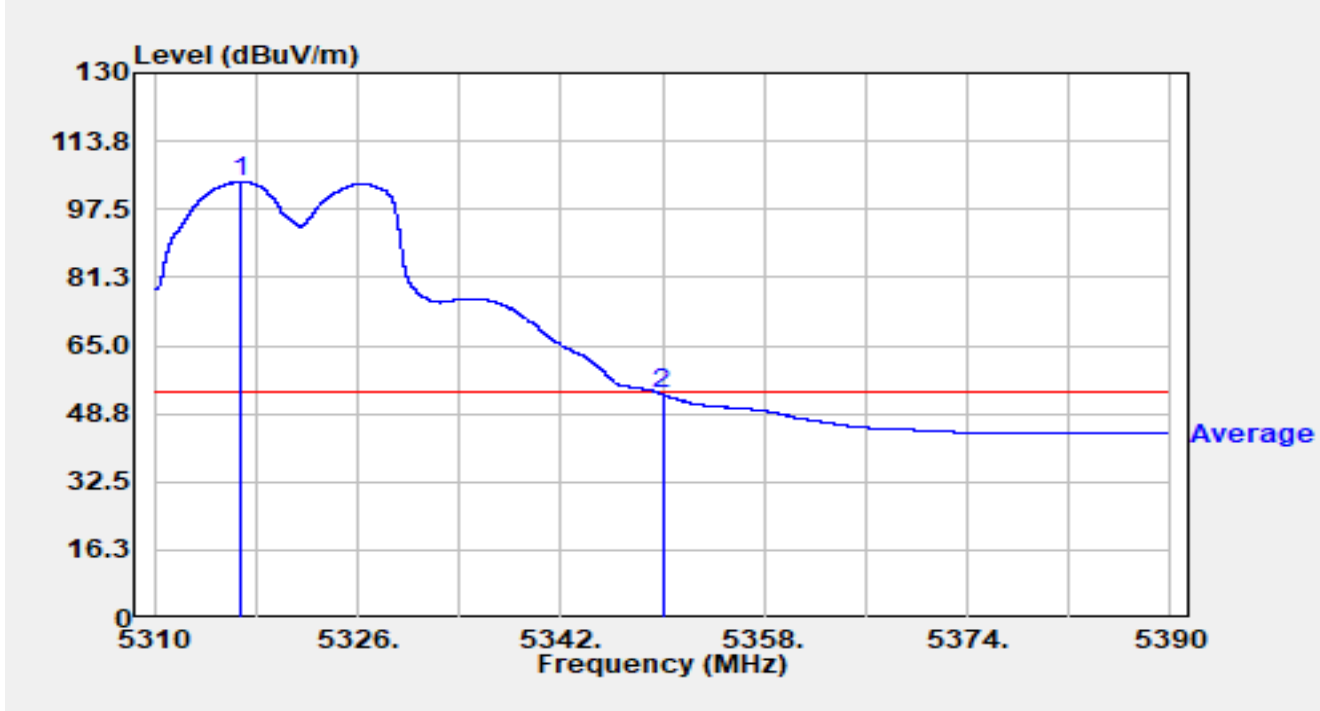


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	5316.784	84.44	19.67	104.11	N/A	N/A	Average
2		5350.000	34.07	19.32	53.39	-0.61	54.00	Average

## Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5320MHz		

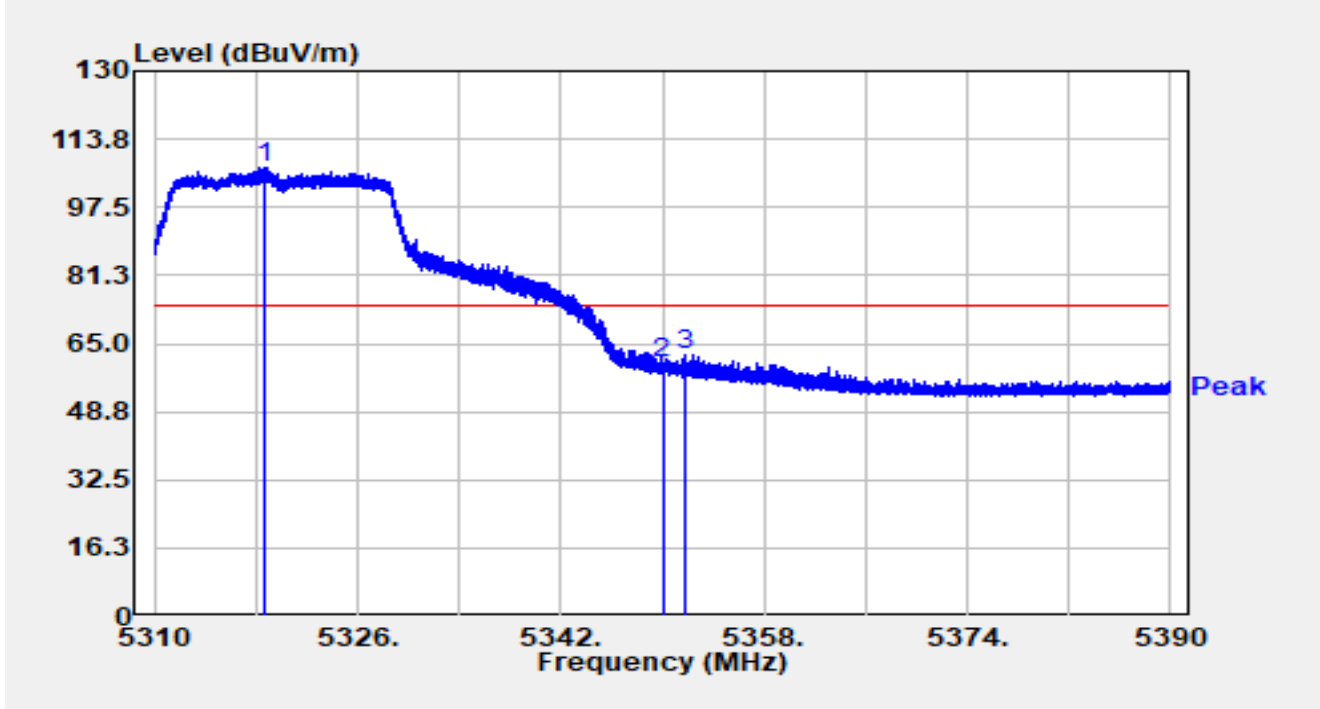


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5318.696	87.45	19.70	107.15	N/A	N/A	Peak
2		5350.000	41.15	19.32	60.48	-13.52	74.00	Peak
3		5351.776	43.18	19.28	62.46	-11.54	74.00	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).



Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5320MHz		

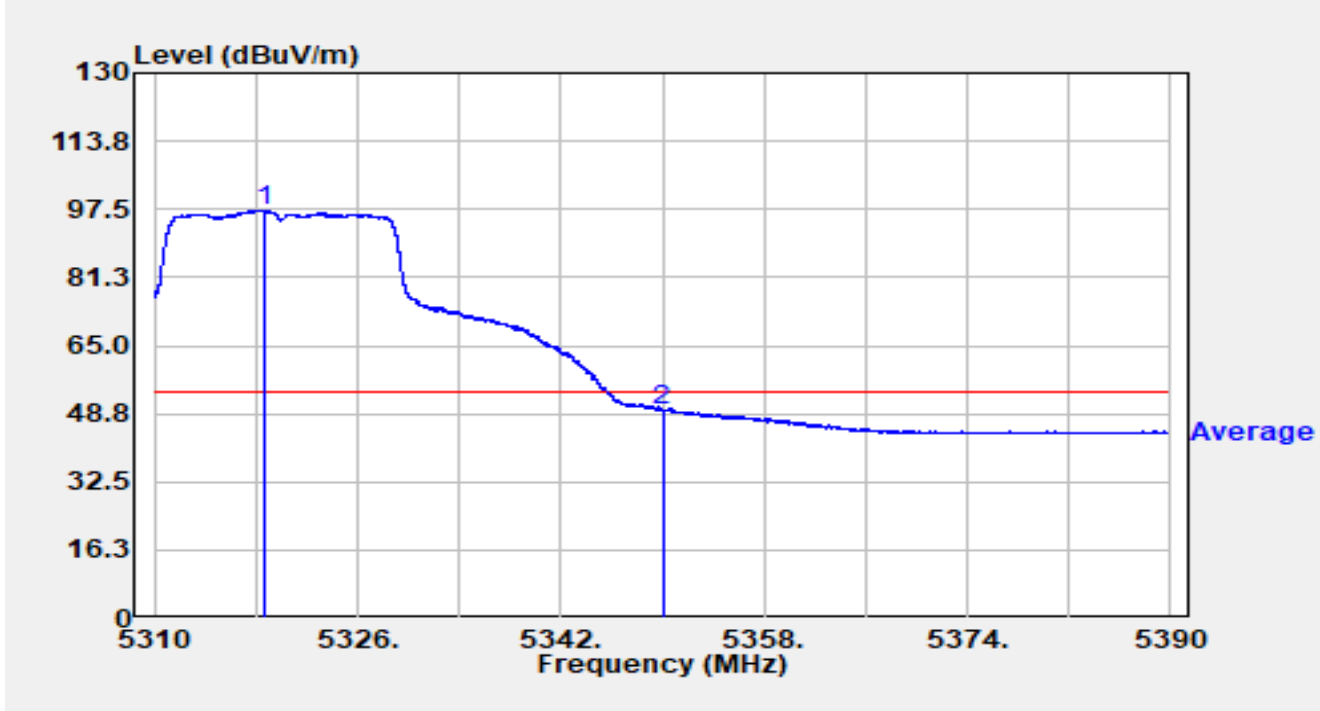


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5318.584	77.59	19.70	97.29	N/A	N/A	Average
2		5350.000	30.29	19.32	49.61	-4.39	54.00	Average

Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5500MHz		

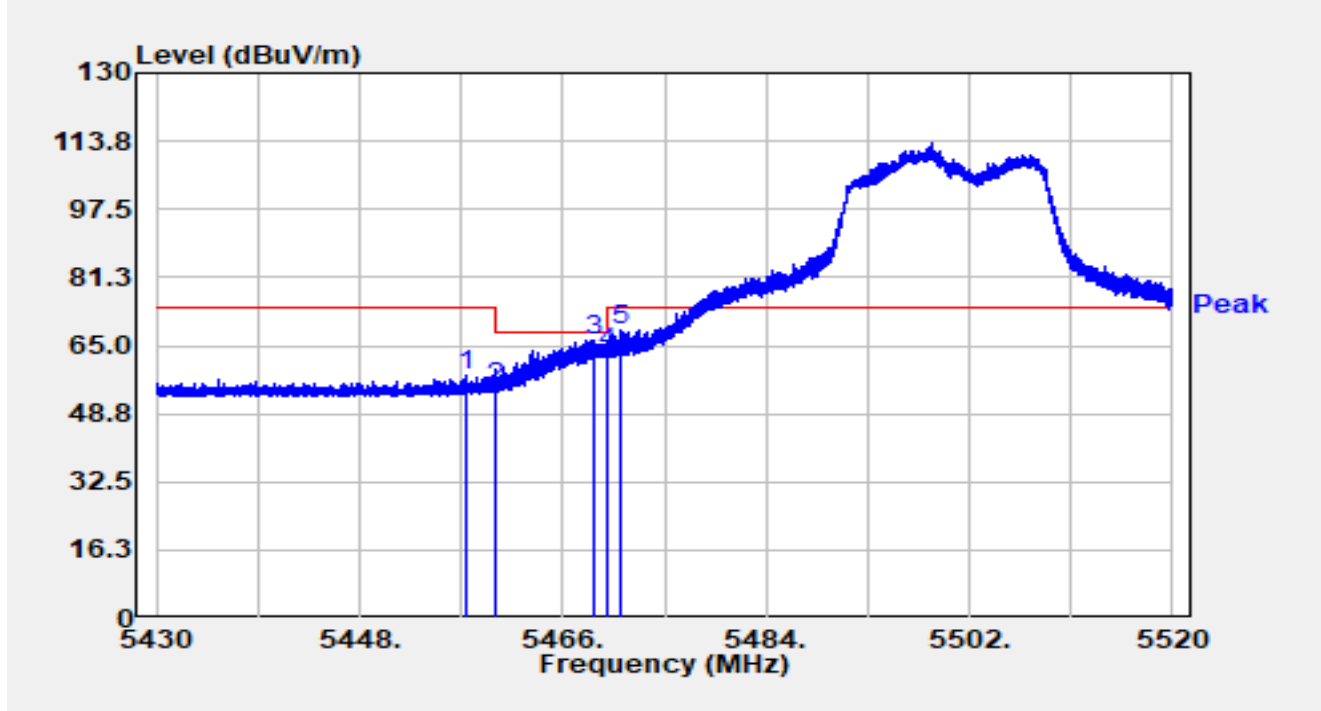


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5457.477	38.42	19.56	57.98	-16.02	74.00	Peak
2		5460.000	35.57	19.61	55.18	-13.02	68.20	Peak
3	*	5468.763	46.44	19.77	66.22	-1.98	68.20	Peak
4		5470.000	43.68	19.80	63.48	-4.72	68.20	Peak
5		5471.004	48.87	19.82	68.68	-5.32	74.00	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5500MHz		

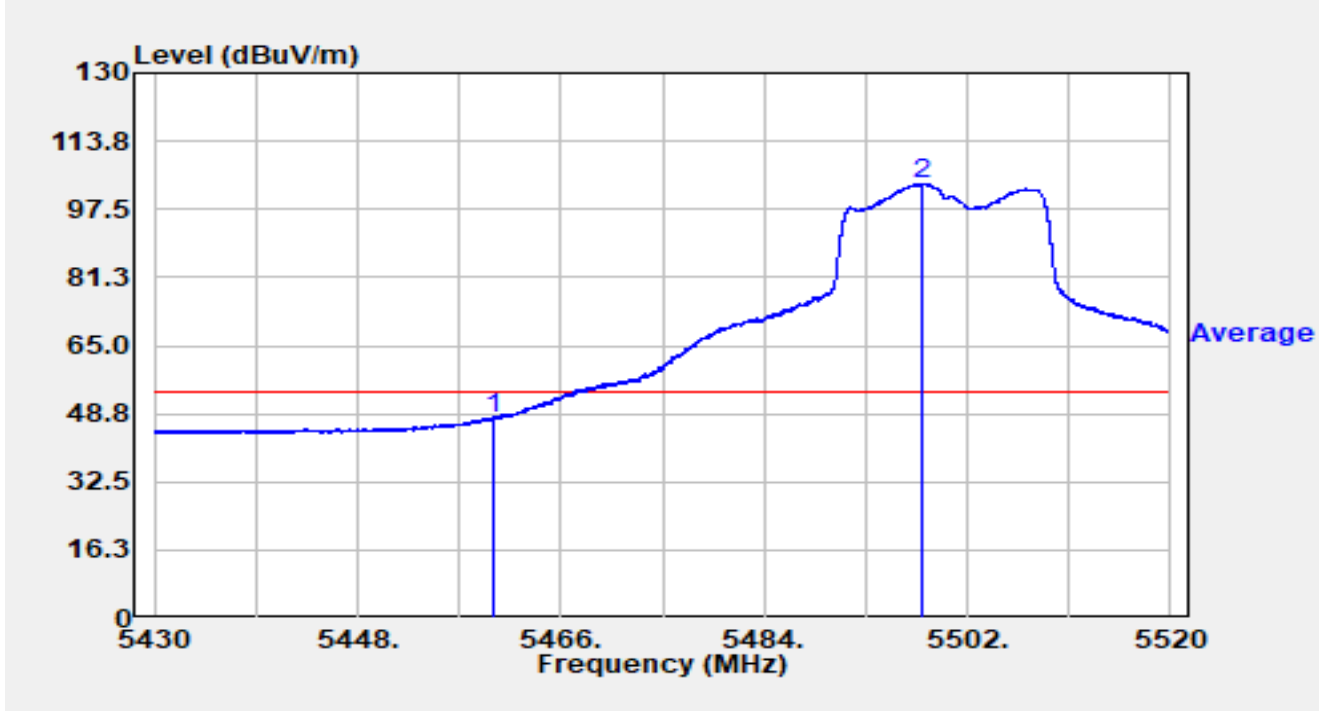


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5460.000	27.89	19.61	47.50	-6.50	54.00	Average
2	*	5498.103	83.96	19.65	103.61	N/A	N/A	Average

Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5500MHz		

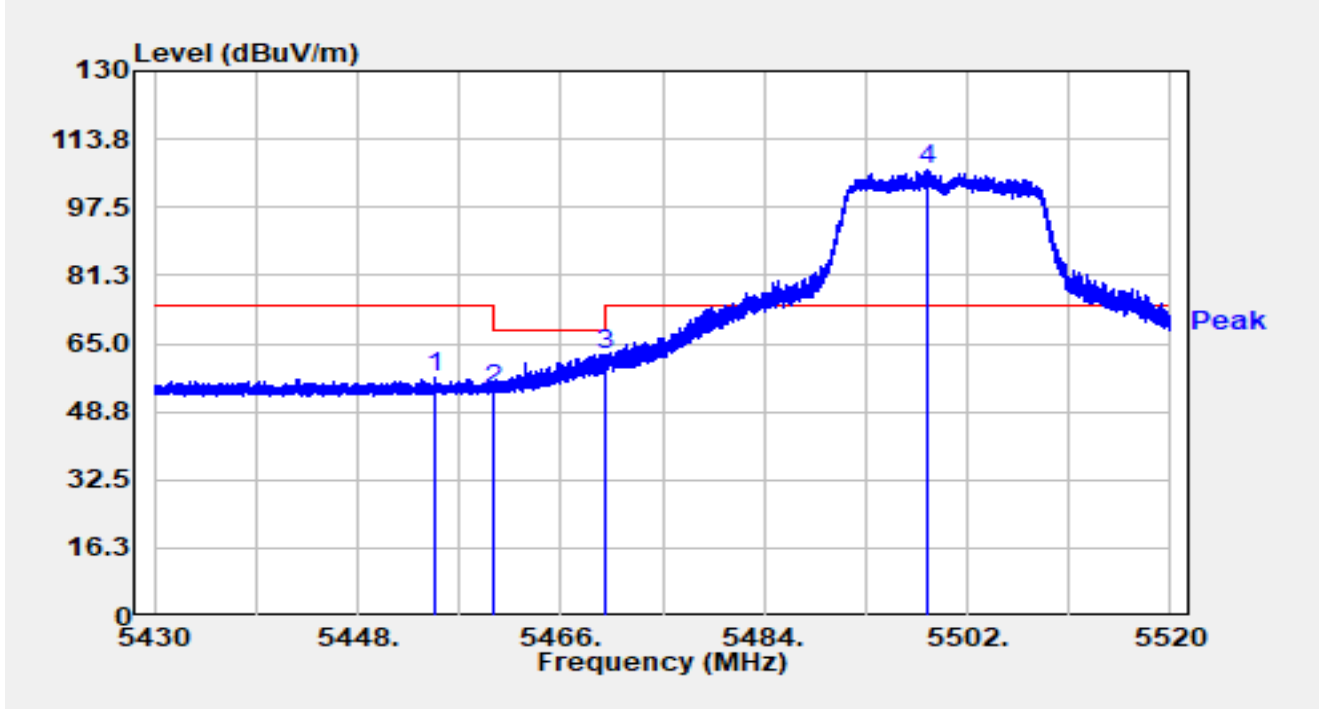


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1		5454.930	37.27	19.51	56.78	-17.22	74.00	Peak
2		5460.000	34.41	19.61	54.02	-14.18	68.20	Peak
3		5470.000	42.48	19.80	62.28	-5.92	68.20	Peak
4	*	5498.355	86.58	19.64	106.22	N/A	N/A	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5500MHz		

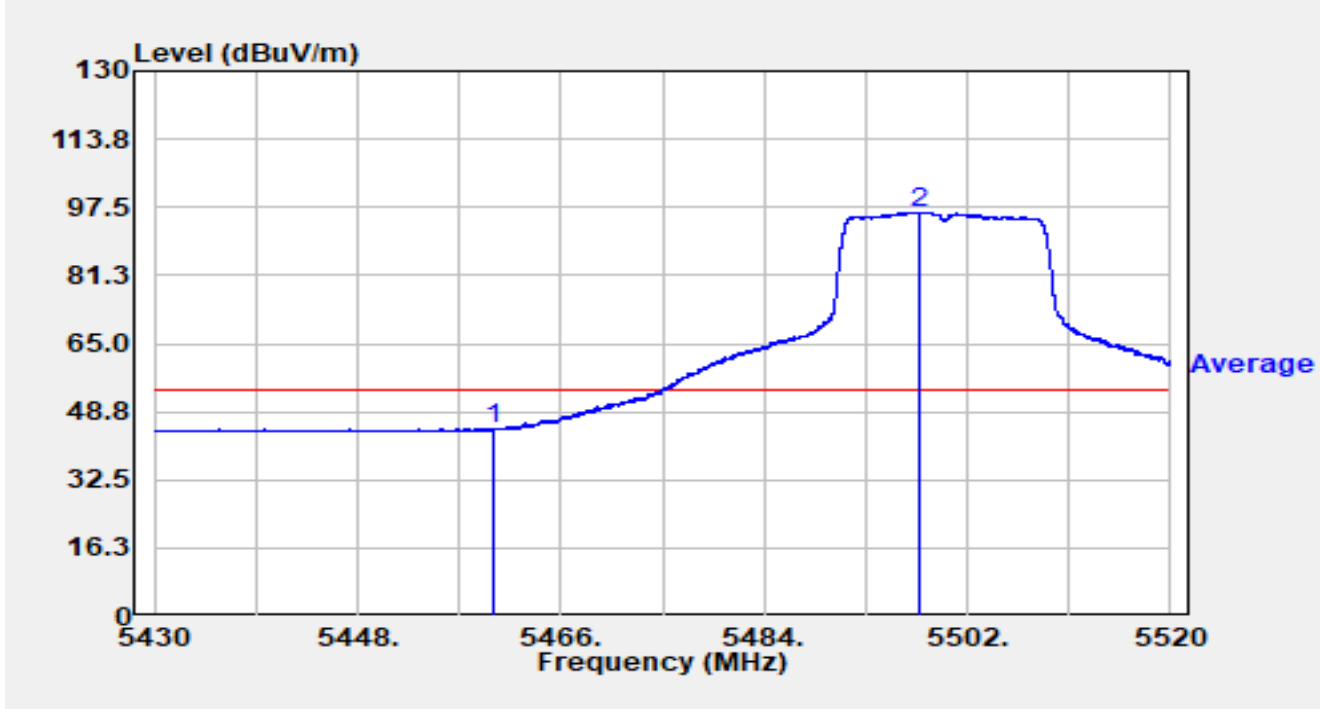


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5460.000	24.84	19.61	44.45	-9.55	54.00	Average
2	*	5497.653	76.73	19.65	96.38	N/A	N/A	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5700MHz		

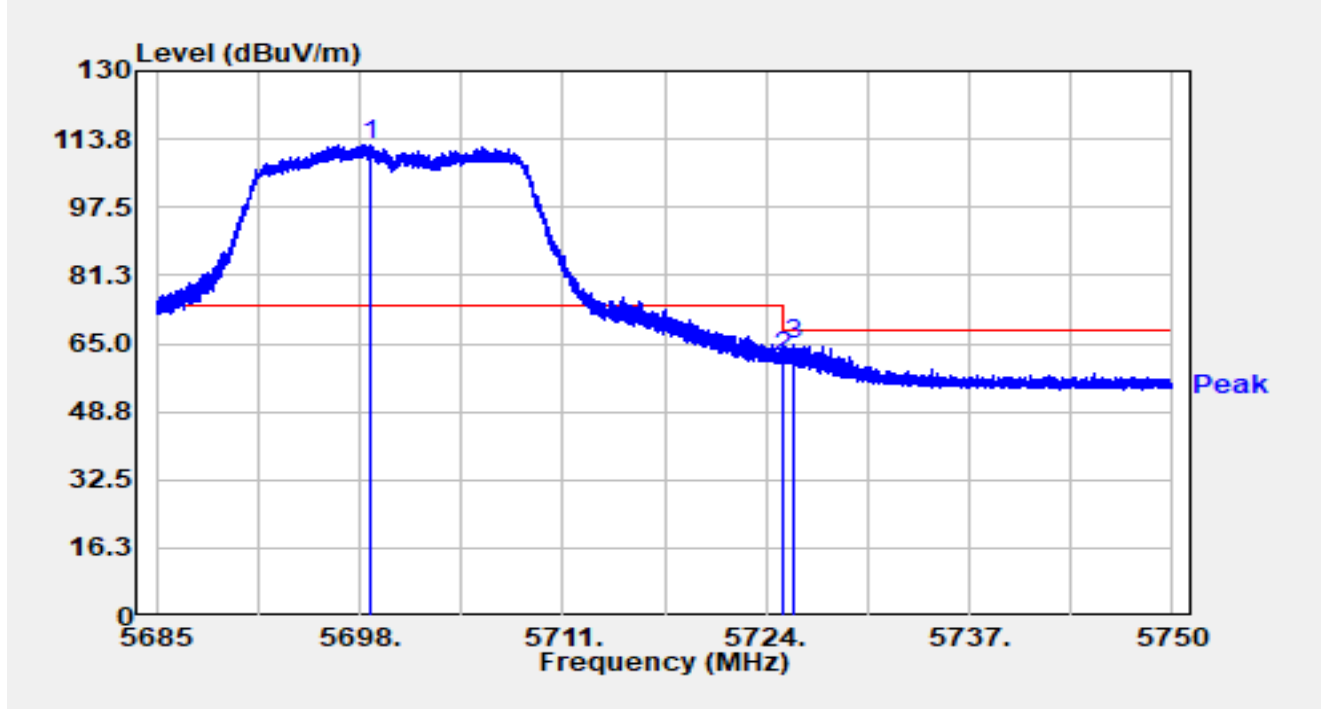


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5698.637	91.74	20.84	112.58	N/A	N/A	Peak
2		5725.000	40.76	21.13	61.89	-6.31	68.20	Peak
3		5725.807	43.82	21.14	64.96	-3.24	68.20	Peak

## Notes:

1. "\*" , means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5700MHz		

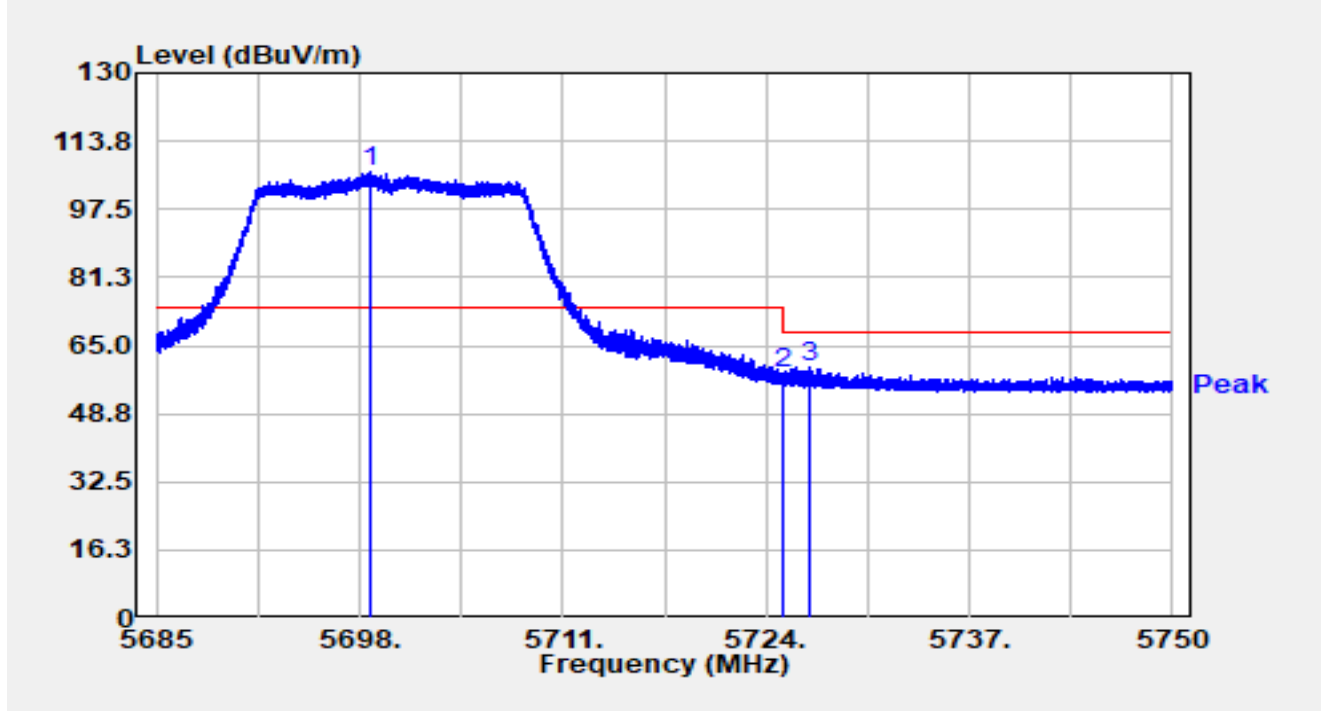


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5698.734	85.36	20.84	106.21	N/A	N/A	Peak
2		5725.000	37.24	21.13	58.37	-9.83	68.20	Peak
3		5726.821	38.68	21.13	59.81	-8.39	68.20	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5745MHz		

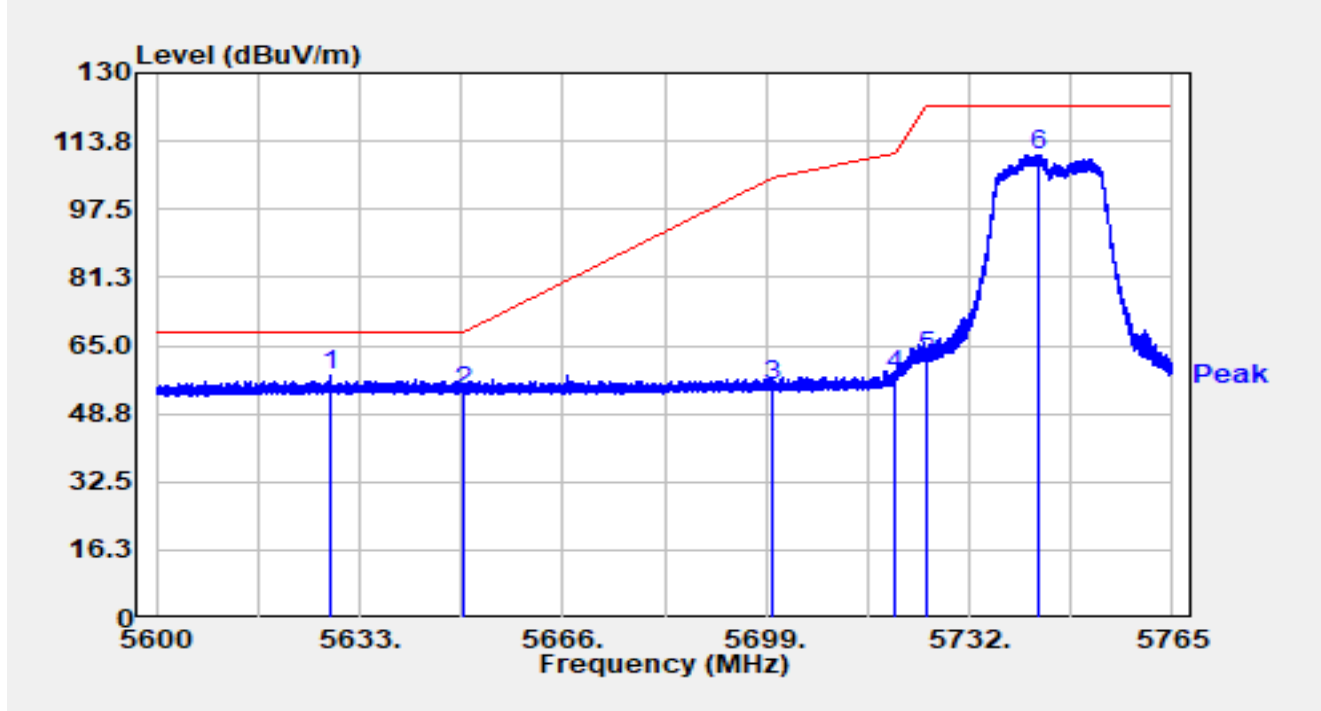


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5628.462	37.20	20.46	57.66	-10.54	68.20	Peak
2		5650.000	33.50	20.50	54.00	-14.20	68.20	Peak
3		5700.000	34.52	20.86	55.38	-49.82	105.20	Peak
4		5720.000	37.03	21.09	58.12	-52.68	110.80	Peak
5		5725.000	41.13	21.13	62.27	-59.93	122.20	Peak
6		5743.418	89.57	20.96	110.53	N/A	N/A	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).



Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5745MHz		

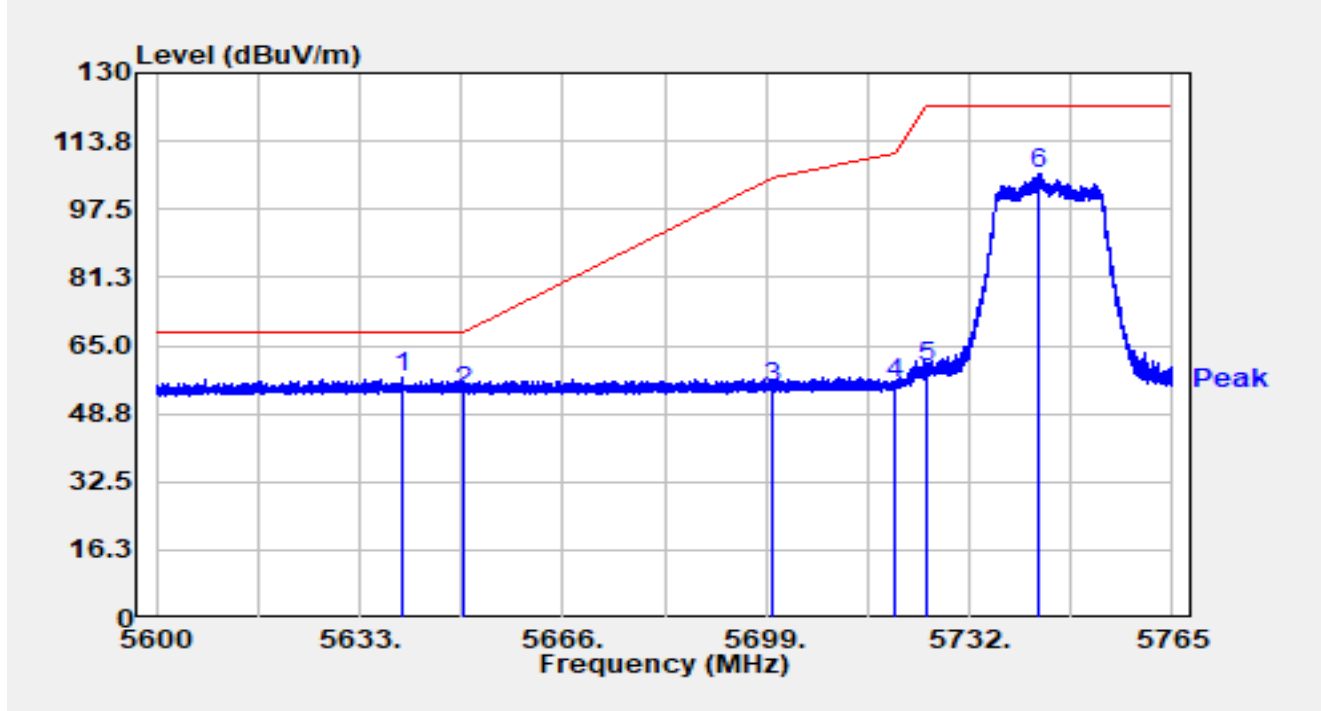


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5639.782	36.77	20.57	57.34	-10.86	68.20	Peak
2		5650.000	33.68	20.50	54.18	-14.02	68.20	Peak
3		5700.000	33.95	20.86	54.82	-50.38	105.20	Peak
4		5720.000	34.92	21.09	56.01	-54.79	110.80	Peak
5		5725.000	38.81	21.13	59.95	-62.25	122.20	Peak
6		5743.418	85.02	20.96	105.98	N/A	N/A	Peak

**Notes:**

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5825MHz		

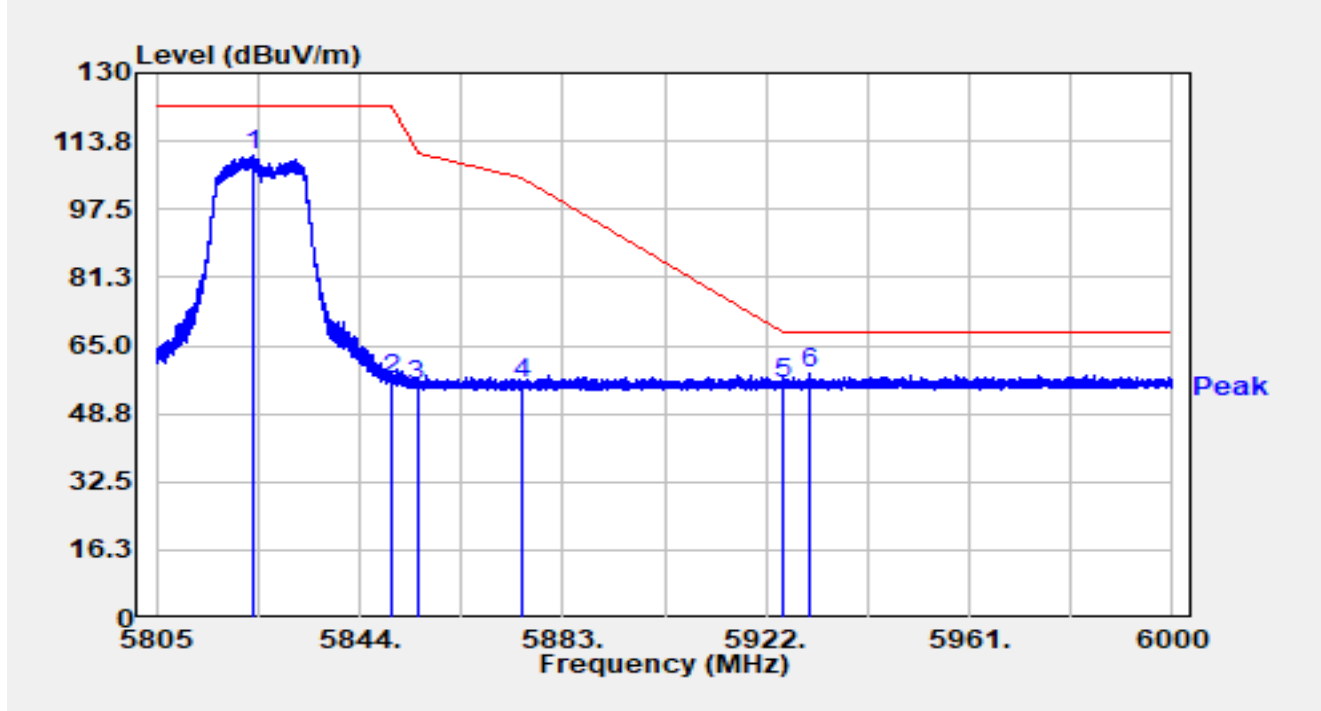


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5823.642	88.97	21.30	110.27	N/A	N/A	Peak
2		5850.000	35.25	21.41	56.66	-65.54	122.20	Peak
3		5855.000	34.12	21.46	55.58	-55.22	110.80	Peak
4		5875.000	34.54	21.51	56.05	-49.15	105.20	Peak
5		5925.000	34.29	21.51	55.80	-12.40	68.20	Peak
6	*	5930.366	36.87	21.54	58.41	-9.79	68.20	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5825MHz		

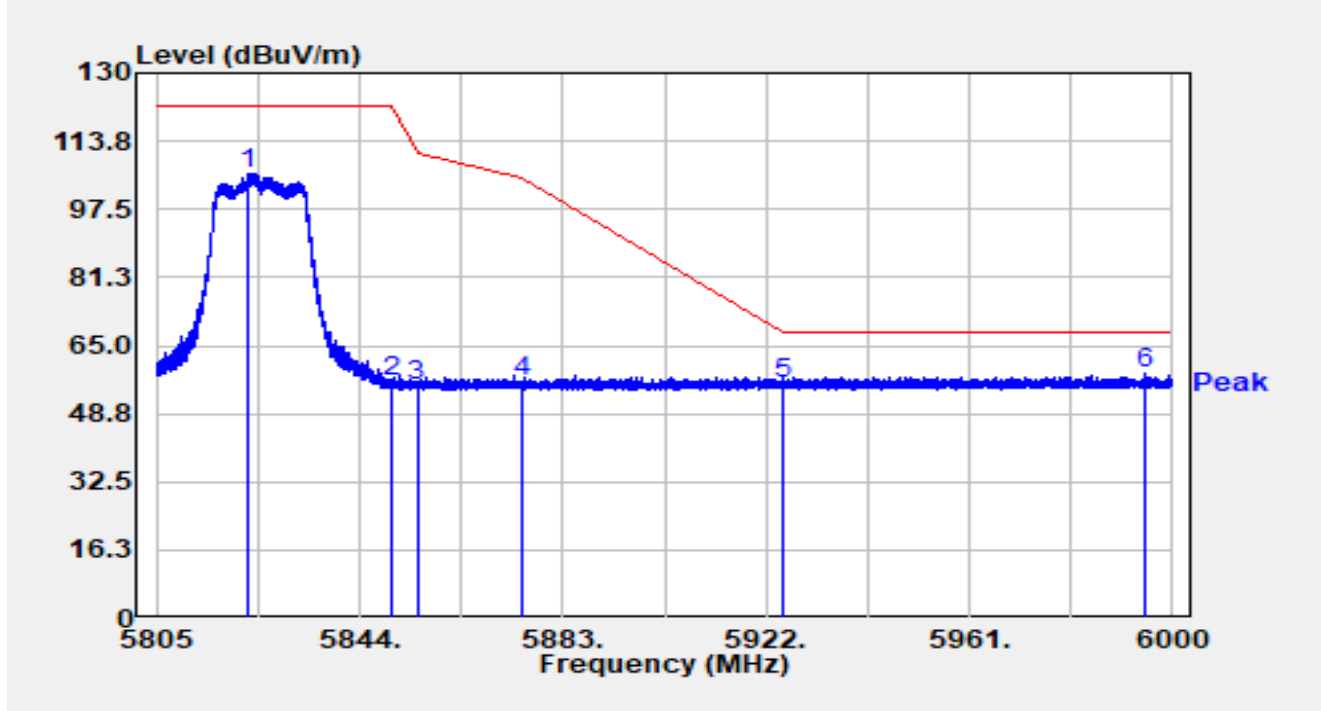


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5822.804	84.84	21.30	106.15	N/A	N/A	Peak
2		5850.000	35.10	21.41	56.51	-65.69	122.20	Peak
3		5855.000	33.86	21.46	55.33	-55.47	110.80	Peak
4		5875.000	34.68	21.51	56.19	-49.01	105.20	Peak
5		5925.000	34.23	21.51	55.74	-12.46	68.20	Peak
6	*	5994.638	36.67	21.65	58.31	-9.89	68.20	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5190MHz		

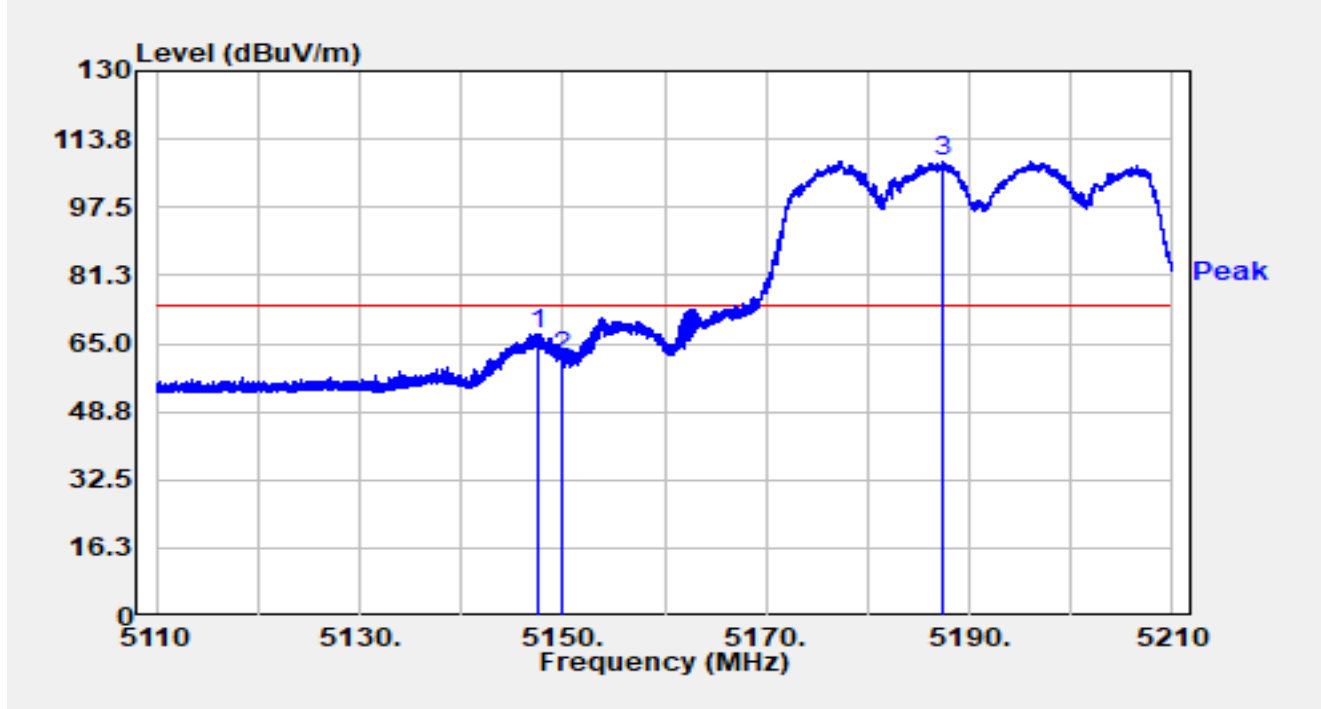


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5147.510	47.53	19.77	67.30	-6.70	74.00	Peak
2		5150.000	42.17	19.78	61.95	-12.05	74.00	Peak
3	*	5187.290	89.12	19.54	108.66	N/A	N/A	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5190MHz		

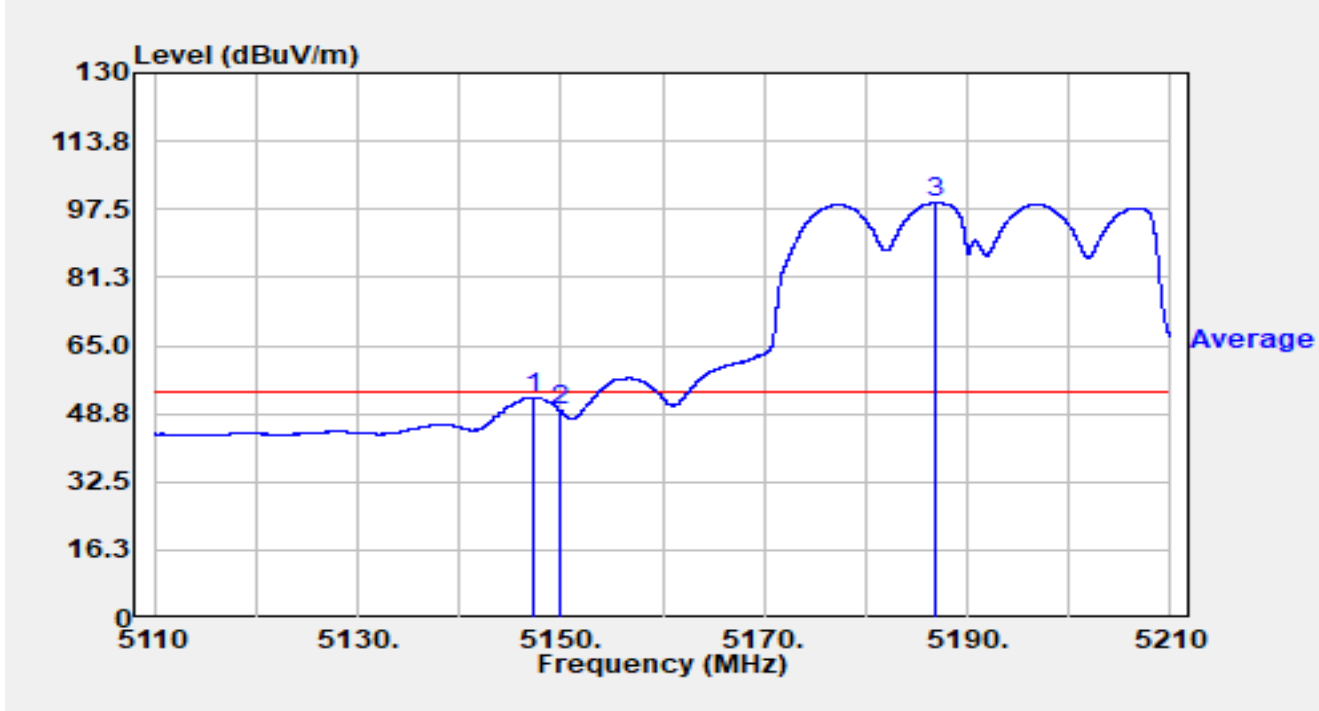


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1		5147.410	32.79	19.76	52.56	-1.44	54.00	Average
2		5150.000	29.59	19.78	49.37	-4.63	54.00	Average
3	*	5186.790	79.50	19.55	99.04	N/A	N/A	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5190MHz		

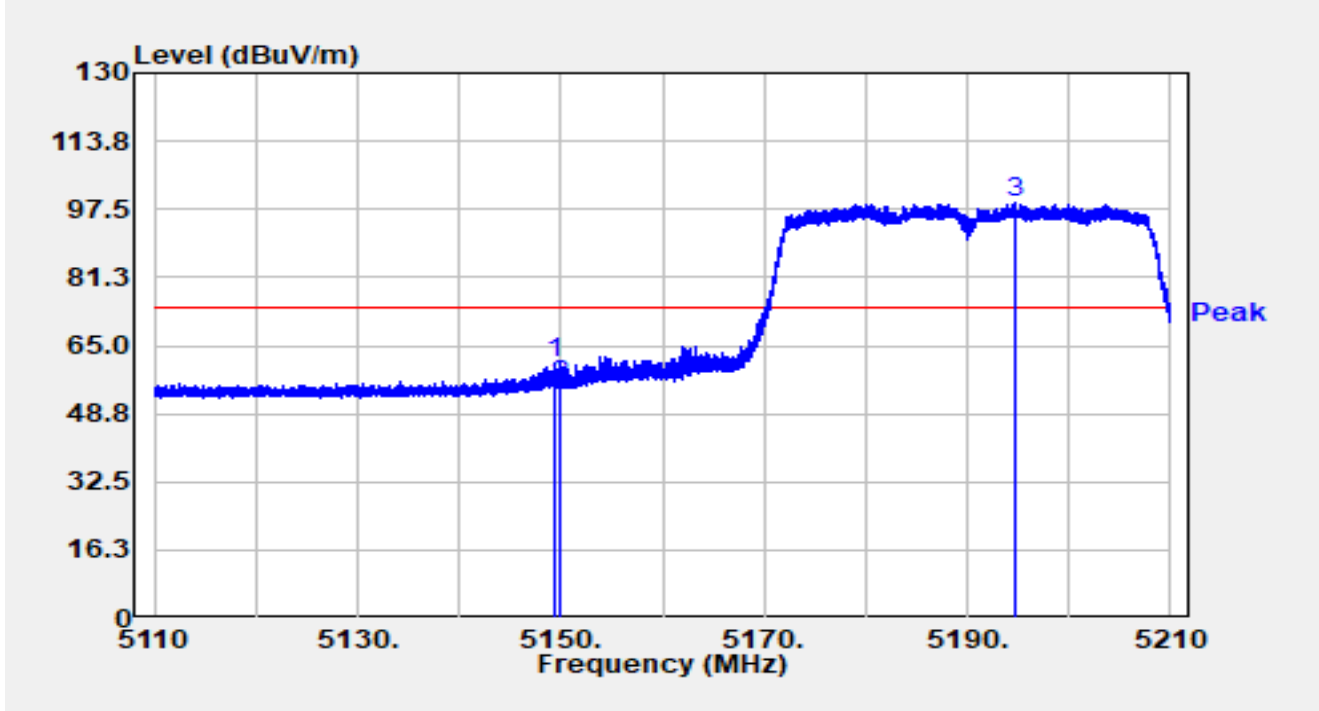


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5149.500	40.90	19.78	60.68	-13.32	74.00	Peak
2		5150.000	35.66	19.78	55.44	-18.56	74.00	Peak
3	*	5194.810	79.61	19.38	98.99	N/A	N/A	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5190MHz		

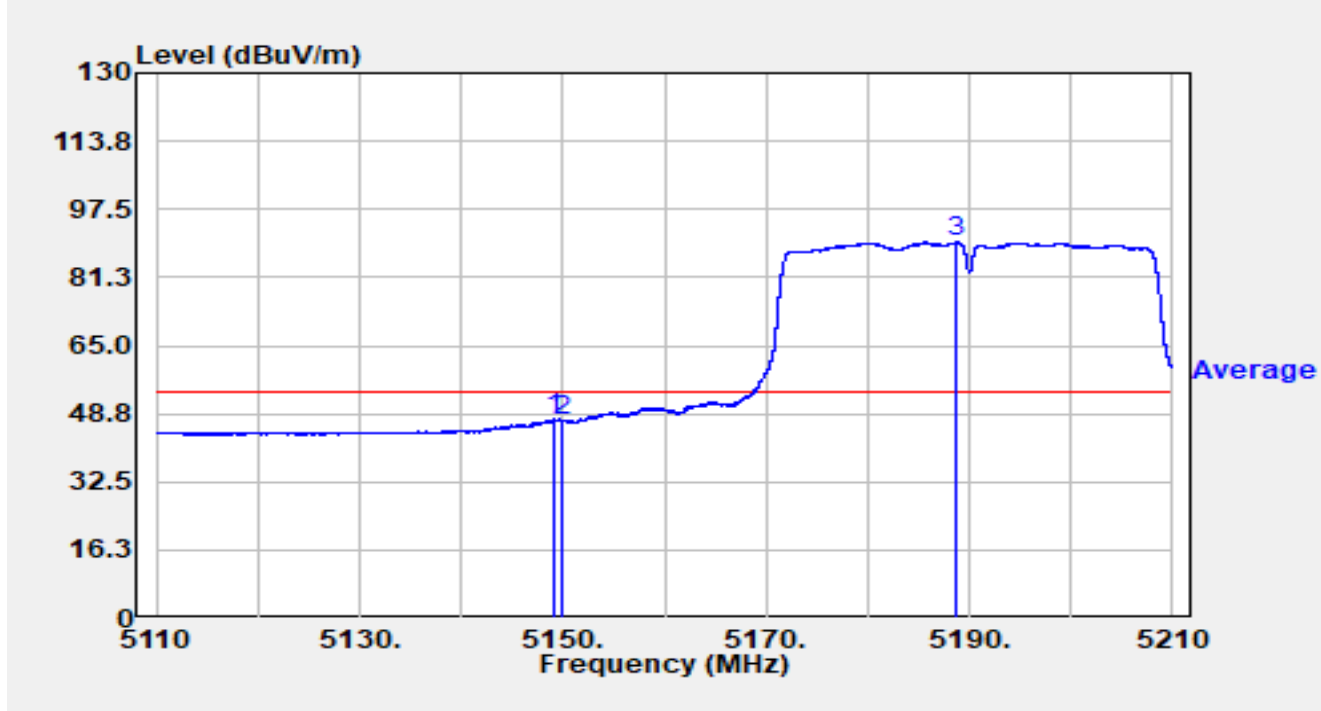


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5149.230	27.58	19.78	47.36	-6.64	54.00	Average
2		5150.000	27.38	19.78	47.16	-6.84	54.00	Average
3	*	5188.750	70.36	19.51	89.86	N/A	N/A	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5310MHz		

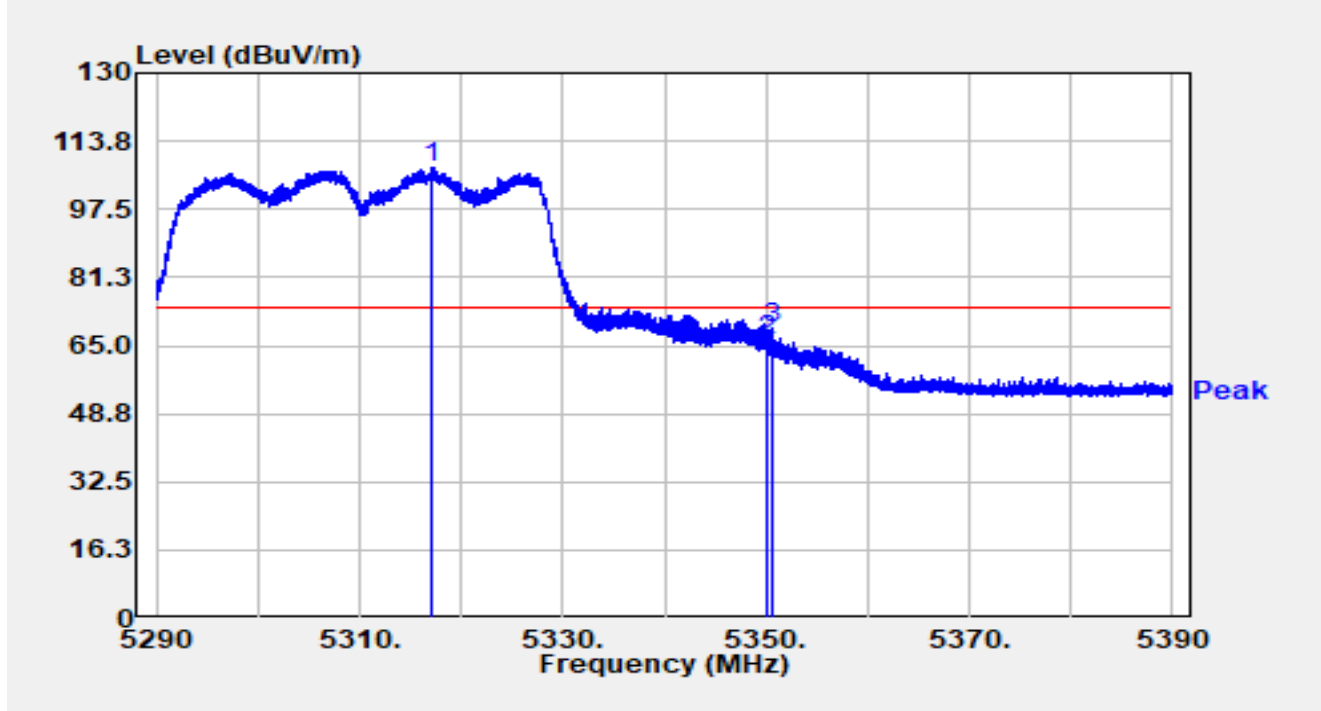


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5317.010	87.93	19.67	107.61	N/A	N/A	Peak
2		5350.000	46.69	19.32	66.01	-7.99	74.00	Peak
3		5350.700	49.72	19.31	69.02	-4.98	74.00	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).



Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5310MHz		

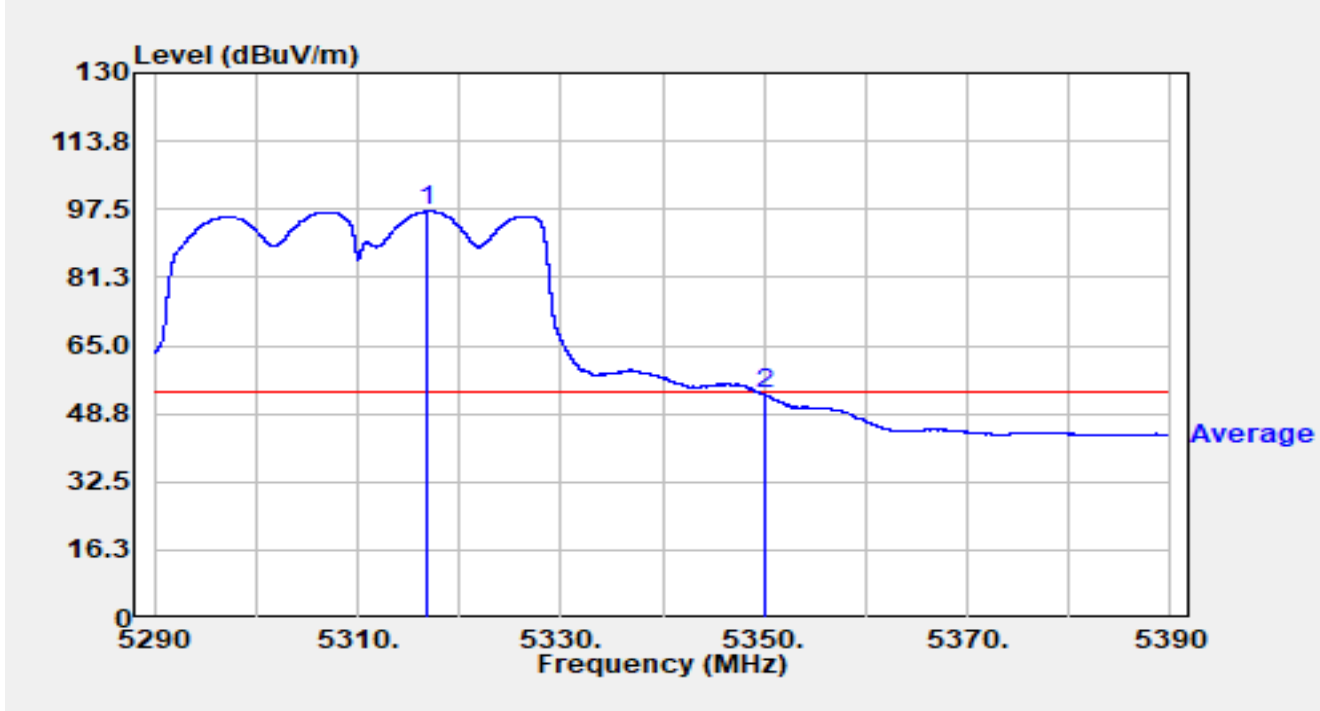


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5316.880	77.36	19.67	97.03	N/A	N/A	Average
2		5350.000	34.00	19.32	53.32	-0.68	54.00	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5310MHz		

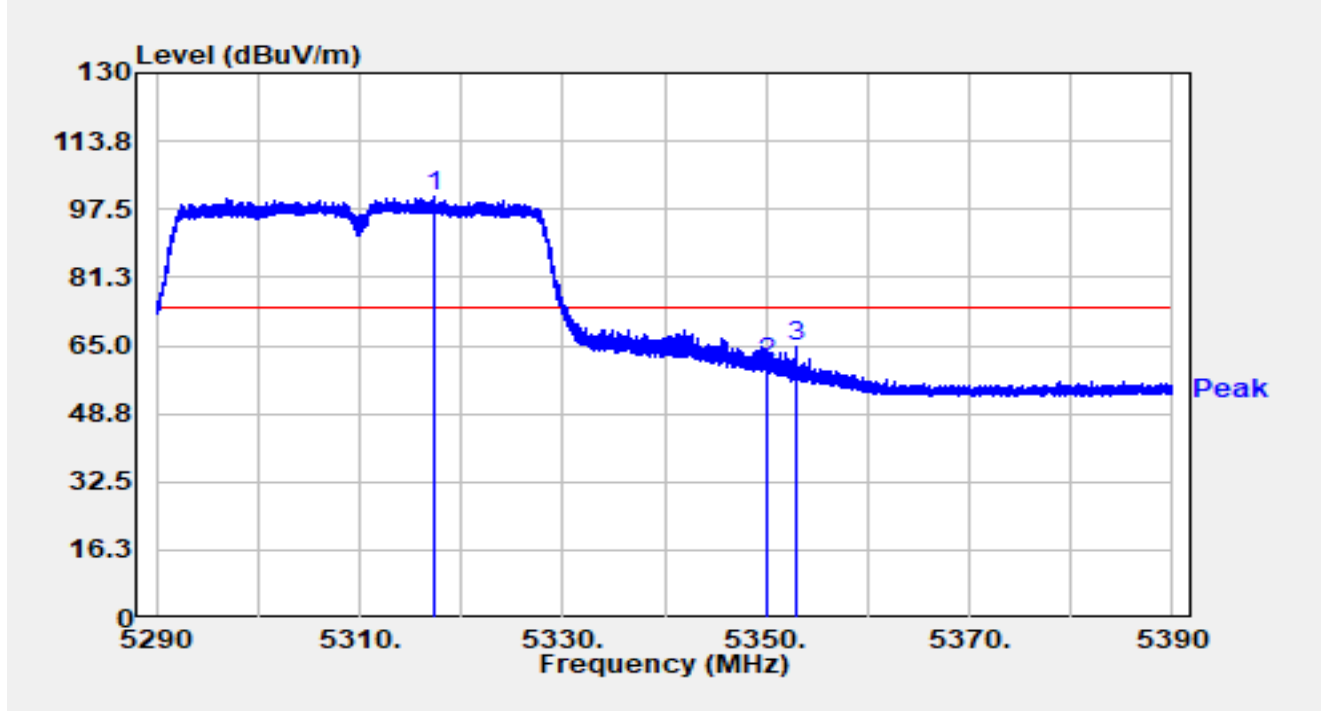


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	5317.380	80.94	19.68	100.62	N/A	N/A	Peak
2		5350.000	41.45	19.32	60.77	-13.23	74.00	Peak
3		5352.920	45.41	19.27	64.68	-9.32	74.00	Peak

## Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5310MHz		

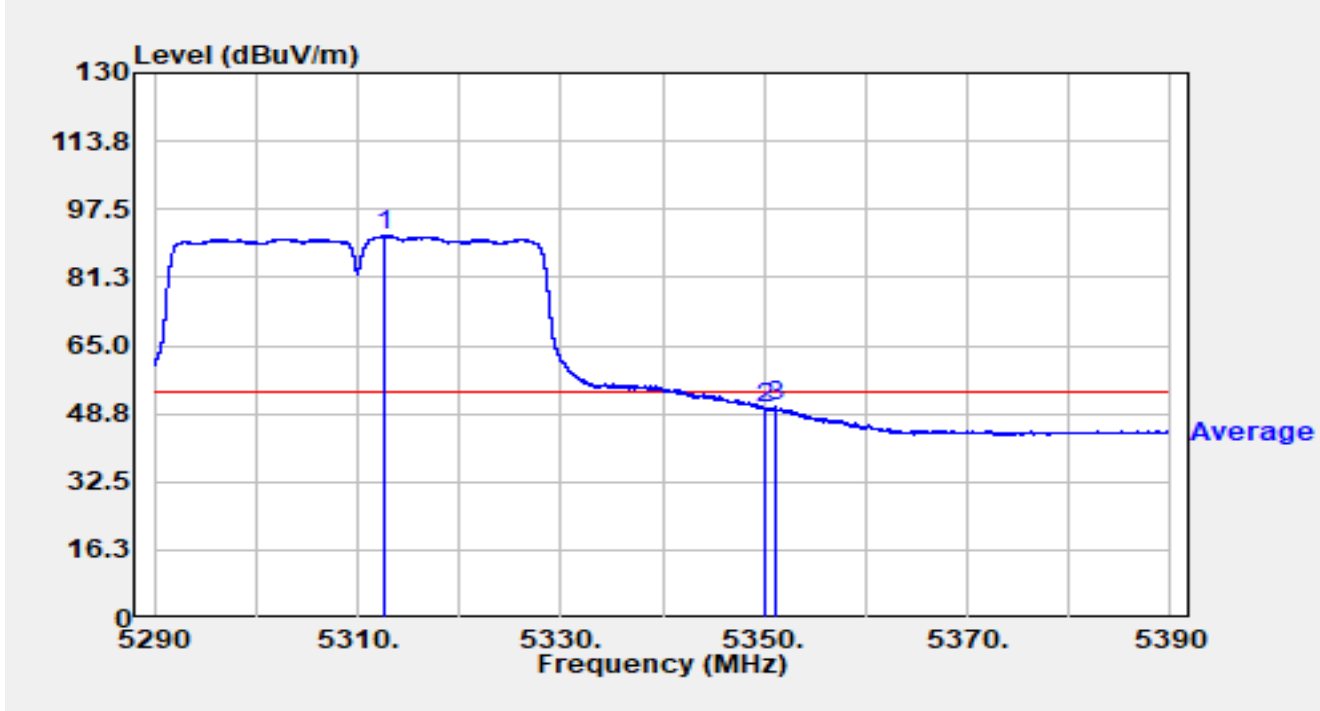


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5312.690	71.64	19.57	91.21	N/A	N/A	Average
2		5350.000	30.76	19.32	50.09	-3.91	54.00	Average
3		5351.060	31.07	19.30	50.36	-3.64	54.00	Average

## Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m)

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5510MHz		

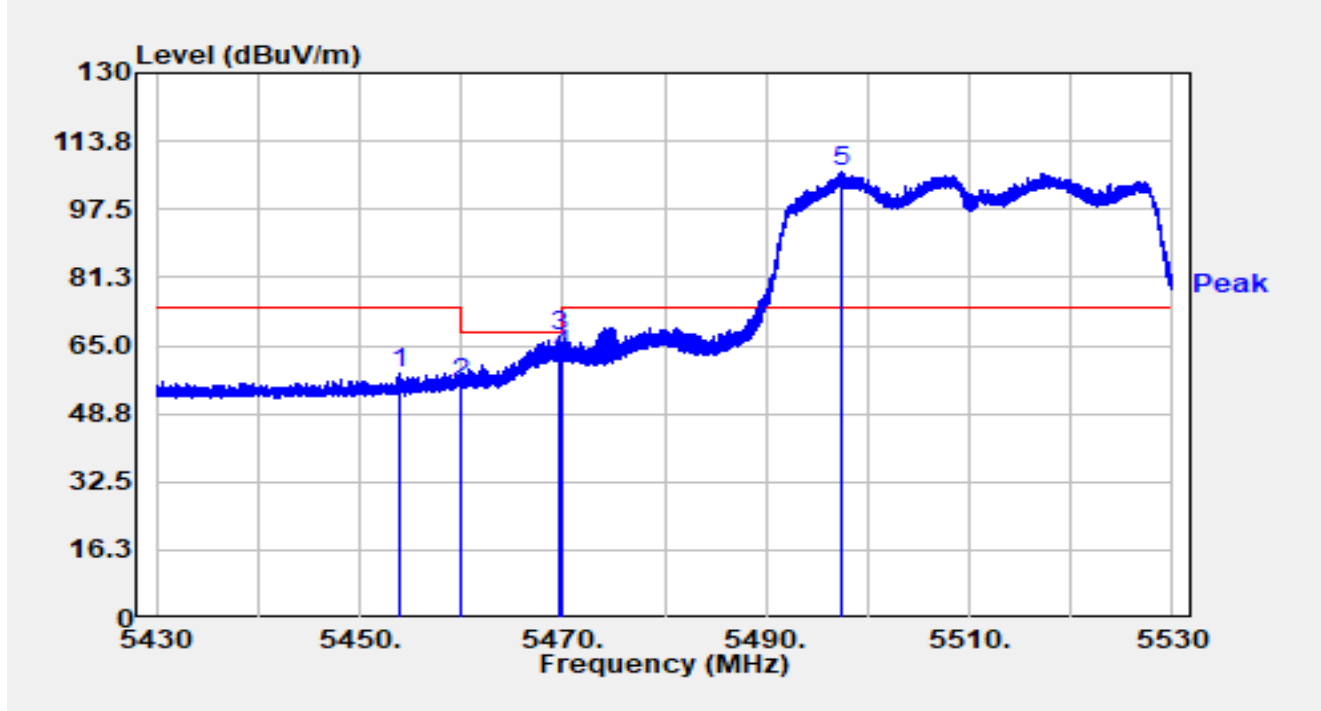


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1		5453.880	38.72	19.49	58.22	-15.78	74.00	Peak
2		5460.000	36.54	19.61	56.15	-12.05	68.20	Peak
3		5469.580	47.53	19.79	67.32	-0.88	68.20	Peak
4		5470.000	42.97	19.80	62.77	-5.43	68.20	Peak
5	*	5497.380	86.81	19.65	106.46	N/A	N/A	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5510MHz		

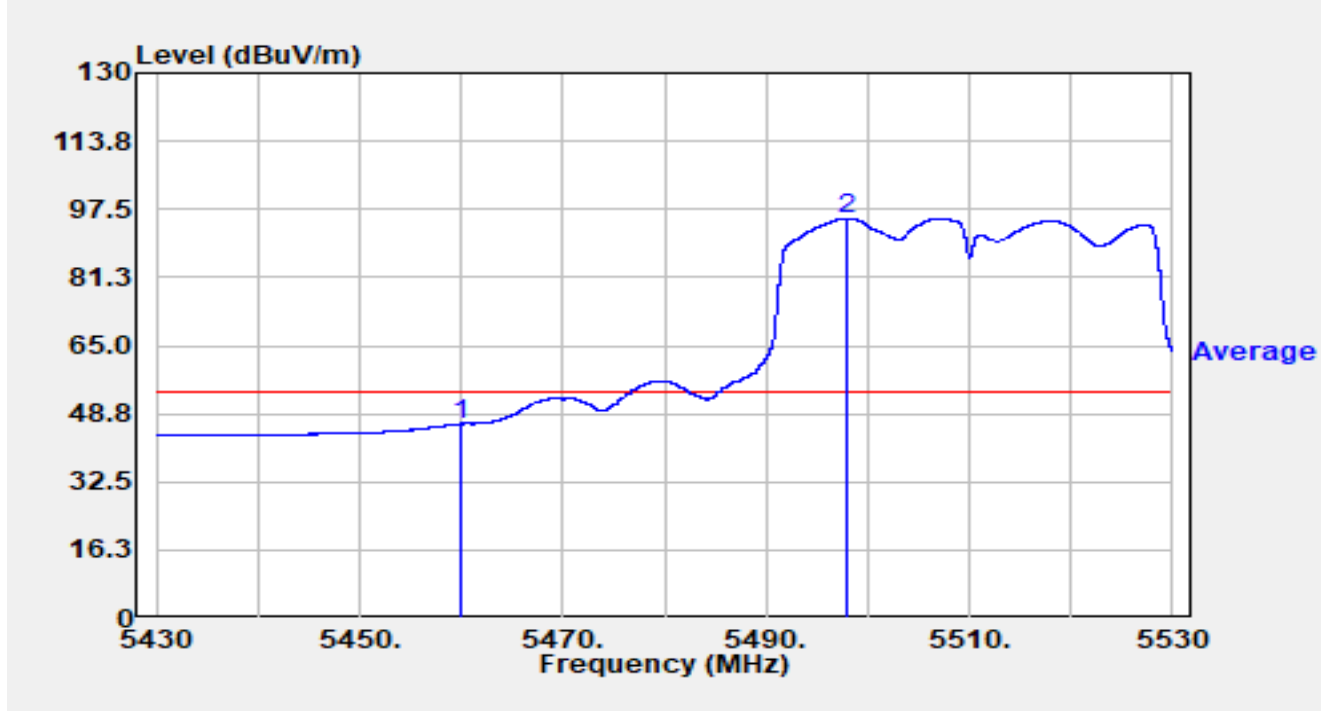


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5460.000	26.71	19.61	46.32	-7.68	54.00	Average
2	*	5498.010	75.74	19.65	95.39	N/A	N/A	Average

Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5510MHz		

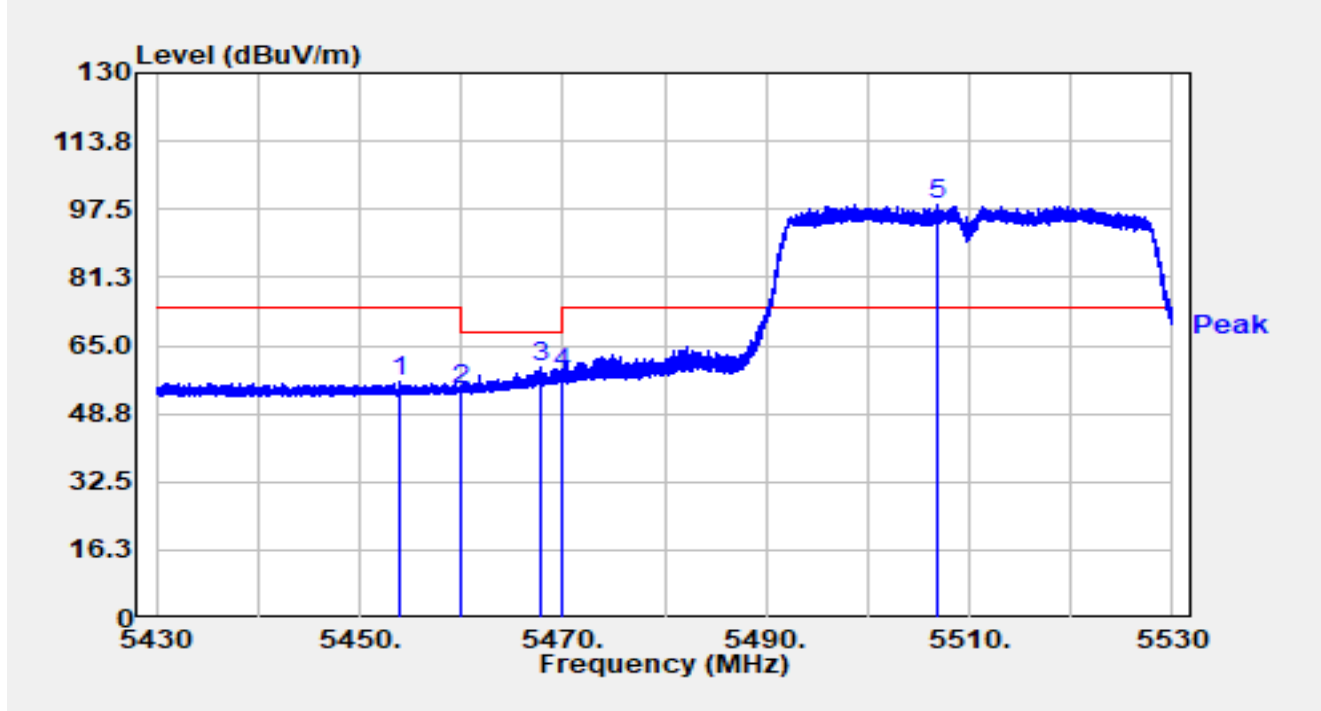


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5453.870	36.82	19.49	56.31	-17.69	74.00	Peak
2		5460.000	35.01	19.61	54.62	-13.58	68.20	Peak
3		5467.900	39.93	19.76	59.69	-8.51	68.20	Peak
4		5470.000	38.45	19.80	58.25	-9.95	68.20	Peak
5	*	5506.930	78.94	19.53	98.47	N/A	N/A	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5510MHz		

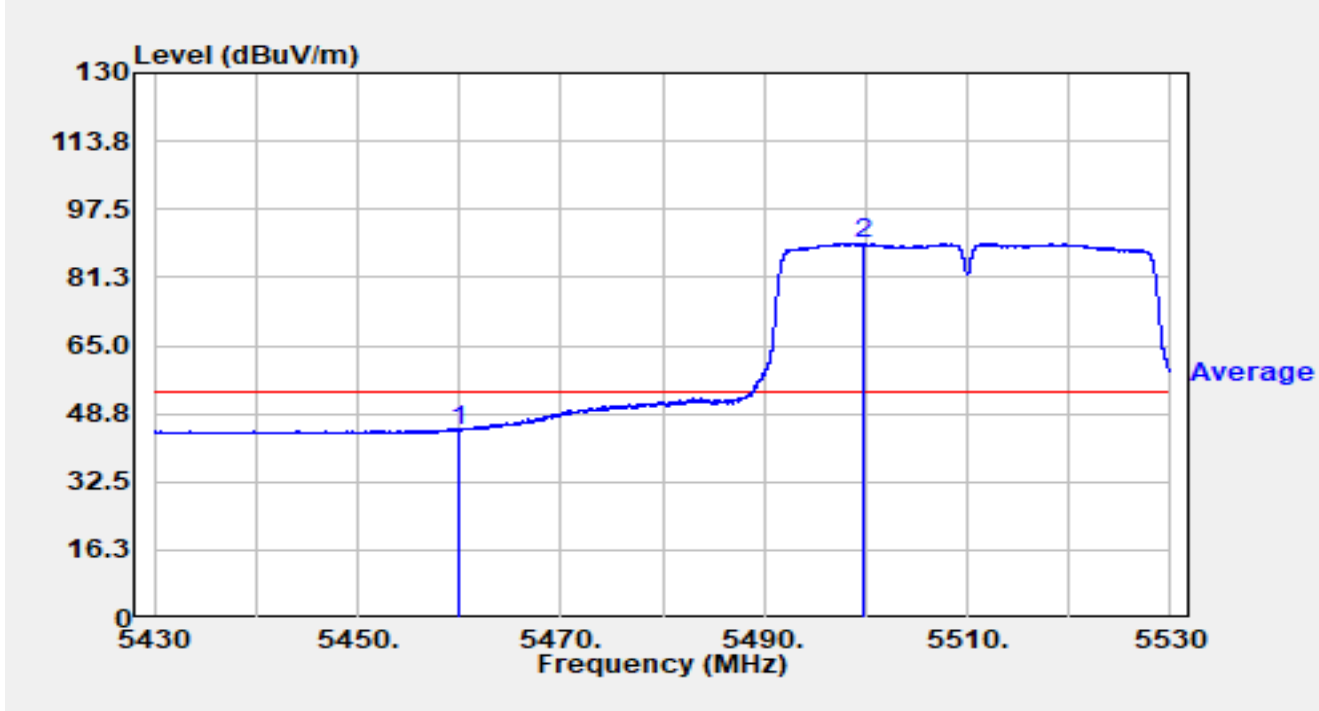


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1		5460.000	25.26	19.61	44.87	-9.13	54.00	Average
2	*	5499.820	69.70	19.63	89.32	N/A	N/A	Average

Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5670MHz		

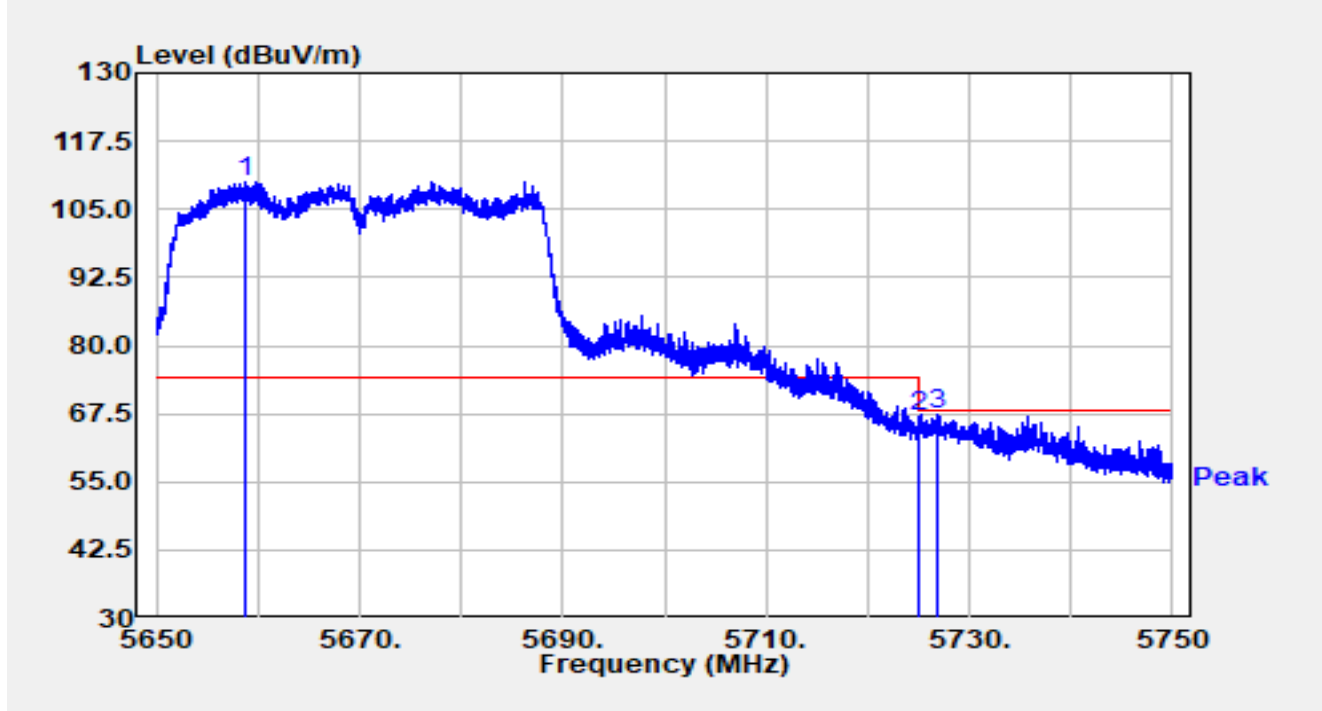


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	5658.660	89.67	20.43	110.10	N/A	N/A	Peak
2		5725.000	45.68	21.13	66.82	-1.38	68.20	Peak
3		5726.920	46.19	21.13	67.33	-0.87	68.20	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).



Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5670MHz		

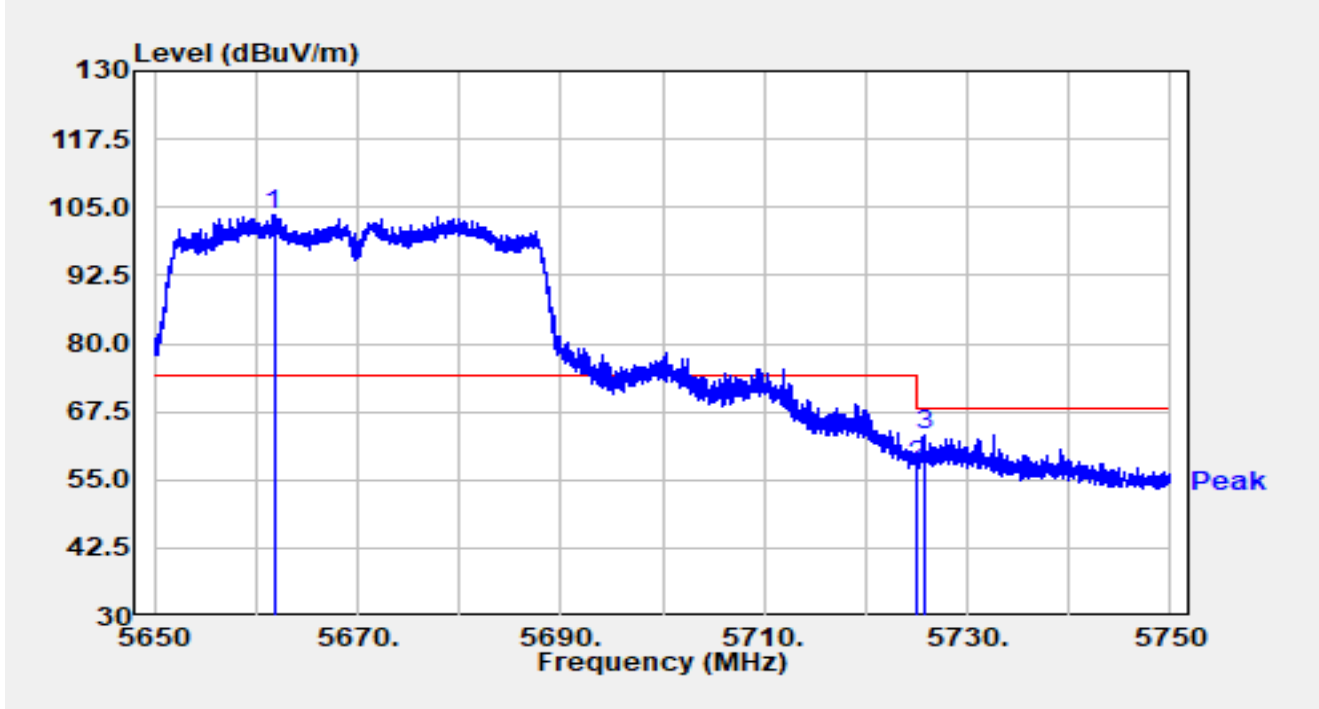


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	5661.760	83.25	20.43	103.68	N/A	N/A	Peak
2		5725.000	36.58	21.13	57.72	-10.48	68.20	Peak
3		5725.690	42.16	21.14	63.30	-4.90	68.20	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5755MHz		

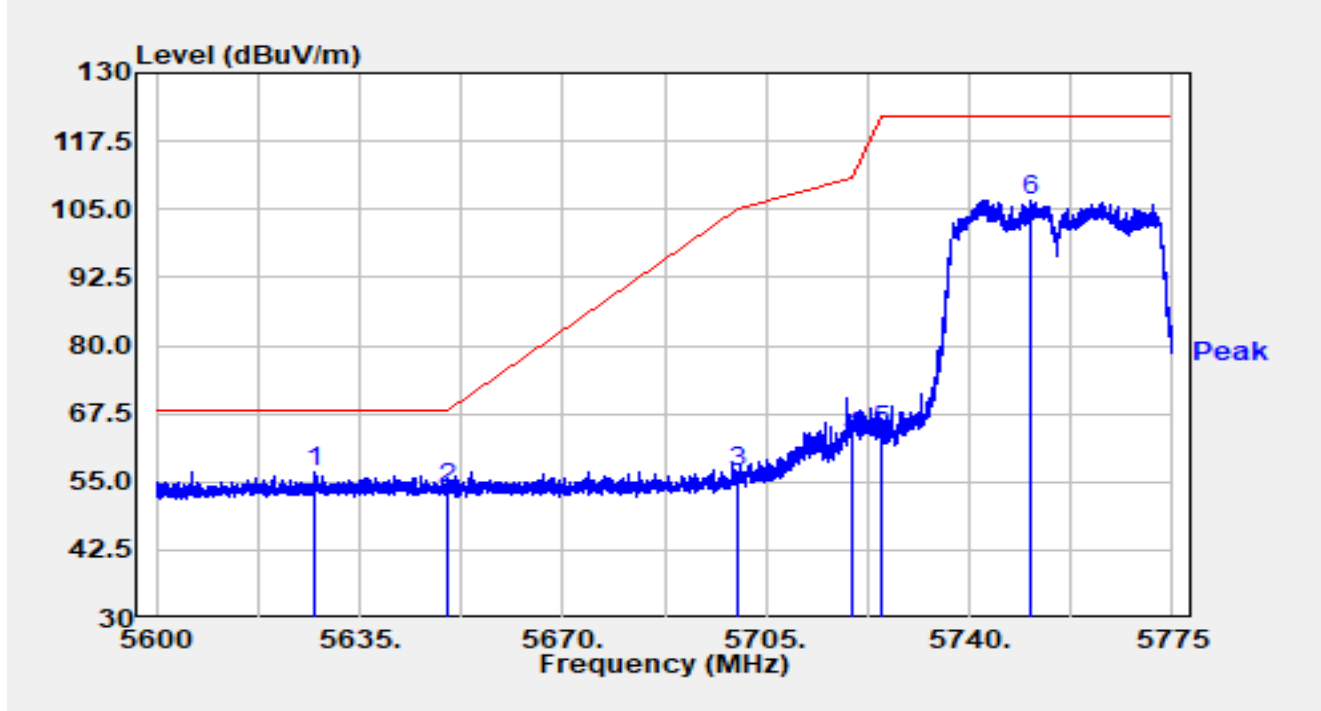


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5627.090	36.27	20.45	56.72	-11.48	68.20	Peak
2		5650.000	33.44	20.50	53.94	-14.26	68.20	Peak
3		5700.000	36.04	20.86	56.90	-48.30	105.20	Peak
4		5720.000	42.00	21.09	63.10	-47.70	110.80	Peak
5		5725.000	43.29	21.13	64.42	-57.78	122.20	Peak
6		5750.640	85.71	20.99	106.71	N/A	N/A	Peak

**Notes:**

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5755MHz		

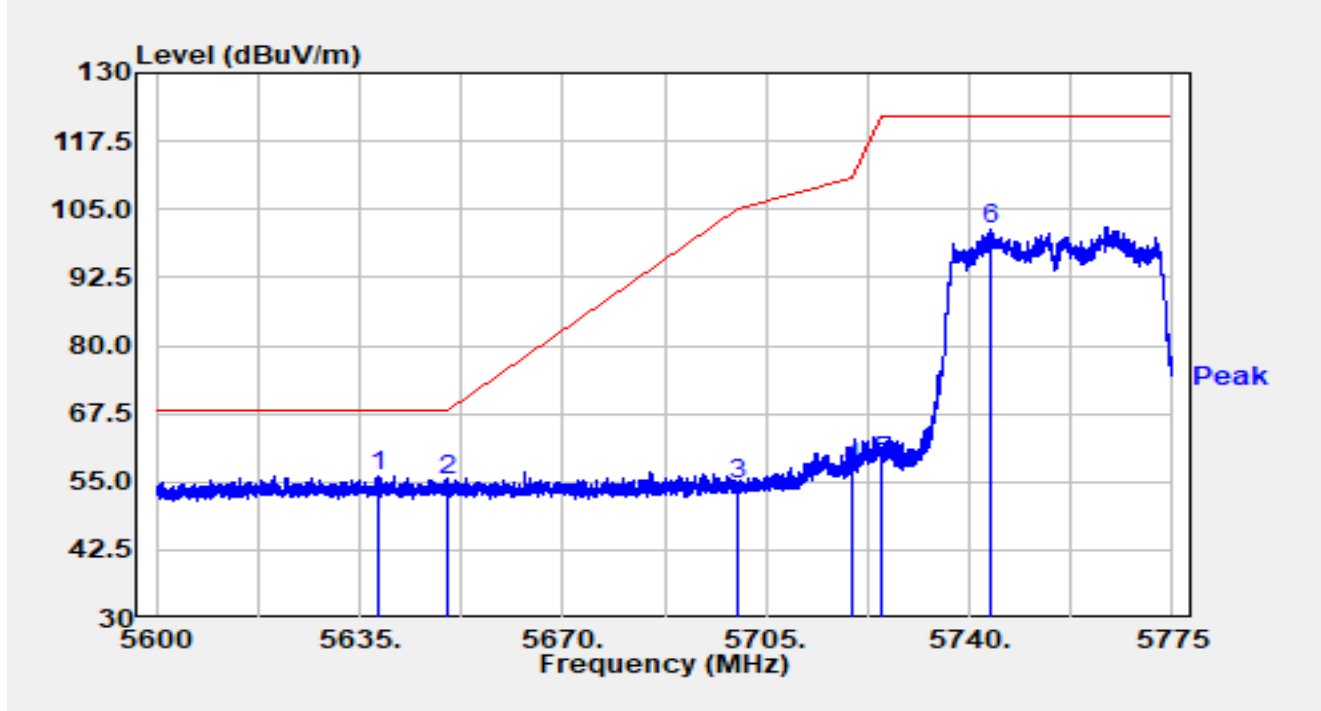


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5638.325	35.46	20.56	56.02	-12.18	68.20	Peak
2		5650.000	34.66	20.50	55.16	-13.04	68.20	Peak
3		5700.000	33.68	20.86	54.54	-50.66	105.20	Peak
4		5720.000	36.57	21.09	57.66	-53.14	110.80	Peak
5		5725.000	37.60	21.13	58.74	-63.46	122.20	Peak
6		5743.623	80.34	20.96	101.30	N/A	N/A	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5795MHz		

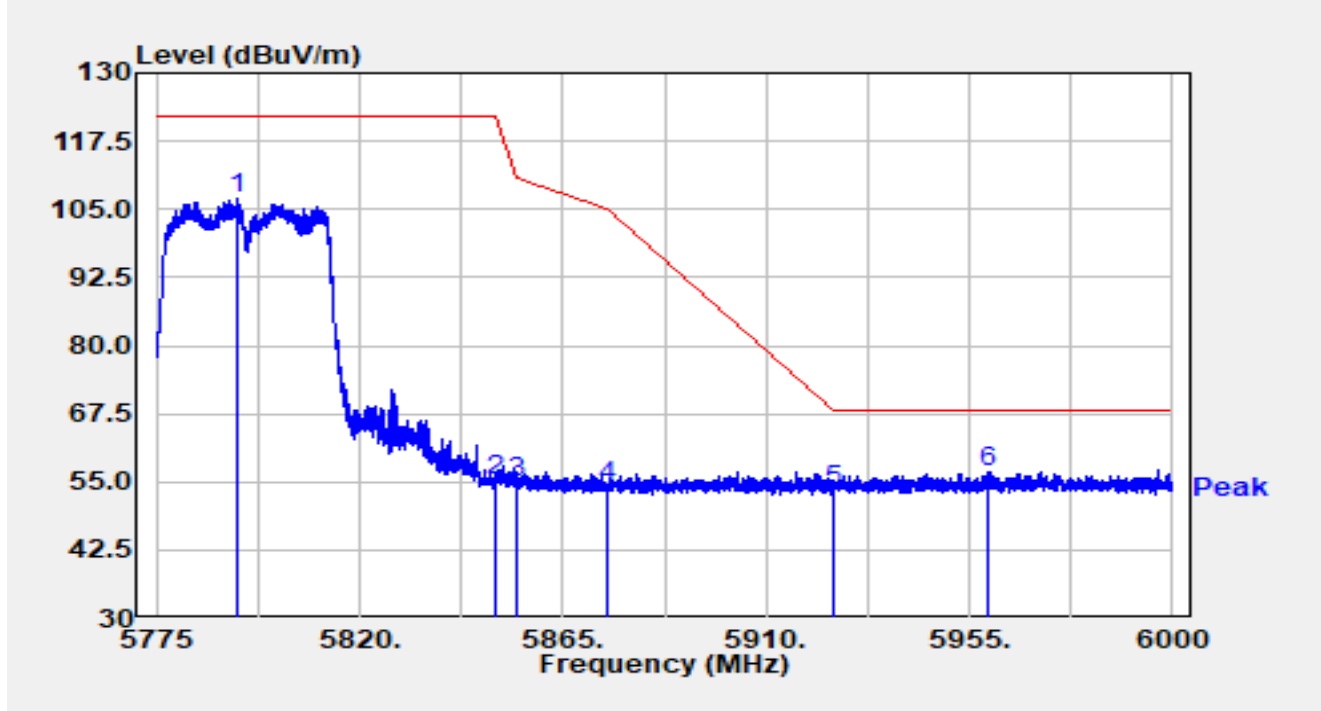


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5793.000	85.62	21.41	107.02	N/A	N/A	Peak
2		5850.000	33.92	21.41	55.33	-66.87	122.20	Peak
3		5855.000	33.39	21.46	54.85	-55.95	110.80	Peak
4		5875.000	32.66	21.51	54.17	-51.03	105.20	Peak
5		5925.000	32.04	21.51	53.54	-14.66	68.20	Peak
6	*	5959.388	35.37	21.58	56.96	-11.24	68.20	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5795MHz		

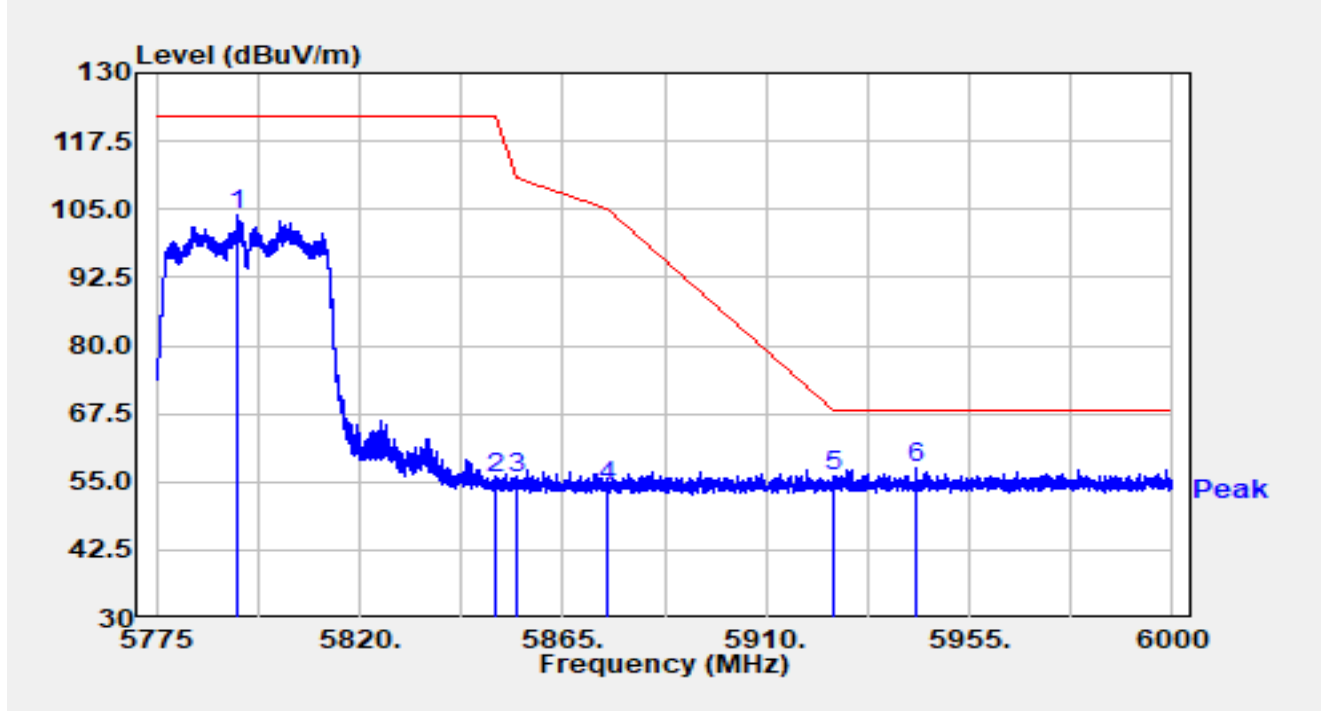


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5793.067	82.65	21.41	104.06	N/A	N/A	Peak
2		5850.000	34.36	21.41	55.77	-66.43	122.20	Peak
3		5855.000	34.25	21.46	55.71	-55.09	110.80	Peak
4		5875.000	32.66	21.51	54.17	-51.03	105.20	Peak
5		5925.000	34.57	21.51	56.08	-12.12	68.20	Peak
6	*	5943.143	36.10	21.58	57.67	-10.53	68.20	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5210MHz		

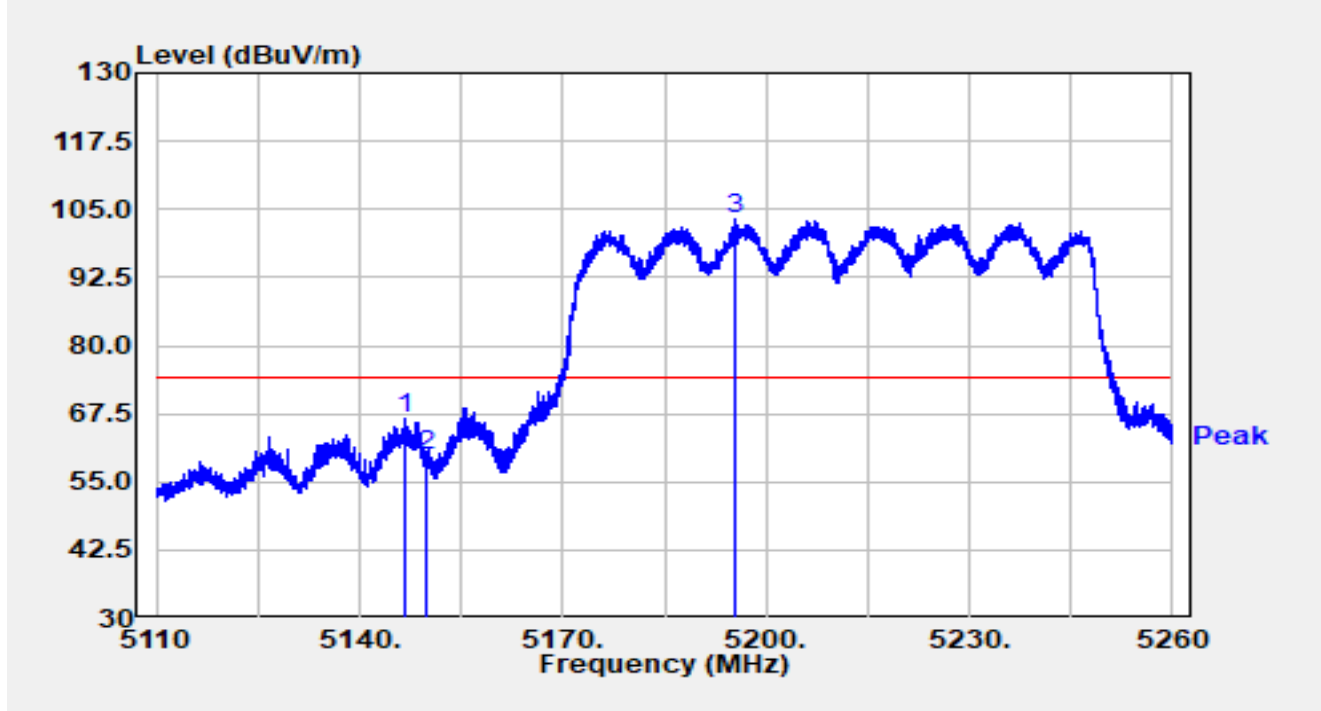


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5146.585	46.71	19.75	66.46	-7.54	74.00	Peak
2		5150.000	39.96	19.78	59.74	-14.26	74.00	Peak
3	*	5195.275	83.72	19.37	103.09	N/A	N/A	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5210MHz		

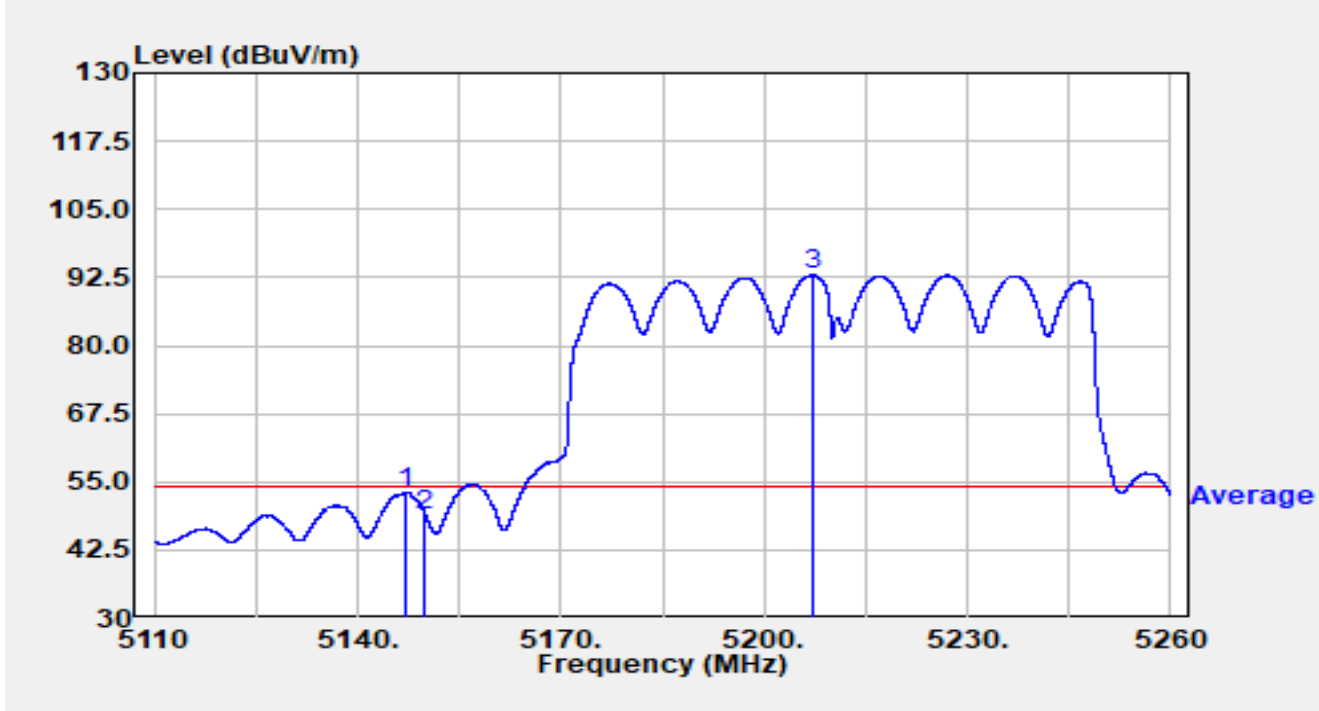


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5147.230	33.34	19.76	53.10	-0.90	54.00	Average
2		5150.000	29.07	19.78	48.85	-5.15	54.00	Average
3	*	5207.185	73.64	19.32	92.96	N/A	N/A	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5210MHz		

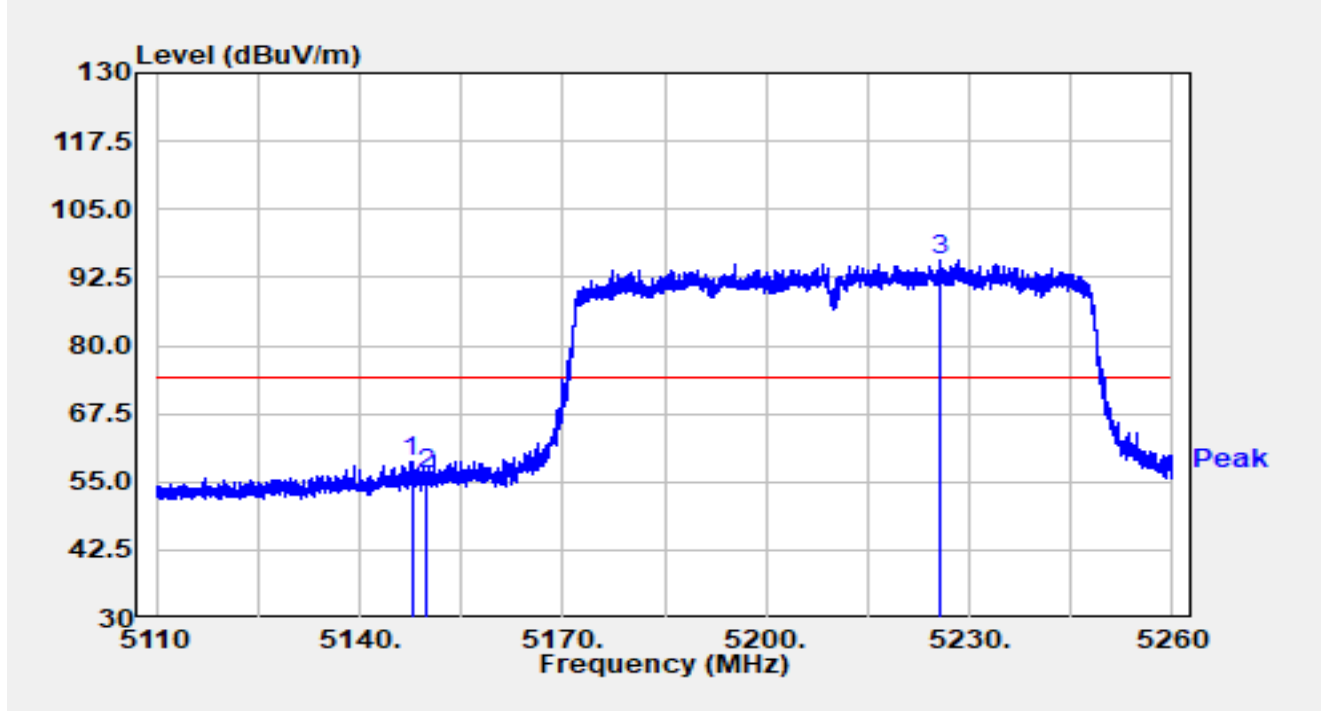


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5147.680	39.03	19.77	58.80	-15.20	74.00	Peak
2		5150.000	36.80	19.78	56.57	-17.43	74.00	Peak
3	*	5225.530	76.32	19.46	95.77	N/A	N/A	Peak

## Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).



Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5210MHz		

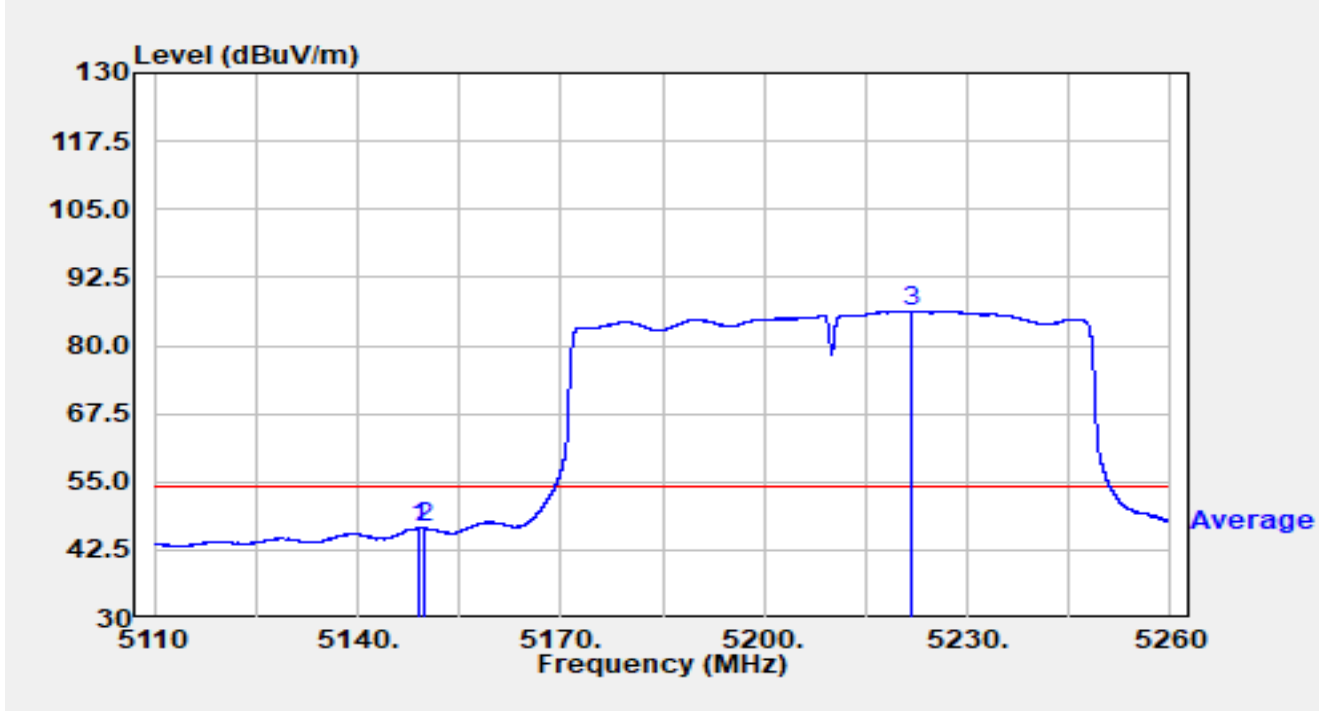


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5149.030	26.76	19.78	46.54	-7.46	54.00	Average
2		5150.000	26.74	19.78	46.52	-7.48	54.00	Average
3	*	5221.780	66.89	19.41	86.30	N/A	N/A	Average

## Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5290MHz		

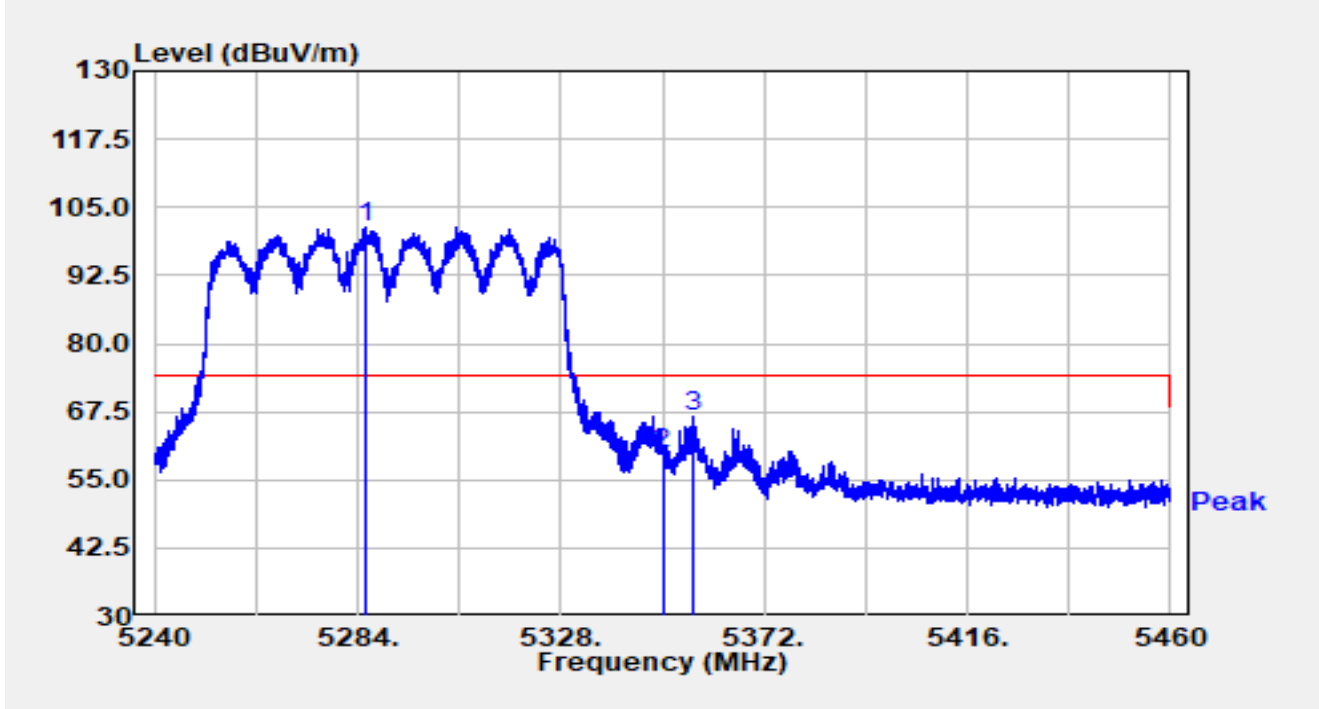


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5285.892	82.32	19.09	101.41	N/A	N/A	Peak
2		5350.000	40.55	19.32	59.87	-14.13	74.00	Peak
3		5356.798	47.19	19.25	66.44	-7.56	74.00	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5290MHz		

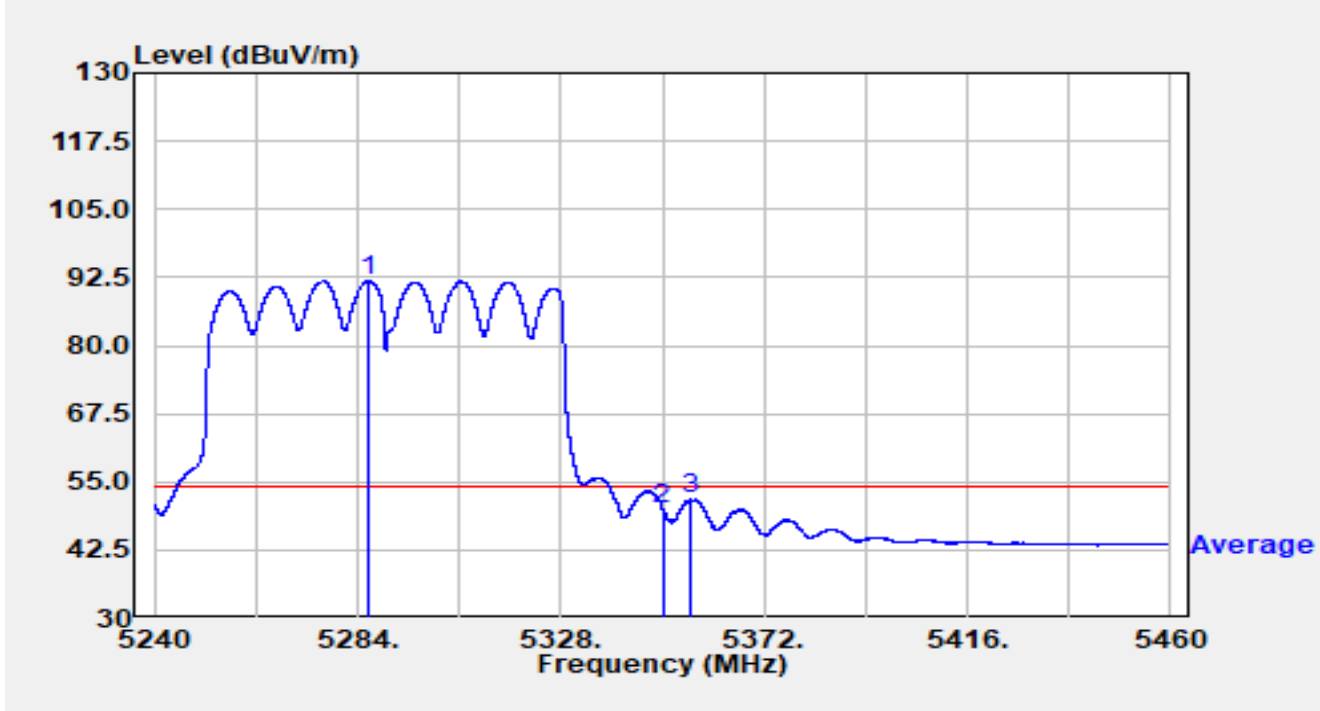


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	5286.310	72.72	19.09	91.82	N/A	N/A	Average
2		5350.000	30.85	19.32	50.17	-3.83	54.00	Average
3		5356.138	32.52	19.25	51.77	-2.23	54.00	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5290MHz		

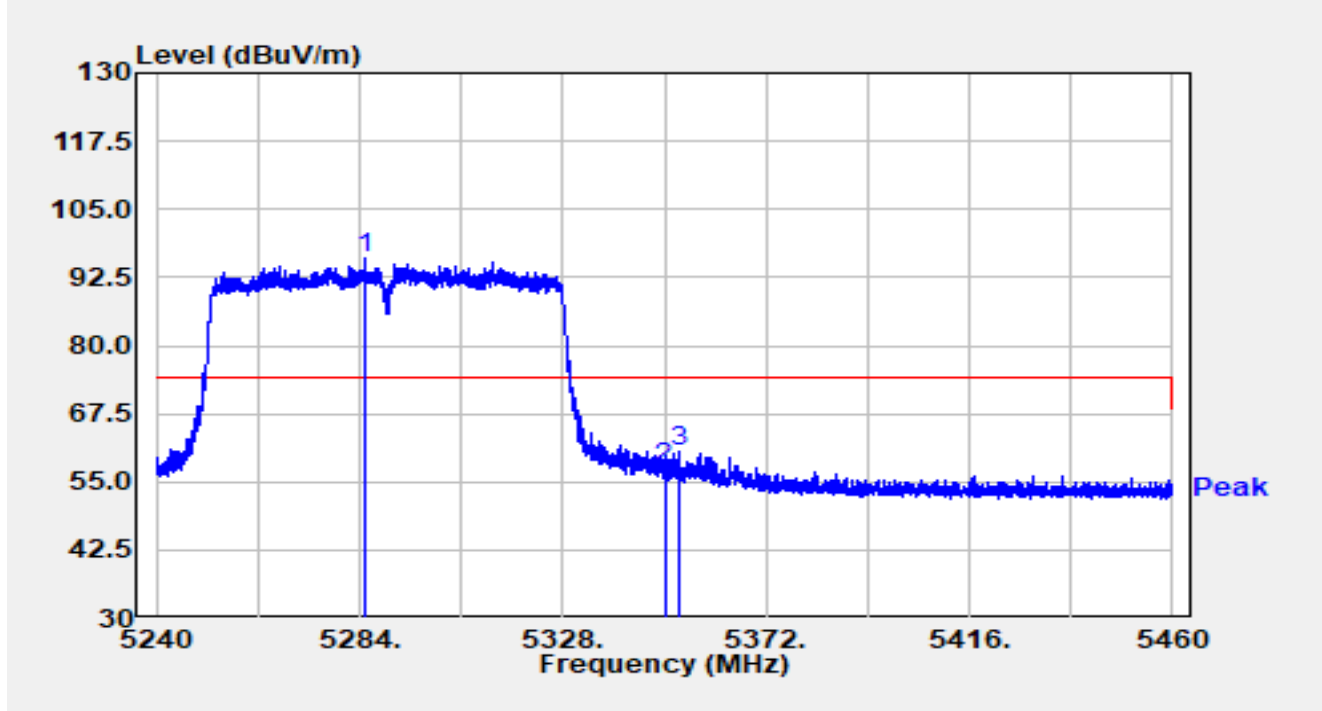


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5284.968	76.80	19.07	95.87	N/A	N/A	Peak
2		5350.000	38.27	19.32	57.60	-16.40	74.00	Peak
3		5353.256	41.48	19.27	60.74	-13.26	74.00	Peak

## Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5290MHz		

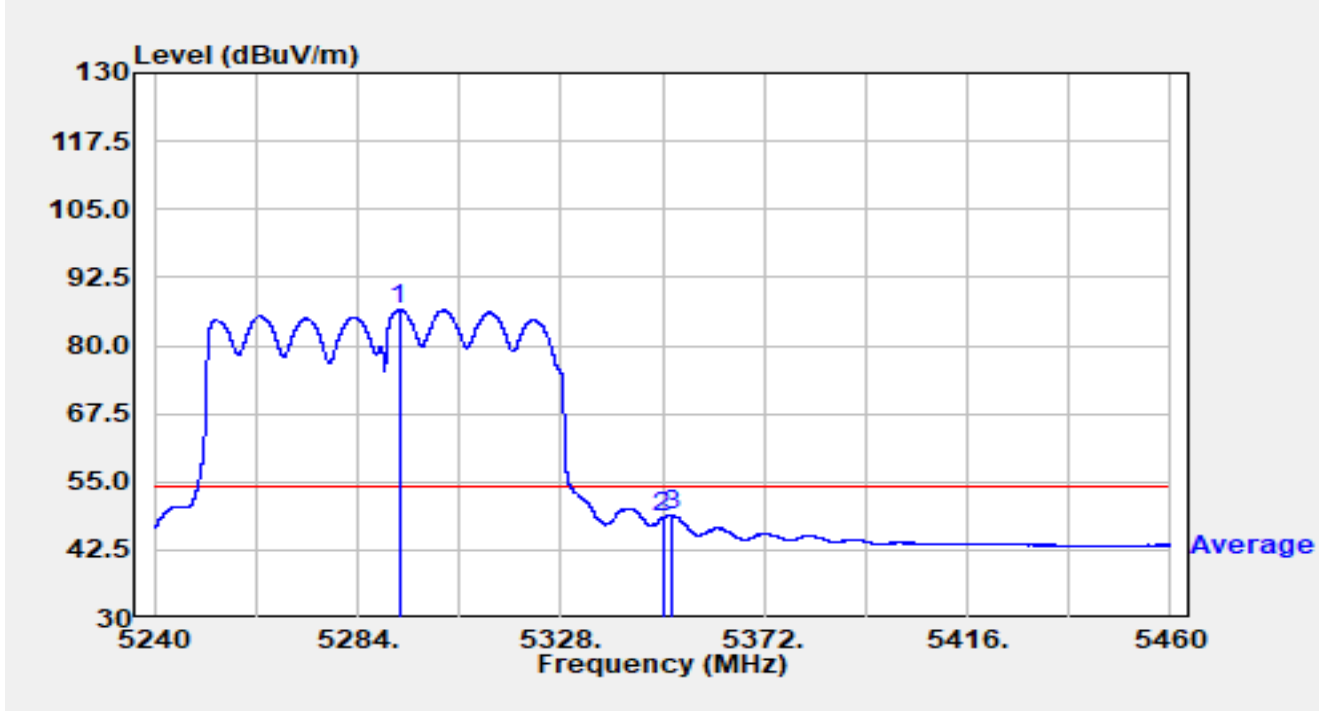


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5292.954	67.39	19.22	86.60	N/A	N/A	Average
2		5350.000	29.08	19.32	48.40	-5.60	54.00	Average
3		5352.090	29.70	19.27	48.97	-5.03	54.00	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5530MHz		

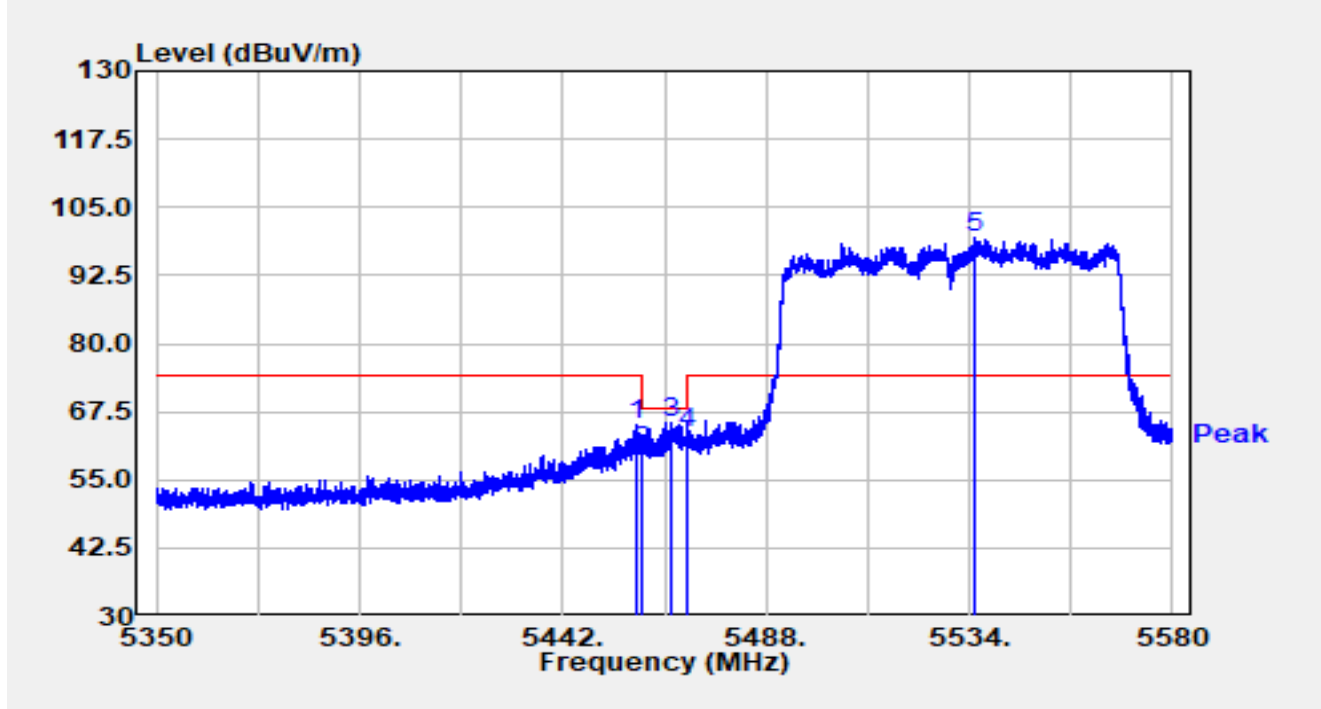


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.445	45.65	19.58	65.24	-8.76	74.00	Peak
2		5460.000	40.41	19.61	60.02	-8.18	68.20	Peak
3		5466.449	45.90	19.73	65.63	-2.57	68.20	Peak
4		5470.000	43.76	19.80	63.56	-4.64	68.20	Peak
5	*	5535.150	79.78	19.67	99.45	N/A	N/A	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5530MHz		

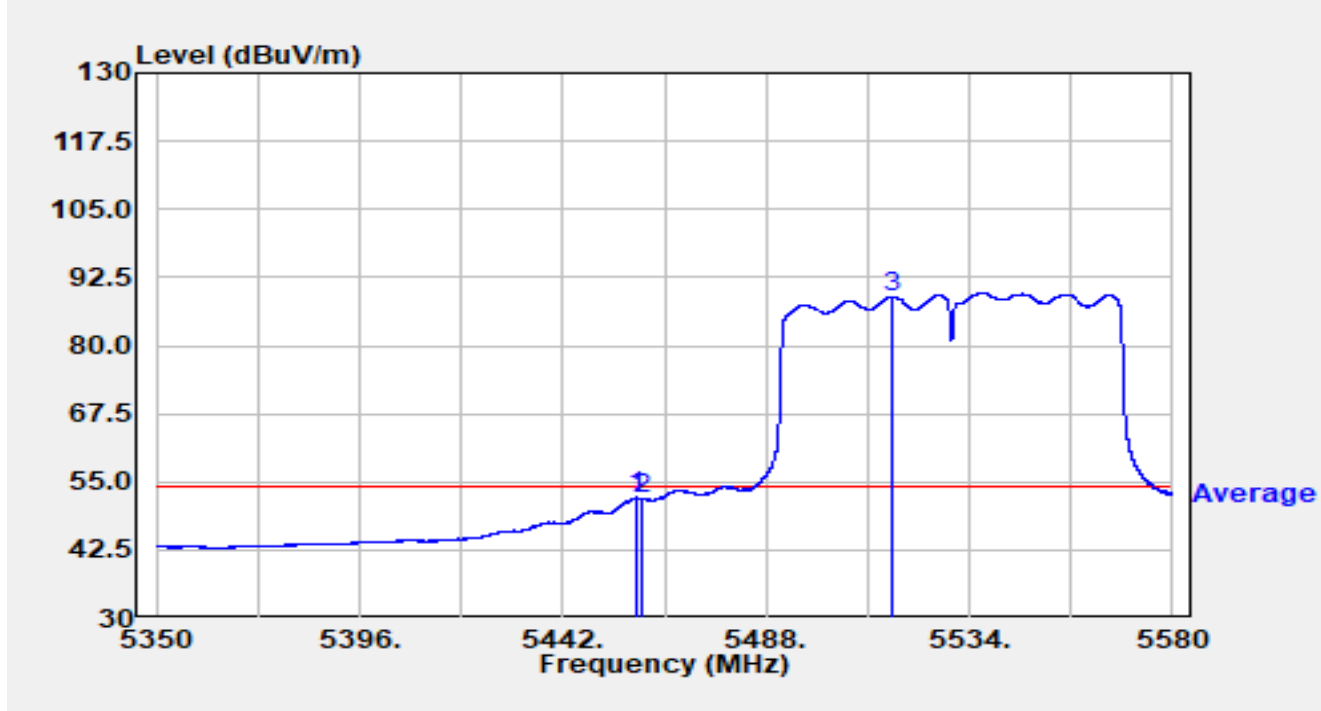


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.537	32.57	19.58	52.16	-1.84	54.00	Average
2		5460.000	32.24	19.61	51.85	-2.15	54.00	Average
3	*	5516.612	69.52	19.43	88.95	N/A	N/A	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5530MHz		

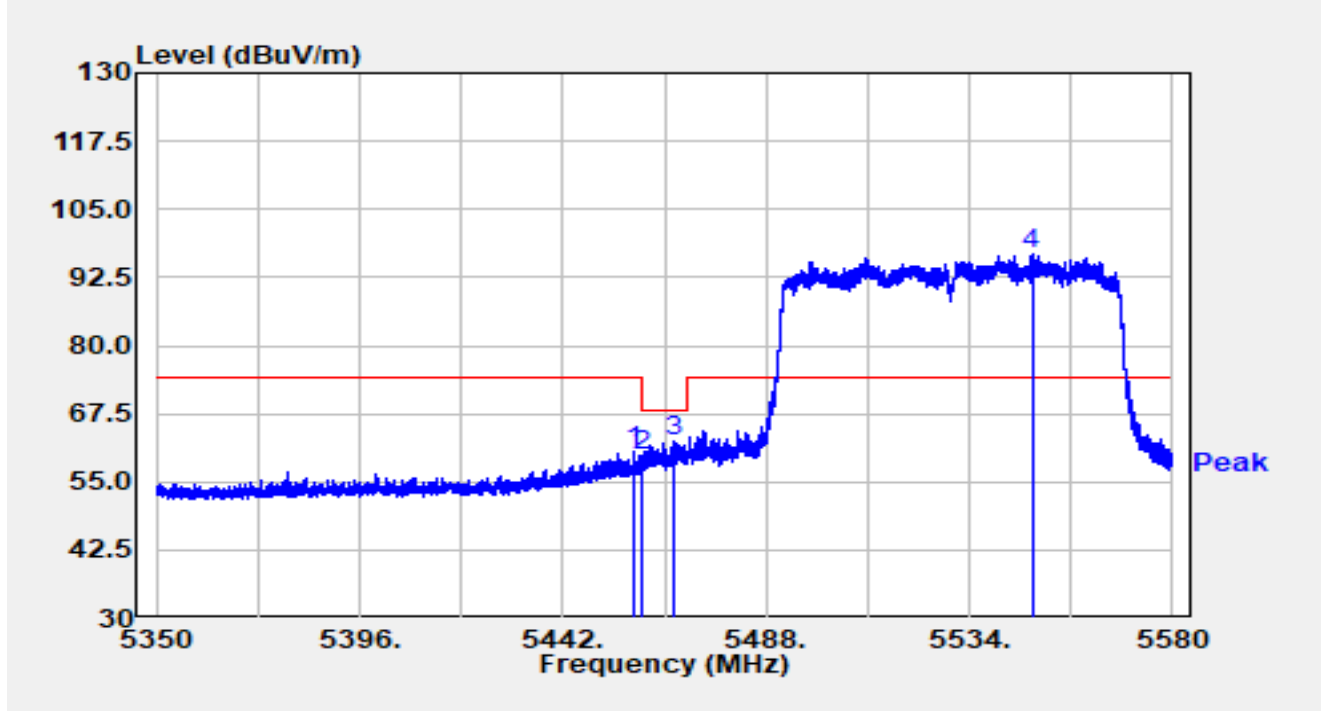


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1		5457.962	40.84	19.57	60.41	-13.59	74.00	Peak
2		5460.000	40.27	19.61	59.88	-8.32	68.20	Peak
3		5467.392	42.65	19.75	62.40	-5.80	68.20	Peak
4	*	5548.168	76.83	19.92	96.75	N/A	N/A	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).



Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5530MHz		

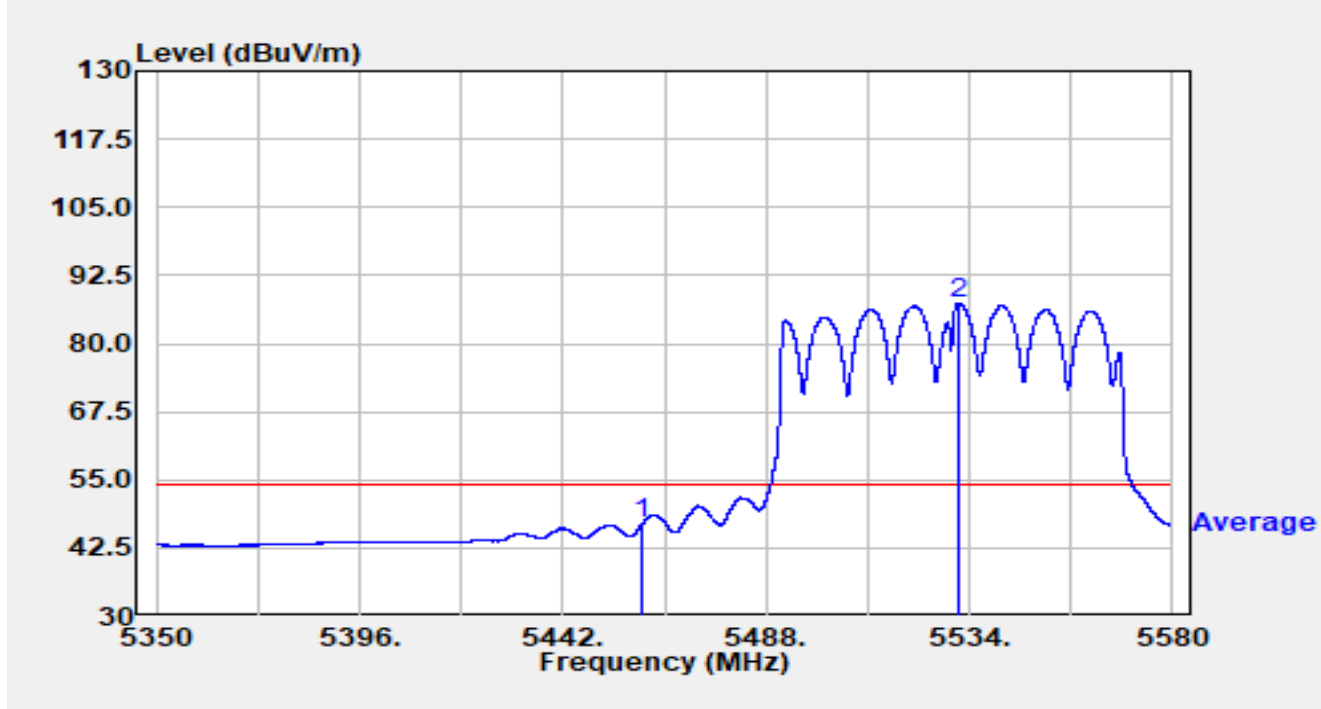


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5460.000	27.34	19.61	46.95	-7.05	54.00	Average
2	*	5531.562	67.70	19.59	87.29	N/A	N/A	Average

Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5610MHz		

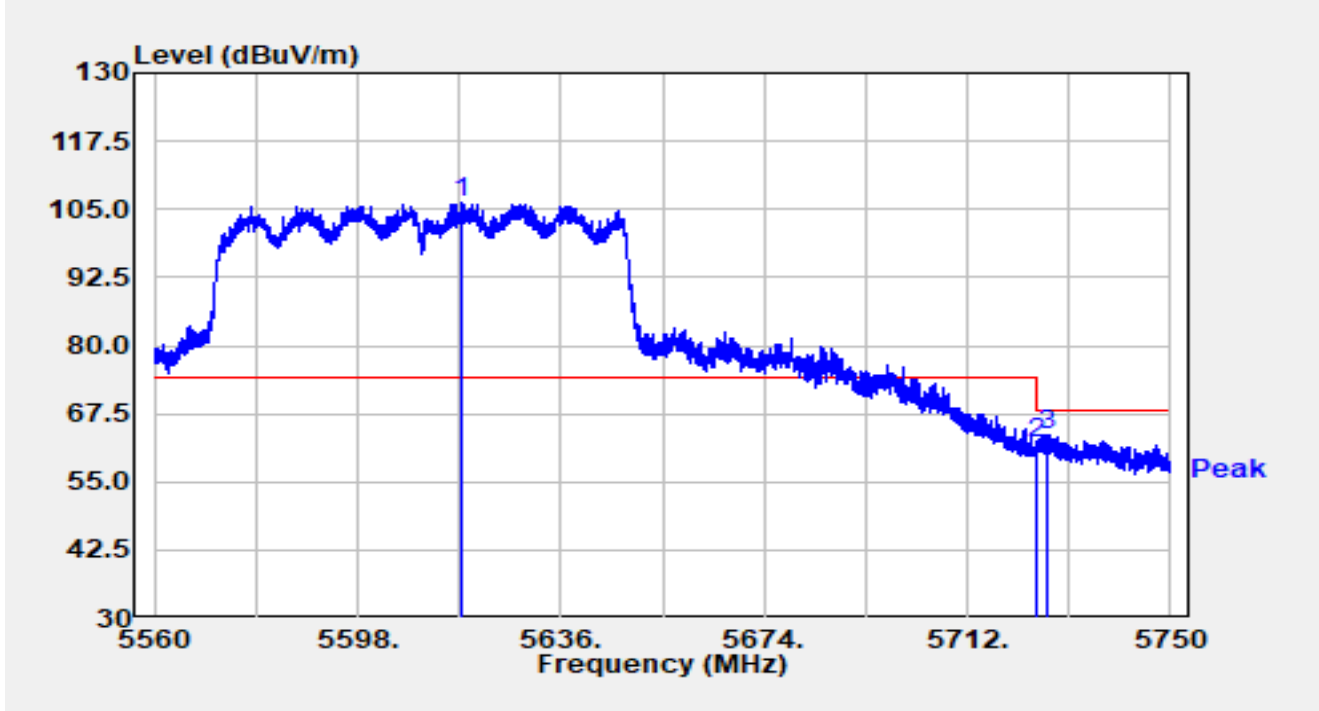


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	5617.437	85.84	20.26	106.10	N/A	N/A	Peak
2		5725.000	41.00	21.13	62.13	-6.07	68.20	Peak
3		5726.991	42.49	21.13	63.62	-4.58	68.20	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5610MHz		

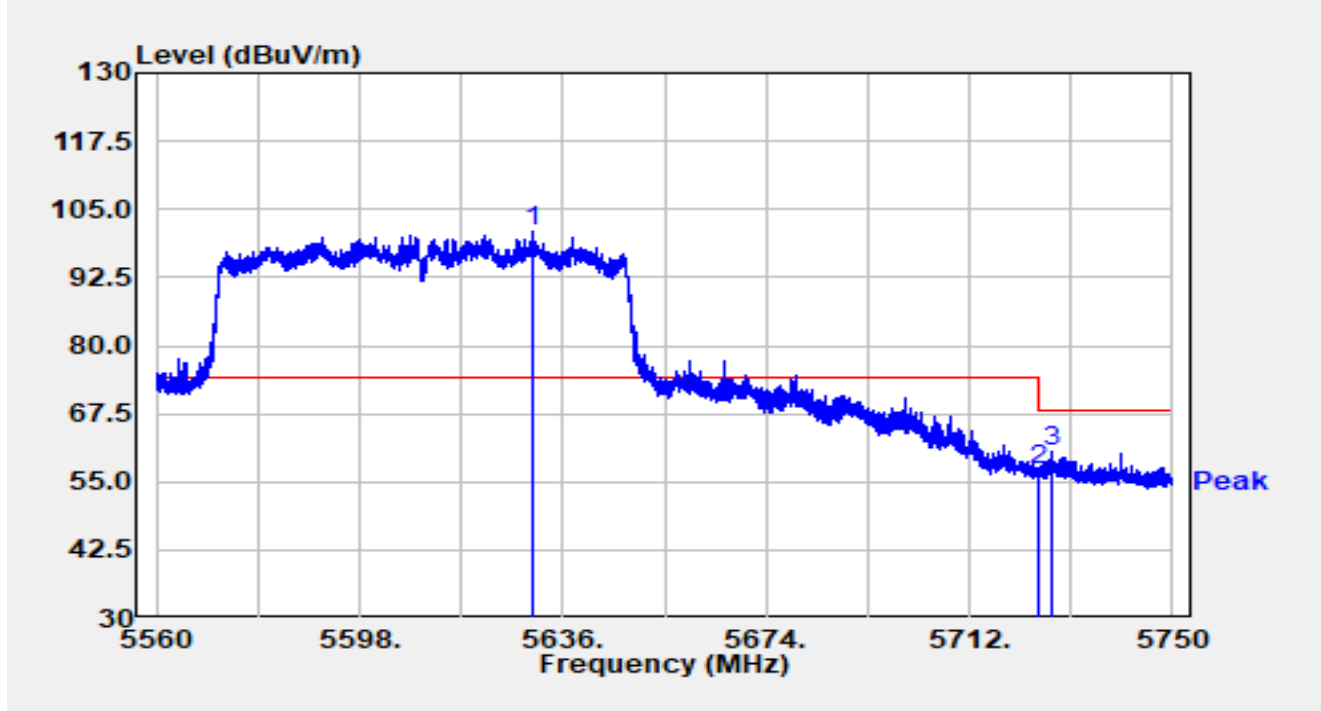


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5630.528	80.48	20.48	100.96	N/A	N/A	Peak
2		5725.000	36.00	21.13	57.13	-11.07	68.20	Peak
3		5727.504	39.54	21.13	60.67	-7.53	68.20	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5775MHz		

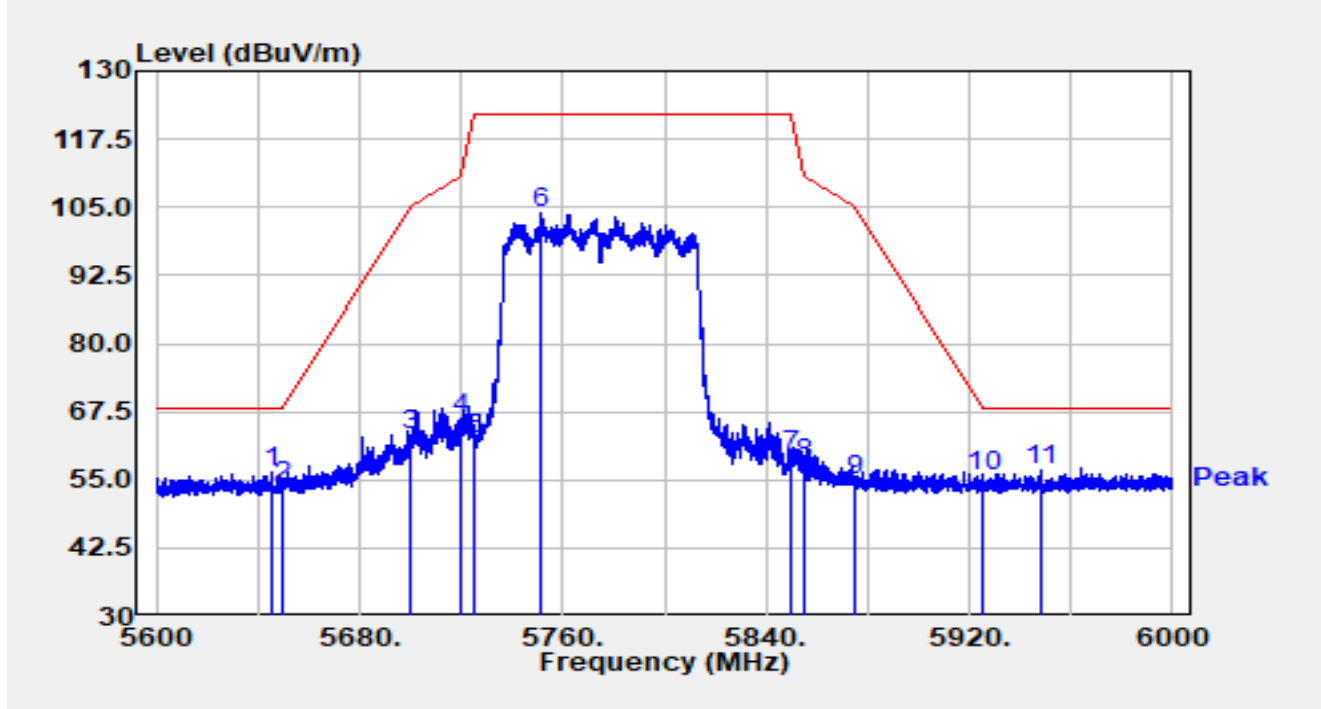


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1		5645.400	35.76	20.54	56.30	-11.90	68.20	Peak
2		5650.000	33.35	20.50	53.85	-14.35	68.20	Peak
3		5700.000	42.18	20.86	63.04	-42.16	105.20	Peak
4		5720.000	45.20	21.09	66.30	-44.50	110.80	Peak
5		5725.000	41.40	21.13	62.53	-59.67	122.20	Peak
6		5751.160	82.88	20.99	103.87	N/A	N/A	Peak
7		5850.000	38.03	21.41	59.44	-62.76	122.20	Peak
8		5855.000	36.55	21.46	58.01	-52.79	110.80	Peak
9		5875.000	33.31	21.51	54.82	-50.38	105.20	Peak
10		5925.000	34.30	21.51	55.81	-12.39	68.20	Peak
11	*	5947.920	35.08	21.60	56.67	-11.53	68.20	Peak

**Notes:**

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5775MHz		

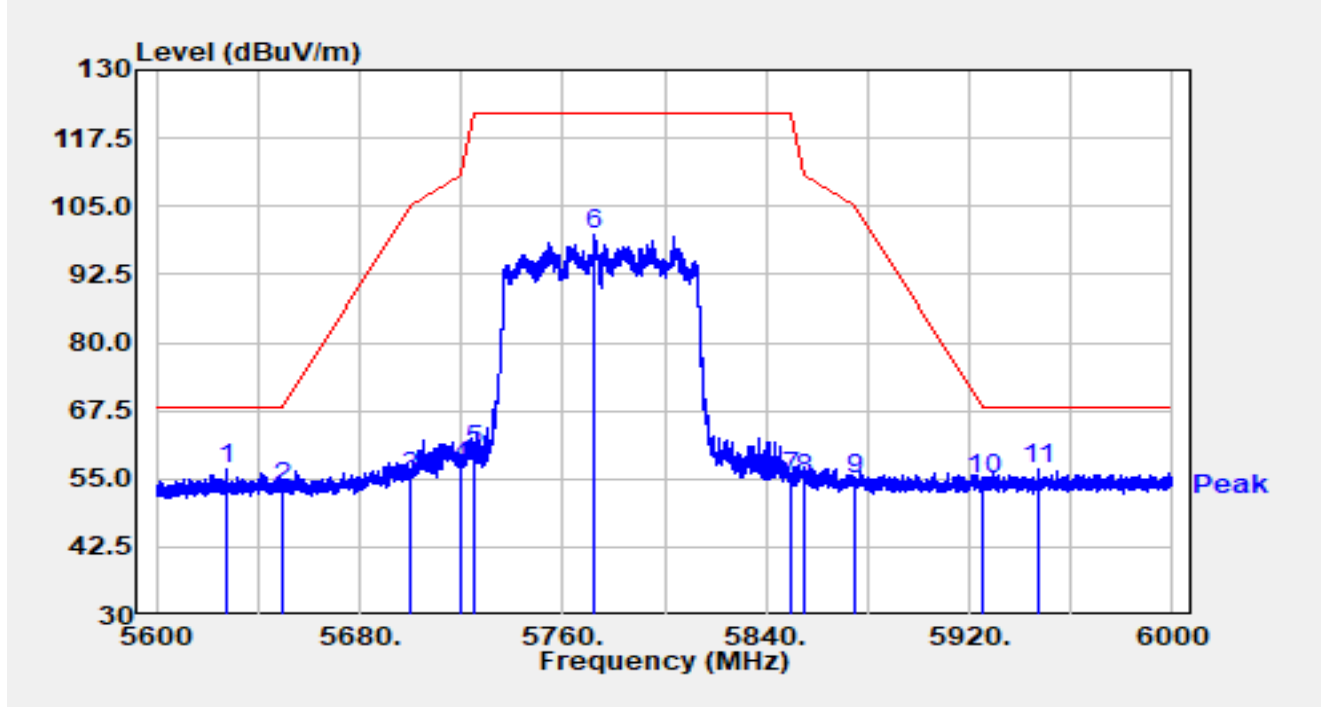


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5627.280	36.30	20.45	56.75	-11.45	68.20	Peak
2		5650.000	32.83	20.50	53.33	-14.87	68.20	Peak
3		5700.000	34.59	20.86	55.45	-49.75	105.20	Peak
4		5720.000	36.00	21.09	57.09	-53.71	110.80	Peak
5		5725.000	38.98	21.13	60.11	-62.09	122.20	Peak
6		5772.680	78.59	21.20	99.79	N/A	N/A	Peak
7		5850.000	33.88	21.41	55.29	-66.91	122.20	Peak
8		5855.000	33.43	21.46	54.89	-55.91	110.80	Peak
9		5875.000	33.33	21.51	54.84	-50.36	105.20	Peak
10		5925.000	33.41	21.51	54.92	-13.28	68.20	Peak
11		5947.280	35.09	21.60	56.68	-11.52	68.20	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5180MHz		

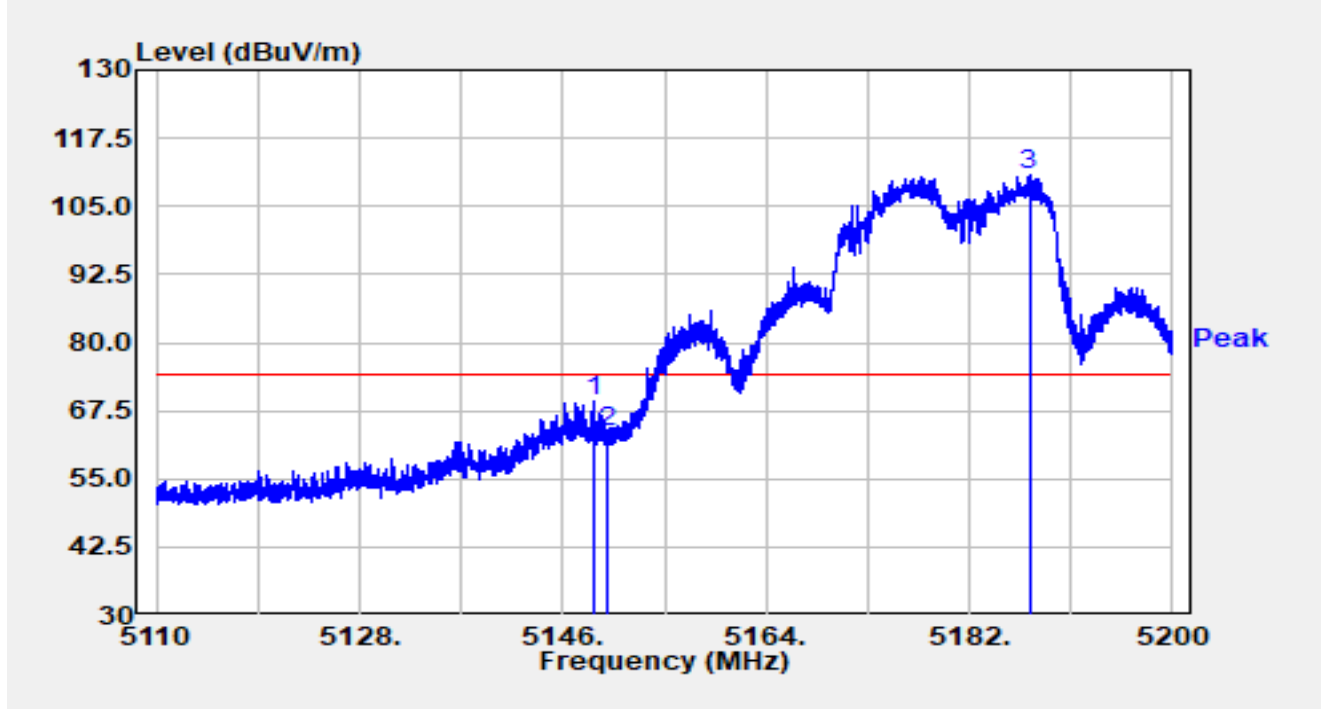


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1		5148.691	49.64	19.78	69.41	-4.59	74.00	Peak
2		5150.000	43.66	19.78	63.44	-10.56	74.00	Peak
3	*	5187.310	91.38	19.54	110.92	N/A	N/A	Peak

## Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5180MHz		

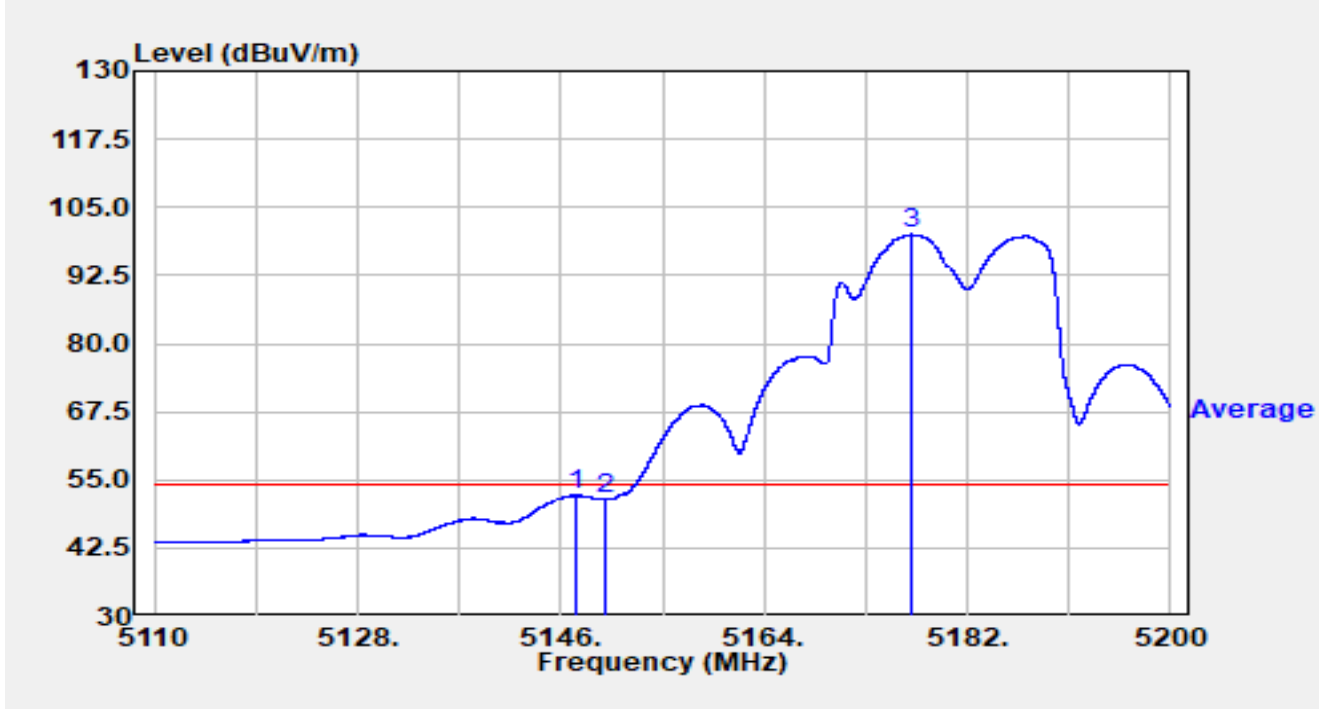


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5147.359	32.40	19.76	52.16	-1.84	54.00	Average
2		5150.000	31.69	19.78	51.47	-2.53	54.00	Average
3	*	5177.023	80.30	19.71	100.01	N/A	N/A	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5180MHz		

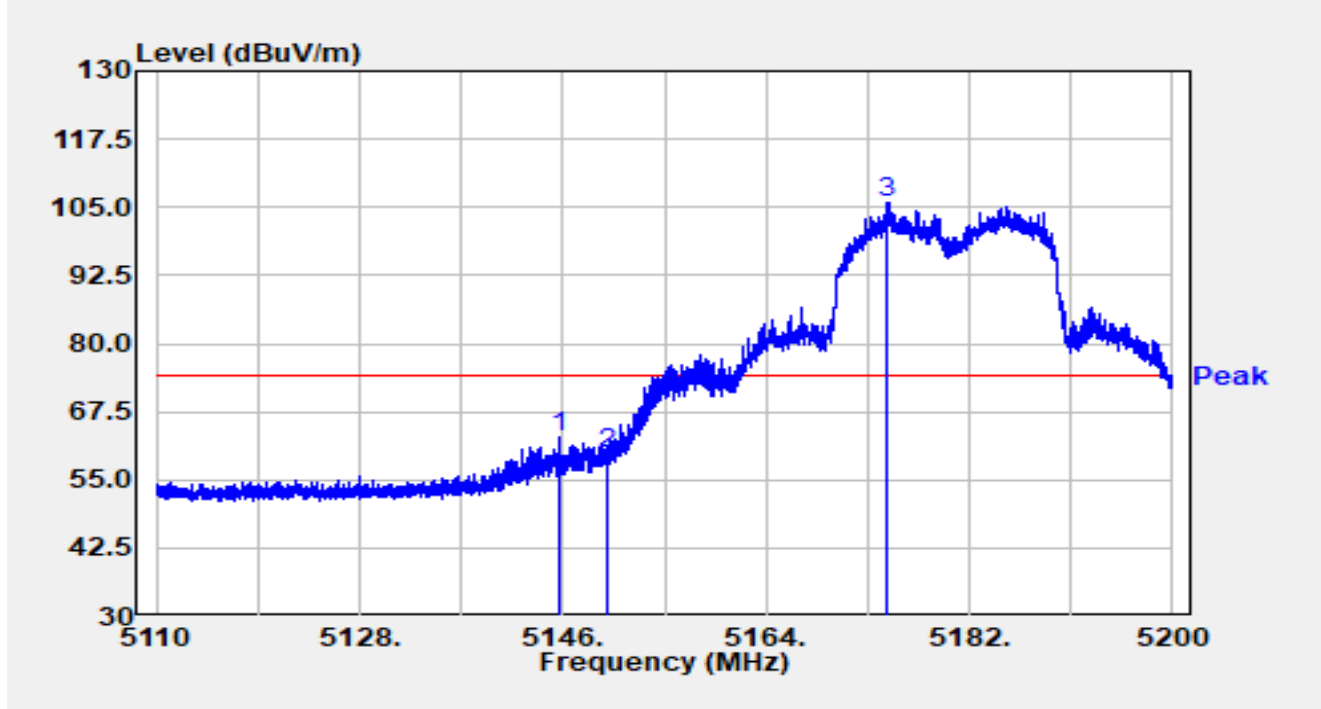


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1		5145.604	43.04	19.74	62.79	-11.21	74.00	Peak
2		5150.000	40.21	19.78	59.99	-14.01	74.00	Peak
3	*	5174.719	86.06	19.75	105.81	N/A	N/A	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).



Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5180MHz		

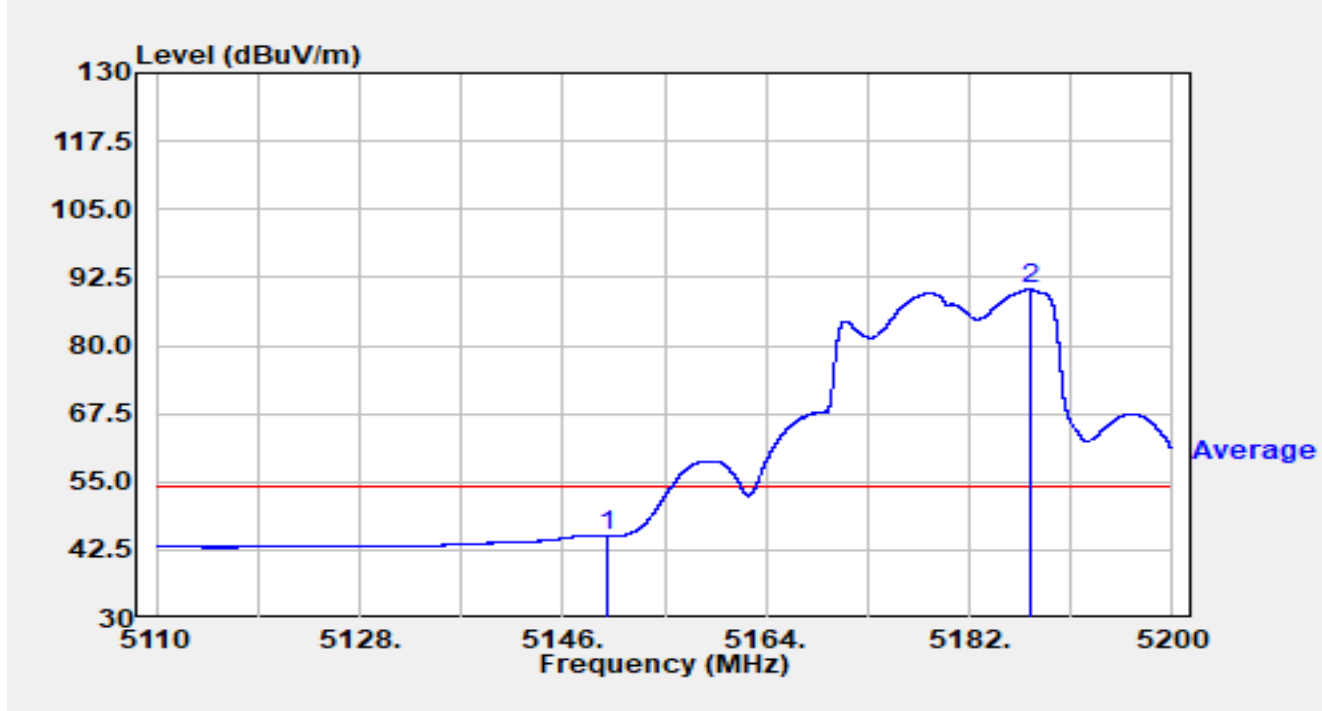


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1		5150.000	25.31	19.78	45.09	-8.91	54.00	Average
2	*	5187.427	70.76	19.53	90.30	N/A	N/A	Average

**Notes:**

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5320MHz		

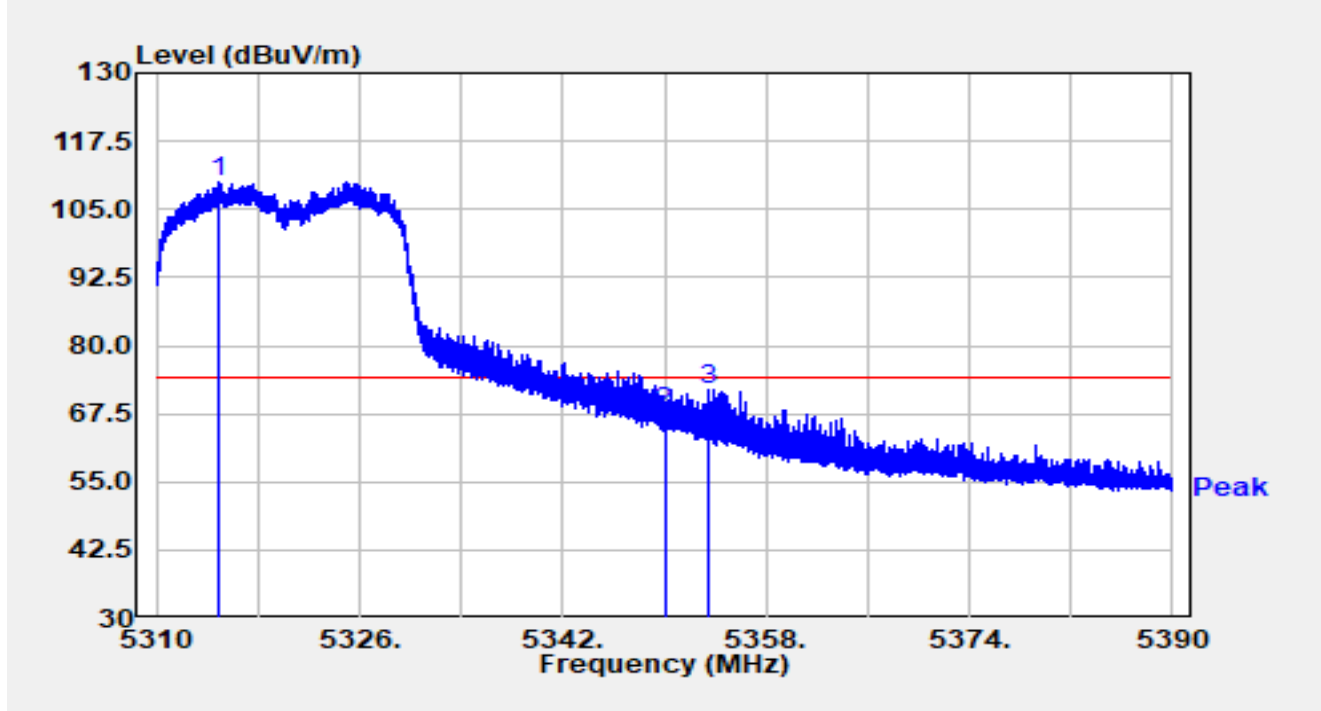


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5314.856	90.31	19.62	109.93	N/A	N/A	Peak
2		5350.000	48.34	19.32	67.66	-6.34	74.00	Peak
3		5353.432	52.59	19.27	71.86	-2.14	74.00	Peak

Notes:

1. "\*" , means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5320MHz		

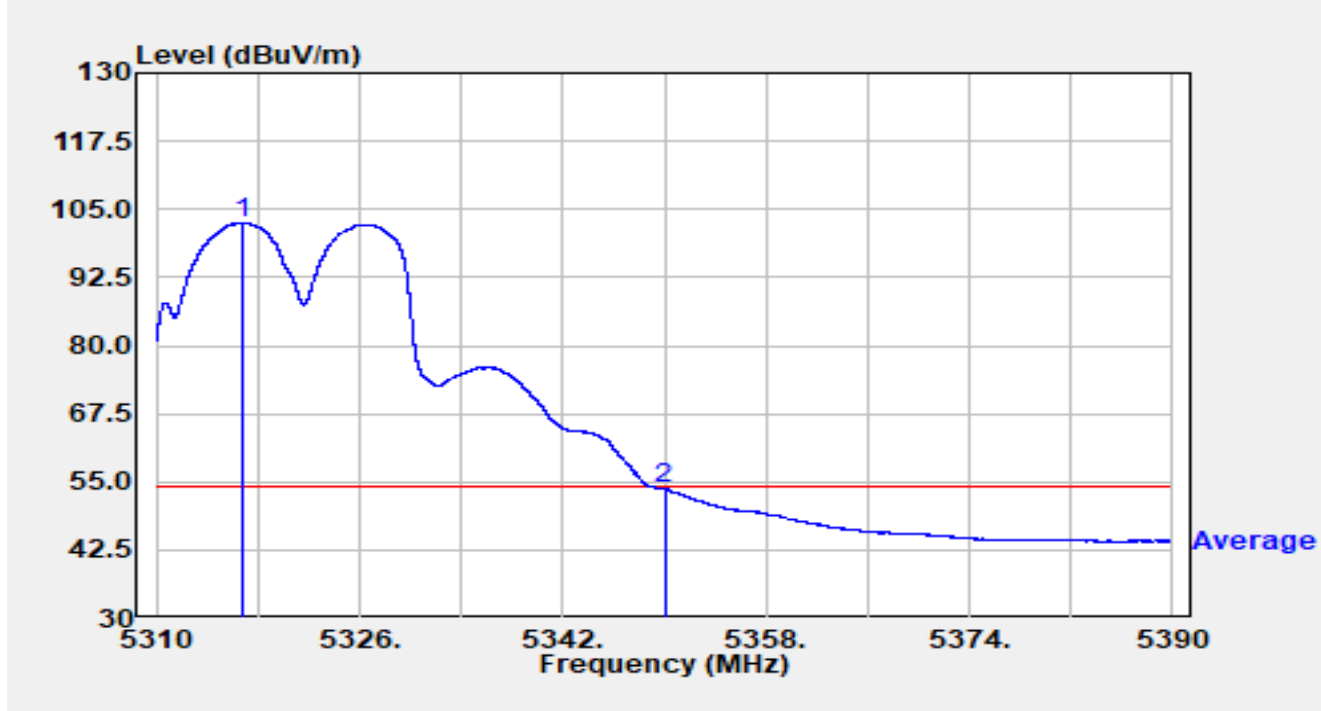


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5316.720	82.85	19.67	102.52	N/A	N/A	Average
2		5350.000	34.37	19.32	53.69	-0.31	54.00	Average

Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5320MHz		

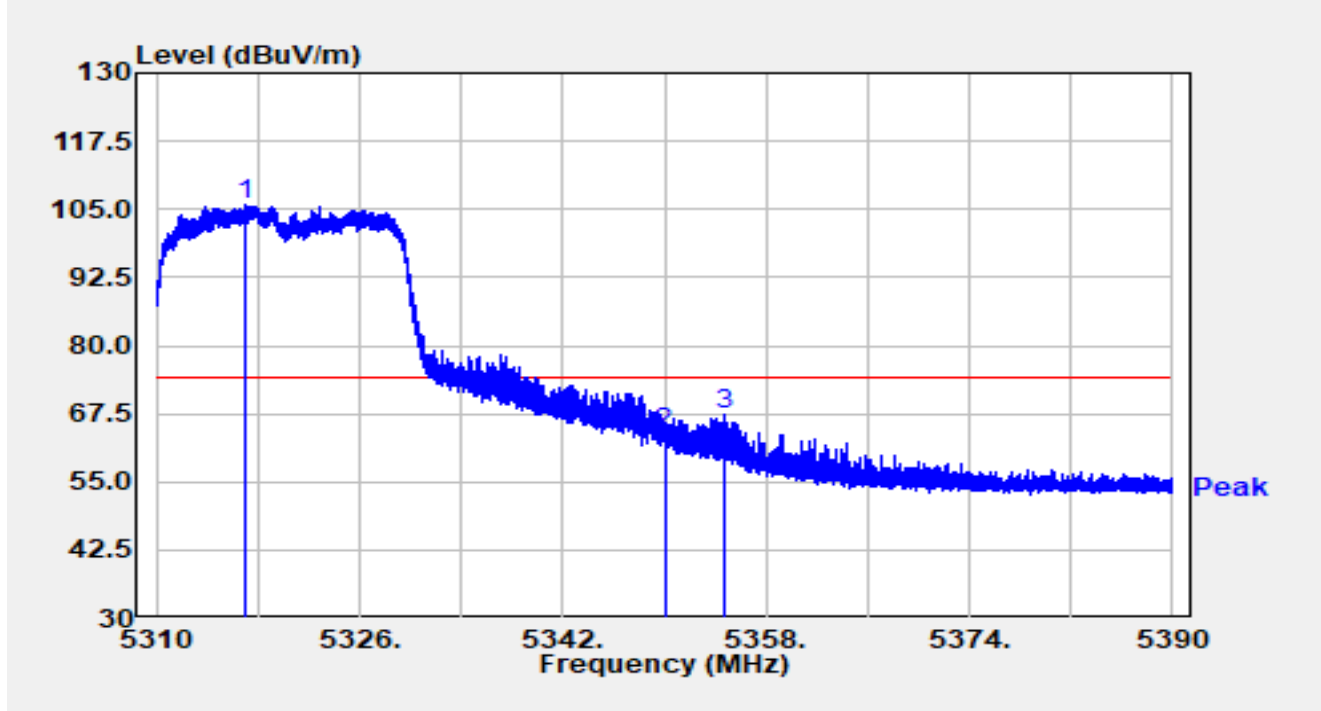


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5317.040	86.07	19.67	105.75	N/A	N/A	Peak
2		5350.000	44.54	19.32	63.86	-10.14	74.00	Peak
3		5354.704	48.14	19.26	67.40	-6.60	74.00	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5320MHz		

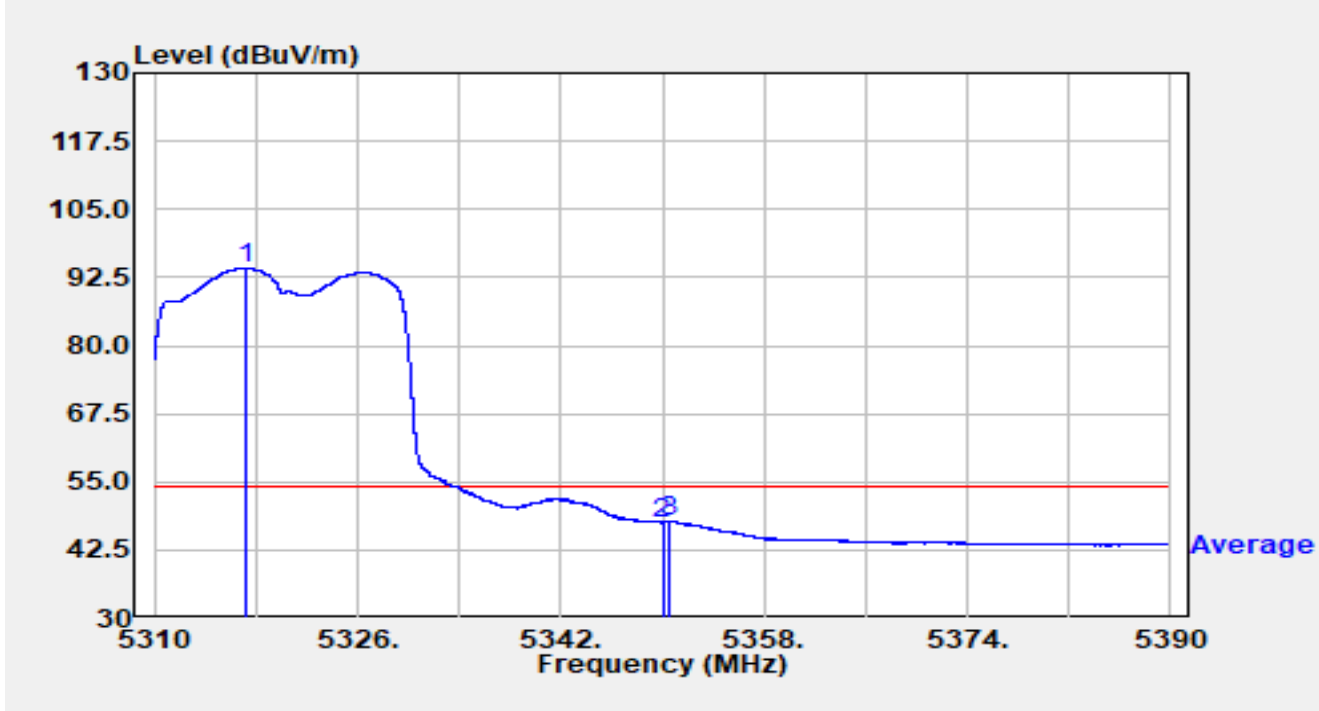


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5317.216	74.48	19.68	94.16	N/A	N/A	Average
2		5350.000	28.15	19.32	47.47	-6.53	54.00	Average
3		5350.520	28.48	19.31	47.79	-6.21	54.00	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5500MHz		

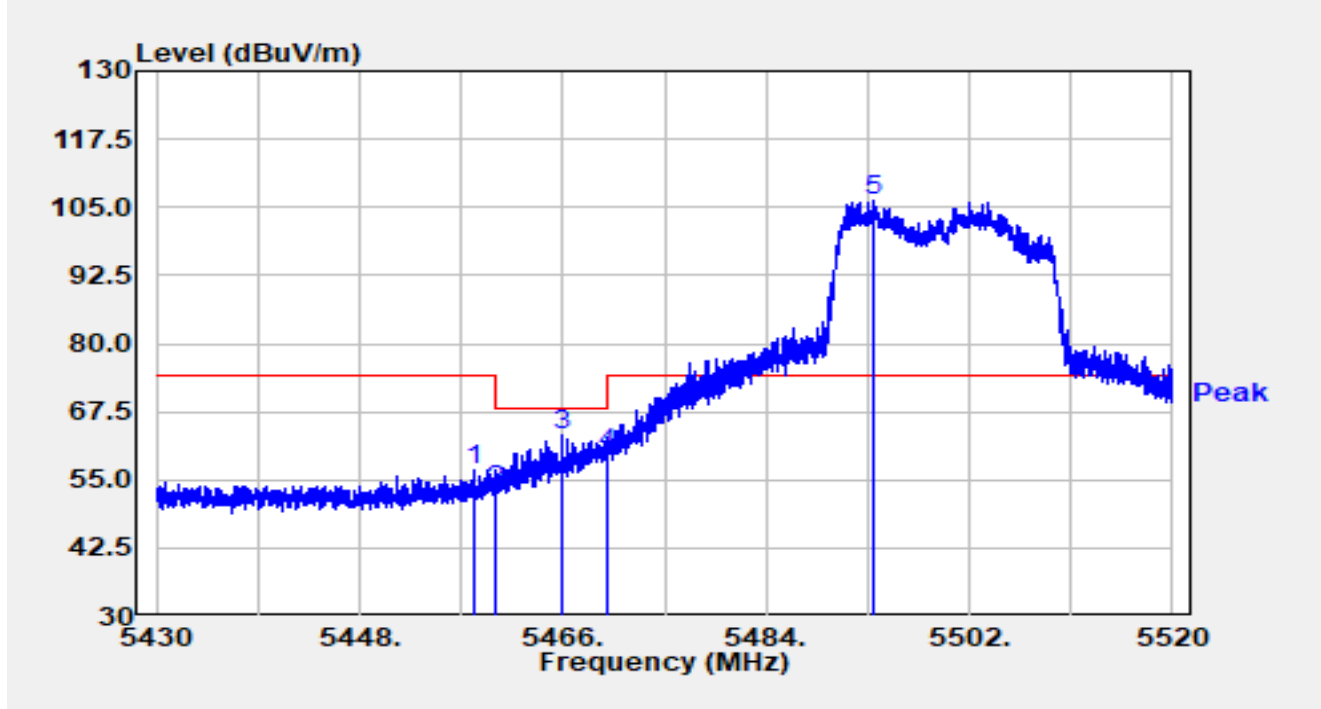


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.206	37.33	19.58	56.91	-17.09	74.00	Peak
2		5460.000	33.24	19.61	52.85	-15.35	68.20	Peak
3		5465.910	43.36	19.72	63.08	-5.12	68.20	Peak
4		5470.000	39.83	19.80	59.63	-8.57	68.20	Peak
5	*	5493.432	86.45	19.70	106.15	N/A	N/A	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5500MHz		

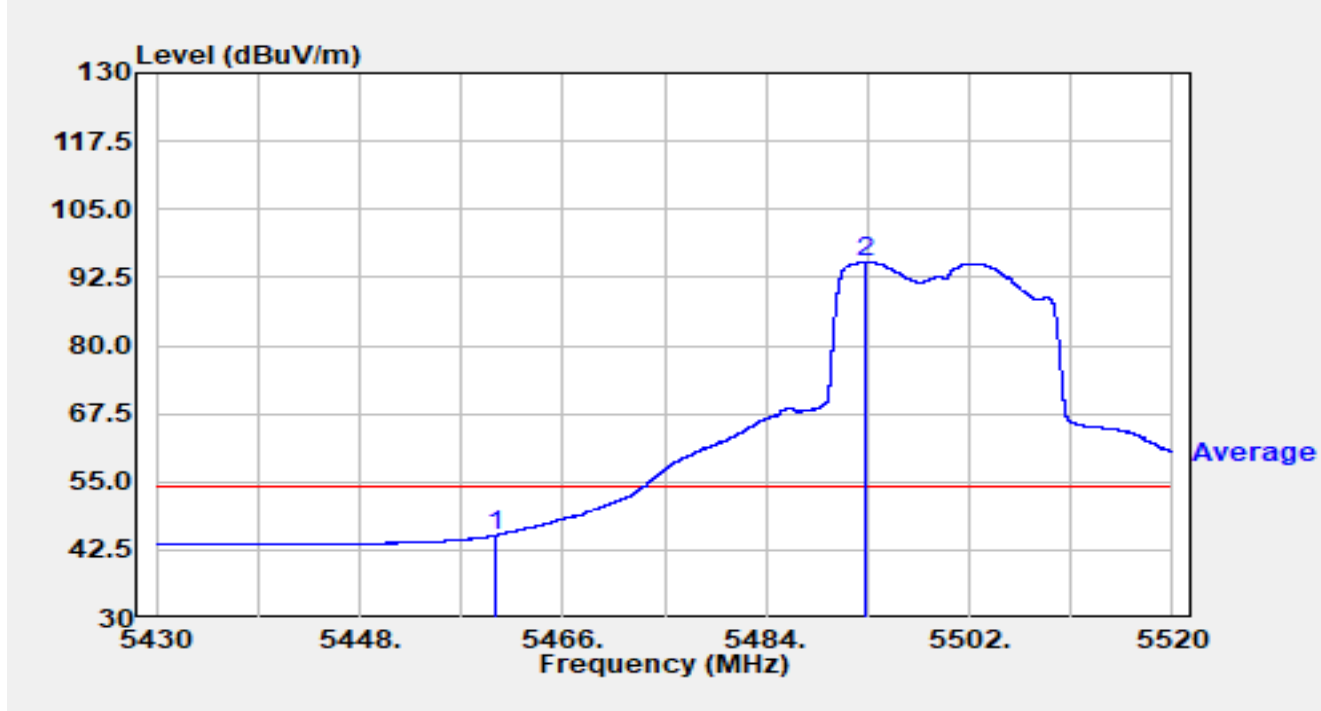


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1		5460.000	25.56	19.61	45.17	-8.83	54.00	Average
2	*	5492.847	75.70	19.71	95.41	N/A	N/A	Average

## Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5500MHz		

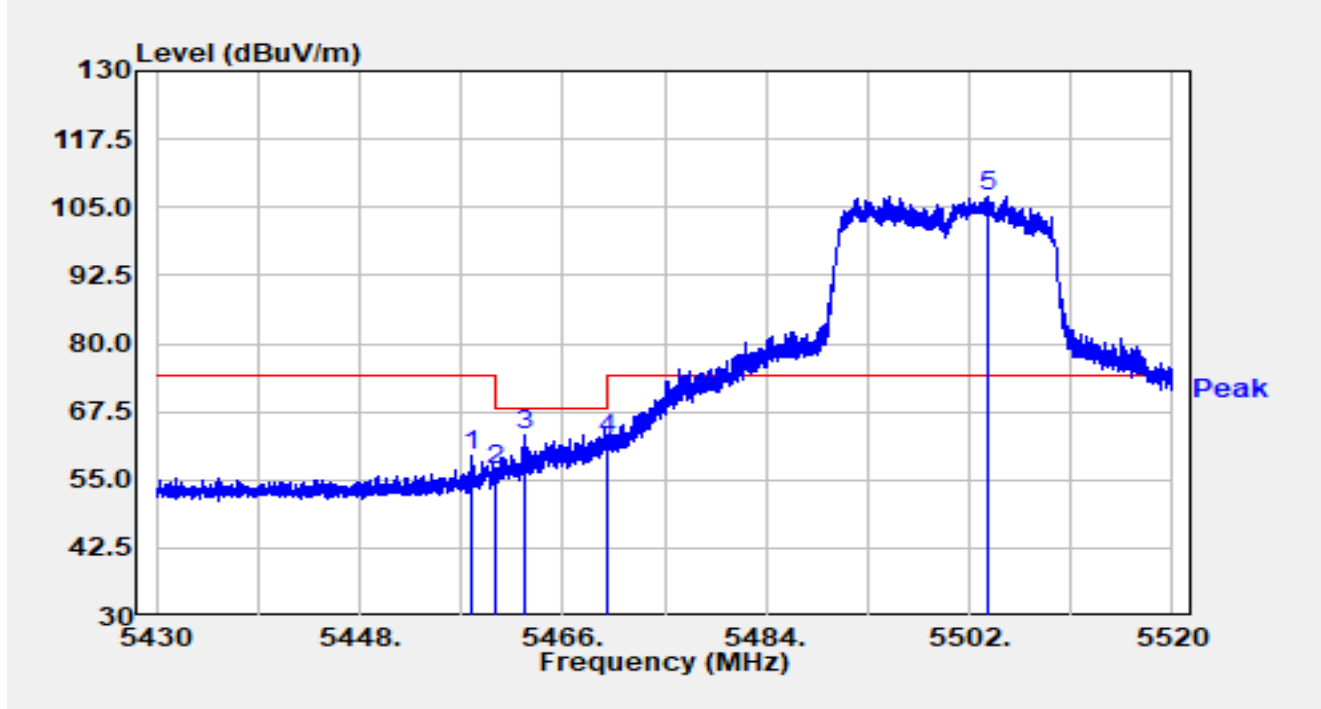


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5457.909	39.70	19.57	59.27	-14.73	74.00	Peak
2		5460.000	37.05	19.61	56.66	-11.54	68.20	Peak
3		5462.607	43.41	19.66	63.07	-5.13	68.20	Peak
4		5470.000	42.79	19.80	62.59	-5.61	68.20	Peak
5	*	5503.638	87.38	19.58	106.96	N/A	N/A	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).



Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5500MHz		

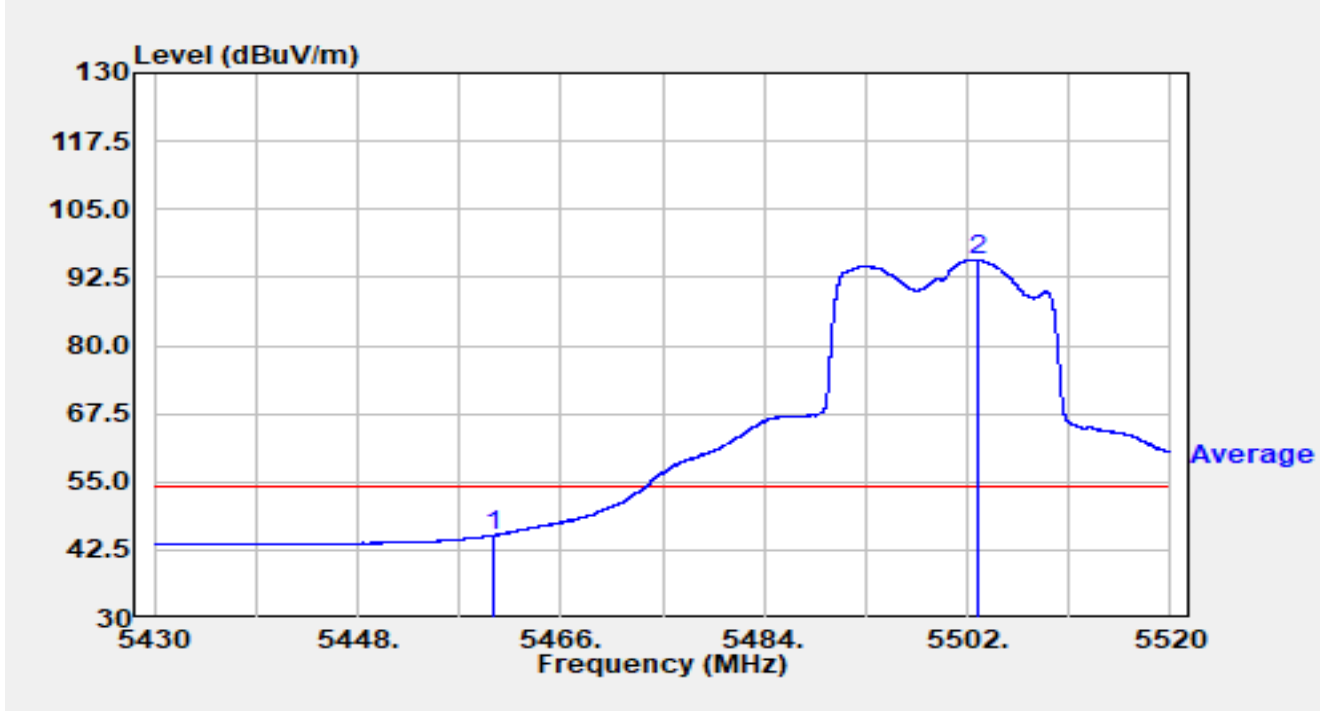


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5460.000	25.50	19.61	45.11	-8.89	54.00	Average
2	*	5502.972	76.10	19.59	95.68	N/A	N/A	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5700MHz		

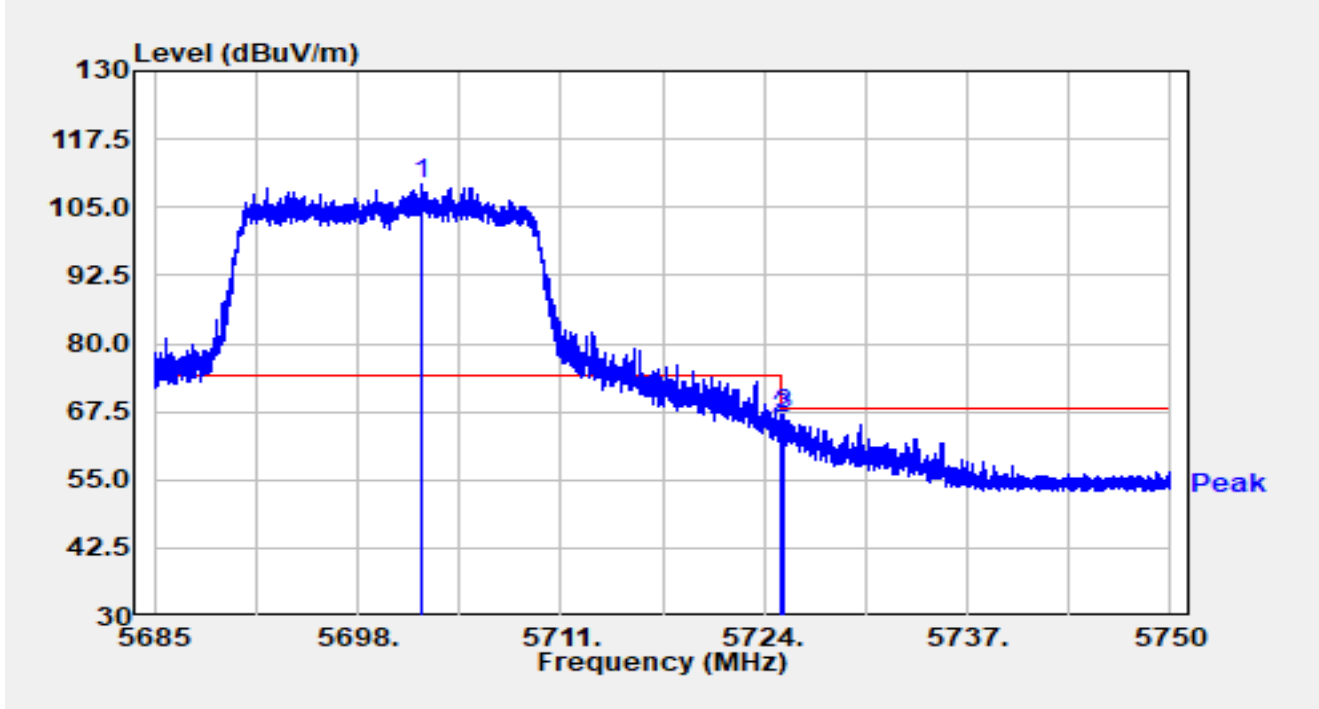


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5702.102	88.29	20.89	109.19	N/A	N/A	Peak
2		5725.000	44.96	21.13	66.10	-2.10	68.20	Peak
3		5725.229	45.76	21.14	66.89	-1.31	68.20	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5700MHz		

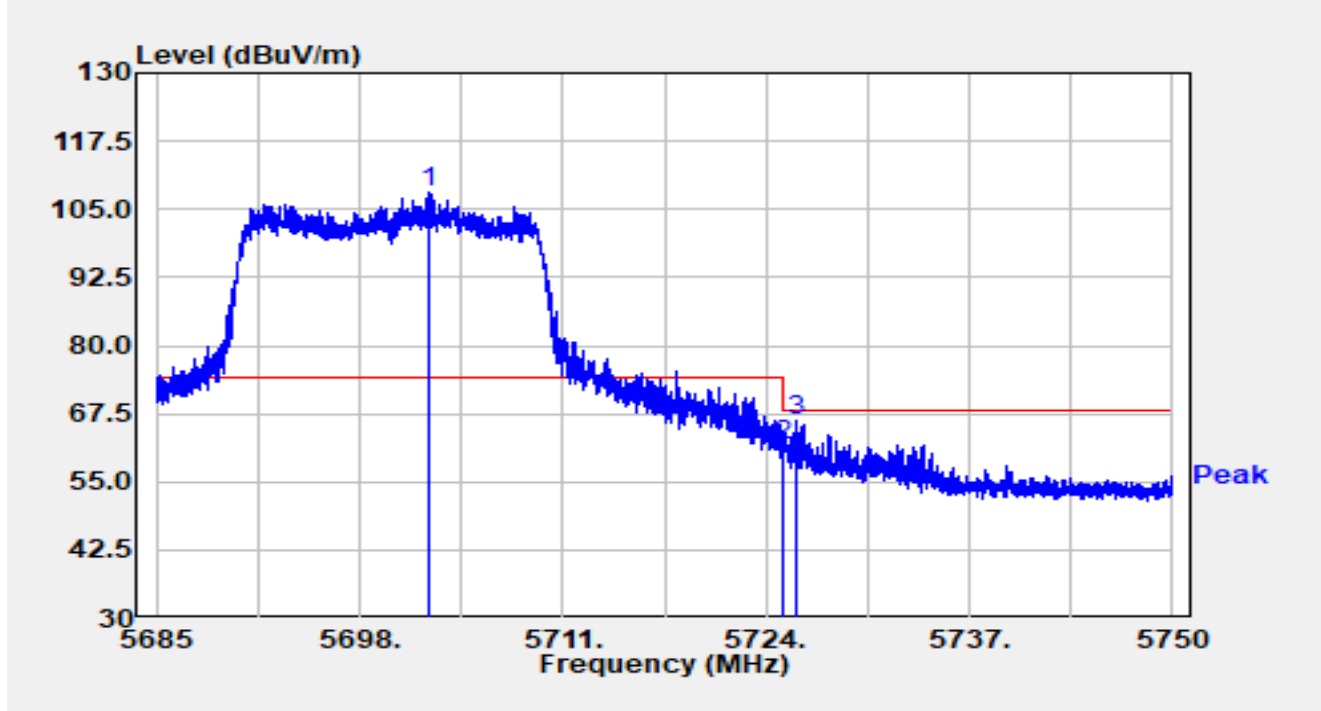


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	5702.511	87.15	20.90	108.05	N/A	N/A	Peak
2		5725.000	40.49	21.13	61.63	-6.57	68.20	Peak
3		5725.885	45.14	21.14	66.28	-1.92	68.20	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5745MHz		

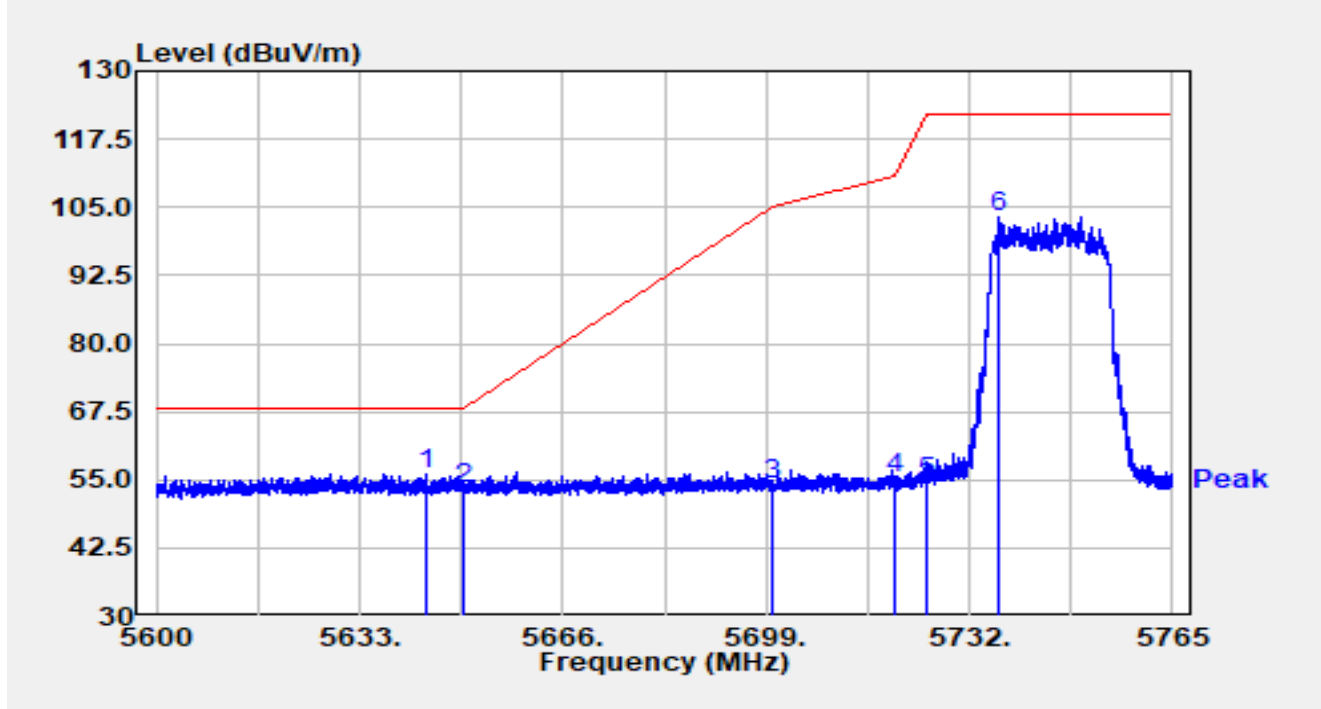


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5643.857	35.32	20.56	55.88	-12.32	68.20	Peak
2		5650.000	32.98	20.50	53.48	-14.72	68.20	Peak
3		5700.000	33.12	20.86	53.98	-51.22	105.20	Peak
4		5720.000	34.28	21.09	55.37	-55.43	110.80	Peak
5		5725.000	33.57	21.13	54.70	-67.50	122.20	Peak
6		5736.868	82.27	21.02	103.30	N/A	N/A	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5745MHz		

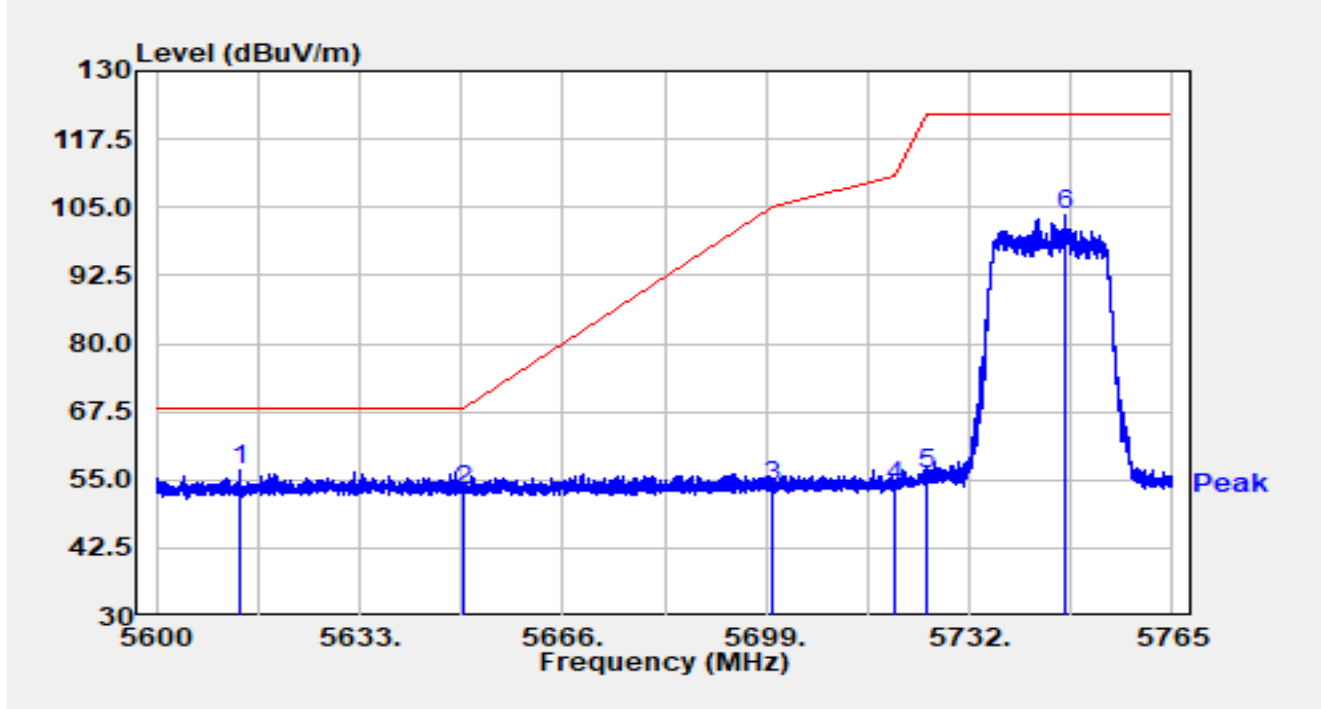


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5613.546	36.59	20.16	56.75	-11.45	68.20	Peak
2		5650.000	32.55	20.50	53.06	-15.14	68.20	Peak
3		5700.000	33.05	20.86	53.91	-51.29	105.20	Peak
4		5720.000	32.76	21.09	53.85	-56.95	110.80	Peak
5		5725.000	34.95	21.13	56.08	-66.12	122.20	Peak
6		5747.428	82.63	20.98	103.61	N/A	N/A	Peak

**Notes:**

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5825MHz		

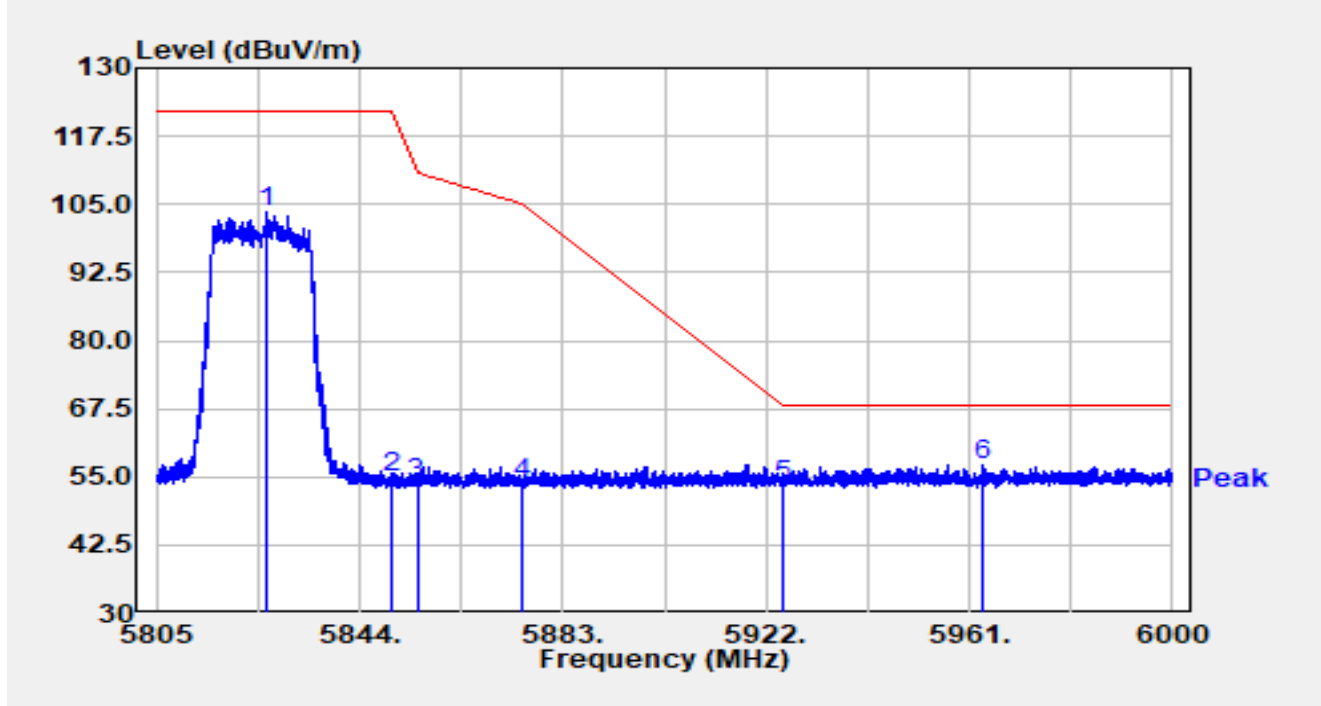


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5826.177	82.35	21.28	103.63	N/A	N/A	Peak
2		5850.000	33.52	21.41	54.93	-67.27	122.20	Peak
3		5855.000	32.48	21.46	53.94	-56.86	110.80	Peak
4		5875.000	32.19	21.51	53.70	-51.50	105.20	Peak
5		5925.000	32.04	21.51	53.55	-14.65	68.20	Peak
6	*	5963.418	35.76	21.58	57.35	-10.85	68.20	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5825MHz		

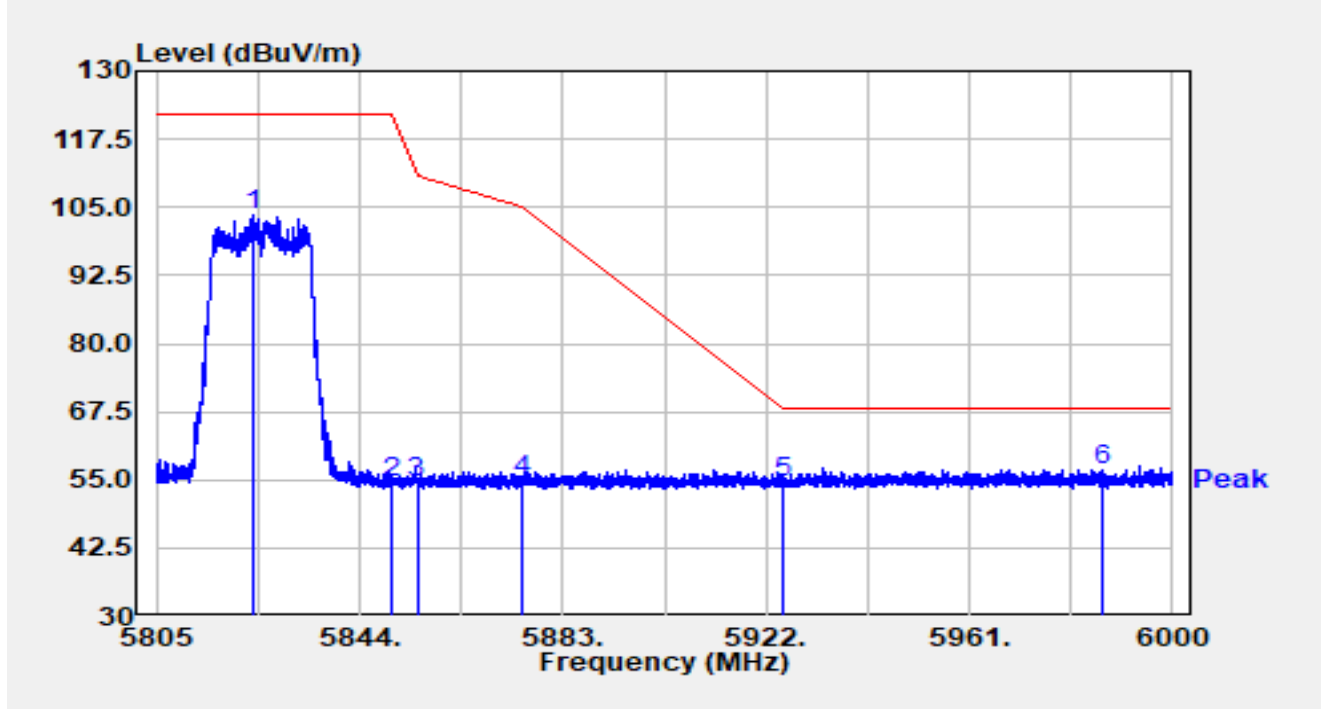


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5823.701	82.24	21.30	103.54	N/A	N/A	Peak
2		5850.000	33.04	21.41	54.45	-67.75	122.20	Peak
3		5855.000	33.01	21.46	54.47	-56.33	110.80	Peak
4		5875.000	33.38	21.51	54.89	-50.31	105.20	Peak
5		5925.000	32.96	21.51	54.47	-13.73	68.20	Peak
6	*	5986.447	35.28	21.61	56.89	-11.31	68.20	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5190MHz		

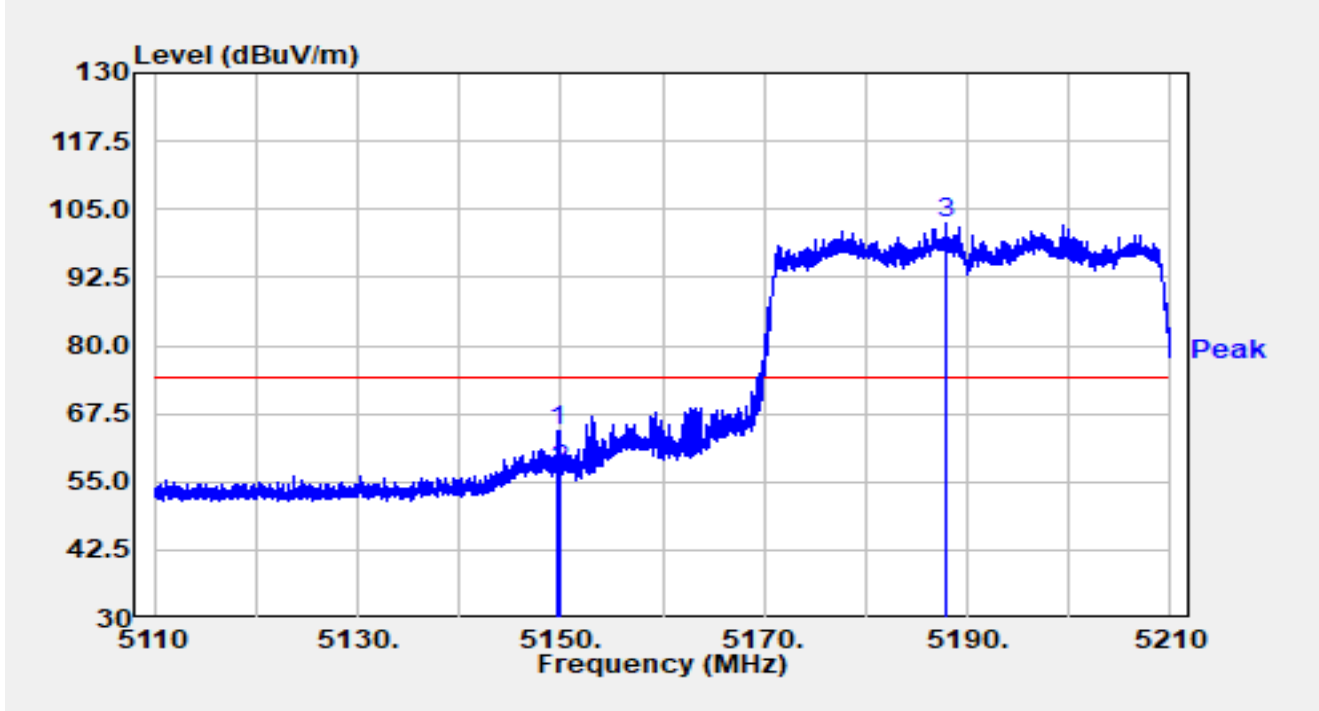


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1		5149.780	44.58	19.78	64.36	-9.64	74.00	Peak
2		5150.000	37.28	19.78	57.06	-16.94	74.00	Peak
3	*	5187.890	82.82	19.52	102.34	N/A	N/A	Peak

## Notes:

- "\*" means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).



Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5190MHz		

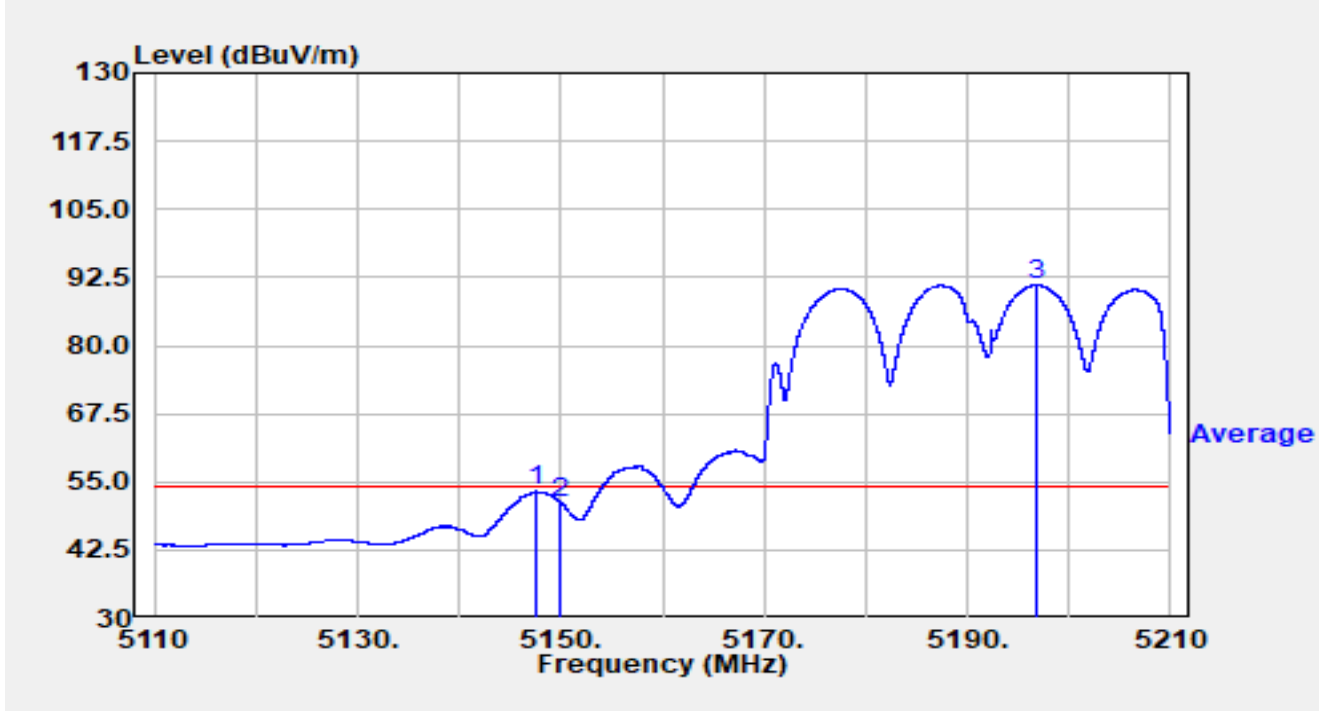


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5147.630	33.45	19.77	53.22	-0.78	54.00	Average
2		5150.000	31.48	19.78	51.26	-2.74	54.00	Average
3	*	5196.770	71.73	19.34	91.07	N/A	N/A	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5190MHz		

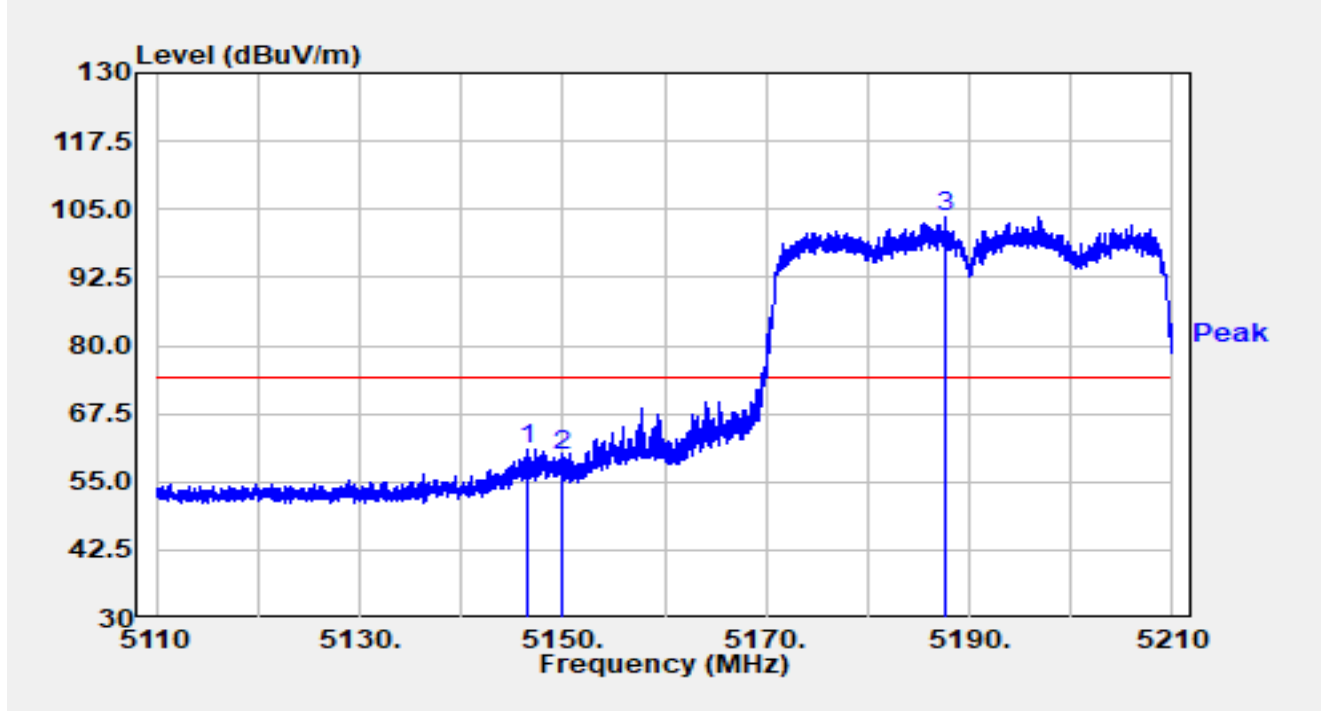


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1		5146.540	41.30	19.75	61.05	-12.95	74.00	Peak
2		5150.000	40.18	19.78	59.95	-14.05	74.00	Peak
3	*	5187.550	84.18	19.53	103.71	N/A	N/A	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5190MHz		

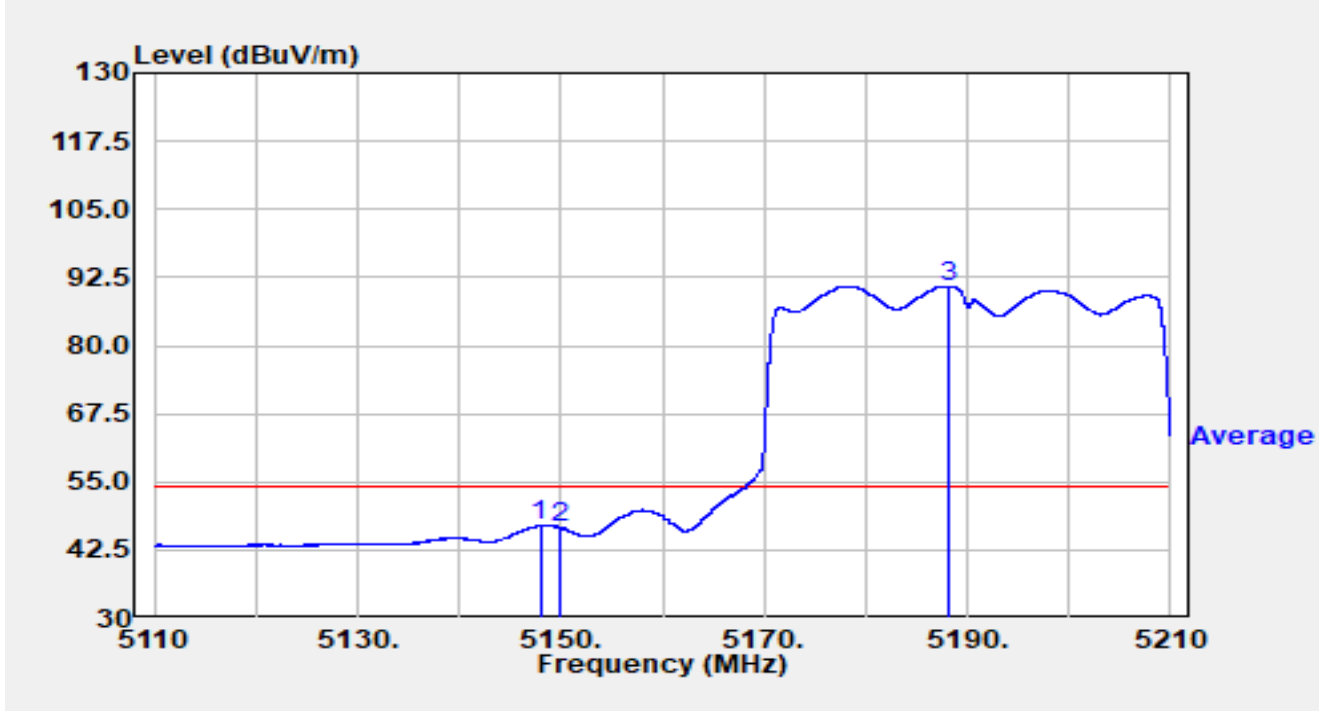


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5147.960	27.26	19.77	47.03	-6.97	54.00	Average
2		5150.000	26.90	19.78	46.67	-7.33	54.00	Average
3	*	5188.200	71.41	19.52	90.93	N/A	N/A	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5310MHz		

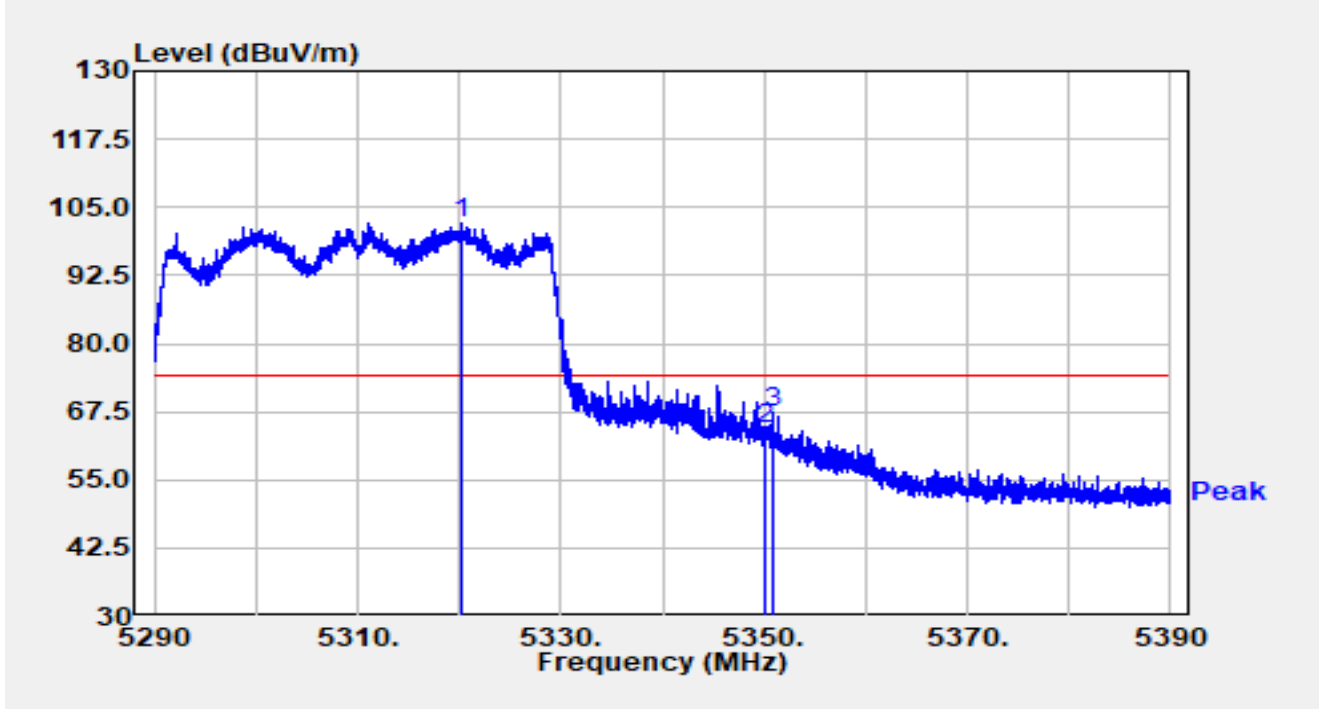


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	5320.120	82.21	19.71	101.92	N/A	N/A	Peak
2		5350.000	45.04	19.32	64.37	-9.63	74.00	Peak
3		5350.970	48.10	19.30	67.40	-6.60	74.00	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5310MHz		

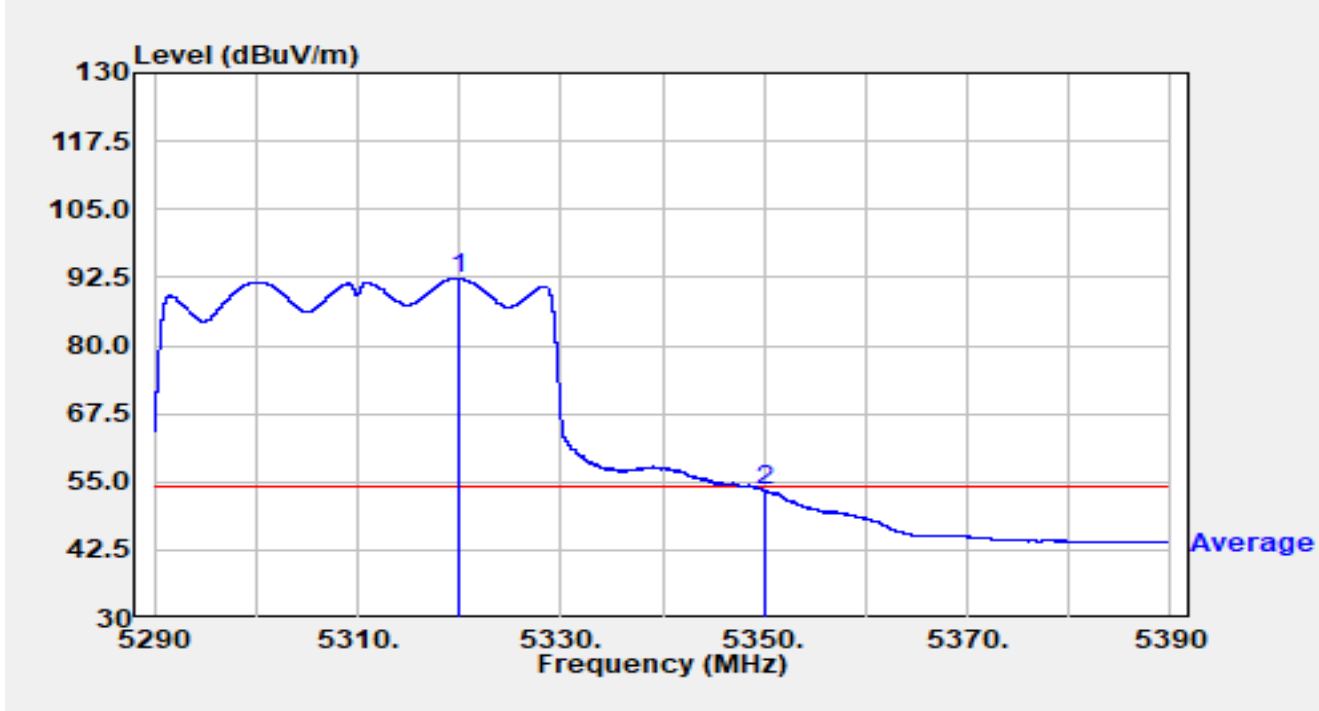


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	5319.860	72.61	19.71	92.32	N/A	N/A	Average
2		5350.000	34.22	19.32	53.55	-0.45	54.00	Average

## Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5310MHz		

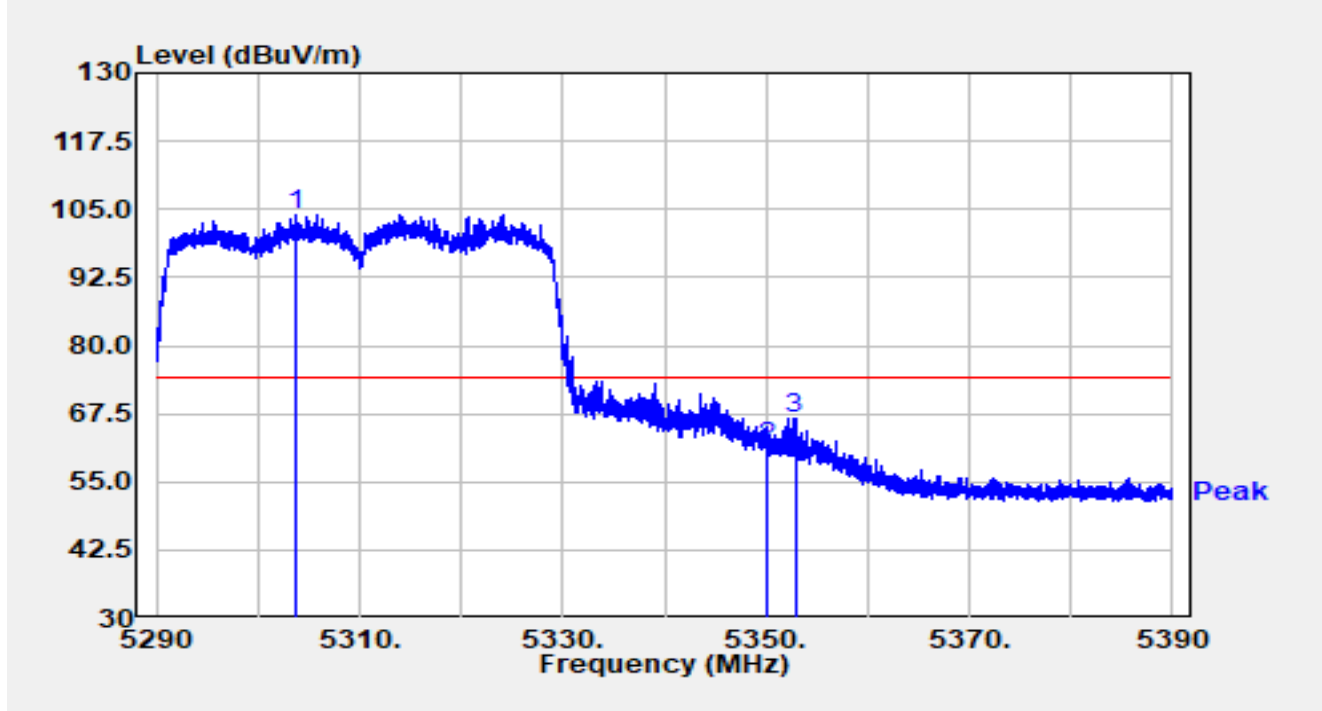


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	5303.720	84.73	19.39	104.12	N/A	N/A	Peak
2		5350.000	42.13	19.32	61.46	-12.54	74.00	Peak
3		5352.840	47.40	19.27	66.67	-7.33	74.00	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5310MHz		

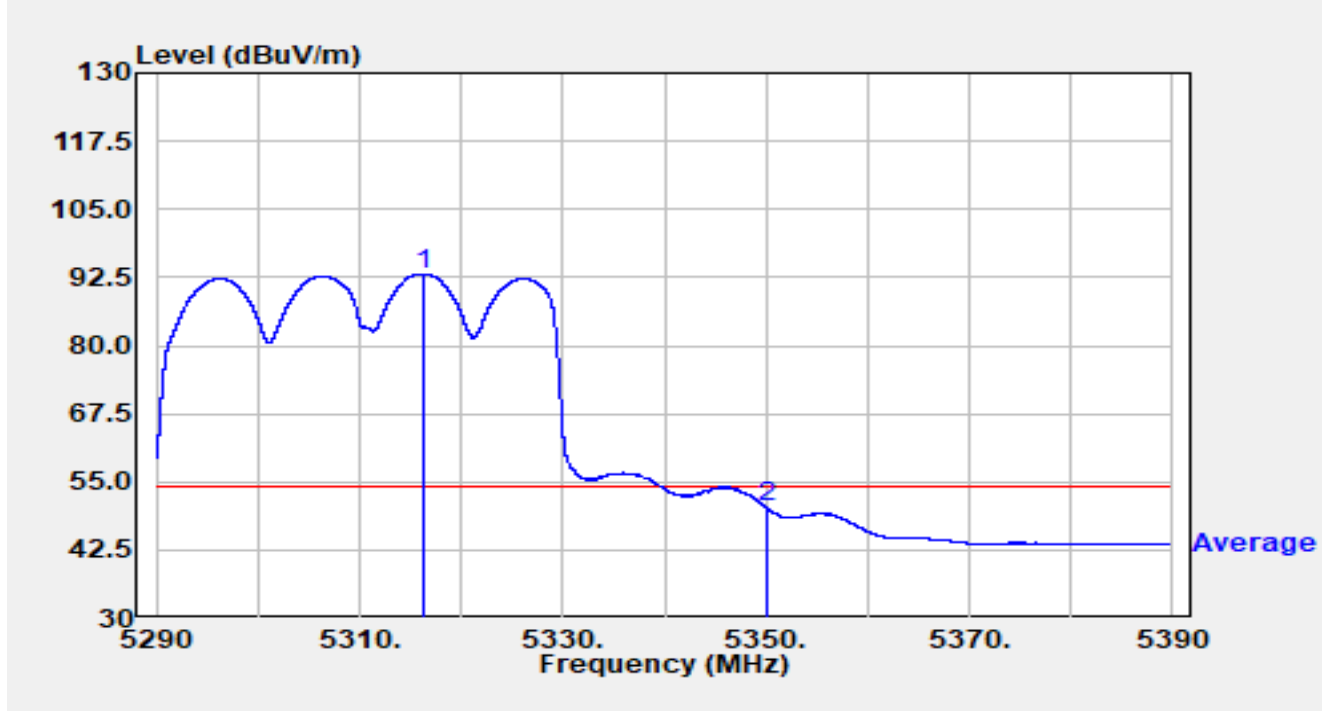


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5316.360	73.52	19.66	93.17	N/A	N/A	Average
2		5350.000	31.02	19.32	50.35	-3.65	54.00	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5510MHz		

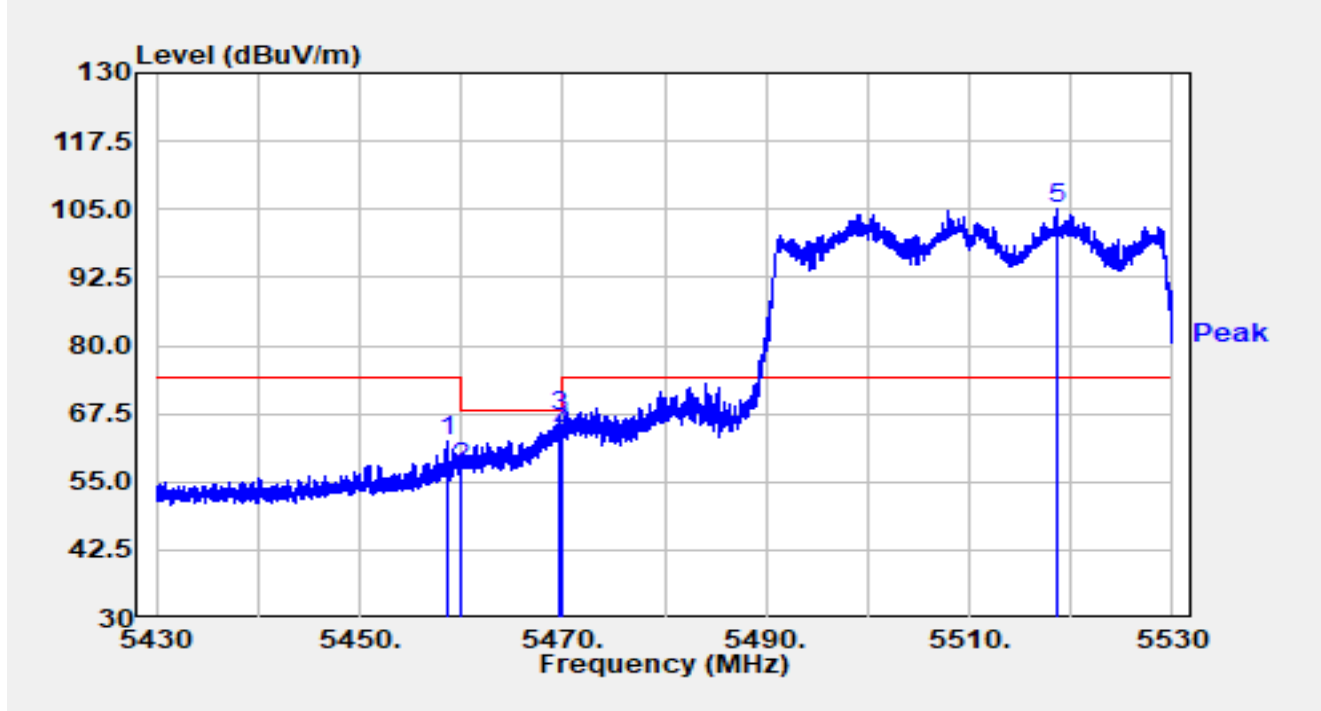


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.690	42.99	19.59	62.57	-11.43	74.00	Peak
2		5460.000	37.98	19.61	57.59	-10.61	68.20	Peak
3		5469.560	47.36	19.79	67.15	-1.05	68.20	Peak
4		5470.000	44.27	19.80	64.06	-4.14	68.20	Peak
5	*	5518.620	85.59	19.42	105.01	N/A	N/A	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).



Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5510MHz		

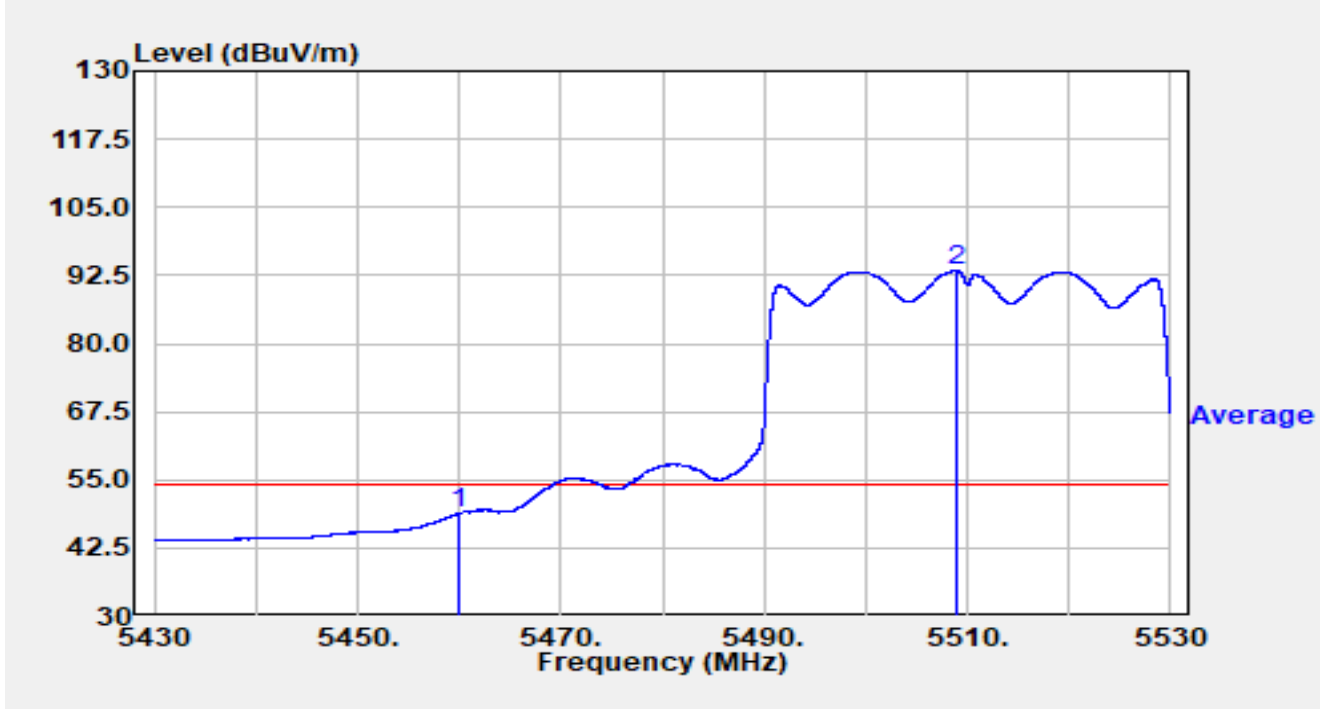


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5460.000	29.08	19.61	48.70	-5.30	54.00	Average
2	*	5509.010	73.88	19.50	93.38	N/A	N/A	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5510MHz		

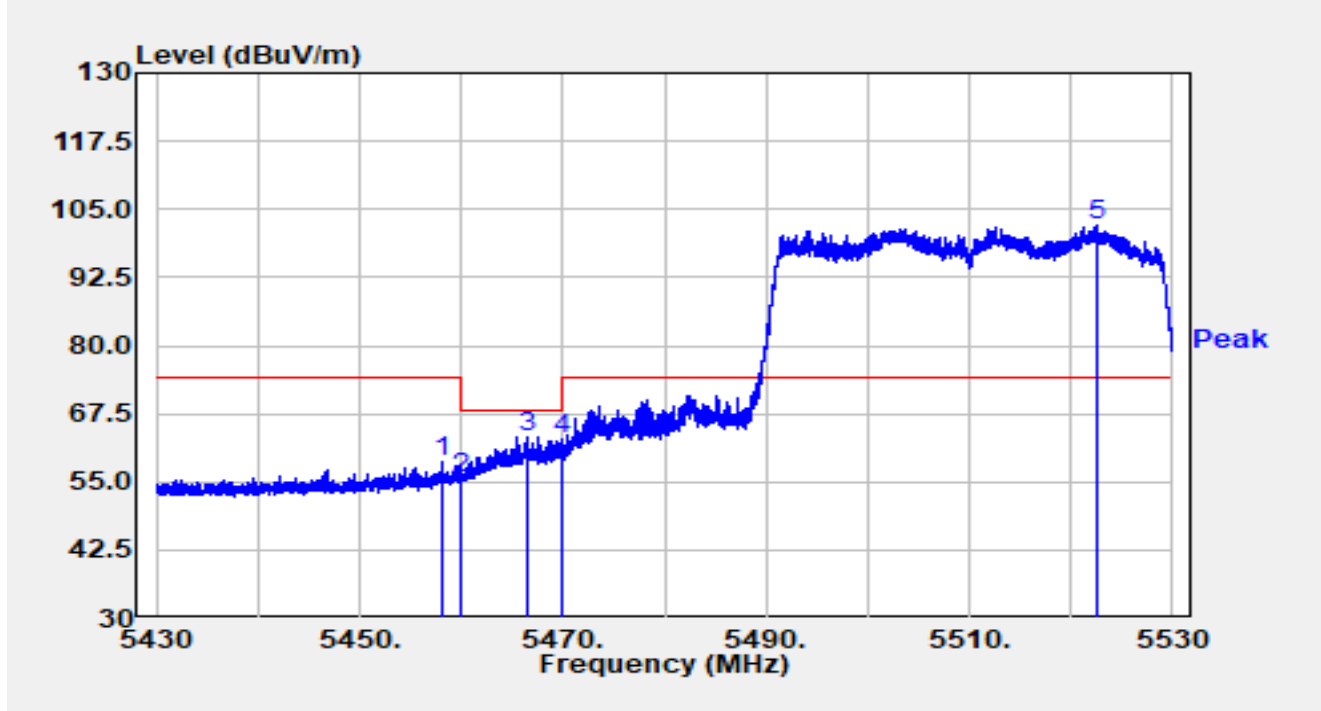


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.030	39.09	19.57	58.66	-15.34	74.00	Peak
2		5460.000	36.03	19.61	55.64	-12.56	68.20	Peak
3		5466.580	43.64	19.73	63.37	-4.83	68.20	Peak
4		5470.000	42.86	19.80	62.66	-5.54	68.20	Peak
5	*	5522.610	82.59	19.41	102.00	N/A	N/A	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5510MHz		

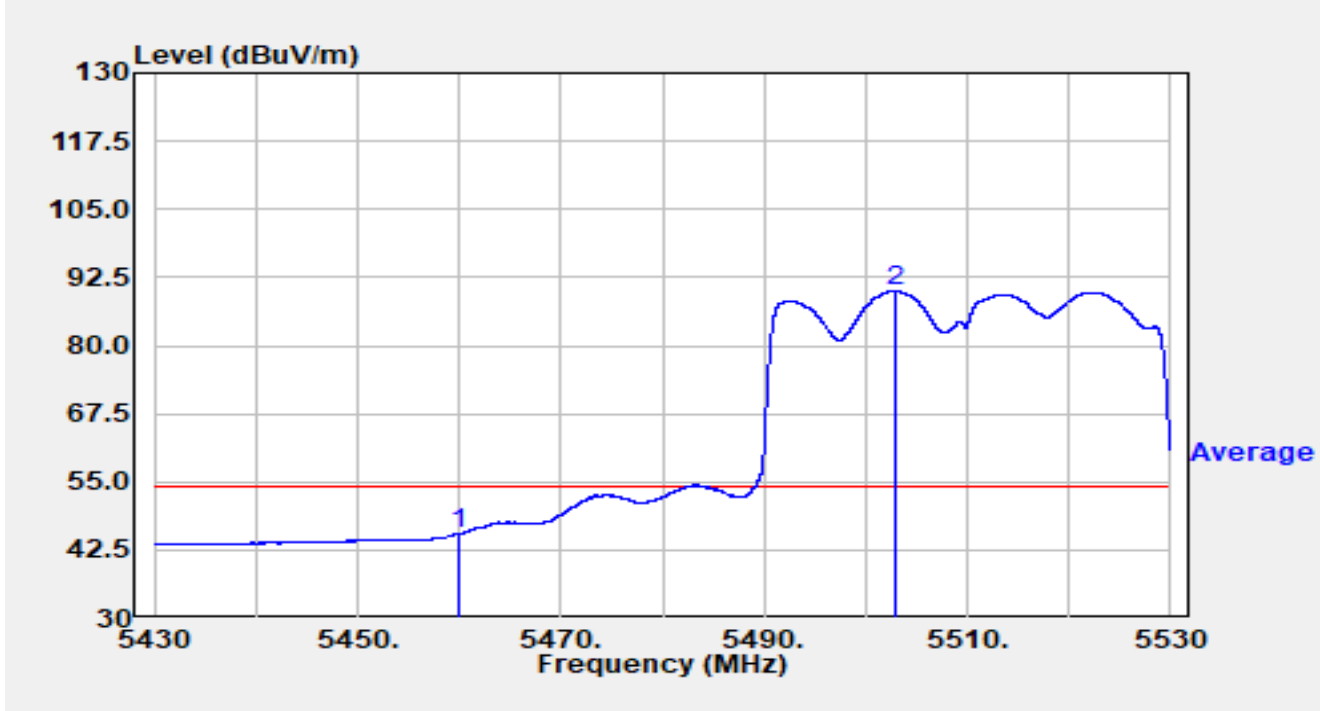


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1		5460.000	25.91	19.61	45.52	-8.48	54.00	Average
2	*	5502.840	70.44	19.59	90.03	N/A	N/A	Average

## Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5670MHz		

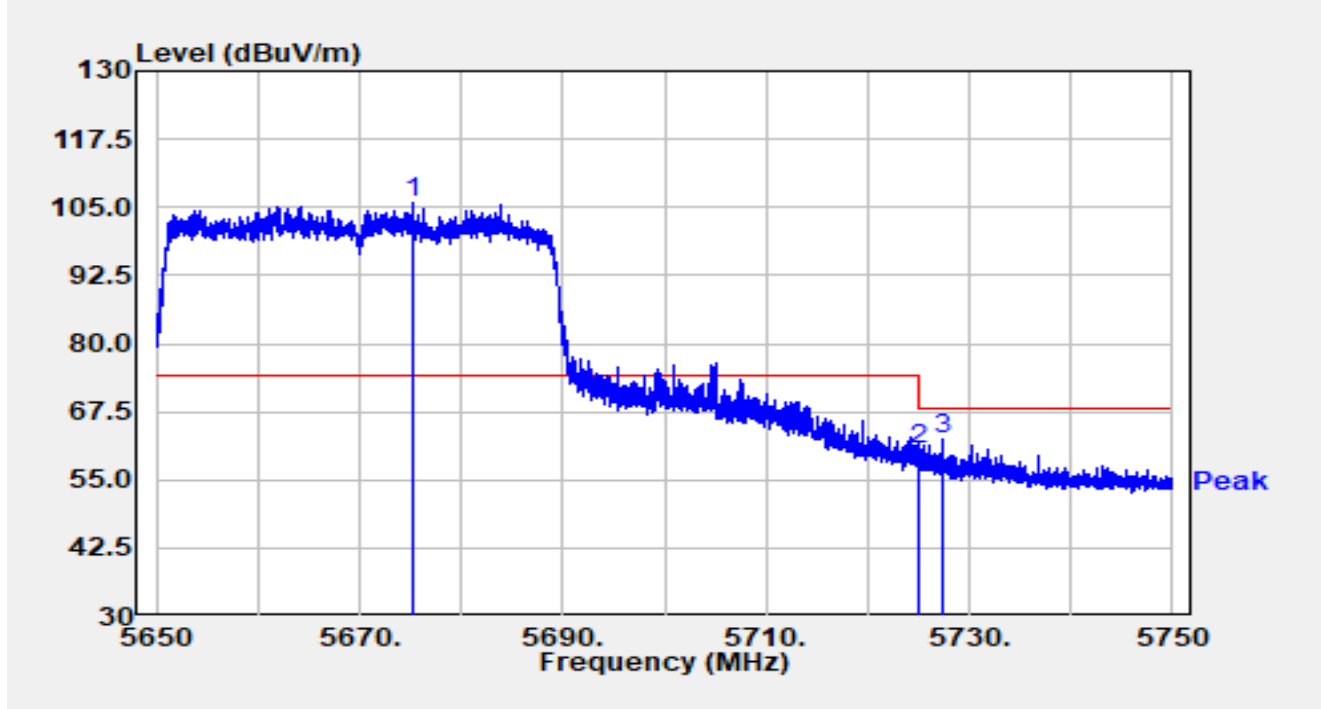


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	5675.310	85.24	20.44	105.68	N/A	N/A	Peak
2		5725.000	39.50	21.13	60.63	-7.57	68.20	Peak
3		5727.290	41.47	21.13	62.60	-5.60	68.20	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5670MHz		

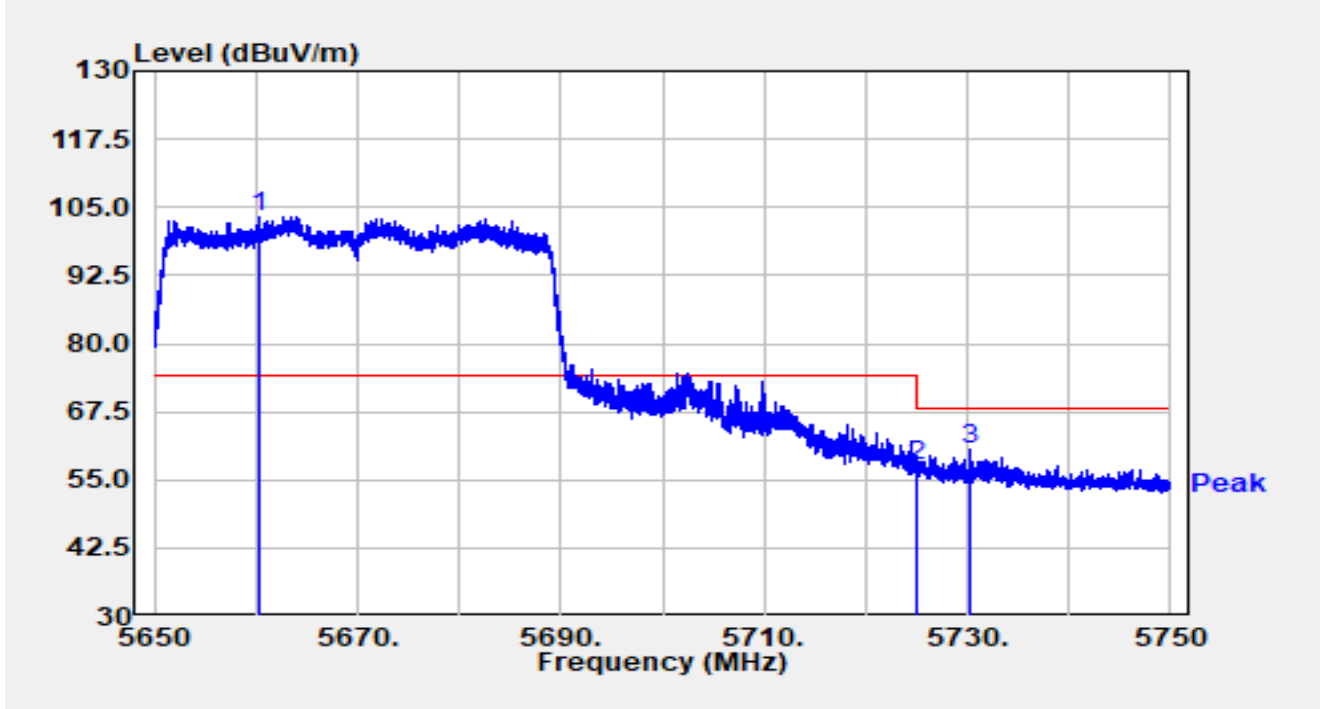


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5660.350	82.85	20.43	103.28	N/A	N/A	Peak
2		5725.000	36.38	21.13	57.52	-10.68	68.20	Peak
3		5730.270	39.53	21.10	60.63	-7.57	68.20	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5755MHz		

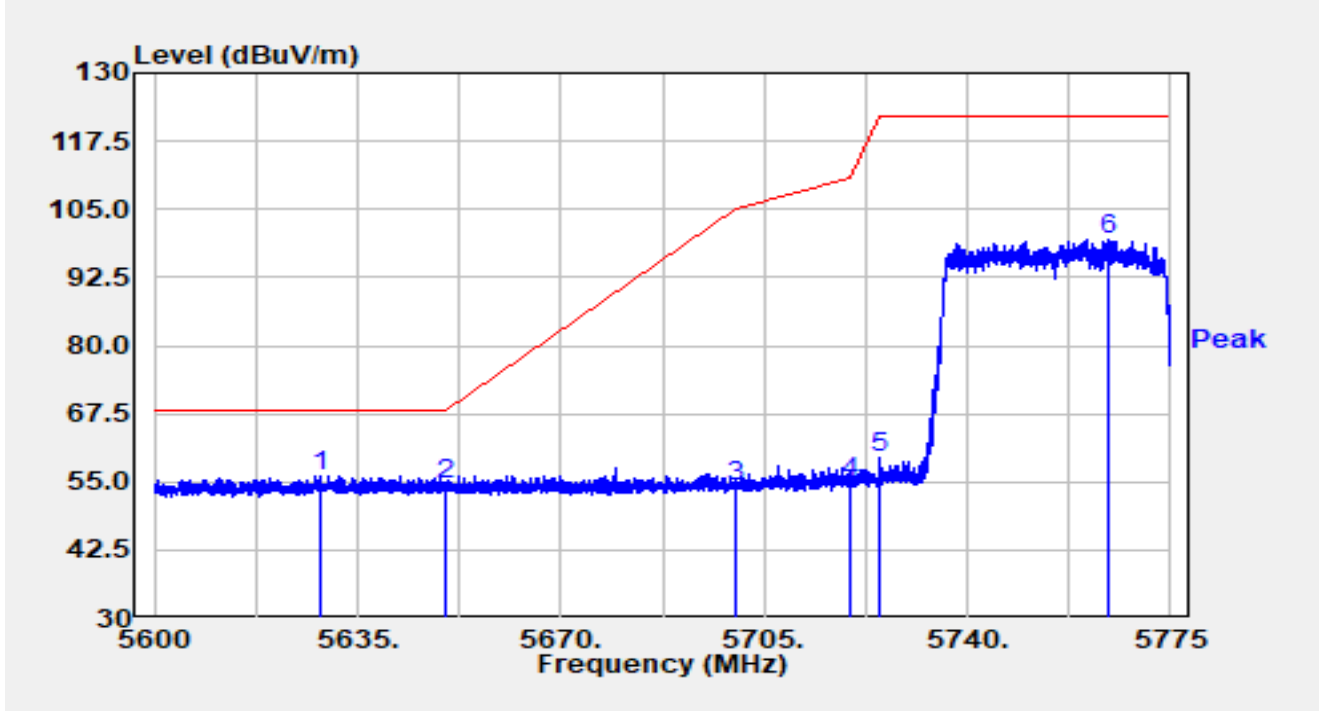


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	5628.455	35.42	20.46	55.89	-12.31	68.20	Peak
2		5650.000	33.94	20.50	54.45	-13.76	68.20	Peak
3		5700.000	33.37	20.86	54.24	-50.96	105.20	Peak
4		5720.000	33.74	21.09	54.84	-55.96	110.80	Peak
5		5725.000	38.32	21.13	59.46	-62.74	122.20	Peak
6		5764.185	78.49	21.09	99.58	N/A	N/A	Peak

**Notes:**

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5755MHz		

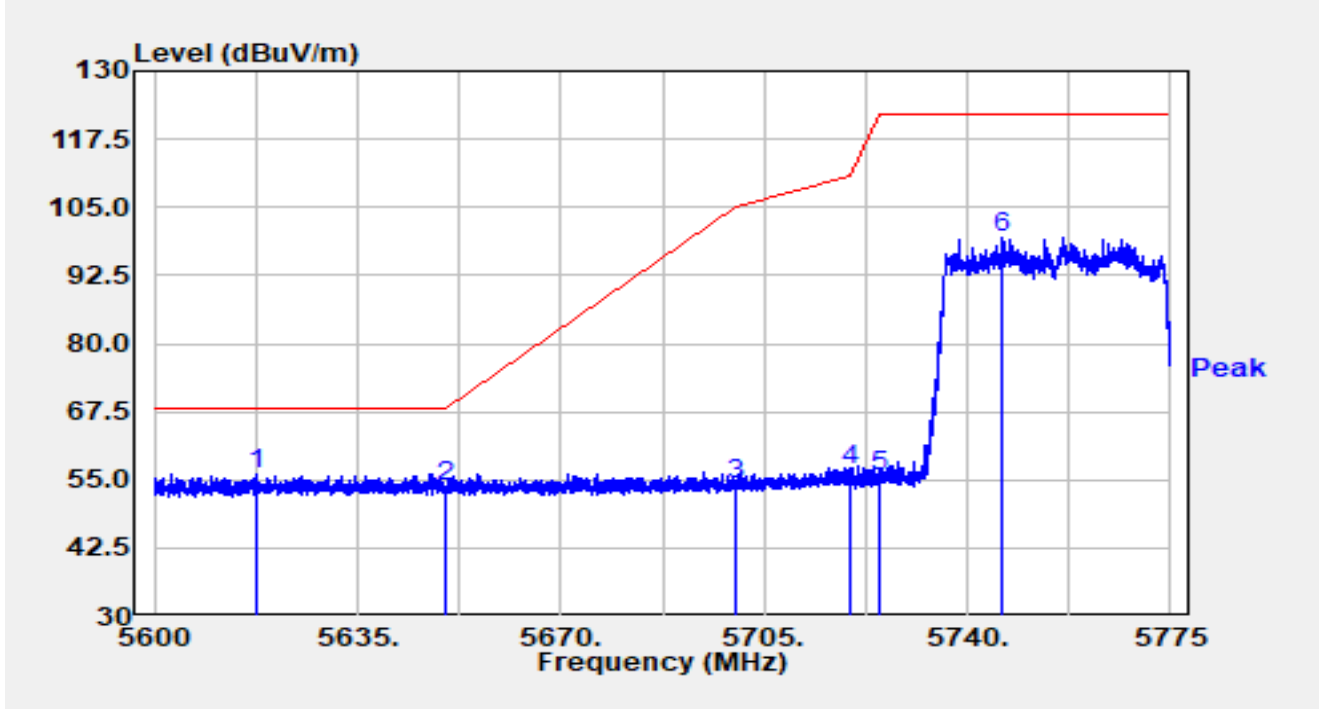


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5617.430	35.93	20.26	56.18	-12.02	68.20	Peak
2		5650.000	33.40	20.50	53.90	-14.30	68.20	Peak
3		5700.000	33.32	20.86	54.19	-51.01	105.20	Peak
4		5720.000	35.80	21.09	56.89	-53.91	110.80	Peak
5		5725.000	34.58	21.13	55.72	-66.48	122.20	Peak
6		5746.107	78.39	20.97	99.36	N/A	N/A	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5795MHz		

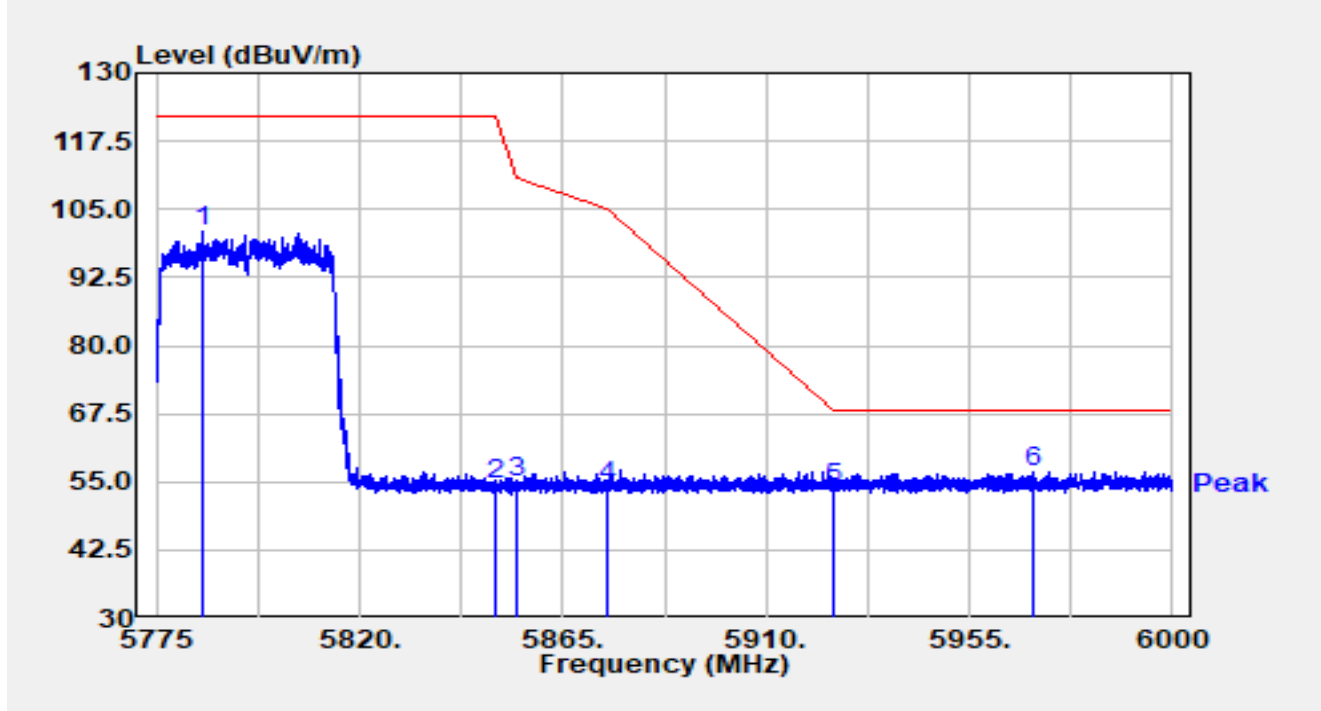


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5785.035	79.53	21.32	100.85	N/A	N/A	Peak
2		5850.000	33.18	21.41	54.59	-67.61	122.20	Peak
3		5855.000	33.35	21.46	54.82	-55.98	110.80	Peak
4		5875.000	32.67	21.51	54.18	-51.02	105.20	Peak
5		5925.000	32.12	21.51	53.63	-14.57	68.20	Peak
6	*	5969.018	35.13	21.59	56.72	-11.48	68.20	Peak

**Notes:**

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).



Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5795MHz		

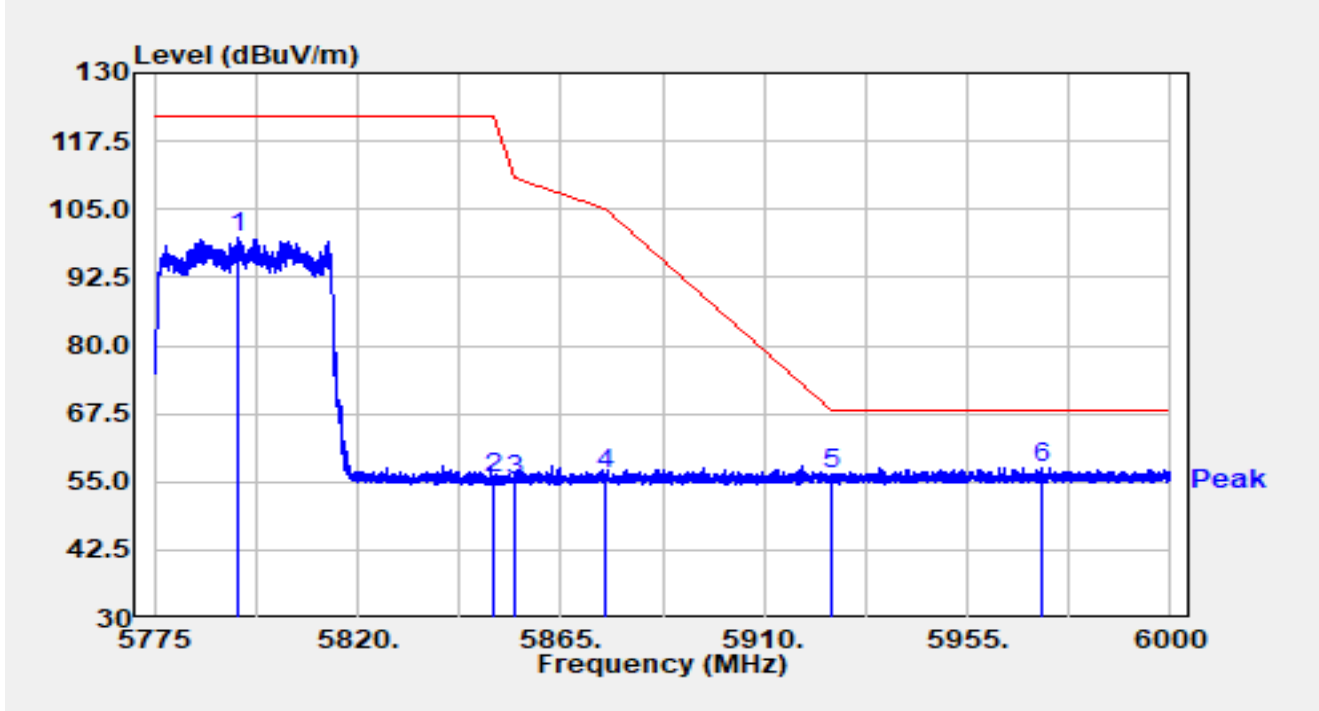


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5793.563	78.27	21.41	99.68	N/A	N/A	Peak
2		5850.000	34.11	21.41	55.52	-66.68	122.20	Peak
3		5855.000	33.73	21.46	55.19	-55.61	110.80	Peak
4		5875.000	34.74	21.51	56.24	-48.96	105.20	Peak
5		5925.000	34.86	21.51	56.37	-11.83	68.20	Peak
6	*	5971.470	36.08	21.60	57.68	-10.52	68.20	Peak

## Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5210MHz		

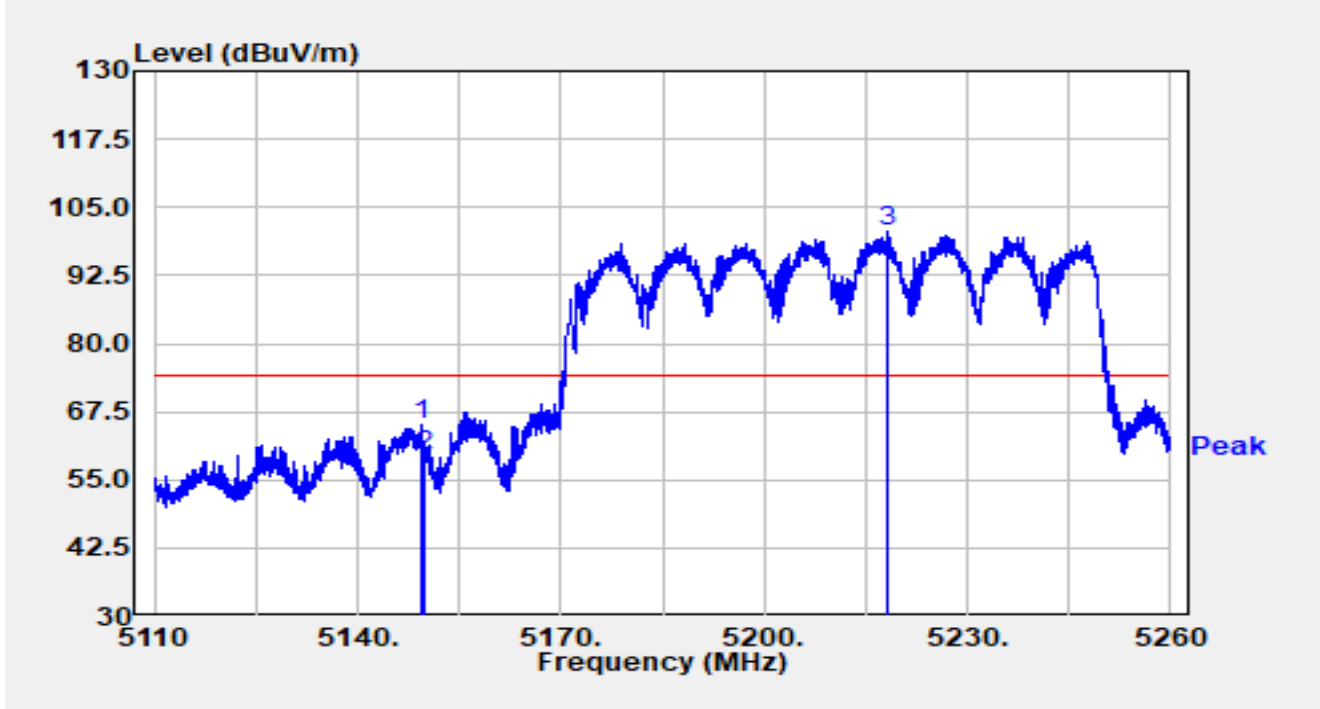


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1		5149.480	45.31	19.78	65.09	-8.91	74.00	Peak
2		5150.000	39.75	19.78	59.53	-14.47	74.00	Peak
3	*	5218.105	81.05	19.36	100.41	N/A	N/A	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5210MHz		

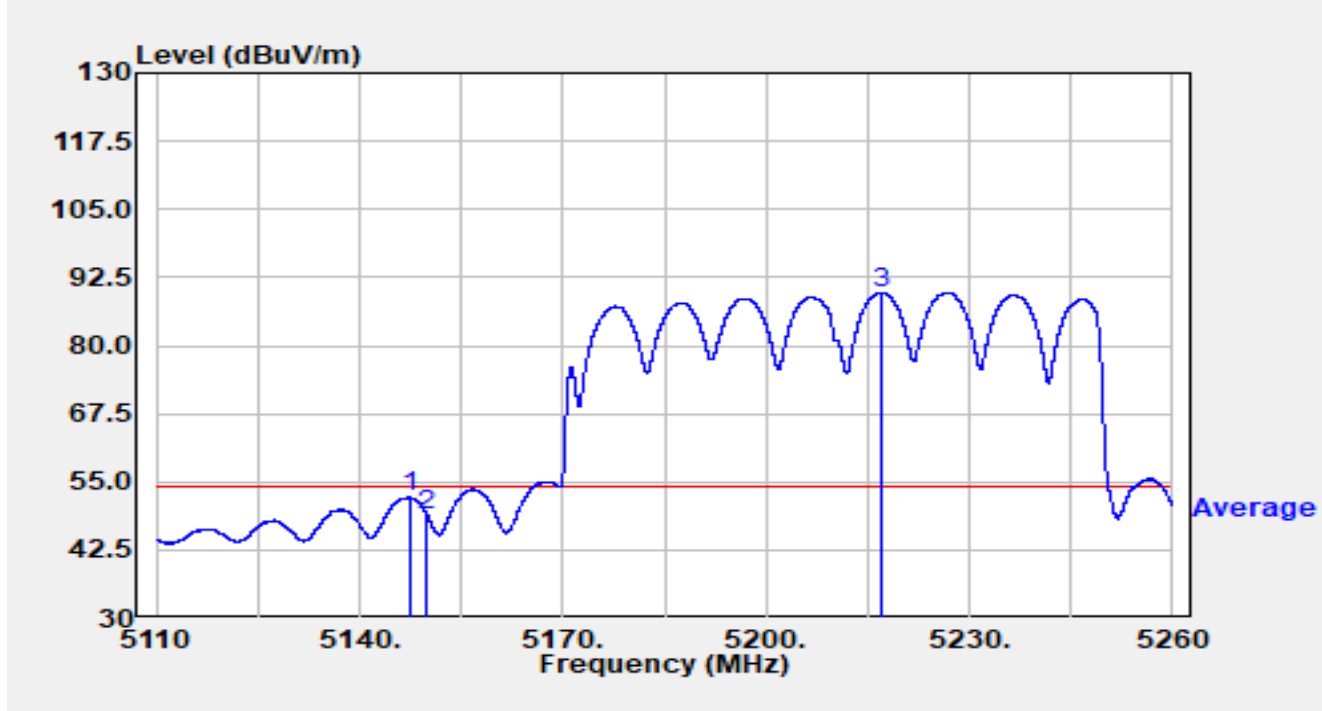


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5147.350	32.44	19.76	52.21	-1.79	54.00	Average
2		5150.000	29.05	19.78	48.83	-5.17	54.00	Average
3	*	5217.130	70.36	19.35	89.71	N/A	N/A	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5210MHz		

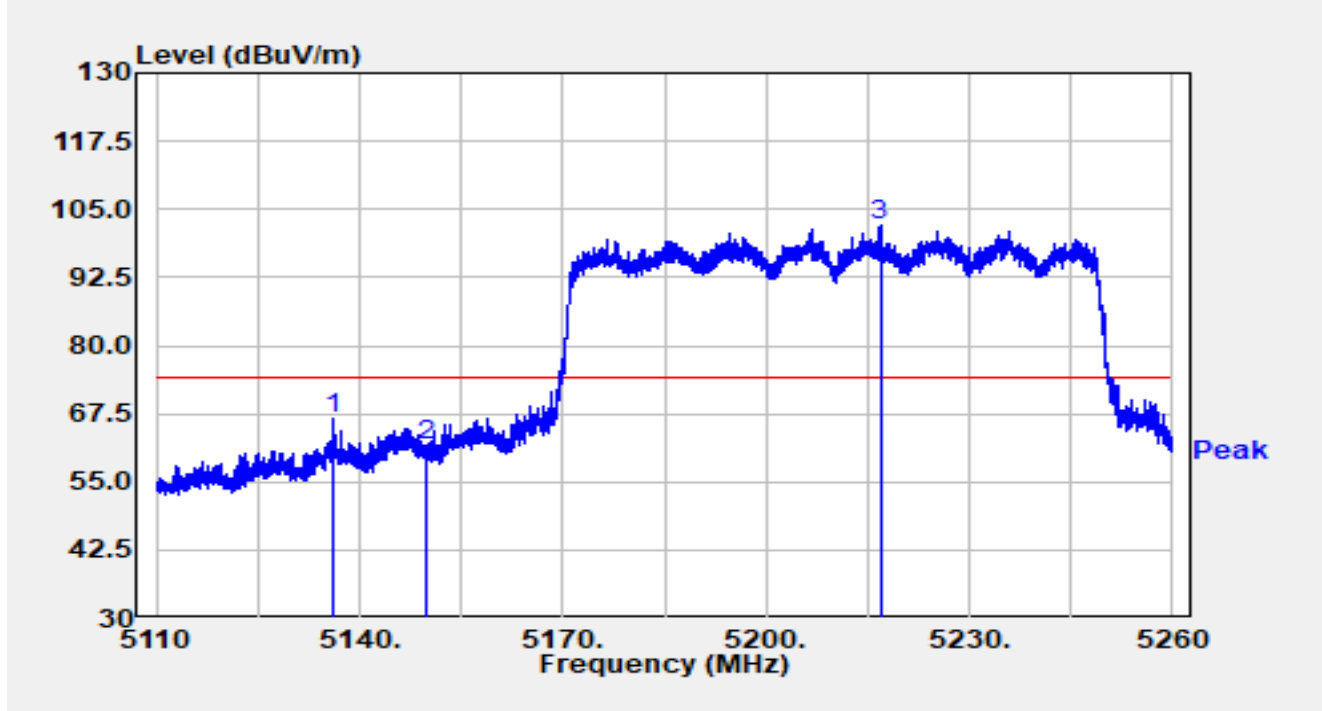


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5136.055	46.81	19.62	66.42	-7.58	74.00	Peak
2		5150.000	41.96	19.78	61.74	-12.26	74.00	Peak
3	*	5216.845	82.64	19.34	101.98	N/A	N/A	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5210MHz		

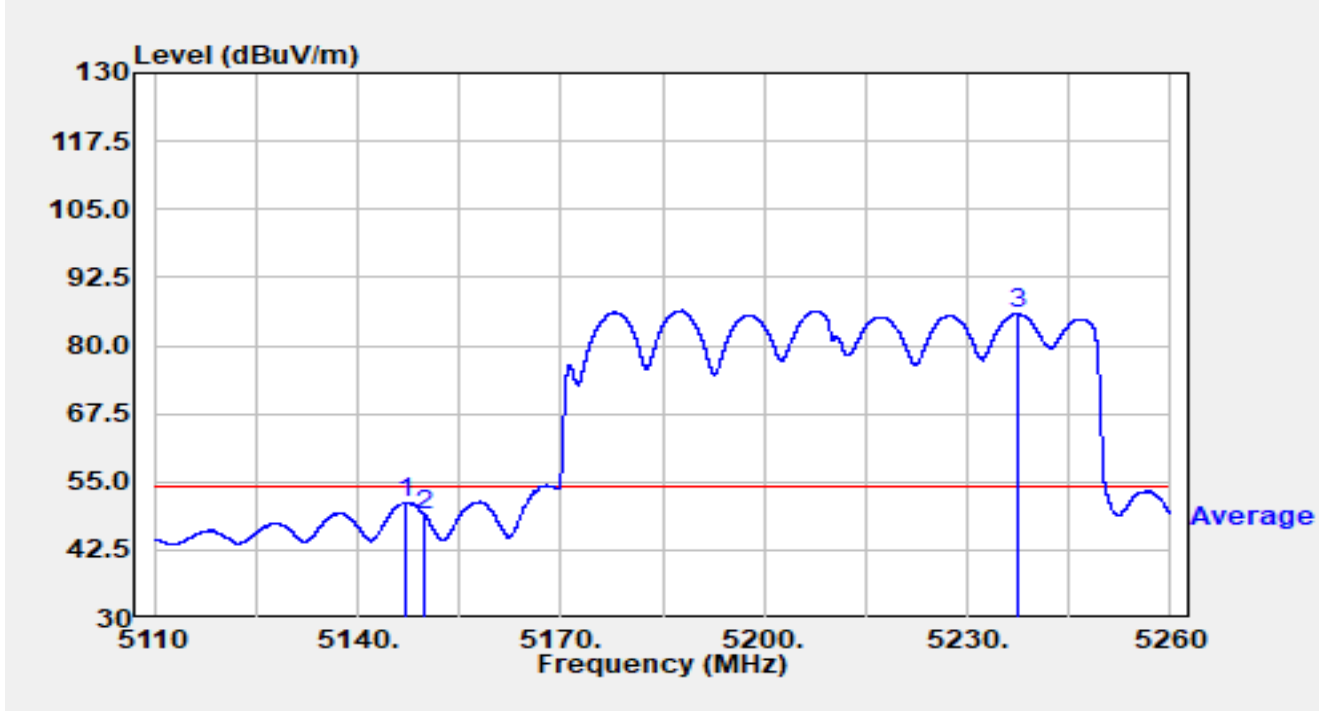


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5147.230	31.52	19.76	51.29	-2.71	54.00	Average
2		5150.000	28.99	19.78	48.77	-5.23	54.00	Average
3	*	5237.410	66.36	19.49	85.85	N/A	N/A	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5290MHz		

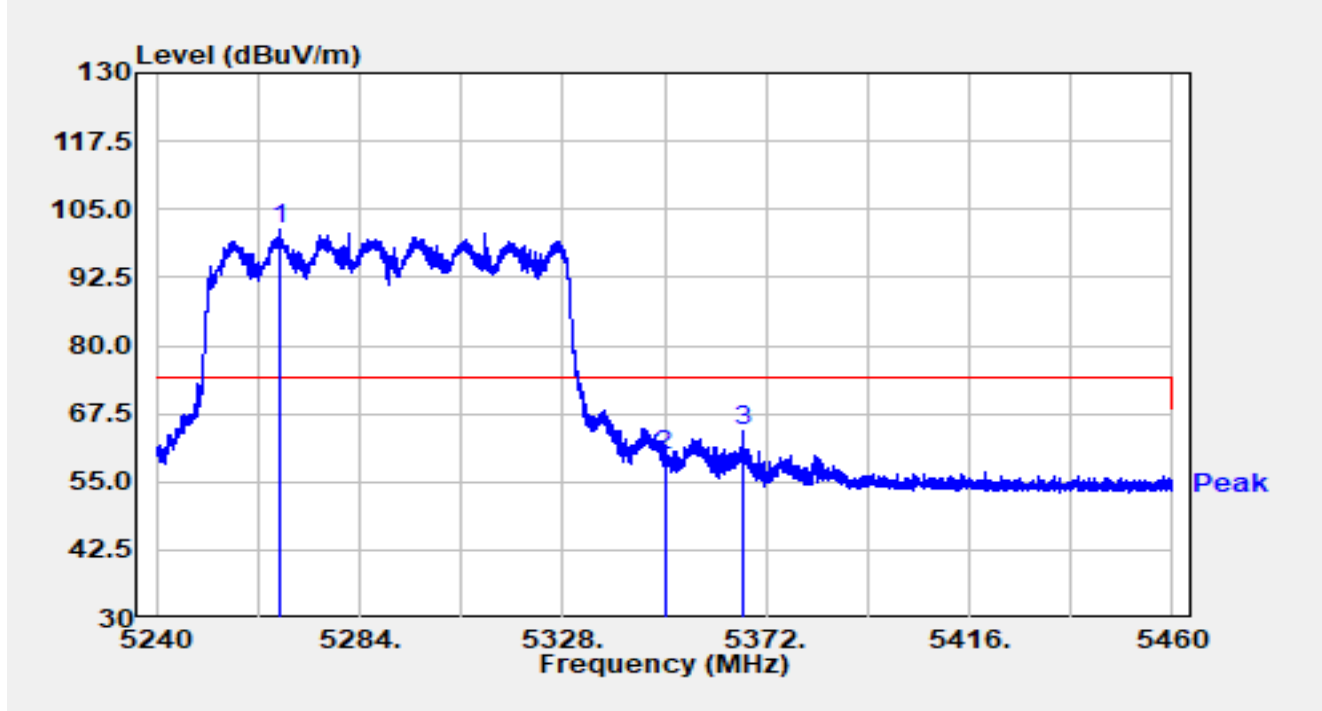


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	5266.510	82.06	19.10	101.16	N/A	N/A	Peak
2		5350.000	40.61	19.32	59.93	-14.07	74.00	Peak
3		5367.094	45.18	19.20	64.39	-9.61	74.00	Peak

Notes:

1. "\*" , means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5290MHz		

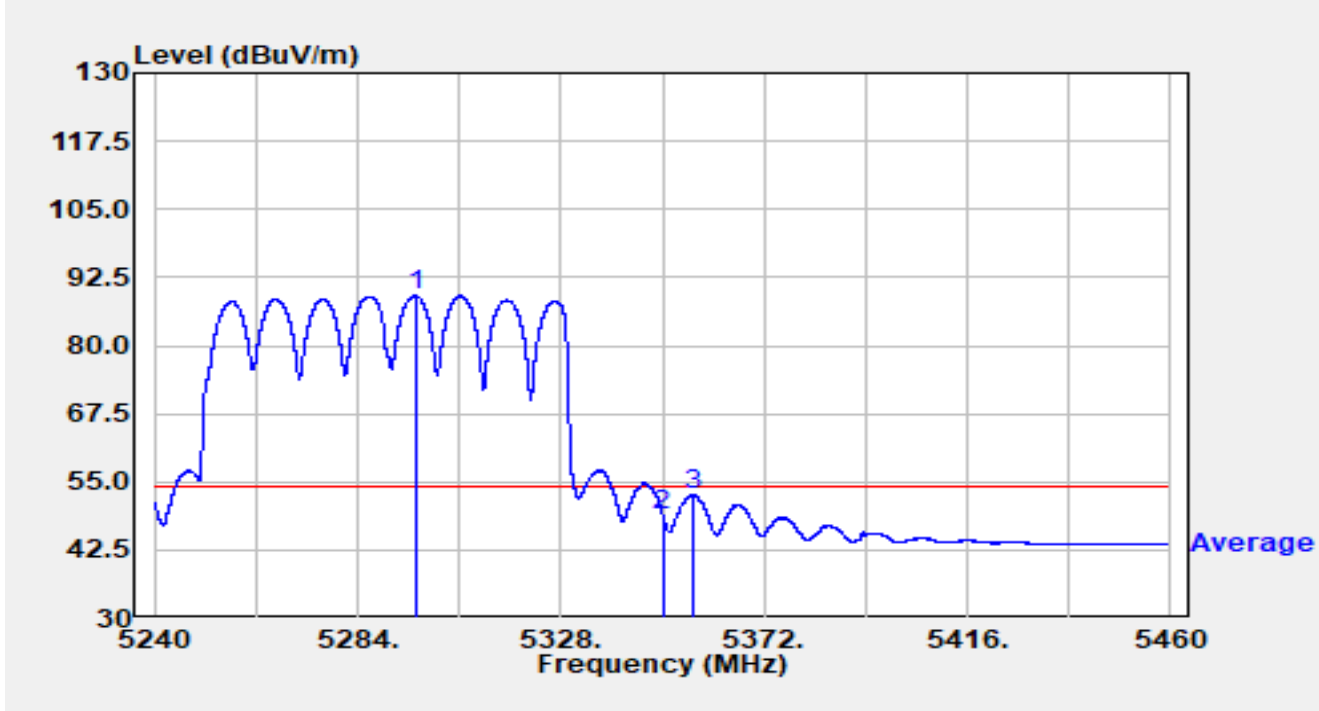


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5296.672	69.89	19.28	89.17	N/A	N/A	Average
2		5350.000	29.72	19.32	49.05	-4.95	54.00	Average
3		5356.512	33.54	19.25	52.79	-1.21	54.00	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5290MHz		

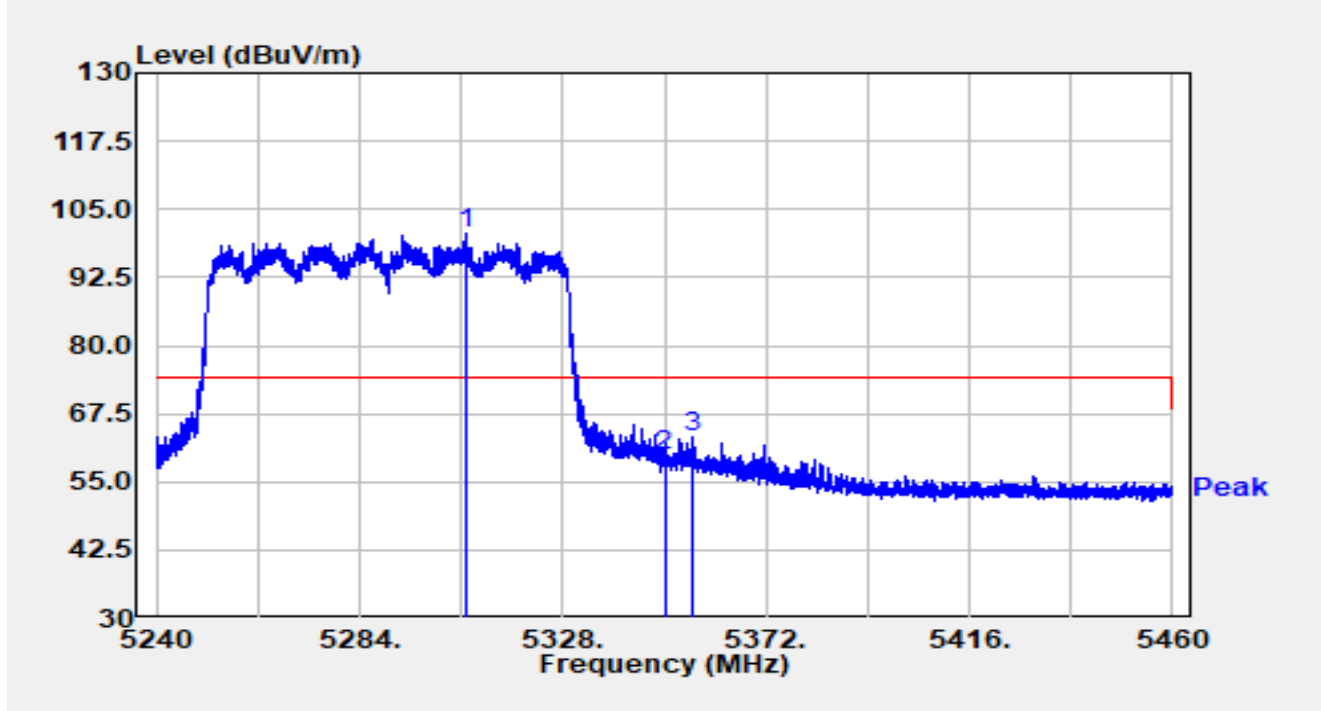


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	5307.232	81.07	19.46	100.53	N/A	N/A	Peak
2		5350.000	40.40	19.32	59.72	-14.28	74.00	Peak
3		5356.006	44.02	19.25	63.28	-10.72	74.00	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).



Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5290MHz		

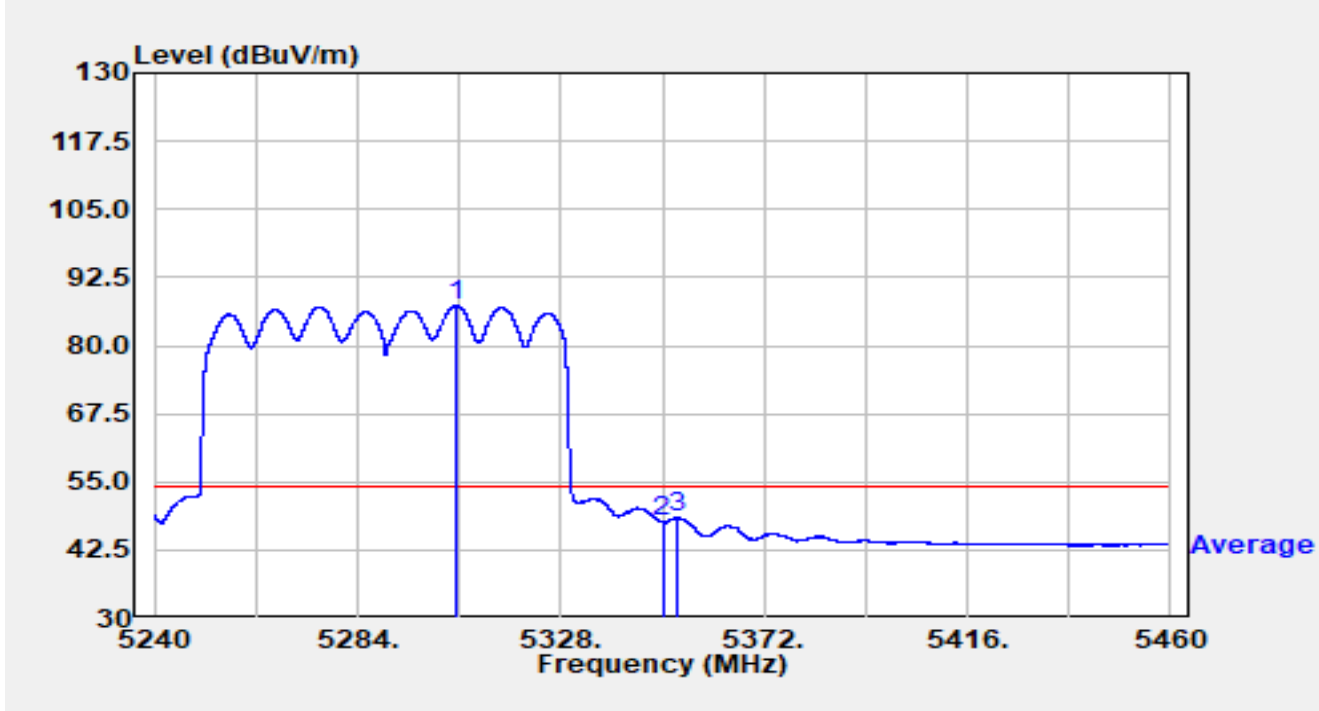


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5305.428	67.91	19.43	87.34	N/A	N/A	Average
2		5350.000	28.27	19.32	47.59	-6.41	54.00	Average
3		5353.344	29.18	19.27	48.45	-5.55	54.00	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5530MHz		

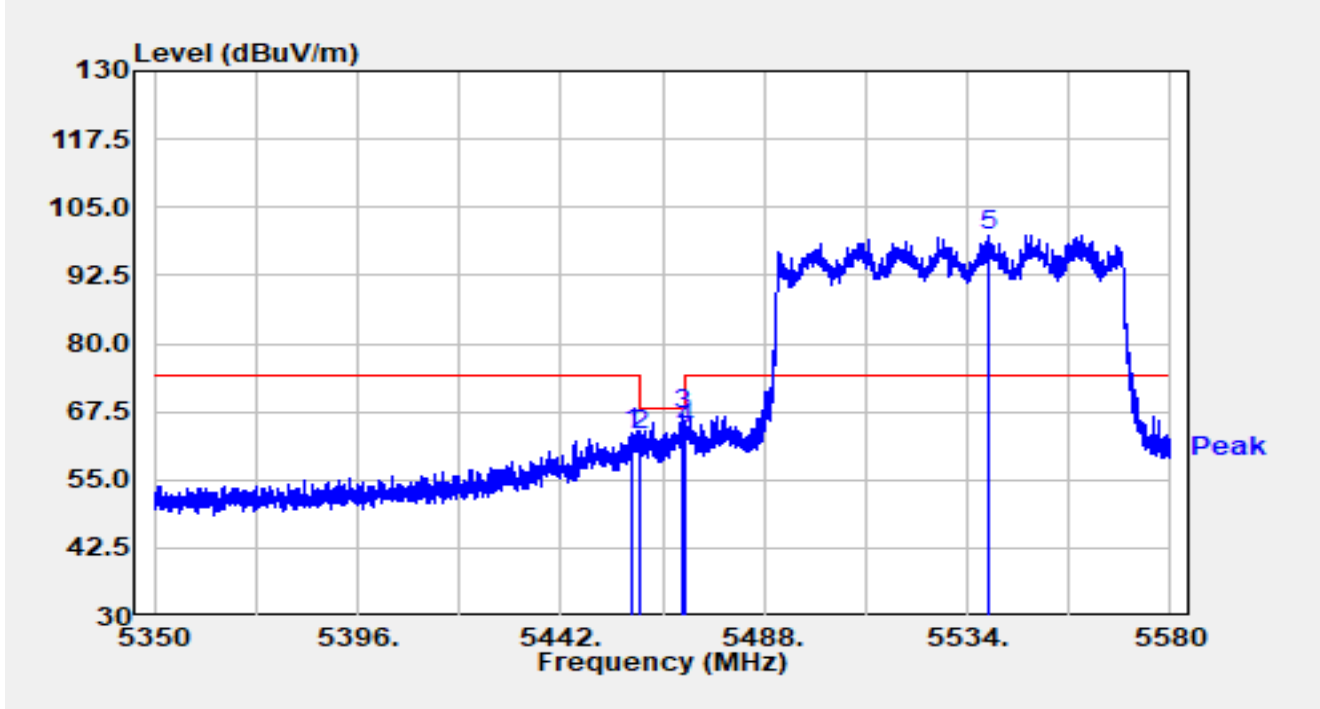


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.238	43.96	19.58	63.54	-10.46	74.00	Peak
2		5460.000	43.44	19.61	63.05	-5.15	68.20	Peak
3		5469.531	47.13	19.79	66.92	-1.28	68.20	Peak
4		5470.000	44.66	19.80	64.46	-3.74	68.20	Peak
5	*	5538.761	80.12	19.75	99.86	N/A	N/A	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5530MHz		

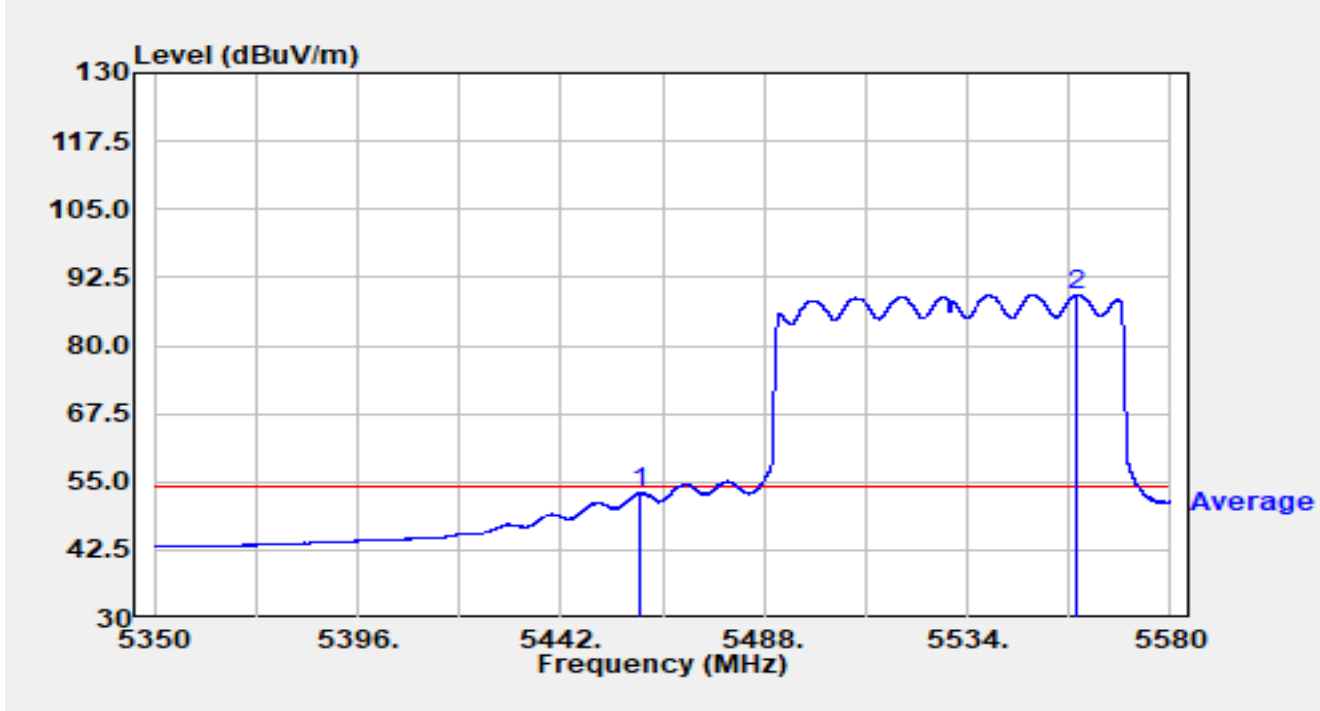


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5460.000	33.26	19.61	52.87	-1.13	54.00	Average
2	*	5558.909	69.33	20.03	89.36	N/A	N/A	Average

Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5530MHz		

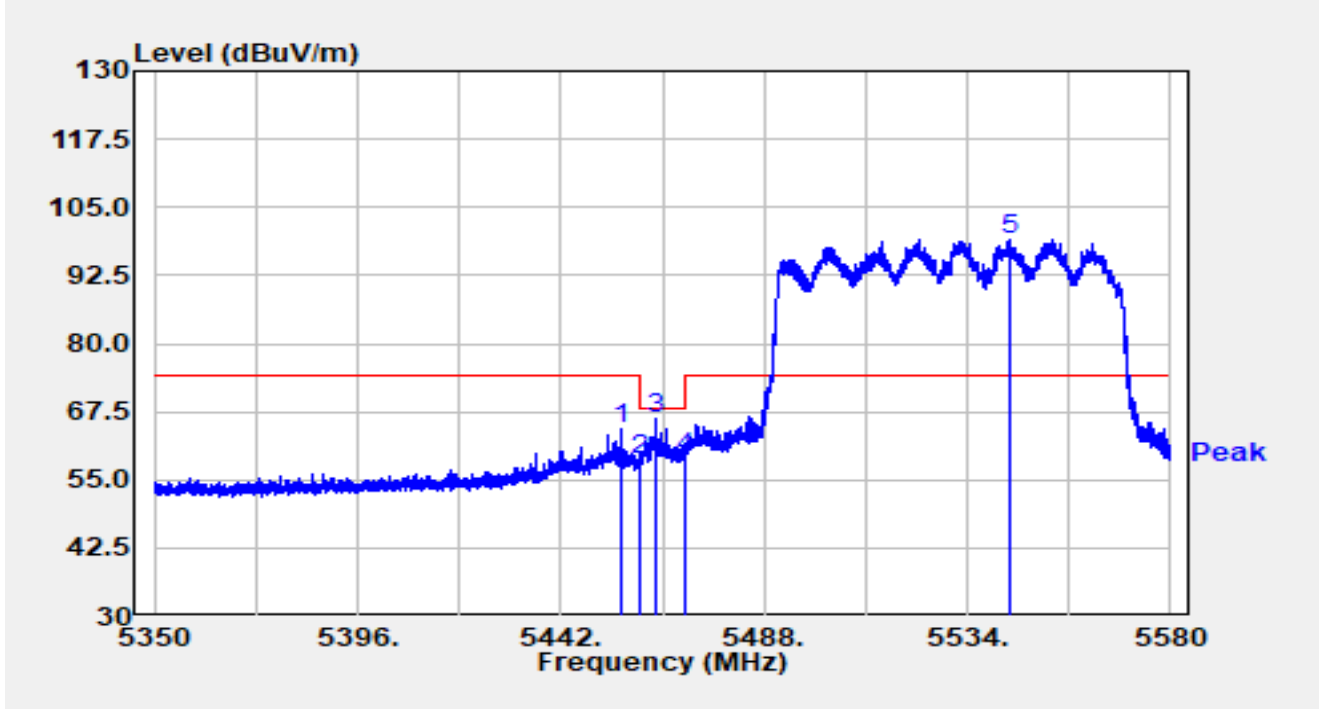


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5455.593	44.97	19.53	64.49	-9.51	74.00	Peak
2		5460.000	39.03	19.61	58.64	-9.56	68.20	Peak
3		5463.390	46.74	19.67	66.41	-1.79	68.20	Peak
4		5470.000	39.31	19.80	59.10	-9.10	68.20	Peak
5	*	5543.361	79.36	19.84	99.19	N/A	N/A	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5530MHz		

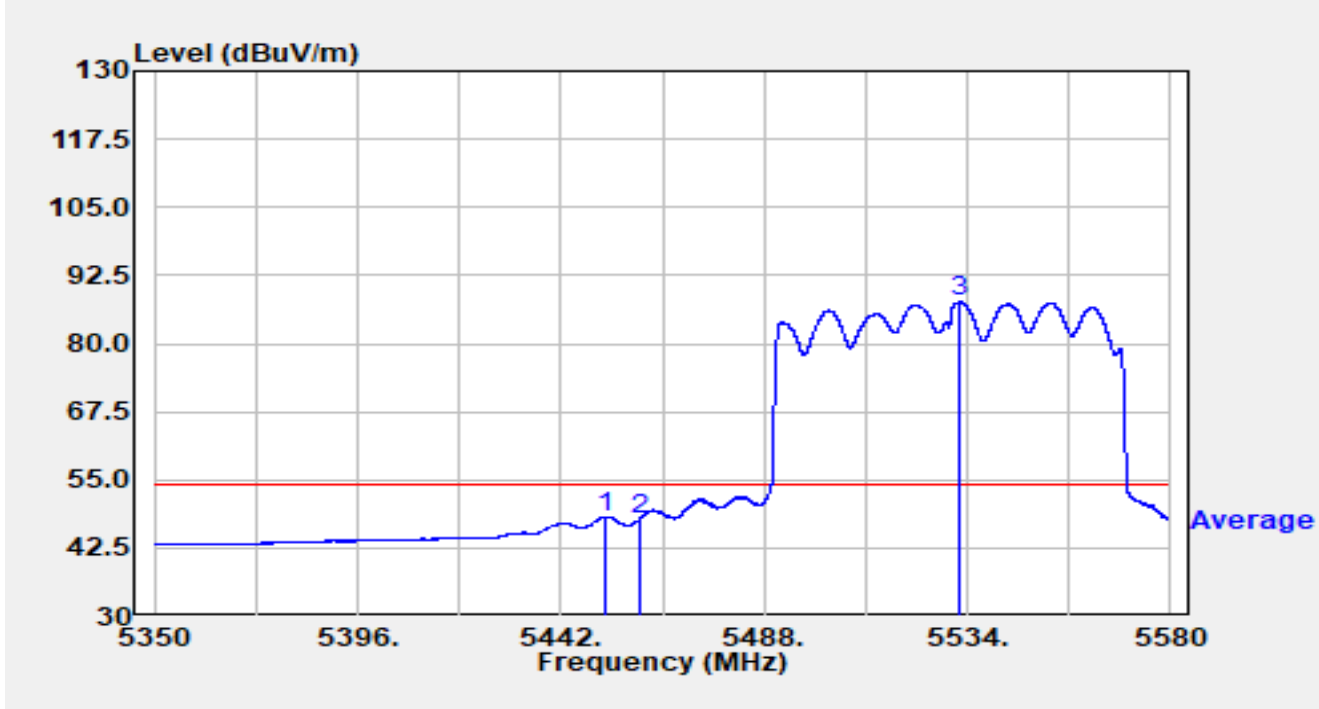


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5452.097	28.74	19.50	48.24	-5.76	54.00	Average
2		5460.000	28.31	19.61	47.92	-6.08	54.00	Average
3	*	5532.413	68.04	19.61	87.65	N/A	N/A	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5610MHz		

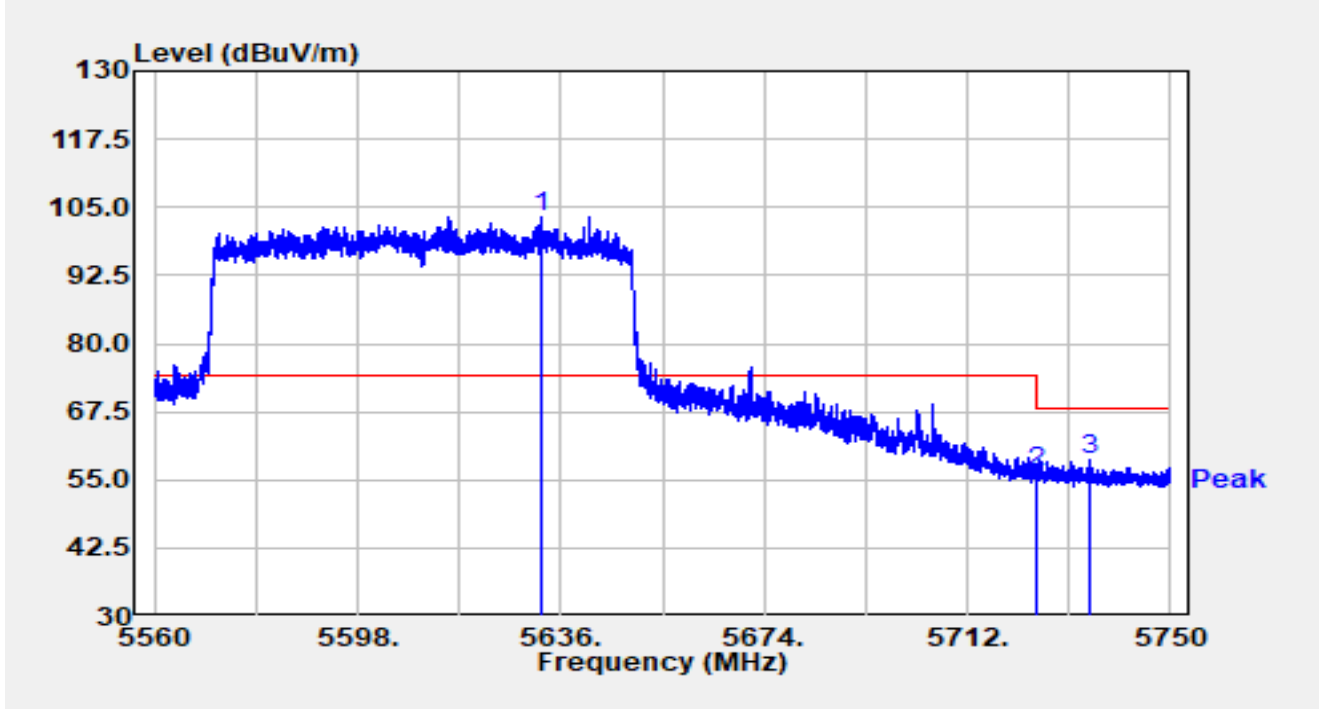


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5632.542	82.85	20.50	103.35	N/A	N/A	Peak
2		5725.000	35.31	21.13	56.45	-11.75	68.20	Peak
3		5734.686	37.49	21.05	58.54	-9.66	68.20	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5610MHz		

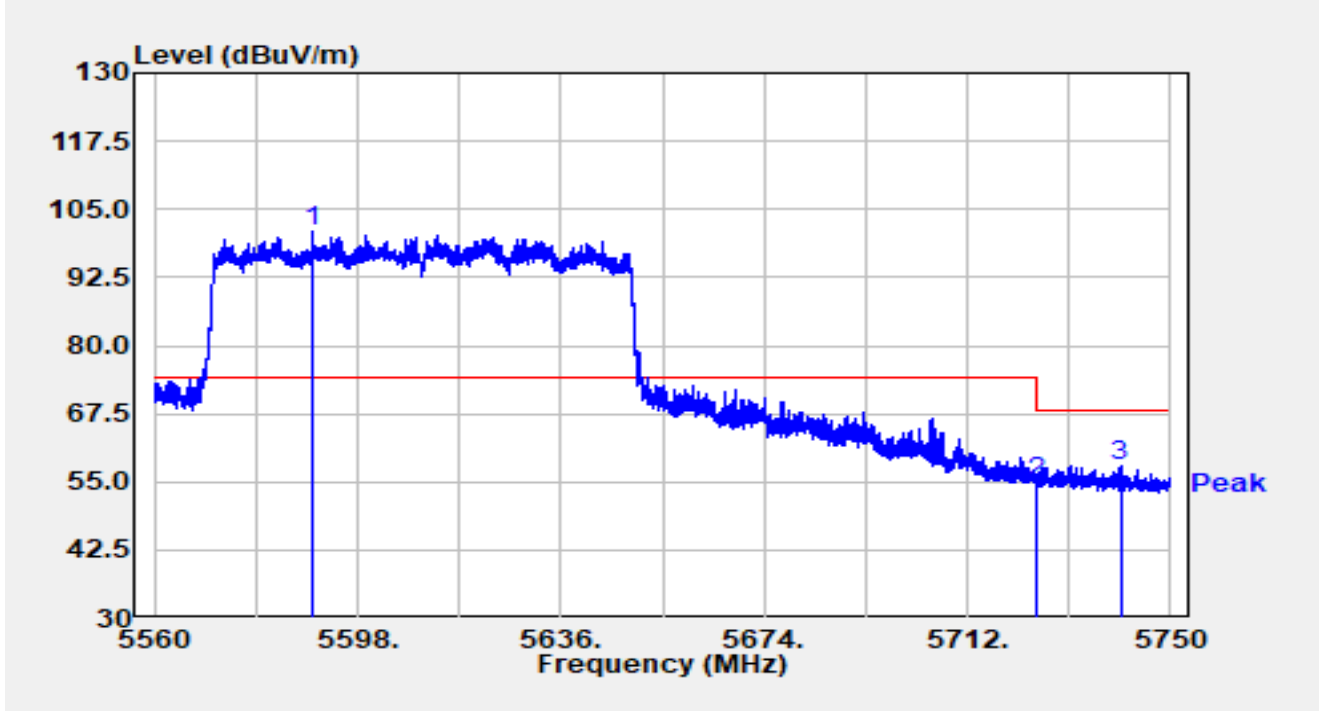


No	Mark	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Detector
1	*	5589.545	81.04	19.88	100.92	N/A	N/A	Peak
2		5725.000	33.89	21.13	55.02	-13.18	68.20	Peak
3		5740.614	36.90	20.98	57.88	-10.32	68.20	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dB $\mu$ V/m) = Reading (dB $\mu$ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5775MHz		

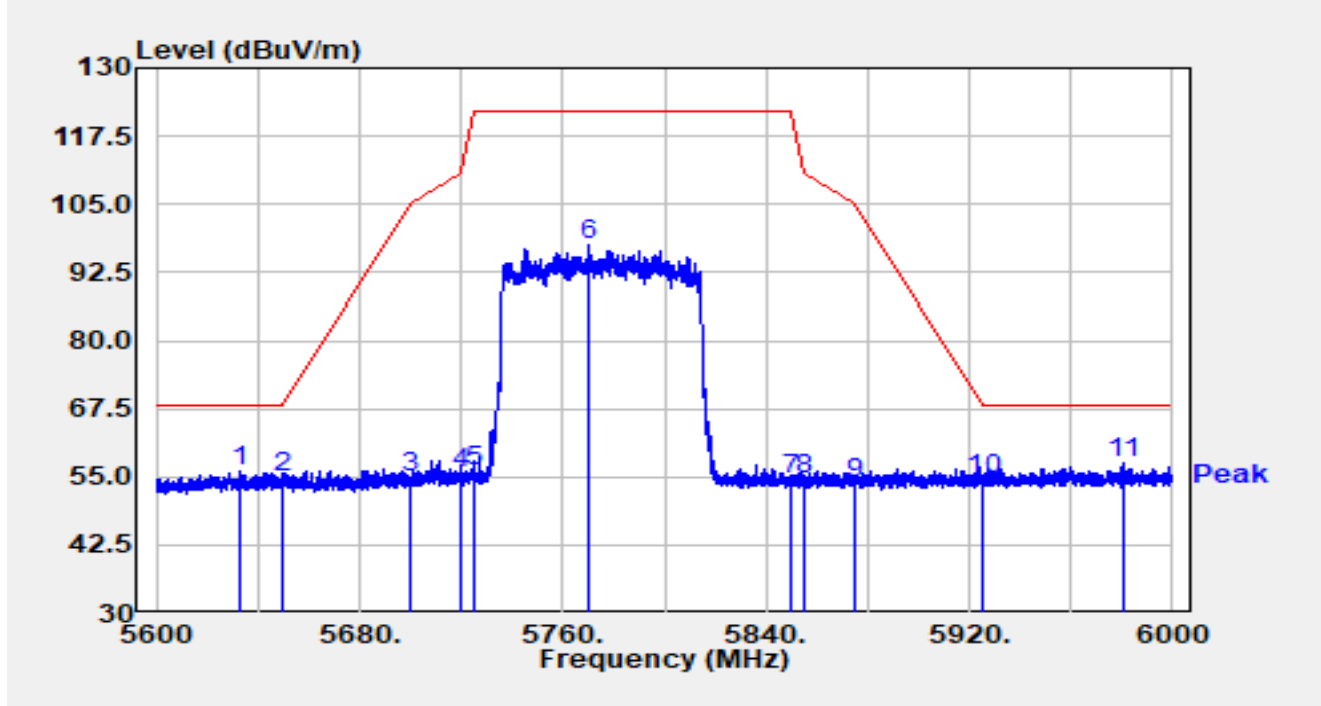


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5632.760	35.41	20.50	55.92	-12.28	68.20	Peak
2		5650.000	34.33	20.50	54.84	-13.36	68.20	Peak
3		5700.000	34.07	20.86	54.94	-50.26	105.20	Peak
4		5720.000	34.71	21.09	55.80	-55.00	110.80	Peak
5		5725.000	34.76	21.13	55.89	-66.31	122.20	Peak
6		5770.320	76.30	21.17	97.47	N/A	N/A	Peak
7		5850.000	33.01	21.41	54.42	-67.78	122.20	Peak
8		5855.000	32.94	21.46	54.40	-56.40	110.80	Peak
9		5875.000	32.16	21.51	53.67	-51.53	105.20	Peak
10		5925.000	32.93	21.51	54.44	-13.76	68.20	Peak
11	*	5980.760	35.99	21.59	57.58	-10.62	68.20	Peak

**Notes:**

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).



Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Ajin Fan	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5775MHz		

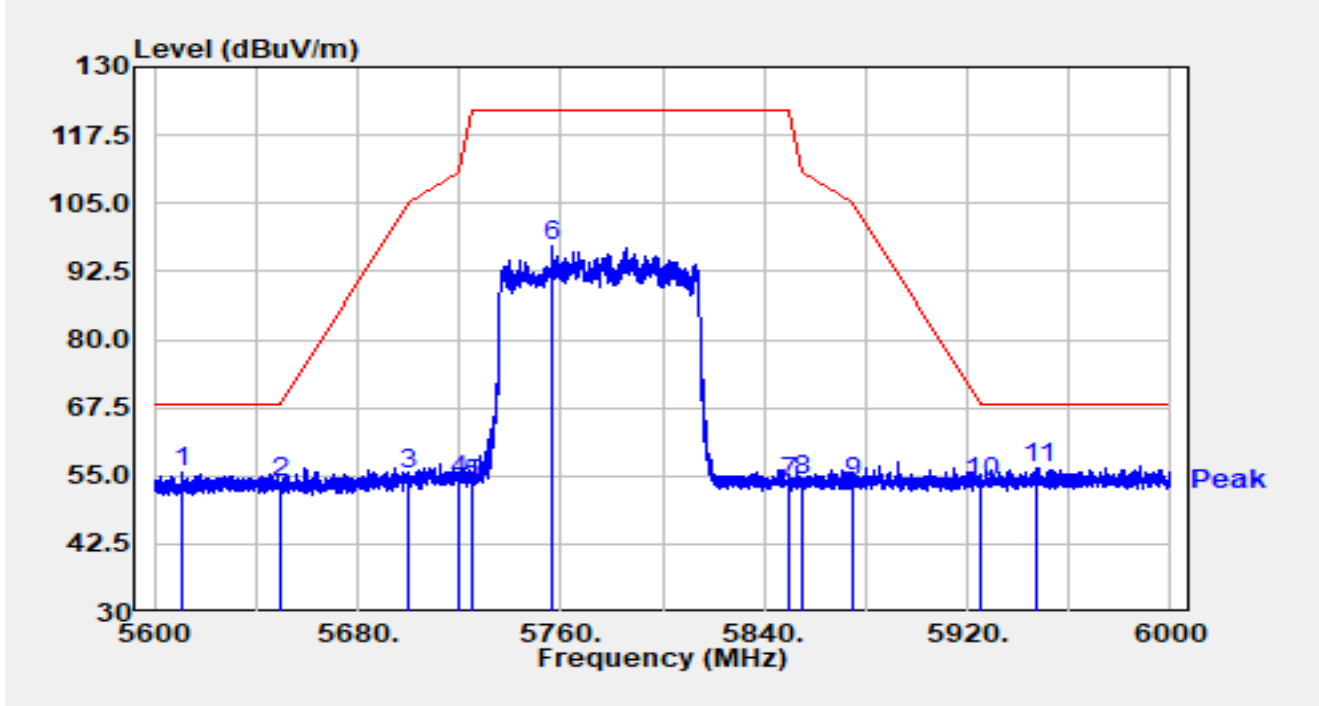

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5610.560	35.41	20.09	55.51	-12.69	68.20	Peak
2		5650.000	33.37	20.50	53.87	-14.33	68.20	Peak
3		5700.000	34.28	20.86	55.14	-50.06	105.20	Peak
4		5720.000	33.18	21.09	54.27	-56.53	110.80	Peak
5		5725.000	32.36	21.13	53.50	-68.70	122.20	Peak
6		5756.720	76.21	21.02	97.23	N/A	N/A	Peak
7		5850.000	32.32	21.41	53.73	-68.47	122.20	Peak
8		5855.000	32.71	21.46	54.17	-56.63	110.80	Peak
9		5875.000	32.18	21.51	53.69	-51.51	105.20	Peak
10		5925.000	32.14	21.51	53.65	-14.55	68.20	Peak
11	*	5947.720	34.77	21.60	56.37	-11.83	68.20	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).