



## Incumbent Signal Calibration Plots (NII-6 Band)


802.11ax-HE20 / CH97

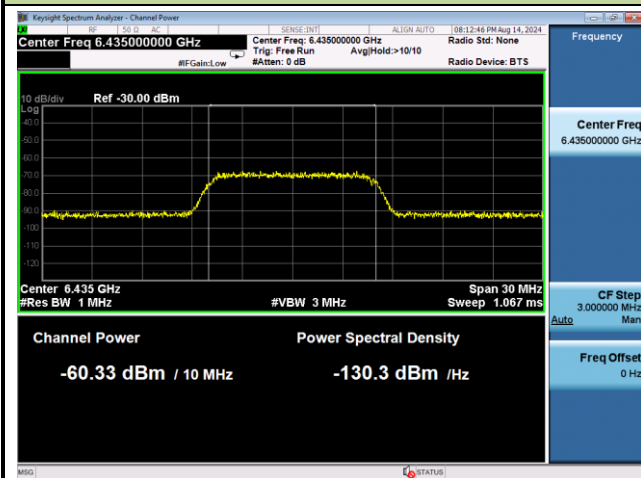

802.11ax-HE160 / CH111 (Low Edge)

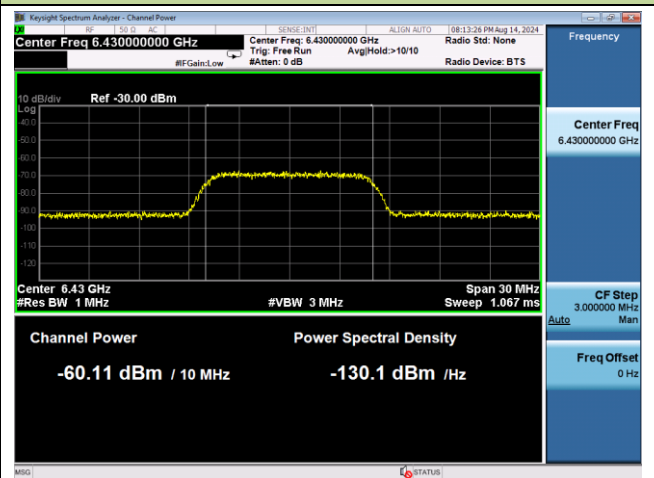

802.11ax-HE160 / CH111 (Middle)

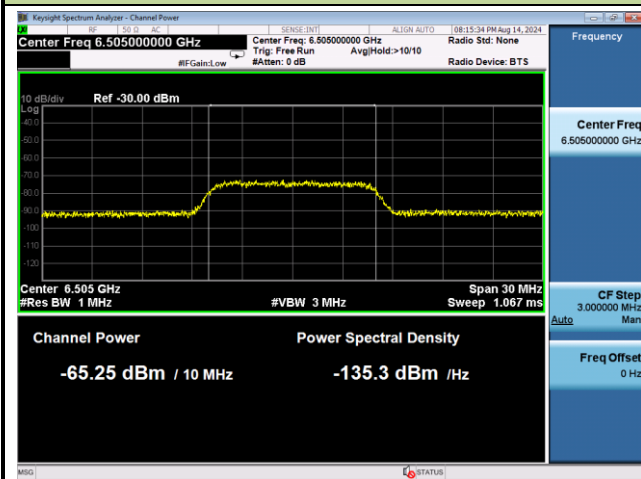


802.11ax-HE160 / CH111 (High Edge)




Incumbent Signal Calibration Plots (NII-7 Band)

802.11ax-HE20 / CH153

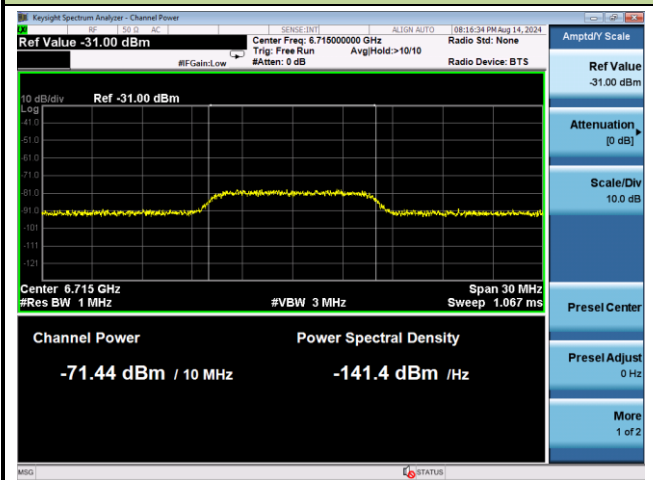

802.11ax-HE160 / CH143 (Low Edge)

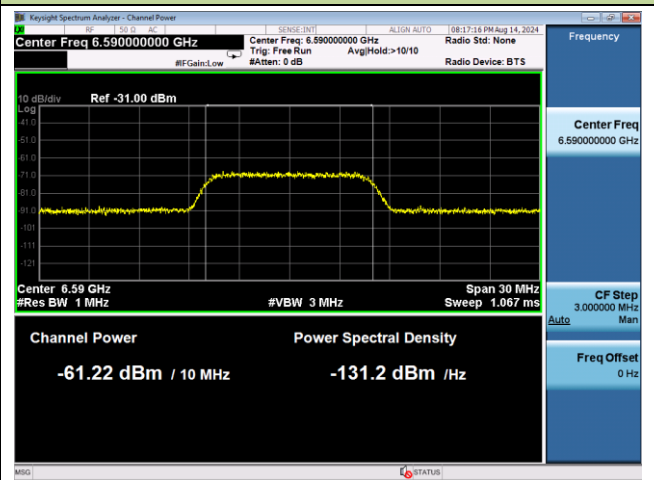

802.11ax-HE160 / CH143 (Middle)




802.11ax-HE160 / CH143 (High Edge)



## Incumbent Signal Calibration Plots (NII-8 Band)


802.11ax-HE20 / CH213

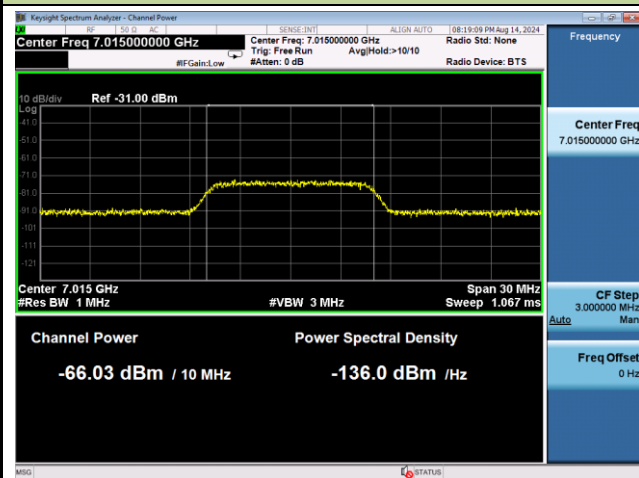

802.11ax-HE160 / CH207 (Low Edge)



802.11ax-HE160 / CH207 (Middle)

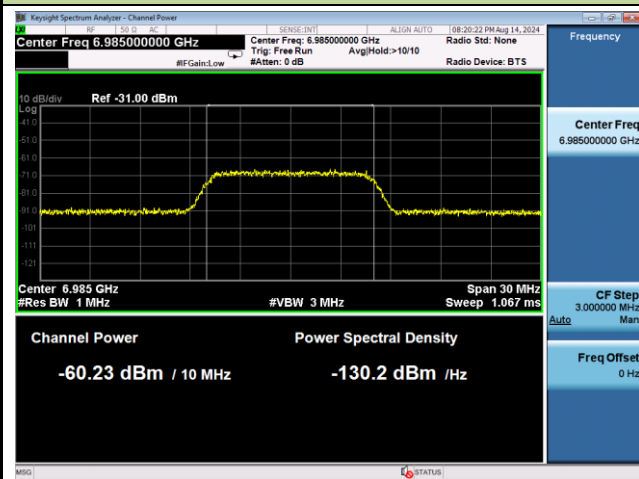


802.11ax-HE160 / CH207 (High Edge)




Test Result of EUT ceased transmission (NII-5 Band)


802.11ax-HE20 / CH33

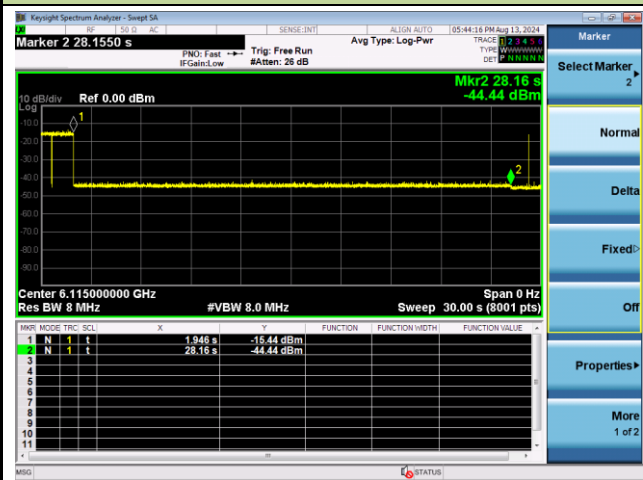


802.11ax-HE160 / CH47 (Low Edge)

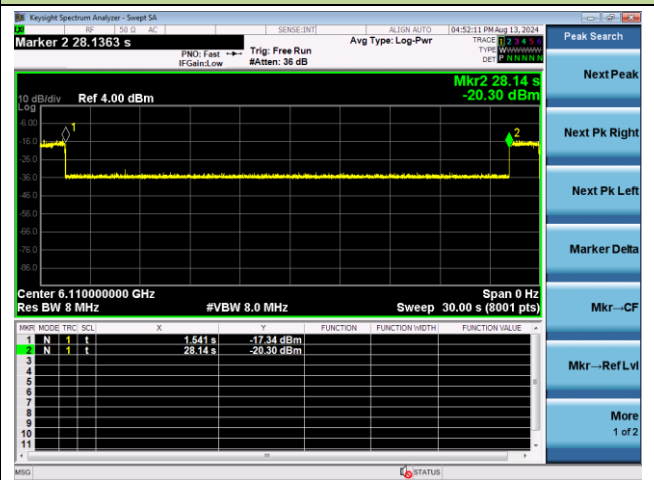

802.11ax-HE160 / CH47 (Middle)

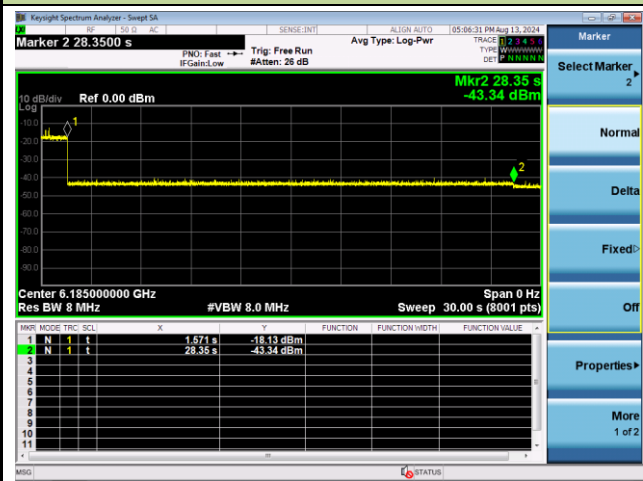



802.11ax-HE160 / CH47 (High Edge)

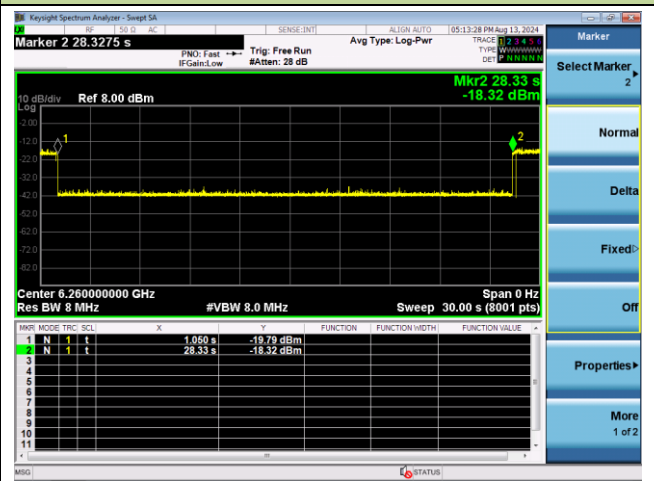

Test Result of EUT ceased transmission (NII-6 Band)



802.11ax-HE20 / CH97


802.11ax-HE160 / CH111 (Low Edge)

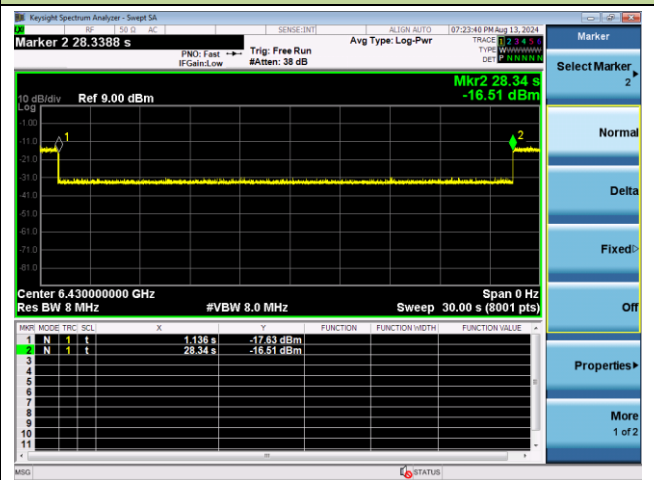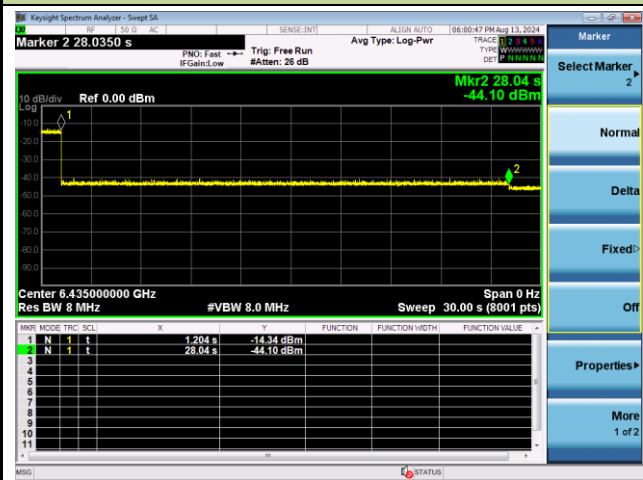


802.11ax-HE160 / CH111 (Middle)

802.11ax-HE160 / CH111 (High Edge)

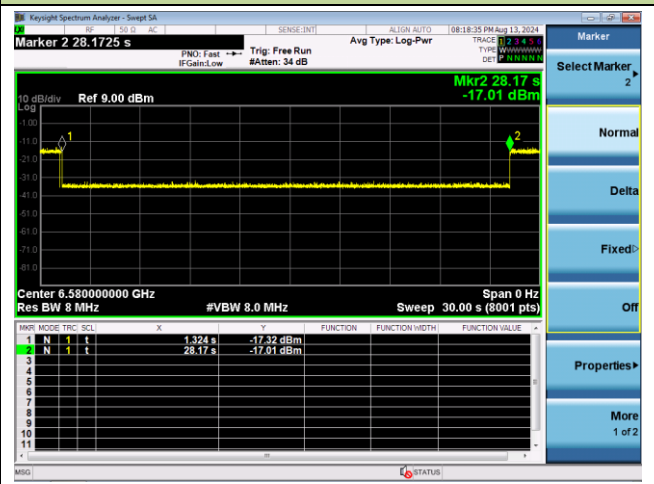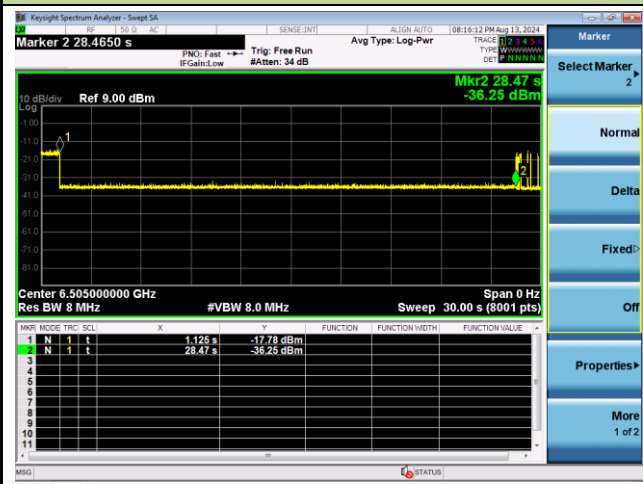

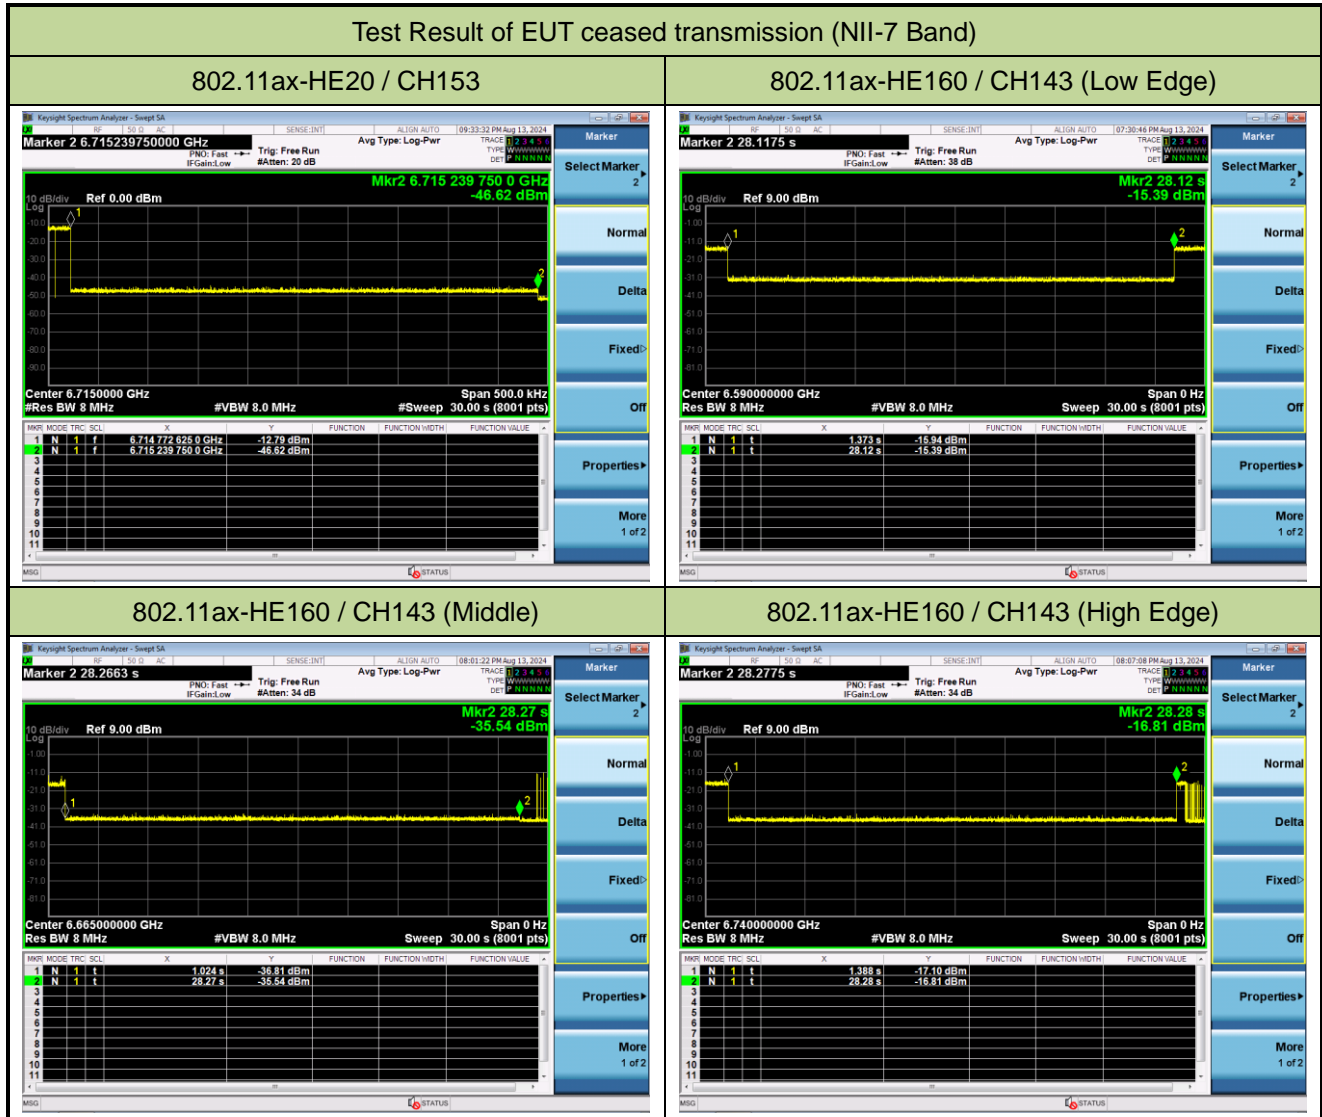

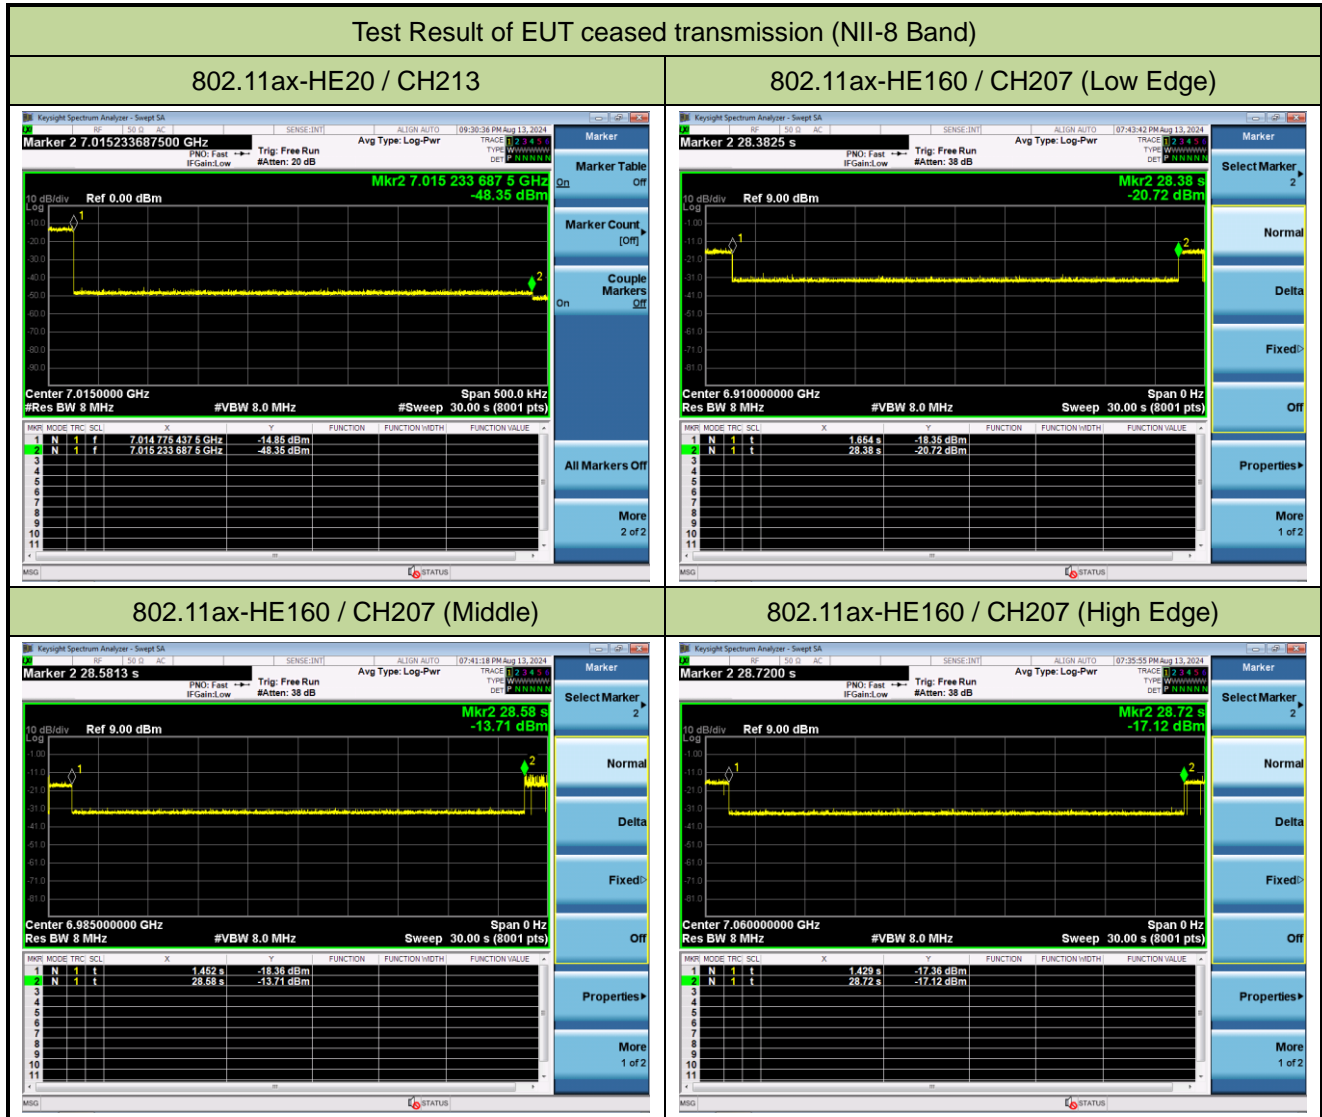

## A.8 Radiated Spurious Emission Test Result

### Test Data of Engine S0703

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE20 – CH1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11313.9	31.7	17.1	48.8	74.0	-25.2	Peak	Horizontal
	11681.1	32.2	17.2	49.4	74.0	-24.6	Peak	Horizontal
*	13629.3	29.9	18.7	48.6	88.2	-39.6	Peak	Horizontal
*	14192.0	29.8	19.4	49.2	88.2	-39.0	Peak	Horizontal
	11334.3	30.2	17.3	47.5	74.0	-26.5	Peak	Vertical
	11830.7	29.1	17.3	46.4	74.0	-27.6	Peak	Vertical
*	13802.7	30.1	18.1	48.2	88.2	-40.0	Peak	Vertical
*	14156.3	31.0	19.4	50.4	88.2	-37.8	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE20 – CH49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11135.4	30.1	16.2	46.3	74.0	-27.7	Peak	Horizontal
	11982.0	29.9	16.7	46.6	74.0	-27.4	Peak	Horizontal
*	13024.1	28.9	17.2	46.1	88.2	-42.1	Peak	Horizontal
*	13802.7	30.6	18.1	48.7	88.2	-39.5	Peak	Horizontal
	11079.3	29.9	16.6	46.5	74.0	-27.5	Peak	Vertical
	11982.0	30.0	16.7	46.7	74.0	-27.3	Peak	Vertical
*	13699.0	30.1	18.2	48.3	88.2	-39.9	Peak	Vertical
*	13942.1	29.5	18.7	48.2	88.2	-40.0	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE20 – CH93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10967.1	32.0	16.0	48.0	74.0	-26.0	Peak	Horizontal
	11633.5	29.7	17.5	47.2	74.0	-26.8	Peak	Horizontal
*	13632.7	30.0	18.7	48.7	88.2	-39.5	Peak	Horizontal
*	14018.6	29.3	19.2	48.5	88.2	-39.7	Peak	Horizontal
*	10210.6	29.8	14.1	43.9	88.2	-44.3	Peak	Vertical
	11138.8	29.4	16.2	45.6	74.0	-28.4	Peak	Vertical
	11852.8	30.0	16.9	46.9	74.0	-27.1	Peak	Vertical
*	13845.2	29.5	18.3	47.8	88.2	-40.4	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE20 – CH97
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11455.0	29.6	17.2	46.8	74.0	-27.2	Peak	Horizontal
	11890.2	28.3	17.0	45.3	74.0	-28.7	Peak	Horizontal
*	13931.9	27.7	18.5	46.2	88.2	-42.0	Peak	Horizontal
*	14328.0	29.8	19.6	49.4	88.2	-38.8	Peak	Horizontal
*	9989.6	31.3	13.4	44.7	88.2	-43.5	Peak	Vertical
	11383.6	29.7	17.2	46.9	74.0	-27.1	Peak	Vertical
	12000.7	30.6	16.6	47.2	74.0	-26.8	Peak	Vertical
*	13889.4	30.1	18.9	49.0	88.2	-39.2	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE20 – CH105
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11172.8	29.2	16.9	46.1	74.0	-27.9	Peak	Horizontal
	11890.2	30.3	17.0	47.3	74.0	-26.7	Peak	Horizontal
*	13845.2	30.0	18.3	48.3	88.2	-39.9	Peak	Horizontal
*	14107.0	30.3	19.3	49.6	88.2	-38.6	Peak	Horizontal
*	10241.2	30.7	14.1	44.8	88.2	-43.4	Peak	Vertical
	11069.1	30.2	16.3	46.5	74.0	-27.5	Peak	Vertical
	12189.4	30.8	17.3	48.1	74.0	-25.9	Peak	Vertical
*	13976.1	29.8	18.9	48.7	88.2	-39.5	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE20 – CH113
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10210.6	29.9	14.1	44.0	88.2	-44.2	Peak	Horizontal
	11208.5	29.9	16.5	46.4	74.0	-27.6	Peak	Horizontal
	11927.6	30.4	17.0	47.4	74.0	-26.6	Peak	Horizontal
*	13845.2	31.3	18.3	49.6	88.2	-38.6	Peak	Horizontal
	11138.8	30.5	16.2	46.7	74.0	-27.3	Peak	Vertical
	12038.1	29.9	16.7	46.6	74.0	-27.4	Peak	Vertical
*	12971.4	29.9	17.5	47.4	88.2	-40.8	Peak	Vertical
*	13802.7	30.0	18.1	48.1	88.2	-40.1	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE20 – CH117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10178.3	31.3	13.8	45.1	88.2	-43.1	Peak	Horizontal
	10933.1	31.1	16.3	47.4	74.0	-26.6	Peak	Horizontal
	11927.6	30.7	17.0	47.7	74.0	-26.3	Peak	Horizontal
*	14062.8	30.7	19.2	49.9	88.2	-38.3	Peak	Horizontal
*	10146.0	32.5	13.6	46.1	88.2	-42.1	Peak	Vertical
	11312.2	29.9	17.1	47.0	74.0	-27.0	Peak	Vertical
	11963.3	29.5	16.9	46.4	74.0	-27.6	Peak	Vertical
*	13802.7	29.8	18.1	47.9	88.2	-40.3	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE20 – CH149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10083.1	31.2	13.4	44.6	88.2	-43.6	Peak	Horizontal
	11278.2	30.3	16.8	47.1	74.0	-26.9	Peak	Horizontal
	12075.5	30.6	16.9	47.5	74.0	-26.5	Peak	Horizontal
*	13717.7	29.3	18.6	47.9	88.2	-40.3	Peak	Horizontal
	11455.0	31.0	17.2	48.2	74.0	-25.8	Peak	Vertical
	11852.8	30.4	16.9	47.3	74.0	-26.7	Peak	Vertical
*	13889.4	30.5	18.9	49.4	88.2	-38.8	Peak	Vertical
*	14872.0	31.5	18.8	50.3	88.2	-37.9	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE20 – CH181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11208.5	31.3	16.5	47.8	74.0	-26.2	Peak	Horizontal
	12000.7	30.0	16.6	46.6	74.0	-27.4	Peak	Horizontal
*	13760.2	31.8	18.0	49.8	88.2	-38.4	Peak	Horizontal
*	14917.9	31.8	19.2	51.0	88.2	-37.2	Peak	Horizontal
*	10115.4	32.3	13.7	46.0	88.2	-42.2	Peak	Vertical
	11069.1	31.0	16.3	47.3	74.0	-26.7	Peak	Vertical
	11669.2	30.9	17.4	48.3	74.0	-25.7	Peak	Vertical
*	13931.9	31.1	18.5	49.6	88.2	-38.6	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE20 – CH185
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10273.5	30.3	14.4	44.7	88.2	-43.5	Peak	Horizontal
	11138.8	30.9	16.2	47.1	74.0	-26.9	Peak	Horizontal
	12038.1	30.5	16.7	47.2	74.0	-26.8	Peak	Horizontal
*	13889.4	29.9	18.9	48.8	88.2	-39.4	Peak	Horizontal
*	10052.5	31.2	13.6	44.8	88.2	-43.4	Peak	Vertical
	11138.8	30.4	16.2	46.6	74.0	-27.4	Peak	Vertical
	11706.6	30.5	17.5	48.0	74.0	-26.0	Peak	Vertical
*	13802.7	30.7	18.1	48.8	88.2	-39.4	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE20 – CH189
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9959.0	31.8	13.5	45.3	88.2	-42.9	Peak	Horizontal
	11242.5	30.5	17.0	47.5	74.0	-26.5	Peak	Horizontal
	12075.5	29.9	16.9	46.8	74.0	-27.2	Peak	Horizontal
*	14018.6	30.3	19.2	49.5	88.2	-38.7	Peak	Horizontal
*	10146.0	31.2	13.6	44.8	88.2	-43.4	Peak	Vertical
	11069.1	32.1	16.3	48.4	74.0	-25.6	Peak	Vertical
	11815.4	29.6	17.5	47.1	74.0	-26.9	Peak	Vertical
*	14062.8	30.4	19.2	49.6	88.2	-38.6	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE20 – CH209
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10115.4	30.6	13.7	44.3	88.2	-43.9	Peak	Horizontal
	11208.5	29.9	16.5	46.4	74.0	-27.6	Peak	Horizontal
	11779.7	30.8	17.1	47.9	74.0	-26.1	Peak	Horizontal
*	13802.7	30.3	18.1	48.4	88.2	-39.8	Peak	Horizontal
*	10052.5	31.5	13.6	45.1	88.2	-43.1	Peak	Vertical
	11242.5	31.2	17.0	48.2	74.0	-25.8	Peak	Vertical
	11779.7	31.0	17.1	48.1	74.0	-25.9	Peak	Vertical
*	13760.2	30.9	18.0	48.9	88.2	-39.3	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE20 – CH233
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10021.9	31.8	13.4	45.2	88.2	-43.0	Peak	Horizontal
*	10273.5	31.5	14.4	45.9	88.2	-42.3	Peak	Horizontal
	11383.6	30.4	17.2	47.6	74.0	-26.4	Peak	Horizontal
	11779.7	30.8	17.1	47.9	74.0	-26.1	Peak	Horizontal
*	9989.6	31.9	13.4	45.3	88.2	-42.9	Peak	Vertical
	11633.5	31.2	17.5	48.7	74.0	-25.3	Peak	Vertical
	12000.7	30.5	16.6	47.1	74.0	-26.9	Peak	Vertical
*	13462.7	33.9	18.6	52.5	88.2	-35.7	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE40 – CH3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10178.3	29.6	13.8	43.4	88.2	-44.8	Peak	Horizontal
	11035.1	29.9	16.1	46.0	74.0	-28.0	Peak	Horizontal
	11789.0	29.1	17.3	46.4	74.0	-27.6	Peak	Horizontal
*	13760.2	29.6	18.0	47.6	88.2	-40.6	Peak	Horizontal
*	10273.5	31.0	14.4	45.4	88.2	-42.8	Peak	Vertical
	11597.8	30.7	17.0	47.7	74.0	-26.3	Peak	Vertical
	12458.0	30.0	16.3	46.3	74.0	-27.7	Peak	Vertical
*	13802.7	30.6	18.1	48.7	88.2	-39.5	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE40 – CH51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10241.2	30.7	14.1	44.8	88.2	-43.4	Peak	Horizontal
	11312.2	29.1	17.1	46.2	74.0	-27.8	Peak	Horizontal
	11633.5	30.1	17.5	47.6	74.0	-26.4	Peak	Horizontal
*	13012.2	29.3	17.2	46.5	88.2	-41.7	Peak	Horizontal
*	10115.4	31.7	13.7	45.4	88.2	-42.8	Peak	Vertical
	11138.8	29.4	16.2	45.6	74.0	-28.4	Peak	Vertical
	11597.8	30.0	17.0	47.0	74.0	-27.0	Peak	Vertical
*	13012.2	29.7	17.2	46.9	88.2	-41.3	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE40 – CH91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10241.2	31.9	14.1	46.0	88.2	-42.2	Peak	Horizontal
	11138.8	30.2	16.2	46.4	74.0	-27.6	Peak	Horizontal
	11597.8	30.2	17.0	47.2	74.0	-26.8	Peak	Horizontal
*	13845.2	31.1	18.3	49.4	88.2	-38.8	Peak	Horizontal
*	10273.5	30.9	14.4	45.3	88.2	-42.9	Peak	Vertical
	10899.1	30.2	16.2	46.4	74.0	-27.6	Peak	Vertical
	11669.2	31.0	17.4	48.4	74.0	-25.6	Peak	Vertical
*	13976.1	29.8	18.9	48.7	88.2	-39.5	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE40 – CH99
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10241.2	30.2	14.1	44.3	88.2	-43.9	Peak	Horizontal
	11242.5	31.1	17.0	48.1	74.0	-25.9	Peak	Horizontal
	12075.5	29.7	16.9	46.6	74.0	-27.4	Peak	Horizontal
*	13802.7	29.8	18.1	47.9	88.2	-40.3	Peak	Horizontal
*	9867.2	31.8	13.4	45.2	88.2	-43.0	Peak	Vertical
	11242.5	30.0	17.0	47.0	74.0	-27.0	Peak	Vertical
	11779.7	30.2	17.1	47.3	74.0	-26.7	Peak	Vertical
*	13889.4	30.4	18.9	49.3	88.2	-38.9	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE40 – CH107
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10305.8	31.4	14.7	46.1	88.2	-42.1	Peak	Horizontal
	11278.2	30.5	16.8	47.3	74.0	-26.7	Peak	Horizontal
	11706.6	29.5	17.5	47.0	74.0	-27.0	Peak	Horizontal
*	13717.7	29.6	18.6	48.2	88.2	-40.0	Peak	Horizontal
*	10146.0	30.9	13.6	44.5	88.2	-43.7	Peak	Vertical
	11172.8	29.5	16.9	46.4	74.0	-27.6	Peak	Vertical
	11597.8	30.1	17.0	47.1	74.0	-26.9	Peak	Vertical
*	12930.6	30.5	17.0	47.5	88.2	-40.7	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE40 – CH115
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10115.4	31.1	13.7	44.8	88.2	-43.4	Peak	Horizontal
	11035.1	30.0	16.1	46.1	74.0	-27.9	Peak	Horizontal
	11742.3	31.8	17.2	49.0	74.0	-25.0	Peak	Horizontal
*	13760.2	29.9	18.0	47.9	88.2	-40.3	Peak	Horizontal
*	10021.9	32.5	13.4	45.9	88.2	-42.3	Peak	Vertical
	11455.0	30.0	17.2	47.2	74.0	-26.8	Peak	Vertical
	12226.8	30.1	17.1	47.2	74.0	-26.8	Peak	Vertical
*	13845.2	30.2	18.3	48.5	88.2	-39.7	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE40 – CH123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10021.9	32.0	13.4	45.4	88.2	-42.8	Peak	Horizontal
	11455.0	30.5	17.2	47.7	74.0	-26.3	Peak	Horizontal
	12189.4	29.9	17.3	47.2	74.0	-26.8	Peak	Horizontal
*	13760.2	30.0	18.0	48.0	88.2	-40.2	Peak	Horizontal
*	9867.2	32.8	13.4	46.2	88.2	-42.0	Peak	Vertical
	11490.7	31.0	17.5	48.5	74.0	-25.5	Peak	Vertical
	12226.8	29.7	17.1	46.8	74.0	-27.2	Peak	Vertical
*	13675.2	30.3	17.9	48.2	88.2	-40.0	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE40 – CH147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9959.0	32.8	13.5	46.3	88.2	-41.9	Peak	Horizontal
	11001.1	30.4	16.5	46.9	74.0	-27.1	Peak	Horizontal
	11815.4	29.8	17.5	47.3	74.0	-26.7	Peak	Horizontal
*	13889.4	28.9	18.9	47.8	88.2	-40.4	Peak	Horizontal
*	10052.5	32.1	13.6	45.7	88.2	-42.5	Peak	Vertical
	11069.1	31.8	16.3	48.1	74.0	-25.9	Peak	Vertical
	11633.5	32.4	17.5	49.9	74.0	-24.1	Peak	Vertical
*	12850.7	31.0	17.2	48.2	88.2	-40.0	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE40 – CH179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10273.5	31.4	14.4	45.8	88.2	-42.4	Peak	Horizontal
	11172.8	31.1	16.9	48.0	74.0	-26.0	Peak	Horizontal
	11633.5	31.3	17.5	48.8	74.0	-25.2	Peak	Horizontal
*	13675.2	30.3	17.9	48.2	88.2	-40.0	Peak	Horizontal
*	9867.2	31.3	13.4	44.7	88.2	-43.5	Peak	Vertical
	11347.9	30.3	17.1	47.4	74.0	-26.6	Peak	Vertical
	11890.2	30.0	17.0	47.0	74.0	-27.0	Peak	Vertical
*	13845.2	29.3	18.3	47.6	88.2	-40.6	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE40 – CH187
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10241.2	31.9	14.1	46.0	88.2	-42.2	Peak	Horizontal
	11242.5	29.8	17.0	46.8	74.0	-27.2	Peak	Horizontal
	12418.9	30.6	16.2	46.8	74.0	-27.2	Peak	Horizontal
*	13976.1	29.9	18.9	48.8	88.2	-39.4	Peak	Horizontal
*	10146.0	32.4	13.6	46.0	88.2	-42.2	Peak	Vertical
	11312.2	30.9	17.1	48.0	74.0	-26.0	Peak	Vertical
	11706.6	31.2	17.5	48.7	74.0	-25.3	Peak	Vertical
*	13760.2	30.1	18.0	48.1	88.2	-40.1	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE40 – CH195
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10021.9	32.2	13.4	45.6	88.2	-42.6	Peak	Horizontal
	11419.3	29.6	17.2	46.8	74.0	-27.2	Peak	Horizontal
	11927.6	29.8	17.0	46.8	74.0	-27.2	Peak	Horizontal
*	13464.4	30.2	18.6	48.8	88.2	-39.4	Peak	Horizontal
*	10402.7	30.4	14.8	45.2	88.2	-43.0	Peak	Vertical
	11419.3	30.6	17.2	47.8	74.0	-26.2	Peak	Vertical
	12495.4	30.4	16.2	46.6	74.0	-27.4	Peak	Vertical
*	13845.2	30.1	18.3	48.4	88.2	-39.8	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE40 – CH211
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9928.4	33.0	13.4	46.4	88.2	-41.8	Peak	Horizontal
	11069.1	30.8	16.3	47.1	74.0	-26.9	Peak	Horizontal
	11669.2	30.1	17.4	47.5	74.0	-26.5	Peak	Horizontal
*	13931.9	29.7	18.5	48.2	88.2	-40.0	Peak	Horizontal
*	10402.7	30.6	14.8	45.4	88.2	-42.8	Peak	Vertical
	11562.1	30.7	17.4	48.1	74.0	-25.9	Peak	Vertical
	12152.0	30.6	16.9	47.5	74.0	-26.5	Peak	Vertical
*	13931.9	30.1	18.5	48.6	88.2	-39.6	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE40 – CH227
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10083.1	31.3	13.4	44.7	88.2	-43.5	Peak	Horizontal
	11138.8	29.7	16.2	45.9	74.0	-28.1	Peak	Horizontal
	12000.7	31.0	16.6	47.6	74.0	-26.4	Peak	Horizontal
*	13931.9	29.8	18.5	48.3	88.2	-39.9	Peak	Horizontal
*	10241.2	31.0	14.1	45.1	88.2	-43.1	Peak	Vertical
	11208.5	31.0	16.5	47.5	74.0	-26.5	Peak	Vertical
	12038.1	30.3	16.7	47.0	74.0	-27.0	Peak	Vertical
*	13675.2	29.7	17.9	47.6	88.2	-40.6	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE80 – CH7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9942.0	34.5	13.4	47.9	88.2	-40.3	Peak	Horizontal
	11419.3	30.0	17.2	47.2	74.0	-26.8	Peak	Horizontal
	11779.7	31.2	17.1	48.3	74.0	-25.7	Peak	Horizontal
*	14147.8	34.4	19.6	54.0	88.2	-34.2	Peak	Horizontal
*	10285.4	32.7	14.6	47.3	88.2	-40.9	Peak	Vertical
	11480.5	32.5	17.4	49.9	74.0	-24.1	Peak	Vertical
	12191.1	31.6	17.3	48.9	74.0	-25.1	Peak	Vertical
*	13867.3	32.6	19.0	51.6	88.2	-36.6	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE80 – CH55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9998.1	33.2	13.3	46.5	88.2	-41.7	Peak	Horizontal
	11240.8	32.2	16.9	49.1	74.0	-24.9	Peak	Horizontal
	11738.9	31.4	17.3	48.7	74.0	-25.3	Peak	Horizontal
*	13962.5	33.8	19.0	52.8	88.2	-35.4	Peak	Horizontal
*	9991.3	34.1	13.4	47.5	88.2	-40.7	Peak	Vertical
	11308.8	31.6	17.0	48.6	74.0	-25.4	Peak	Vertical
	12112.9	32.5	17.2	49.7	74.0	-24.3	Peak	Vertical
*	13717.7	32.5	18.6	51.1	88.2	-37.1	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE80 – CH87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10021.9	31.8	13.4	45.2	88.2	-43.0	Peak	Horizontal
	11455.0	29.4	17.2	46.6	74.0	-27.4	Peak	Horizontal
	12152.0	29.6	16.9	46.5	74.0	-27.5	Peak	Horizontal
*	14054.3	34.3	19.3	53.6	88.2	-34.6	Peak	Horizontal
*	10010.0	33.6	13.3	46.9	88.2	-41.3	Peak	Vertical
	11393.8	31.3	17.3	48.6	74.0	-25.4	Peak	Vertical
	12099.3	31.4	17.1	48.5	74.0	-25.5	Peak	Vertical
*	13952.3	31.4	18.9	50.3	88.2	-37.9	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE80 – CH103
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10144.3	32.7	13.6	46.3	88.2	-41.9	Peak	Horizontal
	11324.1	31.8	17.3	49.1	74.0	-24.9	Peak	Horizontal
	11839.2	31.4	17.2	48.6	74.0	-25.4	Peak	Horizontal
*	14093.4	32.1	19.0	51.1	88.2	-37.1	Peak	Horizontal
*	10055.9	34.2	13.5	47.7	88.2	-40.5	Peak	Vertical
	11626.7	31.5	17.4	48.9	74.0	-25.1	Peak	Vertical
	11963.3	32.3	16.9	49.2	74.0	-24.8	Peak	Vertical
*	13872.4	31.2	19.0	50.2	88.2	-38.0	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE80 – CH119
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9952.2	34.1	13.5	47.6	88.2	-40.6	Peak	Horizontal
	11608.0	32.8	16.9	49.7	74.0	-24.3	Peak	Horizontal
	12284.6	32.0	17.0	49.0	74.0	-25.0	Peak	Horizontal
*	13926.8	32.2	18.4	50.6	88.2	-37.6	Peak	Horizontal
*	9959.0	34.1	13.5	47.6	88.2	-40.6	Peak	Vertical
	11519.6	32.0	17.2	49.2	74.0	-24.8	Peak	Vertical
	12136.7	31.7	17.0	48.7	74.0	-25.3	Peak	Vertical
*	13911.5	32.3	18.3	50.6	88.2	-37.6	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE80 – CH135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10343.2	32.4	14.7	47.1	88.2	-41.1	Peak	Horizontal
	11410.8	31.2	17.3	48.5	74.0	-25.5	Peak	Horizontal
	12145.2	33.1	16.9	50.0	74.0	-24.0	Peak	Horizontal
*	13716.0	32.0	18.6	50.6	88.2	-37.6	Peak	Horizontal
*	9982.8	33.8	13.4	47.2	88.2	-41.0	Peak	Vertical
	11531.5	32.1	17.3	49.4	74.0	-24.6	Peak	Vertical
	12116.3	31.7	17.2	48.9	74.0	-25.1	Peak	Vertical
*	13863.9	31.5	18.9	50.4	88.2	-37.8	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE80 – CH151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9933.5	33.8	13.4	47.2	88.2	-41.0	Peak	Horizontal
	11548.5	31.8	17.3	49.1	74.0	-24.9	Peak	Horizontal
	12055.1	32.1	16.8	48.9	74.0	-25.1	Peak	Horizontal
*	13661.6	32.2	18.1	50.3	88.2	-37.9	Peak	Horizontal
*	9938.6	34.3	13.4	47.7	88.2	-40.5	Peak	Vertical
	11249.3	31.7	17.1	48.8	74.0	-25.2	Peak	Vertical
	12192.8	31.5	17.3	48.8	74.0	-25.2	Peak	Vertical
*	13874.1	31.7	19.0	50.7	88.2	-37.5	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE80 – CH167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10326.2	32.7	14.7	47.4	88.2	-40.8	Peak	Horizontal
	11334.3	31.6	17.3	48.9	74.0	-25.1	Peak	Horizontal
	11812.0	32.5	17.5	50.0	74.0	-24.0	Peak	Horizontal
*	13977.8	31.4	18.9	50.3	88.2	-37.9	Peak	Horizontal
*	10047.4	33.2	13.6	46.8	88.2	-41.4	Peak	Vertical
	11563.8	31.8	17.4	49.2	74.0	-24.8	Peak	Vertical
	11914.0	32.3	16.9	49.2	74.0	-24.8	Peak	Vertical
*	13964.2	31.6	19.0	50.6	88.2	-37.6	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE80 – CH183
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9913.1	33.8	13.4	47.2	88.2	-41.0	Peak	Horizontal
	11327.5	32.3	17.3	49.6	74.0	-24.4	Peak	Horizontal
	12050.0	32.7	16.8	49.5	74.0	-24.5	Peak	Horizontal
*	13875.8	31.6	19.0	50.6	88.2	-37.6	Peak	Horizontal
*	9921.6	34.1	13.4	47.5	88.2	-40.7	Peak	Vertical
	11089.5	31.8	16.7	48.5	74.0	-25.5	Peak	Vertical
	11959.9	31.3	16.9	48.2	74.0	-25.8	Peak	Vertical
*	13991.4	32.3	18.8	51.1	88.2	-37.1	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE80 – CH199
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9899.5	34.0	13.5	47.5	88.2	-40.7	Peak	Horizontal
	10939.9	32.8	16.1	48.9	74.0	-25.1	Peak	Horizontal
	11619.9	32.6	17.2	49.8	74.0	-24.2	Peak	Horizontal
*	14039.0	31.3	19.4	50.7	88.2	-37.5	Peak	Horizontal
*	9931.8	34.9	13.4	48.3	88.2	-39.9	Peak	Vertical
	11329.2	32.3	17.3	49.6	74.0	-24.4	Peak	Vertical
	11732.1	32.1	17.4	49.5	74.0	-24.5	Peak	Vertical
*	13632.7	32.2	18.7	50.9	88.2	-37.3	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE80 – CH215
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10010.0	33.8	13.3	47.1	88.2	-41.1	Peak	Horizontal
	11256.1	32.1	17.0	49.1	74.0	-24.9	Peak	Horizontal
	12293.1	32.6	17.0	49.6	74.0	-24.4	Peak	Horizontal
*	14015.2	32.6	19.1	51.7	88.2	-36.5	Peak	Horizontal
*	9965.8	33.5	13.5	47.0	88.2	-41.2	Peak	Vertical
	11492.4	31.9	17.5	49.4	74.0	-24.6	Peak	Vertical
	12077.2	32.3	16.9	49.2	74.0	-24.8	Peak	Vertical
*	13629.3	31.2	18.7	49.9	88.2	-38.3	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE160 – CH15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9936.9	34.4	13.4	47.8	88.2	-40.4	Peak	Horizontal
	11009.6	31.9	16.5	48.4	74.0	-25.6	Peak	Horizontal
	11689.6	32.4	17.3	49.7	74.0	-24.3	Peak	Horizontal
*	13734.7	32.2	18.4	50.6	88.2	-37.6	Peak	Horizontal
*	9928.4	34.0	13.4	47.4	88.2	-40.8	Peak	Vertical
	11276.5	32.4	16.8	49.2	74.0	-24.8	Peak	Vertical
	11876.6	33.0	17.0	50.0	74.0	-24.0	Peak	Vertical
*	13717.7	33.1	18.6	51.7	88.2	-36.5	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE160 – CH47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9902.9	34.3	13.5	47.8	88.2	-40.4	Peak	Horizontal
	10895.7	33.5	16.2	49.7	74.0	-24.3	Peak	Horizontal
	11895.3	32.8	17.0	49.8	74.0	-24.2	Peak	Horizontal
*	13614.0	32.9	18.1	51.0	88.2	-37.2	Peak	Horizontal
*	10105.2	34.0	13.6	47.6	88.2	-40.6	Peak	Vertical
	10999.4	32.5	16.5	49.0	74.0	-25.0	Peak	Vertical
	12084.0	32.3	16.9	49.2	74.0	-24.8	Peak	Vertical
*	13874.1	32.3	19.0	51.3	88.2	-36.9	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE160 – CH79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10112.0	34.4	13.6	48.0	88.2	-40.2	Peak	Horizontal
	11398.9	32.4	17.3	49.7	74.0	-24.3	Peak	Horizontal
	11793.3	32.1	17.4	49.5	74.0	-24.5	Peak	Horizontal
*	13875.8	31.2	19.0	50.2	88.2	-38.0	Peak	Horizontal
*	9952.2	33.6	13.5	47.1	88.2	-41.1	Peak	Vertical
	11256.1	32.0	17.0	49.0	74.0	-25.0	Peak	Vertical
	11779.7	32.4	17.1	49.5	74.0	-24.5	Peak	Vertical
*	13965.9	31.4	19.0	50.4	88.2	-37.8	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE160 – CH111
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9919.9	34.1	13.4	47.5	88.2	-40.7	Peak	Horizontal
	11298.6	32.7	16.8	49.5	74.0	-24.5	Peak	Horizontal
	11647.1	32.0	17.6	49.6	74.0	-24.4	Peak	Horizontal
*	13717.7	32.0	18.6	50.6	88.2	-37.6	Peak	Horizontal
*	10220.8	33.3	14.1	47.4	88.2	-40.8	Peak	Vertical
	11067.4	32.6	16.3	48.9	74.0	-25.1	Peak	Vertical
	12090.8	32.2	17.0	49.2	74.0	-24.8	Peak	Vertical
*	13880.9	31.9	19.0	50.9	88.2	-37.3	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE160 – CH143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9970.9	32.7	13.5	46.2	88.2	-42.0	Peak	Horizontal
	11461.8	31.7	17.3	49.0	74.0	-25.0	Peak	Horizontal
	11924.2	31.8	17.0	48.8	74.0	-25.2	Peak	Horizontal
*	13945.5	31.7	18.8	50.5	88.2	-37.7	Peak	Horizontal
*	9991.3	34.5	13.4	47.9	88.2	-40.3	Peak	Vertical
	11642.0	32.5	17.6	50.1	74.0	-23.9	Peak	Vertical
	12034.7	32.4	16.7	49.1	74.0	-24.9	Peak	Vertical
*	13889.4	31.8	18.9	50.7	88.2	-37.5	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE160 – CH175
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9909.7	33.5	13.4	46.9	88.2	-41.3	Peak	Horizontal
	11213.6	32.4	16.5	48.9	74.0	-25.1	Peak	Horizontal
	12070.4	32.0	16.8	48.8	74.0	-25.2	Peak	Horizontal
*	14054.3	31.2	19.3	50.5	88.2	-37.7	Peak	Horizontal
*	10106.9	33.5	13.6	47.1	88.2	-41.1	Peak	Vertical
	11565.5	32.3	17.4	49.7	74.0	-24.3	Peak	Vertical
	11893.6	32.1	17.0	49.1	74.0	-24.9	Peak	Vertical
*	13991.4	31.8	18.8	50.6	88.2	-37.6	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-15	Test Mode	802.11ax-HE160 – CH207
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10151.1	33.2	13.6	46.8	88.2	-41.4	Peak	Horizontal
	11155.8	32.2	16.6	48.8	74.0	-25.2	Peak	Horizontal
	11966.7	31.4	16.9	48.3	74.0	-25.7	Peak	Horizontal
*	13872.4	31.6	19.0	50.6	88.2	-37.6	Peak	Horizontal
*	10193.6	32.1	14.0	46.1	88.2	-42.1	Peak	Vertical
	11172.8	31.6	16.9	48.5	74.0	-25.5	Peak	Vertical
	11859.6	32.3	16.9	49.2	74.0	-24.8	Peak	Vertical
*	13870.7	30.7	19.0	49.7	88.2	-38.5	Peak	Vertical


Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

**The Result of Radiated Emission below 1GHz:**

Site	WZ-AC2	Test Date	2024-07-15
Test Engineer	Bob Zhang	Temp./Humidity	25.4°C/61.0%
Factor	VULB 9162_30-7000MHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

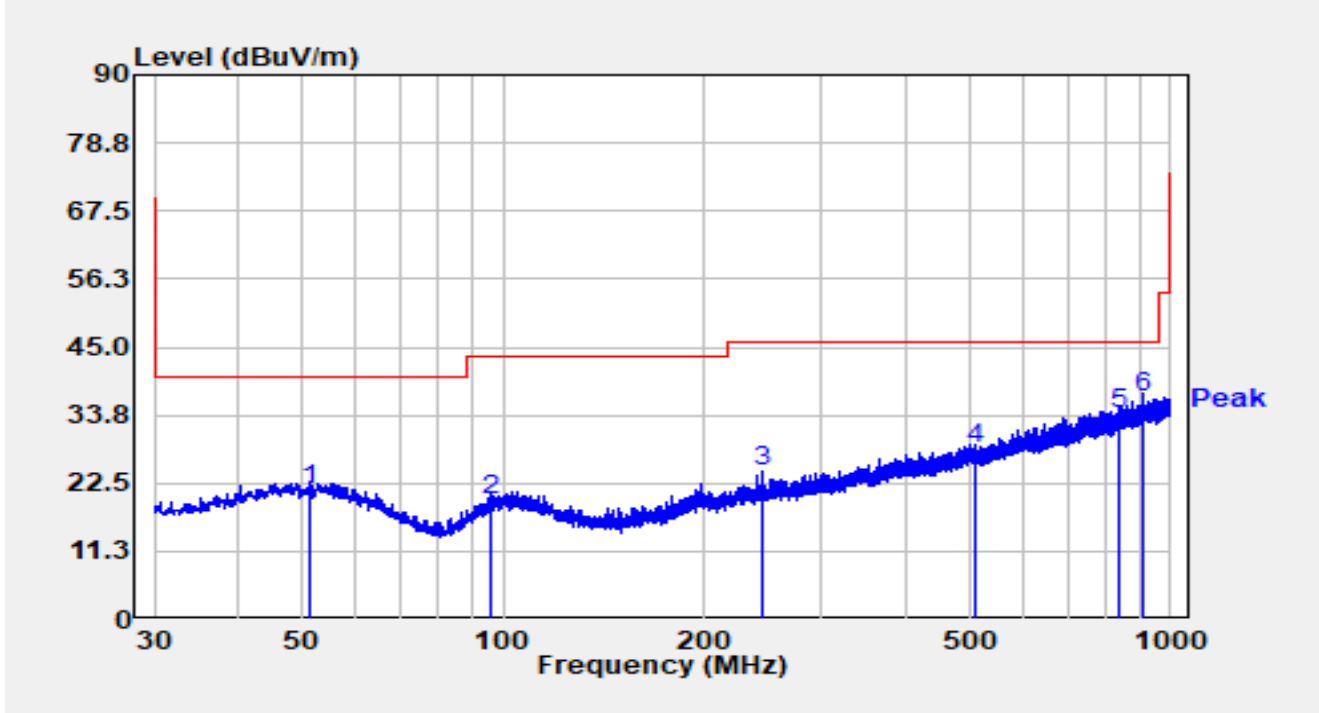


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		51.243	1.02	20.47	21.49	-18.51	40.00	QP
2		95.669	1.59	18.02	19.61	-23.89	43.50	QP
3		244.176	4.38	19.96	24.34	-21.66	46.00	QP
4		507.628	2.62	25.66	28.29	-17.71	46.00	QP
5		837.040	2.86	31.23	34.09	-11.91	46.00	QP
6	*	911.924	4.25	32.27	36.52	-9.48	46.00	QP

**Notes:**

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site	WZ-AC2	Test Date	2024-07-15
Test Engineer	Bob Zhang	Temp./Humidity	25.4°C/61.0%
Factor	VULB 9162_30-7000MHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

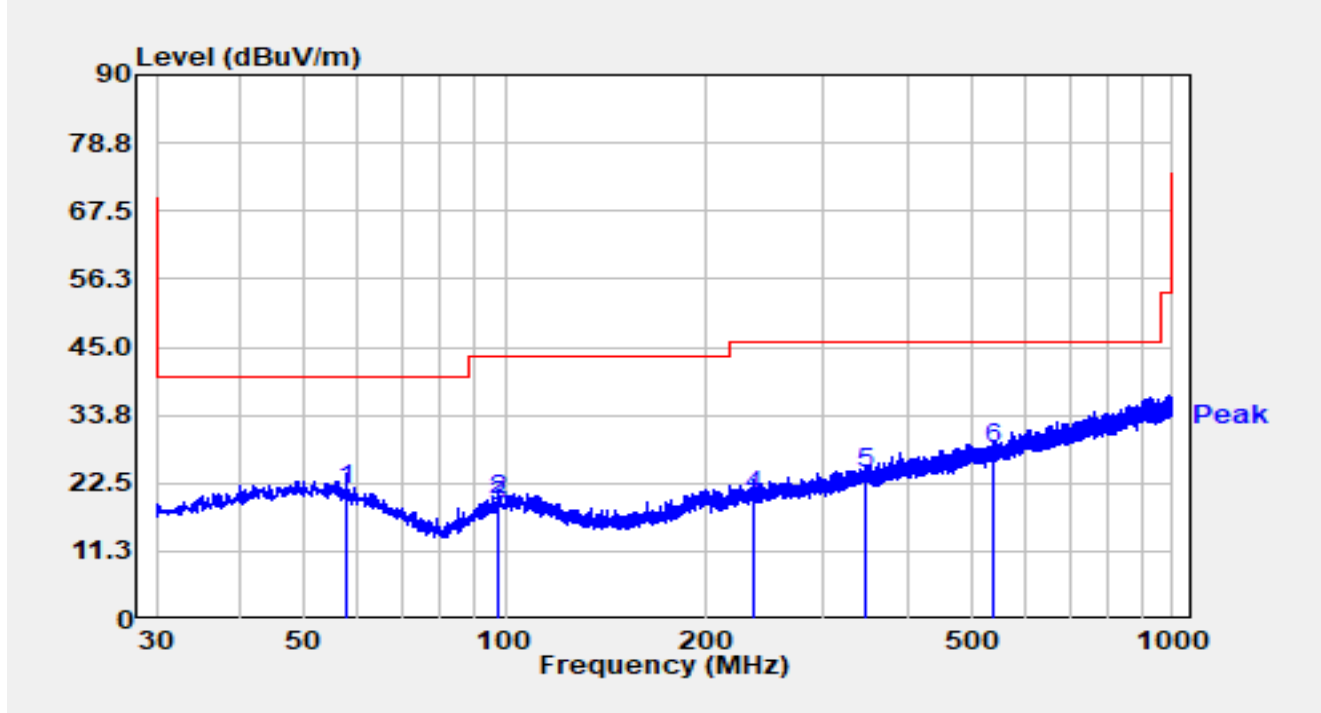

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		57.936	1.50	19.77	21.27	-18.73	40.00	QP
2		97.512	1.50	18.34	19.84	-23.66	43.50	QP
3		97.512	0.40	18.34	18.74	-24.76	43.50	QP
4		236.222	0.80	19.73	20.53	-25.47	46.00	QP
5		345.250	1.10	22.87	23.97	-22.03	46.00	QP
6	*	538.280	2.10	26.22	28.32	-17.68	46.00	QP

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

**Test Data of Engine S0803/N6803**

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-07-18	Test Mode	802.11ax-HE160 – CH143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10174.9	30.3	13.7	44.0	88.2	-44.2	Peak	Horizontal
	11179.6	29.5	16.9	46.4	74.0	-27.6	Peak	Horizontal
	11636.9	30.7	17.5	48.2	74.0	-25.8	Peak	Horizontal
*	14149.5	30.8	19.6	50.4	88.2	-37.8	Peak	Horizontal
*	10101.8	31.1	13.5	44.6	88.2	-43.6	Peak	Vertical
	11302.0	30.9	16.9	47.8	74.0	-26.2	Peak	Vertical
	11869.8	30.4	17.0	47.4	74.0	-26.6	Peak	Vertical
*	13972.7	29.7	19.0	48.7	88.2	-39.5	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)


Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

### A.9 Radiated Restricted Band Edge Test Result

#### Test Data of Engine S0703

##### Full RU

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

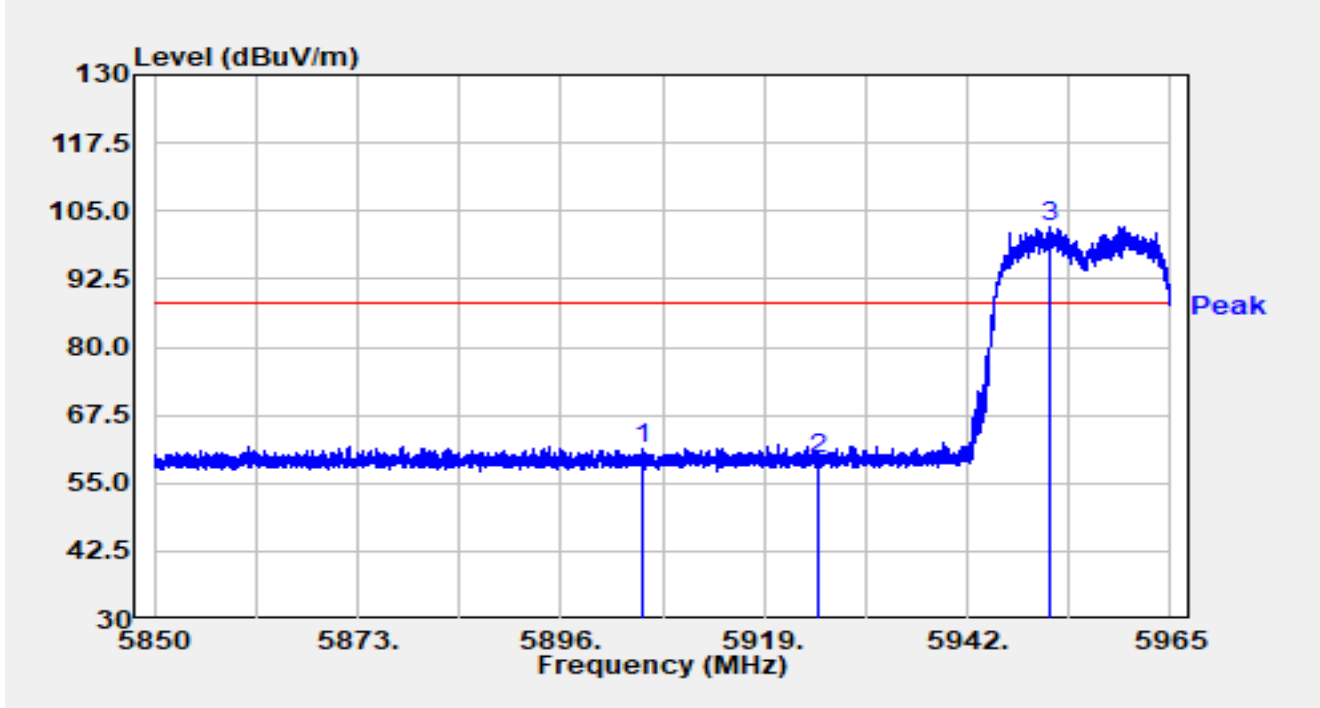


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5905.280	40.03	21.43	61.47	-26.73	88.20	Peak
2		5925.000	37.95	21.51	59.46	-28.74	88.20	Peak
3	*	5951.441	80.36	21.59	101.96	N/A	N/A	Peak

#### Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

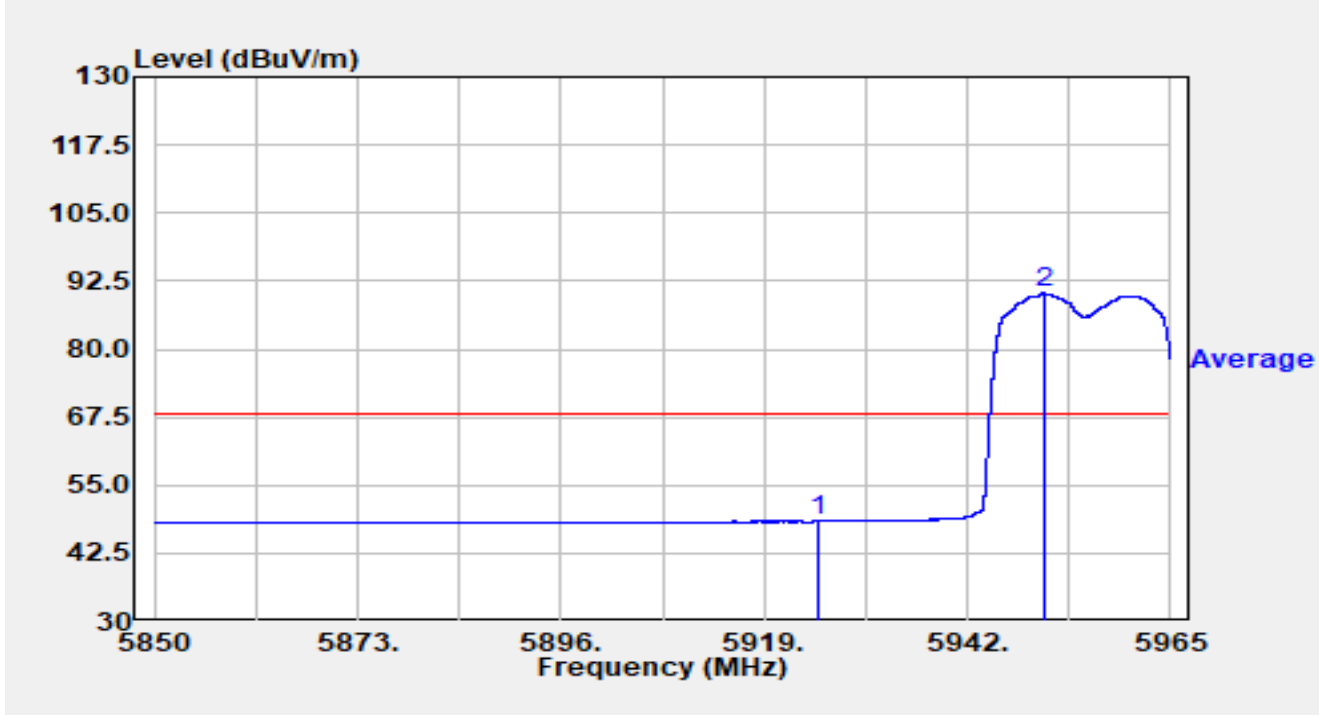


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5925.000	26.85	21.51	48.36	-19.84	68.20	Average
2	*	5950.637	68.65	21.59	90.24	N/A	N/A	Average

Notes:

1. "\*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).



Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

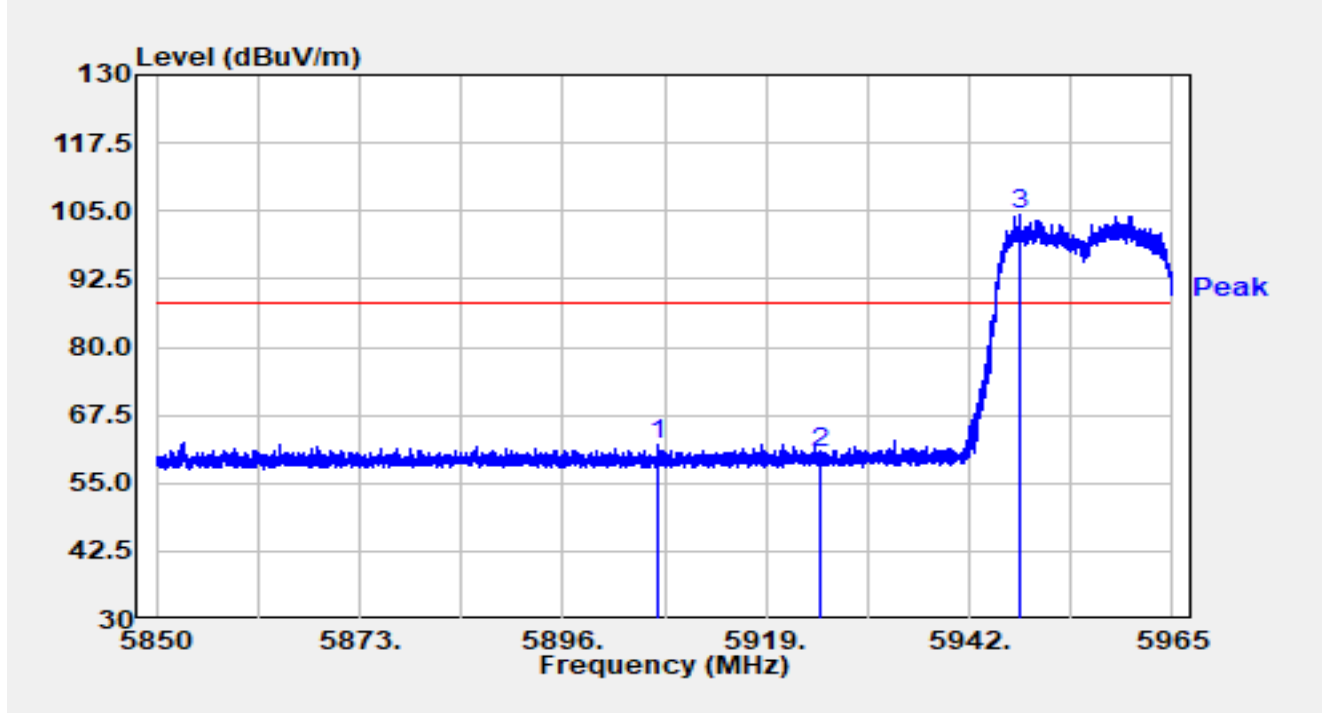


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5906.695	40.46	21.44	61.90	-26.30	88.20	Peak
2		5925.000	38.87	21.51	60.38	-27.82	88.20	Peak
3	*	5947.624	82.93	21.60	104.52	N/A	N/A	Peak

Notes:

1. "\*" , means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

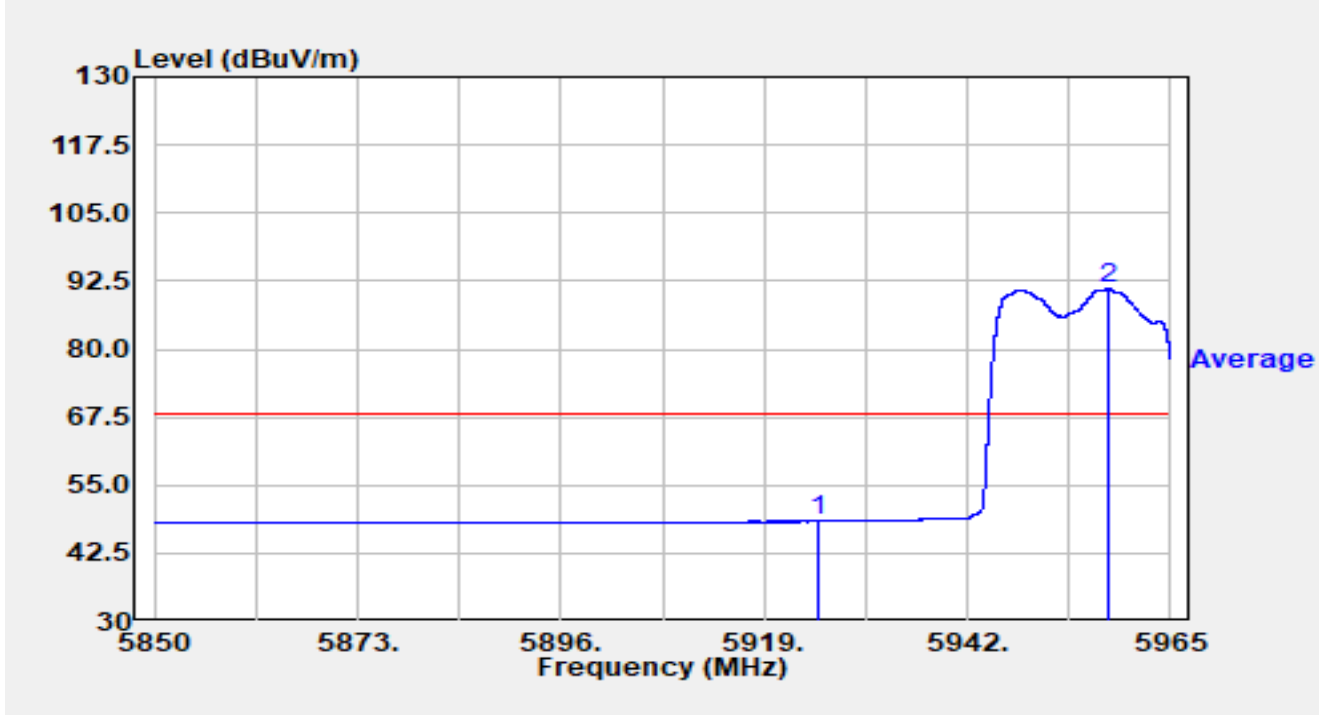


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5925.000	26.84	21.51	48.35	-19.85	68.20	Average
2	*	5957.997	69.48	21.58	91.07	N/A	N/A	Average

Notes:

1. "\*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-22
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C /46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE20 at 7115MHz		

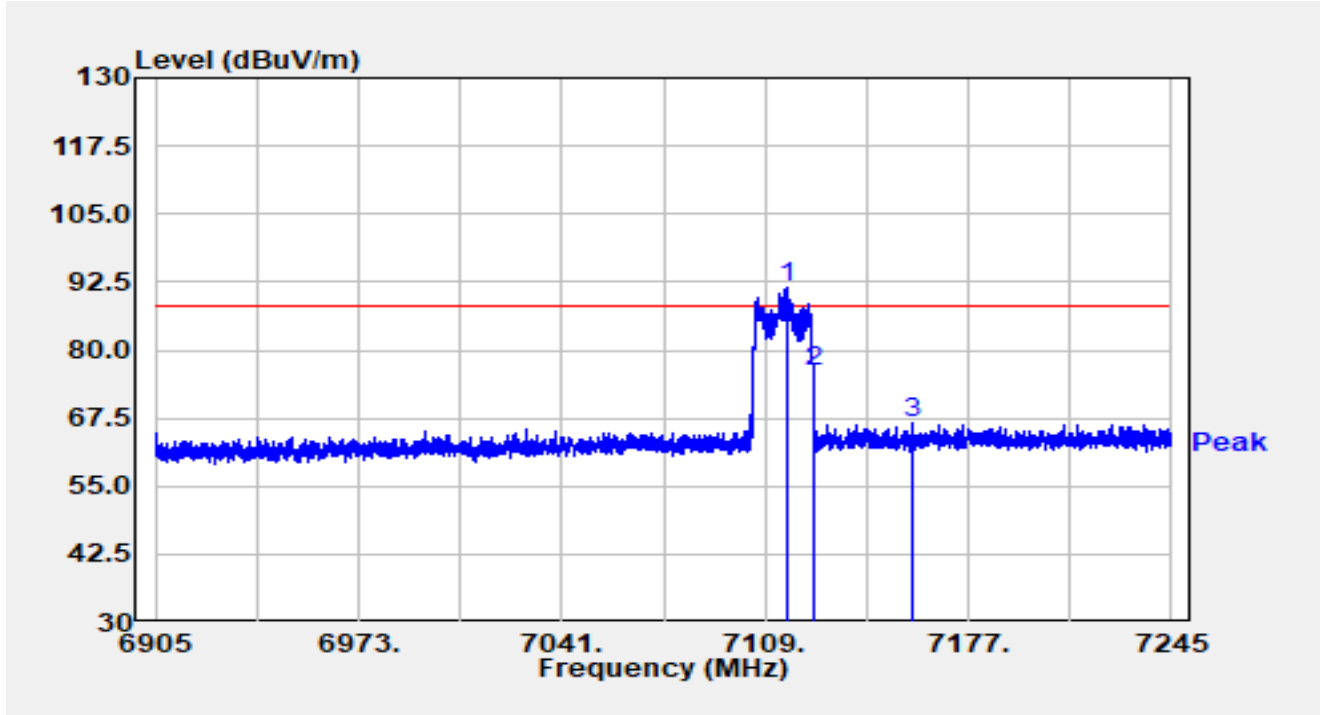


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7116.174	64.78	26.77	91.55	N/A	N/A	Peak
2		7125.000	49.13	26.90	76.03	-12.17	88.20	Peak
3		7158.096	39.21	27.35	66.56	-21.64	88.20	Peak

## Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-22
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C /46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE20 at 7115MHz		

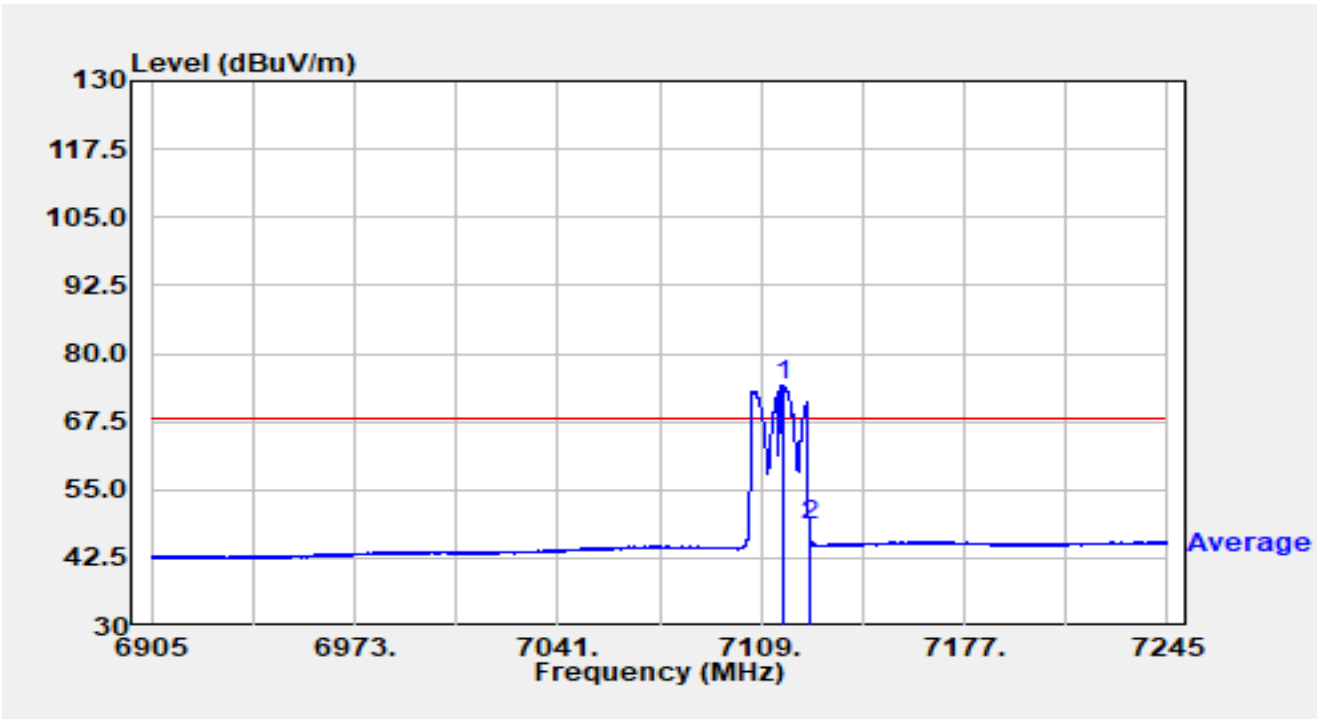


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement @RBW=100k (dBμV/m)	Measurement @RBW=1M (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7116.242	47.34	26.77	74.12	84.12	N/A	N/A	Average
2		7125.014	21.78	26.90	48.68	58.68	-9.52	68.20	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
4. Measurement @RBW=1M (dBμV/m) = Measurement @RBW=100k (dBμV/m) + 10\*log(1000/100).

Site	WZ-AC2	Test Date	2024-07-22
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C /46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE20 at 7115MHz		

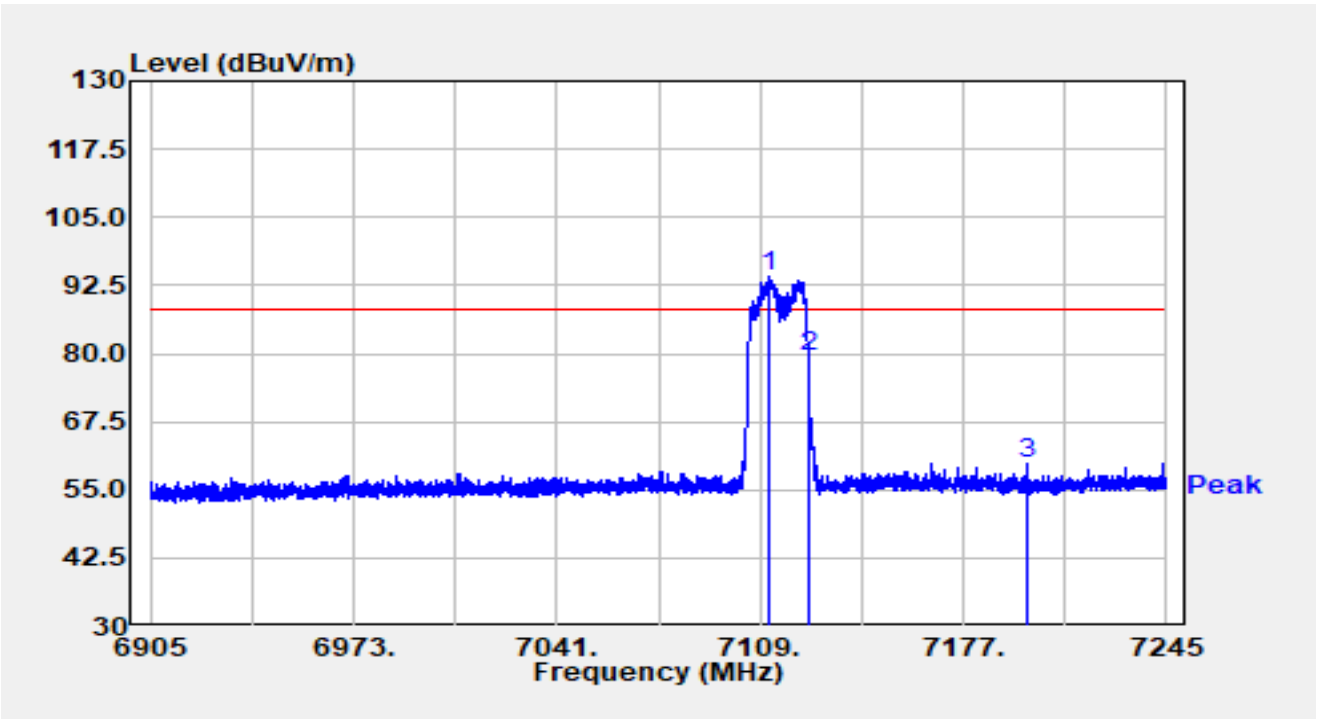


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7111.924	67.24	26.74	93.98	N/A	N/A	Peak
2		7125.000	52.69	26.90	79.59	-8.61	88.20	Peak
3		7198.114	32.66	26.98	59.65	-28.55	88.20	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-22
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C /46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE20 at 7115MHz		

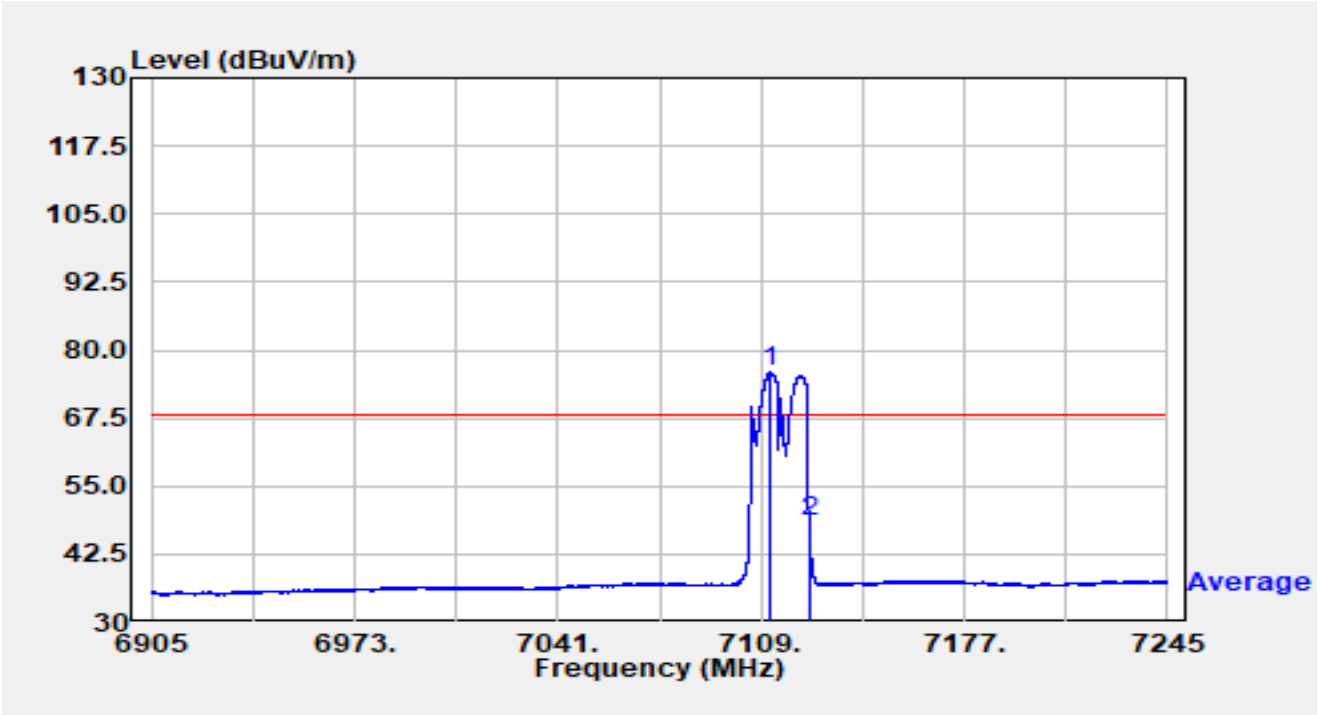


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement @ RBW=100k (dBμV/m)	Measurement @ RBW=1M (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7112.196	49.18	26.74	75.92	85.92	N/A	N/A	Average
2		7125.014	21.69	26.90	48.59	58.59	-9.61	68.20	Average

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
4. Measurement @RBW=1M (dBμV/m) = Measurement @RBW=100k (dBμV/m) + 10\*log(1000/100).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz		

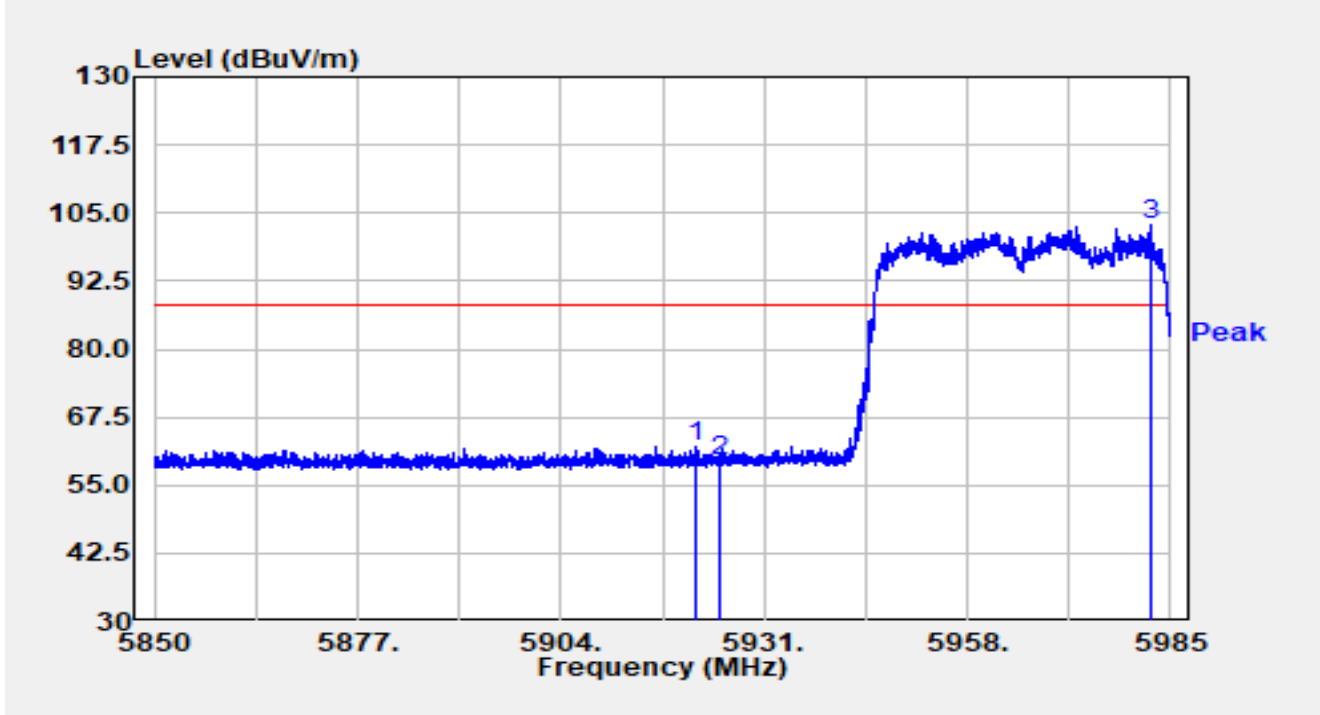


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5921.962	40.76	21.49	62.25	-25.95	88.20	Peak
2		5925.000	38.02	21.51	59.53	-28.67	88.20	Peak
3	*	5982.248	81.20	21.59	102.79	N/A	N/A	Peak

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz		

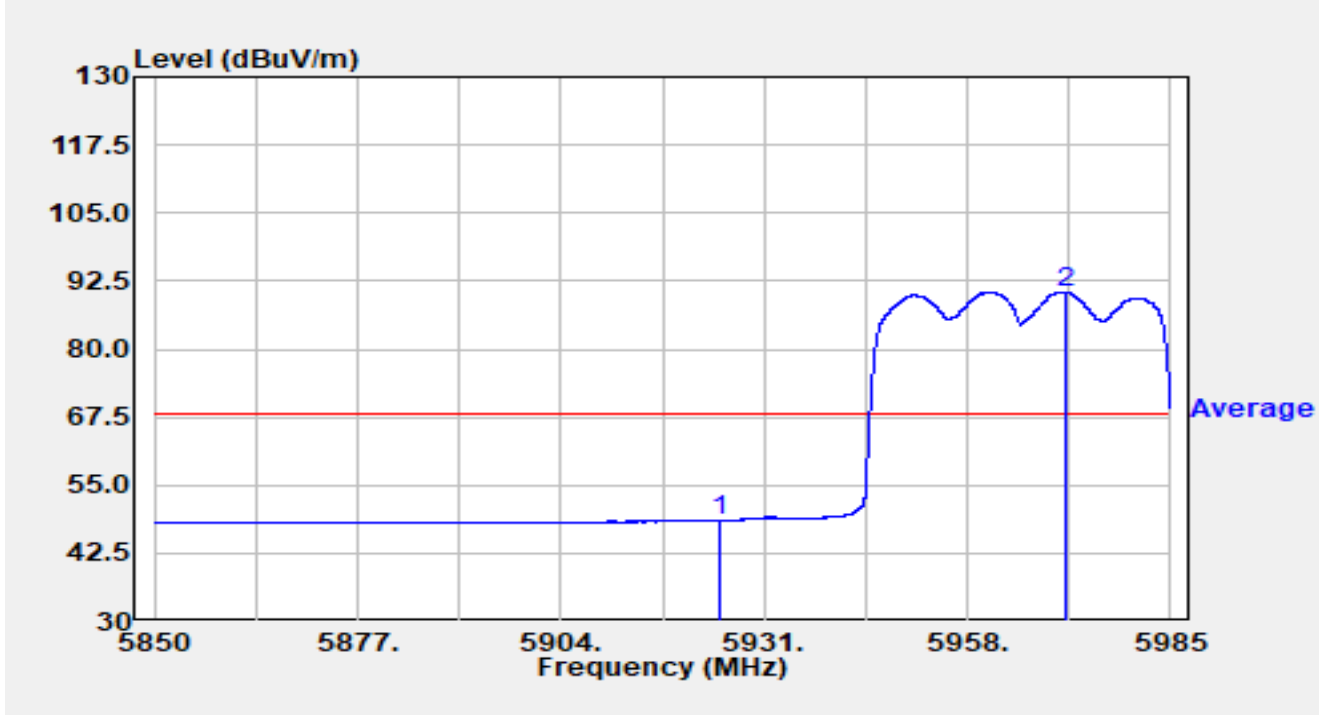


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5925.000	27.07	21.51	48.58	-19.62	68.20	Average
2	*	5970.917	68.97	21.59	90.56	N/A	N/A	Average

## Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).



Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz		

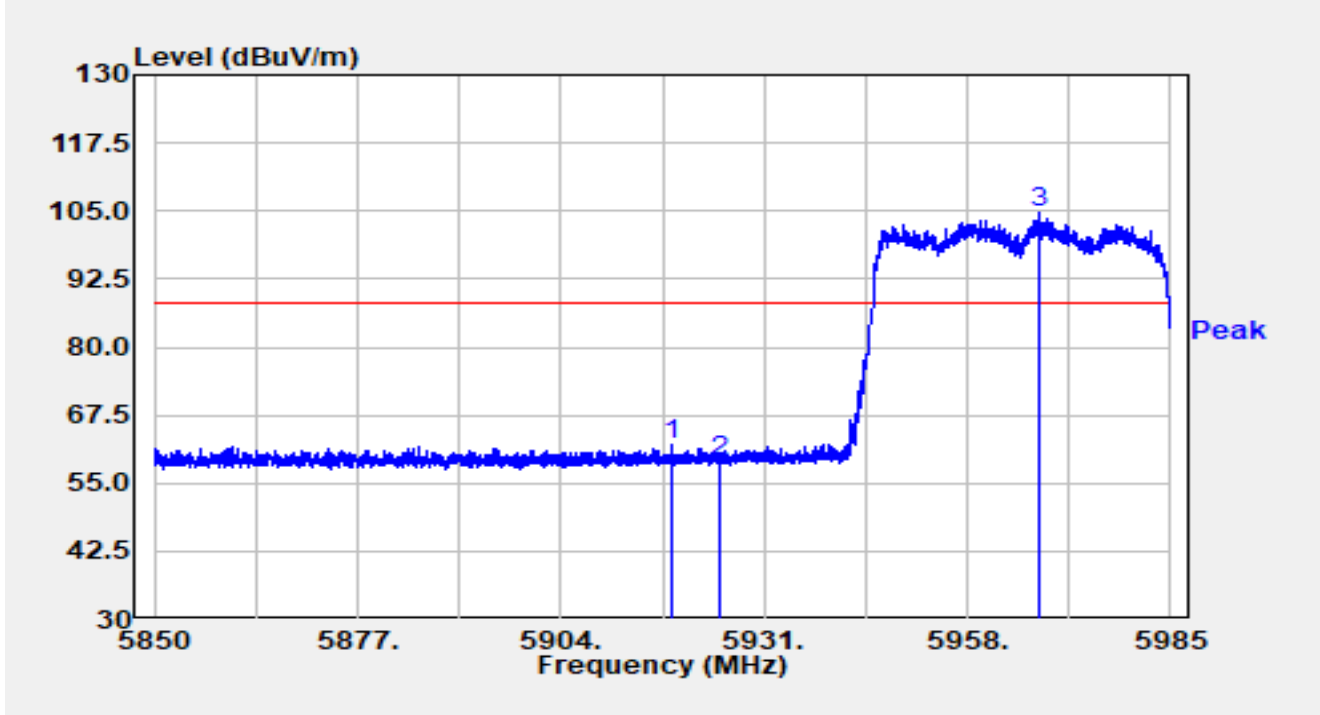


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		5918.608	40.56	21.47	62.04	-26.16	88.20	Peak
2		5925.000	37.42	21.51	58.93	-29.27	88.20	Peak
3	*	5967.499	83.16	21.59	104.75	N/A	N/A	Peak

**Notes:**

1. "\*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz		

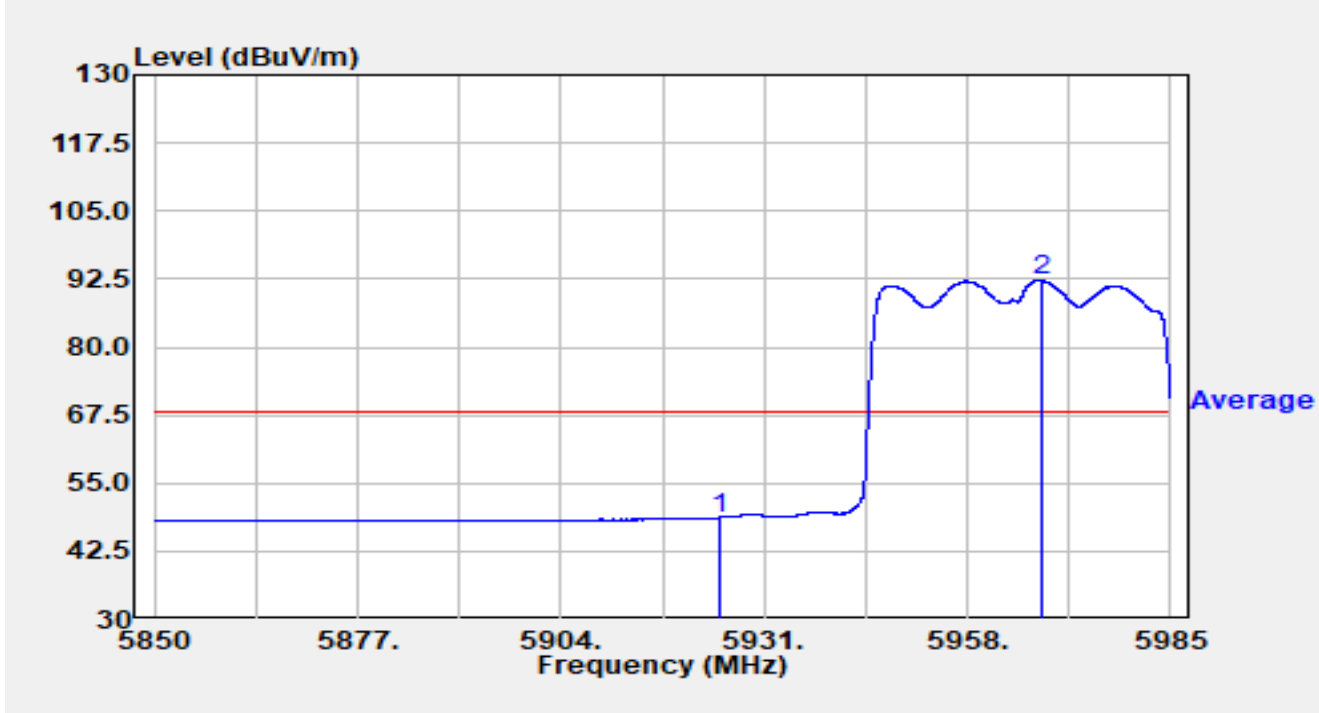


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5925.000	27.15	21.51	48.66	-19.54	68.20	Average
2	*	5967.929	70.60	21.59	92.19	N/A	N/A	Average

Notes:

1. "\*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE40 at 7085MHz		

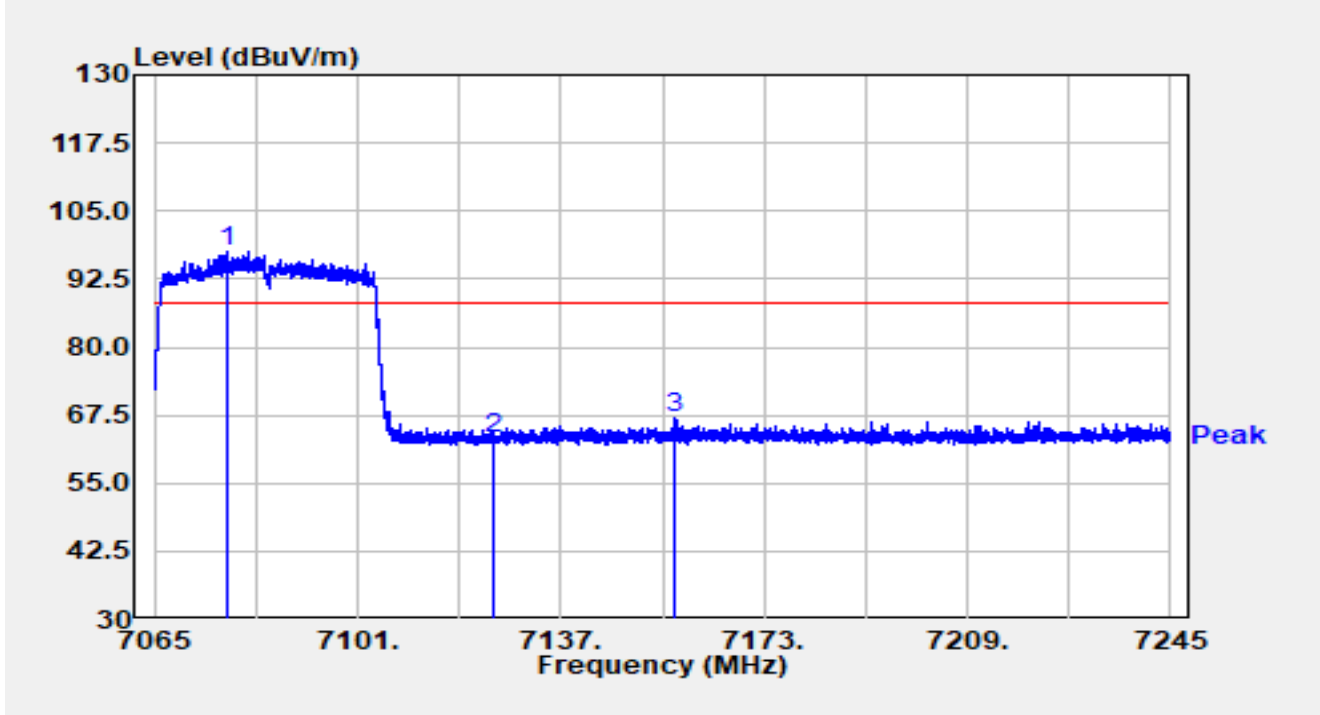

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7077.780	70.60	26.90	97.50	N/A	N/A	Peak
2		7125.000	36.40	26.90	63.30	-24.90	88.20	Peak
3		7157.322	39.53	27.35	66.88	-21.32	88.20	Peak

Notes:

1. "\*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).