


Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE40 at 7085MHz		

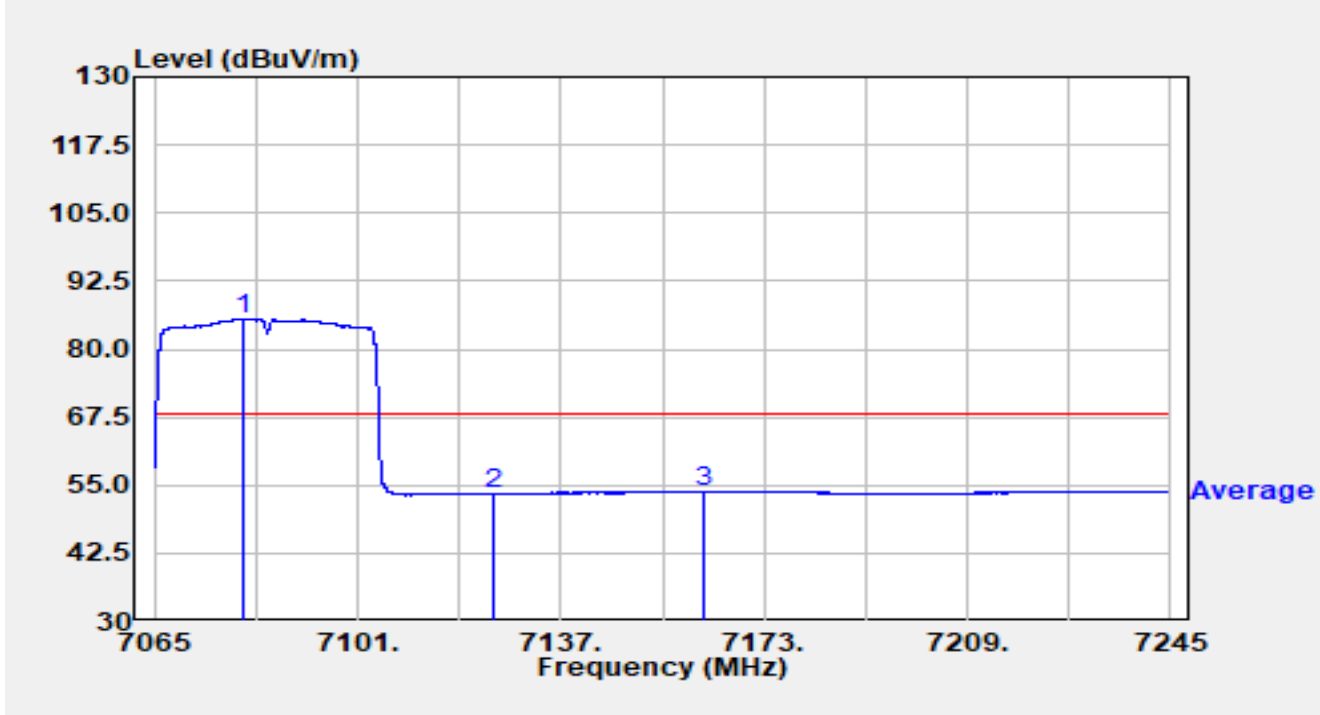


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7080.534	58.77	26.88	85.65	N/A	N/A	Average
2		7125.000	26.50	26.90	53.40	-14.80	68.20	Average
3		7162.380	26.49	27.35	53.85	-14.35	68.20	Average

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE40 at 7085MHz		

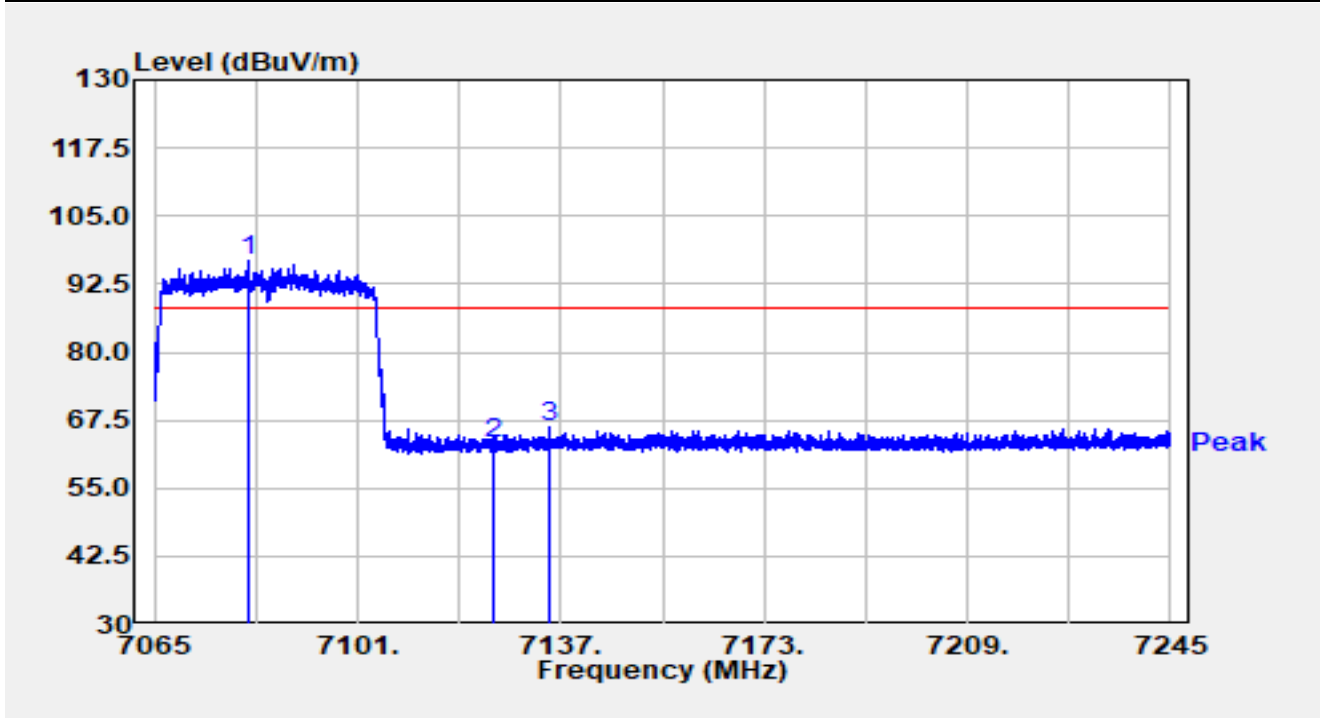


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7081.524	70.05	26.87	96.92	N/A	N/A	Peak
2		7125.000	36.16	26.90	63.06	-25.14	88.20	Peak
3		7135.020	38.95	27.11	66.06	-22.14	88.20	Peak

Notes:

1. "*" , means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE40 at 7085MHz		

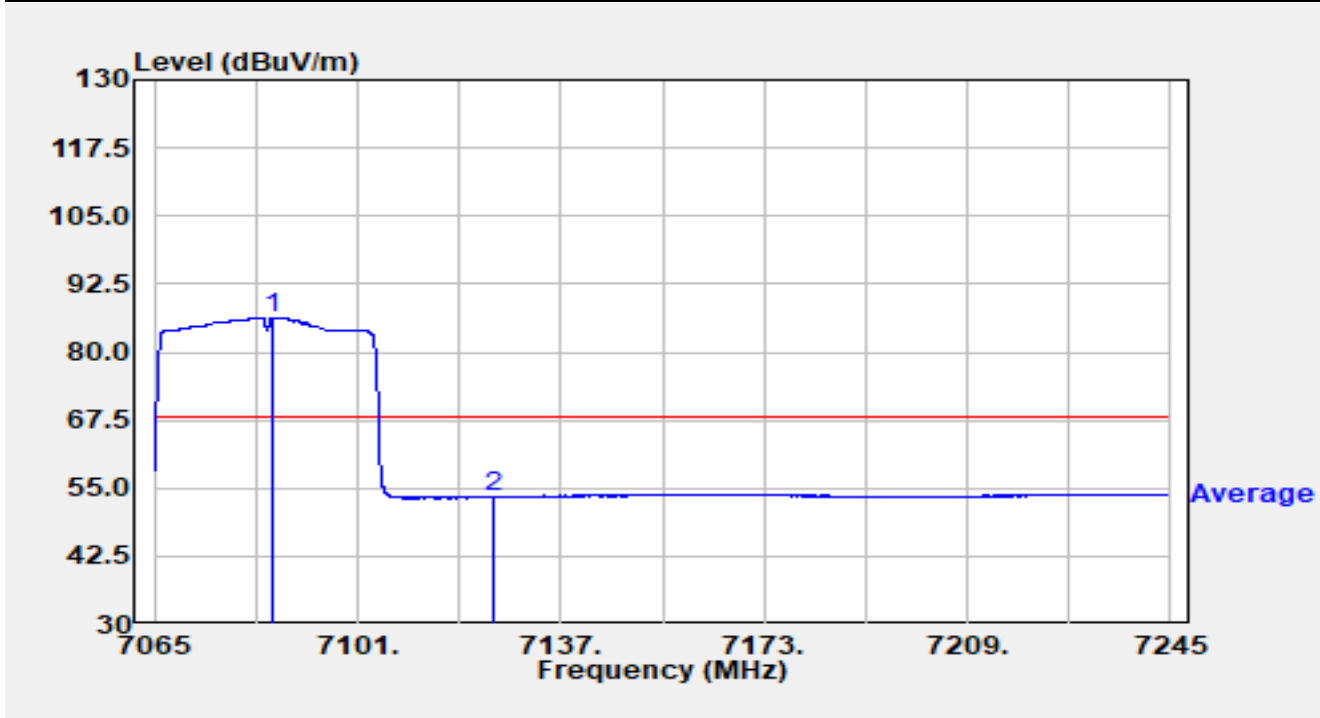


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7086.006	59.53	26.84	86.37	N/A	N/A	Average
2		7125.000	26.45	26.90	53.35	-14.85	68.20	Average

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz		

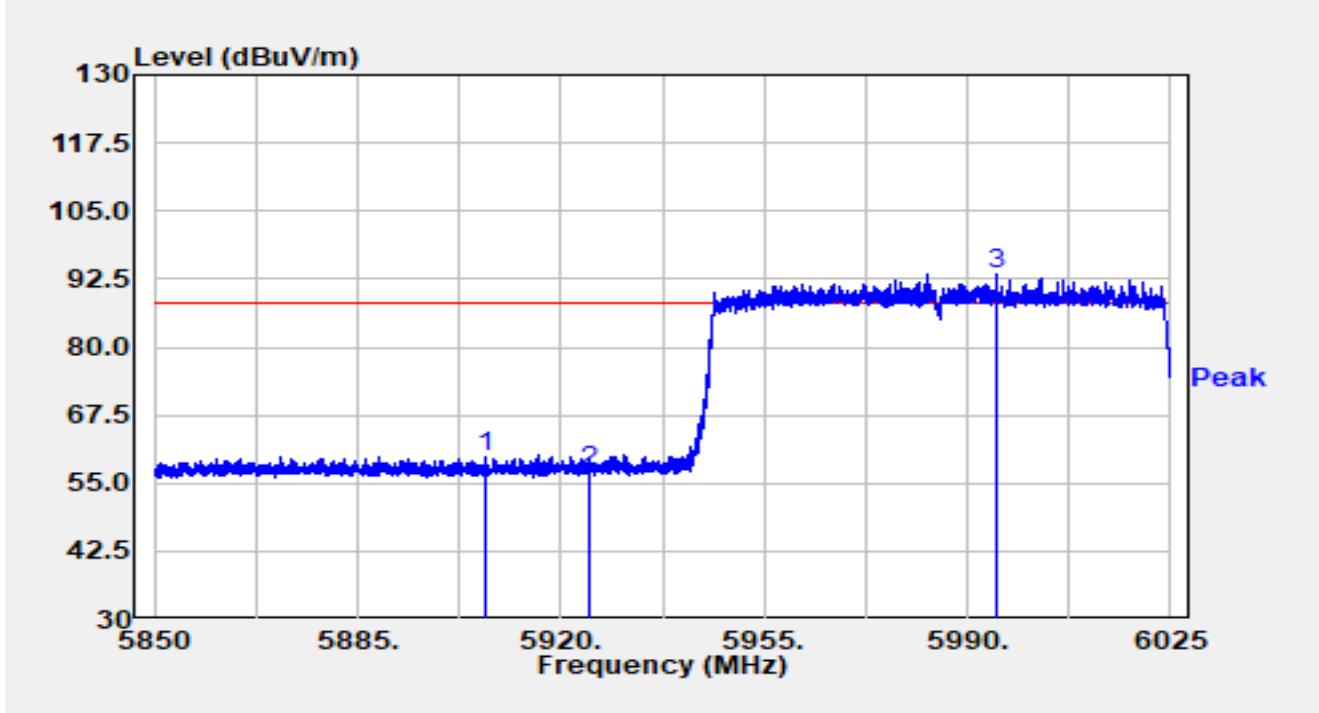


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		5907.067	38.35	21.44	59.79	-28.41	88.20	Peak
2		5925.000	35.66	21.51	57.17	-31.03	88.20	Peak
3	*	5994.953	71.83	21.65	93.47	N/A	N/A	Peak

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz		

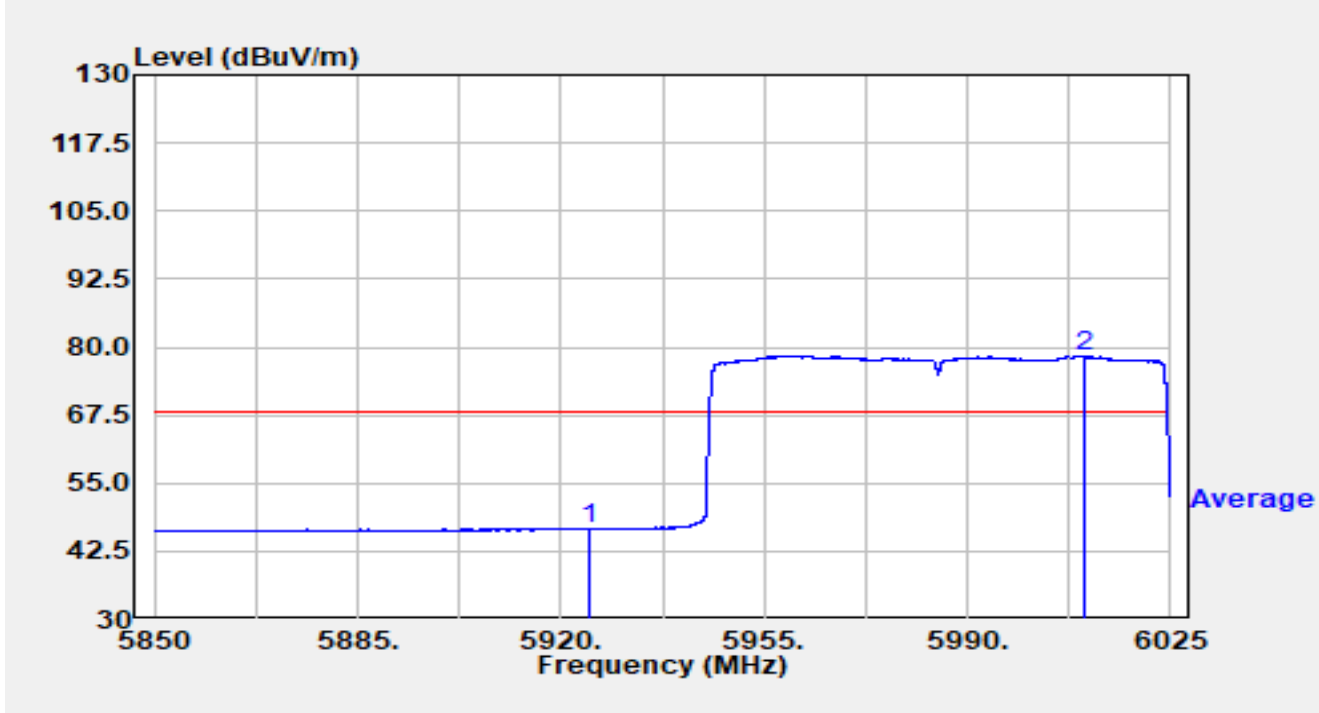


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5925.000	25.07	21.51	46.58	-21.62	68.20	Average
2	*	6010.002	56.44	21.84	78.28	N/A	N/A	Average

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz		

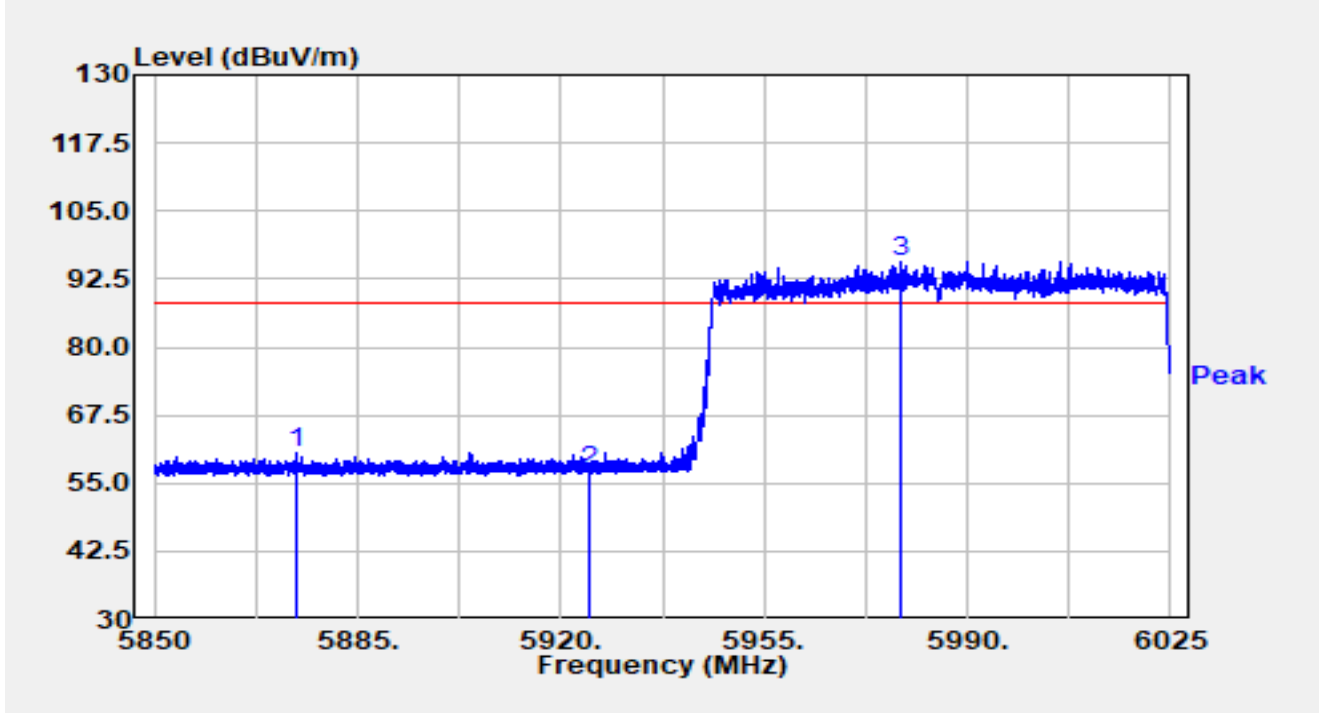


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5874.290	39.18	21.51	60.69	-27.51	88.20	Peak
2		5925.000	35.63	21.51	57.13	-31.07	88.20	Peak
3	*	5978.643	73.98	21.60	95.58	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz		

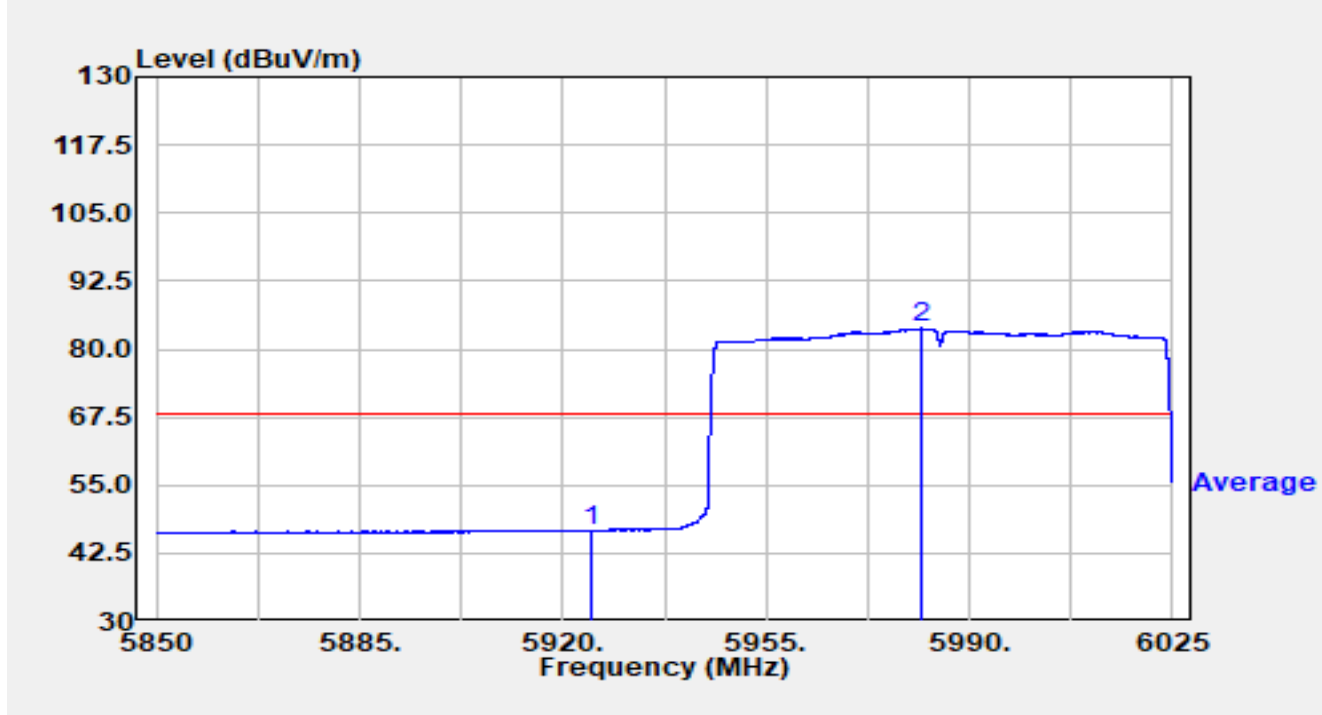


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5925.000	25.21	21.51	46.72	-21.48	68.20	Average
2	*	5981.933	62.20	21.59	83.79	N/A	N/A	Average

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE80 at 7025MHz		

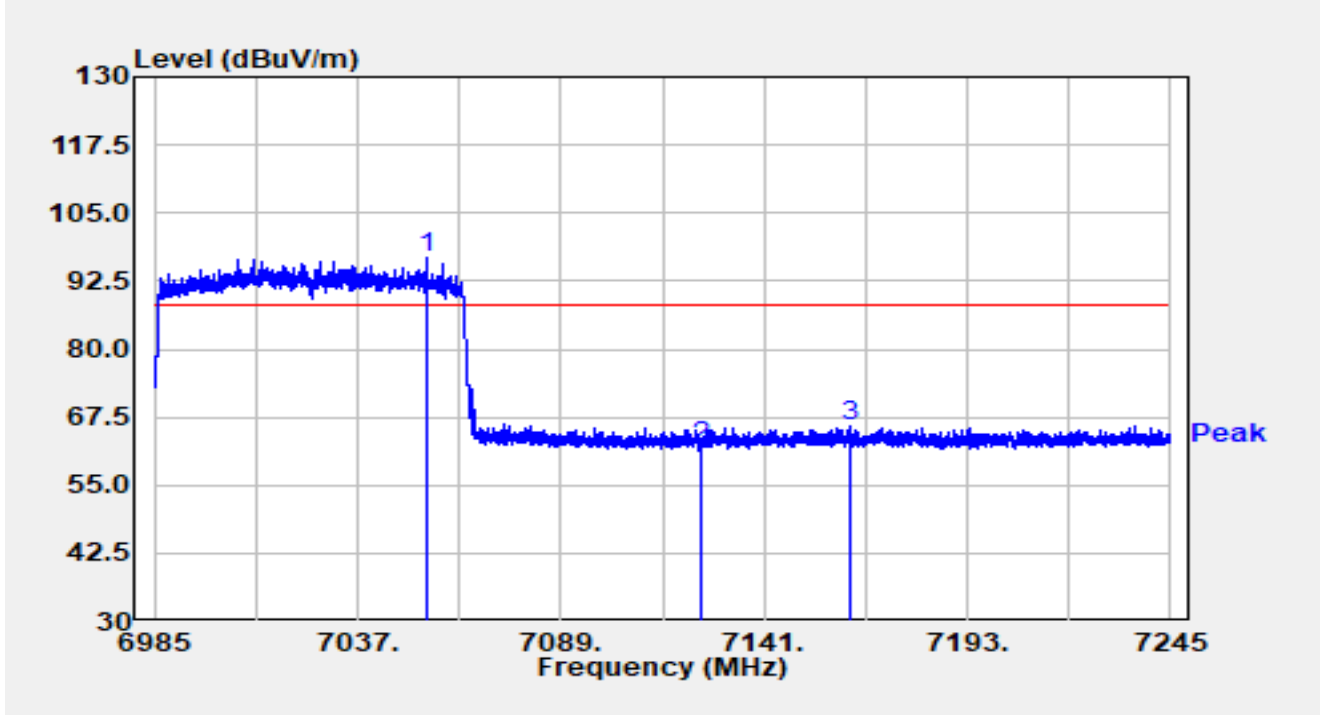


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7054.940	70.01	26.82	96.83	N/A	N/A	Peak
2		7125.000	35.30	26.90	62.20	-26.00	88.20	Peak
3		7162.710	38.45	27.35	65.80	-22.40	88.20	Peak

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE80 at 7025MHz		

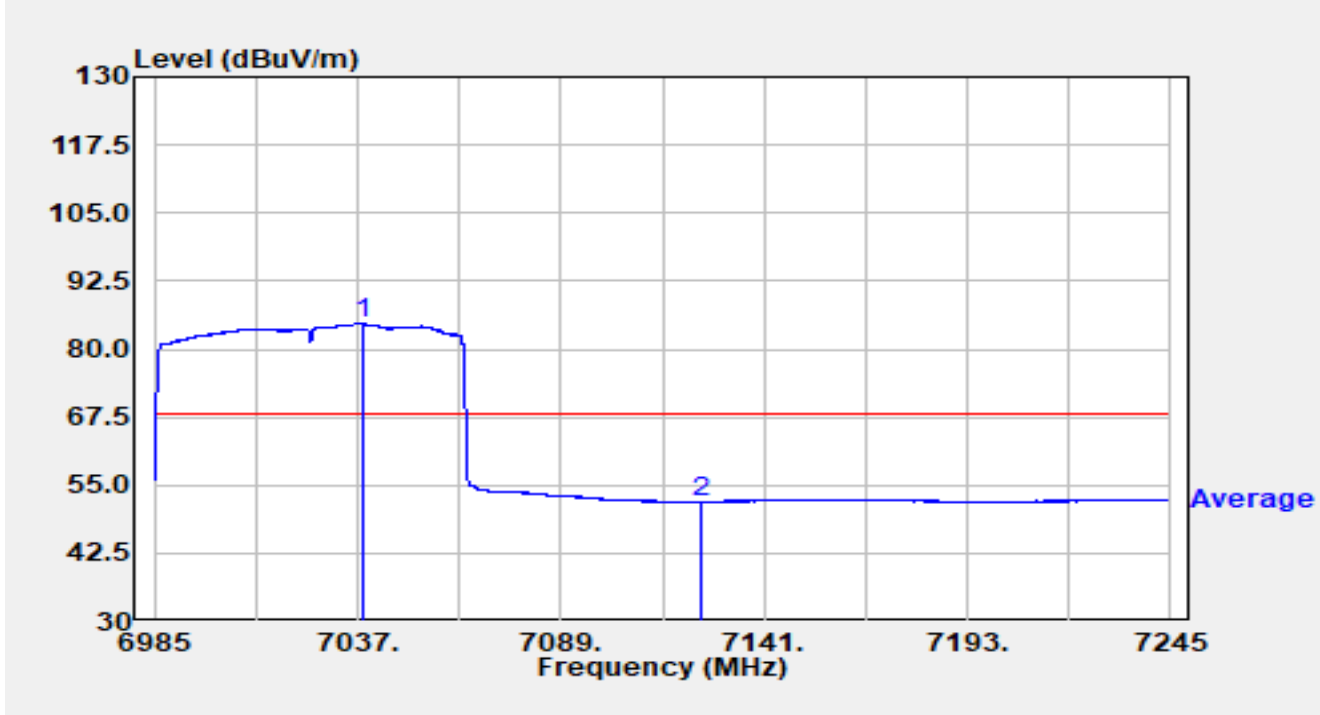


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7038.066	58.22	26.44	84.65	N/A	N/A	Average
2		7125.000	25.06	26.90	51.96	-16.24	68.20	Average

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE80 at 7025MHz		

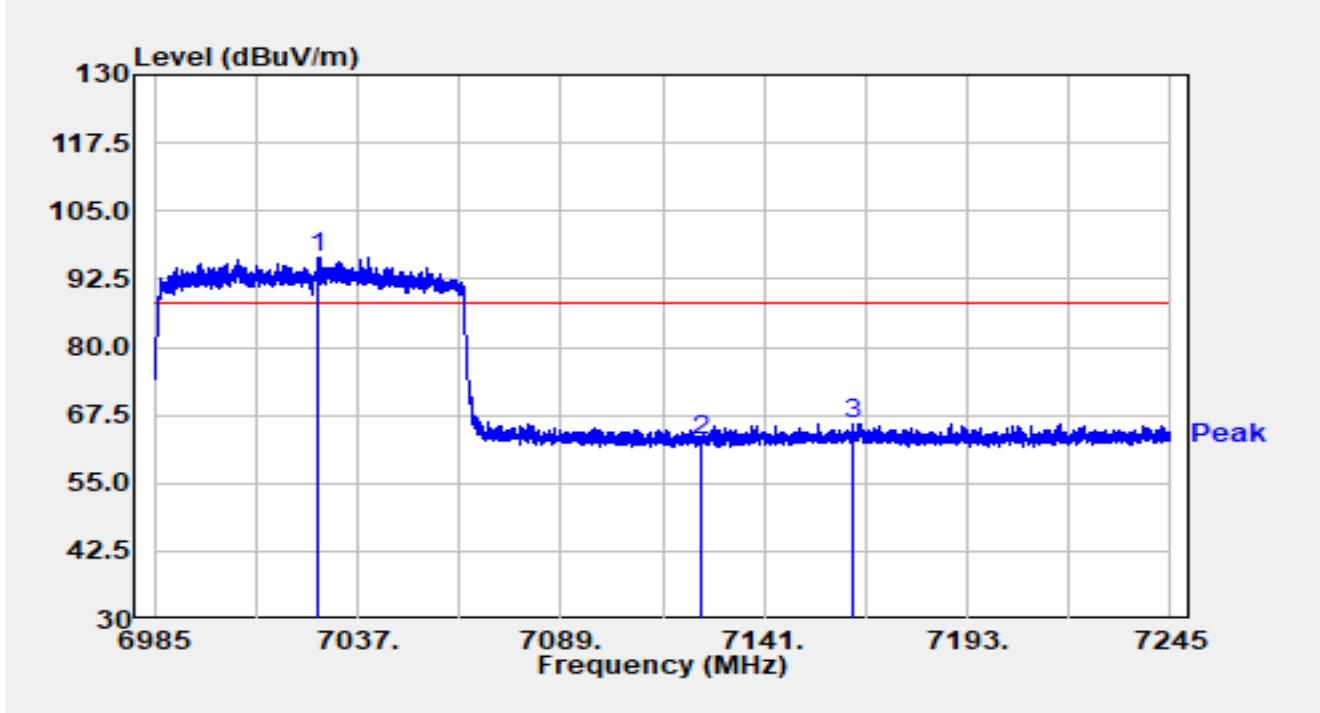


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7027.120	70.29	26.31	96.60	N/A	N/A	Peak
2		7125.000	36.10	26.90	63.00	-25.20	88.20	Peak
3		7163.750	38.60	27.36	65.96	-22.24	88.20	Peak

Notes:

1. "*" , means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE80 at 7025MHz		

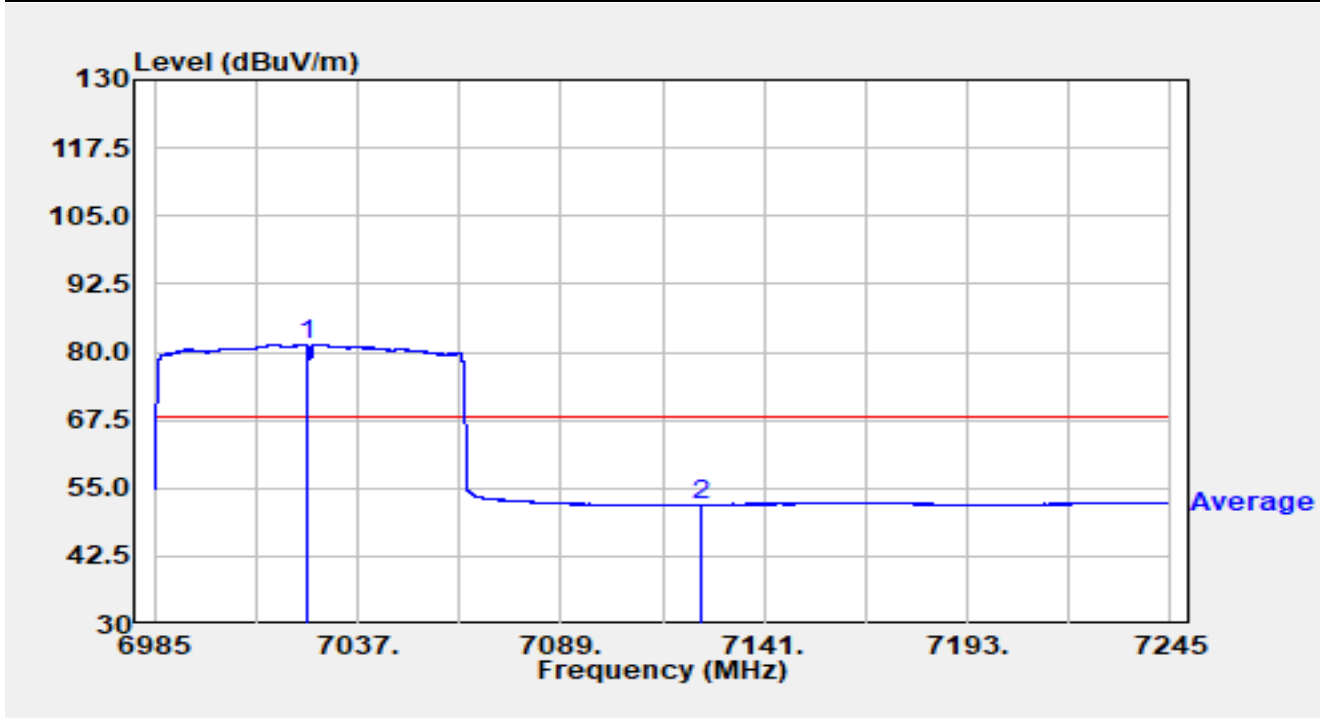


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7023.792	55.14	26.29	81.42	N/A	N/A	Average
2		7125.000	24.98	26.90	51.88	-16.32	68.20	Average

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

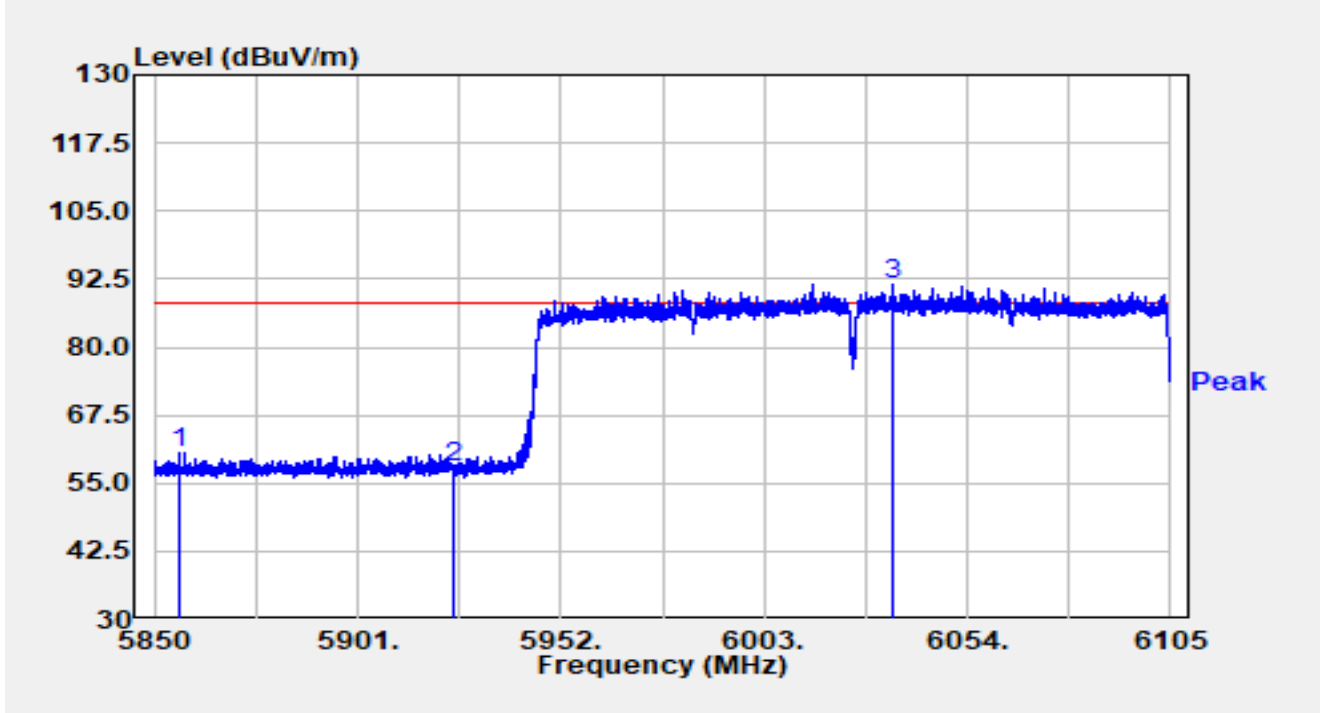


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5856.400	39.17	21.48	60.64	-27.56	88.20	Peak
2		5925.000	36.26	21.51	57.77	-30.43	88.20	Peak
3	*	6035.385	69.56	22.01	91.57	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

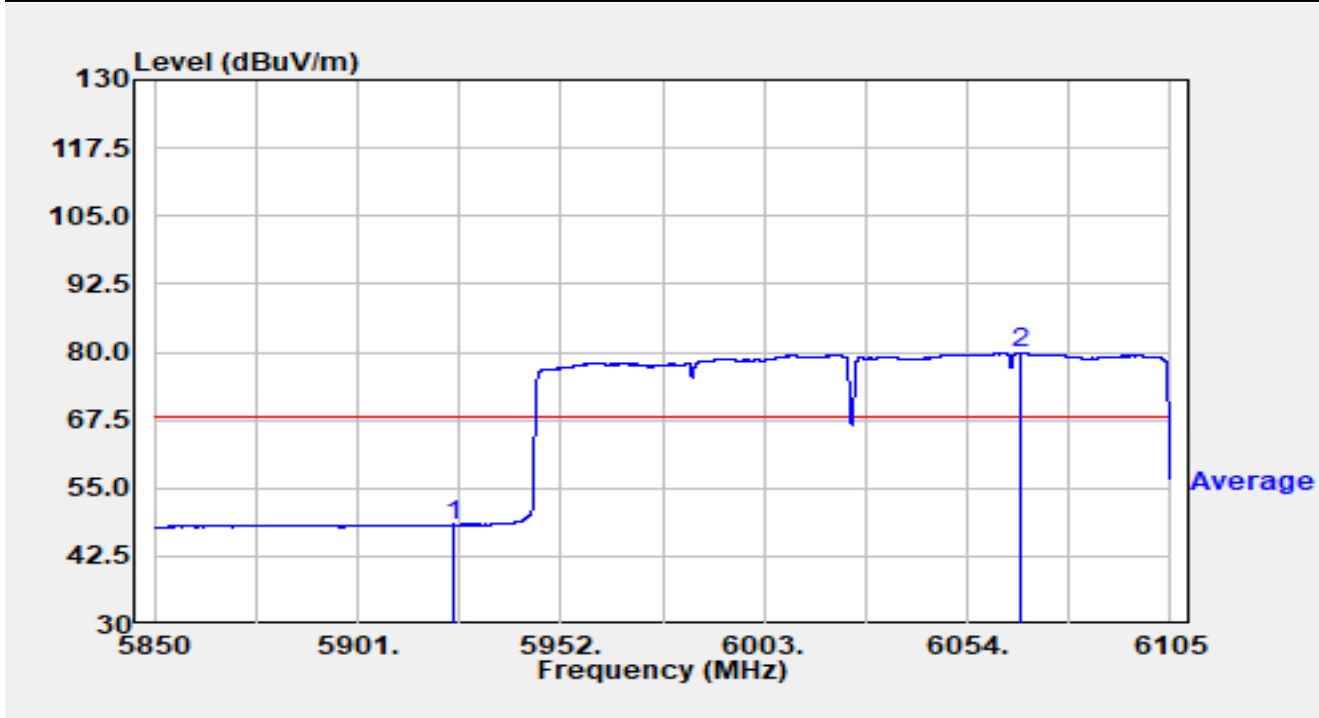


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5925.000	26.72	21.51	48.23	-19.97	68.20	Average
2	*	6067.643	57.92	21.92	79.83	N/A	N/A	Average

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

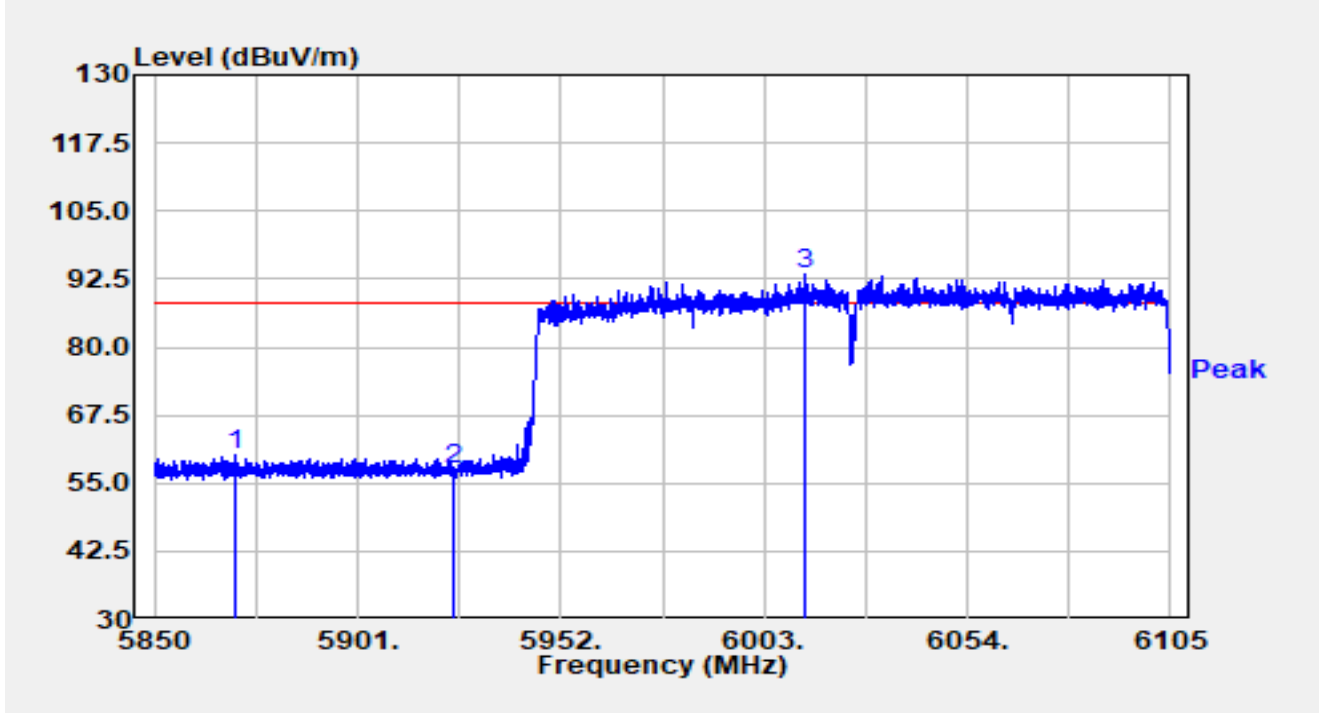


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5870.451	38.52	21.52	60.03	-28.17	88.20	Peak
2		5925.000	35.92	21.51	57.43	-30.77	88.20	Peak
3	*	6013.378	71.32	21.89	93.21	N/A	N/A	Peak

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

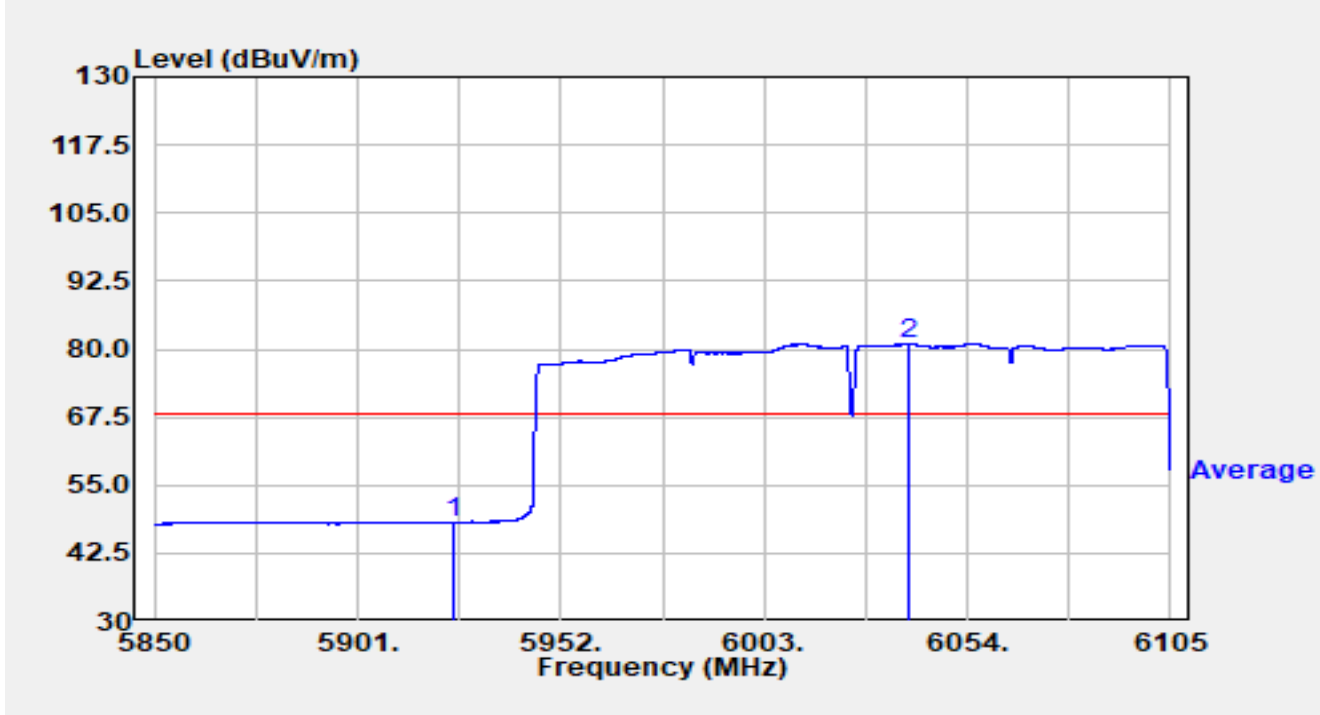


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5925.000	26.68	21.51	48.19	-20.01	68.20	Average
2	*	6039.210	59.03	21.99	81.02	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE160 at 6985MHz		

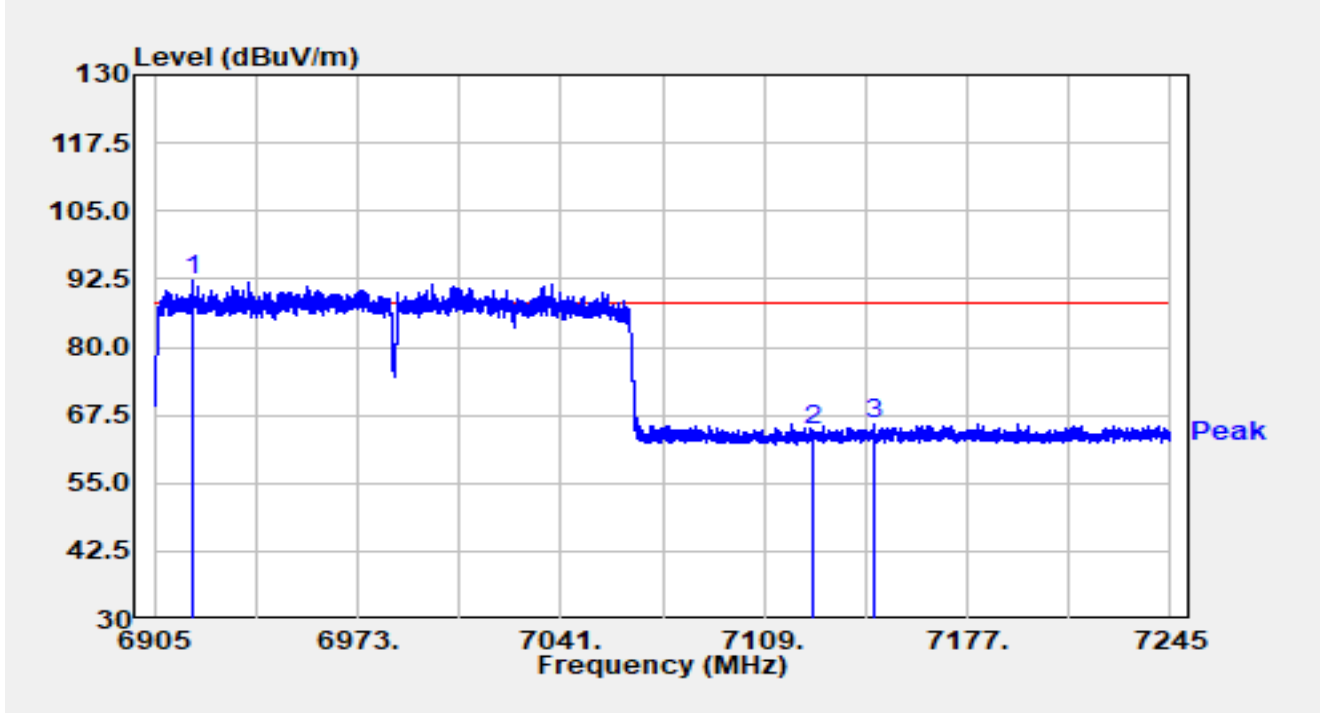


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	6917.886	66.78	25.41	92.19	N/A	N/A	Peak
2		7125.000	37.81	26.90	64.71	-23.49	88.20	Peak
3		7145.890	38.76	27.22	65.99	-22.21	88.20	Peak

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE160 at 6985MHz		

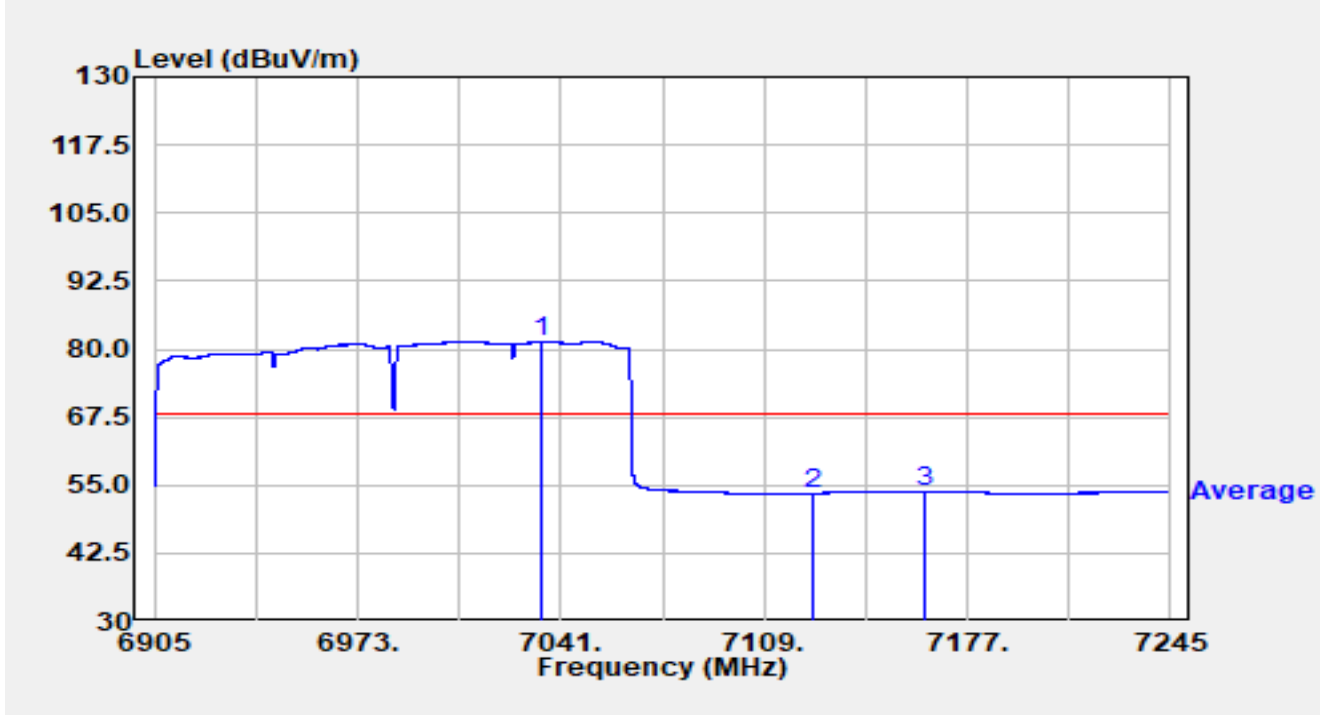


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7034.642	55.10	26.36	81.46	N/A	N/A	Average
2		7125.000	26.58	26.90	53.48	-14.72	68.20	Average
3		7163.026	26.48	27.35	53.84	-14.36	68.20	Average

Notes:

1. "*" , means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE160 at 6985MHz		

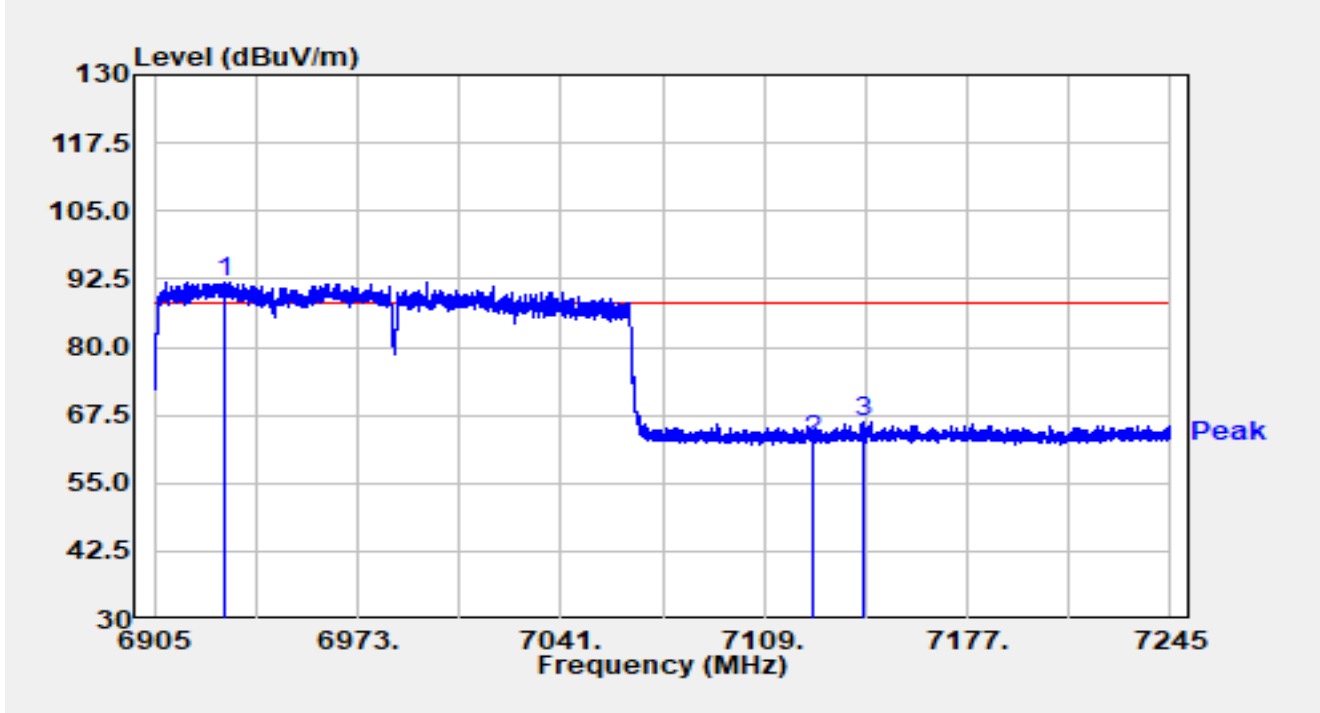


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	6928.290	66.44	25.40	91.84	N/A	N/A	Peak
2		7125.000	35.77	26.90	62.67	-25.53	88.20	Peak
3		7142.490	39.13	27.20	66.33	-21.87	88.20	Peak

Notes:

1. "*" , means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-12
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE160 at 6985MHz		

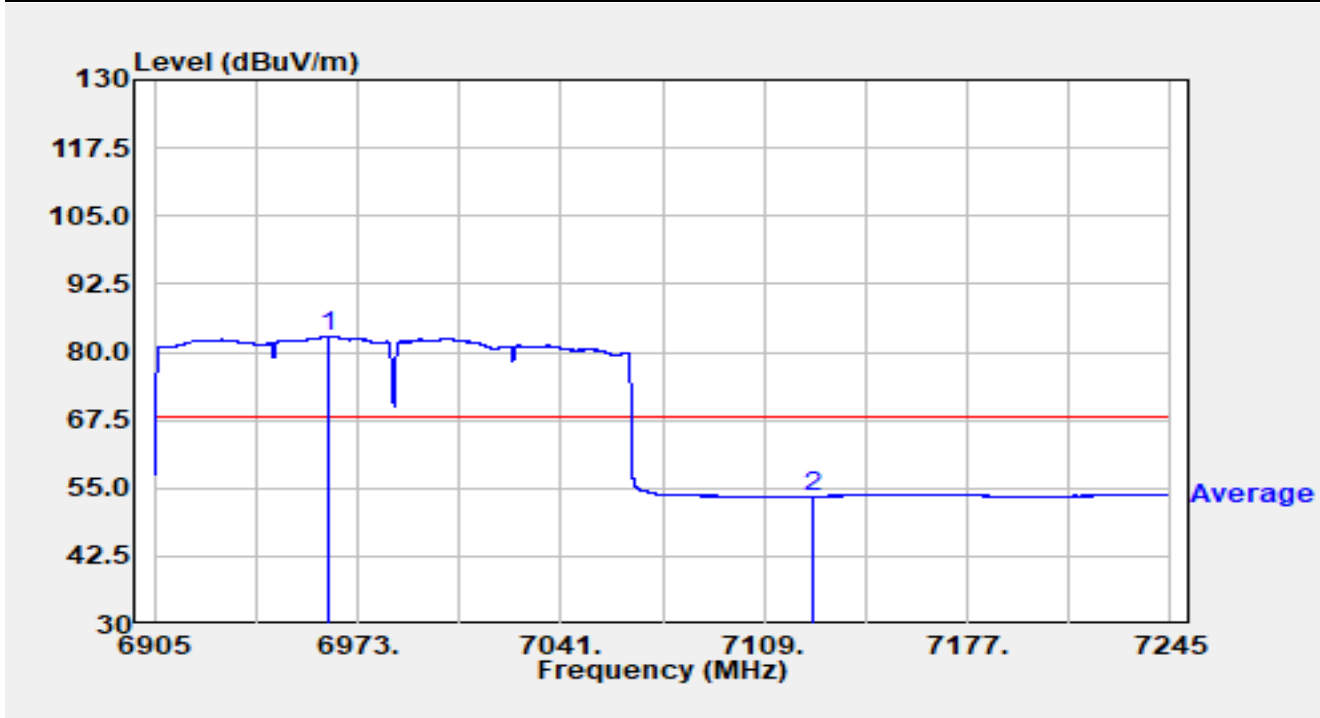


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	6963.650	57.05	25.81	82.86	N/A	N/A	Average
2		7125.000	26.58	26.90	53.48	-14.72	68.20	Average

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Partial RU

Site	WZ-AC2	Test Date	2024-07-18
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz RU26/0		

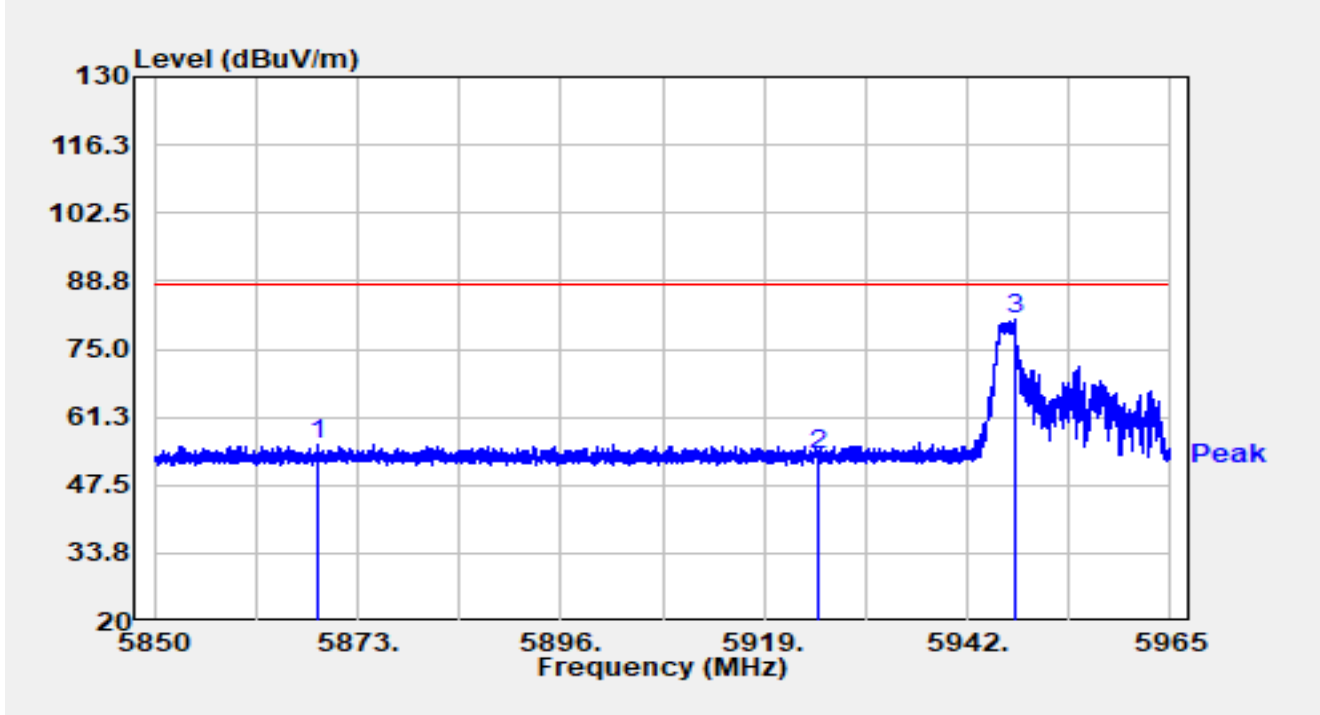


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5868.458	34.11	21.52	55.64	-32.56	88.20	Peak
2		5925.000	32.21	21.51	53.72	-34.48	88.20	Peak
3	*	5947.371	59.34	21.60	80.94	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-18
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz RU26/0		

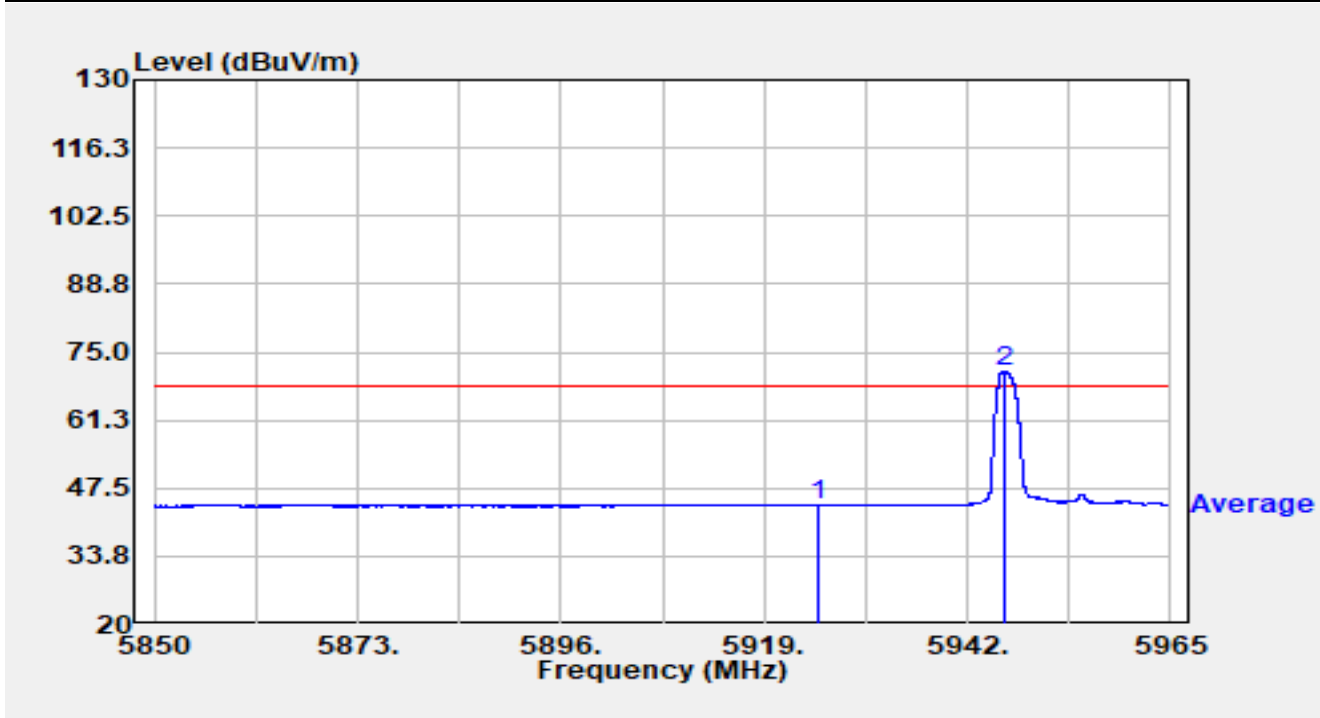


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5925.000	22.52	21.51	44.03	-24.17	68.20	Average
2	*	5946.105	49.66	21.59	71.25	N/A	N/A	Average

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-18
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz RU26/0		

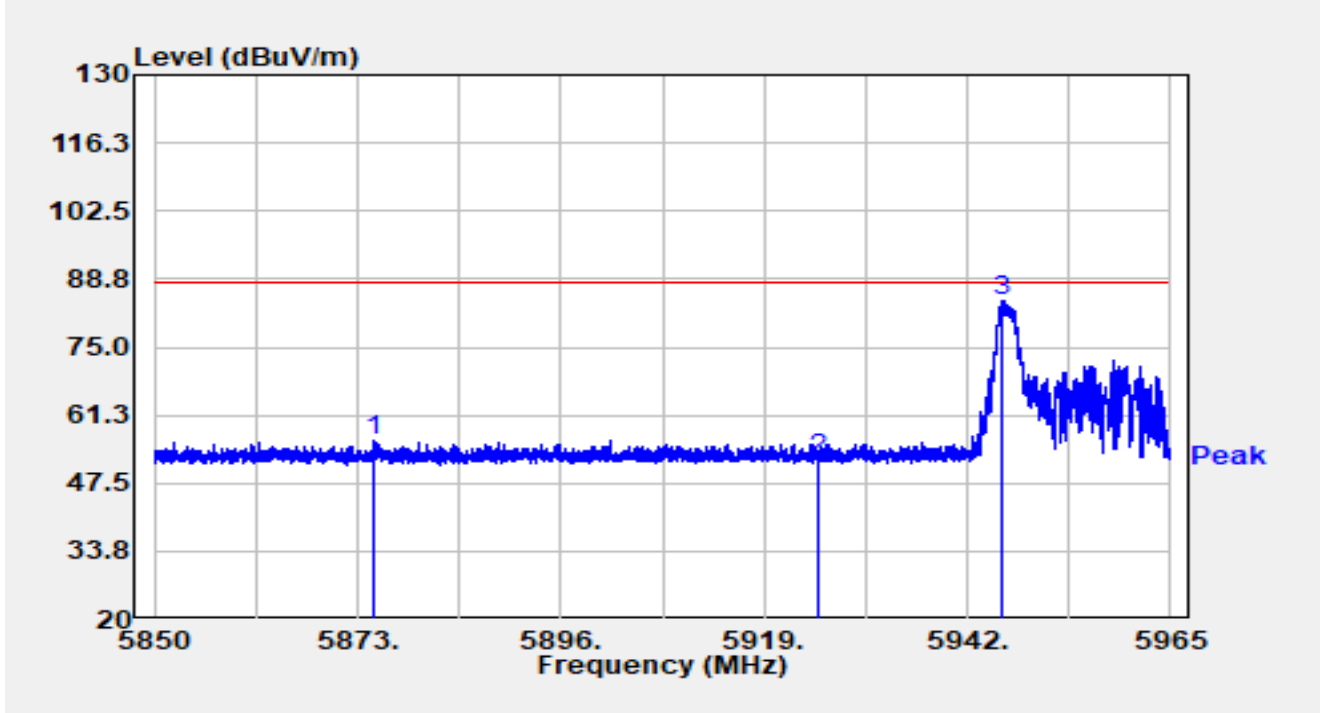


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5874.806	34.64	21.51	56.15	-32.05	88.20	Peak
2		5925.000	30.73	21.51	52.24	-35.96	88.20	Peak
3	*	5945.921	62.93	21.59	84.52	N/A	N/A	Peak

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-18
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz RU26/0		

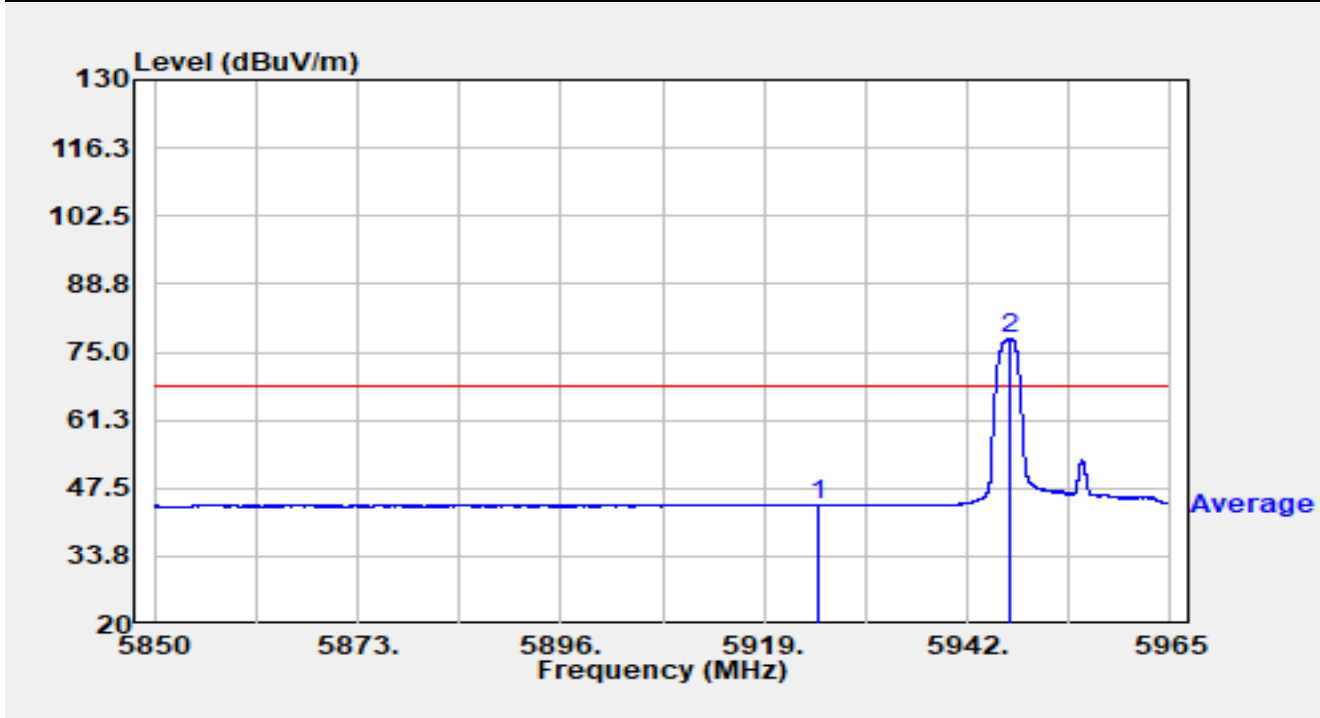


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5925.000	22.53	21.51	44.04	-24.16	68.20	Average
2	*	5946.957	56.23	21.60	77.82	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-18
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz RU52/37		

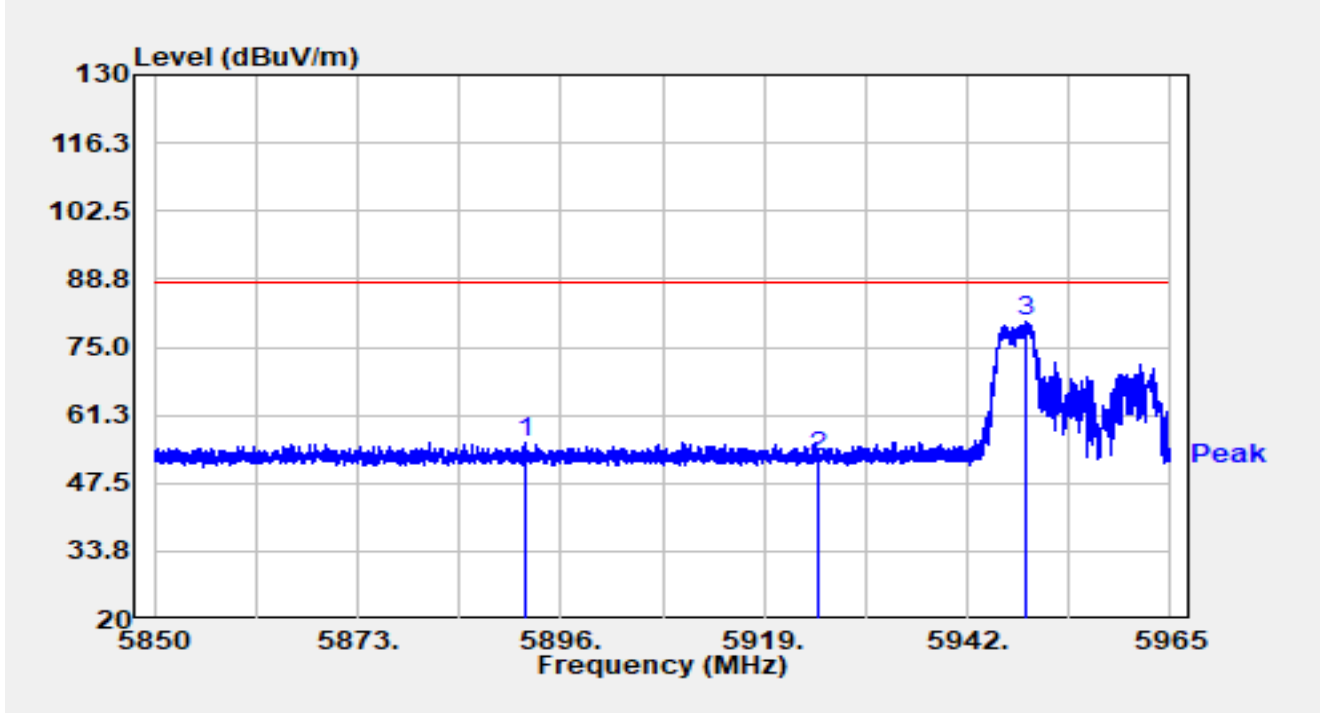


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5892.033	34.42	21.43	55.85	-32.35	88.20	Peak
2		5925.000	31.48	21.51	52.99	-35.21	88.20	Peak
3	*	5948.509	58.63	21.60	80.22	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-18
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz RU52/37		

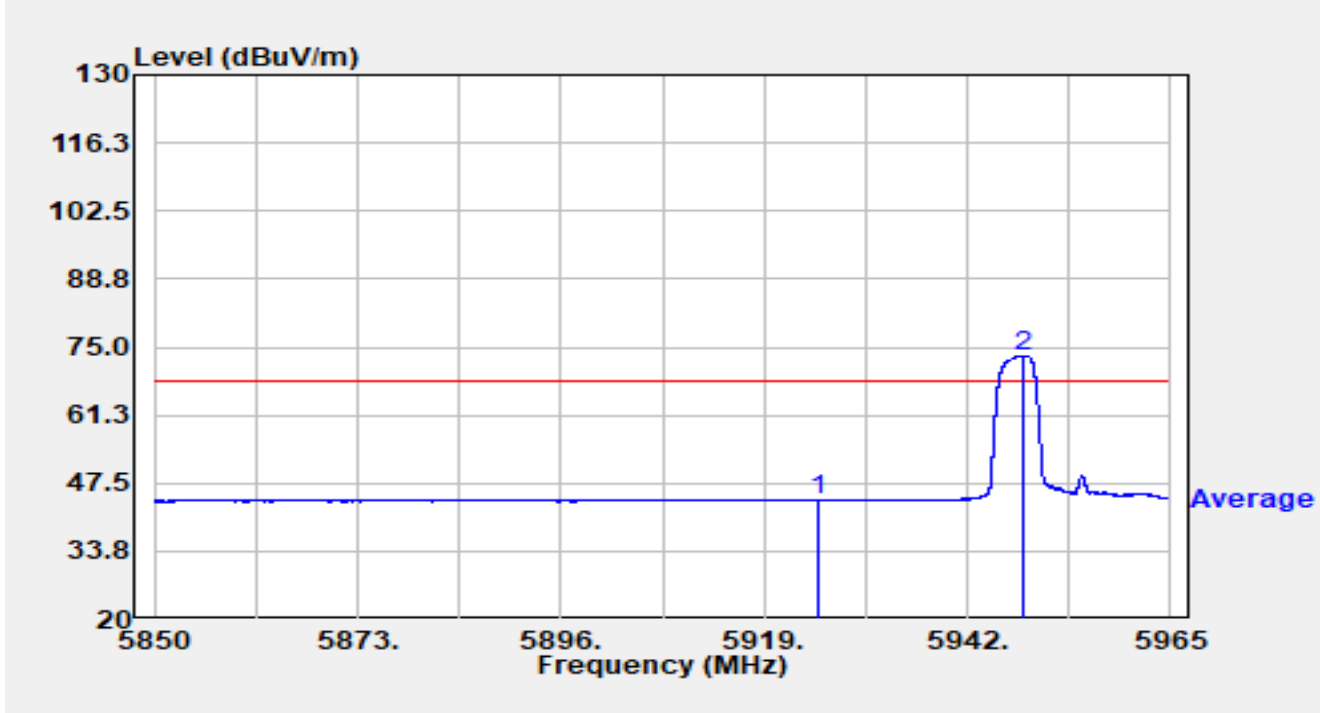


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5925.000	22.55	21.51	44.06	-24.14	68.20	Average
2	*	5948.302	51.62	21.60	73.21	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-18
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz RU52/37		

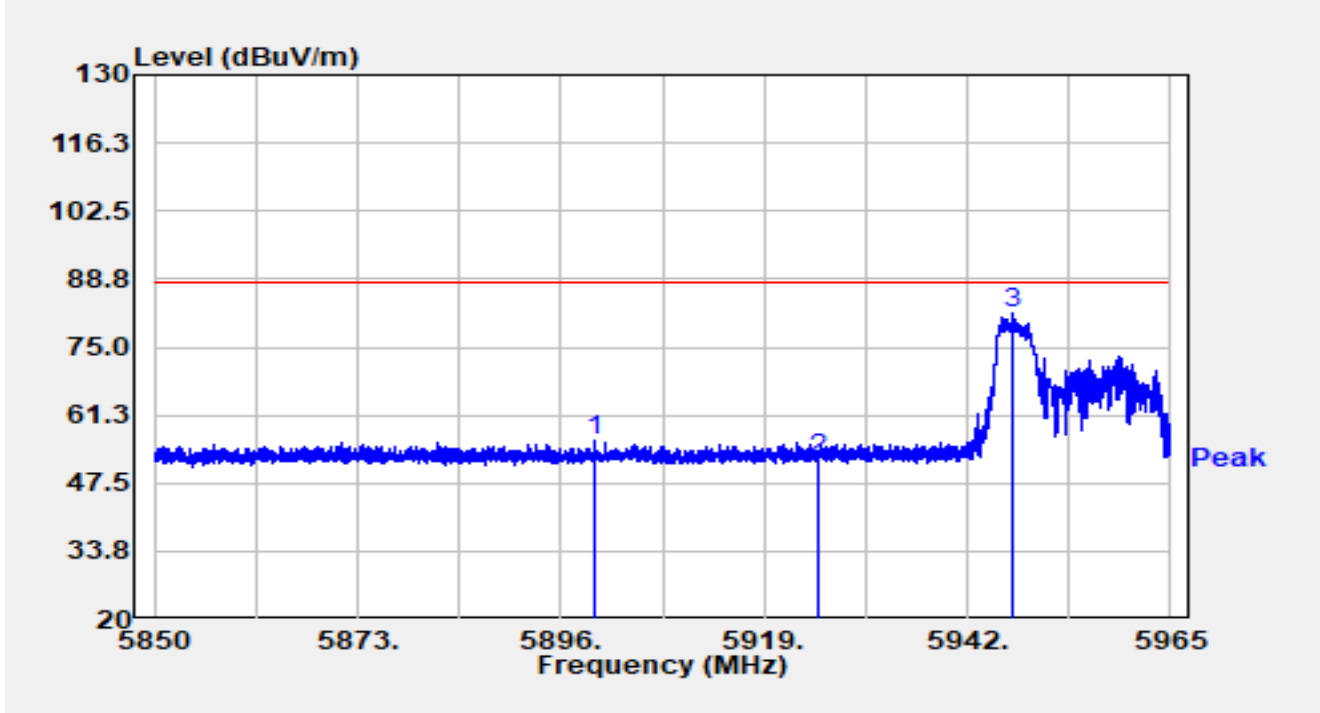


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5899.795	34.70	21.42	56.12	-32.08	88.20	Peak
2		5925.000	30.73	21.51	52.24	-35.96	88.20	Peak
3	*	5947.106	60.27	21.60	81.87	N/A	N/A	Peak

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-18
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz RU52/37		

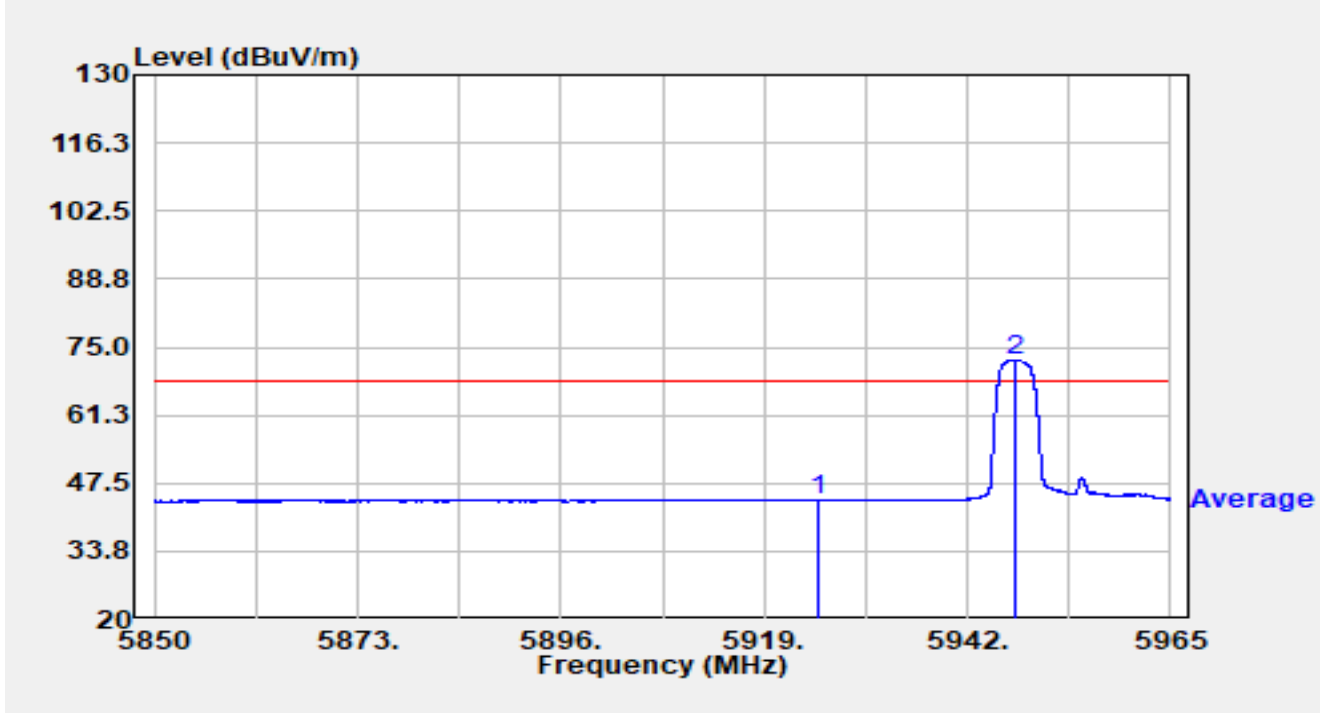


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5925.003	22.54	21.51	44.05	-24.15	68.20	Average
2	*	5947.451	50.86	21.60	72.46	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-18
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz RU106/53		

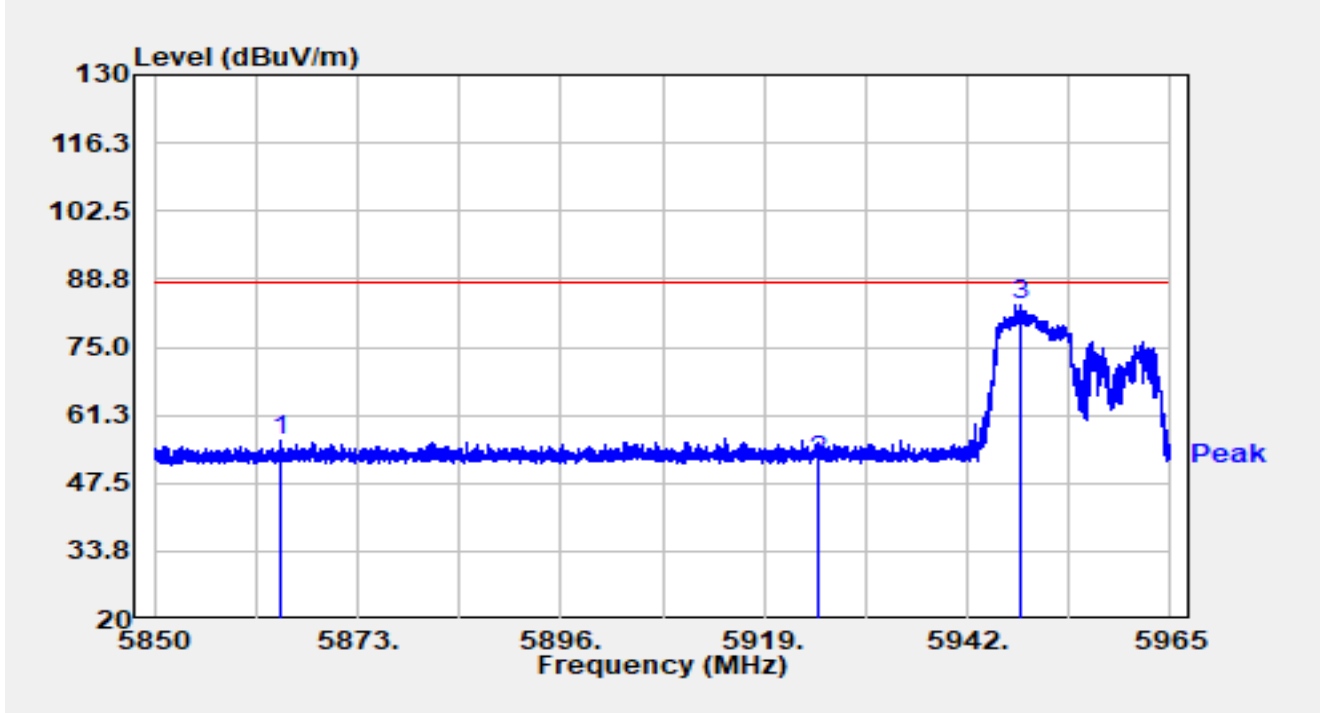


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5864.352	34.45	21.53	55.98	-32.22	88.20	Peak
2		5925.000	30.42	21.51	51.93	-36.27	88.20	Peak
3	*	5948.095	61.86	21.60	83.46	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-18
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz RU106/53		

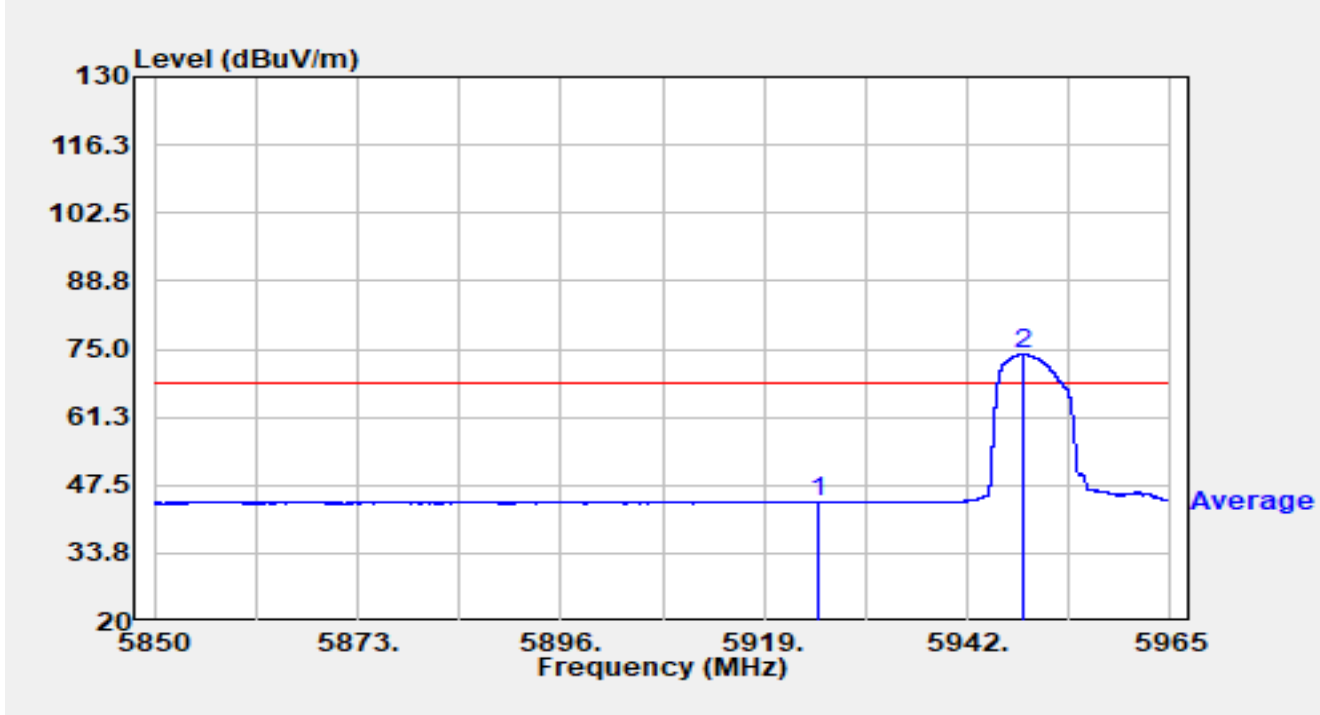


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5925.000	22.46	21.51	43.96	-24.24	68.20	Average
2	*	5948.348	52.25	21.60	73.84	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-18
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz RU106/53		

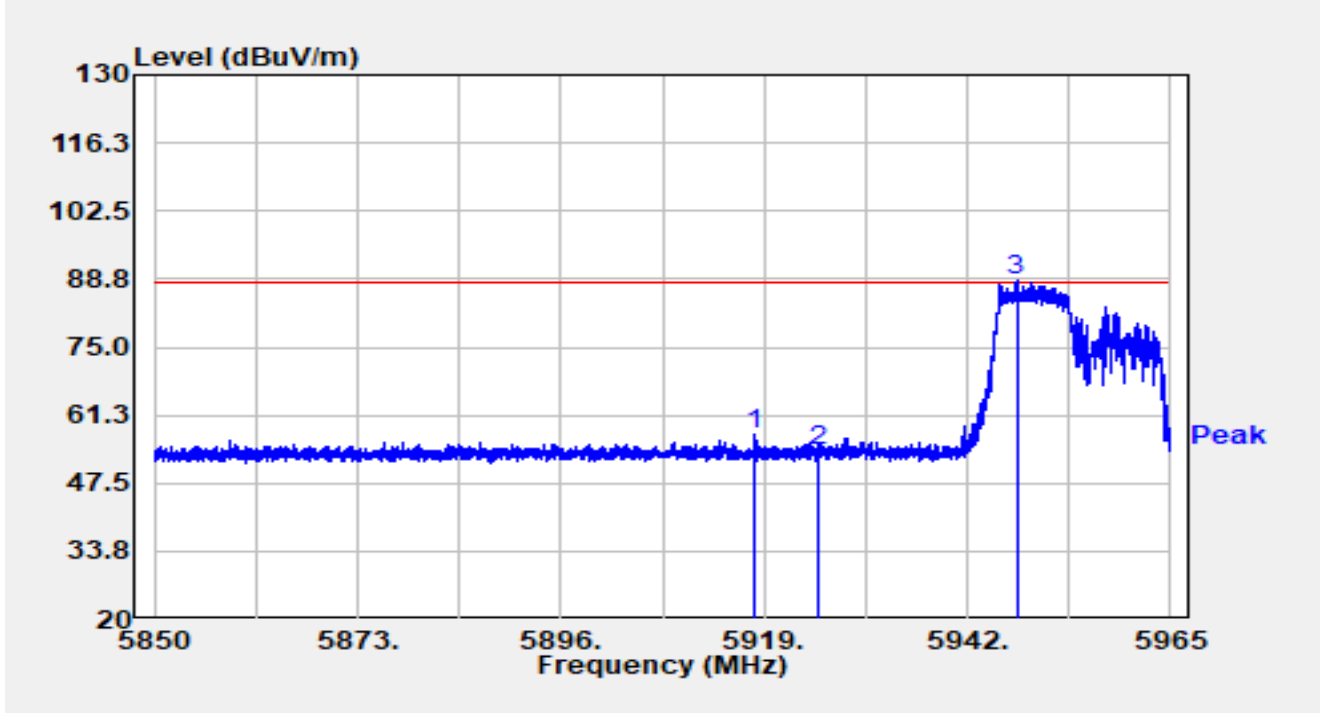


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5918.011	35.87	21.47	57.34	-30.86	88.20	Peak
2		5925.000	32.36	21.51	53.86	-34.34	88.20	Peak
3	*	5947.578	66.71	21.60	88.30	N/A	N/A	Peak

Notes:

1. "*" , means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-18
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz RU106/53		

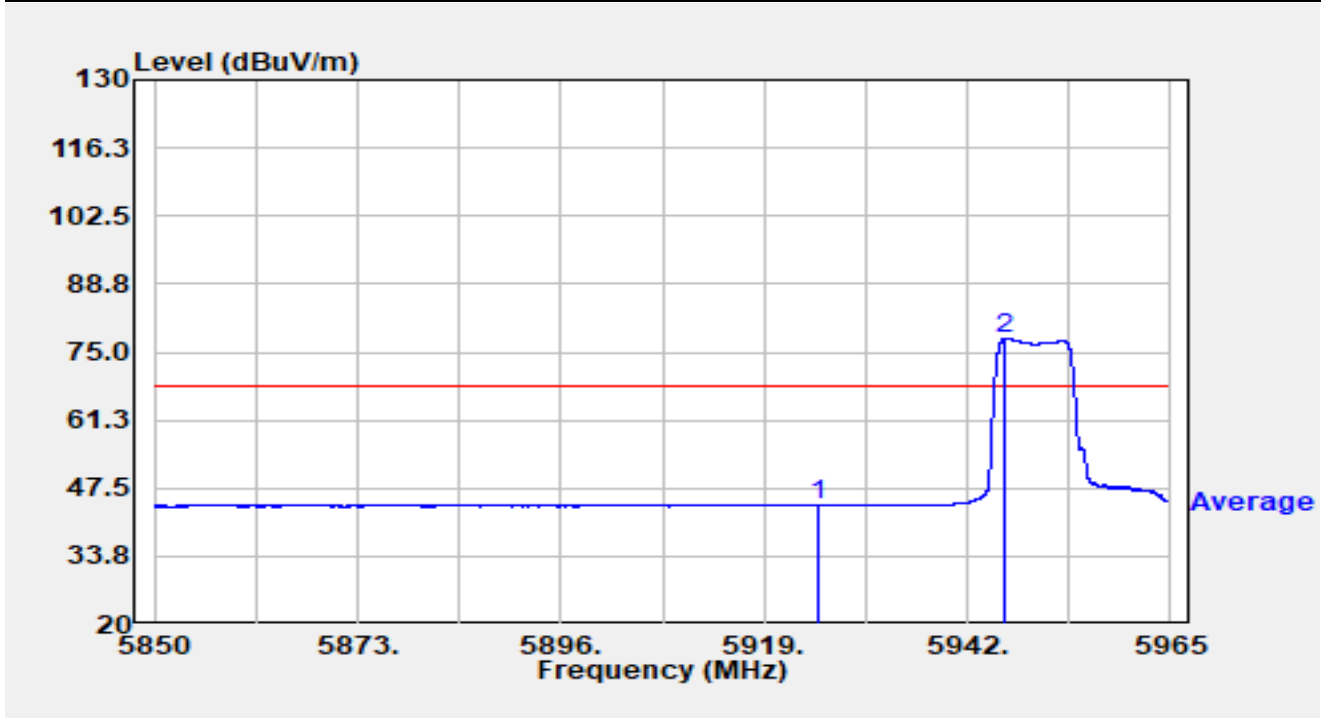


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5925.000	22.52	21.51	44.03	-24.17	68.20	Average
2	*	5946.255	56.14	21.59	77.73	N/A	N/A	Average

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-08-14
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C /46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE20 at 7115MHz RU26/8		

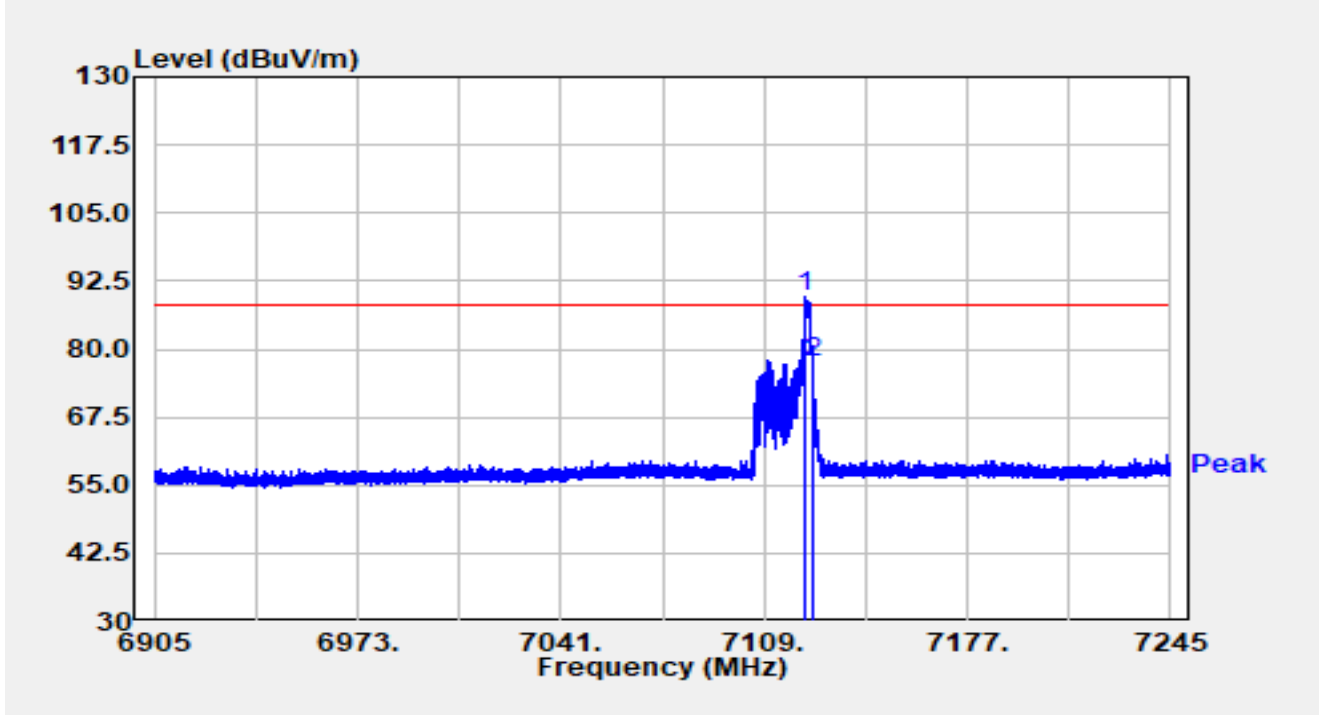


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7123.076	62.59	26.86	89.45	N/A	N/A	Peak
2		7125.000	50.63	26.90	77.53	-10.67	88.20	Peak

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-08-14
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C /46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE20 at 7115MHz RU26/8		

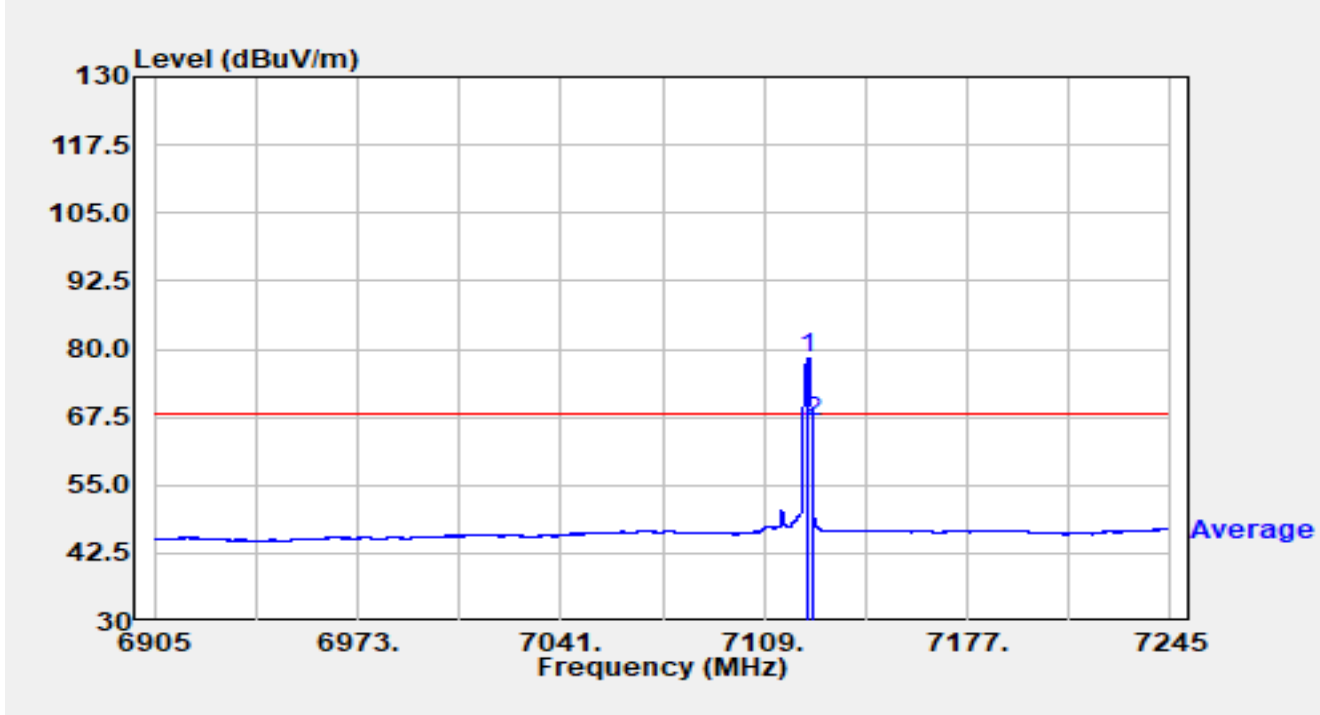


No	Mark	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Detector
1	*	7123.926	51.47	26.88	78.35	N/A	N/A	Average
2		7125.000	39.68	26.90	66.58	-1.62	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-08-14
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C /46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE20 at 7115MHz RU26/8		

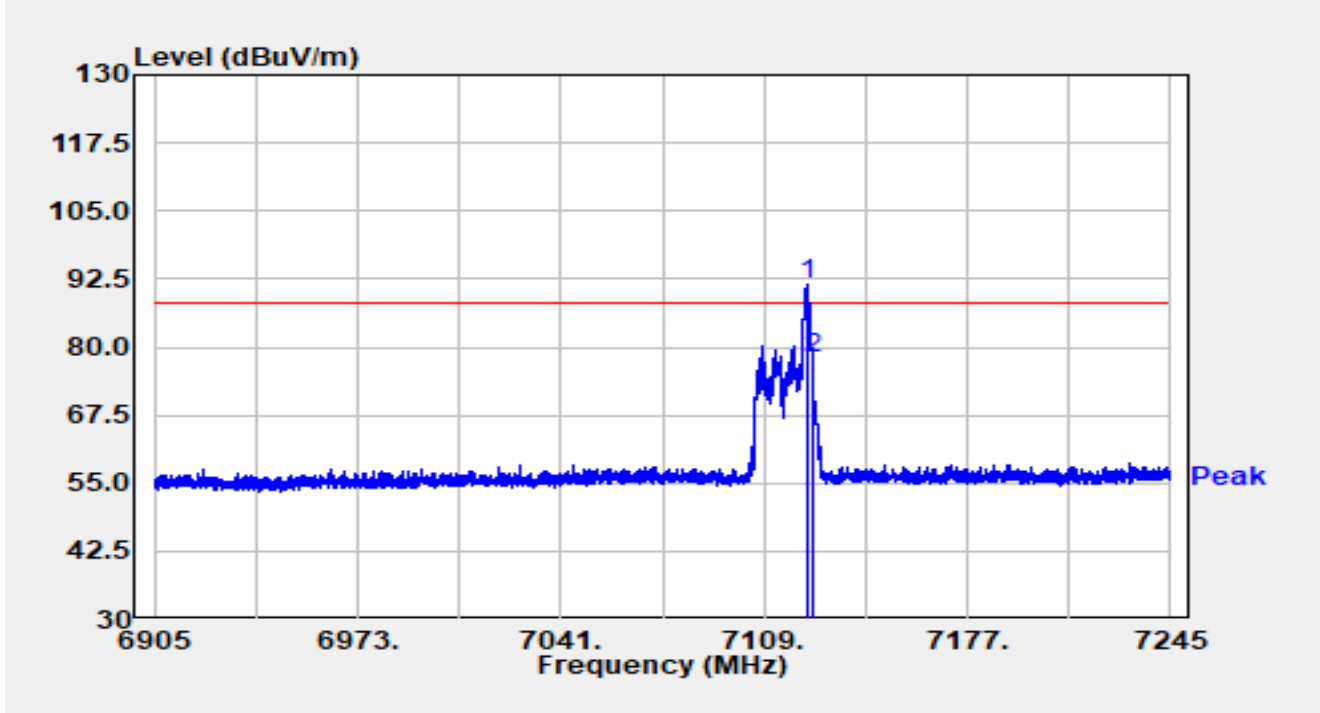


No	Mark	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Detector
1	*	7123.484	64.69	26.87	91.55	N/A	N/A	Peak
2		7125.000	50.85	26.90	77.75	-10.45	88.20	Peak

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-08-14
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C /46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE20 at 7115MHz RU26/8		

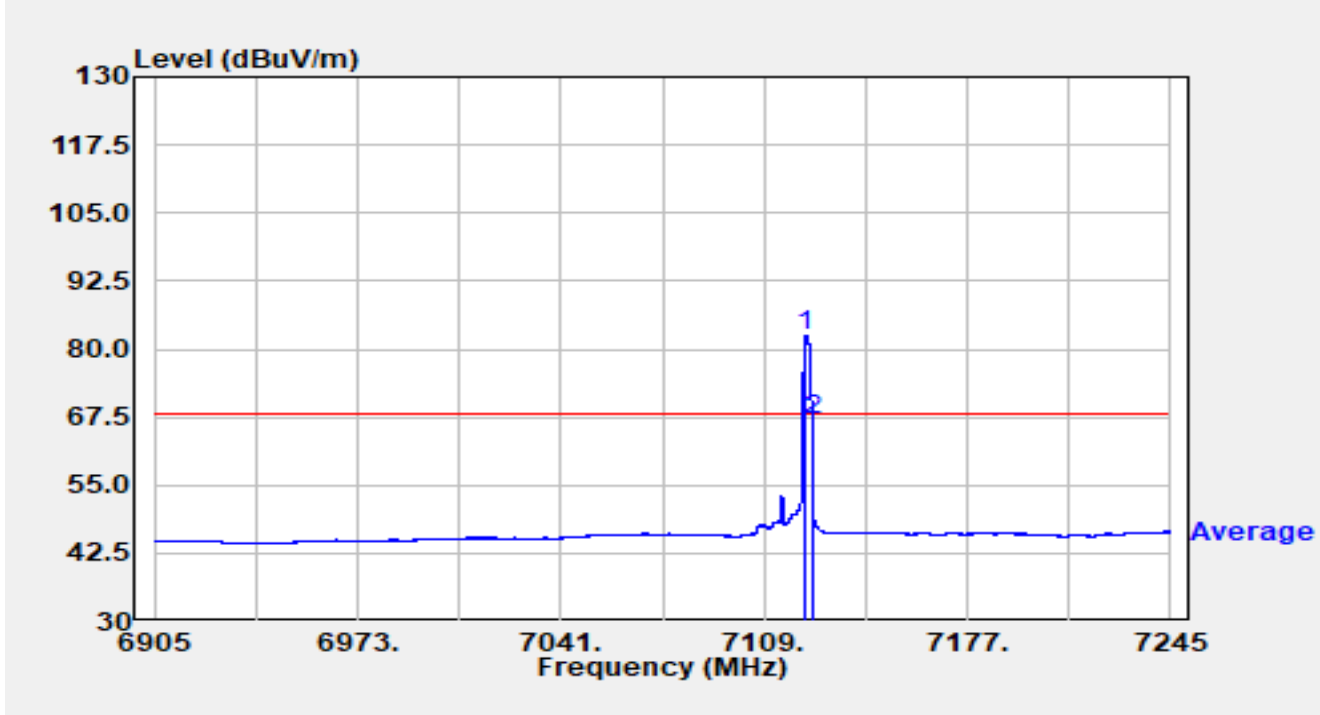


No	Mark	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Detector
1	*	7123.042	55.51	26.86	82.37	N/A	N/A	Average
2		7125.000	40.21	26.90	67.11	-1.09	68.20	Average

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-08-14
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C /46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE20 at 7115MHz RU52/40		

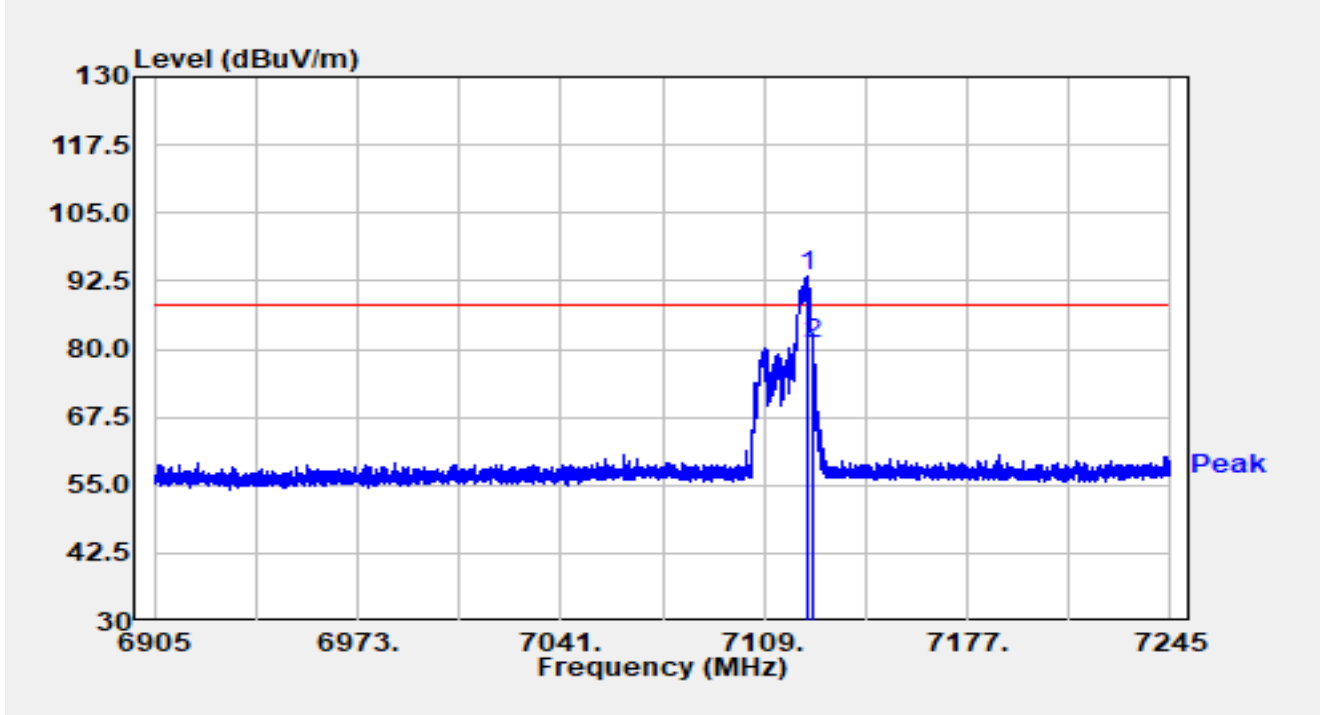


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7123.382	66.69	26.87	93.56	N/A	N/A	Peak
2		7125.000	54.18	26.90	81.08	-7.12	88.20	Peak

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-08-14
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C /46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE20 at 7115MHz RU52/40		

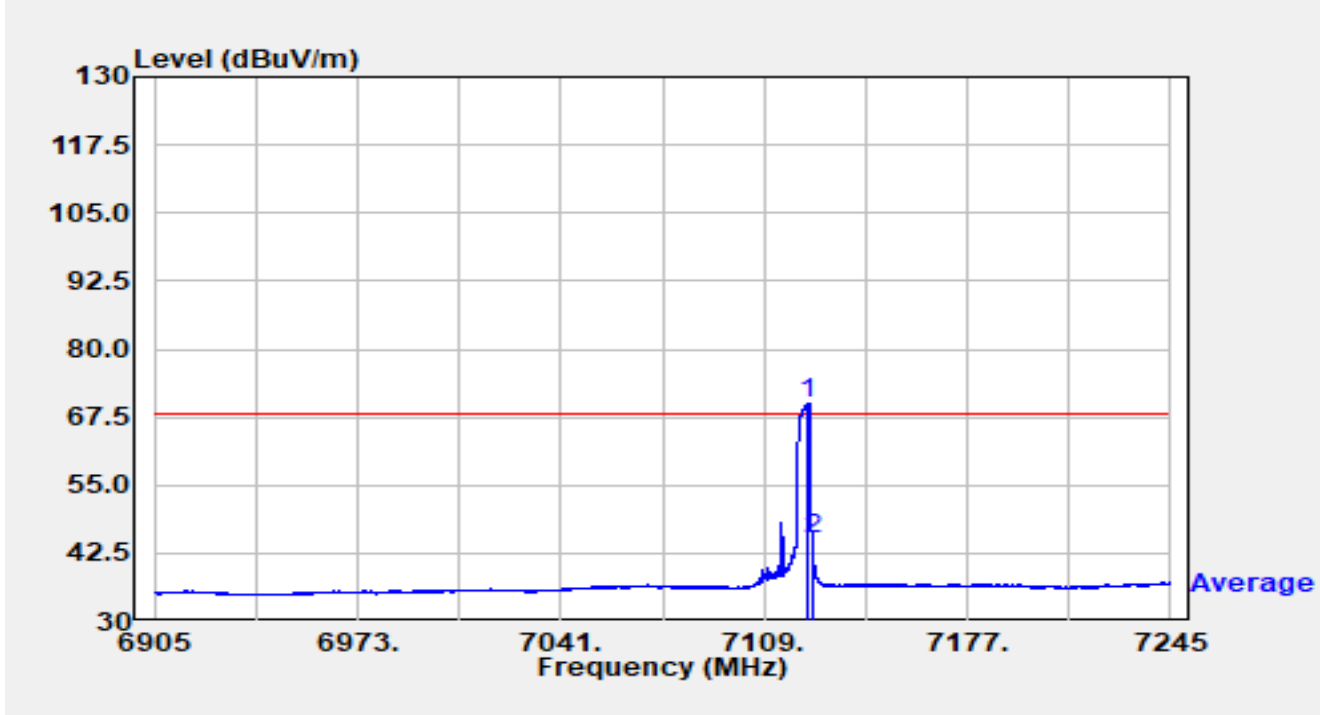


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement @RBW=100k (dBμV/m)	Measurement @RBW=1M (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7123.926	43.02	26.88	69.90	79.90	N/A	N/A	Average
2		7125.000	18.07	26.90	44.97	54.97	-13.23	68.20	Average

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
4. Measurement @RBW=1M (dBμV/m) = Measurement @RBW=100k (dBμV/m) + 10*log(1000/100).

Site	WZ-AC2	Test Date	2024-08-14
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C /46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE20 at 7115MHz RU52/40		

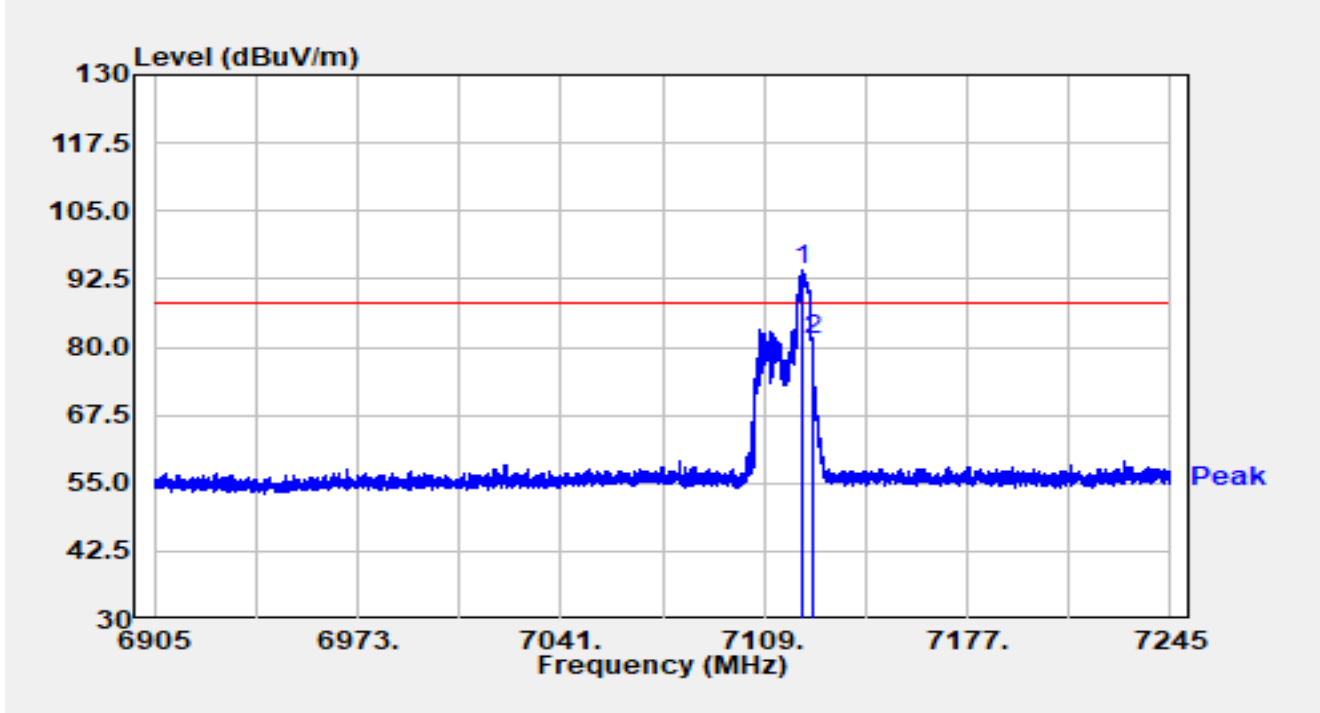


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7122.022	67.46	26.84	94.30	N/A	N/A	Peak
2		7125.000	54.50	26.90	81.40	-6.80	88.20	Peak

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-08-14
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C /46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE20 at 7115MHz RU52/40		

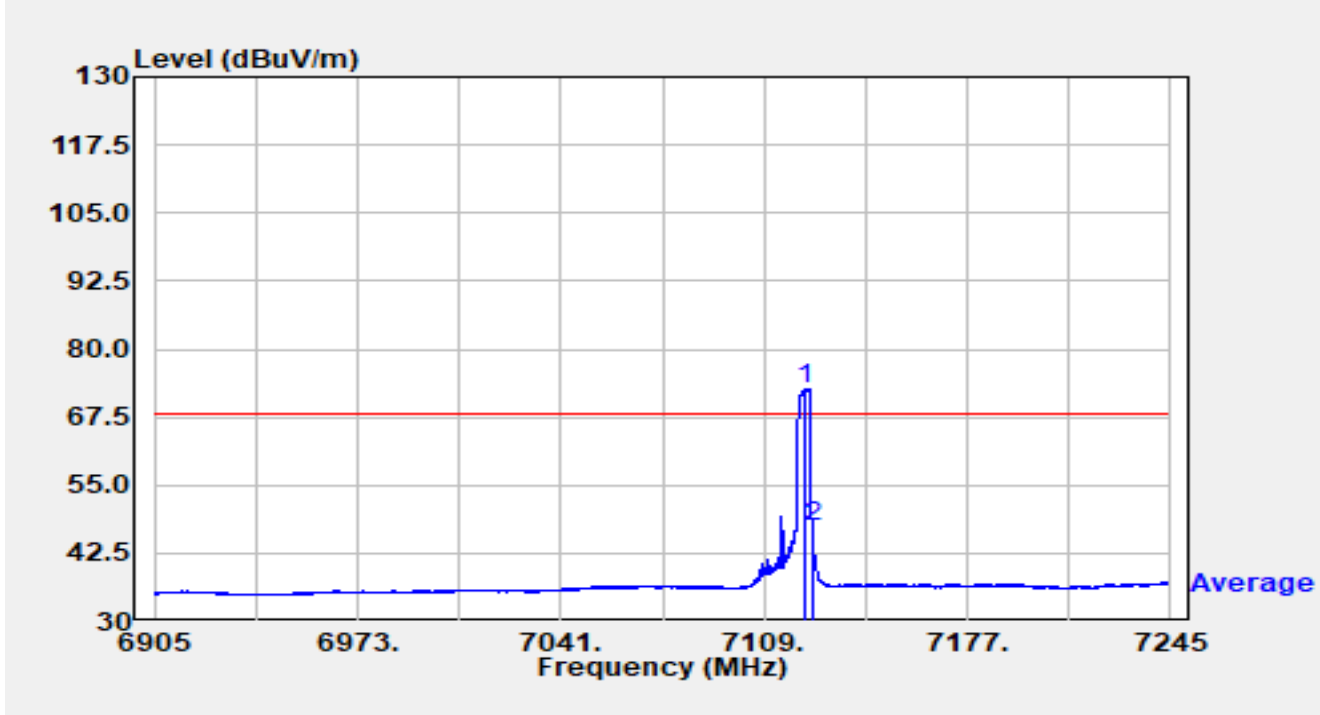


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement @RBW=100k (dBμV/m)	Measurement @RBW=1M (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7122.906	45.97	26.86	72.83	82.83	N/A	N/A	Average
2		7125.000	20.58	26.90	47.48	57.48	-10.72	68.20	Average

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
4. Measurement @RBW=1M (dBμV/m) = Measurement @RBW=100k (dBμV/m) + 10*log(1000/100).

Site	WZ-AC2	Test Date	2024-08-14
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C /46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE20 at 7115MHz RU106/54		

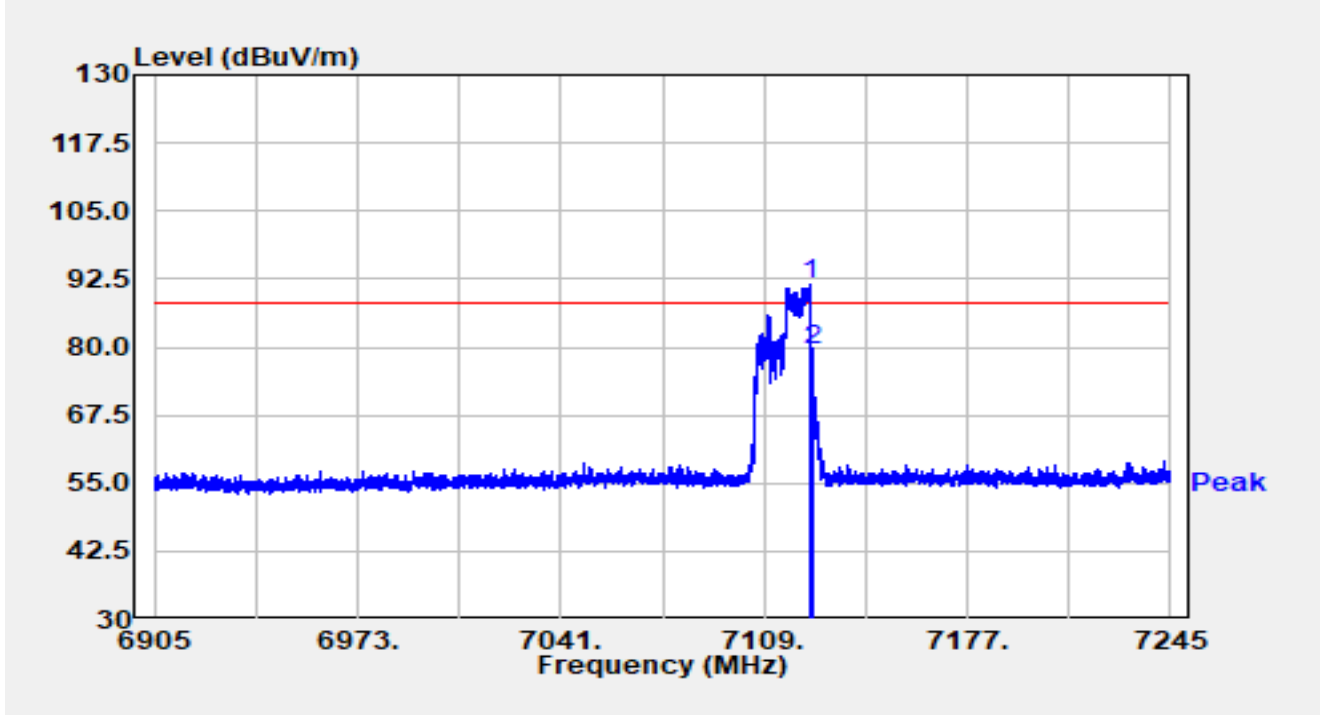


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7124.096	64.74	26.88	91.62	N/A	N/A	Peak
2		7125.000	52.51	26.90	79.41	-8.79	88.20	Peak

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-08-14
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C /46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE20 at 7115MHz RU106/54		

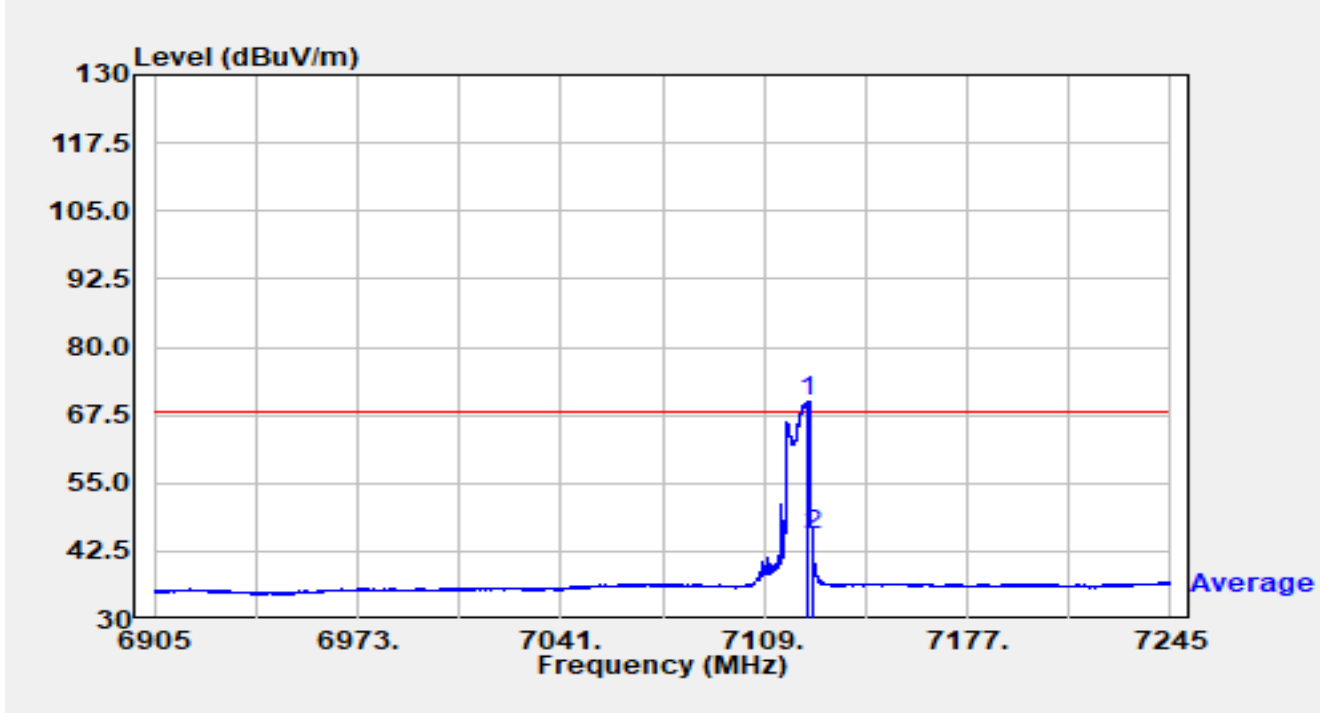


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement @RBW=100k (dBUV/m)	Measurement @RBW=1M (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	7123.688	43.15	26.87	70.03	80.03	N/A	N/A	Average
2		7125.000	18.68	26.90	45.58	55.58	-12.62	68.20	Average

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBUV/m) = Reading(dBμV) + C.F (dB/m).
4. Measurement @RBW=1M (dBUV/m) = Measurement @RBW=100k (dBUV/m) + 10*log(1000/100).

Site	WZ-AC2	Test Date	2024-08-14
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C /46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE20 at 7115MHz RU106/54		

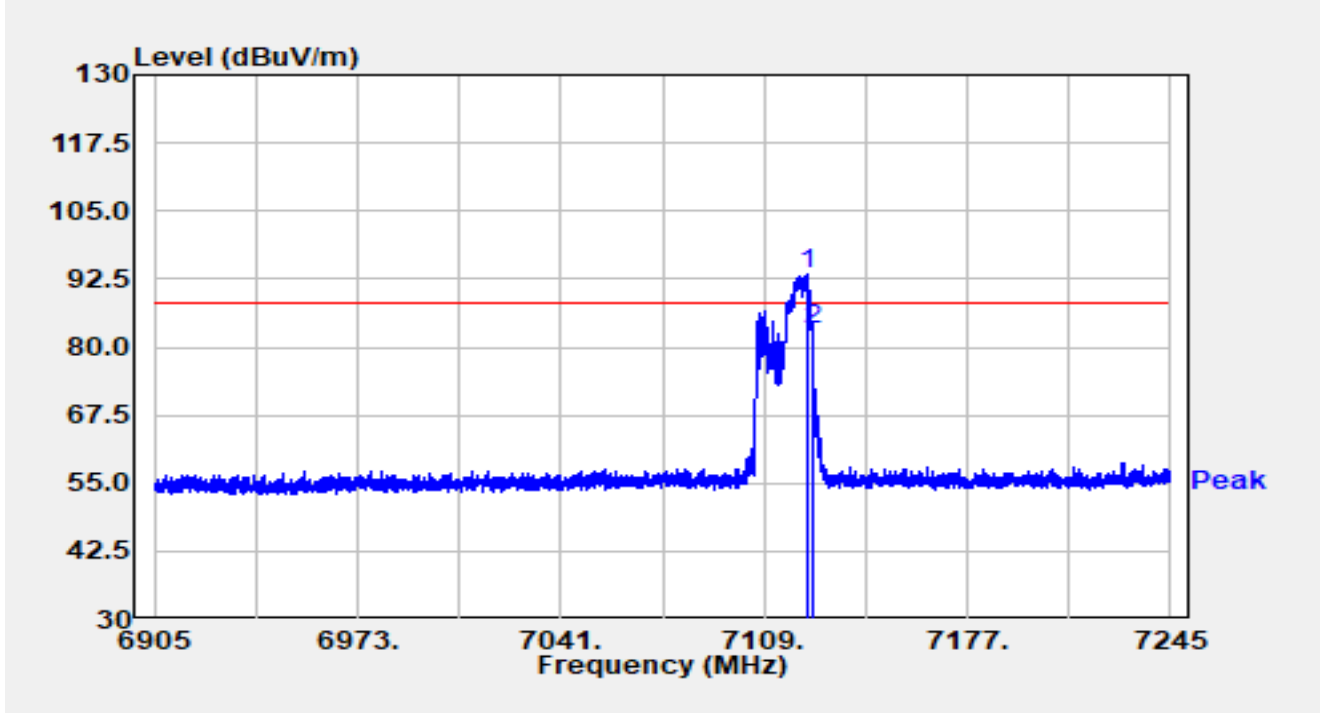


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7123.450	66.46	26.87	93.32	N/A	N/A	Peak
2		7125.000	56.42	26.90	83.32	-4.88	88.20	Peak

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-08-14
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C /46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE20 at 7115MHz RU106/54		

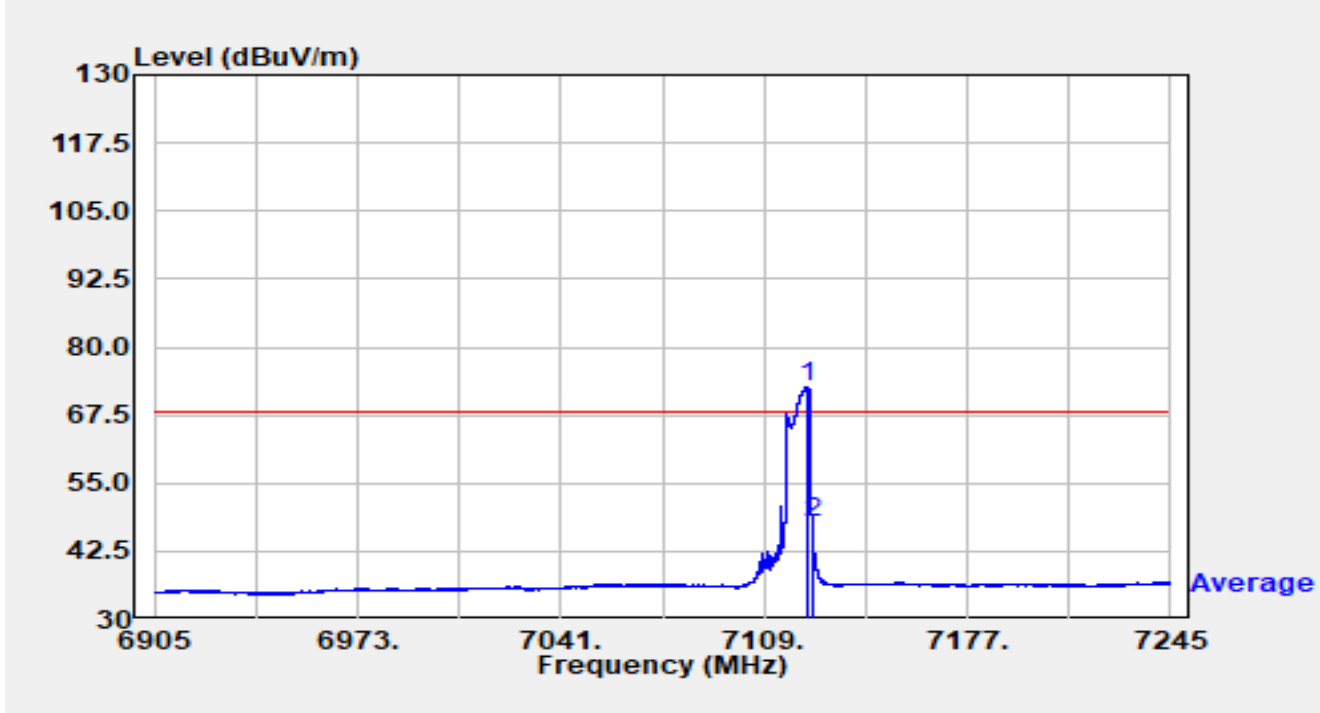


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement @RBW=100k (dBμV/m)	Measurement @RBW=1M (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7123.212	45.78	26.86	72.64	82.64	N/A	N/A	Average
2		7125.000	20.89	26.90	47.79	57.79	-10.41	68.20	Average

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
4. Measurement @RBW=1M (dBμV/m) = Measurement @RBW=100k (dBμV/m) + 10*log(1000/100).

Site	WZ-AC1	Test Date	2024-07-24
Test Engineer	Frank Xue	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz RU242/61		

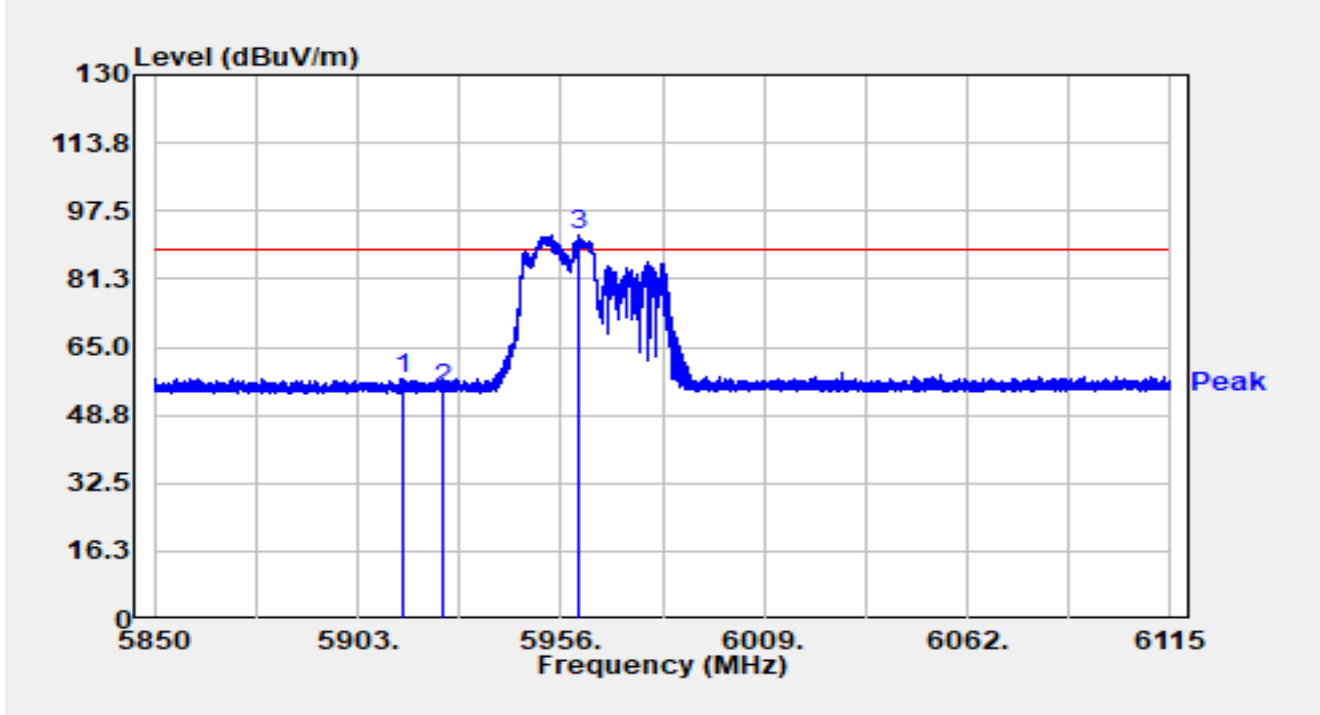


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5914.846	35.97	21.60	57.56	-30.64	88.20	Peak
2		5925.000	33.24	21.64	54.88	-33.32	88.20	Peak
3	*	5960.770	70.41	21.47	91.88	N/A	N/A	Peak

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-24
Test Engineer	Frank Xue	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz RU242/61		

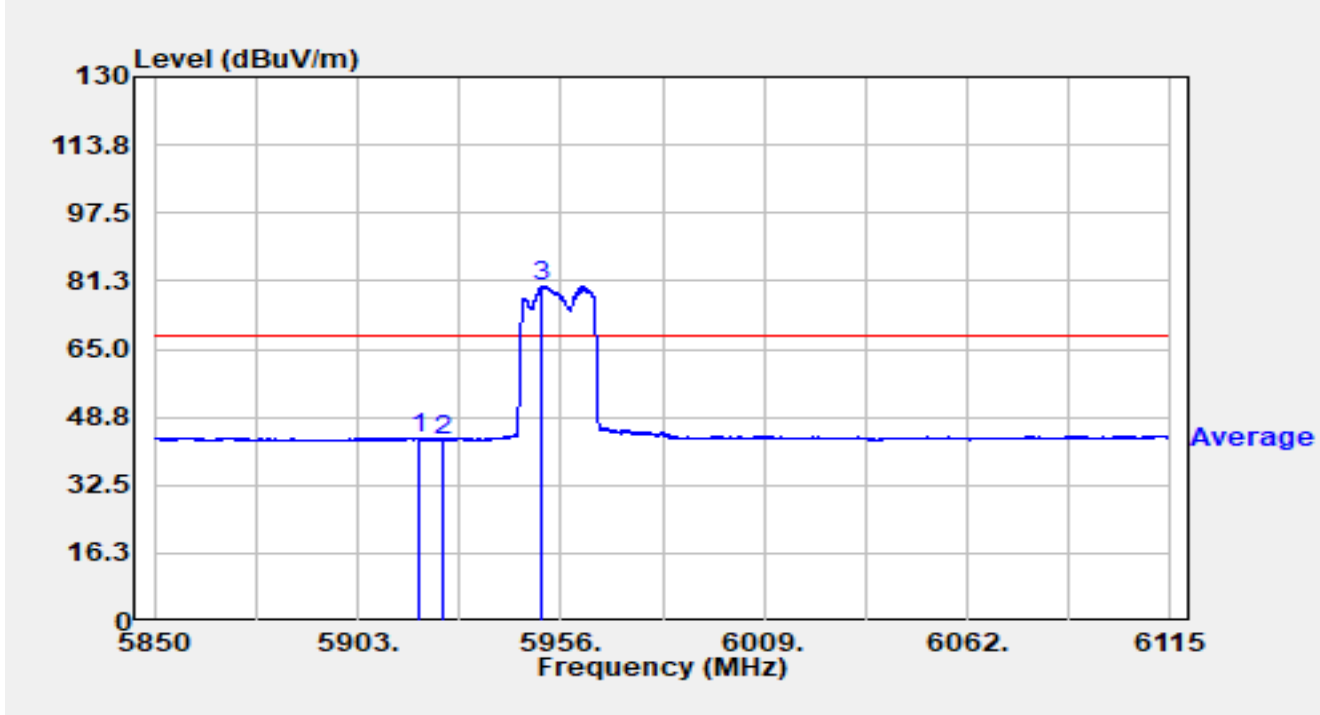


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5918.926	22.06	21.62	43.67	-24.53	68.20	Average
2		5925.000	21.75	21.64	43.39	-24.81	68.20	Average
3	*	5951.230	58.63	21.55	80.18	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-24
Test Engineer	Frank Xue	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz RU242/61		

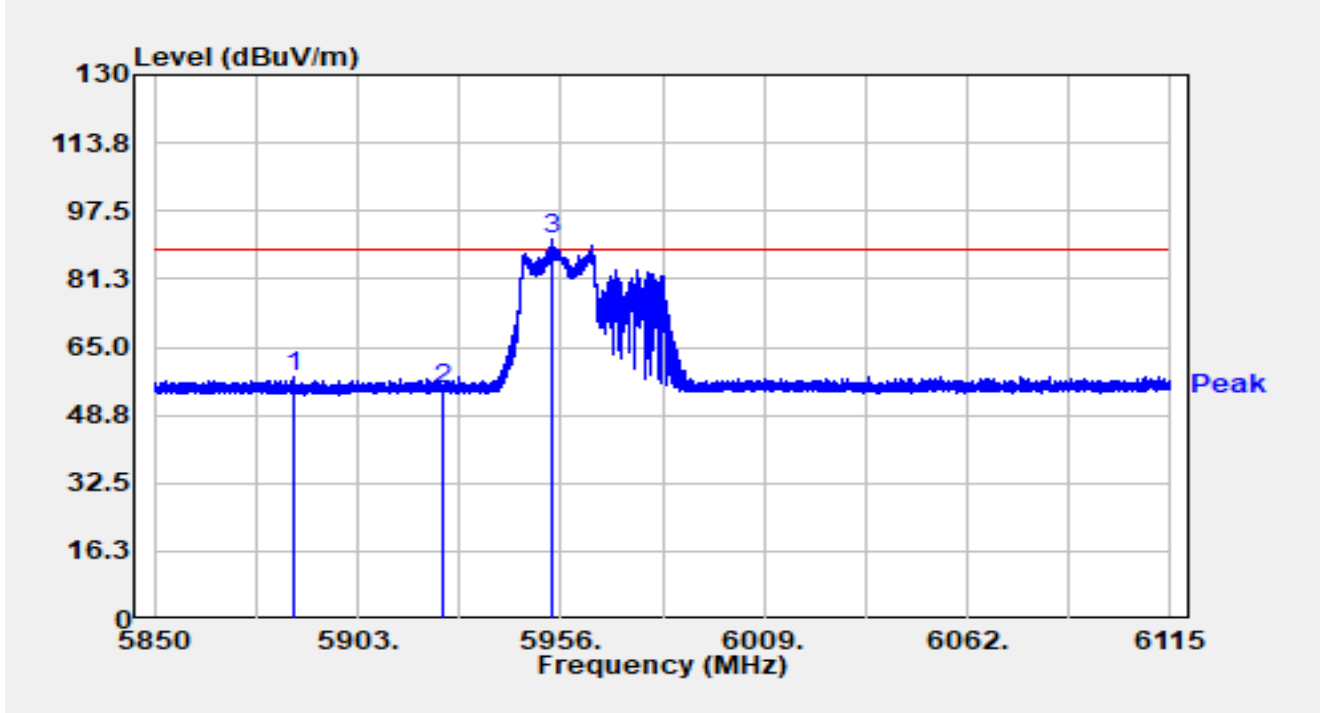


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5886.543	36.35	21.43	57.78	-30.42	88.20	Peak
2		5924.995	33.45	21.64	55.09	-33.11	88.20	Peak
3	*	5953.721	68.99	21.53	90.52	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-24
Test Engineer	Frank Xue	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz RU242/61		

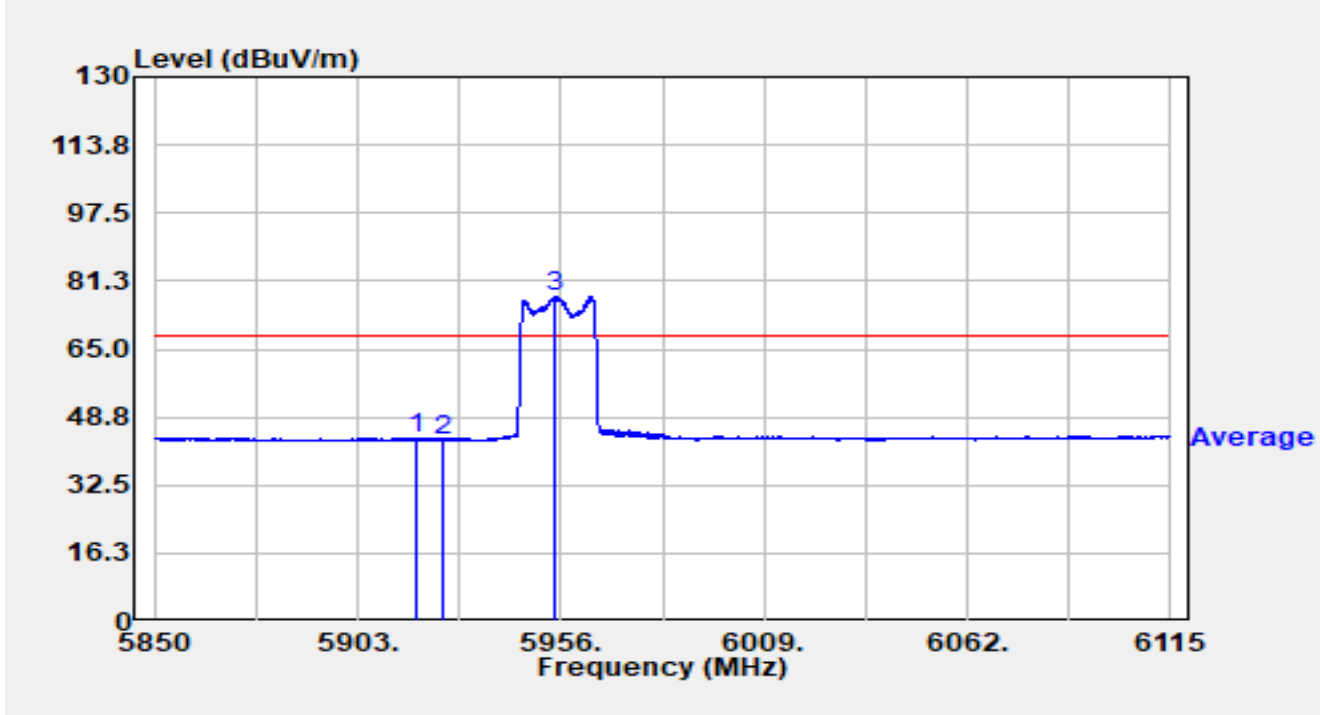


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5918.079	22.04	21.61	43.65	-24.55	68.20	Average
2		5925.000	21.74	21.64	43.38	-24.82	68.20	Average
3	*	5954.171	55.84	21.52	77.37	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-24
Test Engineer	Frank Xue	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE40 at 7085MHz RU242/62		

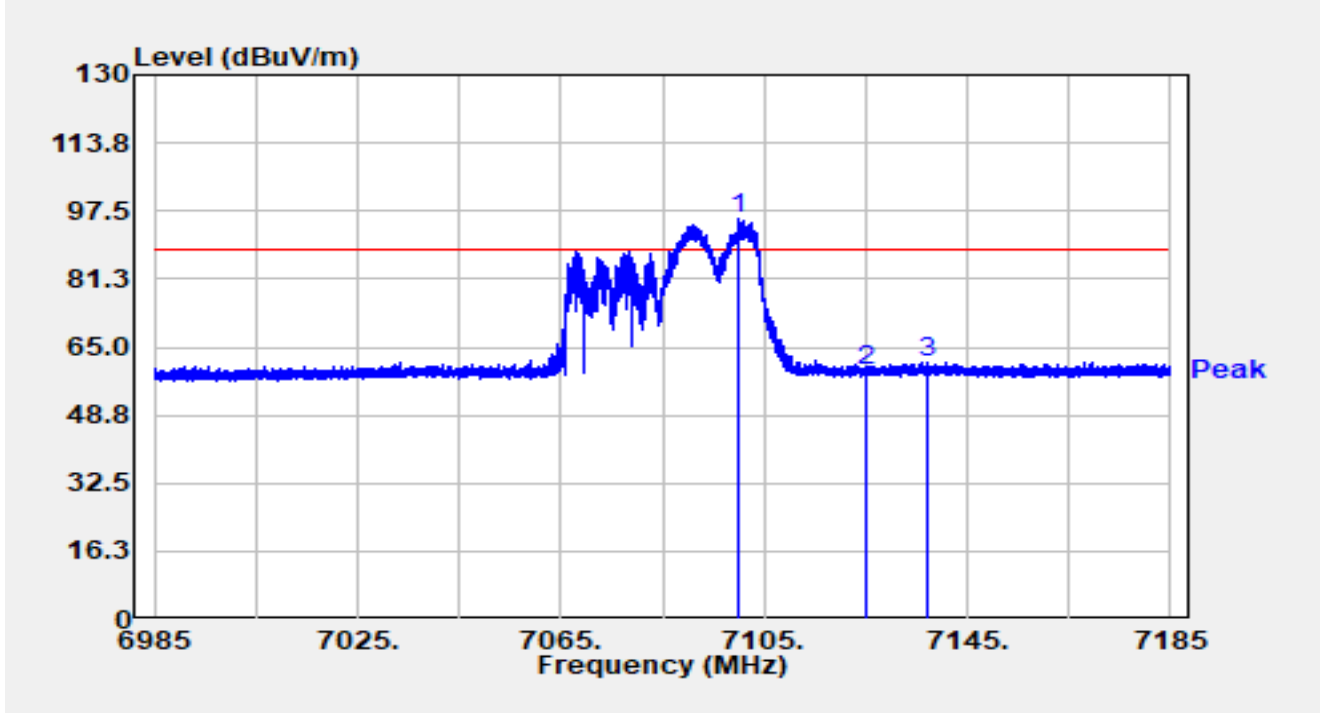


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7100.020	70.79	24.86	95.64	N/A	N/A	Peak
2		7125.000	34.39	24.96	59.35	-28.85	88.20	Peak
3		7136.940	36.45	25.08	61.53	-26.67	88.20	Peak

Notes:

1. "*" , means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-24
Test Engineer	Frank Xue	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE40 at 7085MHz RU242/62		

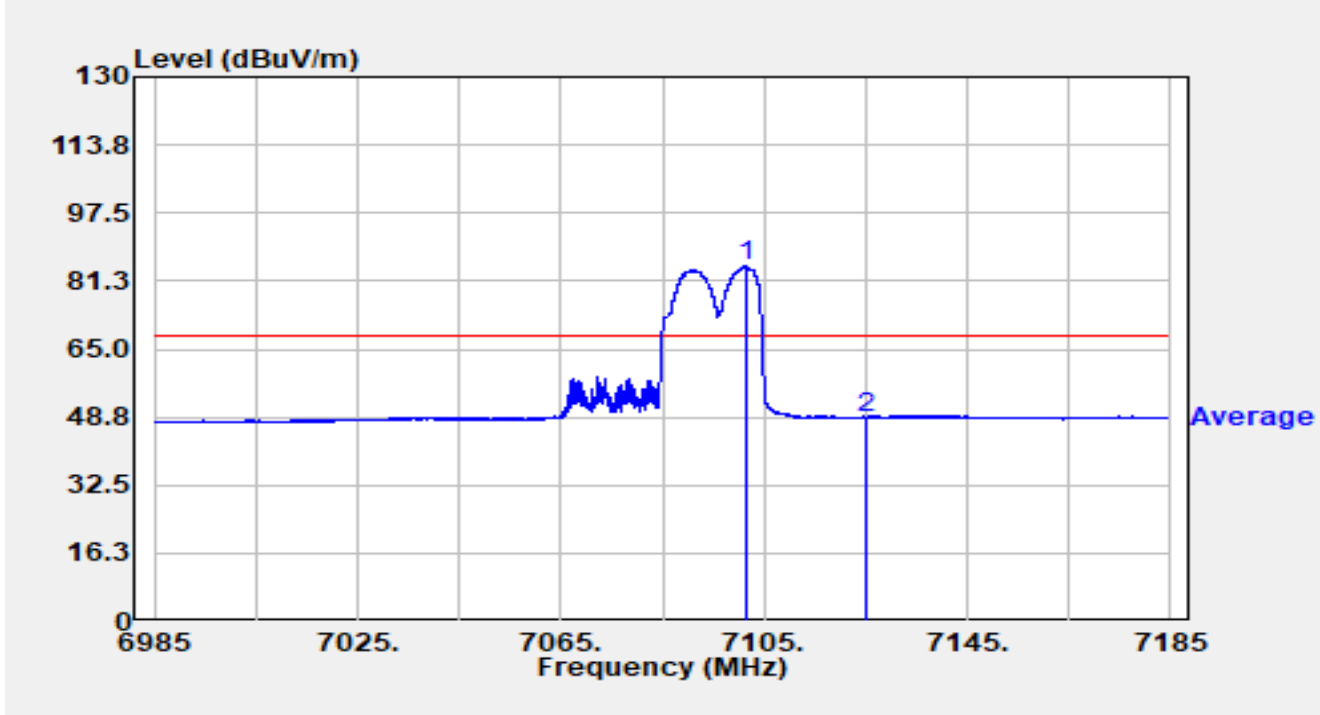


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7101.280	59.87	24.89	84.76	N/A	N/A	Average
2		7125.000	23.84	24.96	48.79	-19.41	68.20	Average

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-24
Test Engineer	Frank Xue	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE40 at 7085MHz RU242/62		

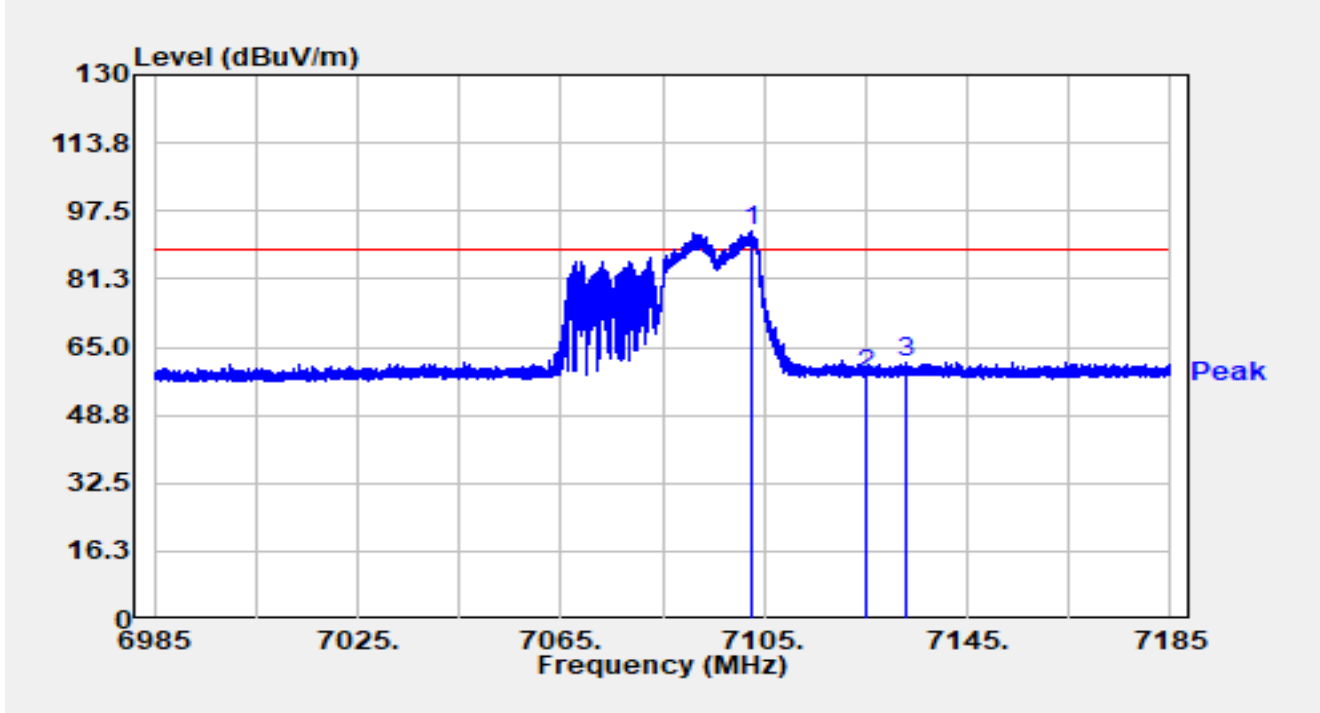


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7102.400	67.77	24.91	92.69	N/A	N/A	Peak
2		7125.000	33.59	24.96	58.54	-29.66	88.20	Peak
3		7133.160	36.38	25.03	61.41	-26.79	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-24
Test Engineer	Frank Xue	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE40 at 7085MHz RU242/62		

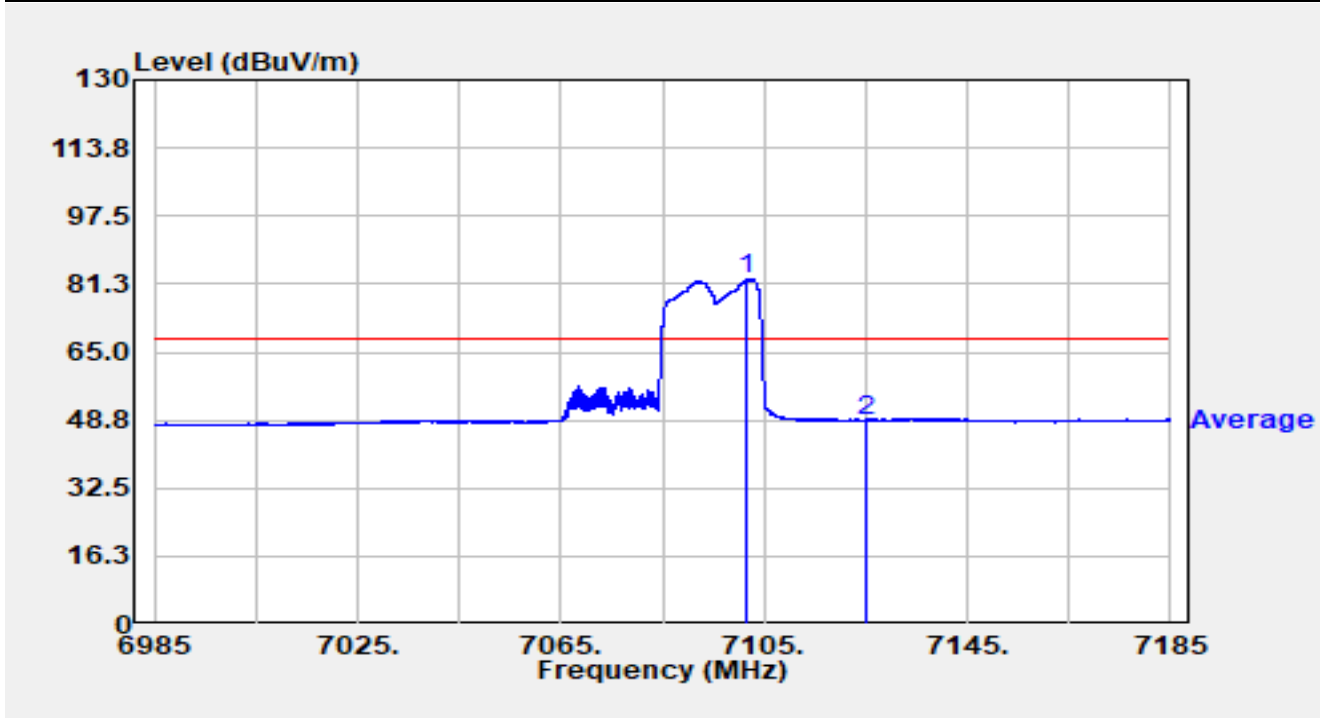


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7101.620	57.42	24.90	82.32	N/A	N/A	Average
2		7125.000	23.80	24.96	48.76	-19.44	68.20	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-24
Test Engineer	Frank Xue	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz RU484/65		

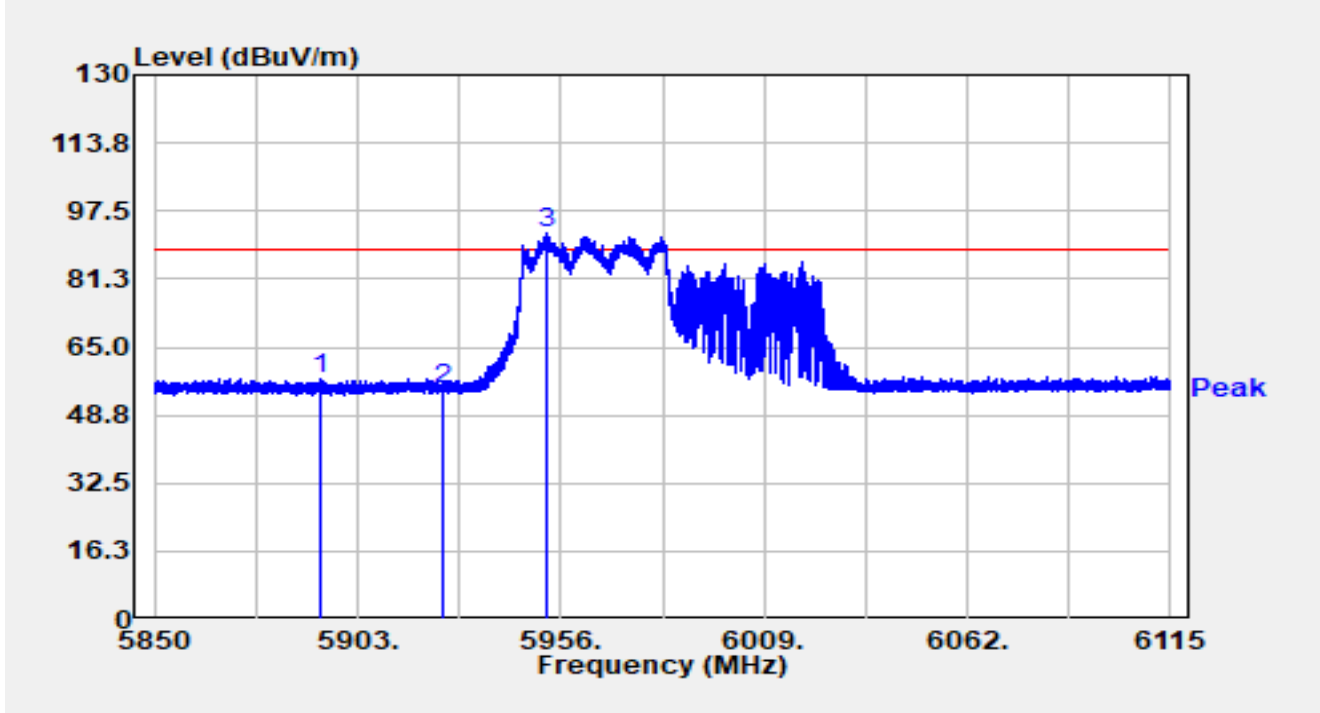


No	Mark	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Detector
1		5893.540	35.85	21.42	57.27	-30.93	88.20	Peak
2		5924.995	33.09	21.64	54.73	-33.47	88.20	Peak
3	*	5952.634	70.78	21.54	92.31	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-24
Test Engineer	Frank Xue	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz RU484/65		

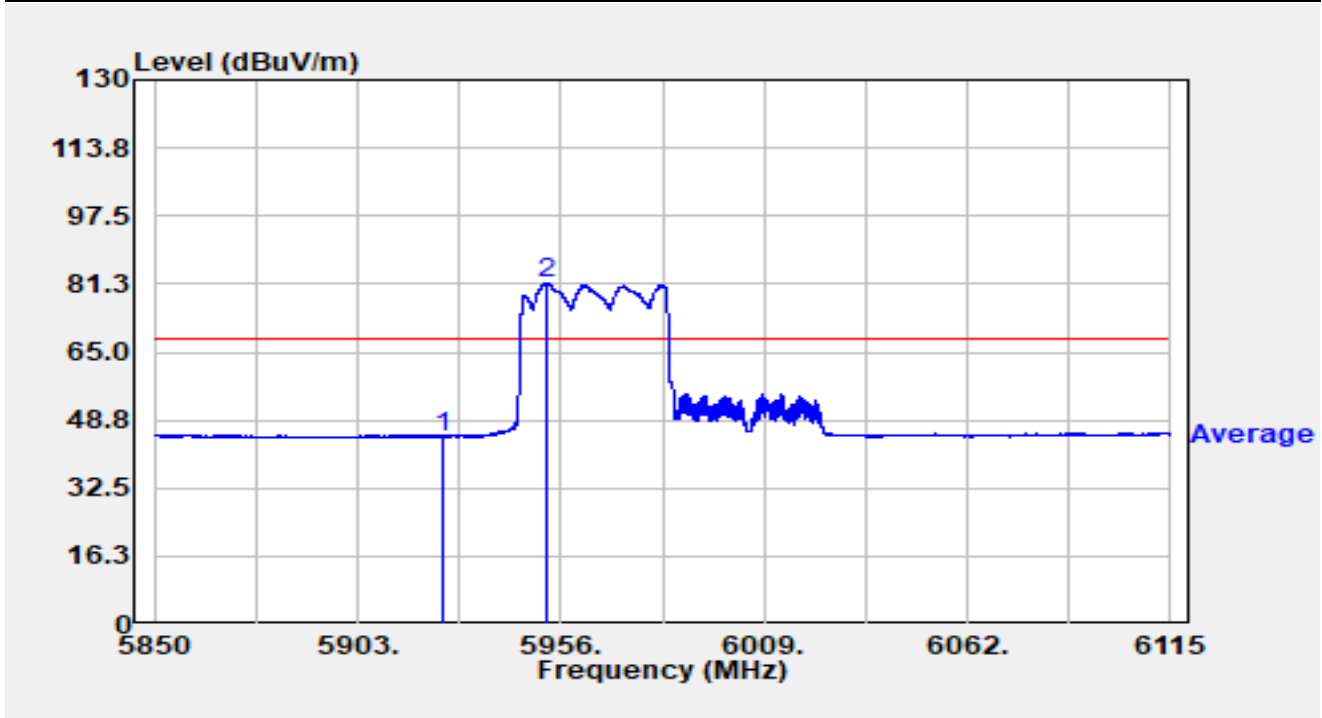


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5925.000	23.19	21.64	44.83	-23.37	68.20	Average
2	*	5951.999	59.79	21.54	81.33	N/A	N/A	Average

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-24
Test Engineer	Frank Xue	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz RU484/65		

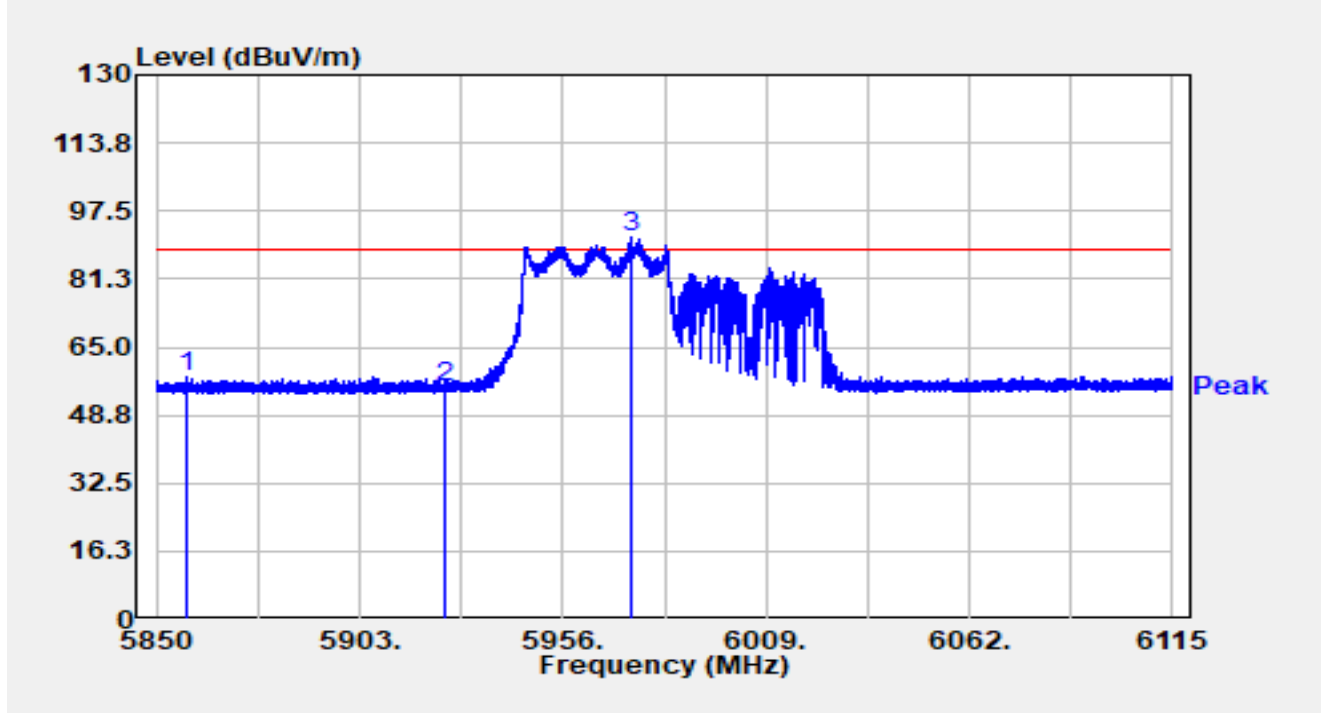


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5857.605	36.03	21.70	57.74	-30.46	88.20	Peak
2		5925.000	34.02	21.64	55.65	-32.55	88.20	Peak
3	*	5973.940	69.59	21.47	91.06	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-24
Test Engineer	Frank Xue	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz RU484/65		

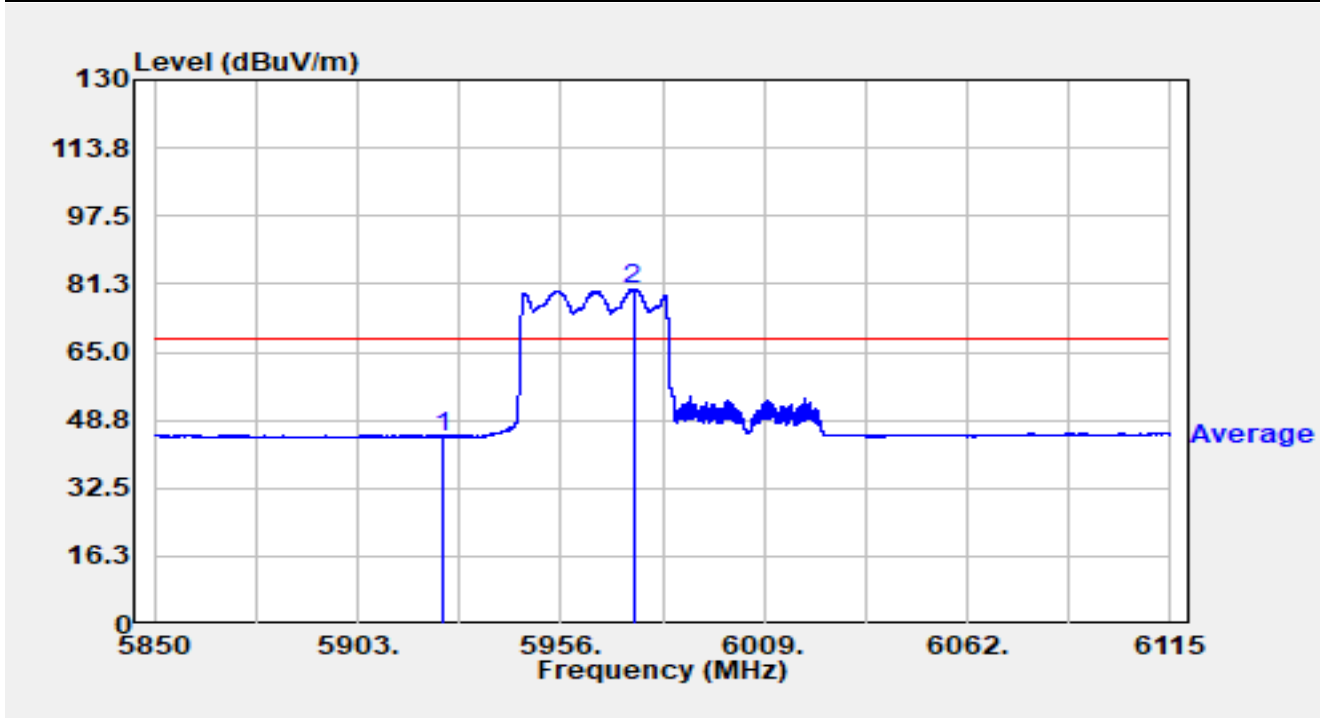


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5925.000	23.11	21.64	44.75	-23.45	68.20	Average
2	*	5974.868	58.62	21.47	80.10	N/A	N/A	Average

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-24
Test Engineer	Frank Xue	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE80 at 7025MHz RU484/66		

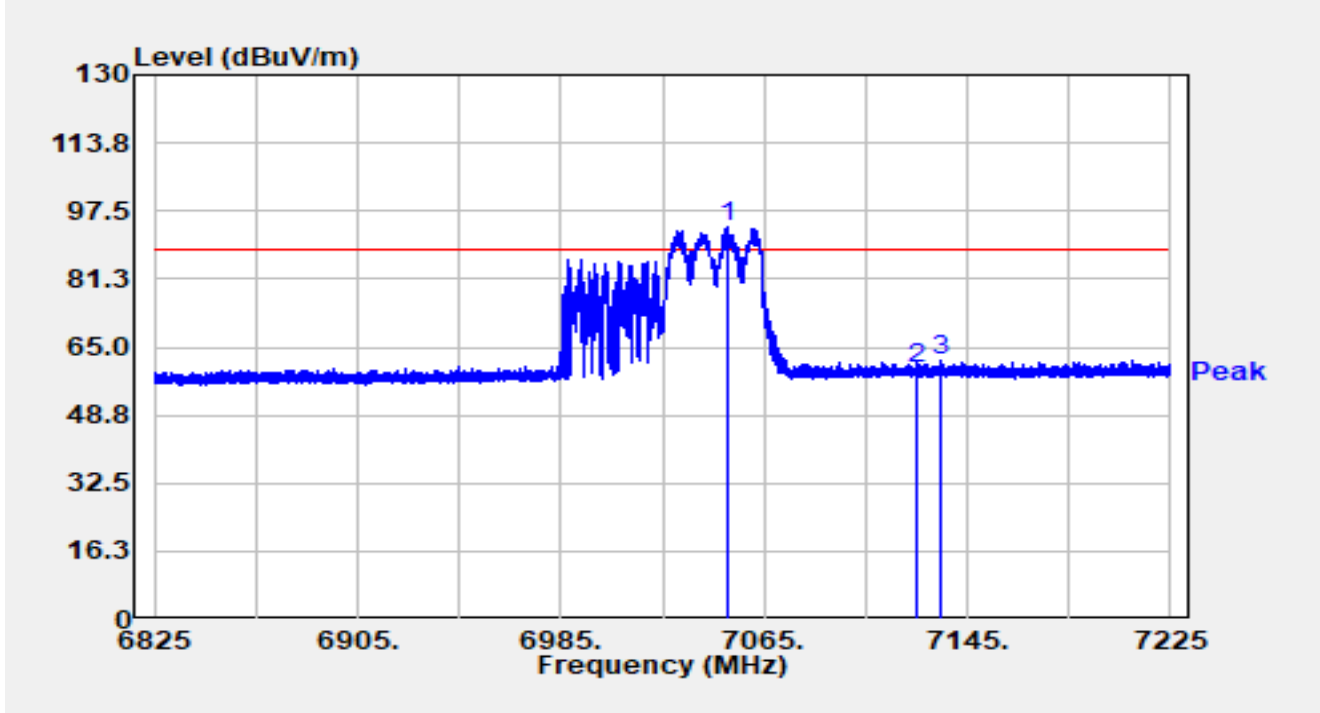


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7050.440	69.28	24.54	93.82	N/A	N/A	Peak
2		7125.000	34.75	24.96	59.71	-28.49	88.20	Peak
3		7134.960	36.61	25.06	61.67	-26.53	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-24
Test Engineer	Frank Xue	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE80 at 7025MHz RU484/66		

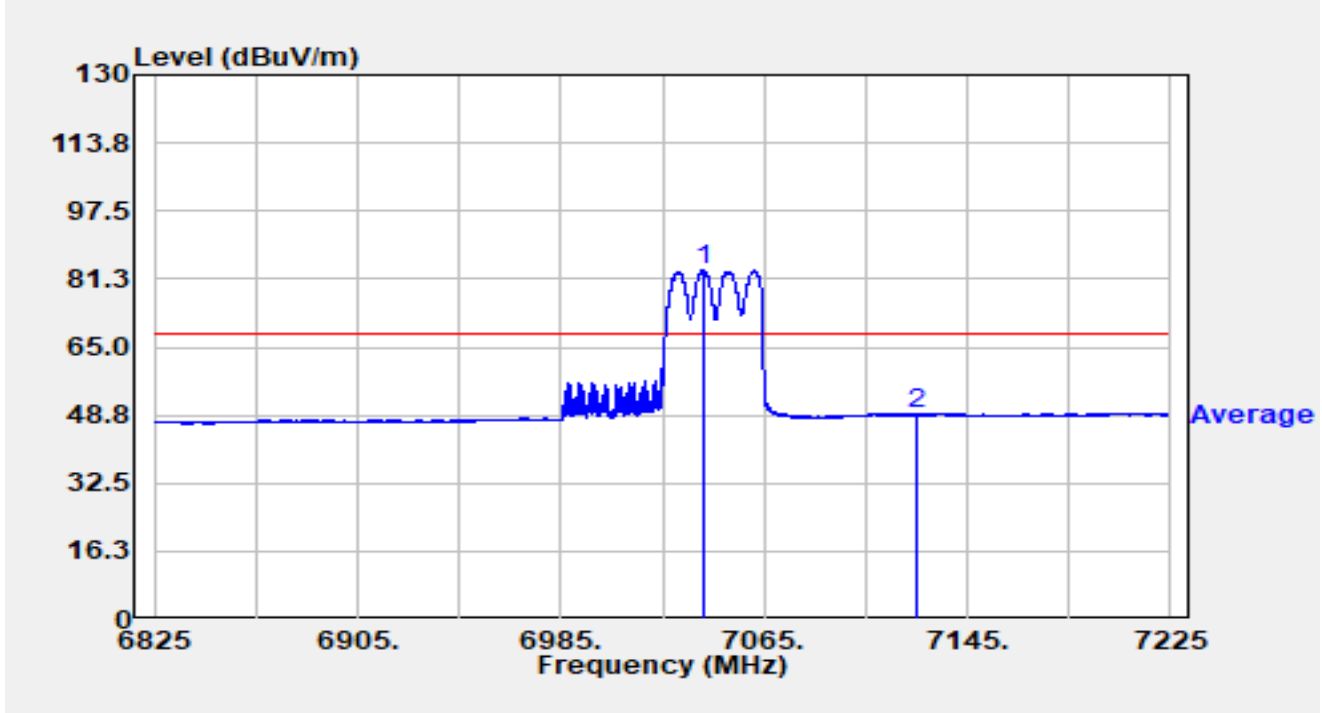


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7041.000	58.69	24.61	83.30	N/A	N/A	Average
2		7125.000	23.95	24.96	48.91	-19.29	68.20	Average

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-24
Test Engineer	Frank Xue	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE80 at 7025MHz RU484/66		

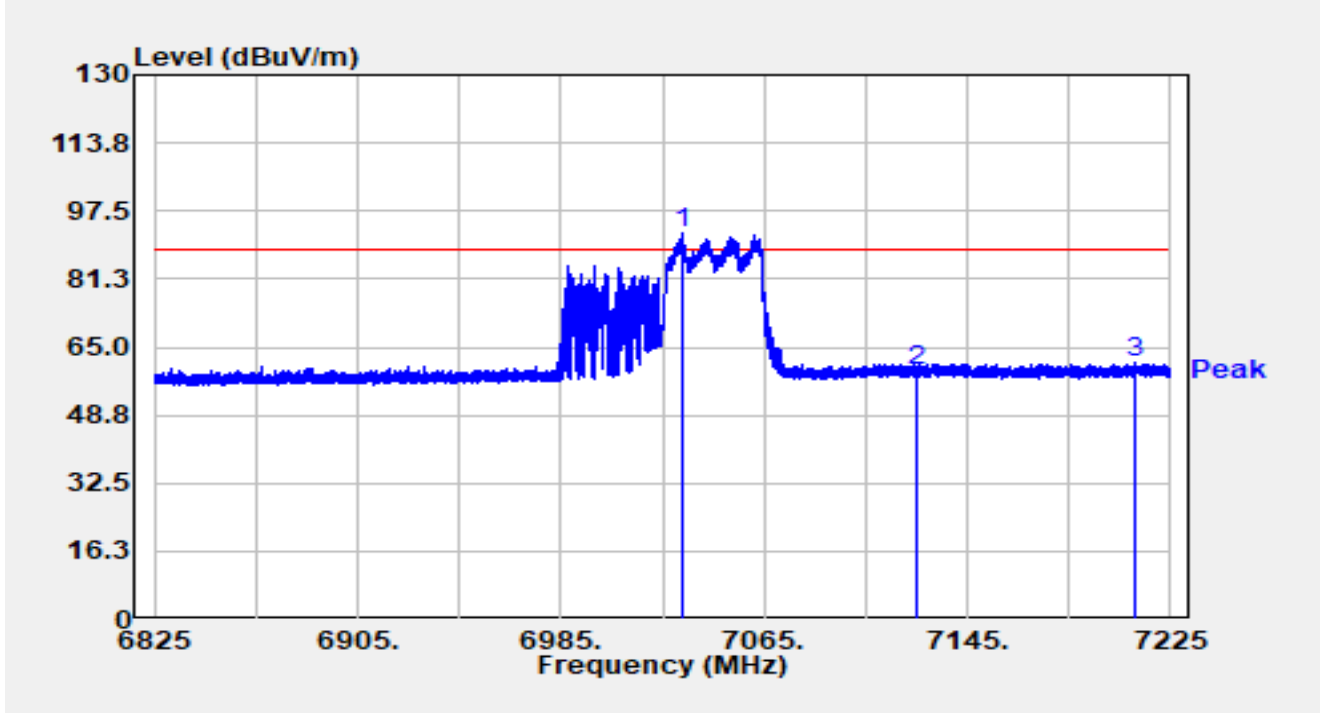


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7032.720	67.74	24.60	92.33	N/A	N/A	Peak
2		7125.000	34.24	24.96	59.19	-29.01	88.20	Peak
3		7210.720	36.11	25.20	61.30	-26.90	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-24
Test Engineer	Frank Xue	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE80 at 7025MHz RU484/66		

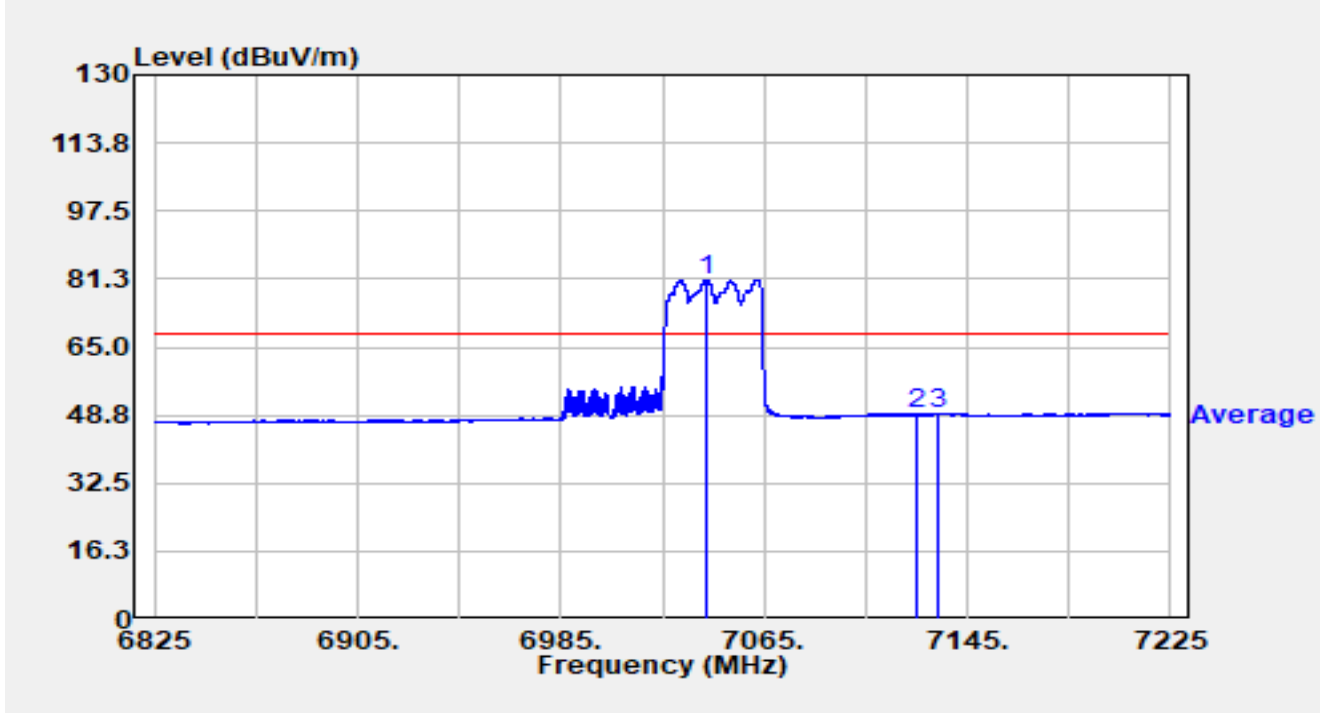


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7041.920	56.58	24.61	81.18	N/A	N/A	Average
2		7125.000	23.91	24.96	48.86	-19.34	68.20	Average
3		7133.560	24.14	25.04	49.18	-19.02	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-24
Test Engineer	Frank Xue	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz RU996-1		

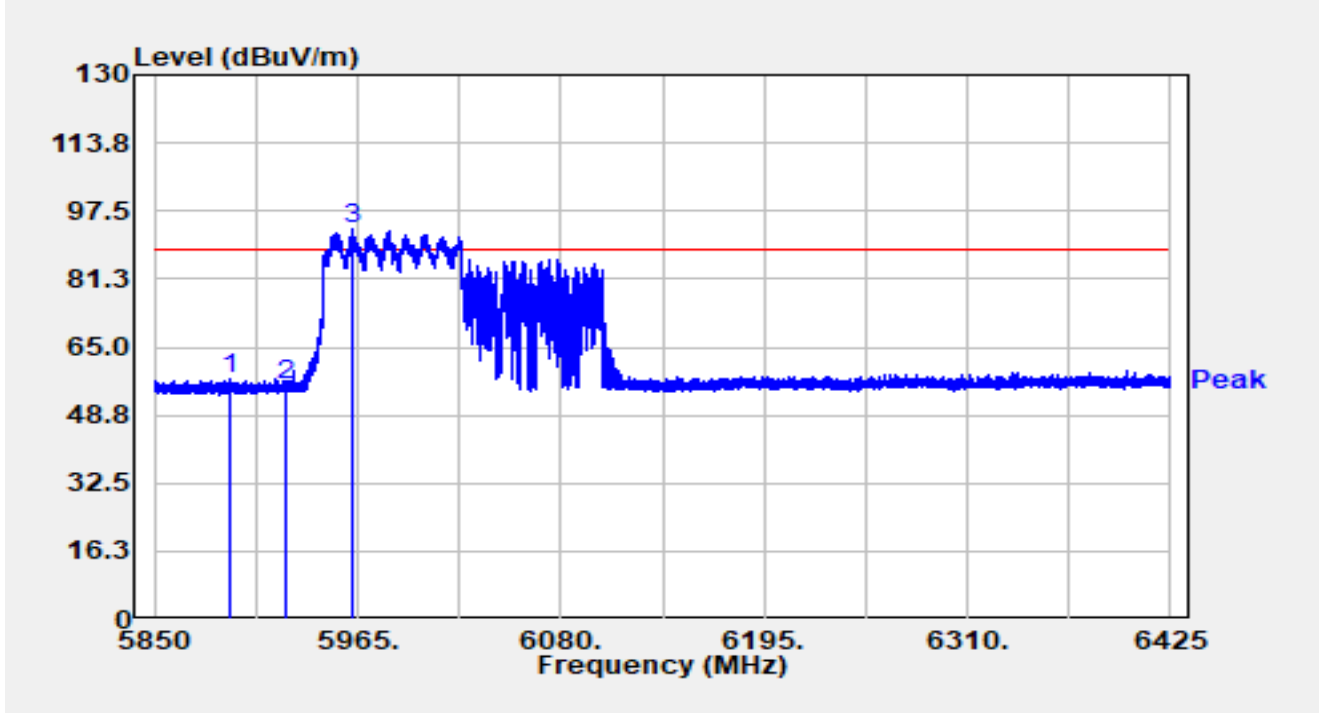


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5892.780	35.89	21.42	57.31	-30.89	88.20	Peak
2		5925.000	34.05	21.64	55.69	-32.51	88.20	Peak
3	*	5962.183	71.92	21.45	93.37	N/A	N/A	Peak

Notes:

1. "*" , means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-24
Test Engineer	Frank Xue	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz RU996-1		

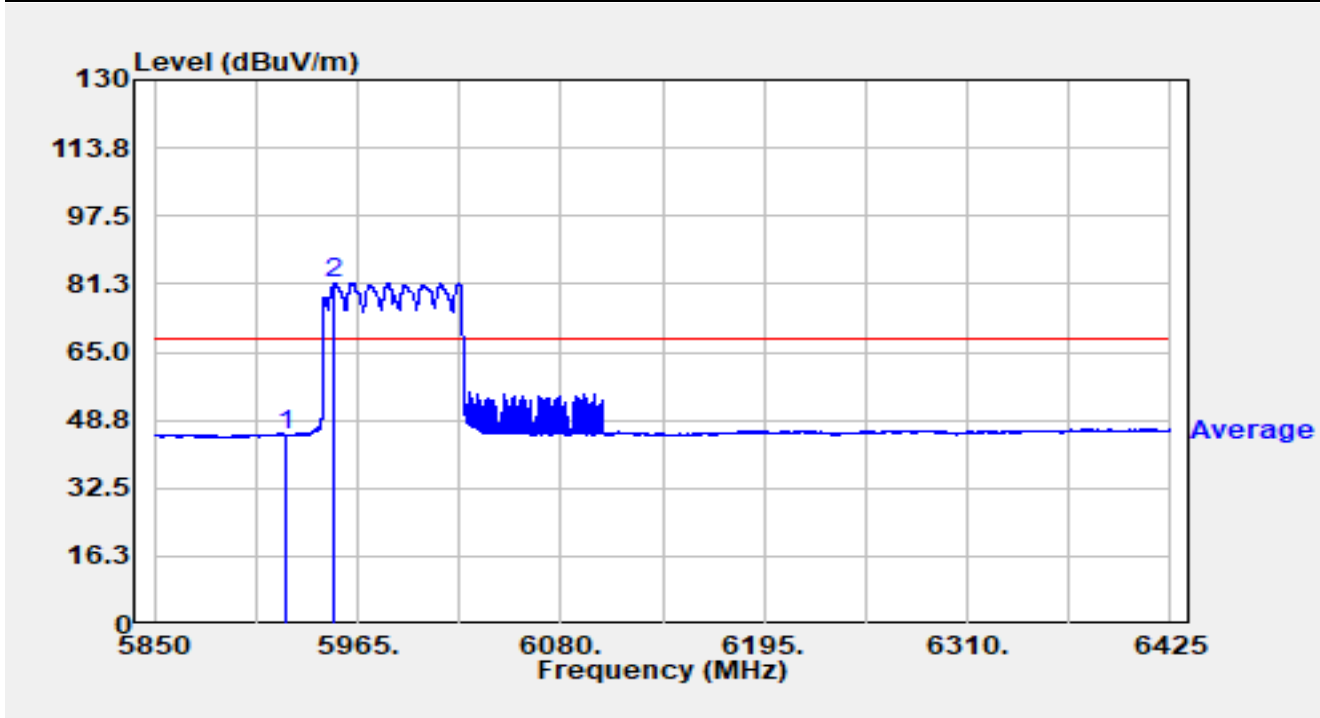


No	Mark	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Detector
1		5925.000	23.54	21.64	45.18	-23.02	68.20	Average
2	*	5952.063	60.12	21.54	81.66	N/A	N/A	Average

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-24
Test Engineer	Frank Xue	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz RU996-1		

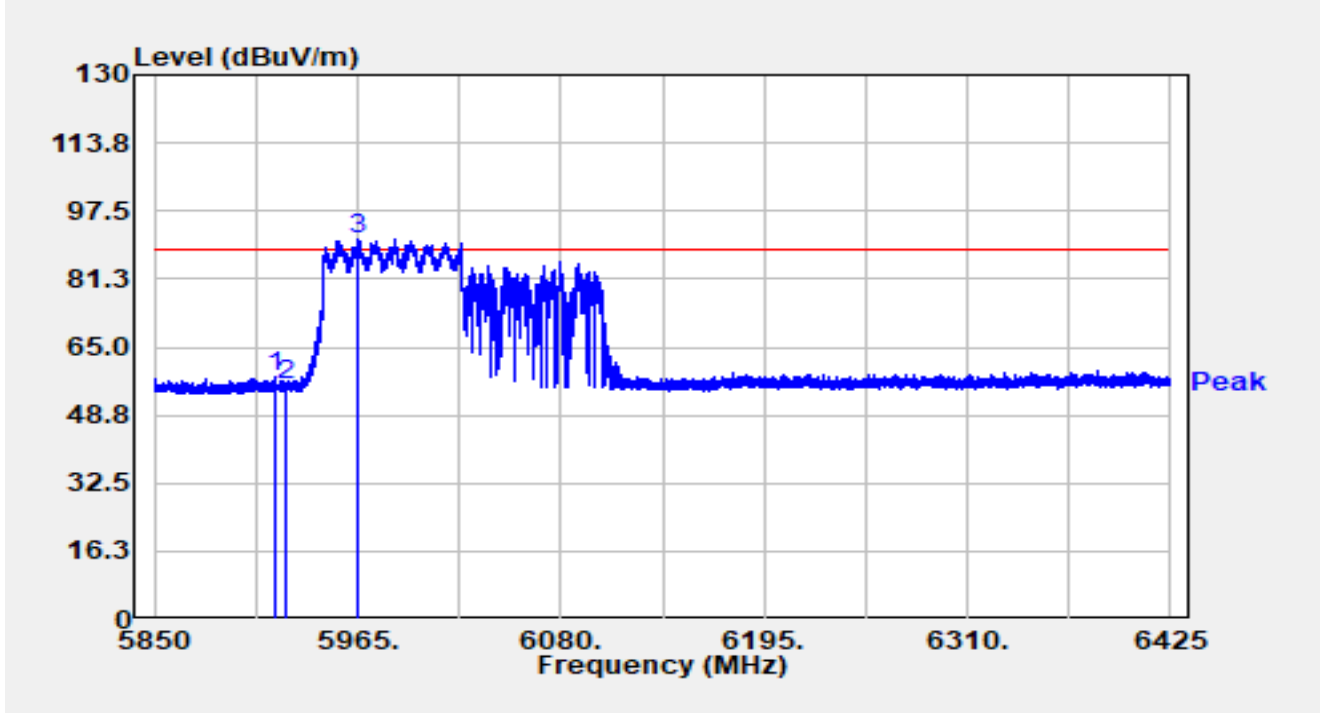


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5918.425	36.34	21.61	57.95	-30.25	88.20	Peak
2		5925.000	34.08	21.64	55.72	-32.48	88.20	Peak
3	*	5965.690	69.50	21.44	90.94	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-24
Test Engineer	Frank Xue	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz RU996-1		

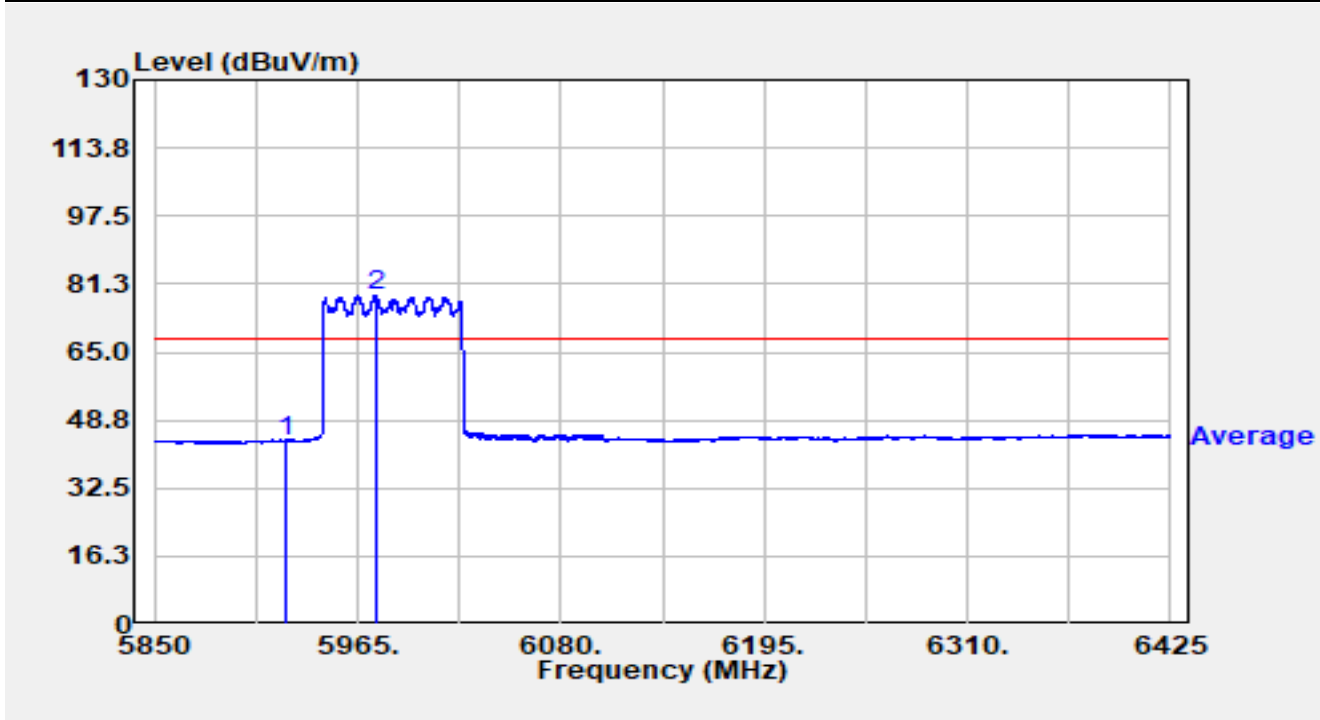


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5924.980	22.10	21.64	43.74	-24.46	68.20	Average
2	*	5975.178	57.04	21.47	78.52	N/A	N/A	Average

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-24
Test Engineer	Frank Xue	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE160 at 6985MHz RU996-1		

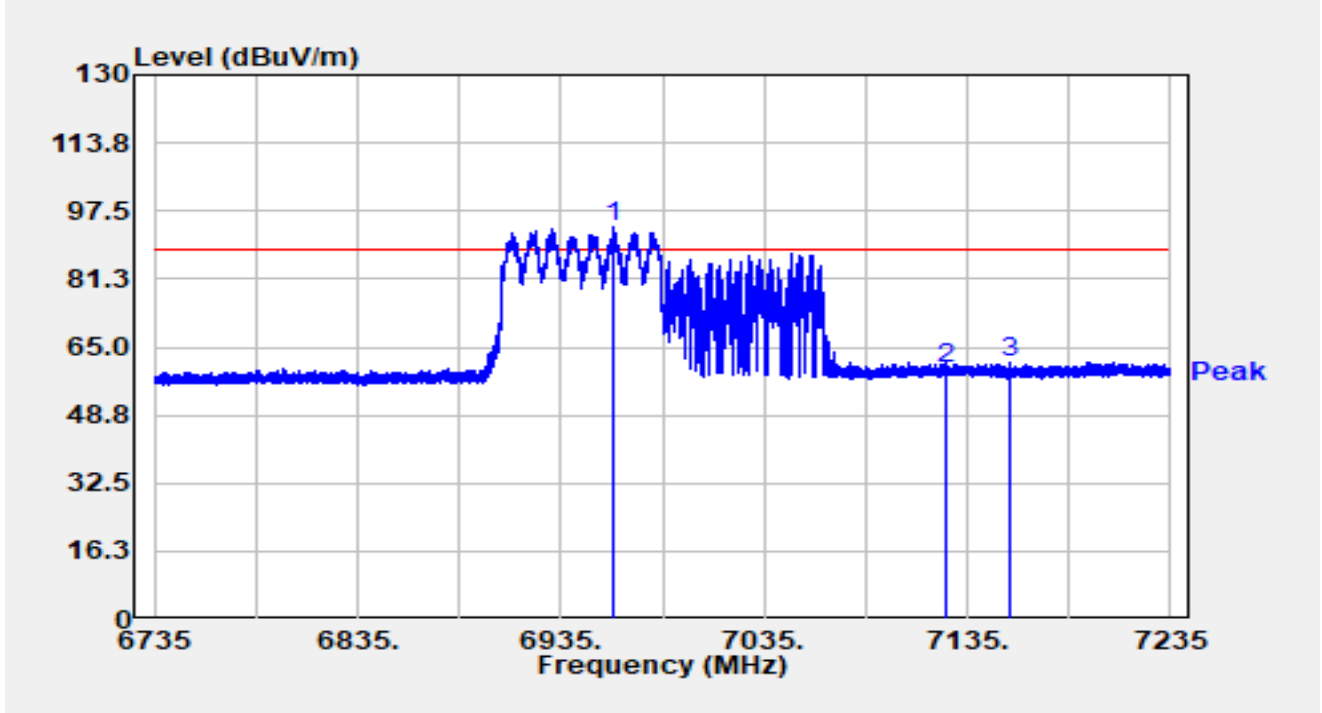


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	6961.300	69.46	24.03	93.49	N/A	N/A	Peak
2		7125.000	34.65	24.96	59.61	-28.59	88.20	Peak
3		7156.500	36.74	24.82	61.56	-26.64	88.20	Peak

Notes:

1. "*" , means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-24
Test Engineer	Frank Xue	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE160 at 6985MHz RU996-1		

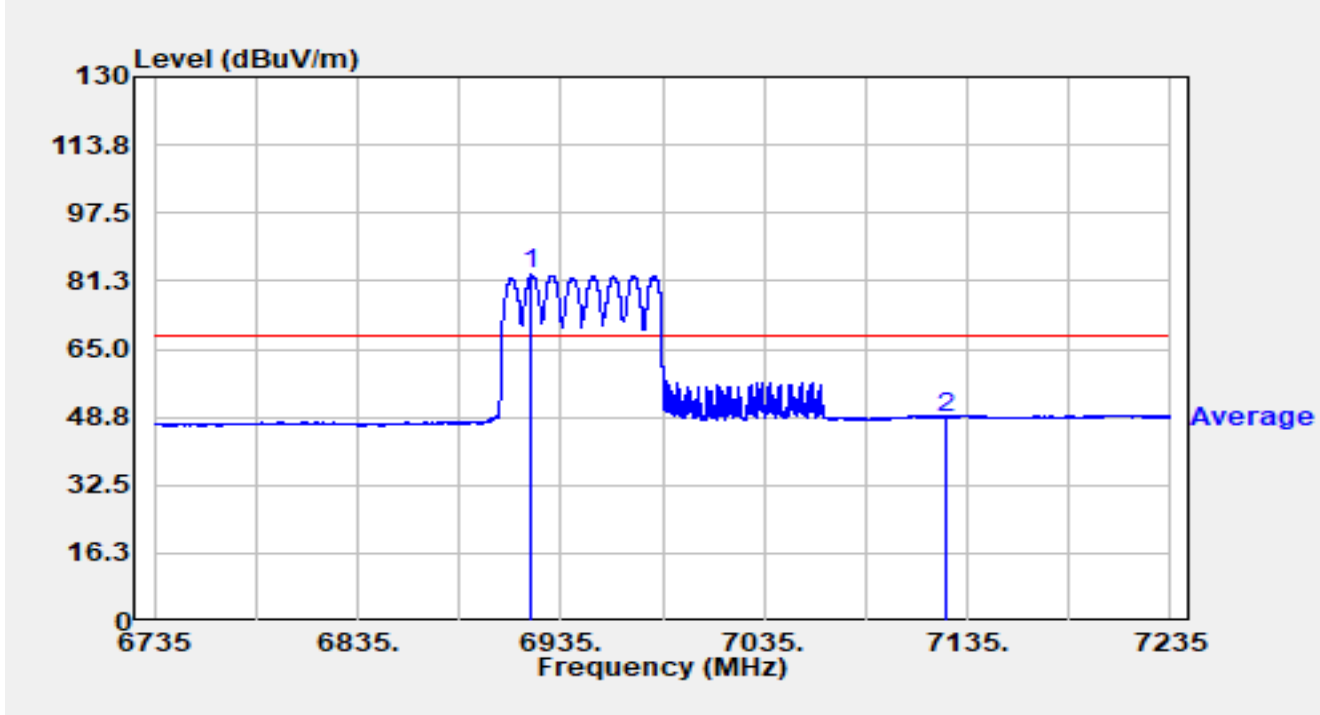


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	6920.450	59.11	23.60	82.71	N/A	N/A	Average
2		7125.000	23.84	24.96	48.80	-19.40	68.20	Average

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-24
Test Engineer	Frank Xue	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE160 at 6985MHz RU996-1		

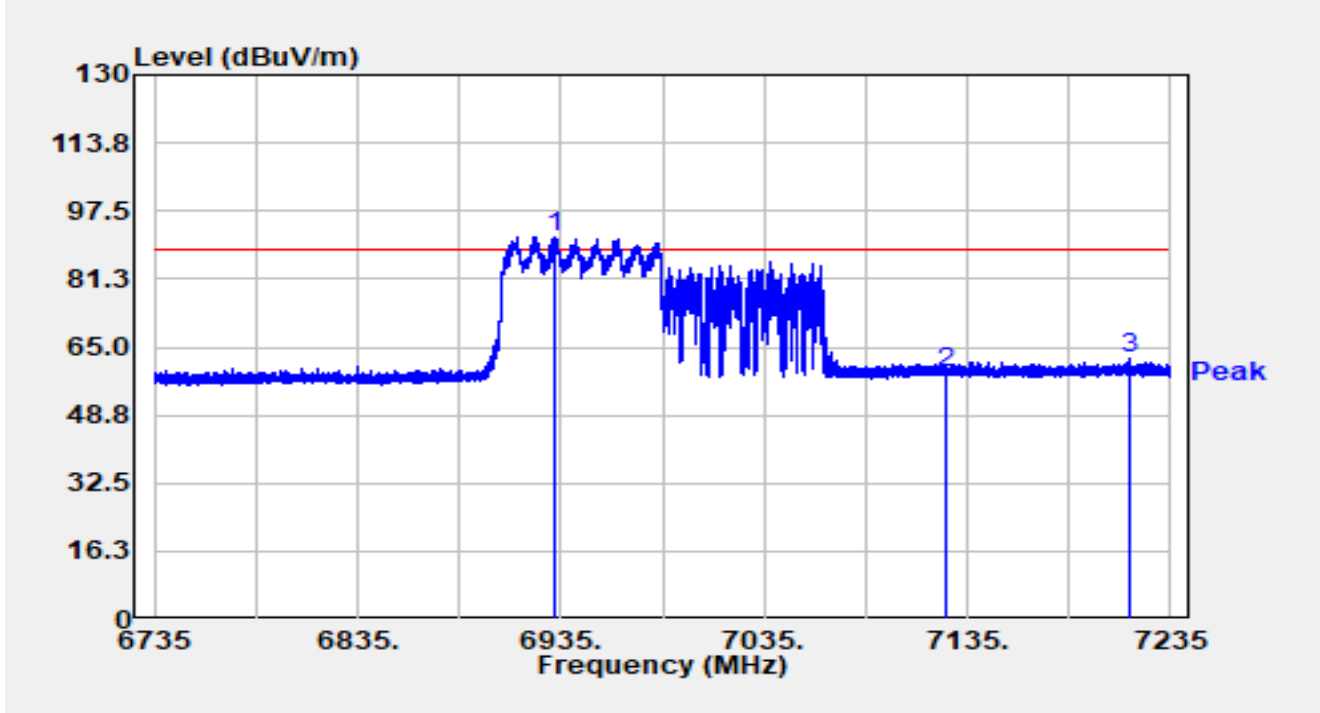


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	6932.550	67.60	23.68	91.27	N/A	N/A	Peak
2		7125.000	33.87	24.96	58.82	-29.38	88.20	Peak
3		7215.100	37.16	25.19	62.35	-25.85	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-24
Test Engineer	Frank Xue	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE160 at 6985MHz RU996-1		

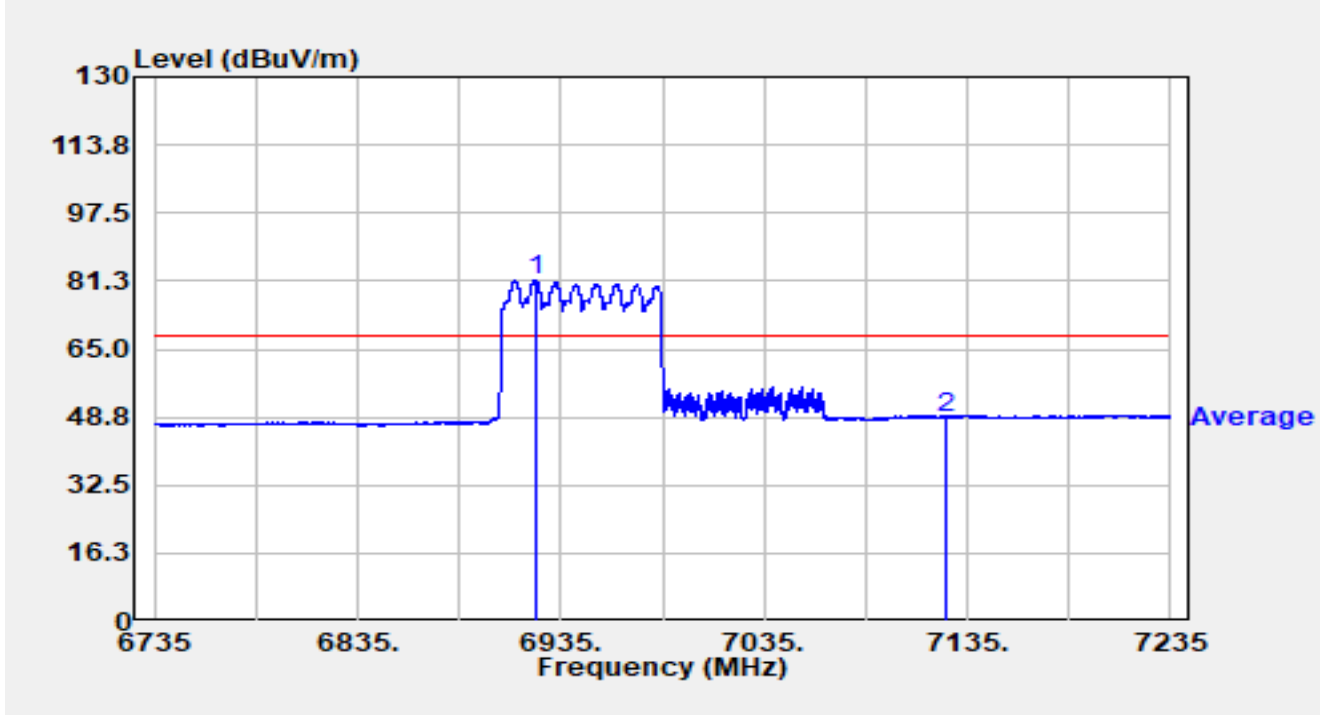


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	6922.450	57.83	23.61	81.44	N/A	N/A	Average
2		7125.000	23.81	24.96	48.77	-19.43	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Test Data of Engine S0803/N6803

Site	WZ-AC2	Test Date	2024-07-18
Test Engineer	Frank Xue	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE40 at 7085MHz		

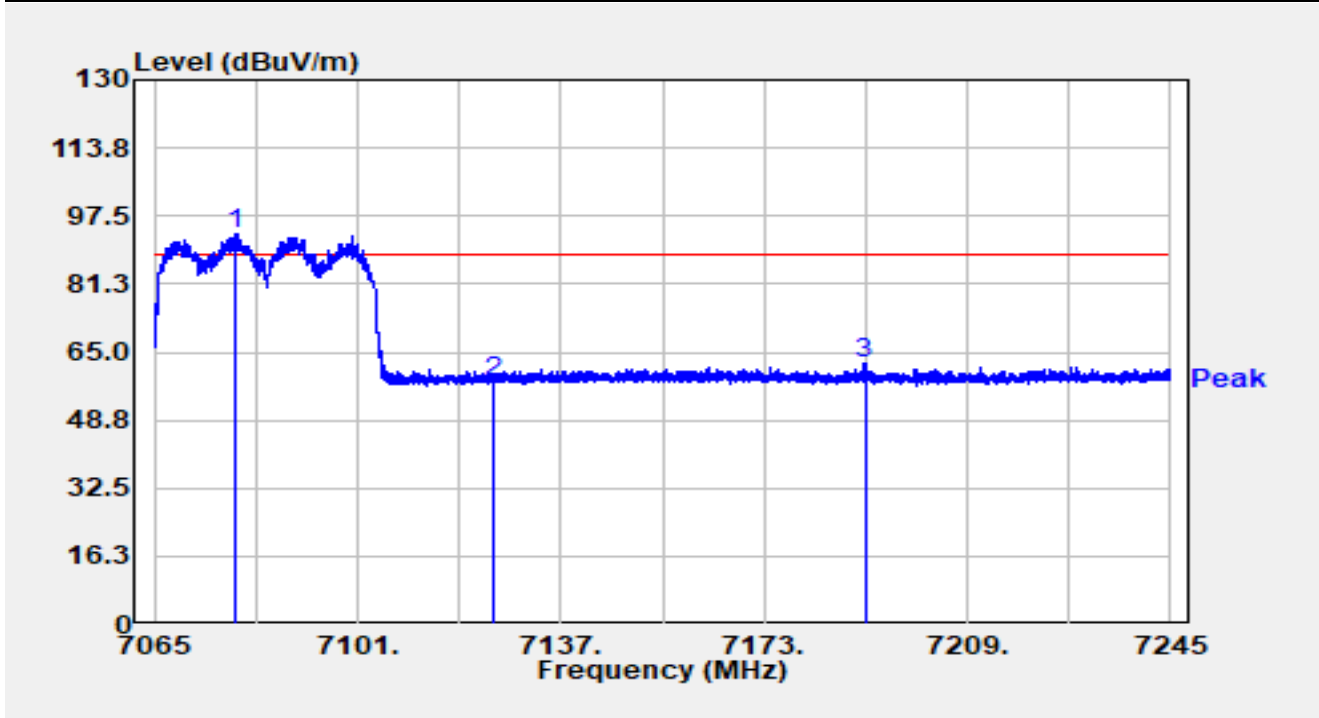


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	7079.544	66.26	26.89	93.14	N/A	N/A	Peak
2		7125.000	31.02	26.90	57.92	-30.28	88.20	Peak
3		7190.838	35.28	27.01	62.29	-25.91	88.20	Peak

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-18
Test Engineer	Frank Xue	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE40 at 7085MHz		

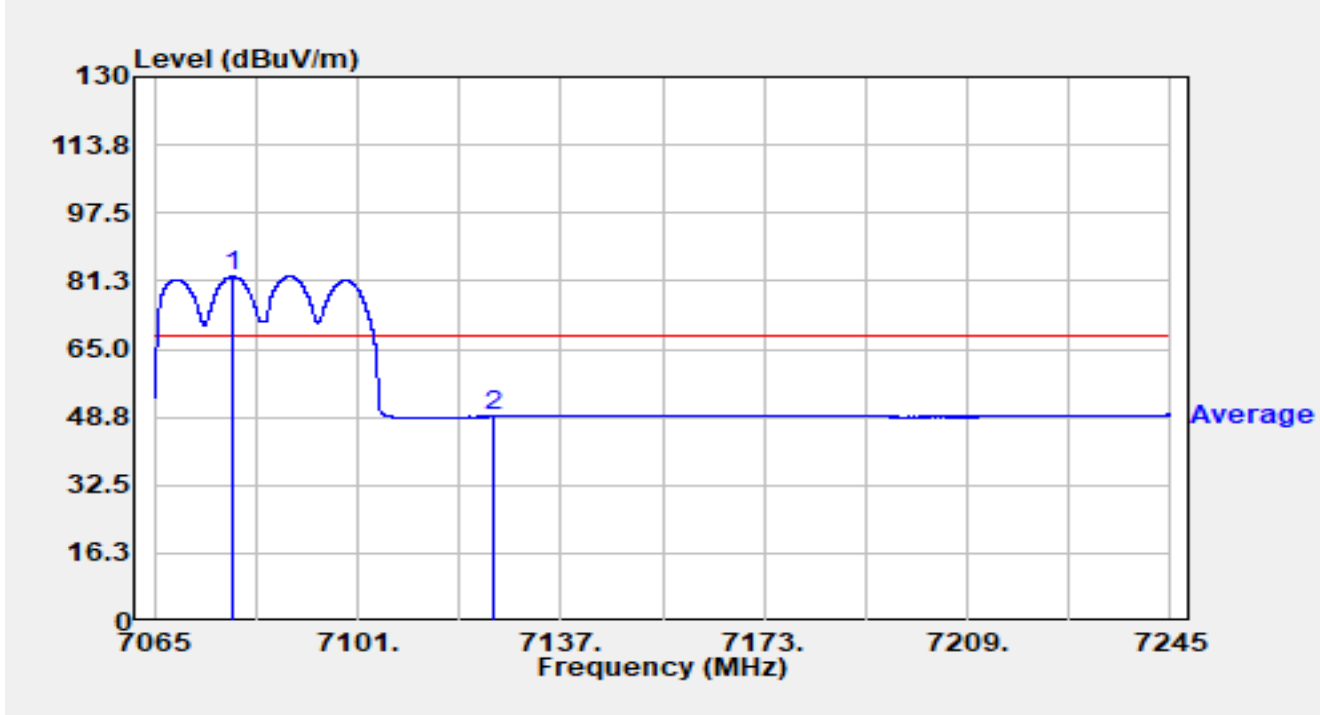


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7078.878	55.41	26.89	82.30	N/A	N/A	Average
2		7125.000	21.97	26.90	48.87	-19.33	68.20	Average

Notes:

1. "*" means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-18
Test Engineer	Frank Xue	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE40 at 7085MHz		

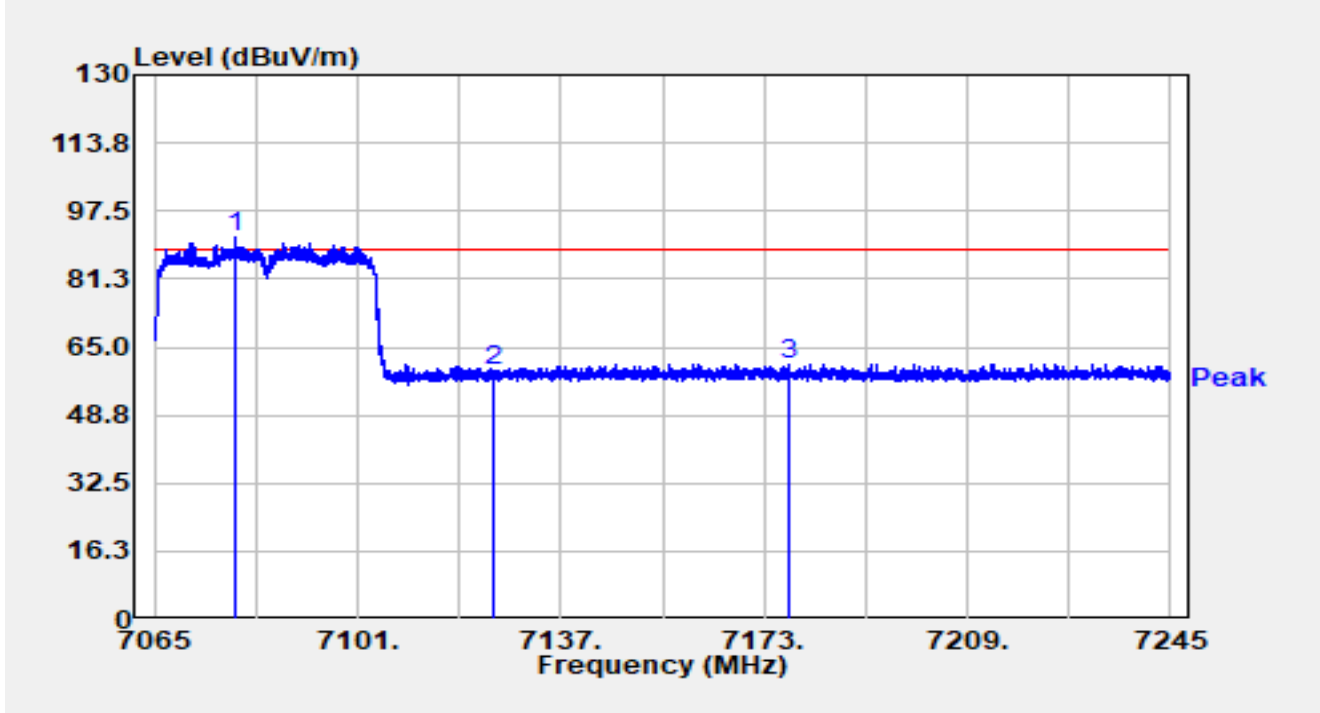


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7079.472	64.44	26.89	91.32	N/A	N/A	Peak
2		7125.000	32.68	26.90	59.58	-28.62	88.20	Peak
3		7177.500	33.70	27.21	60.91	-27.29	88.20	Peak

Notes:

1. "*" , means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-18
Test Engineer	Frank Xue	Temp./Humidity	25.5°C/46.4%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By PC
Test Mode	Transmit by 802.11ax-HE40 at 7085MHz		

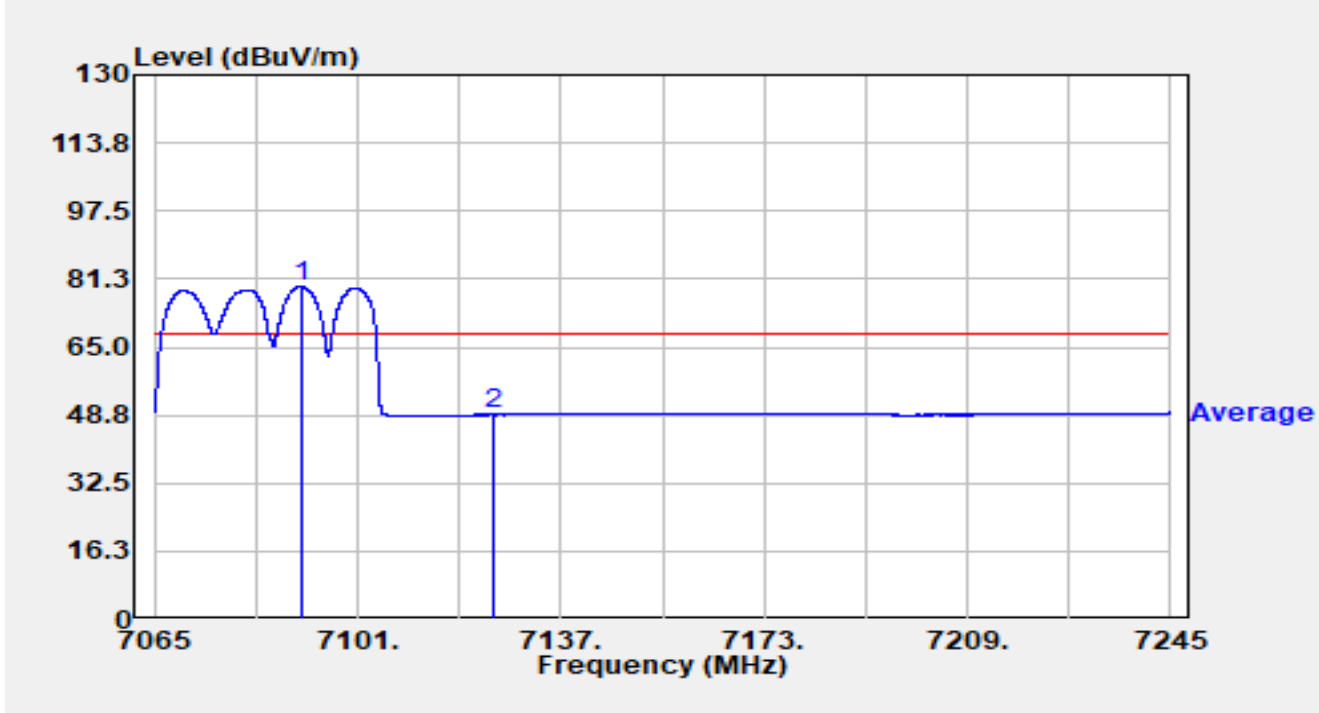


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7090.974	52.68	26.81	79.49	N/A	N/A	Average
2		7125.000	21.97	26.90	48.87	-19.33	68.20	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.10 AC Conducted Emissions Test Result

Site	WZ-SR2	Test Date	2024-07-12
Test Engineer	Linda Wei	Temp./Humidity	24.0°C /63.3%
Factor	ENV216_101683_L1_Filter Off_E	Polarity	Line
EUT	Mobile Computer	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

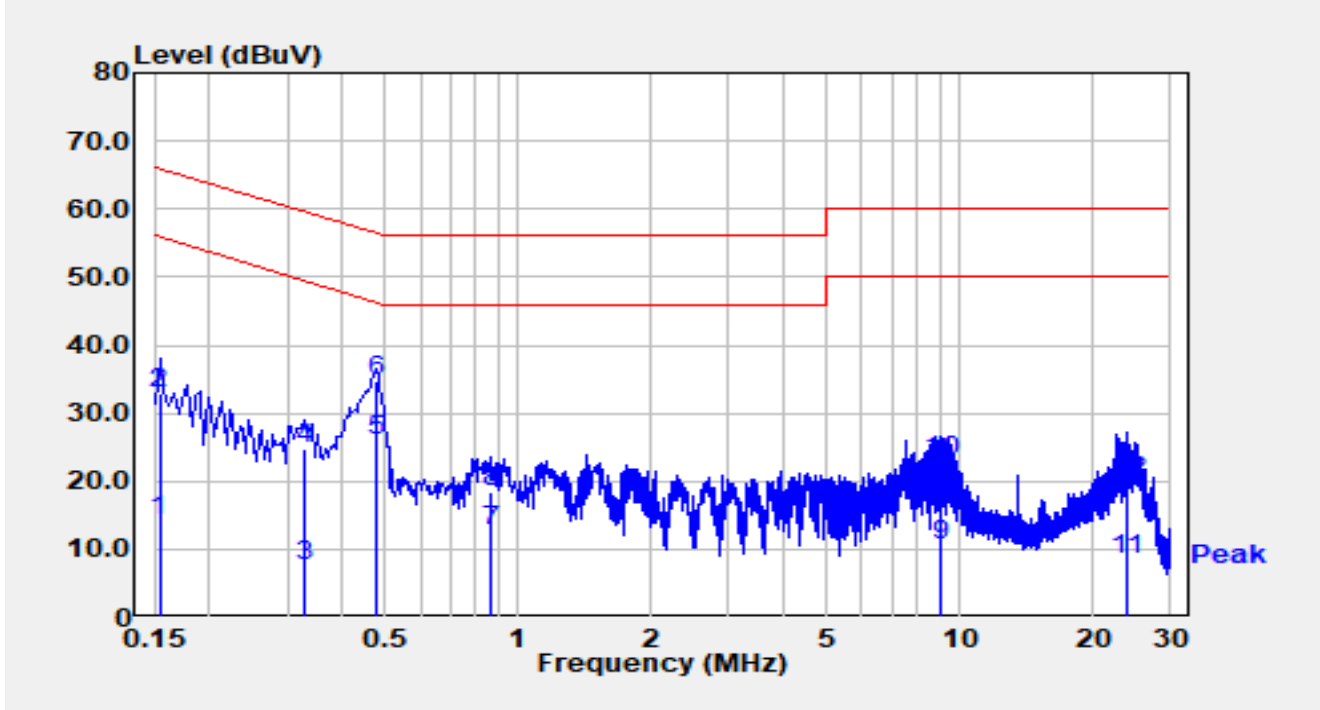


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.154	4.40	9.78	14.18	-41.60	55.78	Average
2		0.154	23.00	9.78	32.78	-33.00	65.78	QP
3		0.330	-2.30	9.84	7.54	-41.91	49.45	Average
4		0.330	14.90	9.84	24.74	-34.71	59.45	QP
5	*	0.478	15.90	9.92	25.82	-20.56	46.37	Average
6		0.478	24.80	9.92	34.72	-21.66	56.37	QP
7		0.862	2.50	10.12	12.62	-33.38	46.00	Average
8		0.862	8.30	10.12	18.42	-37.58	56.00	QP
9		9.090	-0.20	10.90	10.70	-39.30	50.00	Average
10		9.090	11.90	10.90	22.80	-37.20	60.00	QP
11		23.830	-2.90	11.45	8.55	-41.45	50.00	Average
12		23.830	8.50	11.45	19.95	-40.05	60.00	QP

Notes:

1. " *", means this data is the worst emission level.

2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement(dB μ V) = Reading(dB μ V) + C.F (dB).

Site	WZ-SR2	Test Date	2024-07-12
Test Engineer	Linda Wei	Temp./Humidity	24.0°C /63.3%
Factor	ENV216_101683_N_Filter Off_E	Polarity	Neutral
EUT	Mobile Computer	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

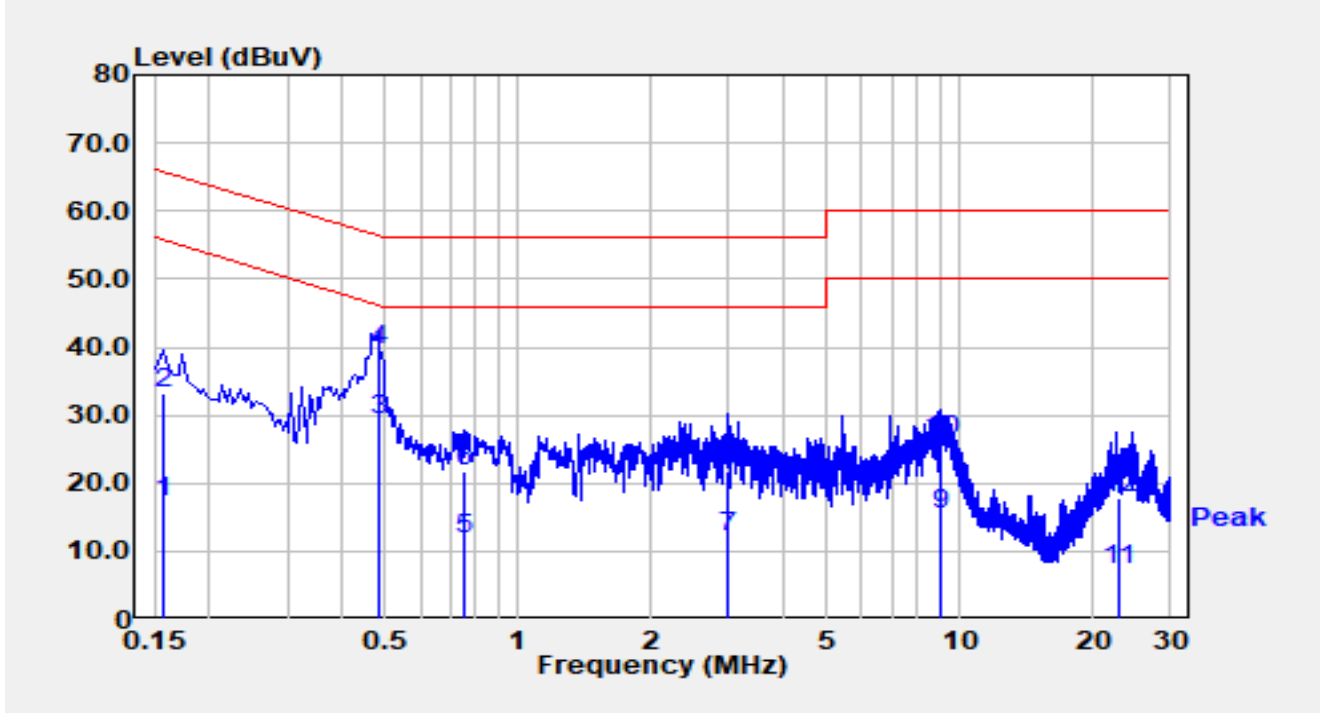

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.158	7.60	9.76	17.36	-38.21	55.57	Average
2		0.158	23.40	9.76	33.16	-32.41	65.57	QP
3		0.482	19.40	9.90	29.30	-17.00	46.30	Average
4	*	0.482	29.70	9.90	39.60	-16.70	56.30	QP
5		0.750	1.80	10.04	11.84	-34.16	46.00	Average
6		0.750	11.80	10.04	21.84	-34.16	56.00	QP
7		2.980	1.80	10.37	12.17	-33.83	46.00	Average
8		2.980	11.50	10.37	21.87	-34.13	56.00	QP
9		9.100	4.50	10.94	15.44	-34.56	50.00	Average
10		9.100	15.20	10.94	26.14	-33.86	60.00	QP
11		22.840	-4.40	11.55	7.15	-42.85	50.00	Average
12		22.840	6.40	11.55	17.95	-42.05	60.00	QP

Notes:

1. " *", means this data is the worst emission level.

2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement(dB μ V) = Reading(dB μ V) + C.F (dB).

Appendix B – Test Setup Photograph

Refer to “2406RSU006-UT” file.

Appendix C – EUT Photograph

Refer to “2406RSU006-UE” file.

————— The End —————