

## Variant FCC Test Report

**Report No.:** RFBERD-WTW-P22060334-1

**FCC ID:** HD5-CK65L0N

**Test Model:** CK65L0N

**Received Date:** Jun. 09, 2022

**Test Date:** Jun. 25, 2022

**Issued Date:** Jul. 27, 2022

**Applicant:** Honeywell International Inc.

**Address:** 9680 Old Bailes Road, Fort Mill, SC 29707 USA

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location:** No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City  
33383, Taiwan

**FCC Registration /  
Designation Number:** 788550 / TW0003



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

## Table of Contents

<b>Release Control Record .....</b>	<b>3</b>
<b>1 Certificate of Conformity .....</b>	<b>4</b>
<b>2 Summary of Test Results.....</b>	<b>5</b>
2.1 Measurement Uncertainty.....	5
2.2 Modification Record .....	5
<b>3 General Information .....</b>	<b>6</b>
3.1 General Description of EUT .....	6
3.2 Description of Test Modes.....	8
3.2.1 Test Mode Applicability and Tested Channel Detail.....	9
3.3 Description of Support Units .....	10
3.3.1 Configuration of System under Test .....	10
3.4 General Description of Applied Standards and References .....	10
<b>4 Test Types and Results .....</b>	<b>11</b>
4.1 Radiated Emission and Bandedge Measurement .....	11
4.1.1 Limits of Radiated Emission and Bandedge Measurement .....	11
4.1.2 Test Instruments .....	12
4.1.3 Test Procedures.....	13
4.1.4 Deviation from Test Standard .....	13
4.1.5 Test Set Up .....	14
4.1.6 EUT Operating Conditions.....	14
4.1.7 Test Results .....	15
<b>5 Pictures of Test Arrangements.....</b>	<b>17</b>
<b>Appendix – Information of the Testing Laboratories .....</b>	<b>18</b>

### Release Control Record

Issue No.	Description	Date Issued
RFBERD-WTW-P22060334-1	Original Release	Jul. 27, 2022

## 1 Certificate of Conformity

**Product:** Mobile computer

**Brand:** Honeywell

**Test Model:** CK65L0N

**Sample Status:** Engineering Sample

**Applicant:** Honeywell International Inc.

**Test Date:** Jun. 25, 2022

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.10:2013

This report is issued as a supplementary report to BV CPS report no.: RFBERD-WTW-P21020547-1. This report shall be used by combining with its original report.

**Prepared by :** Gina Liu , **Date:** Jul. 27, 2022  
Gina Liu / Specialist

**Approved by :** Jeremy Lin , **Date:** Jul. 27, 2022  
Jeremy Lin / Project Engineer

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	N/A	Without AC power port of the EUT.
15.205 & 209	Radiated Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -9.0 dB at 53.28 MHz.
15.247(d)	Band Edge Measurement	N/A	Refer to Note
15.247(d)	Antenna Port Emission	N/A	Refer to Note
15.247(a)(2)	6 dB Bandwidth	N/A	Refer to Note
---	Occupied Bandwidth Measurement	N/A	Refer to Note
15.247(b)	Conducted Power	N/A	Refer to Note
15.247(e)	Power Spectral Density	N/A	Refer to Note
15.203	Antenna Requirement	N/A	Refer to Note

### Note:

1. Only Radiated Emissions test was performed for this addendum. Refer to original report for other test data.
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

<b>Product</b>	Mobile computer
<b>Brand</b>	Honeywell
<b>Test Model</b>	CK65L0N
<b>Model Description</b>	For India (BIS & WPC) information only : - Standard Version : CK65-L0N - Cold Storage Version : CK65-L0N-CS
<b>Status of EUT</b>	Engineering Sample
<b>Power Supply Rating</b>	3.6 Vdc or 3.7 Vdc (Battery)
<b>Modulation Type</b>	GFSK
<b>Transfer Rate</b>	LE 4.0: 1 Mbps LE 5.0: 2 Mbps
<b>Operating Frequency</b>	2402 ~ 2480 MHz
<b>Number of Channel</b>	40
<b>Antenna Type</b>	Refer to Note as below
<b>Antenna Connector</b>	Refer to Note as below
<b>Accessory Device</b>	Refer to Note as below
<b>Antenna Connector</b>	N/A
<b>HW Version</b>	V1.1
<b>HW P/N</b>	DVT1
<b>SW Version</b>	01.04.00.1392
<b>SW P/N</b>	91.00.00-DEBUG-(0574)

Note:

1. This report is issued as a supplementary report to BV CPS report no.: RFBBERD-WTW-P21020547-1. The differences compared with original report is changing NFC chip and add new scanner (S0703VE - Gen8), and the change list is listed as below. Therefore, only Radiated Emissions test was verified on the worst case of original report and recorded in this report.

2. Change list:

Original Source			Second Source			
Vender	Vender P/N	Location	Vender	Vender P/N	TYPE	
					Phase 2	Phase 3
HON	N6703SR-WS-103-O	N/A	HON	S0703SR-W4-103O	v	v
NXP	NQ310A1EV/C101Y	U901	NXP	NQ410A1EV/C101Y	v	v
NXP	PCA9412AUKZ	U902	SGMICRO	SGM66055A-5.4YG/T R	v	v
ST	LSM6DSMTR	U1502	TDK	ICM-42607	v	x
			Bosch	BMI270	x	v

VISHAY	SIA483DJ-T1-GE3	Q2201,Q2204,Q2205	VISHAY	SIA483ADJ-T1-GE3	v	v
DIODES	DMN3730UFB4-7	Q1401,Q2203,Q2206 ,Q2303,Q2401	DIODES	DMN3731UFB4-7B	v	v
SAMSUNG MURATA	CL05A475KP5NRNC GRM15SR61A475KEAA D	STD: C2311 CS: C2311, C2515	Darfon	C1005X5R475KDTS	v	v
SIWARD	XTL741-E149-094	Y2001	Taitien	06172-W-087-3	v	v
YAGEO	CC0201MRX5R5BB225	CAM: C1308 No CAM: N/A	Darfon	C0603X5R225MCTS	v	v

3. The EUT contains following accessory devices.

Product	Brand	Model	Description
Battery 1	Intermec Technologies Corporation	AB18	3.7 Vdc, 5.1 Ah, 18.9 Wh
Battery 2	Honeywell	CK65-BTCS	3.6 Vdc, 5200 mAh, 18.7 Wh
Battery 3	Honeywell	CK65-BTSC	3.6 Vdc, 7000 mAh, 25.2 Wh R5480(RICHO)
Battery 4	Honeywell	CK65-BTSC	3.6 Vdc, 7000 mAh, 25.2 Wh MM3722(MITSUMI)

4. There're 8 configurations for the EUT listed as below. (New configuration is marked in gray.)

Sample	Scanner	Keypad	Antenna Type			
			Type	Connector	Gain (dBi)	
					Chain 0	Chain 1
A	N6703	Alpha/Num	FPC antenna	POGO pin	2.62	2.85
B	EX20	Alpha/Num	FPC antenna	POGO pin	2.62	2.85
C	N6703	Num	FPC antenna	POGO pin	2.64	2.88
D	EX20	Num	FPC antenna	POGO pin	2.64	2.88
E	S0803	Alpha/Num	FPC antenna	POGO pin	2.53	2.66
F	S0703	Alpha/Num	FPC antenna	POGO pin	2.56	2.61
G	S0703VE	Alpha/Num	FPC antenna	POGO pin	2.56	2.61
H	Gen8	Alpha	FPC antenna	POGO pin	2.62	2.85

\*From the above samples the worst cases were found in sample H. therefore only the test of the mode was recorded in the report.

- The above Antenna information refers to the manufacturer's antenna specifications, the laboratory shall not be held responsible.
- The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or User's Manual.

### 3.2 Description of Test Modes

40 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480



### 3.2.1 Test Mode Applicability and Tested Channel Detail

<LE 4.0>

EUT Configure Mode	Applicable To	Description
	Radiated Emission below 1 GHz	
-	√	-

**Note:**

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Y-plane**.
2. "-" means no effect.

**Radiated Emission Test (Below 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	0 to 39	0	GFSK	1

**Test Condition:**


Applicable To	Environmental Conditions	Input Power	Tested by
RE<1G	22 deg. C, 66 % RH	3.6 Vdc	Thomas Cheng

### 3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1.	Battery	Honeywell	CK65-BTCS	N/A	N/A

#### 3.3.1 Configuration of System under Test

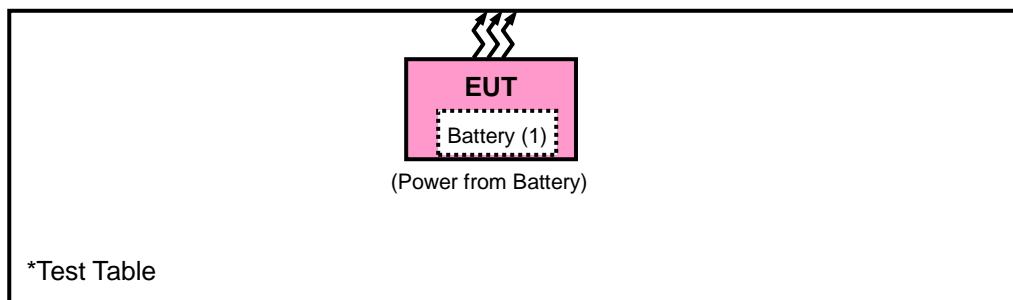

### 3.4 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

#### Test Standard:

**FCC Part 15, Subpart C (15.247)**

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

#### References Test Guidance:

**KDB 558074 D01 15.247 Meas Guidance v05r02**

All test items have been performed as a reference to the above KDB test guidance.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**Note:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Spectrum Analyzer Agilent	N9010A	MY52220314	2021/12/03	2022/12/02
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-969	2021/11/14	2022/11/13
BILOG Antenna SCHWARZBECK	VULB 9168	9168-472	2021/10/28	2022/10/27
Fixed Attenuator WOKEN	MDCS18N-10	MDCS18N-10-01	2022/04/05	2023/04/04
Preamplifier EMCI	EMC 012645	980115	2021/10/05	2022/10/04
Preamplifier EMCI	EMC 330H	980112	2021/10/05	2022/10/04
RF Coaxial Cable EMCI	EMC104-SM-SM-8 000	171005	2021/10/05	2022/10/04
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM-1 000(140807)	2021/10/05	2022/10/04
RF Coaxial Cable WOKEN	8D-FB	Cable-Ch10-01	2021/10/05	2022/10/04
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Chamber 10.

#### 4.1.3 Test Procedures

##### **For Radiated Emission below 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

##### **Note:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.

#### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Set Up

##### <Radiated Emission below 30 MHz>

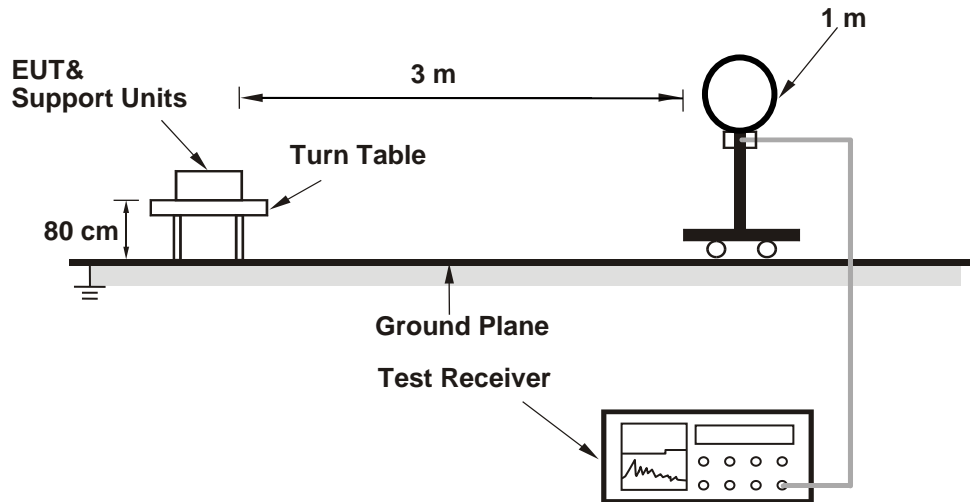

##### <Radiated Emission 30 MHz to 1 GHz>

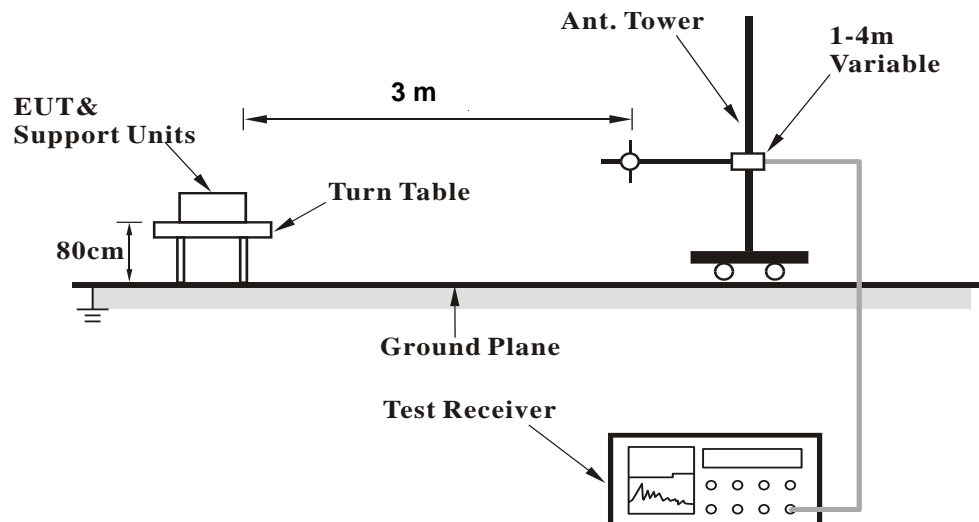

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

- a. Placed the EUT on the testing table.
- b. Set the EUT under transmission condition continuously at specific channel frequency.

#### 4.1.7 Test Results

#### 9 kHz ~ 1 GHz Worst-Case Data:


<b>RF Mode</b>	TX BT-LE 1M	<b>Channel</b>	CH 0 : 2402 MHz
<b>Frequency Range</b>	9 kHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	(QP) RB = 120kHz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 66% RH
<b>Tested By</b>	Thomas Cheng	<b>Test Date</b>	2022/6/25

#### Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	61.04	26.5 QP	40.0	-13.5	3.38 H	82	40.0	-13.5
2	176.49	28.8 QP	43.5	-14.7	2.52 H	103	42.5	-13.7
3	299.69	28.2 QP	46.0	-17.8	2.40 H	193	40.3	-12.1
4	492.74	30.4 QP	46.0	-15.6	1.27 H	158	36.7	-6.3
5	669.30	26.9 QP	46.0	-19.1	3.21 H	16	29.1	-2.2
6	832.27	31.6 QP	46.0	-14.4	2.28 H	156	30.6	1.0

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

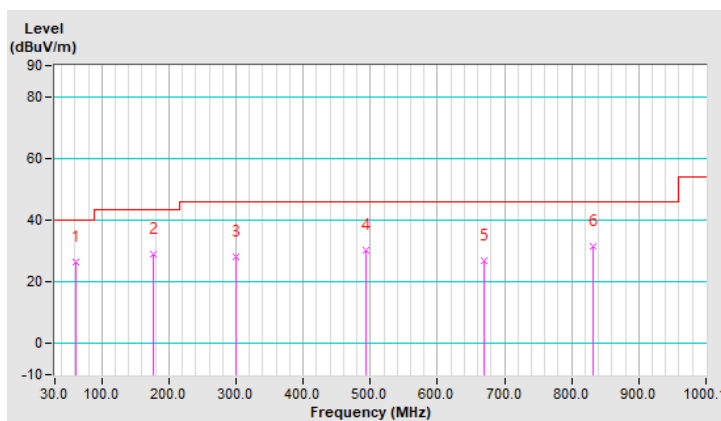


<b>RF Mode</b>	TX BT-LE 1M	<b>Channel</b>	CH 0 : 2402 MHz
<b>Frequency Range</b>	9 kHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	(QP) RB = 120kHz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 66% RH
<b>Tested By</b>	Thomas Cheng	<b>Test Date</b>	2022/6/25

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	53.28	31.0 QP	40.0	-9.0	1.75 V	119	43.7	-12.7
2	129.92	29.1 QP	43.5	-14.4	2.60 V	35	42.5	-13.4
3	321.03	30.2 QP	46.0	-15.8	3.38 V	90	41.4	-11.2
4	441.32	27.3 QP	46.0	-18.7	2.55 V	347	34.8	-7.5
5	600.42	31.5 QP	46.0	-14.5	3.74 V	75	35.0	-3.5
6	874.96	31.8 QP	46.0	-14.2	2.11 V	322	30.4	1.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

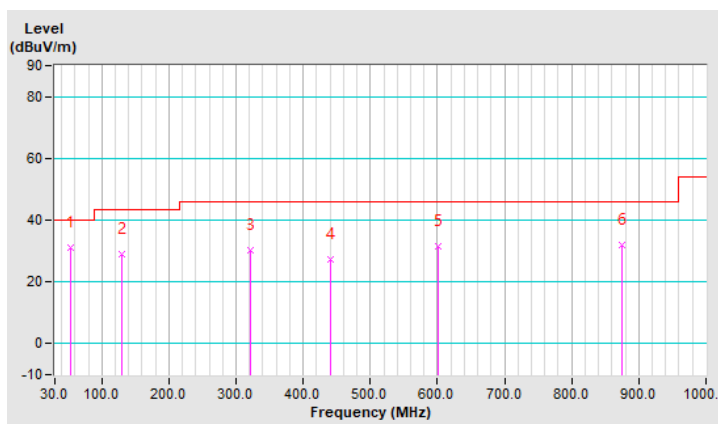



## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---