



# MEASUREMENT REPORT

## FCC PART 15.407 / RSS-247 WLAN 802.11a/n/ac

**FCC ID:** HD5-CT40L0N

**IC:** 1693B-CT40L0N

**APPLICANT:** Honeywell International Inc  
 Honeywell Safety and Productivity Solutions

**Application Type:** Certification

**Product:** DOLPHIN CT40

**Model No.:** CT40-L0N

**Brand Name:** Honeywell

**FCC Classification:** Unlicensed National Information Infrastructure (UNII)

**FCC Rule Part(s):** Part15 Subpart E (Section 15.407)

**IC Rule(s):** RSS-247 Issue 2, RSS-GEN Issue 5

**Test Procedure(s):** ANSI C63.10-2013, KDB 789033 D02v02r01,

**Test Date:** April 18 ~ June 04, 2018

Reviewed By : Jame Yuan  
 ( Jame Yuan )

Approved By : Robin Wu  
 ( Robin Wu )



The test results relate only to the samples tested.  
 This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033 D02v02r01. Test results reported herein relate only to the item(s) tested.  
 The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

### Revision History

Report No.	Version	Description	Issue Date	Note
1804RSU010-U4	Rev. 01	Initial report	06-05-2018	Valid

# CONTENTS

Description	Page
<b>§2.1033 General Information .....</b>	<b>6</b>
<b>1. INTRODUCTION .....</b>	<b>7</b>
1.1. Scope .....	7
1.2. MRT Test Location .....	7
<b>2. PRODUCT INFORMATION .....</b>	<b>8</b>
2.1. Equipment Description.....	8
2.2. Product Specification Subjective to this Report.....	9
2.3. Working Frequencies for this Report.....	9
2.4. Test Mode .....	10
2.5. Description of Test Software .....	11
2.6. Device Capabilities .....	13
2.7. Test Configuration .....	15
2.8. EMI Suppression Device(s)/Modifications .....	15
2.9. Labeling Requirements.....	15
<b>3. DESCRIPTION OF TEST .....</b>	<b>16</b>
3.1. Evaluation Procedure .....	16
3.2. AC Line Conducted Emissions .....	16
3.3. Radiated Emissions.....	17
<b>4. ANTENNA REQUIREMENTS.....</b>	<b>18</b>
<b>5. TEST EQUIPMENT CALIBRATION DATE.....</b>	<b>19</b>
<b>6. MEASUREMENT UNCERTAINTY.....</b>	<b>20</b>
<b>7. TEST RESULT .....</b>	<b>21</b>
7.1. Summary .....	21
7.2. 26dB Bandwidth Measurement.....	24
7.2.1. Test Limit .....	24
7.2.2. Test Procedure Used .....	24
7.2.3. Test Setting.....	24
7.2.4. Test Setup .....	24
7.2.5. Test Result.....	25
7.3. 6dB Bandwidth Measurement.....	42
7.3.1. Test Limit .....	42
7.3.2. Test Procedure used.....	42
7.3.3. TestSetting.....	42

7.3.4. Test Setup .....	42
7.3.5. Test Result.....	43
7.4. Output Power Measurement .....	48
7.4.1. Test Limit .....	48
7.4.2. Test Procedure Used .....	48
7.4.3. Test Setting.....	48
7.4.4. Test Setup .....	49
7.4.5. Test Result.....	50
7.5. Transmit Power Control .....	54
7.5.1. Test Limit .....	54
7.5.2. Test Procedure Used .....	54
7.5.3. Test Setting.....	54
7.5.4. Test Setup .....	54
7.5.5. Test Result.....	54
7.6. Power Spectral Density Measurement .....	55
7.6.1. Test Limit .....	55
7.6.2. Test Procedure Used .....	55
7.6.3. Test Setting.....	55
7.6.4. Test Setup .....	56
7.6.5. Test Result.....	57
7.7. Frequency Stability Measurement.....	75
7.7.1. Test Limit .....	75
7.7.2. Test Procedure Used .....	75
7.7.3. Test Setup .....	76
7.7.4. Test Result.....	77
7.8. Radiated Spurious Emission Measurement .....	78
7.8.1. Test Limit .....	78
7.8.2. Test Procedure Used .....	78
7.8.3. Test Setting.....	78
7.8.4. Test Setup .....	80
7.8.5. Test Result.....	82
7.9. Radiated Restricted Band Edge Measurement .....	154
7.9.1. Test Limit .....	154
7.9.2. Test Procedure Used .....	157
7.9.3. Test Setting.....	158
7.9.4. Test Setup .....	158
7.9.5. Test Result.....	159
7.10. AC Conducted Emissions Measurement.....	277
7.10.1. Test Limit .....	277

7.10.2. Test Setup .....	277
7.10.3. Test Result.....	278
<b>8. CONCLUSION.....</b>	<b>280</b>

## §2.1033 General Information

<b>Applicant:</b>	Honeywell International Inc Honeywell Safety and Productivity Solutions
<b>Applicant Address:</b>	9680 Old Bailes Road, Fort Mill, SC 29707 United States
<b>Manufacturer:</b>	Honeywell International Inc Honeywell Safety and Productivity Solutions
<b>Manufacturer Address:</b>	9680 Old Bailes Road, Fort Mill, SC 29707 United States
<b>Test Site:</b>	MRT Technology (Suzhou) Co., Ltd
<b>Test Site Address:</b>	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
<b>MRT FCC Registration No.:</b>	893164
<b>MRT IC Registration No.:</b>	11384A-1
<b>Test Device Serial No.:</b>	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering

### Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 893164) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-20025, G-20034, C-20020, T-20020) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications and Radio testing for FCC, Industry Canada, EU and TELEC Rules.



## 1. INTRODUCTION

### 1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

### 1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on September 30, 2013.



## 2. PRODUCT INFORMATION

### 2.1. Equipment Description

Product Name:	DOLPHIN CT40
Model No.:	CT40-L0N
Brand Name:	Honeywell
Hardware Version:	1.0
Software Version:	OS.01.008
Wi-Fi Specification:	802.11a/b/g/n/ac
Bluetooth Specification:	v5.0 dual mode
NFC:	13.56MHz
<b>Accessories</b>	
USB Adapter:	Model No.: ADS-12B-06 05010E Input Power: 100 - 240V ~ 50/60Hz, Max. 0.3A Output Power: 5VDC 2.0A
Snap-on Adapter:	Model No.: CT40-SN
Battery:	Model No.: CT50-BTSC Capacitance: 15.5Wh, 4090mAh Rated Voltage: 3.8V Limit Charge Voltage: 4.36V



## 2.2. Product Specification Subjective to this Report

Frequency Range:	For 802.11a/n-HT20/ac-VHT20: 5180~5240MHz, 5260~5320MHz, 5500~5720MHz, 5745~5825MHz For 802.11n-HT40/ac-VHT40: 5190~5230MHz, 5270~5310MHz, 5510~5710MHz, 5755~5795MHz For 802.11ac-VHT80: 5210MHz, 5290MHz, 5530MHz, 5610MHz, 5690MHz, 5775MHz
Type of Modulation:	802.11a/n/ac: OFDM
Data Rate:	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 150Mbps 802.11ac: up to 433.3Mbps
Maximum Average Output Power:	802.11a: 12.32dBm 802.11n-HT20: 11.45dBm 802.11n-HT40: 11.43dBm 802.11ac-VHT20: 11.45dBm 802.11a-VHT40: 11.39dBm 802.11a-VHT80:10.71dBm
Antenna Type:	FPC Antenna
Antenna Gain:	2.20dBi for 2.4GHz Band, 3.39dBi for 5GHz Band

Note: For other features of this EUT, test report will be issued separately.

## 2.3. Working Frequencies for this Report

802.11a/n-HT20/ac-VHT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz
48	5240 MHz	52	5260 MHz	56	5280 MHz
60	5300 MHz	64	5320 MHz	100	5500 MHz
104	5520 MHz	108	5540 MHz	112	5560 MHz
116	5580 MHz	120	5600 MHz	124	5620 MHz
128	5640 MHz	132	5660 MHz	136	5680 MHz
140	5700 MHz	144	5720 MHz	149	5745 MHz
153	5765 MHz	157	5785 MHz	161	5805 MHz
165	5825 MHz	--	--	--	--

## 802.11n-HT40/ac-VHT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	54	5270 MHz
62	5310 MHz	102	5510 MHz	110	5550 MHz
118	5590 MHz	126	5630 MHz	134	5670 MHz
142	5710 MHz	151	5755 MHz	159	5795 MHz

## 802.11ac-VHT80

Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz	106	5530 MHz
122	5610 MHz	138	5690 MHz	155	5775 MHz

Note: The frequencies that fall in the 5600MHz to 5650MHz band will not be used in Canada.

## 2.4. Test Mode

Test Mode	Mode 1: Transmit by 802.11a (6Mbps)
	Mode 2: Transmit by 802.11n-HT20 (MCS0)
	Mode 3: Transmit by 802.11n-HT40 (MCS0)
	Mode 4: Transmit by 802.11ac-VHT20 (MCS0)
	Mode 5: Transmit by 802.11ac-VHT40 (MCS0)
	Mode 6: Transmit by 802.11ac-VHT80 (MCS0)

### 2.5. Description of Test Software

The test utility software used during testing was “QRCT”, and the version was 3.0.268.0..

Power Parameter Value:

Test Mode	Channel No.	Frequency (MHz)	Power Parameter Value	Test Mode	Channel No.	Frequency (MHz)	Power Parameter Value
802.11a	36	5180	12.0	802.11 n-HT20	36	5180	11.5
	44	5220	12.0		44	5220	11.0
	48	5240	12.0		48	5240	11.5
	52	5260	12.0		52	5260	11.0
	60	5300	12.0		60	5300	11.5
	64	5320	12.0		64	5320	11.5
	100	5500	12.5		100	5500	12.0
	116	5580	13.0		116	5580	12.0
	120	5600	12.5		120	5600	12.0
	140	5700	12.0		140	5700	11.5
	144	5720	12.0		144	5720	11.5
	149	5745	12.0		149	5745	11.5
	157	5785	12.0		157	5785	11.0
	165	5825	12.0		165	5825	11.0
802.11 n-HT40	38	5190	11.5	802.11 ac-VHT20	36	5180	11.5
	46	5230	11.5		44	5220	11.5
	54	5270	11.5		48	5240	11.5
	62	5310	11.5		52	5260	11.5
	102	5510	12.0		60	5300	11.5
	110	5550	12.0		64	5320	11.5
	118	5590	12.0		100	5500	12.0
	134	5670	12.0		116	5580	12.0
	142	5710	11.5		120	5600	12.0
	151	5755	11.5		140	5700	11.5
159	5795	11.5	144	5720	11.5		
802.11 ac-VHT40	38	5190	11.5	802.11 ac-VHT80	149	5745	11.5
	46	5230	11.5		157	5785	11.0
	54	5270	11.5		165	5825	11.0
	62	5310	11.5		42	5210	11.0
	102	5510	12.0		58	5290	10.5
	110	5550	12.0		106	5530	11.5
	118	5590	12.0		122	5610	11.5

---

	134	5670	11.5		138	5690	11.5
	142	5710	11.5		155	5775	11.0
	151	5755	11.5	--	--	--	--
	159	5795	11.5	--	--	--	--


## 2.6. Device Capabilities

This device contains the following capabilities:


2.4GHz WLAN (DTS), 5GHz WLAN (UNII) and Bluetooth (v5.0 dual mode), NFC

**Note:** 5GHz (NII) operation is possible in 20MHz, 40MHz and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:


Test Mode	Duty Cycle
802.11a	95.73 %
802.11n-HT20	95.29 %
802.11n-HT40	92.40 %
802.11ac-VHT20	95.45 %
802.11ac-VHT40	91.19 %
802.11ac-VHT80	85.93 %

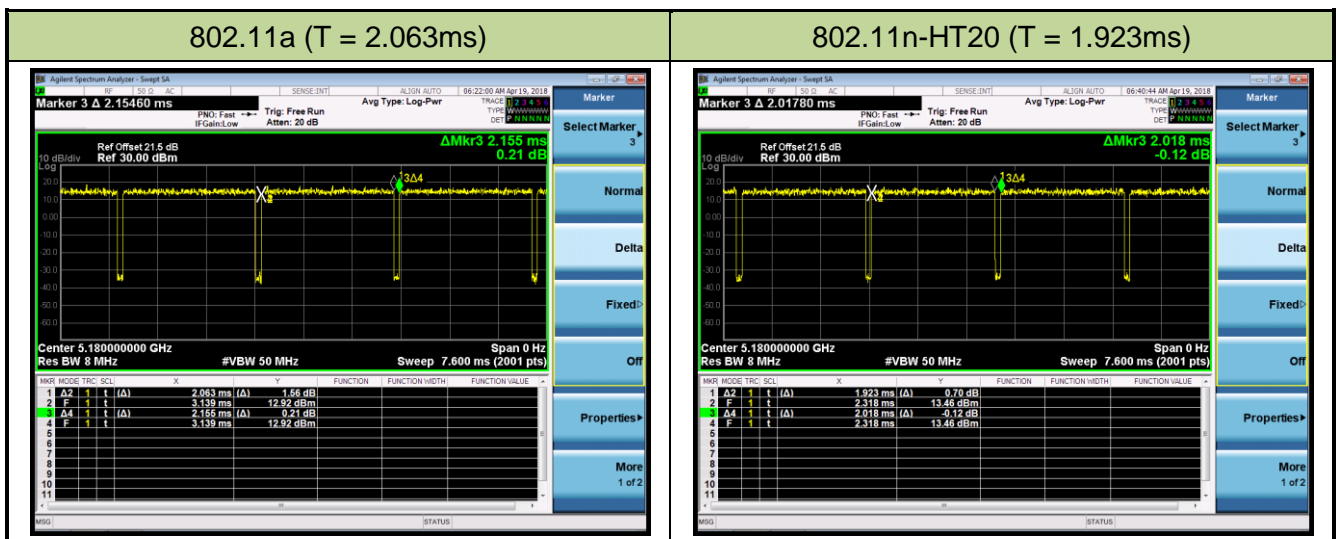


## 802.11n-HT40 (T = 0.948ms)

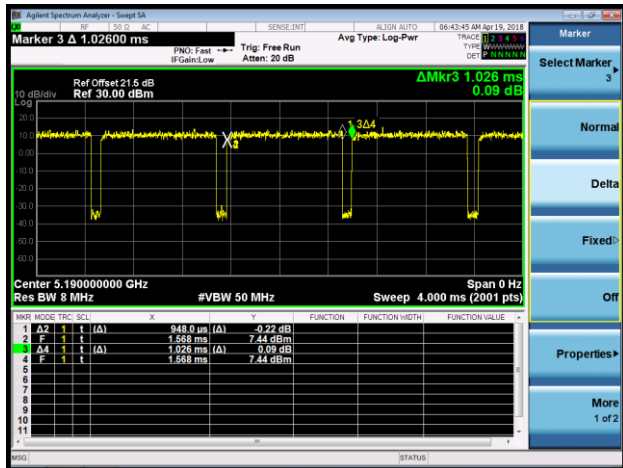


## 802.11ac-VHT20 (T = 1.930ms)

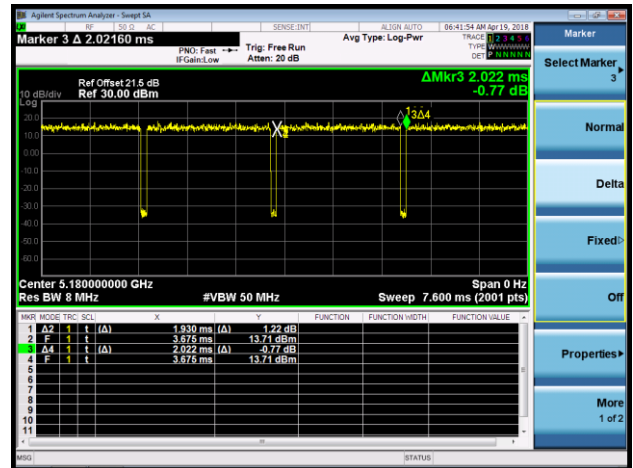

## 802.11ac-VHT40 (T = 0.952ms)

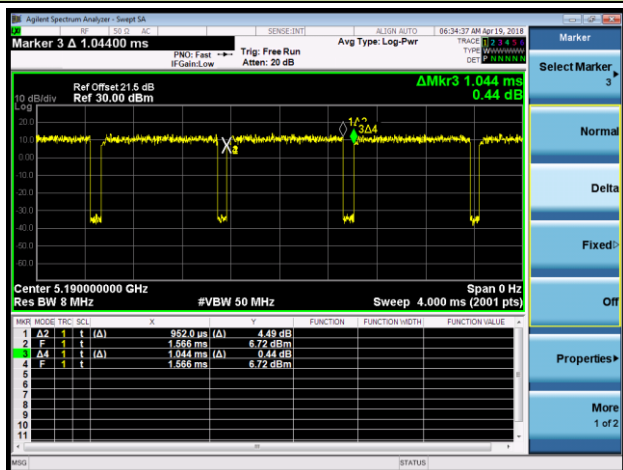

## 802.11ac-VHT80 (T = 0.464ms)

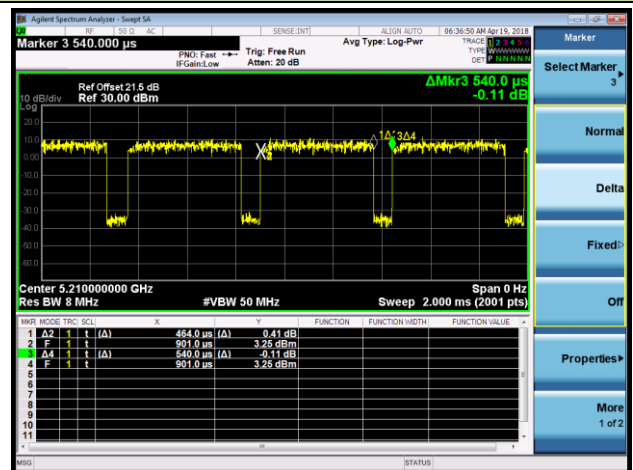

## 2.7. Test Configuration

The **DOLPHIN CT40** was tested per the guidance of KDB 789033 D02v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

## 2.8. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

## 2.9. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlets supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

### RSP-100 Issue 11 Section 3

The manufacturer, importer or distributor shall meet the labelling requirements set out in this section for every unit:

- (i) prior to marketing in Canada, for products manufactured in Canada
- (ii) prior to importation into Canada, for imported products

For information regarding the e-labelling option, see Notice 2014–DRS1003. The label for the certified product represents the manufacturer's or importer's compliance with Innovation, Science and Economic Development Canada's (ISED) regulatory requirements.

Please see attachment for IC label and label location.

### 3. DESCRIPTION OF TEST

#### 3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 789033 D02v02r01 were used in the measurement of the **DOLPHIN CT40**.

**Deviation from measurement procedure.....None**

#### 3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.



### 3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remotecontrolled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

## 4. ANTENNA REQUIREMENTS

### Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the **DOLPHIN CT40** is **permanently attached**.
- There are no provisions for connection to an external antenna.

### Conclusion:

The **DOLPHIN CT40** unit complies with the requirement of §15.203.

## 5. TEST EQUIPMENT CALIBRATION DATE

### Conducted Emissions - SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2018/08/18
Two-Line V-Network	R&S	ENV 216	MRTSUE06002	1 year	2018/06/21
Two-Line V-Network	R&S	ENV 216	MRTSUE06003	1 year	2018/06/21
Thermohygrometer	Testo	608-H1	MRTSUE06404	1 year	2018/08/14

### Radiated Emissions - AC1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
MXE EMI Receiver	Agilent	N9038A	MRTSUE06125	1 year	2018/08/18
Microwave System Amplifier	Agilent	83017A	MRTSUE06076	1 year	2018/11/17
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2018/11/20
Bilog Period Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2018/11/18
Broad Band Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06023	1 year	2018/10/21
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06024	1 year	2018/12/14
Broadband Coaxial Preamp	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2018/11/17
Thermohygrometer	Testo	608-H1	MRTSUE06403	1 year	2018/08/14
Anechoic Chamber	TDK	Chamber-AC1	MRTSUE06212	1 year	2019/05/02

### Conducted Test Equipment - TR3

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Power Meter	Agilent	U2021XA	MRTSUE06030	1 year	2018/12/06
Programmable Temperature & Humidity Chamber	BAOYT	BYH-1500L	MRTSUE06051	1 year	2018/12/06
Spectrum Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2018/04/20
				1 year	2019/04/20
Thermohygrometer	Testo	608-H1	MRTSUE06401	1 year	2018/08/14

Software	Version	Function
EMI Software	V3	EMI Test Software

## 6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

<b>AC Conducted Emission Measurement - SR2</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 150kHz~30MHz: 3.46dB
<b>Radiated Emission Measurement - AC1</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 9kHz ~ 1GHz: 4.18dB 1GHz ~ 25GHz: 4.76dB
<b>Spurious Emissions, Conducted - TR3</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 0.78dB
<b>Output Power - TR3</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 1.13dB
<b>Power Spectrum Density - TR3</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 1.15dB

## 7. TEST RESULT

### 7.1. Summary

**Product Name:** DOLPHIN CT40  
**FCC ID:** HD5-CT40L0N  
**IC:** 1693B-CT40L0N

FCC Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.407(a)	26dB Bandwidth	N/A	Conducted	Pass	Section 7.2
15.407(e)	6dB Bandwidth	$\geq 500\text{kHz}$		Pass	Section 7.3
15.407(a)(1)(iv), (2), (3)	Maximum Conducted Output Power	$\leq 30\text{ dBm U-NII-3}$ $\leq 24\text{ dBm U-NII-1 \& U-NII-2}$		Pass	Section 7.4
15.407(h)(1)	Transmit Power Control	$\leq 24\text{ dBm}$		Pass	Section 7.5
15.407(a)(1)(iv), (2), (3), (5)	Peak Power Spectral Density	$\leq 17\text{ dBm/MHz U-NII-1}$ $\leq 11\text{ dBm/MHz U-NII-2}$ $\leq 30\text{ dBm/500kHz U-NII-3}$		Pass	Section 7.6
15.407(g)	Frequency Stability	N/A		Pass	Section 7.7
15.407(b)(1), (2), (3), (4)(i)	Undesirable Emissions	$\leq -27\text{dBm/MHz EIRP}$ Detail see section 7.9		Radiated	Pass
15.205, 15.209 15.407(b)(5), (6), (7)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Pass		
15.207	AC Conducted Emissions 150kHz - 30MHz	$< \text{FCC 15.207 limits}$	Line Conducted	Pass	Section 7.10

RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
RSS-247 §6.2	99% Bandwidth	N/A	Conducted	Pass	Section 7.2
RSS-247 §6.2.4	6dB Bandwidth	≥ 500kHz		Pass	Section 7.3
RSS-247 §6.2.1, §6.2.2, §6.2.3, §6.2.4	Max Conducted Output Power	5250~5250, 5470~5725MHz ≤ 250 mW or 11 + 10 log <sub>10</sub> (99% B) 5725~5850MHz, ≤ 30 dBm		Pass	Section 7.4
	Maximum E.I.R.P	5150~5250MHz ≤ 23 dBm or 10 + 10 log <sub>10</sub> (99% B) 5250~5250, 5470~5725MHz ≤ 30 dBm or 17 + 10 log <sub>10</sub> (99% B)			
RSS-247 §6.2.2, §6.2.3	Transmit Power Control	≤ 24 dBm		Pass	Section 7.5
RSS-247 §6.2.1, §6.2.2, §6.2.3, §6.2.4	Peak Power Spectral Density	5150~5250MHz ≤ 10 dBm/MHz 5250~5250, 5470~5725MHz ≤ 11 dBm/MHz 5725~5850MHz, ≤ 30 dBm/500kHz		Pass	Section 7.6
RSS-Gen [8.11]	Frequency Stability	N/A		Pass	Section 7.7

RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
RSS-247 §6.2.1, §6.2.2, §6.2.3, §6.2.4	Out-of-Band Emissions	Refer to section 6.10	Radiated	Pass	Section 7.8 & 7.9
RSS-247 §6.2.1, §6.2.2, §6.2.3, §6.2.4	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in RSS-Gen [8.9]		Pass	
RSS-Gen [8.8]	AC Conducted Emissions 150kHz - 30MHz	< RSS-Gen [8.8] limits	Line Conducted	Pass	Section 7.10

**Notes:**

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.

## 7.2. 26dB Bandwidth Measurement

### 7.2.1. Test Limit

N/A


### 7.2.2. Test Procedure Used

KDB 789033 D02v02r01 - Section C.1

### 7.2.3. Test Setting

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 26$ . The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. VBW  $\geq 3 \times$  RBW.
4. Detector = Peak.
5. Trace mode = max hold.

### 7.2.4. Test Setup

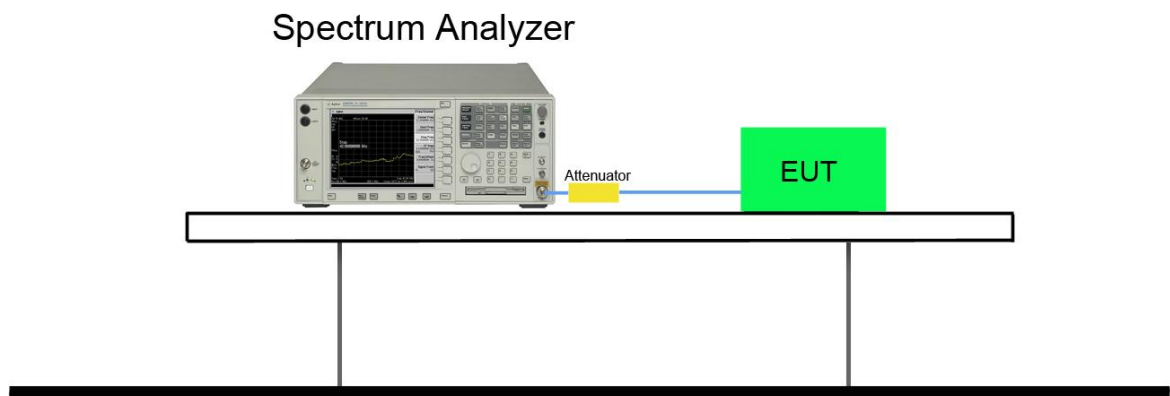



**7.2.5. Test Result**

Product	DOLPHIN CT40	Temperature	25°C
Test Engineer	Cat Hu	Relative Humidity	50%
Test Site	TR3	Test Date	2018/04/19


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
802.11a	6Mbps	36	5180	25.55	16.72
802.11a	6Mbps	44	5220	25.67	16.75
802.11a	6Mbps	48	5240	25.47	16.69
802.11a	6Mbps	52	5260	25.26	16.70
802.11a	6Mbps	60	5300	22.30	16.64
802.11a	6Mbps	64	5320	23.51	16.66
802.11a	6Mbps	100	5500	20.87	16.64
802.11a	6Mbps	116	5580	23.19	16.66
802.11a	6Mbps	120	5600	22.13	16.64
802.11a	6Mbps	140	5700	23.59	16.65
802.11a	6Mbps	144	5720	23.84	16.67
802.11a	6Mbps	149	5745	23.47	16.65
802.11a	6Mbps	157	5785	23.83	16.65
802.11a	6Mbps	165	5825	23.99	16.68
802.11n-HT20	MCS0	36	5180	23.66	17.84
802.11n-HT20	MCS0	44	5220	21.63	17.83
802.11n-HT20	MCS0	48	5240	22.22	17.85
802.11n-HT20	MCS0	52	5260	22.33	17.81
802.11n-HT20	MCS0	60	5300	21.96	17.84
802.11n-HT20	MCS0	64	5320	21.80	17.82
802.11n-HT20	MCS0	100	5500	21.89	17.82
802.11n-HT20	MCS0	116	5580	21.69	17.82
802.11n-HT20	MCS0	120	5600	22.19	17.83
802.11n-HT20	MCS0	140	5700	21.75	17.83
802.11n-HT20	MCS0	144	5720	21.87	17.83
802.11n-HT20	MCS0	149	5745	22.03	17.83
802.11n-HT20	MCS0	157	5785	21.96	17.83
802.11n-HT20	MCS0	165	5825	21.72	17.84

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
802.11n-HT40	MCS0	38	5190	46.99	36.62
802.11n-HT40	MCS0	46	5230	51.10	36.59
802.11n-HT40	MCS0	54	5270	42.81	36.62
802.11n-HT40	MCS0	62	5310	42.67	36.51
802.11n-HT40	MCS0	102	5510	42.03	36.45
802.11n-HT40	MCS0	110	5550	42.15	36.50
802.11n-HT40	MCS0	118	5590	42.29	36.55
802.11n-HT40	MCS0	134	5670	42.56	36.59
802.11n-HT40	MCS0	142	5710	42.26	36.56
802.11n-HT40	MCS0	151	5755	41.95	36.52
802.11n-HT40	MCS0	159	5795	42.48	36.55
802.11ac-VHT20	MCS0	36	5180	22.54	17.84
802.11ac-VHT20	MCS0	44	5220	22.43	17.88
802.11ac-VHT20	MCS0	48	5240	23.34	17.85
802.11ac-VHT20	MCS0	52	5260	22.41	17.84
802.11ac-VHT20	MCS0	60	5300	21.93	17.84
802.11ac-VHT20	MCS0	64	5320	22.18	17.83
802.11ac-VHT20	MCS0	100	5500	21.73	17.83
802.11ac-VHT20	MCS0	116	5580	21.72	17.82
802.11ac-VHT20	MCS0	120	5600	22.04	17.82
802.11ac-VHT20	MCS0	140	5700	21.60	17.84
802.11ac-VHT20	MCS0	144	5720	22.19	17.85
802.11ac-VHT20	MCS0	149	5745	21.74	17.84
802.11ac-VHT20	MCS0	157	5785	21.60	17.82
802.11ac-VHT20	MCS0	165	5825	21.81	17.84


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
802.11ac-VHT40	MCS0	38	5190	52.84	36.58
802.11ac-VHT40	MCS0	46	5230	45.16	36.61
802.11ac-VHT40	MCS0	54	5270	43.80	36.55
802.11ac-VHT40	MCS0	62	5310	42.05	36.51
802.11ac-VHT40	MCS0	102	5510	42.14	36.45
802.11ac-VHT40	MCS0	110	5550	41.93	36.48
802.11ac-VHT40	MCS0	118	5590	42.05	36.51
802.11ac-VHT40	MCS0	134	5670	41.87	36.50
802.11ac-VHT40	MCS0	142	5710	42.19	36.56
802.11ac-VHT40	MCS0	151	5755	42.01	36.47
802.11ac-VHT40	MCS0	159	5795	42.13	36.51
802.11ac-VHT80	MCS0	42	5210	87.56	76.18
802.11ac-VHT80	MCS0	58	5290	85.36	76.16
802.11ac-VHT80	MCS0	106	5530	85.38	76.16
802.11ac-VHT80	MCS0	122	5610	85.61	76.23
802.11ac-VHT80	MCS0	138	5690	85.68	76.32
802.11ac-VHT80	MCS0	155	5775	85.62	76.12

**802.11a 26dB Bandwidth & 99% Bandwidth**


**Channel 36 (5180MHz)**

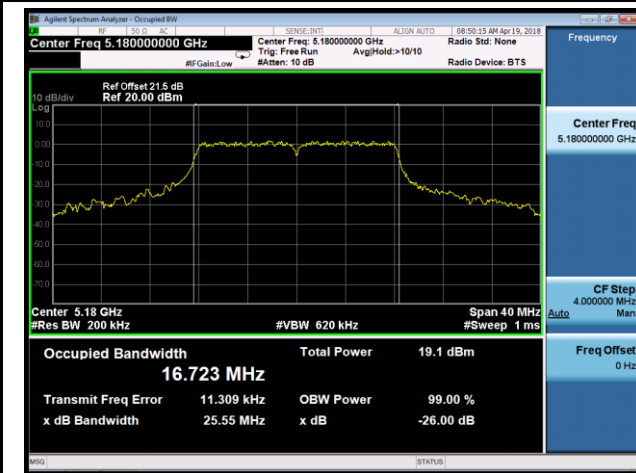


**Channel 44 (5220MHz)**

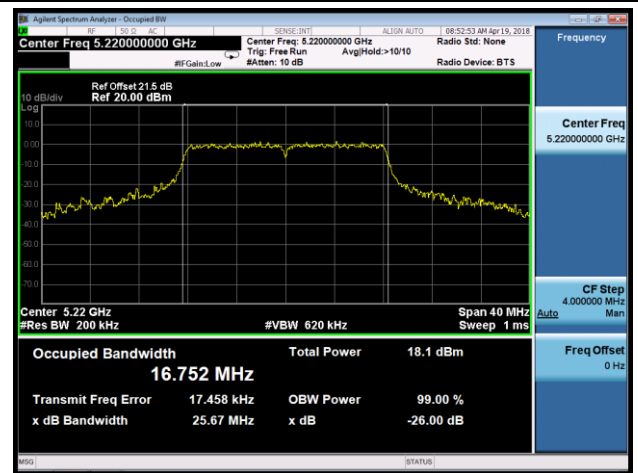


**Channel 48 (5240MHz)**

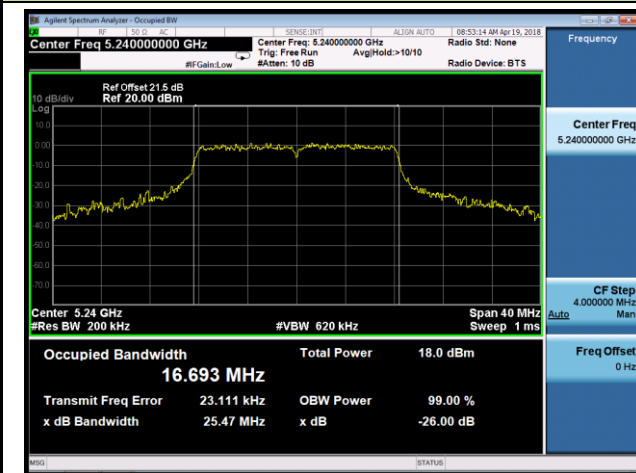


**Channel 52 (5260MHz)**

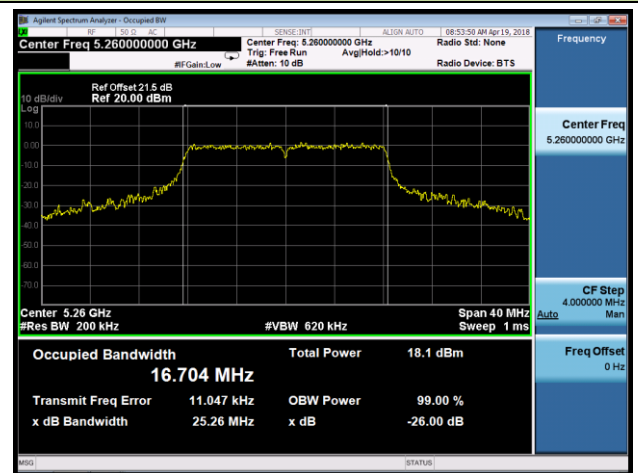

**Channel 60 (5300MHz)**

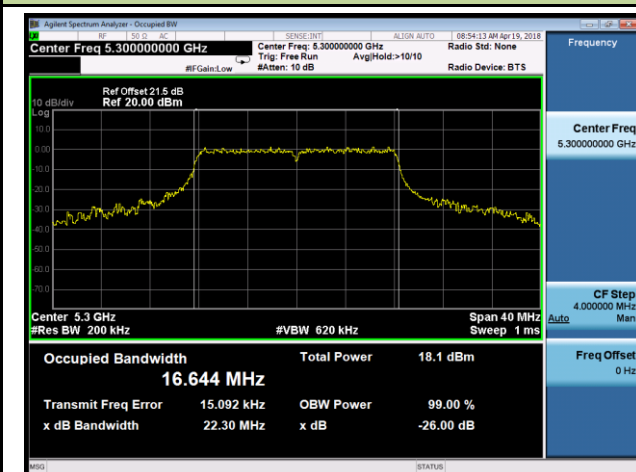


**Channel 64 (5320MHz)**

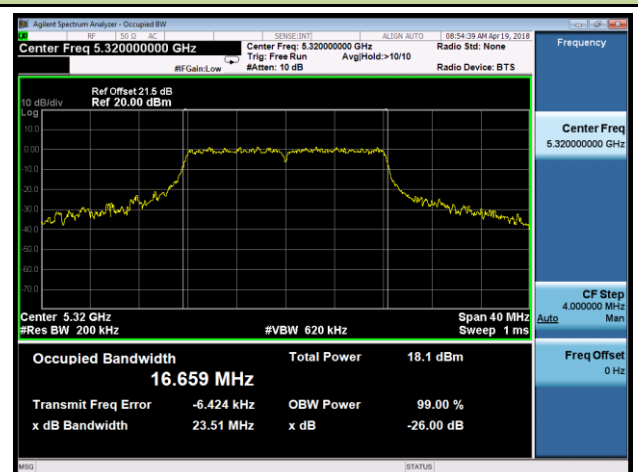


**802.11a 26dB Bandwidth & 99% Bandwidth**


**Channel 100 (5500MHz)**

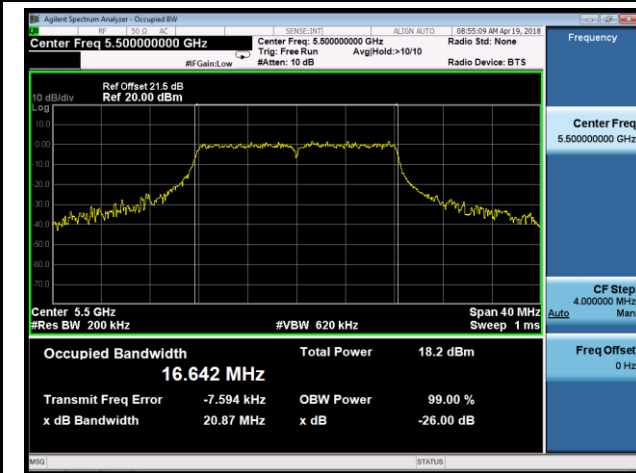


**Channel 116 (5580MHz)**

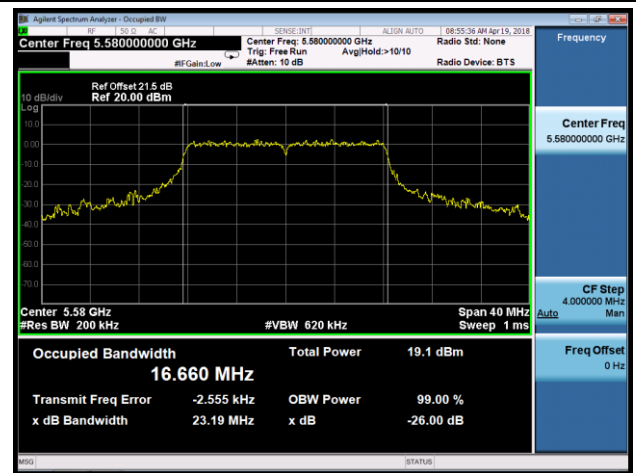


**Channel 120 (5600MHz)**

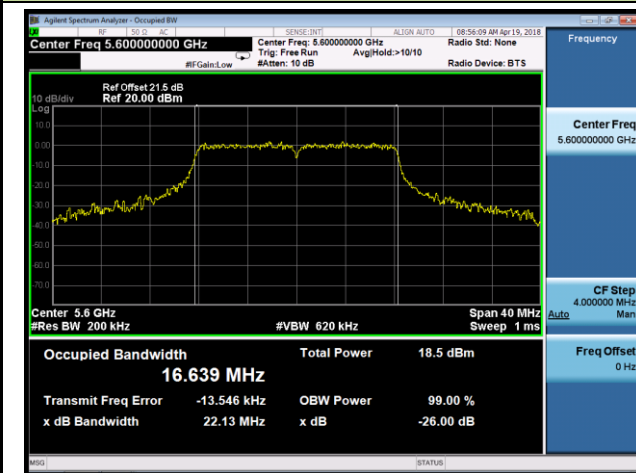


**Channel 140 (5700MHz)**

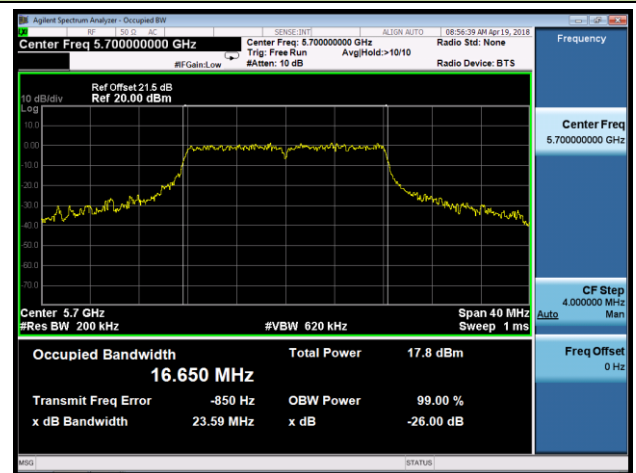

**Channel 144 (5720MHz)**

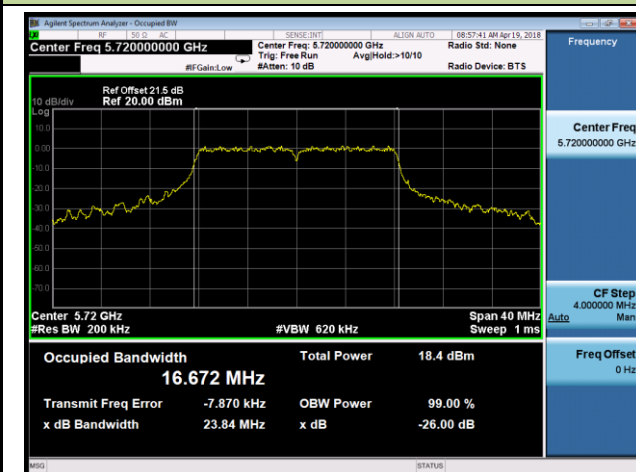


**Channel 149 (5745MHz)**

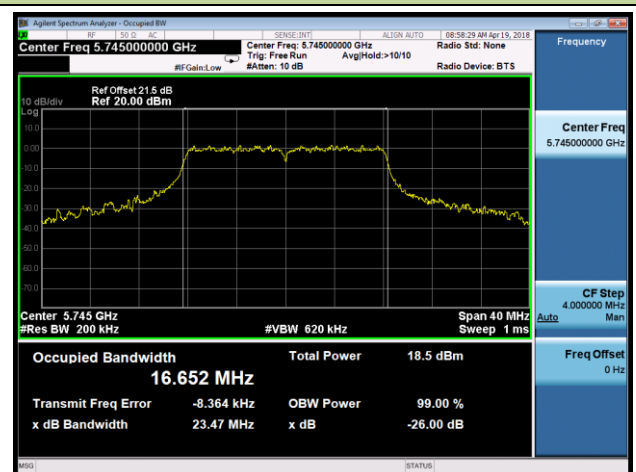


**802.11a 26dB Bandwidth & 99% Bandwidth**

**Channel 157 (5785MHz)**

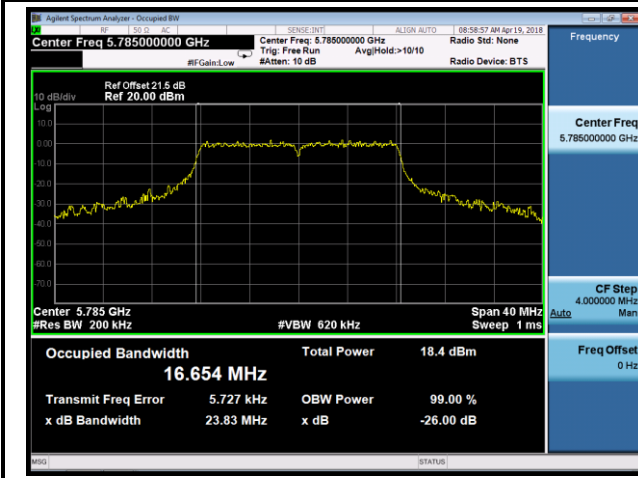


**Channel 165 (5825MHz)**

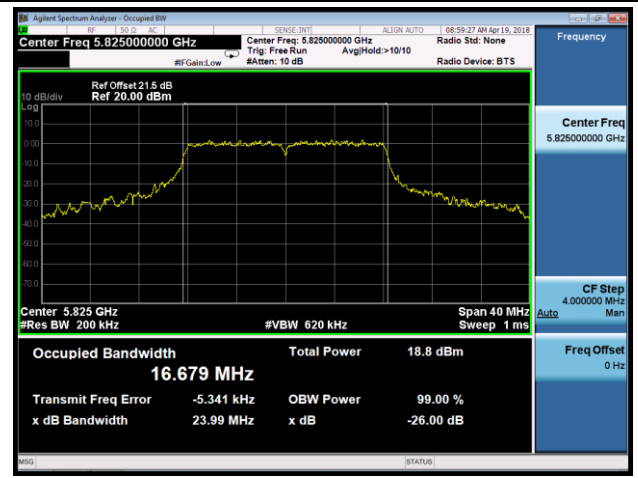


802.11n-HT20 26dB Bandwidth & 99% Bandwidth


Channel 36 (5180MHz)

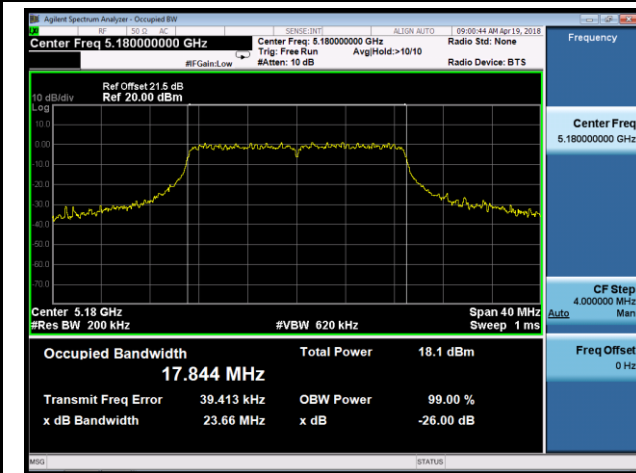


Channel 44 (5220MHz)

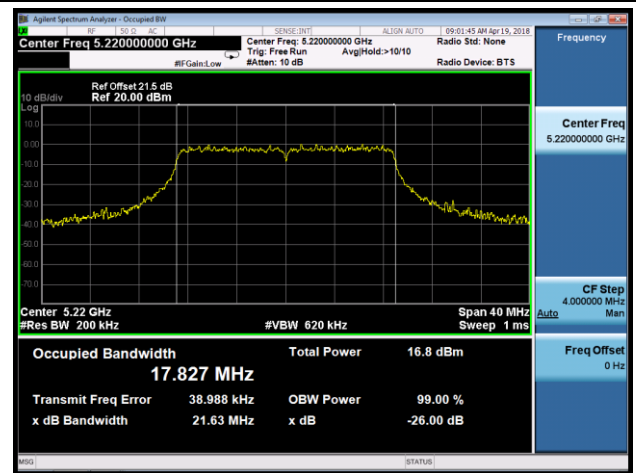


Channel 48 (5240MHz)

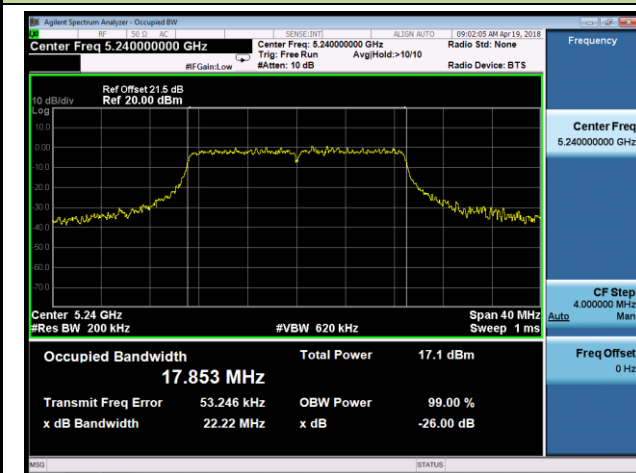


Channel 52 (5260MHz)

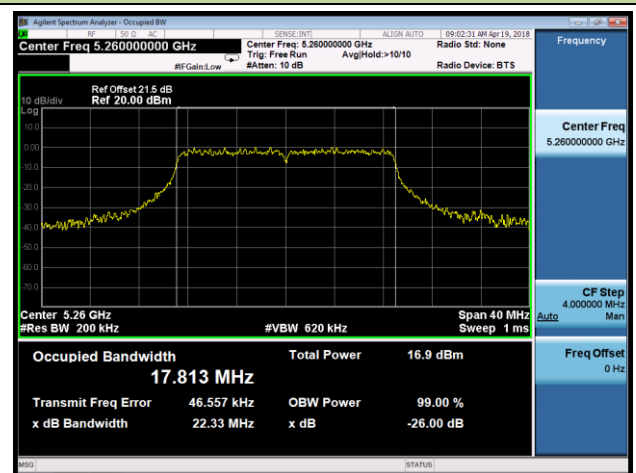

Channel 60 (5300MHz)

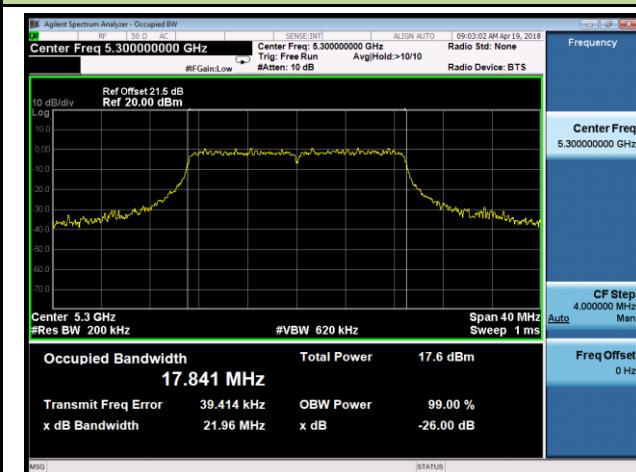


Channel 64 (5320MHz)

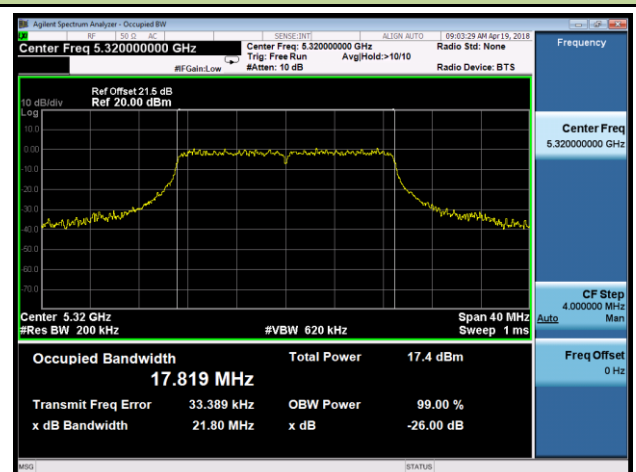


**802.11n-HT20 26dB Bandwidth & 99% Bandwidth**


**Channel 100 (5500MHz)**

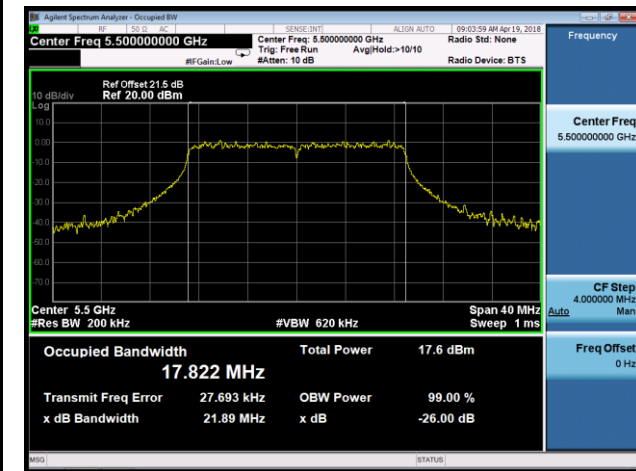


**Channel 116 (5580MHz)**

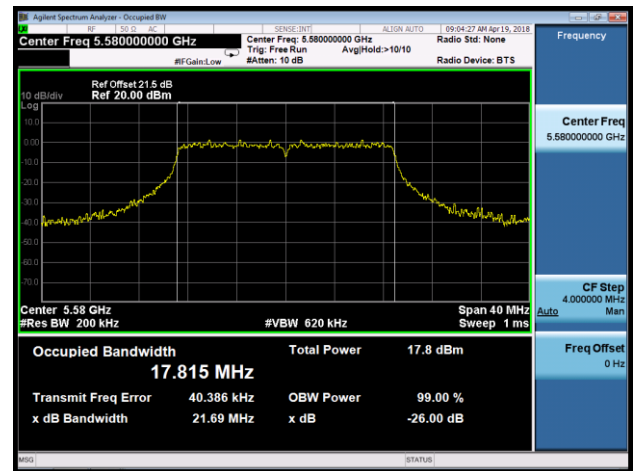


**Channel 120 (5600MHz)**

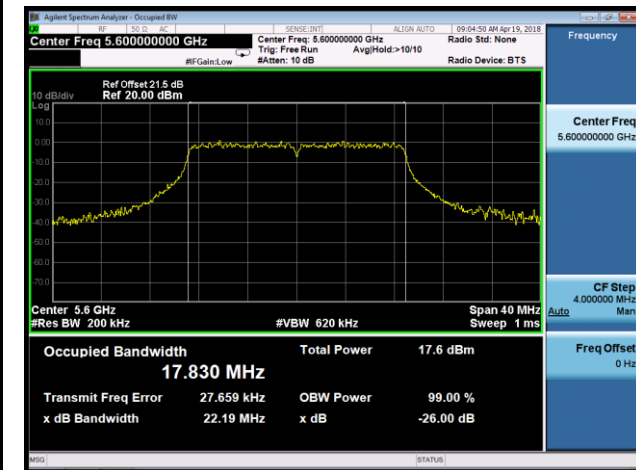


**Channel 140 (5700MHz)**

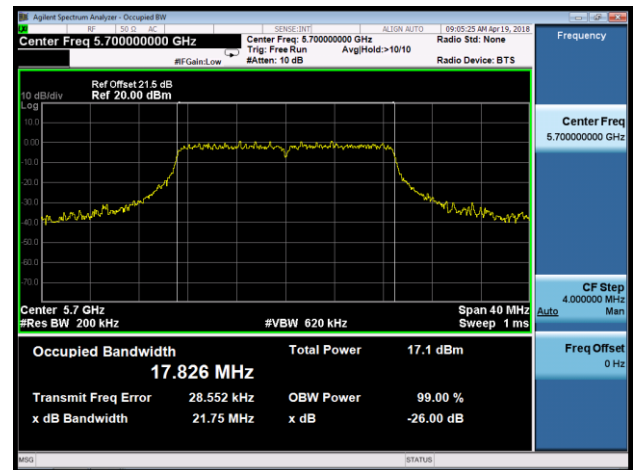

**Channel 144 (5720MHz)**

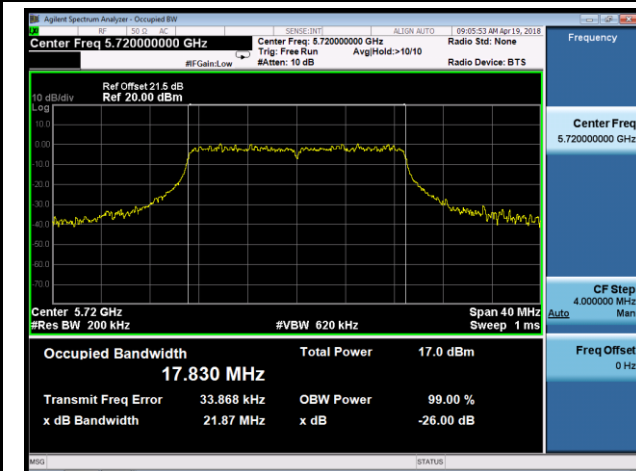


**Channel 149 (5745MHz)**

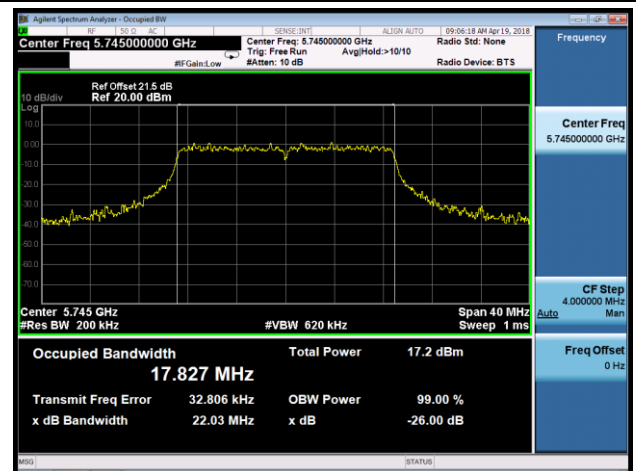




**802.11n-HT20 26dB Bandwidth & 99% Bandwidth**

**Channel 157 (5785MHz)**

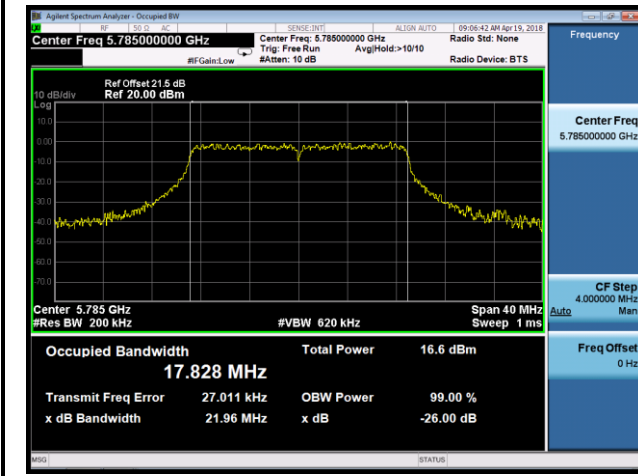


**Channel 165 (5825MHz)**

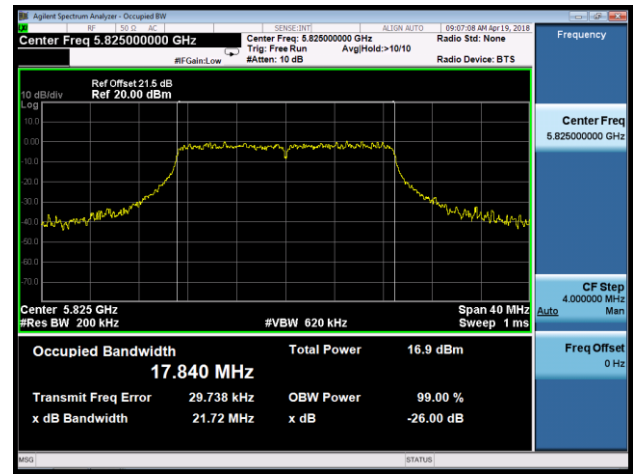


**802.11n-HT40 26dB Bandwidth & 99% Bandwidth**


**Channel 38 (5190MHz)**

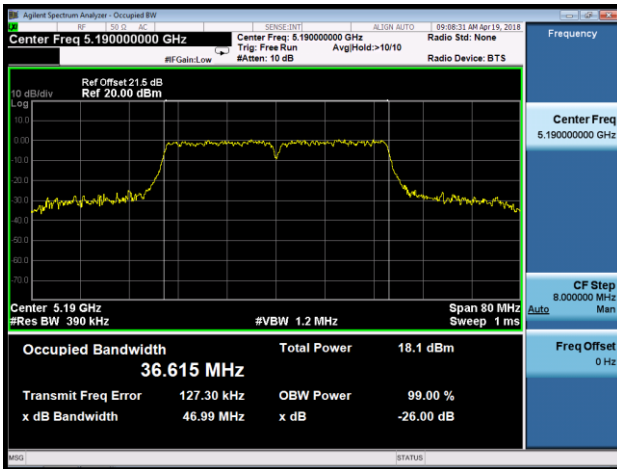


**Channel 46 (5230MHz)**

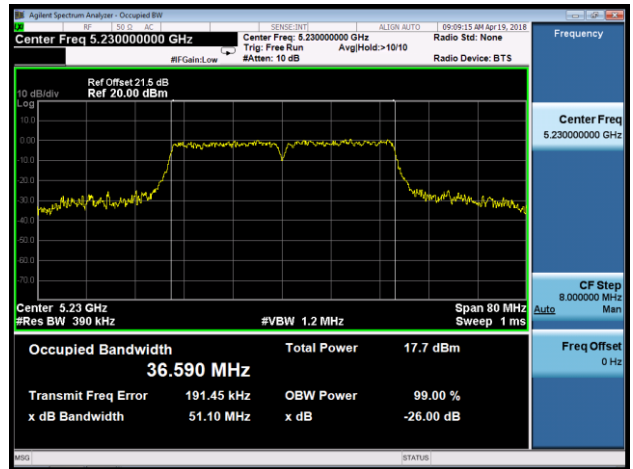


**Channel 54 (5270MHz)**

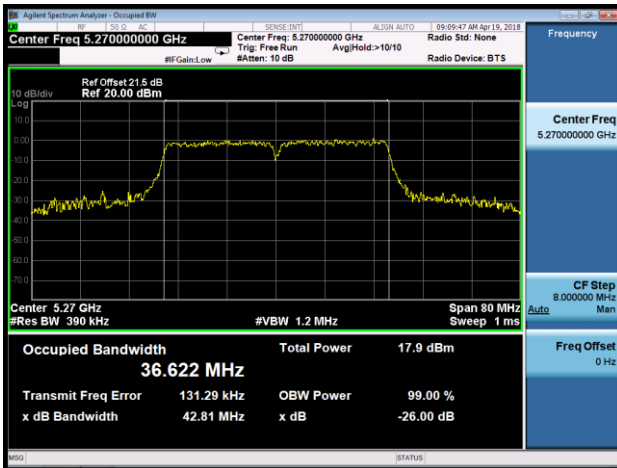


**Channel 62 (5310MHz)**

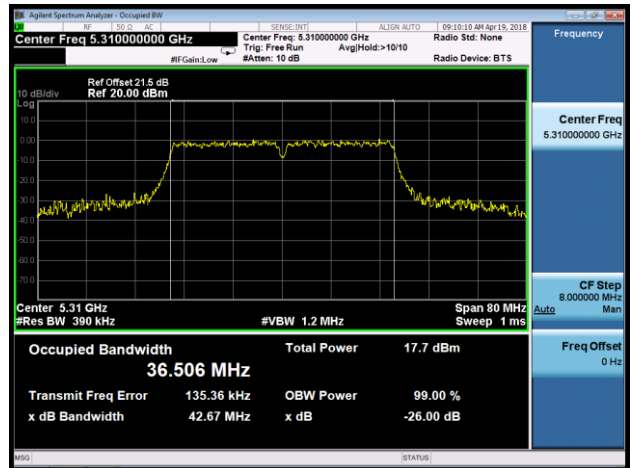

**Channel 102 (5510MHz)**

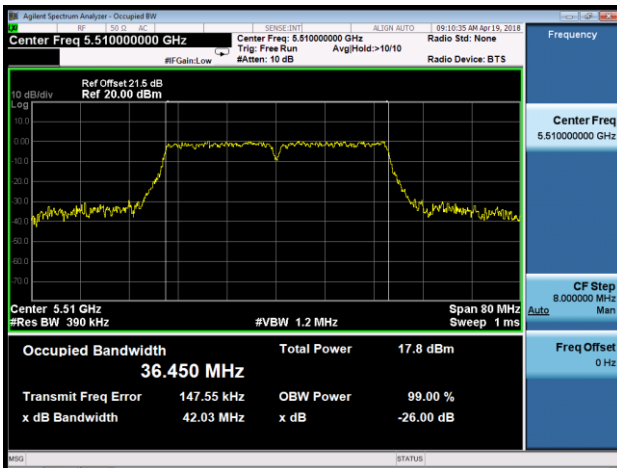


**Channel 110 (5500MHz)**

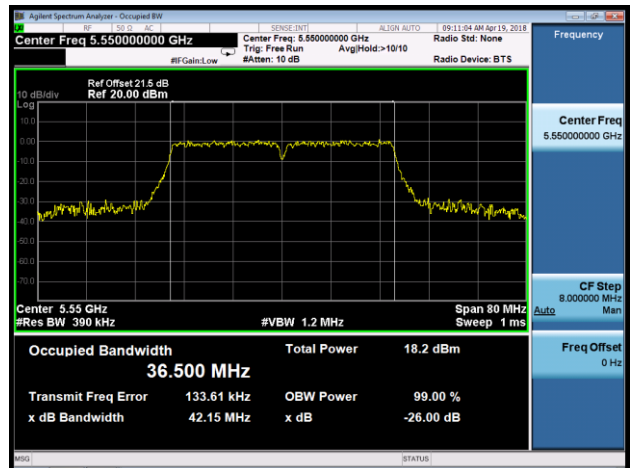


**802.11n-HT40 26dB Bandwidth & 99% Bandwidth**


**Channel 118 (5590MHz)**

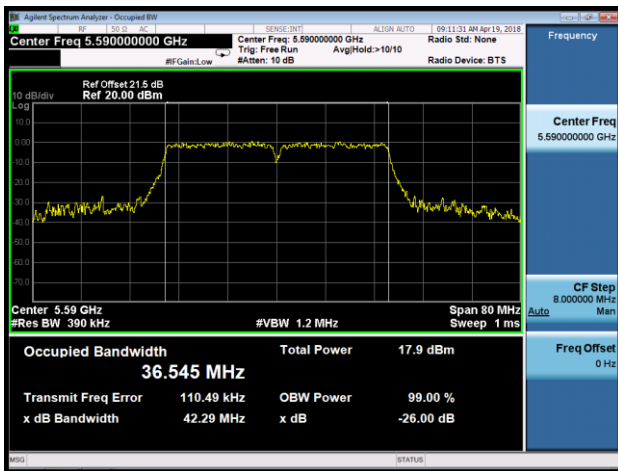


**Channel 134 (5670MHz)**

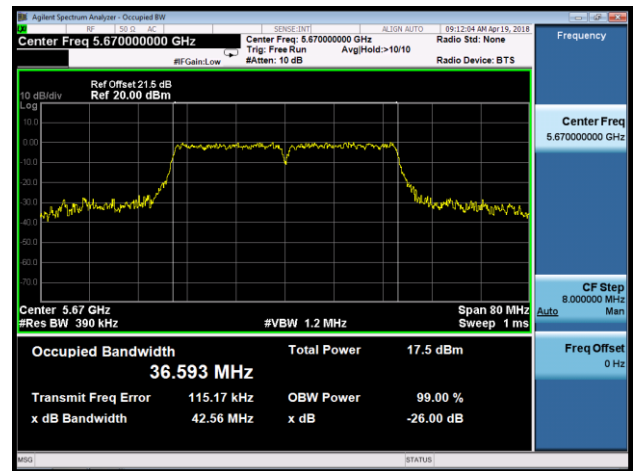


**Channel 142 (5710MHz)**





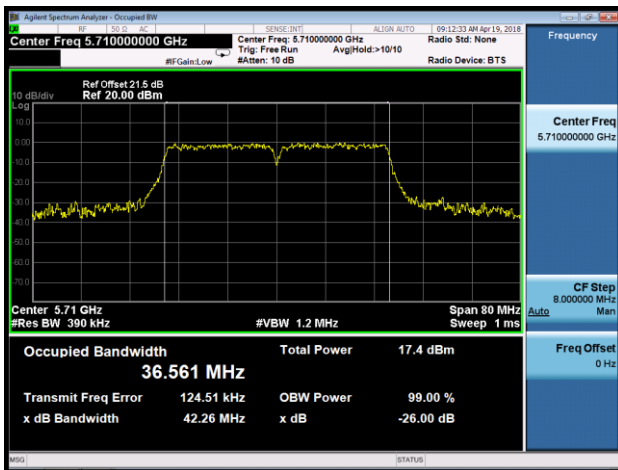


**Channel 151 (5755MHz)**

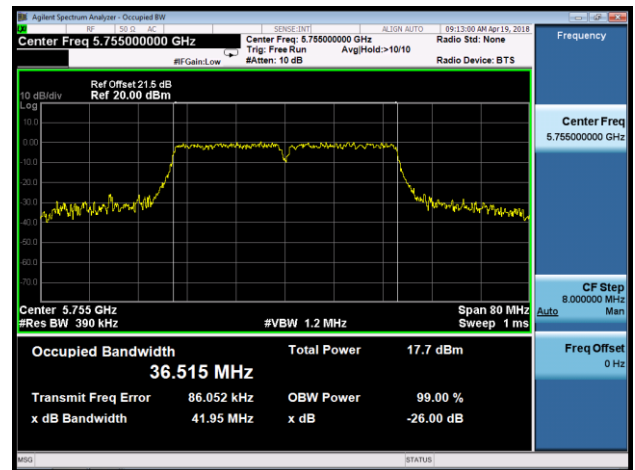

**Channel 159 (5795MHz)**

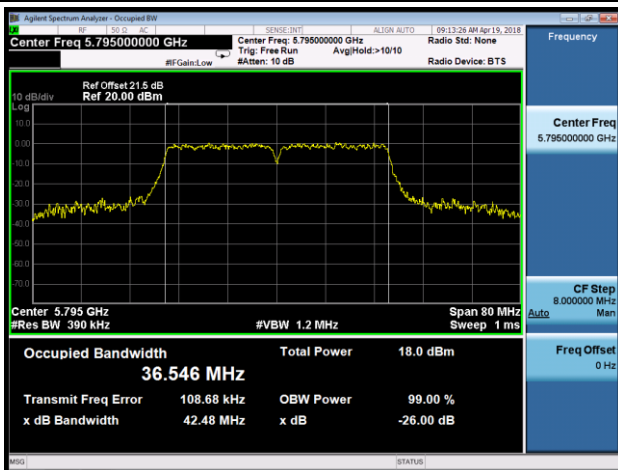

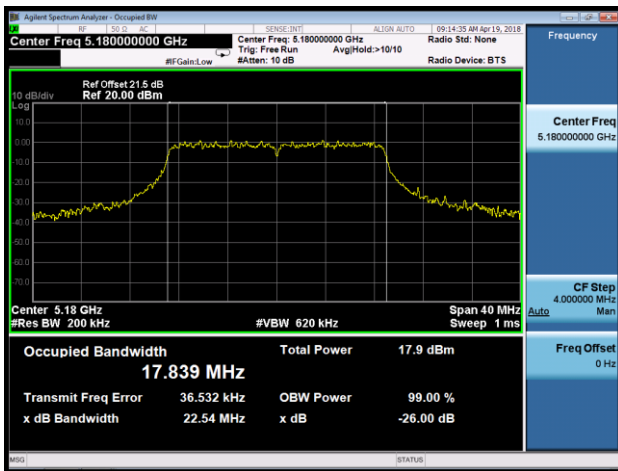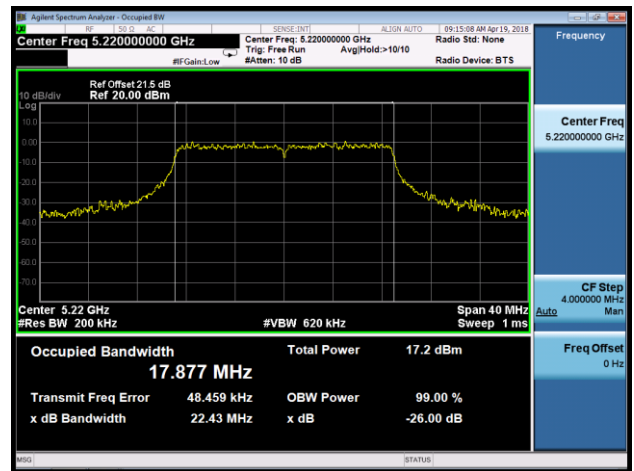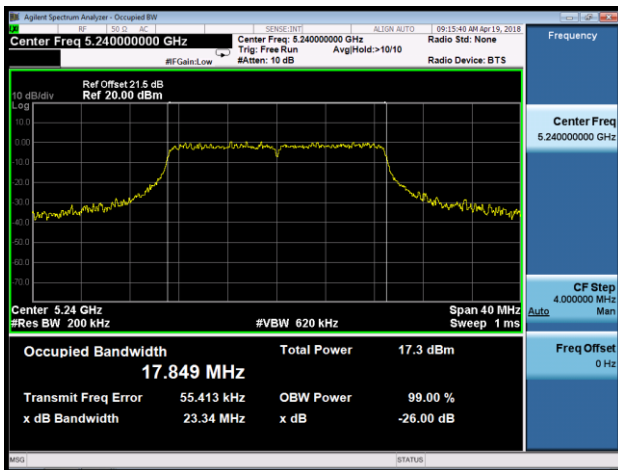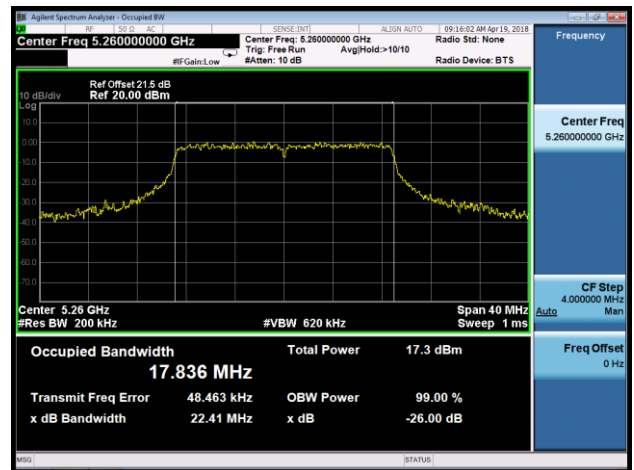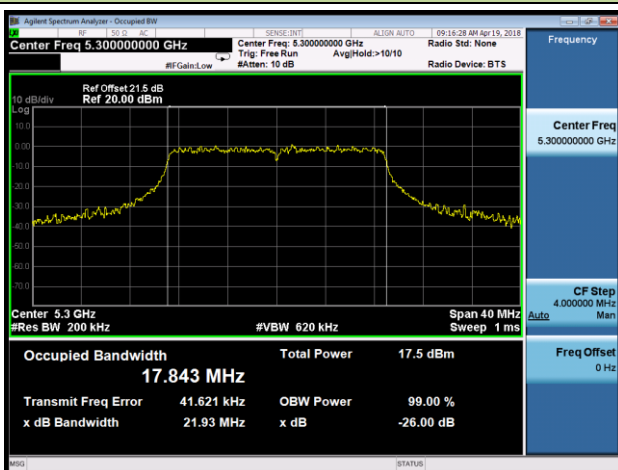**802.11ac-VHT20 26dB Bandwidth & 99% Bandwidth**
**Channel 36 (5180MHz)**

**Channel 44 (5220MHz)**

**Channel 48 (5240MHz)**

**Channel 52 (5260MHz)**

**Channel 60 (5300MHz)**

**Channel 64 (5320MHz)**
