

VARIANT RADIO TEST REPORT

(FCC Part 15 Subpart C / IC RSS-247)



Applicant:	Honeywell International Inc Honeywell Safety and Productivity Solutions
Address:	9680 Old Bailes Road, Fort Mill, SC 29707 United States

Manufacturer:	Honeywell International Inc Honeywell Safety and Productivity Solutions
Address:	9680 Old Bailes Road, Fort Mill, SC 29707 United States
Product:	Mobile Computer
Brand Name:	Honeywell
Model Name:	CT45-L0N
FCC ID:	HD5-CT45L0N
Date of tests:	2021-10-25 to 2022-01-18

The tests have been carried out according to the requirements of the following standard:

Part 15 Subpart C §15. 247 / IC RSS-247 issue 2

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
 Date: Jan. 18, 2022	 Date: Jan. 18, 2022

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute you unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



Test Report No.: W7L-211129W004RF10

Report Revise Record

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RFBGDJ-W7L-P21060011-5	Original release	Jul. 14, 2021
W7L-211129W004RF10	Based on the original report RFBGDJ-W7L-P21060011-5 changing components.	Jan. 18, 2022

TABLE OF CONTENTS

1. GENERAL DESCRIPTION.....	5
1.1 APPLICANT.....	5
1.2 MANUFACTURER.....	5
1.3 GENERAL DESCRIPTION OF EUT.....	5
1.4 MODIFICATION OF EUT	6
1.5 APPLICABLE STANDARDS	6
2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	7
2.1 DESCRIPTIONS OF TEST MODE.....	7
2.2 TEST MODE.....	7
2.3 SUPPORT EQUIPMENT.....	8
2.4 TEST SETUP.....	9
2.5 MEASUREMENT RESULTS EXPLANATION EXAMPLE.....	13
2.6 PEAK OUTPUT POWER MEASUREMENT	14
2.7 RADIATED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT	15
3 UNCERTAINTY OF EVALUATION.....	21
APPENDIX A: MAXIMUM CONDUCTED OUTPUT POWER & E.I.R.P.	22

Summary of Test RESULT

FCC Rule	IC Rule	Description	Limit	Result	Remark
15.247(a)(2)	RSS-247 5.2(a)	6dB Bandwidth	$\geq 0.5\text{MHz}$	(See Note 2)	-
-	RSS-Gen 6.7	99% Bandwidth	-	(See Note 2)	-
15.247(b)(3)	RSS-247 5.4(d)	Peak Output Power	$\leq 30\text{dBm}$	Compliance (See Note 1)	-
15.247(e)	RSS-247 5.2(b)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	(See Note 2)	-
15.247(d)	RSS-247 5.5	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	(See Note 2)	-
15.247(d)	RSS-247 5.5	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d) RSS-247 5.5 & RSS-Gen Table 5 , Table 6	(See Note 1)	-
15.207	RSS-GEN 8.8	AC Conducted Emission	15.207(a) RSS-GEN 8.8 Table 4	(See Note 2)	Under limit 17.16 dB at 0.497 MHz
15.203 & 15.247(b)	RSS-GEN 6.8	Antenna Requirement	15.203 & 15.247(b) RSS-GEN 6.8	(See Note 2)	-

Note:

- Per the change notice provide by manufactory, the difference is changing components, all the change no effect any RF parameter. Therefore only verify the power and radiated emission worse case. The report only show the verify test data. More test details please refer to the original report.
- Please refer to original report RFBGDJ-W7L-P21060011-5

1. General Description

1.1 Applicant

Honeywell International Inc
Honeywell Safety and Productivity Solutions
 9680 Old Bailes Road, Fort Mill, SC 29707 United States

1.2 Manufacturer

Honeywell International Inc
Honeywell Safety and Productivity Solutions
 9680 Old Bailes Road, Fort Mill, SC 29707 United States

1.3 General Description Of EUT

Product	Mobile Computer
Model No.	CT45-L0N
Additional No.	N/A
Difference Description	N/A
Power Supply	3.85Vdc for EUT
Modulation Technology	BLE
Modulation Type	GFSK
Operating Frequency	2402MHz~2480MHz
Number Of Channel	40
Max. Output Power	6.51 dBm (0.0045 W)
Max. e.i.r.p.	7.91 dBm (0.0062W)
Antenna Type	LDS type Antenna with 1.4dBi gain
HW Version	V1.0
SW Version	OS.11.001
I/O Ports	Refer to user's manual

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ ANSI C63.10-2013
- ♦ KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ IC RSS-247 Issue 2
- ♦ IC RSS-Gen Issue 5

Remark:

1. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B&ICES-003, recorded in a separate test report.

2. Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

The transmitter has a maximum peak conducted output power as follows:

Test Mode	Channel	Frequency	Bluetooth RF Output Power
BLE_125K	Ch00	2402MHz	4.53
	Ch19	2440MHz	5.29
	Ch39	2480MHz	6.24
BLE_1M	Ch00	2402MHz	4.59
	Ch19	2440MHz	5.27
	Ch39	2480MHz	6.51
BLE_2M	Ch00	2402MHz	4.49
	Ch19	2440MHz	5.25
	Ch39	2480MHz	6.33
BLE_500K	Ch00	2402MHz	4.54
	Ch19	2440MHz	5.19
	Ch39	2480MHz	6.4

- Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.
- The data rate was set in 2Mbps for all the test items due to the highest RF output power

2.2 Test Mode

2.2.1 Antenna Port Conducted Measurement

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Mode 1: CH00_2402 MHz Mode 2: CH19_2440 MHz Mode 3: CH39_2480 MHz

2.2.2 Radiated Emission Test (Below 1GHz)

Radiated Test Cases	Bluetooth 5.1 – LE GFSK 2Mbps
	Mode 1: CH00_2402 MHz

Note : 1. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type. Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.

2. Following channel(s) was (were) selected for the final test as listed above

2.2.3 Radiated Emission Test (Above 1GHz)

Radiated Test Cases	Bluetooth 5.1 – LE GFSK 2Mbps
	Mode 1: CH00_2402 MHz
	Mode 2: CH19_2440 MHz
	Mode 3: CH39_2480 MHz

Note : 1. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.

2. Following channel(s) was (were) selected for the final test as listed above

3. For frequency above 18GHz, the measured value is much lower than the limit, therefore, it is not reflected in the report.

2.2.4 Power Line Conducted Emission Test:

AC Conducted Emission	Mode 1 : BT Linking + Earphone + Adapter
--------------------------------------	--

2.3 Support Equipment

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	NETGARE	R7800	PY315100319	N/A	unshielded AC I/P cable1.2 m
2.	Notebook	Lenovo	E470C	FCC DoC	N/A	shielded cable DC O/P 1.8 m unshielded AC I/P cable1.2 m
3.	Earphone	Honeywell	PTE-300N	FCC sDoC	N/A	N/A



4.	Adapter	Honeywell	ADS-12B-06 05010E	FCC sDoC	N/A	N/A
----	---------	-----------	----------------------	----------	-----	-----


Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	May. 19,20	May. 18,23
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Mar. 05,21	Mar. 04,22
Horn Antenna	ETS-LINDGREN	3117	00168728	Apr. 02,21	Apr. 01,22
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K-SG/QMS-00361	15433	Aug. 25, 21	Aug. 24, 22
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	Jun. 03,21	Jun. 02,22
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Apr. 22,21	Apr. 21,22
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jun. 02,21	Jun. 01,22
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jun. 03,21	Jun. 02,22
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Apr. 22,21	Apr. 21,22

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Chamber.
 3. The FCC Site Registration No. is 525120; The Designation No. is CN1171.
 4. The IC test Site Registration No. is 21771-1; The CAB Identifier No. is CN0007.


2.4 Test Setup

EUT was set in the Hidden menu mode to enable BT communications.

The following picture is a screenshot of the test software

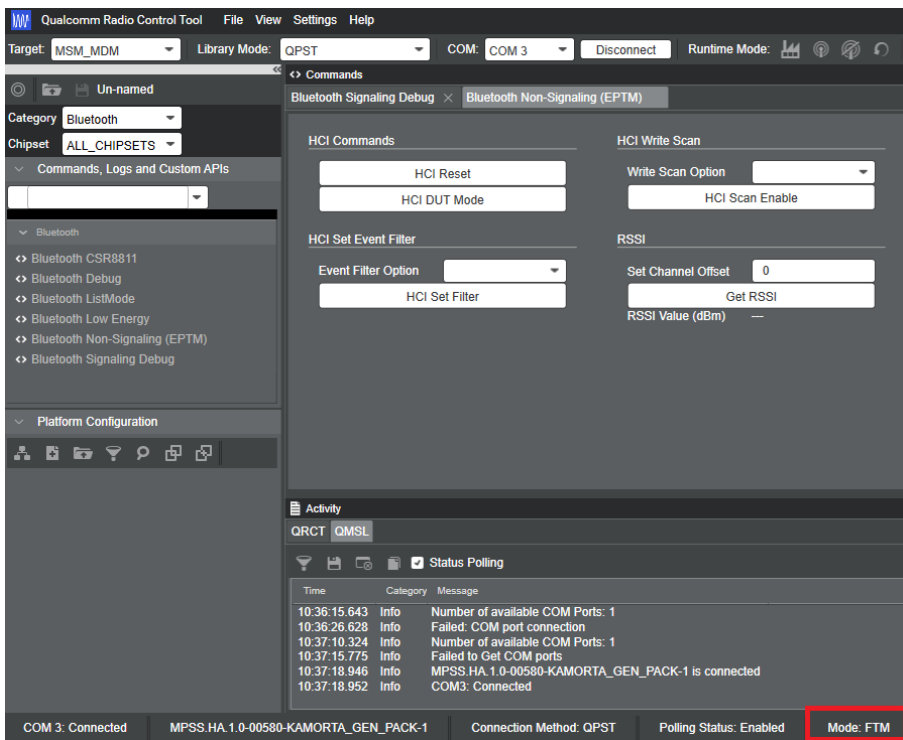


Setup diagram for Conducted Test

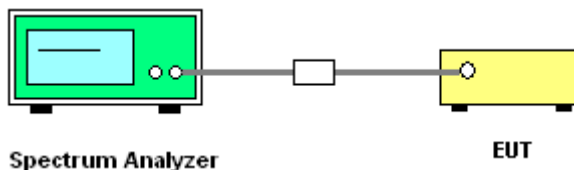





Setup diagram for Radiation(9KHz~30MHz) Test

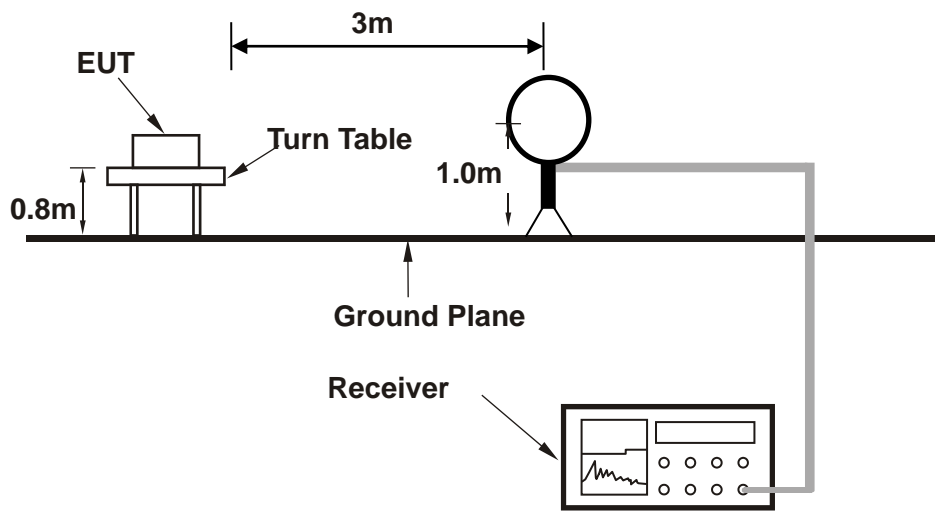


Setup diagram for Radiation(Below 1G) Test

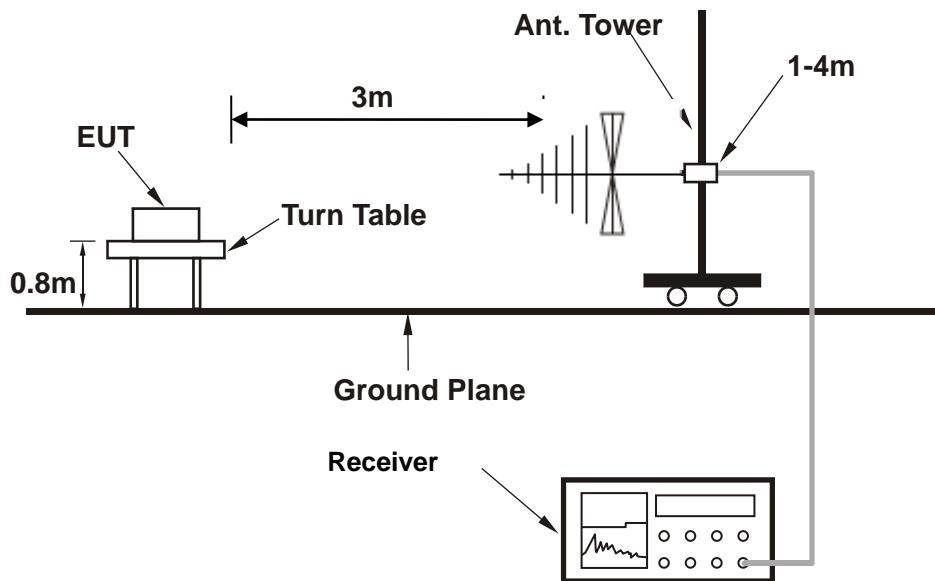

Setup diagram for Radiation (Above1G) Test

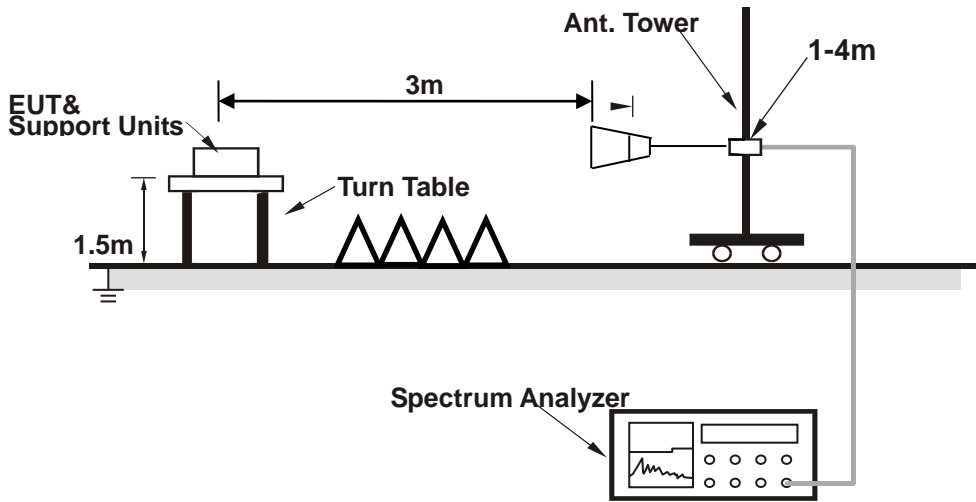

Setup diagram for AC Conducted Emission Test

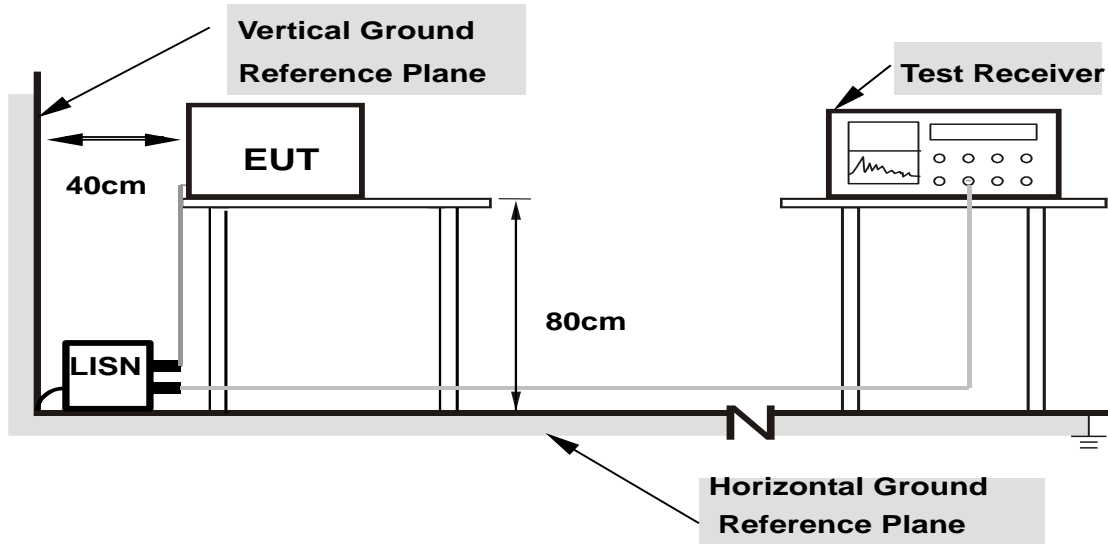

- Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**



2.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

Following shows an offset computation example with cable loss 5 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 5 + 10 = 15 \text{ (dB)}\end{aligned}$$

For all radiated test items:

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Over Limit (dB μ V/m) = Level(dB μ V/m) - Limit Level (dB μ V/m)

2.6 Peak Output Power Measurement

2.6.1 Limit of Peak Output Power

FCC §15.247 (b)(3)

For systems using digital modulation in the 2400-2483.5 MHz bands: 30dBm.

IC RSS-247 A5.4(d)

For DTSs employing digital modulation techniques operating in the bands 902-928MHz and 2400-2483.5MHz, the maximum peak conducted output power shall not exceed 1 W.

The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e)

2.6.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to spectrum analyzer.
3. Set to the maximum power setting and enable the EUT transmit continuously
4. Set the $RBW \geq DTS$ Bandwidth, $VBW \geq 3 * RBW$, $Span \geq 1.5 * DTS$ Bandwidth, Detector=Peak, Sweep time=auto couple, Trace mode=max holde.
5. Allow trace to fully stabilize, Use peak marker function to determine the peak amplitude level.
6. Measure the conducted output power

2.6.3 Test Result of Peak Output Power

Refer to Appendix A of this test report.

2.7 Radiated Band Edges and Spurious Emission Measurement

2.7.1 Limit of Radiated Band Edges and Spurious Emission

FCC §15.247 (d)

IC RSS-247 5.5


In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

2.7.2 Test Procedures

7. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
8. The measurement distance is 3 meter.
9. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
10. Set to the maximum power setting and enable the EUT transmit continuously.
11. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement:
 VBW = 10 Hz, when duty cycle is no less than 98 percent.
 VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission

duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

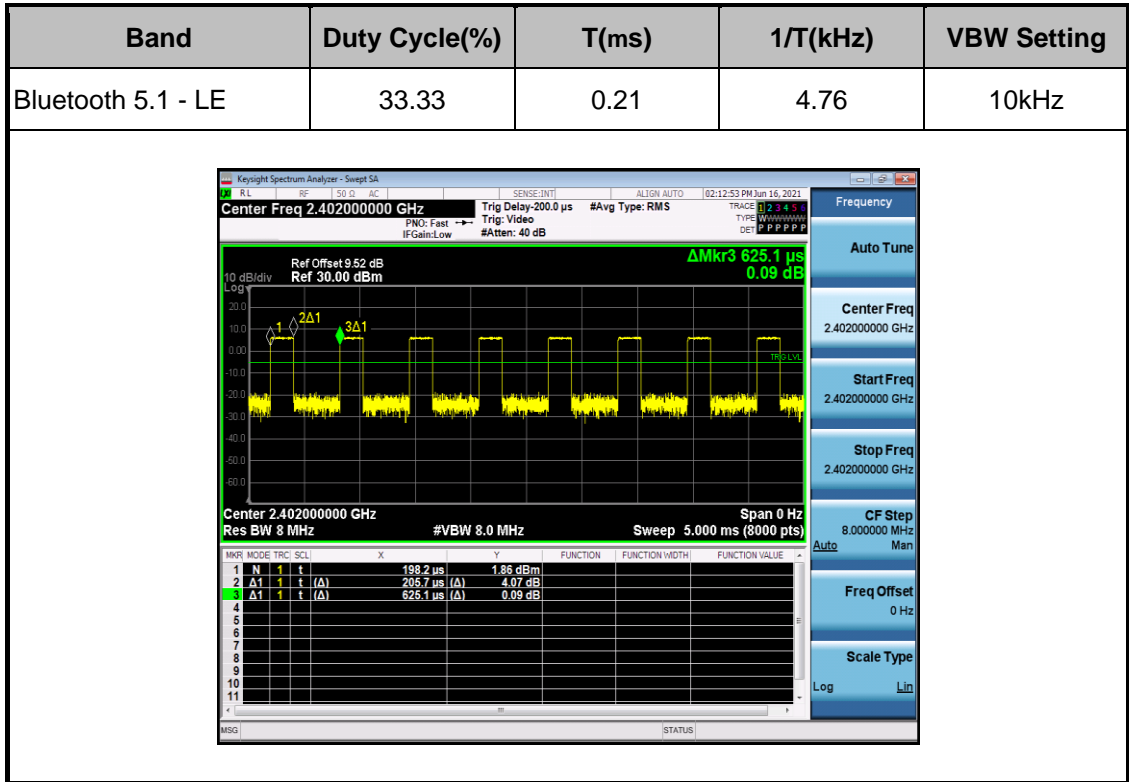

2.7.3 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)


The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



2.7.4 Test Result of Radiated Spurious Emission (1GHz ~ 10th Harmonic)

Test Mode :	BLE CH19 (2440 MHz)	Temperature :	21~23°C
Test Engineer :	Jace Hu	Relative Humidity :	63~65%
Frequency Range	3GHz~18GHz	Polarization :	Horizontal


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	4876.000	45.61	48.78	74.00	-28.39	-3.17	Peak	Horizontal
2	4876.000	36.12	39.29	54.00	-17.88	-3.17	Average	Horizontal
3	7320.000	48.05	45.97	74.00	-25.95	2.08	Peak	Horizontal
4	7320.000	37.70	35.62	54.00	-16.30	2.08	Average	Horizontal
5 PK	9760.000	51.67	46.79	74.00	-22.33	4.88	Peak	Horizontal
6 PP	9760.000	41.61	36.73	54.00	-12.39	4.88	Average	Horizontal

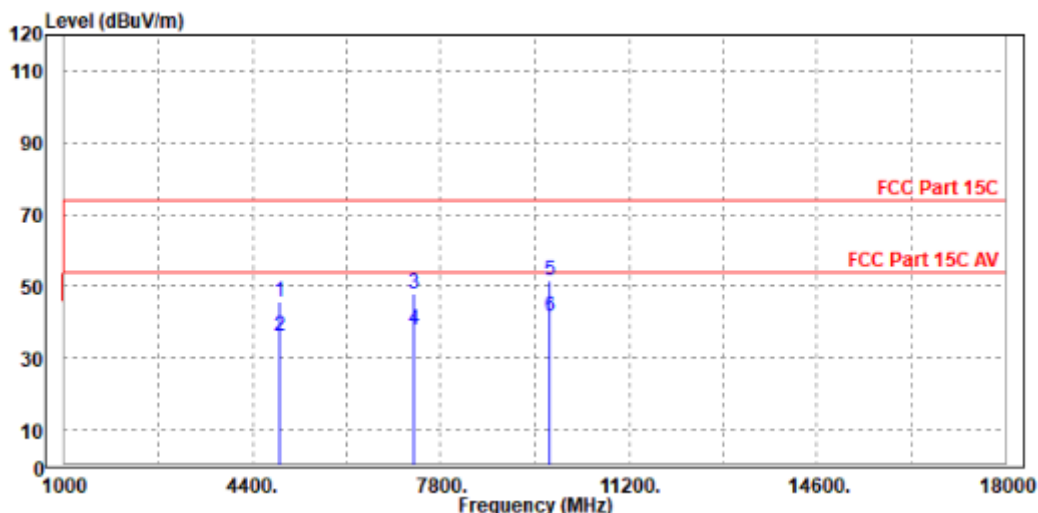

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	BLE CH19 (2440 MHz)	Temperature :	21~23°C
Test Engineer :	Jace Hu	Relative Humidity :	63~65%
Frequency Range	3GHz~18GHz	Polarization :	Vertical

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	4876.000	46.18	49.15	74.00	-27.82	-2.97	Peak	Vertical
2	4876.000	35.66	38.63	54.00	-18.34	-2.97	Average	Vertical
3	7320.000	48.31	46.16	74.00	-25.69	2.15	Peak	Vertical
4	7320.000	37.97	35.82	54.00	-16.03	2.15	Average	Vertical
5 PK	9760.000	51.33	46.10	74.00	-22.67	5.23	Peak	Vertical
6 PP	9760.000	41.16	35.93	54.00	-12.84	5.23	Average	Vertical

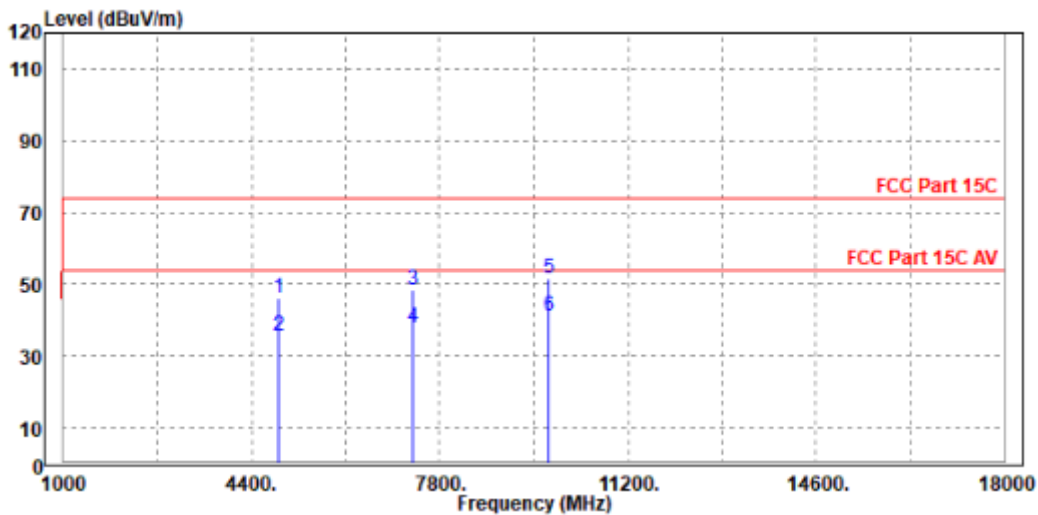


Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.



2.7.5 Test Result of Radiated Spurious Emission (30MHz ~ 1GHz)

Test Mode :	BLE CH00 (2402 MHz)	Temperature :	21~23°C
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	30MHz~1GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 25°C / 64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: Ble CH00(2402MHz)	Power rating:	DC 3.85V
EUT	: Mobile Computer		
Model No.	: CT45-L0N		

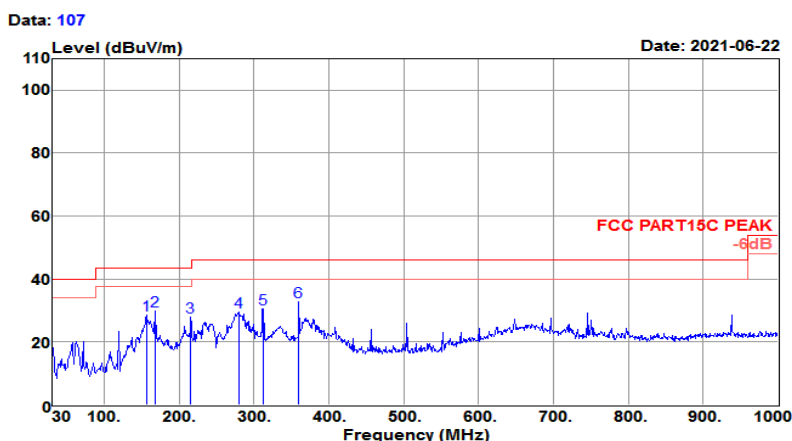

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
156.100	44.83	14.11	2.14	32.48	28.60	43.50	-14.90	QP
167.740	46.69	13.45	2.22	32.48	29.88	43.50	-13.62	QP
215.270	48.06	9.89	2.55	32.47	28.03	43.50	-15.47	QP
280.260	46.53	12.74	2.90	32.49	29.68	46.00	-16.32	QP
312.270	46.59	13.30	3.10	32.50	30.49	46.00	-15.51	QP
359.800	47.88	14.24	3.34	32.53	32.93	46.00	-13.07	QP




**BUREAU
VERITAS**

Test Report No.: W7L-211129W004RF10

Test Mode :	BLE CH00 (2402 MHz)	Temperature :	21~23°C
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	30MHz~1GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 25°C / 64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: Ble CH00(2402MHz)	Power rating:	DC 3.85V
EUT	: Mobile Computer		
Model No.	: CT45-L0N		

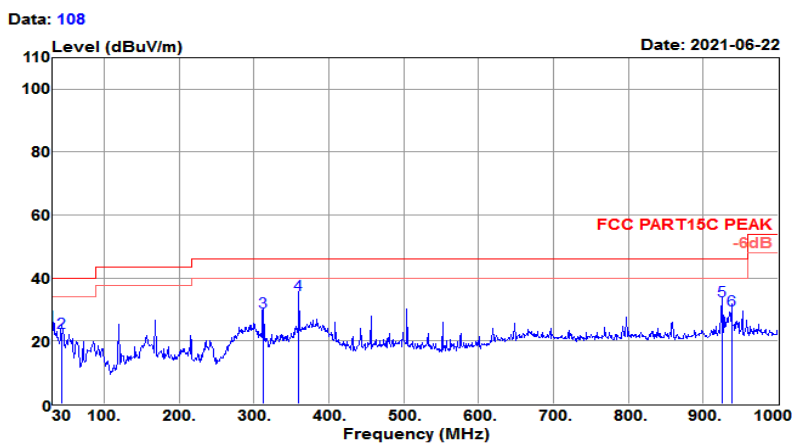

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
30.000	42.71	13.77	0.96	32.44	25.00	40.00	-15.00	QP
42.610	39.77	14.51	1.05	32.48	22.85	40.00	-17.15	QP
312.270	45.20	13.30	3.10	32.50	29.10	46.00	-16.90	QP
359.800	49.60	14.24	3.34	32.53	34.65	46.00	-11.35	QP
925.310	36.91	22.34	5.75	32.16	32.84	46.00	-13.16	QP
937.920	33.91	22.41	5.76	32.15	29.93	46.00	-16.07	QP

3 Uncertainty of Evaluation

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.42dB
Radiated emission	9kHz~30MHz	2.68dB
	30MHz ~ 1GMHz	2.50dB
	1GHz ~ 18GHz	3.51dB
	18GHz ~ 40GHz	3.96dB

MEASUREMENT	UNCERTAINTY
Occupied Channel Bandwidth	±196.4Hz
RF output power, conducted	±2.31dB
Power density, conducted	±2.31dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Appendix A: Maximum conducted output power & E.I.R.P.

Test Result

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Antenna Gain(dBi)	EIRP [dBm]	EIRP Limit [dBm]	Verdict
BLE_125K	Ant1	2402	4.53	<=30	1.4	5.93	36.02	PASS
		2440	5.29	<=30	1.4	6.69	36.02	PASS
		2480	6.24	<=30	1.4	7.64	36.02	PASS
BLE_1M	Ant1	2402	4.59	<=30	1.4	5.99	36.02	PASS
		2440	5.27	<=30	1.4	6.67	36.02	PASS
		2480	6.51	<=30	1.4	7.91	36.02	PASS
BLE_2M	Ant1	2402	4.49	<=30	1.4	5.89	36.02	PASS
		2440	5.25	<=30	1.4	6.65	36.02	PASS
		2480	6.33	<=30	1.4	7.73	36.02	PASS
BLE_500K	Ant1	2402	4.54	<=30	1.4	5.94	36.02	PASS
		2440	5.19	<=30	1.4	6.59	36.02	PASS
		2480	6.4	<=30	1.4	7.8	36.02	PASS