





11AX20MIMO_Ant9_6175_26Tone_RU0

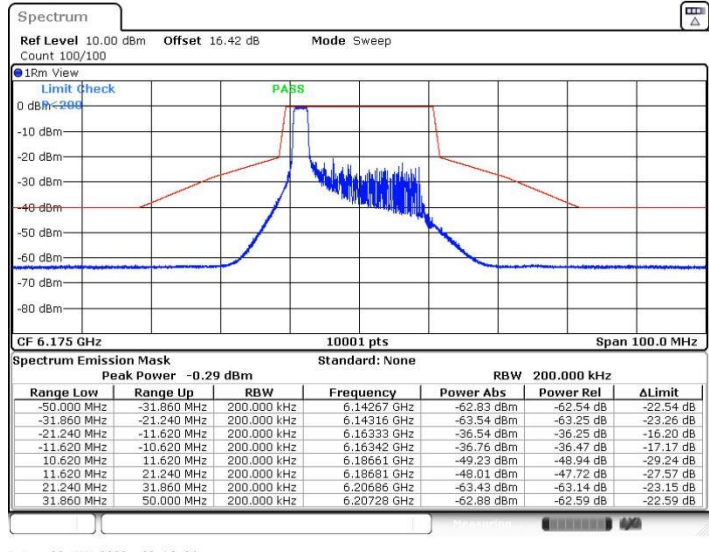


11AX20MIMO_Ant9_6175_52Tone_RU37

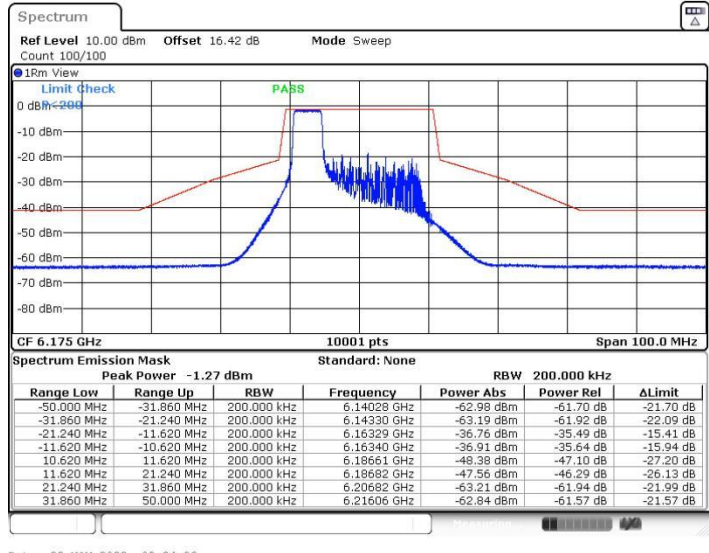




11AX20MIMO_Ant9_6175_106Tone_RU53

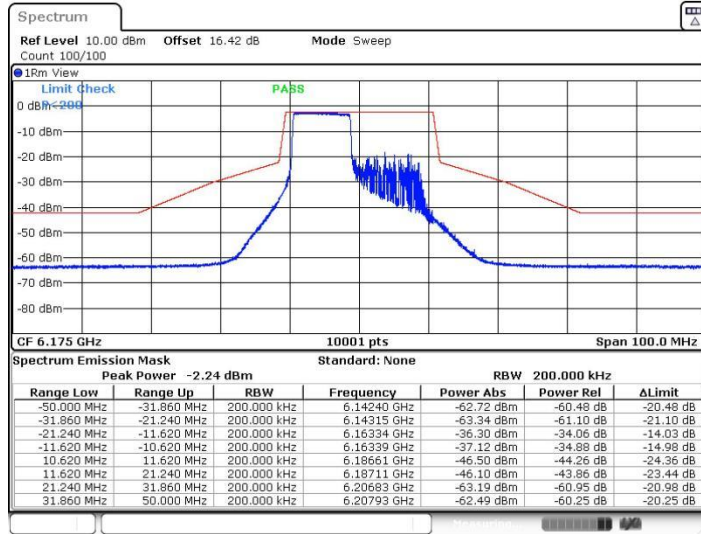



Date: 22.NOV.2022 09:28:16

11AX20MIMO_Ant10_6175_26Tone_RU0

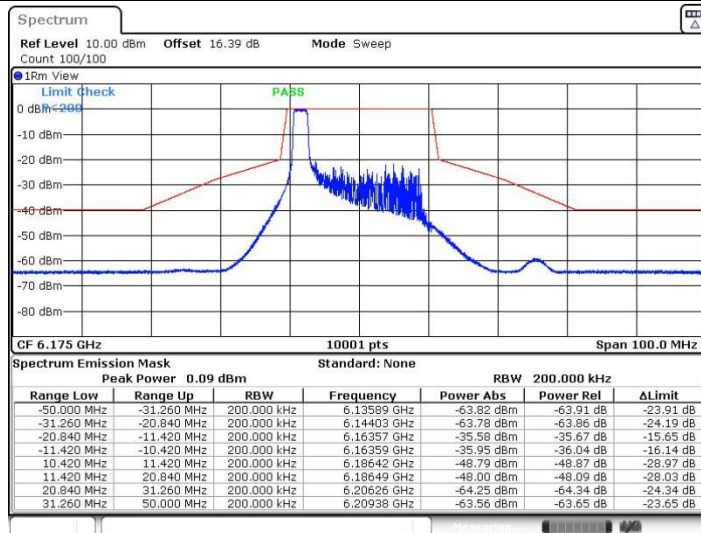


Date: 22.NOV.2022 09:19:38

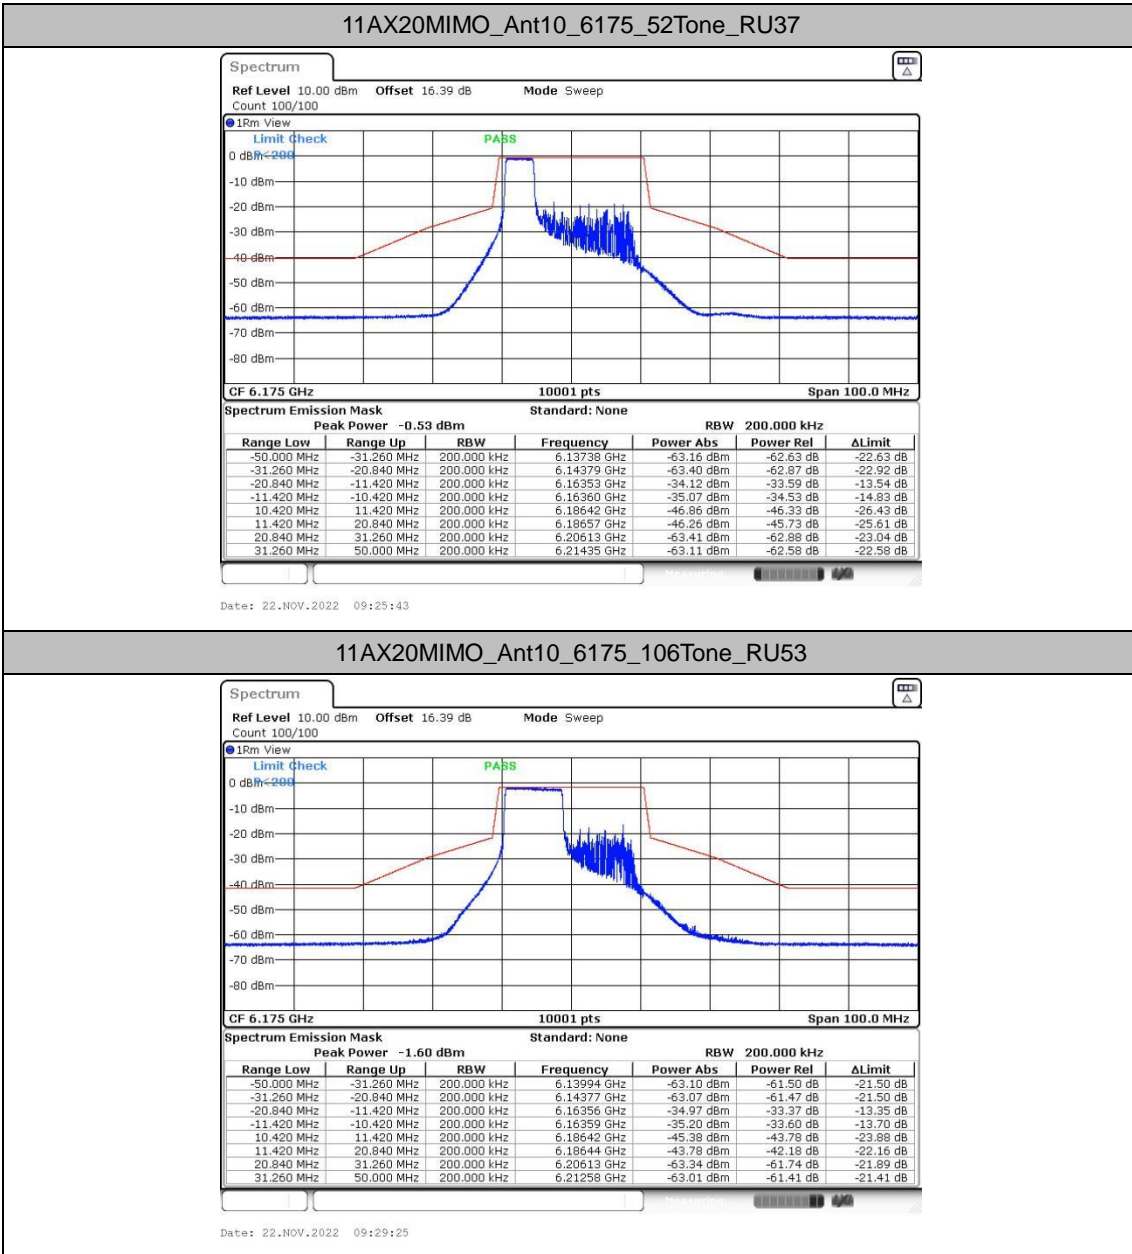

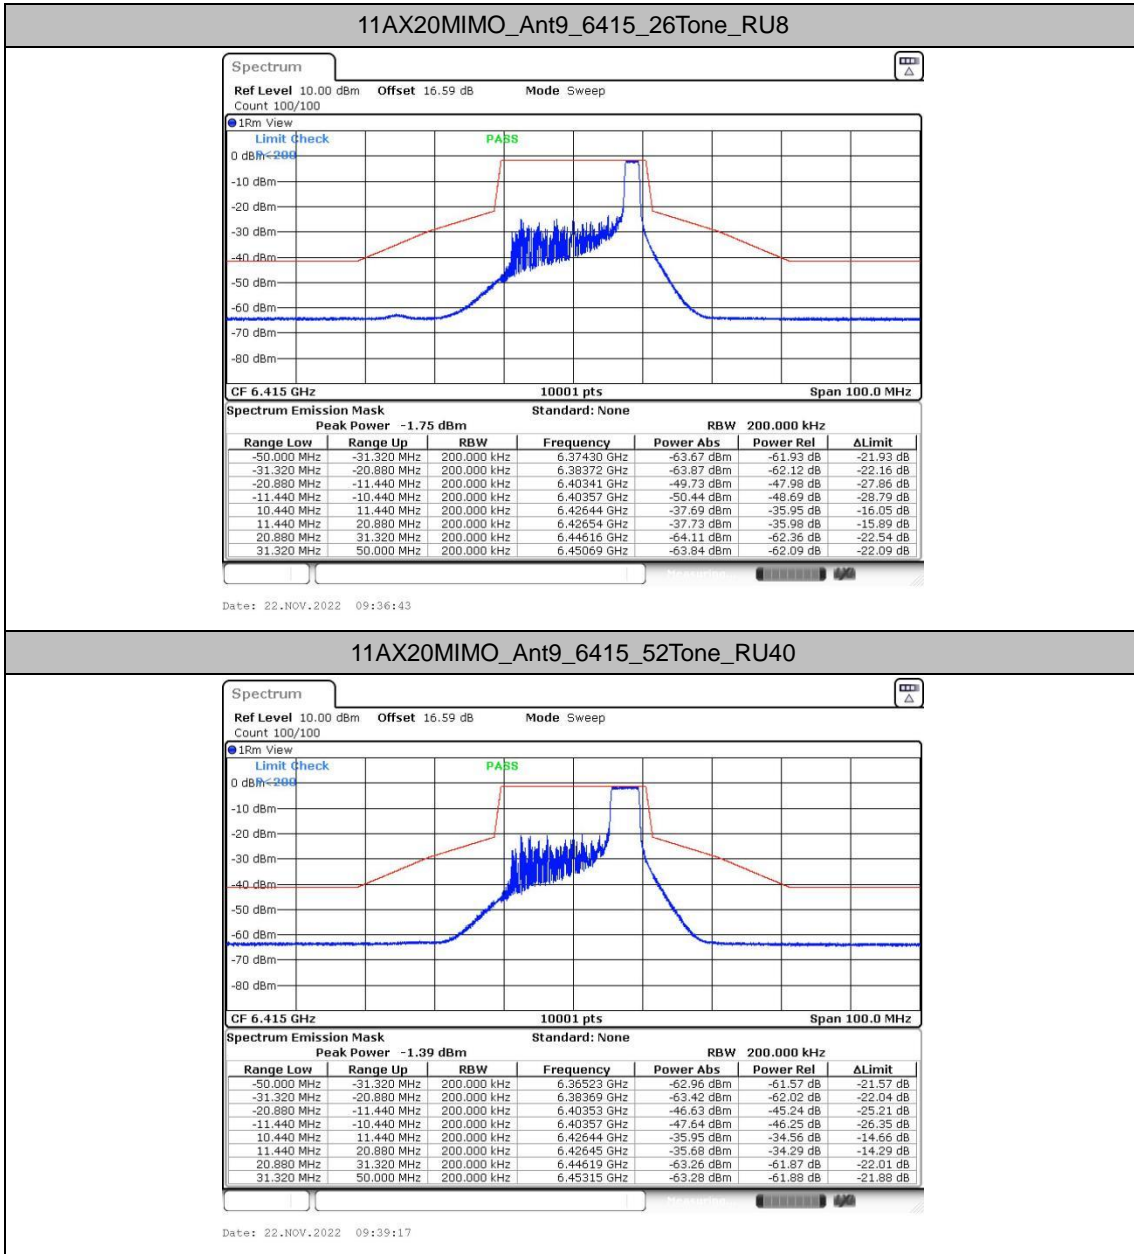




11AX20MIMO_Ant9_6415_106Tone_RU54

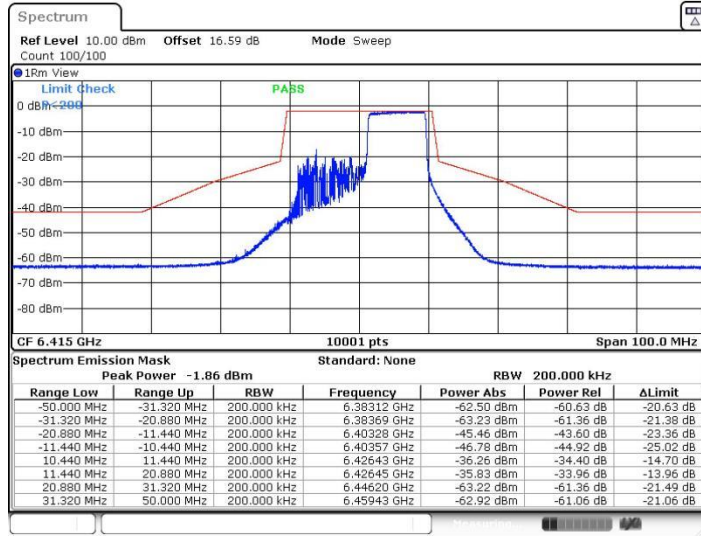


11AX20MIMO_Ant10_6415_26Tone_RU8

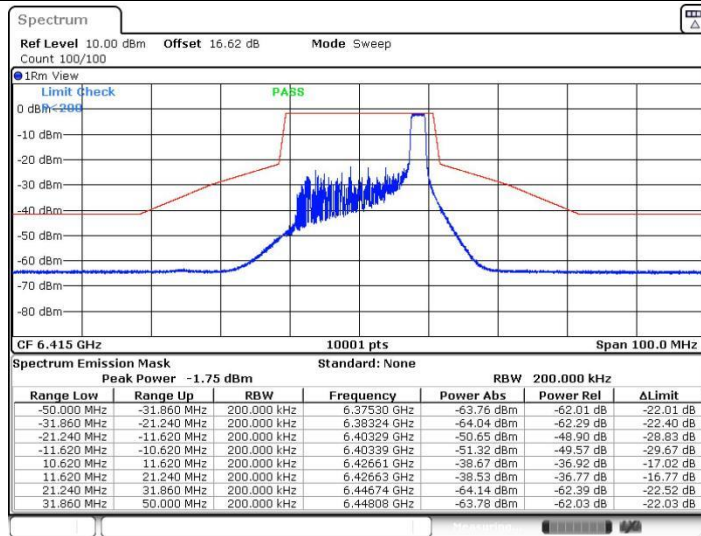




11AX20MIMO_Ant10_6415_52Tone_RU40

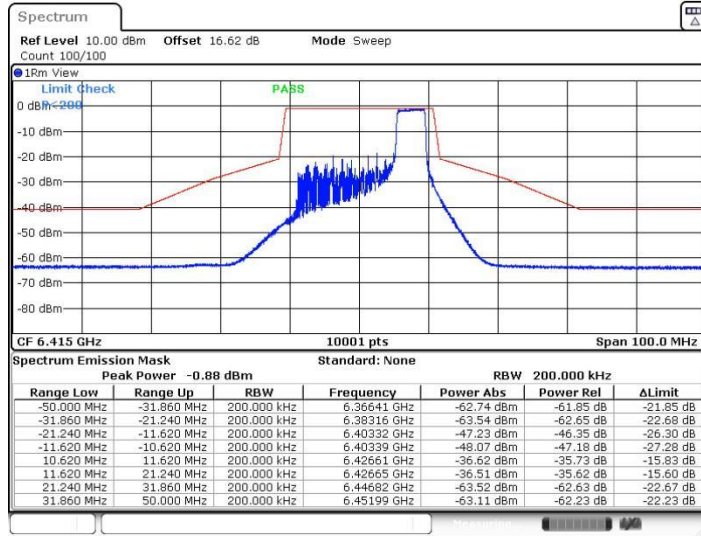


11AX20MIMO_Ant10_6415_106Tone_RU54

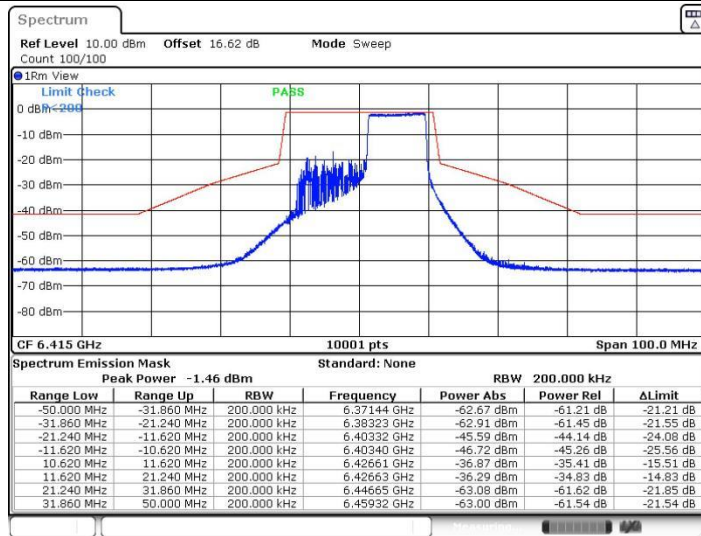




11AX20MIMO_Ant9_6535_26Tone_RU0

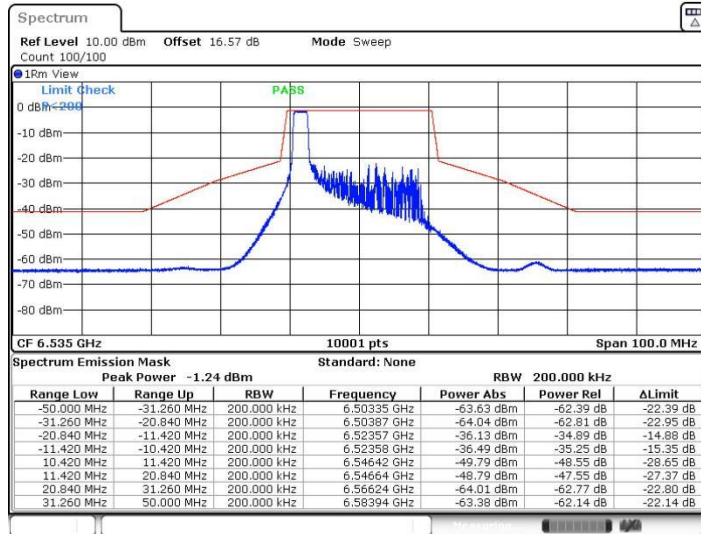

Date: 22.NOV.2022 09:49:57


11AX20MIMO_Ant9_6535_52Tone_RU37

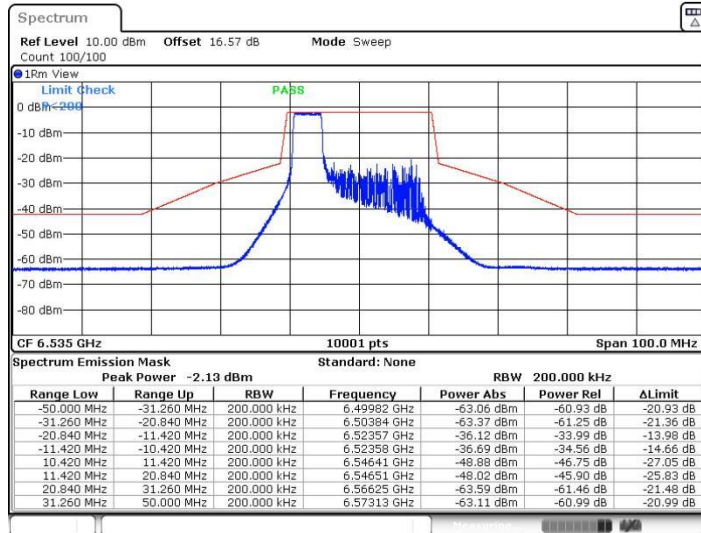


Date: 22.NOV.2022 09:53:18



11AX20MIMO_Ant9_6535_106Tone_RU53

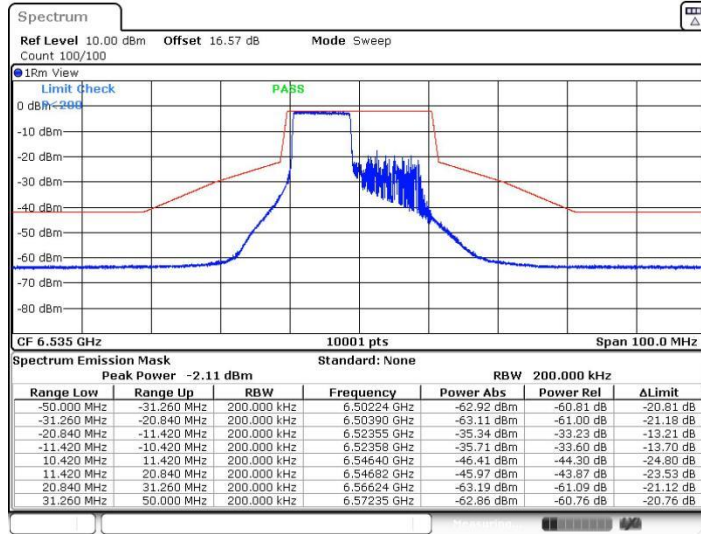


11AX20MIMO_Ant10_6535_26Tone_RU0

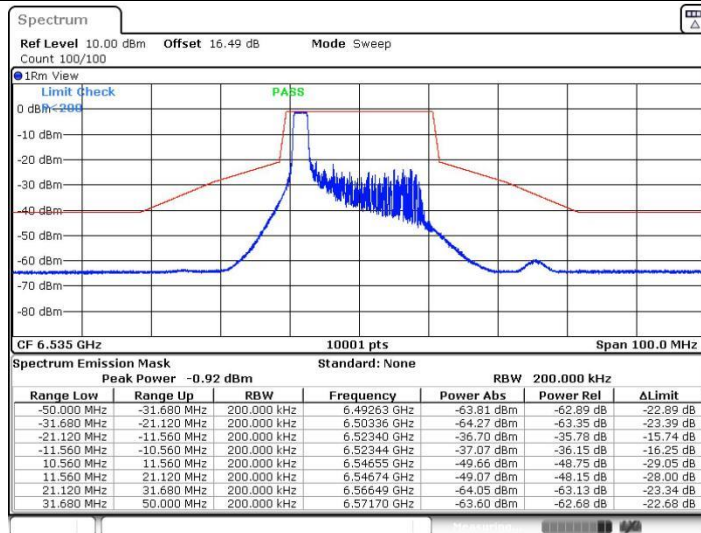






11AX20MIMO_Ant10_6535_52Tone_RU37

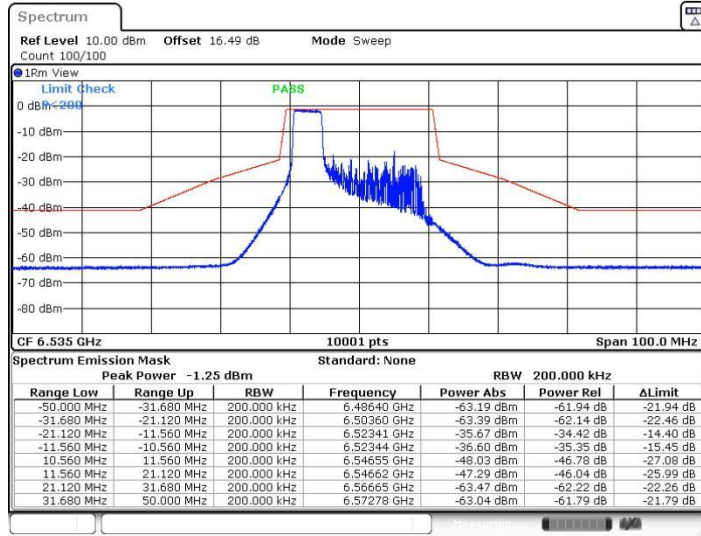

11AX20MIMO_Ant10_6535_106Tone_RU53

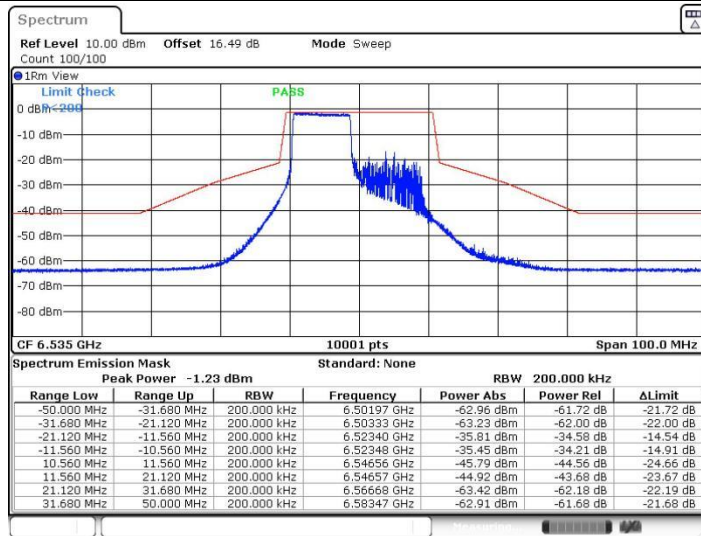


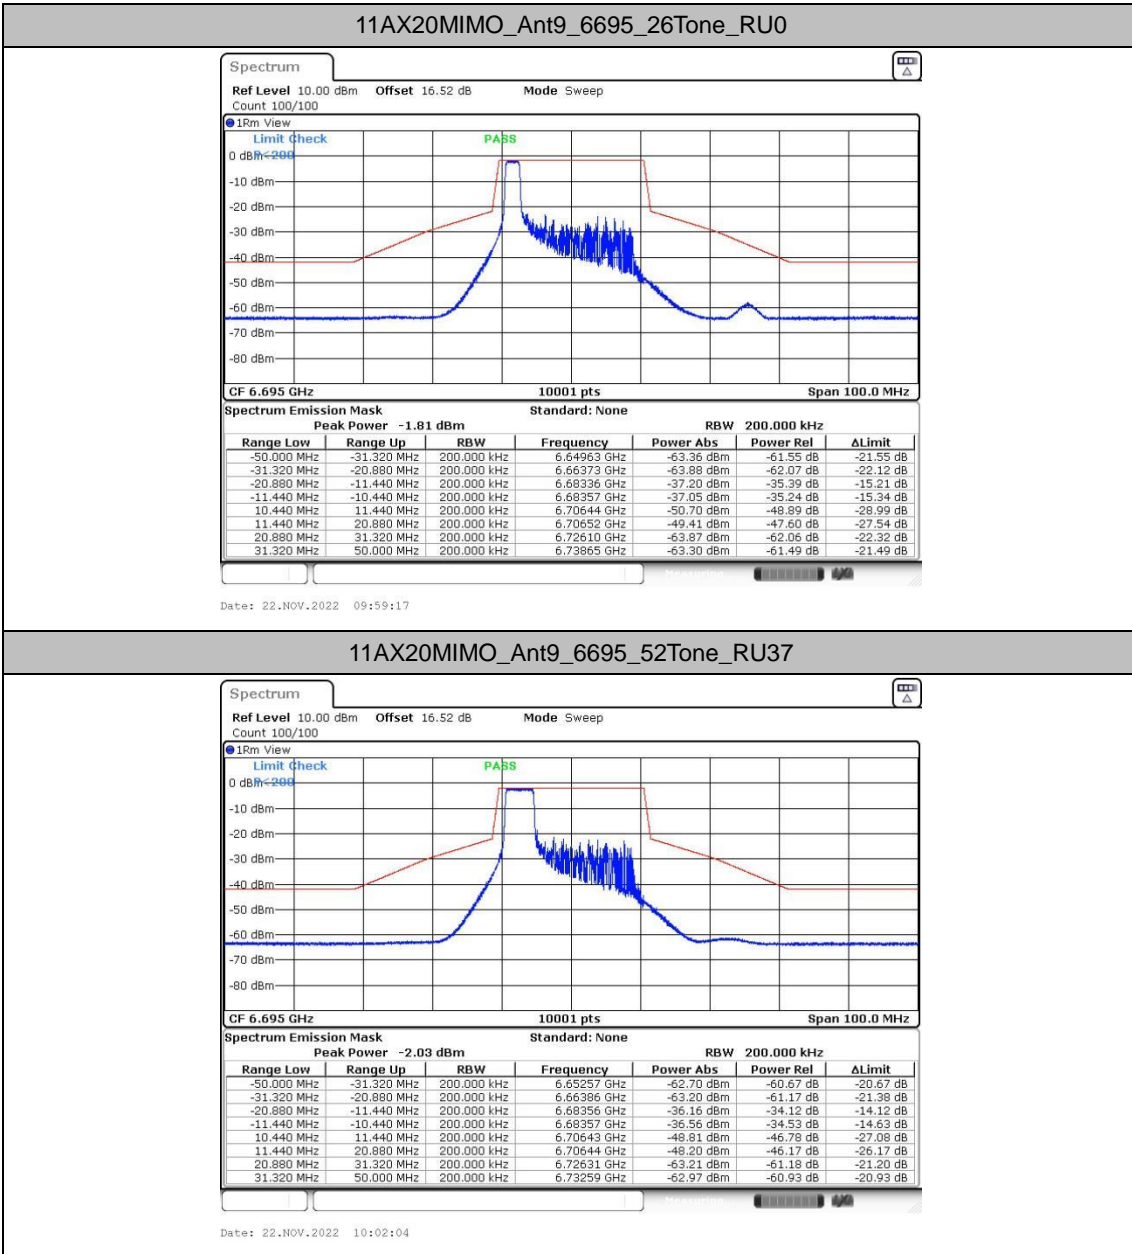

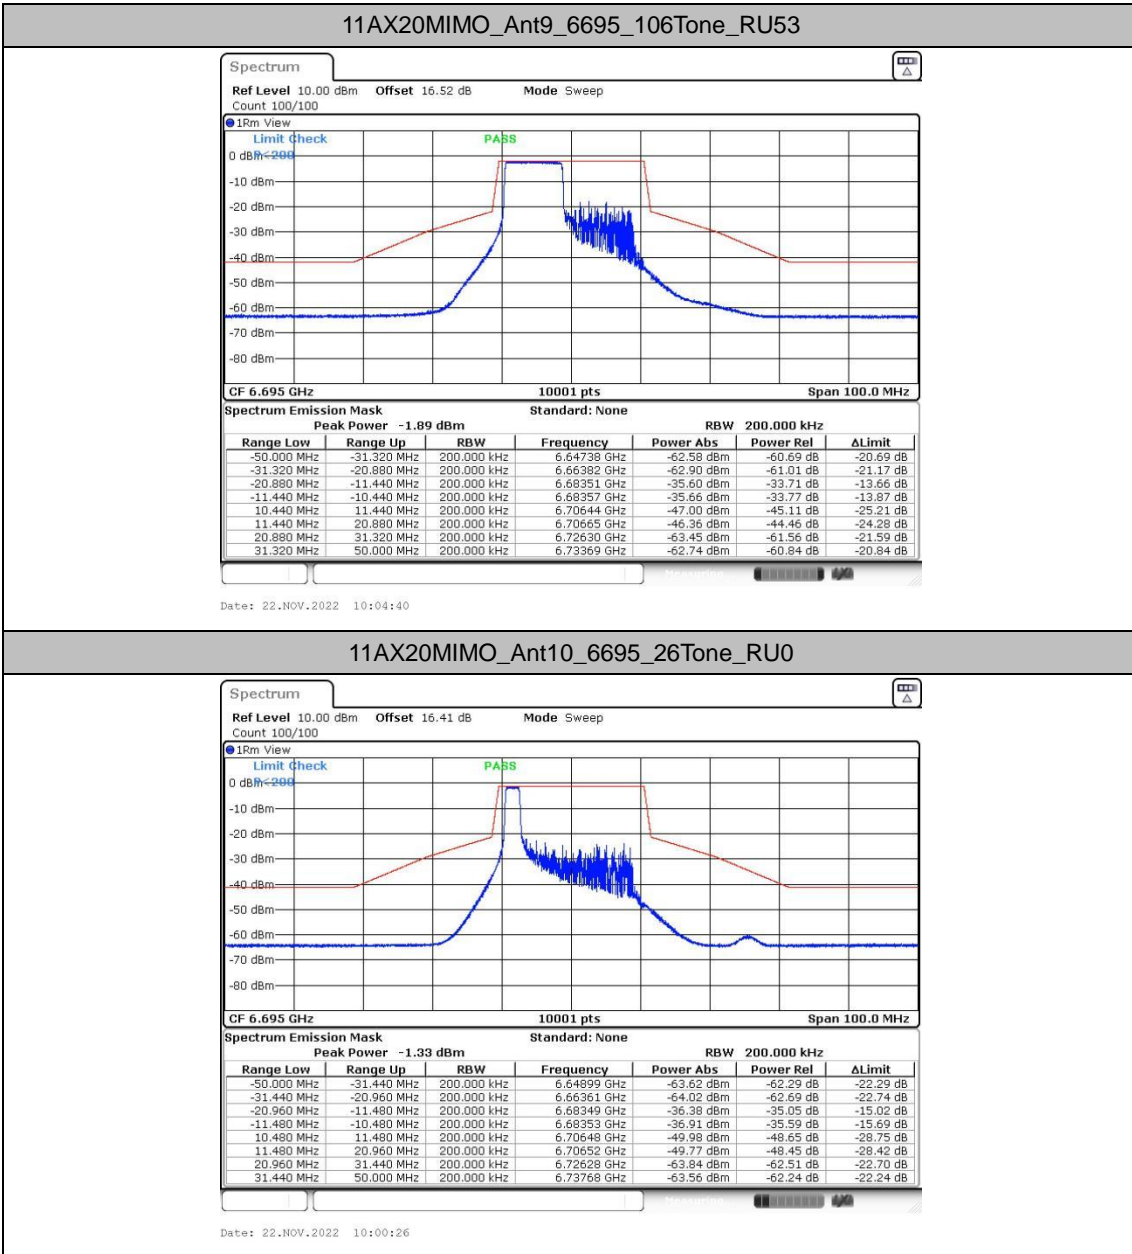







11AX20MIMO_Ant10_6695_52Tone_RU37

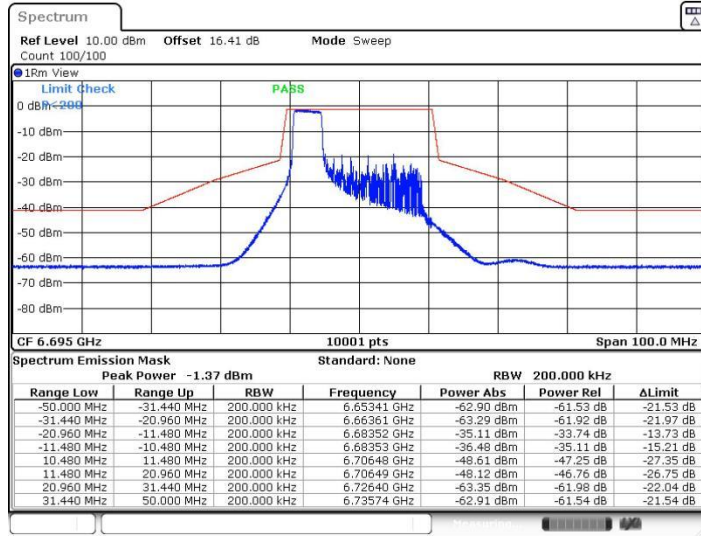

11AX20MIMO_Ant10_6695_106Tone_RU53

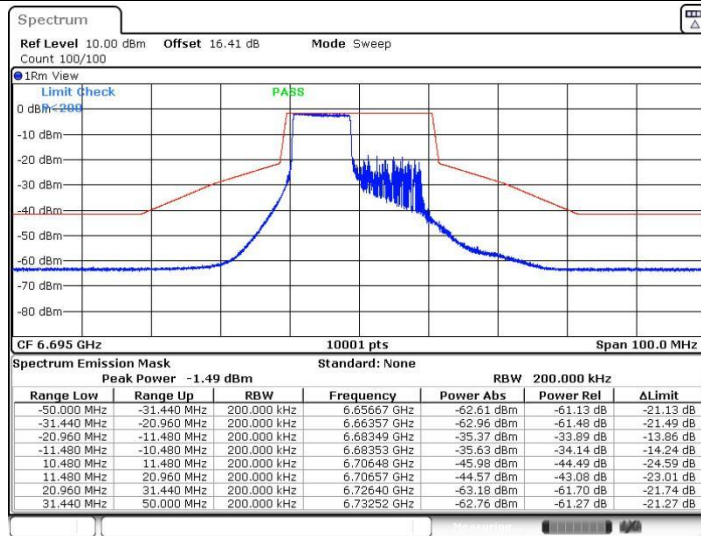


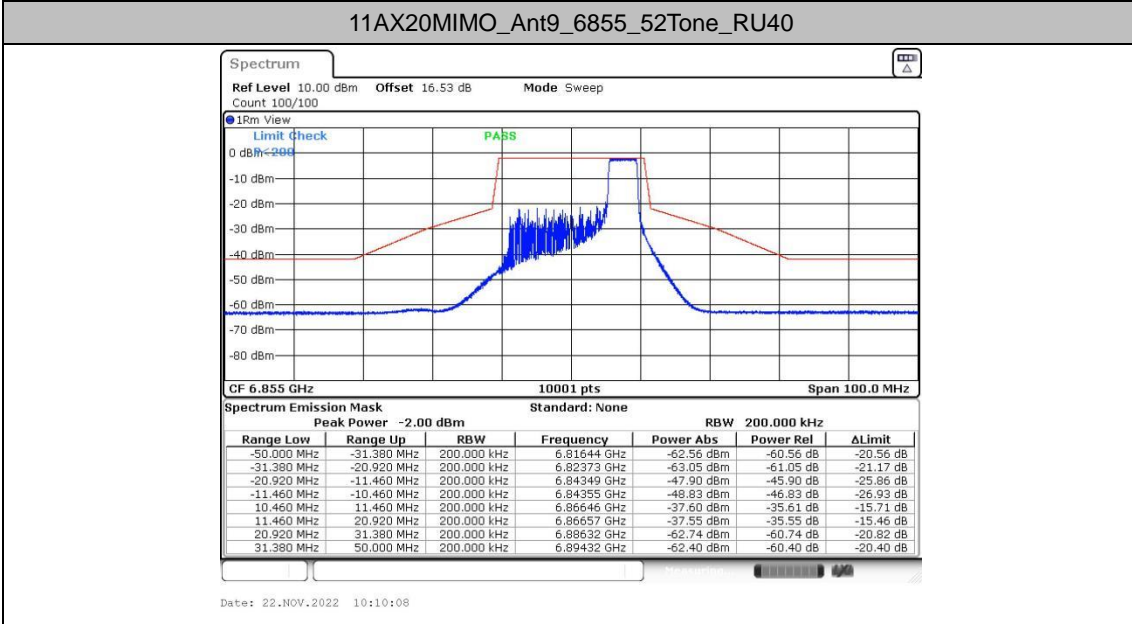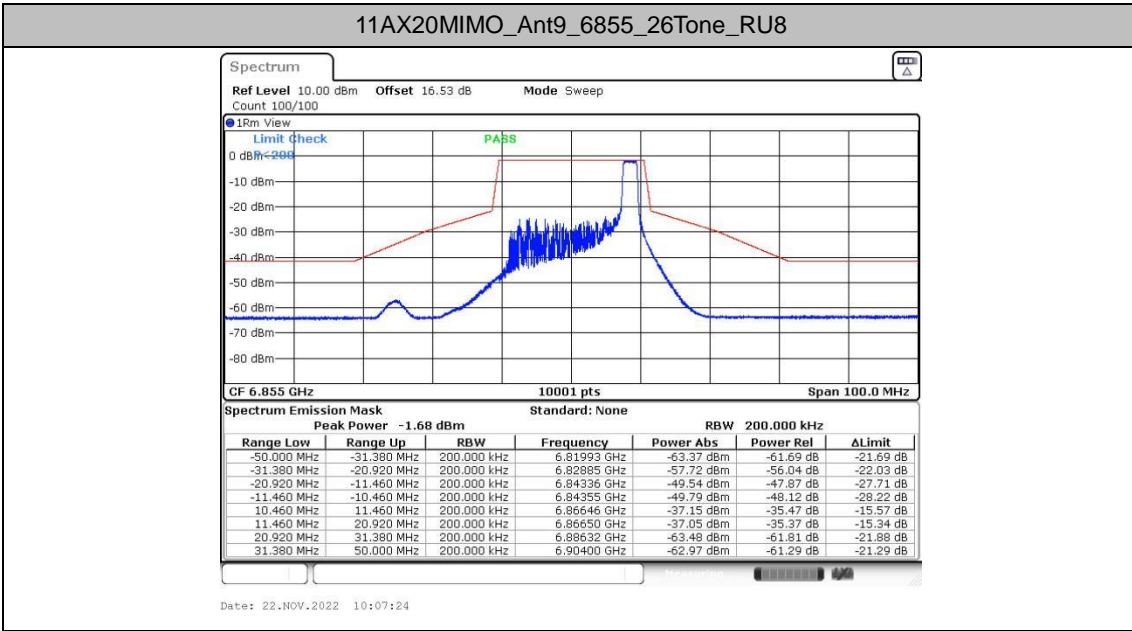

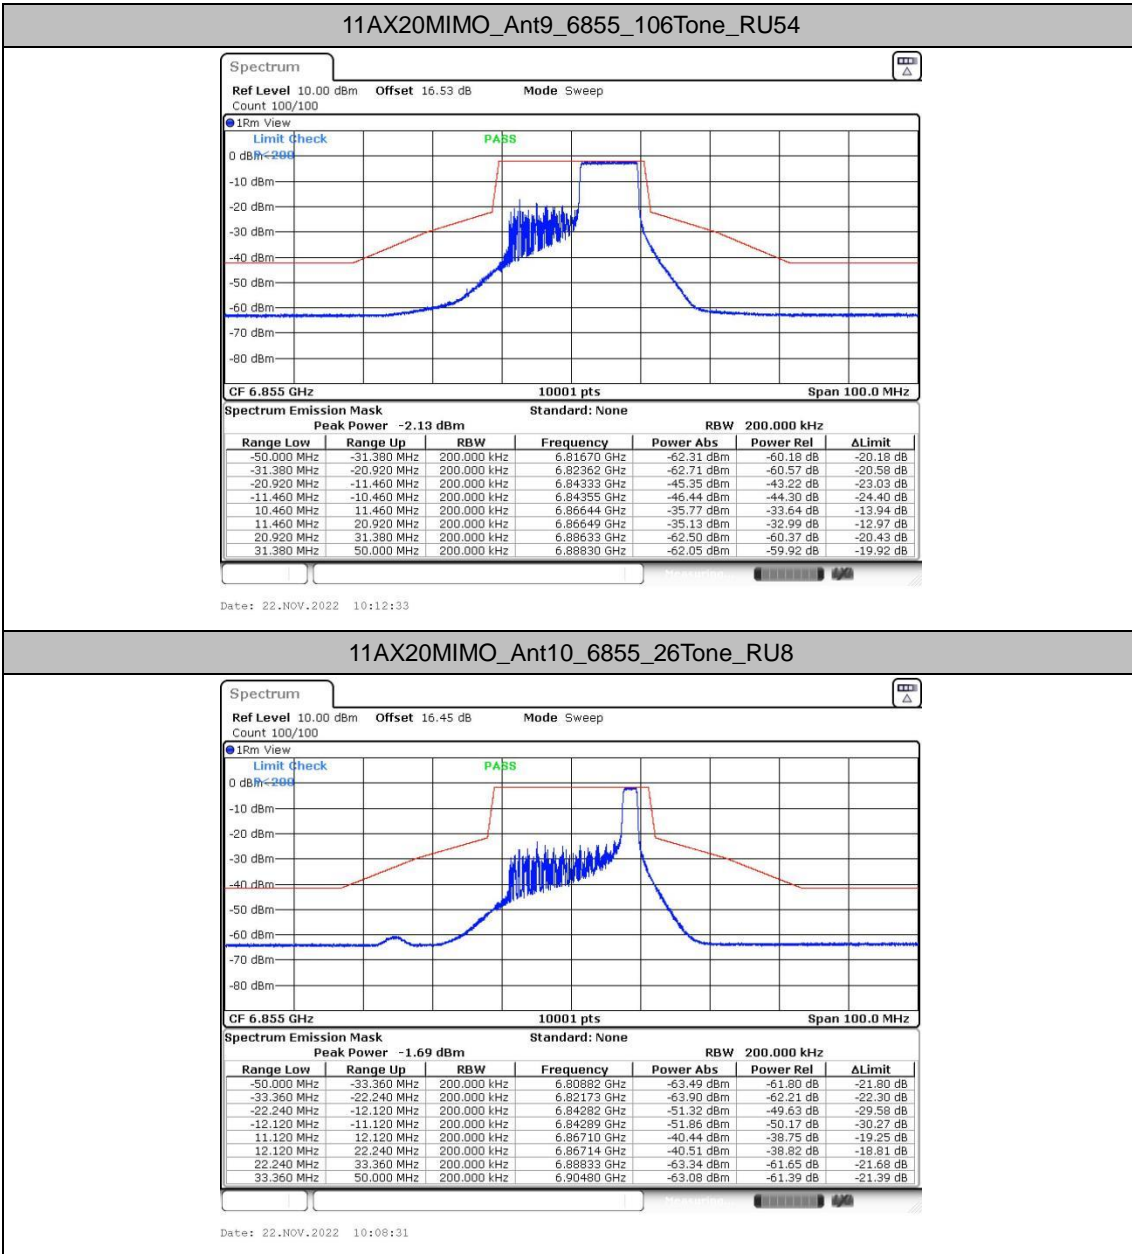




11AX20MIMO_Ant10_6855_52Tone_RU40

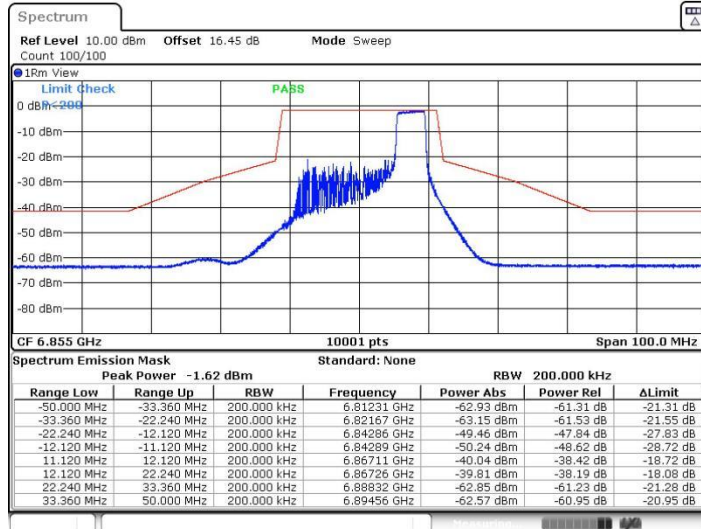

Date: 22.NOV.2022 10:11:15

11AX20MIMO_Ant10_6855_106Tone_RU54

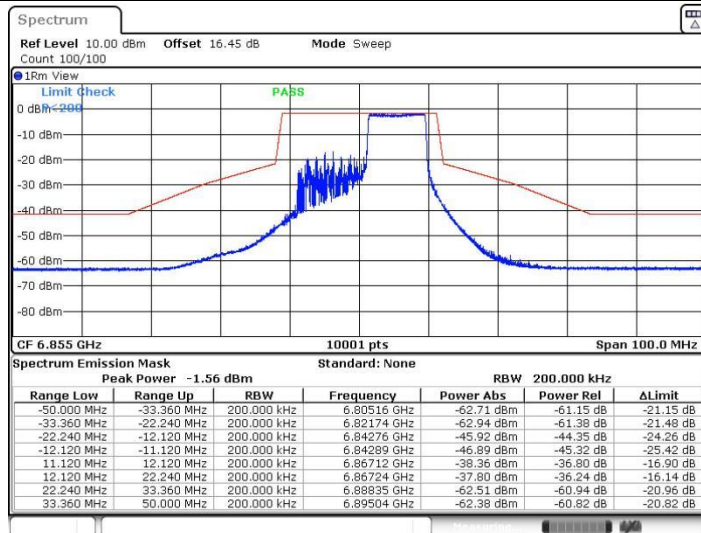


Date: 22.NOV.2022 10:13:37



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

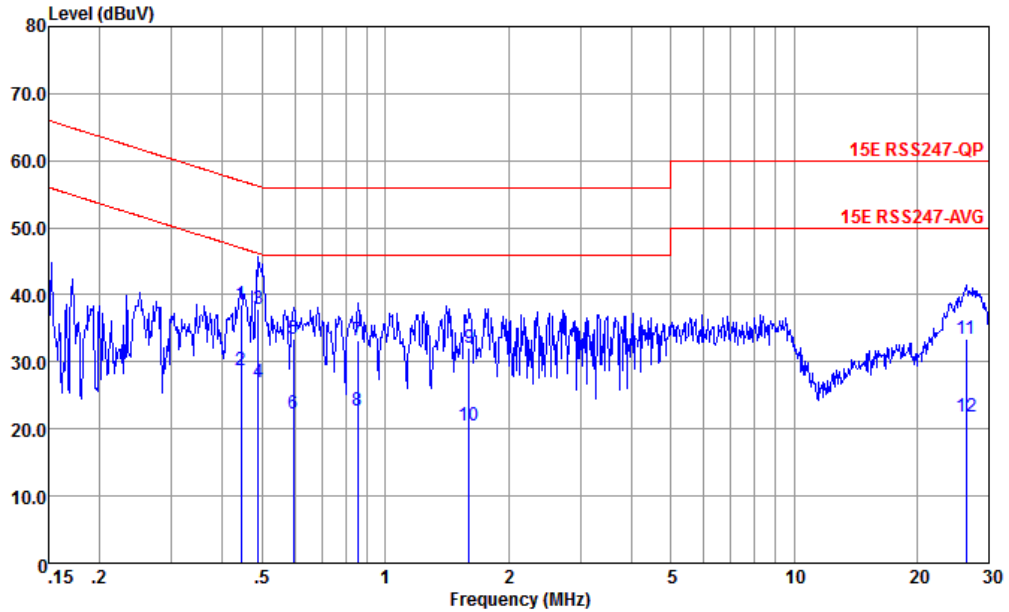


Site : CO01-KS
 Condition : 15E RSS247-QP LISN-060105-LINE LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.444	38.45	-18.53	56.98	28.20	-0.01	10.26	QP
2	0.444	28.85	-28.13	56.98	18.60	-0.01	10.26	Average
3 *	0.489	37.79	-18.40	56.19	27.60	-0.03	10.22	QP
4	0.489	26.99	-29.20	56.19	16.80	-0.03	10.22	Average
5	0.595	33.32	-22.68	56.00	23.20	-0.06	10.18	QP
6	0.595	22.32	-33.68	56.00	12.20	-0.06	10.18	Average
7	0.857	33.23	-22.77	56.00	23.20	-0.10	10.13	QP
8	0.857	22.63	-33.37	56.00	12.60	-0.10	10.13	Average
9	1.602	32.16	-23.84	56.00	22.19	-0.11	10.08	QP
10	1.602	20.56	-35.44	56.00	10.59	-0.11	10.08	Average
11	26.418	33.43	-26.57	60.00	22.21	-0.35	11.57	QP
12	26.418	21.83	-38.17	60.00	10.61	-0.35	11.57	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

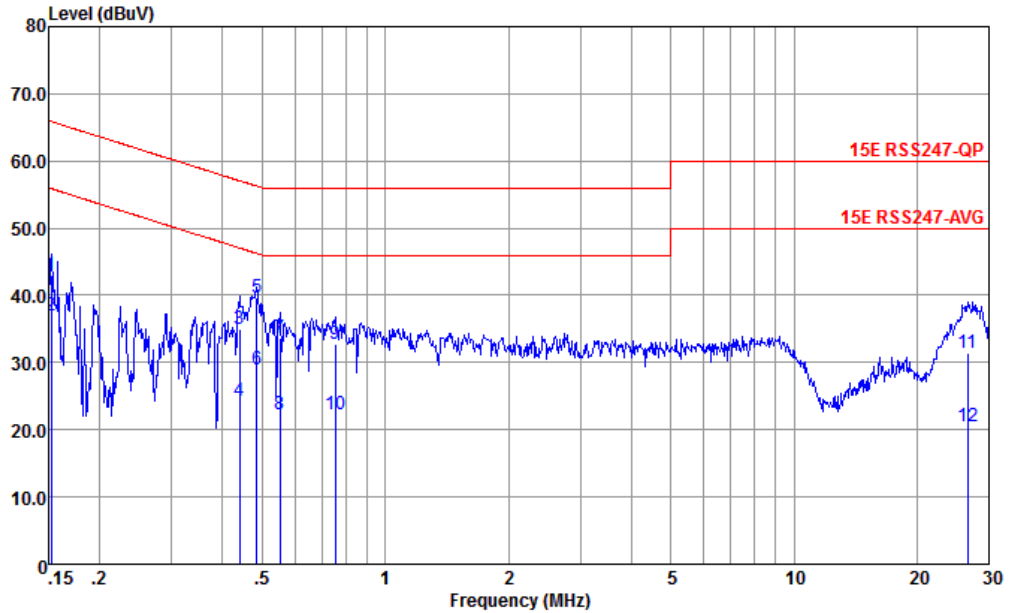

Site : CO01-KS
 Condition : 15E RSS247-QP LISN-060105-NEUTRAL NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.152	42.96	-22.91	65.87	32.50	0.03	10.43	QP
2	0.152	37.06	-28.81	65.87	26.60	0.03	10.43	Average
3	0.440	34.99	-22.08	57.07	24.80	-0.07	10.26	QP
4	0.440	24.39	-32.68	57.07	14.20	-0.07	10.26	Average
5 *	0.484	39.64	-16.63	56.27	29.50	-0.08	10.22	QP
6	0.484	29.04	-27.23	56.27	18.90	-0.08	10.22	Average
7	0.552	33.61	-22.39	56.00	23.49	-0.08	10.20	QP
8	0.552	22.31	-33.69	56.00	12.19	-0.08	10.20	Average
9	0.755	32.85	-23.15	56.00	22.79	-0.09	10.15	QP
10	0.755	22.25	-33.75	56.00	12.19	-0.09	10.15	Average
11	26.558	31.42	-28.58	60.00	20.20	-0.36	11.58	QP
12	26.558	20.42	-39.58	60.00	9.20	-0.36	11.58	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Test Engineer :	Carry Xu	Temperature :	22~23°C
		Relative Humidity :	41~42%

Note: All modes had been tested and only the worst channel test data of each bandwidth shown in the report

U-NII 5 - 5925-6425MHzMHz

WIFI 802.11ax HE20 Full (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
9+10		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ax HE20 Full CH 01 5955MHz		5924.96	64.55	-23.75	88.3	50.89	35.13	10.52	31.99	100	211	P	H
		5924.96	53.16	-15.14	68.3	39.5	35.13	10.52	31.99	100	211	A	H
		5950	109.33	-	-	95.61	35.2	10.53	32.01	100	211	P	H
		5959	100.7	-	-	86.89	35.27	10.55	32.01	100	211	A	H
		5922.58	61.03	-27.27	88.3	47.37	35.13	10.52	31.99	295	107	P	V
		5922.02	50	-18.3	68.3	36.34	35.13	10.52	31.99	295	107	A	V
		5950	108.96	-	-	95.24	35.2	10.53	32.01	295	107	P	V
	5950	101	-	-	87.28	35.2	10.53	32.01	295	107	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

U-NII 5 5925~6425MHz

WIFI 802.11ax HE20 Full (Harmonic @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
9+10		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ax HE20 Full CH 01 5955MHz		11912	46.74	-27.26	74	53.6	38.71	15.21	60.78	300	0	P	H
		11912	49.06	-24.94	74	55.92	38.71	15.21	60.78	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 5 5925~6425MHz
WIFI 802.11ax HE20 Partial 26 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 9+10, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Includes a Remark section at the bottom.



U-NII 5 5925~6425MHz
WIFI 802.11ax HE20 Partial 52 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 9+10, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for 802.11ax HE20 Partial 52/37 CH 01 5955MHz and a Remark section.



U-NII 5 5925~6425MHz
WIFI 802.11ax HE20 Partial 106 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 9+10, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for 802.11ax HE20 Partial 106/53 CH 01 5955MHz and a Remark section.



U-NII 5 5925~6425MHz
WIFI 802.11ax HE40 Full (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 9+10, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Includes a Remark section with two points.

U-NII 5 5925~6425MHz
WIFI 802.11ax HE40 Full (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 9+10, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Includes a Remark section with two points.



U-NII 5 5925~6425MHz
WIFI 802.11ax HE80 Full (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 9+10, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include frequencies 5895.56, 5919.08, 5968, 5977, 5918.28, 5917.8, 5995, 5968.

U-NII 5 5925~6425MHz
WIFI 802.11ax HE80 Full (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 9+10, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include frequencies 11968, 11968.



U-NII 5 5925~6425MHz

WIFI 802.11ax HE160 Full (Band Edge @ 3m)

WIFI Ant. 9+10	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE160 Full CH 15 6025MHz		5902.12	62.35	-25.95	88.3	48.83	35	10.49	31.97	103	193	P	H
		5901.16	53.72	-14.58	68.3	40.2	35	10.49	31.97	103	193	A	H
	*	6067	98.69	-	-	84.63	35.53	10.64	32.11	103	193	P	H
		5995	91	-	-	77.07	35.4	10.58	32.05	103	193	A	H
		5891.88	61.28	-27.02	88.3	47.76	35	10.49	31.97	100	46	P	V
		5896.04	53.14	-15.16	68.3	39.62	35	10.49	31.97	100	46	A	V
	*	6013	98.5	-	-	84.55	35.43	10.59	32.07	100	46	P	V
	6013	90.42	-	-	76.47	35.43	10.59	32.07	100	46	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

U-NII 5 5925~6425MHz

WIFI 802.11ax HE160 Full (Harmonic @ 3m)

WIFI Ant. 9+10	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE160 Full CH 15 6025MHz		12048	44.63	-29.37	74	51.88	38.82	15.31	61.38	300	0	P	H
		12048	45.19	-28.81	74	52.44	38.82	15.31	61.38	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

WIFI 802.11ax HE40 Full (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
9+10		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ax HE40 Full LF		50.37	35.17	-4.83	40	52.77	14.59	0.72	32.91	100	0	P	H
		89.17	28.04	-15.46	43.5	44.88	14.8	1.21	32.85	-	-	P	H
		170.65	25.17	-18.33	43.5	40.59	15.66	1.75	32.83	-	-	P	H
		334.58	21.8	-24.2	46	32.22	20	2.47	32.89	-	-	P	H
		599.39	26.66	-19.34	46	30.44	25.99	3.31	33.08	-	-	P	H
		702.21	28.91	-17.09	46	31.49	26.91	3.58	33.07	-	-	P	H
		50.37	34.23	-5.77	40	51.83	14.59	0.72	32.91	-	-	P	V
		131.85	24.26	-19.24	43.5	37.8	17.77	1.53	32.84	-	-	P	V
		171.62	26.71	-16.79	43.5	42.2	15.58	1.76	32.83	-	-	P	V
		327.79	21.75	-24.25	46	32.39	19.79	2.44	32.87	-	-	P	V
		637.22	27.25	-18.75	46	30.14	26.67	3.42	32.98	-	-	P	V
		828.31	34.44	-11.56	46	34.11	28.99	3.88	32.54	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Co-location:

WIFI 6E 802.11ax HE40 CH3 MIMO Tx + BLE (2Mbps) CH00 Tx

2.4GHz 2400~2483.5MHz

BLE(2M) (Band Edge @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		2384.88	53.23	-20.77	74	47.3	32.23	6.58	32.88	166	126	P	H
		2348.22	44.56	-9.44	54	38.85	32.1	6.53	32.92	166	126	A	H
	*	2402	103.29	-	-	97.22	32.3	6.61	32.84	166	126	P	H
	*	2402	101.21	-	-	95.14	32.3	6.61	32.84	166	126	A	H
		2389.17	53.57	-20.43	74	47.54	32.3	6.61	32.88	400	71	P	V
		2358.49	44.79	-9.21	54	38.98	32.17	6.56	32.92	400	71	A	V
	*	2402	99.17	-	-	93.1	32.3	6.61	32.84	400	71	P	V
	*	2402	97.24	-	-	91.17	32.3	6.61	32.84	400	71	A	V

Remark

1. No other spurious found.
2. All results are PASS against Peak and Average limit line.

2.4GHz 2400~2483.5MHz

BLE(2M) (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4800	45.88	-28.12	74	63.36	34.3	9.45	61.23	300	0	P	H
		4800	45.3	-28.7	74	62.78	34.3	9.45	61.23	100	0	P	V

Remark

1. No other spurious found.
2. All results are PASS against Peak and Average limit line.



U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE40 Full (Band Edge @ 3m)

Table with 14 columns: WIFI Ant., Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Includes a Remark section with two points.

U-NII 5 5925~6425MHz
WIFI 802.11ax HE40 Full (Harmonic @ 3m)

Table with 14 columns: WIFI Ant., Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Includes a Remark section with two points.



WIFI 6E 802.11ax HE40 CH3 MIMO Tx + WLAN 2.4G 802.11g CH11 MIMO Tx
2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 9+10, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Includes a Remark section with two points.

2.4GHz 2400~2483.5MHz
WIFI 802.11g (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 9+10, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Includes a Remark section with two points.



U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE40 Full (Band Edge @ 3m)

Table with 14 columns: WIFI Ant., Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Includes data for frequencies 5918.66, 5924.96, 5977, 5968, 5924.26, 5924.96, 5959, 5959 and a Remark section.

U-NII 5 5925~6425MHz
WIFI 802.11ax HE40 Full (Harmonic @ 3m)

Table with 14 columns: WIFI Ant., Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Includes data for frequencies 11928 and 11928 and a Remark section.



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
9+10		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission

Note symbol

-L	Low channel location
-R	High channel location






U-NII 5 - 5925-6425MHzMHz

WIFI 802.11ax HE20 Full (Band Edge @ 3m)

WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																													
ANT	802.11ax HE20 Full CH01 5955MHz																																																													
9+10	Horizontal	Fundamental																																																												
Peak	<p>Site: 030006-KS Condition: WIFI 6E PEAK 3m 3117 SN 00218602- HORIZONTAL Project: RFR 1000 0000KHz VPM 0.2400KHz SRT Auto Mode: T Plane: X Full-directivity: X IMEI: #75 Powersetting: 18</p> <table border="1"> <thead> <tr> <th>Line</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.96</td> <td>64.55</td> <td>88.30</td> <td>-23.75</td> <td>50.89</td> <td>35.13</td> <td>10.52</td> <td>31.99</td> <td>100</td> <td>211 Peak</td> <td>HORIZONT</td> </tr> </tbody> </table>	Line	Limit	Over	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV	dB/m	dB	cm	deg		1	5924.96	64.55	88.30	-23.75	50.89	35.13	10.52	31.99	100	211 Peak	HORIZONT	<p>Site: 030006-KS Condition: WIFI 6E PEAK 3m 3117 SN 00218602- HORIZONTAL Project: RFR 1000 0000KHz VPM 0.2400KHz SRT Auto Mode: T Plane: X Full-directivity: X IMEI: #75 Powersetting: 18</p> <table border="1"> <thead> <tr> <th>Line</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5950.00</td> <td>109.33</td> <td>88.30</td> <td>21.03</td> <td>95.61</td> <td>35.20</td> <td>10.53</td> <td>32.01</td> <td>100</td> <td>211 Peak</td> <td>HORIZONT</td> </tr> </tbody> </table>	Line	Limit	Over	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV	dB/m	dB	cm	deg		1	5950.00	109.33	88.30	21.03	95.61	35.20	10.53	32.01	100	211 Peak	HORIZONT
	Line	Limit	Over	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																					
MHz	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																							
1	5924.96	64.55	88.30	-23.75	50.89	35.13	10.52	31.99	100	211 Peak	HORIZONT																																																			
Line	Limit	Over	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																						
MHz	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																							
1	5950.00	109.33	88.30	21.03	95.61	35.20	10.53	32.01	100	211 Peak	HORIZONT																																																			
Avg.	<p>Site: 030006-KS Condition: WIFI 6E (AVG) 3m 3117 SN 00218602- HORIZONTAL Project: RFR 1000 0000KHz VPM 0.2400KHz SRT Auto Mode: T Plane: X Full-directivity: X IMEI: #75 Powersetting: 18</p> <table border="1"> <thead> <tr> <th>Line</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.96</td> <td>53.16</td> <td>68.30</td> <td>-15.14</td> <td>39.50</td> <td>35.13</td> <td>10.52</td> <td>31.99</td> <td>100</td> <td>211 Average</td> <td>HORIZONT</td> </tr> </tbody> </table>	Line	Limit	Over	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV	dB/m	dB	cm	deg		1	5924.96	53.16	68.30	-15.14	39.50	35.13	10.52	31.99	100	211 Average	HORIZONT	<p>Site: 030006-KS Condition: WIFI 6E (AVG) 3m 3117 SN 00218602- HORIZONTAL Project: RFR 1000 0000KHz VPM 0.2400KHz SRT Auto Mode: T Plane: X Full-directivity: X IMEI: #75 Powersetting: 18</p> <table border="1"> <thead> <tr> <th>Line</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5959.00</td> <td>100.70</td> <td>68.30</td> <td>32.40</td> <td>86.89</td> <td>35.27</td> <td>10.55</td> <td>32.01</td> <td>100</td> <td>211 Average</td> <td>HORIZONT</td> </tr> </tbody> </table>	Line	Limit	Over	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV	dB/m	dB	cm	deg		1	5959.00	100.70	68.30	32.40	86.89	35.27	10.55	32.01	100	211 Average	HORIZONT
	Line	Limit	Over	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																					
MHz	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																							
1	5924.96	53.16	68.30	-15.14	39.50	35.13	10.52	31.99	100	211 Average	HORIZONT																																																			
Line	Limit	Over	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																						
MHz	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																							
1	5959.00	100.70	68.30	32.40	86.89	35.27	10.55	32.01	100	211 Average	HORIZONT																																																			

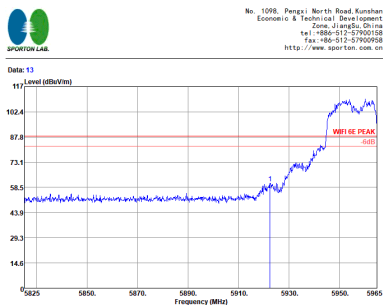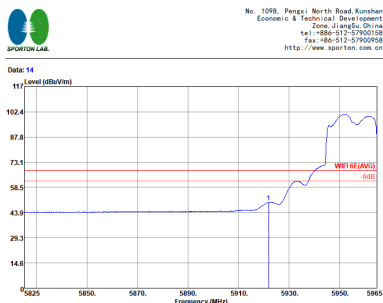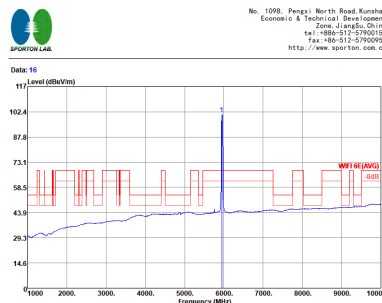





WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																									
ANT	802.11ax HE20 Full CH01 5955MHz																																																																									
9+10	Vertical	Fundamental																																																																								
<p>Peak</p>	 <p>No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030806-KS Condition : WIFI 6E PEAK 3m 3117 SN 00218652- VERTICAL Project : RSM 1000, 000KHz VEM 3000, 000KHz SRT Auto Project : (FR) 272913 Mode : I Plane : X Full-directivity : #75 IMEI : Powersetting : 18</p> <table border="1"> <thead> <tr> <th>IMEI</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5922.58</td> <td>61.03</td> <td>88.30</td> <td>-27.27</td> <td>47.37</td> <td>35.13</td> <td>10.52</td> <td>31.99</td> <td>295</td> <td>107 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	IMEI	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg			1	5922.58	61.03	88.30	-27.27	47.37	35.13	10.52	31.99	295	107 Peak	VERTICAL	 <p>No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030806-KS Condition : WIFI 6E PEAK 3m 3117 SN 00218652- VERTICAL Project : RSM 1000, 000KHz VEM 3000, 000KHz SRT Auto Project : (FR) 272913 Mode : I Plane : X Full-directivity : #75 IMEI : Powersetting : 18</p> <table border="1"> <thead> <tr> <th>IMEI</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>5950.00</td> <td>108.96</td> <td>88.30</td> <td>20.66</td> <td>95.24</td> <td>35.20</td> <td>10.53</td> <td>32.01</td> <td>295</td> <td>107 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	IMEI	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg			1 *	5950.00	108.96	88.30	20.66	95.24	35.20	10.53	32.01	295	107 Peak	VERTICAL
IMEI	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																	
1	5922.58	61.03	88.30	-27.27	47.37	35.13	10.52	31.99	295	107 Peak	VERTICAL																																																															
IMEI	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																	
1 *	5950.00	108.96	88.30	20.66	95.24	35.20	10.53	32.01	295	107 Peak	VERTICAL																																																															
<p>Avg.</p>	 <p>No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030806-KS Condition : WIFI 6E (AVG) 3m 3117 SN 00218652- VERTICAL Project : RSM 1000, 000KHz VEM 3000, 000KHz SRT Auto Project : (FR) 272913 Mode : I Plane : X Full-directivity : #75 IMEI : Powersetting : 18</p> <table border="1"> <thead> <tr> <th>IMEI</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5922.02</td> <td>50.00</td> <td>68.30</td> <td>-18.30</td> <td>36.34</td> <td>35.13</td> <td>10.52</td> <td>31.99</td> <td>295</td> <td>107 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	IMEI	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg			1	5922.02	50.00	68.30	-18.30	36.34	35.13	10.52	31.99	295	107 Average	VERTICAL	 <p>No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030806-KS Condition : WIFI 6E (AVG) 3m 3117 SN 00218652- VERTICAL Project : RSM 1000, 000KHz VEM 3000, 000KHz SRT Auto Project : (FR) 272913 Mode : I Plane : X Full-directivity : #75 IMEI : Powersetting : 18</p> <table border="1"> <thead> <tr> <th>IMEI</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>5950.00</td> <td>101.00</td> <td>68.30</td> <td>32.70</td> <td>87.28</td> <td>35.20</td> <td>10.53</td> <td>32.01</td> <td>295</td> <td>107 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	IMEI	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg			1 *	5950.00	101.00	68.30	32.70	87.28	35.20	10.53	32.01	295	107 Average	VERTICAL
IMEI	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																	
1	5922.02	50.00	68.30	-18.30	36.34	35.13	10.52	31.99	295	107 Average	VERTICAL																																																															
IMEI	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																	
1 *	5950.00	101.00	68.30	32.70	87.28	35.20	10.53	32.01	295	107 Average	VERTICAL																																																															



U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE20 Partial 26 (Band Edge @ 3m)

WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																													
ANT	802.11ax HE20 Partial 26/0 CH01 5955MHz																																																													
9+10	Horizontal	Fundamental																																																												
Peak	<p>Site : 030906-KS Condition : WIFI 6E PEAK 3m 3117 SN 00218652- HORIZONTAL Project : RSM 1000 0000Hz VBM 3000 0000Hz SRT Auto Mode : I Plane : X IRE1 : Full-directivity Powersetting : #75</p> <table border="1"> <thead> <tr> <th>IRE1</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>ca</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5923.98</td> <td>65.49</td> <td>88.30</td> <td>-22.81</td> <td>51.83</td> <td>35.13</td> <td>10.52</td> <td>31.99</td> <td>100</td> <td>174 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	IRE1	Limit	Over	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	ca	deg	1	5923.98	65.49	88.30	-22.81	51.83	35.13	10.52	31.99	100	174 Peak	HORIZONTAL	<p>Site : 030906-KS Condition : WIFI 6E PEAK 3m 3117 SN 00218652- HORIZONTAL Project : RSM 1000 0000Hz VBM 3000 0000Hz SRT Auto Mode : I Plane : X IRE1 : Full-directivity Powersetting : #76</p> <table border="1"> <thead> <tr> <th>IRE1</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>ca</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5950.00</td> <td>119.18</td> <td>88.30</td> <td>30.88</td> <td>105.46</td> <td>35.20</td> <td>10.53</td> <td>32.01</td> <td>100</td> <td>174 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	IRE1	Limit	Over	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	ca	deg	1	5950.00	119.18	88.30	30.88	105.46	35.20	10.53	32.01	100	174 Peak	HORIZONTAL
IRE1	Limit	Over	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	ca	deg																																																						
1	5923.98	65.49	88.30	-22.81	51.83	35.13	10.52	31.99	100	174 Peak	HORIZONTAL																																																			
IRE1	Limit	Over	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	ca	deg																																																						
1	5950.00	119.18	88.30	30.88	105.46	35.20	10.53	32.01	100	174 Peak	HORIZONTAL																																																			
Avg.	<p>Site : 030906-KS Condition : WIFI 6E (AVG) 3m 3117 SN 00218652- HORIZONTAL Project : RSM 1000 0000Hz VBM 0.2400Hz SRT Auto Mode : I Plane : X IRE1 : Full-directivity Powersetting : #75</p> <table border="1"> <thead> <tr> <th>IRE1</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>ca</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.68</td> <td>46.74</td> <td>68.30</td> <td>-21.56</td> <td>33.68</td> <td>35.13</td> <td>10.52</td> <td>31.99</td> <td>100</td> <td>174 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	IRE1	Limit	Over	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	ca	deg	1	5924.68	46.74	68.30	-21.56	33.68	35.13	10.52	31.99	100	174 Average	HORIZONTAL	<p>Site : 030906-KS Condition : WIFI 6E (AVG) 3m 3117 SN 00218652- HORIZONTAL Project : RSM 1000 0000Hz VBM 0.2400Hz SRT Auto Mode : I Plane : X IRE1 : Full-directivity Powersetting : #76</p> <table border="1"> <thead> <tr> <th>IRE1</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>ca</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5950.00</td> <td>111.66</td> <td>68.30</td> <td>43.36</td> <td>97.94</td> <td>35.20</td> <td>10.53</td> <td>32.01</td> <td>100</td> <td>174 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	IRE1	Limit	Over	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	ca	deg	1	5950.00	111.66	68.30	43.36	97.94	35.20	10.53	32.01	100	174 Average	HORIZONTAL
IRE1	Limit	Over	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	ca	deg																																																						
1	5924.68	46.74	68.30	-21.56	33.68	35.13	10.52	31.99	100	174 Average	HORIZONTAL																																																			
IRE1	Limit	Over	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	ca	deg																																																						
1	5950.00	111.66	68.30	43.36	97.94	35.20	10.53	32.01	100	174 Average	HORIZONTAL																																																			

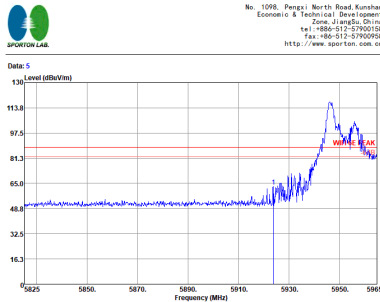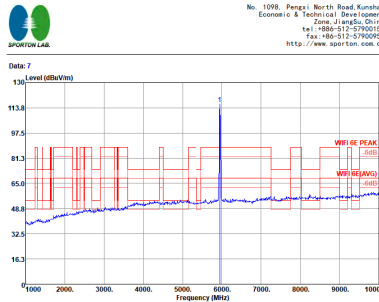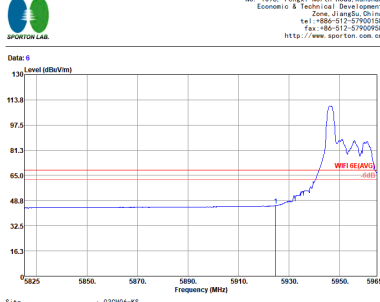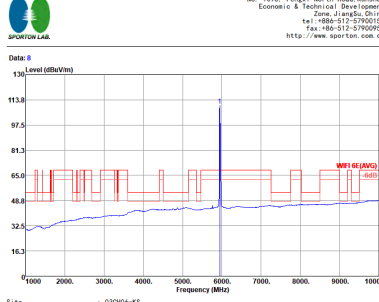

WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																											
ANT	802.11ax HE20 Partial 26/0 CH01 5955MHz																																																																											
9+10	Vertical	Fundamental																																																																										
Peak	 <p>No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 03D06-KS Condition : WIFI 6E PEAK 3m 3117 SN 00218662- VERTICAL Project : RSM 1000 000KHz VSW 3000 000KHz SRT:Auto Mode : I Plane : X Full-directivity : X IMEI : #75 Powersetting : 1B</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5923.84</td> <td>63.10</td> <td>88.30</td> <td>-25.20</td> <td>49.44</td> <td>35.13</td> <td>10.52</td> <td>31.99</td> <td>100</td> <td>52</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Limit	Over	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Limit	Level Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	cn	deg	1	5923.84	63.10	88.30	-25.20	49.44	35.13	10.52	31.99	100	52	Peak	VERTICAL	 <p>No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 03D06-KS Condition : WIFI 6E PEAK 3m 3117 SN 00218662- VERTICAL Project : RSM 1000 000KHz VSW 3000 000KHz SRT:Auto Mode : I Plane : X Full-directivity : X IMEI : #75 Powersetting : 1B</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5950.00</td> <td>116.13</td> <td>88.30</td> <td>27.83</td> <td>102.41</td> <td>35.20</td> <td>10.53</td> <td>32.01</td> <td>100</td> <td>52</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Limit	Over	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Limit	Level Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	cn	deg	1	5950.00	116.13	88.30	27.83	102.41	35.20	10.53	32.01	100	52	Peak	VERTICAL
Limit	Over	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Line	Limit	Level Factor	Loss Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	cn	deg																																																																					
1	5923.84	63.10	88.30	-25.20	49.44	35.13	10.52	31.99	100	52	Peak	VERTICAL																																																																
Limit	Over	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Line	Limit	Level Factor	Loss Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	cn	deg																																																																					
1	5950.00	116.13	88.30	27.83	102.41	35.20	10.53	32.01	100	52	Peak	VERTICAL																																																																
Avg.	 <p>No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 03D06-KS Condition : WIFI 6E (AVG) 3m 3117 SN 00218662- VERTICAL Project : RSM 1000 000KHz VSW 0.2400KHz SRT:Auto Mode : I Plane : X Full-directivity : X IMEI : #75 Powersetting : 1B</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.82</td> <td>45.65</td> <td>68.30</td> <td>-22.65</td> <td>31.99</td> <td>35.13</td> <td>10.52</td> <td>31.99</td> <td>100</td> <td>52</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Limit	Over	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Limit	Level Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	cn	deg	1	5924.82	45.65	68.30	-22.65	31.99	35.13	10.52	31.99	100	52	Average	VERTICAL	 <p>No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 03D06-KS Condition : WIFI 6E (AVG) 3m 3117 SN 00218662- VERTICAL Project : RSM 1000 000KHz VSW 0.2400KHz SRT:Auto Mode : I Plane : X Full-directivity : X IMEI : #75 Powersetting : 1B</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5950.00</td> <td>110.03</td> <td>68.30</td> <td>41.73</td> <td>96.31</td> <td>35.20</td> <td>10.53</td> <td>32.01</td> <td>100</td> <td>52</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Limit	Over	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Limit	Level Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	cn	deg	1	5950.00	110.03	68.30	41.73	96.31	35.20	10.53	32.01	100	52	Average	VERTICAL
Limit	Over	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Line	Limit	Level Factor	Loss Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	cn	deg																																																																					
1	5924.82	45.65	68.30	-22.65	31.99	35.13	10.52	31.99	100	52	Average	VERTICAL																																																																
Limit	Over	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Line	Limit	Level Factor	Loss Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	cn	deg																																																																					
1	5950.00	110.03	68.30	41.73	96.31	35.20	10.53	32.01	100	52	Average	VERTICAL																																																																



U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE20 Partial 52 (Band Edge @ 3m)

WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																			
ANT	802.11ax HE20 Partial 52/37 CH01 5955MHz																																																																			
9+10	Horizontal	Fundamental																																																																		
Peak	<p>Site: 032006-KS Condition: WIFI 0E PEAK 3m 3117 SN 00218652- HORIZONTAL Project: RSM 1000 0000Hz VBR 3000 0000Hz SRT Auto Mode: (FR)272913 Plane: X Full-directivity Powersetting: #75 #18</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5922.44</td> <td>59.90</td> <td>88.30</td> <td>-28.40</td> <td>46.24</td> <td>35.13</td> <td>10.52</td> <td>31.99</td> <td>100</td> <td>175 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg			1 5922.44	59.90	88.30	-28.40	46.24	35.13	10.52	31.99	100	175 Peak	HORIZONTAL	<p>Site: 032006-KS Condition: WIFI 0E PEAK 3m 3117 SN 00218652- HORIZONTAL Project: RSM 1000 0000Hz VBR 3000 0000Hz SRT Auto Mode: (FR)272913 Plane: X Full-directivity Powersetting: #75 #18</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 5950.00</td> <td>116.83</td> <td>88.30</td> <td>28.53</td> <td>103.11</td> <td>35.20</td> <td>10.53</td> <td>32.01</td> <td>100</td> <td>175 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg			1 * 5950.00	116.83	88.30	28.53	103.11	35.20	10.53	32.01	100	175 Peak	HORIZONTAL
Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																												
1 5922.44	59.90	88.30	-28.40	46.24	35.13	10.52	31.99	100	175 Peak	HORIZONTAL																																																										
Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																												
1 * 5950.00	116.83	88.30	28.53	103.11	35.20	10.53	32.01	100	175 Peak	HORIZONTAL																																																										
Avg.	<p>Site: 032006-KS Condition: WIFI 0E (AVG) 3m 3117 SN 00218652- HORIZONTAL Project: RSM 1000 0000Hz VBR 0.2400Hz SRT Auto Mode: (FR)272913 Plane: X Full-directivity Powersetting: #75 #18</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5893.46</td> <td>46.77</td> <td>68.30</td> <td>-21.53</td> <td>33.25</td> <td>35.00</td> <td>10.49</td> <td>31.97</td> <td>100</td> <td>175 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg			1 5893.46	46.77	68.30	-21.53	33.25	35.00	10.49	31.97	100	175 Average	HORIZONTAL	<p>Site: 032006-KS Condition: WIFI 0E (AVG) 3m 3117 SN 00218652- HORIZONTAL Project: RSM 1000 0000Hz VBR 0.2400Hz SRT Auto Mode: (FR)272913 Plane: X Full-directivity Powersetting: #75 #18</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 5950.00</td> <td>108.60</td> <td>68.30</td> <td>40.30</td> <td>94.88</td> <td>35.20</td> <td>10.53</td> <td>32.01</td> <td>100</td> <td>175 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg			1 * 5950.00	108.60	68.30	40.30	94.88	35.20	10.53	32.01	100	175 Average	HORIZONTAL
Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																												
1 5893.46	46.77	68.30	-21.53	33.25	35.00	10.49	31.97	100	175 Average	HORIZONTAL																																																										
Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																												
1 * 5950.00	108.60	68.30	40.30	94.88	35.20	10.53	32.01	100	175 Average	HORIZONTAL																																																										



WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																			
ANT	802.11ax HE20 Partial 52/37 CH01 5955MHz																																																																			
9+10	Vertical	Fundamental																																																																		
<p>Peak</p>	<p>Site : 030806-KS Condition : WIFI 6E PEAK 3m 3117 SN 00218652- VERTICAL Project : RSM 1000 0000Hz VSW 3000 0000Hz SRT-Auto Mode : I Plane : X MEI : Full-directivity Powersetting : #75</p> <table border="1"> <thead> <tr> <th>Line</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Poa</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5915.44</td> <td>56.49</td> <td>88.30</td> <td>-31.81</td> <td>42.90</td> <td>35.07</td> <td>10.51</td> <td>31.99</td> <td>131</td> <td>48 Peak VERTICAL</td> </tr> </tbody> </table>	Line	Freq	Level	Limit	Over	ReadAntenna	Cable Preamp	A/Poa	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	deg		1	5915.44	56.49	88.30	-31.81	42.90	35.07	10.51	31.99	131	48 Peak VERTICAL	<p>Site : 030806-KS Condition : WIFI 6E PEAK 3m 3117 SN 00218652- VERTICAL Project : RSM 1000 0000Hz VSW 3000 0000Hz SRT-Auto Mode : I Plane : X MEI : Full-directivity Powersetting : #75</p> <table border="1"> <thead> <tr> <th>Line</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Poa</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5950.00</td> <td>114.43</td> <td>88.30</td> <td>26.13</td> <td>100.71</td> <td>35.20</td> <td>10.53</td> <td>32.01</td> <td>131</td> <td>48 Peak VERTICAL</td> </tr> </tbody> </table>	Line	Freq	Level	Limit	Over	ReadAntenna	Cable Preamp	A/Poa	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	deg		1	5950.00	114.43	88.30	26.13	100.71	35.20	10.53	32.01	131	48 Peak VERTICAL
Line	Freq	Level	Limit	Over	ReadAntenna	Cable Preamp	A/Poa	T/Pos	Remark	Pol/Phas																																																										
	MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	deg																																																											
1	5915.44	56.49	88.30	-31.81	42.90	35.07	10.51	31.99	131	48 Peak VERTICAL																																																										
Line	Freq	Level	Limit	Over	ReadAntenna	Cable Preamp	A/Poa	T/Pos	Remark	Pol/Phas																																																										
	MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	deg																																																											
1	5950.00	114.43	88.30	26.13	100.71	35.20	10.53	32.01	131	48 Peak VERTICAL																																																										
<p>Avg.</p>	<p>Site : 030806-KS Condition : WIFI 6E (AVG) 3m 3117 SN 00218652- VERTICAL Project : RSM 1000 0000Hz VSW 0.3400Hz SRT-Auto Mode : I Plane : X MEI : Full-directivity Powersetting : #75</p> <table border="1"> <thead> <tr> <th>Line</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Poa</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5892.06</td> <td>45.55</td> <td>48.30</td> <td>-22.75</td> <td>32.03</td> <td>35.00</td> <td>10.49</td> <td>31.97</td> <td>131</td> <td>48 Average VERTICAL</td> </tr> </tbody> </table>	Line	Freq	Level	Limit	Over	ReadAntenna	Cable Preamp	A/Poa	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	deg		1	5892.06	45.55	48.30	-22.75	32.03	35.00	10.49	31.97	131	48 Average VERTICAL	<p>Site : 030806-KS Condition : WIFI 6E (AVG) 3m 3117 SN 00218652- VERTICAL Project : RSM 1000 0000Hz VSW 0.3400Hz SRT-Auto Mode : I Plane : X MEI : Full-directivity Powersetting : #75</p> <table border="1"> <thead> <tr> <th>Line</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Poa</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5950.00</td> <td>107.00</td> <td>68.30</td> <td>38.70</td> <td>93.28</td> <td>35.20</td> <td>10.53</td> <td>32.01</td> <td>131</td> <td>48 Average VERTICAL</td> </tr> </tbody> </table>	Line	Freq	Level	Limit	Over	ReadAntenna	Cable Preamp	A/Poa	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	deg		1	5950.00	107.00	68.30	38.70	93.28	35.20	10.53	32.01	131	48 Average VERTICAL
Line	Freq	Level	Limit	Over	ReadAntenna	Cable Preamp	A/Poa	T/Pos	Remark	Pol/Phas																																																										
	MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	deg																																																											
1	5892.06	45.55	48.30	-22.75	32.03	35.00	10.49	31.97	131	48 Average VERTICAL																																																										
Line	Freq	Level	Limit	Over	ReadAntenna	Cable Preamp	A/Poa	T/Pos	Remark	Pol/Phas																																																										
	MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	deg																																																											
1	5950.00	107.00	68.30	38.70	93.28	35.20	10.53	32.01	131	48 Average VERTICAL																																																										



U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE20 Partial 106 (Band Edge @ 3m)

WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m	
ANT	802.11ax HE20 Partial 106/53 CH01 5955MHz	
9+10	Horizontal	Fundamental
Peak	<p>Peak</p>	
Avg.	<p>Avg.</p>	



WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																									
ANT	802.11ax HE20 Partial 106/53 CH01 5955MHz																																																																									
9+10	Vertical	Fundamental																																																																								
<p>Peak</p>	<p>No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030806-KS Condition : WIFI 6E PEAK 3m 3117 SN 00218652- VERTICAL Project : RSM 1000, 000KHz VSW 3000, 000KHz SRT:Auto FRJ272913 Mode : 4 Plane : X Full-directivity IMEI : #75 Powersetting : 1B</p> <table border="1"> <thead> <tr> <th>IMEI</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.96</td> <td>57.00</td> <td>88.30</td> <td>-31.30</td> <td>43.34</td> <td>35.13</td> <td>10.52</td> <td>31.99</td> <td>100</td> <td>46 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	IMEI	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg			1	5924.96	57.00	88.30	-31.30	43.34	35.13	10.52	31.99	100	46 Peak	VERTICAL	<p>No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030806-KS Condition : WIFI 6E PEAK 3m 3117 SN 00218652- VERTICAL Project : RSM 1000, 000KHz VSW 3000, 000KHz SRT:Auto FRJ272913 Mode : 4 Plane : X Full-directivity IMEI : #75 Powersetting : 1B</p> <table border="1"> <thead> <tr> <th>IMEI</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5950.00</td> <td>112.37</td> <td>88.30</td> <td>24.07</td> <td>98.05</td> <td>35.20</td> <td>10.53</td> <td>32.01</td> <td>100</td> <td>46 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	IMEI	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg			1	5950.00	112.37	88.30	24.07	98.05	35.20	10.53	32.01	100	46 Peak	VERTICAL
IMEI	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																	
1	5924.96	57.00	88.30	-31.30	43.34	35.13	10.52	31.99	100	46 Peak	VERTICAL																																																															
IMEI	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																	
1	5950.00	112.37	88.30	24.07	98.05	35.20	10.53	32.01	100	46 Peak	VERTICAL																																																															
<p>Avg.</p>	<p>No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030806-KS Condition : WIFI 6E (AVG) 3m 3117 SN 00218652- VERTICAL Project : RSM 1000, 000KHz VSW 0.0100KHz SRT:Auto FRJ272913 Mode : 4 Plane : X Full-directivity IMEI : #75 Powersetting : 1B</p> <table border="1"> <thead> <tr> <th>IMEI</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.82</td> <td>45.81</td> <td>68.30</td> <td>-22.49</td> <td>32.15</td> <td>35.13</td> <td>10.52</td> <td>31.99</td> <td>100</td> <td>46 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	IMEI	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg			1	5924.82	45.81	68.30	-22.49	32.15	35.13	10.52	31.99	100	46 Average	VERTICAL	<p>No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030806-KS Condition : WIFI 6E (AVG) 3m 3117 SN 00218652- VERTICAL Project : RSM 1000, 000KHz VSW 0.0100KHz SRT:Auto FRJ272913 Mode : 4 Plane : X Full-directivity IMEI : #75 Powersetting : 1B</p> <table border="1"> <thead> <tr> <th>IMEI</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5950.00</td> <td>105.56</td> <td>68.30</td> <td>37.26</td> <td>91.84</td> <td>35.20</td> <td>10.53</td> <td>32.01</td> <td>100</td> <td>46 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	IMEI	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg			1	5950.00	105.56	68.30	37.26	91.84	35.20	10.53	32.01	100	46 Average	VERTICAL
IMEI	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																	
1	5924.82	45.81	68.30	-22.49	32.15	35.13	10.52	31.99	100	46 Average	VERTICAL																																																															
IMEI	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																	
1	5950.00	105.56	68.30	37.26	91.84	35.20	10.53	32.01	100	46 Average	VERTICAL																																																															



U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE40 Full (Band Edge @ 3m)

WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																			
ANT	802.11ax HE40 Full CH03 5965MHz																																																																			
9+10	Horizontal	Fundamental																																																																		
Peak	<p>Site: 032006-KS No. 1098, Pengji North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site Condition: 032006-KS Condition: WIFI 6E PEAK 3m 3117 SN 00218652- HORIZONTAL RRM 1000 0000Hz VBM 3000 0000Hz SRT Auto Project: FR272913 Mode: 7 Plane: X Full-directivity IRE1: #75 Powersetting: 17</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5921.74</td> <td>69.98</td> <td>88.30</td> <td>-18.32</td> <td>56.32</td> <td>35.13</td> <td>10.52</td> <td>31.99</td> <td>104</td> <td>174 Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	ca	deg			1	5921.74	69.98	88.30	-18.32	56.32	35.13	10.52	31.99	104	174 Peak	<p>Site: 032006-KS No. 1098, Pengji North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site Condition: 032006-KS Condition: WIFI 6E PEAK 3m 3117 SN 00218652- HORIZONTAL RRM 1000 0000Hz VBM 3000 0000Hz SRT Auto Project: FR272913 Mode: 7 Plane: X Full-directivity IRE1: #75 Powersetting: 17</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5968.00</td> <td>105.95</td> <td>88.30</td> <td>17.65</td> <td>92.16</td> <td>35.27</td> <td>10.55</td> <td>32.03</td> <td>104</td> <td>174 Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	ca	deg			1	5968.00	105.95	88.30	17.65	92.16	35.27	10.55	32.03	104	174 Peak
Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	ca	deg																																																												
1	5921.74	69.98	88.30	-18.32	56.32	35.13	10.52	31.99	104	174 Peak																																																										
Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	ca	deg																																																												
1	5968.00	105.95	88.30	17.65	92.16	35.27	10.55	32.03	104	174 Peak																																																										
Avg.	<p>Site: 032006-KS No. 1098, Pengji North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site Condition: 032006-KS Condition: WIFI 6E (AVG) 3m 3117 SN 00218652- HORIZONTAL RRM 1000 0000Hz VBM 0.0100Hz SRT Auto Project: FR272913 Mode: 7 Plane: X Full-directivity IRE1: #75 Powersetting: 17</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5919.08</td> <td>56.92</td> <td>68.30</td> <td>-11.38</td> <td>43.33</td> <td>35.07</td> <td>10.51</td> <td>31.99</td> <td>104</td> <td>174 Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	ca	deg			1	5919.08	56.92	68.30	-11.38	43.33	35.07	10.51	31.99	104	174 Average	<p>Site: 032006-KS No. 1098, Pengji North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site Condition: 032006-KS Condition: WIFI 6E (AVG) 3m 3117 SN 00218652- HORIZONTAL RRM 1000 0000Hz VBM 0.0100Hz SRT Auto Project: FR272913 Mode: 7 Plane: X Full-directivity IRE1: #75 Powersetting: 17</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5968.00</td> <td>98.34</td> <td>68.30</td> <td>30.04</td> <td>84.55</td> <td>35.27</td> <td>10.55</td> <td>32.03</td> <td>104</td> <td>174 Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	ca	deg			1	5968.00	98.34	68.30	30.04	84.55	35.27	10.55	32.03	104	174 Average
Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	ca	deg																																																												
1	5919.08	56.92	68.30	-11.38	43.33	35.07	10.51	31.99	104	174 Average																																																										
Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	ca	deg																																																												
1	5968.00	98.34	68.30	30.04	84.55	35.27	10.55	32.03	104	174 Average																																																										



WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																			
ANT	802.11ax HE40 Full H03 5965MHz																																																																			
9+10	Vertical	Fundamental																																																																		
<p>Peak</p>	<p>No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030806-KS Condition : WIFI 6E PEAK 3m 3117 SN 00218662- VERTICAL Project : RSM 1000, 000KHz VSW 3000, 000KHz SRT:Auto FR272913 Mode : 7 Plane : X Full-directivity : X IMEI : #75 Powersetting : 17</p> <table border="1"> <thead> <tr> <th>IMEI</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5917.12</td> <td>69.39</td> <td>68.30</td> <td>-18.91</td> <td>55.80</td> <td>35.07</td> <td>10.51</td> <td>31.99</td> <td>100</td> <td>51 Peak VERTICAL</td> </tr> </tbody> </table>	IMEI	Freq	Level	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV	dB/m	dB	cm	deg			1	5917.12	69.39	68.30	-18.91	55.80	35.07	10.51	31.99	100	51 Peak VERTICAL	<p>No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030806-KS Condition : WIFI 6E PEAK 3m 3117 SN 00218662- VERTICAL Project : RSM 1000, 000KHz VSW 3000, 000KHz SRT:Auto FR272913 Mode : 7 Plane : X Full-directivity : X IMEI : #75 Powersetting : 17</p> <table border="1"> <thead> <tr> <th>IMEI</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>5968.00</td> <td>104.00</td> <td>88.30</td> <td>17.75</td> <td>92.26</td> <td>35.27</td> <td>10.55</td> <td>32.03</td> <td>100</td> <td>51 Peak VERTICAL</td> </tr> </tbody> </table>	IMEI	Freq	Level	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV	dB/m	dB	cm	deg			1 *	5968.00	104.00	88.30	17.75	92.26	35.27	10.55	32.03	100	51 Peak VERTICAL
IMEI	Freq	Level	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
	MHz	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																												
1	5917.12	69.39	68.30	-18.91	55.80	35.07	10.51	31.99	100	51 Peak VERTICAL																																																										
IMEI	Freq	Level	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
	MHz	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																												
1 *	5968.00	104.00	88.30	17.75	92.26	35.27	10.55	32.03	100	51 Peak VERTICAL																																																										
<p>Avg.</p>	<p>No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030806-KS Condition : WIFI 6E (AVG) 3m 3117 SN 00218662- VERTICAL Project : RSM 1000, 000KHz VSW 0.0100KHz SRT:Auto FR272913 Mode : 7 Plane : X Full-directivity : X IMEI : #75 Powersetting : 17</p> <table border="1"> <thead> <tr> <th>IMEI</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5917.68</td> <td>57.65</td> <td>68.30</td> <td>-10.65</td> <td>44.06</td> <td>35.07</td> <td>10.51</td> <td>31.99</td> <td>100</td> <td>51 Average VERTICAL</td> </tr> </tbody> </table>	IMEI	Freq	Level	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV	dB/m	dB	cm	deg			1	5917.68	57.65	68.30	-10.65	44.06	35.07	10.51	31.99	100	51 Average VERTICAL	<p>No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030806-KS Condition : WIFI 6E (AVG) 3m 3117 SN 00218662- VERTICAL Project : RSM 1000, 000KHz VSW 0.0100KHz SRT:Auto FR272913 Mode : 7 Plane : X Full-directivity : X IMEI : #75 Powersetting : 17</p> <table border="1"> <thead> <tr> <th>IMEI</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>5968.00</td> <td>98.61</td> <td>68.30</td> <td>30.31</td> <td>84.82</td> <td>35.27</td> <td>10.55</td> <td>32.03</td> <td>100</td> <td>51 Average VERTICAL</td> </tr> </tbody> </table>	IMEI	Freq	Level	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV	dB/m	dB	cm	deg			1 *	5968.00	98.61	68.30	30.31	84.82	35.27	10.55	32.03	100	51 Average VERTICAL
IMEI	Freq	Level	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
	MHz	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																												
1	5917.68	57.65	68.30	-10.65	44.06	35.07	10.51	31.99	100	51 Average VERTICAL																																																										
IMEI	Freq	Level	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
	MHz	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																												
1 *	5968.00	98.61	68.30	30.31	84.82	35.27	10.55	32.03	100	51 Average VERTICAL																																																										



U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE80 Full (Band Edge @ 3m)





WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																											
ANT	802.11ax HE80 Full CH07 5985MHz																											
9+10	Horizontal	Fundamental																										
Peak	<p>Site: 032006-KS Condition: WIFI 6E PEAK 3m 3117 SN 00218652- HORIZONTAL Project: FR272913 Mode: 10 Plane: X IPE1: Full-directivity Powersetting: #75</p> <table border="1"> <thead> <tr> <th>1</th> <th>5895.56</th> <th>64.13</th> <th>88.30</th> <th>-24.17</th> <th>50.61</th> <th>35.00</th> <th>10.49</th> <th>31.97</th> <th>100</th> <th>174</th> <th>Peak</th> <th>HORIZONTAL</th> </tr> </thead> </table>	1	5895.56	64.13	88.30	-24.17	50.61	35.00	10.49	31.97	100	174	Peak	HORIZONTAL	<p>Site: 032006-KS Condition: WIFI 6E PEAK 3m 3117 SN 00218652- HORIZONTAL Project: FR272913 Mode: 10 Plane: X IPE1: Full-directivity Powersetting: #75</p> <table border="1"> <thead> <tr> <th>1</th> <th>5968.00</th> <th>102.76</th> <th>88.30</th> <th>14.46</th> <th>88.97</th> <th>35.27</th> <th>10.55</th> <th>32.03</th> <th>100</th> <th>174</th> <th>Peak</th> <th>HORIZONTAL</th> </tr> </thead> </table>	1	5968.00	102.76	88.30	14.46	88.97	35.27	10.55	32.03	100	174	Peak	HORIZONTAL
1	5895.56	64.13	88.30	-24.17	50.61	35.00	10.49	31.97	100	174	Peak	HORIZONTAL																
1	5968.00	102.76	88.30	14.46	88.97	35.27	10.55	32.03	100	174	Peak	HORIZONTAL																
Avg.	<p>Site: 032006-KS Condition: WIFI 6E (AVG) 3m 3117 SN 00218652- HORIZONTAL Project: FR272913 Mode: 10 Plane: X IPE1: Full-directivity Powersetting: #75</p> <table border="1"> <thead> <tr> <th>1</th> <th>5919.08</th> <th>53.26</th> <th>68.30</th> <th>-15.04</th> <th>39.67</th> <th>35.07</th> <th>10.51</th> <th>31.99</th> <th>100</th> <th>174</th> <th>Average</th> <th>HORIZONTAL</th> </tr> </thead> </table>	1	5919.08	53.26	68.30	-15.04	39.67	35.07	10.51	31.99	100	174	Average	HORIZONTAL	<p>Site: 032006-KS Condition: WIFI 6E (AVG) 3m 3117 SN 00218652- HORIZONTAL Project: FR272913 Mode: 10 Plane: X IPE1: Full-directivity Powersetting: #75</p> <table border="1"> <thead> <tr> <th>1</th> <th>5977.00</th> <th>93.74</th> <th>68.30</th> <th>25.44</th> <th>79.88</th> <th>35.33</th> <th>10.56</th> <th>32.03</th> <th>100</th> <th>174</th> <th>Average</th> <th>HORIZONTAL</th> </tr> </thead> </table>	1	5977.00	93.74	68.30	25.44	79.88	35.33	10.56	32.03	100	174	Average	HORIZONTAL
1	5919.08	53.26	68.30	-15.04	39.67	35.07	10.51	31.99	100	174	Average	HORIZONTAL																
1	5977.00	93.74	68.30	25.44	79.88	35.33	10.56	32.03	100	174	Average	HORIZONTAL																



WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																									
ANT	802.11ax HE80 Full CH07 5985MHz																																																																									
9+10	Vertical	Fundamental																																																																								
<p>Peak</p>	<p>No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030806-KS Condition : WIFI 6E PEAK 3m 3117 SN 00218662- VERTICAL Project : RSM 1000 0000Hz VSW 3000 0000Hz SRT:Auto Mode : FR272913 Plane : X Full-directivity : X IMEI : #75 Powersetting : 16</p> <table border="1"> <thead> <tr> <th>IMEI</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5918.28</td> <td>68.42</td> <td>68.30</td> <td>-19.88</td> <td>54.83</td> <td>35.07</td> <td>10.51</td> <td>31.99</td> <td>100</td> <td>51 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	IMEI	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg			1	5918.28	68.42	68.30	-19.88	54.83	35.07	10.51	31.99	100	51 Peak	VERTICAL	<p>No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030806-KS Condition : WIFI 6E PEAK 3m 3117 SN 00218662- VERTICAL Project : RSM 1000 0000Hz VSW 3000 0000Hz SRT:Auto Mode : FR272913 Plane : X Full-directivity : X IMEI : #75 Powersetting : 16</p> <table border="1"> <thead> <tr> <th>IMEI</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>5995.00</td> <td>102.55</td> <td>88.30</td> <td>14.25</td> <td>88.02</td> <td>35.40</td> <td>10.58</td> <td>32.05</td> <td>100</td> <td>51 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	IMEI	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg			1 *	5995.00	102.55	88.30	14.25	88.02	35.40	10.58	32.05	100	51 Peak	VERTICAL
IMEI	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																	
1	5918.28	68.42	68.30	-19.88	54.83	35.07	10.51	31.99	100	51 Peak	VERTICAL																																																															
IMEI	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																	
1 *	5995.00	102.55	88.30	14.25	88.02	35.40	10.58	32.05	100	51 Peak	VERTICAL																																																															
<p>Avg.</p>	<p>No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030806-KS Condition : WIFI 6E (AVG) 3m 3117 SN 00218662- VERTICAL Project : RSM 1000 0000Hz VSW 0.01000Hz SRT:Auto Mode : FR272913 Plane : X Full-directivity : X IMEI : #75 Powersetting : 16</p> <table border="1"> <thead> <tr> <th>IMEI</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5917.80</td> <td>55.12</td> <td>68.30</td> <td>-13.18</td> <td>41.53</td> <td>35.07</td> <td>10.51</td> <td>31.99</td> <td>100</td> <td>51 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	IMEI	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg			1	5917.80	55.12	68.30	-13.18	41.53	35.07	10.51	31.99	100	51 Average	VERTICAL	<p>No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030806-KS Condition : WIFI 6E (AVG) 3m 3117 SN 00218662- VERTICAL Project : RSM 1000 0000Hz VSW 0.01000Hz SRT:Auto Mode : FR272913 Plane : X Full-directivity : X IMEI : #75 Powersetting : 16</p> <table border="1"> <thead> <tr> <th>IMEI</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>5968.00</td> <td>94.22</td> <td>68.30</td> <td>25.92</td> <td>80.43</td> <td>35.27</td> <td>10.55</td> <td>32.03</td> <td>100</td> <td>51 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	IMEI	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg			1 *	5968.00	94.22	68.30	25.92	80.43	35.27	10.55	32.03	100	51 Average	VERTICAL
IMEI	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																	
1	5917.80	55.12	68.30	-13.18	41.53	35.07	10.51	31.99	100	51 Average	VERTICAL																																																															
IMEI	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																	
1 *	5968.00	94.22	68.30	25.92	80.43	35.27	10.55	32.03	100	51 Average	VERTICAL																																																															



U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE160 Full (Band Edge @ 3m)

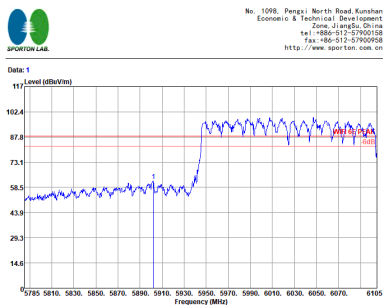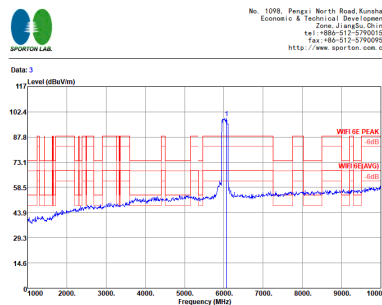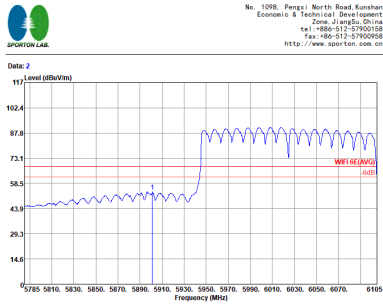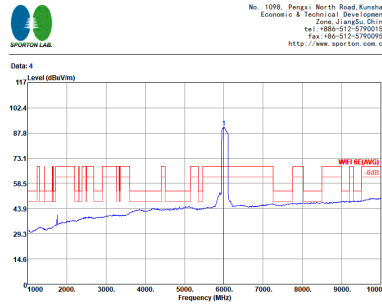WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																			
ANT	802.11ax HE160 Full CH15 6025MHz																																																																			
9+10	Horizontal	Fundamental																																																																		
Peak	 <p>Site : 030906-KS Condition : WIFI 6E PEAK 3m 3117.5M 00218652- HORIZONTAL Project : RSM 1000.000KHz VBR 3000.000KHz SRT Auto Mode : 13 Plane : Z IRE1 : Full-directivity Powersetting : #75</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5902.12</td> <td>62.35</td> <td>88.30</td> <td>-25.95</td> <td>48.83</td> <td>35.00</td> <td>10.49</td> <td>31.97</td> <td>103</td> <td>193</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5902.12	62.35	88.30	-25.95	48.83	35.00	10.49	31.97	103	193	Peak	HORIZONTAL	 <p>Site : 030906-KS Condition : WIFI 6E PEAK 3m 3117.5M 00218652- HORIZONTAL Project : RSM 1000.000KHz VBR 3000.000KHz SRT Auto Mode : 13 Plane : Z IRE1 : Full-directivity Powersetting : #75</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6067.00</td> <td>98.69</td> <td>88.30</td> <td>10.39</td> <td>84.63</td> <td>35.53</td> <td>10.64</td> <td>32.11</td> <td>103</td> <td>193</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6067.00	98.69	88.30	10.39	84.63	35.53	10.64	32.11	103	193	Peak	HORIZONTAL
Freq	Level	Limit	Over	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	5902.12	62.35	88.30	-25.95	48.83	35.00	10.49	31.97	103	193	Peak	HORIZONTAL																																																								
Freq	Level	Limit	Over	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	6067.00	98.69	88.30	10.39	84.63	35.53	10.64	32.11	103	193	Peak	HORIZONTAL																																																								
Avg.	 <p>Site : 030906-KS Condition : WIFI 6E AVG 3m 3117.5M 00218652- HORIZONTAL Project : RSM 1000.000KHz VBR 2.200KHz SRT Auto Mode : 13 Plane : Z IRE1 : Full-directivity Powersetting : #75</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5901.16</td> <td>63.72</td> <td>68.30</td> <td>-14.58</td> <td>40.20</td> <td>35.00</td> <td>10.49</td> <td>31.97</td> <td>103</td> <td>193</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5901.16	63.72	68.30	-14.58	40.20	35.00	10.49	31.97	103	193	Average	HORIZONTAL	 <p>Site : 030906-KS Condition : WIFI 6E AVG 3m 3117.5M 00218652- HORIZONTAL Project : RSM 1000.000KHz VBR 2.200KHz SRT Auto Mode : 13 Plane : Z IRE1 : Full-directivity Powersetting : #75</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5995.00</td> <td>91.00</td> <td>68.30</td> <td>22.70</td> <td>77.07</td> <td>35.40</td> <td>10.58</td> <td>32.05</td> <td>103</td> <td>193</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5995.00	91.00	68.30	22.70	77.07	35.40	10.58	32.05	103	193	Average	HORIZONTAL
Freq	Level	Limit	Over	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	5901.16	63.72	68.30	-14.58	40.20	35.00	10.49	31.97	103	193	Average	HORIZONTAL																																																								
Freq	Level	Limit	Over	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	5995.00	91.00	68.30	22.70	77.07	35.40	10.58	32.05	103	193	Average	HORIZONTAL																																																								





WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																									
ANT	802.11ax HE160 Full CH15 6025MHz																																																																									
9+10	Vertical	Fundamental																																																																								
<p>Peak</p>	<p>No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032006-KS Condition : WIFI 6E PEAK 3m 3117 SN 00218662- VERTICAL Project : RSM 1000 000000 VEM 3000 000000 SRT-Auto Mode : FR272913 Plane : X Full-directivity : X IMEI : #75 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>IMEI</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBV/m</th> <th>dBV/m</th> <th>dB</th> <th>dBV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5891.88</td> <td>61.28</td> <td>88.30</td> <td>-27.02</td> <td>47.76</td> <td>35.00</td> <td>10.49</td> <td>31.97</td> <td>100</td> <td>46 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	IMEI	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	cm	deg			1	5891.88	61.28	88.30	-27.02	47.76	35.00	10.49	31.97	100	46 Peak	VERTICAL	<p>No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032006-KS Condition : WIFI 6E PEAK 3m 3117 SN 00218662- VERTICAL Project : RSM 1000 000000 VEM 3000 000000 SRT-Auto Mode : FR272913 Plane : X Full-directivity : X IMEI : #75 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>IMEI</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBV/m</th> <th>dBV/m</th> <th>dB</th> <th>dBV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>6013.00</td> <td>98.50</td> <td>88.30</td> <td>10.20</td> <td>84.55</td> <td>35.43</td> <td>10.59</td> <td>32.07</td> <td>100</td> <td>46 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	IMEI	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	cm	deg			1 *	6013.00	98.50	88.30	10.20	84.55	35.43	10.59	32.07	100	46 Peak	VERTICAL
IMEI	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	cm	deg																																																																	
1	5891.88	61.28	88.30	-27.02	47.76	35.00	10.49	31.97	100	46 Peak	VERTICAL																																																															
IMEI	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	cm	deg																																																																	
1 *	6013.00	98.50	88.30	10.20	84.55	35.43	10.59	32.07	100	46 Peak	VERTICAL																																																															
<p>Avg.</p>	<p>No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032006-KS Condition : WIFI 6E (AVG) 3m 3117 SN 00218662- VERTICAL Project : RSM 1000 000000 VEM 3000 000000 SRT-Auto Mode : FR272913 Plane : X Full-directivity : X IMEI : #75 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>IMEI</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBV/m</th> <th>dBV/m</th> <th>dB</th> <th>dBV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5890.04</td> <td>53.14</td> <td>68.30</td> <td>-15.16</td> <td>39.42</td> <td>35.00</td> <td>10.49</td> <td>31.97</td> <td>100</td> <td>46 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	IMEI	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	cm	deg			1	5890.04	53.14	68.30	-15.16	39.42	35.00	10.49	31.97	100	46 Average	VERTICAL	<p>No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032006-KS Condition : WIFI 6E (AVG) 3m 3117 SN 00218662- VERTICAL Project : RSM 1000 000000 VEM 3000 000000 SRT-Auto Mode : FR272913 Plane : X Full-directivity : X IMEI : #75 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>IMEI</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBV/m</th> <th>dBV/m</th> <th>dB</th> <th>dBV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>6013.00</td> <td>90.42</td> <td>68.30</td> <td>22.12</td> <td>76.47</td> <td>35.43</td> <td>10.59</td> <td>32.07</td> <td>100</td> <td>46 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	IMEI	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	cm	deg			1 *	6013.00	90.42	68.30	22.12	76.47	35.43	10.59	32.07	100	46 Average	VERTICAL
IMEI	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	cm	deg																																																																	
1	5890.04	53.14	68.30	-15.16	39.42	35.00	10.49	31.97	100	46 Average	VERTICAL																																																															
IMEI	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	cm	deg																																																																	
1 *	6013.00	90.42	68.30	22.12	76.47	35.43	10.59	32.07	100	46 Average	VERTICAL																																																															



U-NII 5 - 5925-6425MHzMHz

WIFI 802.11ax HE20 Full (Harmonic @ 3m)

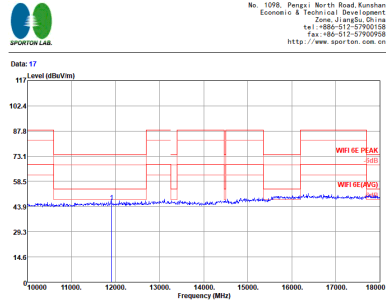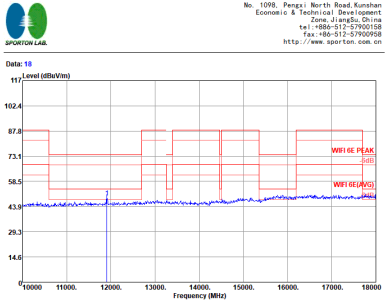WIFI	U-NII 5 - 5925-6425MHzMHz Harmonic @ 3m																																																																			
ANT	802.11ax HE20 Full CH01 5955MHz																																																																			
9+10	Horizontal	Vertical																																																																		
Peak	 <p>Site : 030006-KS Condition : WIFI 02 PEAK 3m 3117 5M 00218002- HORIZONTAL Project : FRJ 272913 Mode : S Plane : X Full-directivity : X IMEI : 820 Powersetting : 18</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11912.00</td> <td>46.74</td> <td>74.00</td> <td>-27.26</td> <td>53.60</td> <td>38.71</td> <td>15.21</td> <td>60.78</td> <td>300</td> <td>0 Peak HORIZONT</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg			1	11912.00	46.74	74.00	-27.26	53.60	38.71	15.21	60.78	300	0 Peak HORIZONT	 <p>Site : 030006-KS Condition : WIFI 02 PEAK 3m 3117 5M 00218002- VERTICAL Project : FRJ 272913 Mode : S Plane : X Full-directivity : X IMEI : 820 Powersetting : 18</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11912.00</td> <td>49.06</td> <td>74.00</td> <td>-24.94</td> <td>55.92</td> <td>38.71</td> <td>15.21</td> <td>60.78</td> <td>100</td> <td>0 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg			1	11912.00	49.06	74.00	-24.94	55.92	38.71	15.21	60.78	100	0 Peak VERTICAL
Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																												
1	11912.00	46.74	74.00	-27.26	53.60	38.71	15.21	60.78	300	0 Peak HORIZONT																																																										
Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																												
1	11912.00	49.06	74.00	-24.94	55.92	38.71	15.21	60.78	100	0 Peak VERTICAL																																																										
Avg.																																																																				



U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE40 Full (Harmonic @ 3m)

WIFI	U-NII 5 - 5925-6425MHzMHz Harmonic @ 3m																																																													
ANT	802.11ax HE40 Full CH03 5965MHz																																																													
9+10	Horizontal	Vertical																																																												
Peak Avg.	<p>Site : 020604-HE Condition : WIFI 802.11ax HE40 Full CH03 5965MHz Project : FR272913 Mode : Z Plane : X Antenna : Full-directivity IMN1 : #75 PowerSetting : 17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11928.00</td> <td>45.99</td> <td>74.00</td> <td>-28.61</td> <td>52.23</td> <td>38.73</td> <td>15.22</td> <td>60.79</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11928.00	45.99	74.00	-28.61	52.23	38.73	15.22	60.79	300	0 Peak	HORIZONTAL	<p>Site : 020604-HE Condition : WIFI 802.11ax HE40 Full CH03 5965MHz Project : FR272913 Mode : Z Plane : X Antenna : Full-directivity IMN1 : #75 PowerSetting : 17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11928.00</td> <td>45.57</td> <td>74.00</td> <td>-28.43</td> <td>52.41</td> <td>38.73</td> <td>15.22</td> <td>60.79</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11928.00	45.57	74.00	-28.43	52.41	38.73	15.22	60.79	100	0 Peak	VERTICAL
	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																						
1	11928.00	45.99	74.00	-28.61	52.23	38.73	15.22	60.79	300	0 Peak	HORIZONTAL																																																			
Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																						
1	11928.00	45.57	74.00	-28.43	52.41	38.73	15.22	60.79	100	0 Peak	VERTICAL																																																			



U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE80 Full (Harmonic @ 3m)

WIFI	U-NII 5 - 5925-6425MHzMHz Harmonic @ 3m																																																													
ANT	802.11ax HE80 Full CH07 5985MHz																																																													
9+10	Horizontal	Vertical																																																												
Peak Avg.	<p>Site : 020604-HE Condition : WIFI 0E PEAK 3m 3117 SN 00218652- HORIZONTAL Project : RM 1000 0000Hz VBM 3000 0000Hz SWT.Auto Mode : FR272913 Plane : X Antenna : Full-directivity IMN1 : #75 PowerSetting : 16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>WIFI</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11968.00</td> <td>44.75</td> <td>74.00</td> <td>-29.25</td> <td>51.55</td> <td>38.77</td> <td>15.25</td> <td>60.82</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	WIFI	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11968.00	44.75	74.00	-29.25	51.55	38.77	15.25	60.82	300	0 Peak	HORIZONTAL	<p>Site : 020604-HE Condition : WIFI 0E PEAK 3m 3117 SN 00218652- VERTICAL Project : RM 1000 0000Hz VBM 3000 0000Hz SWT.Auto Mode : FR272913 Plane : X Antenna : Full-directivity IMN1 : #76 PowerSetting : 16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>WIFI</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11968.00</td> <td>45.30</td> <td>74.00</td> <td>-28.70</td> <td>52.10</td> <td>38.77</td> <td>15.25</td> <td>60.82</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	WIFI	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11968.00	45.30	74.00	-28.70	52.10	38.77	15.25	60.82	100	0 Peak	VERTICAL
Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
WIFI	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																						
1	11968.00	44.75	74.00	-29.25	51.55	38.77	15.25	60.82	300	0 Peak	HORIZONTAL																																																			
Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
WIFI	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																						
1	11968.00	45.30	74.00	-28.70	52.10	38.77	15.25	60.82	100	0 Peak	VERTICAL																																																			



U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE160 Full (Harmonic @ 3m)

WIFI	U-NII 5 - 5925-6425MHzMHz Harmonic @ 3m																																																																																																																																																																																																																																																																																																									
ANT	802.11ax HE160 Full CH15 6025MHz																																																																																																																																																																																																																																																																																																									
9+10	Horizontal	Vertical																																																																																																																																																																																																																																																																																																								
Peak Avg.	<table border="1"> <thead> <tr> <th>Site</th> <th colspan="11">: 020604-HE</th> </tr> <tr> <th>Condition</th> <td colspan="11">: WIFI 0E PEAK 3m 3117 5N 00218652- HORIZONTAL</td> </tr> <tr> <th>Project</th> <td colspan="11">: RM 1000 0000Hz VEM 3000 0000Hz SWT.Auto</td> </tr> <tr> <th>Mode</th> <td colspan="11">: (FR)272913</td> </tr> <tr> <th>Mode</th> <td colspan="11">: 13</td> </tr> <tr> <th>Plane</th> <td colspan="11">: Z</td> </tr> <tr> <th>Plane</th> <td colspan="11">: Full-directivity</td> </tr> <tr> <th>IME1</th> <td colspan="11">: #76</td> </tr> <tr> <th>Powersetting</th> <td colspan="11">: 15</td> </tr> <tr> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> <th colspan="3"></th> </tr> <tr> <th>WIFI</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="3"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12048.00</td> <td>44.63</td> <td>74.00</td> <td>-29.37</td> <td>51.88</td> <td>38.82</td> <td>15.31</td> <td>61.38</td> <td>300</td> <td>0</td> <td>Peak</td> <td>HORIZONTAL</td> <td colspan="3"></td> </tr> </tbody> </table>	Site	: 020604-HE											Condition	: WIFI 0E PEAK 3m 3117 5N 00218652- HORIZONTAL											Project	: RM 1000 0000Hz VEM 3000 0000Hz SWT.Auto											Mode	: (FR)272913											Mode	: 13											Plane	: Z											Plane	: Full-directivity											IME1	: #76											Powersetting	: 15											Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas				WIFI	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg				1	12048.00	44.63	74.00	-29.37	51.88	38.82	15.31	61.38	300	0	Peak	HORIZONTAL				<table border="1"> <thead> <tr> <th>Site</th> <th colspan="11">: 020604-HE</th> </tr> <tr> <th>Condition</th> <td colspan="11">: WIFI 0E PEAK 3m 3117 5N 00218652- VERTICAL</td> </tr> <tr> <th>Project</th> <td colspan="11">: RM 1000 0000Hz VEM 3000 0000Hz SWT.Auto</td> </tr> <tr> <th>Mode</th> <td colspan="11">: (FR)272913</td> </tr> <tr> <th>Mode</th> <td colspan="11">: 13</td> </tr> <tr> <th>Plane</th> <td colspan="11">: Z</td> </tr> <tr> <th>Plane</th> <td colspan="11">: Full-directivity</td> </tr> <tr> <th>IME1</th> <td colspan="11">: #76</td> </tr> <tr> <th>Powersetting</th> <td colspan="11">: 15</td> </tr> <tr> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> <th colspan="3"></th> </tr> <tr> <th>WIFI</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="3"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12048.00</td> <td>45.19</td> <td>74.00</td> <td>-28.81</td> <td>52.44</td> <td>38.82</td> <td>15.31</td> <td>61.38</td> <td>100</td> <td>0</td> <td>Peak</td> <td>VERTICAL</td> <td colspan="3"></td> </tr> </tbody> </table>	Site	: 020604-HE											Condition	: WIFI 0E PEAK 3m 3117 5N 00218652- VERTICAL											Project	: RM 1000 0000Hz VEM 3000 0000Hz SWT.Auto											Mode	: (FR)272913											Mode	: 13											Plane	: Z											Plane	: Full-directivity											IME1	: #76											Powersetting	: 15											Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas				WIFI	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg				1	12048.00	45.19	74.00	-28.81	52.44	38.82	15.31	61.38	100	0	Peak	VERTICAL			
Site	: 020604-HE																																																																																																																																																																																																																																																																																																									
Condition	: WIFI 0E PEAK 3m 3117 5N 00218652- HORIZONTAL																																																																																																																																																																																																																																																																																																									
Project	: RM 1000 0000Hz VEM 3000 0000Hz SWT.Auto																																																																																																																																																																																																																																																																																																									
Mode	: (FR)272913																																																																																																																																																																																																																																																																																																									
Mode	: 13																																																																																																																																																																																																																																																																																																									
Plane	: Z																																																																																																																																																																																																																																																																																																									
Plane	: Full-directivity																																																																																																																																																																																																																																																																																																									
IME1	: #76																																																																																																																																																																																																																																																																																																									
Powersetting	: 15																																																																																																																																																																																																																																																																																																									
Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																																																																																																																																																																																																																		
WIFI	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																																																																																																																																																																																		
1	12048.00	44.63	74.00	-29.37	51.88	38.82	15.31	61.38	300	0	Peak	HORIZONTAL																																																																																																																																																																																																																																																																																														
Site	: 020604-HE																																																																																																																																																																																																																																																																																																									
Condition	: WIFI 0E PEAK 3m 3117 5N 00218652- VERTICAL																																																																																																																																																																																																																																																																																																									
Project	: RM 1000 0000Hz VEM 3000 0000Hz SWT.Auto																																																																																																																																																																																																																																																																																																									
Mode	: (FR)272913																																																																																																																																																																																																																																																																																																									
Mode	: 13																																																																																																																																																																																																																																																																																																									
Plane	: Z																																																																																																																																																																																																																																																																																																									
Plane	: Full-directivity																																																																																																																																																																																																																																																																																																									
IME1	: #76																																																																																																																																																																																																																																																																																																									
Powersetting	: 15																																																																																																																																																																																																																																																																																																									
Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																																																																																																																																																																																																																		
WIFI	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																																																																																																																																																																																		
1	12048.00	45.19	74.00	-28.81	52.44	38.82	15.31	61.38	100	0	Peak	VERTICAL																																																																																																																																																																																																																																																																																														







Emission below 1GHz
5GHz WIFI 802.11ax HE40 Full (LF)

WIFI	5GHz WIFI																																																																																																				
ANT	802.11ax HE40 Full LF																																																																																																				
9+10	Horizontal	Vertical																																																																																																			
QP / Peak	<p>Site Condition: 030402-K3 WIFI 802.11ax HE40 Full LF 0110 0N4483 HORIZONTAL EIRP: 100.000000 WSR: 300.000000 dBm Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Poss</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>1</th> <th>50.37</th> <th>35.17</th> <th>-4.83</th> <th>40.00</th> <th>52.77</th> <th>14.59</th> <th>0.72</th> <th>32.91</th> <th>100</th> <th>0 Peak HORIZONTAL</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>89.17</td> <td>28.54</td> <td>-15.46</td> <td>43.50</td> <td>44.88</td> <td>14.80</td> <td>1.73</td> <td>32.83</td> <td>---</td> <td>Peak HORIZONTAL</td> </tr> <tr> <td>3</td> <td>176.65</td> <td>25.17</td> <td>-18.33</td> <td>43.00</td> <td>45.09</td> <td>15.89</td> <td>1.75</td> <td>33.83</td> <td>---</td> <td>Peak HORIZONTAL</td> </tr> <tr> <td>4</td> <td>334.65</td> <td>21.30</td> <td>-24.30</td> <td>43.00</td> <td>45.27</td> <td>15.00</td> <td>1.75</td> <td>33.89</td> <td>---</td> <td>Peak HORIZONTAL</td> </tr> <tr> <td>5</td> <td>598.59</td> <td>26.50</td> <td>-19.38</td> <td>46.00</td> <td>36.14</td> <td>25.99</td> <td>3.41</td> <td>33.08</td> <td>---</td> <td>Peak HORIZONTAL</td> </tr> <tr> <td>6</td> <td>702.21</td> <td>28.91</td> <td>-17.09</td> <td>46.00</td> <td>31.49</td> <td>26.91</td> <td>3.58</td> <td>33.07</td> <td>---</td> <td>Peak HORIZONTAL</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Poss	T/Pos	Remark	Poi/Phas	1	50.37	35.17	-4.83	40.00	52.77	14.59	0.72	32.91	100	0 Peak HORIZONTAL	2	89.17	28.54	-15.46	43.50	44.88	14.80	1.73	32.83	---	Peak HORIZONTAL	3	176.65	25.17	-18.33	43.00	45.09	15.89	1.75	33.83	---	Peak HORIZONTAL	4	334.65	21.30	-24.30	43.00	45.27	15.00	1.75	33.89	---	Peak HORIZONTAL	5	598.59	26.50	-19.38	46.00	36.14	25.99	3.41	33.08	---	Peak HORIZONTAL	6	702.21	28.91	-17.09	46.00	31.49	26.91	3.58	33.07	---	Peak HORIZONTAL	<p>Site Condition: 030402-K3 WIFI 802.11ax HE40 Full LF 0110 0N4483 VERTICAL EIRP: 100.000000 WSR: 300.000000 dBm Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Poss</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>1</th> <th>50.37</th> <th>34.23</th> <th>-5.77</th> <th>40.00</th> <th>51.83</th> <th>14.59</th> <th>0.72</th> <th>32.91</th> <th>---</th></tr></thead></table>	Peak	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Poss	T/Pos	Remark	Poi/Phas	1	50.37	34.23	-5.77	40.00	51.83	14.59	0.72	32.91	---	Peak VERTICAL
	Peak	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Poss	T/Pos	Remark	Poi/Phas																																																																																										
1	50.37	35.17	-4.83	40.00	52.77	14.59	0.72	32.91	100	0 Peak HORIZONTAL																																																																																											
2	89.17	28.54	-15.46	43.50	44.88	14.80	1.73	32.83	---	Peak HORIZONTAL																																																																																											
3	176.65	25.17	-18.33	43.00	45.09	15.89	1.75	33.83	---	Peak HORIZONTAL																																																																																											
4	334.65	21.30	-24.30	43.00	45.27	15.00	1.75	33.89	---	Peak HORIZONTAL																																																																																											
5	598.59	26.50	-19.38	46.00	36.14	25.99	3.41	33.08	---	Peak HORIZONTAL																																																																																											
6	702.21	28.91	-17.09	46.00	31.49	26.91	3.58	33.07	---	Peak HORIZONTAL																																																																																											
Peak	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Poss	T/Pos	Remark	Poi/Phas																																																																																											
1	50.37	34.23	-5.77	40.00	51.83	14.59	0.72	32.91	---																																																																																												
2	131.85	32.26	-15.24	43.50	37.90	17.73	1.53	32.84	---	Peak VERTICAL																																																																																											
3	176.65	26.71	-18.79	43.00	42.30	15.39	1.76	32.83	---	Peak VERTICAL																																																																																											
4	337.79	21.75	-24.25	43.00	42.39	15.39	1.76	32.83	---	Peak VERTICAL																																																																																											
5	597.77	27.75	-18.75	46.00	30.14	26.83	3.42	32.98	---	Peak VERTICAL																																																																																											
6	828.31	34.44	-11.56	46.00	34.11	28.99	3.88	32.54	---	Peak VERTICAL																																																																																											



Co-location:

WIFI 6G 802.11ax HE40 Full + BLE(2M)_CH00
U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE40 Full (Band Edge @ 3m)

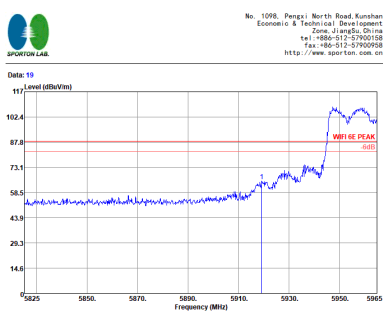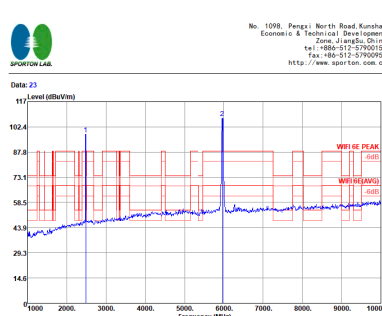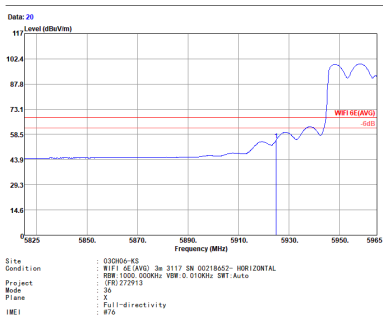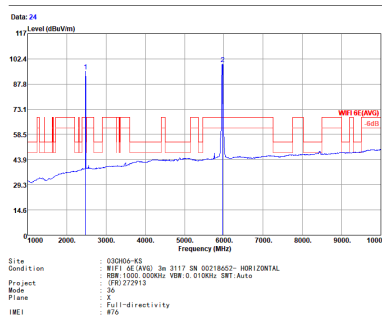WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																																	
ANT	802.11ax HE40 Full CH03 5965MHz																																																																																	
9+10	Horizontal	Fundamental																																																																																
Peak	 <p style="font-size: small;">No. 1098, Pengji North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p style="font-size: x-small;">Data: 19 Level (dBuV/m) 102.4 87.8 73.1 58.5 43.9 29.3 14.6</p> <p style="font-size: x-small;">Site : 03D06-KS Condition : WiFi 6E PEAK 3m 3117.5M 00218652- HORIZONTAL Project : RRM 1000.000KHz VBR 3000.000KHz SRT Auto Mode : 24 Plane : X Full-directivity IE1 : #75 Powersetting : #75</p> <table border="1" style="width: 100%; font-size: x-small;"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>599.22</td> <td>65.25</td> <td>88.30</td> <td>-23.05</td> <td>51.66</td> <td>35.07</td> <td>10.51</td> <td>31.99</td> <td>100</td> <td>193 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	599.22	65.25	88.30	-23.05	51.66	35.07	10.51	31.99	100	193 Peak	HORIZONTAL	 <p style="font-size: small;">No. 1098, Pengji North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p style="font-size: x-small;">Data: 23 Level (dBuV/m) 102.4 87.8 73.1 58.5 43.9 29.3 14.6</p> <p style="font-size: x-small;">Site : 03D06-KS Condition : WiFi 6E PEAK 3m 3117.5M 00218652- HORIZONTAL Project : RRM 1000.000KHz VBR 3000.000KHz SRT Auto Mode : 24 Plane : X Full-directivity IE1 : #75 Powersetting : #75</p> <table border="1" style="width: 100%; font-size: x-small;"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.00</td> <td>98.24</td> <td>74.00</td> <td>24.24</td> <td>88.75</td> <td>32.84</td> <td>9.27</td> <td>32.64</td> <td>100</td> <td>193 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>5999.00</td> <td>107.54</td> <td>88.30</td> <td>19.24</td> <td>93.73</td> <td>35.27</td> <td>10.55</td> <td>32.01</td> <td>100</td> <td>193 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2485.00	98.24	74.00	24.24	88.75	32.84	9.27	32.64	100	193 Peak	HORIZONTAL	2	5999.00	107.54	88.30	19.24	93.73	35.27	10.55	32.01	100	193 Peak	HORIZONTAL
Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	599.22	65.25	88.30	-23.05	51.66	35.07	10.51	31.99	100	193 Peak	HORIZONTAL																																																																							
Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2485.00	98.24	74.00	24.24	88.75	32.84	9.27	32.64	100	193 Peak	HORIZONTAL																																																																							
2	5999.00	107.54	88.30	19.24	93.73	35.27	10.55	32.01	100	193 Peak	HORIZONTAL																																																																							
Avg.	 <p style="font-size: small;">No. 1098, Pengji North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p style="font-size: x-small;">Data: 20 Level (dBuV/m) 102.4 87.8 73.1 58.5 43.9 29.3 14.6</p> <p style="font-size: x-small;">Site : 03D06-KS Condition : WiFi 6E AVG 3m 3117.5M 00218652- HORIZONTAL Project : RRM 1000.000KHz VBR 0.010KHz SRT Auto Mode : 24 Plane : X Full-directivity IE1 : #75 Powersetting : #75</p> <table border="1" style="width: 100%; font-size: x-small;"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.96</td> <td>55.18</td> <td>68.30</td> <td>-13.12</td> <td>41.52</td> <td>35.13</td> <td>10.52</td> <td>31.99</td> <td>100</td> <td>193 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5924.96	55.18	68.30	-13.12	41.52	35.13	10.52	31.99	100	193 Average	HORIZONTAL	 <p style="font-size: small;">No. 1098, Pengji North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p style="font-size: x-small;">Data: 24 Level (dBuV/m) 102.4 87.8 73.1 58.5 43.9 29.3 14.6</p> <p style="font-size: x-small;">Site : 03D06-KS Condition : WiFi 6E AVG 3m 3117.5M 00218652- HORIZONTAL Project : RRM 1000.000KHz VBR 0.010KHz SRT Auto Mode : 24 Plane : X Full-directivity IE1 : #75 Powersetting : #75</p> <table border="1" style="width: 100%; font-size: x-small;"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2476.00</td> <td>95.12</td> <td>68.30</td> <td>26.82</td> <td>85.63</td> <td>32.84</td> <td>9.27</td> <td>32.64</td> <td>100</td> <td>193 Average</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>5968.00</td> <td>99.56</td> <td>68.30</td> <td>31.26</td> <td>85.77</td> <td>35.27</td> <td>10.55</td> <td>32.03</td> <td>100</td> <td>193 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2476.00	95.12	68.30	26.82	85.63	32.84	9.27	32.64	100	193 Average	HORIZONTAL	2	5968.00	99.56	68.30	31.26	85.77	35.27	10.55	32.03	100	193 Average	HORIZONTAL
Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5924.96	55.18	68.30	-13.12	41.52	35.13	10.52	31.99	100	193 Average	HORIZONTAL																																																																							
Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2476.00	95.12	68.30	26.82	85.63	32.84	9.27	32.64	100	193 Average	HORIZONTAL																																																																							
2	5968.00	99.56	68.30	31.26	85.77	35.27	10.55	32.03	100	193 Average	HORIZONTAL																																																																							