

Appendix D. SAR Test Setup Photos

Head Exposure Condition



Right Cheek, Test Separation 0 mm



Right Tilted, Test Separation 0 mm



Left Cheek, Test Separation 0 mm



Left Tilted, Test Separation 0 mm

Body-worn Exposure Condition



Front, Test Separation 15 mm



Back, Test Separation 15 mm

Product Specific 10g SAR



Front, Test Separation 0 mm




Back, Test Separation 0 mm



Left Side, Test Separation 0 mm




Right Side, Test Separation 0 mm

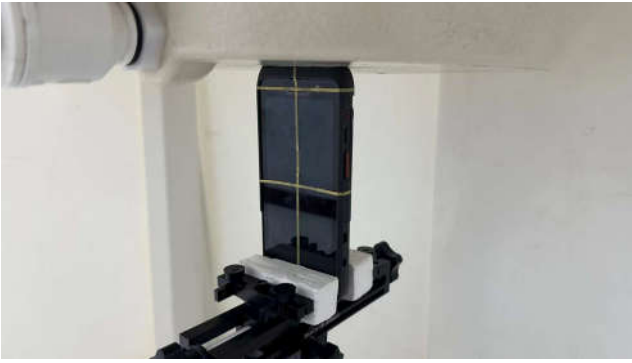

Top Side, Test Separation 0 mm

Antenna Location

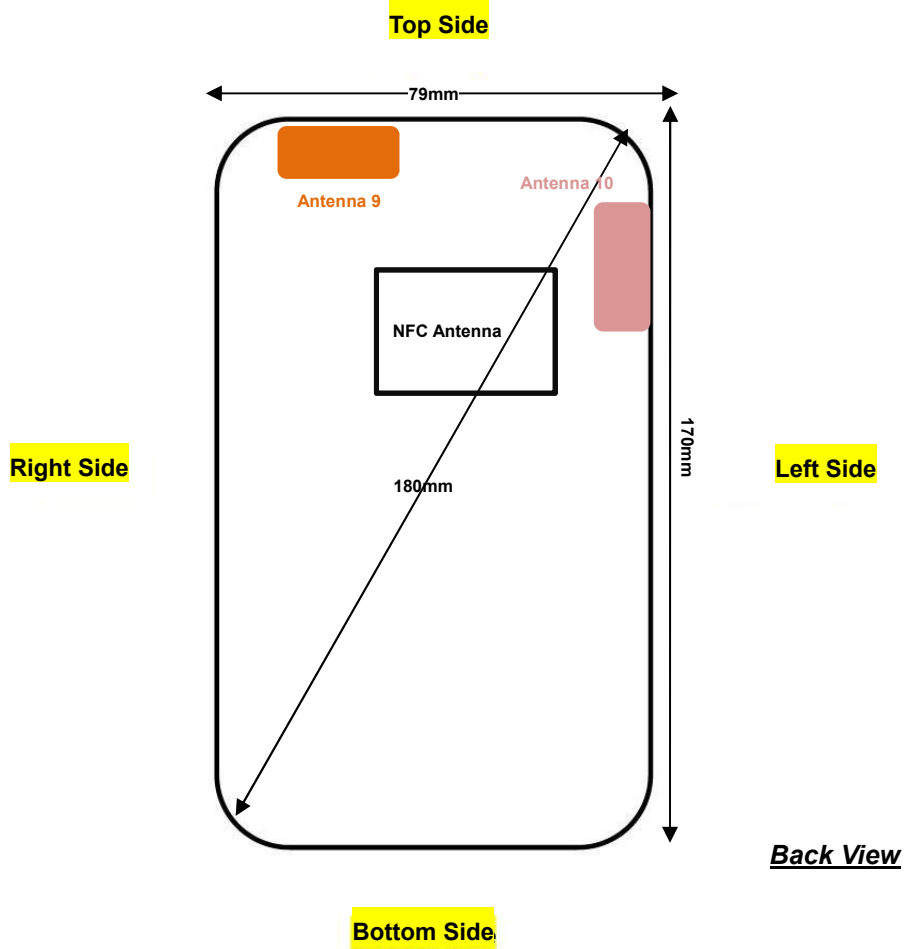

Antenna	Support Band
Antenna 9	WLAN 2.4GHz<TX/RX> WLAN 5GHz/6GHz<TX/RX> Bluetooth<TX/RX>
Antenna 10	WLAN 2.4GHz<TX/RX> WLAN 5GHz/6GHz<TX/RX>
NFC Antenna	NFC<TX/RX>



Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
Antenna 9	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm
Antenna 10	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm
NFC Antenna	>25mm	>25mm	>25mm	>25mm	>25mm	≤ 25mm

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
Antenna 9	Yes	Yes	Yes	No	Yes	No
Antenna 10	Yes	Yes	Yes	No	No	Yes
NFC Antenna	No	No	No	No	No	Yes

Note: Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.