


Site: SIP-AC3	Test Date: 2022-10-19
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by VHT20 at channel 2462MHz	

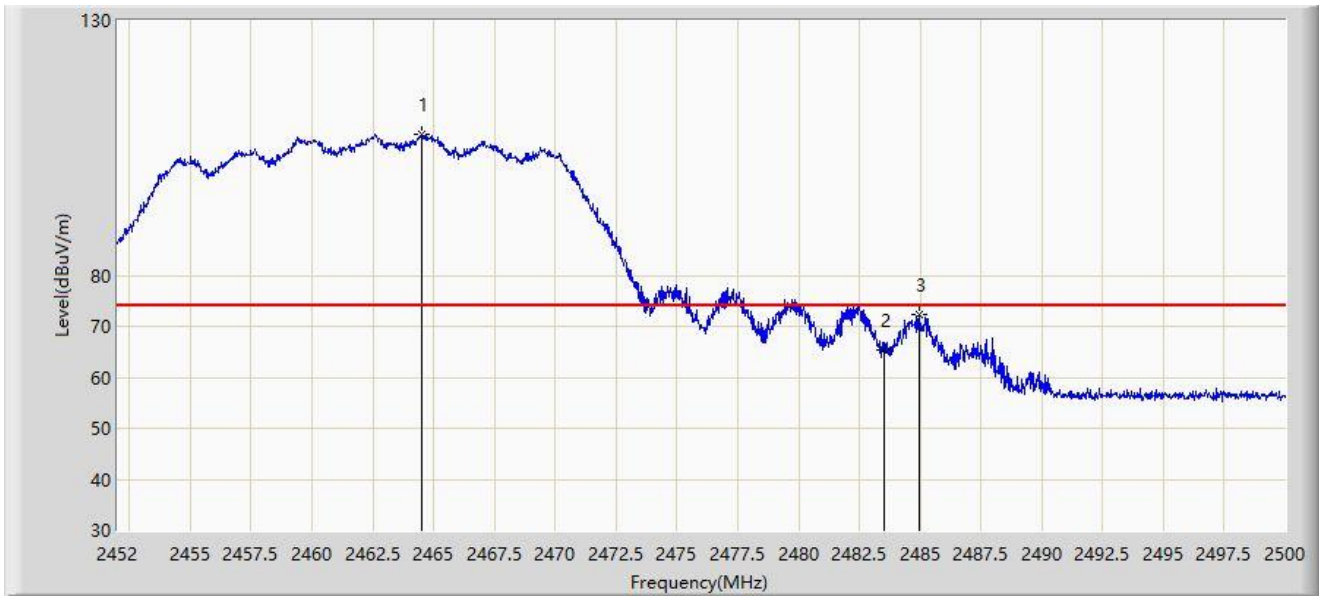


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2464.528	107.549	75.324	N/A	N/A	32.225	PK
2		2483.500	65.449	33.144	-8.551	74.000	32.305	PK
3	*	2484.952	72.278	39.966	-1.722	74.000	32.313	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-19
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by VHT20 at channel 2462MHz	

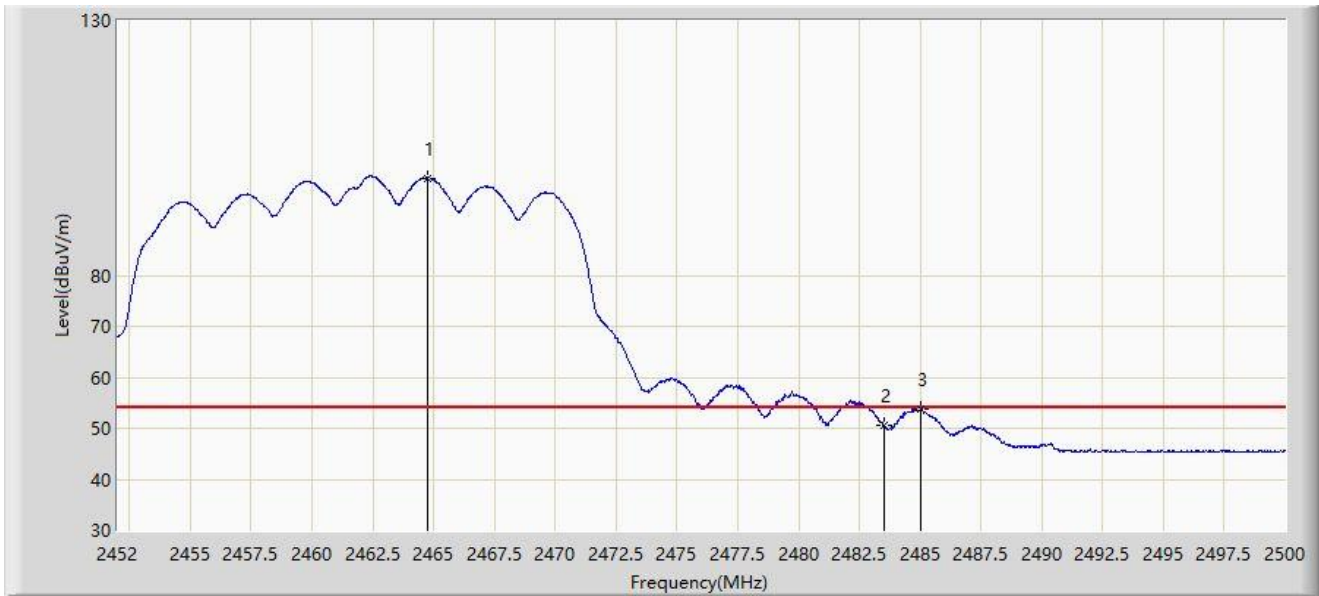


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2464.744	99.124	66.898	N/A	N/A	32.226	AV
2		2483.500	50.668	18.363	-3.332	54.000	32.305	AV
3	*	2485.048	53.862	21.549	-0.138	54.000	32.313	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-19
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by VHT20 at channel 2462MHz	

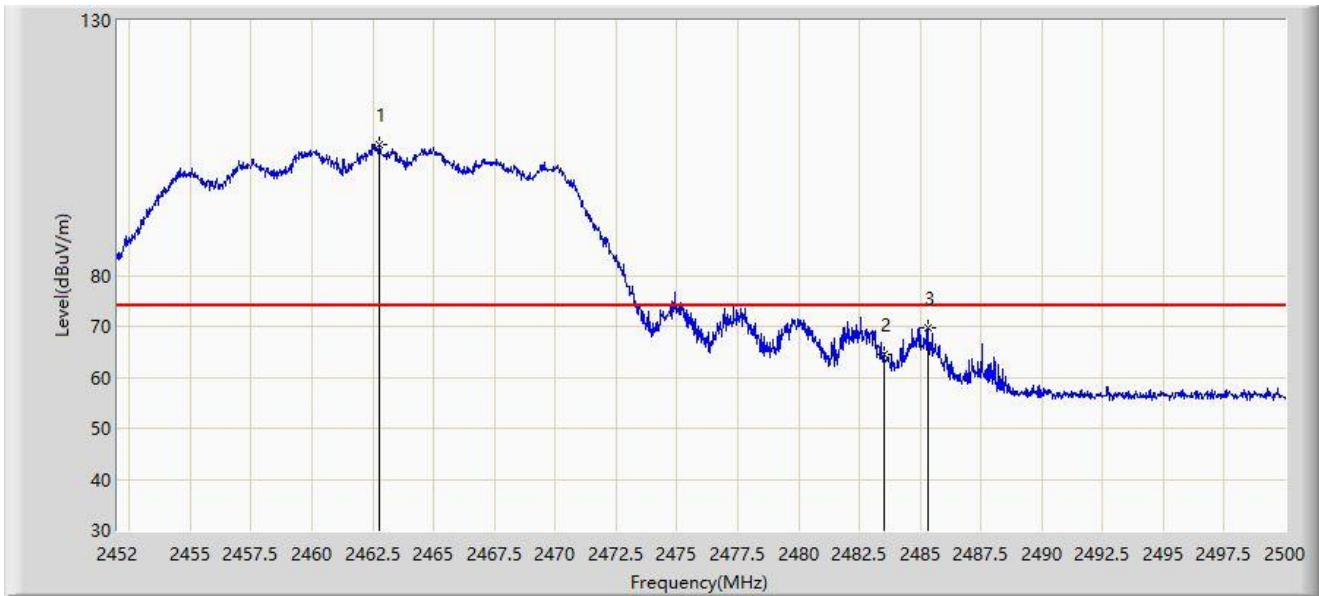


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2462.776	105.511	73.293	N/A	N/A	32.218	PK
2		2483.500	64.437	32.132	-9.563	74.000	32.305	PK
3	*	2485.312	69.781	37.467	-4.219	74.000	32.314	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-19
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by VHT20 at channel 2462MHz	

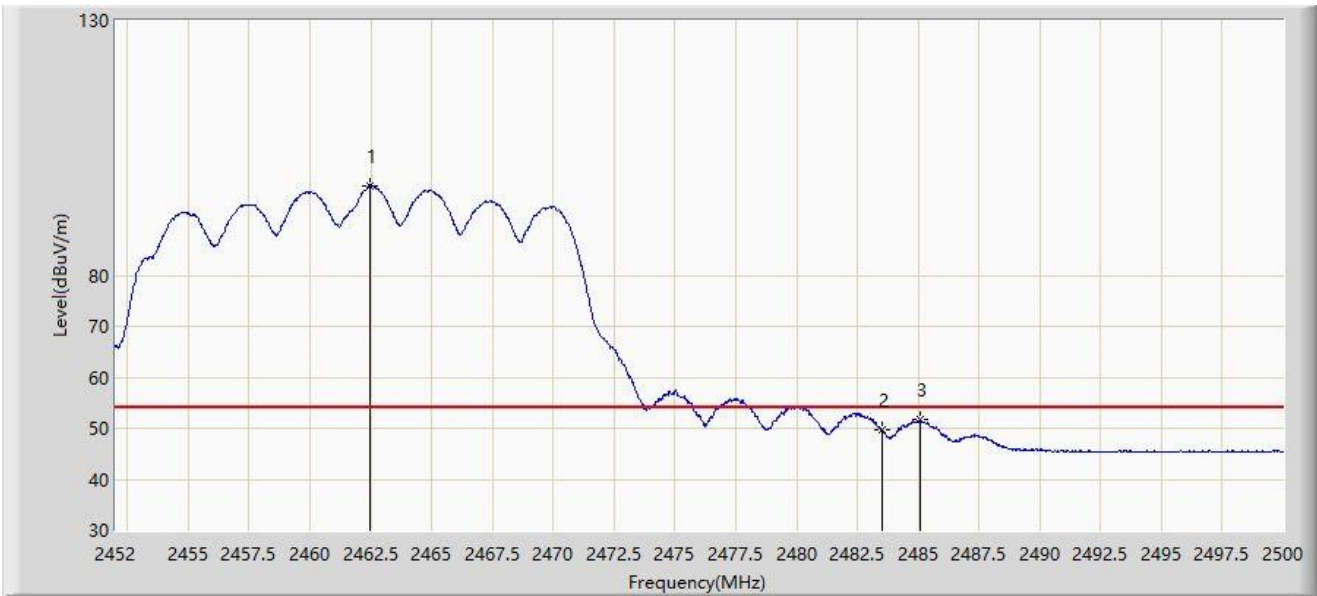


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2462.440	97.574	65.357	N/A	N/A	32.217	AV
2		2483.500	49.800	17.495	-4.200	54.000	32.305	AV
3	*	2485.072	51.713	19.400	-2.287	54.000	32.313	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-19
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by VHT40 at channel 2422MHz	

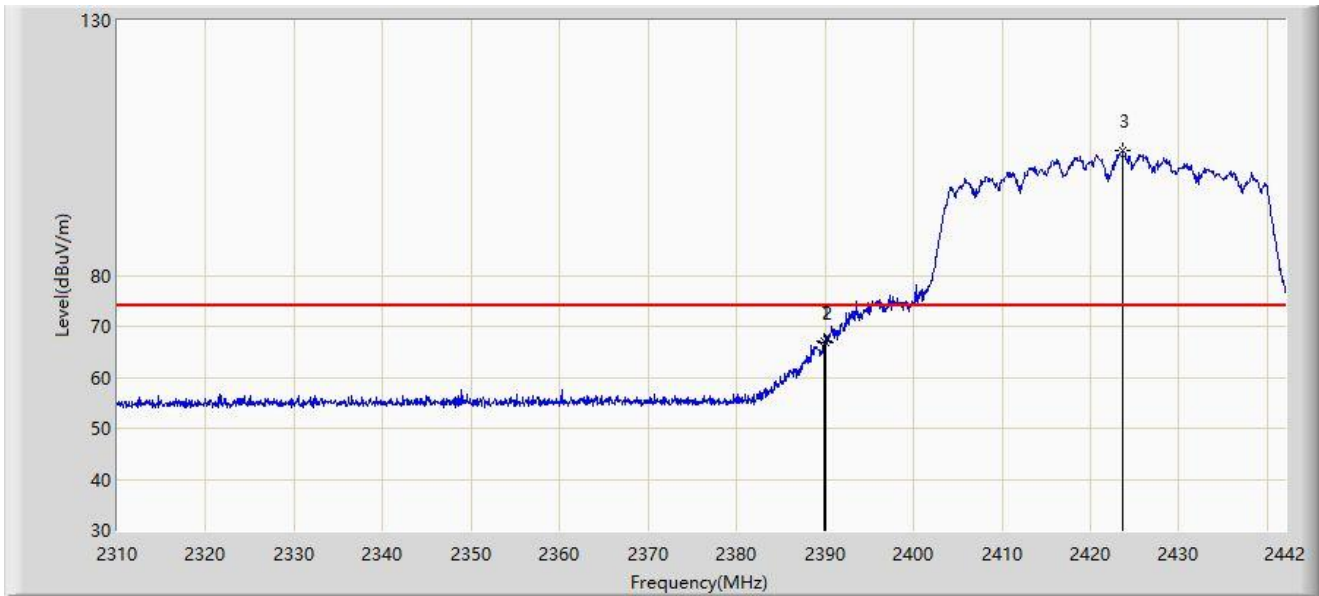


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2389.926	67.000	35.072	-7.000	74.000	31.928	PK
2		2390.000	66.891	34.962	-7.109	74.000	31.929	PK
3		2423.652	104.421	72.353	N/A	N/A	32.068	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-19
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by VHT40 at channel 2422MHz	

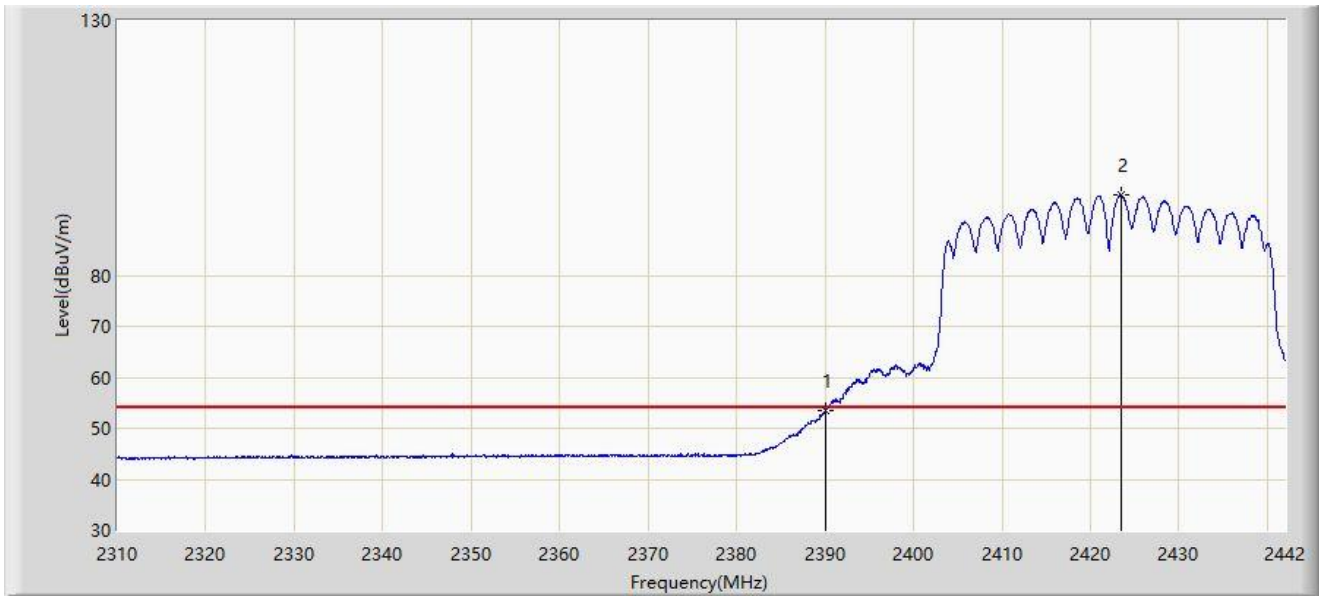


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2390.000	53.340	21.411	-0.660	54.000	31.929	AV
2		2423.454	95.845	63.777	N/A	N/A	32.069	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-19
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by VHT40 at channel 2422MHz	

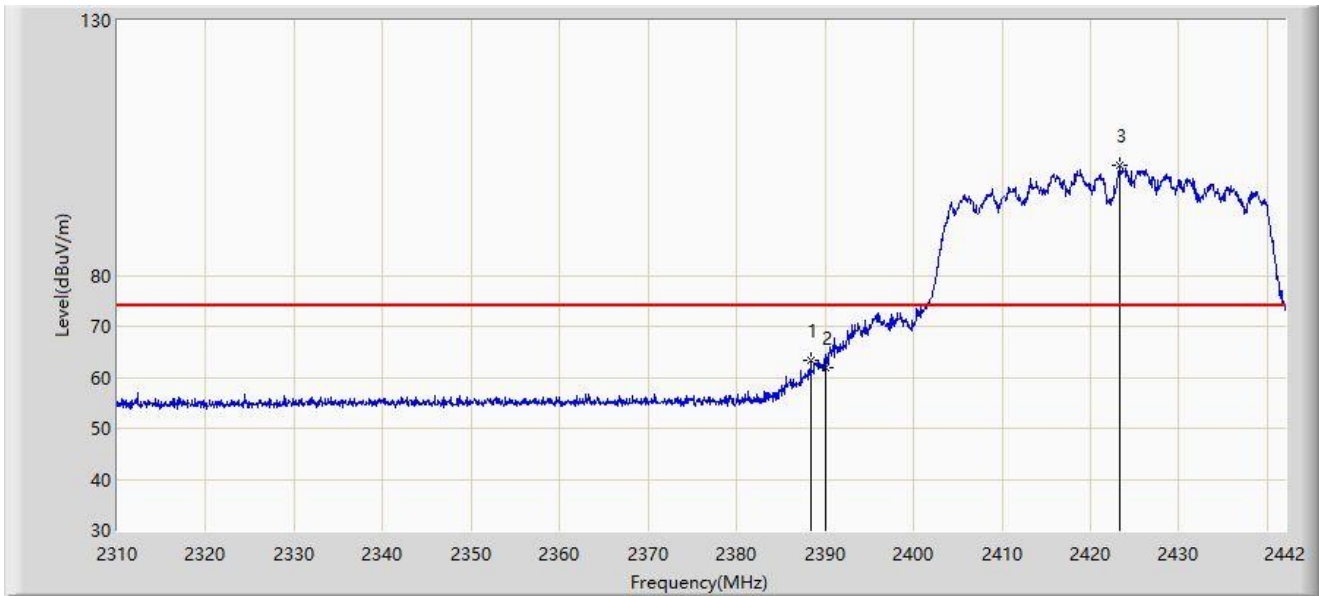


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2388.408	63.358	31.439	-10.642	74.000	31.920	PK
2		2390.000	61.800	29.871	-12.200	74.000	31.929	PK
3		2423.322	101.738	69.669	N/A	N/A	32.068	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-19
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by VHT40 at channel 2422MHz	

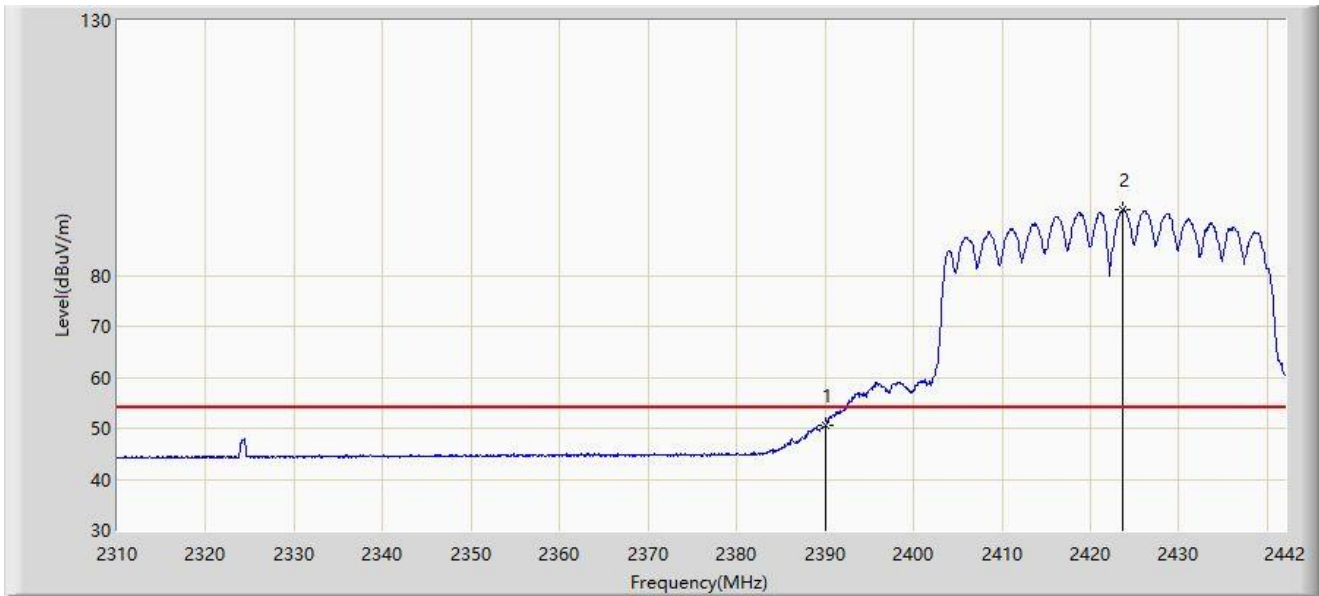

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2390.000	50.477	18.548	-3.523	54.000	31.929	AV
2		2423.652	92.886	60.818	N/A	N/A	32.068	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: SIP-AC3	Test Date: 2022-10-19
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by VHT40 at channel 2452MHz	




No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2466.306	104.472	72.240	N/A	N/A	32.232	PK
2		2483.500	64.493	32.188	-9.507	74.000	32.305	PK
3	*	2486.366	69.078	36.758	-4.922	74.000	32.319	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-19
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by VHT40 at channel 2452MHz	

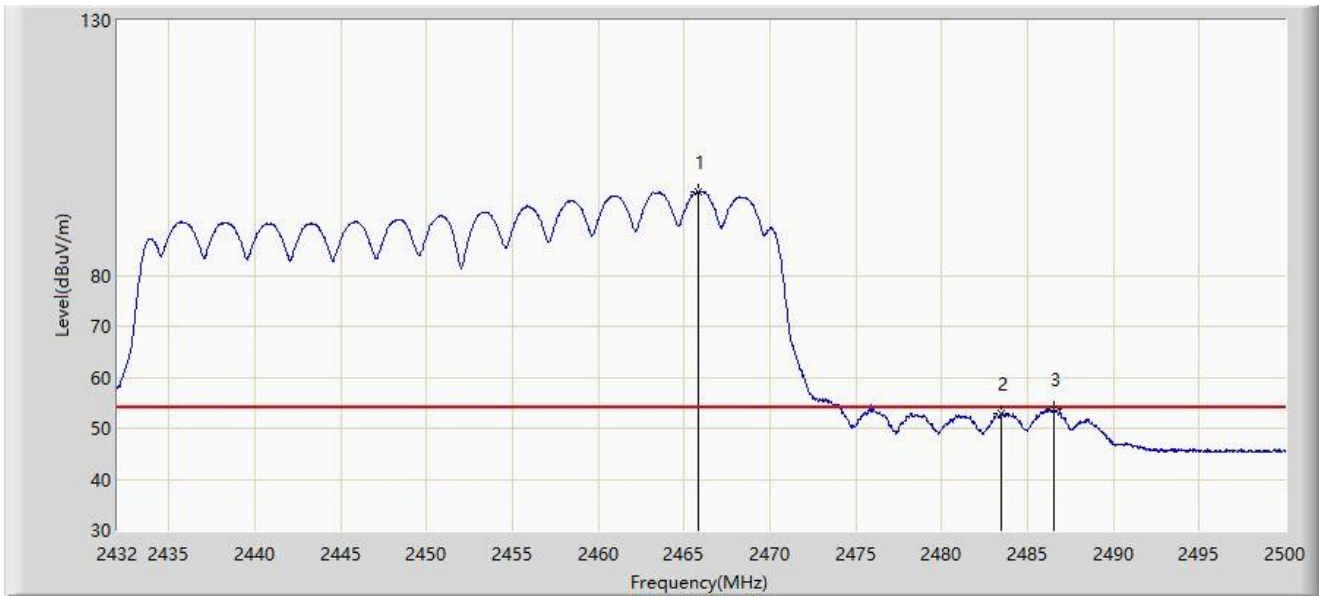


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2465.864	96.321	64.091	N/A	N/A	32.231	AV
2		2483.500	52.935	20.630	-1.065	54.000	32.305	AV
3	*	2486.502	53.778	21.458	-0.222	54.000	32.320	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-19
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by VHT40 at channel 2452MHz	

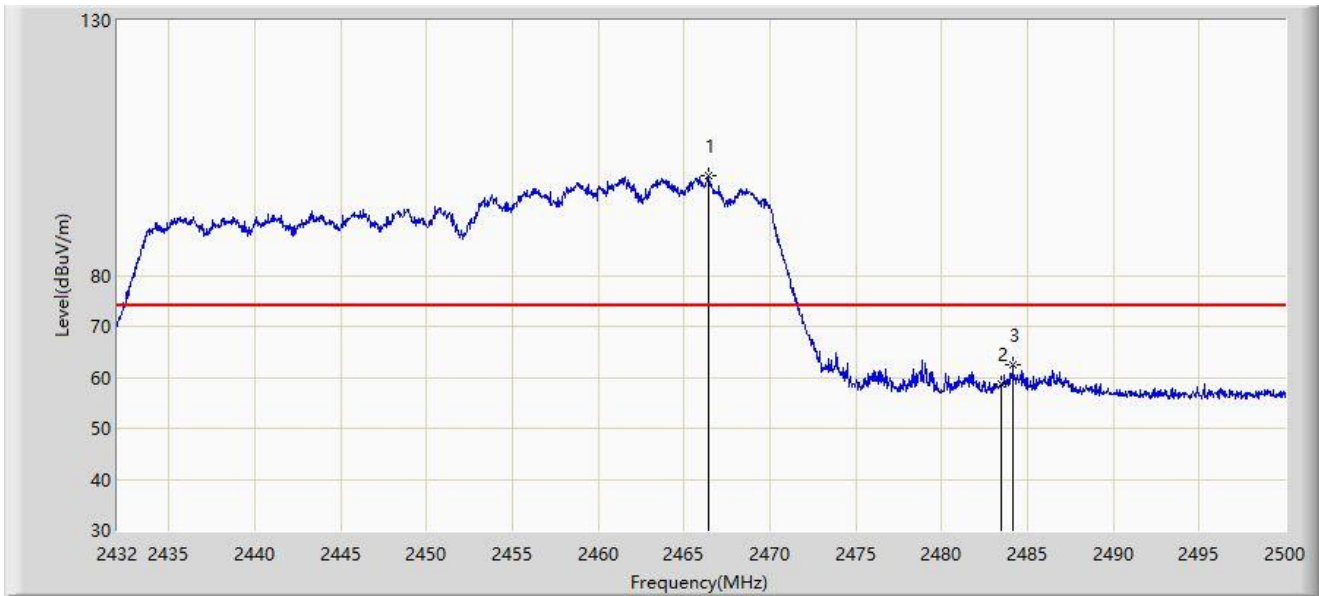


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2466.408	99.466	67.233	N/A	N/A	32.233	PK
2		2483.500	58.683	26.378	-15.317	74.000	32.305	PK
3	*	2484.156	62.340	30.032	-11.660	74.000	32.308	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-19
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by VHT40 at channel 2452MHz	

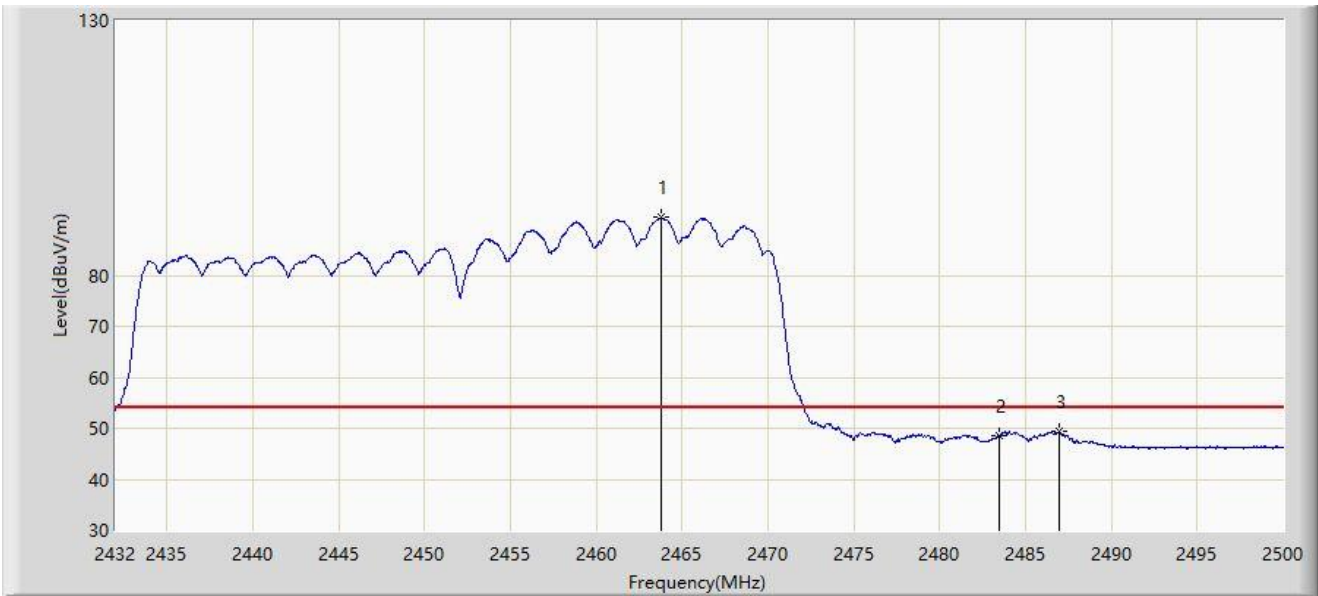


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2463.790	91.381	59.159	N/A	N/A	32.222	AV
2		2483.500	48.497	16.192	-5.503	54.000	32.305	AV
3	*	2486.944	49.296	16.974	-4.704	54.000	32.322	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-18
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at channel 2412MHz 26Tone RU0	

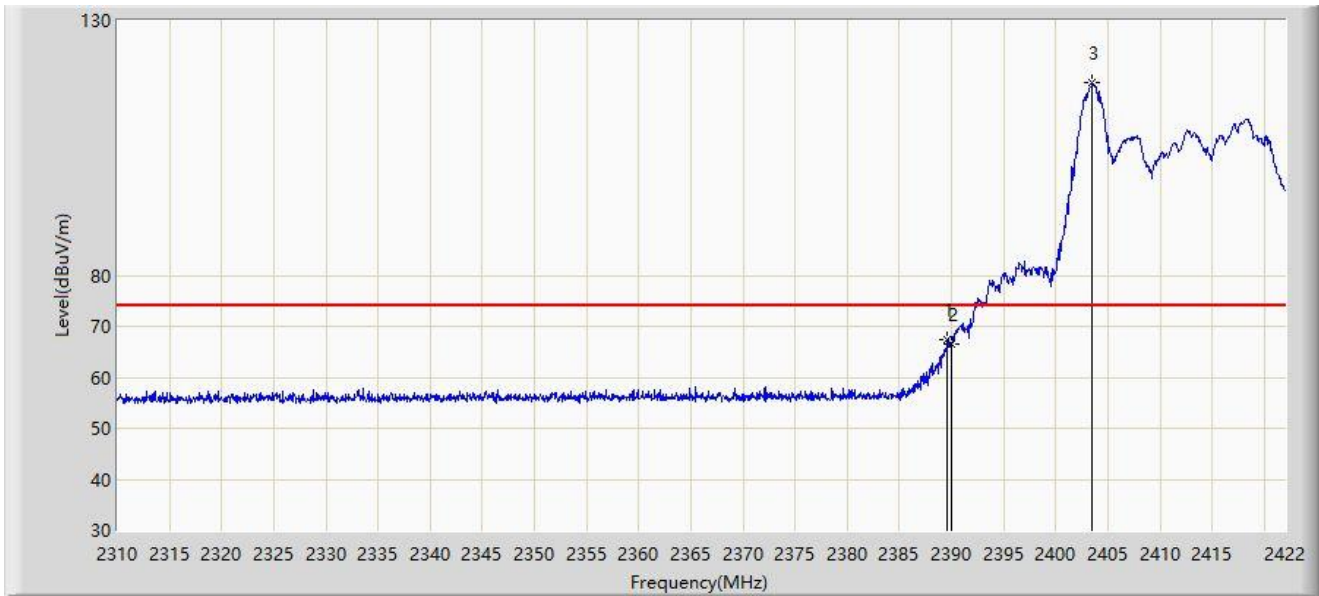


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.632	67.520	35.593	-6.480	74.000	31.926	PK
2		2390.000	66.511	34.582	-7.489	74.000	31.929	PK
3		2403.464	117.692	85.669	N/A	N/A	32.023	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-18
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at channel 2412MHz 26Tone RU0	

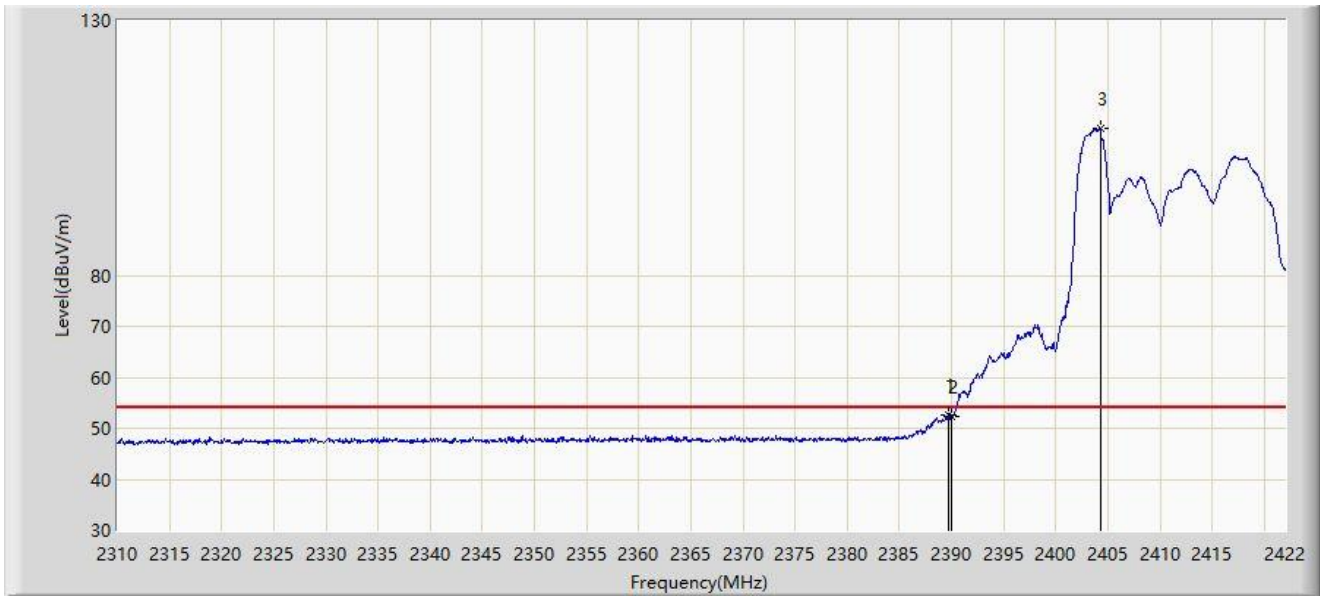


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2389.744	52.526	20.599	-1.474	54.000	31.928	AV
2		2390.000	52.357	20.428	-1.643	54.000	31.929	AV
3		2404.248	108.744	76.715	N/A	N/A	32.028	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-18
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at channel 2412MHz 26Tone RU0	

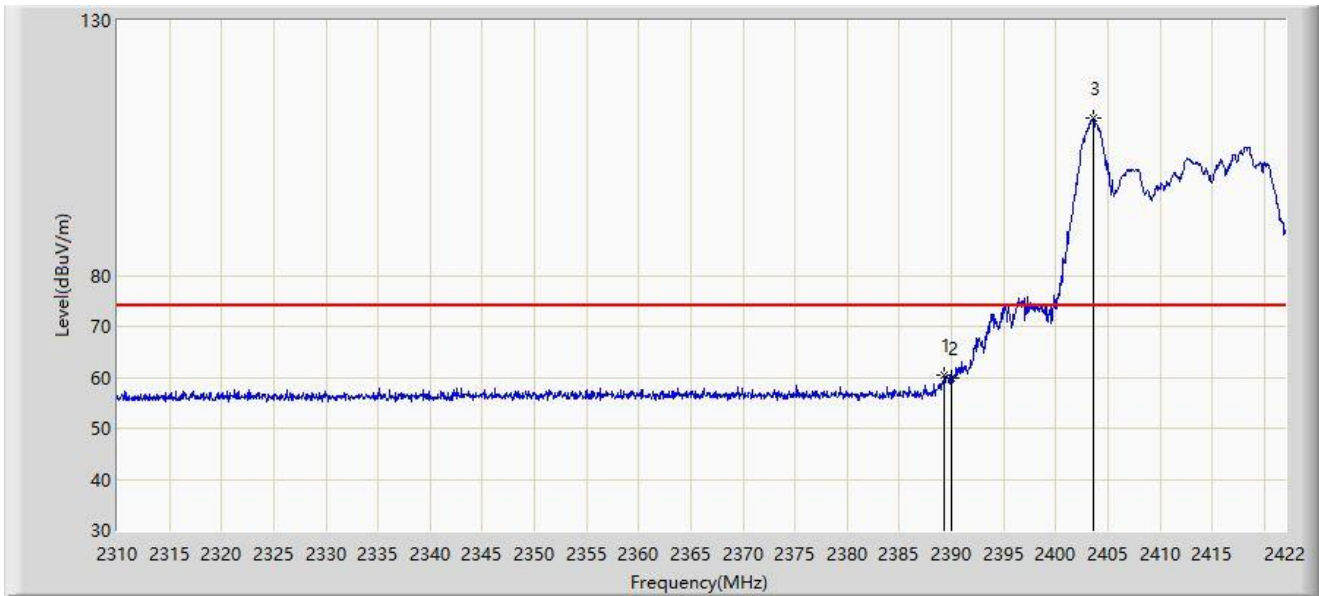


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2389.296	60.557	28.632	-13.443	74.000	31.925	PK
2		2390.000	59.986	28.057	-14.014	74.000	31.929	PK
3		2403.632	110.786	78.762	N/A	N/A	32.024	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-18
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at channel 2412MHz 26Tone RU0	

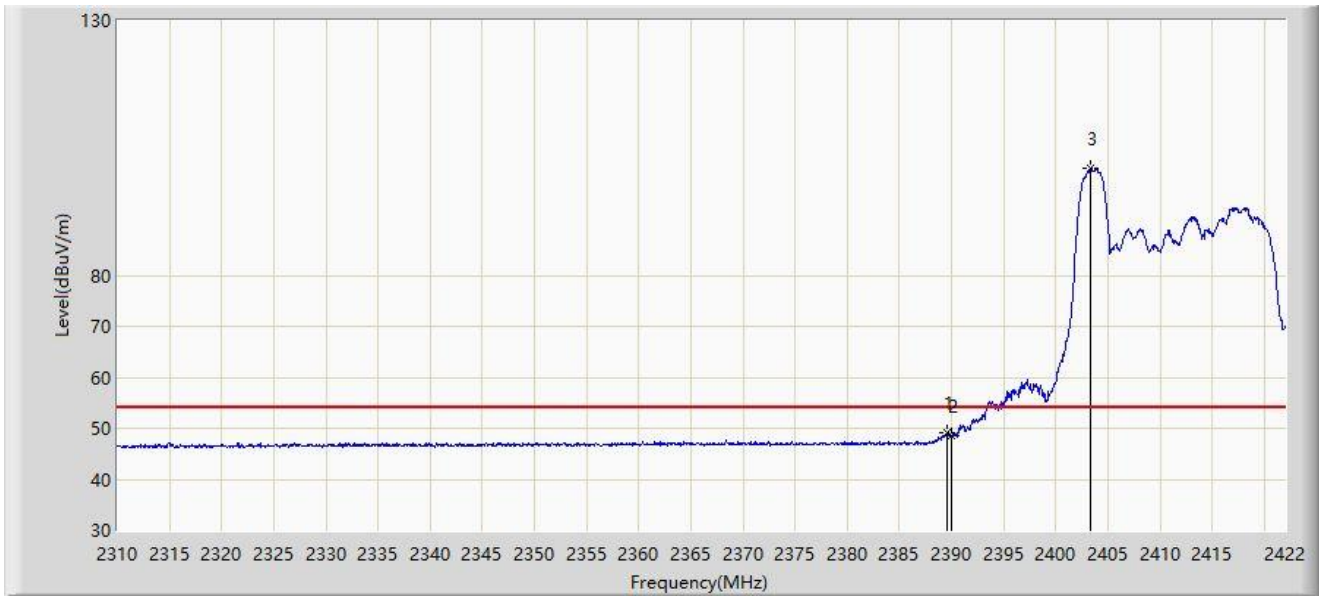

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2389.520	48.989	17.063	-5.011	54.000	31.926	AV
2		2390.000	48.450	16.521	-5.550	54.000	31.929	AV
3		2403.296	101.041	69.019	N/A	N/A	32.021	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: SIP-AC3	Test Date: 2022-10-18
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at channel 2462MHz 26Tone RU8	

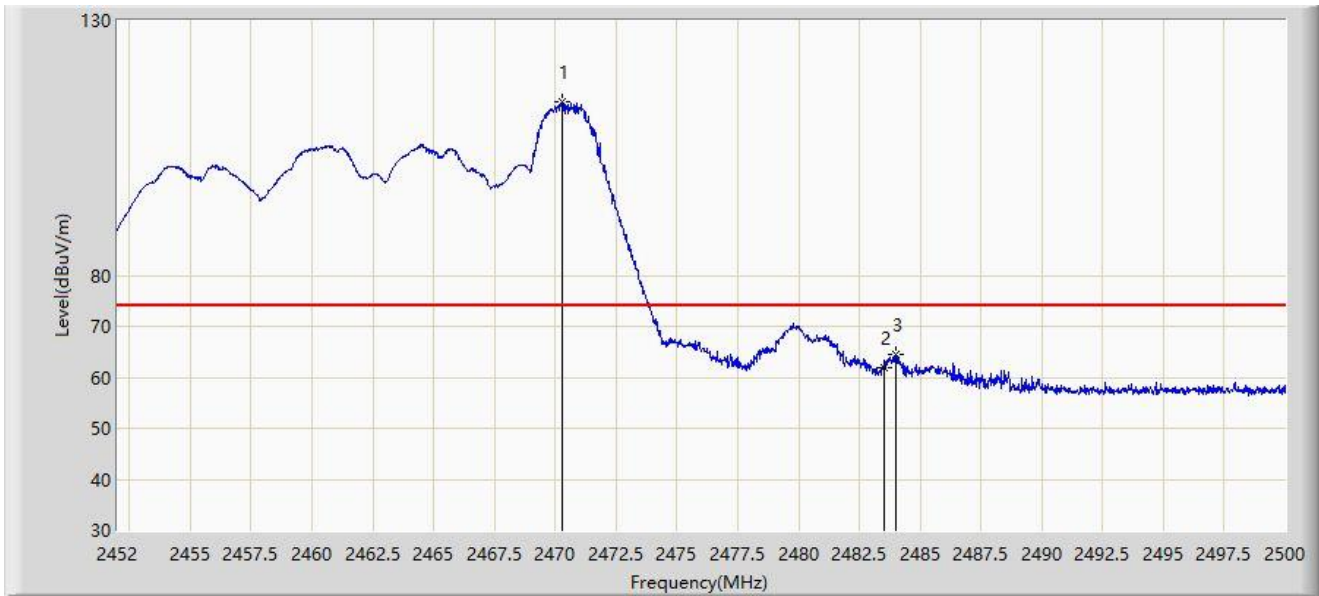


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2470.312	113.922	81.674	N/A	N/A	32.248	PK
2		2483.500	61.890	29.585	-12.110	74.000	32.305	PK
3	*	2484.016	64.596	32.288	-9.404	74.000	32.308	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-18
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at channel 2462MHz 26Tone RU8	

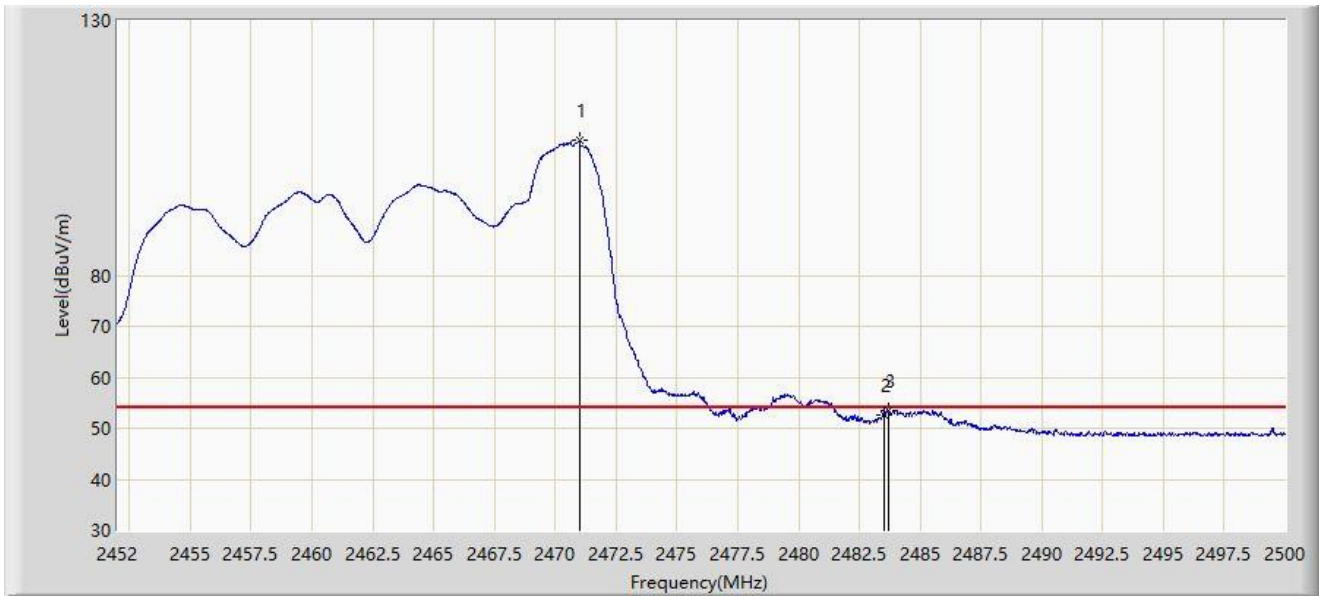


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2471.008	106.413	74.162	N/A	N/A	32.251	AV
2		2483.500	52.710	20.405	-1.290	54.000	32.305	AV
3	*	2483.704	53.536	21.230	-0.464	54.000	32.306	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-18
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at channel 2462MHz 26Tone RU8	

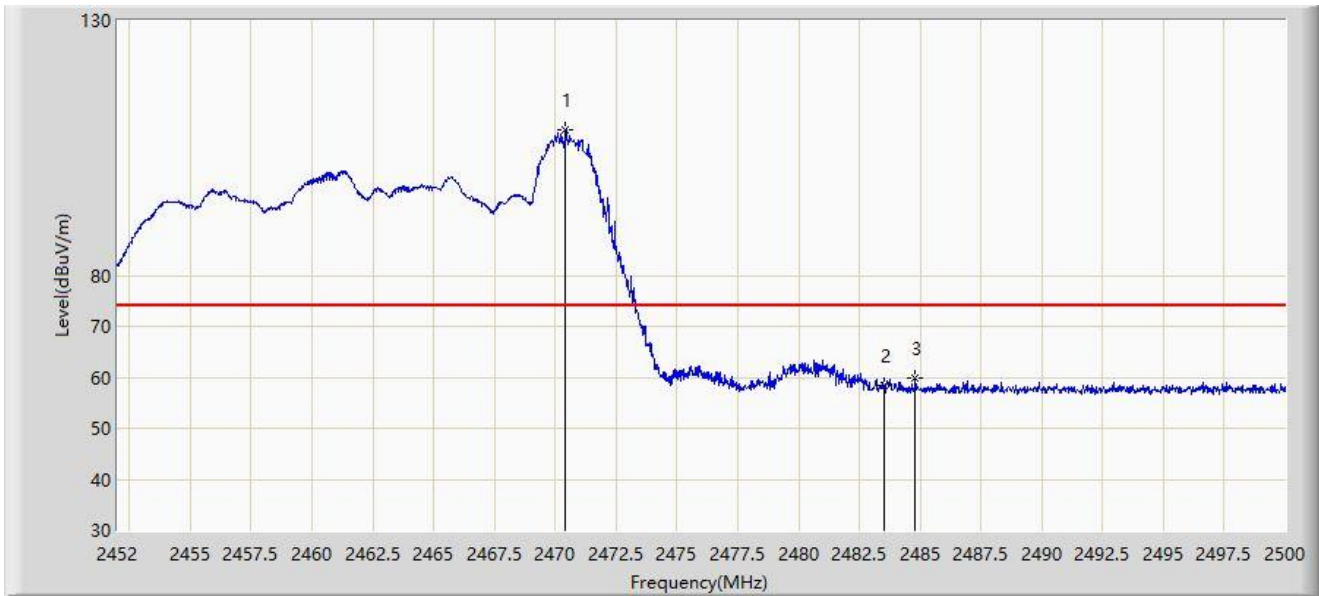


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2470.432	108.615	76.366	N/A	N/A	32.249	PK
2		2483.500	58.297	25.992	-15.703	74.000	32.305	PK
3	*	2484.808	59.954	27.642	-14.046	74.000	32.312	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-18
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at channel 2462MHz 26Tone RU8	

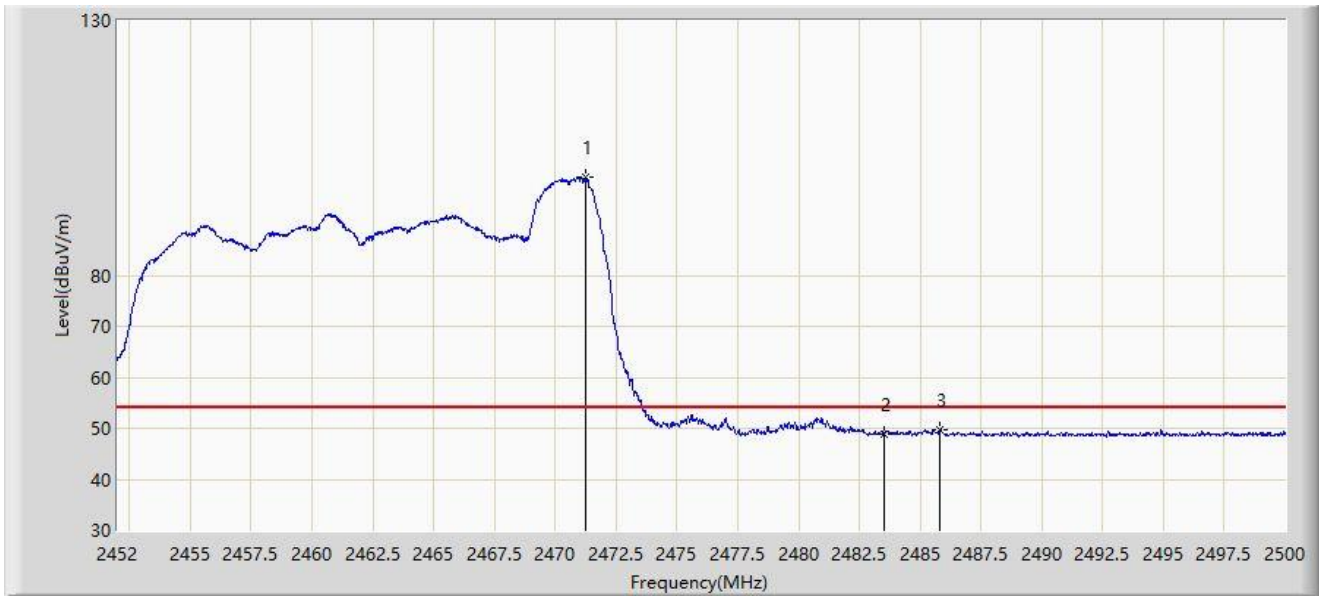


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2471.272	99.250	66.998	N/A	N/A	32.252	AV
2		2483.500	48.931	16.626	-5.069	54.000	32.305	AV
3	*	2485.816	49.834	17.517	-4.166	54.000	32.316	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at channel 2412MHz 242 Tone RU61	

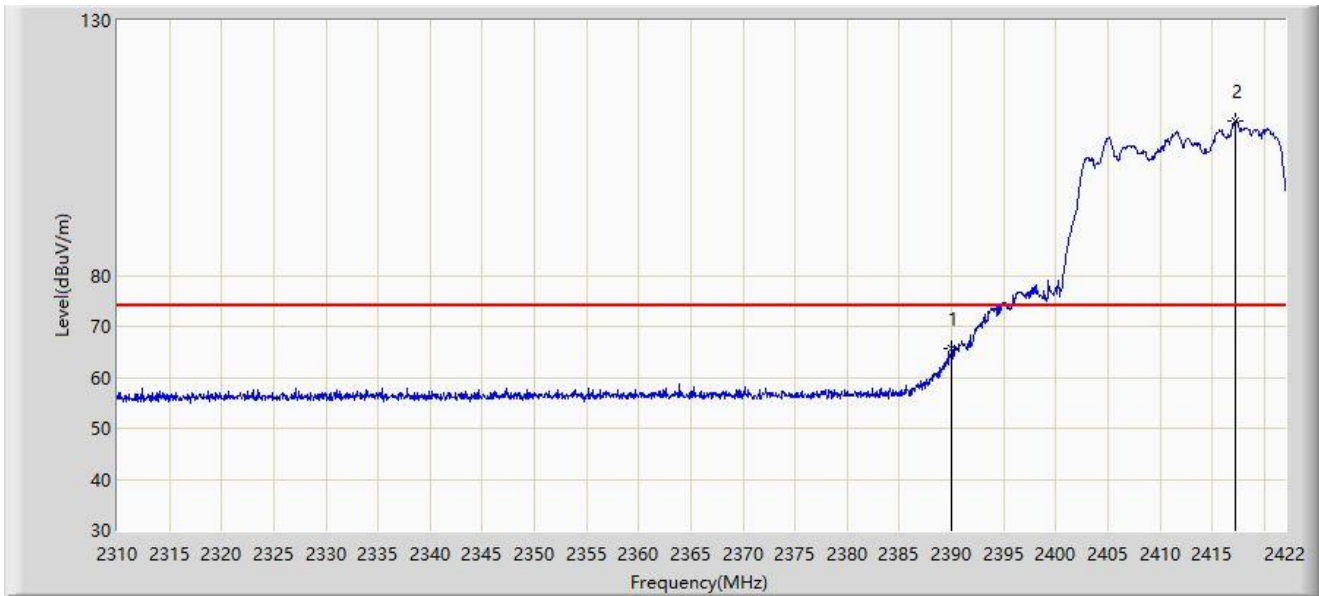


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2390.000	65.638	33.709	-8.362	74.000	31.929	PK
2		2417.184	110.351	78.278	N/A	N/A	32.074	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at channel 2412MHz 242 Tone RU61	

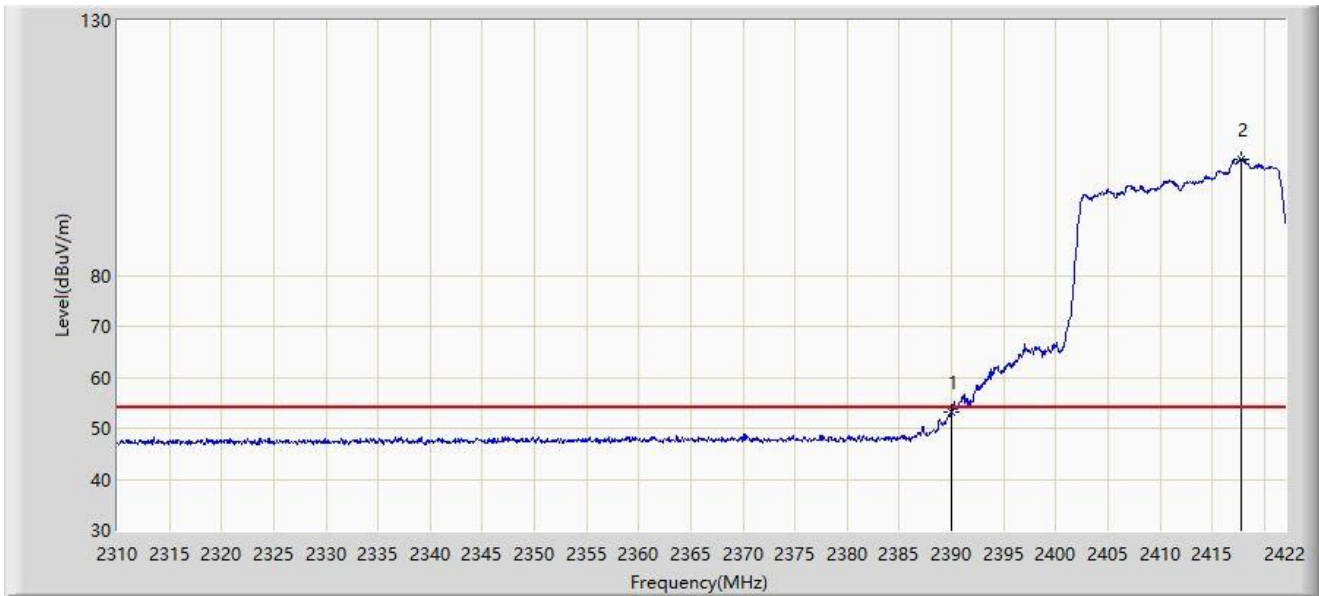


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2390.000	53.322	21.393	-0.678	54.000	31.929	AV
2		2417.856	102.868	70.795	N/A	N/A	32.073	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at channel 2412MHz 242 Tone RU61	

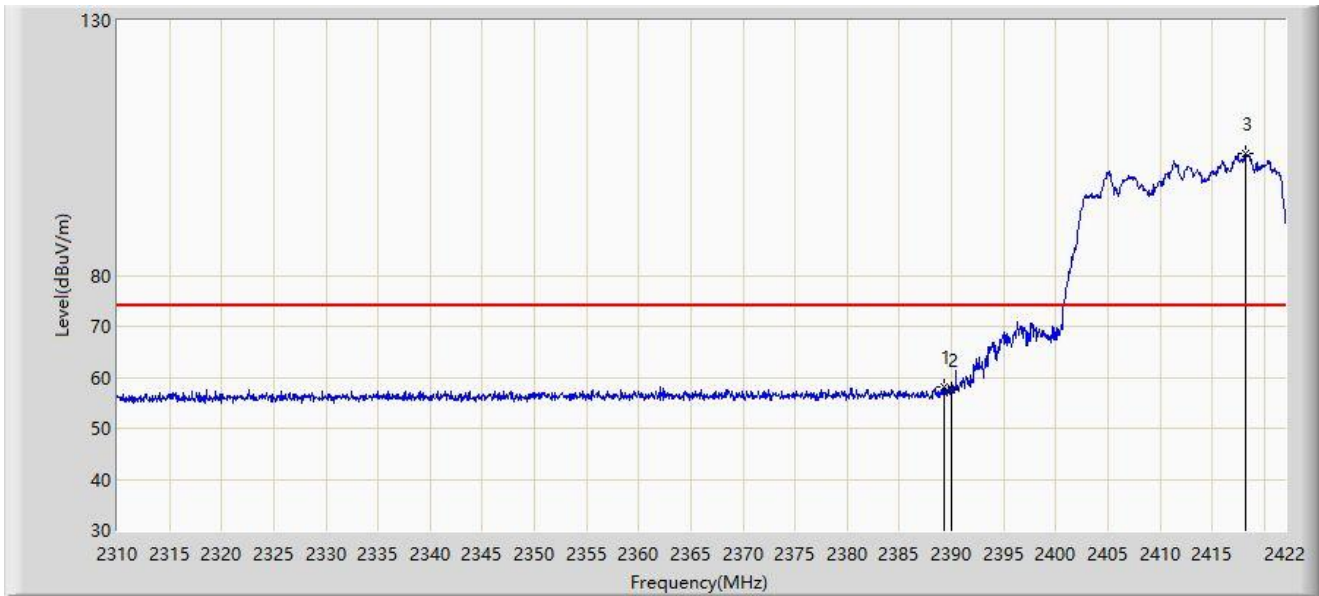


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2389.240	58.236	26.312	-15.764	74.000	31.924	PK
2		2390.000	57.583	25.654	-16.417	74.000	31.929	PK
3		2418.248	103.993	71.920	N/A	N/A	32.072	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at channel 2412MHz 242 Tone RU61	

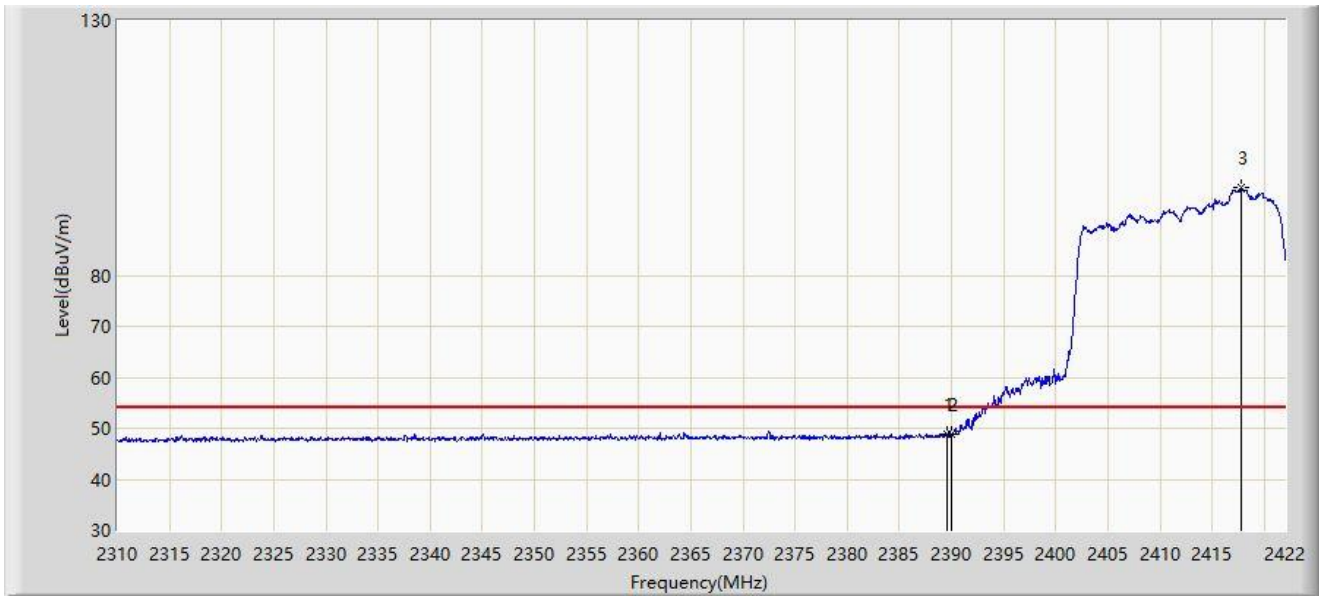

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.632	48.983	17.056	-5.017	54.000	31.926	AV
2		2390.000	48.786	16.857	-5.214	54.000	31.929	AV
3		2417.744	97.139	65.066	N/A	N/A	32.073	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: SIP-AC3	Test Date: 2022-10-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at channel 2462MHz 242 Tone RU61	




No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2465.104	106.614	74.387	N/A	N/A	32.227	PK
2		2483.500	63.819	31.514	-10.181	74.000	32.305	PK
3	*	2483.560	64.774	32.469	-9.226	74.000	32.305	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at channel 2462MHz 242 Tone RU61	

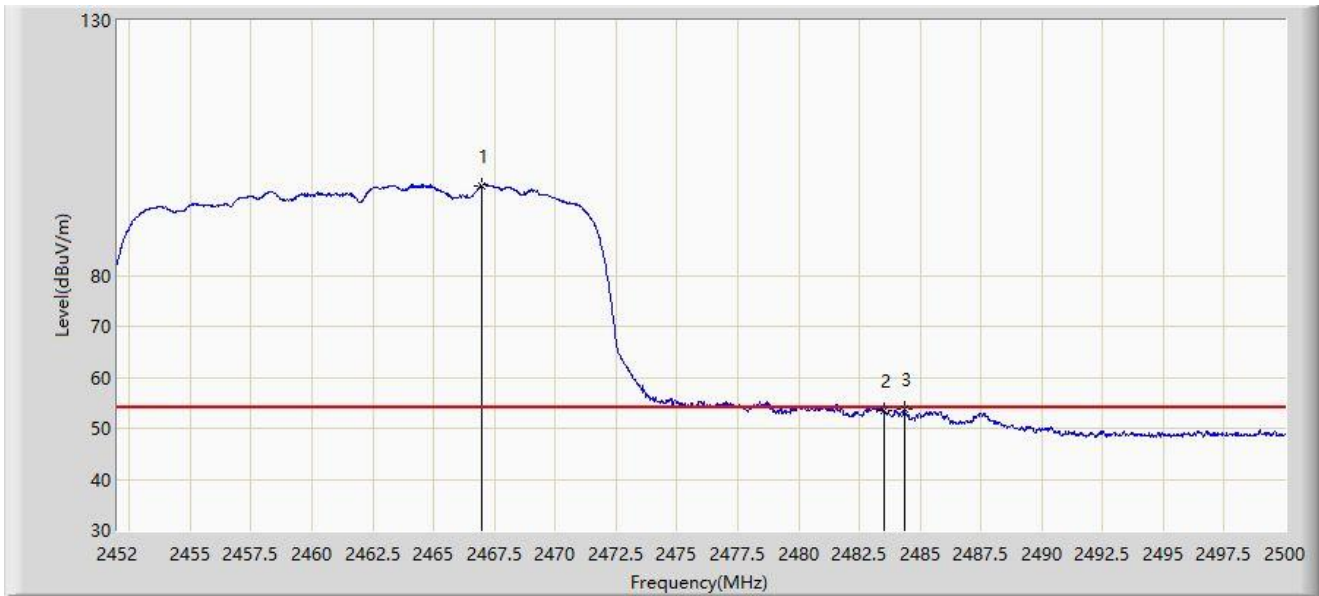


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2466.976	97.574	65.339	N/A	N/A	32.235	AV
2		2483.500	53.465	21.160	-0.535	54.000	32.305	AV
3	*	2484.352	53.653	21.344	-0.347	54.000	32.310	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at channel 2462MHz 242 Tone RU61	

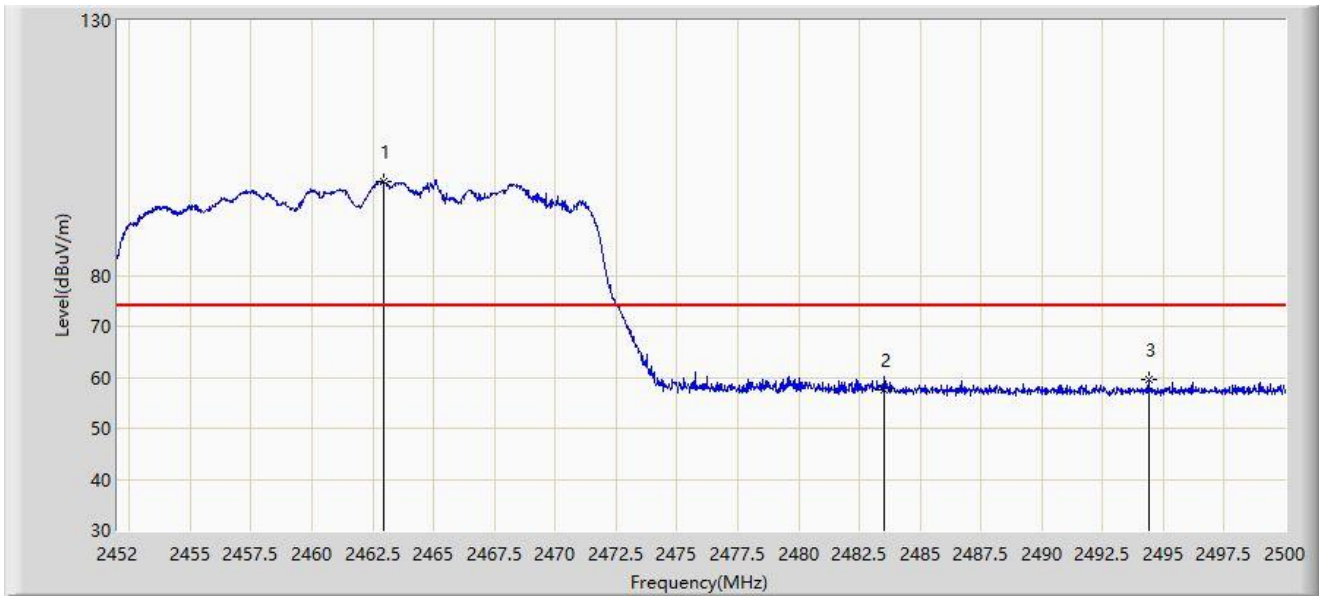


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2462.944	98.502	66.283	N/A	N/A	32.219	PK
2		2483.500	57.581	25.276	-16.419	74.000	32.305	PK
3	*	2494.384	59.589	27.229	-14.411	74.000	32.360	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at channel 2462MHz 242 Tone RU61	

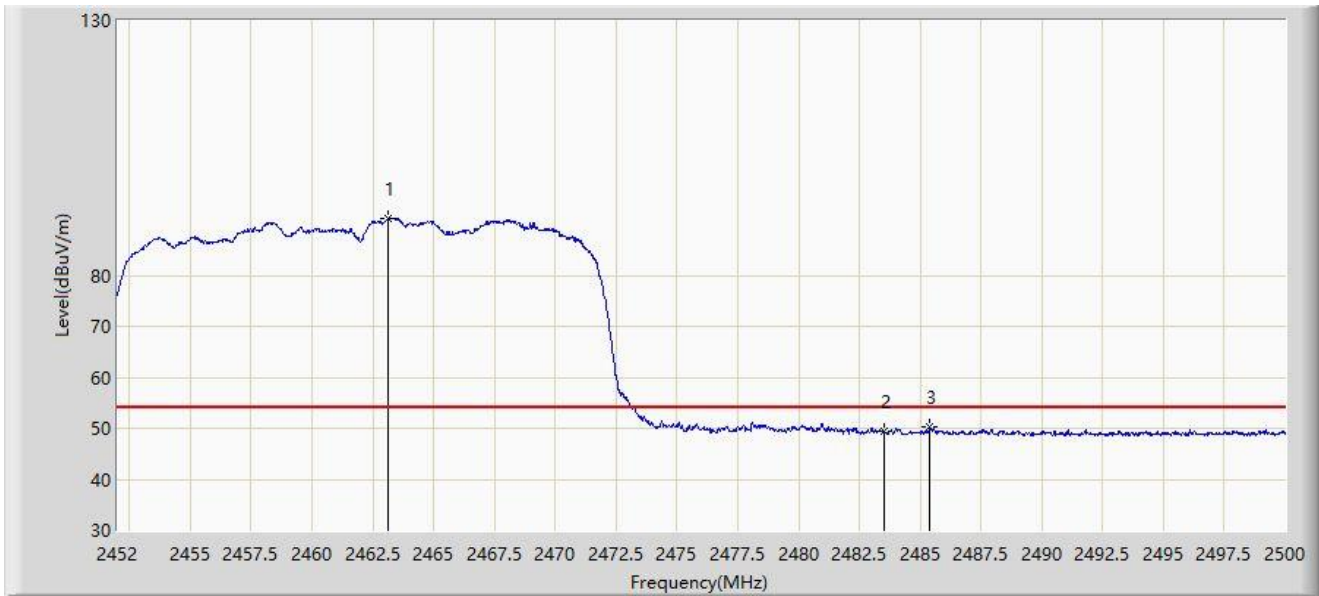

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2463.136	91.106	58.886	N/A	N/A	32.220	AV
2		2483.500	49.367	17.062	-4.633	54.000	32.305	AV
3	*	2485.408	50.225	17.910	-3.775	54.000	32.315	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at channel 2422MHz 26 Tone RU0	




No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2389.625	65.999	34.072	-8.001	74.000	31.926	PK
2		2390.000	65.595	33.666	-8.405	74.000	31.929	PK
3		2404.250	111.972	79.943	N/A	N/A	32.028	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at channel 2422MHz 26 Tone RU0	

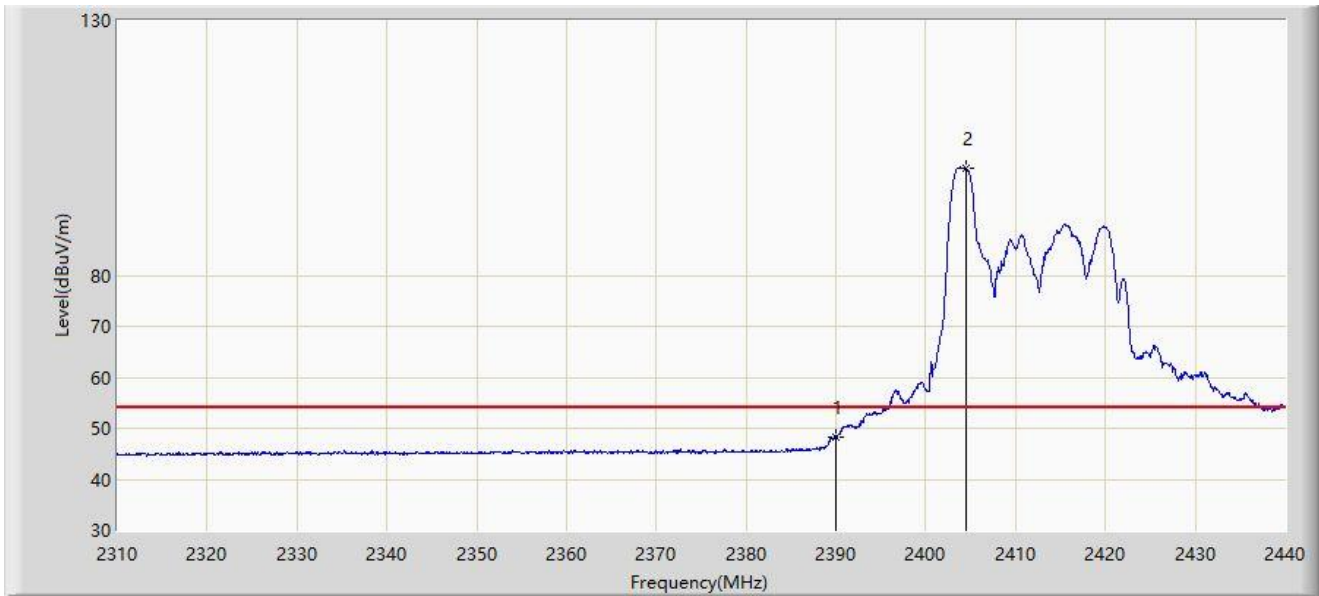


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2390.000	48.338	16.409	-5.662	54.000	31.929	AV
2		2404.510	101.067	69.037	N/A	N/A	32.030	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at channel 2422MHz 26 Tone RU0	

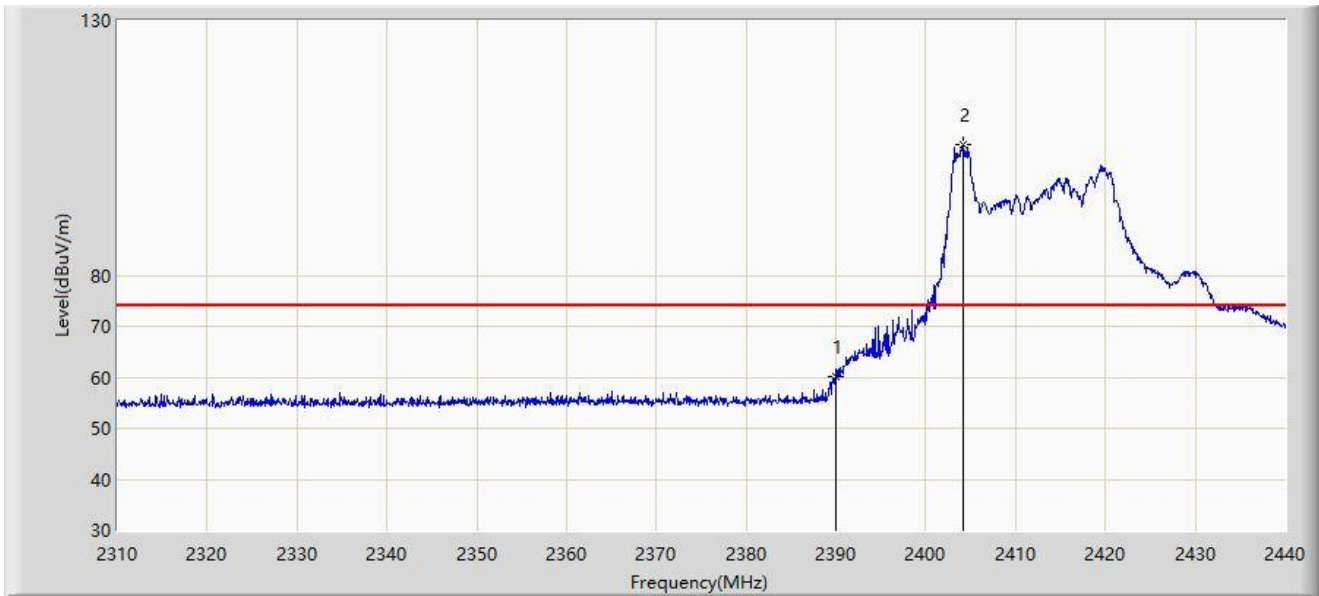


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2390.000	60.006	28.077	-13.994	74.000	31.929	PK
2		2404.120	105.583	73.555	N/A	N/A	32.028	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at channel 2422MHz 26 Tone RU0	

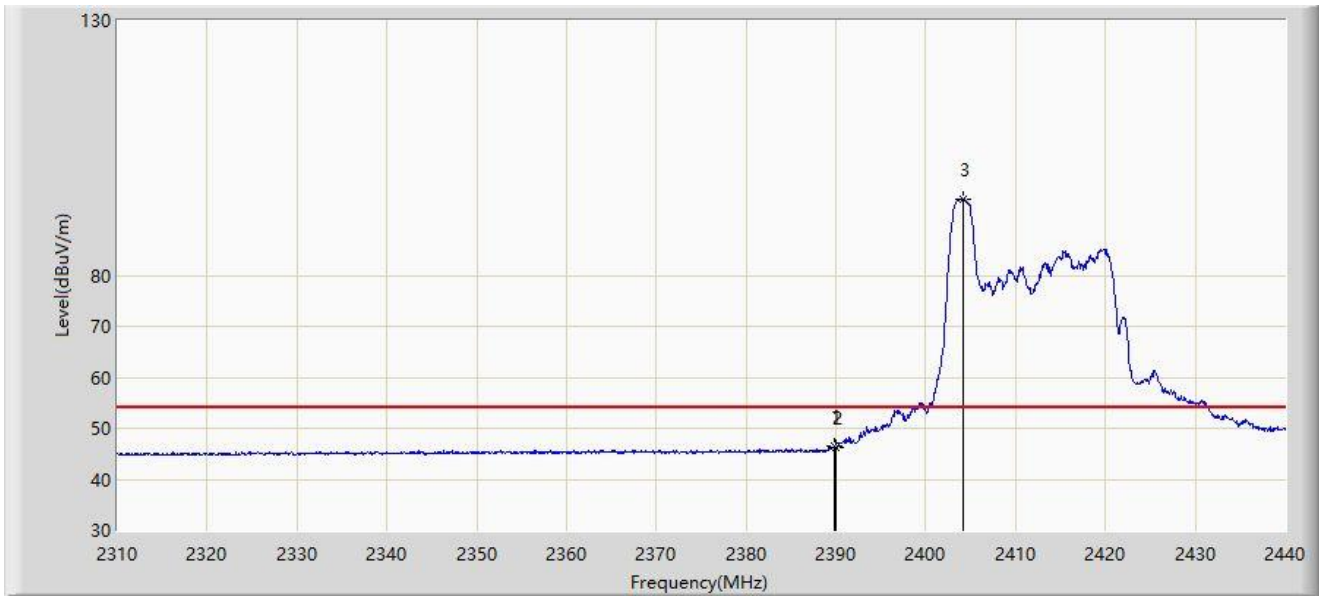

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2389.755	46.575	14.648	-7.425	54.000	31.928	AV
2		2390.000	46.245	14.316	-7.755	54.000	31.929	AV
3		2404.120	94.860	62.832	N/A	N/A	32.028	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: SIP-AC3	Test Date: 2022-10-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at channel 2452MHz 26 Tone RU17	

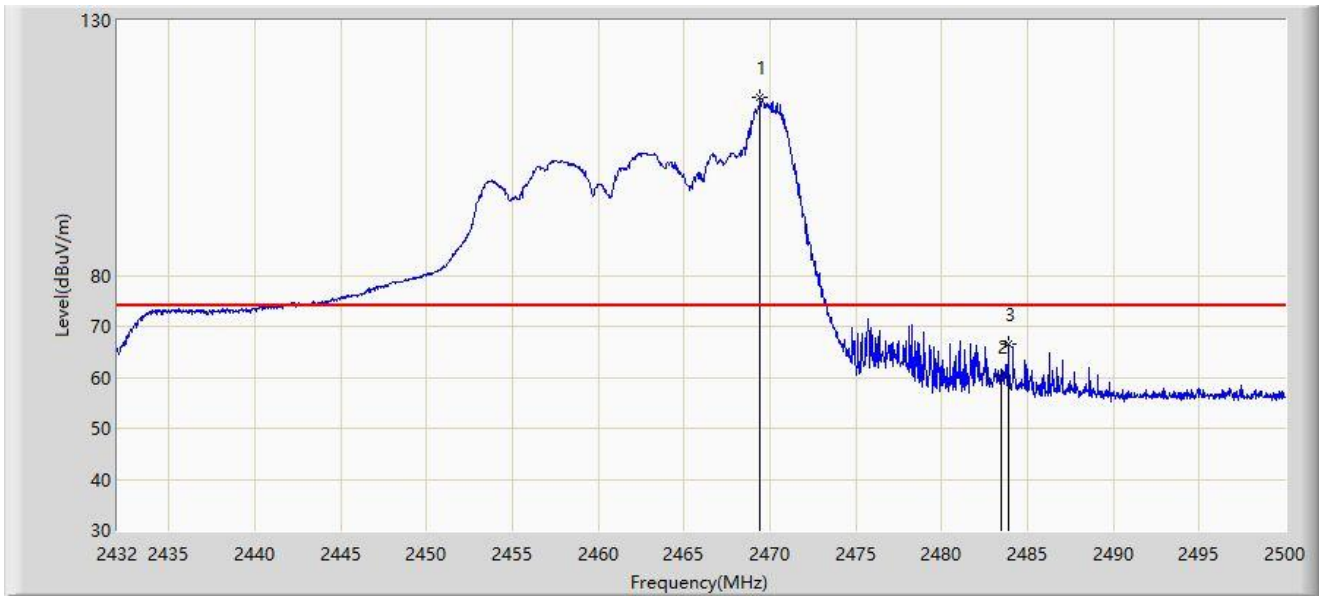


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2469.434	114.911	82.666	N/A	N/A	32.244	PK
2		2483.500	60.069	27.764	-13.931	74.000	32.305	PK
3	*	2483.884	66.496	34.189	-7.504	74.000	32.307	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at channel 2452MHz 26 Tone RU17	

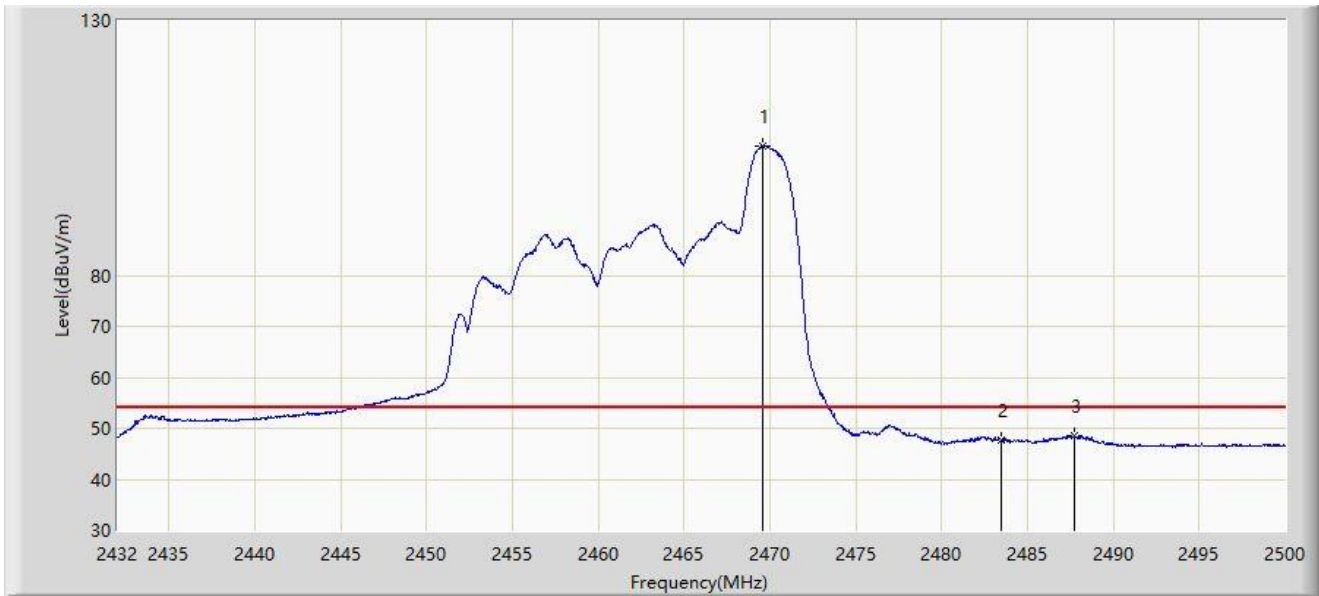


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2469.570	105.343	73.098	N/A	N/A	32.245	AV
2		2483.500	47.544	15.239	-6.456	54.000	32.305	AV
3	*	2487.726	48.452	16.126	-5.548	54.000	32.327	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at channel 2452MHz 26 Tone RU17	

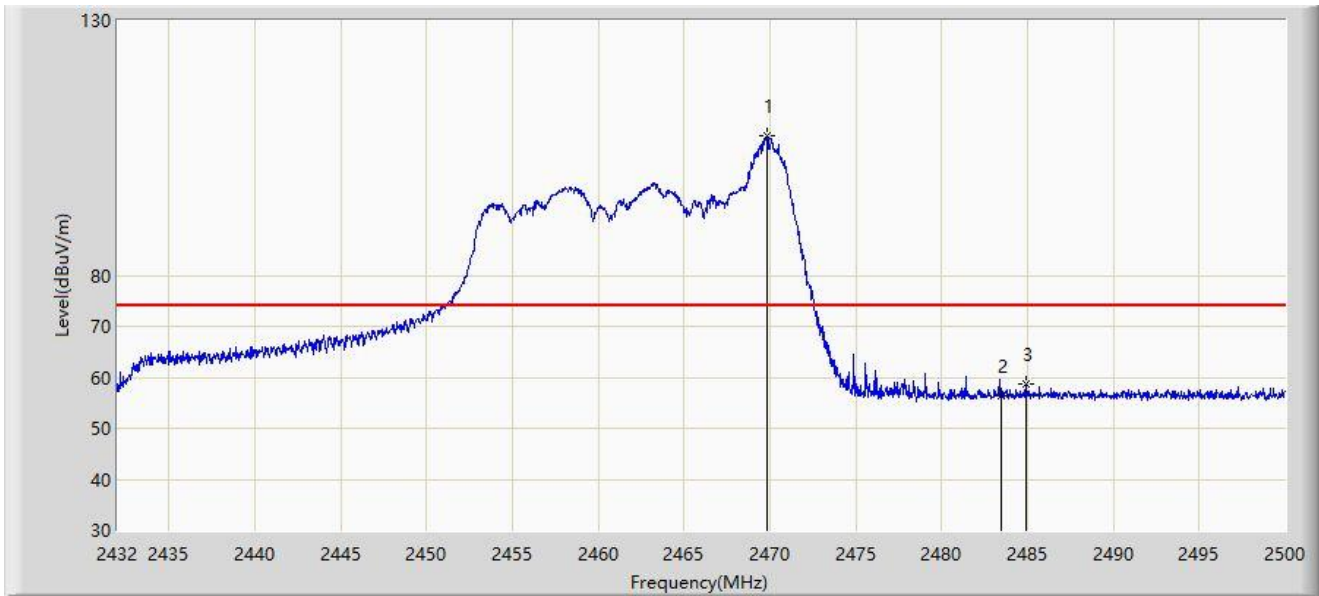


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2469.808	107.297	75.051	N/A	N/A	32.247	PK
2		2483.500	56.287	23.982	-17.713	74.000	32.305	PK
3	*	2484.938	58.560	26.248	-15.440	74.000	32.313	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at channel 2452MHz 26 Tone RU17	

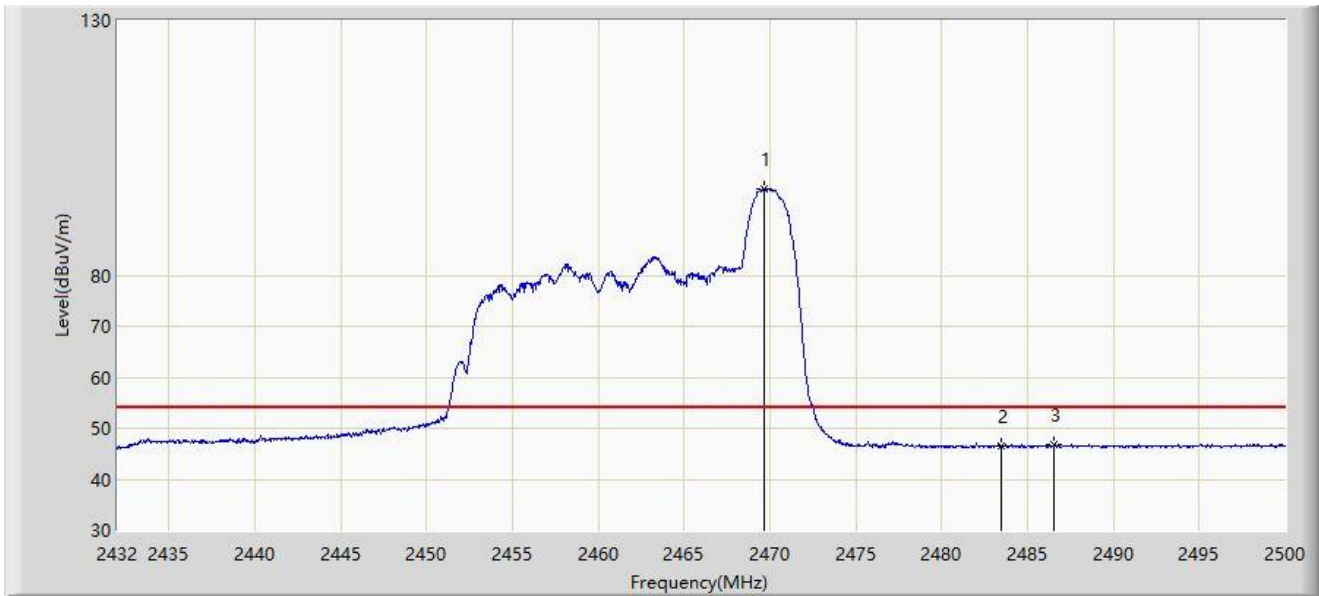


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2469.706	96.979	64.733	N/A	N/A	32.245	AV
2		2483.500	46.510	14.205	-7.490	54.000	32.305	AV
3	*	2486.536	46.710	14.390	-7.290	54.000	32.321	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at channel 2422MHz 484 Tone RU65	

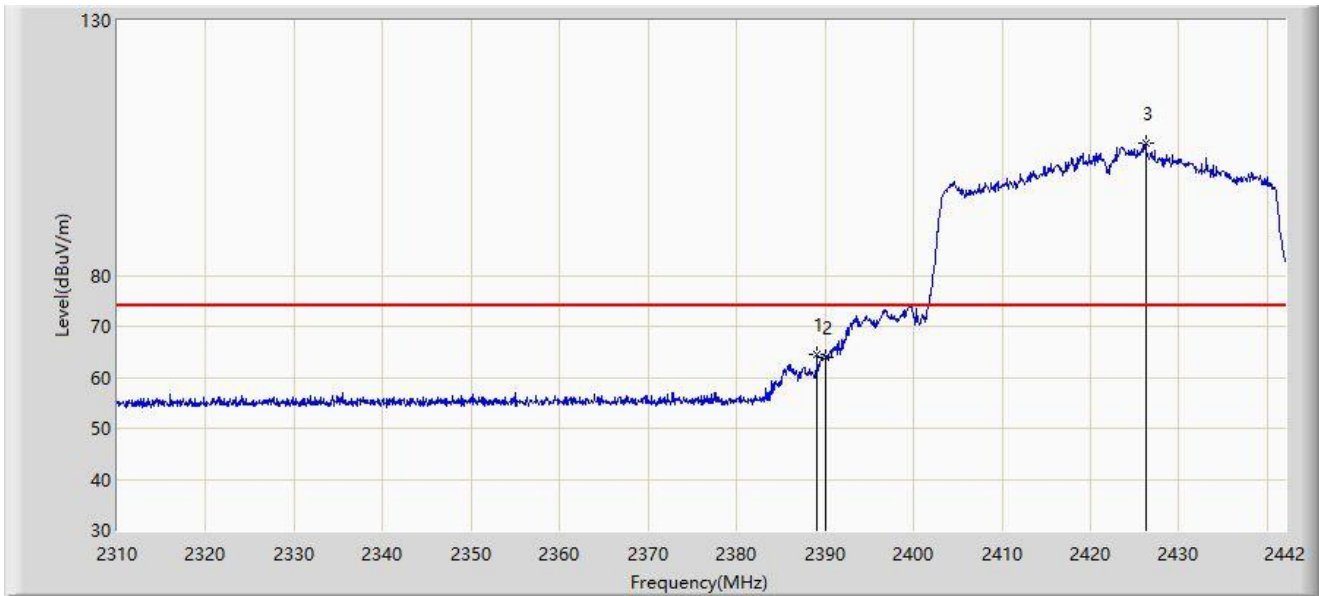


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2389.068	64.379	32.456	-9.621	74.000	31.923	PK
2		2390.000	63.844	31.915	-10.156	74.000	31.929	PK
3		2426.292	105.855	73.789	N/A	N/A	32.066	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at channel 2422MHz 484 Tone RU65	

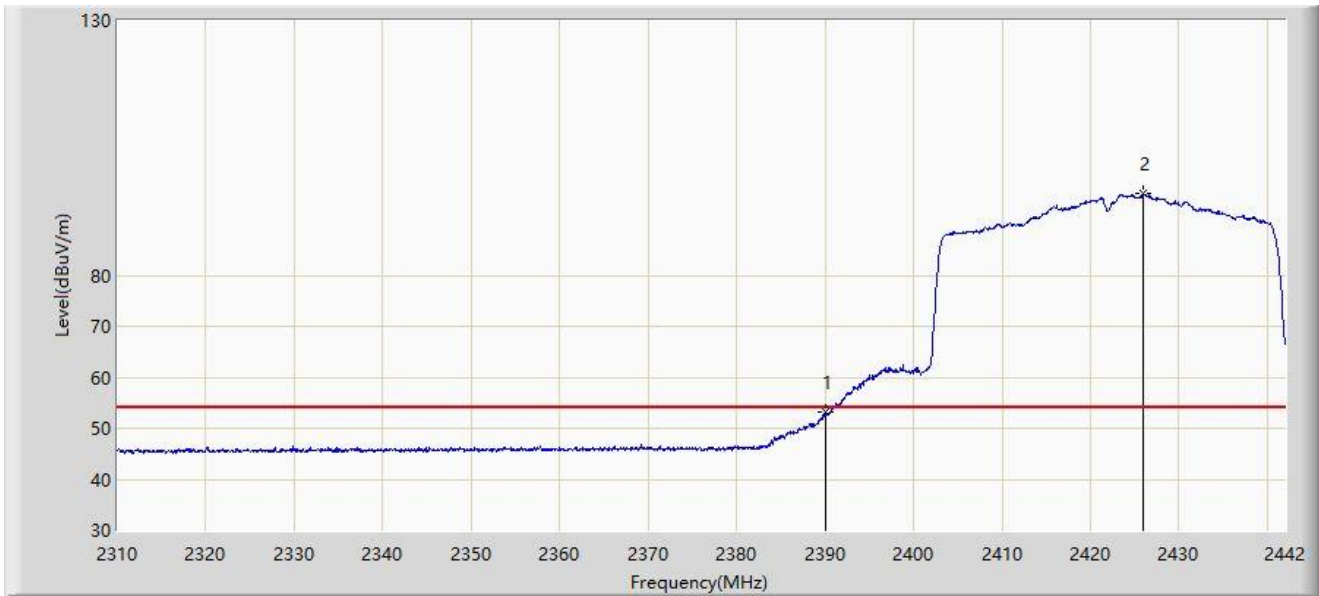


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2390.000	53.199	21.270	-0.801	54.000	31.929	AV
2		2426.028	96.058	63.992	N/A	N/A	32.066	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at channel 2422MHz 484 Tone RU65	

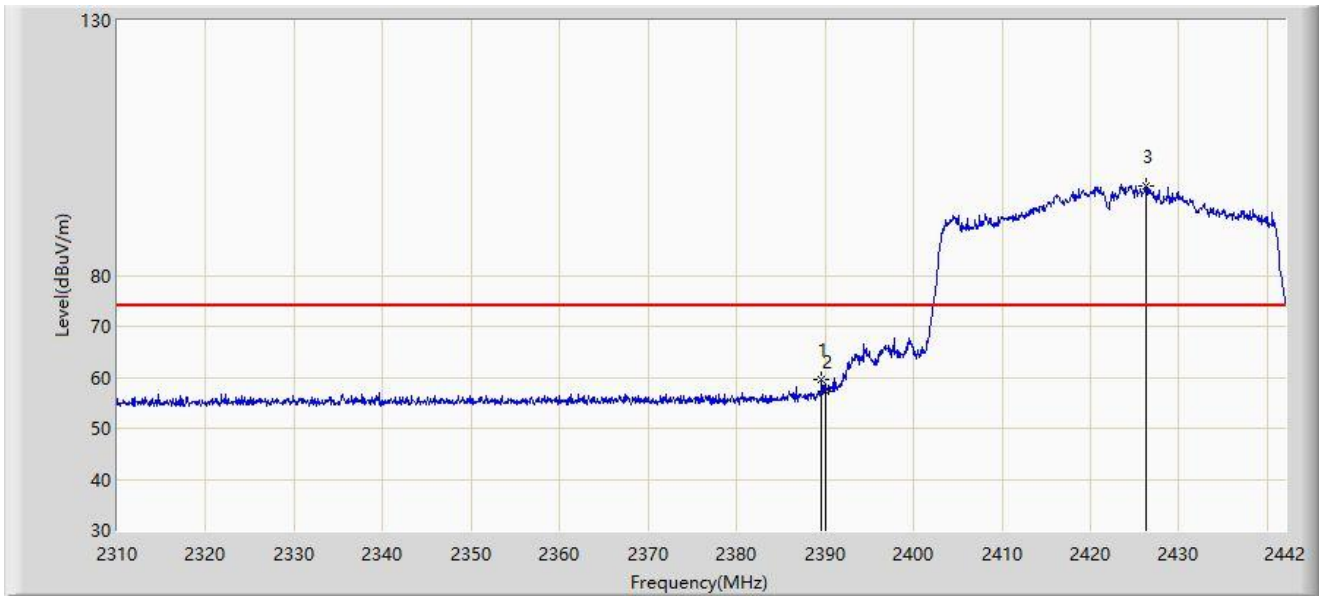


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2389.596	59.438	27.512	-14.562	74.000	31.926	PK
2		2390.000	57.325	25.396	-16.675	74.000	31.929	PK
3		2426.292	97.605	65.539	N/A	N/A	32.066	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at channel 2422MHz 484 Tone RU65	

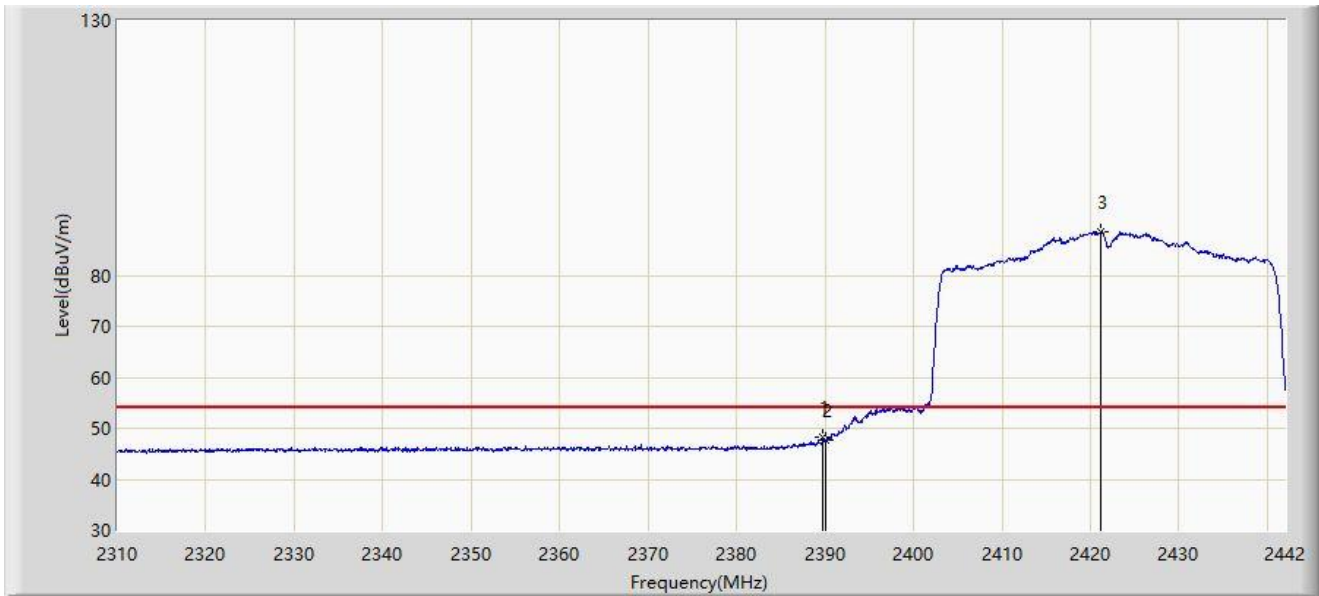

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2389.794	48.172	16.244	-5.828	54.000	31.928	AV
2		2390.000	47.721	15.792	-6.279	54.000	31.929	AV
3		2421.144	88.576	56.506	N/A	N/A	32.071	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: SIP-AC3	Test Date: 2022-10-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at channel 2452MHz 484 Tone RU65	

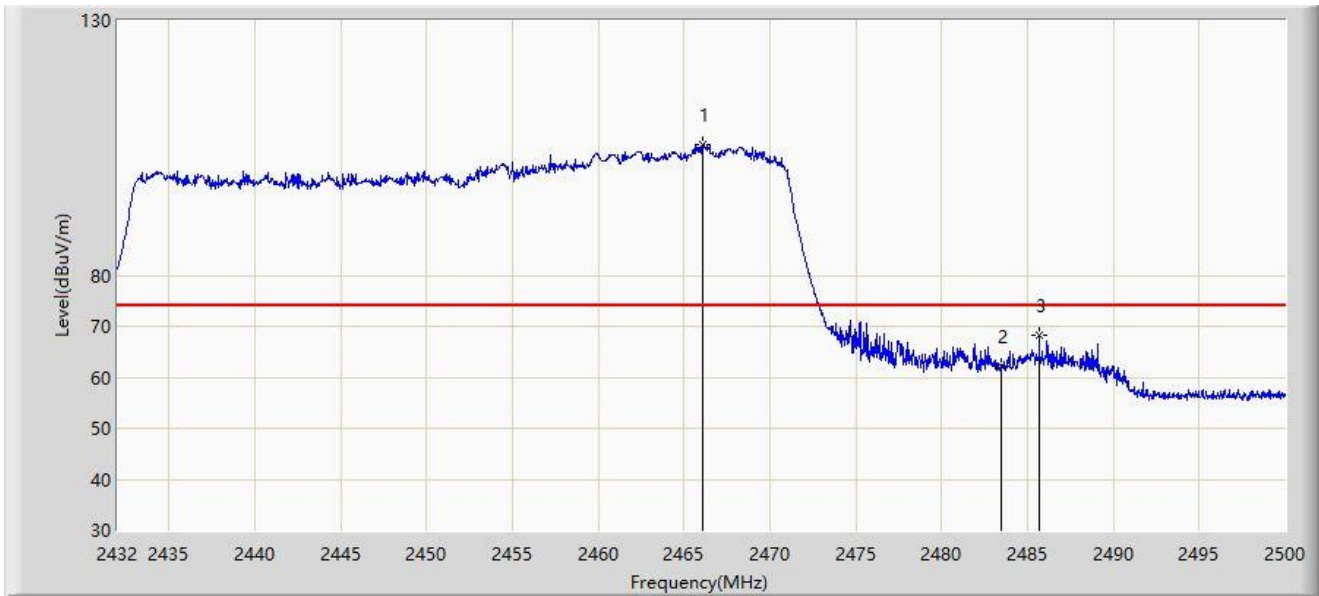


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2466.068	105.735	73.504	N/A	N/A	32.231	PK
2		2483.500	62.114	29.809	-11.886	74.000	32.305	PK
3	*	2485.686	68.372	36.056	-5.628	74.000	32.316	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at channel 2452MHz 484 Tone RU65	

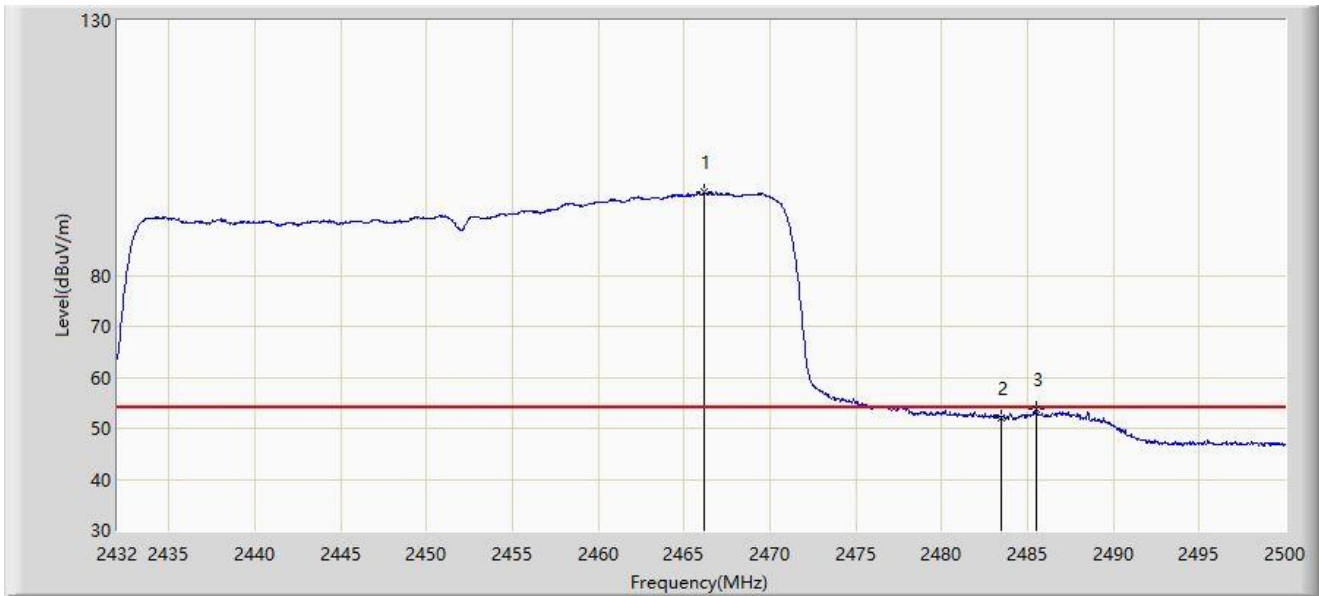


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2466.170	96.389	64.157	N/A	N/A	32.232	AV
2		2483.500	52.141	19.836	-1.859	54.000	32.305	AV
3	*	2485.482	53.788	21.473	-0.212	54.000	32.315	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at channel 2452MHz 484 Tone RU65	

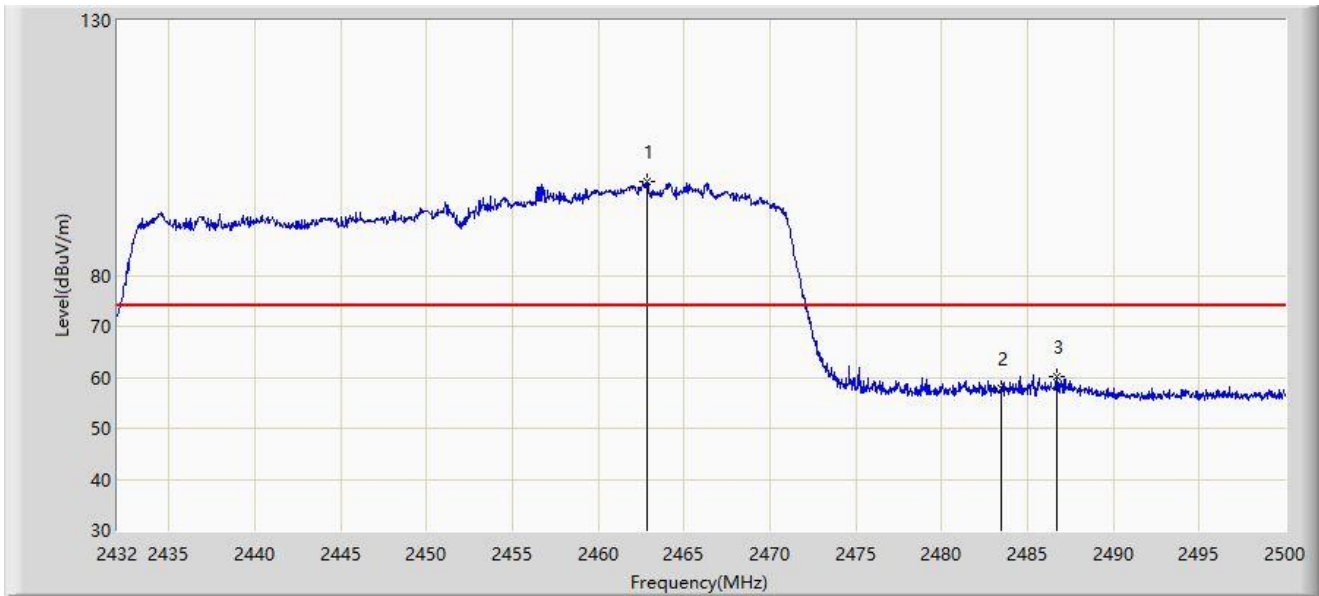


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2462.872	98.268	66.049	N/A	N/A	32.219	PK
2		2483.500	57.928	25.623	-16.072	74.000	32.305	PK
3	*	2486.740	60.281	27.960	-13.719	74.000	32.321	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022-10-19
Limit: FCC_2.4G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at channel 2452MHz 484 Tone RU65	

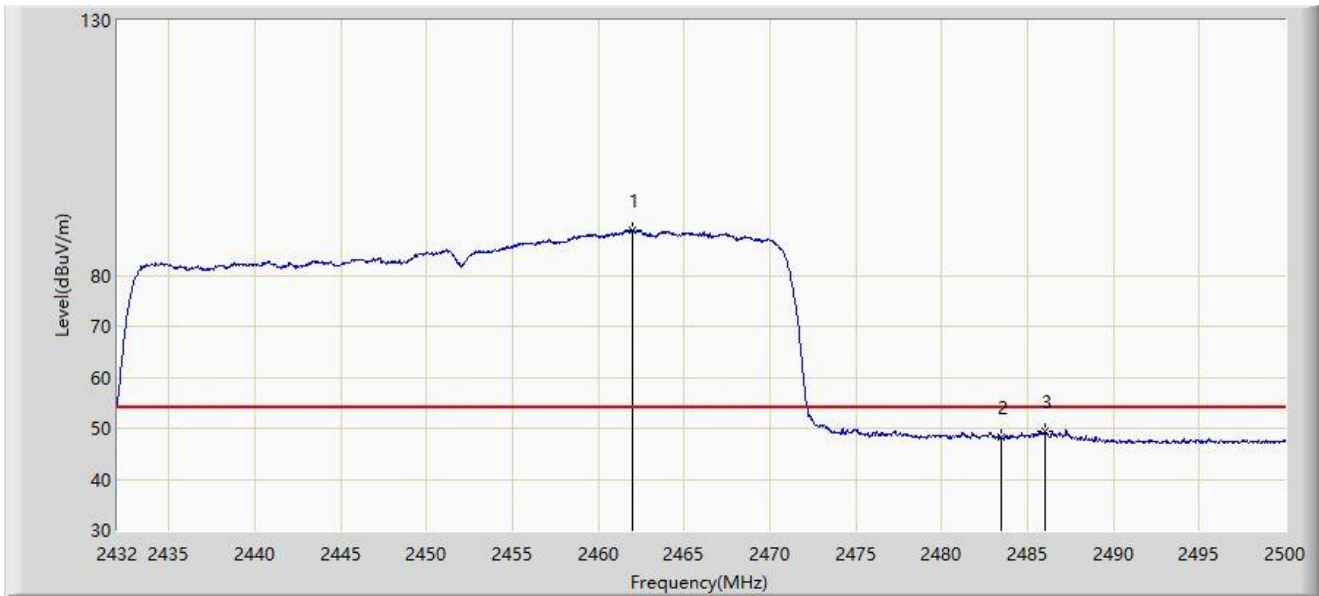

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2461.988	88.878	56.663	N/A	N/A	32.215	AV
2		2483.500	48.231	15.926	-5.769	54.000	32.305	AV
3	*	2486.026	49.433	17.115	-4.567	54.000	32.318	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

**A.8 AC Conducted Emissions Test Result**

Site: SIP-SR2	Time: 2022/10/27 - 14:14
Temperature: 24.4°C	Humidity: 60.5%
Limit: FCC_Part15.107_CE_AC Power_Class B	Engineer: Miron Ding
Probe: SIP-SR2-ENV216_101684_E	Polarity: Line
EUT: Mobile Computer	Power: AC 120V/60Hz
<b>Test Mode:</b> Transmit by 802.11ax-HE20 at channel 2462MHz	

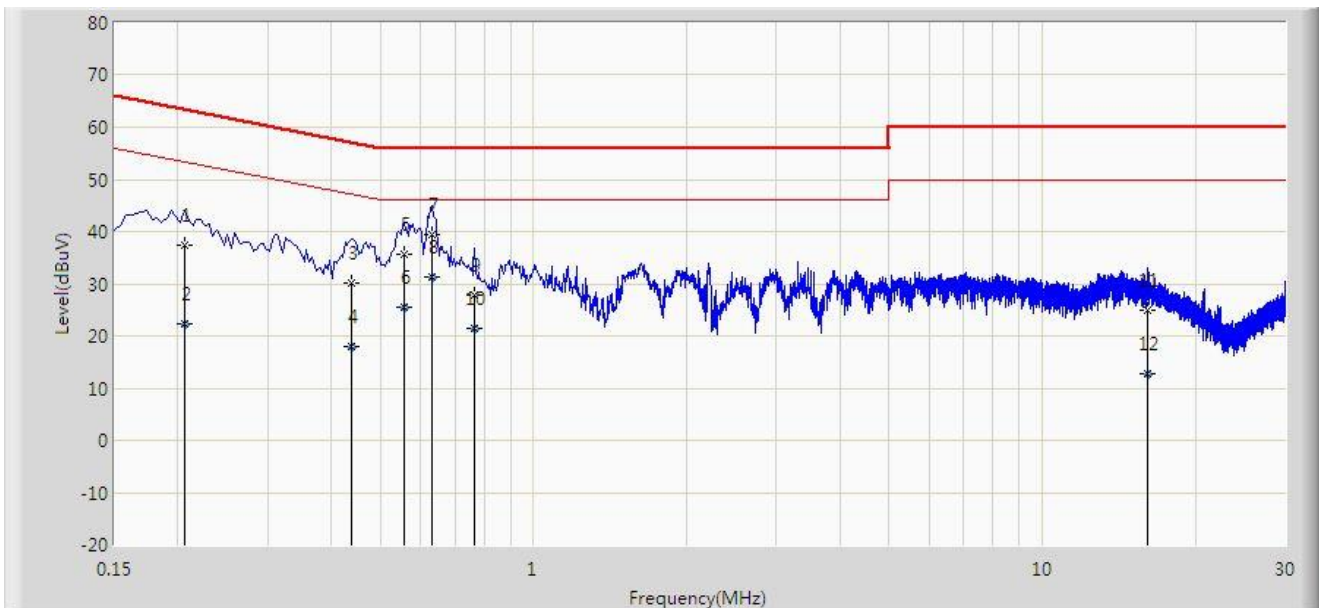


No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.206	37.417	27.646	-25.948	63.365	9.771	QP
2		0.206	22.334	12.564	-31.031	53.365	9.771	AV
3		0.438	30.246	20.423	-26.854	57.100	9.823	QP
4		0.438	18.084	8.261	-29.015	47.100	9.823	AV
5		0.558	35.631	25.801	-20.369	56.000	9.830	QP
6		0.558	25.375	15.545	-20.625	46.000	9.830	AV
7		0.630	39.315	29.480	-16.685	56.000	9.835	QP
8	*	0.630	31.427	21.591	-14.573	46.000	9.835	AV
9		0.766	27.934	18.090	-28.066	56.000	9.844	QP
10		0.766	21.486	11.641	-24.514	46.000	9.844	AV
11		16.150	24.911	12.690	-35.089	60.000	12.220	QP
12		16.150	12.667	0.447	-37.333	50.000	12.220	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: SIP-SR2	Time: 2022/10/27 - 14:19
Temperature: 24.4°C	Humidity: 60.5%
Limit: FCC_Part15.107_CE_AC Power_Class B	Engineer: Miron Ding
Probe: SIP-SR2-ENV216_101684_E	Polarity: Neutral
EUT: Mobile Computer	Power: AC 120V/60Hz
<b>Test Mode:</b> Transmit by 802.11ax-HE20 at channel 2462MHz	

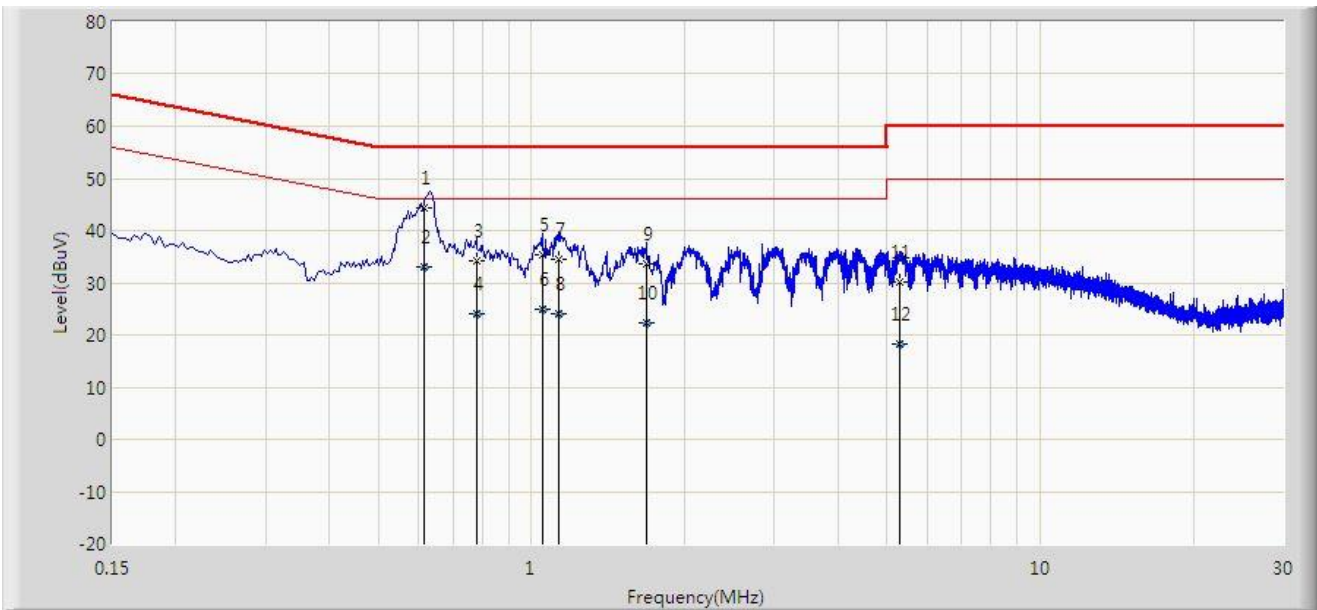

No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1	*	0.616	44.225	34.400	-11.775	56.000	9.825	QP
2		0.616	33.025	23.200	-12.975	46.000	9.825	AV
3		0.778	34.194	24.356	-21.806	56.000	9.838	QP
4		0.778	23.952	14.114	-22.048	46.000	9.838	AV
5		1.050	35.262	25.408	-20.738	56.000	9.853	QP
6		1.050	24.849	14.995	-21.151	46.000	9.853	AV
7		1.130	34.527	24.661	-21.473	56.000	9.866	QP
8		1.130	23.962	14.096	-22.038	46.000	9.866	AV
9		1.678	33.507	23.596	-22.493	56.000	9.911	QP
10		1.678	22.380	12.469	-23.620	46.000	9.911	AV
11		5.306	30.082	19.850	-29.918	60.000	10.232	QP
12		5.306	18.146	7.914	-31.854	50.000	10.232	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

## **Appendix B – Test Setup Photograph**

Refer to “2209RSU040-UT” file.

## Appendix C – EUT Photograph

Refer to “2209RSU040-UE” file.

————— The End —————