



# RF Exposure Evaluation Declaration

Product Name : Wireless Charge Rack

Model No. : CN85-WCR

FCC ID : HD5-CX85WCR

Applicant : HONEYWELL INTERNATIONAL INC  
Honeywell Safety and Productivity Solutions  
Address : 9680 OLD BAILES RD  
FORT MILL SC 29707-7539

Date of Receipt : Dec. 12, 2018

Test Date : Dec. 13, 2018~ Dec. 31, 2018

Issued Date : Jan. 07, 2019

Report No. : 18C2057R-RF-US-P20V01

Report Version : V1.0

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by A2LA or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification (Suzhou) Co., Ltd.

# Test Report Certification

Issued Date : Jan. 07, 2019  
Report No. : 18C2057R-RF-US-P20V01



Product Name : Wireless Charge Rack  
Applicant : HONEYWELL INTERNATIONAL INC  
Honeywell Safety and Productivity Solutions  
Address : 9680 OLD BAILES RD  
FORT MILL SC 29707-7539  
Manufacturer : 1.HONEYWELL INTERNATIONAL INC  
Honeywell Safety and Productivity Solutions  
2.RAYVAL (SUZHOU) TECHNOLOGIES CO LTD  
3.Metro(Suzhou)Technologies Co.,Ltd  
Address : 1.9680 OLD BAILES RD  
FORT MILL SC 29707-7539  
2.SUCHUN INDUSTRIAL SQUARE, BLDG 15A 428 XINGLONG STR  
SUZHOU INDUSTRIAL PARK SUZHOU JIANGSU 215126 CHINA  
3.No.221 Xinghai street China-Singapore Suzhou Industrial Park  
Model No. : CN85-WCR  
FCC ID : HD5-CX85WCR  
Brand Name : Honeywell  
EUT Voltage : AC 120V/60Hz  
Applicable Standard : KDB 680106 D01 RF Exposure Wireless Charging Apps v03  
Test Result : Complied  
Performed Location : DEKRA Testing and Certification (Suzhou) Co., Ltd.  
No.99 Hongye Rd., Suzhou Industrial Park, Suzhou, 215006, Jiangsu,  
China  
TEL: +86-512-6251-5088 / FAX: +86-512-6251-5098  
FCC Delegation Number: CN1199

Documented By : 

( Adm. Specialist: Kitty Li )

Reviewed By : 

(Senior Project Manager: Frank He )

Approved By : 

(Engineering Supervisor: Jack Zhang)

**1. General Information**  
**1.1. EUT Description**

Product Name	Wireless Charge Rack
Model No.	CN85-WCR
Working Voltage	AC 120V/60Hz
Frequency Range	110kHz~145kHz
Type of Modulation	ASK

**1.2. Antenna information**

Model No.	N/A					
Antenna manufacturer	N/A					
Antenna Delivery	<input checked="" type="checkbox"/>	1*TX+1*RX	<input type="checkbox"/>	2*TX+2*RX	<input type="checkbox"/>	3*TX+3*RX
Antenna technology	<input checked="" type="checkbox"/>	SISO				
	<input type="checkbox"/>	MIMO	<input type="checkbox"/>	Basic		
			<input type="checkbox"/>	CDD		
			<input type="checkbox"/>	Sectorized		
			<input type="checkbox"/>	Beam-forming		
Antenna Type	<input type="checkbox"/>	External	<input type="checkbox"/>	Dipole		
			<input type="checkbox"/>	Sectorized		
	<input checked="" type="checkbox"/>	Internal	<input type="checkbox"/>	PIFA		
			<input type="checkbox"/>	PCB		
			<input type="checkbox"/>	Ceramic Chip Antenna		
			<input checked="" type="checkbox"/>	Loop antenna		
			<input type="checkbox"/>	Type F antenna		

### 1.3. Mode of Operation

DEKRA has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Transmit

Note:


1. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.
2. For portable device, radiated spurious emission was verified over X, Y, Z Axis, and shown the worst case on this report.

#### 1.4. Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 N/A	N/A	N/A	N/A	N/A

### 1.5. Configuration of Tested System

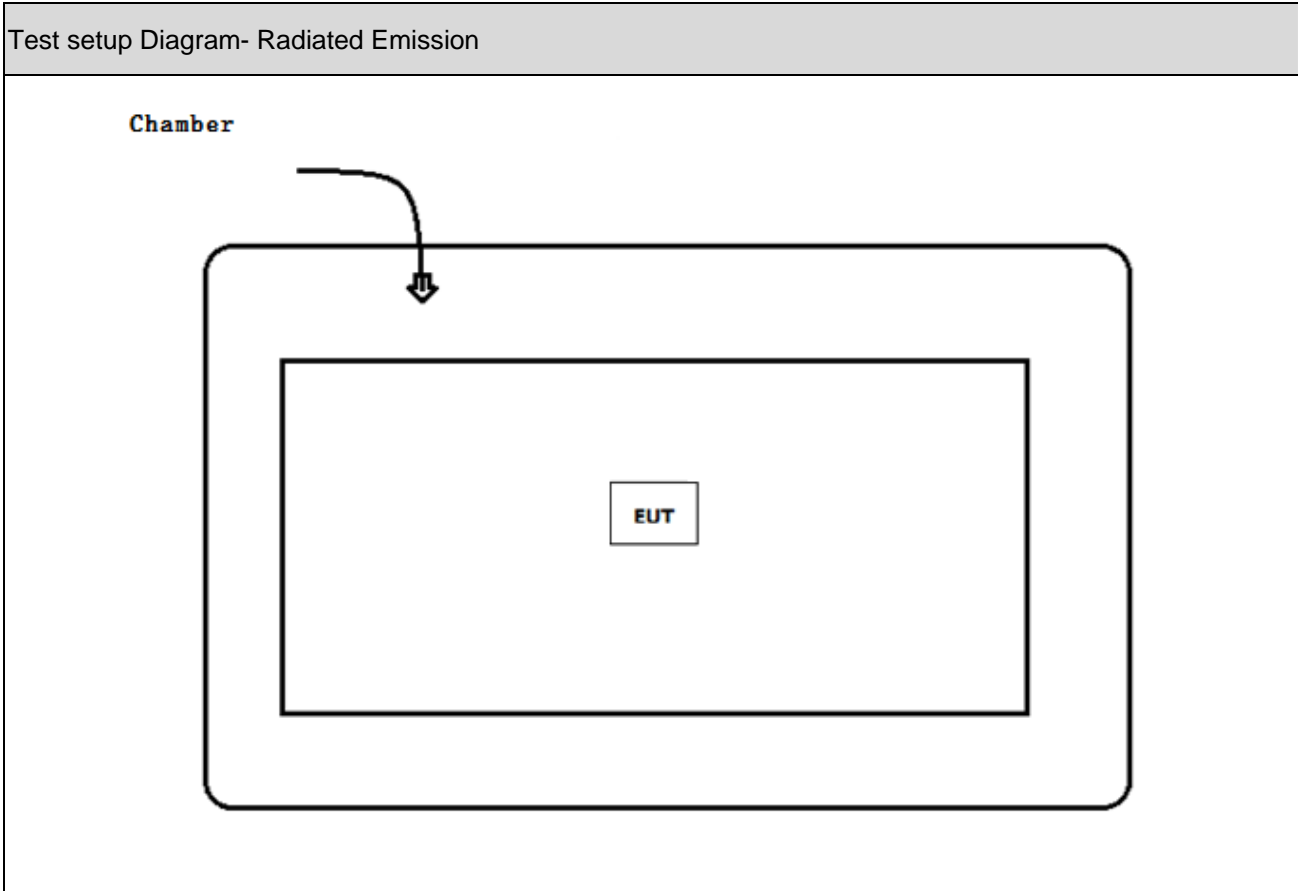

### 1.6. EUT Exercise Software

1	Setup the EUT and simulators as shown on above.
2	Turn on the power of equipment.
3	Start to continue transmit.



## 2. Technical Test

### 2.1. Test Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	21
Humidity (%RH)	25-75	50
Barometric pressure (mbar)	860-1060	950-1000


### 3. Electric Field Strength

#### 3.1. Test Equipment


Electric Field Strength / AC-6					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2018.01.07	2019.01.06
Loop Antenna	R&S	HFH2-Z2	833799/003	2018.11.26	2019.11.25
MAGNETIC FIELD HiTESTER	HIOKI	FT3470-51	1009-B1	2018.10.11	2019.10.10
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC2-C	2018.03.02	2019.03.01
Temperature/Humidity Meter	Zhicheng	ZC1-2	AC2-TH	2018.01.08	2019.01.07
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

### 3.2. Test Setup

3kHz~10MHz Test Setup:

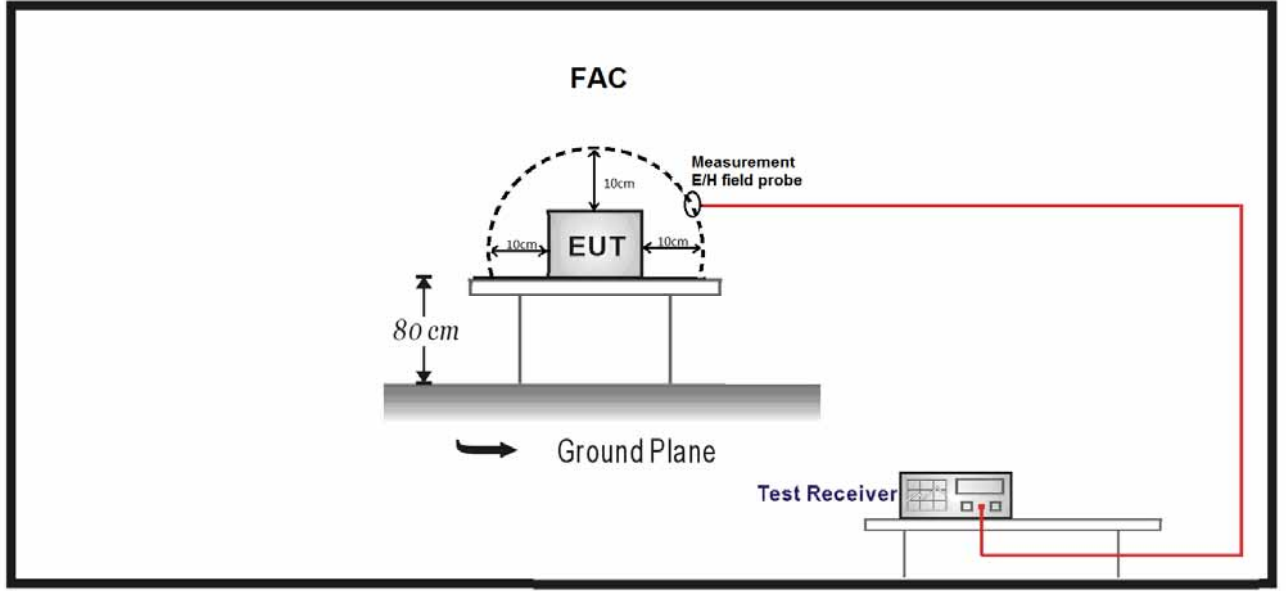

### 3.3. Setup Photo

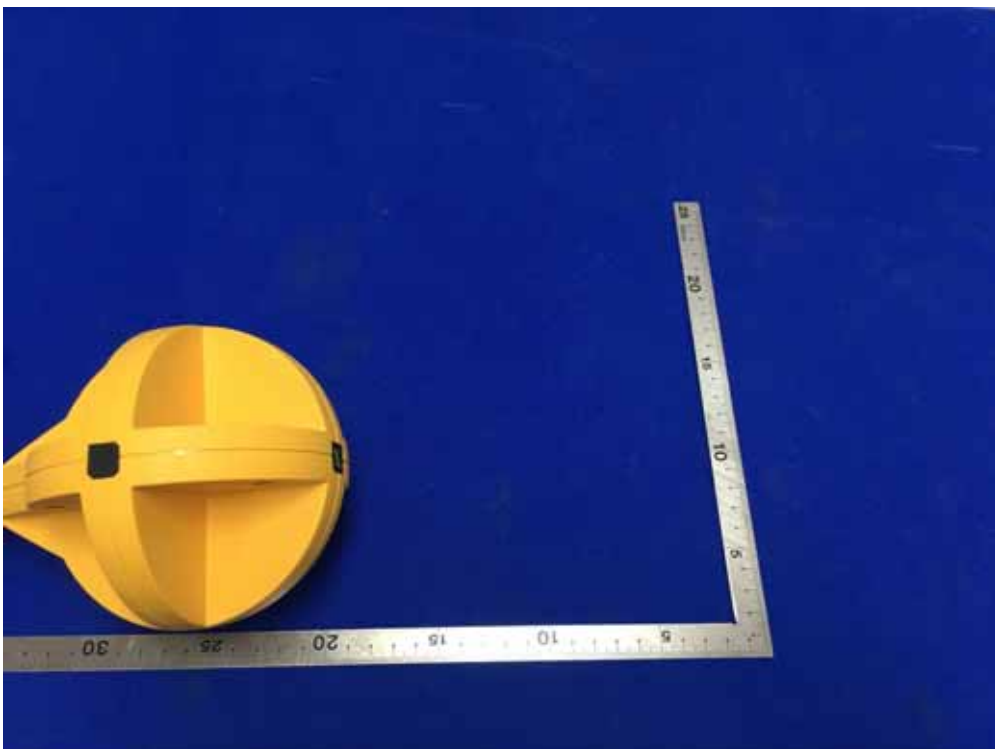

### 3.4. Limit

According to KDB 680106 D01v03 Clause 3.c: For devices designed for typical desktop applications, such as wireless charging pads, RF exposure evaluation should be conducted assuming a user separation distance of 15 cm. E and H field strength measurements or numerical modeling may be used to demonstrate compliance. Measurements should be made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m.

### 3.5. Test Procedure

- a. Set the measurement frequency of the measurement probe to the fundamental frequency of the device under test.
  - b. Set the span to encompass the entire emission bandwidth.
  - c. Set the RBW greater than the 99% OBW of the fundamental emission.
- Note: This step is not required for a broadband measurement probe that integrates the entire frequency range.
- d. Set the detector to Peak and trace display to Max-Hold.
  - e. Allow the spectrum to fill; for pulsing devices this may require an increased monitoring period.
  - f. Using a marker, set it to the maximum level of the spectral envelope.
  - g. Repeat steps (b) to (f) while scanning a parallel plane at the measurement distance of 10cm on each side of the device to find the peak level.
  - h. Repeat steps (b) to (g) for any frequencies where the field value is greater than -20 dBc below the maximum level identified.
  - i. If there are multiple frequencies transmitted by the device under test, use equations (2) and (3) to determine compliance.

Note: When scanning around the entire device, the location found to be the maximum for the E- or H-field may not be the same location as the opposite field.


### **3.6. Uncertainty**

The measurement uncertainty is defined as  $\pm 3.80$  dB


### 3.7. Test Result

Axial	Maximum Freq. (kHz)	Maximum Level (mV/m)	Limit (V/m)	Result
X	110~145	18.123	307	Pass
Y	110~145	25.704	307	Pass
Z	110~145	9.1568	307	Pass
Axial	Maximum Freq. (kHz)	Maximum Level ( $\mu$ A/m)	Limit (A/m)	Result
X	110~145	362.46	0.815	Pass
Y	110~145	514.08	0.815	Pass
Z	110~145	183.14	0.815	Pass

X Axial-E Field:

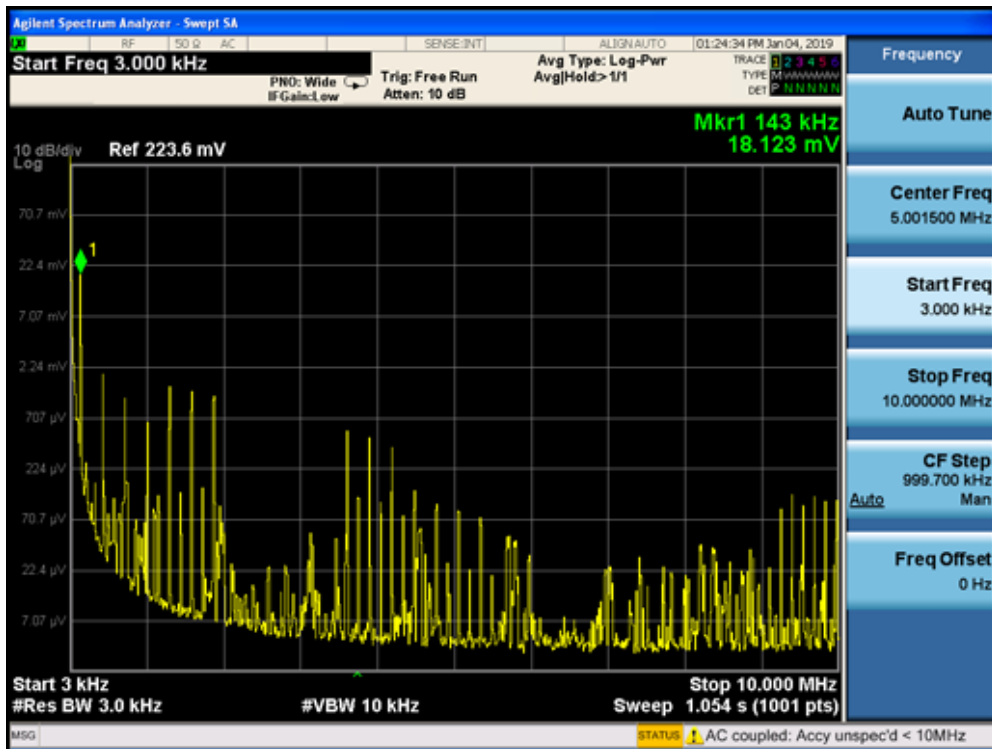


Y Axial-E Field:

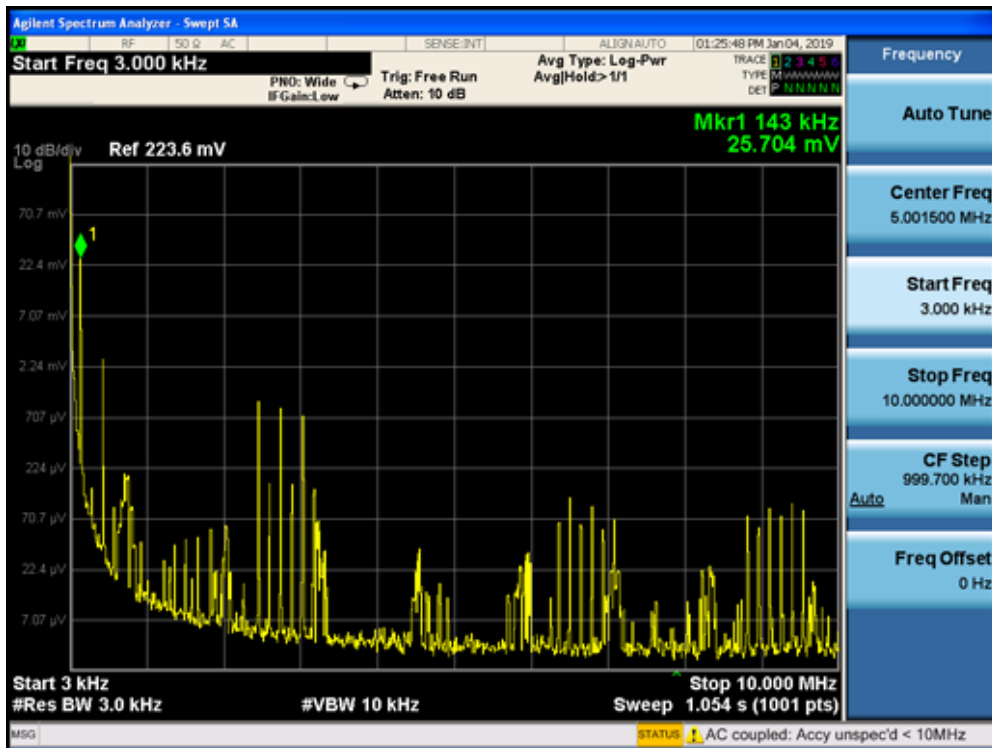





Z Axial-E Field:

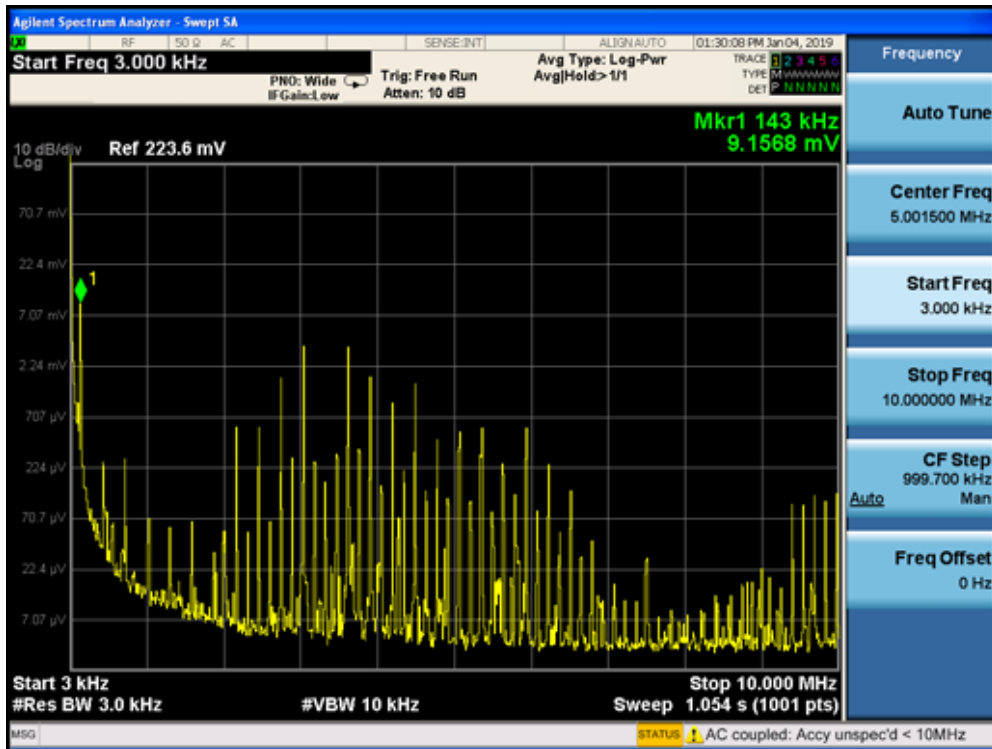


X Axial-H Field:

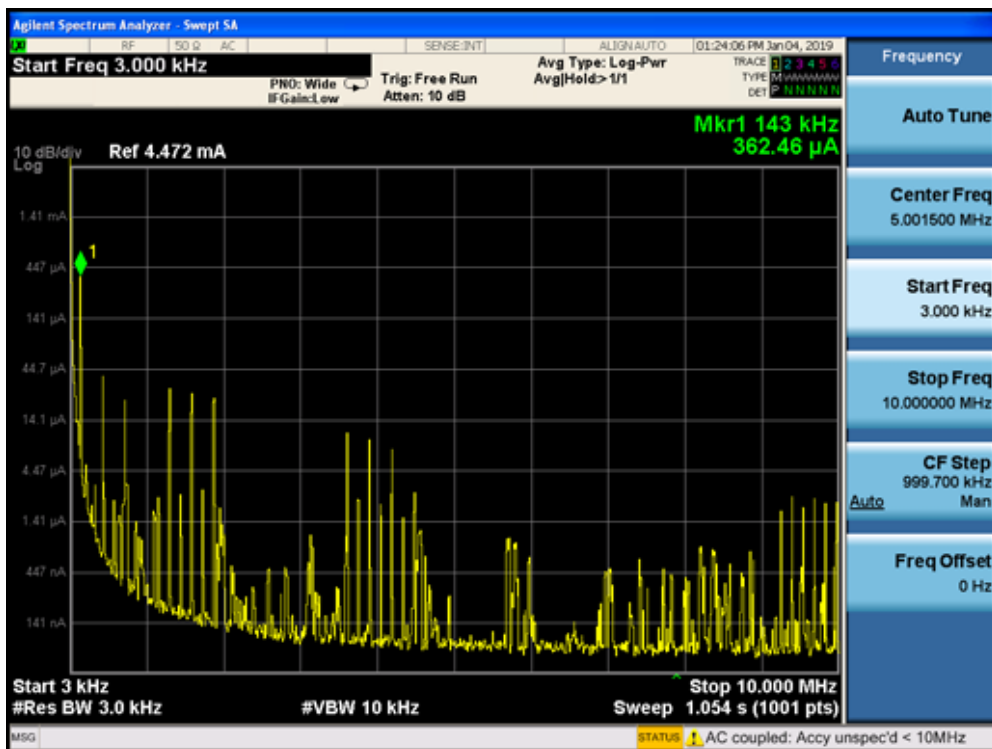

Y Axial-H Field:

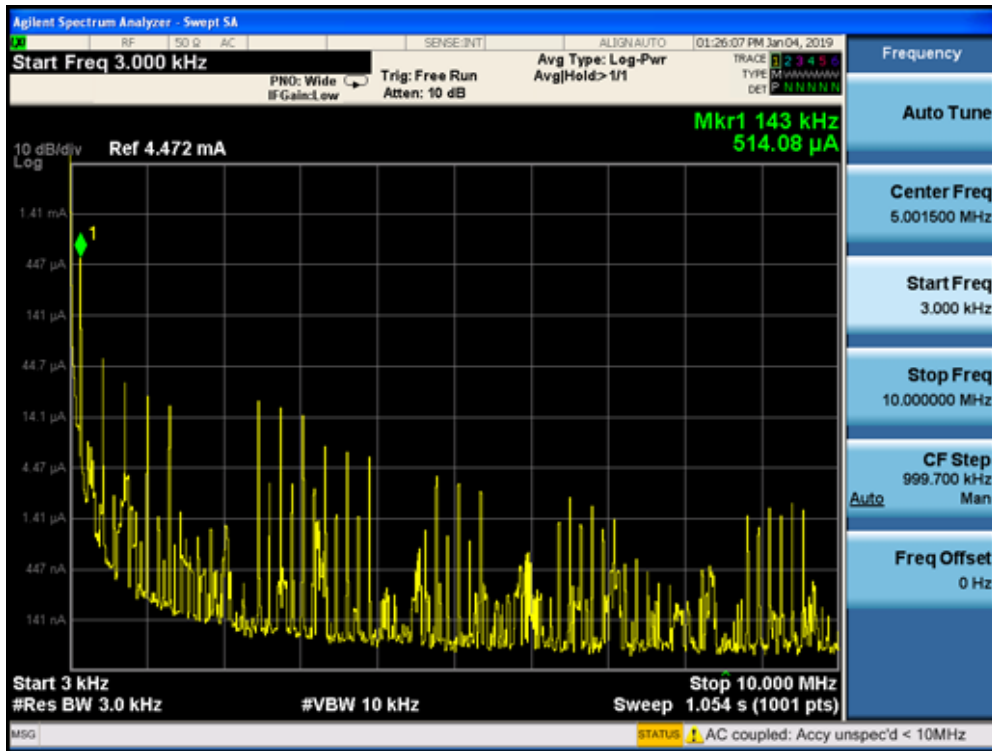

Z Axial-H Field:

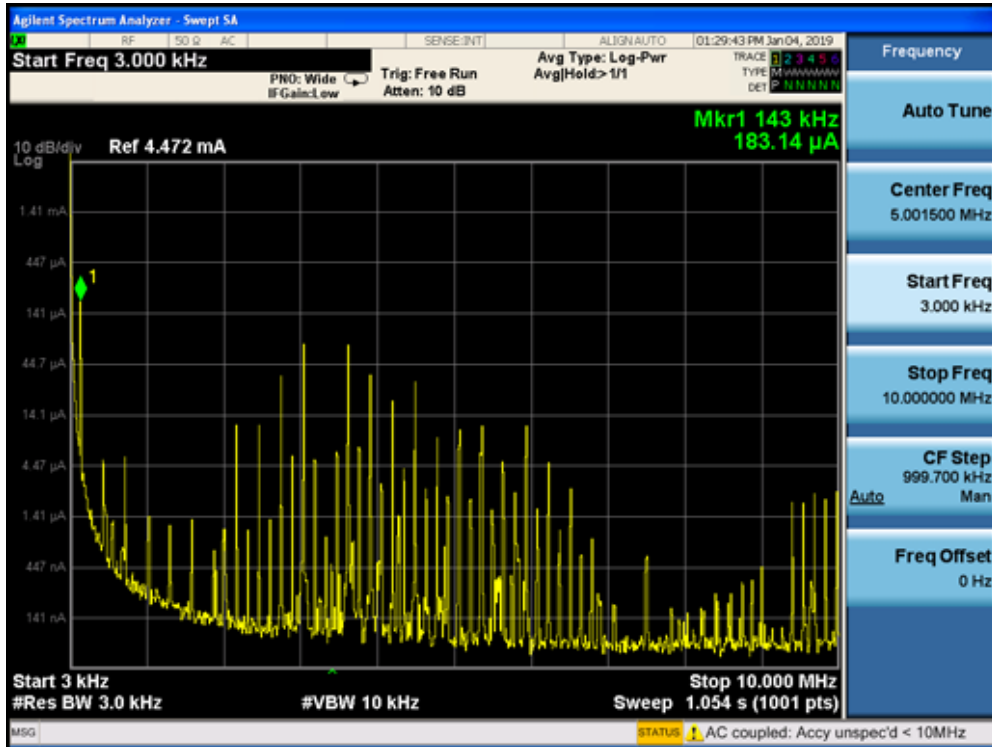

#### 4. RF Exposure Evaluation

WPT Device requirement	
<input checked="" type="checkbox"/>	Wireless power transfer frequency is below 1 MHz;
<input checked="" type="checkbox"/>	Output power from each primary coil is less than or equal to 15 watts;
<input checked="" type="checkbox"/>	The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.
<input checked="" type="checkbox"/>	Client device is placed directly in contact with the transmitter;
<input checked="" type="checkbox"/>	Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).
<input checked="" type="checkbox"/>	The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

Note: The WPT device can maintain all the six conditions above, so the RF exposure can be exempted.

\_\_\_\_\_ The End \_\_\_\_\_