



Band-edge Compliance

DH5 - Channel 00 (2402MHz)

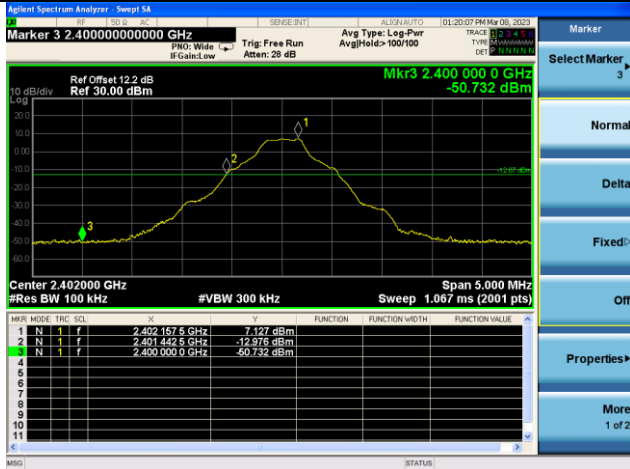


DH5 - Channel 78 (2480MHz)

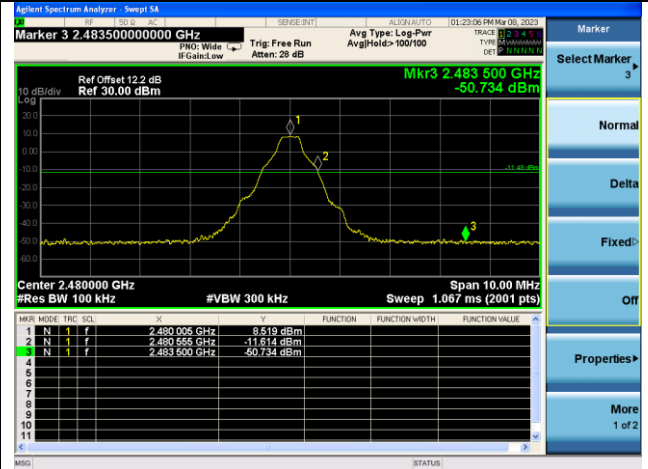


2DH5 - Channel 00 (2402MHz)




2DH5 - Channel 78 (2480MHz)

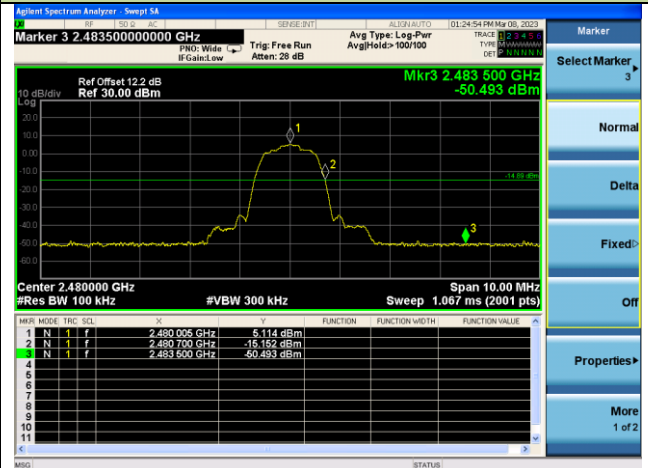

3DH5 - Channel 00 (2402MHz)

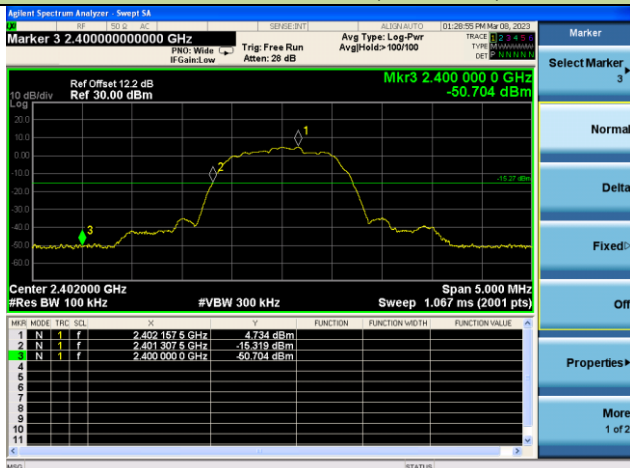


3DH5 - Channel 78 (2480MHz)

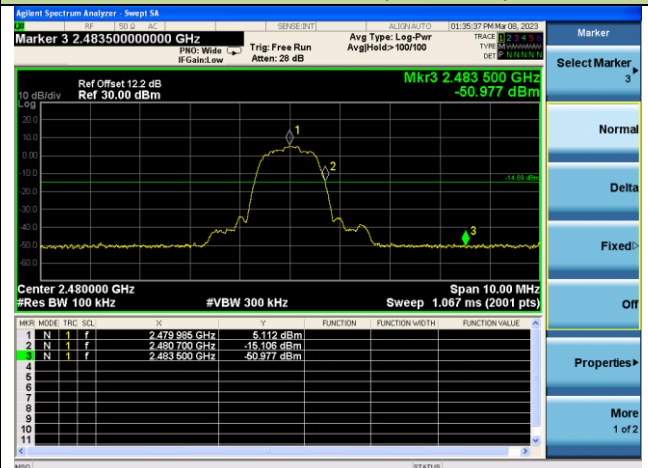


Operation Frequency Range of 20dB Bandwidth within Hopping Mode


DH5 - Channel 00 (2402MHz)

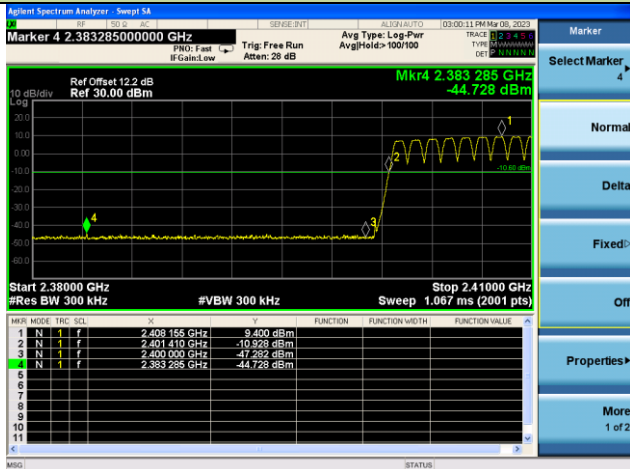


DH5 - Channel 78 (2480MHz)

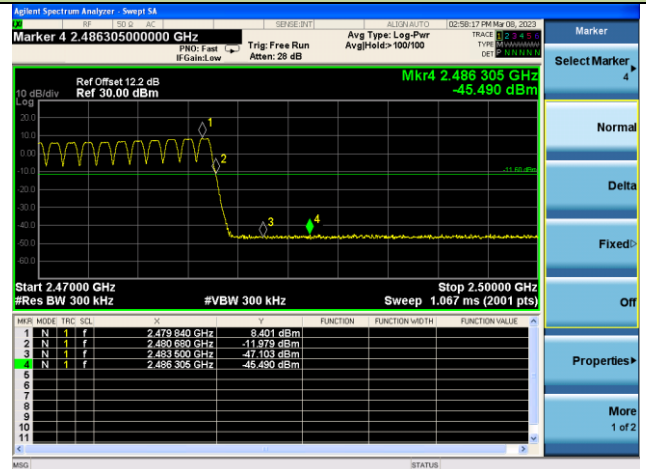


2DH5 - Channel 00 (2402MHz)

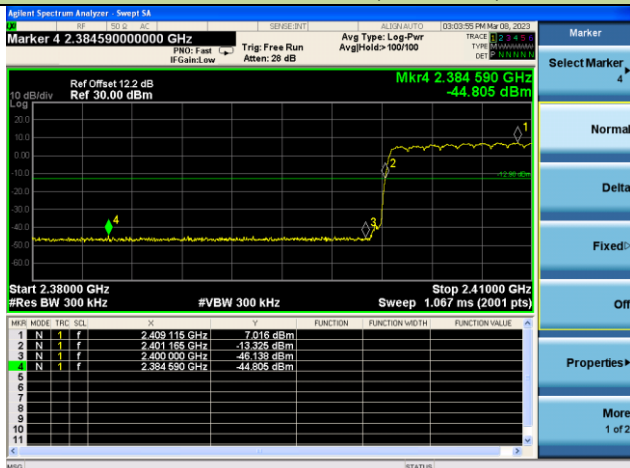


2DH5 - Channel 78 (2480MHz)

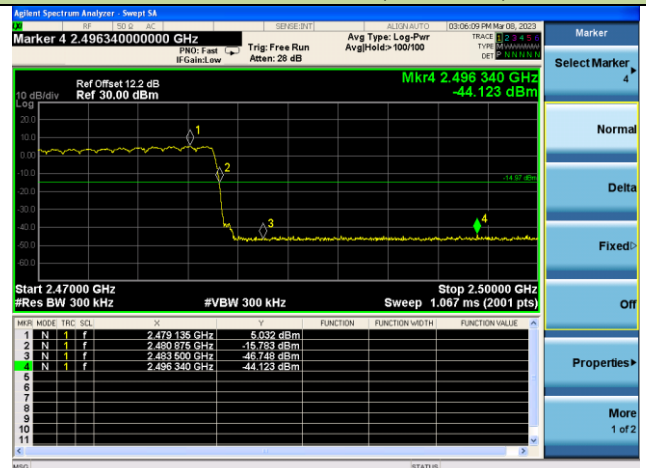

3DH5 - Channel 00 (2402MHz)

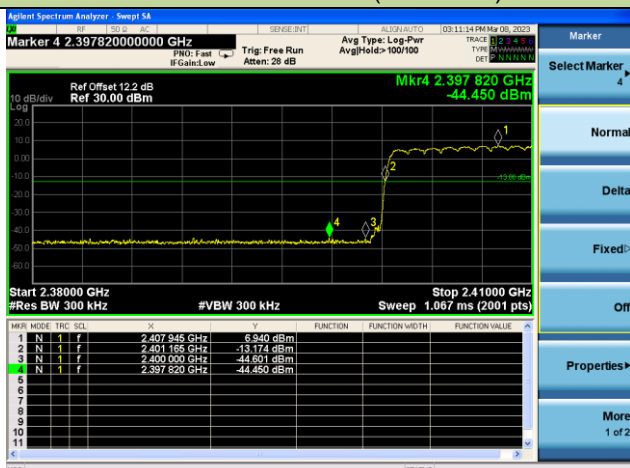

3DH5 - Channel 78 (2480MHz)

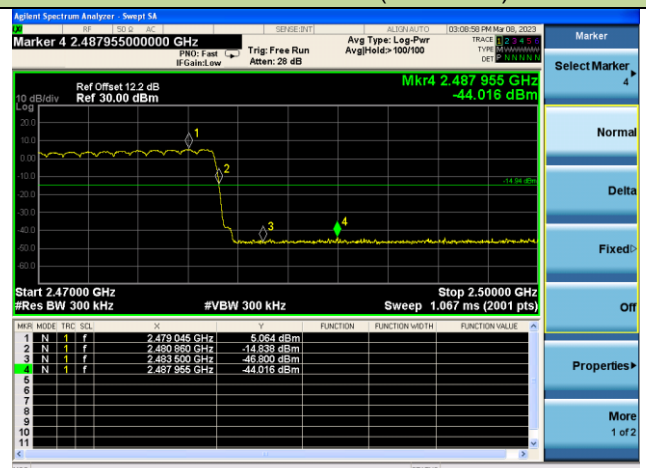


A.8 Conducted Spurious Emissions Test Result

Test Site	NS-TR2	Test Engineer	Summer Tang
Test Date	2023-03-08		


Test Mode	Channel No.	Frequency (MHz)	Limit (MHz)	Result
DH5	00	2402	20dBc	Pass
DH5	39	2441	20dBc	Pass
DH5	78	2480	20dBc	Pass
2DH5	00	2402	20dBc	Pass
2DH5	39	2441	20dBc	Pass
2DH5	78	2480	20dBc	Pass
3DH5	00	2402	20dBc	Pass
3DH5	39	2441	20dBc	Pass
3DH5	78	2480	20dBc	Pass

DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)

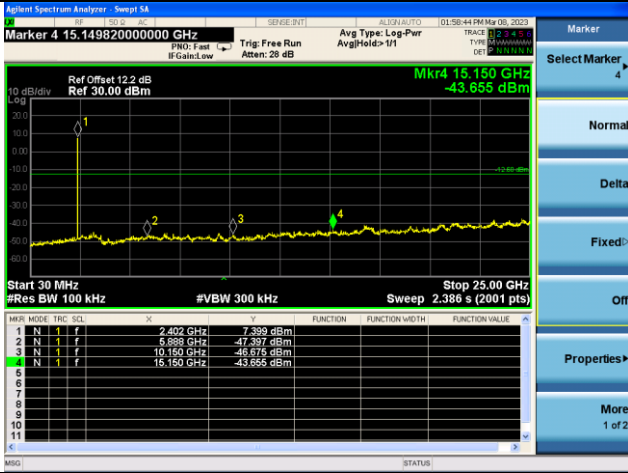

Channel 39 (2441MHz)

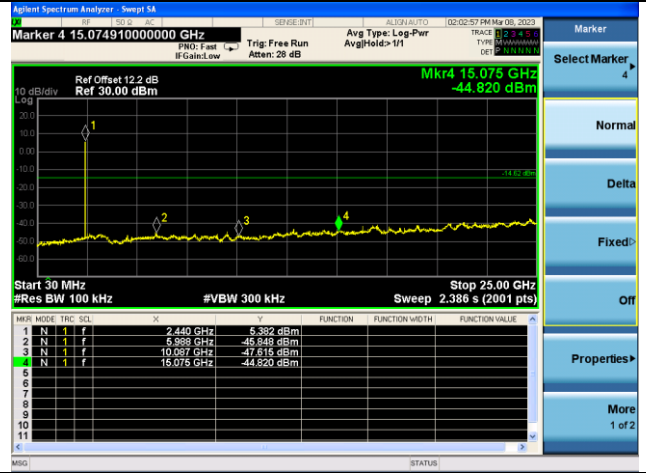


Channel 78 (2480MHz)

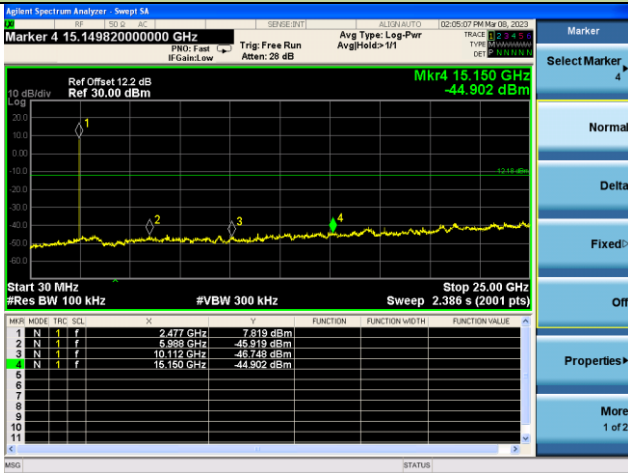


2DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)

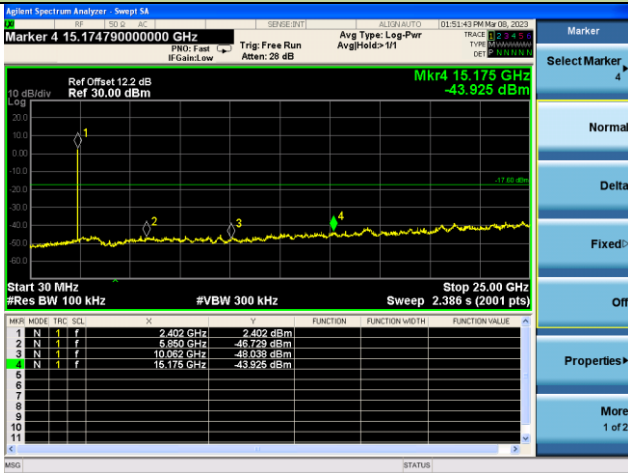

Channel 39 (2441MHz)

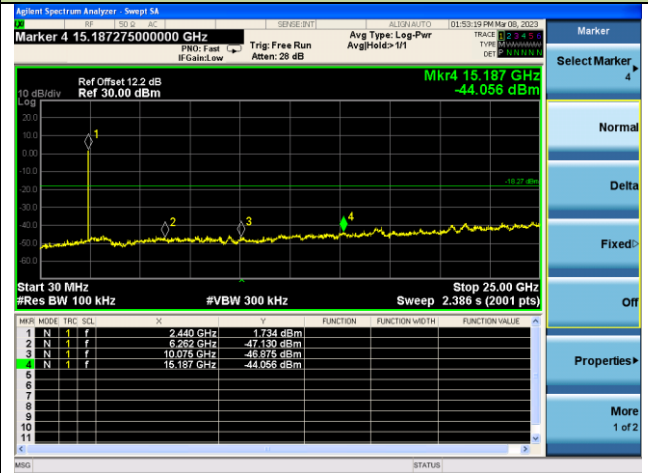


Channel 78 (2480MHz)

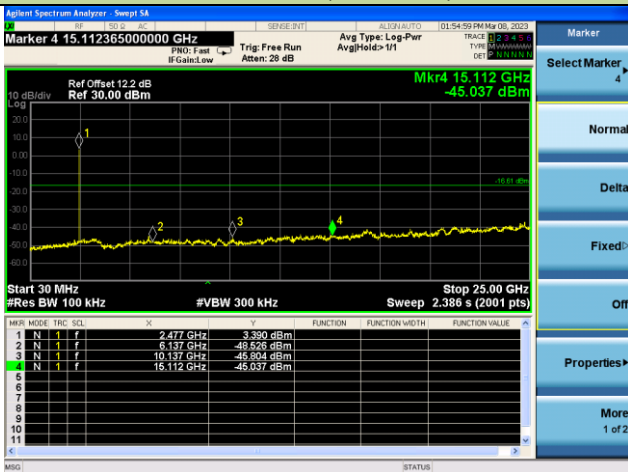


3DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)

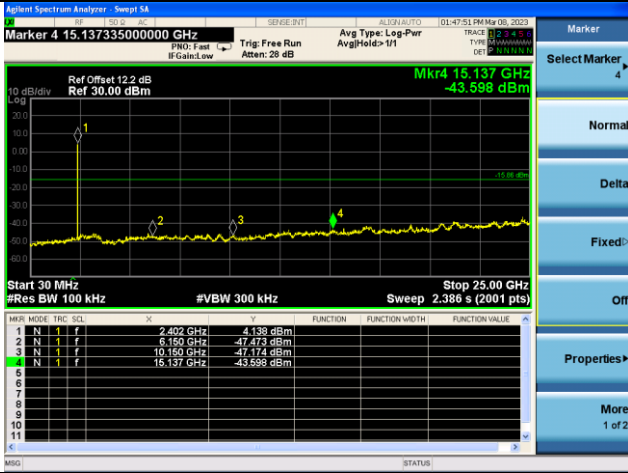

Channel 39 (2441MHz)

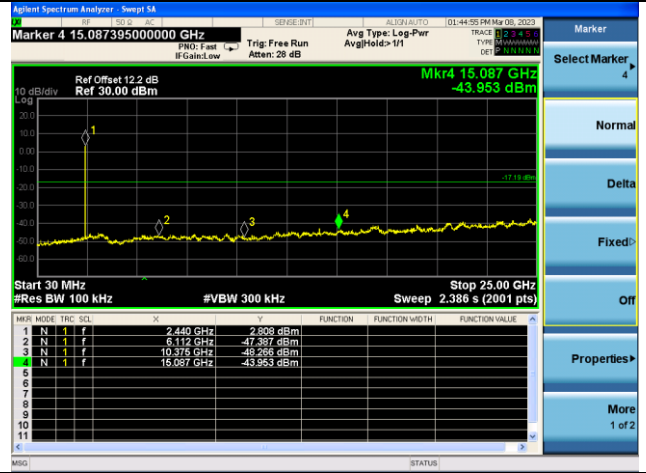

Channel 78 (2480MHz)

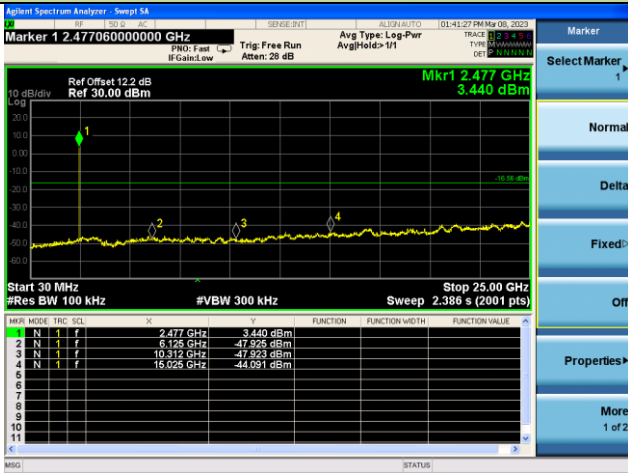

A.9 Radiated Spurious Emission Test Result

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-04-02	Test Mode:	DH5
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
00	7638.5	36.0	7.9	43.9	74.0	-30.1	Peak	Horizontal
	11149.0	35.5	13.1	48.6	74.0	-25.4	Peak	Horizontal
	12449.5	36.2	11.9	48.1	74.0	-25.9	Peak	Horizontal
	7621.5	37.0	7.9	44.9	74.0	-29.1	Peak	Vertical
	10996.0	34.8	13.6	48.4	74.0	-25.6	Peak	Vertical
	12109.5	35.5	12.1	47.6	74.0	-26.4	Peak	Vertical
39	7536.5	36.3	8.2	44.5	74.0	-29.5	Peak	Horizontal
	10902.5	35.2	13.4	48.6	74.0	-25.4	Peak	Horizontal
	12160.5	36.3	12.2	48.5	74.0	-25.5	Peak	Horizontal
	7647.0	36.8	7.9	44.7	74.0	-29.3	Peak	Vertical
	11446.5	34.8	13.0	47.8	74.0	-26.2	Peak	Vertical
	12415.5	36.3	12.0	48.3	74.0	-25.7	Peak	Vertical
78	7536.5	35.8	8.2	44.0	74.0	-30.0	Peak	Horizontal
	11472.0	35.8	13.0	48.8	74.0	-25.2	Peak	Horizontal
	12220.0	35.3	12.2	47.5	74.0	-26.5	Peak	Horizontal
	7366.5	36.1	8.2	44.3	74.0	-29.7	Peak	Vertical
	11497.5	35.6	13.3	48.9	74.0	-25.1	Peak	Vertical
	12322.0	35.5	12.1	47.6	74.0	-26.4	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor ((dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-04-02	Test Mode:	2DH5
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
00	7553.5	36.7	8.1	44.8	74.0	-29.2	Peak	Horizontal
	11353.0	35.4	12.8	48.2	74.0	-25.8	Peak	Horizontal
	12211.5	36.2	12.2	48.4	74.0	-25.6	Peak	Horizontal
	7468.5	36.5	8.2	44.7	74.0	-29.3	Peak	Vertical
	11047.0	34.7	13.7	48.4	74.0	-25.6	Peak	Vertical
	12271.0	36.7	12.0	48.7	74.0	-25.3	Peak	Vertical
39	7681.0	36.8	7.8	44.6	74.0	-29.4	Peak	Horizontal
	11098.0	34.8	13.3	48.1	74.0	-25.9	Peak	Horizontal
	12381.5	35.6	11.8	47.4	74.0	-26.6	Peak	Horizontal
	7630.0	36.4	8.0	44.4	74.0	-29.6	Peak	Vertical
	11183.0	34.2	12.8	47.0	74.0	-27.0	Peak	Vertical
	11931.0	35.7	12.0	47.7	74.0	-26.3	Peak	Vertical
78	8318.5	35.2	8.4	43.6	74.0	-30.4	Peak	Horizontal
	11081.0	33.2	13.2	46.4	74.0	-27.6	Peak	Horizontal
	12007.5	34.9	12.3	47.2	74.0	-26.8	Peak	Horizontal
	7638.5	35.7	7.9	43.6	74.0	-30.4	Peak	Vertical
	11038.5	33.6	13.6	47.2	74.0	-26.8	Peak	Vertical
	12398.5	36.1	11.8	47.9	74.0	-26.1	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor ((dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-04-02	Test Mode:	3DH5
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Test Channel	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
00	7443.0	35.4	8.2	43.6	74.0	-30.4	Peak	Horizontal
	11047.0	34.9	13.7	48.6	74.0	-25.4	Peak	Horizontal
	12203.0	35.9	12.1	48.0	74.0	-26.0	Peak	Horizontal
	7366.5	35.3	8.2	43.5	74.0	-30.5	Peak	Vertical
	10979.0	35.0	13.4	48.4	74.0	-25.6	Peak	Vertical
	12356.0	35.9	12.1	48.0	74.0	-26.0	Peak	Vertical
39	7468.5	34.5	8.2	42.7	74.0	-31.3	Peak	Horizontal
	11217.0	34.4	12.5	46.9	74.0	-27.1	Peak	Horizontal
	12024.5	35.7	12.2	47.9	74.0	-26.1	Peak	Horizontal
	7426.0	37.2	8.0	45.2	74.0	-28.8	Peak	Vertical
	11055.5	34.6	13.5	48.1	74.0	-25.9	Peak	Vertical
	12075.5	35.2	12.2	47.4	74.0	-26.6	Peak	Vertical
78	7536.5	36.0	8.2	44.2	74.0	-29.8	Peak	Horizontal
	11497.5	36.0	13.3	49.3	74.0	-24.7	Peak	Horizontal
	12262.5	36.8	12.0	48.8	74.0	-25.2	Peak	Horizontal
	7477.0	35.9	8.3	44.2	74.0	-29.8	Peak	Vertical
	11191.5	33.9	12.8	46.7	74.0	-27.3	Peak	Vertical
	11999.0	35.5	12.2	47.7	74.0	-26.3	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor ((dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

Site: NS-AC1	Test Date: 2023-03-23
Limit: FCC_Part15.209_RSE(3m)	Engineer: Ted Chen
Probe: NS-AC1_VULB9162	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by DH5 at 2441MHz	

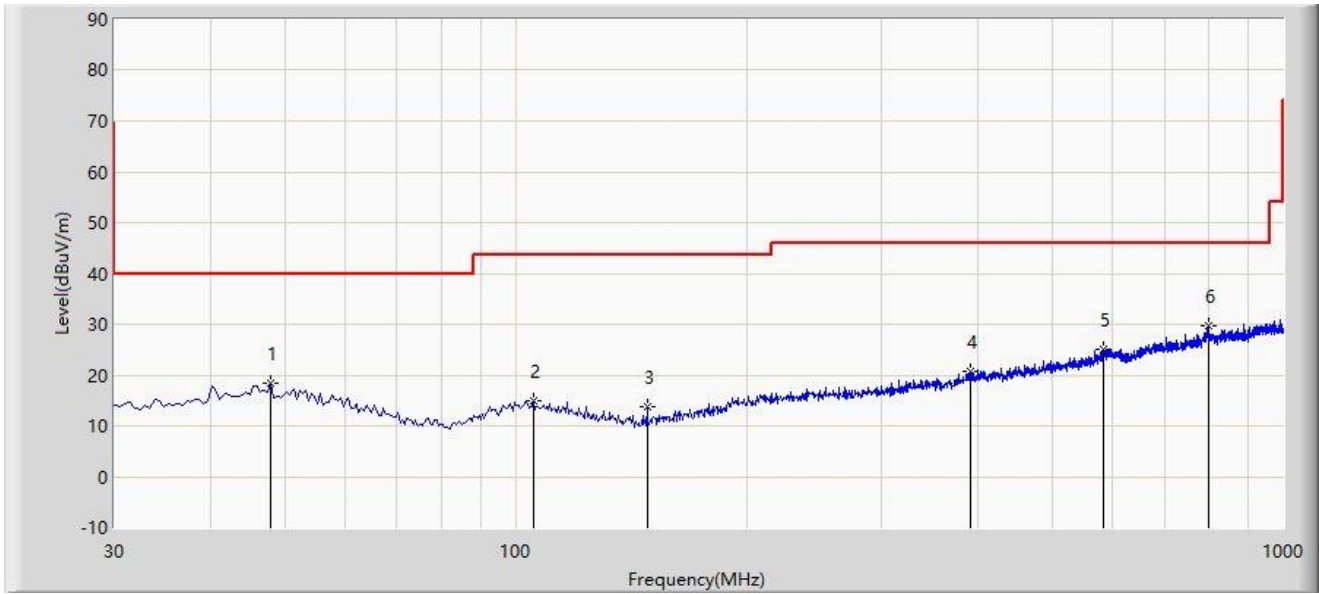

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		47.945	18.518	0.322	-21.482	40.000	18.196	PK
2		105.660	15.031	-0.671	-28.469	43.500	15.702	PK
3		148.340	13.872	1.478	-29.628	43.500	12.394	PK
4		391.325	20.765	0.089	-25.235	46.000	20.676	PK
5		583.385	24.993	0.638	-21.007	46.000	24.355	PK
6	*	798.725	29.746	2.124	-16.254	46.000	27.622	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: NS-AC1	Test Date: 2023-03-23
Limit: FCC_Part15.209_RSE(3m)	Engineer: Ted Chen
Probe: NS-AC1_VULB9162	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by DH5 at 2441MHz	

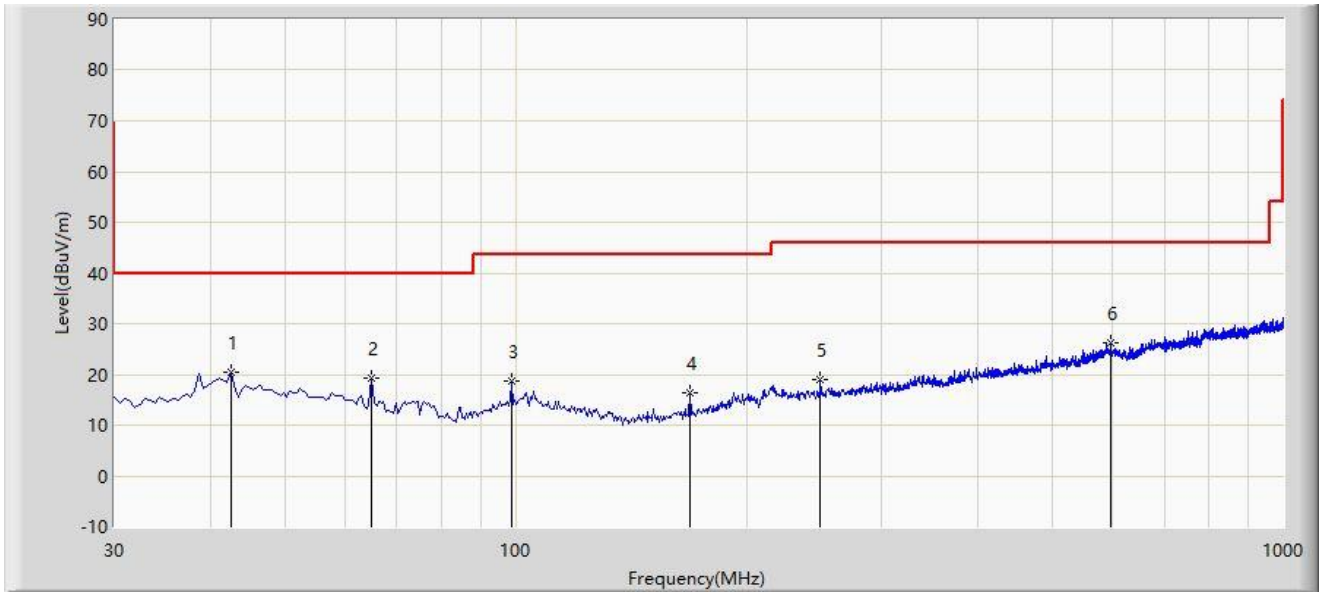

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	42.610	20.325	2.425	-19.675	40.000	17.901	PK
2		64.920	19.318	4.041	-20.682	40.000	15.277	PK
3		98.870	18.626	3.012	-24.874	43.500	15.614	PK
4		168.710	16.468	2.851	-27.032	43.500	13.618	PK
5		249.705	18.912	1.474	-27.088	46.000	17.438	PK
6		595.510	26.190	1.501	-19.810	46.000	24.689	PK

Note 1: " * ", means this data is the worst emission level.


Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

A.10 Radiated Restricted Band Edge Test Result

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by DH5 at 2402MHz	

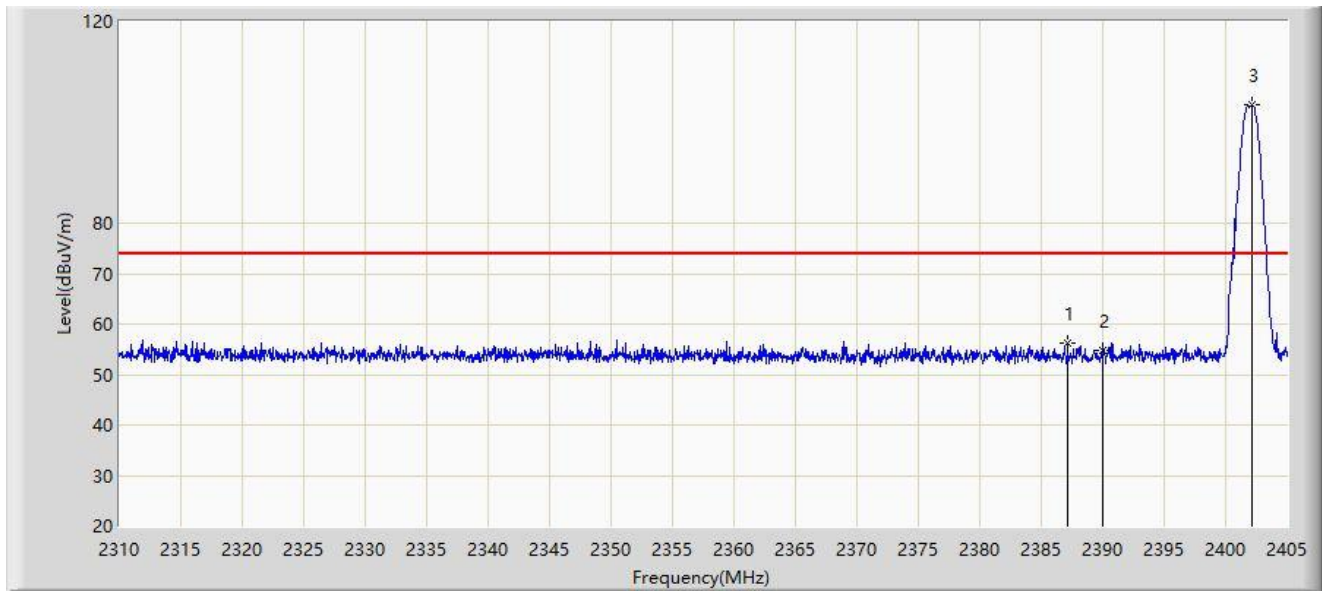


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2387.140	56.362	25.369	-17.638	74.000	30.994	PK
2		2390.000	54.921	23.929	-19.079	74.000	30.992	PK
3		2402.150	103.527	72.539	N/A	N/A	30.988	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by DH5 at 2402MHz	

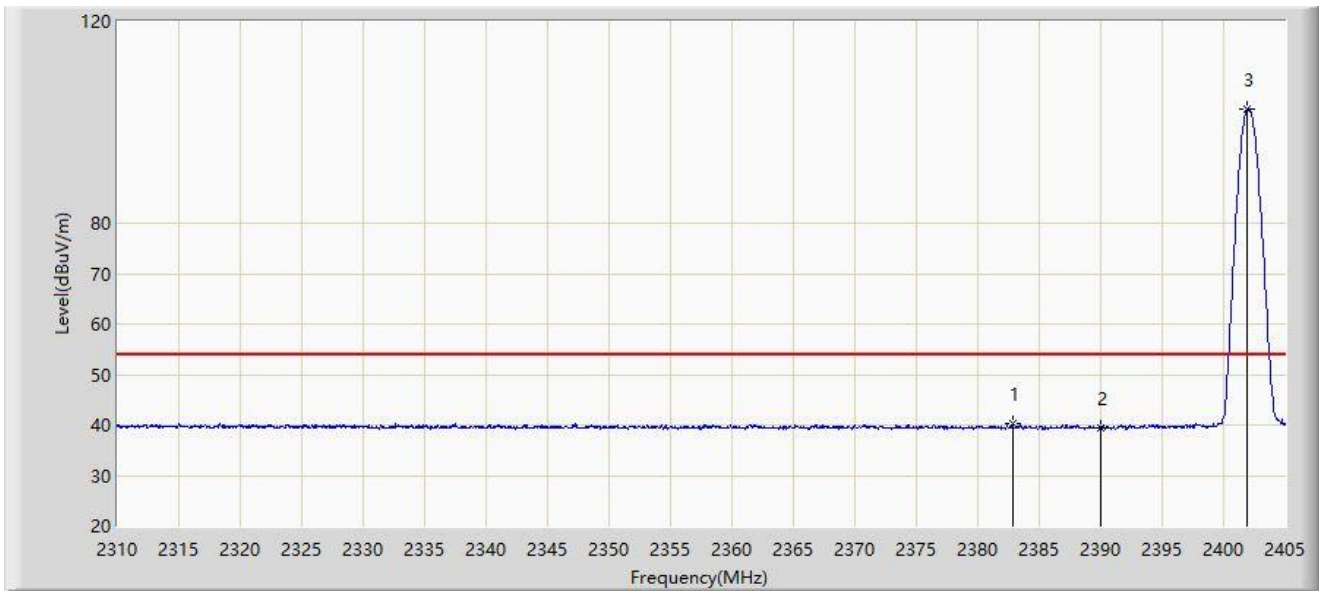


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2382.865	40.216	9.216	-13.784	54.000	31.000	AV
2		2390.000	39.494	8.502	-14.506	54.000	30.992	AV
3		2401.913	102.523	71.534	N/A	N/A	30.989	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by DH5 at 2402MHz	

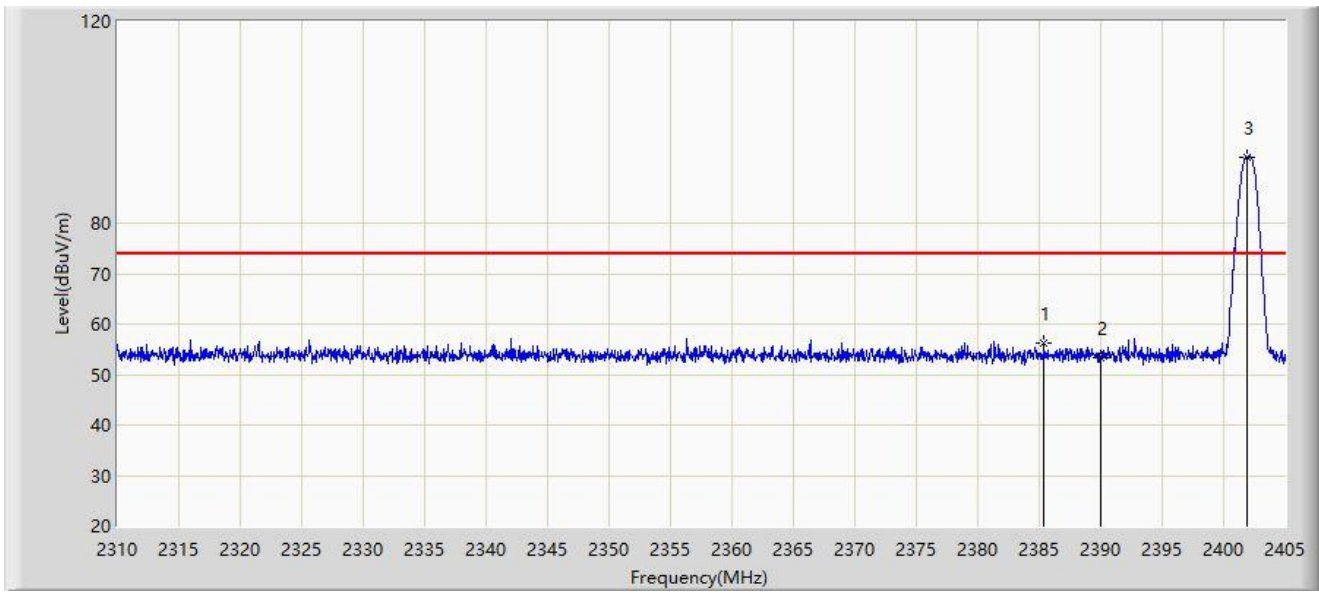


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2385.383	56.289	25.295	-17.711	74.000	30.994	PK
2		2390.000	53.283	22.291	-20.717	74.000	30.992	PK
3		2401.865	93.157	62.168	N/A	N/A	30.989	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by DH5 at 2402MHz	

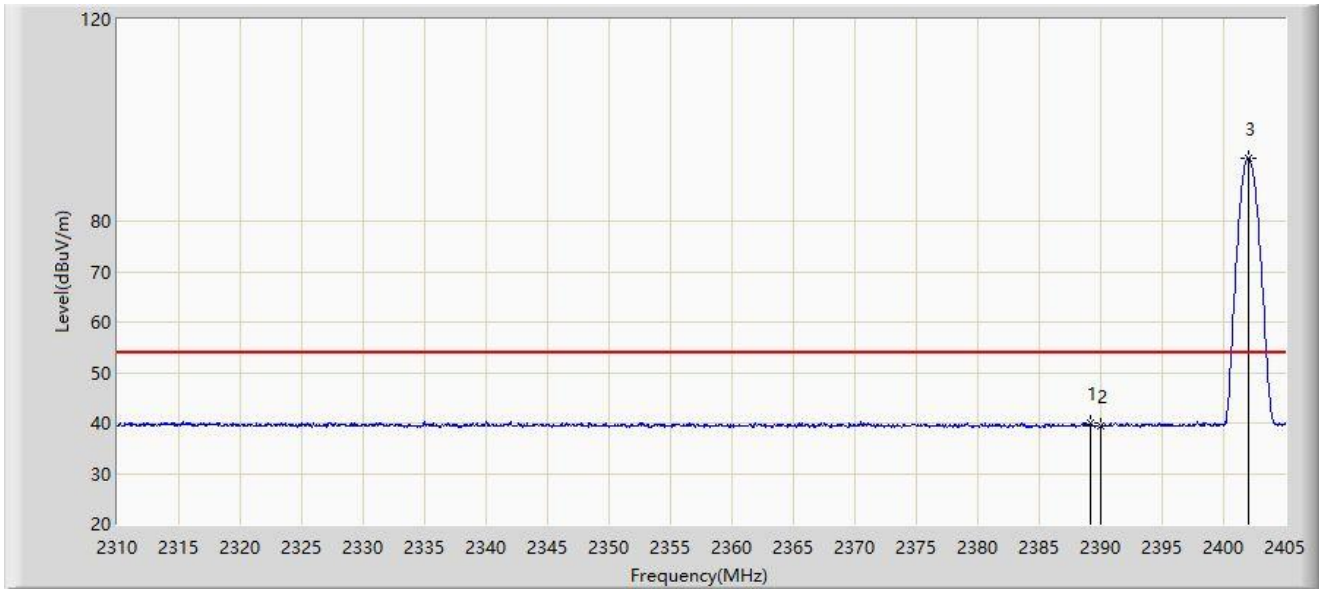


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2389.135	39.907	8.914	-14.093	54.000	30.993	AV
2		2390.000	39.348	8.356	-14.652	54.000	30.992	AV
3		2402.008	92.582	61.593	N/A	N/A	30.989	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by DH5 at 2480MHz	

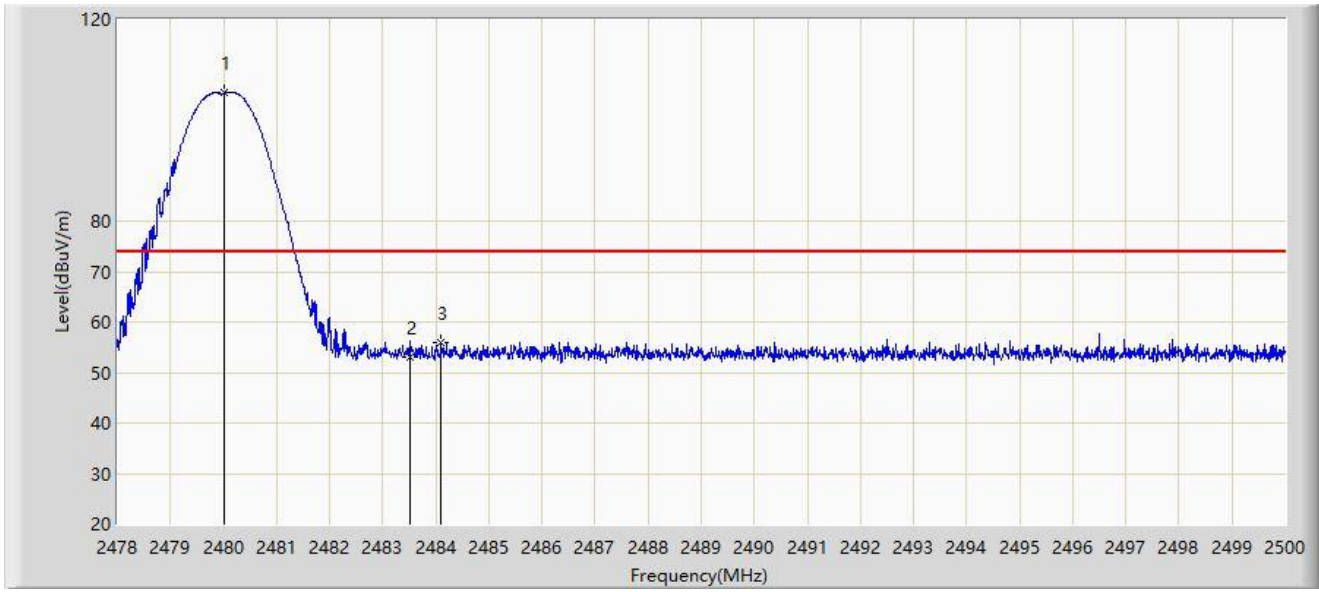


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.024	105.620	74.723	N/A	N/A	30.897	PK
2		2483.500	53.135	22.244	-20.865	74.000	30.892	PK
3	*	2484.105	56.075	25.185	-17.925	74.000	30.891	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by DH5 at 2480MHz	

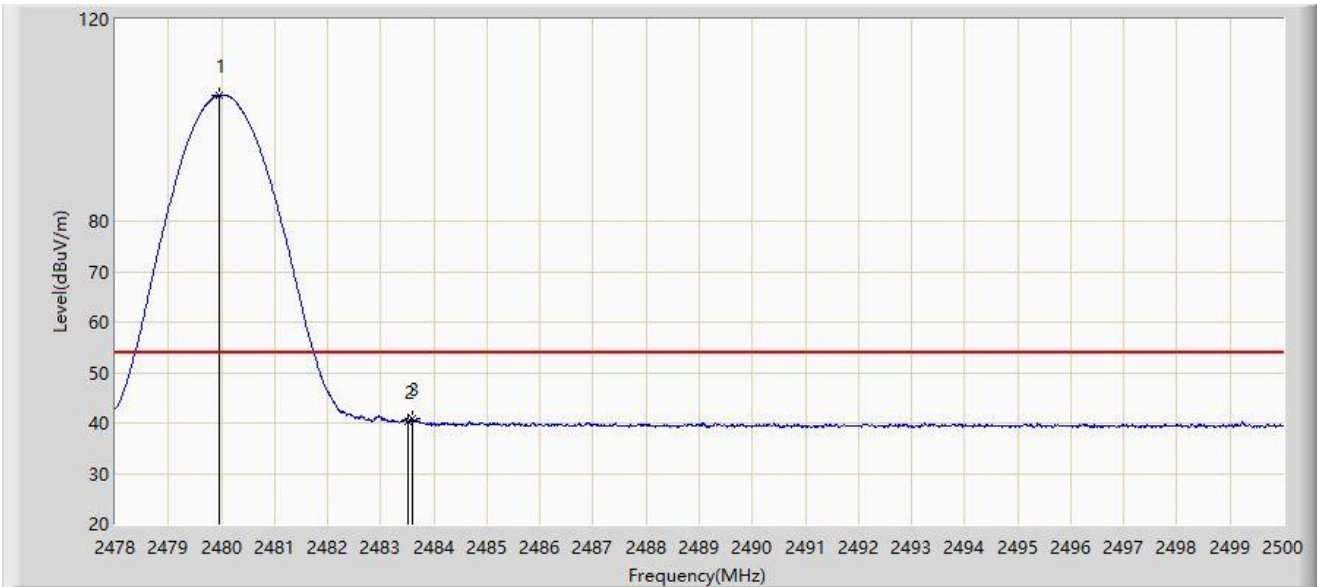


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.958	104.944	74.047	N/A	N/A	30.897	AV
2		2483.500	40.189	9.298	-13.811	54.000	30.892	AV
3	*	2483.610	40.818	9.927	-13.182	54.000	30.892	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by DH5 at 2480MHz	

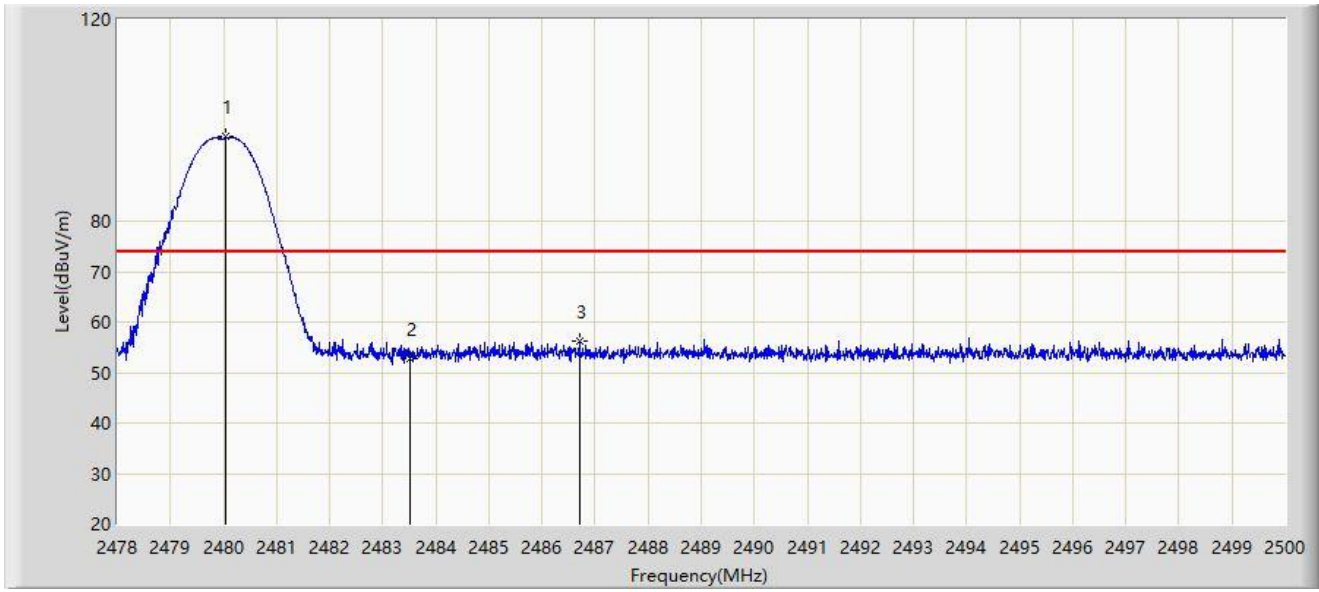


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2480.035	96.727	65.830	N/A	N/A	30.897	PK
2		2483.500	52.808	21.917	-21.192	74.000	30.892	PK
3	*	2486.701	56.196	25.310	-17.804	74.000	30.886	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by DH5 at 2480MHz	

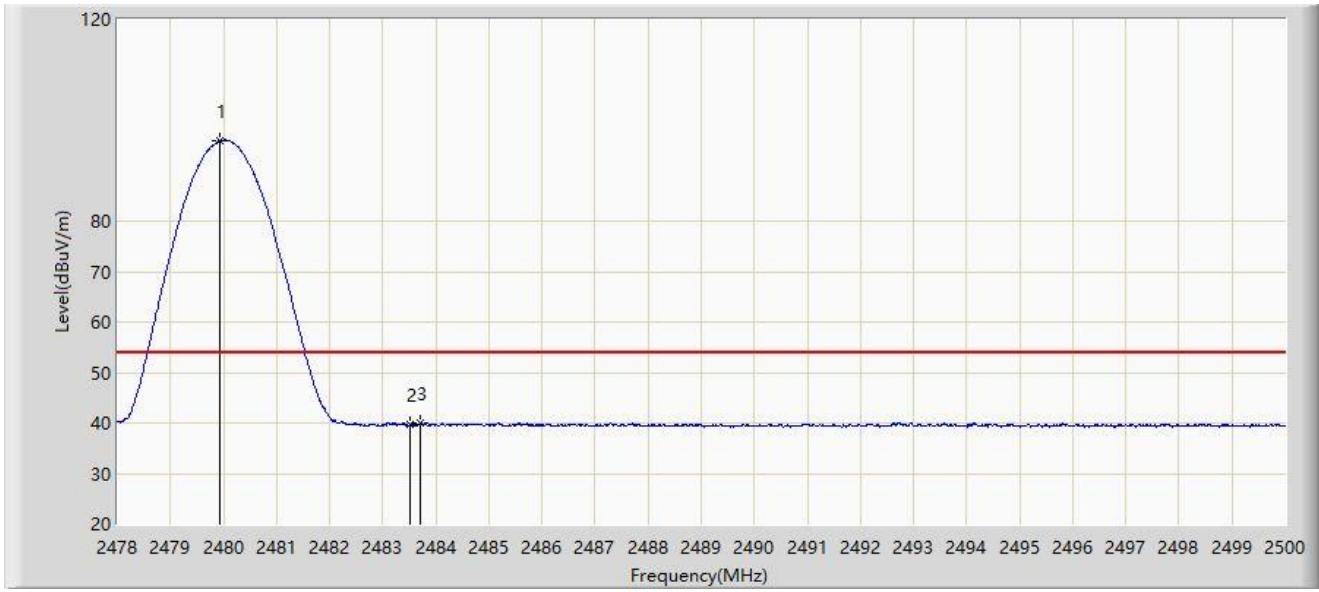


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.936	95.950	65.053	N/A	N/A	30.897	AV
2		2483.500	39.623	8.732	-14.377	54.000	30.892	AV
3	*	2483.720	40.023	9.132	-13.977	54.000	30.892	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 2DH5 at 2402MHz	

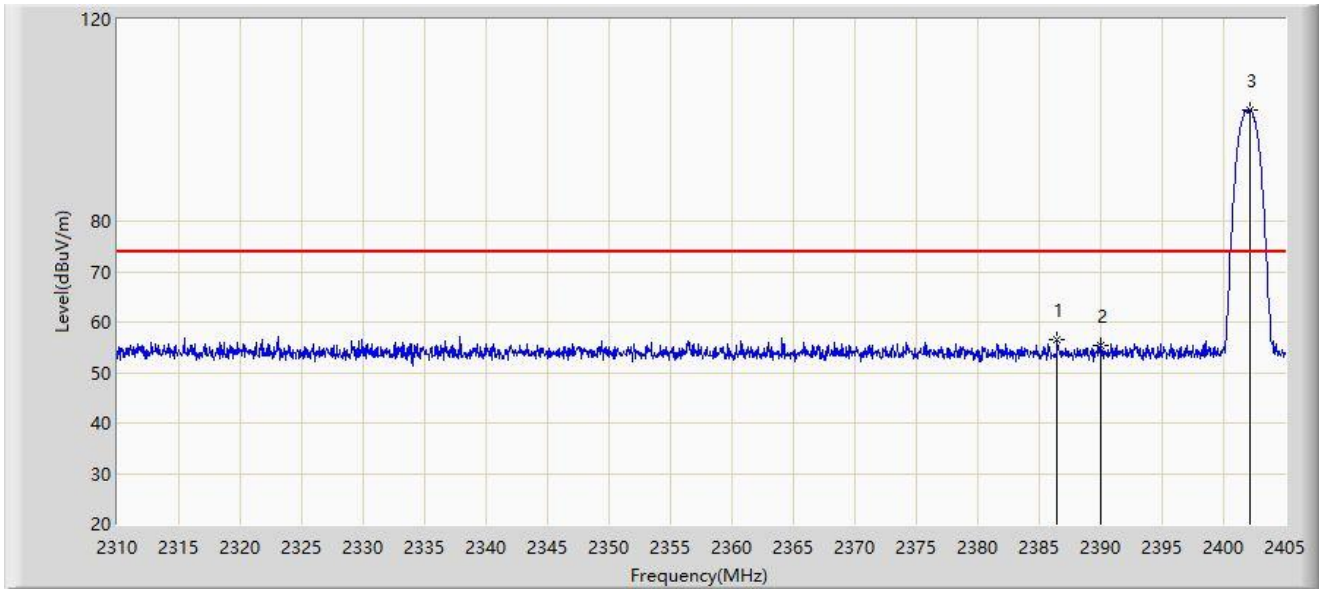


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2386.427	56.407	25.413	-17.593	74.000	30.994	PK
2		2390.000	55.388	24.396	-18.612	74.000	30.992	PK
3		2402.150	101.919	70.931	N/A	N/A	30.988	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 2DH5 at 2402MHz	

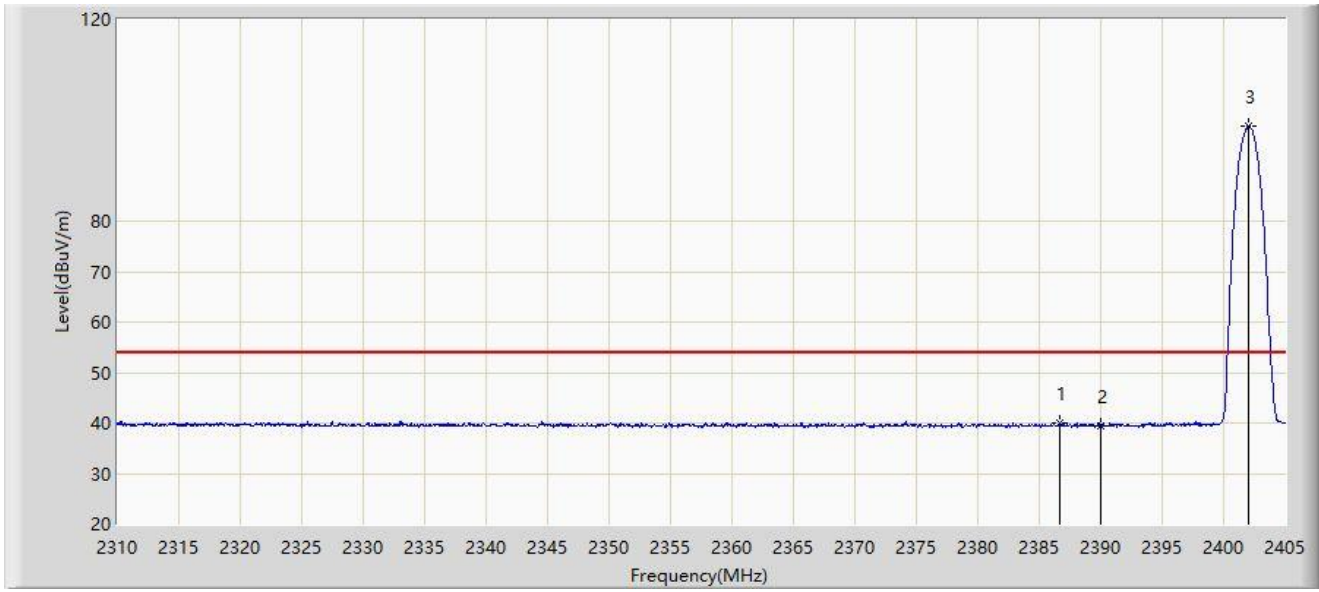


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2386.712	39.904	8.910	-14.096	54.000	30.994	AV
2		2390.000	39.534	8.542	-14.466	54.000	30.992	AV
3		2402.055	98.776	67.787	N/A	N/A	30.989	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 2DH5 at 2402MHz	

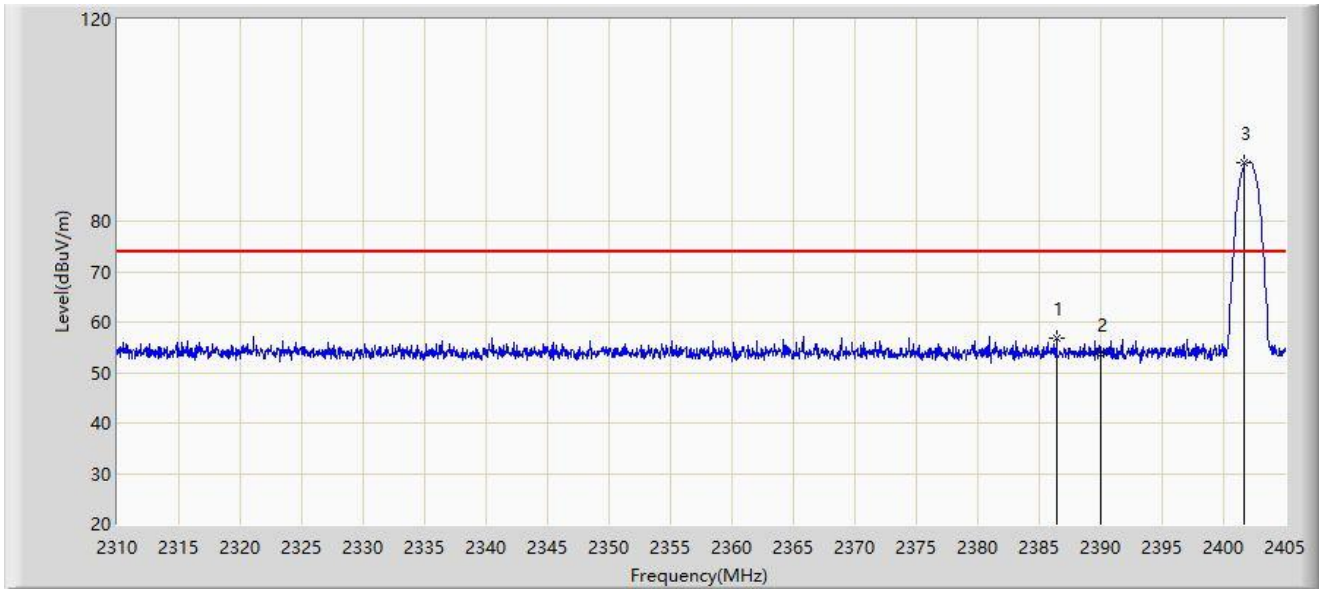


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2386.380	56.929	25.935	-17.071	74.000	30.994	PK
2		2390.000	53.708	22.716	-20.292	74.000	30.992	PK
3		2401.722	91.606	60.617	N/A	N/A	30.989	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 2DH5 at 2402MHz	

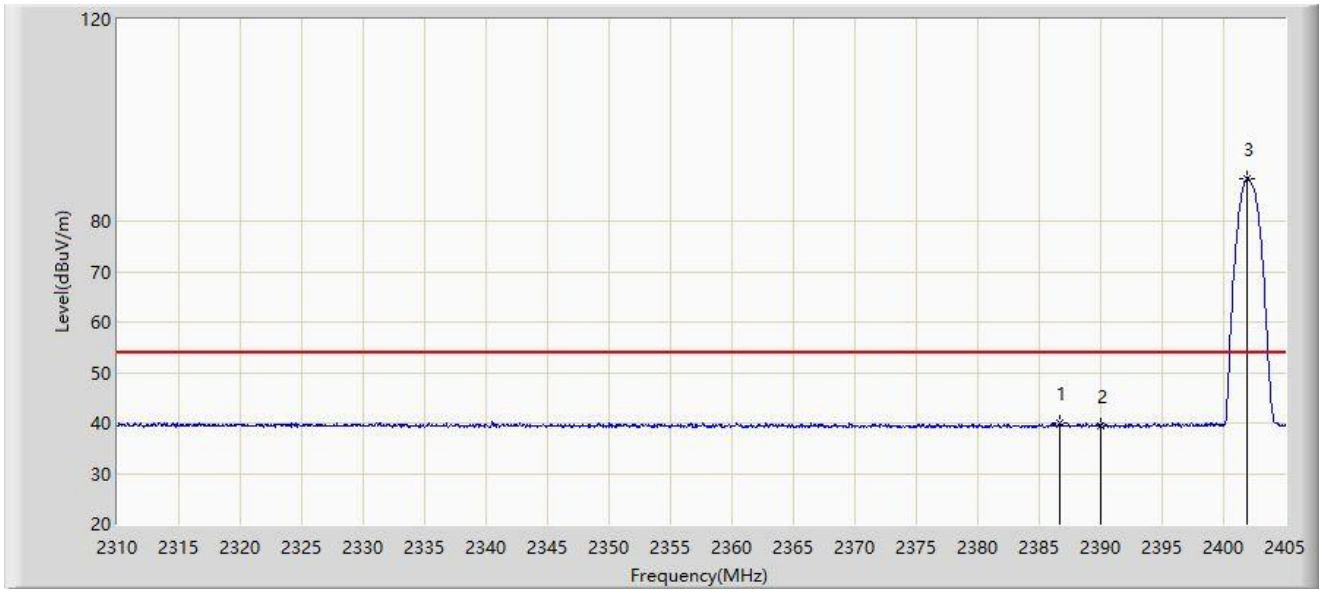


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2386.665	40.056	9.062	-13.944	54.000	30.994	AV
2		2390.000	39.338	8.346	-14.662	54.000	30.992	AV
3		2401.913	88.480	57.491	N/A	N/A	30.989	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 2DH5 at 2480MHz	

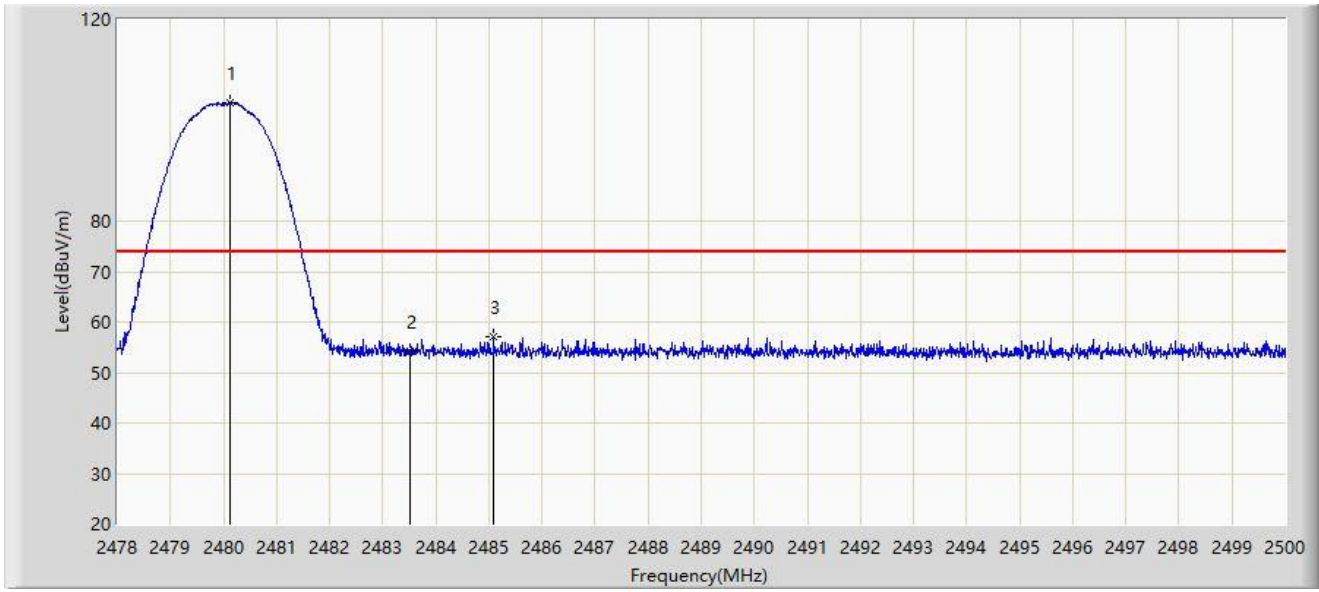


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2480.123	103.443	72.546	N/A	N/A	30.897	PK
2		2483.500	54.129	23.238	-19.871	74.000	30.892	PK
3	*	2485.084	56.959	26.070	-17.041	74.000	30.889	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 2DH5 at 2480MHz	

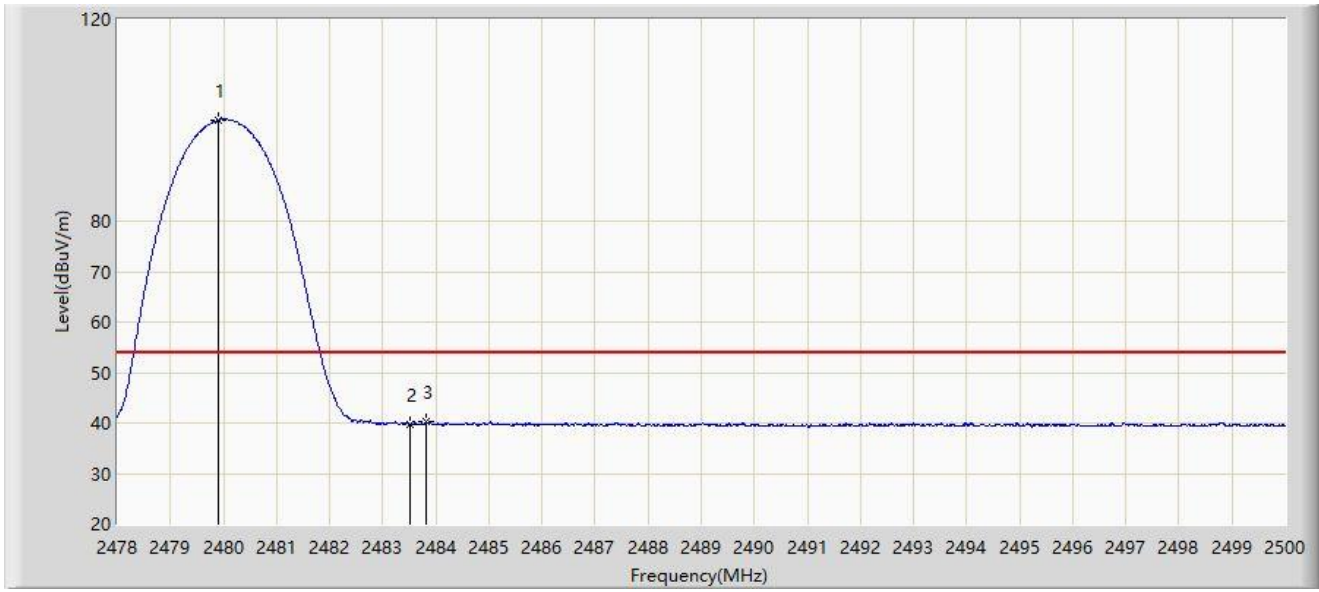


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.892	99.998	69.101	N/A	N/A	30.897	AV
2		2483.500	39.642	8.751	-14.358	54.000	30.892	AV
3	*	2483.830	40.259	9.368	-13.741	54.000	30.891	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 2DH5 at 2480MHz	

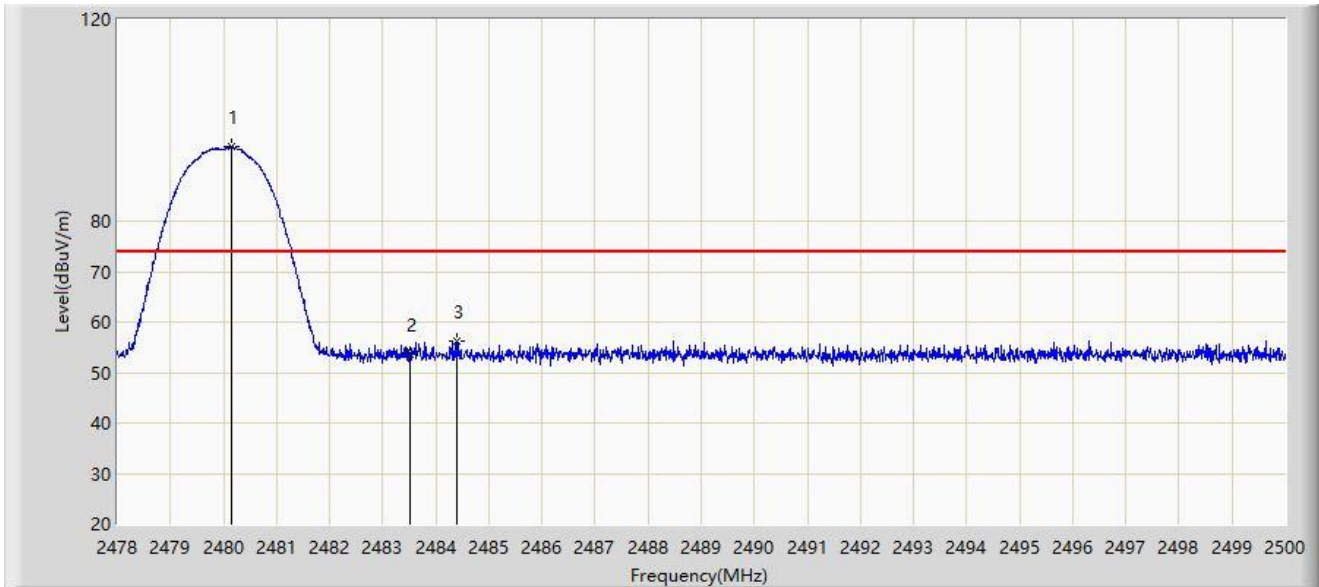


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.156	94.746	63.849	N/A	N/A	30.897	PK
2		2483.500	53.588	22.697	-20.412	74.000	30.892	PK
3	*	2484.402	56.094	25.204	-17.906	74.000	30.890	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 2DH5 at 2480MHz	

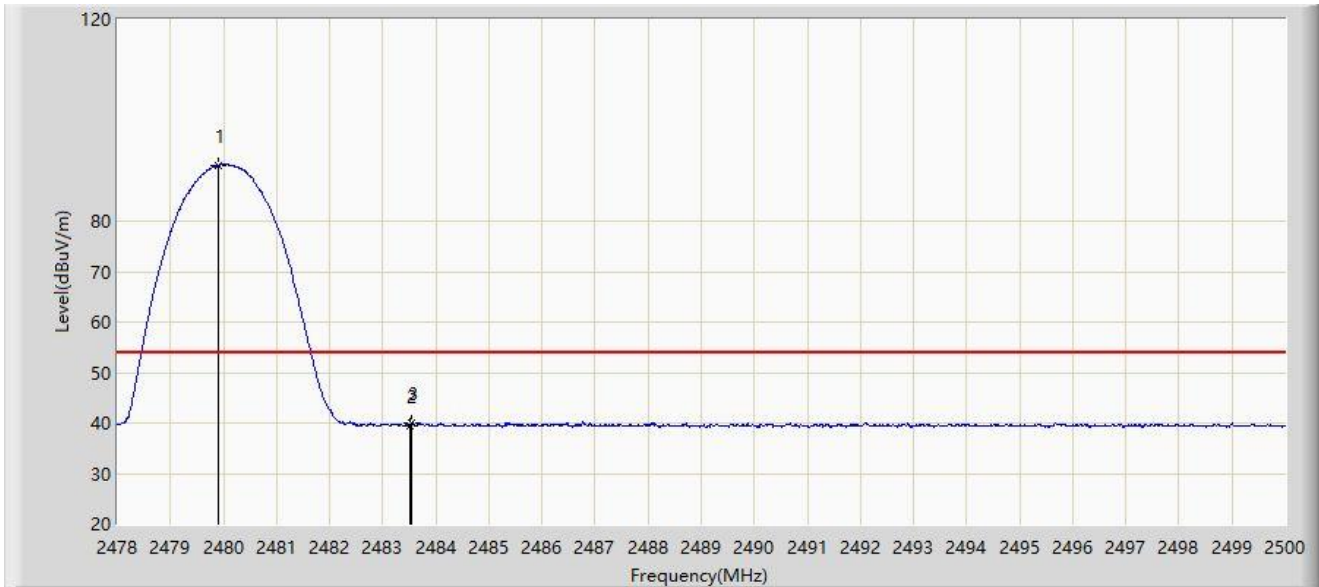


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.892	90.997	60.100	N/A	N/A	30.897	AV
2		2483.500	39.413	8.522	-14.587	54.000	30.892	AV
3	*	2483.544	39.990	9.099	-14.010	54.000	30.892	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 3DH5 at 2402MHz	

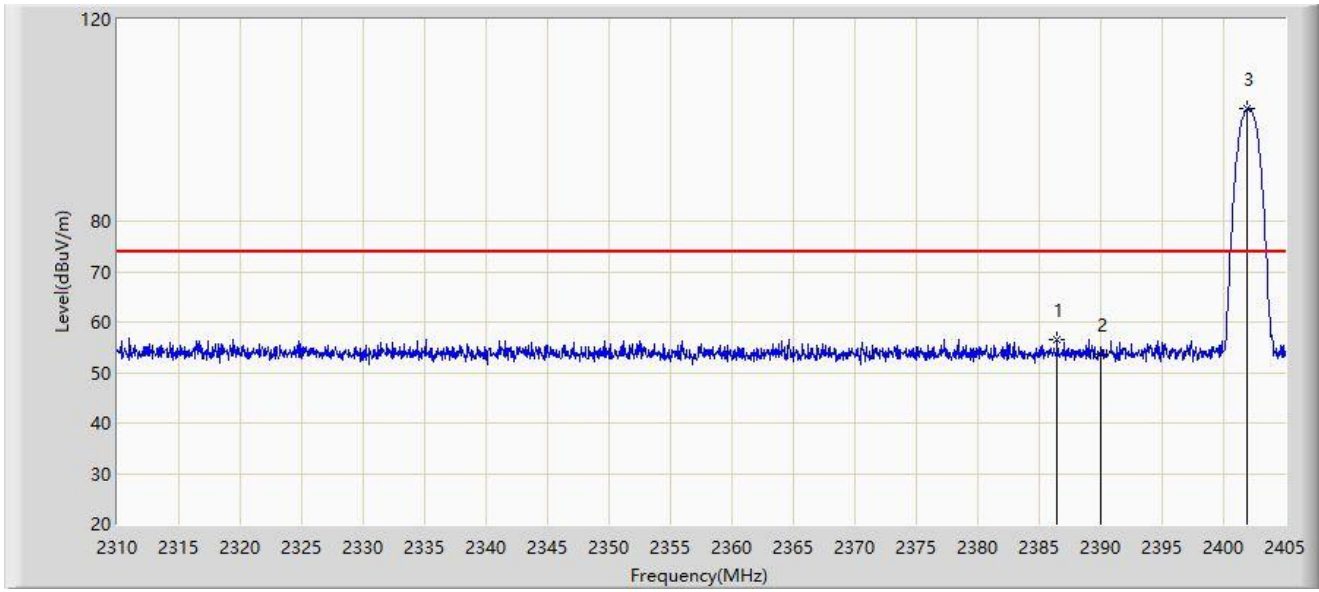


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2386.475	56.395	25.401	-17.605	74.000	30.994	PK
2		2390.000	53.762	22.770	-20.238	74.000	30.992	PK
3		2401.960	102.317	71.328	N/A	N/A	30.989	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 3DH5 at 2402MHz	

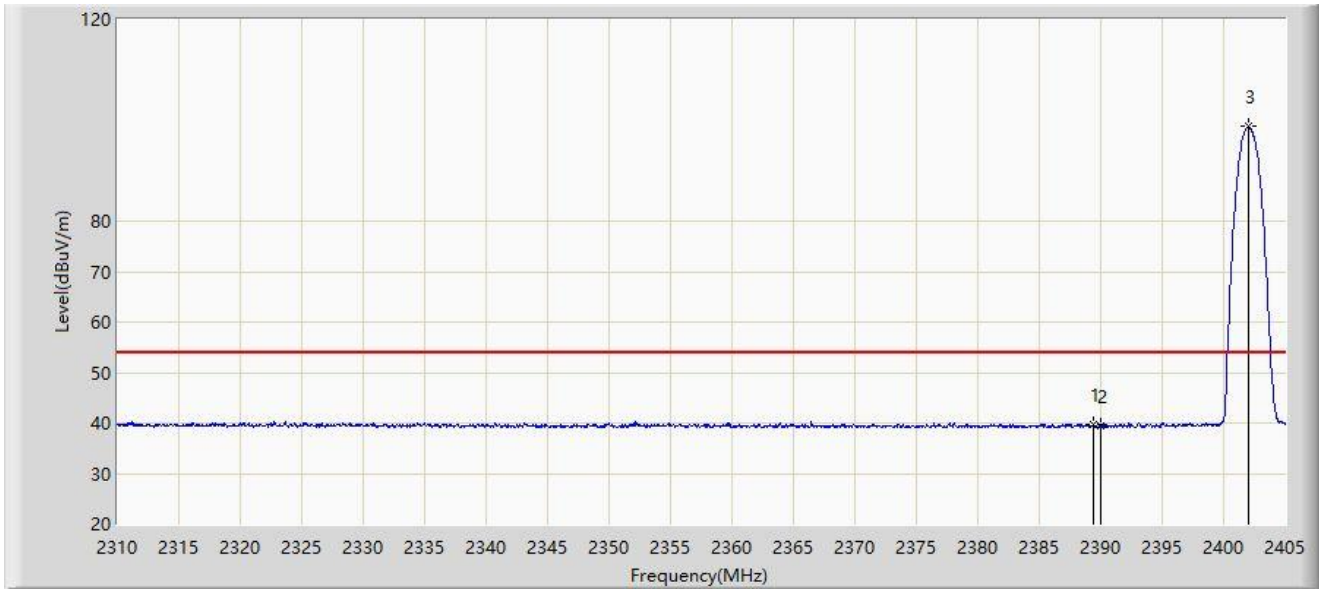


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2389.420	39.707	8.715	-14.293	54.000	30.993	AV
2		2390.000	39.296	8.304	-14.704	54.000	30.992	AV
3		2402.008	98.738	67.749	N/A	N/A	30.989	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 3DH5 at 2402MHz	

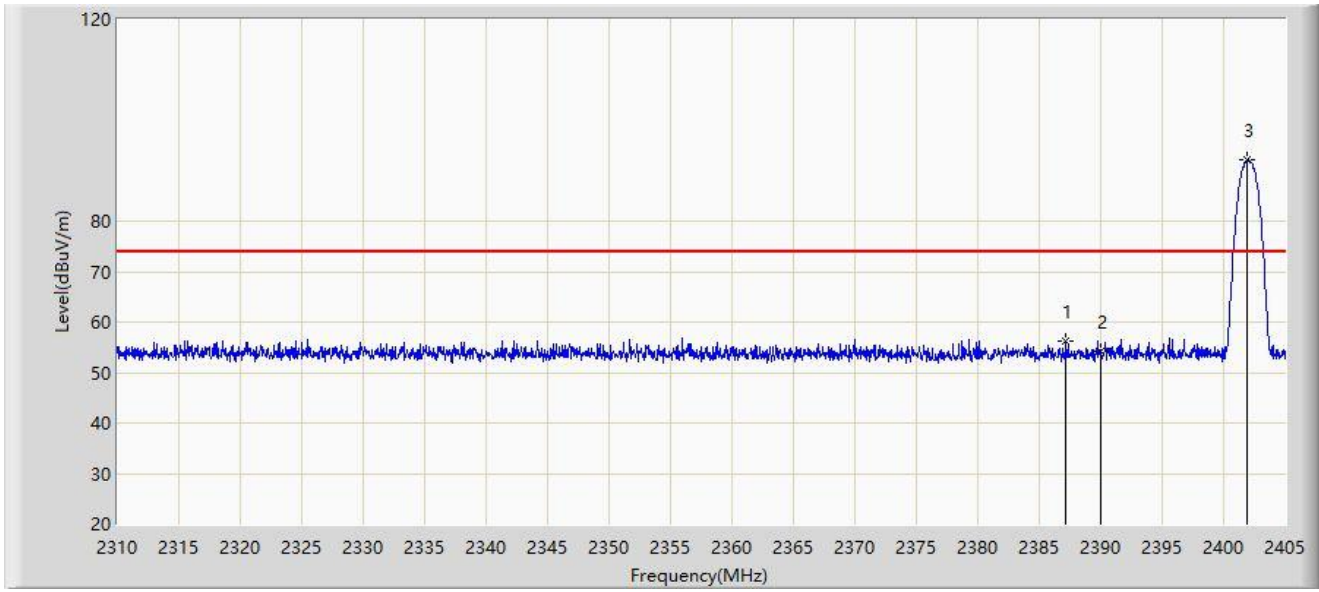


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2387.187	56.193	25.200	-17.807	74.000	30.993	PK
2		2390.000	54.217	23.225	-19.783	74.000	30.992	PK
3		2401.960	92.087	61.098	N/A	N/A	30.989	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 3DH5 at 2402MHz	

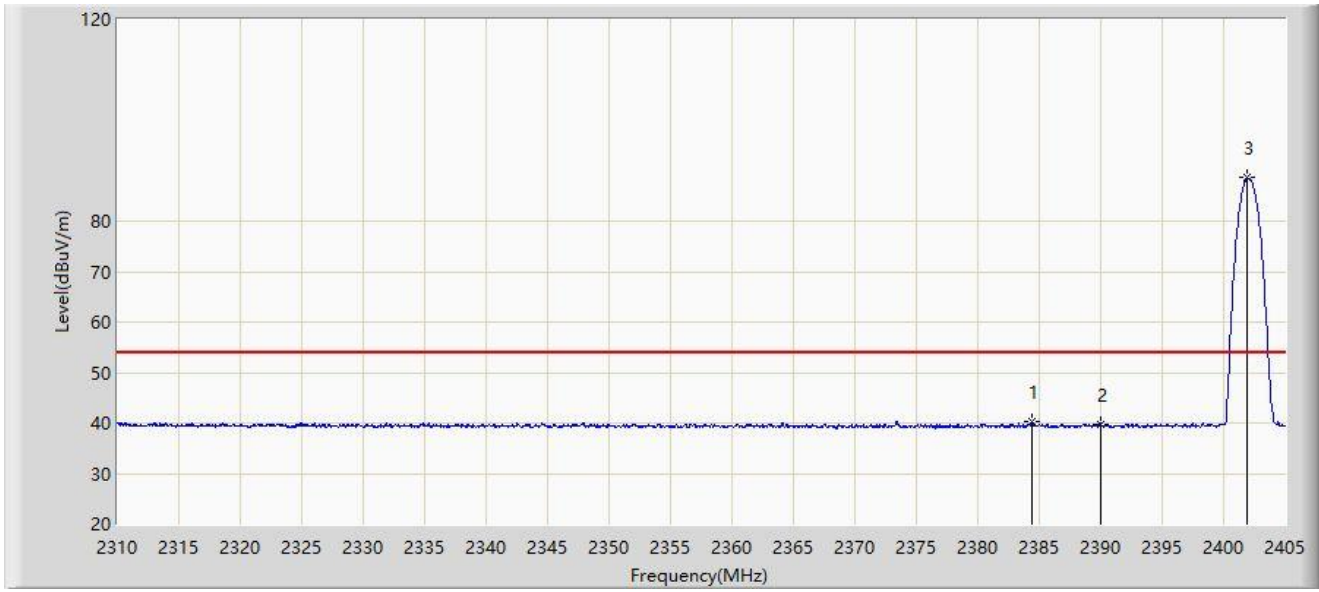


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2384.433	40.155	9.160	-13.845	54.000	30.995	AV
2		2390.000	39.729	8.737	-14.271	54.000	30.992	AV
3		2401.913	88.616	57.627	N/A	N/A	30.989	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 3DH5 at 2480MHz	

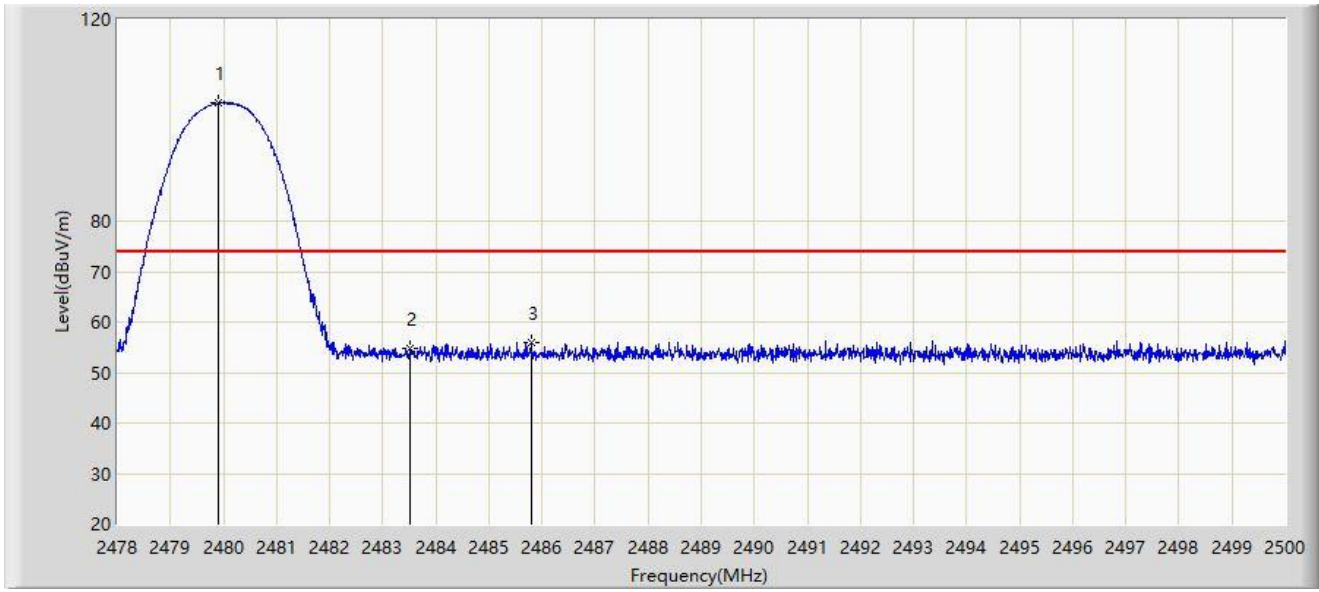


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2479.892	103.405	72.508	N/A	N/A	30.897	PK
2		2483.500	54.796	23.905	-19.204	74.000	30.892	PK
3	*	2485.799	56.055	25.167	-17.945	74.000	30.888	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 3DH5 at 2480MHz	

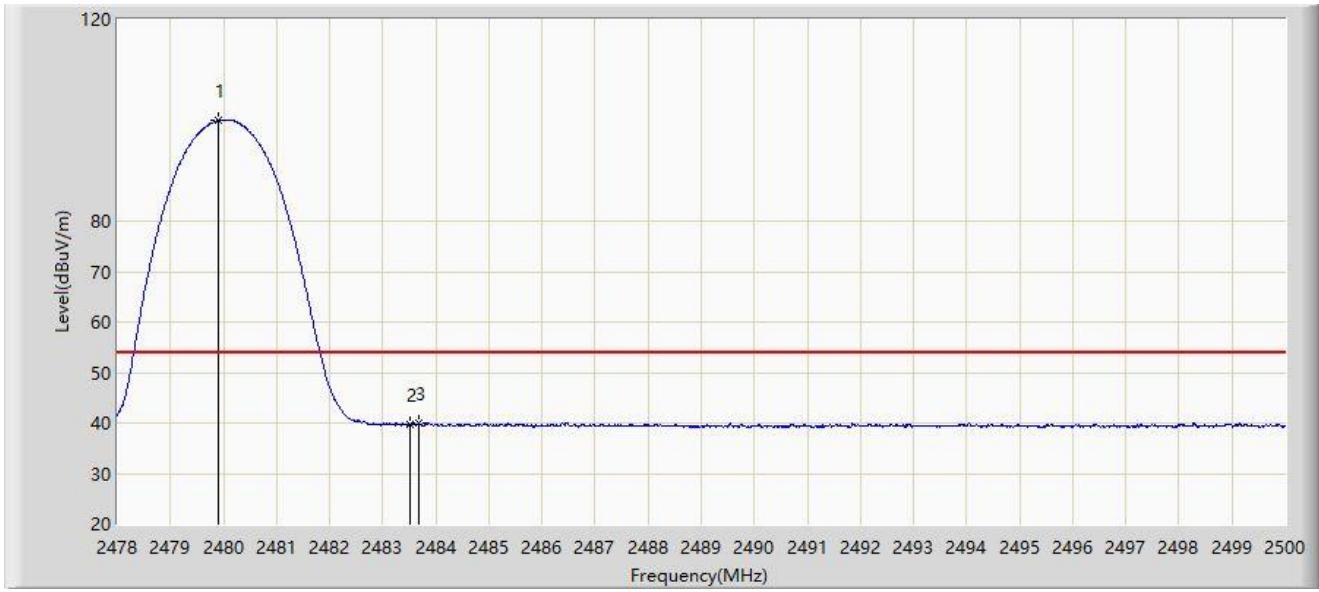


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2479.914	99.986	69.089	N/A	N/A	30.897	AV
2		2483.500	39.663	8.772	-14.337	54.000	30.892	AV
3	*	2483.687	39.893	9.002	-14.107	54.000	30.892	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 3DH5 at 2480MHz	

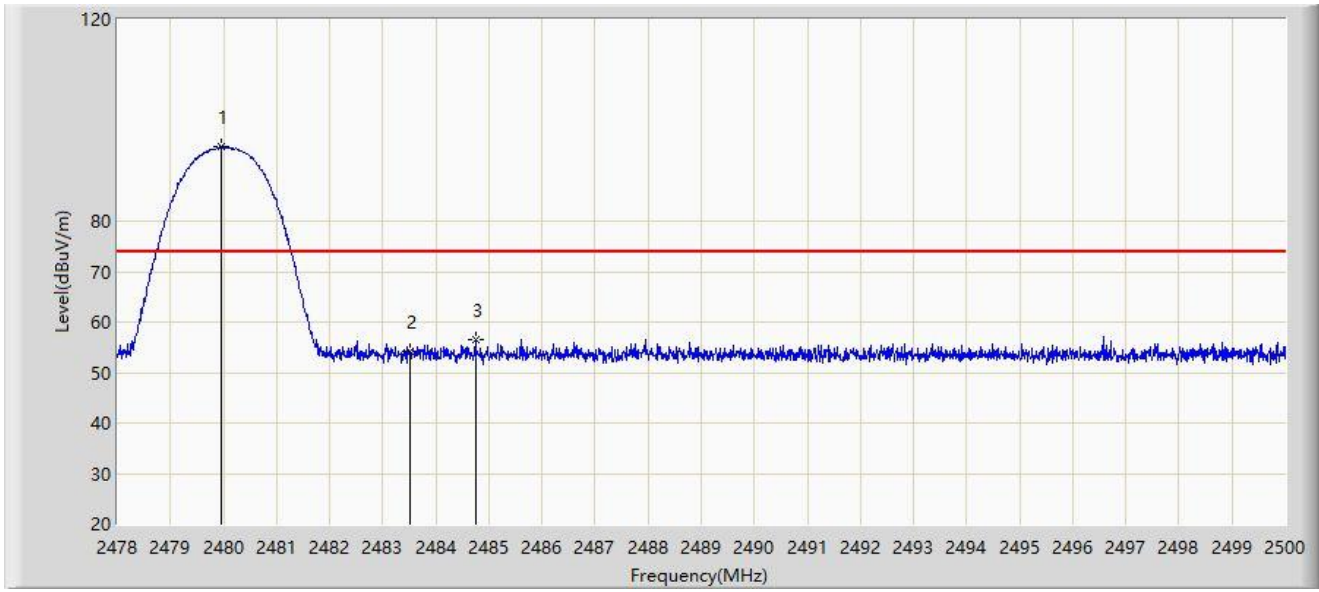


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.958	94.706	63.809	N/A	N/A	30.897	PK
2		2483.500	54.300	23.409	-19.700	74.000	30.892	PK
3	*	2484.743	56.461	25.572	-17.539	74.000	30.890	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 3DH5 at 2480MHz	

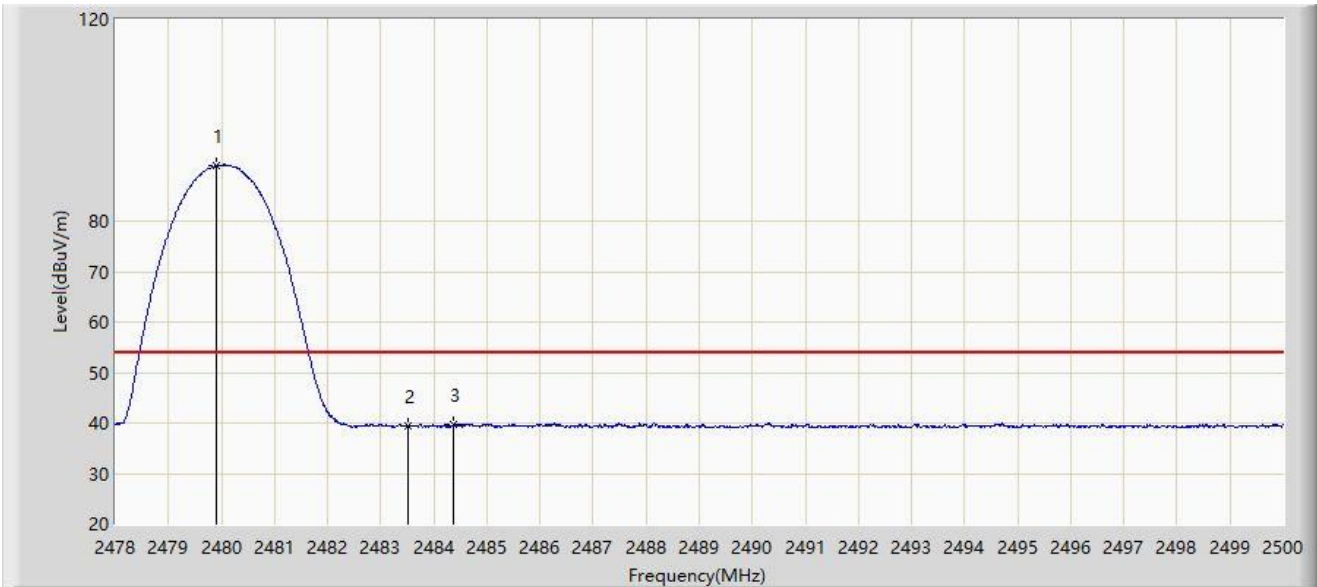

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.914	90.975	60.078	N/A	N/A	30.897	AV
2		2483.500	39.349	8.458	-14.651	54.000	30.892	AV
3	*	2484.380	39.776	8.886	-14.224	54.000	30.890	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).


Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

A.11 AC Conducted Emissions Test Result

Site: NS-SR2	Test Date: 2023-03-28
Limit: FCC_Part15.207_CE_AC Power	Engineer: Flag Yang
Probe: ENV216_102493_0.15MHz~30MHz	Polarity: Line
EUT: Tablet Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at channel 2441MHz	

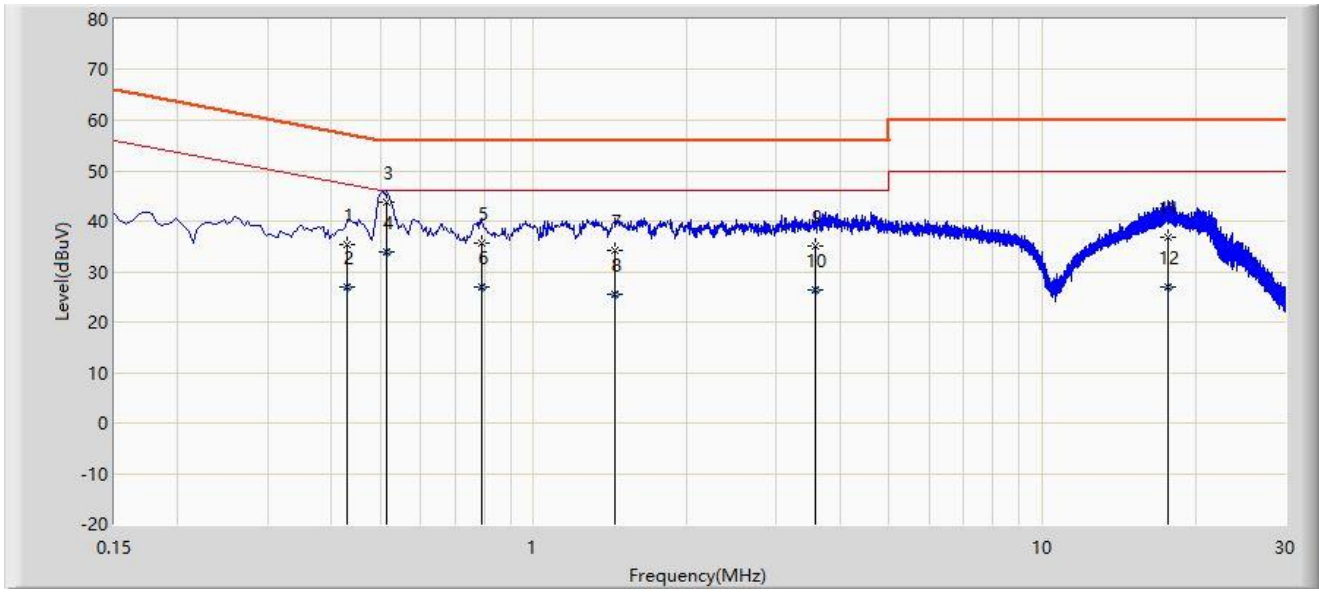


No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.430	35.430	25.872	-21.823	57.253	9.558	QP
2		0.430	26.843	17.285	-20.410	47.253	9.558	AV
3		0.514	43.739	34.171	-12.261	56.000	9.568	QP
4	*	0.514	33.994	24.425	-12.006	46.000	9.568	AV
5		0.790	35.629	26.045	-20.371	56.000	9.584	QP
6		0.790	26.844	17.259	-19.156	46.000	9.584	AV
7		1.446	34.217	24.610	-21.783	56.000	9.608	QP
8		1.446	25.551	15.943	-20.449	46.000	9.608	AV
9		3.578	35.130	25.471	-20.870	56.000	9.660	QP
10		3.578	26.328	16.668	-19.672	46.000	9.660	AV
11		17.706	36.716	26.724	-23.284	60.000	9.992	QP
12		17.706	26.941	16.949	-23.059	50.000	9.992	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: NS-SR2	Test Date: 2023-03-28
Limit: FCC_Part15.207_CE_AC Power	Engineer: Flag Yang
Probe: ENV216_102493_0.15MHz~30MHz	Polarity: Neutral
EUT: Tablet Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at channel 2441MHz	

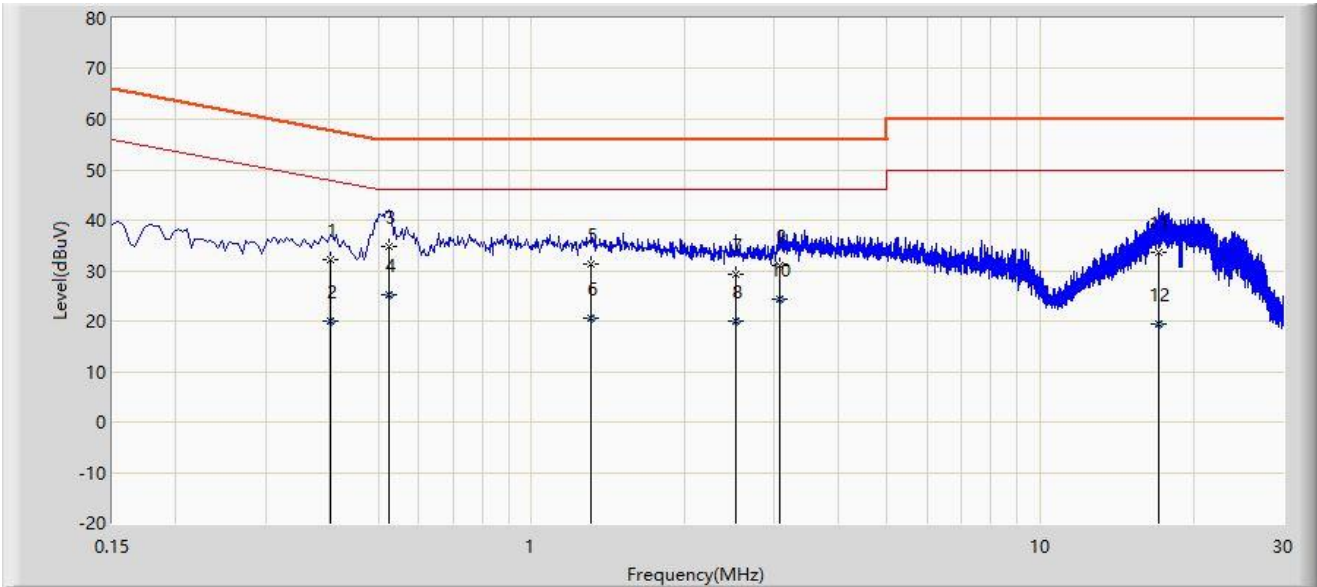

No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.402	32.285	22.730	-25.527	57.812	9.556	QP
2		0.402	20.093	10.537	-27.719	47.812	9.556	AV
3		0.526	34.704	25.144	-21.296	56.000	9.560	QP
4	*	0.526	25.135	15.575	-20.865	46.000	9.560	AV
5		1.310	31.303	21.699	-24.697	56.000	9.604	QP
6		1.310	20.519	10.915	-25.481	46.000	9.604	AV
7		2.526	29.373	19.737	-26.627	56.000	9.636	QP
8		2.526	19.963	10.327	-26.037	46.000	9.636	AV
9		3.066	31.110	21.465	-24.890	56.000	9.645	QP
10		3.066	24.229	14.583	-21.771	46.000	9.645	AV
11		17.130	33.612	23.671	-26.388	60.000	9.940	QP
12		17.130	19.343	9.403	-30.657	50.000	9.940	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Appendix B - Test Setup Photograph

Refer to "2301RSU043-UT" file.

Appendix C - EUT Photograph

Refer to "2301RSU043-UE" file.

_____ The End _____