


### BLE-125kpbs Out-of-Band Emissions

#### Channel 00 (2402MHz)


##### 100kHz PSD Reference Level



##### Low Band Edge

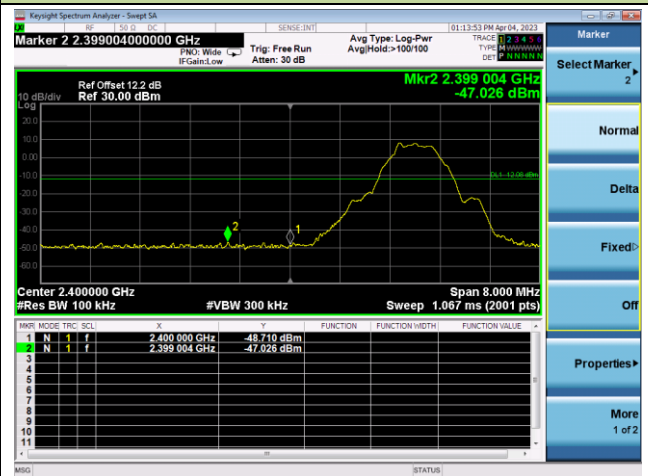

##### Spurious Emission 30MHz ~ 25GHz

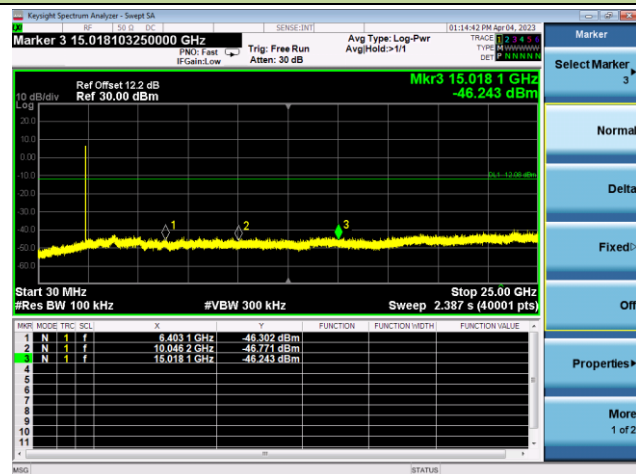



#### Channel 19 (2440MHz)

##### 100kHz PSD Reference Level



##### Spurious Emission 30MHz ~ 25GHz

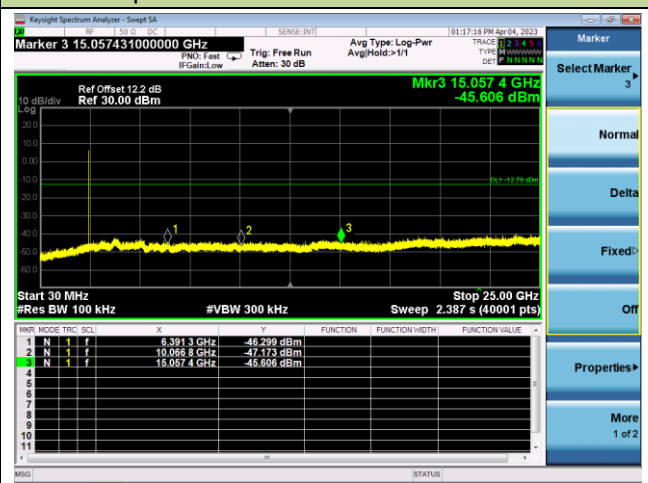

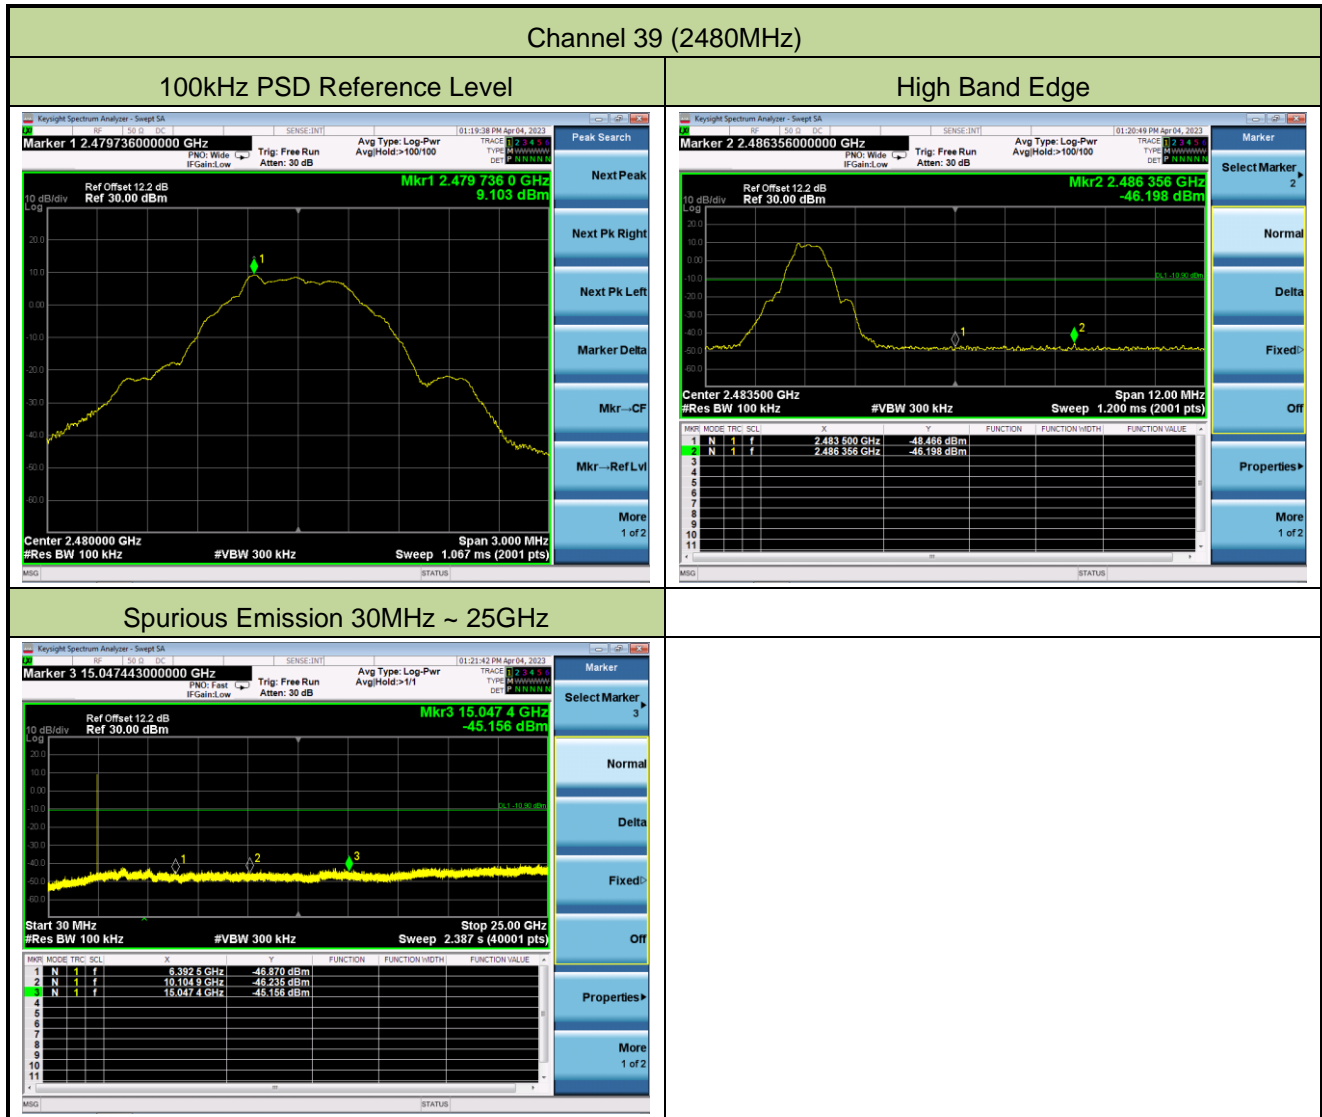


### BLE-500kbps Out-of-Band Emissions

#### Channel 00 (2402MHz)


##### 100kHz PSD Reference Level



##### Low Band Edge

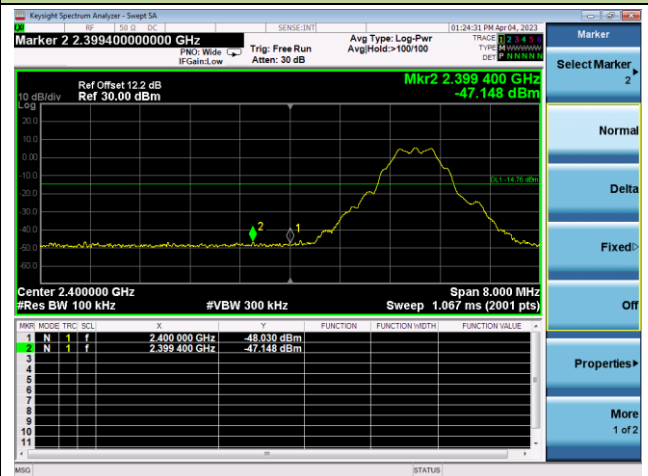

##### Spurious Emission 30MHz ~ 25GHz

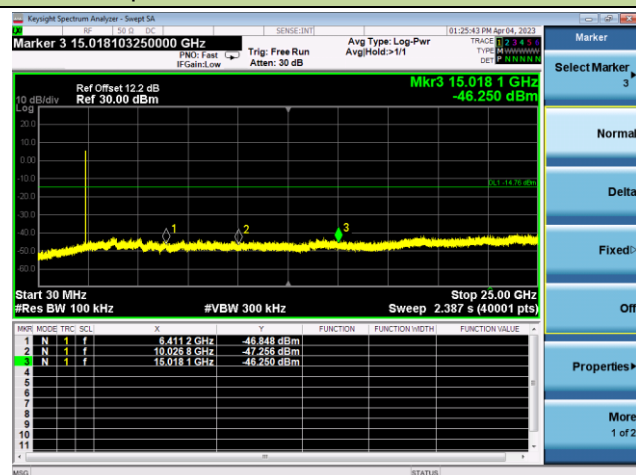


#### Channel 19 (2440MHz)

##### 100kHz PSD Reference Level



##### Spurious Emission 30MHz ~ 25GHz

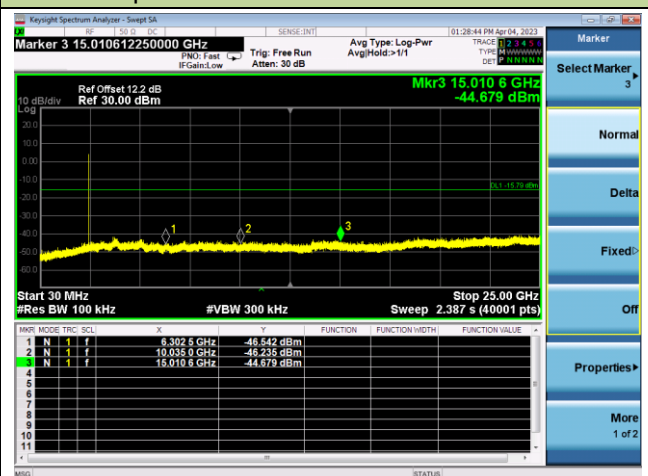



**A.6 Radiated Spurious Emission Test Result**

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-04-02	Test Mode:	BLE-1Mbps
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detect or	Polarization
00	7511.0	38.7	8.2	46.9	74.0	-27.1	Peak	Horizontal
	11455.0	36.4	13.0	49.4	74.0	-24.6	Peak	Horizontal
	12169.0	36.1	12.2	48.3	74.0	-25.7	Peak	Horizontal
	7494.0	37.7	8.3	46.0	74.0	-28.0	Peak	Vertical
	11480.5	35.2	13.0	48.2	74.0	-25.8	Peak	Vertical
	12041.5	38.4	12.2	50.6	74.0	-23.4	Peak	Vertical
19	7375.0	37.0	8.3	45.3	74.0	-28.7	Peak	Horizontal
	11361.5	36.4	12.8	49.2	74.0	-24.8	Peak	Horizontal
	12466.5	38.3	11.8	50.1	74.0	-23.9	Peak	Horizontal
	7672.5	37.1	7.8	44.9	74.0	-29.1	Peak	Vertical
	11157.5	35.5	13.1	48.6	74.0	-25.4	Peak	Vertical
	12305.0	36.8	12.1	48.9	74.0	-25.1	Peak	Vertical
39	7664.0	37.3	7.8	45.1	74.0	-28.9	Peak	Horizontal
	11616.5	36.9	12.6	49.5	74.0	-24.5	Peak	Horizontal
	12135.0	37.2	12.2	49.4	74.0	-24.6	Peak	Horizontal
	7536.5	37.0	8.2	45.2	74.0	-28.8	Peak	Vertical
	11072.5	33.9	13.3	47.2	74.0	-26.8	Peak	Vertical
	12271.0	35.2	12.0	47.2	74.0	-26.8	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-04-02	Test Mode:	BLE-2Mbps
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detect or	Polarization
00	7638.5	37.7	7.9	45.6	74.0	-28.4	Peak	Horizontal
	10919.5	35.5	13.4	48.9	74.0	-25.1	Peak	Horizontal
	12330.5	36.4	12.0	48.4	74.0	-25.6	Peak	Horizontal
	7655.5	37.3	7.8	45.1	74.0	-28.9	Peak	Vertical
	10749.5	34.4	13.4	47.8	74.0	-26.2	Peak	Vertical
	12279.5	36.4	12.0	48.4	74.0	-25.6	Peak	Vertical
19	7494.0	36.7	8.3	45.0	74.0	-29.0	Peak	Horizontal
	10996.0	35.0	13.6	48.6	74.0	-25.4	Peak	Horizontal
	12152.0	36.8	12.1	48.9	74.0	-25.1	Peak	Horizontal
	7434.5	37.1	8.1	45.2	74.0	-28.8	Peak	Vertical
	11489.0	35.4	13.2	48.6	74.0	-25.4	Peak	Vertical
	12458.0	37.7	11.9	49.6	74.0	-24.4	Peak	Vertical
39	7443.0	35.5	8.2	43.7	74.0	-30.3	Peak	Horizontal
	11480.5	34.8	13.0	47.8	74.0	-26.2	Peak	Horizontal
	12560.0	36.4	11.8	48.2	74.0	-25.8	Peak	Horizontal
	7528.0	36.9	8.1	45.0	74.0	-29.0	Peak	Vertical
	11489.0	36.6	13.2	49.8	74.0	-24.2	Peak	Vertical
	12186.0	36.8	12.0	48.8	74.0	-25.2	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-04-02	Test Mode:	BLE-125kbps
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detect or	Polarization
00	7536.5	36.1	8.2	44.3	74.0	-29.7	Peak	Horizontal
	11404.0	36.1	13.0	49.1	74.0	-24.9	Peak	Horizontal
	12441.0	37.3	12.0	49.3	74.0	-24.7	Peak	Horizontal
	7562.0	36.0	8.0	44.0	74.0	-30.0	Peak	Vertical
	10885.5	34.6	13.4	48.0	74.0	-26.0	Peak	Vertical
	11684.5	37.5	12.2	49.7	74.0	-24.3	Peak	Vertical
19	7392.0	36.6	8.3	44.9	74.0	-29.1	Peak	Horizontal
	10885.5	34.8	13.4	48.2	74.0	-25.8	Peak	Horizontal
	12024.5	36.1	12.2	48.3	74.0	-25.7	Peak	Horizontal
	7400.5	35.8	8.2	44.0	74.0	-30.0	Peak	Vertical
	11387.0	35.2	13.0	48.2	74.0	-25.8	Peak	Vertical
	12058.5	36.3	12.3	48.6	74.0	-25.4	Peak	Vertical
39	7511.0	37.7	8.2	45.9	74.0	-28.1	Peak	Horizontal
	11327.5	35.1	12.7	47.8	74.0	-26.2	Peak	Horizontal
	12143.5	36.5	12.1	48.6	74.0	-25.4	Peak	Horizontal
	7375.0	37.0	8.3	45.3	74.0	-28.7	Peak	Vertical
	11157.5	35.4	13.1	48.5	74.0	-25.5	Peak	Vertical
	12058.5	36.3	12.3	48.6	74.0	-25.4	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-04-02	Test Mode:	BLE-500kbps
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detect or	Polarization
00	7579.0	37.1	8.0	45.1	74.0	-28.9	Peak	Horizontal
	11013.0	35.0	13.4	48.4	74.0	-25.6	Peak	Horizontal
	11786.5	36.4	12.0	48.4	74.0	-25.6	Peak	Horizontal
	7468.5	36.2	8.2	44.4	74.0	-29.6	Peak	Vertical
	11038.5	34.9	13.6	48.5	74.0	-25.5	Peak	Vertical
	12135.0	36.1	12.2	48.3	74.0	-25.7	Peak	Vertical
19	7400.5	36.7	8.2	44.9	74.0	-29.1	Peak	Horizontal
	10741.0	34.3	13.6	47.9	74.0	-26.1	Peak	Horizontal
	12441.0	36.1	12.0	48.1	74.0	-25.9	Peak	Horizontal
	7579.0	37.1	8.0	45.1	74.0	-28.9	Peak	Vertical
	11242.5	34.6	12.7	47.3	74.0	-26.7	Peak	Vertical
	12118.0	36.1	12.2	48.3	74.0	-25.7	Peak	Vertical
39	7536.5	35.4	8.2	43.6	74.0	-30.4	Peak	Horizontal
	10928.0	34.7	13.5	48.2	74.0	-25.8	Peak	Horizontal
	12152.0	36.4	12.1	48.5	74.0	-25.5	Peak	Horizontal
	7409.0	36.4	8.1	44.5	74.0	-29.5	Peak	Vertical
	11497.5	35.9	13.3	49.2	74.0	-24.8	Peak	Vertical
	12364.5	36.5	12.0	48.5	74.0	-25.5	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

**The Result of Radiated Emission below 1GHz:**

Site: NS-AC1	Test Date: 2023-03-23
Limit: FCC_Part15.209_RSE(3m)	Engineer: Ted Chen
Probe: NS-AC1_VULB9162	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
<b>Test Mode:</b> Transmit by BLE 2Mbps at 2402MHz	

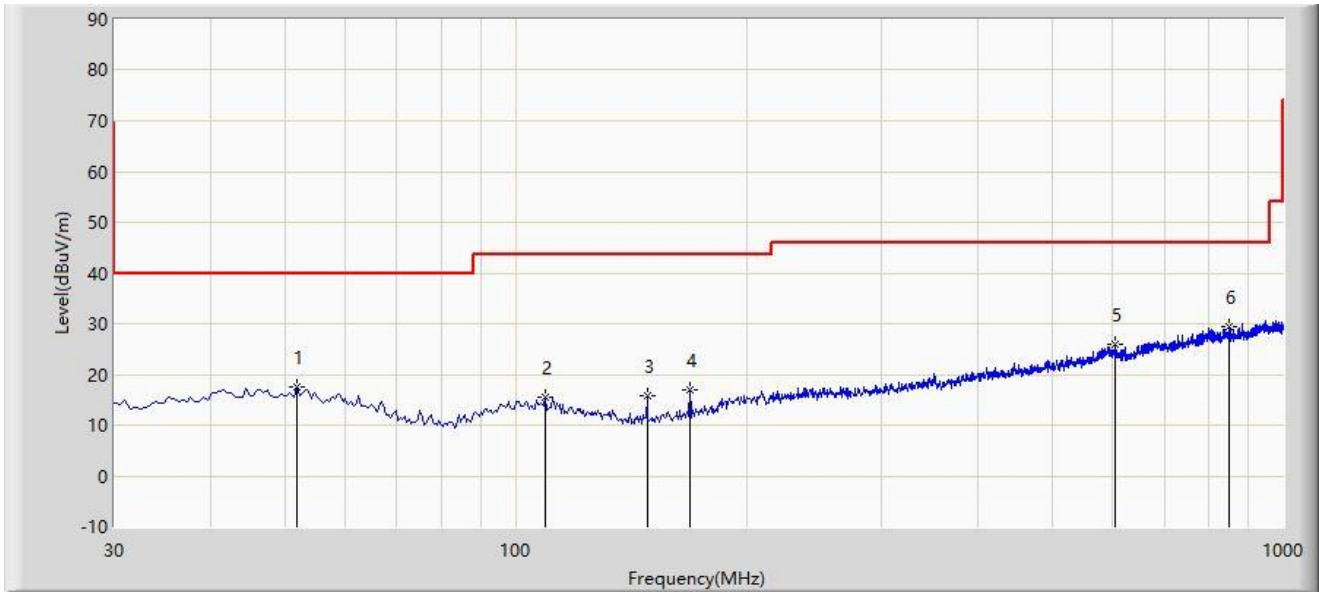

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		51.825	17.494	-0.468	-22.506	40.000	17.961	PK
2		109.540	15.409	-0.061	-28.091	43.500	15.470	PK
3		148.340	15.853	3.459	-27.647	43.500	12.394	PK
4		168.710	16.834	3.217	-26.666	43.500	13.618	PK
5		605.210	25.884	1.297	-20.116	46.000	24.587	PK
6	*	850.620	29.446	1.596	-16.554	46.000	27.850	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: NS-AC1	Test Date: 2023-03-23
Limit: FCC_Part15.209_RSE(3m)	Engineer: Ted Chen
Probe: NS-AC1_VULB9162	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
<b>Test Mode:</b> Transmit by BLE 2Mbps at 2402MHz	

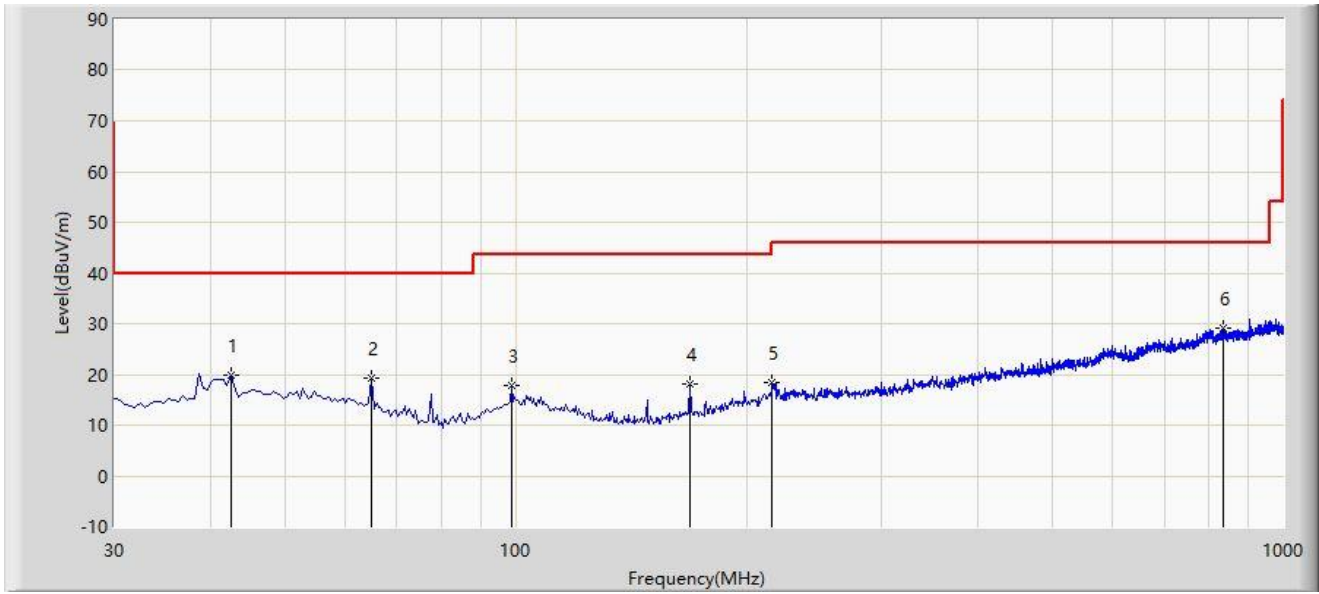

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		42.610	19.902	2.002	-20.098	40.000	17.901	PK
2		64.920	19.232	3.955	-20.768	40.000	15.277	PK
3		98.870	17.711	2.097	-25.789	43.500	15.614	PK
4		168.710	18.199	4.582	-25.301	43.500	13.618	PK
5		215.755	18.507	2.655	-24.993	43.500	15.852	PK
6	*	835.100	29.193	1.342	-16.807	46.000	27.851	PK

Note 1: " \* ", means this data is the worst emission level.


Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

**A.7 Radiated Restricted Band Edge Test Result**

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by BLE 1Mbps at 2402MHz	

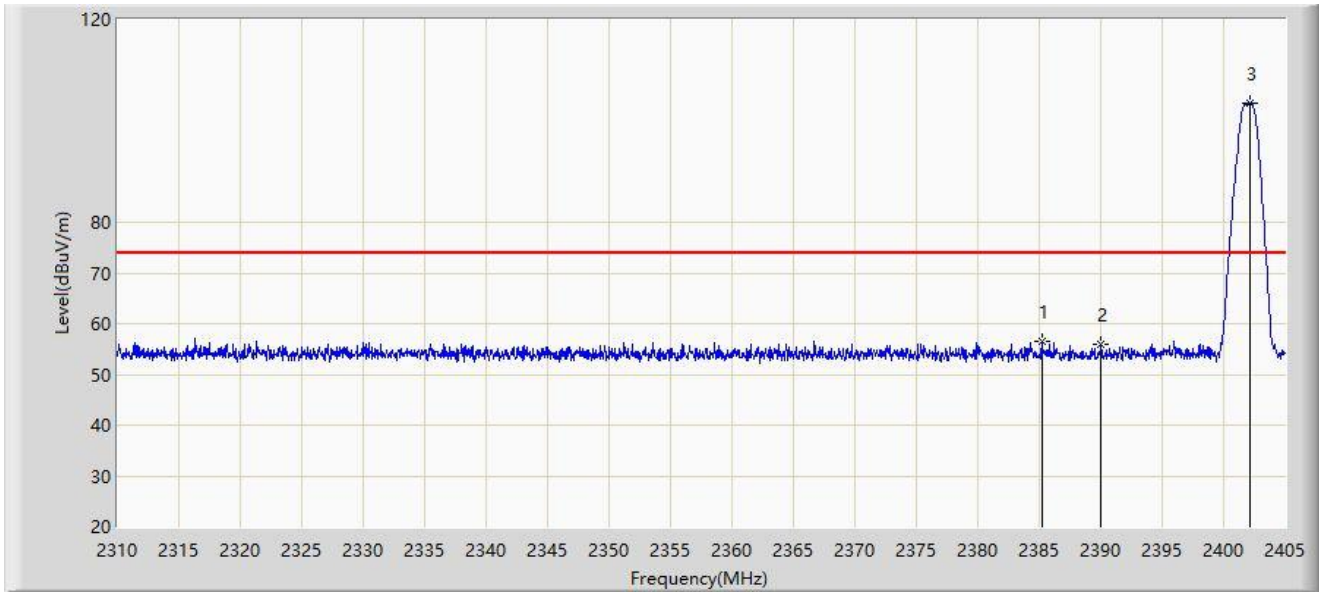


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2385.240	56.629	25.635	-17.371	74.000	30.994	PK
2		2390.000	55.864	24.872	-18.136	74.000	30.992	PK
3		2402.103	103.603	72.614	N/A	N/A	30.989	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by BLE 1Mbps at 2402MHz	

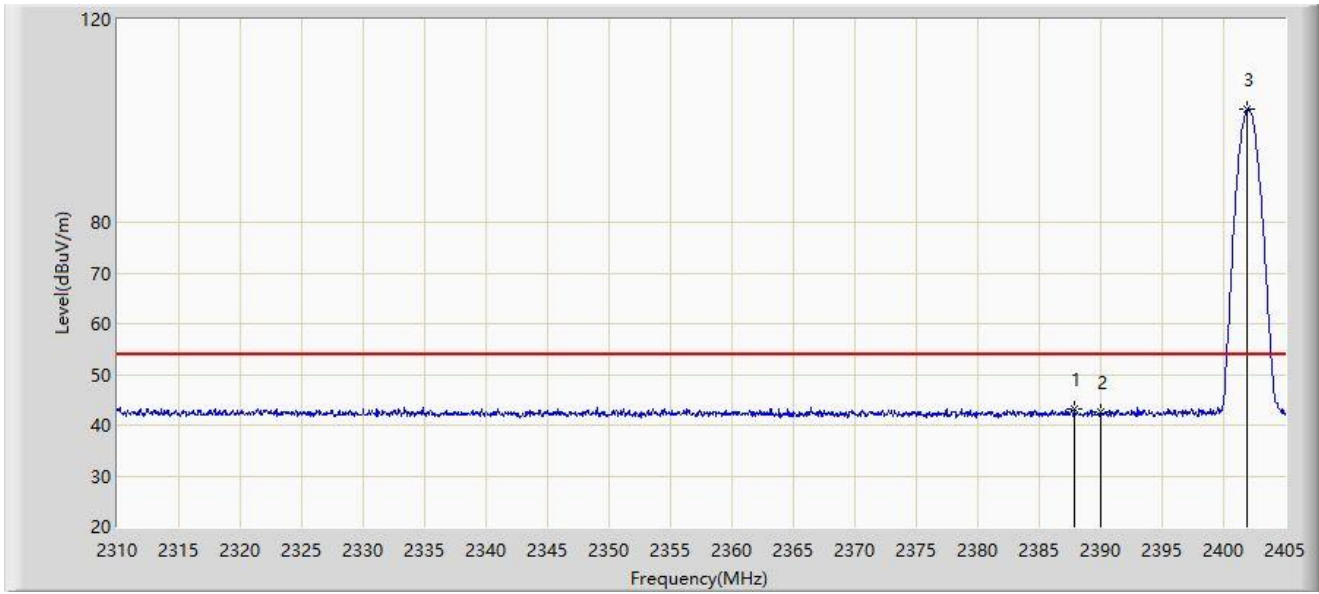


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2387.853	43.254	12.261	-10.746	54.000	30.993	AV
2		2390.000	42.579	11.587	-11.421	54.000	30.992	AV
3		2401.960	102.311	71.322	N/A	N/A	30.989	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by BLE 1Mbps at 2402MHz	

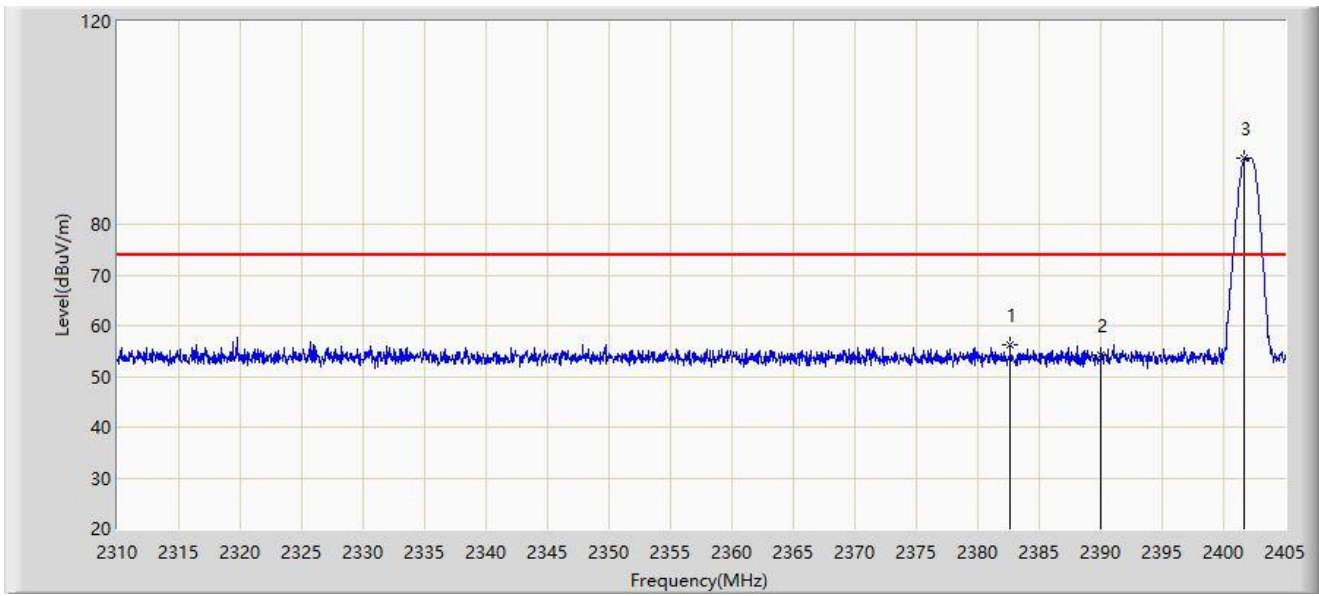


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2382.627	56.088	25.087	-17.912	74.000	31.001	PK
2		2390.000	54.068	23.076	-19.932	74.000	30.992	PK
3		2401.722	92.968	61.979	N/A	N/A	30.989	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by BLE 1Mbps at 2402MHz	

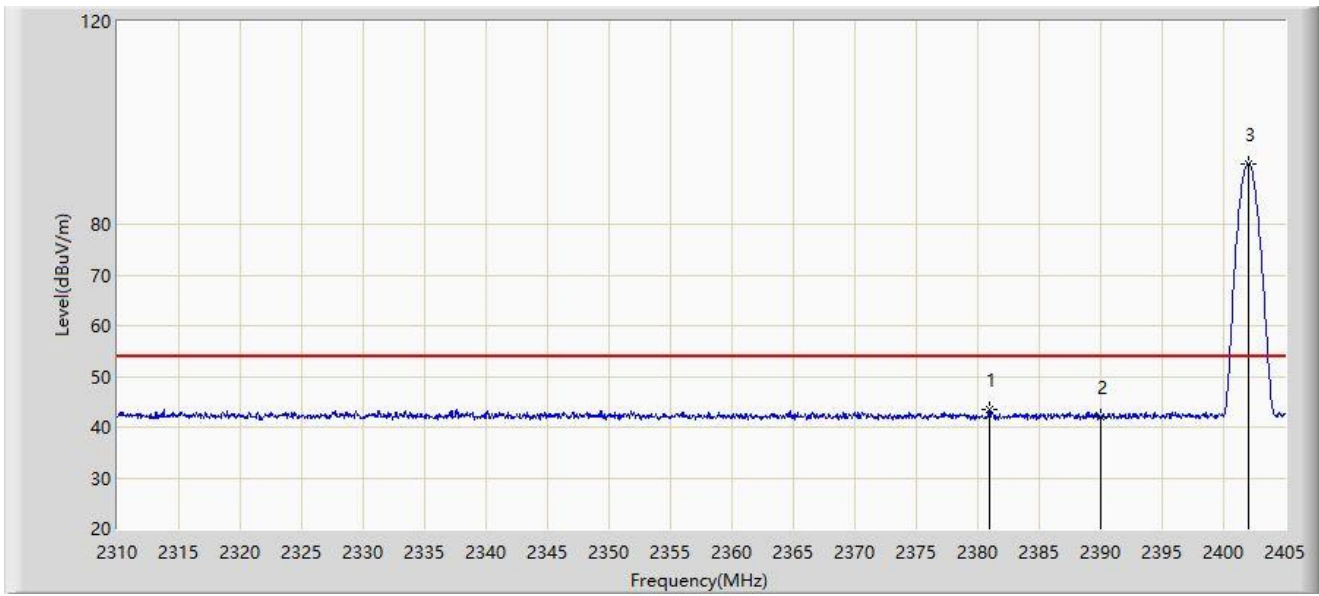


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2380.965	43.341	12.333	-10.659	54.000	31.008	AV
2		2390.000	42.016	11.024	-11.984	54.000	30.992	AV
3		2402.008	91.908	60.919	N/A	N/A	30.989	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by BLE 1Mbps at 2480MHz	

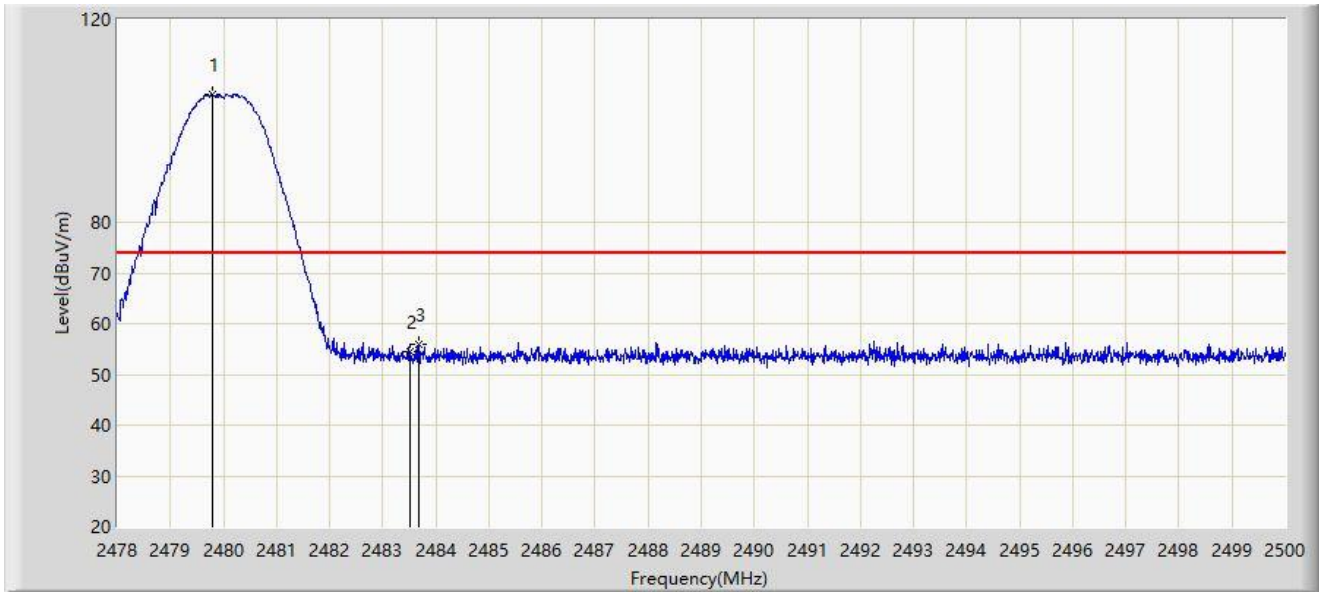

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2479.782	105.276	74.378	N/A	N/A	30.897	PK
2		2483.500	54.458	23.567	-19.542	74.000	30.892	PK
3	*	2483.676	55.808	24.917	-18.192	74.000	30.892	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by BLE 1Mbps at 2480MHz	

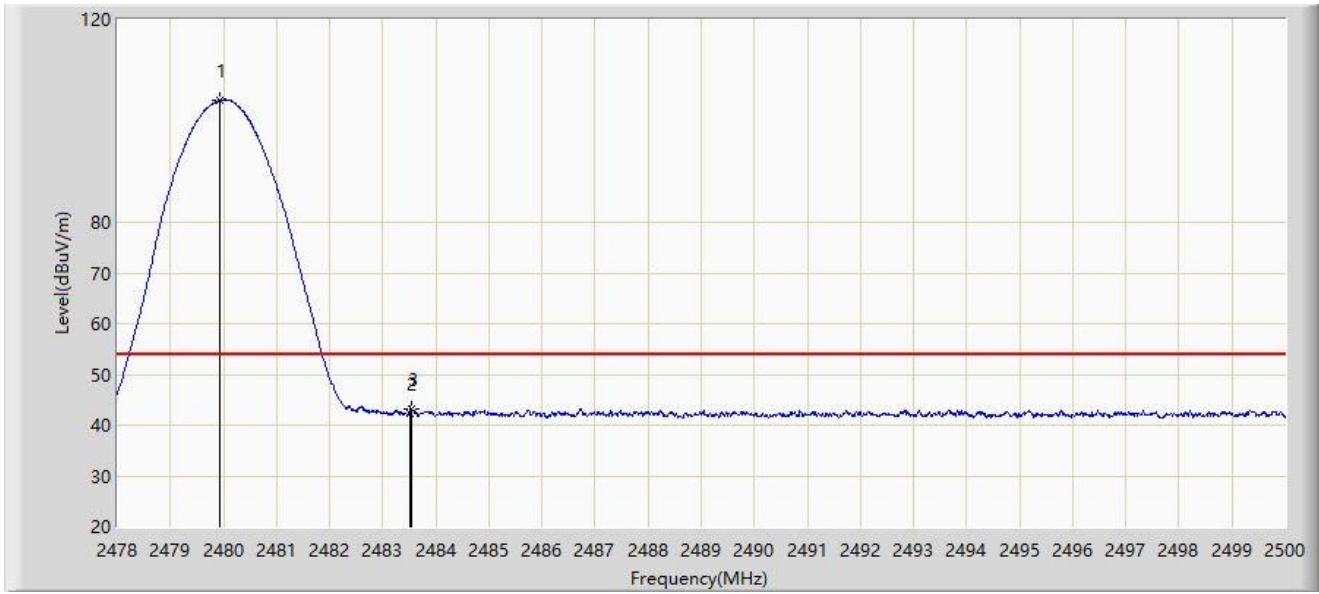


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2479.936	104.006	73.109	N/A	N/A	30.897	AV
2		2483.500	42.324	11.433	-11.676	54.000	30.892	AV
3	*	2483.533	43.171	12.280	-10.829	54.000	30.892	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by BLE 1Mbps at 2480MHz	

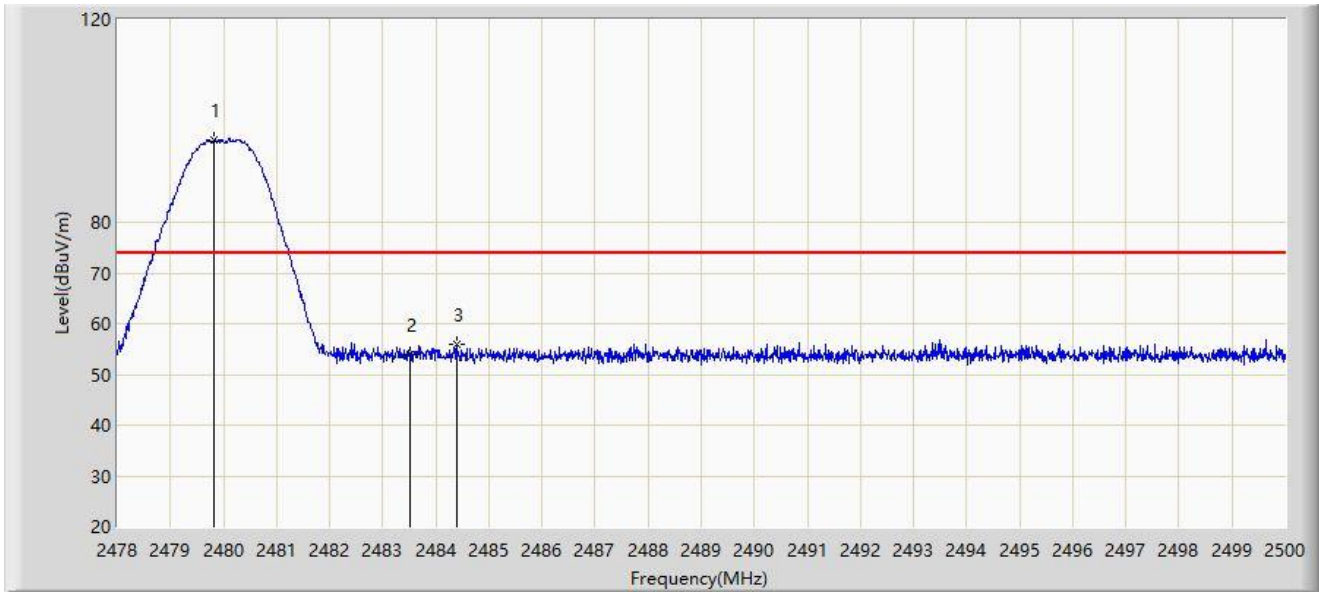


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2479.826	96.268	65.371	N/A	N/A	30.897	PK
2		2483.500	53.934	23.043	-20.066	74.000	30.892	PK
3	*	2484.391	55.863	24.973	-18.137	74.000	30.890	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by BLE 1Mbps at 2480MHz	

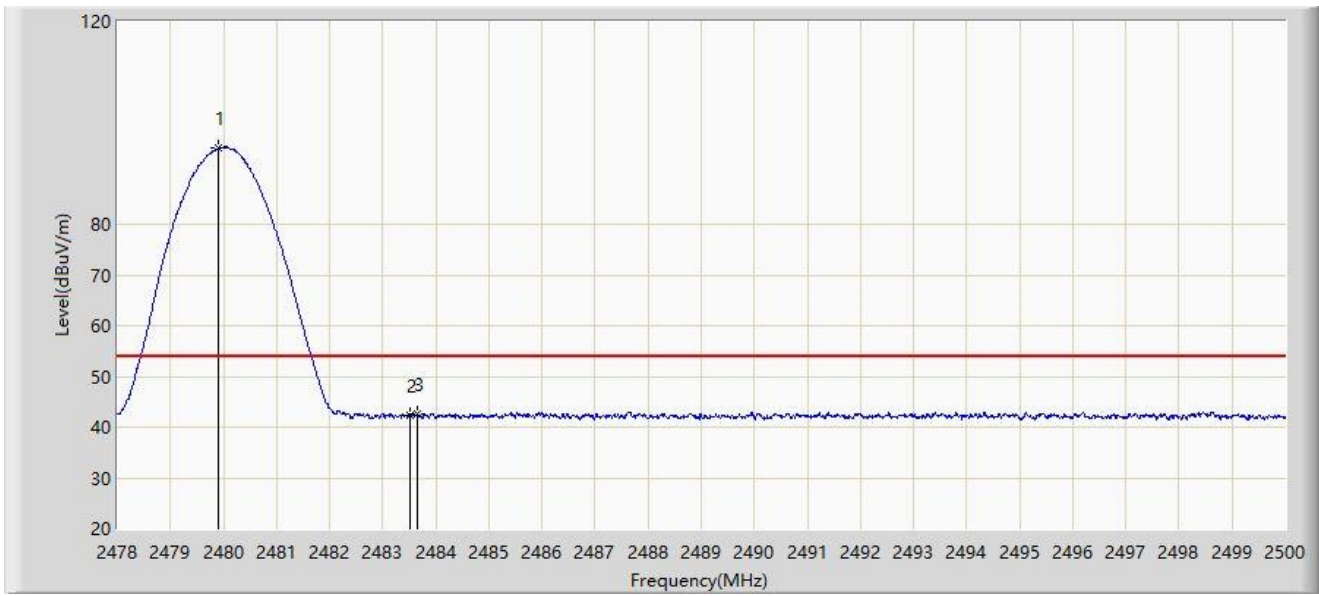


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2479.914	95.002	64.105	N/A	N/A	30.897	AV
2		2483.500	42.209	11.318	-11.791	54.000	30.892	AV
3	*	2483.643	42.661	11.770	-11.339	54.000	30.892	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by BLE 2Mbps at 2402MHz	

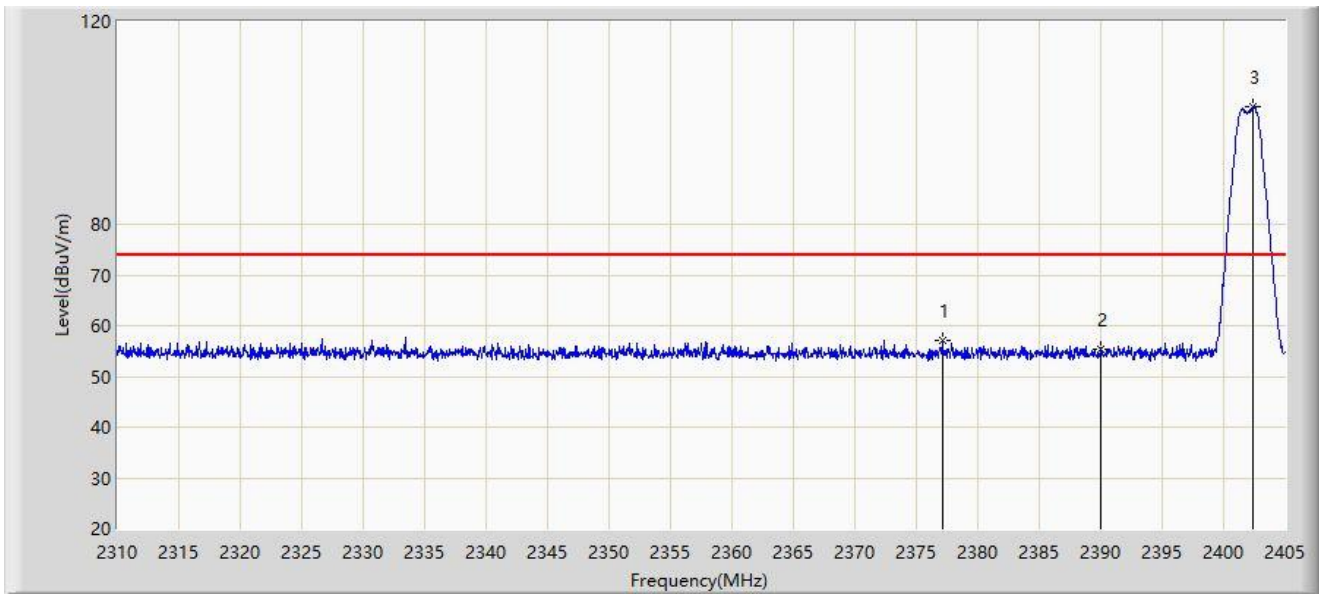


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2377.117	57.046	26.021	-16.954	74.000	31.025	PK
2		2390.000	55.455	24.463	-18.545	74.000	30.992	PK
3		2402.435	103.272	72.285	N/A	N/A	30.988	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by BLE 2Mbps at 2402MHz	

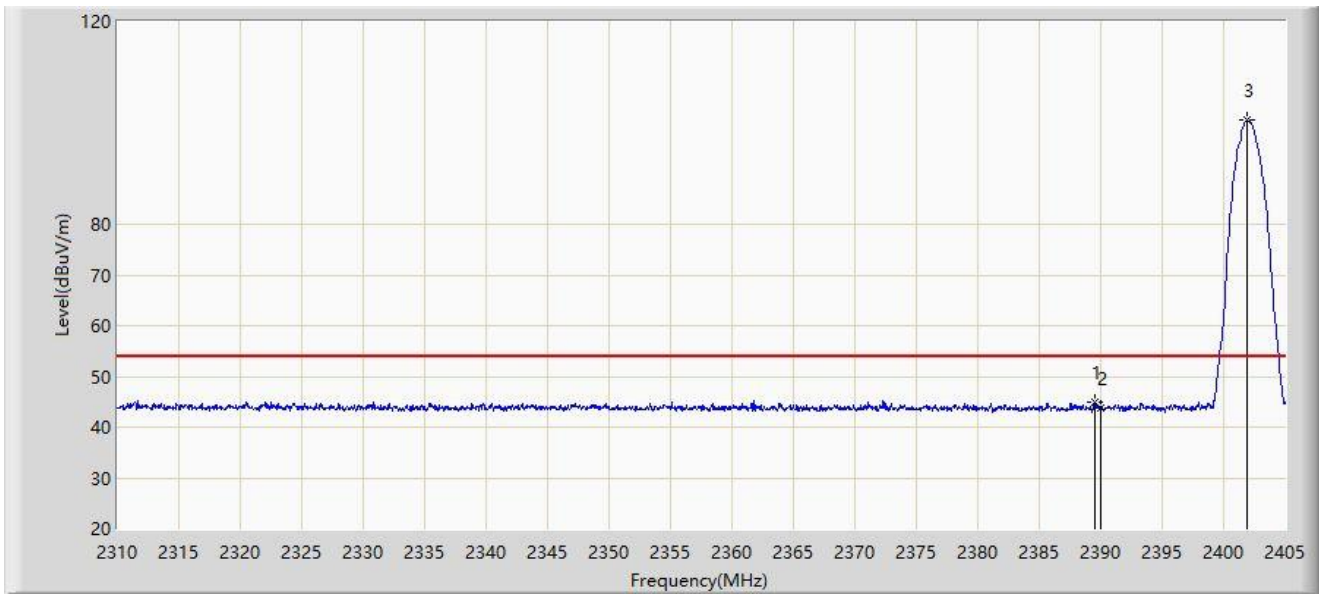


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.468	45.052	14.060	-8.948	54.000	30.993	AV
2		2390.000	43.837	12.845	-10.163	54.000	30.992	AV
3		2401.913	100.617	69.628	N/A	N/A	30.989	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by BLE 2Mbps at 2402MHz	

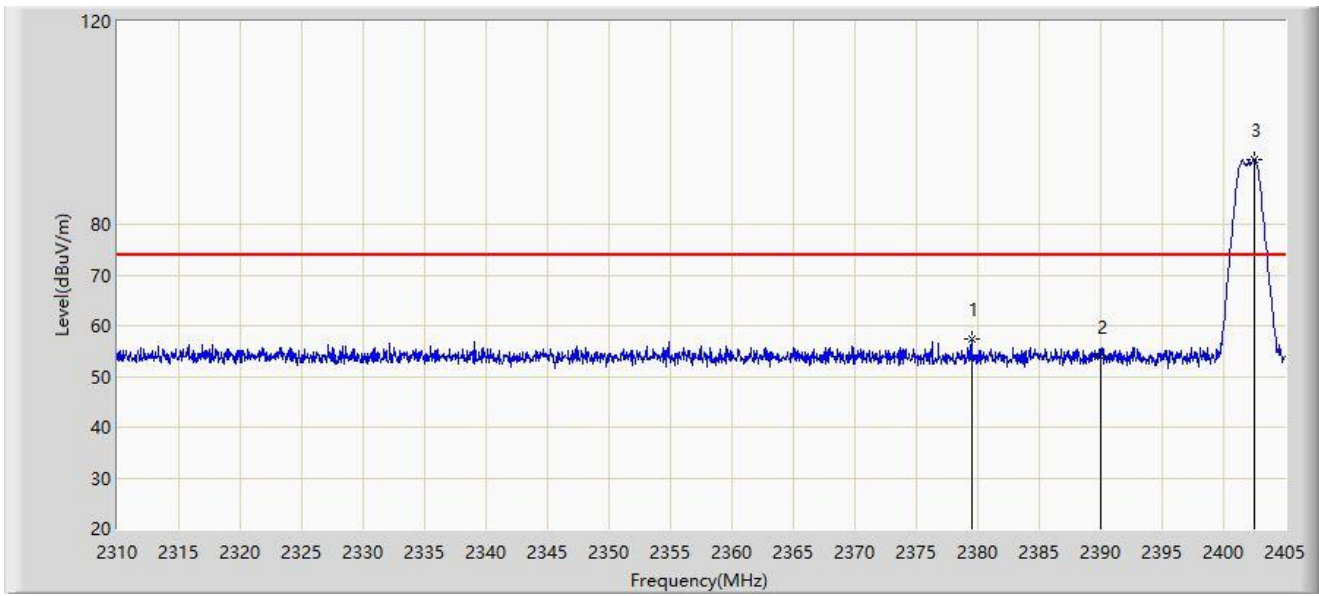


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2379.492	57.273	26.258	-16.727	74.000	31.015	PK
2		2390.000	53.972	22.980	-20.028	74.000	30.992	PK
3		2402.482	92.876	61.889	N/A	N/A	30.988	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by BLE 2Mbps at 2402MHz	

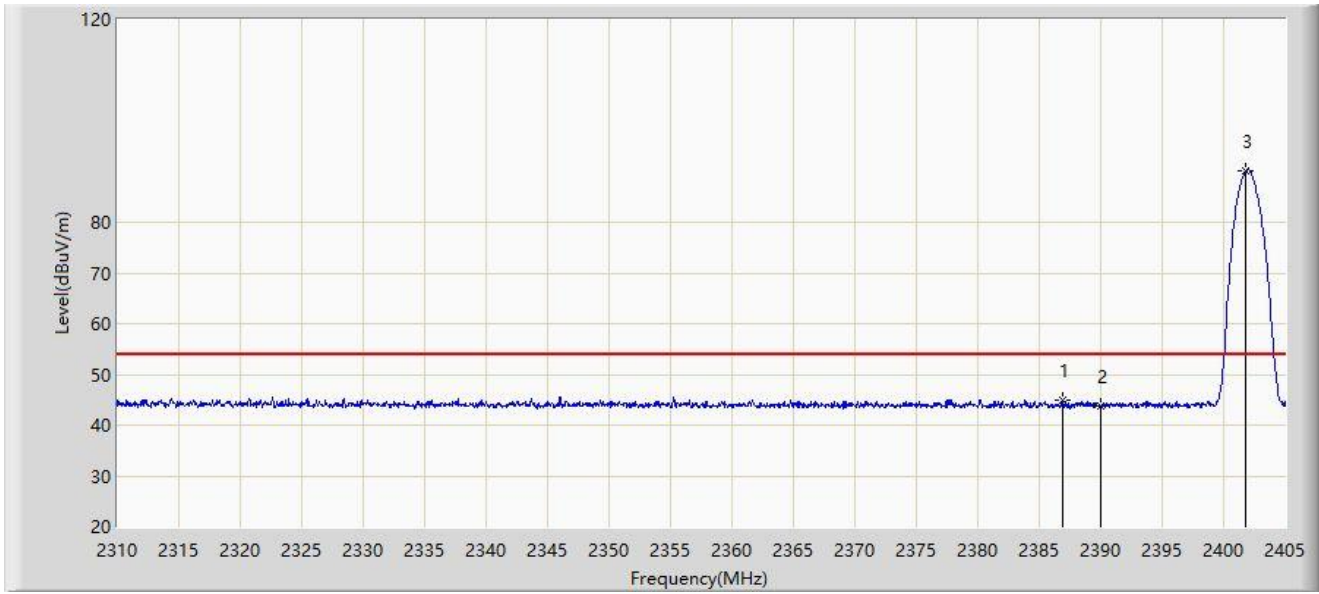


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2386.855	44.901	13.907	-9.099	54.000	30.993	AV
2		2390.000	43.695	12.703	-10.305	54.000	30.992	AV
3		2401.817	90.063	59.074	N/A	N/A	30.988	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by BLE 2Mbps at 2480MHz	

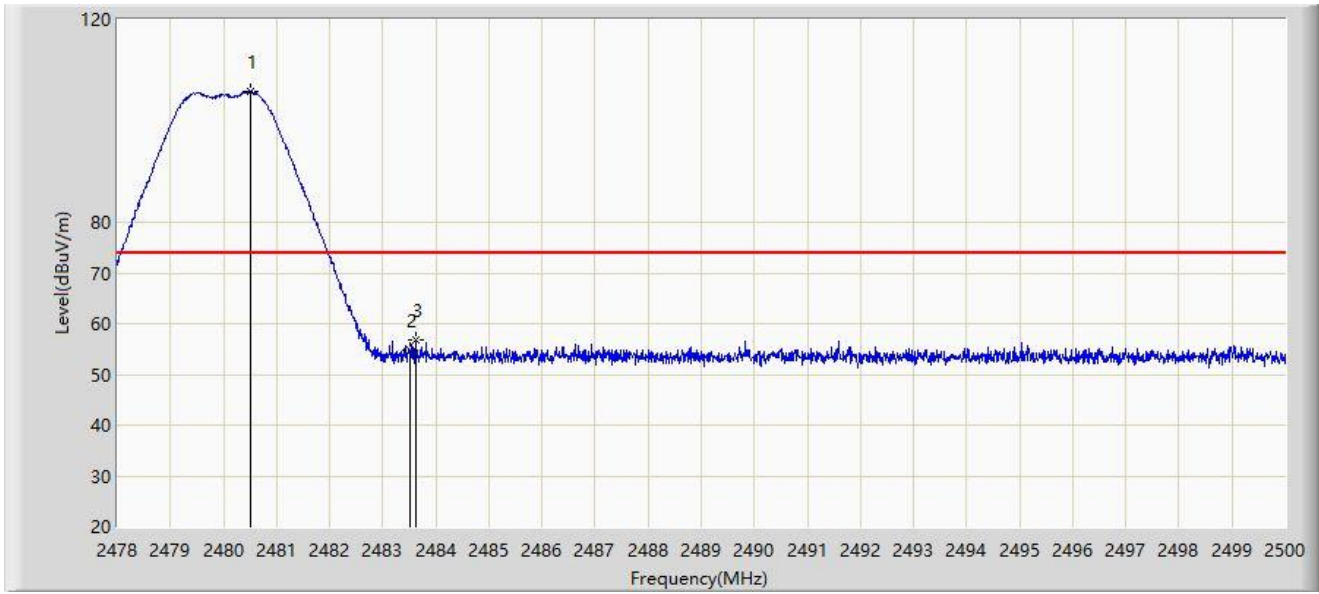

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2480.497	105.896	75.000	N/A	N/A	30.896	PK
2		2483.500	54.761	23.870	-19.239	74.000	30.892	PK
3	*	2483.621	56.746	25.855	-17.254	74.000	30.892	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by BLE 2Mbps at 2480MHz	

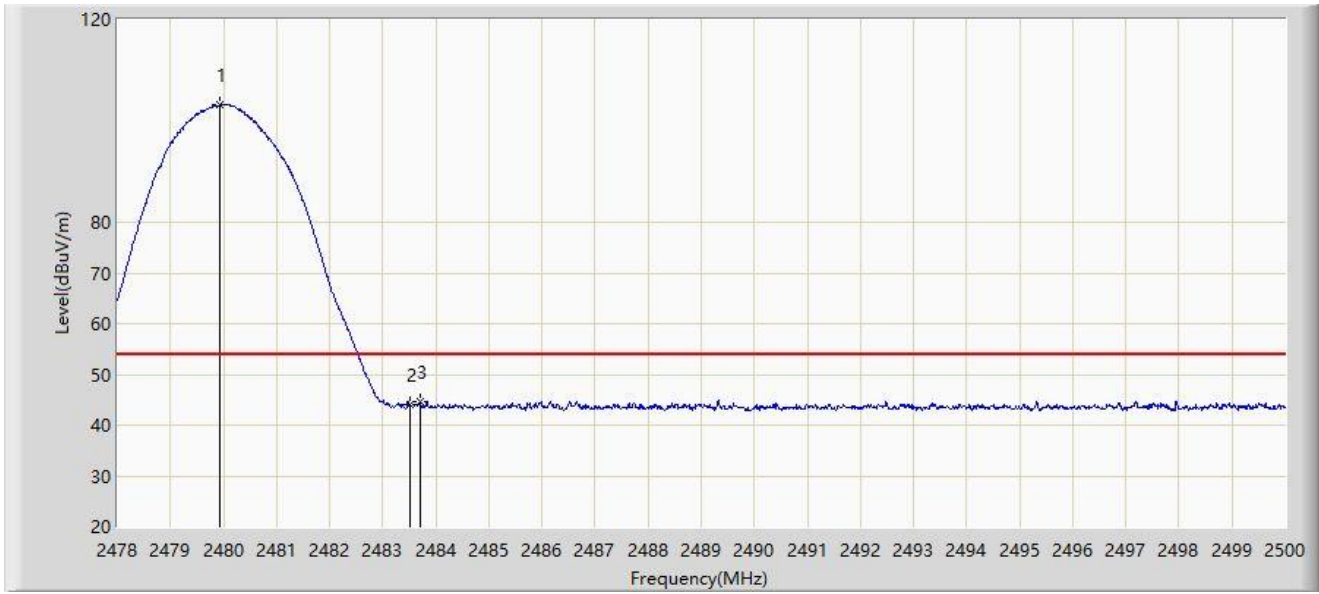


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2479.925	103.111	72.214	N/A	N/A	30.897	AV
2		2483.500	43.944	13.053	-10.056	54.000	30.892	AV
3	*	2483.698	44.618	13.727	-9.382	54.000	30.892	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by BLE 2Mbps at 2480MHz	

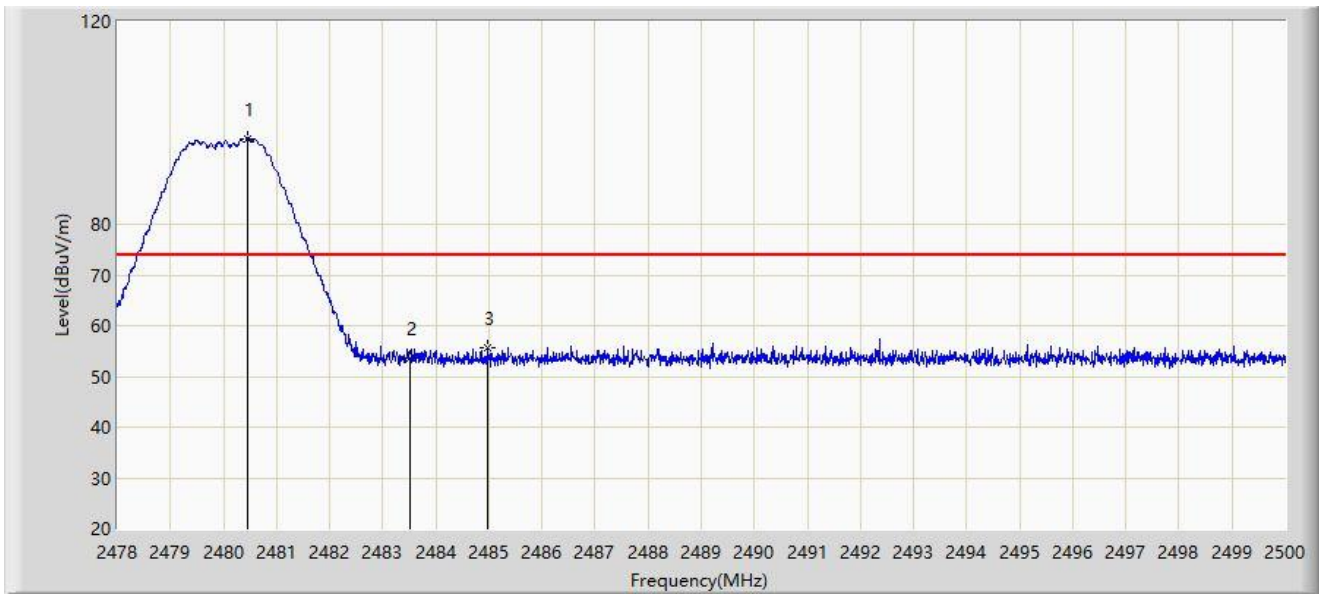


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.442	96.905	66.009	N/A	N/A	30.896	PK
2		2483.500	53.487	22.596	-20.513	74.000	30.892	PK
3	*	2484.974	55.694	24.805	-18.306	74.000	30.889	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by BLE 2Mbps at 2480MHz	

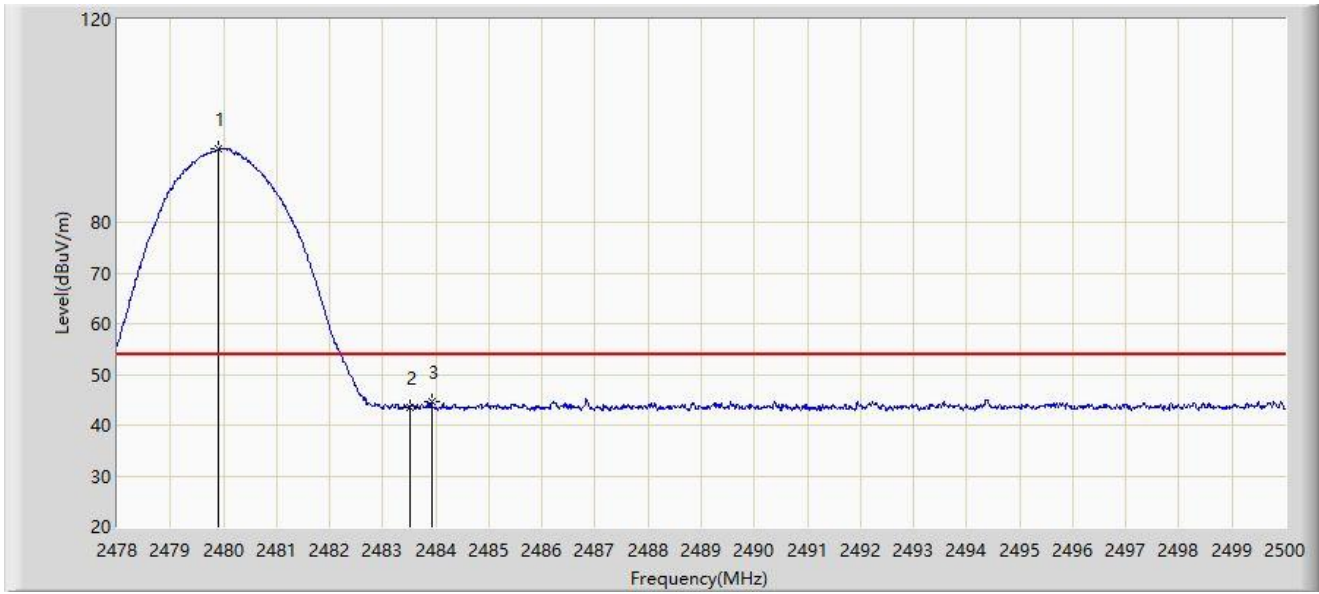


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2479.892	94.386	63.489	N/A	N/A	30.897	AV
2		2483.500	43.483	12.592	-10.517	54.000	30.892	AV
3	*	2483.918	44.531	13.640	-9.469	54.000	30.891	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by BLE 500kbps at 2402MHz	

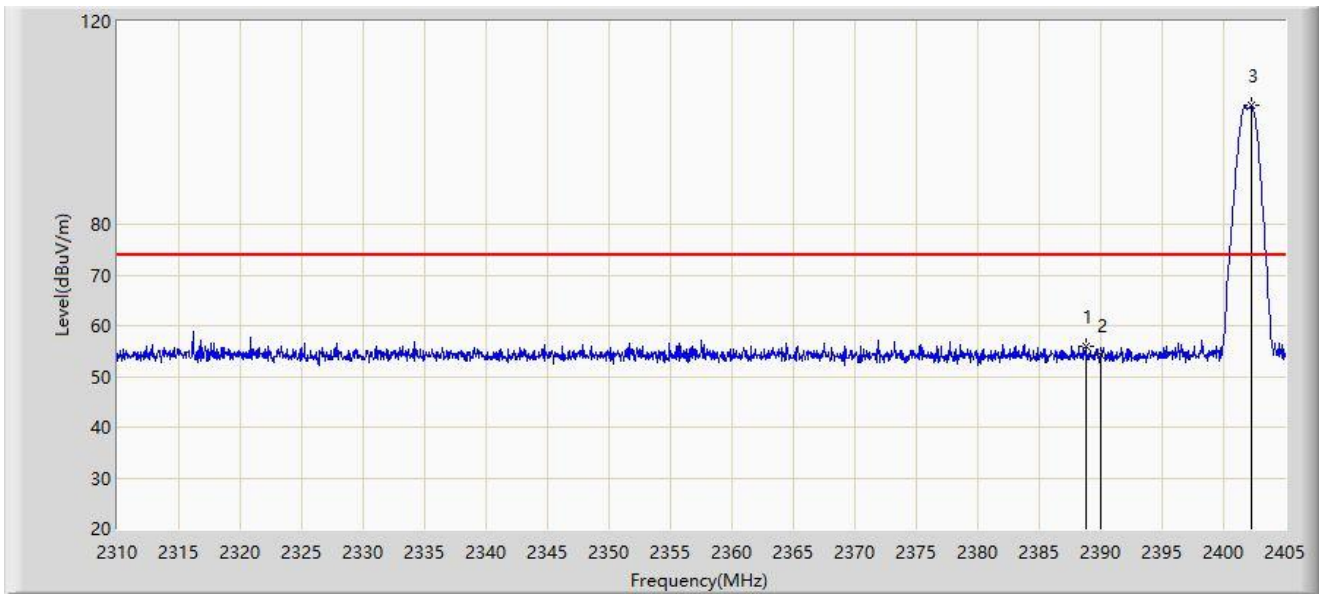


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2388.755	56.048	25.055	-17.952	74.000	30.993	PK
2		2390.000	54.151	23.159	-19.849	74.000	30.992	PK
3		2402.245	103.568	72.580	N/A	N/A	30.988	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by BLE 500kbps at 2402MHz	

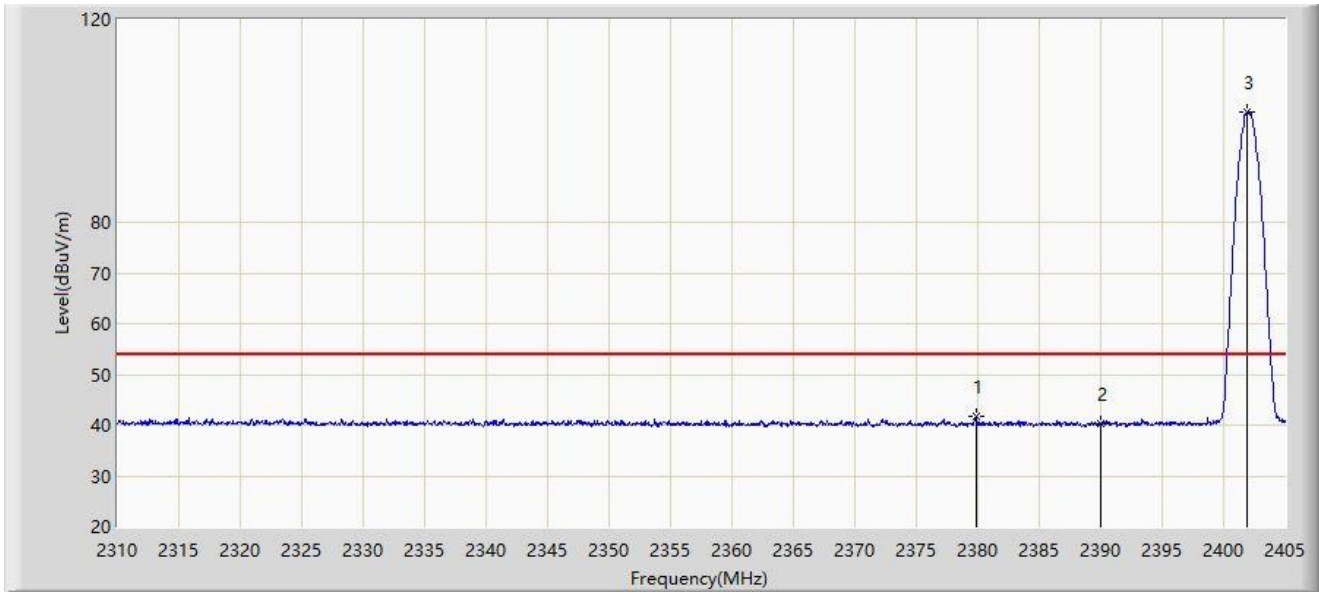


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2379.825	41.722	10.709	-12.278	54.000	31.014	AV
2		2390.000	40.257	9.265	-13.743	54.000	30.992	AV
3		2401.960	101.628	70.639	N/A	N/A	30.989	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by BLE 500kbps at 2402MHz	

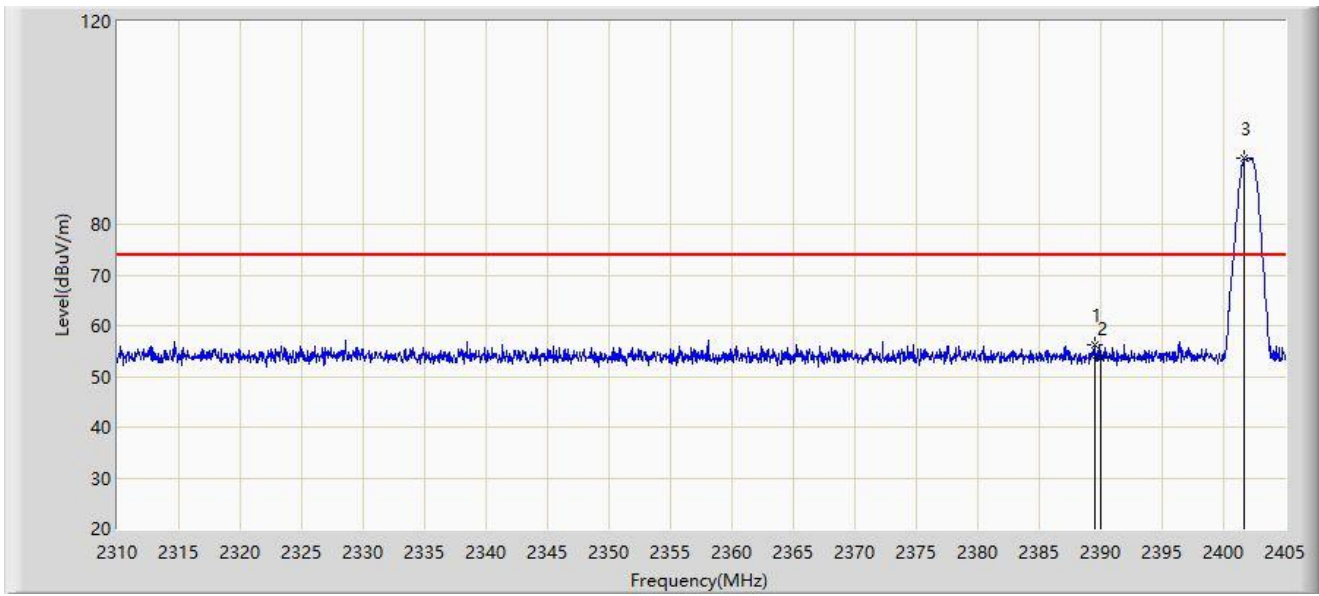


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2389.562	56.284	25.292	-17.716	74.000	30.992	PK
2		2390.000	53.734	22.742	-20.266	74.000	30.992	PK
3		2401.722	92.905	61.916	N/A	N/A	30.989	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by BLE 500kbps at 2402MHz	

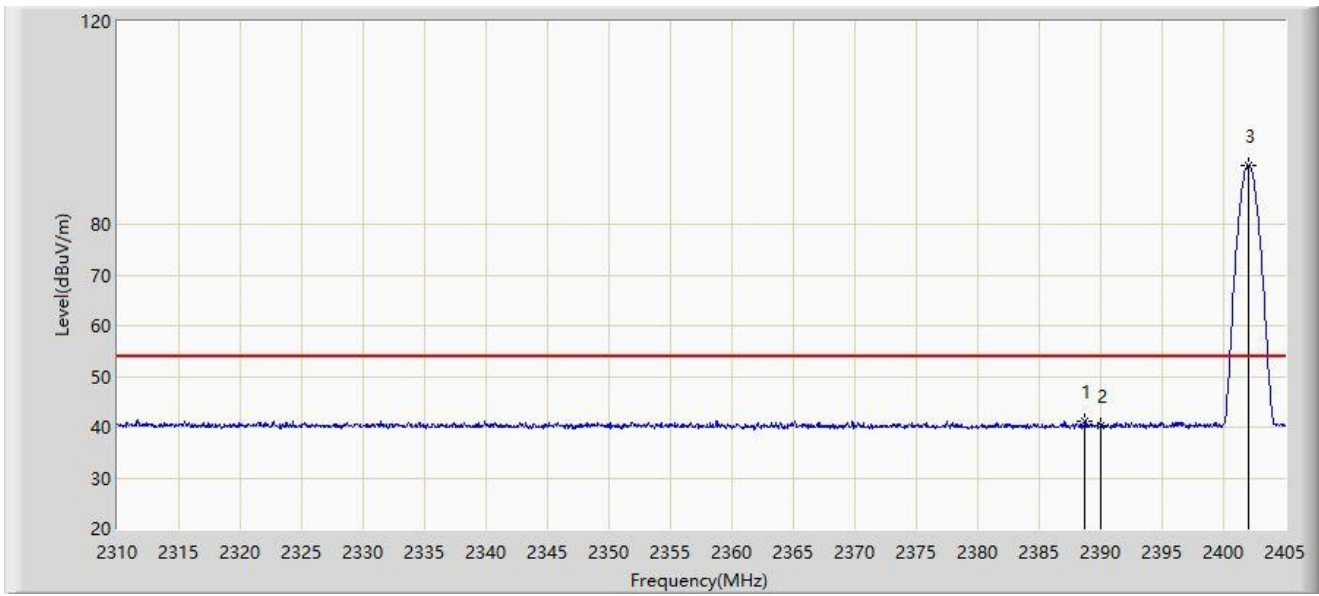


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2388.708	41.284	10.291	-12.716	54.000	30.993	AV
2		2390.000	40.291	9.299	-13.709	54.000	30.992	AV
3		2402.055	91.689	60.700	N/A	N/A	30.989	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by BLE 500kbps at 2480MHz	

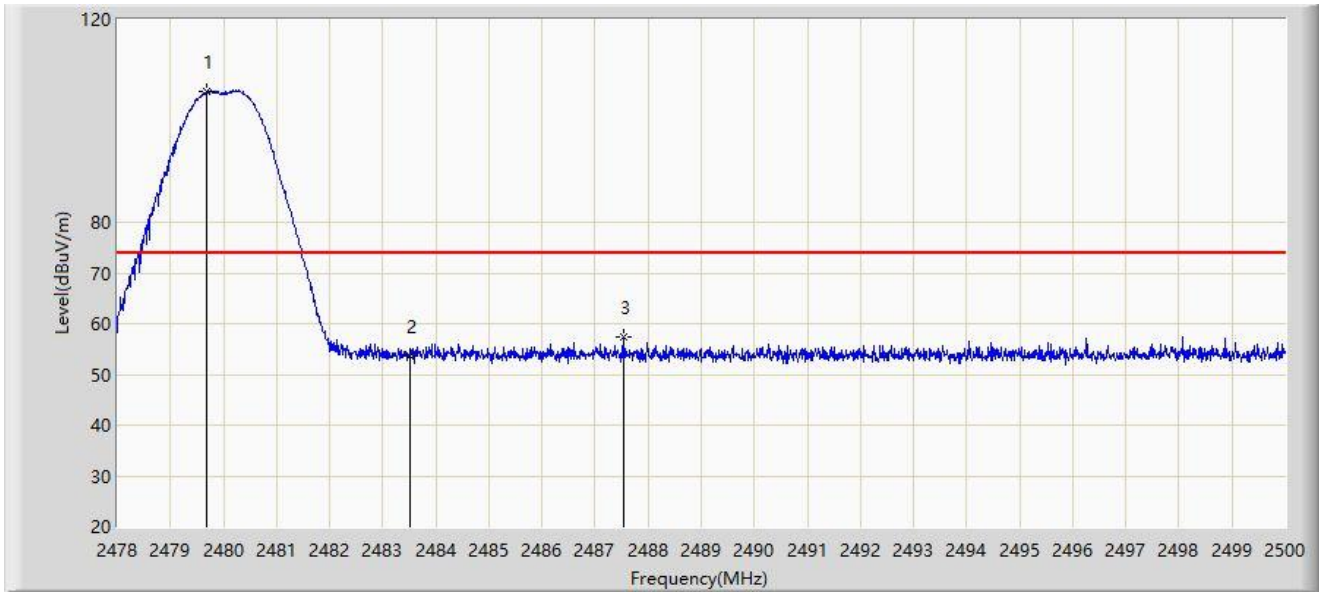

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2479.694	105.908	75.010	N/A	N/A	30.898	PK
2		2483.500	53.612	22.721	-20.388	74.000	30.892	PK
3	*	2487.526	57.262	26.377	-16.738	74.000	30.885	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by BLE 500kbps at 2480MHz	

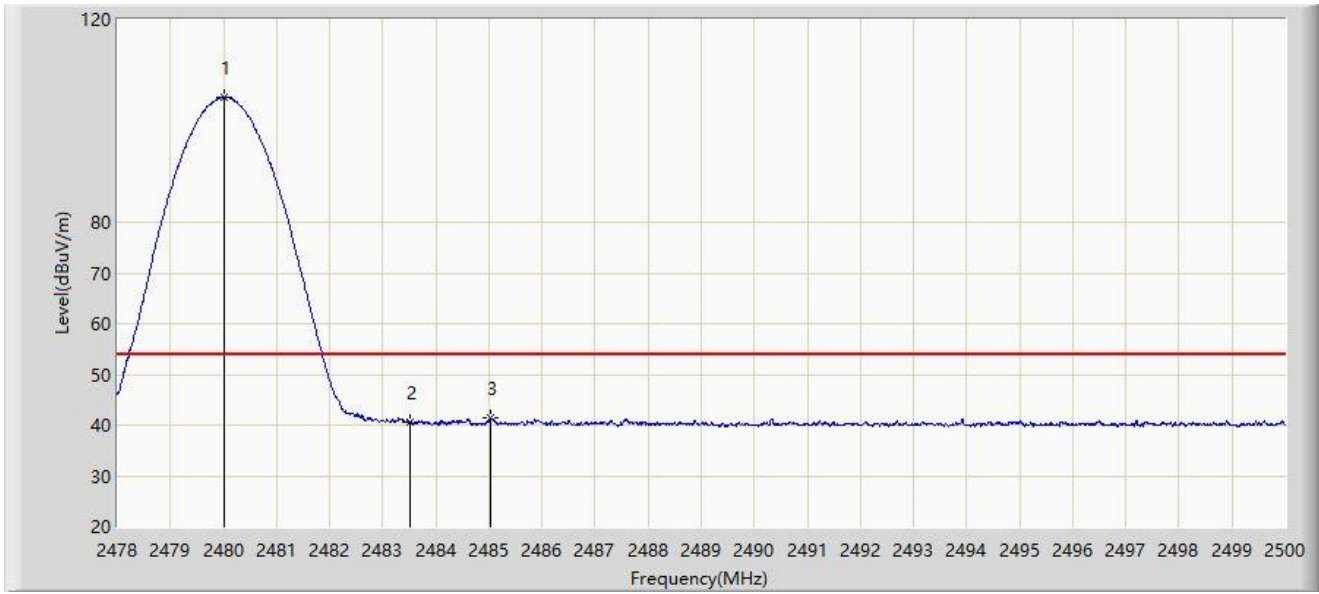


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.013	104.682	73.785	N/A	N/A	30.897	AV
2		2483.500	40.667	9.776	-13.333	54.000	30.892	AV
3	*	2485.040	41.395	10.506	-12.605	54.000	30.889	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by BLE 500kbps at 2480MHz	

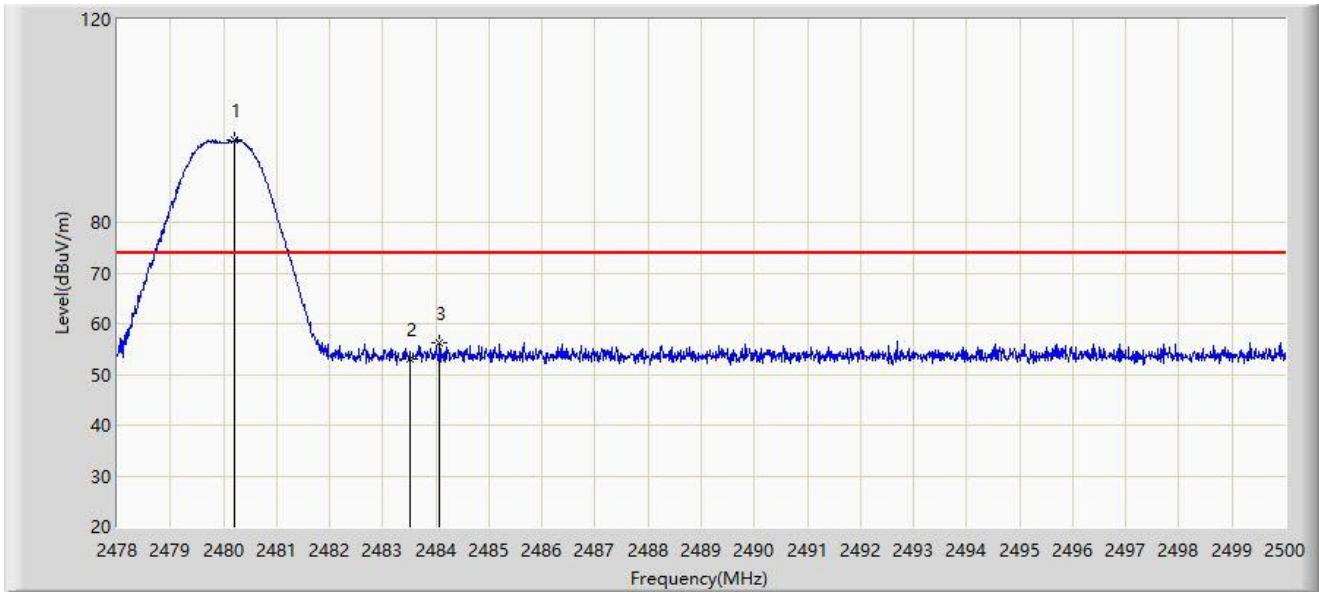


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.211	96.313	65.416	N/A	N/A	30.897	PK
2		2483.500	53.056	22.165	-20.944	74.000	30.892	PK
3	*	2484.072	56.167	25.276	-17.833	74.000	30.891	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by BLE 500kbps at 2480MHz	

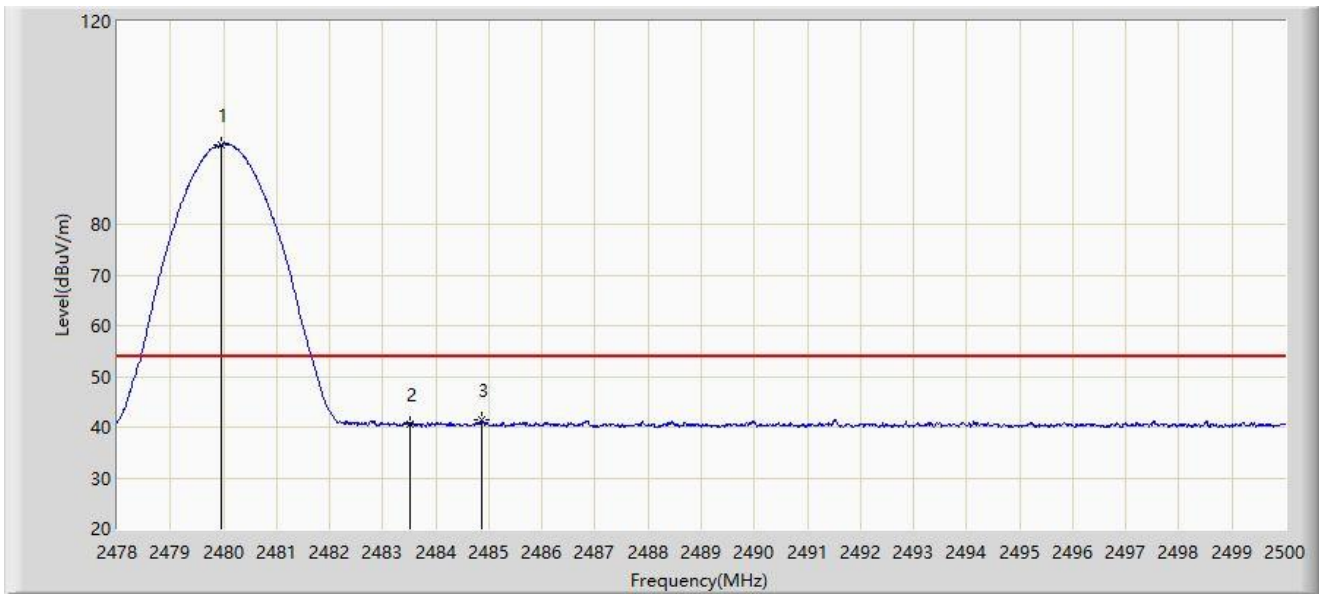


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		2479.947	95.664	64.767	N/A	N/A	30.897	AV
2		2483.500	40.636	9.745	-13.364	54.000	30.892	AV
3	*	2484.875	41.383	10.494	-12.617	54.000	30.889	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by BLE 125kbps at 2402MHz	

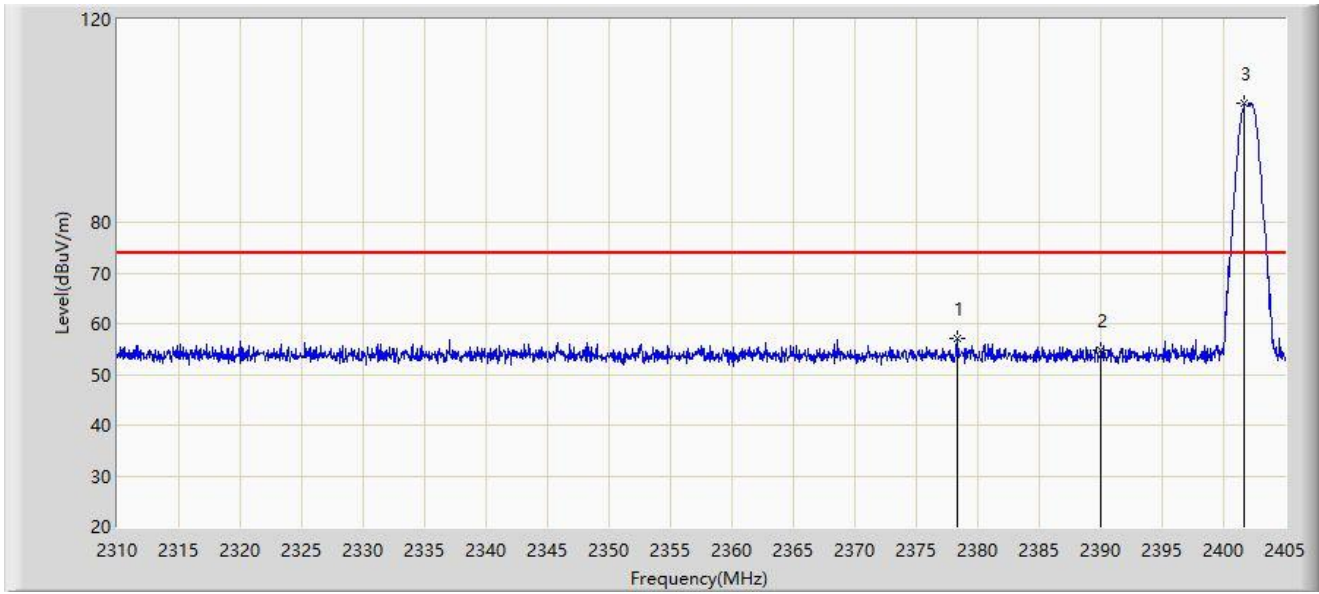


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2378.353	57.000	25.980	-17.000	74.000	31.020	PK
2		2390.000	54.641	23.649	-19.359	74.000	30.992	PK
3		2401.722	103.362	72.373	N/A	N/A	30.989	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by BLE 125kbps at 2402MHz	

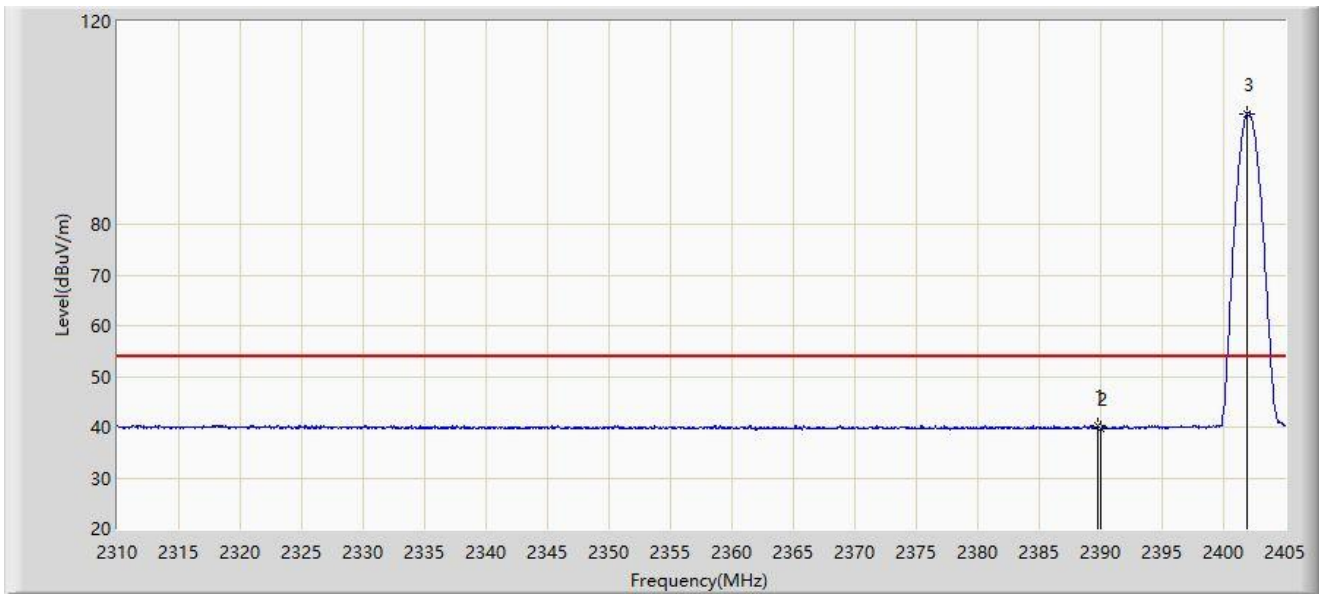


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2389.800	40.238	9.246	-13.762	54.000	30.993	AV
2		2390.000	39.762	8.770	-14.238	54.000	30.992	AV
3		2401.913	101.860	70.871	N/A	N/A	30.989	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by BLE 125kbps at 2402MHz	

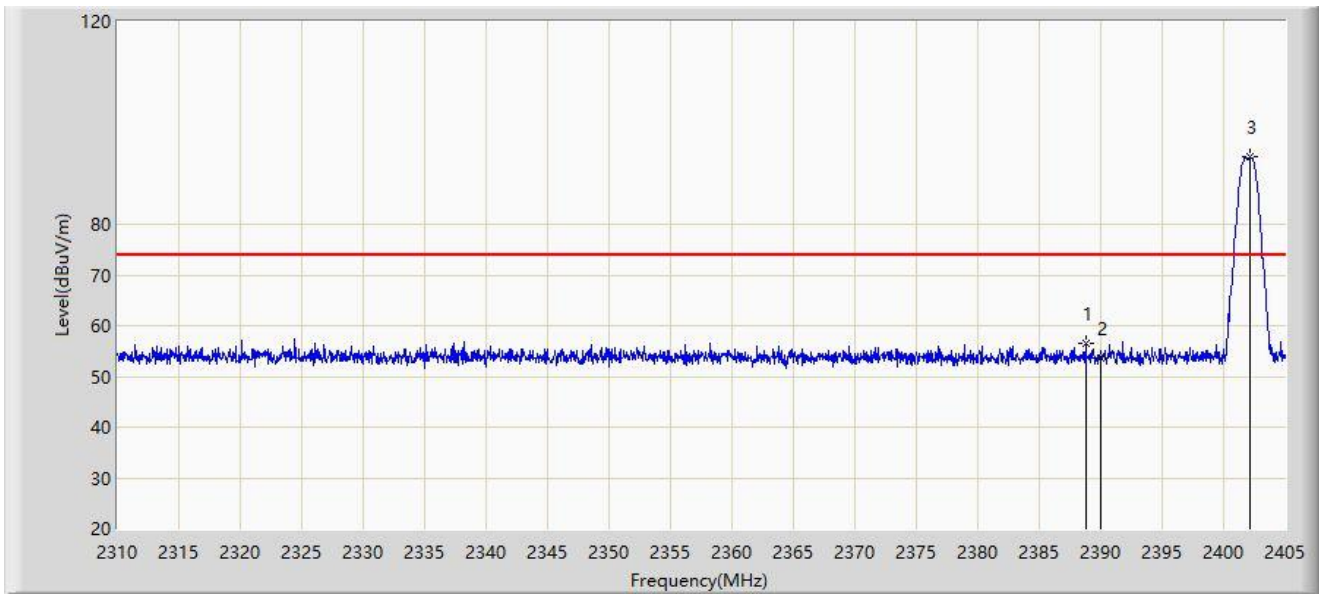


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2388.755	56.619	25.626	-17.381	74.000	30.993	PK
2		2390.000	53.575	22.583	-20.425	74.000	30.992	PK
3		2402.150	93.310	62.322	N/A	N/A	30.988	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by BLE 125kbps at 2402MHz	

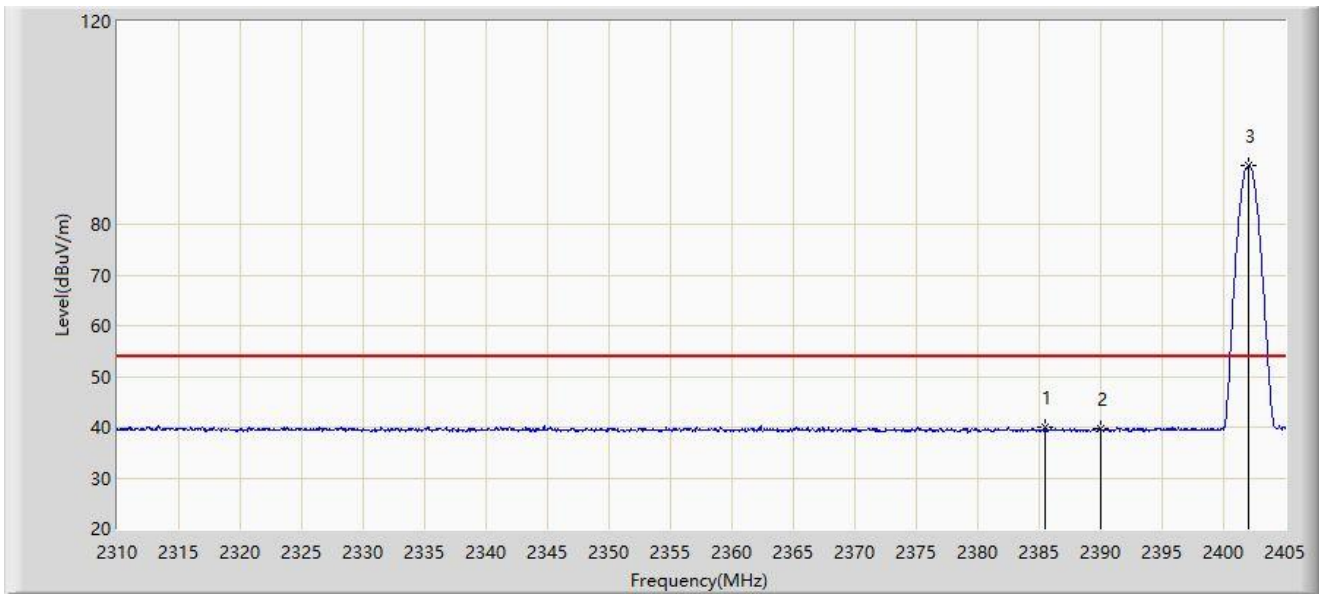


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2385.525	40.012	9.018	-13.988	54.000	30.994	AV
2		2390.000	39.602	8.610	-14.398	54.000	30.992	AV
3		2402.055	91.591	60.602	N/A	N/A	30.989	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by BLE 125kbps at 2480MHz	

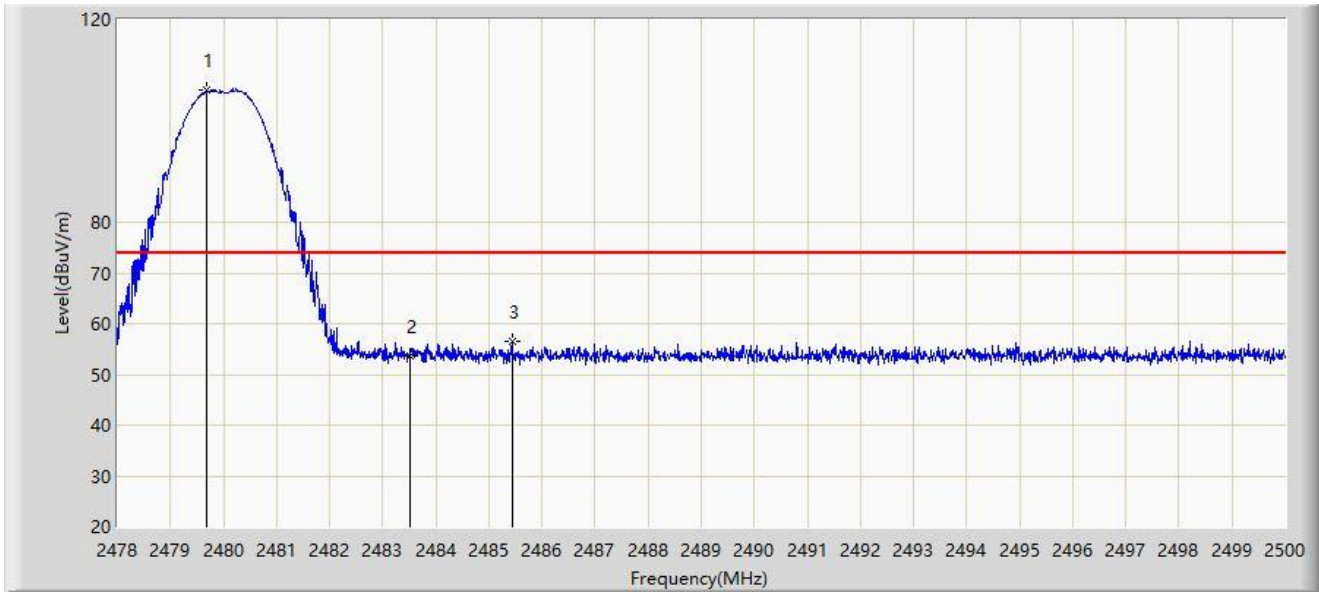

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2479.694	106.182	75.284	N/A	N/A	30.898	PK
2		2483.500	53.703	22.812	-20.297	74.000	30.892	PK
3	*	2485.436	56.636	25.748	-17.364	74.000	30.889	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by BLE 125kbps at 2480MHz	

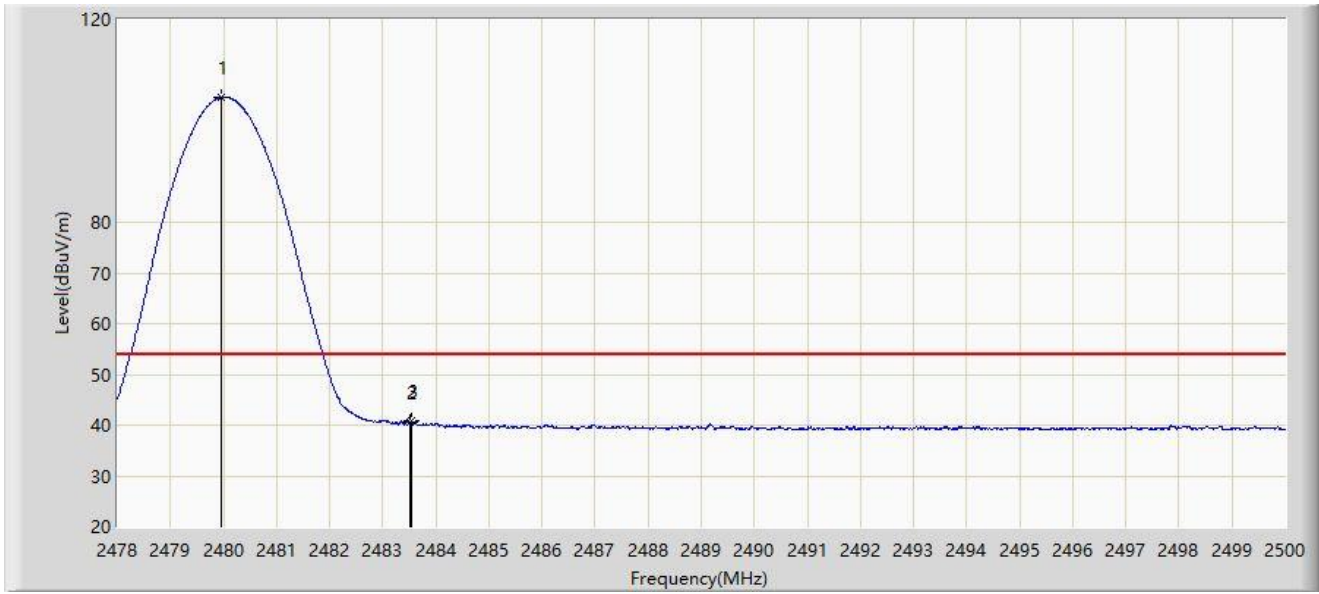


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2479.947	104.643	73.746	N/A	N/A	30.897	AV
2		2483.500	40.530	9.639	-13.470	54.000	30.892	AV
3	*	2483.533	40.751	9.860	-13.249	54.000	30.892	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by BLE 125kbps at 2480MHz	

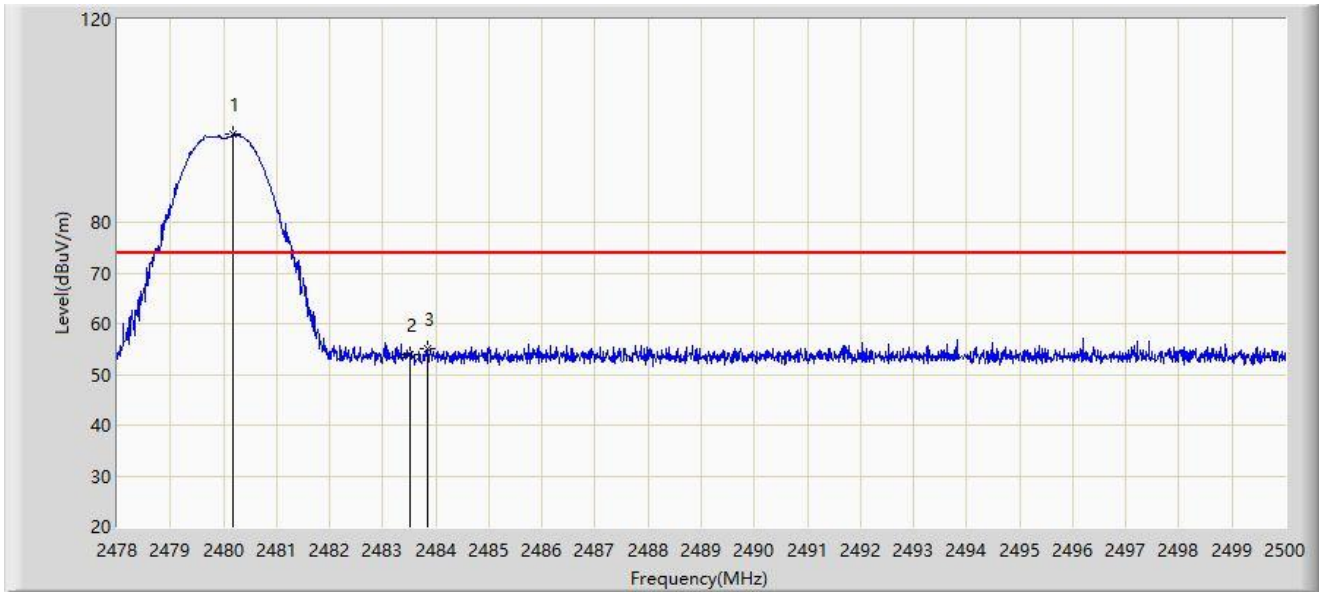


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2480.189	97.422	66.525	N/A	N/A	30.897	PK
2		2483.500	53.782	22.891	-20.218	74.000	30.892	PK
3	*	2483.841	55.018	24.127	-18.982	74.000	30.891	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-04-02
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by BLE 125kbps at 2480MHz	

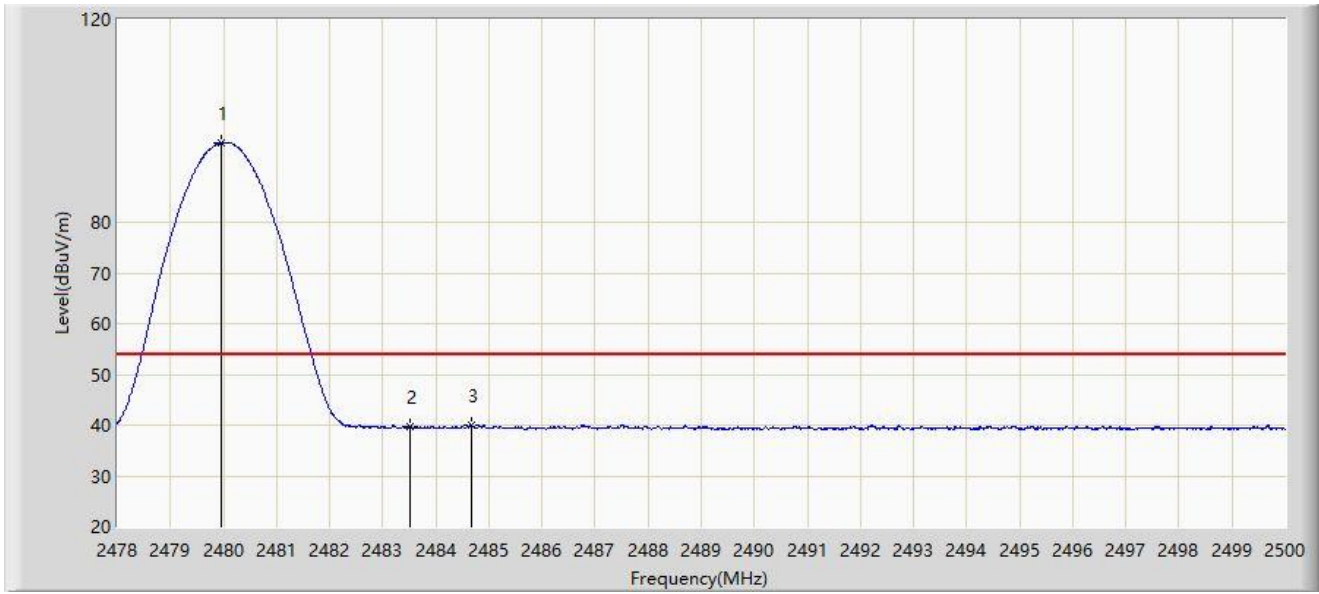

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2479.947	95.629	64.732	N/A	N/A	30.897	AV
2		2483.500	39.654	8.763	-14.346	54.000	30.892	AV
3	*	2484.666	39.968	9.078	-14.032	54.000	30.890	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

**A.8 AC Conducted Emissions Test Result**

Site: NS-SR2	Test Date: 2023-03-28
Limit: FCC_Part15.207_CE_AC Power	Engineer: Flag Yang
Probe: ENV216_102493_0.15MHz~30MHz	Polarity: Line
EUT: Tablet Computer	Power: AC 120V/60Hz
<b>Test Mode:</b> Transmit by BLE 1Mbps at channel 2440MHz	

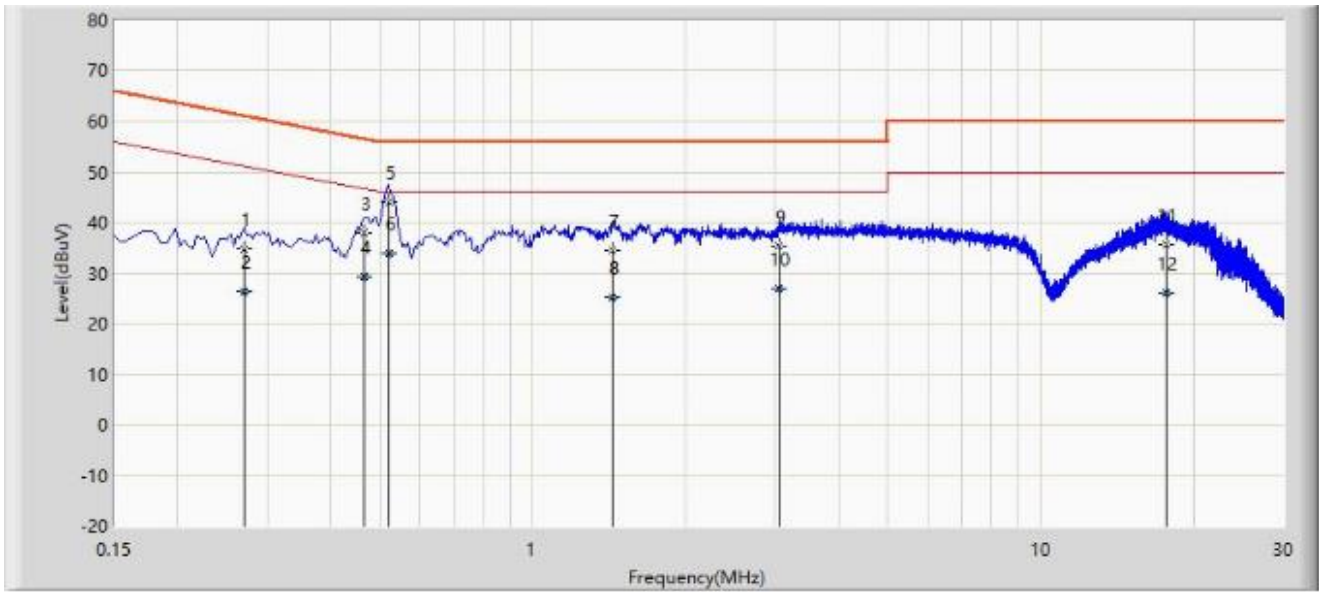


No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.270	34.875	25.328	-26.243	61.118	9.547	QP
2		0.270	26.290	16.743	-24.828	51.118	9.547	AV
3		0.466	37.919	28.355	-18.666	56.585	9.564	QP
4		0.466	29.180	19.616	-17.405	46.585	9.564	AV
5	*	0.522	43.976	34.408	-12.024	56.000	9.568	QP
6		0.522	33.857	24.289	-12.143	46.000	9.568	AV
7		1.434	34.533	24.925	-21.467	56.000	9.608	QP
8		1.434	25.284	15.676	-20.716	46.000	9.608	AV
9		3.050	35.239	25.594	-20.761	56.000	9.644	QP
10		3.050	27.090	17.445	-18.910	46.000	9.644	AV
11		17.706	35.701	25.708	-24.299	60.000	9.992	QP
12		17.706	26.173	16.181	-23.827	50.000	9.992	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: NS-SR2	Test Date: 2023-03-28
Limit: FCC_Part15.207_CE_AC Power	Engineer: Flag Yang
Probe: ENV216_102493_0.15MHz~30MHz	Polarity: Neutral
EUT: Tablet Computer	Power: AC 120V/60Hz
<b>Test Mode:</b> Transmit by BLE 1Mbps at channel 2440MHz	

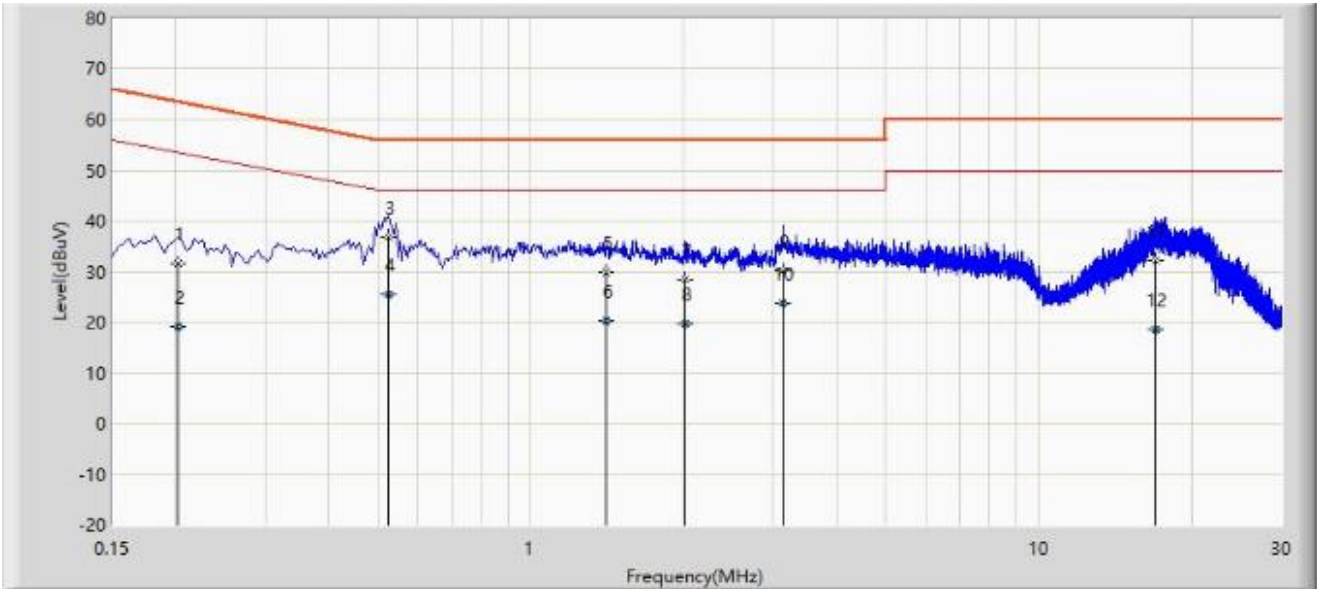

No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.202	31.540	21.990	-31.988	63.528	9.550	QP
2		0.202	19.086	9.535	-34.442	53.528	9.550	AV
3	*	0.526	36.817	27.257	-19.183	56.000	9.560	QP
4		0.526	25.580	16.020	-20.420	46.000	9.560	AV
5		1.410	29.956	20.350	-26.044	56.000	9.606	QP
6		1.410	20.279	10.673	-25.721	46.000	9.606	AV
7		2.006	28.471	18.845	-27.529	56.000	9.625	QP
8		2.006	19.580	9.955	-26.420	46.000	9.625	AV
9		3.138	30.250	20.601	-25.750	56.000	9.649	QP
10		3.138	23.747	14.098	-22.253	46.000	9.649	AV
11		16.918	32.254	22.317	-27.746	60.000	9.937	QP
12		16.918	18.538	8.600	-31.462	50.000	9.937	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

## **Appendix B - Test Setup Photograph**

Refer to "2301RSU043-UT" file.

## Appendix C - EUT Photograph

Refer to "2301RSU043-UE" file.

\_\_\_\_\_ The End \_\_\_\_\_