


Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 4 by 5825MHz	

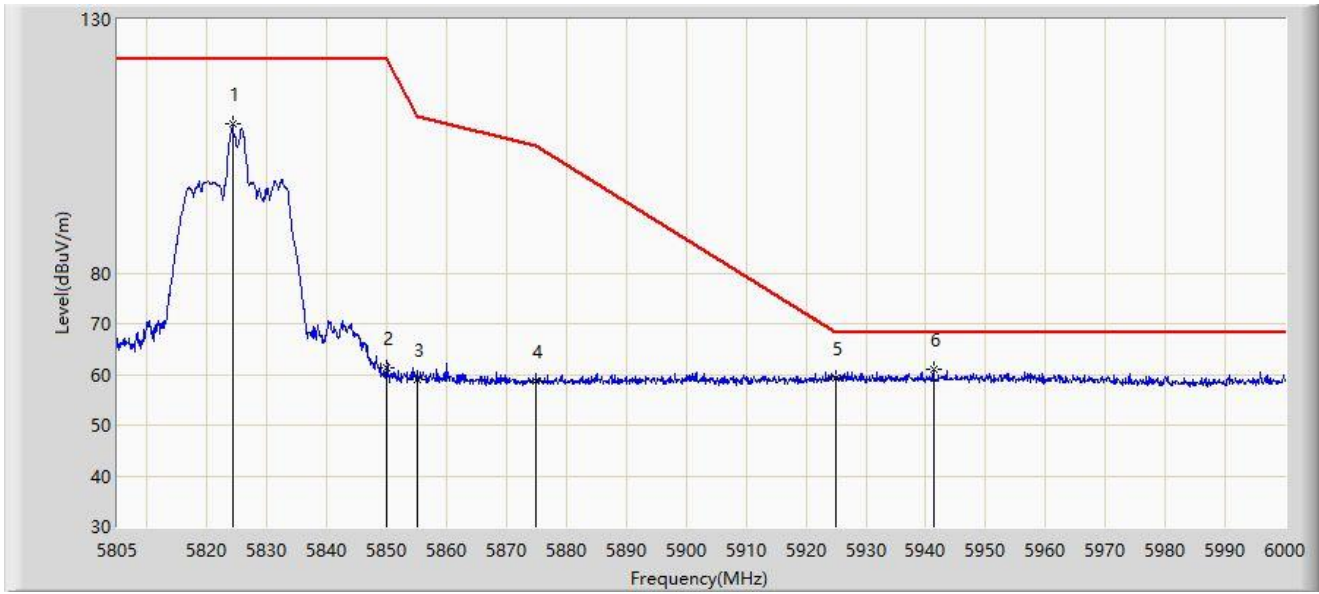


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5824.208	109.398	103.468	N/A	N/A	5.930	PK
2		5850.000	61.163	55.279	-61.037	122.200	5.885	PK
3		5855.000	58.976	53.080	-51.824	110.800	5.896	PK
4		5875.000	58.581	52.612	-46.619	105.200	5.968	PK
5		5925.000	59.414	53.050	-8.786	68.200	6.365	PK
6	*	5941.305	60.930	54.396	-7.270	68.200	6.535	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 8 by 5180MHz	

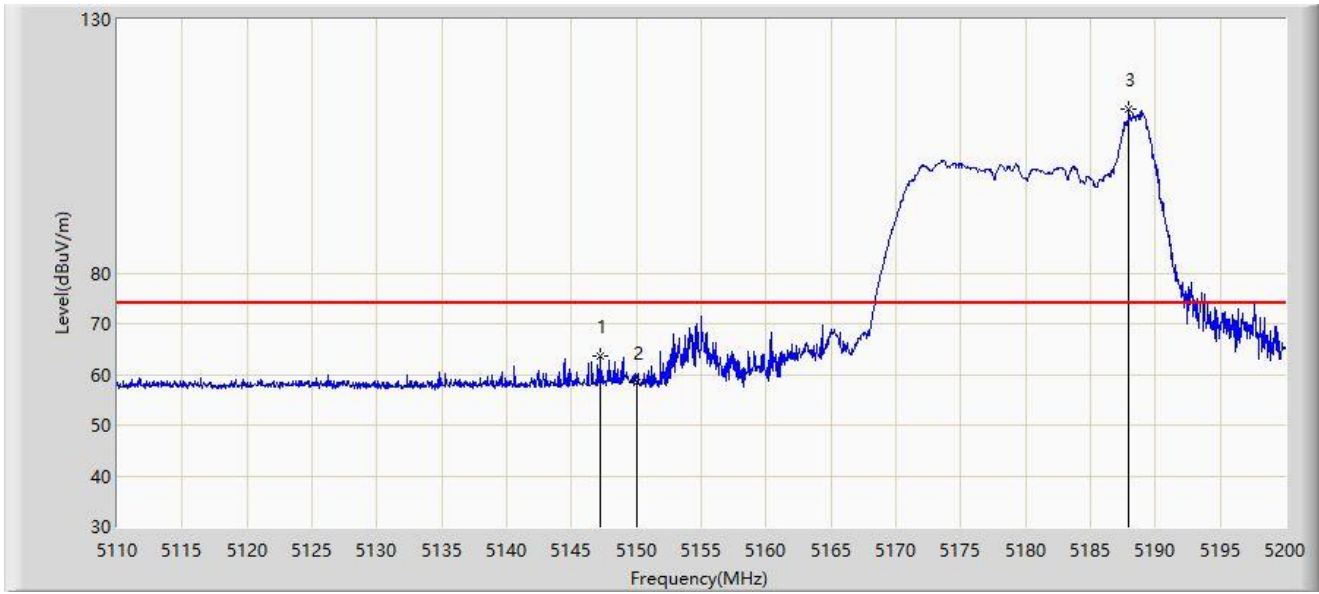


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5147.260	63.672	58.719	-10.328	74.000	4.954	PK
2		5150.000	58.386	53.418	-15.614	74.000	4.967	PK
3		5187.985	112.431	107.979	N/A	N/A	4.453	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 8 by 5180MHz	

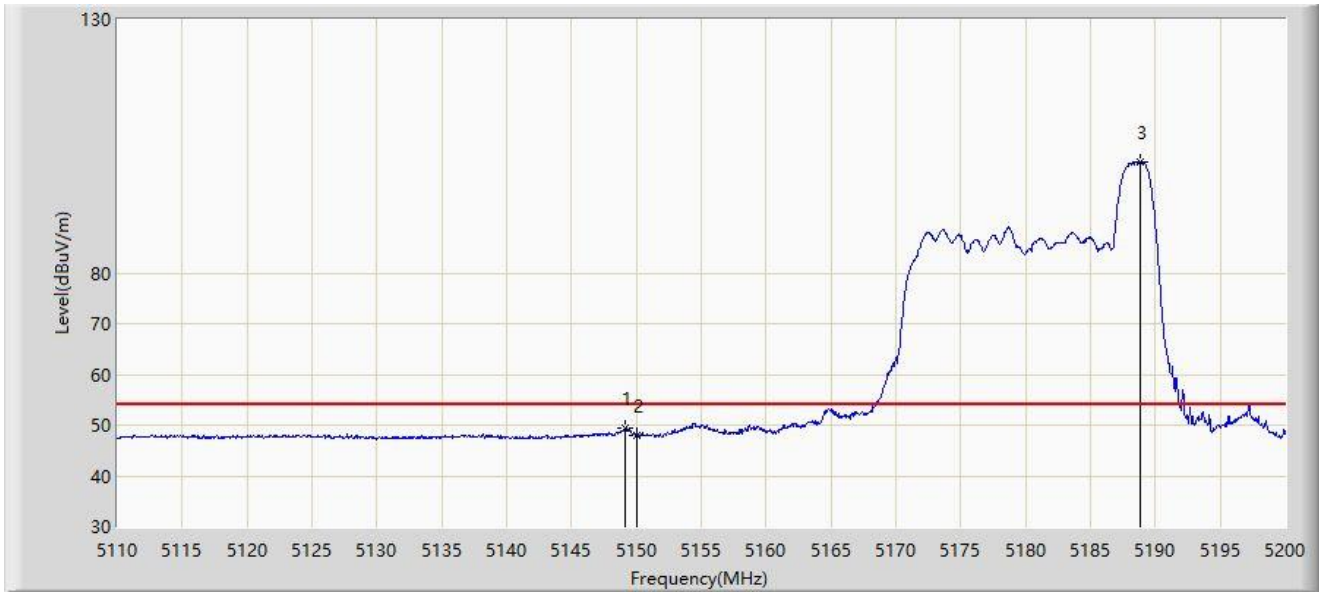


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5149.105	49.380	44.410	-4.620	54.000	4.969	AV
2		5150.000	47.982	43.014	-6.018	54.000	4.967	AV
3		5188.840	101.955	97.504	N/A	N/A	4.451	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 8 by 5180MHz	

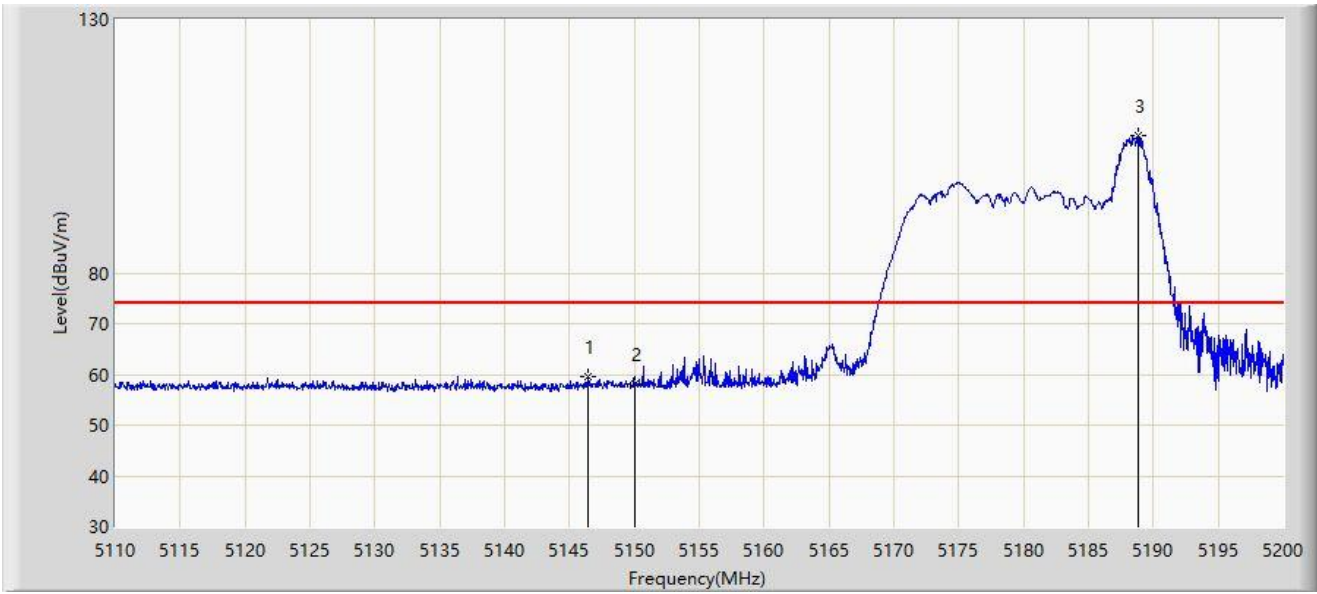


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5146.450	59.489	54.556	-14.511	74.000	4.933	PK
2		5150.000	57.995	53.027	-16.005	74.000	4.967	PK
3		5188.840	107.028	102.577	N/A	N/A	4.451	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 8 by 5180MHz	

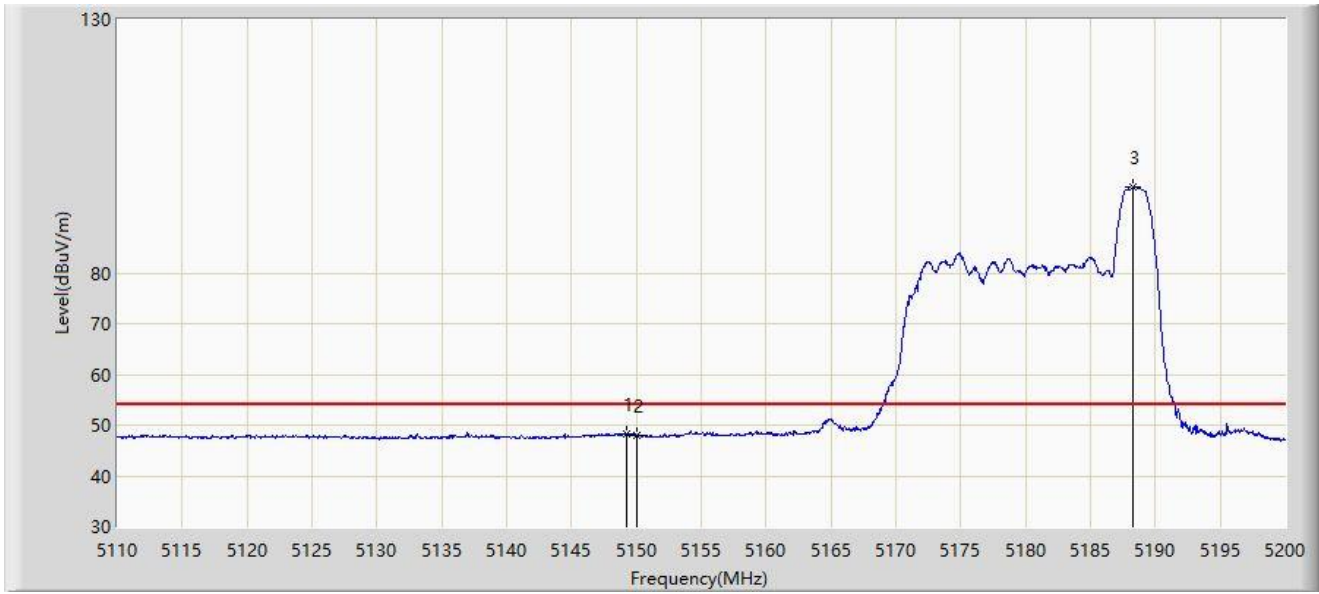


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5149.240	48.337	43.368	-5.663	54.000	4.969	AV
2		5150.000	47.925	42.957	-6.075	54.000	4.967	AV
3		5188.255	97.017	92.565	N/A	N/A	4.452	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 8 by 5320MHz	

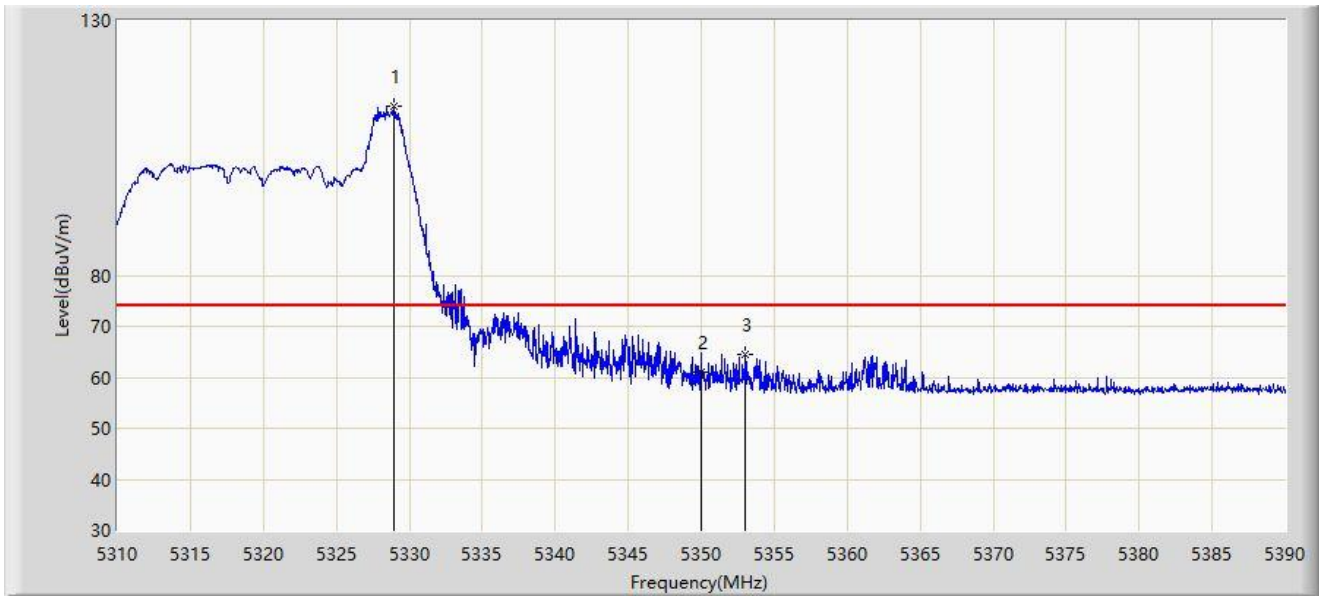


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5328.920	113.160	108.679	N/A	N/A	4.481	PK
2		5350.000	61.148	56.729	-12.852	74.000	4.419	PK
3	*	5353.000	64.468	60.045	-9.532	74.000	4.423	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 8 by 5320MHz	

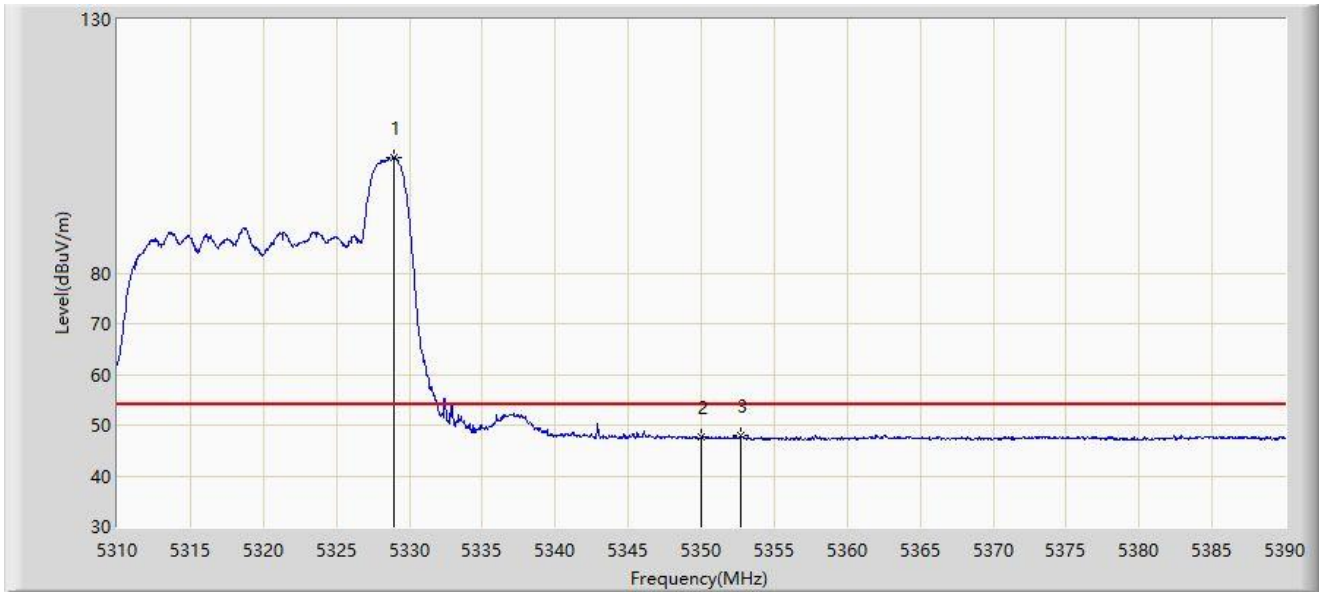


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5328.960	102.793	98.312	N/A	N/A	4.480	AV
2		5350.000	47.575	43.156	-6.425	54.000	4.419	AV
3	*	5352.720	47.893	43.473	-6.107	54.000	4.420	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 8 by 5320MHz	

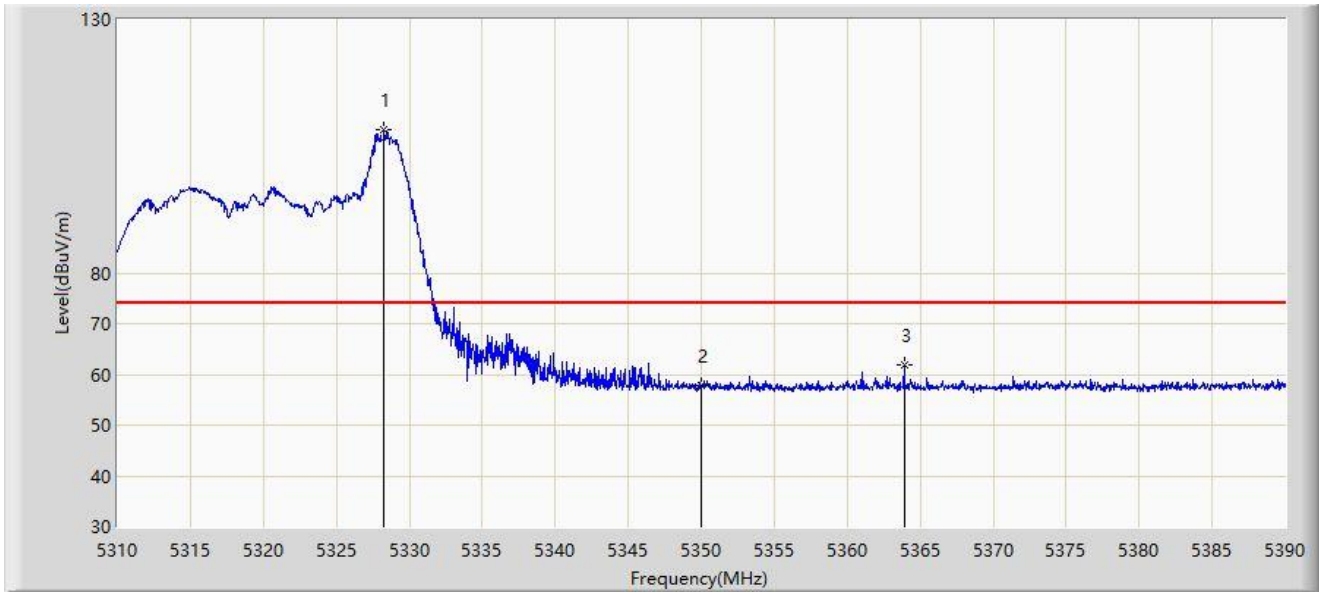


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5328.280	108.217	103.735	N/A	N/A	4.483	PK
2		5350.000	57.700	53.281	-16.300	74.000	4.419	PK
3	*	5363.920	61.793	57.246	-12.207	74.000	4.547	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 8 by 5320MHz	

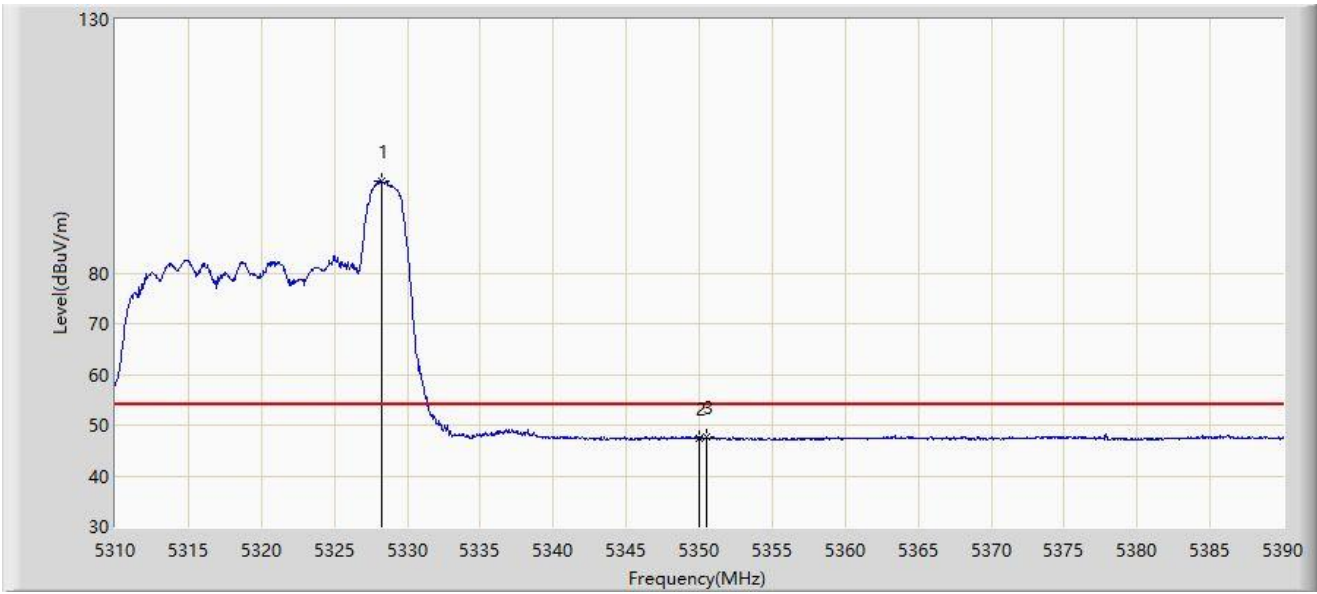


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5328.200	98.092	93.609	N/A	N/A	4.483	AV
2		5350.000	47.277	42.858	-6.723	54.000	4.419	AV
3	*	5350.480	47.716	43.299	-6.284	54.000	4.417	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 8 by 5500MHz	

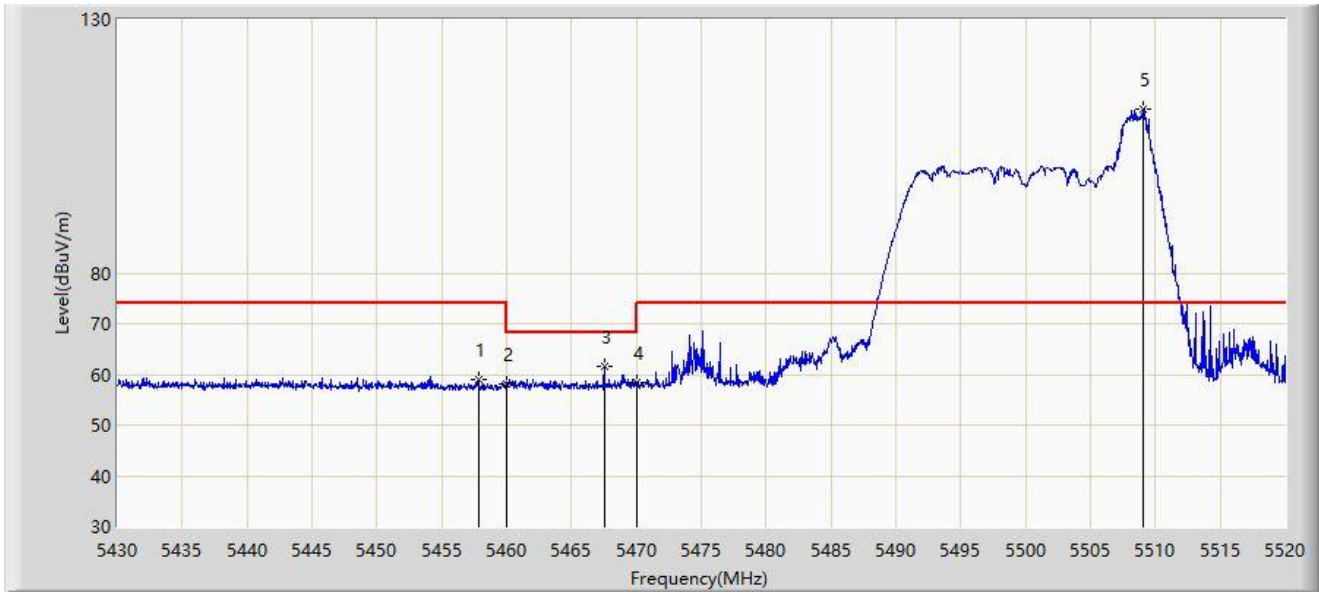


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5457.810	58.930	54.233	-15.070	74.000	4.696	PK
2		5460.000	58.189	53.473	-15.811	74.000	4.716	PK
3	*	5467.530	61.491	56.711	-6.709	68.200	4.781	PK
4		5470.000	58.454	53.653	-9.746	68.200	4.801	PK
5		5509.020	112.398	107.591	N/A	N/A	4.807	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 8 by 5500MHz	

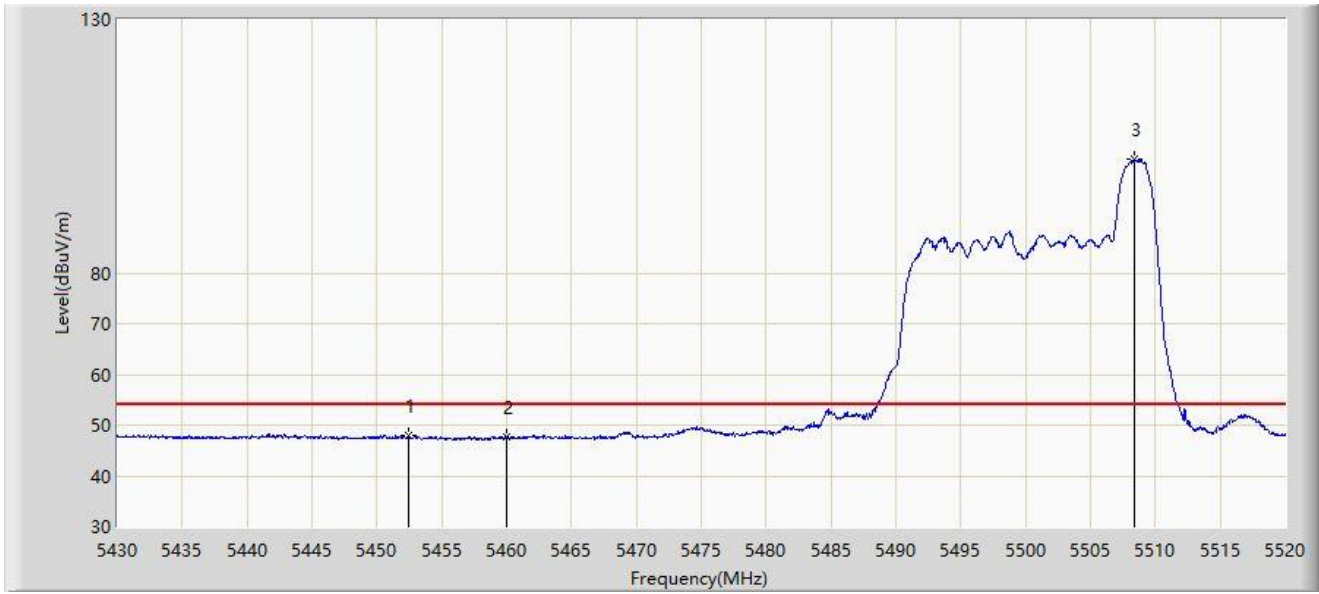


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5452.455	47.931	43.239	-6.069	54.000	4.692	AV
2		5460.000	47.574	42.858	-6.426	54.000	4.716	AV
3		5508.435	102.361	97.534	N/A	N/A	4.826	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 8 by 5500MHz	

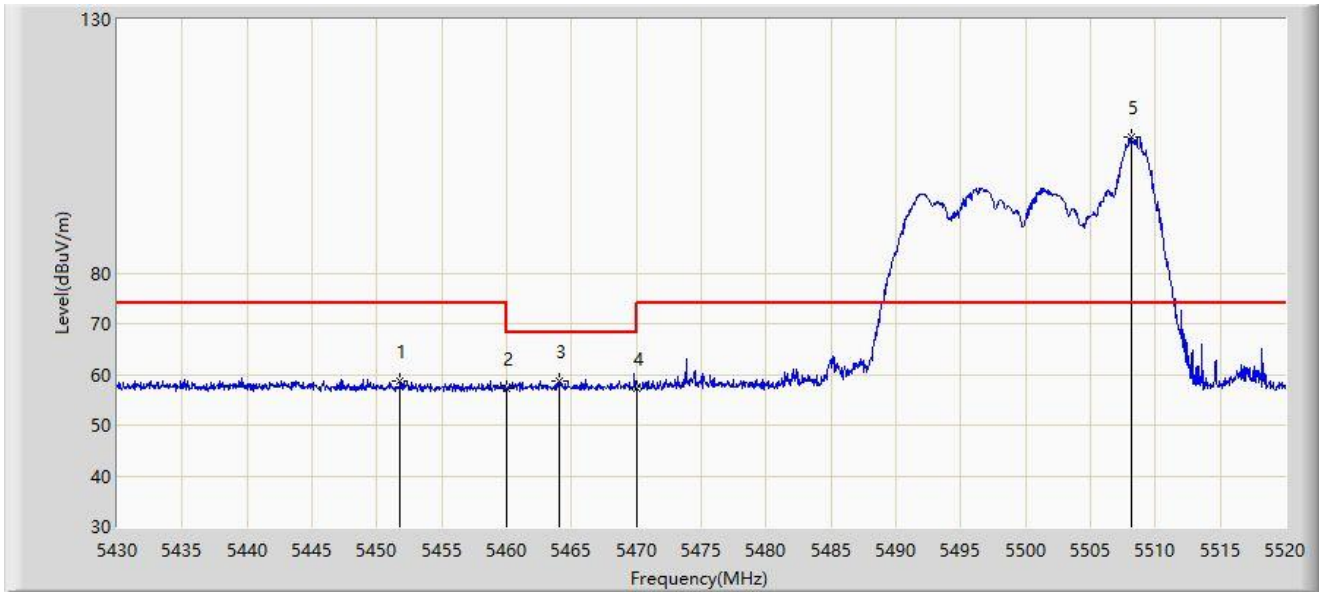


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5451.780	58.802	54.098	-15.198	74.000	4.704	PK
2		5460.000	57.125	52.409	-16.875	74.000	4.716	PK
3	*	5464.065	58.820	54.070	-9.380	68.200	4.750	PK
4		5470.000	57.328	52.527	-10.872	68.200	4.801	PK
5		5508.165	106.896	102.060	N/A	N/A	4.835	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 8 by 5500MHz	

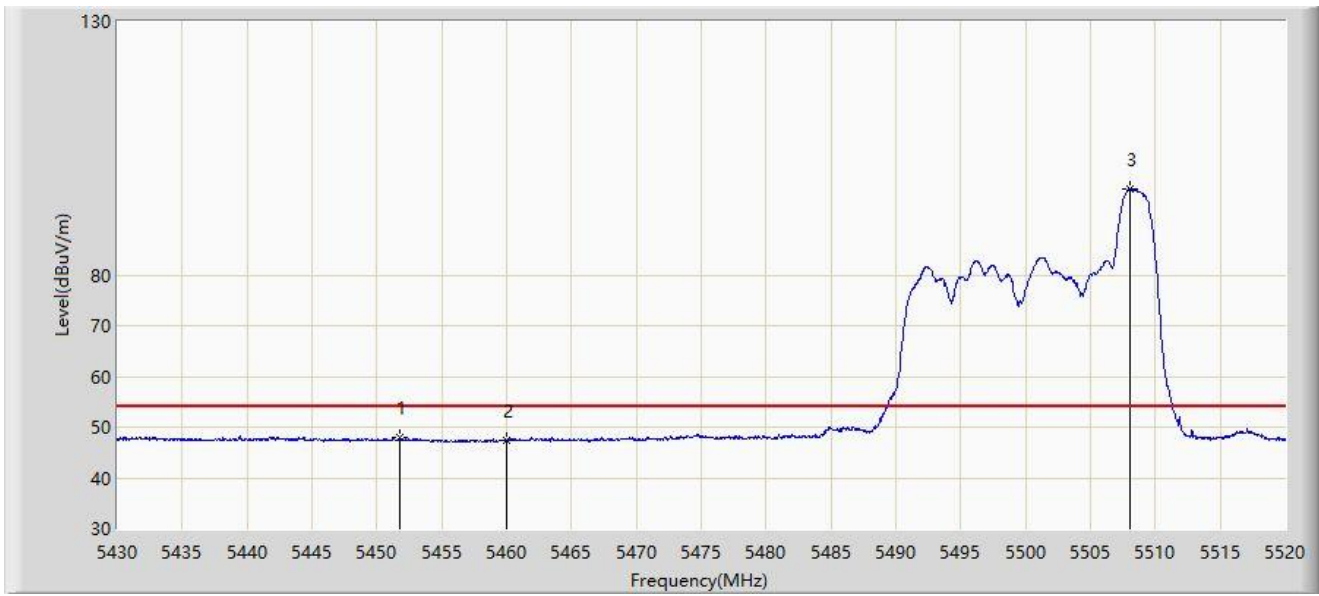


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5451.735	47.973	43.268	-6.027	54.000	4.705	AV
2		5460.000	47.362	42.646	-6.638	54.000	4.716	AV
3		5508.075	97.036	92.197	N/A	N/A	4.838	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 8 by 5700MHz	

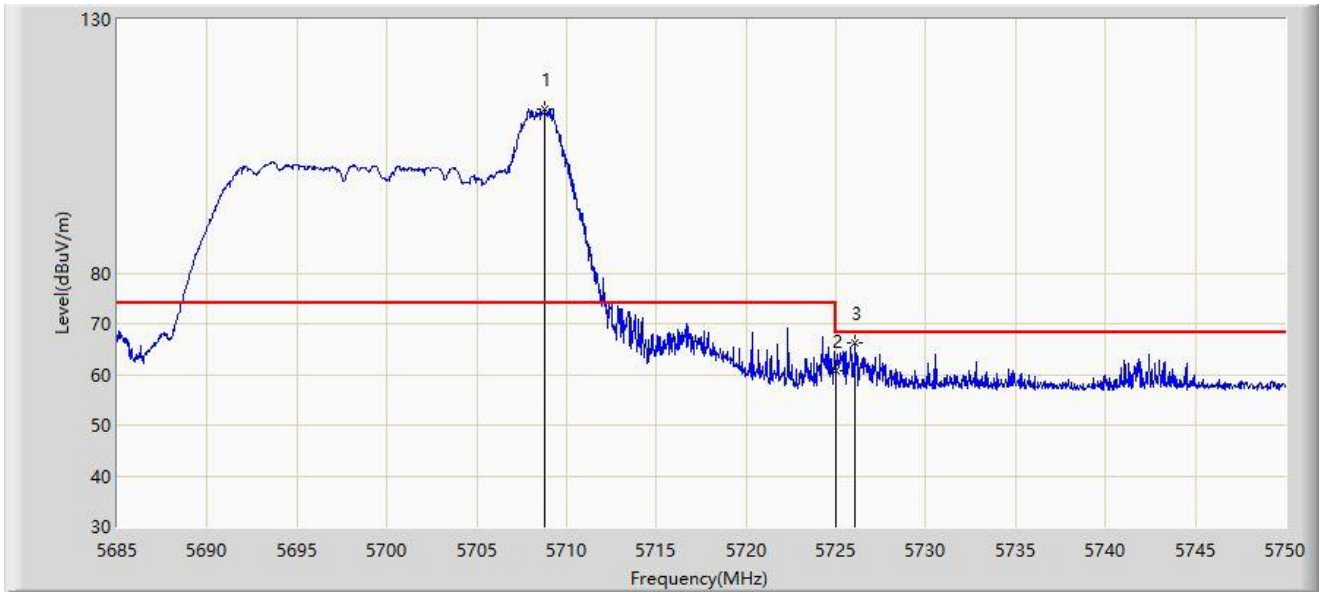


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5708.790	112.401	107.146	N/A	N/A	5.255	PK
2		5725.000	60.766	55.408	-7.434	68.200	5.358	PK
3	*	5726.080	66.205	60.839	-1.995	68.200	5.365	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 8 by 5700MHz	

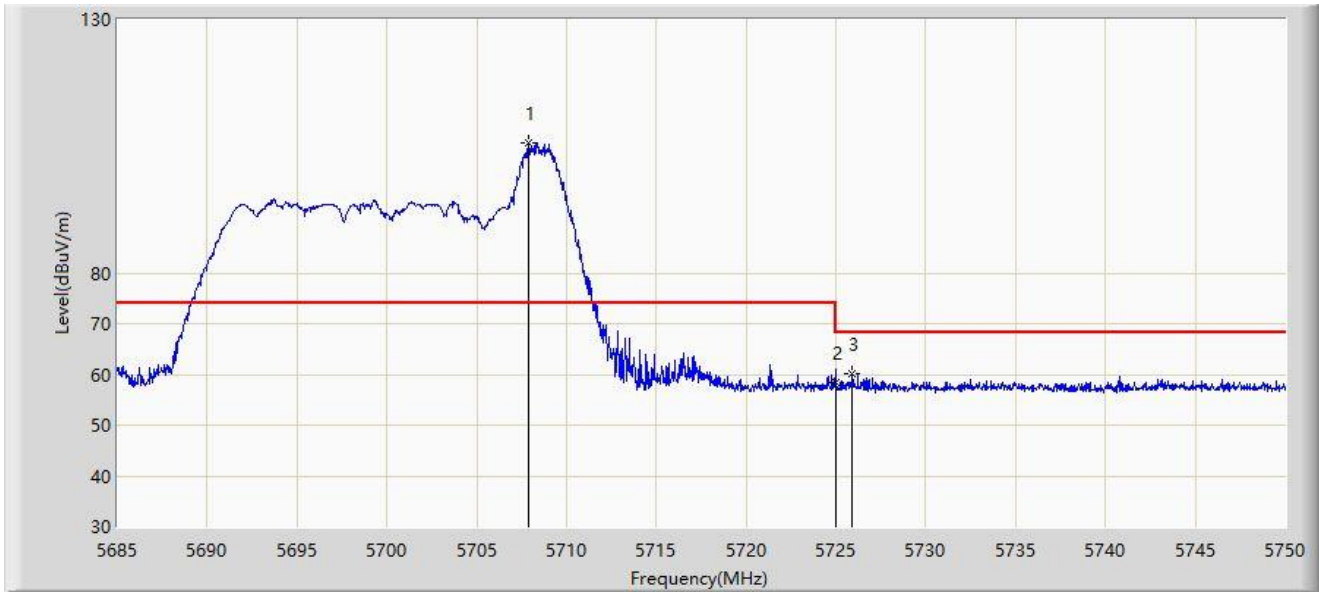


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5707.880	105.708	100.439	N/A	N/A	5.269	PK
2		5725.000	58.272	52.914	-9.928	68.200	5.358	PK
3	*	5725.917	60.272	54.908	-7.928	68.200	5.365	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 8 by 5745MHz	

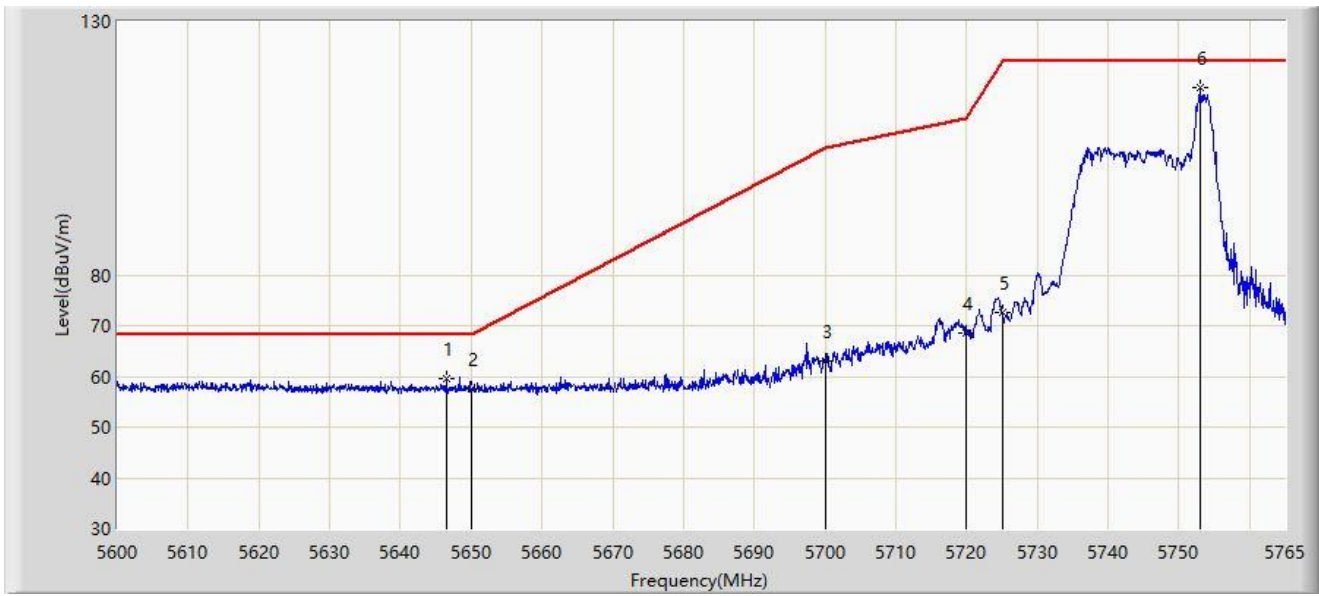


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5646.447	59.557	54.488	-8.643	68.200	5.069	PK
2		5650.000	57.445	52.366	-10.755	68.200	5.080	PK
3		5700.000	63.014	57.629	-42.186	105.200	5.385	PK
4		5720.000	68.482	63.157	-42.318	110.800	5.325	PK
5		5725.000	72.698	67.340	-49.502	122.200	5.358	PK
6		5752.955	117.063	111.440	N/A	N/A	5.623	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 8 by 5745MHz	

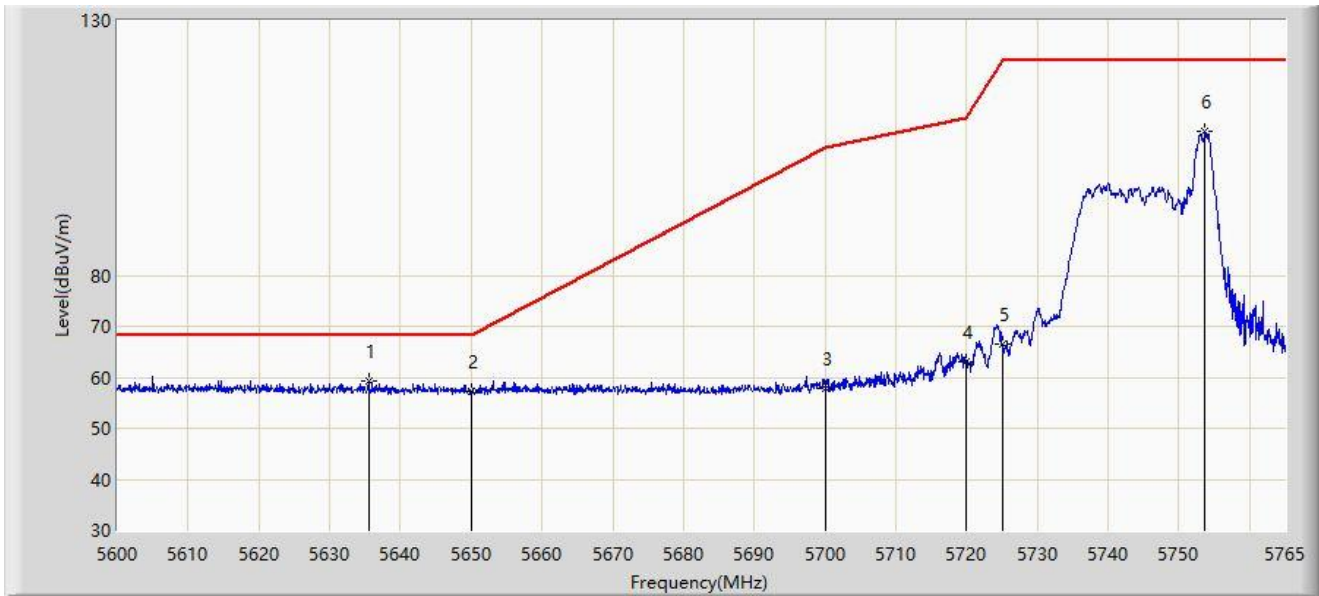


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5635.475	59.151	54.146	-9.049	68.200	5.005	PK
2		5650.000	57.336	52.257	-10.864	68.200	5.080	PK
3		5700.000	57.758	52.373	-47.442	105.200	5.385	PK
4		5720.000	63.159	57.834	-47.641	110.800	5.325	PK
5		5725.000	66.604	61.246	-55.596	122.200	5.358	PK
6		5753.697	108.321	102.691	N/A	N/A	5.629	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 8 by 5825MHz	

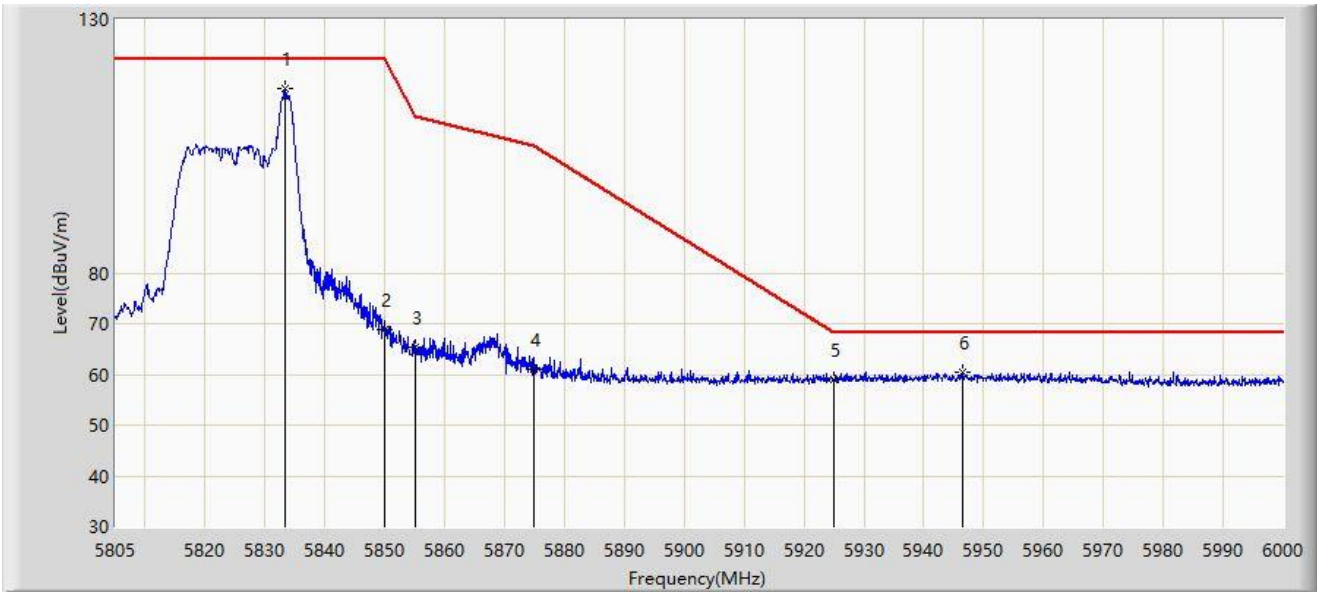


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5833.275	116.301	110.342	N/A	N/A	5.959	PK
2		5850.000	68.948	63.064	-53.252	122.200	5.885	PK
3		5855.000	65.221	59.325	-45.579	110.800	5.896	PK
4		5875.000	61.113	55.144	-44.087	105.200	5.968	PK
5		5925.000	59.072	52.708	-9.128	68.200	6.365	PK
6	*	5946.375	60.323	53.758	-7.877	68.200	6.565	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 8 by 5825MHz	

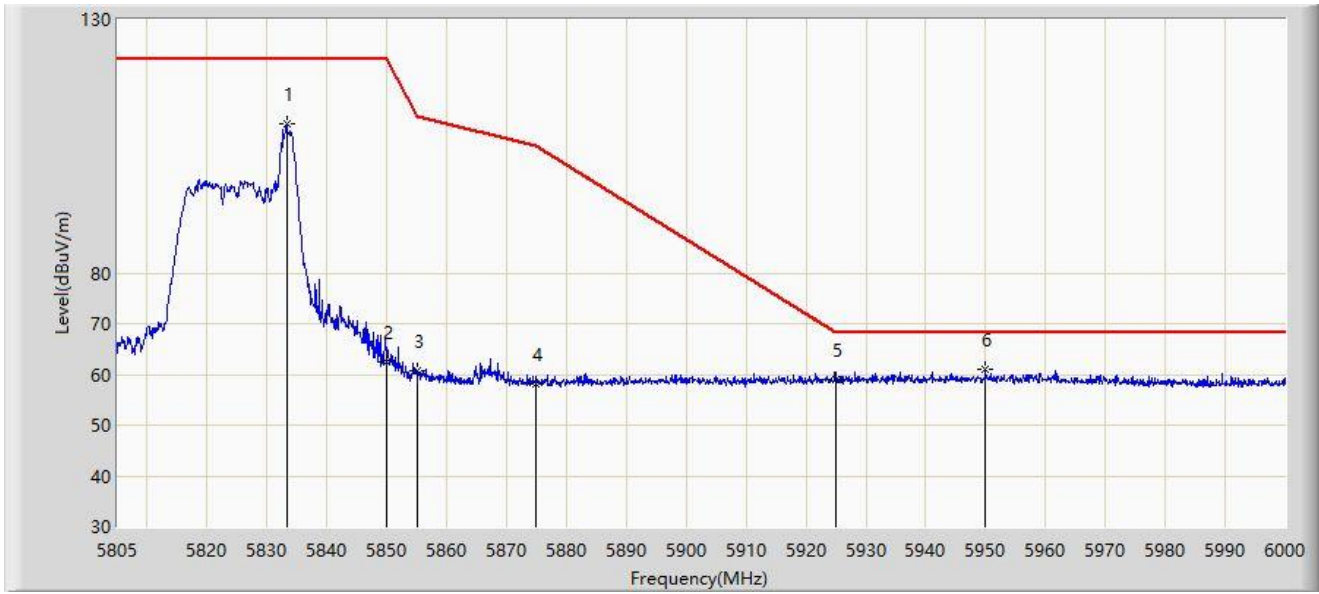


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5833.275	109.308	103.349	N/A	N/A	5.959	PK
2		5850.000	62.335	56.451	-59.865	122.200	5.885	PK
3		5855.000	60.637	54.741	-50.163	110.800	5.896	PK
4		5875.000	58.228	52.259	-46.972	105.200	5.968	PK
5		5925.000	59.124	52.760	-9.076	68.200	6.365	PK
6	*	5949.982	60.955	54.414	-7.245	68.200	6.542	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 61 by 5180MHz	

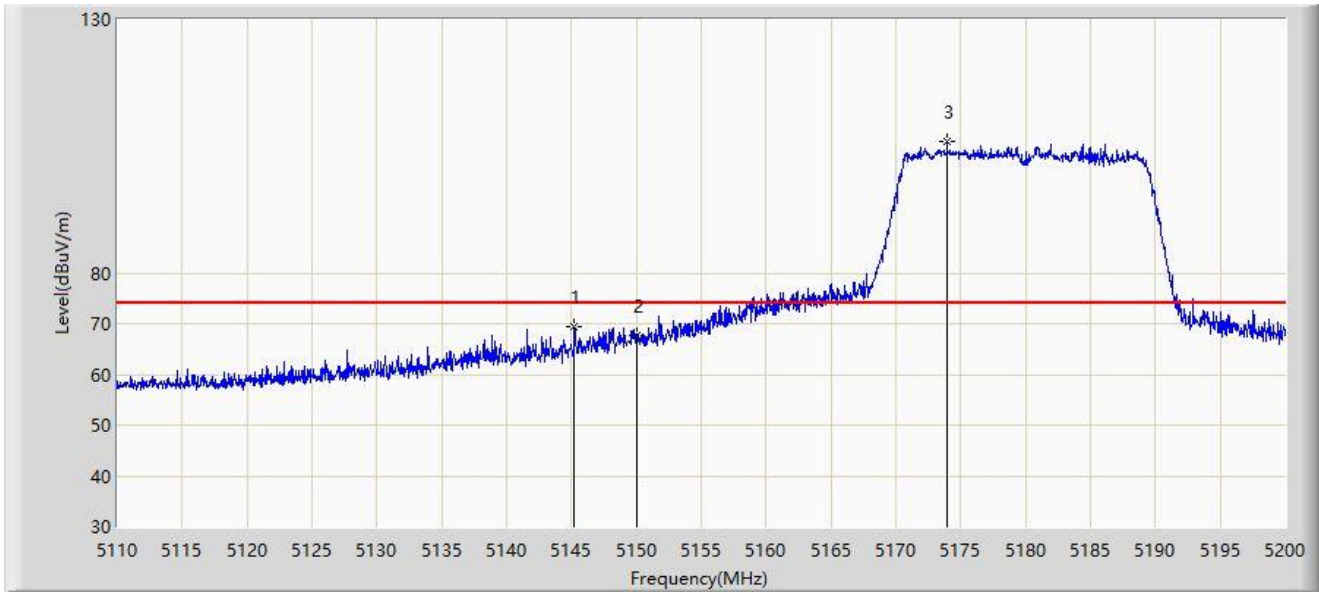


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5145.235	69.277	64.374	-4.723	74.000	4.902	PK
2		5150.000	67.802	62.834	-6.198	74.000	4.967	PK
3		5173.945	105.940	101.253	N/A	N/A	4.687	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 61 by 5180MHz	

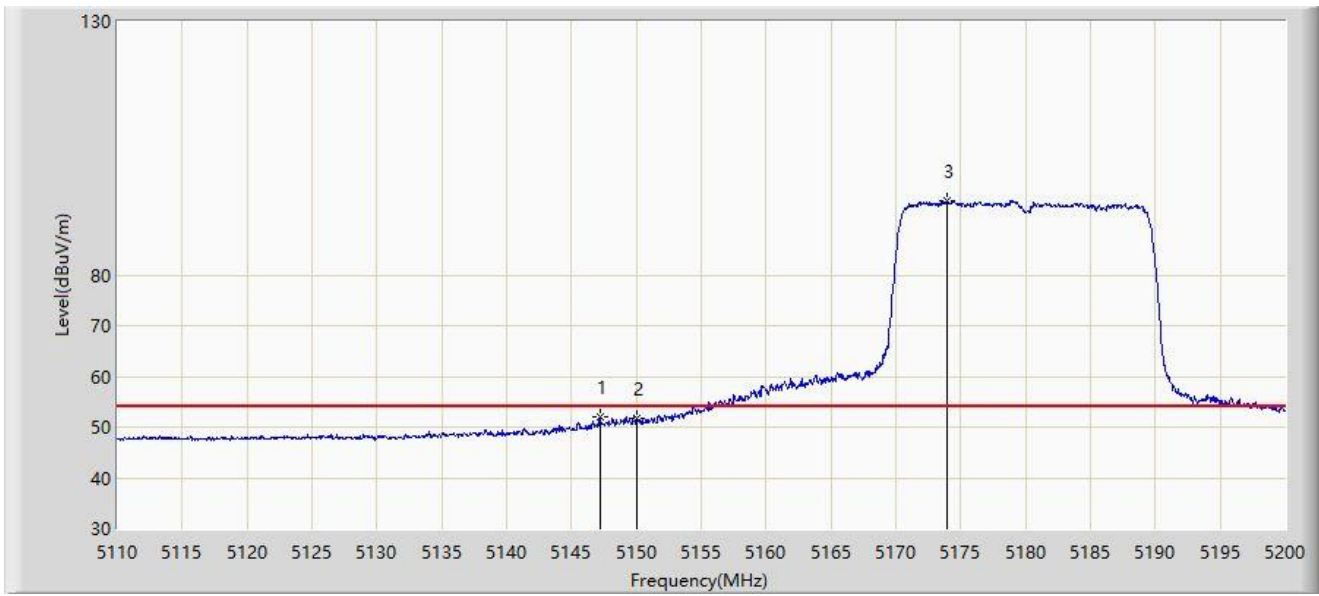


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5147.170	51.966	47.015	-2.034	54.000	4.951	AV
2		5150.000	51.652	46.684	-2.348	54.000	4.967	AV
3		5173.990	94.527	89.841	N/A	N/A	4.685	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 61 by 5180MHz	

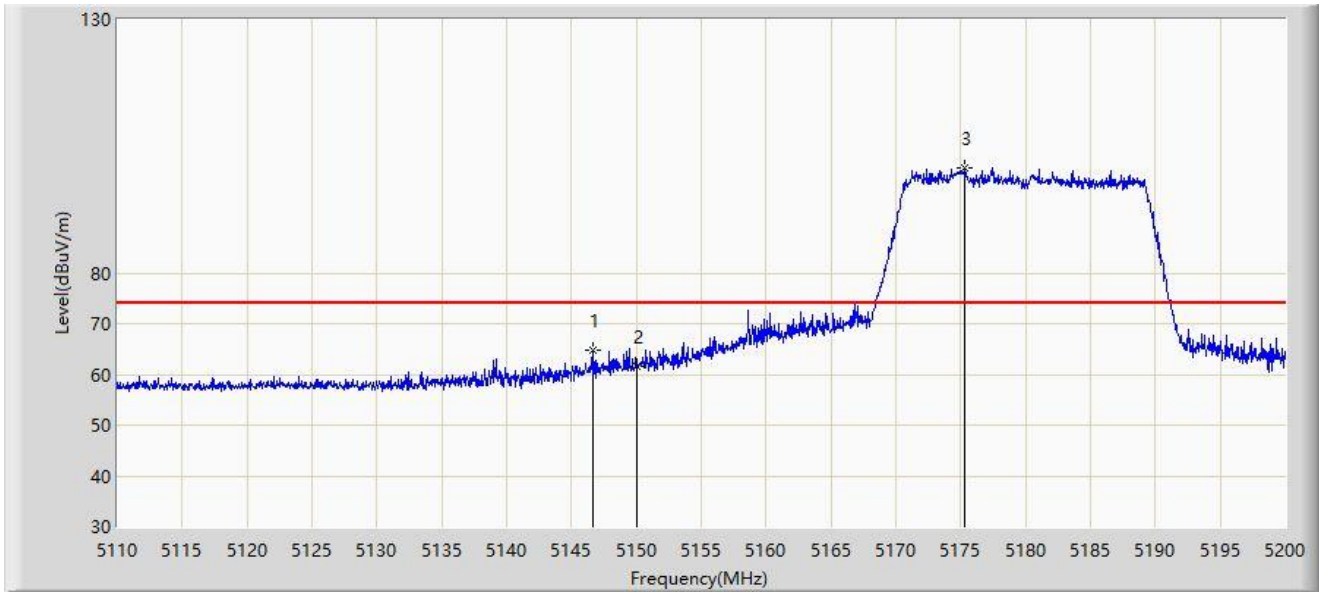


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5146.630	64.894	59.956	-9.106	74.000	4.938	PK
2		5150.000	61.502	56.534	-12.498	74.000	4.967	PK
3		5175.340	100.630	95.981	N/A	N/A	4.648	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 61 by 5180MHz	

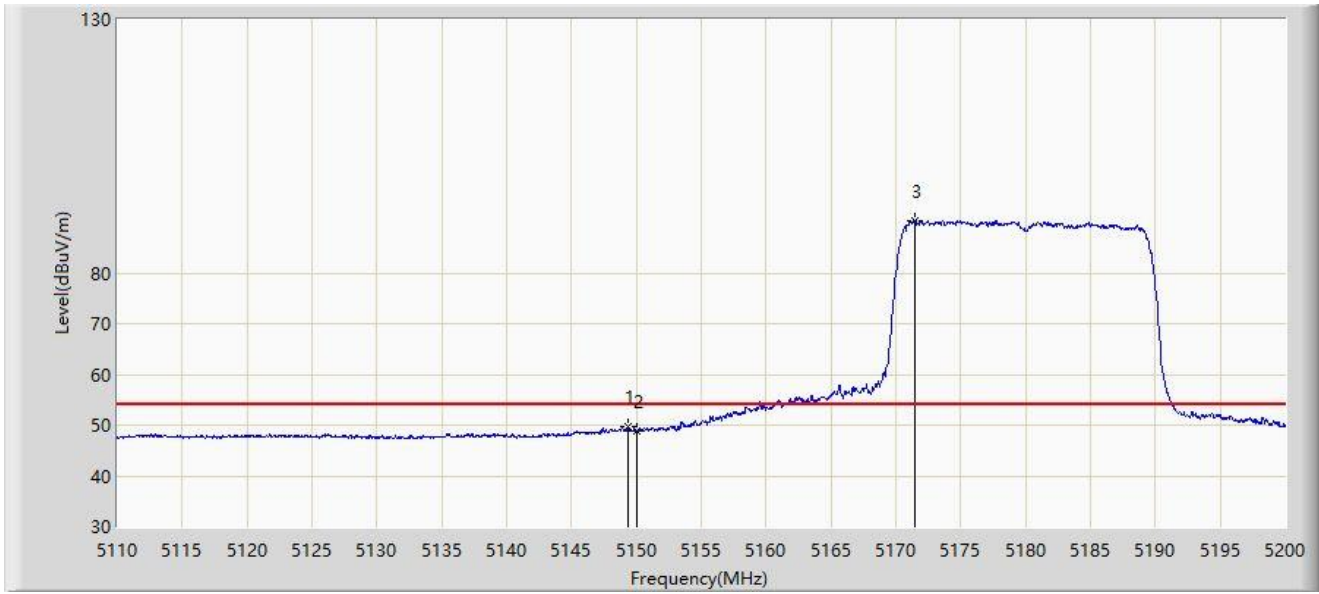


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5149.375	49.580	44.611	-4.420	54.000	4.969	AV
2		5150.000	48.848	43.880	-5.152	54.000	4.967	AV
3		5171.515	90.387	85.633	N/A	N/A	4.754	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 61 by 5320MHz	

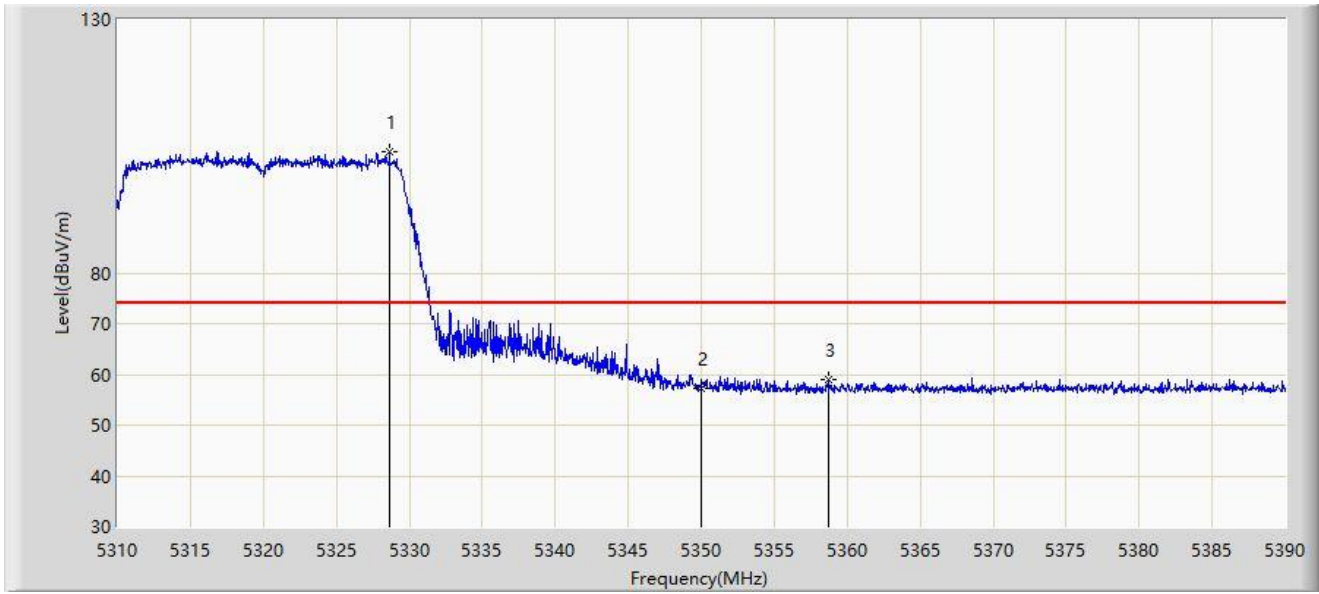


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5328.640	103.917	99.435	N/A	N/A	4.482	PK
2		5350.000	57.339	52.920	-16.661	74.000	4.419	PK
3	*	5358.680	59.048	54.561	-14.952	74.000	4.488	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 61 by 5320MHz	

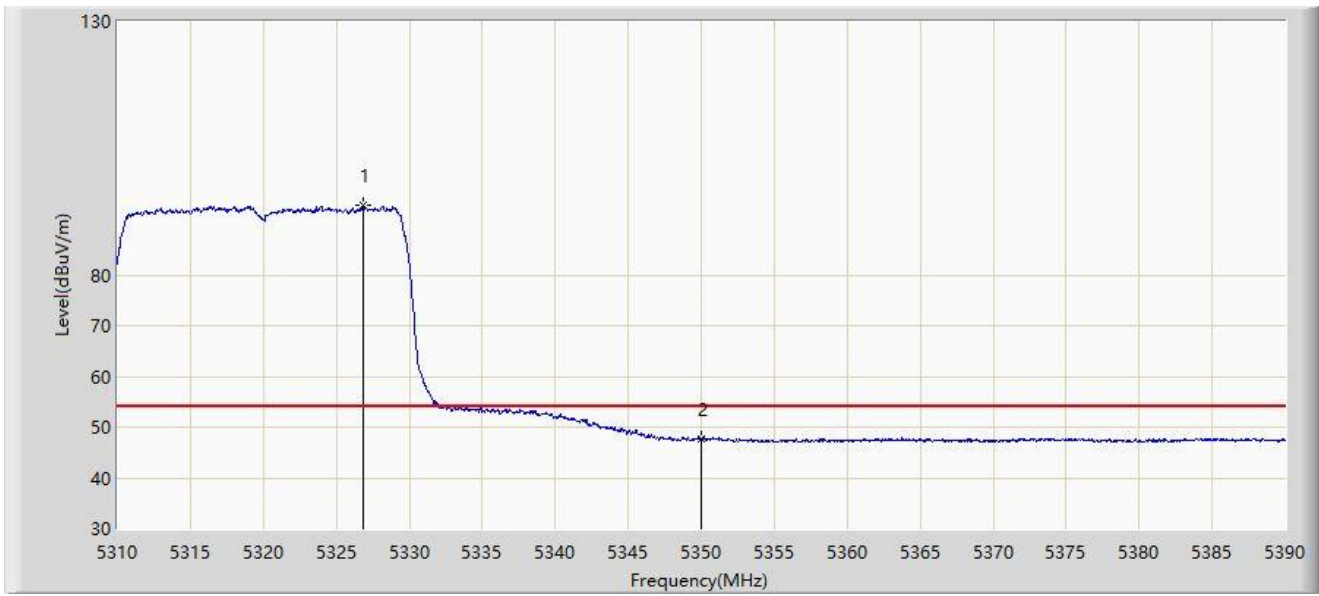


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5326.840	93.801	89.316	N/A	N/A	4.484	AV
2	*	5350.000	47.756	43.337	-6.244	54.000	4.419	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 61 by 5320MHz	

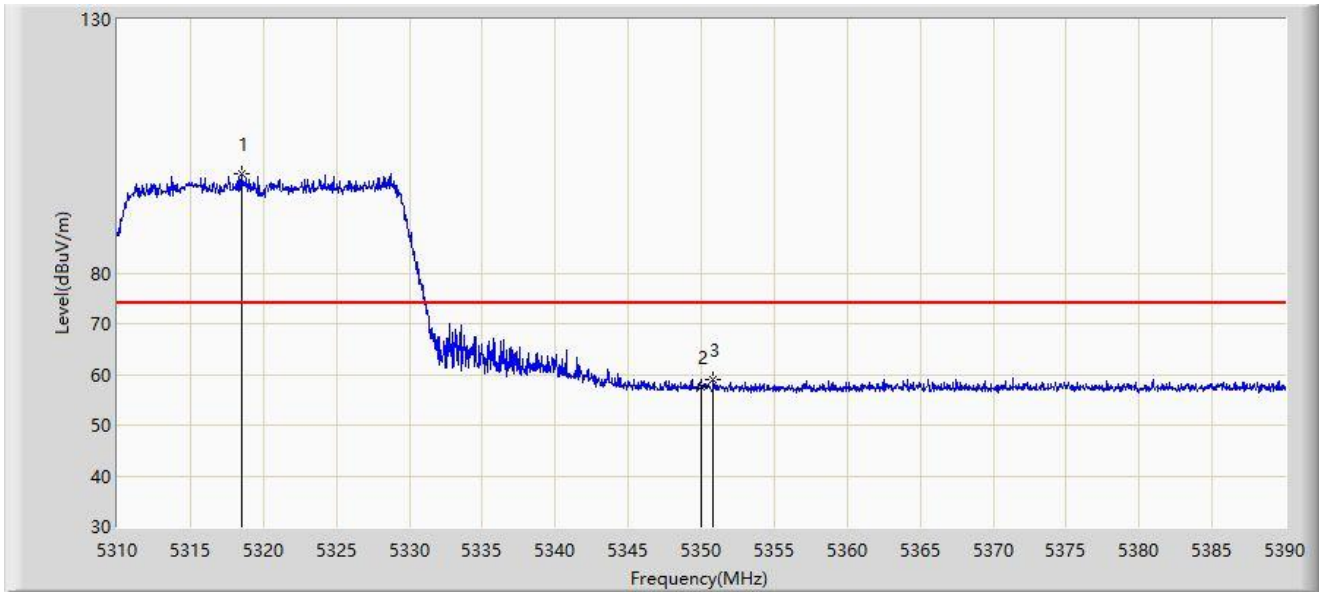


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5318.480	99.438	94.939	N/A	N/A	4.499	PK
2		5350.000	57.596	53.177	-16.404	74.000	4.419	PK
3	*	5350.840	58.923	54.507	-15.077	74.000	4.415	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 61 by 5320MHz	

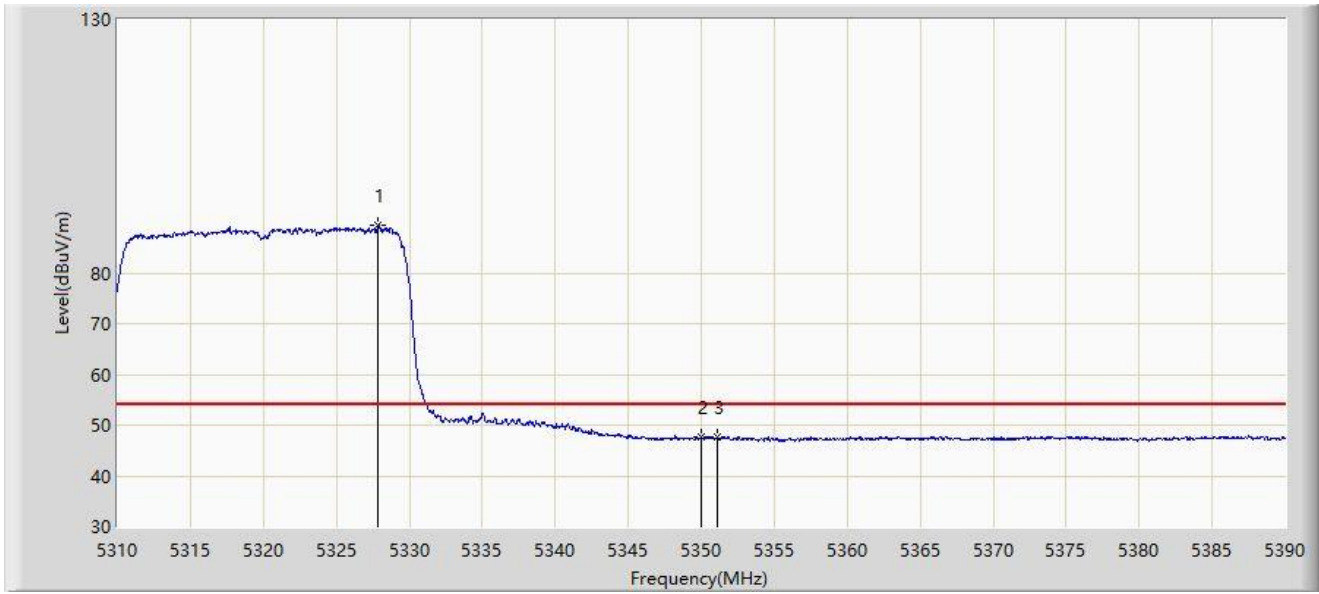


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5327.880	89.465	84.982	N/A	N/A	4.484	AV
2		5350.000	47.541	43.122	-6.459	54.000	4.419	AV
3	*	5351.080	47.652	43.237	-6.348	54.000	4.416	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 61 by 5500MHz	

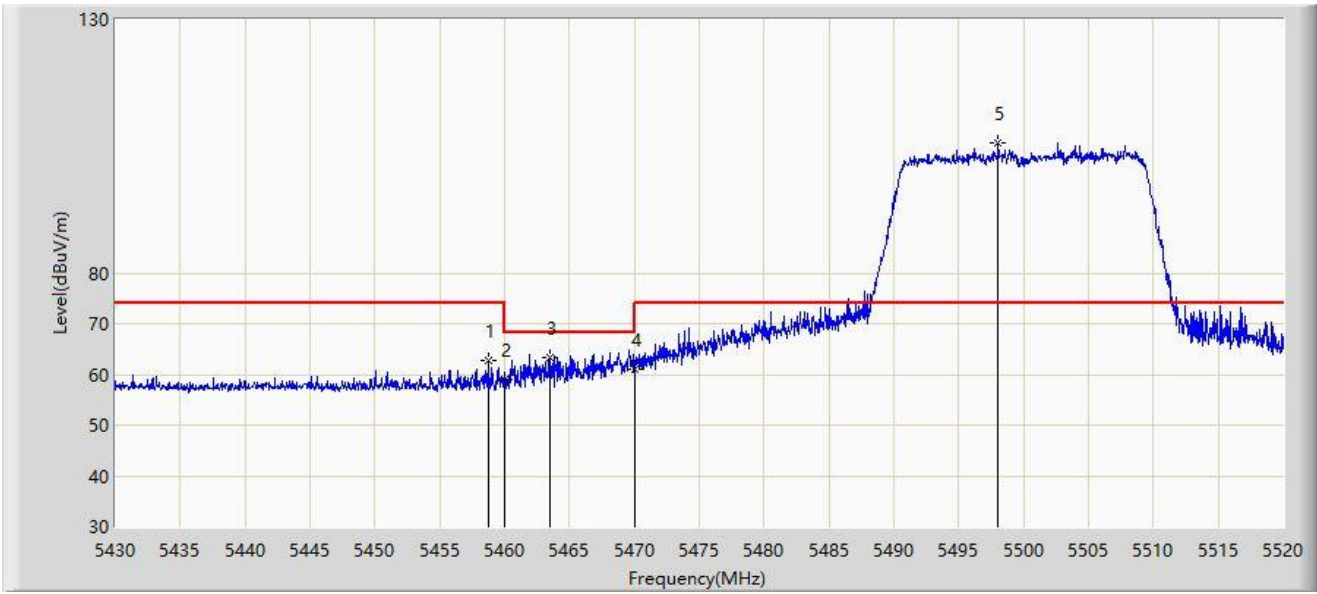


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5458.710	62.649	57.945	-11.351	74.000	4.705	PK
2		5460.000	59.107	54.391	-14.893	74.000	4.716	PK
3	*	5463.525	63.431	58.685	-4.769	68.200	4.746	PK
4		5470.000	60.973	56.172	-7.227	68.200	4.801	PK
5		5498.040	105.684	100.657	N/A	N/A	5.027	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 61 by 5500MHz	

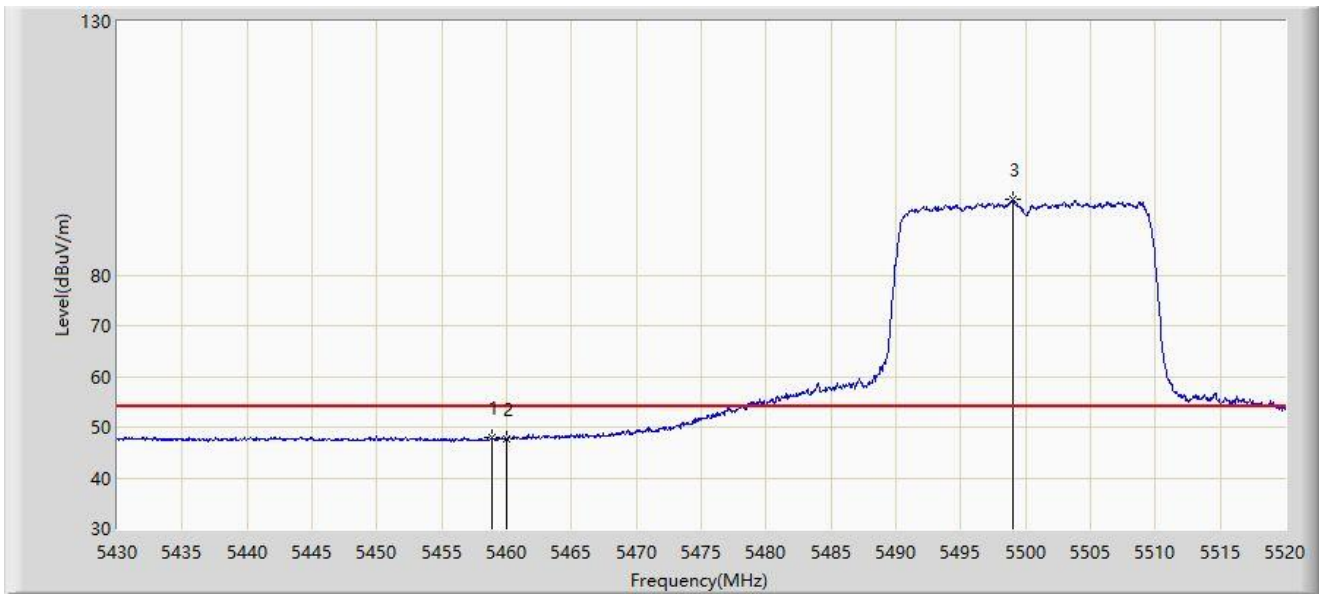


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5458.845	47.883	43.177	-6.117	54.000	4.706	AV
2		5460.000	47.643	42.927	-6.357	54.000	4.716	AV
3		5499.075	94.927	89.913	N/A	N/A	5.014	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 61 by 5500MHz	

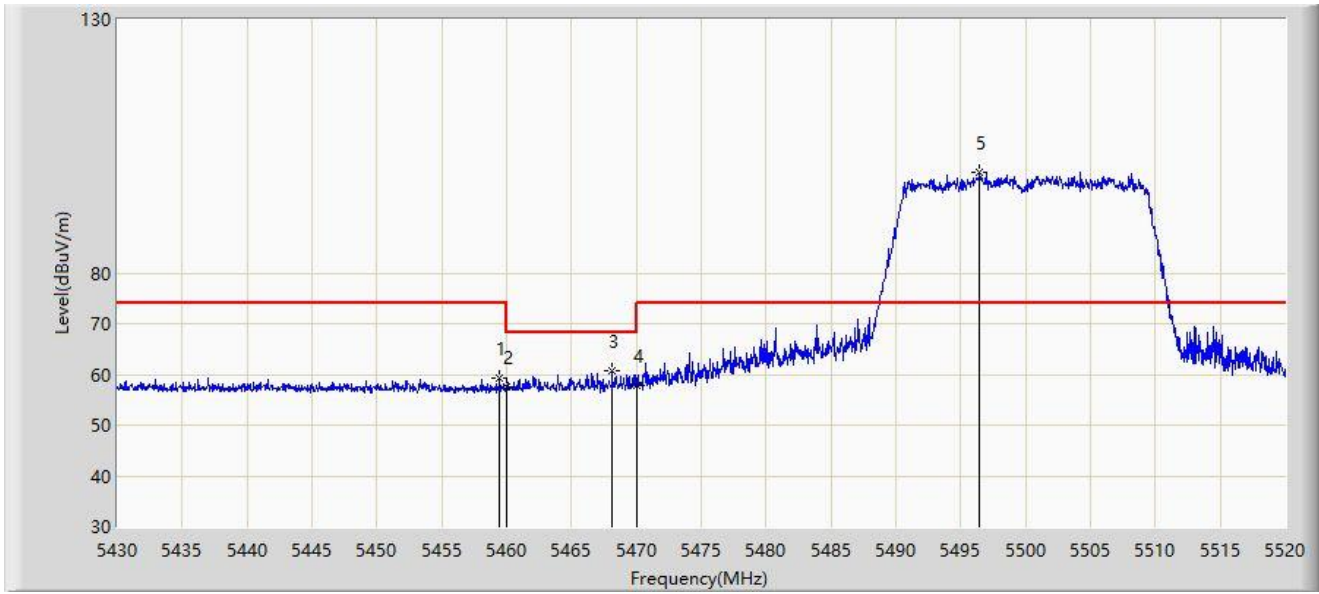


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5459.430	59.201	54.490	-14.799	74.000	4.711	PK
2		5460.000	57.629	52.913	-16.371	74.000	4.716	PK
3	*	5468.115	60.852	56.067	-7.348	68.200	4.786	PK
4		5470.000	57.772	52.971	-10.428	68.200	4.801	PK
5		5496.420	99.879	94.831	N/A	N/A	5.048	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 61 by 5500MHz	

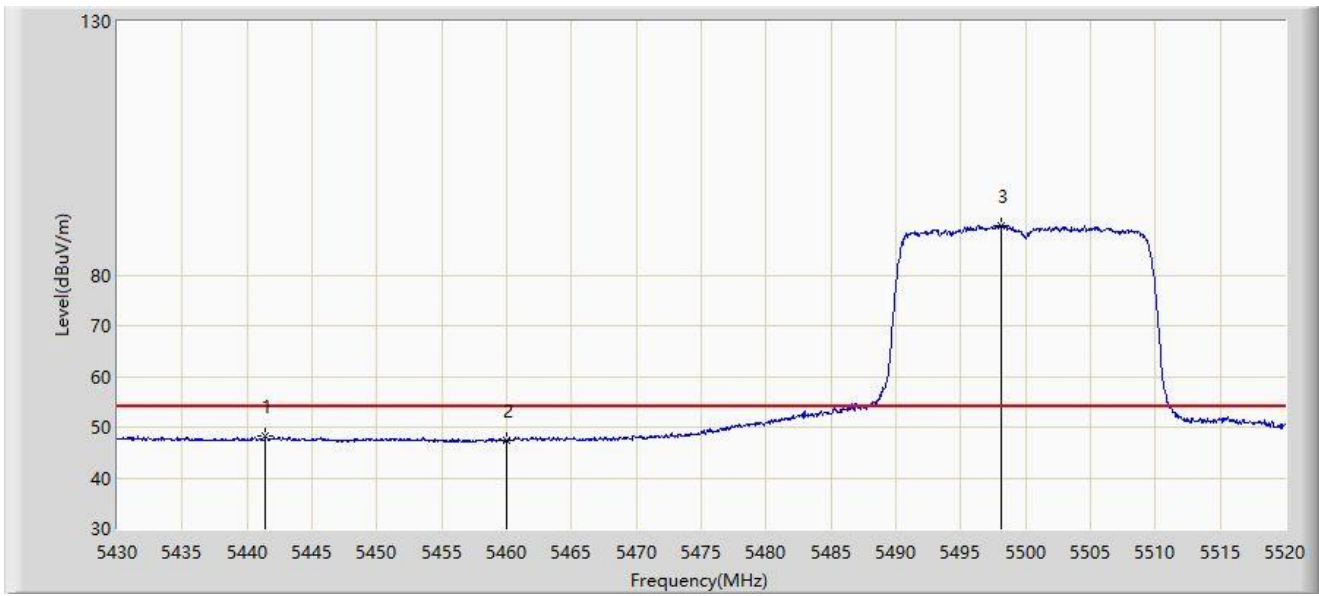


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5441.430	48.197	43.306	-5.803	54.000	4.891	AV
2		5460.000	47.514	42.798	-6.486	54.000	4.716	AV
3		5498.085	89.811	84.784	N/A	N/A	5.027	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 61 by 5700MHz	

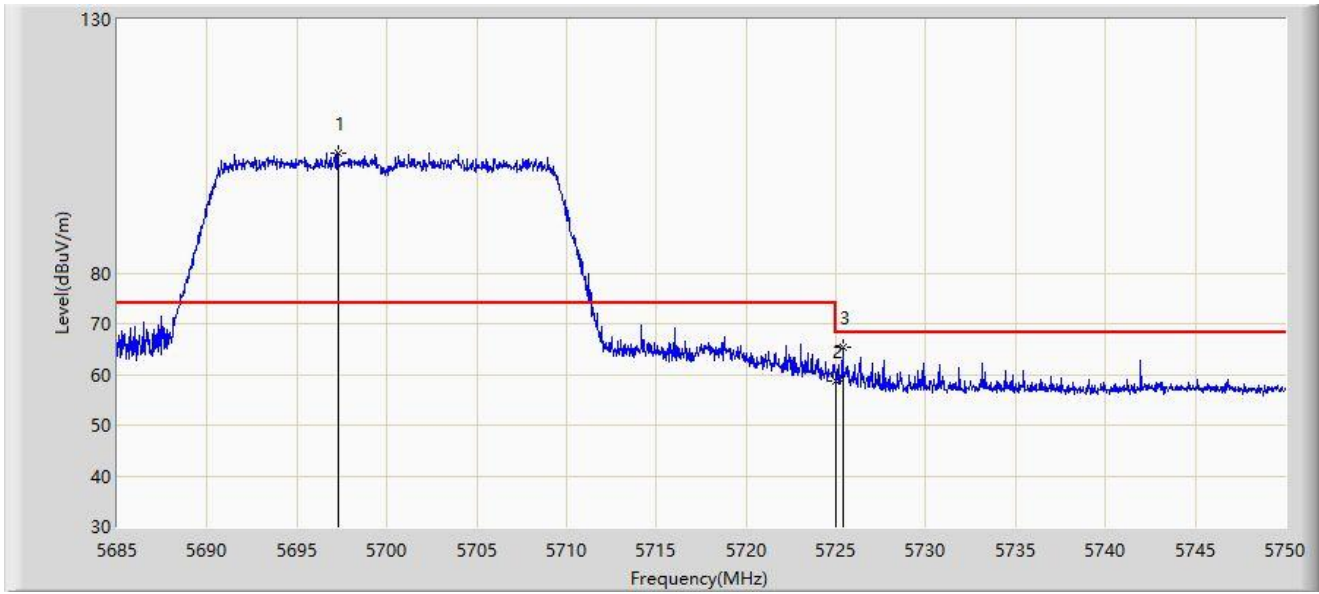


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5697.285	103.651	98.225	N/A	N/A	5.426	PK
2		5725.000	58.836	53.478	-9.364	68.200	5.358	PK
3	*	5725.365	65.292	59.931	-2.908	68.200	5.361	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 61 by 5700MHz	

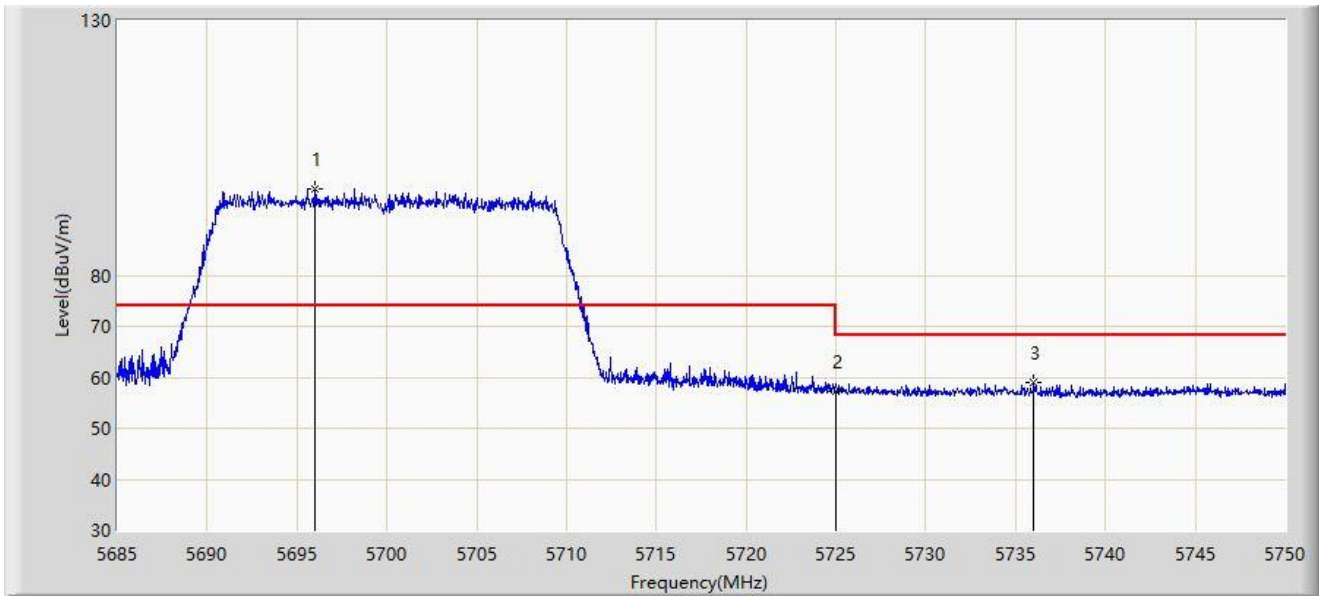


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5695.985	96.936	91.491	N/A	N/A	5.445	PK
2		5725.000	57.119	51.761	-11.081	68.200	5.358	PK
3	*	5736.025	58.961	53.494	-9.239	68.200	5.467	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 61 by 5745MHz	

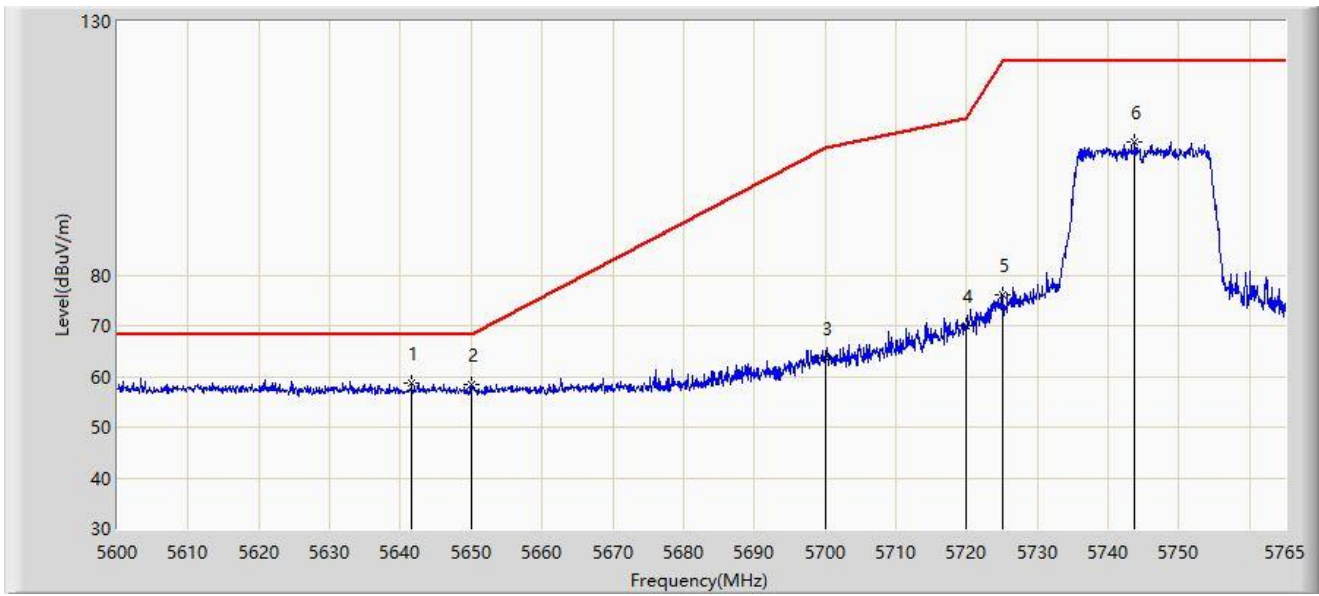


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5641.580	58.751	53.695	-9.449	68.200	5.056	PK
2		5650.000	58.280	53.201	-9.920	68.200	5.080	PK
3		5700.000	63.550	58.165	-41.650	105.200	5.385	PK
4		5720.000	70.117	64.792	-40.683	110.800	5.325	PK
5		5725.000	76.207	70.849	-45.993	122.200	5.358	PK
6		5743.797	106.167	100.622	N/A	N/A	5.545	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 61 by 5745MHz	

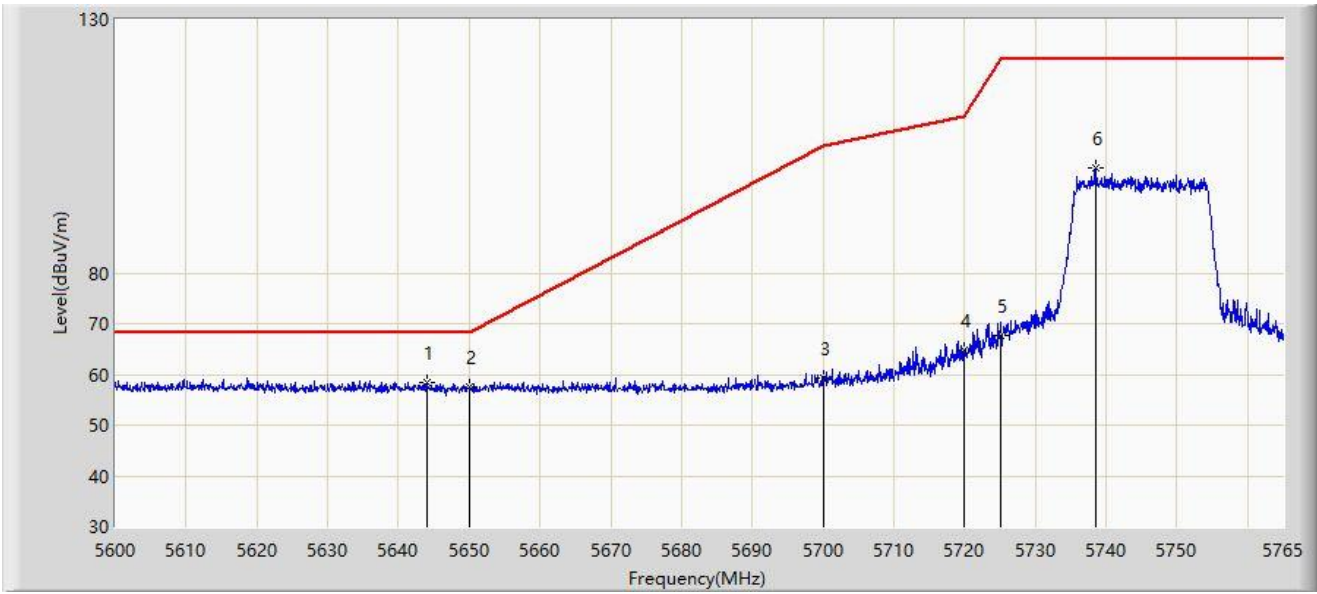


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5644.055	58.495	53.433	-9.705	68.200	5.063	PK
2		5650.000	57.522	52.443	-10.678	68.200	5.080	PK
3		5700.000	59.366	53.981	-45.834	105.200	5.385	PK
4		5720.000	64.785	59.460	-46.015	110.800	5.325	PK
5		5725.000	67.718	62.360	-54.482	122.200	5.358	PK
6		5738.600	100.848	95.355	N/A	N/A	5.493	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 61 by 5825MHz	

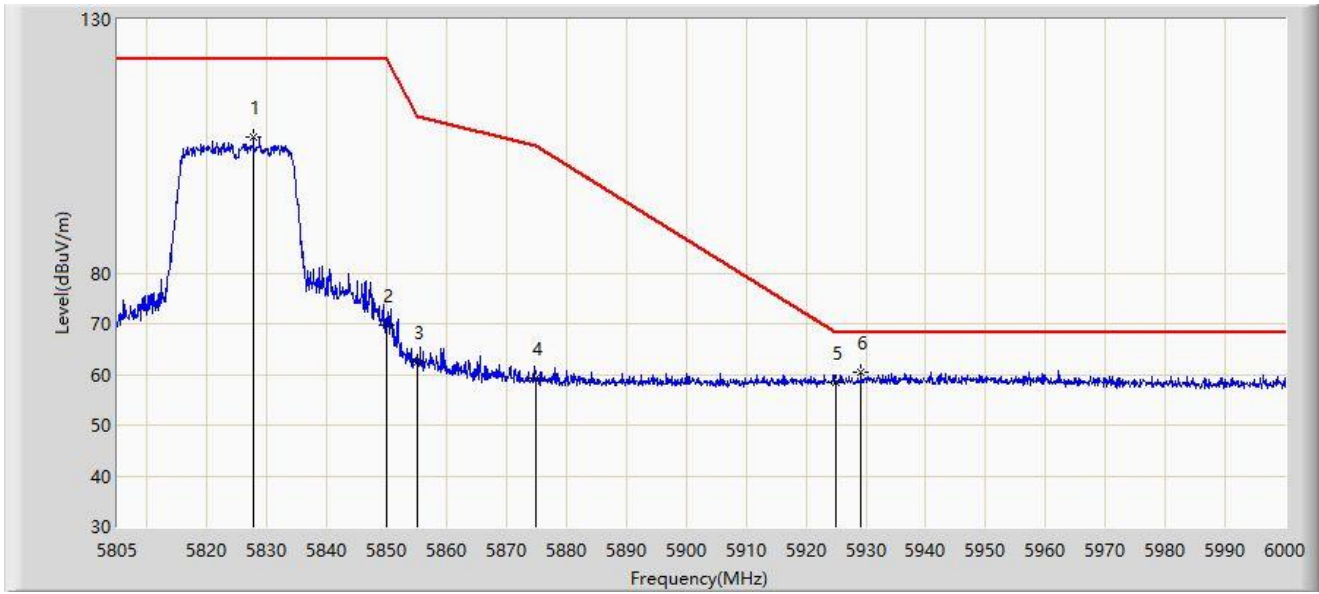


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5827.717	106.840	100.847	N/A	N/A	5.993	PK
2		5850.000	69.608	63.724	-52.592	122.200	5.885	PK
3		5855.000	62.507	56.611	-48.293	110.800	5.896	PK
4		5875.000	59.356	53.387	-45.844	105.200	5.968	PK
5		5925.000	58.462	52.098	-9.738	68.200	6.365	PK
6	*	5929.118	60.527	54.079	-7.673	68.200	6.448	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 61 by 5825MHz	

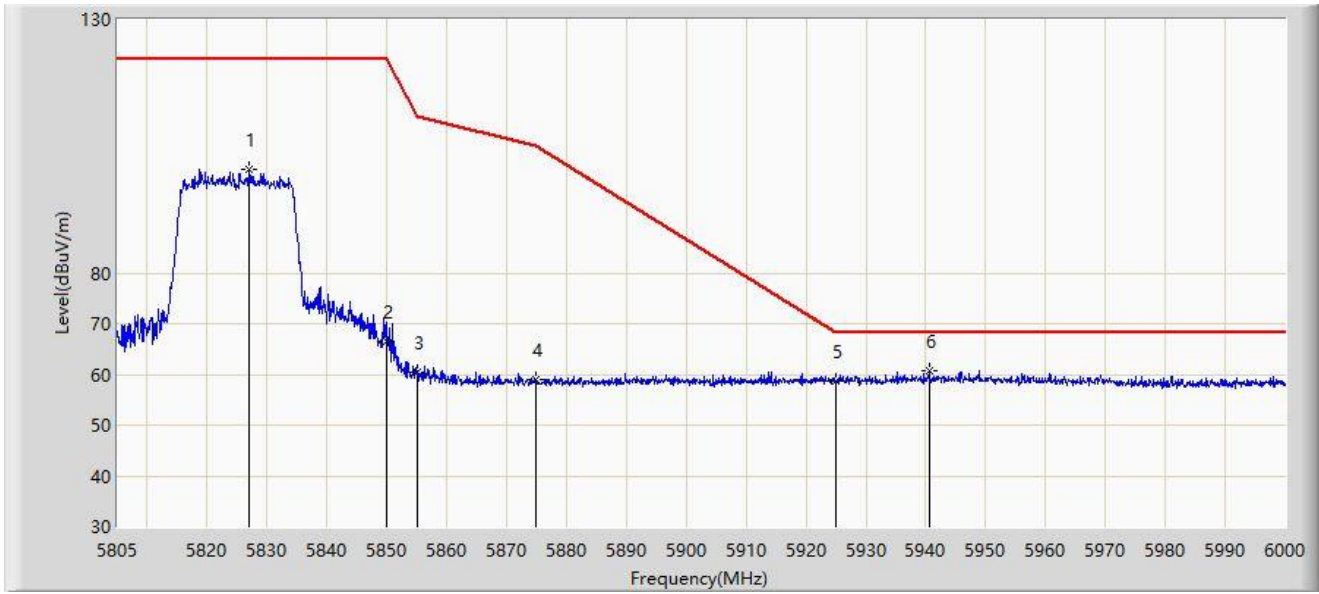


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5827.035	100.313	94.332	N/A	N/A	5.980	PK
2		5850.000	66.391	60.507	-55.809	122.200	5.885	PK
3		5855.000	60.547	54.651	-50.253	110.800	5.896	PK
4		5875.000	58.853	52.884	-46.347	105.200	5.968	PK
5		5925.000	58.575	52.211	-9.625	68.200	6.365	PK
6	*	5940.525	60.752	54.222	-7.448	68.200	6.529	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-31
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-Tone-RU 0 by 5190MHz	

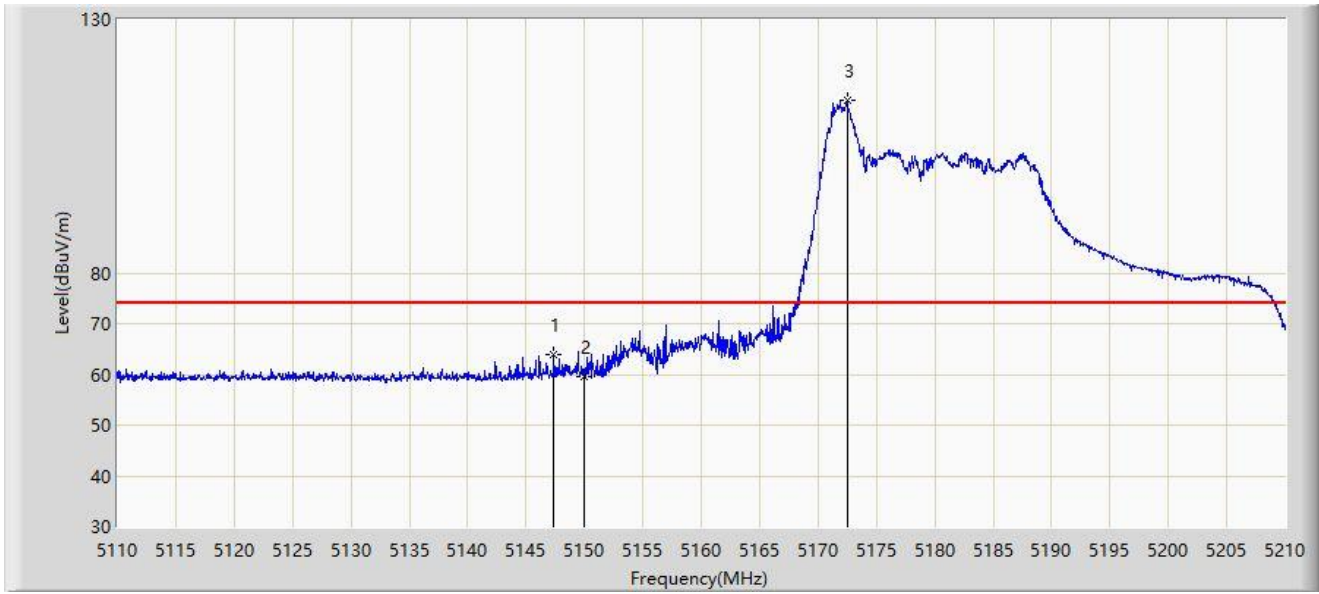


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5147.400	63.819	58.862	-10.181	74.000	4.957	PK
2		5150.000	59.693	54.725	-14.307	74.000	4.967	PK
3		5172.500	113.977	109.250	N/A	N/A	4.728	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-31
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-Tone-RU 0 by 5190MHz	

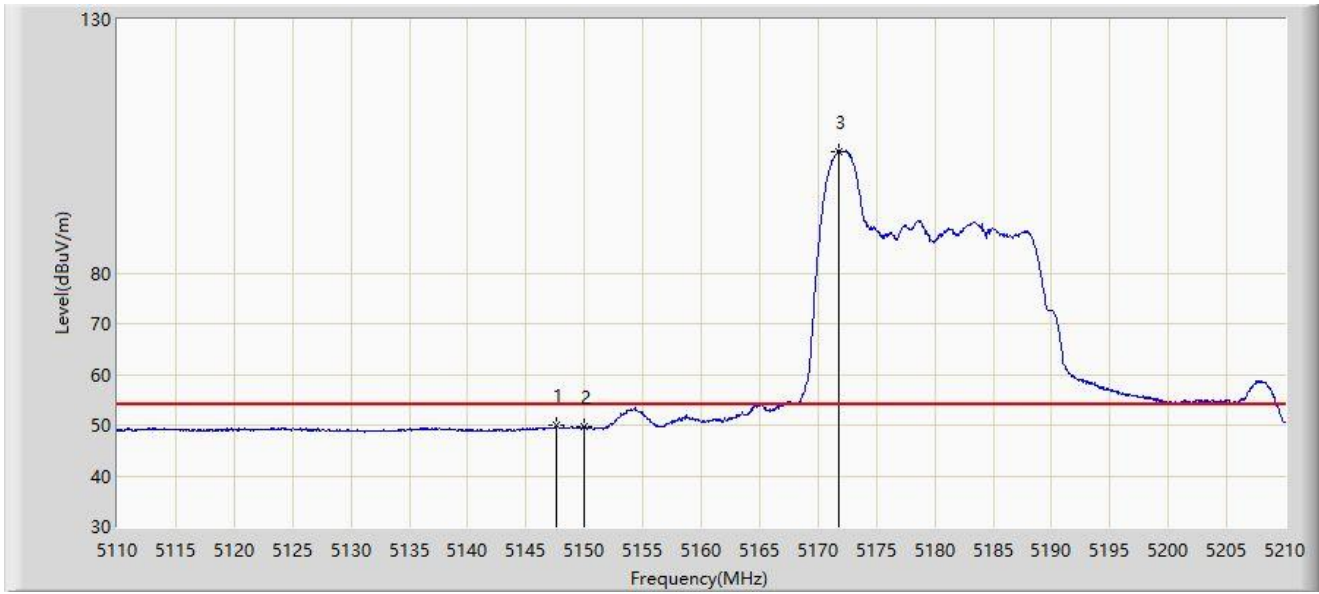


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5147.650	49.859	44.896	-4.141	54.000	4.964	AV
2		5150.000	49.742	44.774	-4.258	54.000	4.967	AV
3		5171.750	103.999	99.251	N/A	N/A	4.748	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-31
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-Tone-RU 0 by 5190MHz	

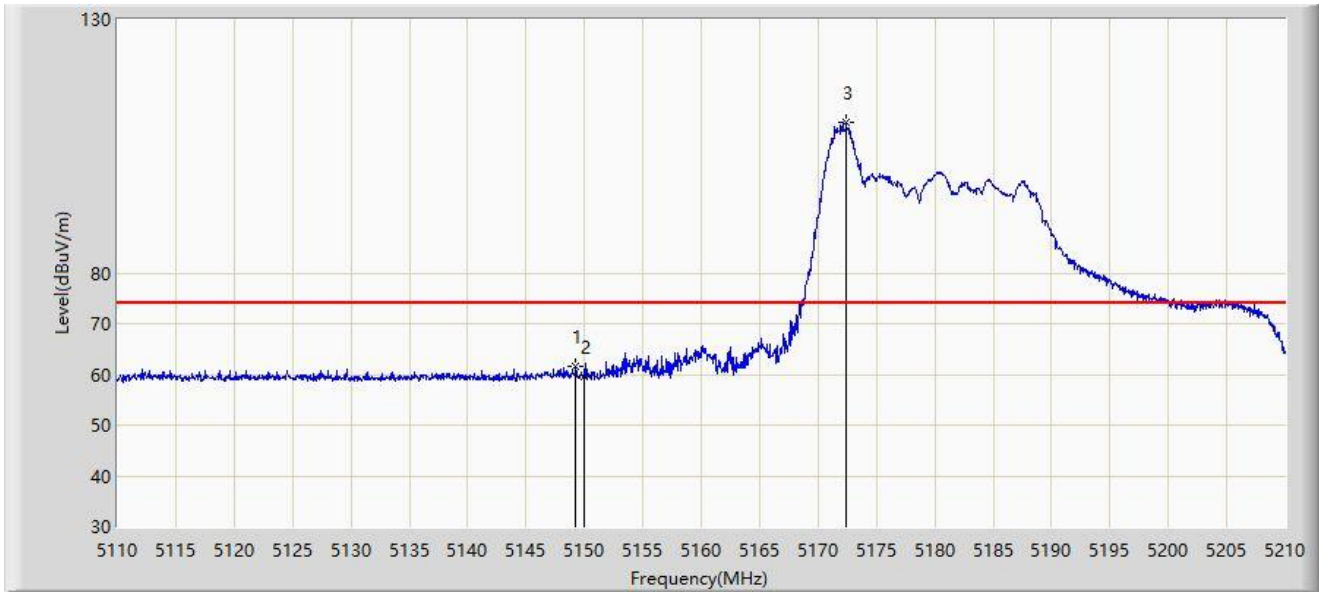


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5149.250	61.546	56.577	-12.454	74.000	4.969	PK
2		5150.000	59.641	54.673	-14.359	74.000	4.967	PK
3		5172.400	109.647	104.917	N/A	N/A	4.730	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-31
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-Tone-RU 0 by 5190MHz	

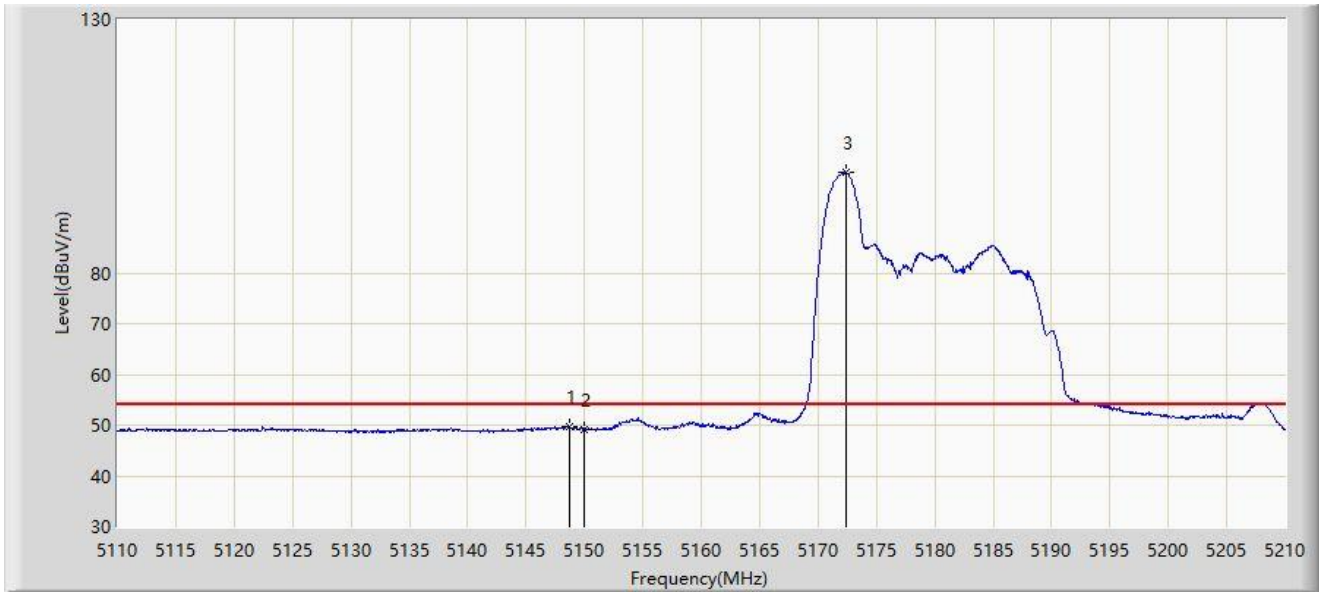


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5148.700	49.758	44.788	-4.242	54.000	4.970	AV
2		5150.000	49.243	44.275	-4.757	54.000	4.967	AV
3		5172.350	99.852	95.121	N/A	N/A	4.732	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-31
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-Tone-RU 0 by 5310MHz	

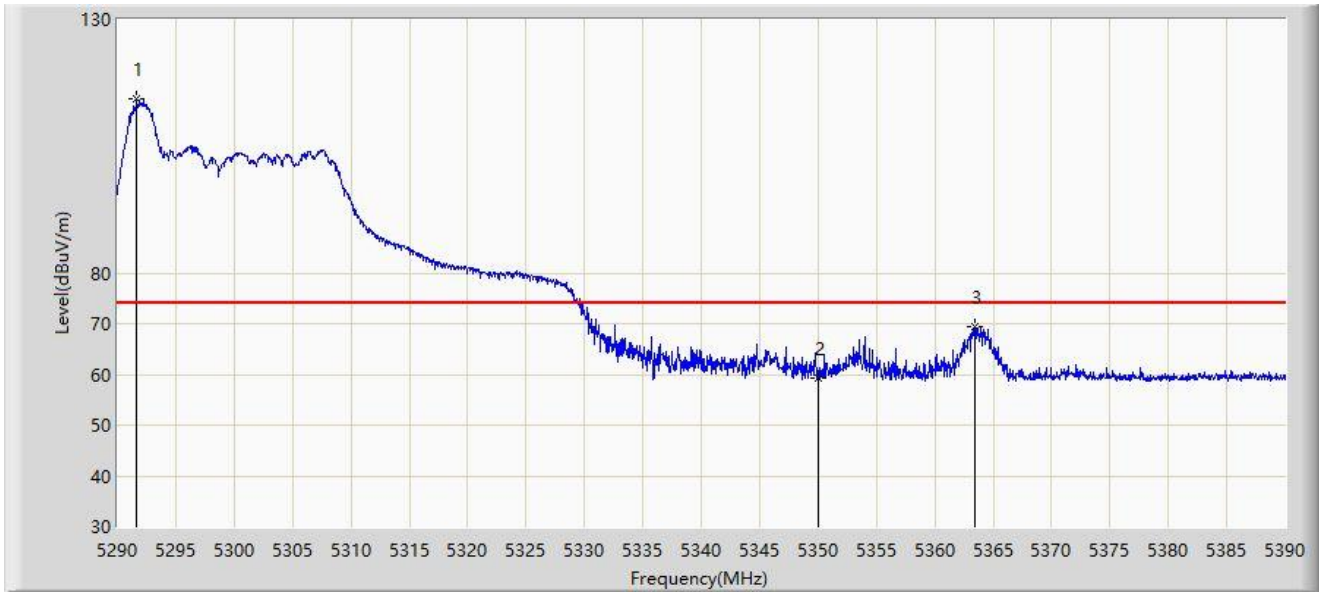


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5291.650	114.289	109.517	N/A	N/A	4.773	PK
2		5350.000	59.336	54.917	-14.664	74.000	4.419	PK
3	*	5363.400	69.396	64.855	-4.604	74.000	4.540	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-31
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-Tone-RU 0 by 5310MHz	

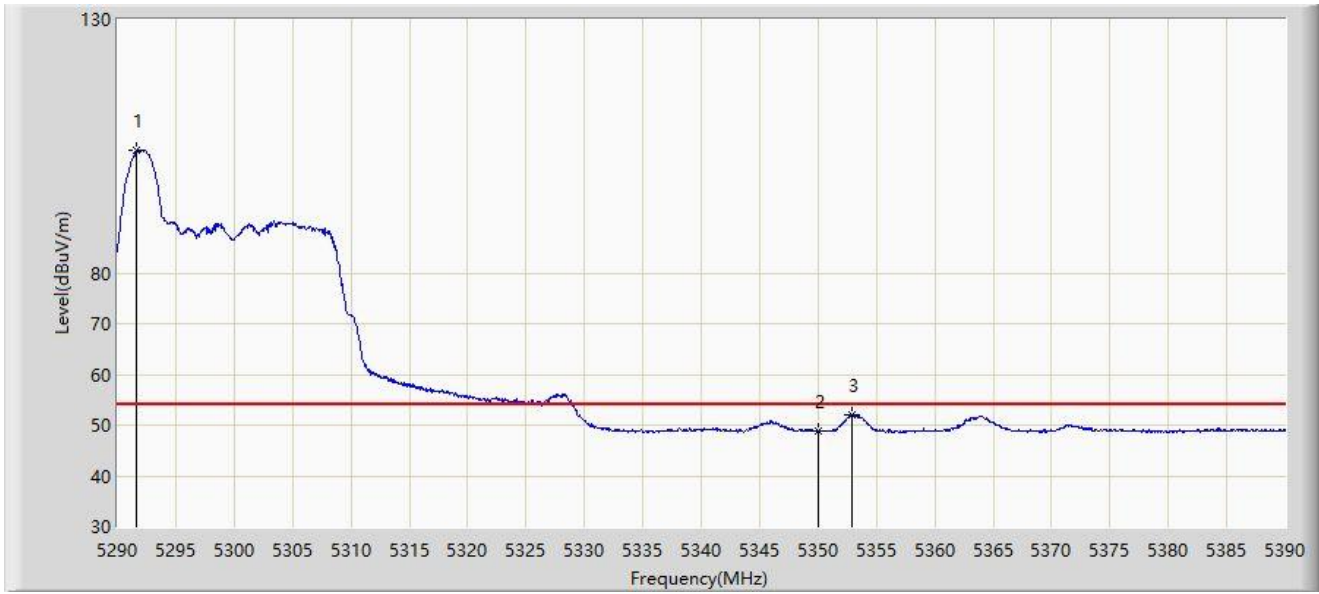


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5291.650	104.059	99.287	N/A	N/A	4.773	AV
2		5350.000	48.859	44.440	-5.141	54.000	4.419	AV
3	*	5352.850	52.107	47.685	-1.893	54.000	4.422	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-31
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-Tone-RU 0 by 5310MHz	

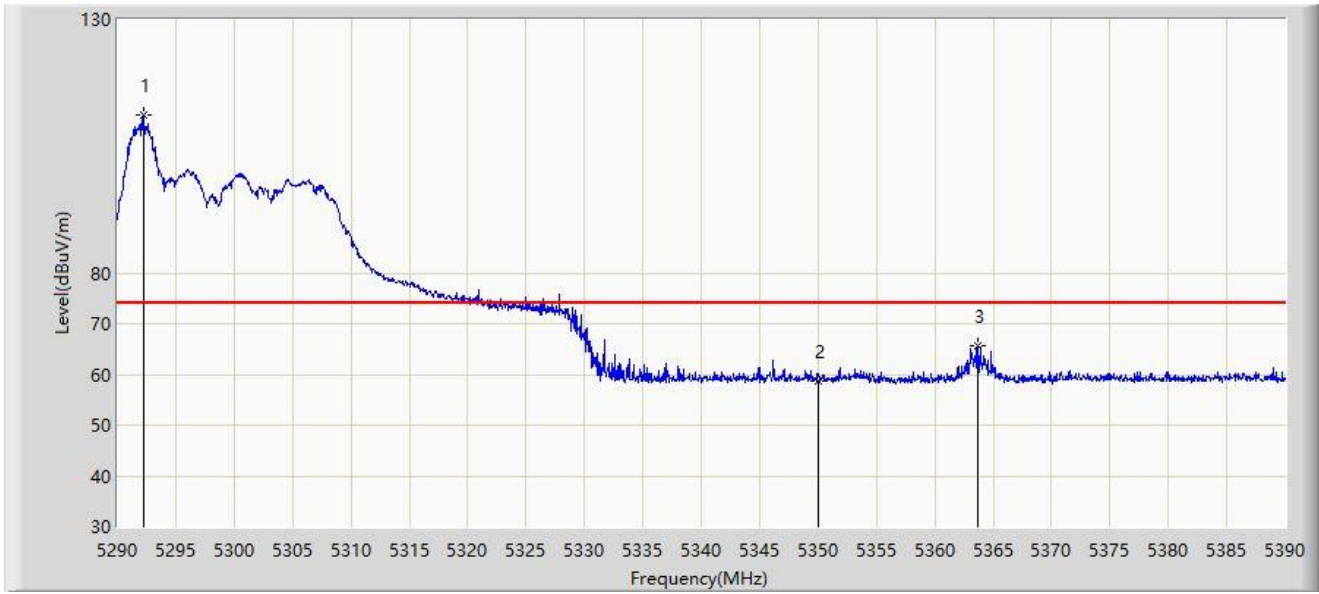


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5292.200	111.207	106.437	N/A	N/A	4.770	PK
2		5350.000	58.700	54.281	-15.300	74.000	4.419	PK
3	*	5363.700	65.741	61.197	-8.259	74.000	4.544	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-31
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-Tone-RU 0 by 5310MHz	

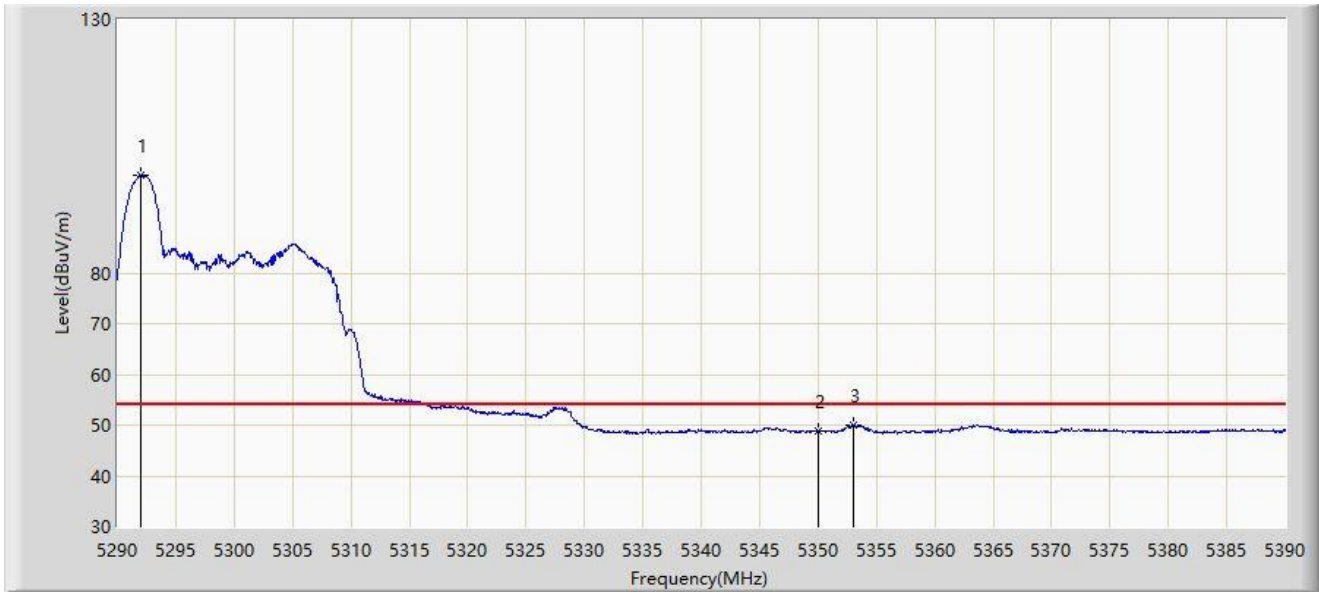


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5292.050	99.300	94.530	N/A	N/A	4.770	AV
2		5350.000	48.880	44.461	-5.120	54.000	4.419	AV
3	*	5353.050	50.139	45.715	-3.861	54.000	4.424	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-31
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-Tone-RU 0 by 5510MHz	

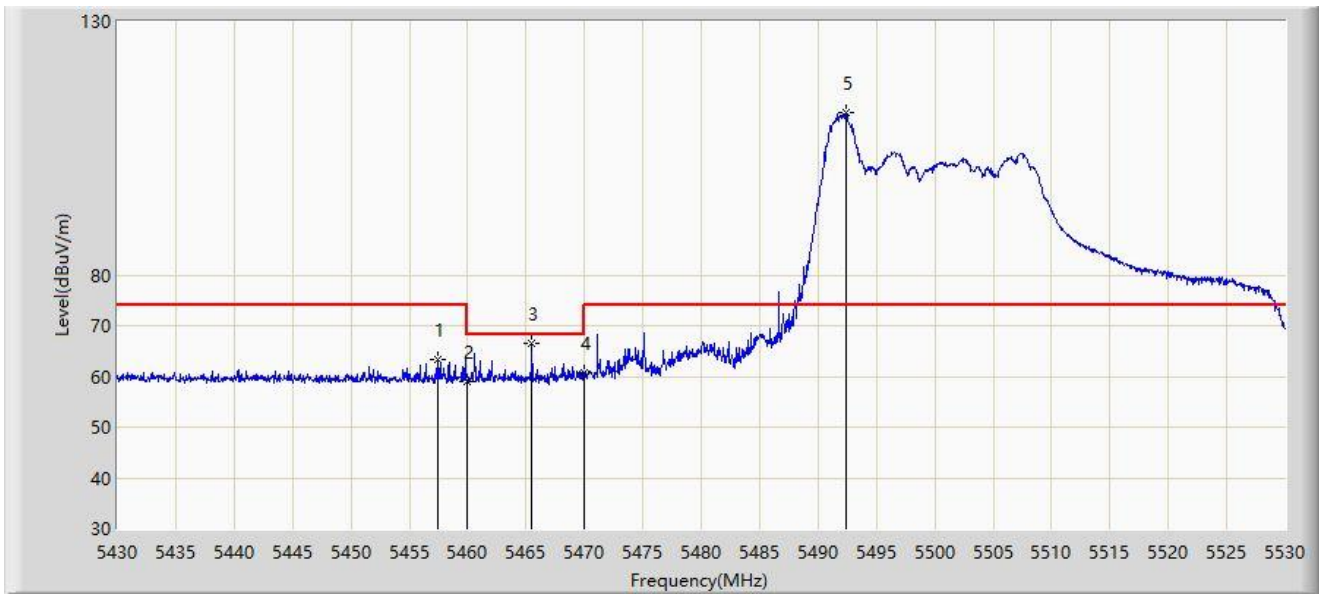


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5457.400	63.189	58.496	-10.811	74.000	4.692	PK
2		5460.000	58.866	54.150	-15.134	74.000	4.716	PK
3	*	5465.500	66.427	61.664	-1.773	68.200	4.762	PK
4		5470.000	60.829	56.028	-7.371	68.200	4.801	PK
5		5492.400	112.058	106.960	N/A	N/A	5.098	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-31
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-Tone-RU 0 by 5510MHz	

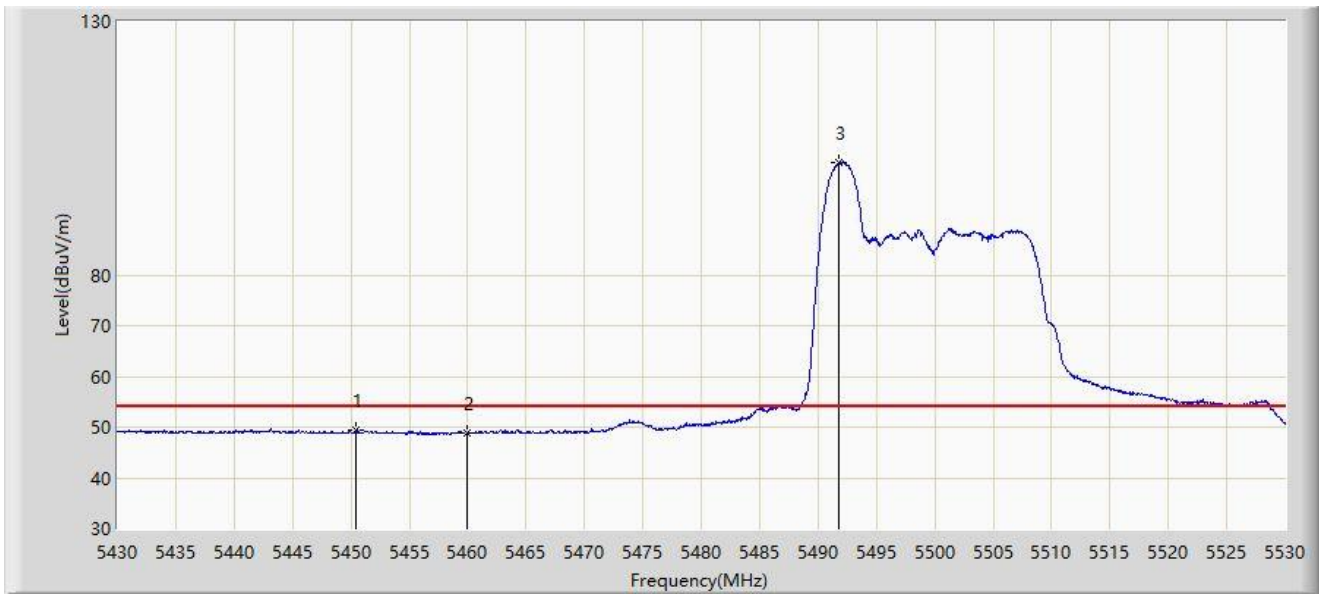


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5450.450	49.352	44.624	-4.648	54.000	4.728	AV
2		5460.000	48.909	44.193	-5.091	54.000	4.716	AV
3		5491.800	102.225	97.120	N/A	N/A	5.105	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-31
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-Tone-RU 0 by 5510MHz	

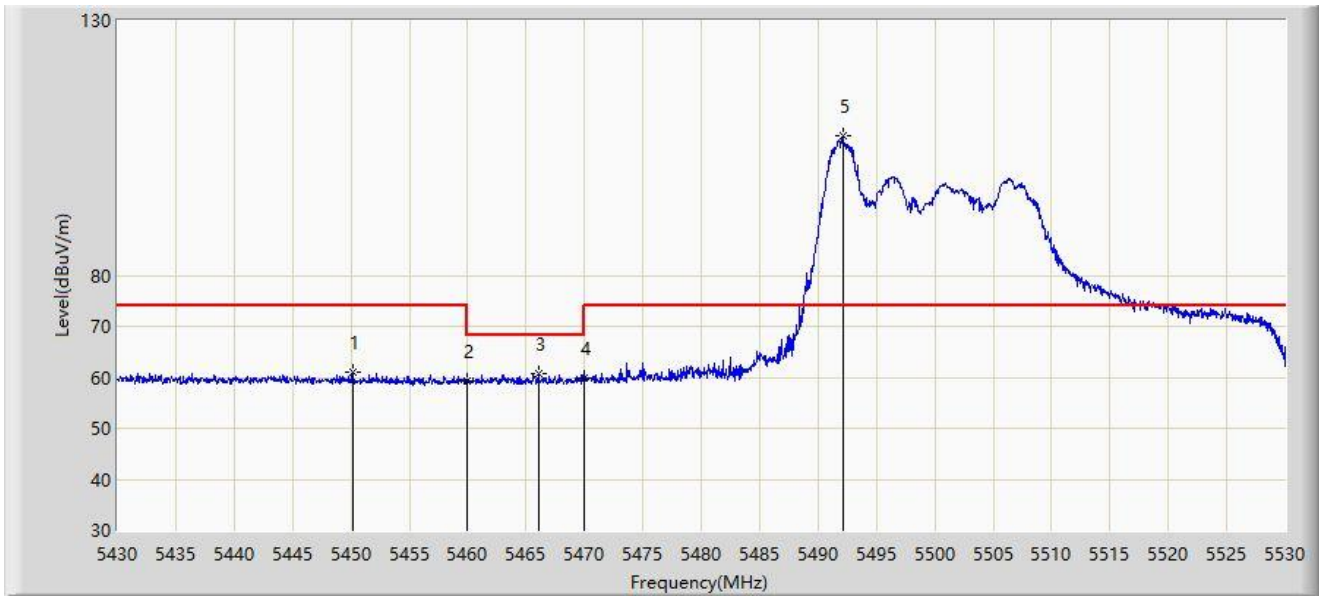


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5450.150	61.055	56.321	-12.945	74.000	4.733	PK
2		5460.000	59.363	54.647	-14.637	74.000	4.716	PK
3	*	5466.050	60.602	55.835	-7.598	68.200	4.768	PK
4		5470.000	59.763	54.962	-8.437	68.200	4.801	PK
5		5492.100	107.270	102.168	N/A	N/A	5.101	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-31
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-Tone-RU 0 by 5510MHz	

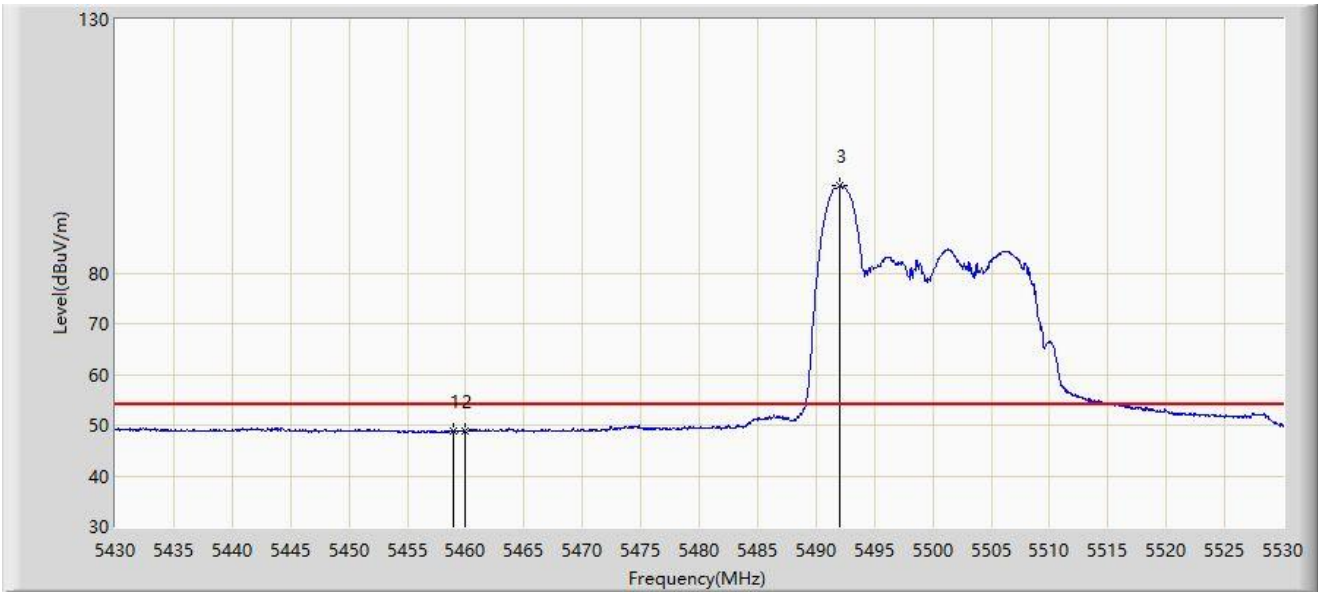


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5459.000	48.969	44.262	-5.031	54.000	4.707	AV
2		5460.000	48.707	43.991	-5.293	54.000	4.716	AV
3		5492.050	97.158	92.056	N/A	N/A	5.102	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-31
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-Tone-RU 0 by 5670MHz	

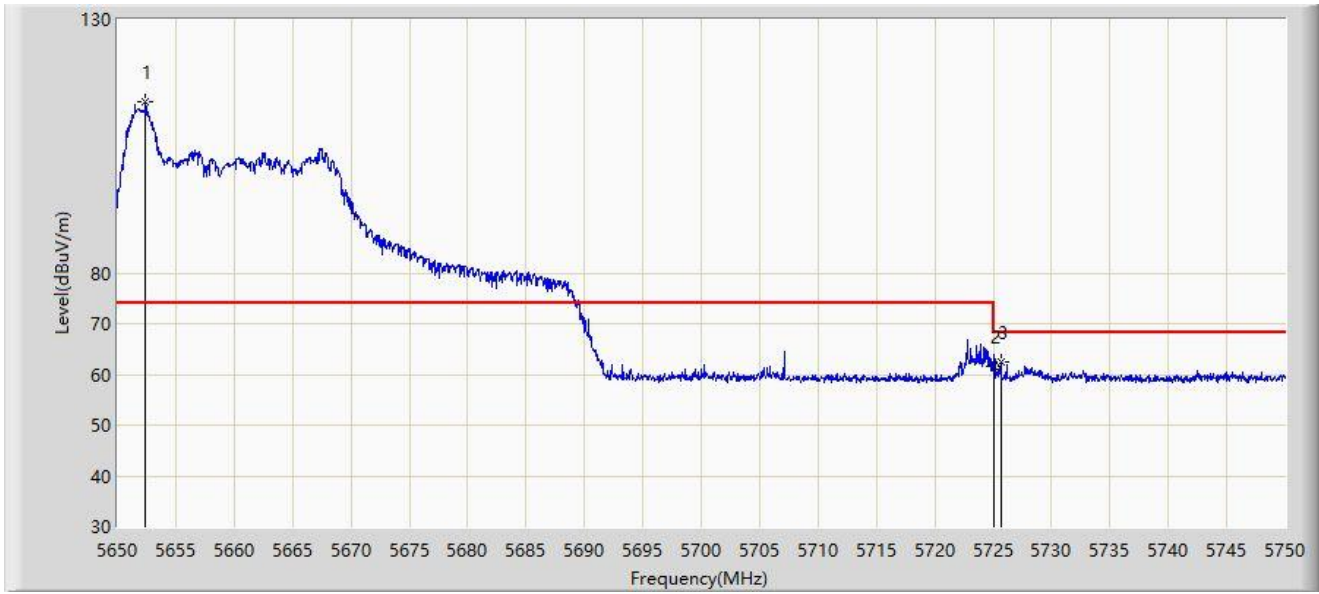


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5652.400	113.650	108.564	N/A	N/A	5.086	PK
2		5725.000	61.476	56.118	-6.724	68.200	5.358	PK
3	*	5725.700	62.336	56.973	-5.864	68.200	5.362	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-31
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-Tone-RU 0 by 5670MHz	

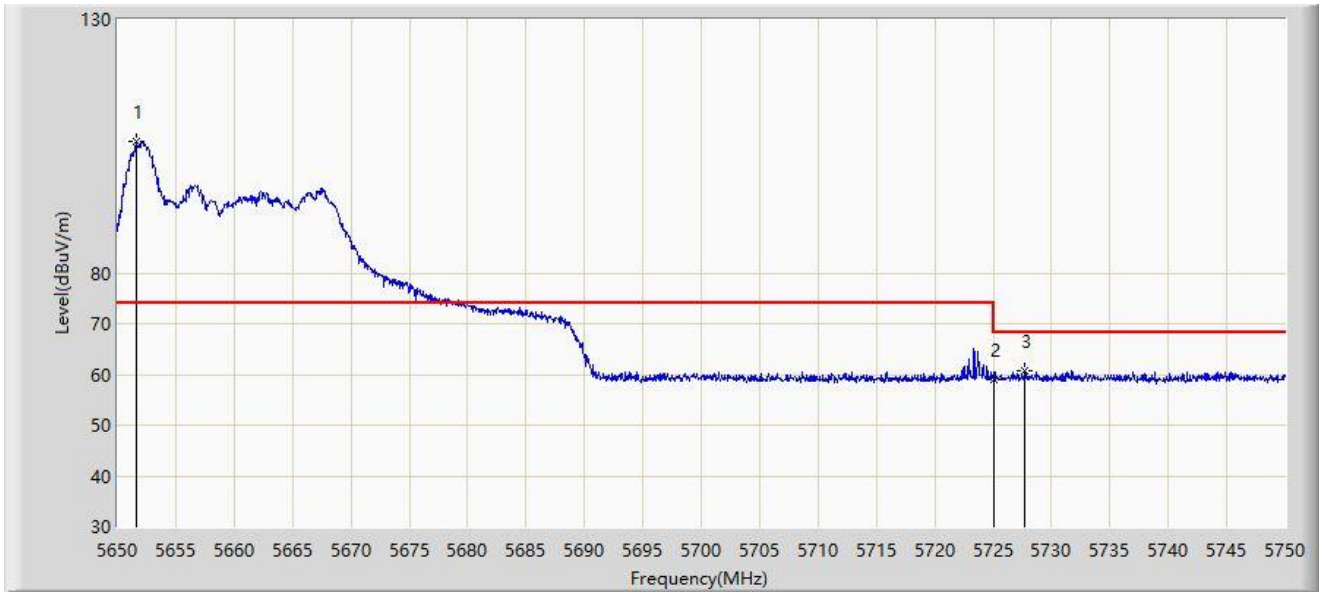


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5651.600	106.042	100.959	N/A	N/A	5.084	PK
2		5725.000	59.128	53.770	-9.072	68.200	5.358	PK
3	*	5727.750	60.630	55.247	-7.570	68.200	5.383	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-31
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-Tone-RU 0 by 5755MHz	

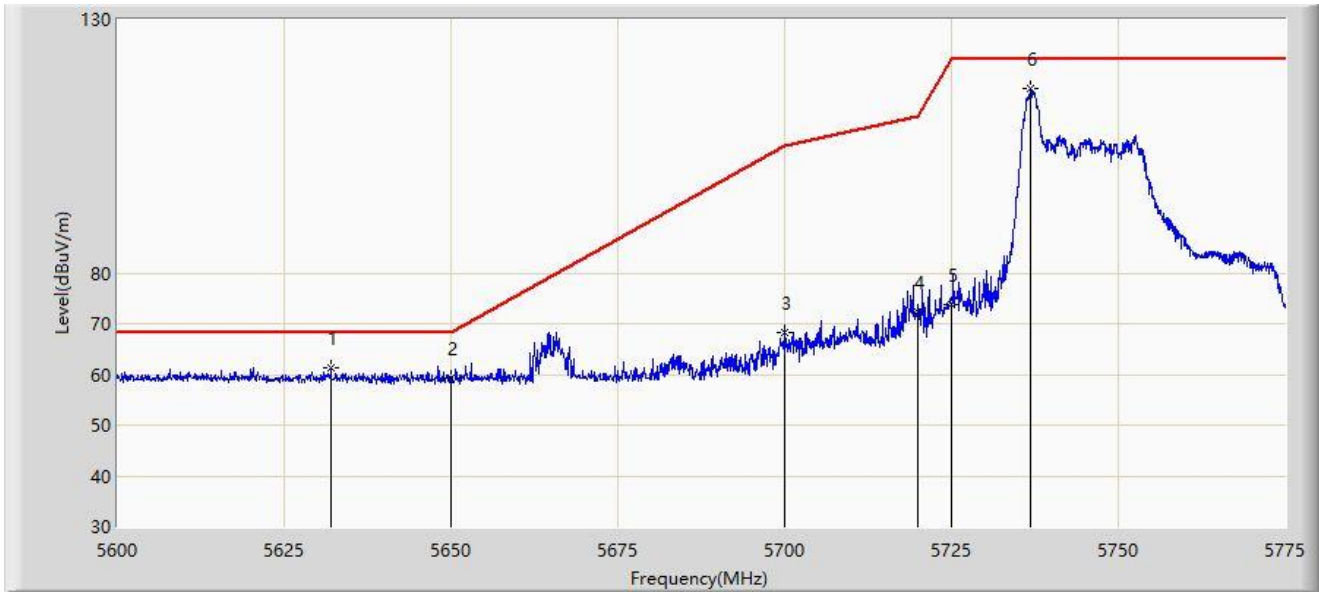


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5632.025	61.236	56.262	-6.964	68.200	4.974	PK
2		5650.000	59.183	54.104	-9.017	68.200	5.080	PK
3		5700.000	68.165	62.780	-37.035	105.200	5.385	PK
4		5720.000	72.329	67.004	-38.471	110.800	5.325	PK
5		5725.000	73.634	68.276	-48.566	122.200	5.358	PK
6		5736.763	116.255	110.780	N/A	N/A	5.474	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-31
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-Tone-RU 0 by 5755MHz	

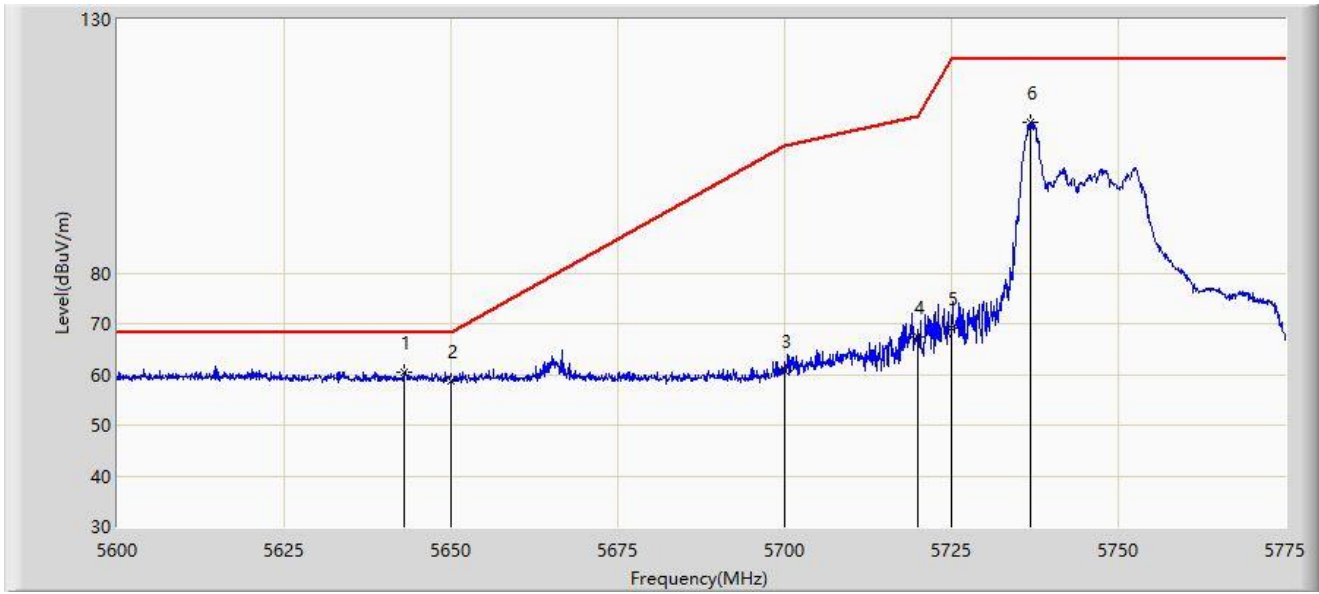


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5643.050	60.376	55.316	-7.824	68.200	5.060	PK
2		5650.000	58.685	53.606	-9.515	68.200	5.080	PK
3		5700.000	60.805	55.420	-44.395	105.200	5.385	PK
4		5720.000	67.322	61.997	-43.478	110.800	5.325	PK
5		5725.000	69.040	63.682	-53.160	122.200	5.358	PK
6		5736.937	109.745	104.269	N/A	N/A	5.476	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-31
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-Tone-RU 0 by 5795MHz	

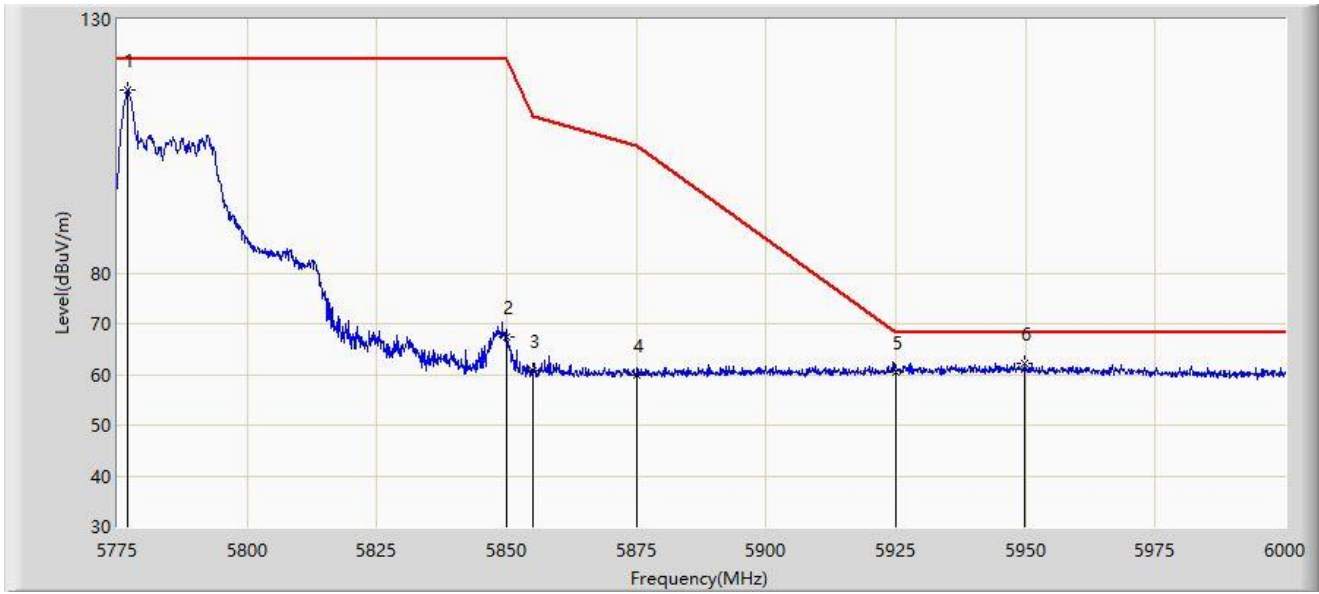


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5776.913	116.072	110.508	N/A	N/A	5.564	PK
2		5850.000	67.527	61.643	-54.673	122.200	5.885	PK
3		5855.000	60.830	54.934	-49.970	110.800	5.896	PK
4		5875.000	59.875	53.906	-45.325	105.200	5.968	PK
5		5925.000	60.478	54.114	-7.722	68.200	6.365	PK
6	*	5949.825	62.318	55.776	-5.882	68.200	6.542	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-31
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-Tone-RU 0 by 5795MHz	

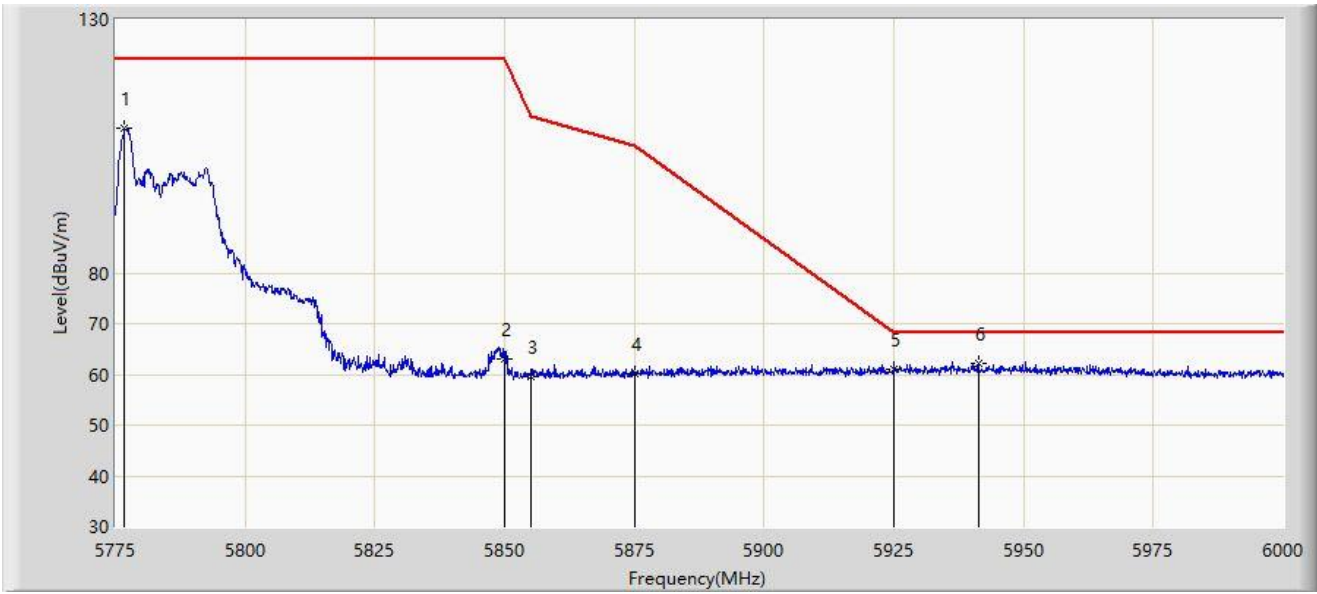


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5776.800	108.684	103.120	N/A	N/A	5.565	PK
2		5850.000	63.163	57.279	-59.037	122.200	5.885	PK
3		5855.000	59.679	53.783	-51.121	110.800	5.896	PK
4		5875.000	60.266	54.297	-44.934	105.200	5.968	PK
5		5925.000	60.893	54.529	-7.307	68.200	6.365	PK
6	*	5941.275	62.286	55.752	-5.914	68.200	6.535	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-31
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-Tone-RU 8 by 5190MHz	

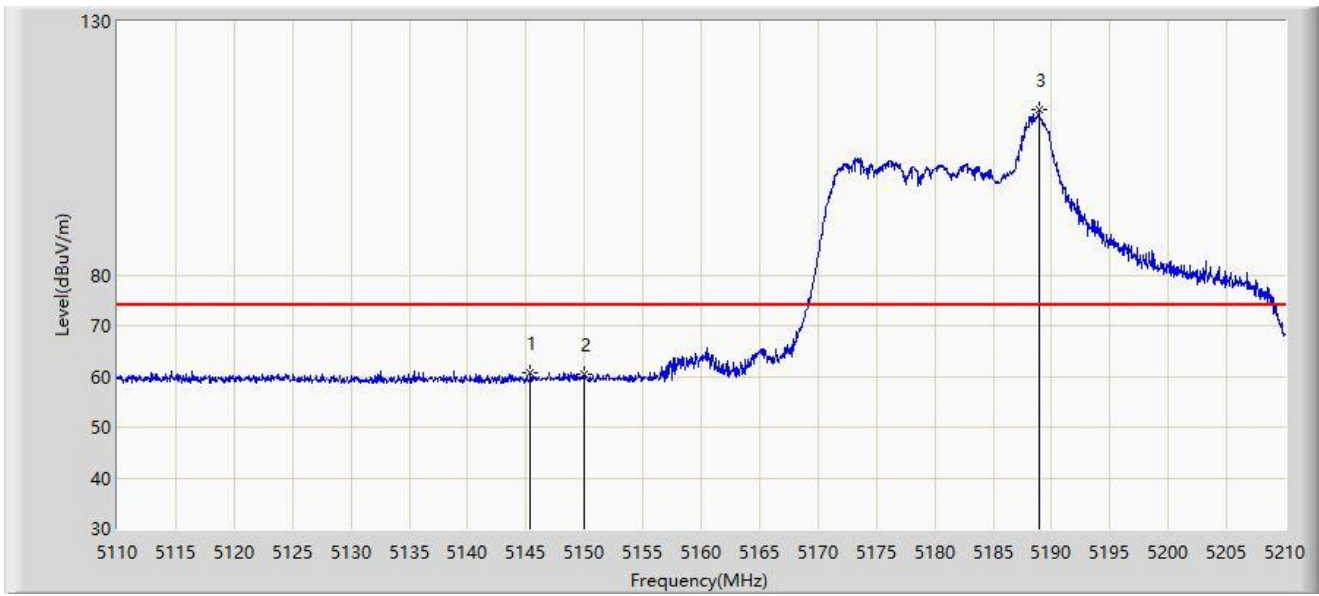


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5145.350	60.670	55.765	-13.330	74.000	4.905	PK
2		5150.000	60.359	55.391	-13.641	74.000	4.967	PK
3		5188.900	112.562	108.112	N/A	N/A	4.451	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-31
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-Tone-RU 8 by 5190MHz	

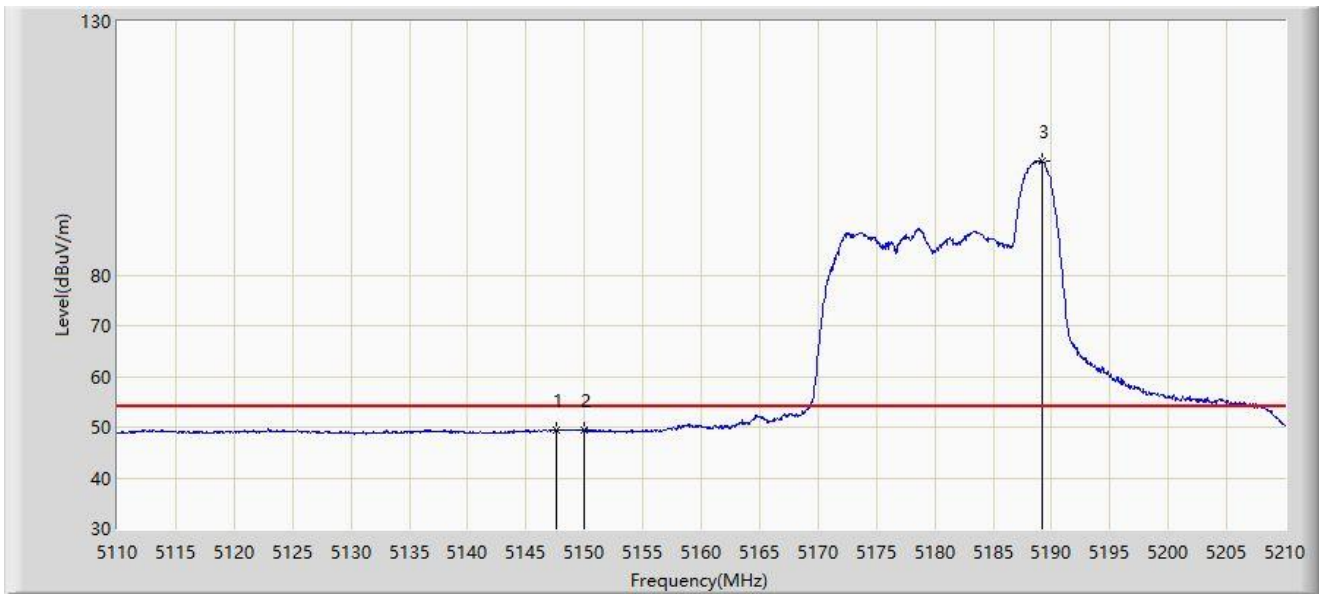


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5147.600	49.563	44.601	-4.437	54.000	4.962	AV
2		5150.000	49.311	44.343	-4.689	54.000	4.967	AV
3		5189.200	102.544	98.094	N/A	N/A	4.450	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-31
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-Tone-RU 8 by 5190MHz	

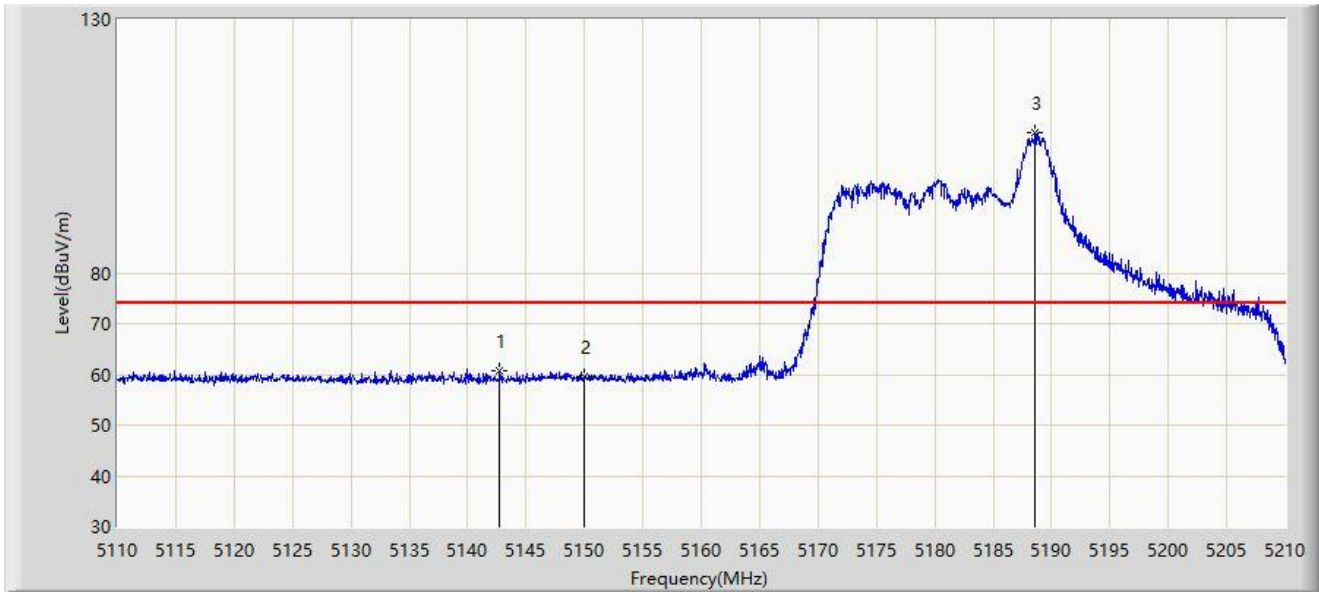


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5142.700	60.720	55.881	-13.280	74.000	4.840	PK
2		5150.000	59.506	54.538	-14.494	74.000	4.967	PK
3		5188.600	107.698	103.247	N/A	N/A	4.451	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-31
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-Tone-RU 8 by 5190MHz	

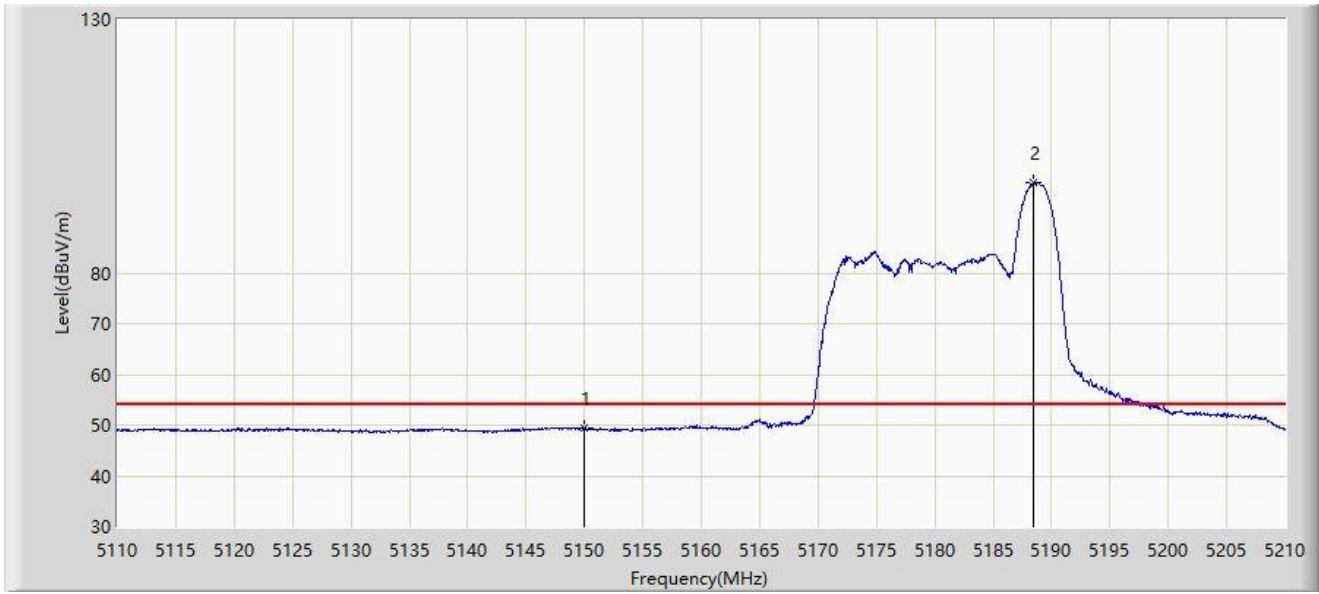


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5150.000	49.448	44.480	-4.552	54.000	4.967	AV
2		5188.450	97.839	93.388	N/A	N/A	4.451	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-31
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-Tone-RU 8 by 5310MHz	

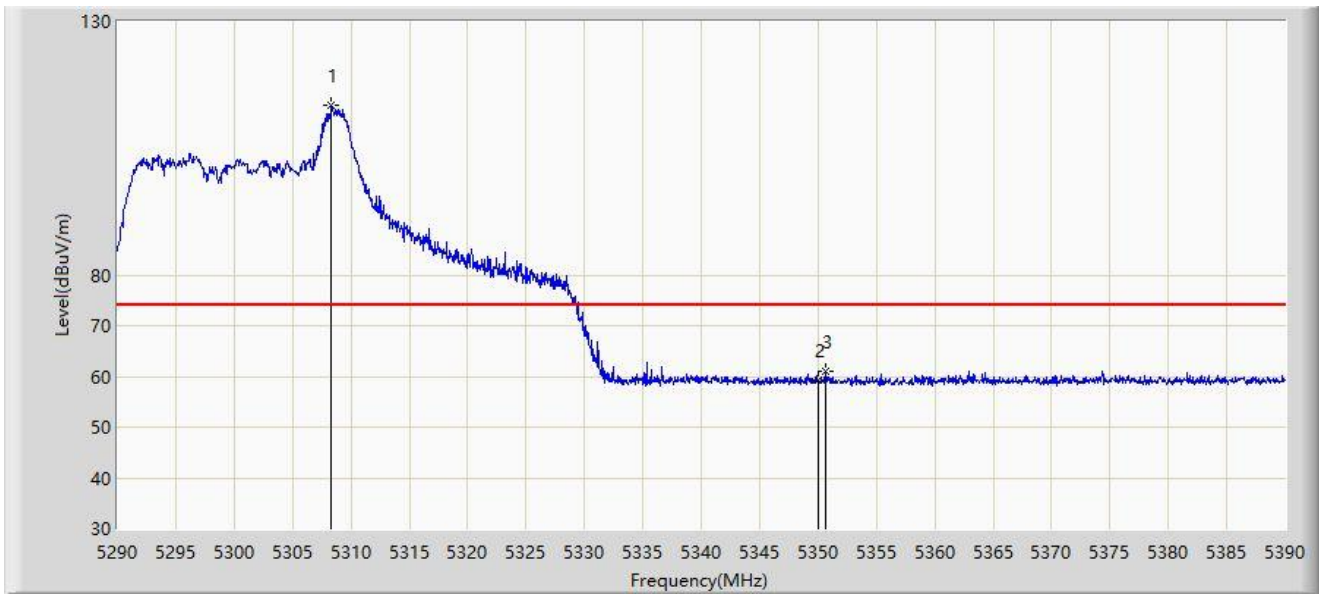


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5308.350	113.339	108.707	N/A	N/A	4.632	PK
2		5350.000	59.280	54.861	-14.720	74.000	4.419	PK
3	*	5350.700	60.981	56.564	-13.019	74.000	4.416	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-31
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-Tone-RU 8 by 5310MHz	

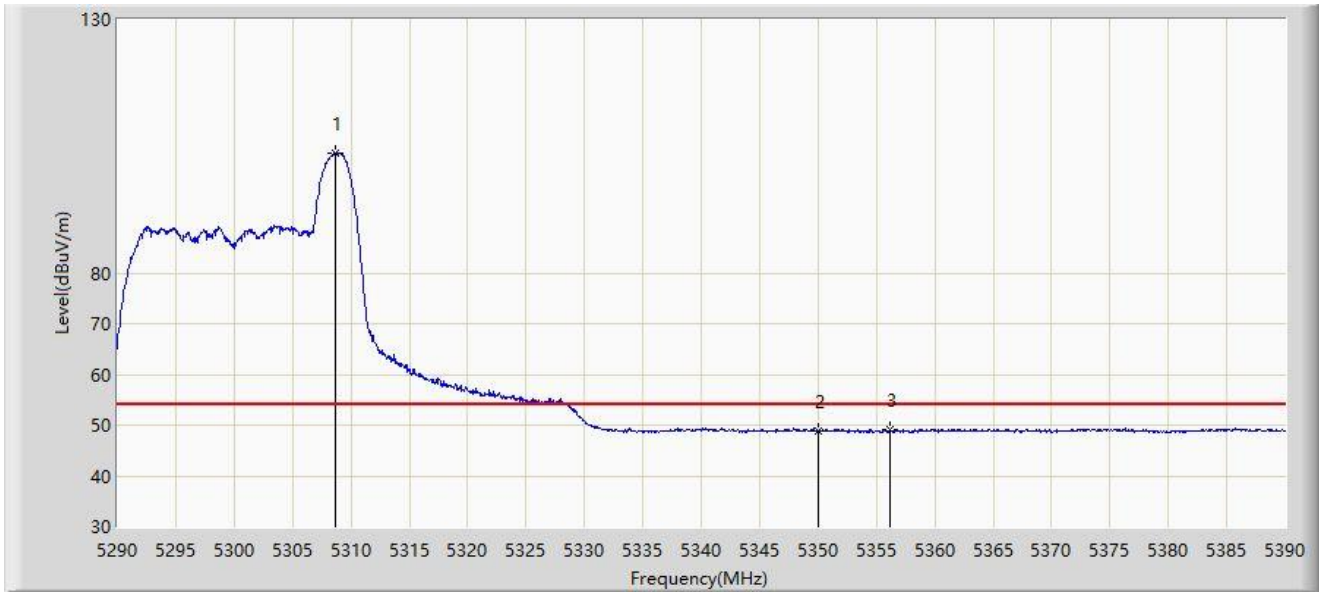


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5308.650	103.675	99.047	N/A	N/A	4.629	AV
2		5350.000	48.968	44.549	-5.032	54.000	4.419	AV
3	*	5356.150	49.118	44.659	-4.882	54.000	4.459	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-31
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-Tone-RU 8 by 5310MHz	

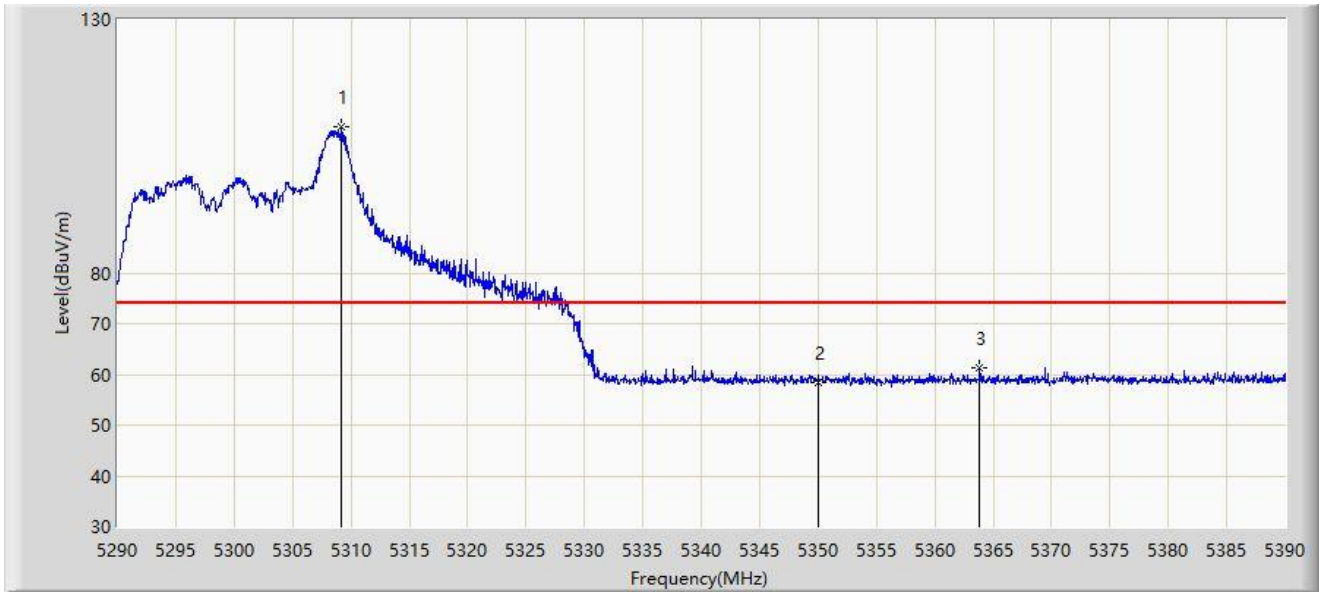


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5309.200	108.735	104.115	N/A	N/A	4.620	PK
2		5350.000	58.400	53.981	-15.600	74.000	4.419	PK
3	*	5363.850	61.395	56.849	-12.605	74.000	4.546	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-31
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-Tone-RU 8 by 5310MHz	

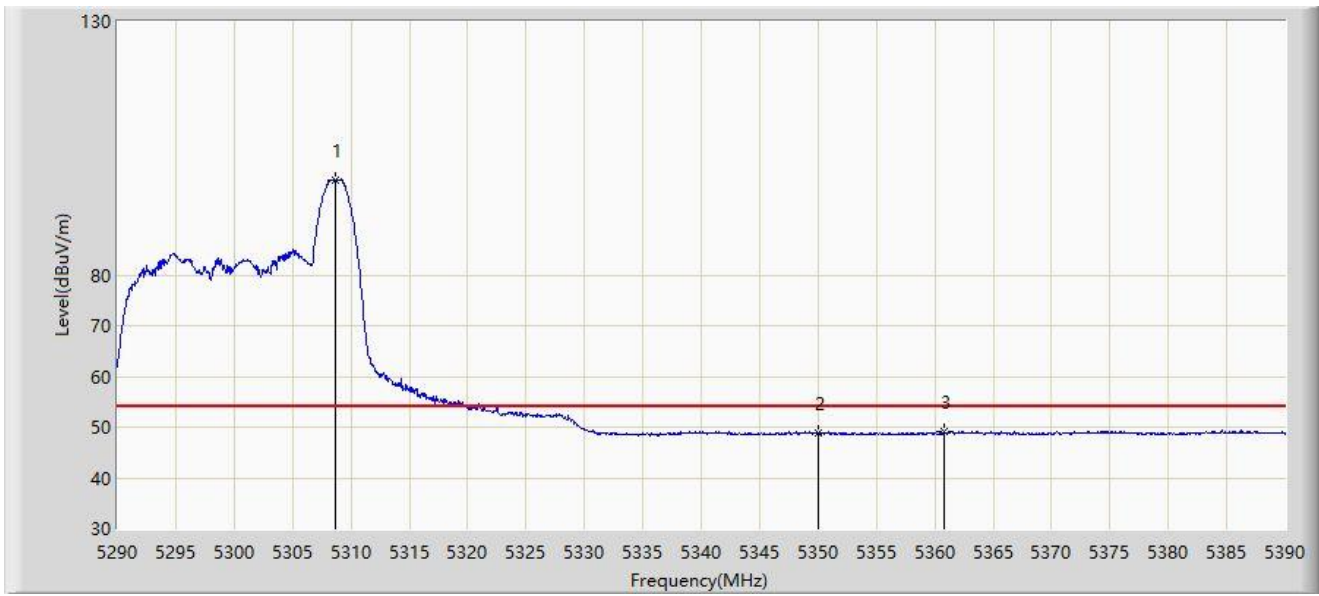


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5308.700	98.837	94.210	N/A	N/A	4.628	AV
2		5350.000	48.867	44.448	-5.133	54.000	4.419	AV
3	*	5360.750	49.127	44.616	-4.873	54.000	4.511	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-31
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-Tone-RU 8 by 5510MHz	

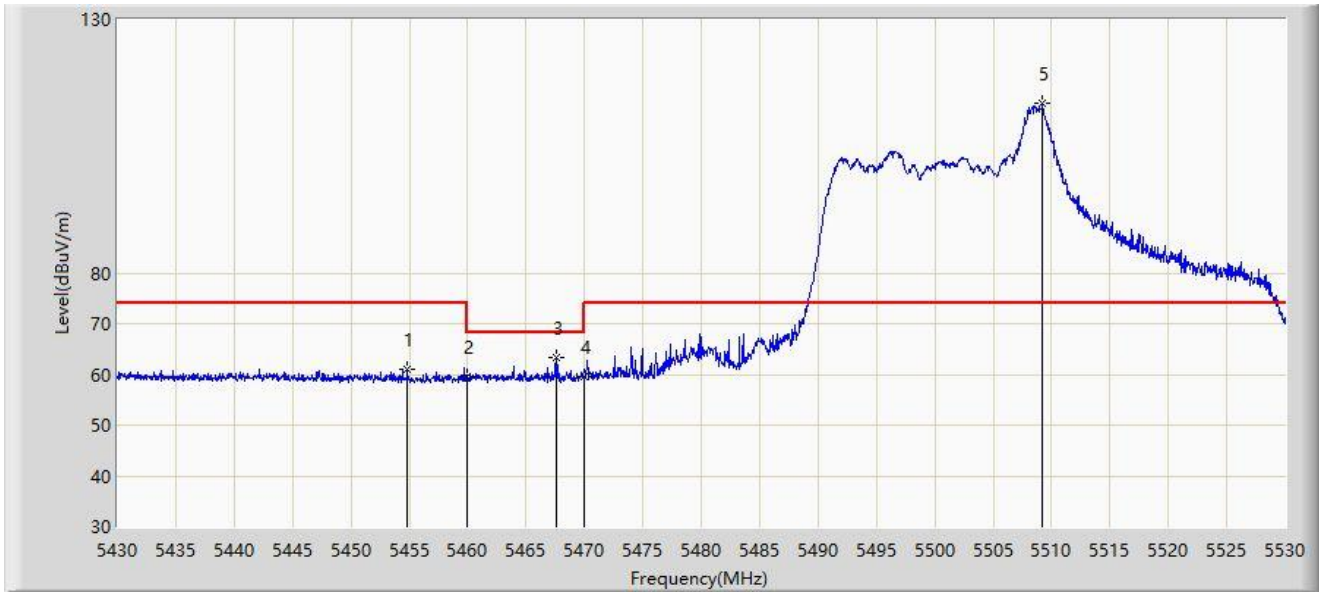


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5454.800	60.966	56.295	-13.034	74.000	4.671	PK
2		5460.000	59.500	54.784	-14.500	74.000	4.716	PK
3	*	5467.550	63.320	58.540	-4.880	68.200	4.781	PK
4		5470.000	59.569	54.768	-8.631	68.200	4.801	PK
5		5509.200	113.449	108.648	N/A	N/A	4.801	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-31
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-Tone-RU 8 by 5510MHz	

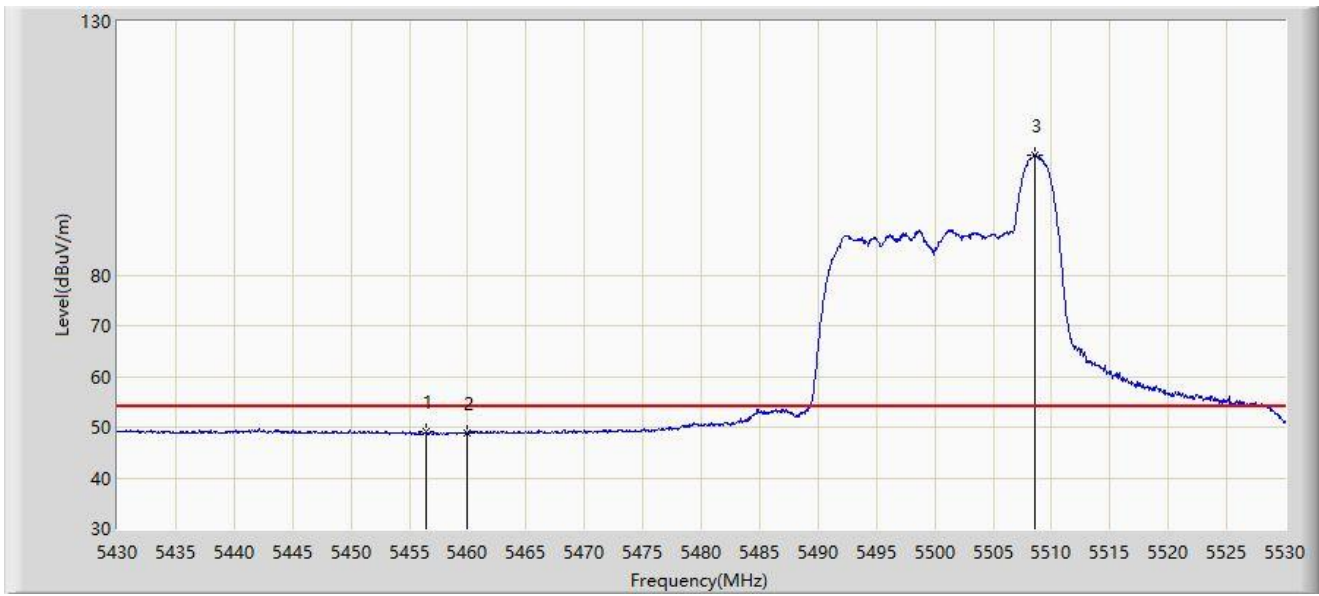


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5456.450	49.044	44.359	-4.956	54.000	4.685	AV
2		5460.000	48.828	44.112	-5.172	54.000	4.716	AV
3		5508.550	103.624	98.801	N/A	N/A	4.823	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-31
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-Tone-RU 8 by 5510MHz	

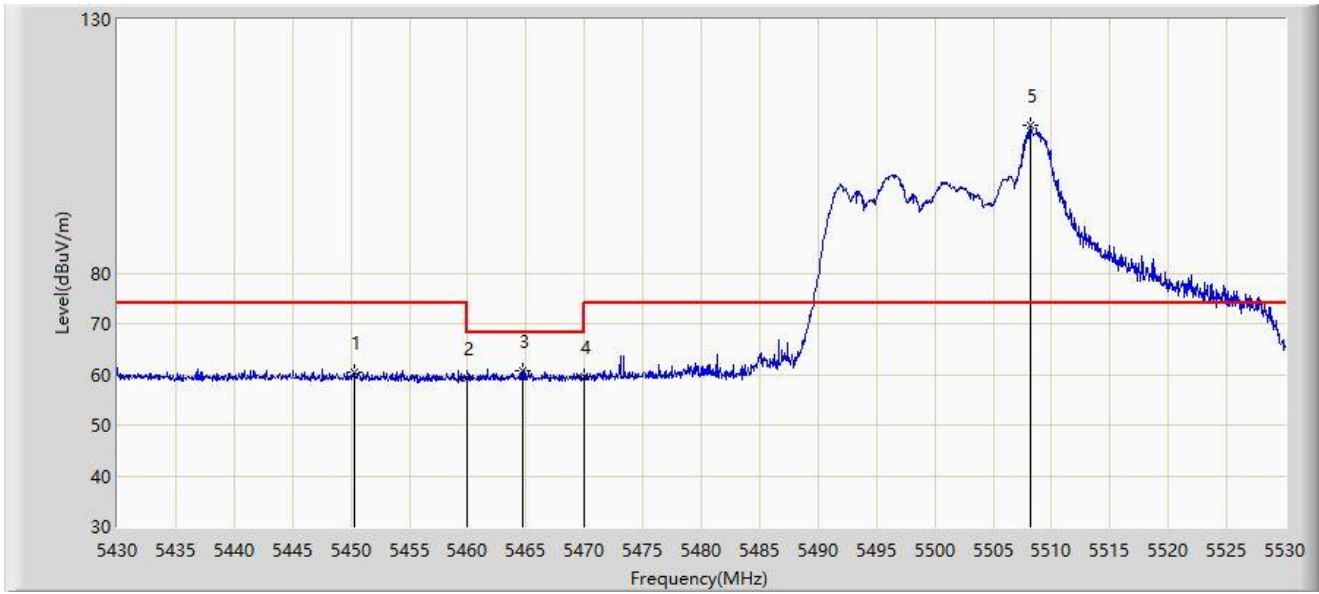


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5450.300	60.484	55.753	-13.516	74.000	4.730	PK
2		5460.000	59.225	54.509	-14.775	74.000	4.716	PK
3	*	5464.750	60.789	56.033	-7.411	68.200	4.756	PK
4		5470.000	59.609	54.808	-8.591	68.200	4.801	PK
5		5508.250	109.080	104.247	N/A	N/A	4.833	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-31
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-Tone-RU 8 by 5510MHz	

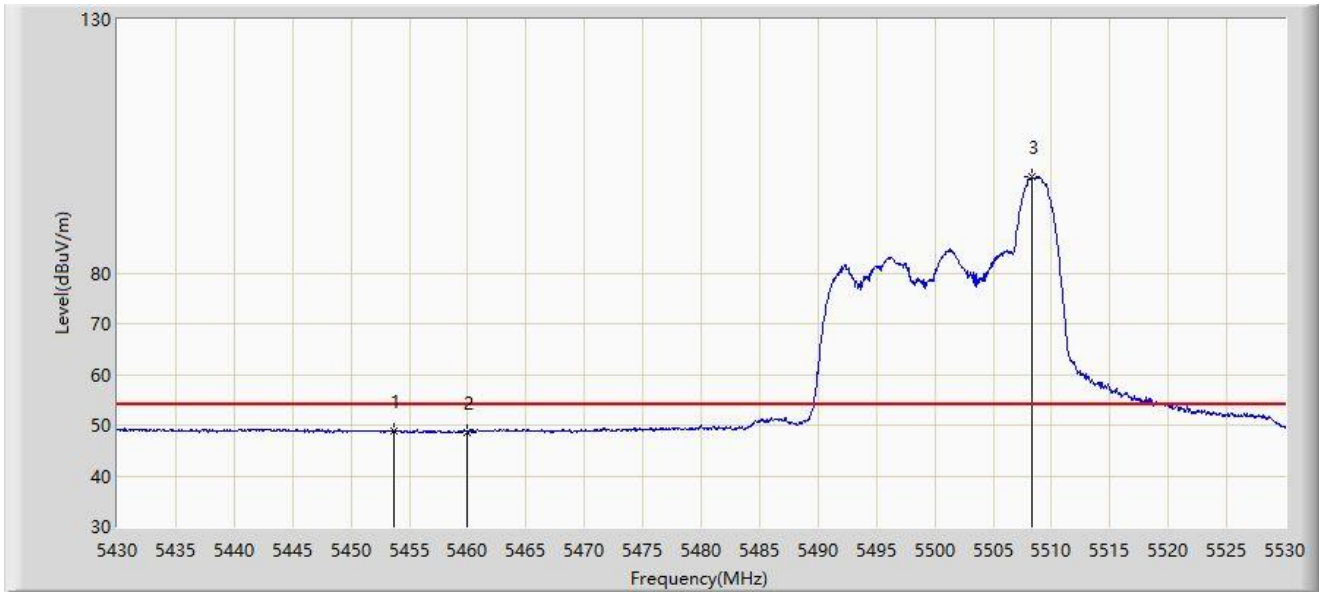


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5453.650	48.813	44.143	-5.187	54.000	4.670	AV
2		5460.000	48.615	43.899	-5.385	54.000	4.716	AV
3		5508.300	98.891	94.060	N/A	N/A	4.830	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_Part15_Band Edge(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-26 Tone-RU 8 by 5670MHz	

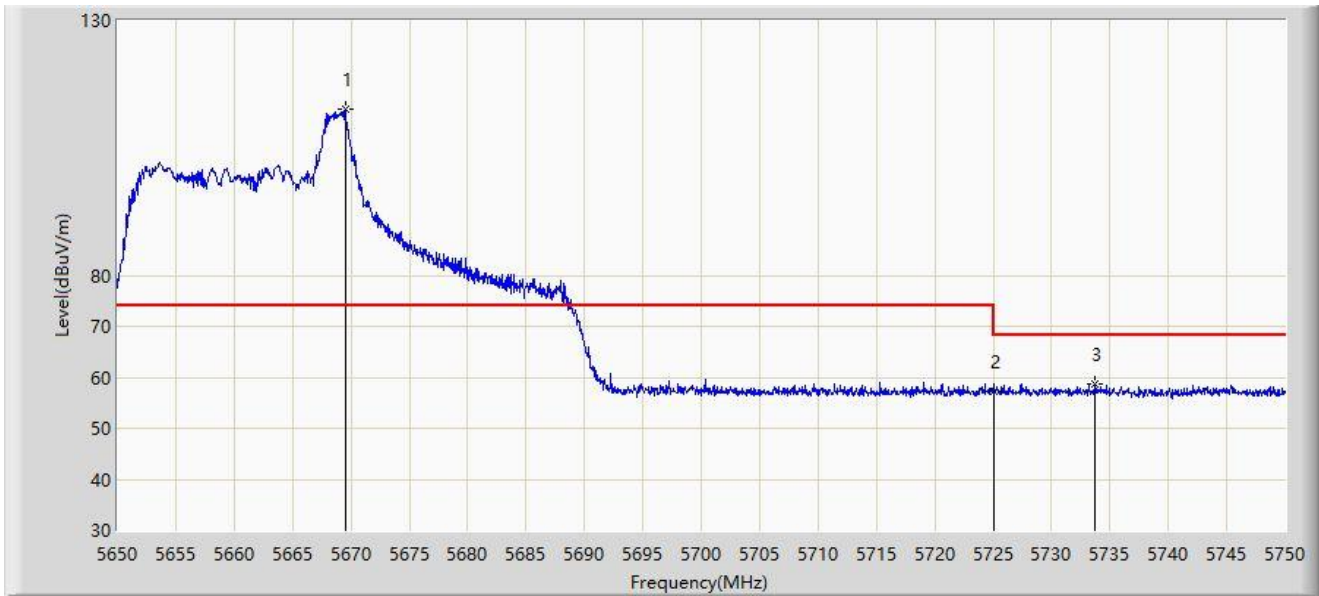


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5669.500	112.542	107.467	N/A	N/A	5.075	PK
2		5725.000	57.102	51.744	-11.098	68.200	5.358	PK
3	*	5733.750	58.686	53.242	-9.514	68.200	5.445	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_Part15_Band Edge(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-26 Tone-RU 8 by 5670MHz	

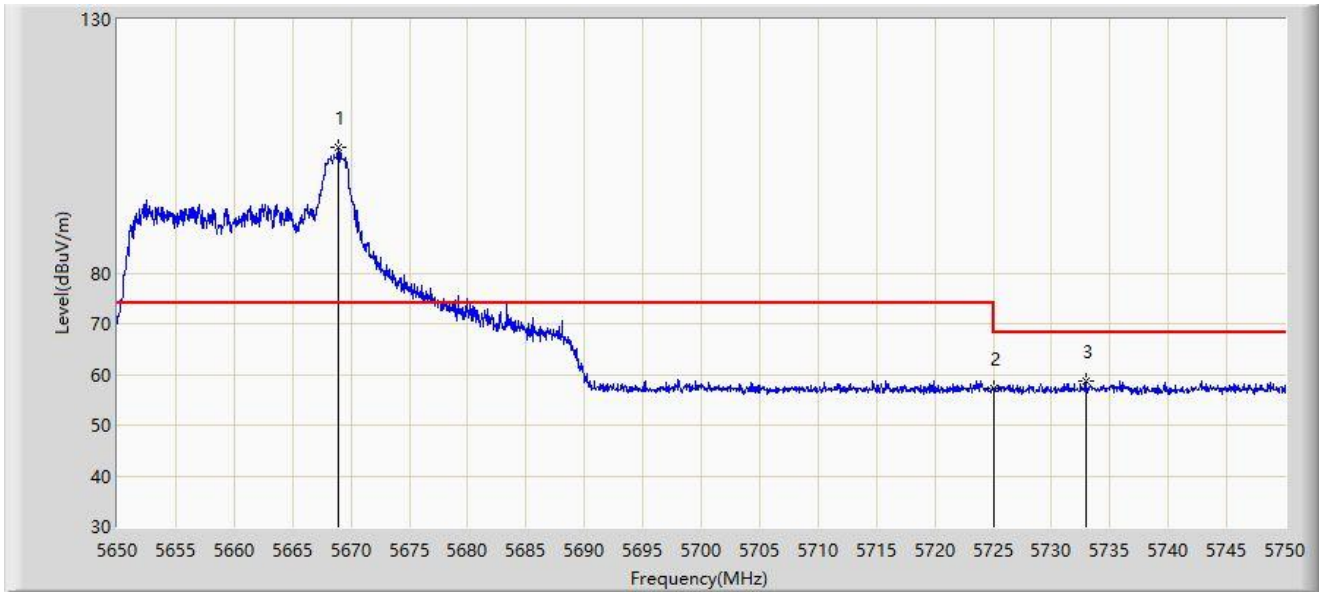


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5668.950	104.786	99.709	N/A	N/A	5.077	PK
2		5725.000	57.158	51.800	-11.042	68.200	5.358	PK
3	*	5732.950	58.755	53.319	-9.445	68.200	5.436	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-26 Tone-RU 8 by 5755MHz	

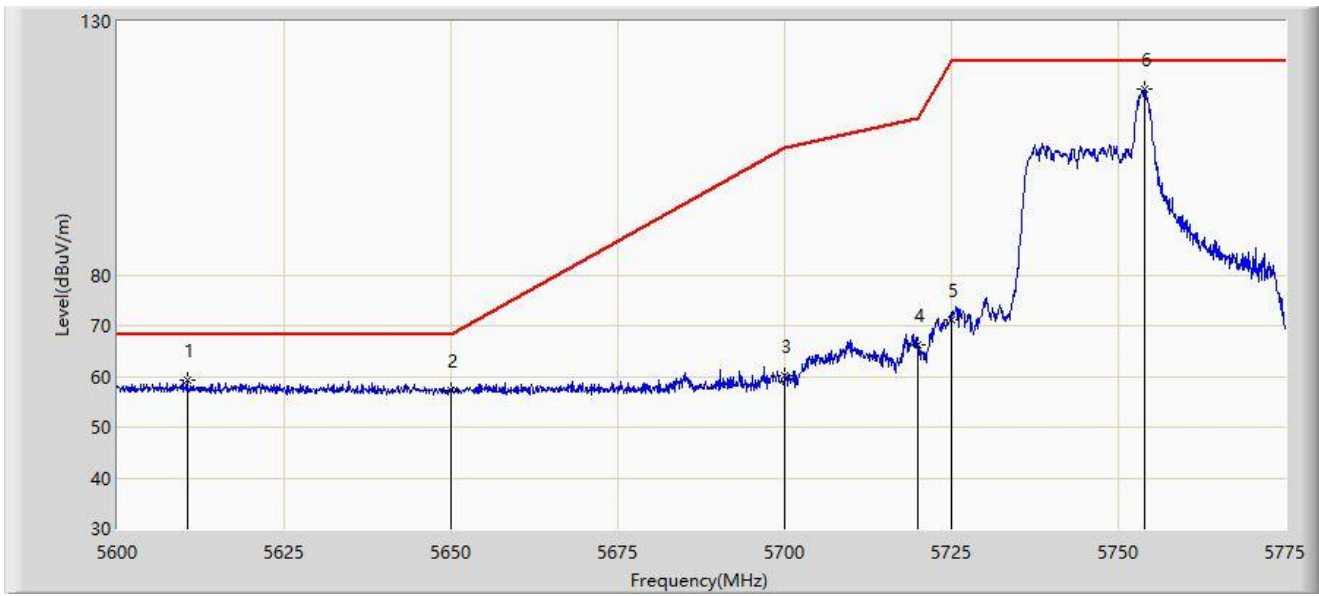


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5610.500	59.245	54.318	-8.955	68.200	4.927	PK
2		5650.000	57.223	52.144	-10.977	68.200	5.080	PK
3		5700.000	60.285	54.900	-44.915	105.200	5.385	PK
4		5720.000	66.092	60.767	-44.708	110.800	5.325	PK
5		5725.000	71.040	65.682	-51.160	122.200	5.358	PK
6		5753.913	116.615	110.983	N/A	N/A	5.632	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-26 Tone-RU 8 by 5755MHz	

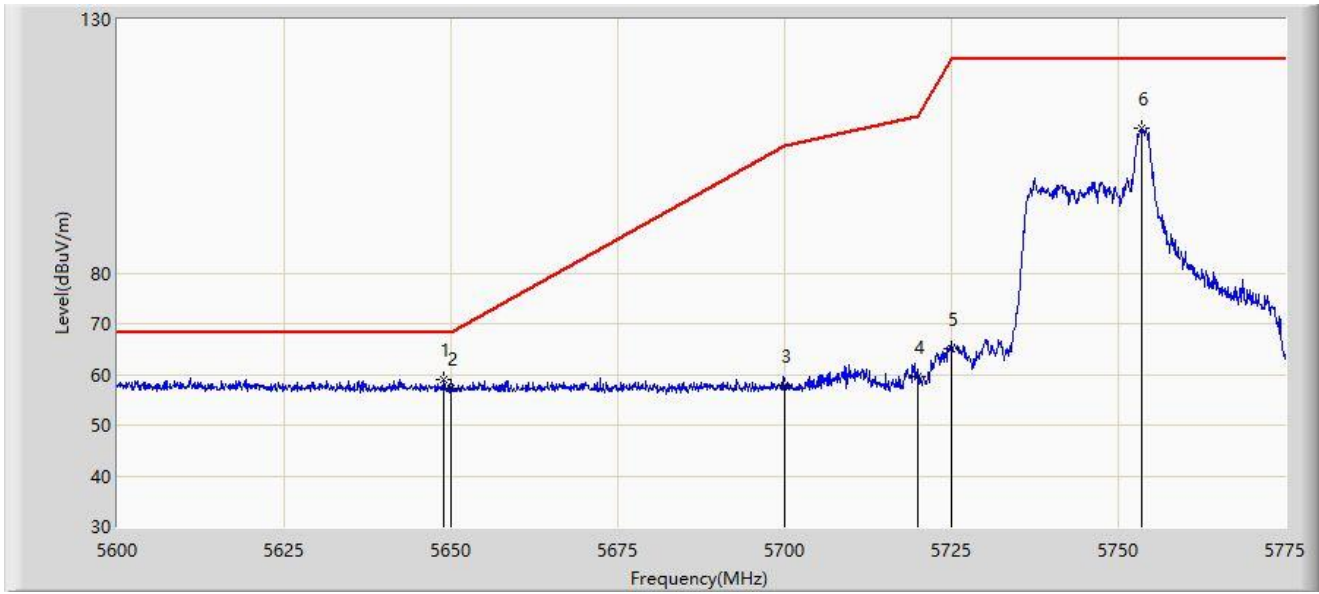


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5649.000	59.078	54.002	-9.122	68.200	5.075	PK
2		5650.000	57.338	52.259	-10.862	68.200	5.080	PK
3		5700.000	57.846	52.461	-47.354	105.200	5.385	PK
4		5720.000	59.463	54.138	-51.337	110.800	5.325	PK
5		5725.000	64.972	59.614	-57.228	122.200	5.358	PK
6		5753.562	108.507	102.878	N/A	N/A	5.629	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-26 Tone-RU 8 by 5795MHz	

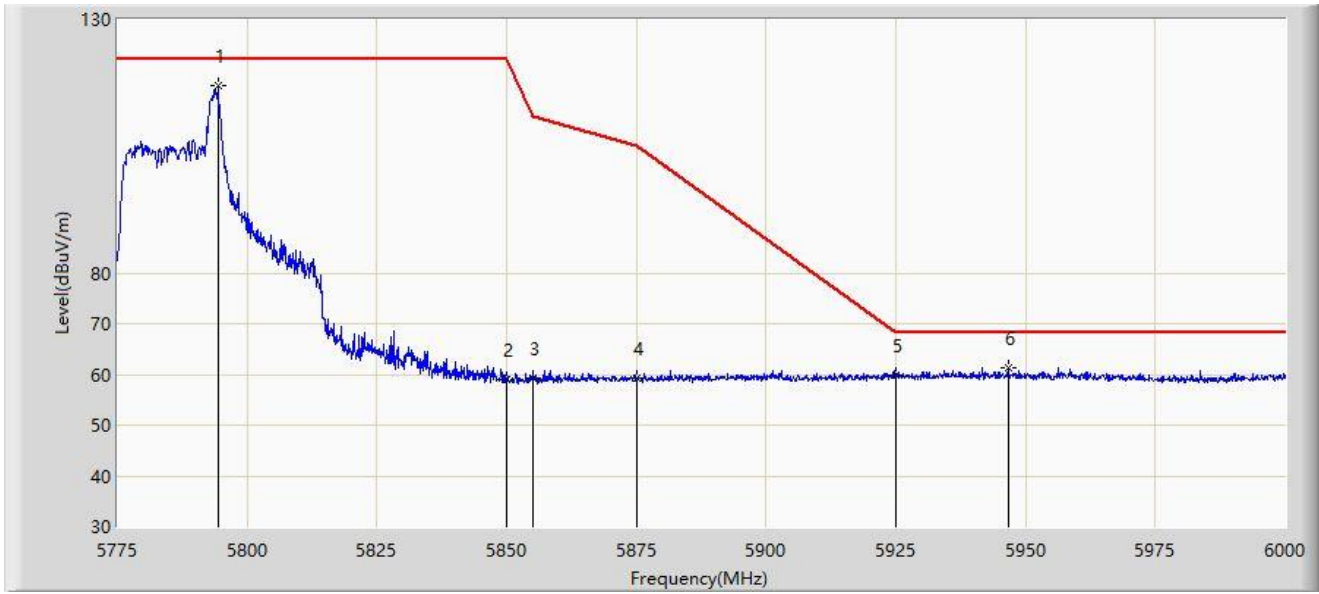


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5794.350	116.831	111.101	N/A	N/A	5.730	PK
2		5850.000	59.061	53.177	-63.139	122.200	5.885	PK
3		5855.000	59.411	53.515	-51.389	110.800	5.896	PK
4		5875.000	59.148	53.179	-46.052	105.200	5.968	PK
5		5925.000	59.902	53.538	-8.298	68.200	6.365	PK
6	*	5946.675	61.436	54.869	-6.764	68.200	6.567	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-26 Tone-RU 8 by 5795MHz	

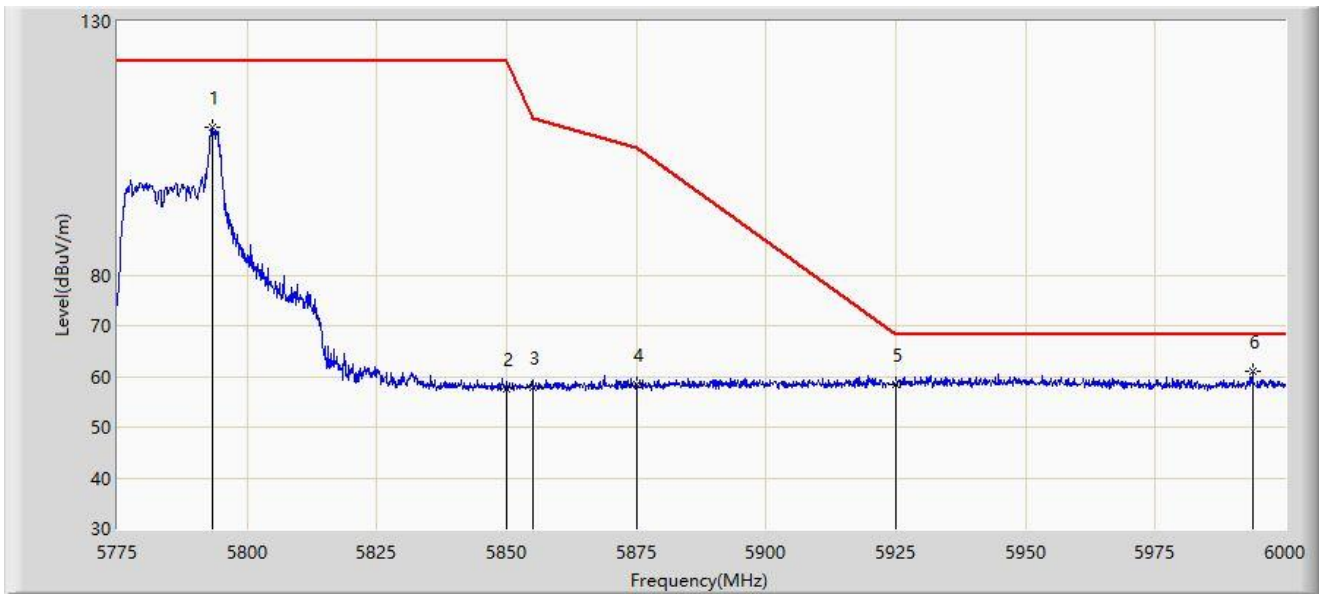


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5793.225	109.107	103.384	N/A	N/A	5.723	PK
2		5850.000	57.571	51.687	-64.629	122.200	5.885	PK
3		5855.000	57.757	51.861	-53.043	110.800	5.896	PK
4		5875.000	58.345	52.376	-46.855	105.200	5.968	PK
5		5925.000	58.358	51.994	-9.842	68.200	6.365	PK
6	*	5993.700	61.101	54.749	-7.099	68.200	6.352	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-26 Tone-RU 17 by 5190MHz	

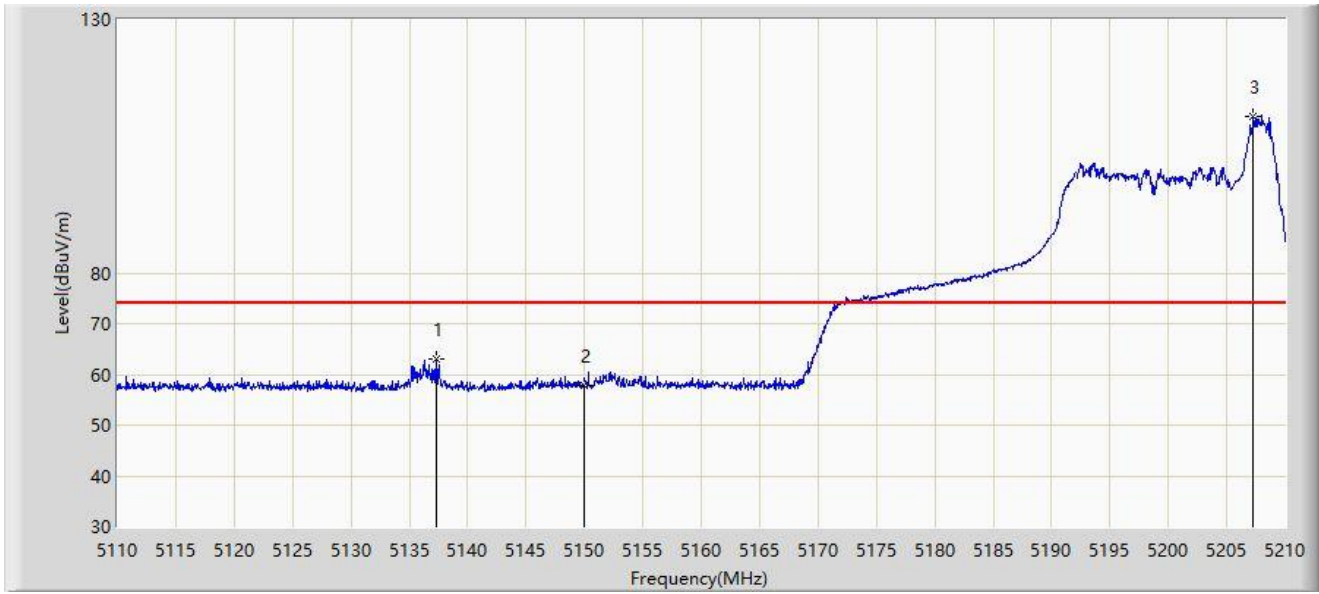


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5137.350	62.910	58.206	-11.090	74.000	4.705	PK
2		5150.000	57.852	52.884	-16.148	74.000	4.967	PK
3		5207.300	110.997	106.318	N/A	N/A	4.680	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-26 Tone-RU 17 by 5190MHz	

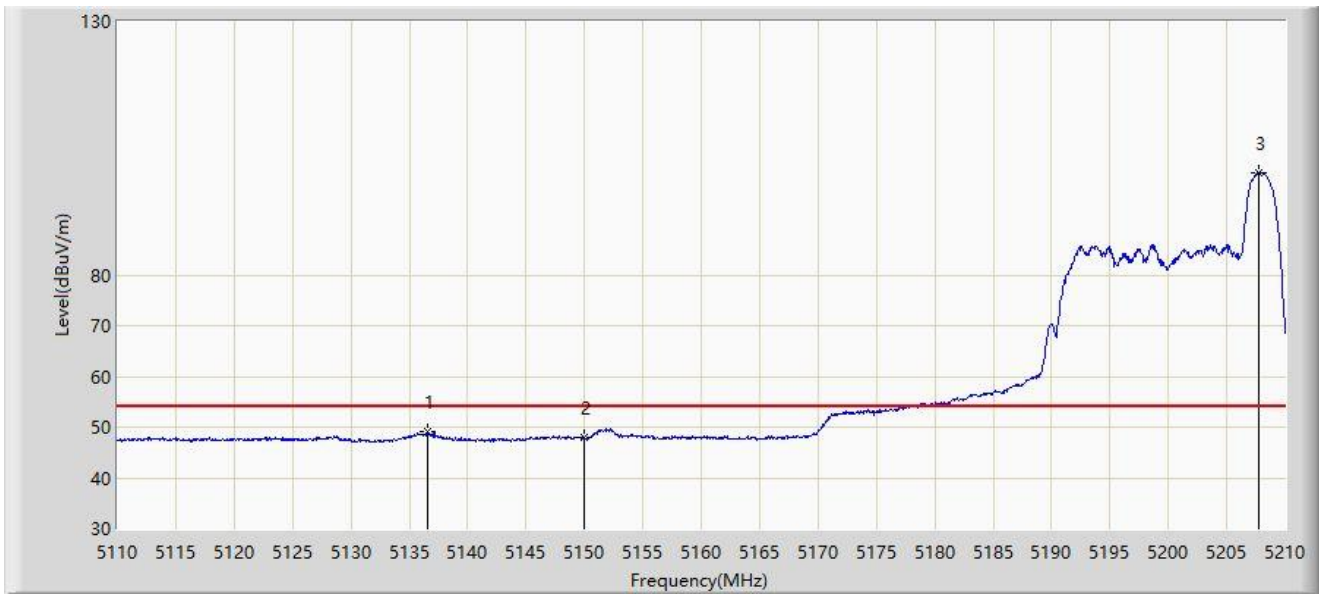


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5136.550	49.131	44.447	-4.869	54.000	4.685	AV
2		5150.000	47.861	42.893	-6.139	54.000	4.967	AV
3		5207.700	100.273	95.581	N/A	N/A	4.691	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-26 Tone-RU 17 by 5190MHz	

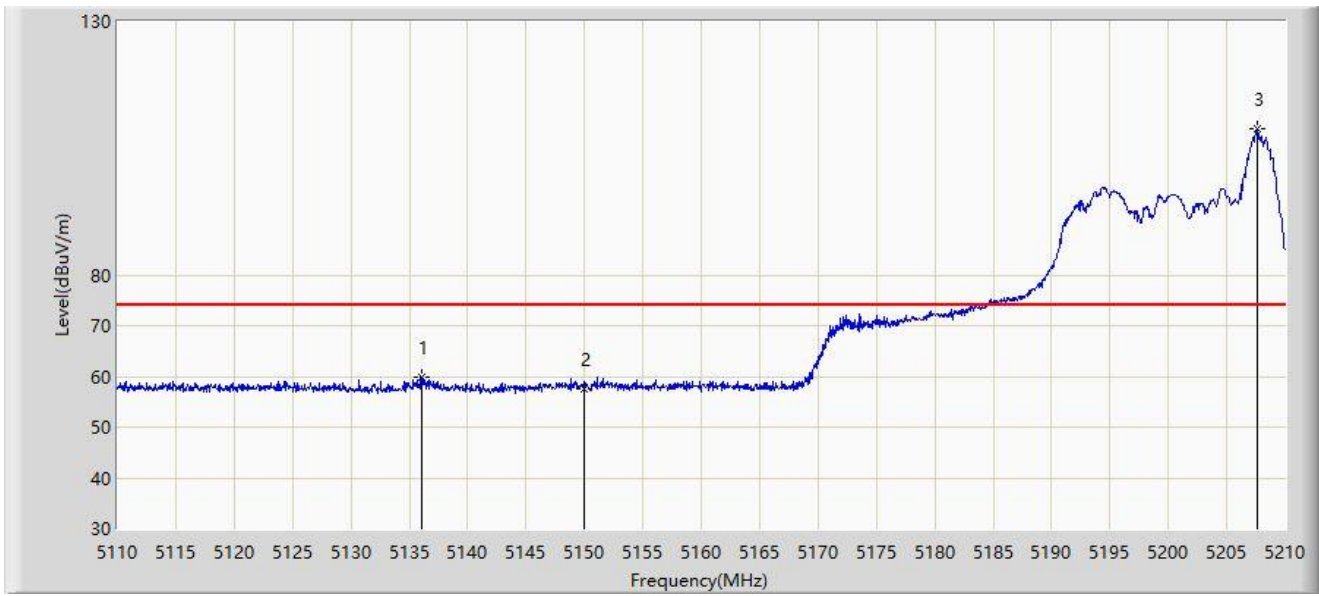


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5136.050	59.965	55.293	-14.035	74.000	4.671	PK
2		5150.000	57.618	52.650	-16.382	74.000	4.967	PK
3		5207.650	108.870	104.180	N/A	N/A	4.690	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-26 Tone-RU 17 by 5190MHz	

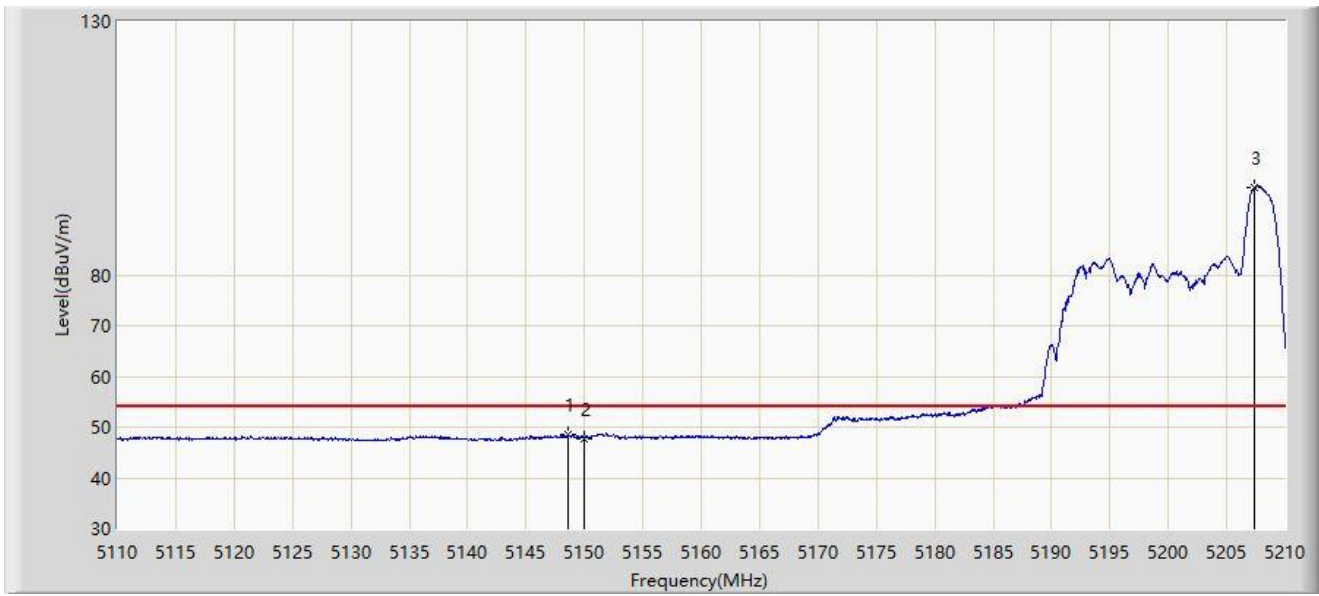


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5148.550	48.454	43.483	-5.546	54.000	4.971	AV
2		5150.000	47.797	42.829	-6.203	54.000	4.967	AV
3		5207.400	97.247	92.565	N/A	N/A	4.683	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-26 Tone-RU 17 by 5310MHz	

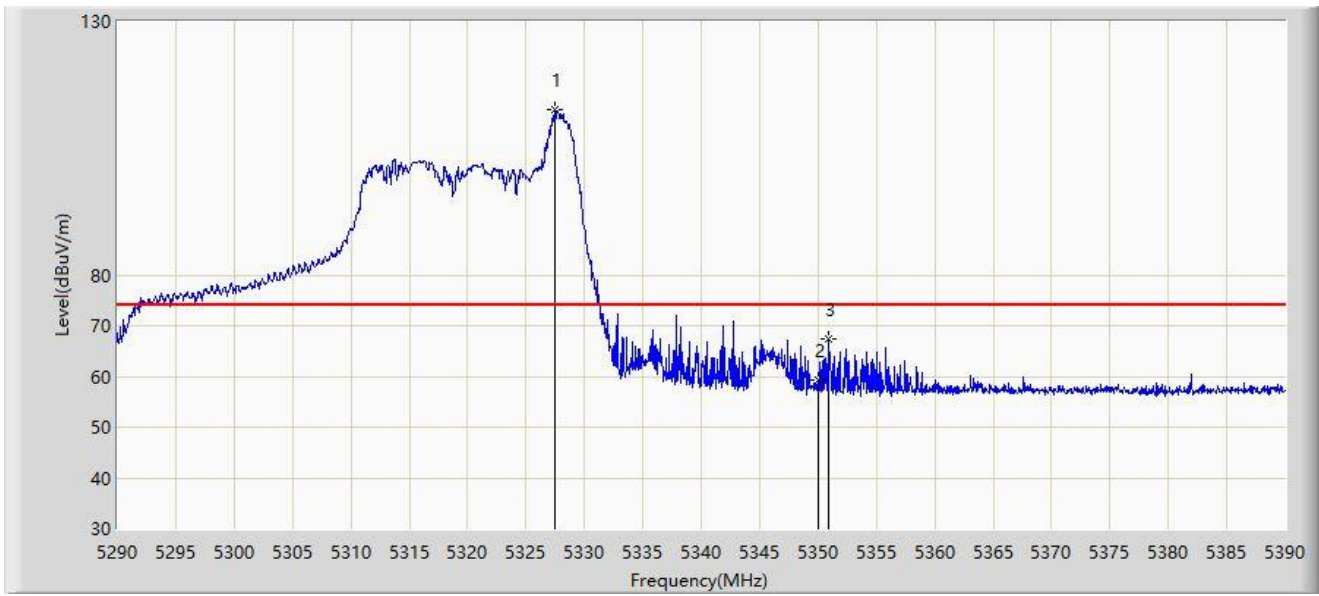


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5327.500	112.714	108.230	N/A	N/A	4.484	PK
2		5350.000	59.242	54.823	-14.758	74.000	4.419	PK
3	*	5350.850	67.494	63.078	-6.506	74.000	4.415	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-26 Tone-RU 17 by 5310MHz	

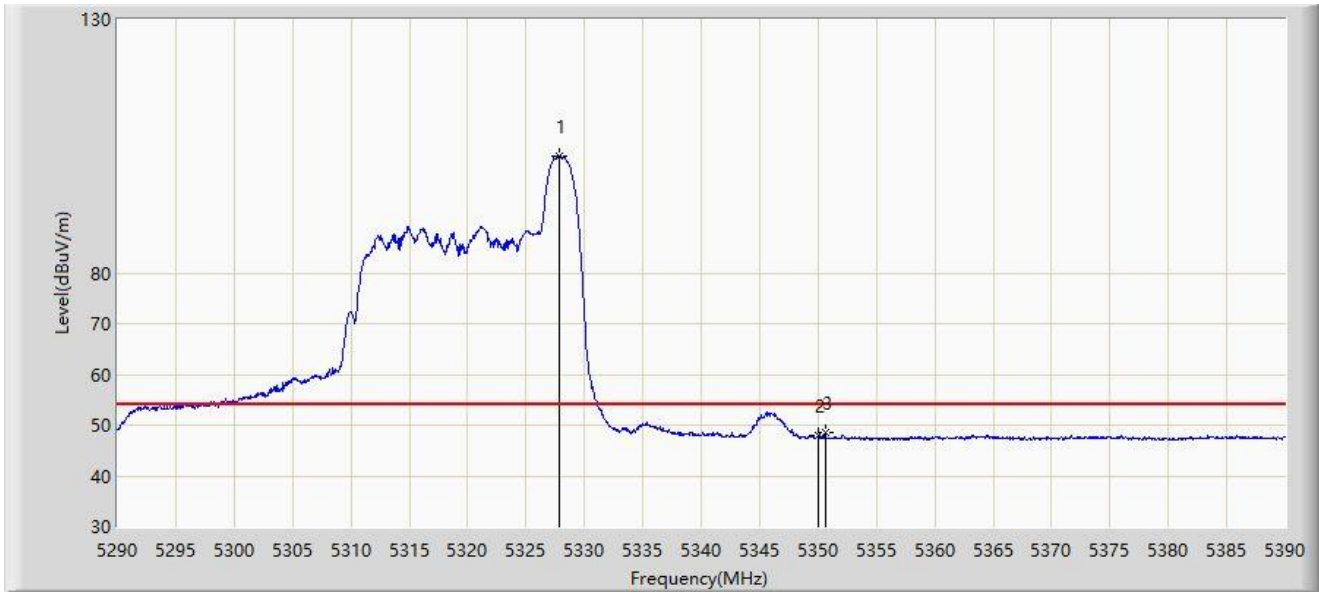


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5327.850	103.171	98.688	N/A	N/A	4.484	AV
2		5350.000	47.876	43.457	-6.124	54.000	4.419	AV
3	*	5350.600	48.470	44.053	-5.530	54.000	4.416	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-26 Tone-RU 17 by 5310MHz	

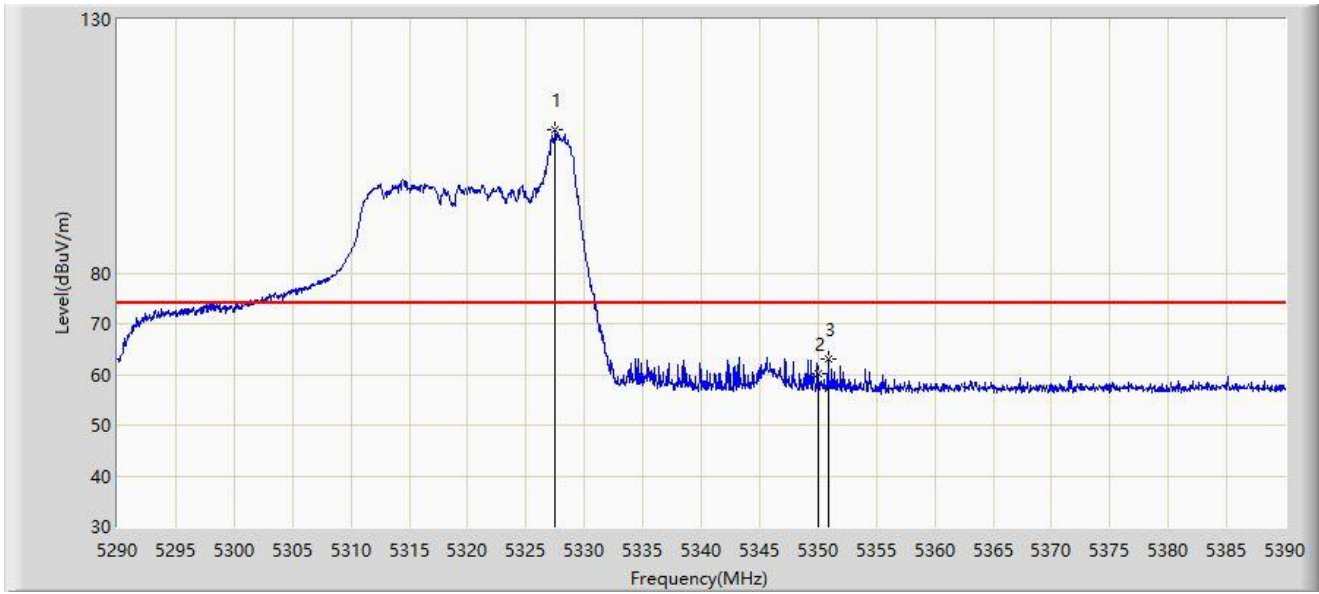


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5327.500	108.260	103.776	N/A	N/A	4.484	PK
2		5350.000	60.173	55.754	-13.827	74.000	4.419	PK
3	*	5350.850	62.985	58.569	-11.015	74.000	4.415	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-26 Tone-RU 17 by 5310MHz	

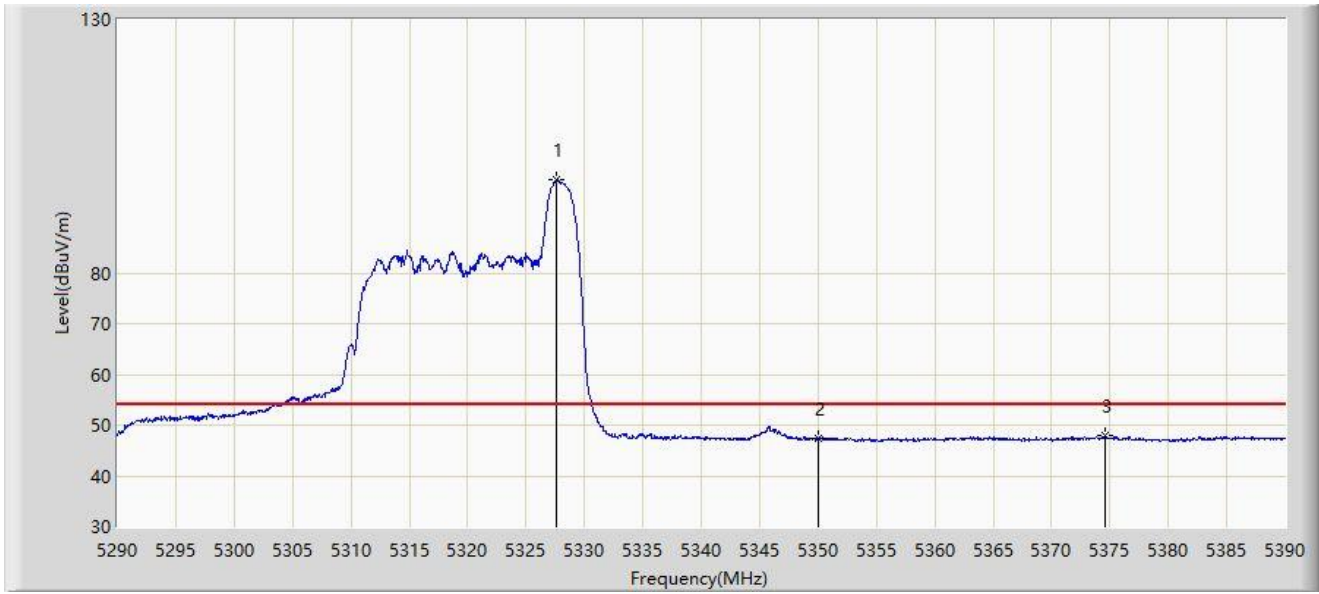


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5327.650	98.321	93.837	N/A	N/A	4.484	AV
2		5350.000	47.261	42.842	-6.739	54.000	4.419	AV
3	*	5374.600	48.009	43.405	-5.991	54.000	4.604	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-26 Tone-RU 17 by 5510MHz	

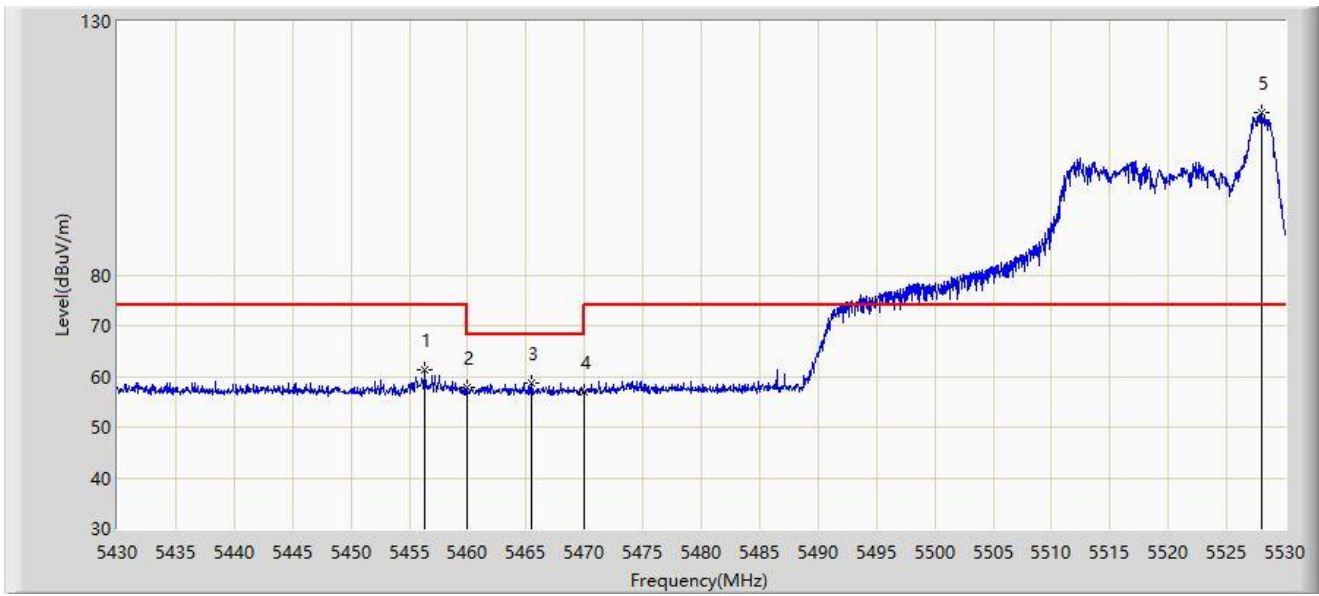


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5456.300	61.206	56.522	-12.794	74.000	4.684	PK
2		5460.000	57.834	53.118	-16.166	74.000	4.716	PK
3	*	5465.500	58.643	53.880	-9.557	68.200	4.762	PK
4		5470.000	56.862	52.061	-11.338	68.200	4.801	PK
5		5528.050	112.154	107.622	N/A	N/A	4.533	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-26 Tone-RU 17 by 5510MHz	

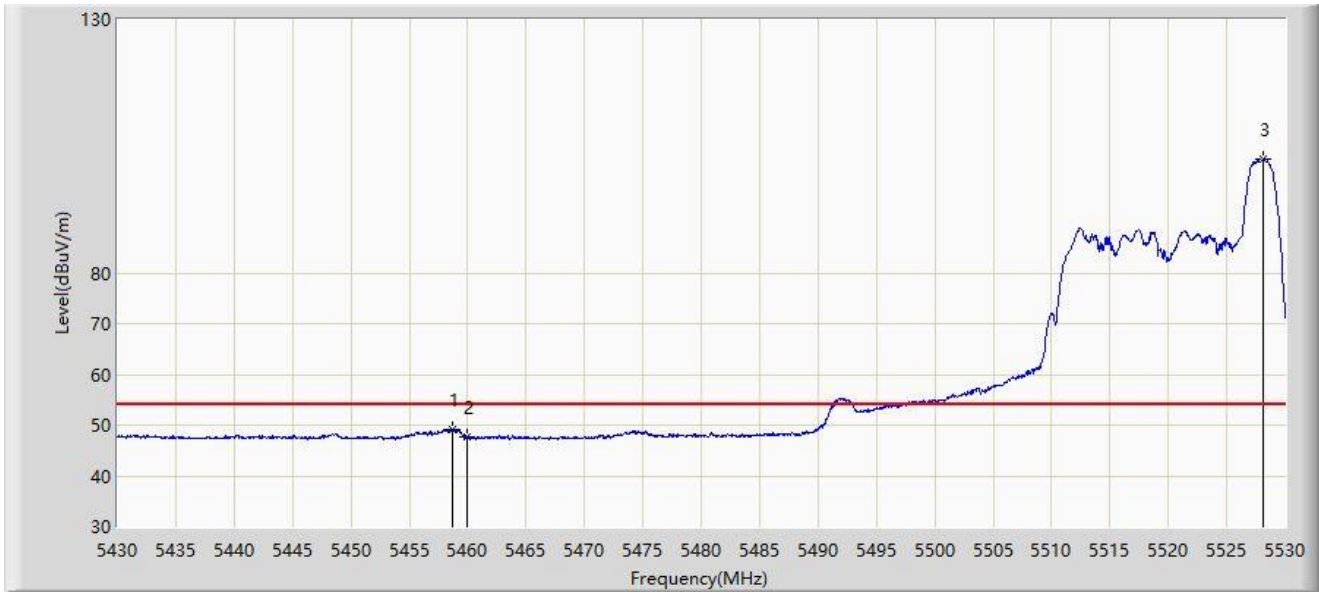


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5458.700	49.256	44.552	-4.744	54.000	4.705	AV
2		5460.000	47.589	42.873	-6.411	54.000	4.716	AV
3		5528.150	102.549	98.014	N/A	N/A	4.535	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-26 Tone-RU 17 by 5510MHz	

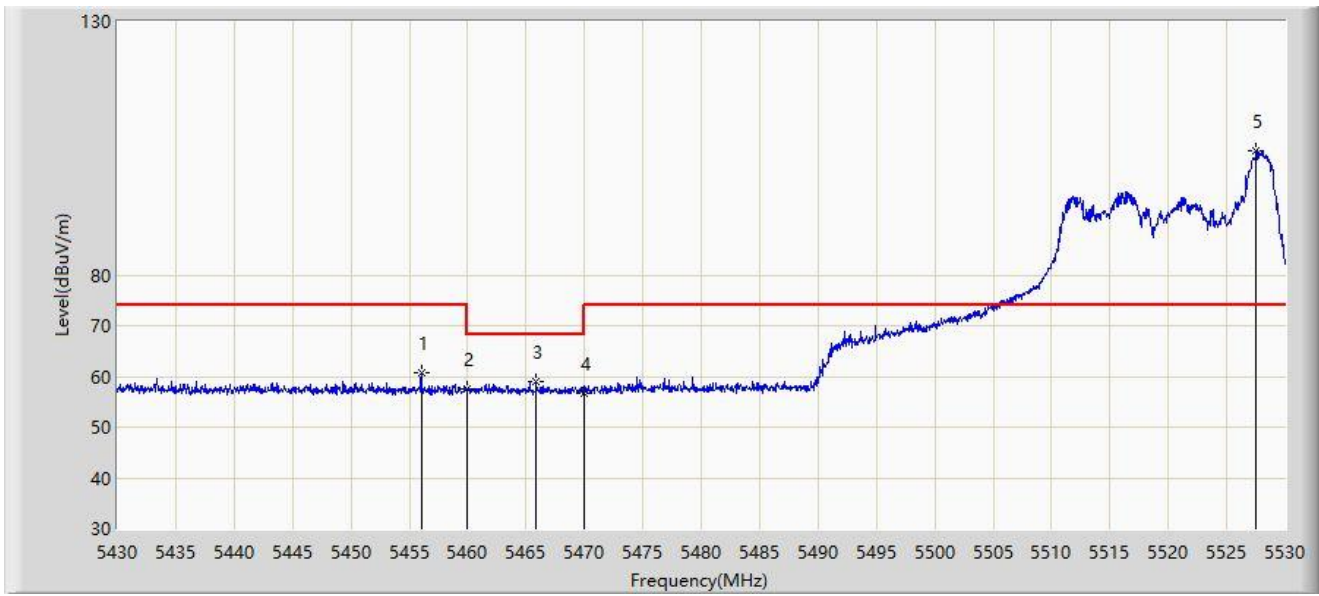


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5456.050	60.842	56.160	-13.158	74.000	4.682	PK
2		5460.000	57.446	52.730	-16.554	74.000	4.716	PK
3	*	5465.900	59.128	54.362	-9.072	68.200	4.766	PK
4		5470.000	56.787	51.986	-11.413	68.200	4.801	PK
5		5527.550	104.500	99.981	N/A	N/A	4.520	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-26 Tone-RU 17 by 5510MHz	

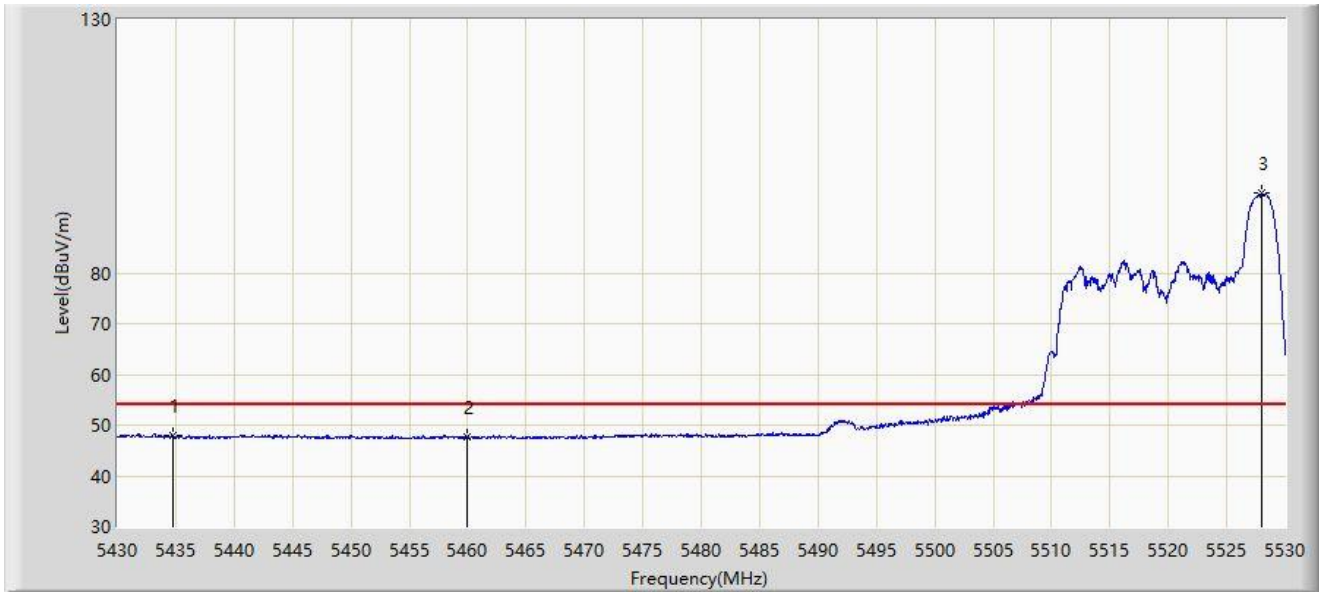


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5434.750	48.039	43.086	-5.961	54.000	4.953	AV
2		5460.000	47.572	42.856	-6.428	54.000	4.716	AV
3		5528.050	95.811	91.279	N/A	N/A	4.533	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-26 Tone-RU 17 by 5670MHz	

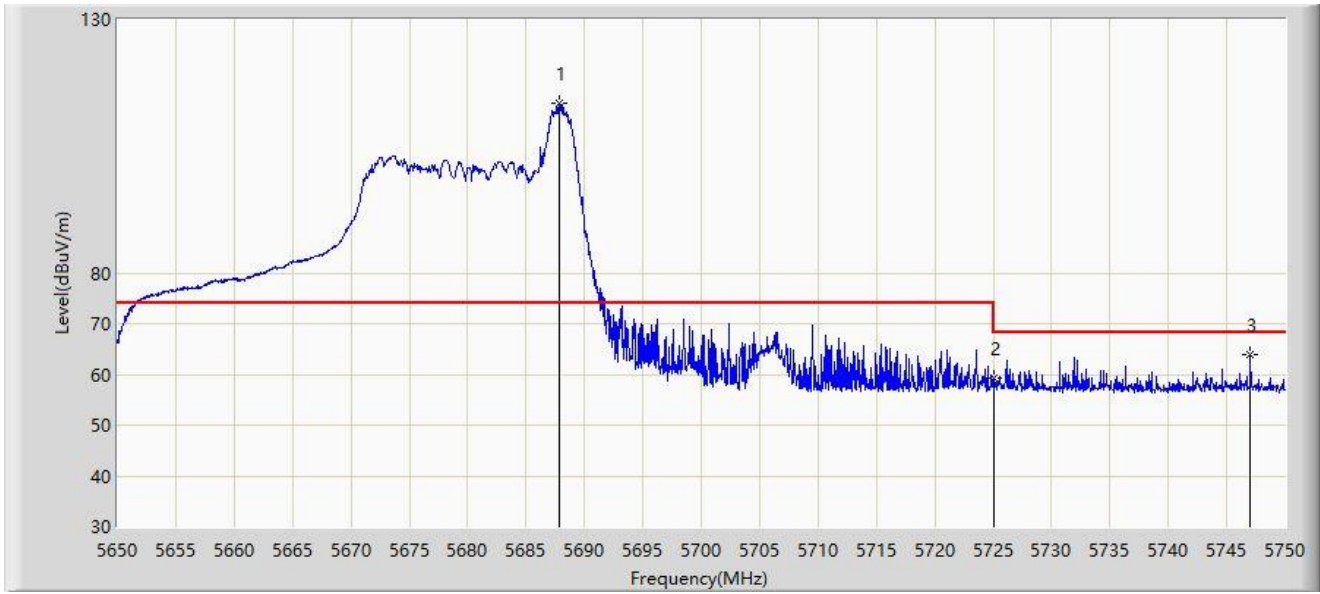


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5687.850	113.445	108.049	N/A	N/A	5.396	PK
2		5725.000	59.223	53.865	-8.977	68.200	5.358	PK
3	*	5747.050	64.029	58.456	-4.171	68.200	5.573	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-26 Tone-RU 17 by 5670MHz	

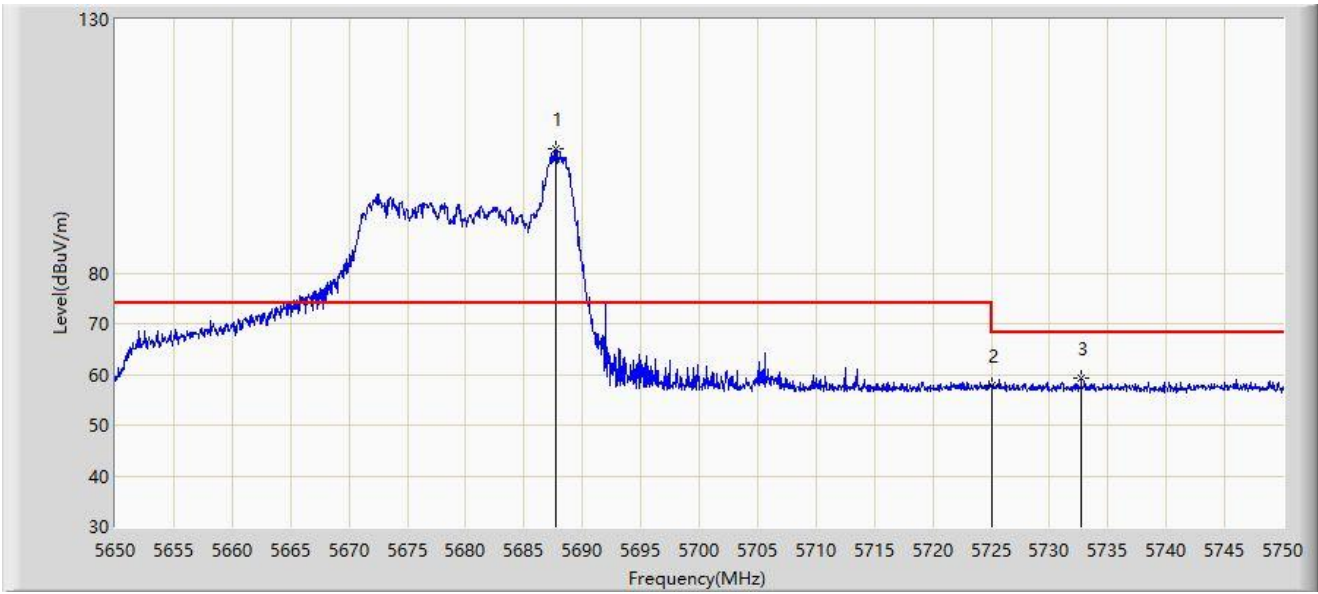


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5687.750	104.458	99.064	N/A	N/A	5.393	PK
2		5725.000	57.865	52.507	-10.335	68.200	5.358	PK
3	*	5732.700	59.213	53.780	-8.987	68.200	5.434	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-26 Tone-RU 17 by 5755MHz	

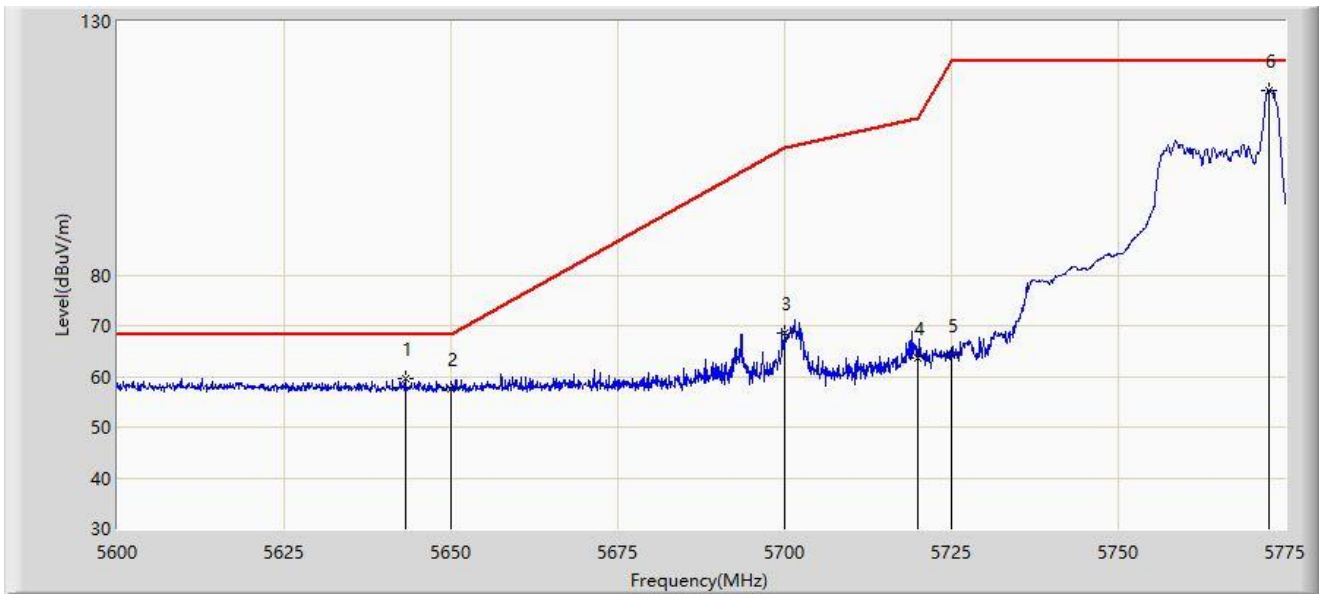


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5643.138	59.503	54.443	-8.697	68.200	5.061	PK
2		5650.000	57.482	52.403	-10.718	68.200	5.080	PK
3		5700.000	68.441	63.056	-36.759	105.200	5.385	PK
4		5720.000	63.758	58.433	-47.042	110.800	5.325	PK
5		5725.000	64.102	58.744	-58.098	122.200	5.358	PK
6		5772.638	116.502	110.908	N/A	N/A	5.593	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-26 Tone-RU 17 by 5755MHz	

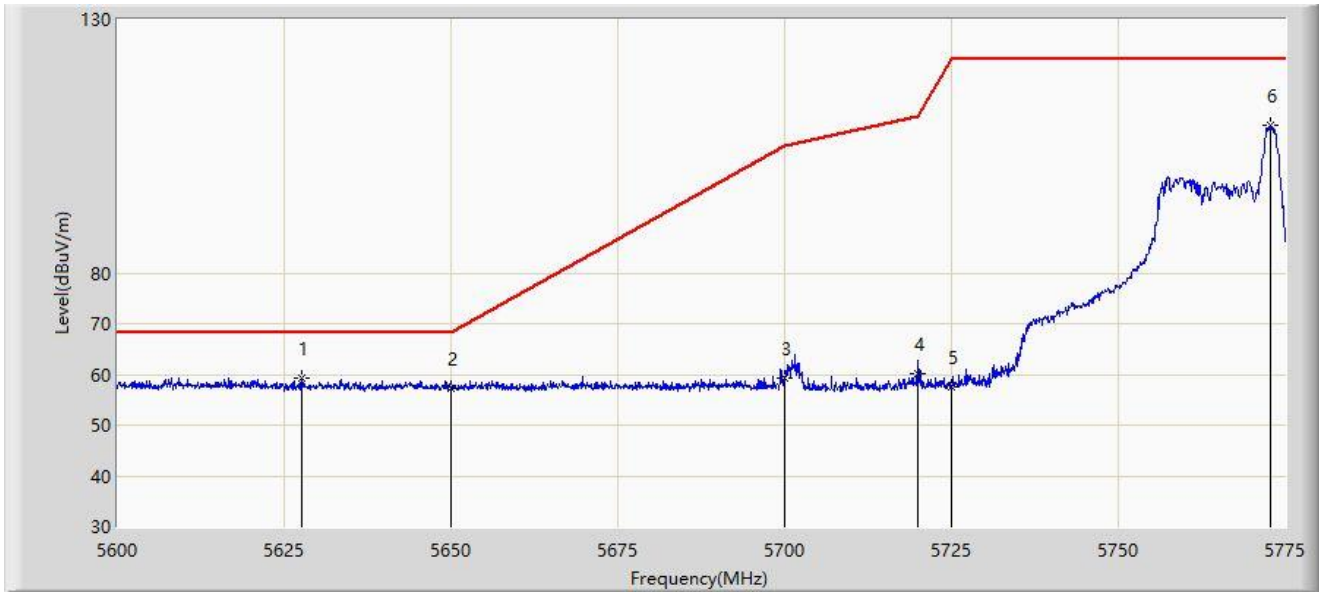


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5627.562	59.386	54.452	-8.814	68.200	4.934	PK
2		5650.000	57.278	52.199	-10.922	68.200	5.080	PK
3		5700.000	59.335	53.950	-45.865	105.200	5.385	PK
4		5720.000	60.057	54.732	-50.743	110.800	5.325	PK
5		5725.000	57.422	52.064	-64.778	122.200	5.358	PK
6		5772.725	109.139	103.546	N/A	N/A	5.594	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-26 Tone-RU 17 by 5795MHz	

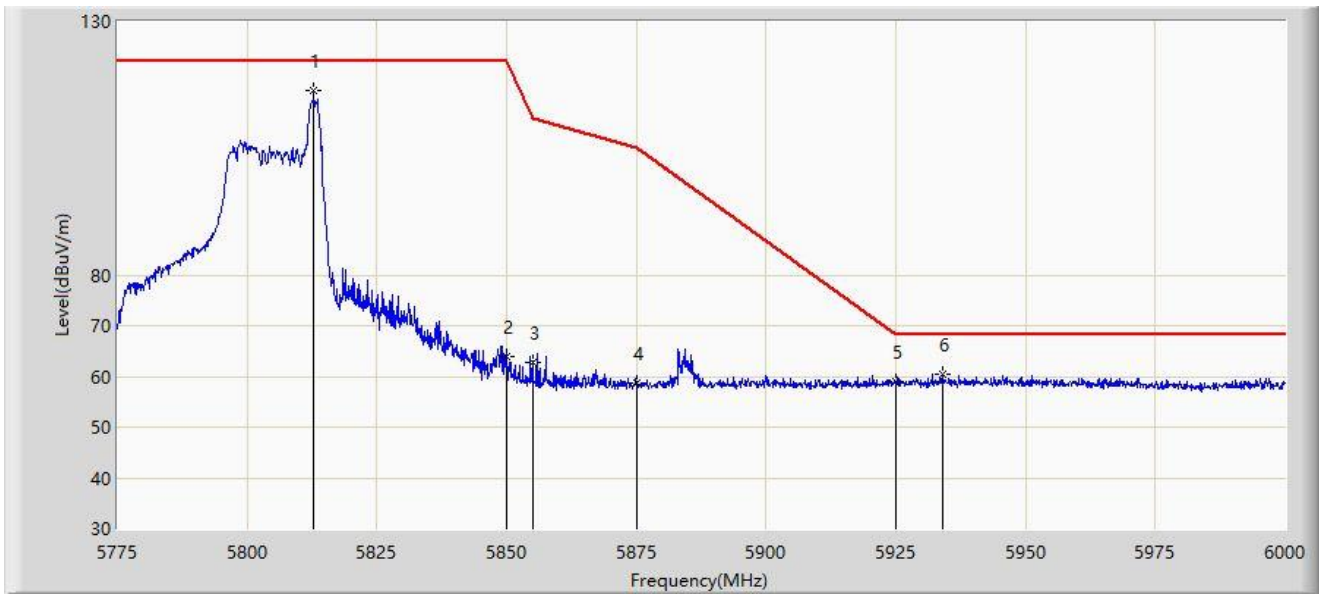


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5812.800	116.260	110.536	N/A	N/A	5.724	PK
2		5850.000	63.817	57.933	-58.383	122.200	5.885	PK
3		5855.000	62.785	56.889	-48.015	110.800	5.896	PK
4		5875.000	58.801	52.832	-46.399	105.200	5.968	PK
5		5925.000	58.850	52.486	-9.350	68.200	6.365	PK
6	*	5933.962	60.433	53.943	-7.767	68.200	6.490	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-26 Tone-RU 17 by 5795MHz	

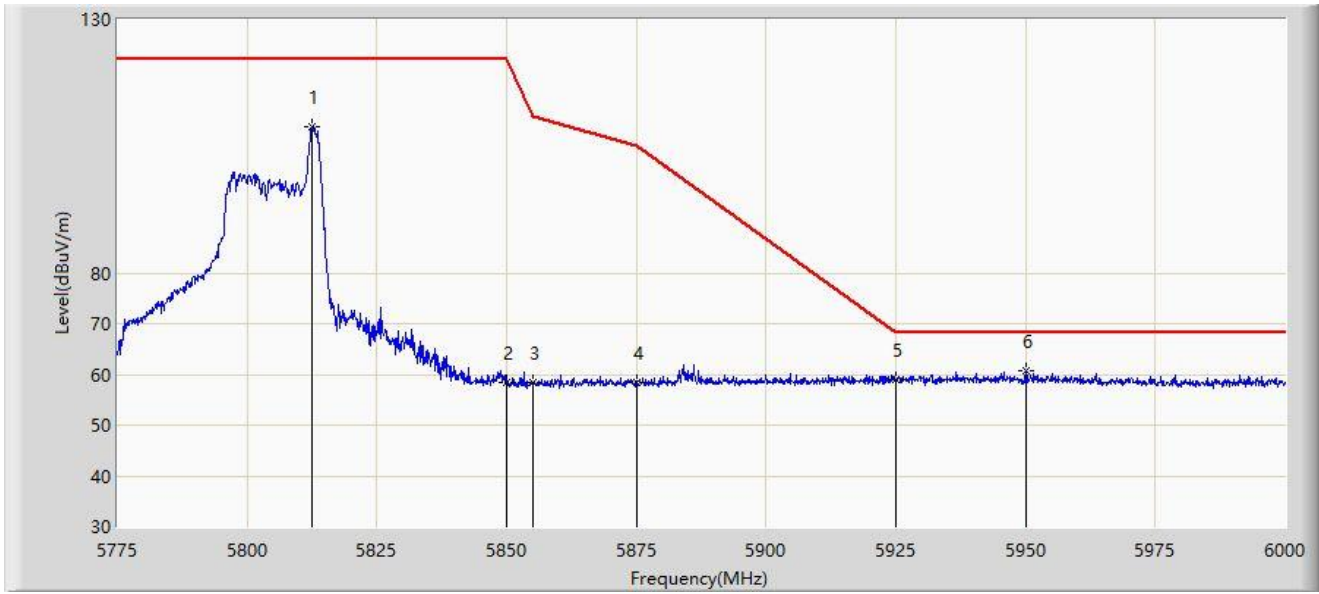


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5812.575	108.851	103.131	N/A	N/A	5.720	PK
2		5850.000	58.447	52.563	-63.753	122.200	5.885	PK
3		5855.000	58.367	52.471	-52.433	110.800	5.896	PK
4		5875.000	58.512	52.543	-46.688	105.200	5.968	PK
5		5925.000	58.912	52.548	-9.288	68.200	6.365	PK
6	*	5950.050	60.609	54.069	-7.591	68.200	6.541	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-484 Tone-RU 65 by 5190MHz	

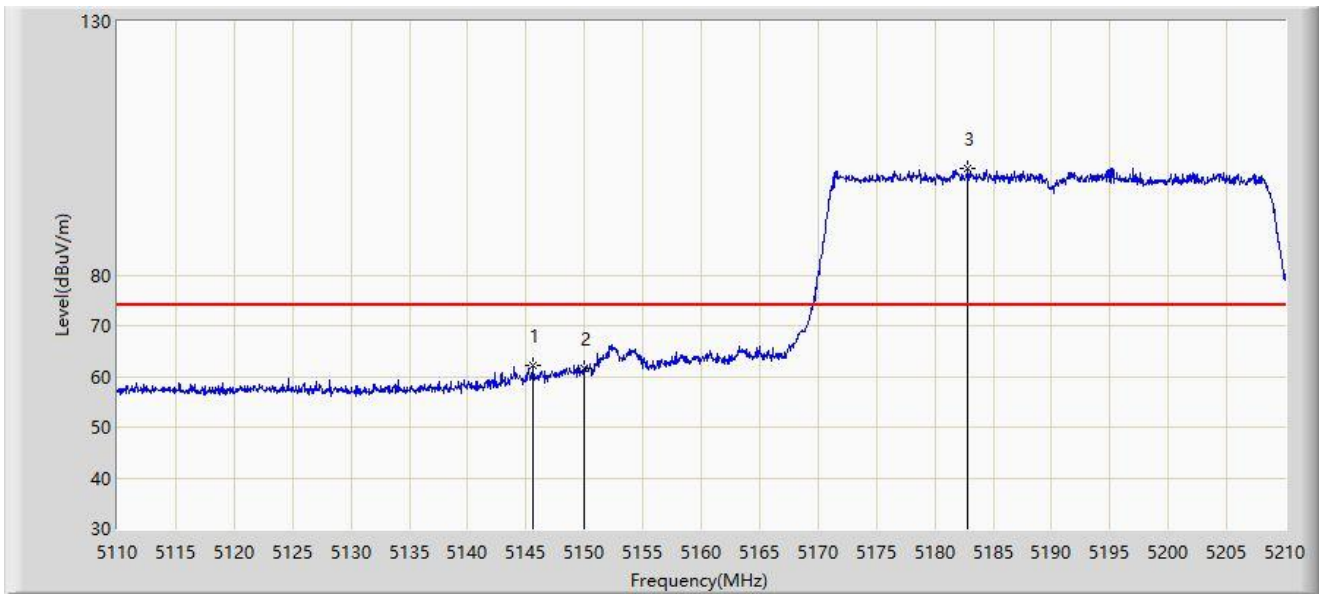


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5145.550	62.272	57.362	-11.728	74.000	4.911	PK
2		5150.000	61.461	56.493	-12.539	74.000	4.967	PK
3		5182.800	101.149	96.686	N/A	N/A	4.463	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-484 Tone-RU 65 by 5190MHz	

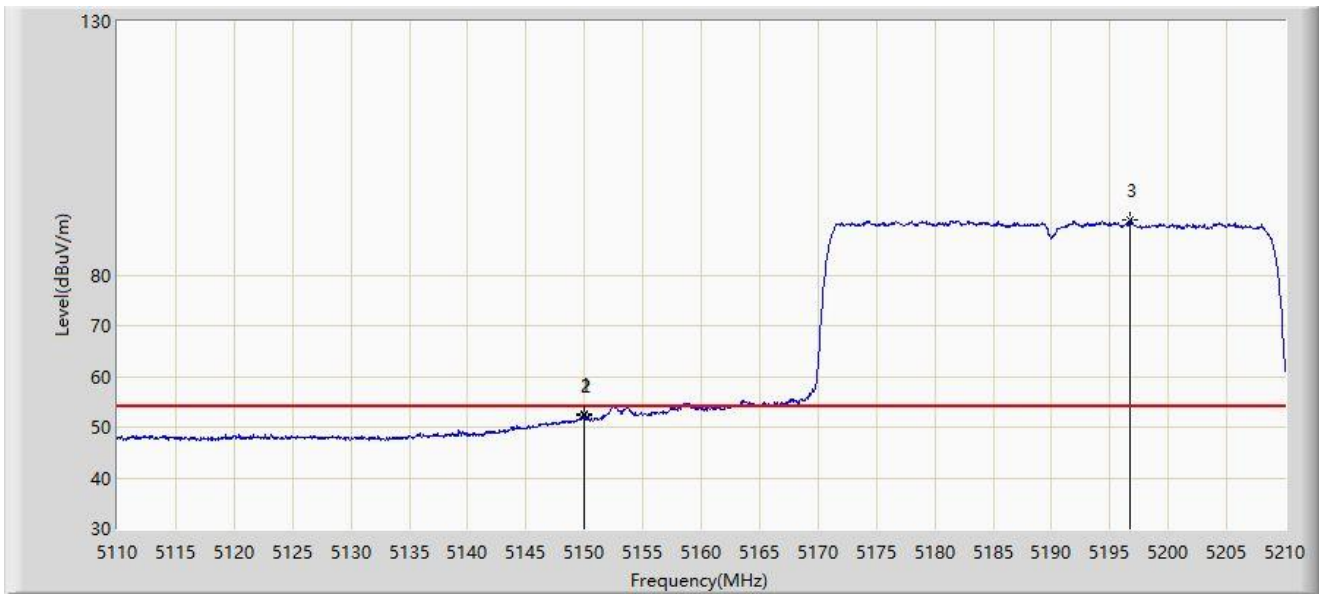


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5149.950	52.472	47.504	-1.528	54.000	4.968	AV
2		5150.000	52.282	47.314	-1.718	54.000	4.967	AV
3		5196.750	90.776	86.342	N/A	N/A	4.433	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-484 Tone-RU 65 by 5190MHz	

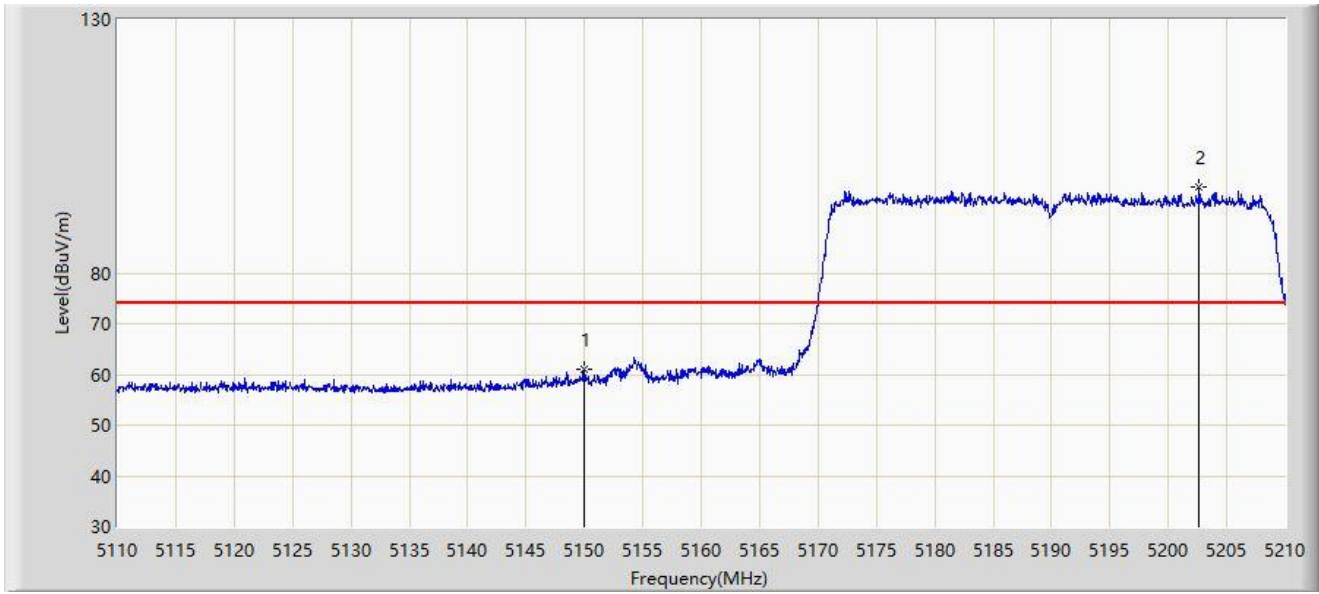


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5150.000	61.043	56.075	-12.957	74.000	4.967	PK
2		5202.650	96.866	92.327	N/A	N/A	4.539	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-484 Tone-RU 65 by 5190MHz	

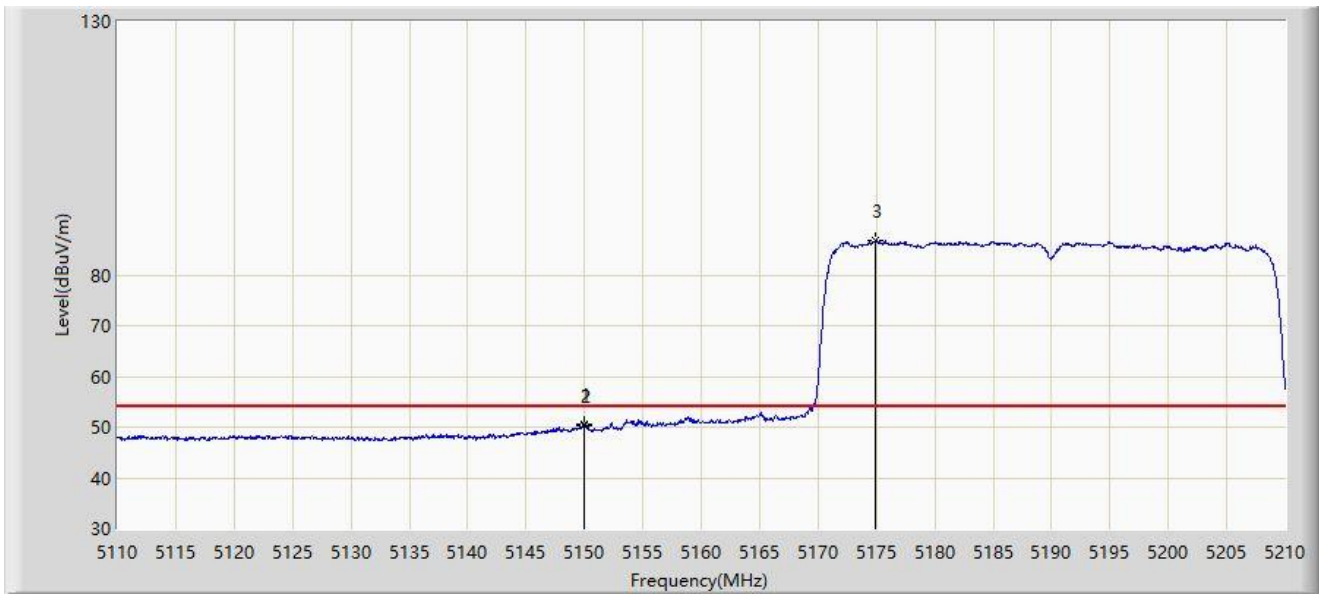


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5149.950	50.472	45.504	-3.528	54.000	4.968	AV
2		5150.000	50.257	45.289	-3.743	54.000	4.967	AV
3		5174.950	86.766	82.107	N/A	N/A	4.659	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-484 Tone-RU 65 by 5310MHz	

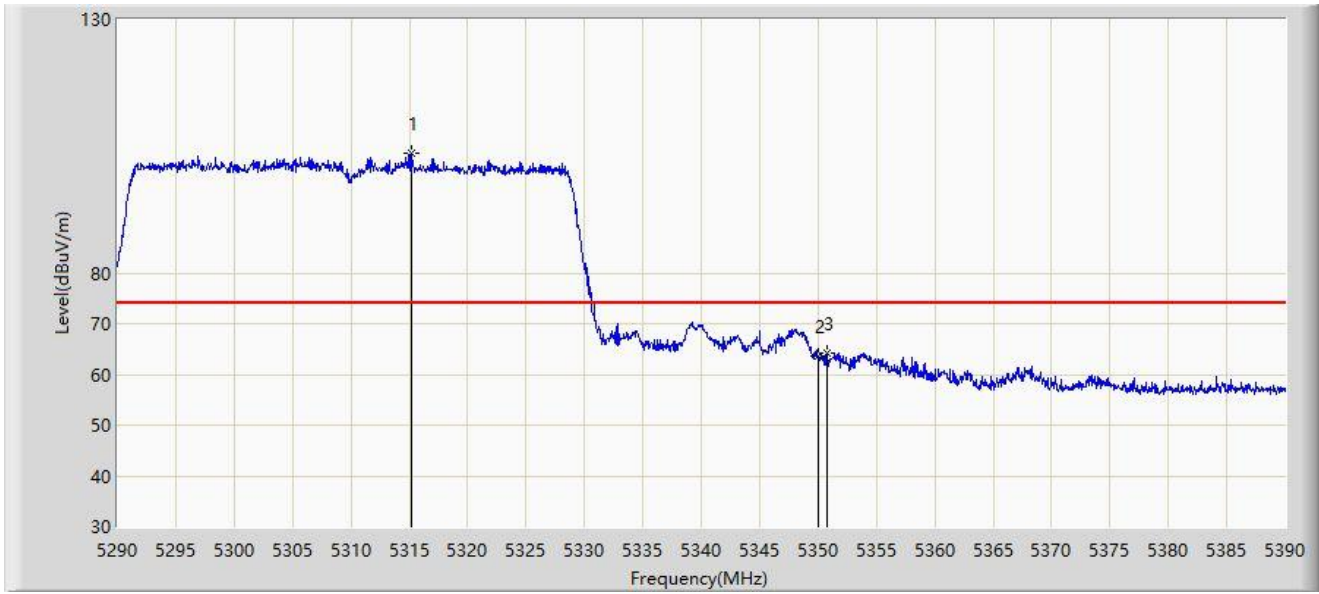


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5315.250	103.643	99.105	N/A	N/A	4.537	PK
2		5350.000	63.735	59.316	-10.265	74.000	4.419	PK
3	*	5350.750	64.301	59.885	-9.699	74.000	4.416	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-484 Tone-RU 65 by 5310MHz	

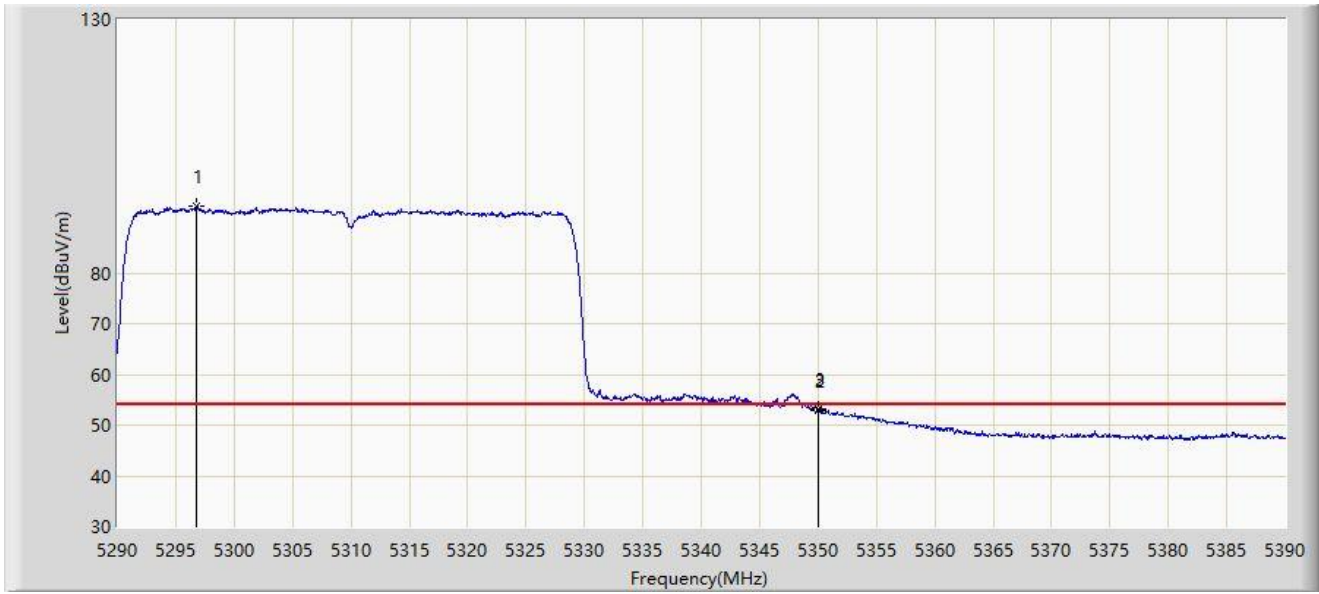


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5296.800	93.079	88.329	N/A	N/A	4.751	AV
2		5350.000	53.016	48.597	-0.984	54.000	4.419	AV
3	*	5350.050	53.147	48.728	-0.853	54.000	4.418	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-484 Tone-RU 65 by 5310MHz	

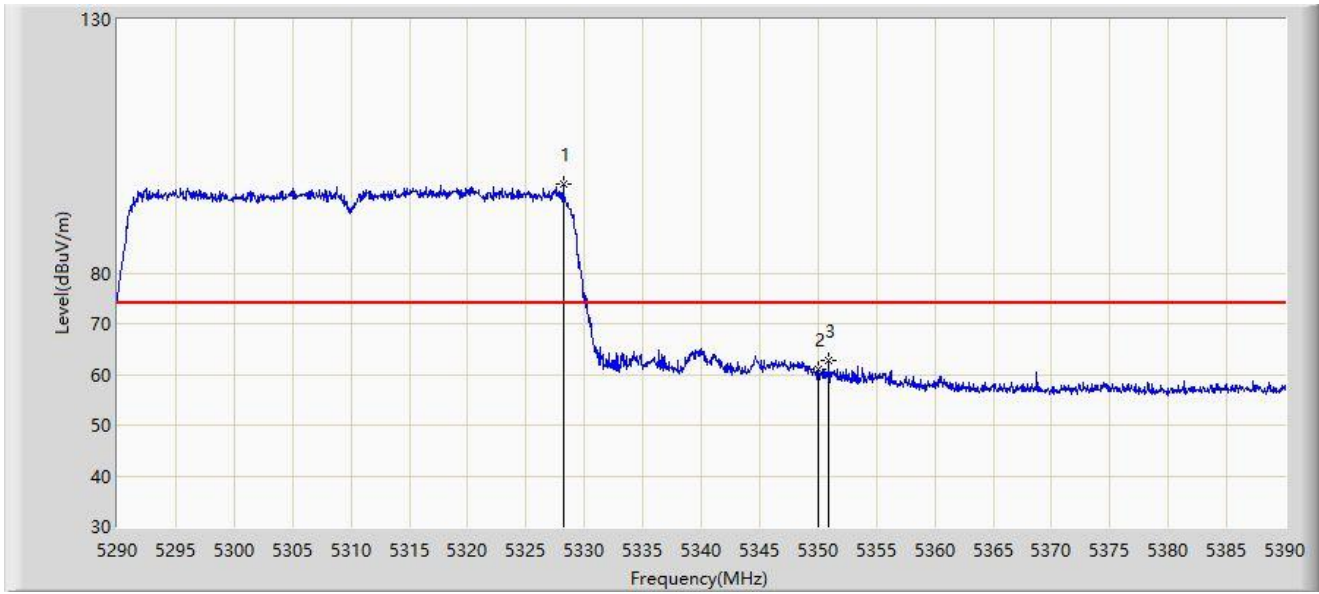


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5328.200	97.580	93.097	N/A	N/A	4.483	PK
2		5350.000	61.005	56.586	-12.995	74.000	4.419	PK
3	*	5350.950	62.738	58.322	-11.262	74.000	4.416	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-484 Tone-RU 65 by 5310MHz	

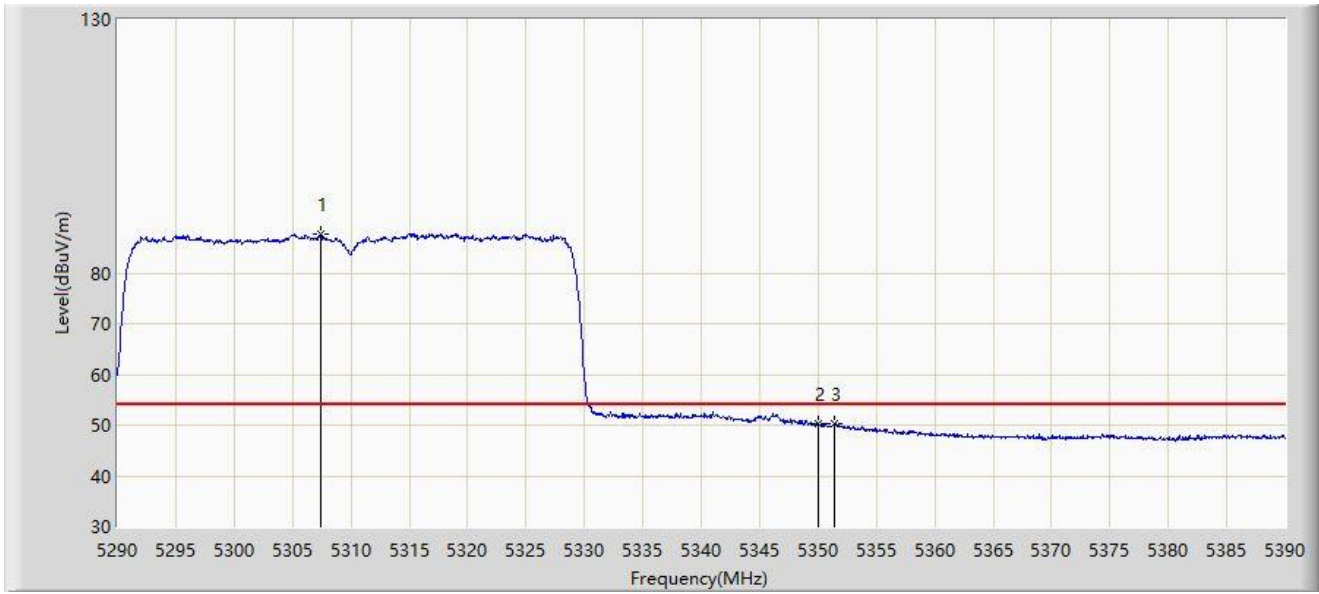


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5307.400	87.774	83.129	N/A	N/A	4.645	AV
2		5350.000	50.324	45.905	-3.676	54.000	4.419	AV
3	*	5351.350	50.426	46.012	-3.574	54.000	4.414	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-484 Tone-RU 65 by 5510MHz	

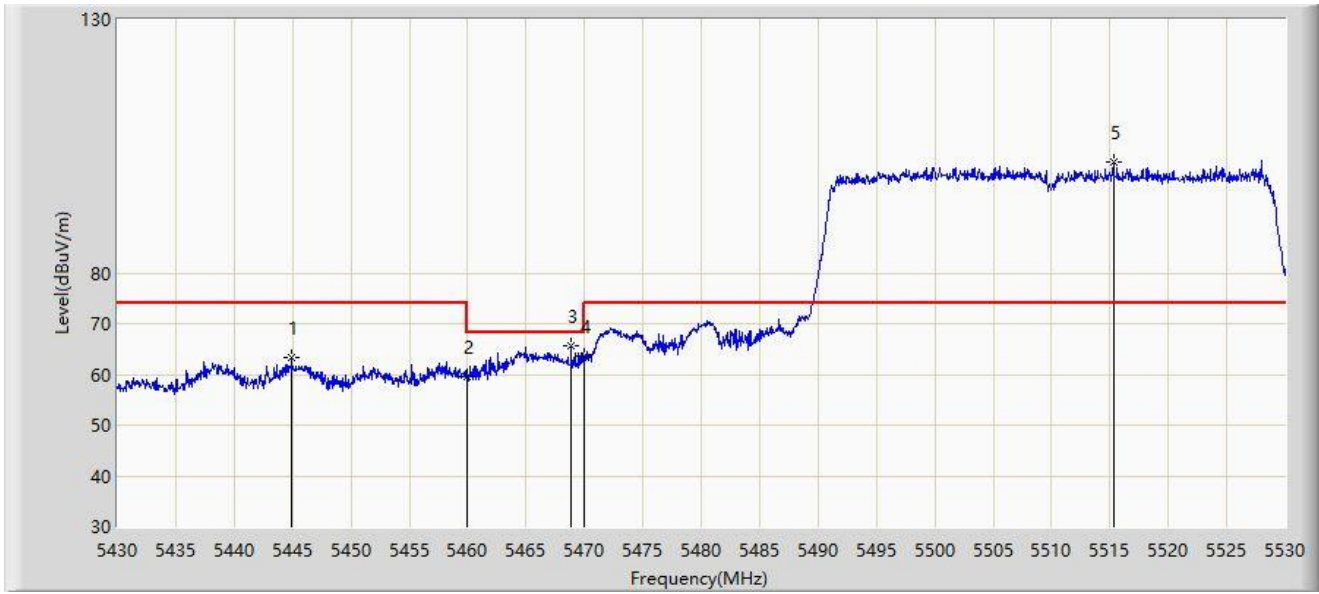


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5444.900	63.321	58.493	-10.679	74.000	4.828	PK
2		5460.000	59.669	54.953	-14.331	74.000	4.716	PK
3	*	5468.850	65.592	60.800	-2.608	68.200	4.791	PK
4		5470.000	63.496	58.695	-4.704	68.200	4.801	PK
5		5515.300	102.006	97.406	N/A	N/A	4.600	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-484 Tone-RU 65 by 5510MHz	

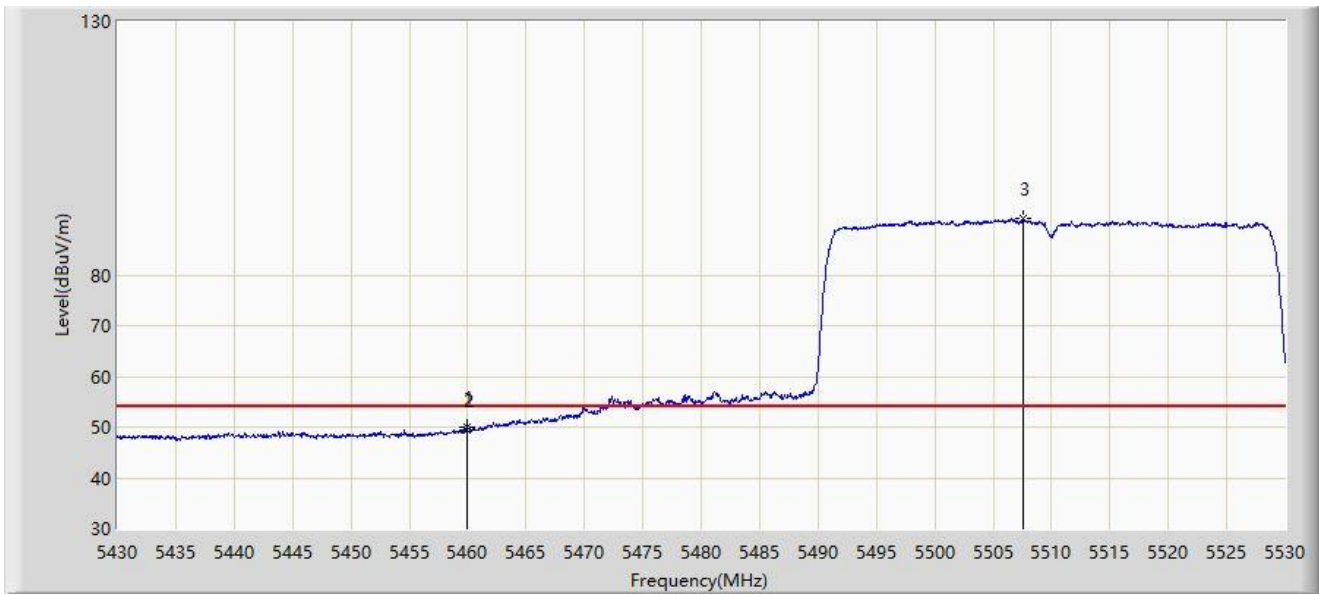


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5459.900	49.916	45.201	-4.084	54.000	4.714	AV
2		5460.000	49.494	44.778	-4.506	54.000	4.716	AV
3		5507.550	91.177	86.321	N/A	N/A	4.857	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-484 Tone-RU 65 by 5510MHz	

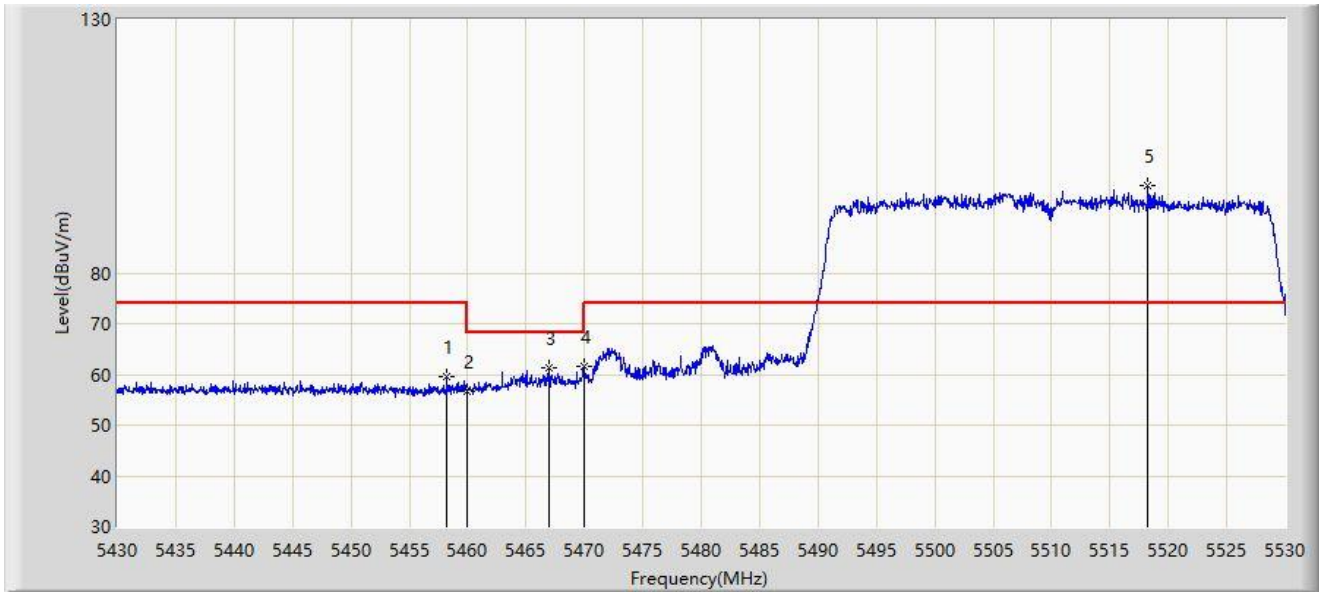


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5458.250	59.523	54.822	-14.477	74.000	4.700	PK
2		5460.000	56.531	51.815	-17.469	74.000	4.716	PK
3		5467.000	61.354	56.578	-6.846	68.200	4.776	PK
4	*	5470.000	61.541	56.740	-6.659	68.200	4.801	PK
5		5518.250	97.161	92.658	N/A	N/A	4.503	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-484 Tone-RU 65 by 5510MHz	

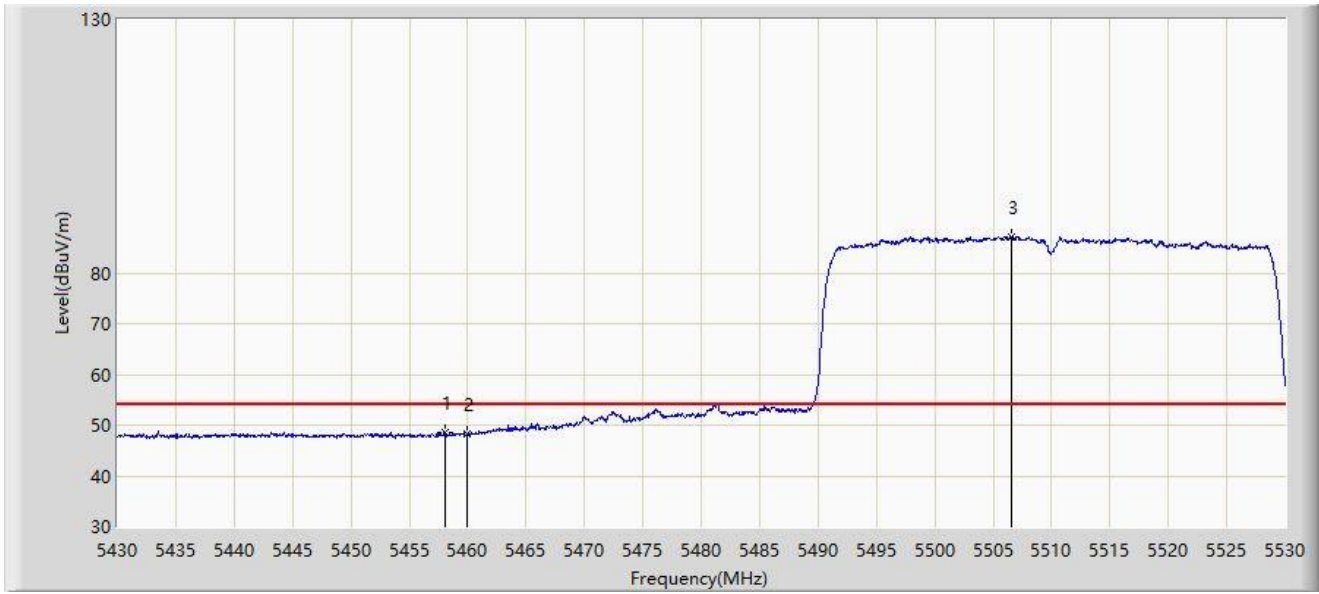


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5458.050	48.577	43.878	-5.423	54.000	4.698	AV
2		5460.000	48.280	43.564	-5.720	54.000	4.716	AV
3		5506.550	87.240	82.351	N/A	N/A	4.889	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-484 Tone-RU 65 by 5670MHz	

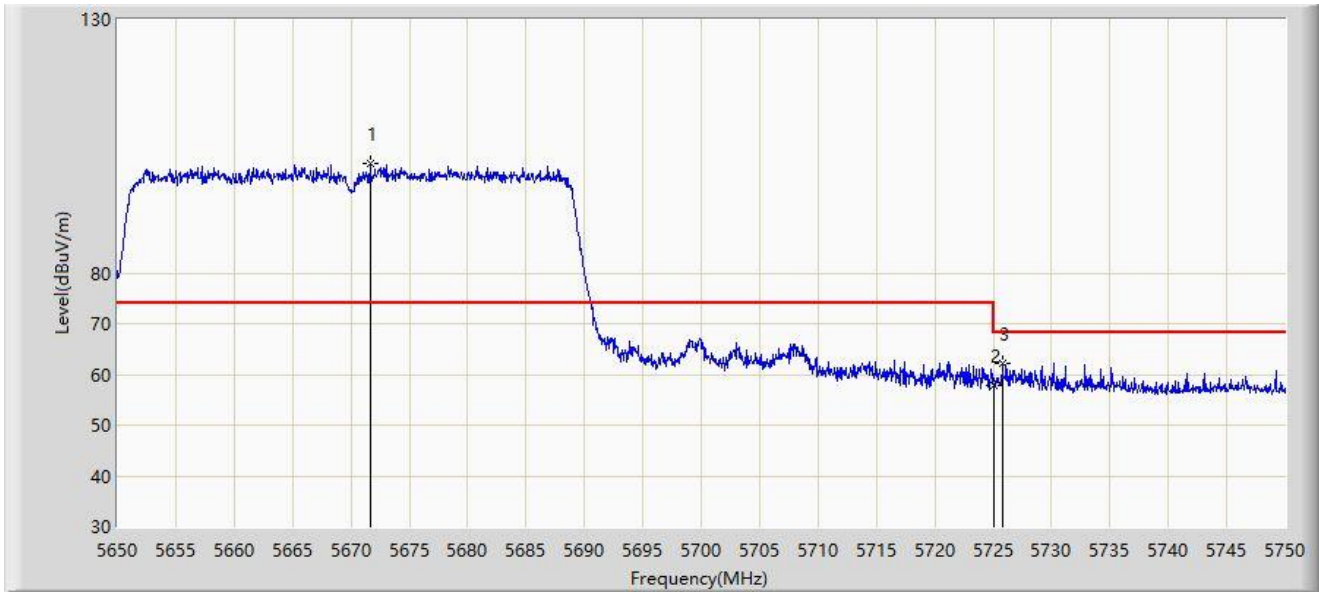


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5671.650	101.657	96.587	N/A	N/A	5.071	PK
2		5725.000	57.943	52.585	-10.257	68.200	5.358	PK
3	*	5725.800	62.036	56.672	-6.164	68.200	5.364	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-484 Tone-RU 65 by 5670MHz	

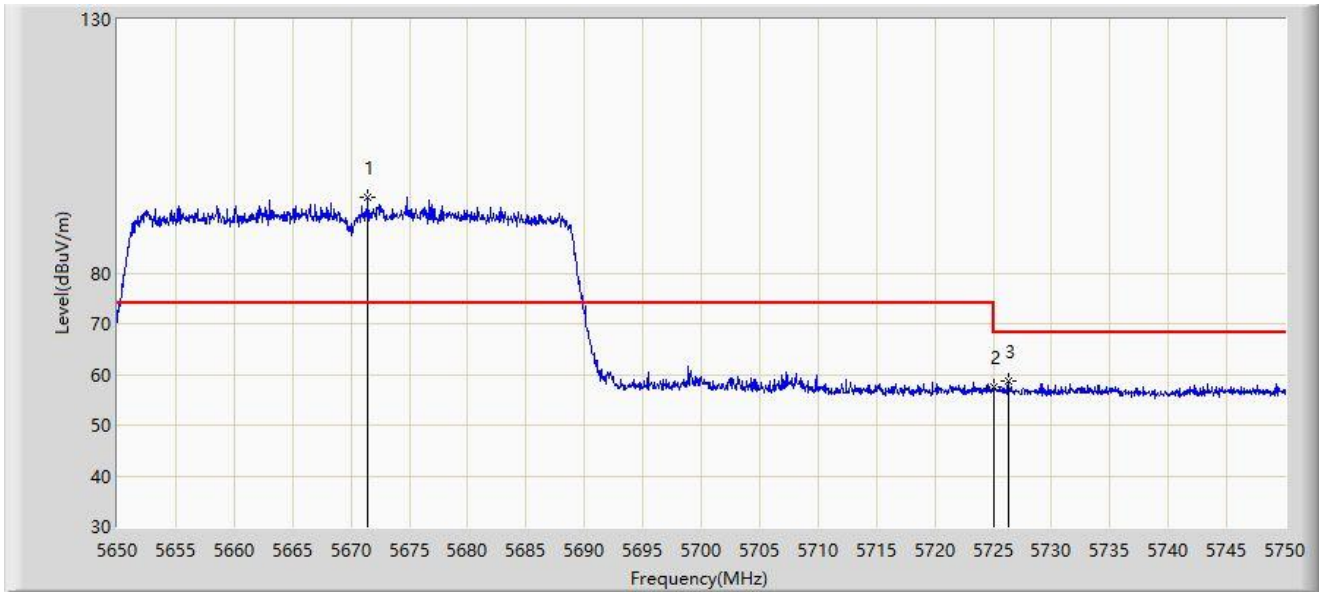


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5671.450	94.880	89.809	N/A	N/A	5.070	PK
2		5725.000	57.625	52.267	-10.575	68.200	5.358	PK
3	*	5726.300	58.778	53.410	-9.422	68.200	5.368	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-484 Tone-RU 65 by 5755MHz	

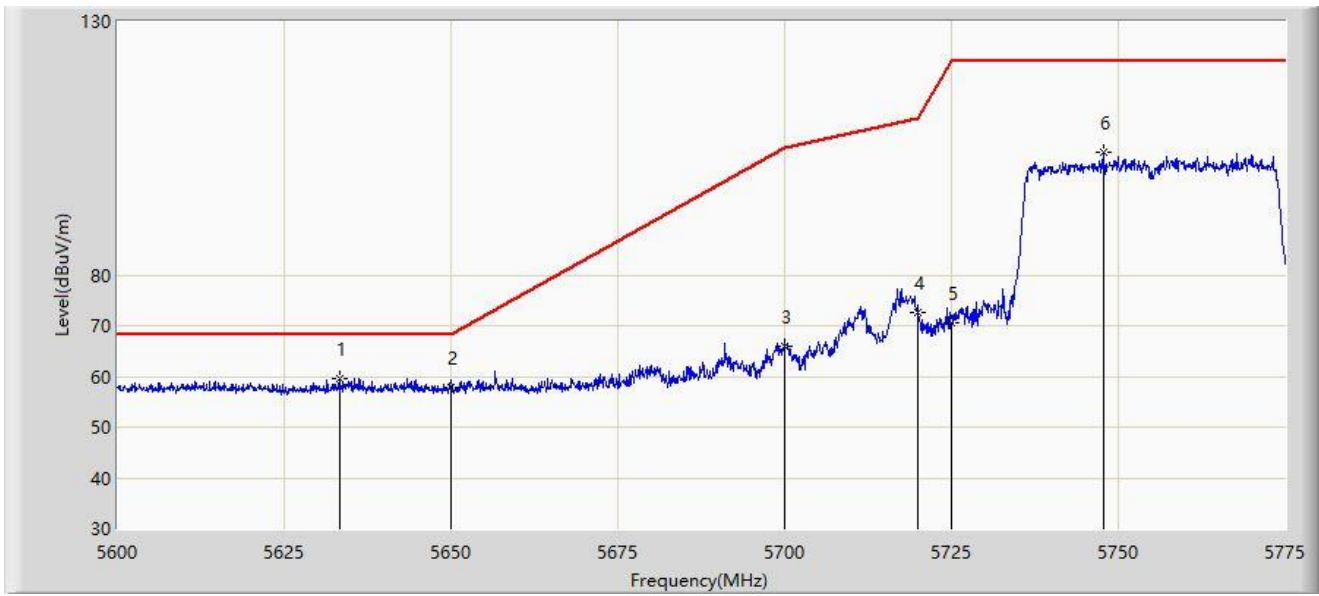


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5633.250	59.543	54.558	-8.657	68.200	4.984	PK
2		5650.000	57.750	52.671	-10.450	68.200	5.080	PK
3		5700.000	65.989	60.604	-39.211	105.200	5.385	PK
4		5720.000	72.531	67.206	-38.269	110.800	5.325	PK
5		5725.000	70.505	65.147	-51.695	122.200	5.358	PK
6		5747.700	104.324	98.746	N/A	N/A	5.578	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-484 Tone-RU 65 by 5755MHz	

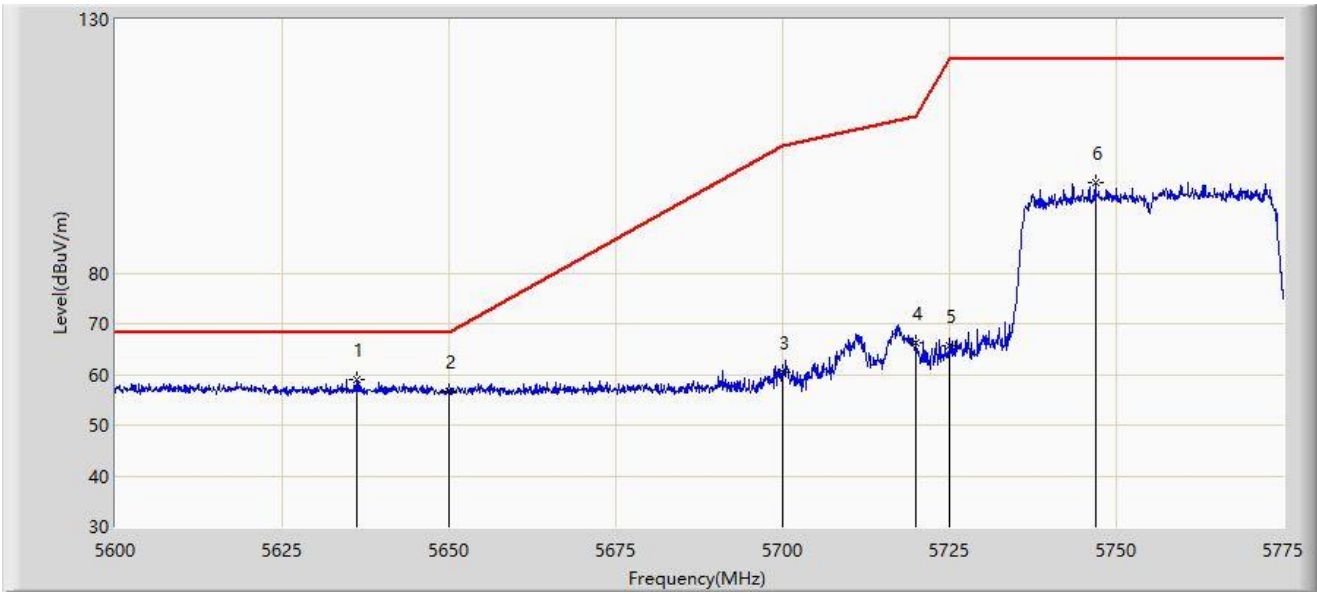


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5636.138	58.955	53.944	-9.245	68.200	5.010	PK
2		5650.000	56.716	51.637	-11.484	68.200	5.080	PK
3		5700.000	60.479	55.094	-44.721	105.200	5.385	PK
4		5720.000	66.360	61.035	-44.440	110.800	5.325	PK
5		5725.000	65.774	60.416	-56.426	122.200	5.358	PK
6		5746.825	97.828	92.257	N/A	N/A	5.571	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-484 Tone-RU 65 by 5795MHz	

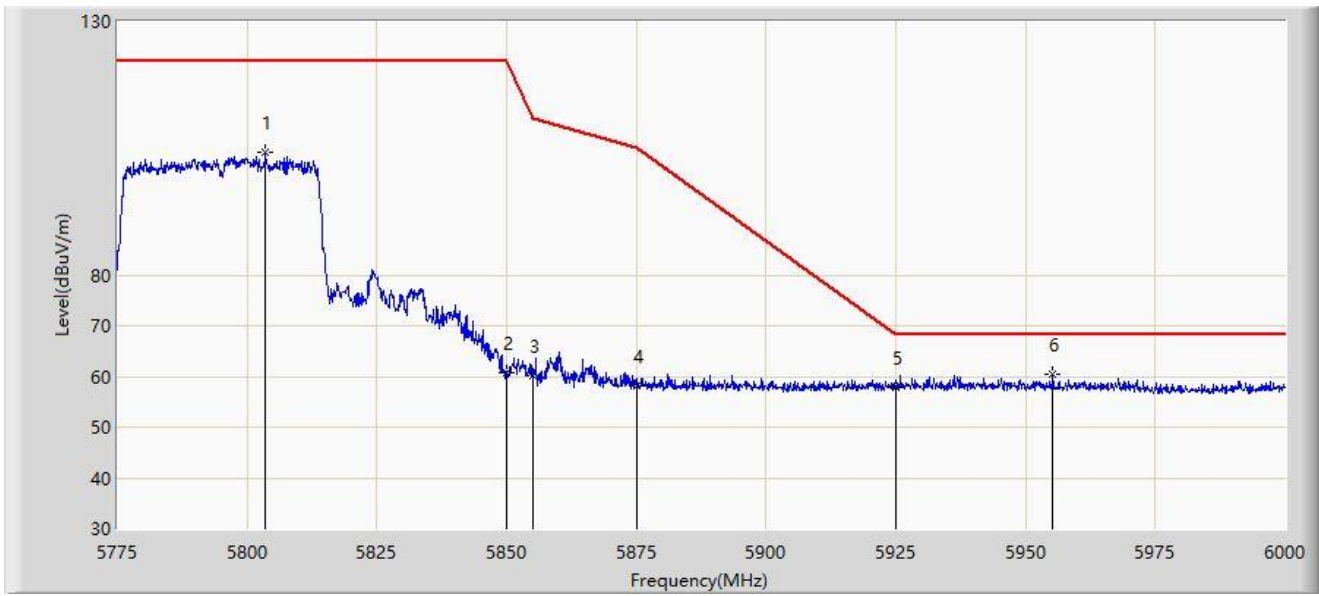


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5803.575	104.313	98.604	N/A	N/A	5.709	PK
2		5850.000	60.592	54.708	-61.608	122.200	5.885	PK
3		5855.000	60.151	54.255	-50.649	110.800	5.896	PK
4		5875.000	58.060	52.091	-47.140	105.200	5.968	PK
5		5925.000	57.871	51.507	-10.329	68.200	6.365	PK
6	*	5955.225	60.441	53.950	-7.759	68.200	6.491	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax40-484 Tone-RU 65 by 5795MHz	

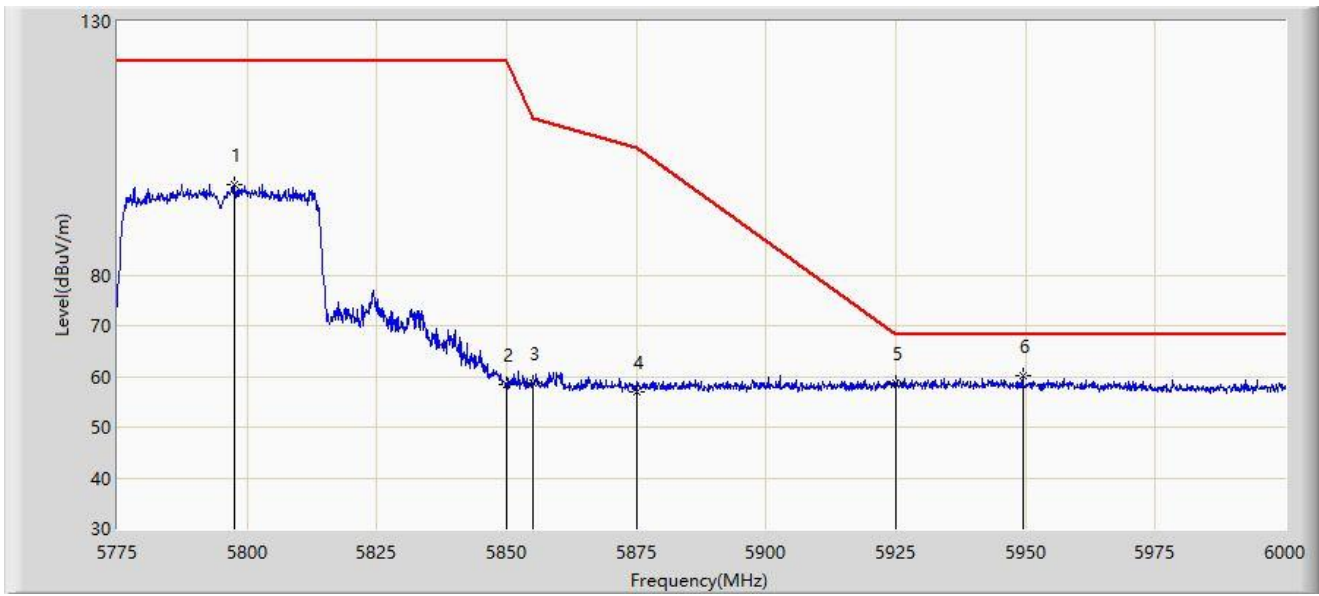


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5797.500	97.922	92.199	N/A	N/A	5.722	PK
2		5850.000	58.265	52.381	-63.935	122.200	5.885	PK
3		5855.000	58.728	52.832	-52.072	110.800	5.896	PK
4		5875.000	57.048	51.079	-48.152	105.200	5.968	PK
5		5925.000	58.568	52.204	-9.632	68.200	6.365	PK
6	*	5949.487	60.030	53.485	-8.170	68.200	6.545	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 0 by 5210MHz	

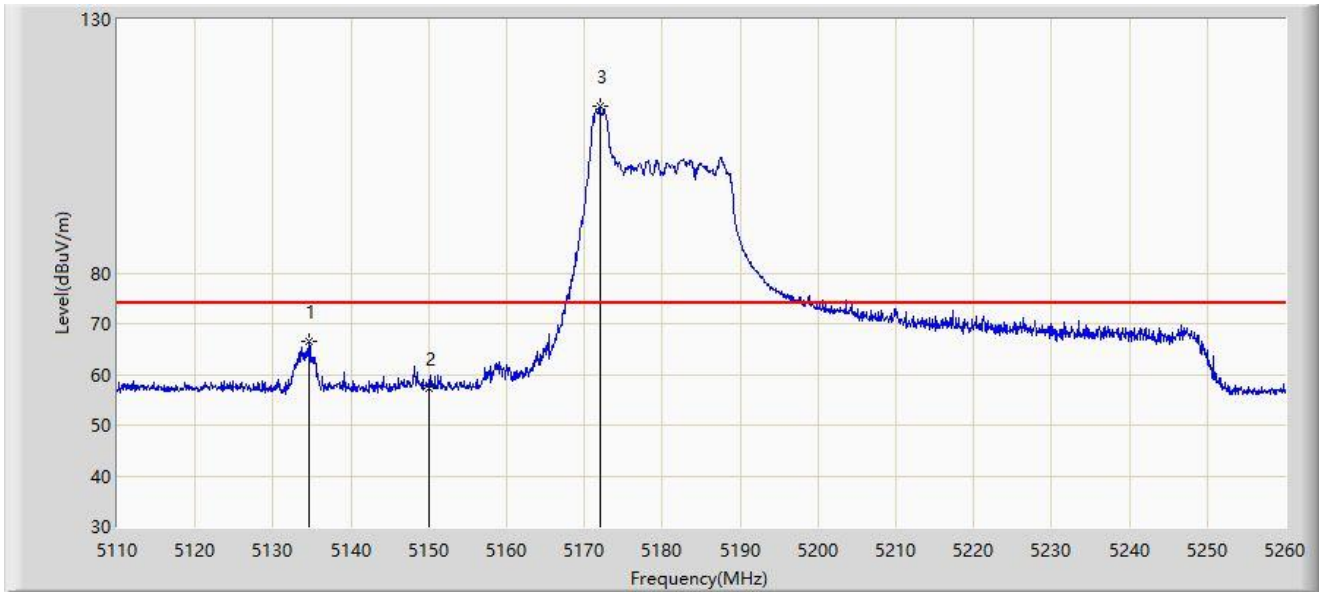


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5134.675	66.559	61.922	-7.441	74.000	4.637	PK
2		5150.000	57.295	52.327	-16.705	74.000	4.967	PK
3		5171.950	112.910	108.168	N/A	N/A	4.742	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 0 by 5210MHz	

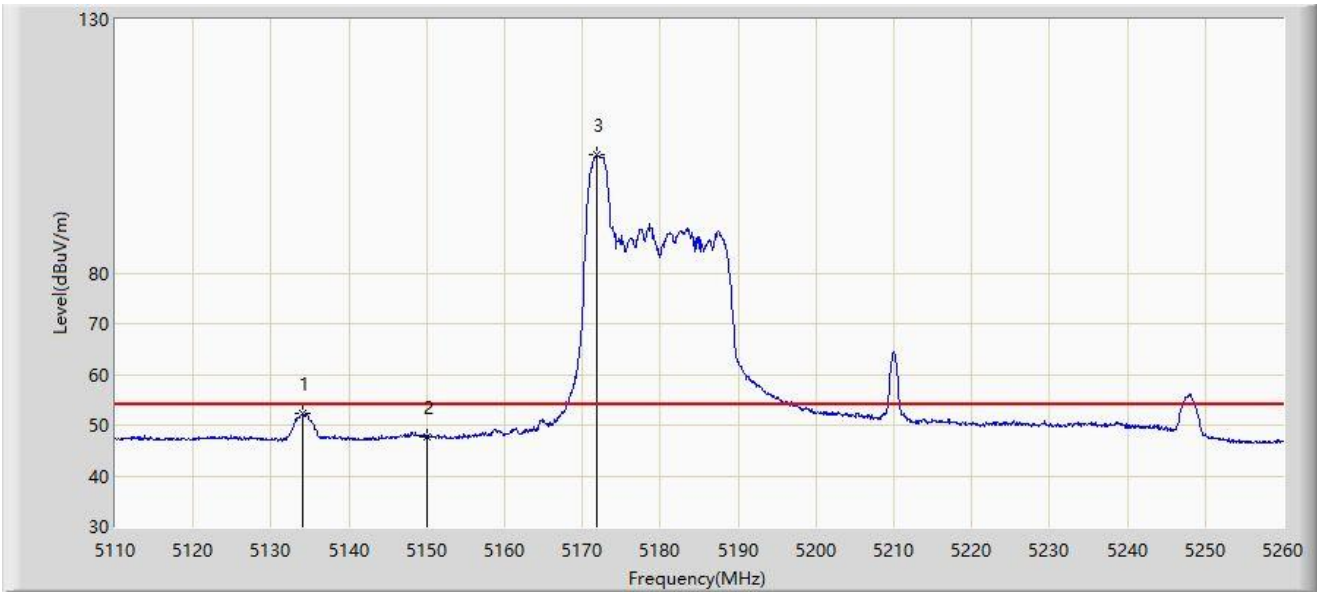


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5134.075	52.417	47.795	-1.583	54.000	4.622	AV
2		5150.000	47.760	42.792	-6.240	54.000	4.967	AV
3		5171.800	103.322	98.576	N/A	N/A	4.747	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 0 by 5210MHz	

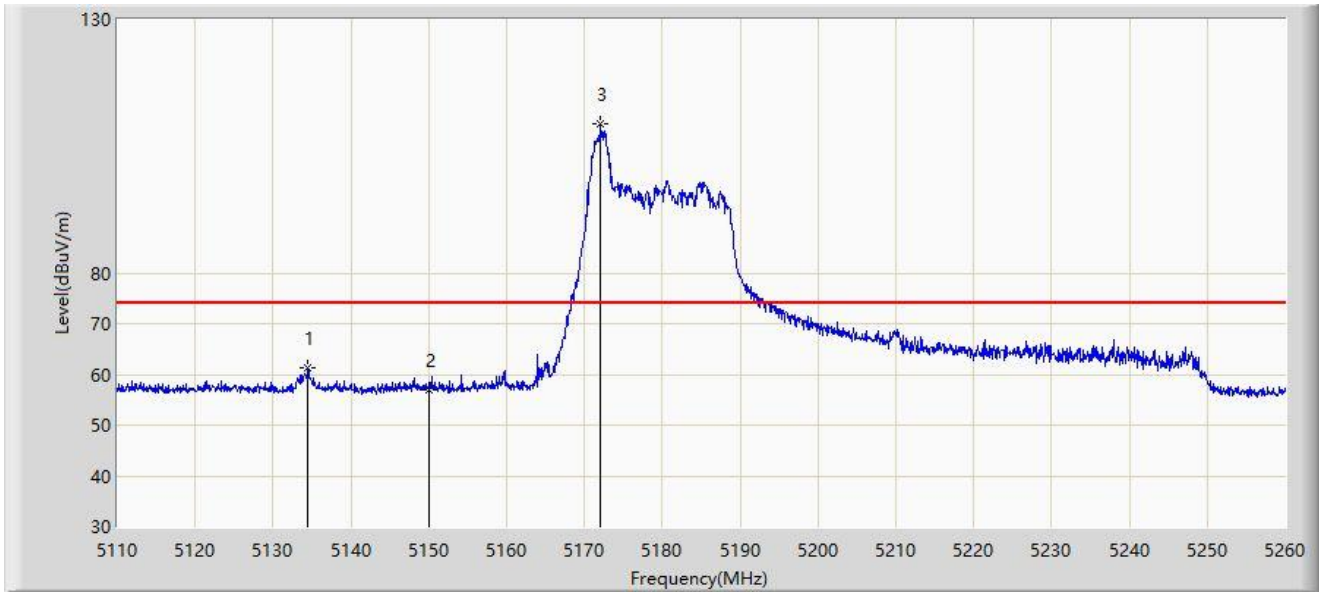


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5134.450	61.384	56.752	-12.616	74.000	4.632	PK
2		5150.000	57.056	52.088	-16.944	74.000	4.967	PK
3		5172.100	109.400	104.662	N/A	N/A	4.738	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 0 by 5210MHz	

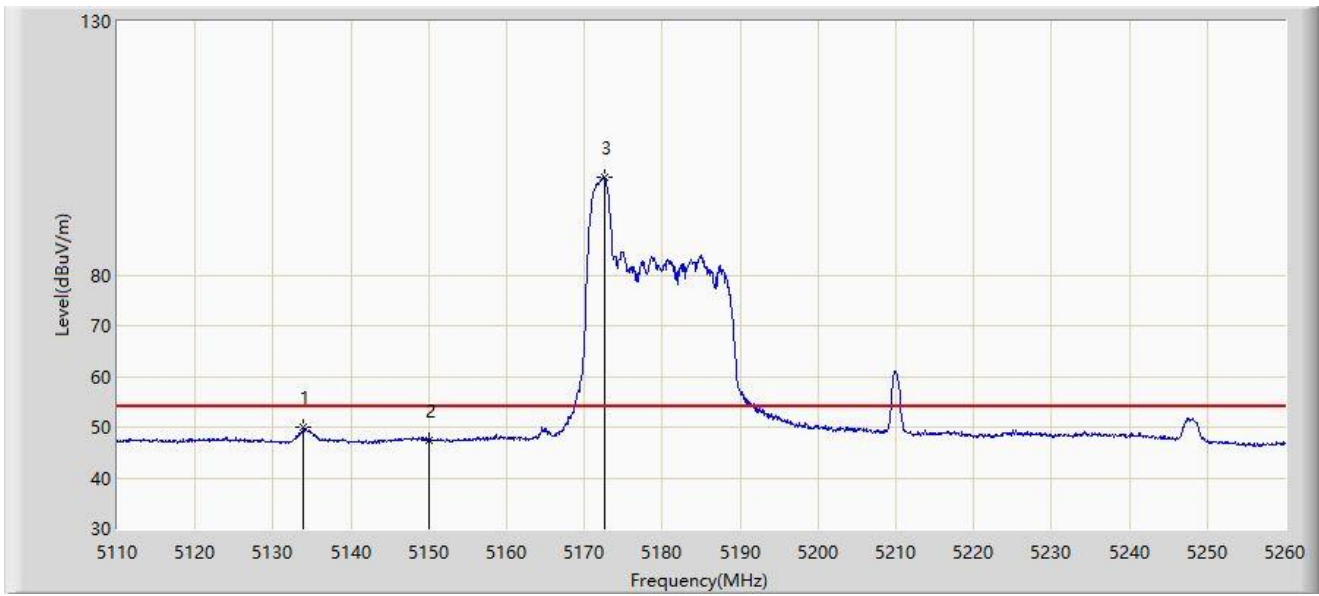


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5133.925	49.937	45.319	-4.063	54.000	4.618	AV
2		5150.000	47.488	42.520	-6.512	54.000	4.967	AV
3		5172.550	99.319	94.593	N/A	N/A	4.726	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 0 by 5290MHz	

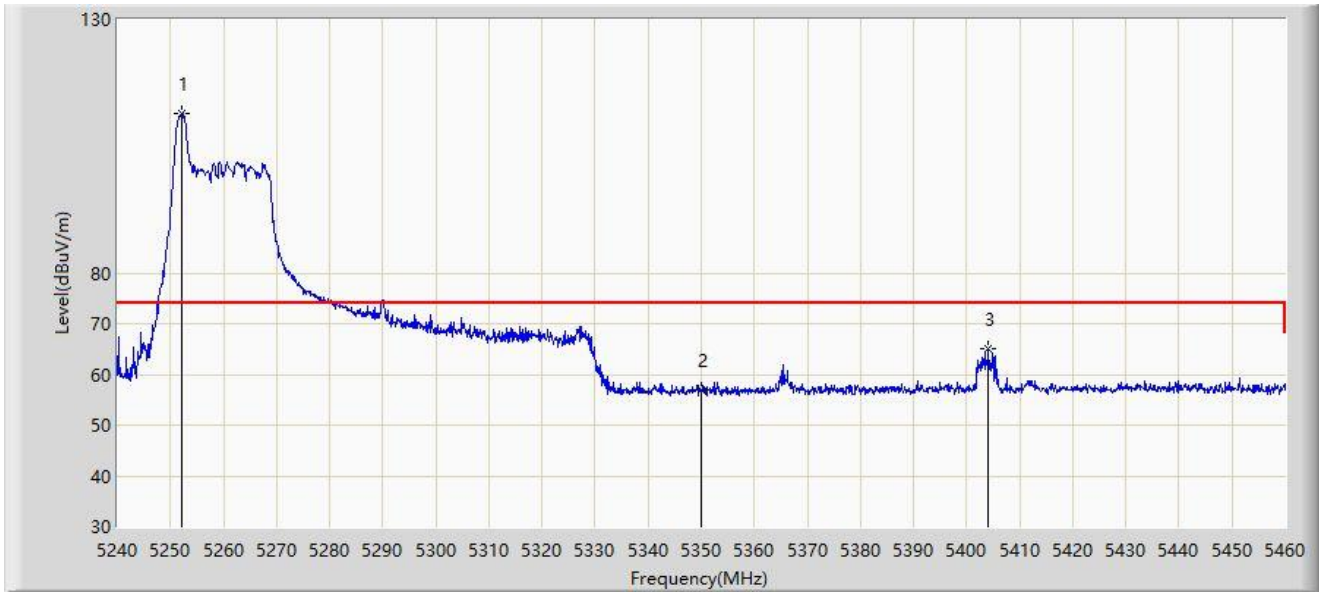


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5252.210	111.534	106.953	N/A	N/A	4.581	PK
2		5350.000	56.815	52.396	-17.185	74.000	4.419	PK
3	*	5404.120	64.952	60.347	-9.048	74.000	4.605	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 0 by 5290MHz	

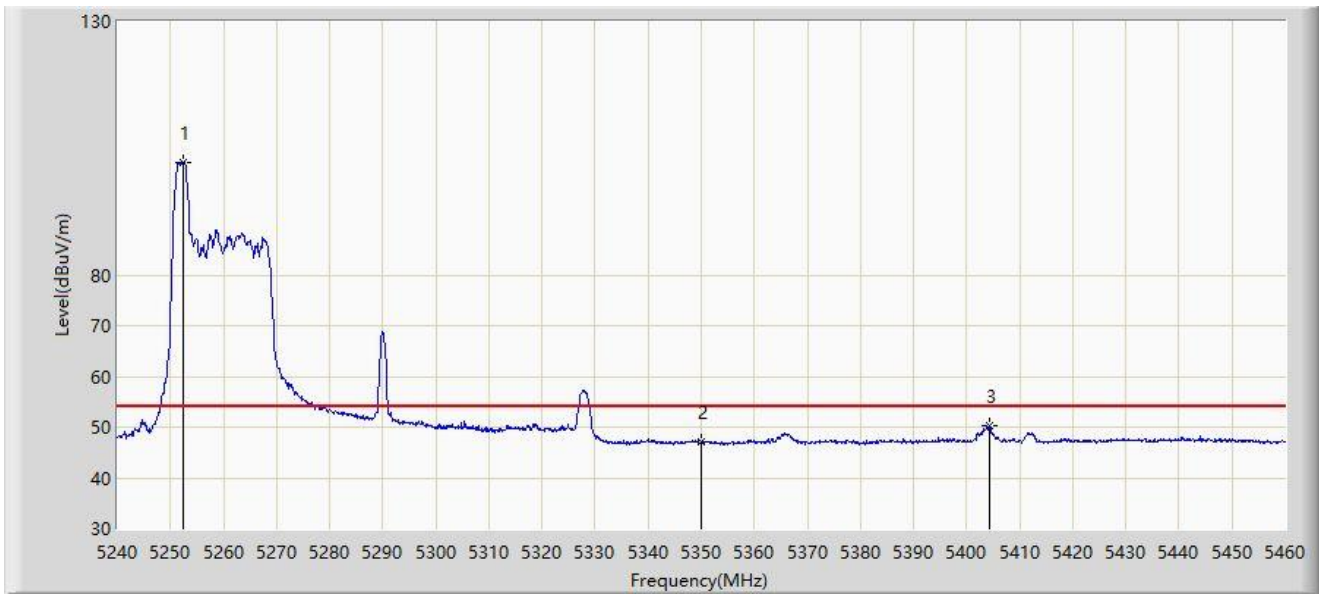


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5252.320	102.273	97.693	N/A	N/A	4.580	AV
2		5350.000	47.001	42.582	-6.999	54.000	4.419	AV
3	*	5404.340	50.321	45.713	-3.679	54.000	4.609	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 0 by 5290MHz	

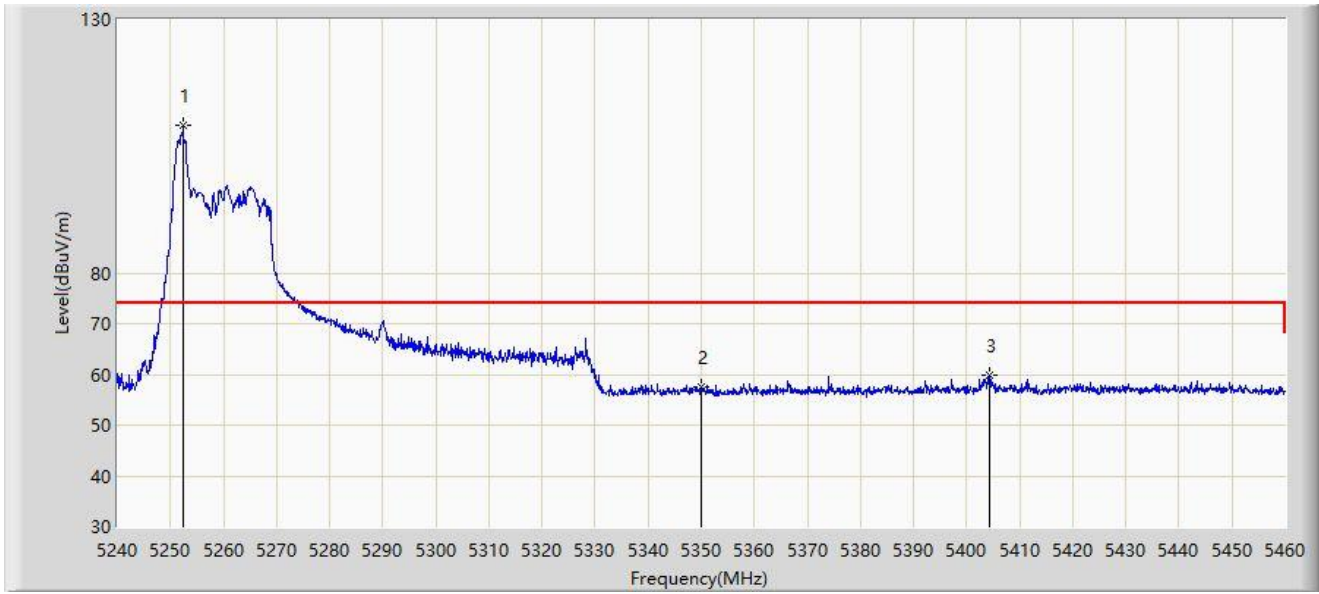


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5252.430	109.021	104.442	N/A	N/A	4.578	PK
2		5350.000	57.521	53.102	-16.479	74.000	4.419	PK
3	*	5404.340	59.714	55.106	-14.286	74.000	4.609	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 0 by 5290MHz	

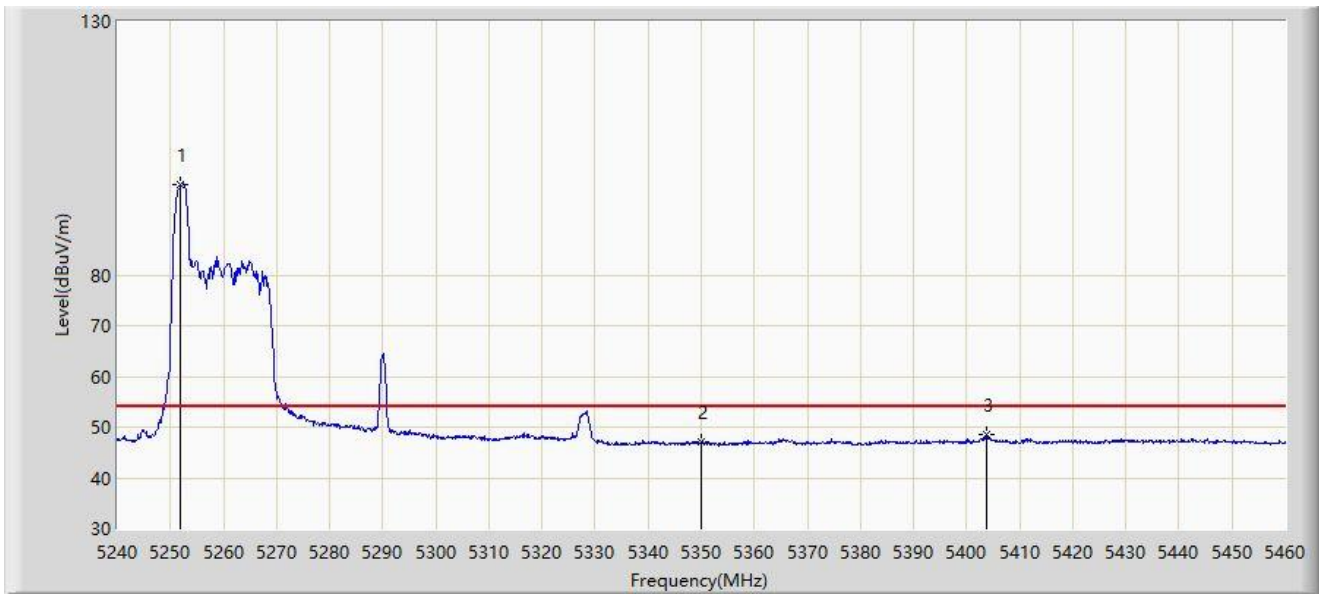


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5251.990	97.910	93.327	N/A	N/A	4.582	AV
2		5350.000	46.983	42.564	-7.017	54.000	4.419	AV
3	*	5403.790	48.473	43.873	-5.527	54.000	4.600	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 0 by 5530MHz	

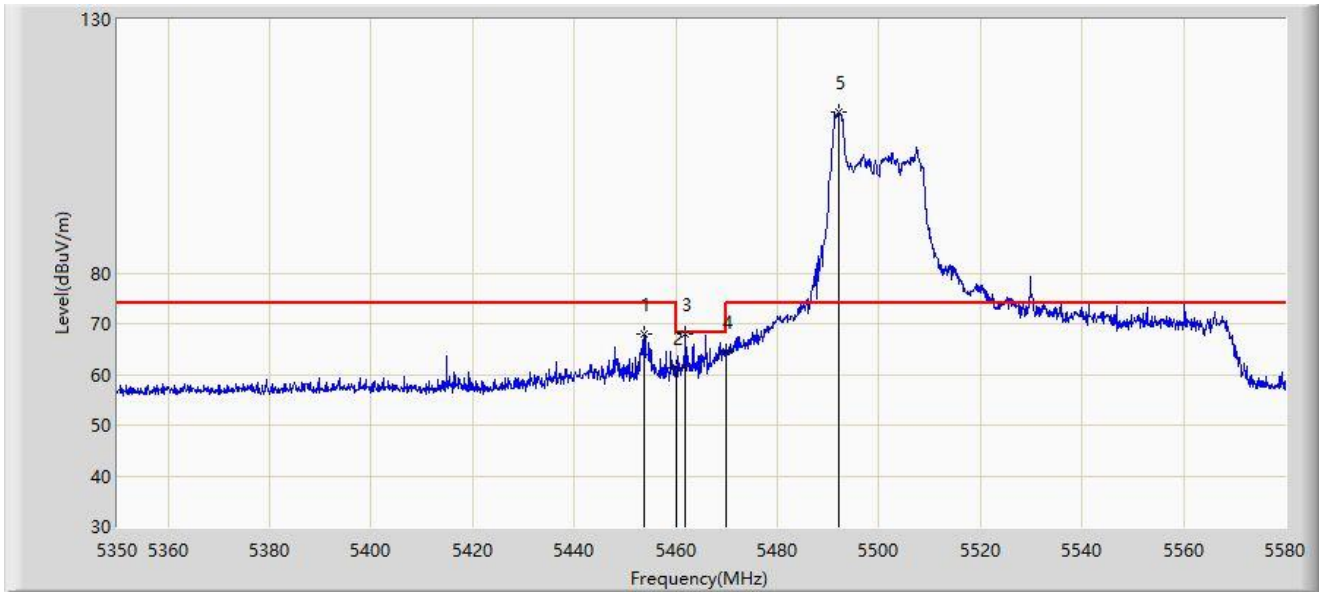


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5453.845	67.984	63.317	-6.016	74.000	4.667	PK
2		5460.000	61.219	56.503	-12.781	74.000	4.716	PK
3	*	5461.895	68.102	63.370	-0.098	68.200	4.732	PK
4		5470.000	64.521	59.720	-3.679	68.200	4.801	PK
5		5492.140	111.798	106.697	N/A	N/A	5.101	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 0 by 5530MHz	

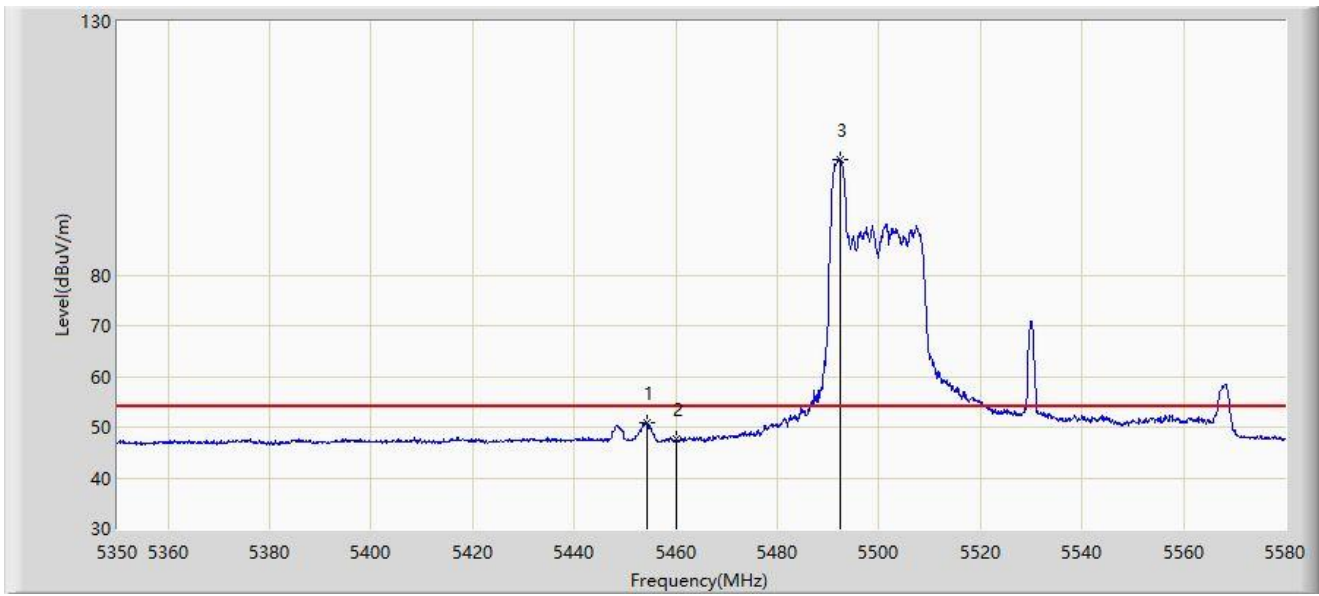


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5454.420	50.911	46.243	-3.089	54.000	4.668	AV
2		5460.000	47.553	42.837	-6.447	54.000	4.716	AV
3		5492.370	102.851	97.753	N/A	N/A	5.098	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 0 by 5530MHz	

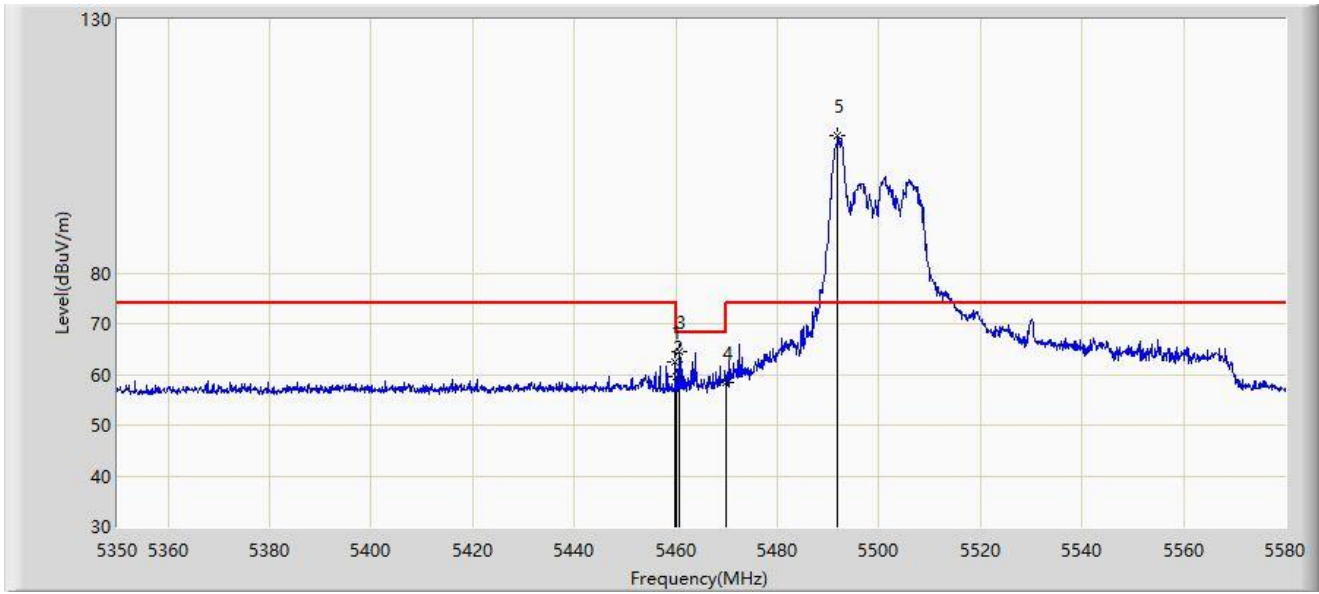

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5459.940	62.497	57.782	-11.503	74.000	4.715	PK
2		5460.000	59.462	54.746	-14.538	74.000	4.716	PK
3	*	5460.630	64.552	59.831	-3.648	68.200	4.721	PK
4		5470.000	58.486	53.685	-9.714	68.200	4.801	PK
5		5491.910	107.106	102.002	N/A	N/A	5.104	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).