


Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 0 by 5530MHz	

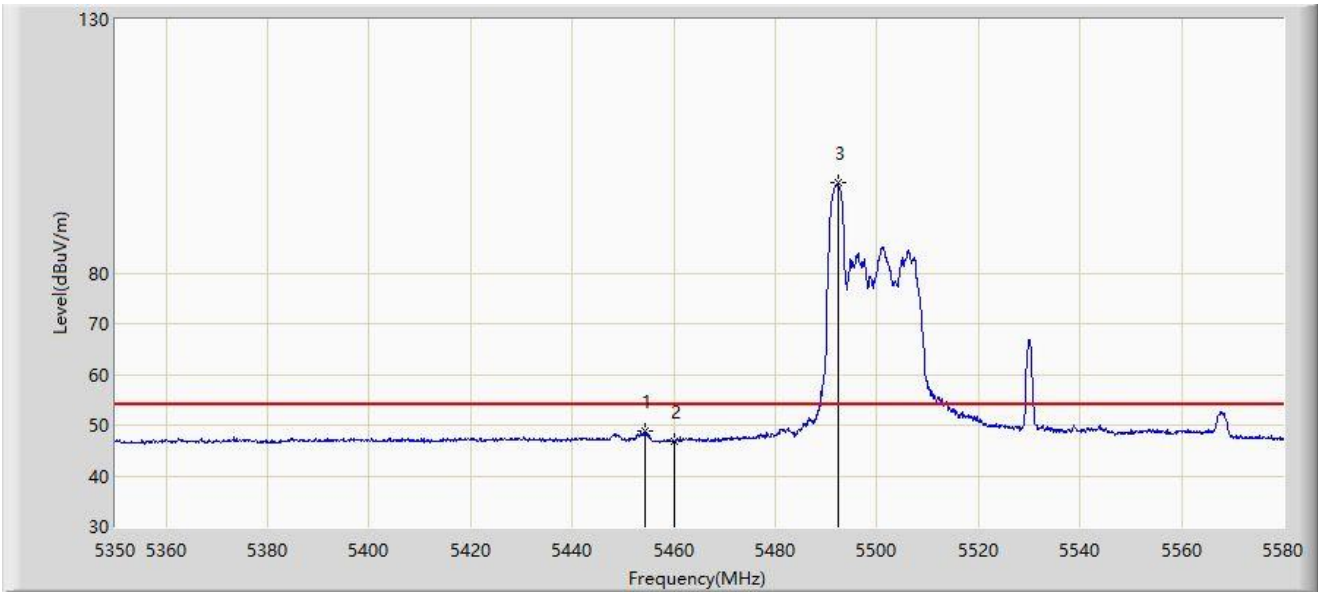


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5454.305	48.784	44.117	-5.216	54.000	4.666	AV
2		5460.000	46.901	42.185	-7.099	54.000	4.716	AV
3		5492.370	97.683	92.585	N/A	N/A	5.098	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 0 by 5610MHz	

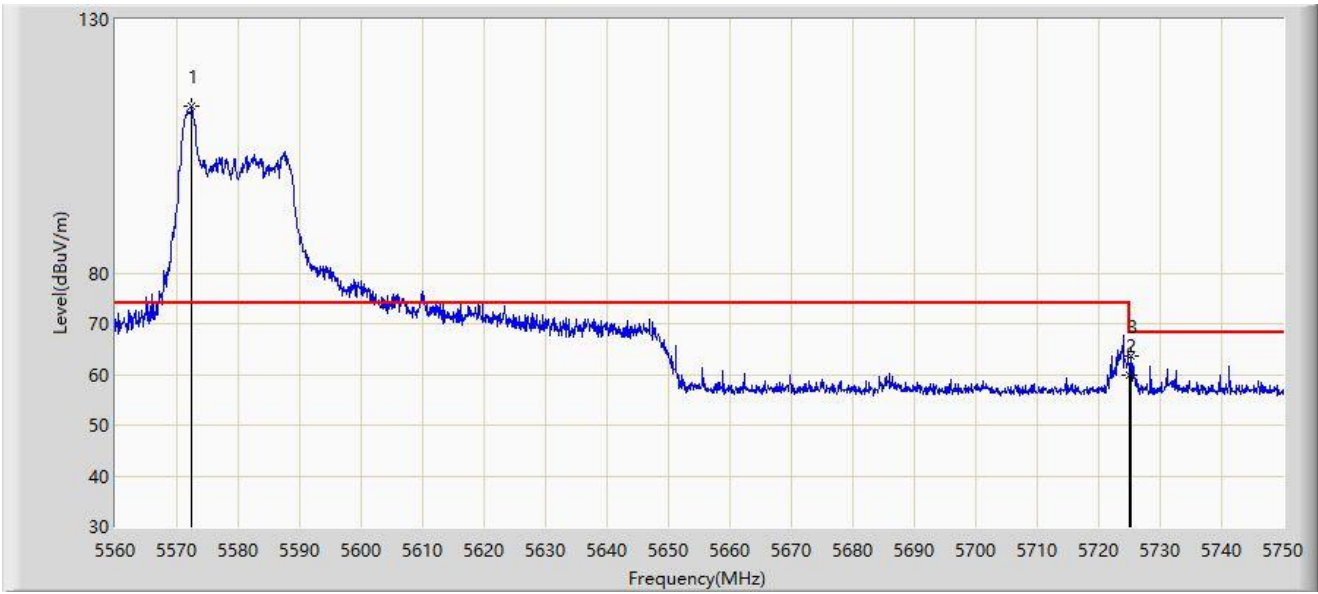


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5572.445	112.759	107.751	N/A	N/A	5.009	PK
2		5725.000	59.983	54.625	-8.217	68.200	5.358	PK
3	*	5725.300	63.749	58.389	-4.451	68.200	5.360	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 0 by 5610MHz	

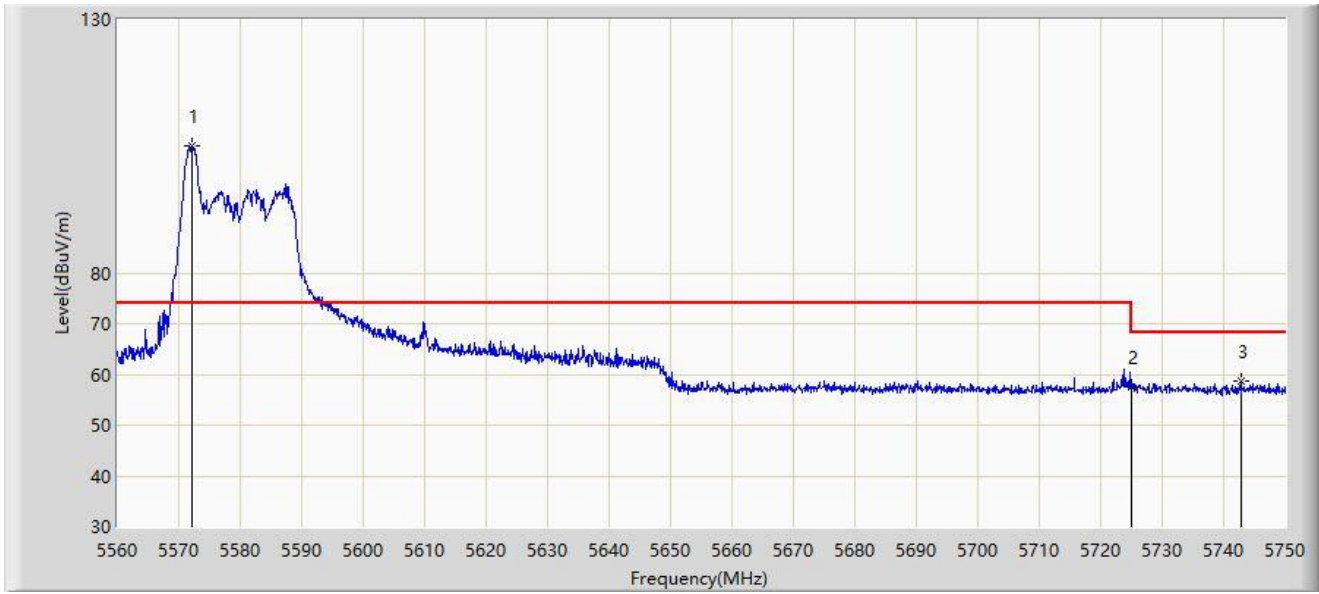


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5572.255	105.042	100.033	N/A	N/A	5.008	PK
2		5725.000	57.497	52.139	-10.703	68.200	5.358	PK
3	*	5742.780	58.733	53.197	-9.467	68.200	5.536	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 0 by 5775MHz	

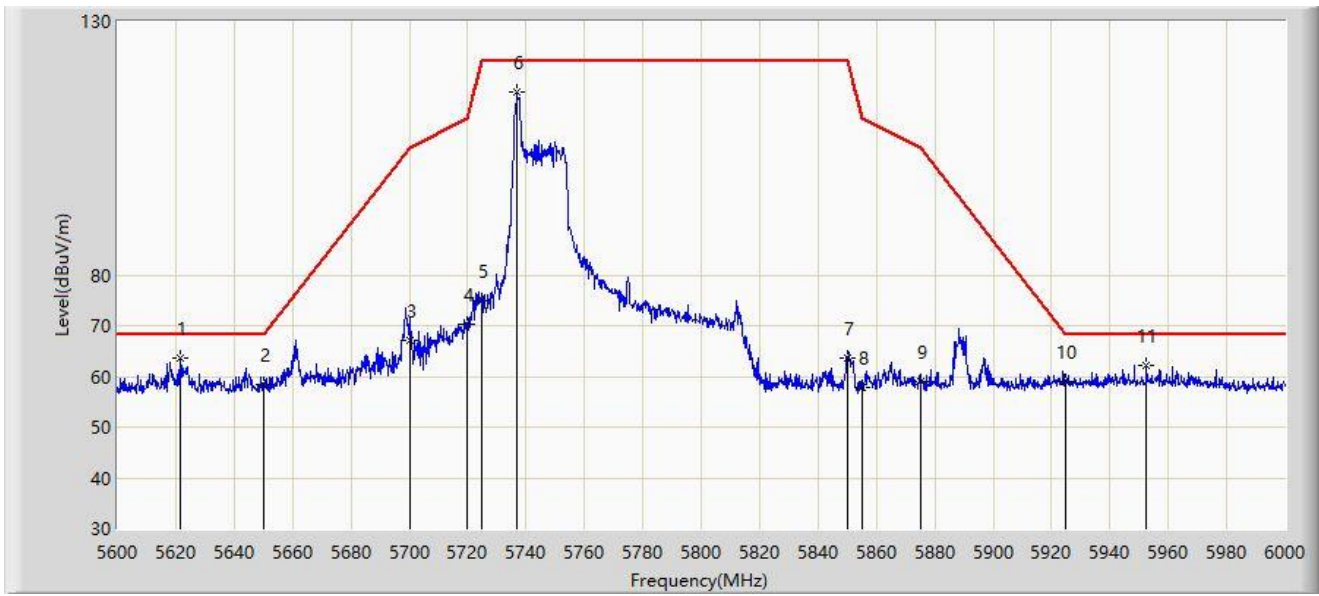


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5621.400	63.610	58.703	-4.590	68.200	4.906	PK
2		5650.000	58.372	53.293	-9.828	68.200	5.080	PK
3		5700.000	67.213	61.828	-37.987	105.200	5.385	PK
4		5720.000	70.289	64.964	-40.511	110.800	5.325	PK
5		5725.000	74.967	69.609	-47.233	122.200	5.358	PK
6		5736.800	116.017	110.542	N/A	N/A	5.475	PK
7		5850.000	63.625	57.741	-58.575	122.200	5.885	PK
8		5855.000	57.941	52.045	-52.859	110.800	5.896	PK
9		5875.000	58.918	52.949	-46.282	105.200	5.968	PK
10		5925.000	58.984	52.620	-9.216	68.200	6.365	PK
11		5952.600	62.072	55.556	-6.128	68.200	6.516	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 0 by 5775MHz	

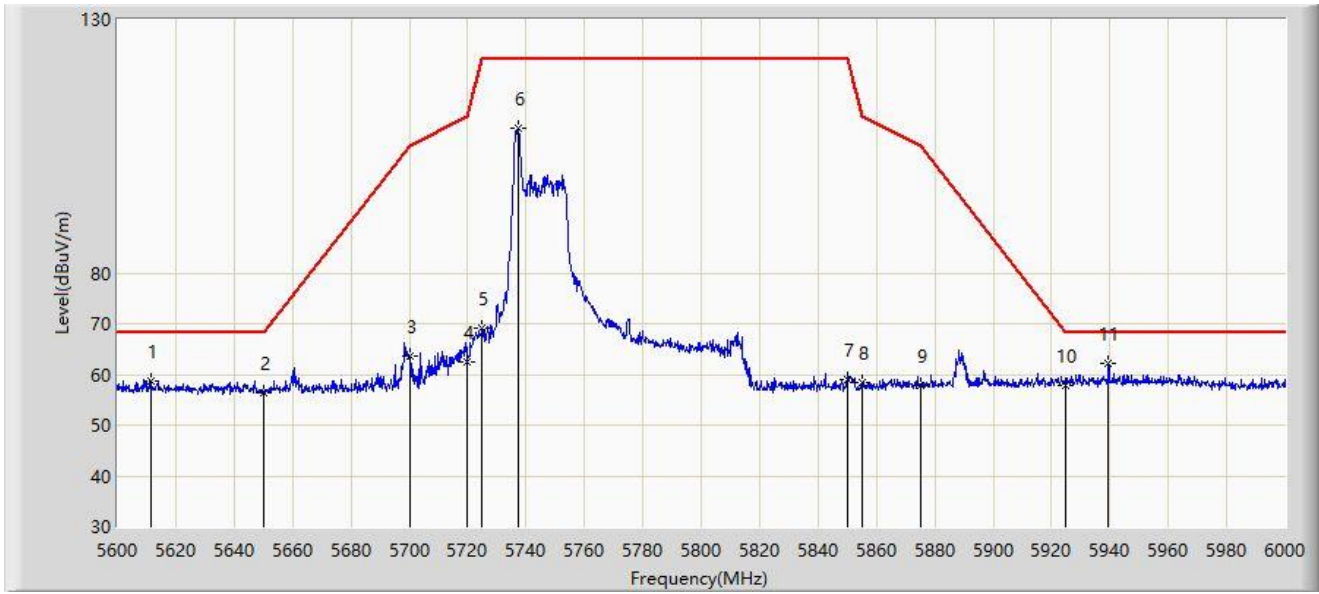


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5611.600	58.802	53.877	-9.398	68.200	4.925	PK
2		5650.000	56.240	51.161	-11.960	68.200	5.080	PK
3		5700.000	63.704	58.319	-41.496	105.200	5.385	PK
4		5720.000	62.392	57.067	-48.408	110.800	5.325	PK
5		5725.000	69.234	63.876	-52.966	122.200	5.358	PK
6		5737.200	108.434	102.955	N/A	N/A	5.479	PK
7		5850.000	58.982	53.098	-63.218	122.200	5.885	PK
8		5855.000	58.489	52.593	-52.311	110.800	5.896	PK
9		5875.000	57.696	51.727	-47.504	105.200	5.968	PK
10		5925.000	57.776	51.412	-10.424	68.200	6.365	PK
11	*	5939.400	62.140	55.617	-6.060	68.200	6.523	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 18 by 5210MHz	

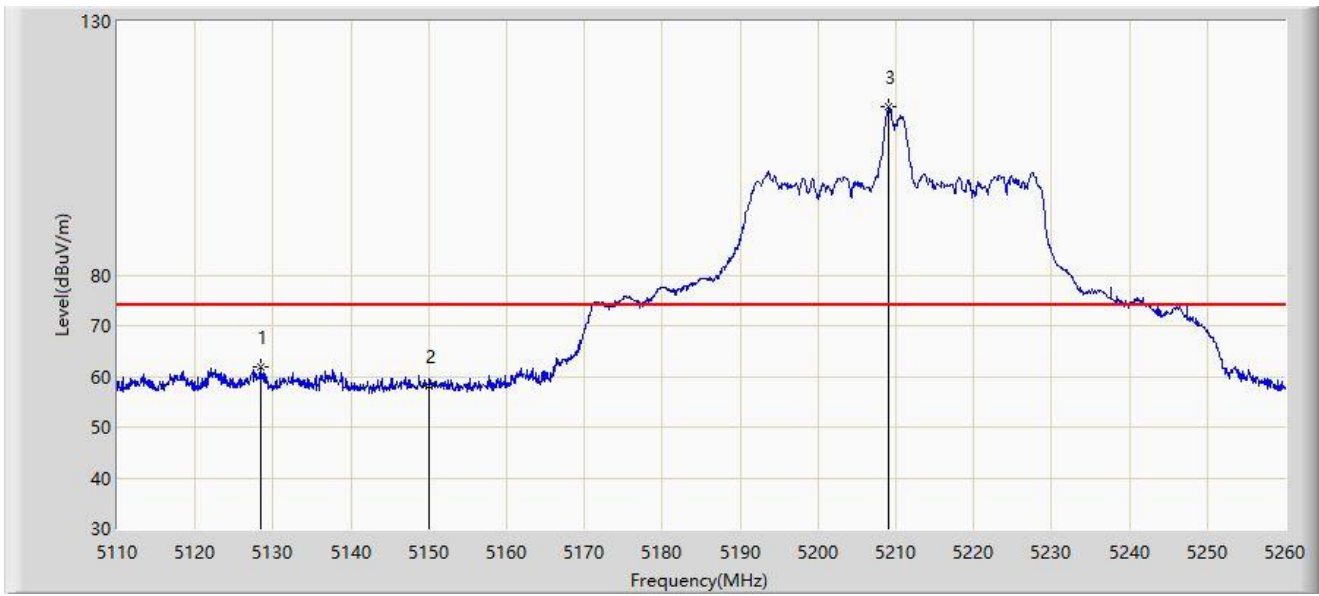


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5128.375	61.844	57.300	-12.156	74.000	4.544	PK
2		5150.000	58.144	53.176	-15.856	74.000	4.967	PK
3		5209.150	113.118	108.383	N/A	N/A	4.735	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 18 by 5210MHz	

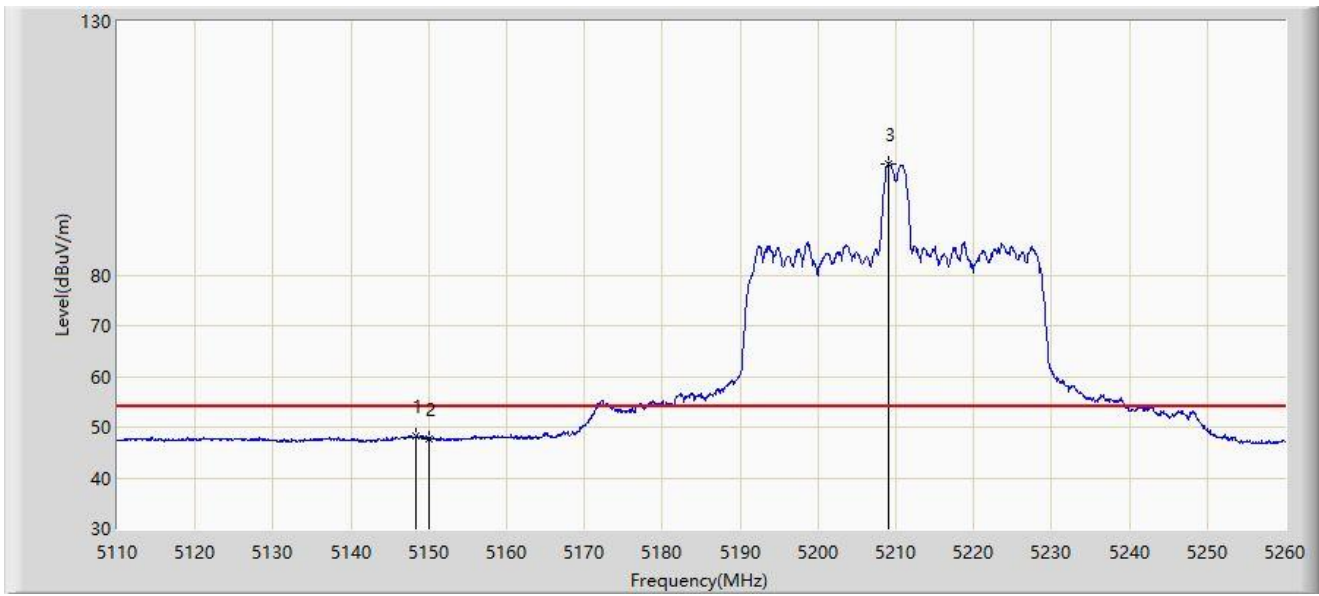


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5148.400	48.373	43.402	-5.627	54.000	4.971	AV
2		5150.000	47.742	42.774	-6.258	54.000	4.967	AV
3		5209.000	101.964	97.233	N/A	N/A	4.730	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 18 by 5210MHz	

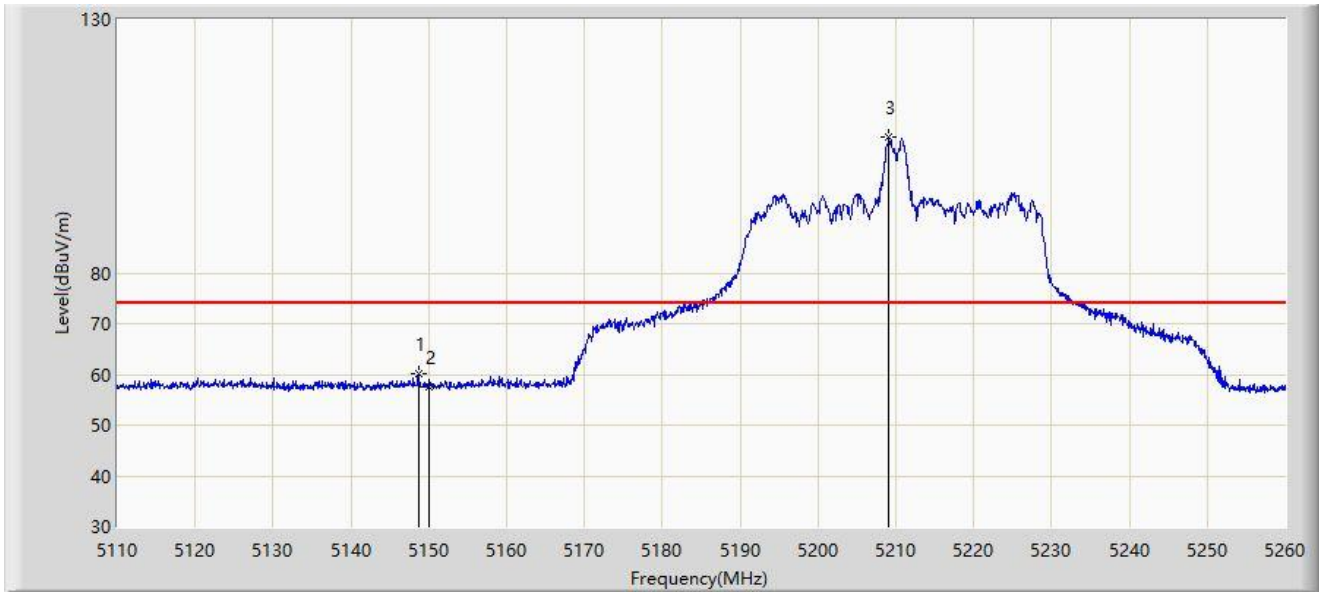

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5148.700	60.082	55.112	-13.918	74.000	4.970	PK
2		5150.000	57.661	52.693	-16.339	74.000	4.967	PK
3		5209.075	106.768	102.035	N/A	N/A	4.734	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 18 by 5210MHz	

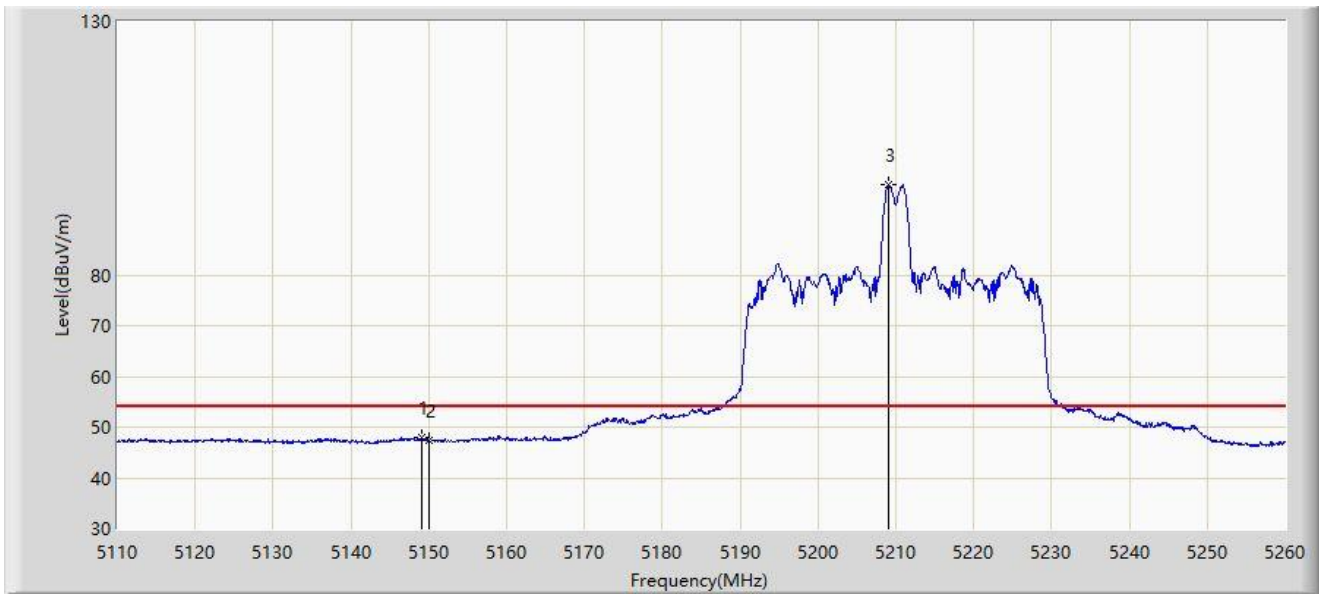


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5149.150	47.934	42.965	-6.066	54.000	4.969	AV
2		5150.000	47.464	42.496	-6.536	54.000	4.967	AV
3		5209.000	97.944	93.213	N/A	N/A	4.730	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 18 by 5290MHz	

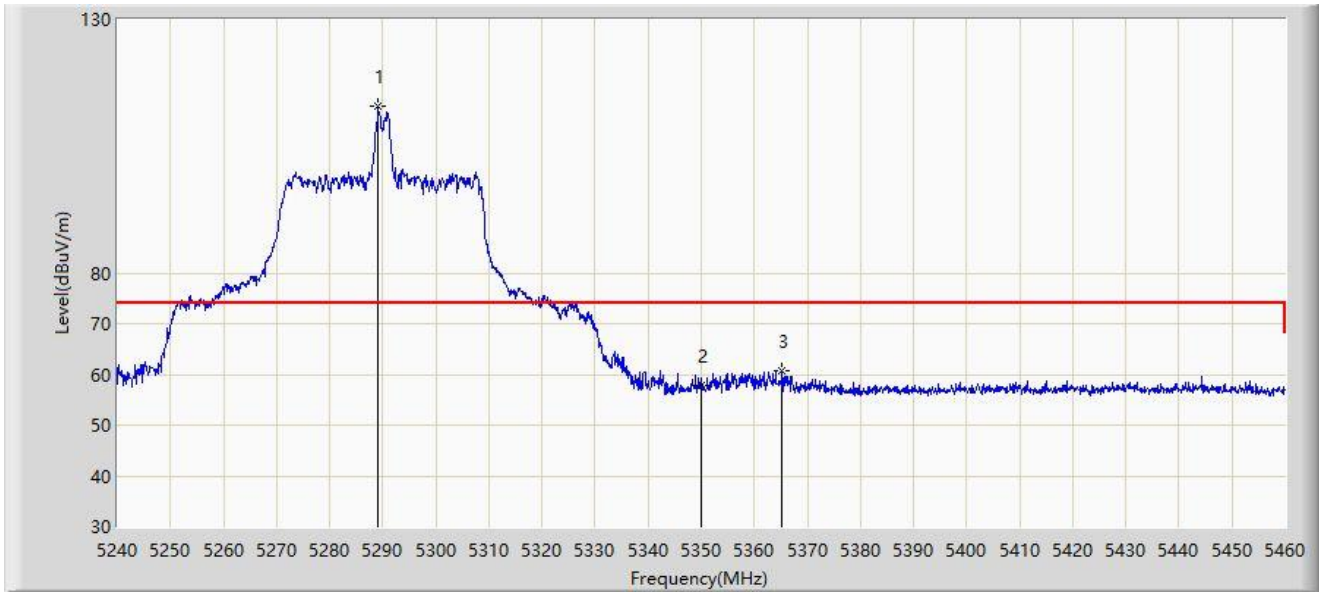


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5289.170	112.778	107.995	N/A	N/A	4.783	PK
2		5350.000	57.731	53.312	-16.269	74.000	4.419	PK
3	*	5365.290	60.808	56.246	-13.192	74.000	4.562	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 18 by 5290MHz	

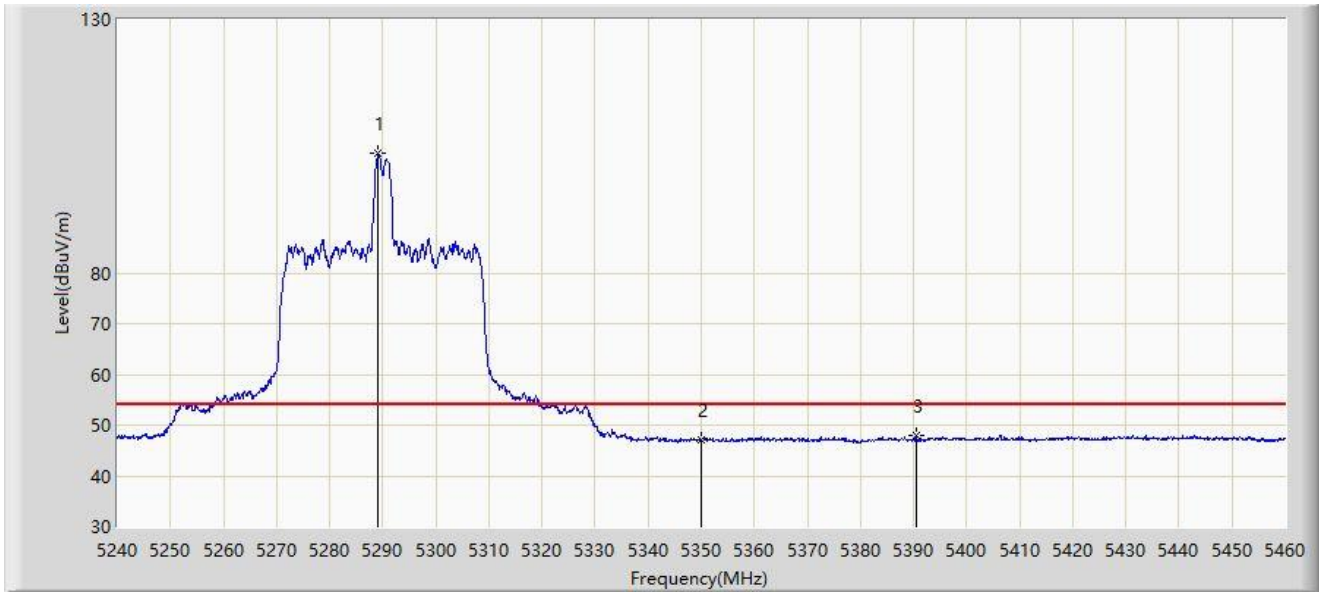

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5289.170	103.497	98.714	N/A	N/A	4.783	AV
2		5350.000	46.977	42.558	-7.023	54.000	4.419	AV
3	*	5390.480	47.845	43.244	-6.155	54.000	4.601	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 18 by 5290MHz	




No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5288.950	107.927	103.143	N/A	N/A	4.783	PK
2		5350.000	57.112	52.693	-16.888	74.000	4.419	PK
3	*	5404.010	59.321	54.717	-14.679	74.000	4.603	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 18 by 5290MHz	

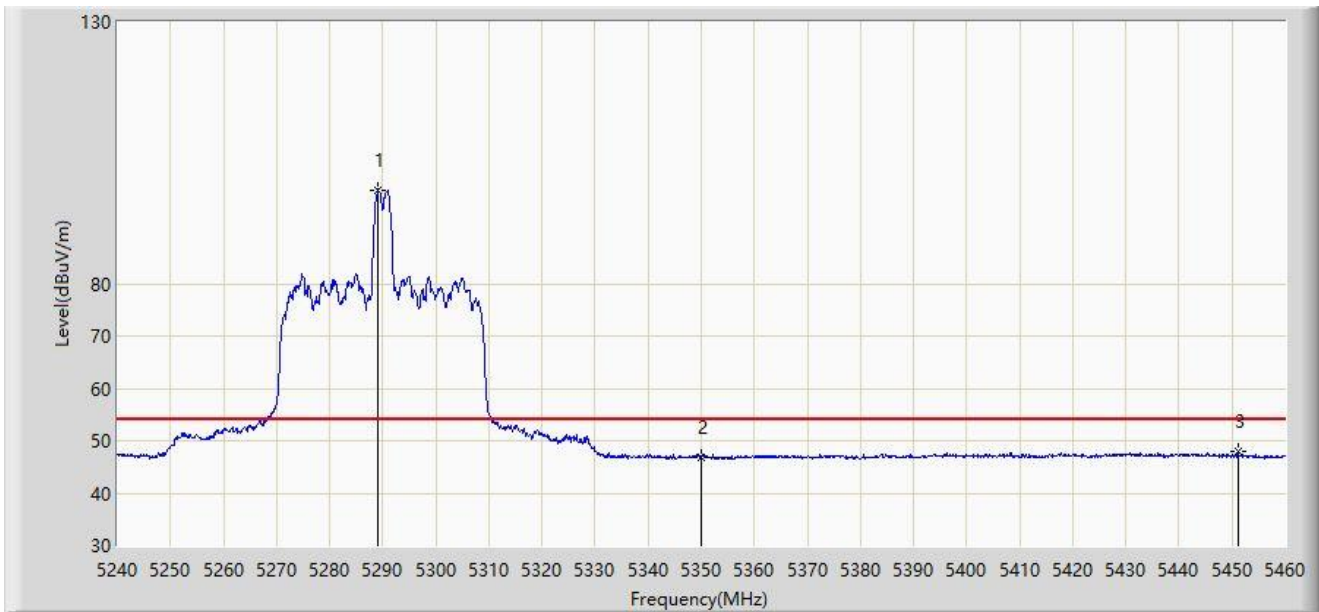


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5289.060	97.867	93.084	N/A	N/A	4.784	AV
2		5350.000	46.892	42.473	-7.108	54.000	4.419	AV
3	*	5451.090	47.880	43.163	-6.120	54.000	4.717	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 18 by 5530MHz	

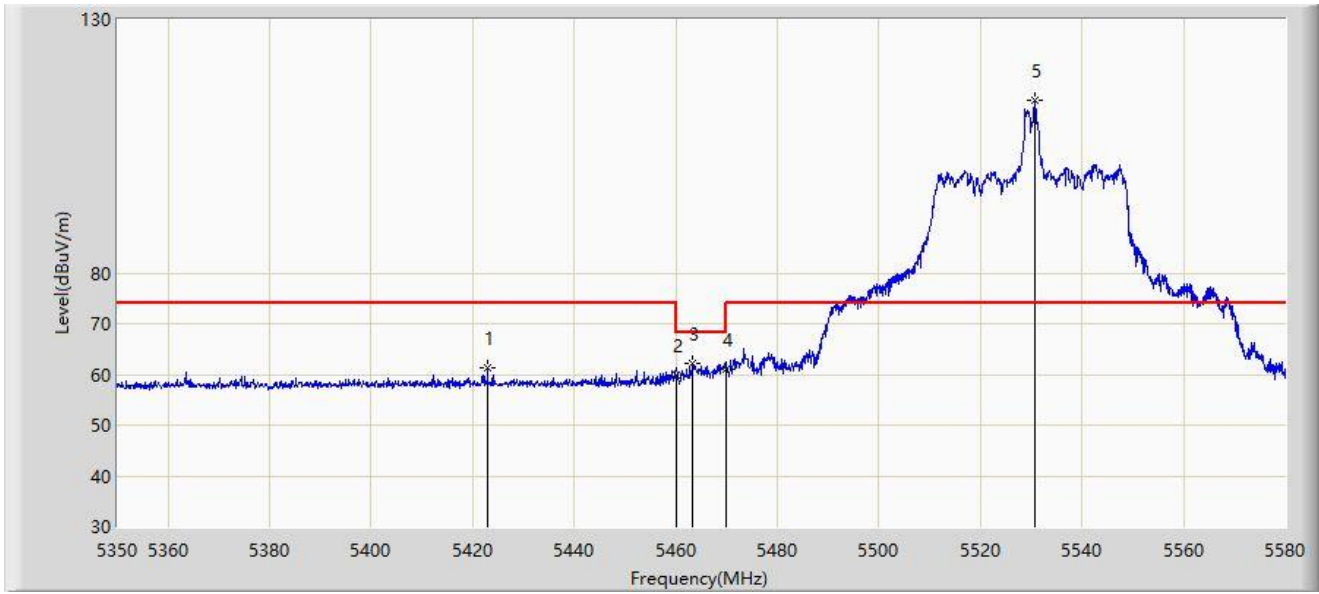


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5422.910	61.438	56.579	-12.562	74.000	4.859	PK
2		5460.000	59.853	55.137	-14.147	74.000	4.716	PK
3	*	5463.390	62.083	57.338	-6.117	68.200	4.744	PK
4		5470.000	61.100	56.299	-7.100	68.200	4.801	PK
5		5530.665	114.121	109.523	N/A	N/A	4.598	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 18 by 5530MHz	

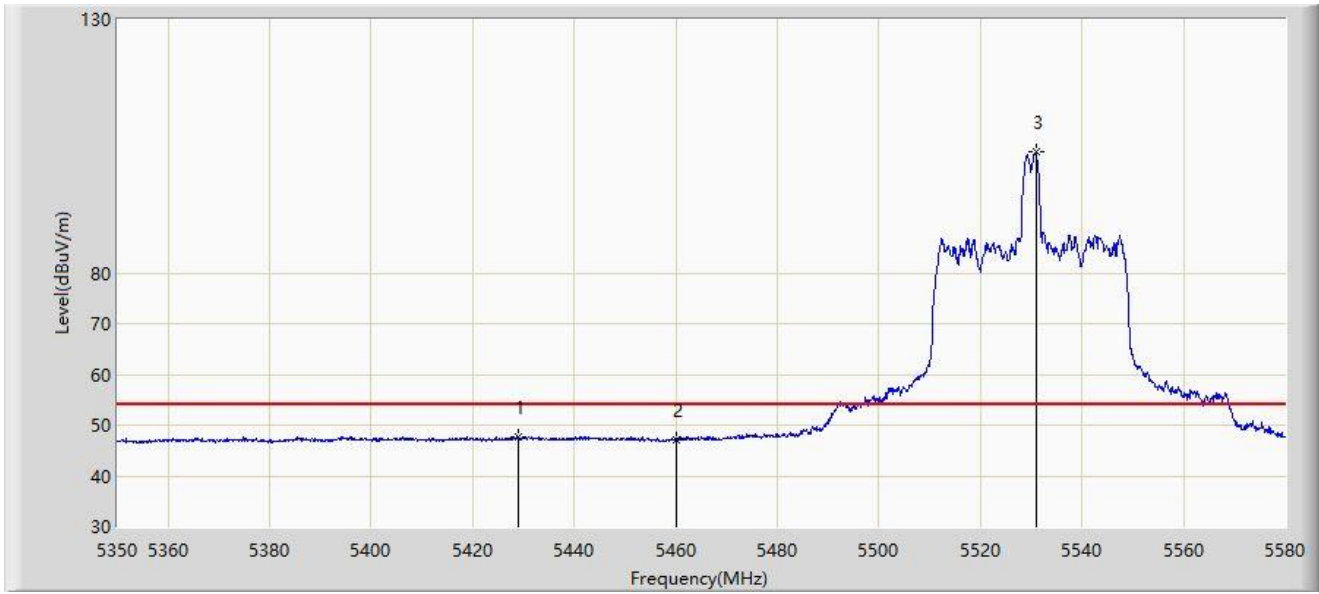


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5428.890	47.810	42.903	-6.190	54.000	4.907	AV
2		5460.000	47.043	42.327	-6.957	54.000	4.716	AV
3		5530.895	103.828	99.224	N/A	N/A	4.604	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 18 by 5530MHz	

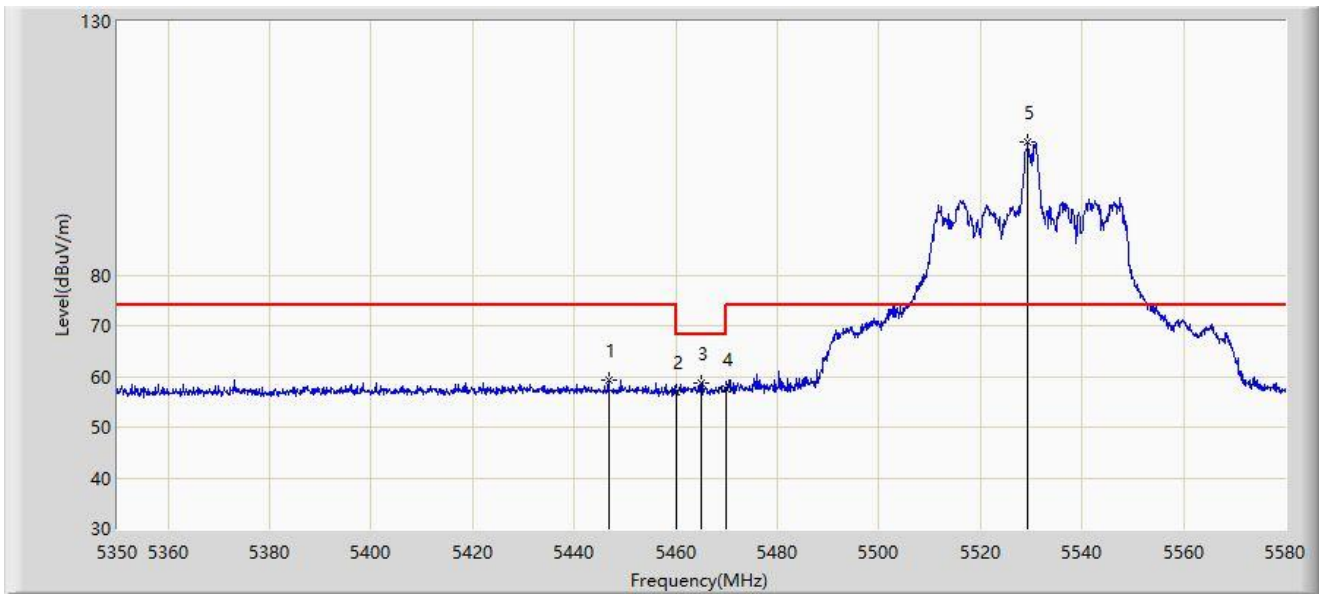

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5446.715	59.411	54.615	-14.589	74.000	4.795	PK
2		5460.000	57.024	52.308	-16.976	74.000	4.716	PK
3	*	5464.885	58.747	53.990	-9.453	68.200	4.758	PK
4		5470.000	57.579	52.778	-10.621	68.200	4.801	PK
5		5529.285	106.118	101.555	N/A	N/A	4.563	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 18 by 5530MHz	

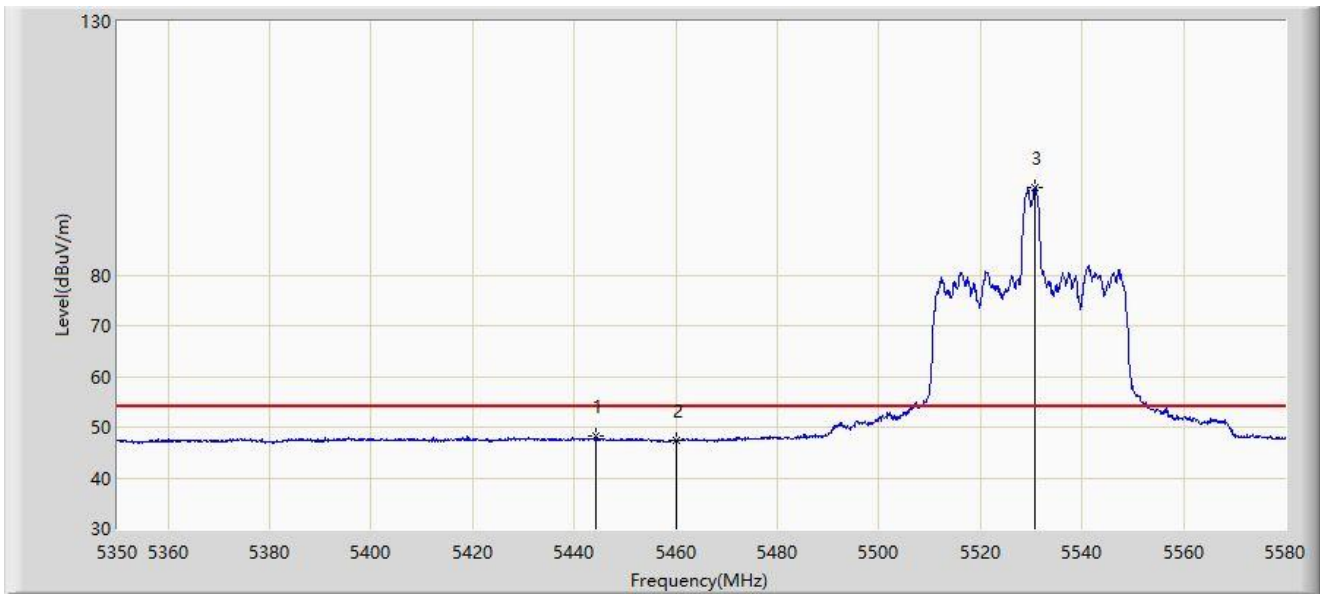


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5444.185	48.154	43.313	-5.846	54.000	4.842	AV
2		5460.000	47.345	42.629	-6.655	54.000	4.716	AV
3		5530.665	97.167	92.569	N/A	N/A	4.598	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 18 by 5610MHz	

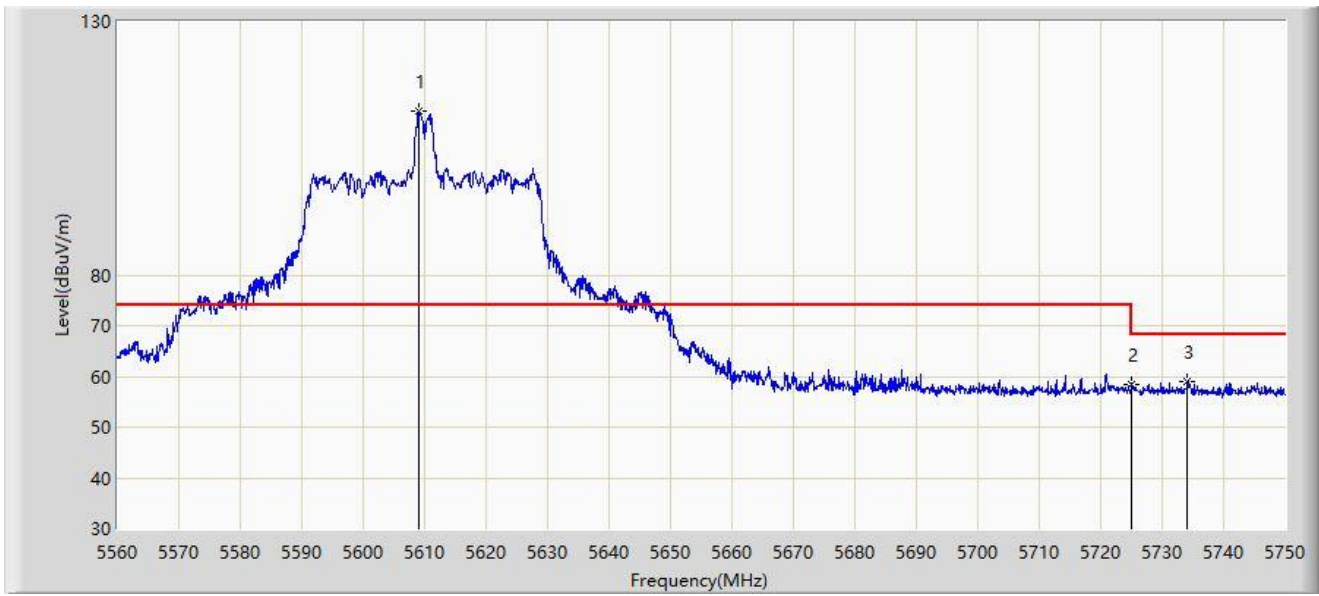


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5609.020	112.281	107.352	N/A	N/A	4.929	PK
2		5725.000	58.379	53.021	-9.821	68.200	5.358	PK
3	*	5734.040	59.073	53.626	-9.127	68.200	5.447	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 18 by 5610MHz	

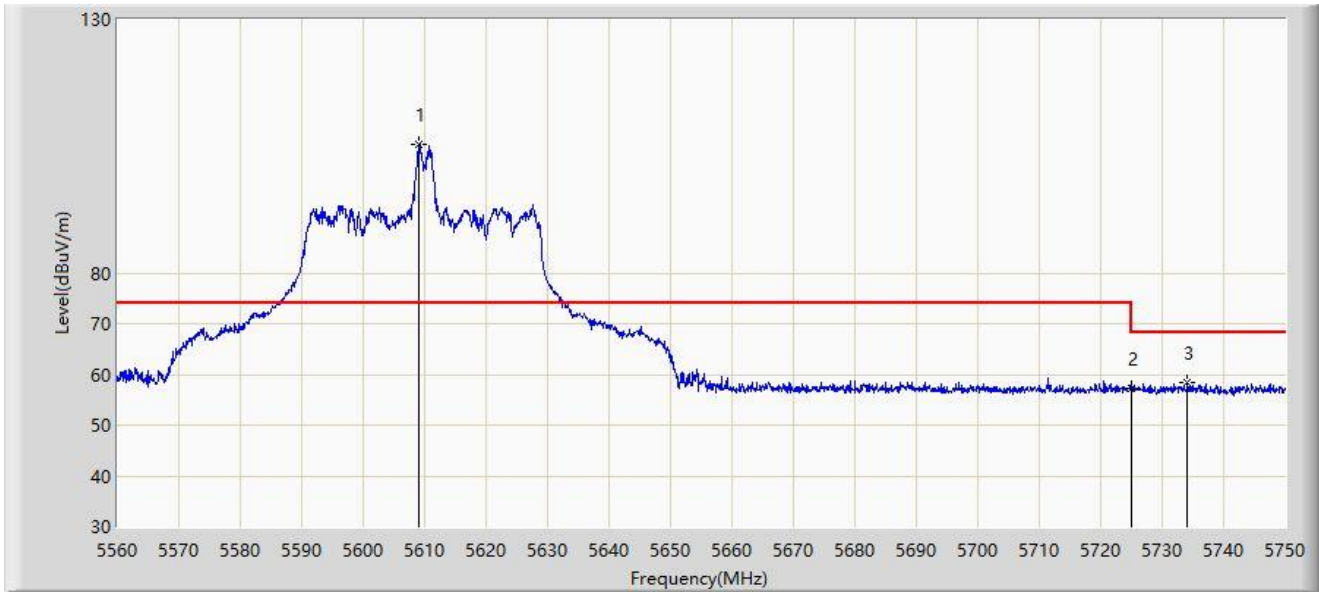


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5609.020	105.393	100.464	N/A	N/A	4.929	PK
2		5725.000	57.390	52.032	-10.810	68.200	5.358	PK
3	*	5734.135	58.378	52.930	-9.822	68.200	5.447	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 18 by 5775MHz	

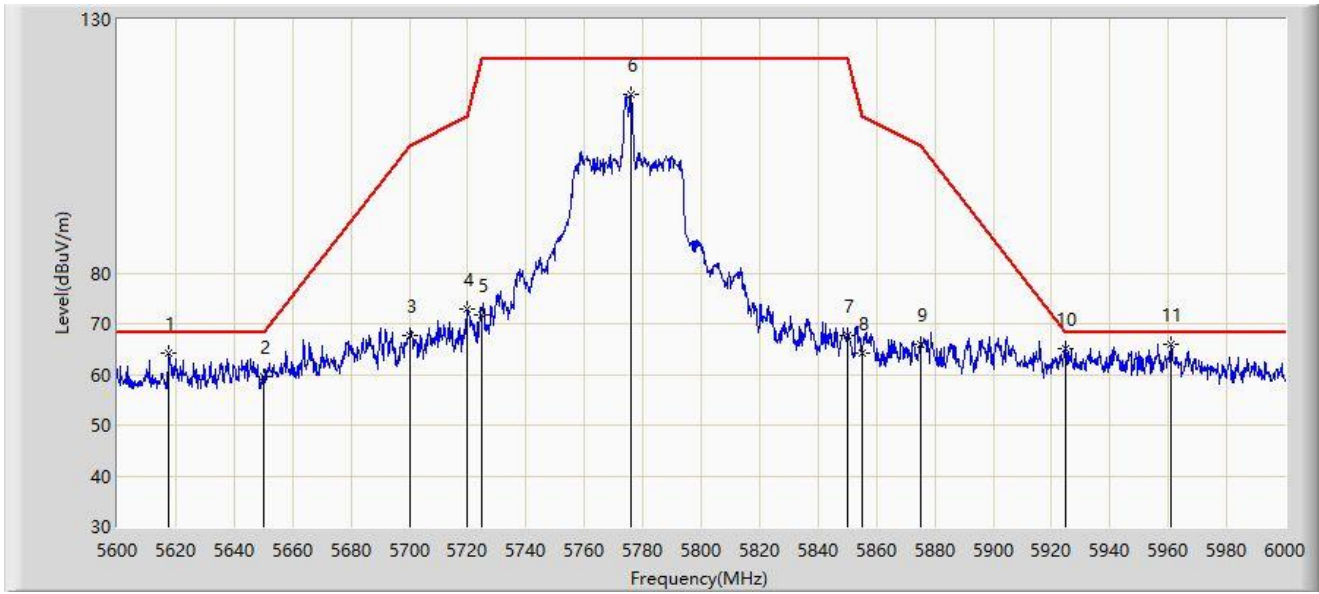


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5617.600	64.219	59.305	-3.981	68.200	4.914	PK
2		5650.000	59.666	54.587	-8.534	68.200	5.080	PK
3		5700.000	67.572	62.187	-37.628	105.200	5.385	PK
4		5720.000	72.861	67.536	-37.939	110.800	5.325	PK
5		5725.000	71.630	66.272	-50.570	122.200	5.358	PK
6		5775.800	115.196	109.624	N/A	N/A	5.571	PK
7		5850.000	67.745	61.861	-54.455	122.200	5.885	PK
8		5855.000	64.118	58.222	-46.682	110.800	5.896	PK
9		5875.000	65.985	60.016	-39.215	105.200	5.968	PK
10		5925.000	64.944	58.580	-3.256	68.200	6.365	PK
11	*	5960.800	65.940	59.502	-2.260	68.200	6.439	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 18 by 5775MHz	

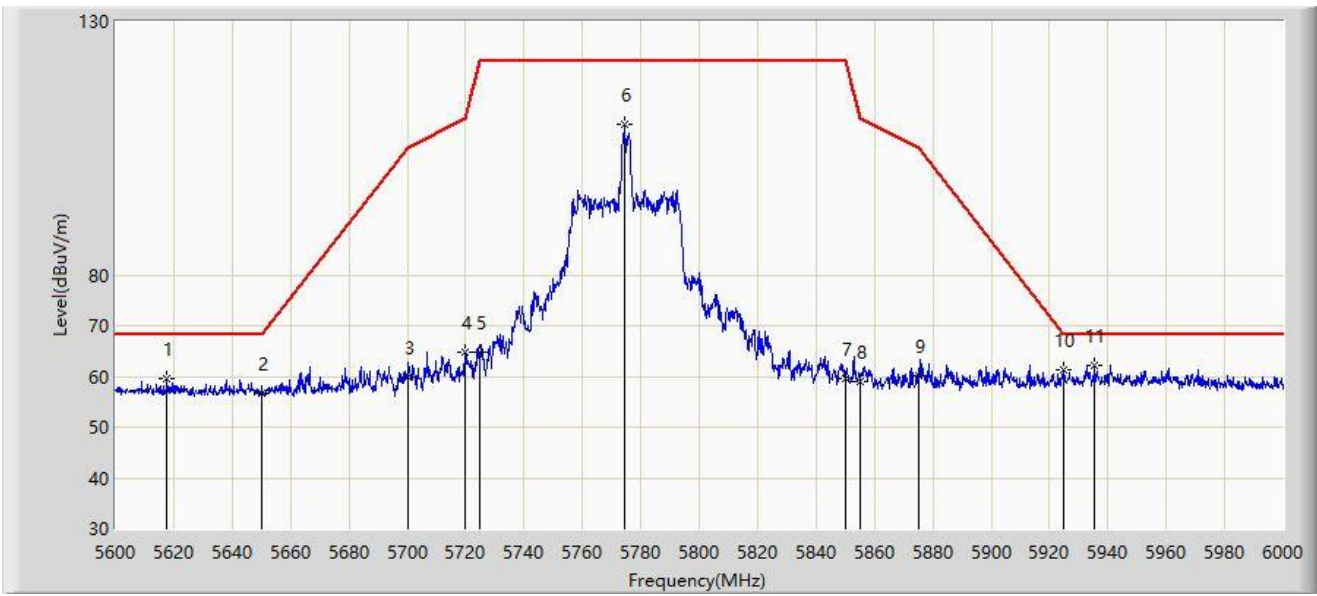


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5617.600	59.496	54.582	-8.704	68.200	4.914	PK
2		5650.000	56.522	51.443	-11.678	68.200	5.080	PK
3		5700.000	59.966	54.581	-45.234	105.200	5.385	PK
4		5720.000	64.715	59.390	-46.085	110.800	5.325	PK
5		5725.000	64.764	59.406	-57.436	122.200	5.358	PK
6		5774.400	109.640	104.058	N/A	N/A	5.582	PK
7		5850.000	59.560	53.676	-62.640	122.200	5.885	PK
8		5855.000	58.985	53.089	-51.815	110.800	5.896	PK
9		5875.000	60.265	54.296	-44.935	105.200	5.968	PK
10		5925.000	61.225	54.861	-6.975	68.200	6.365	PK
11	*	5935.400	62.227	55.728	-5.973	68.200	6.499	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 36 by 5210MHz	

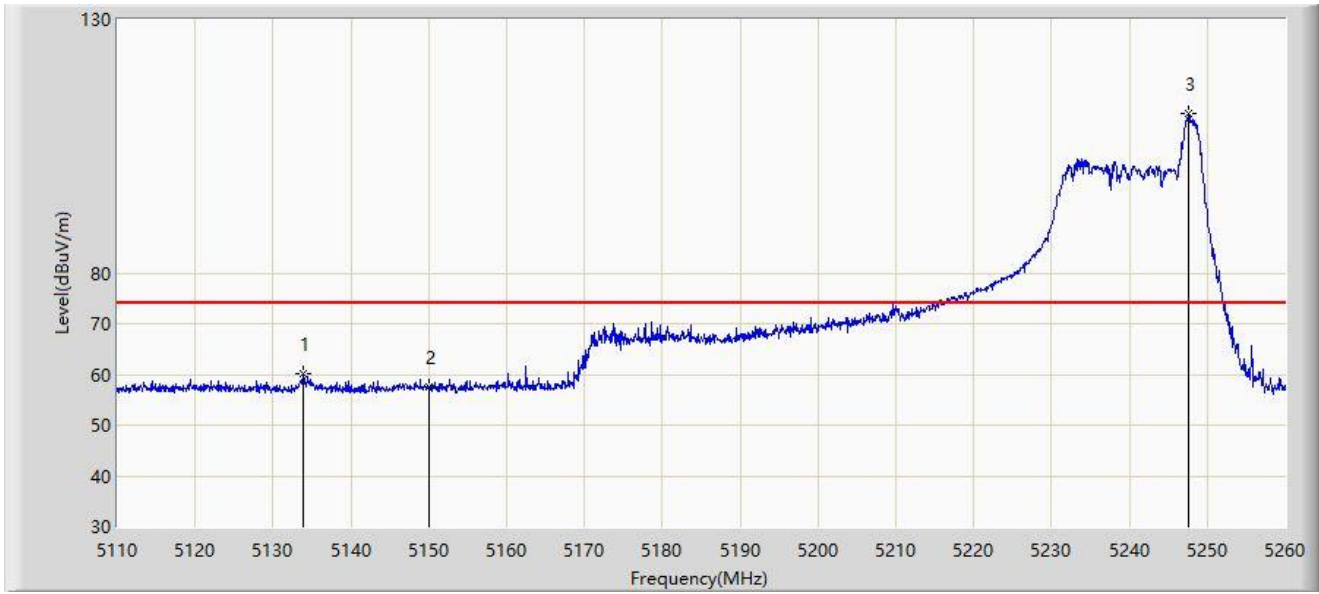


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5133.925	60.188	55.570	-13.812	74.000	4.618	PK
2		5150.000	57.432	52.464	-16.568	74.000	4.967	PK
3		5247.550	111.336	106.698	N/A	N/A	4.638	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 36 by 5210MHz	

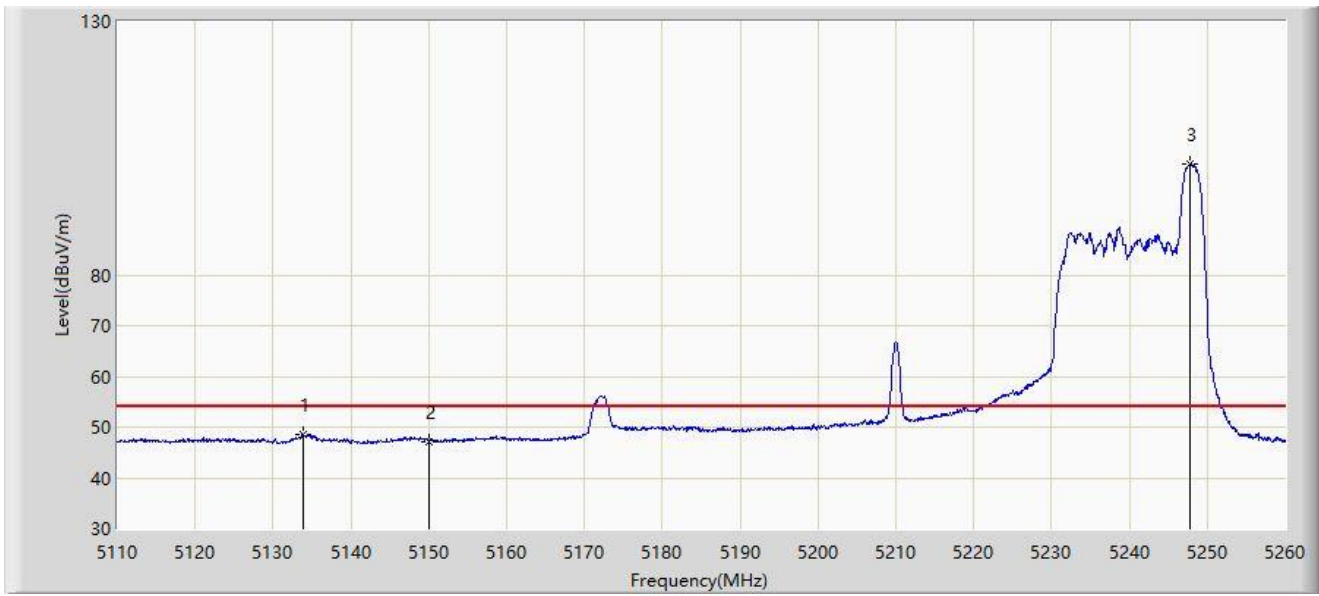


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5133.850	48.500	43.883	-5.500	54.000	4.616	AV
2		5150.000	47.243	42.275	-6.757	54.000	4.967	AV
3		5247.850	101.970	97.336	N/A	N/A	4.634	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 36 by 5210MHz	

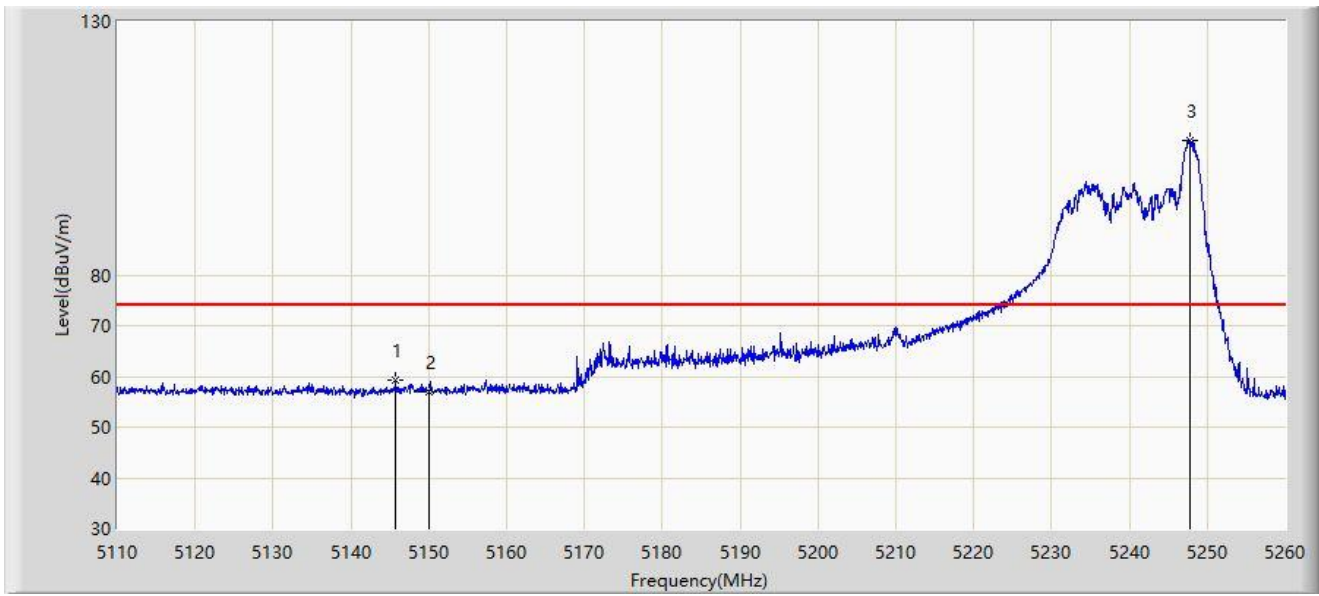

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5145.775	59.269	54.353	-14.731	74.000	4.916	PK
2		5150.000	56.972	52.004	-17.028	74.000	4.967	PK
3		5247.850	106.580	101.946	N/A	N/A	4.634	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 36 by 5210MHz	

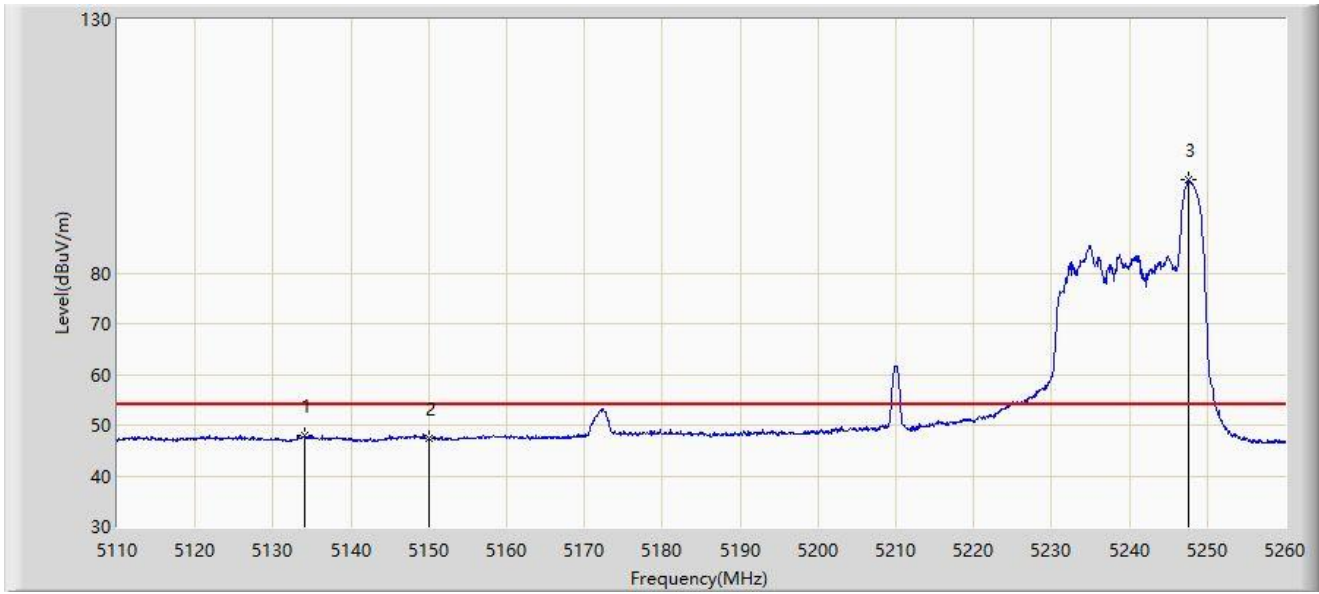


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5134.075	47.913	43.291	-6.087	54.000	4.622	AV
2		5150.000	47.485	42.517	-6.515	54.000	4.967	AV
3		5247.550	98.297	93.659	N/A	N/A	4.638	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 36 by 5290MHz	

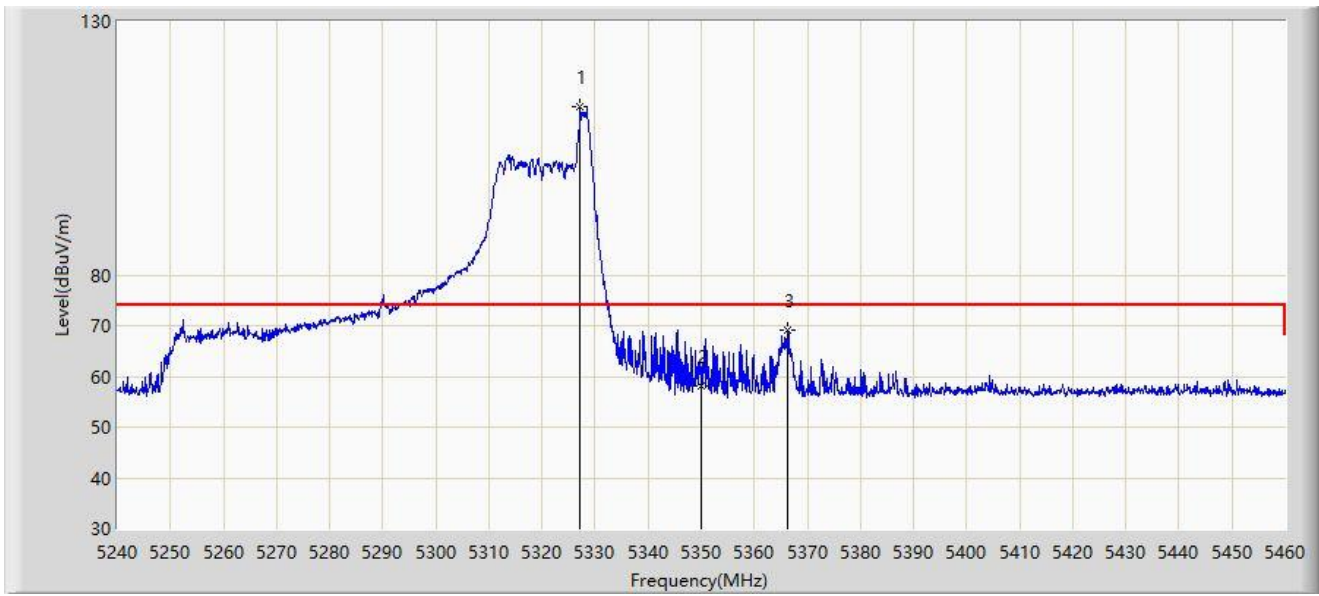


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5327.230	113.288	108.804	N/A	N/A	4.484	PK
2		5350.000	58.050	53.631	-15.950	74.000	4.419	PK
3	*	5366.390	69.060	64.485	-4.940	74.000	4.574	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 36 by 5290MHz	

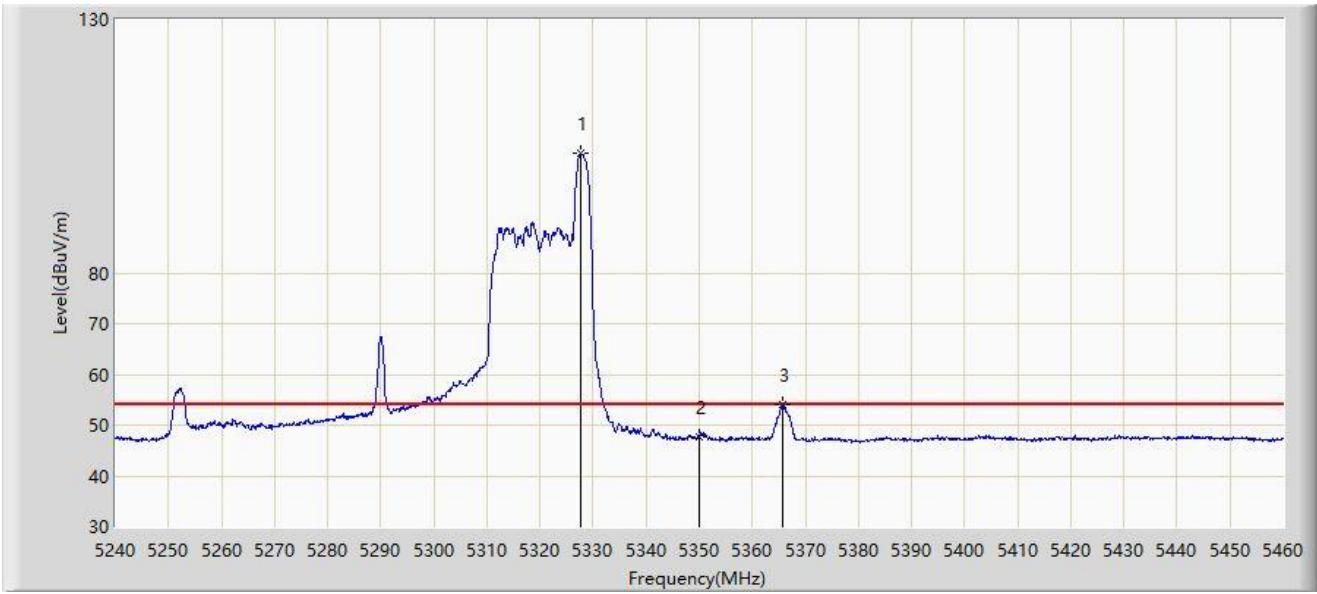


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5327.780	103.493	99.010	N/A	N/A	4.484	AV
2		5350.000	47.719	43.300	-6.281	54.000	4.419	AV
3	*	5365.840	53.944	49.376	-0.056	54.000	4.568	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 36 by 5290MHz	

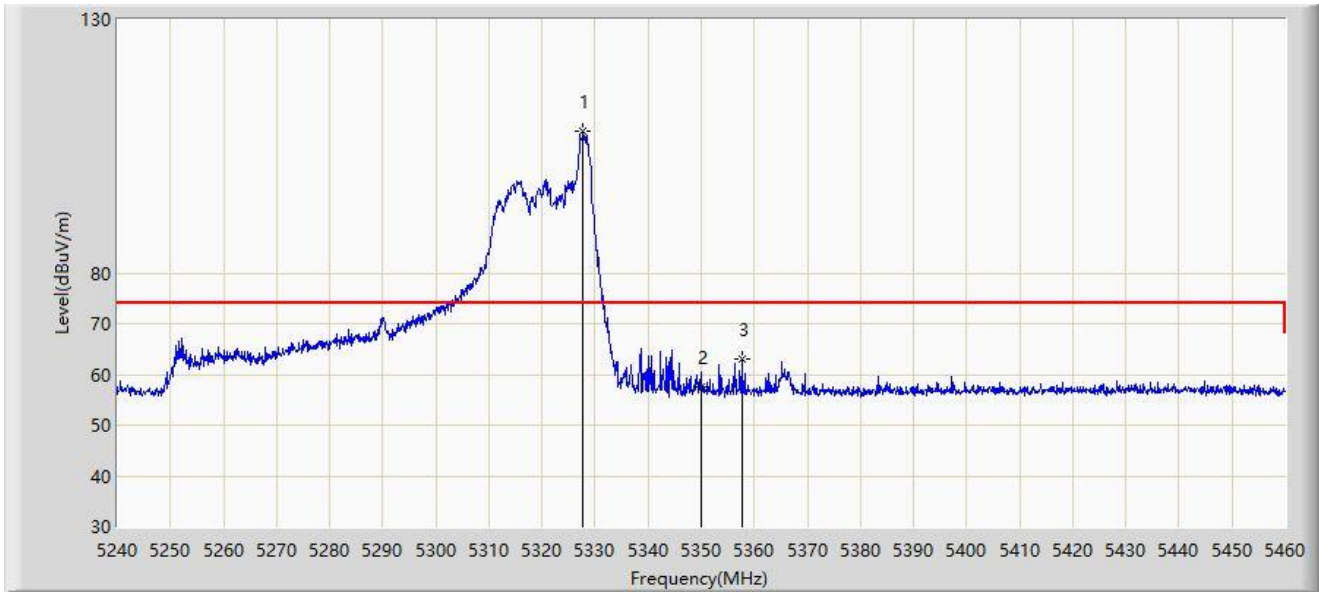


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5327.670	108.047	103.563	N/A	N/A	4.483	PK
2		5350.000	57.564	53.145	-16.436	74.000	4.419	PK
3	*	5357.590	62.920	58.445	-11.080	74.000	4.476	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 36 by 5290MHz	

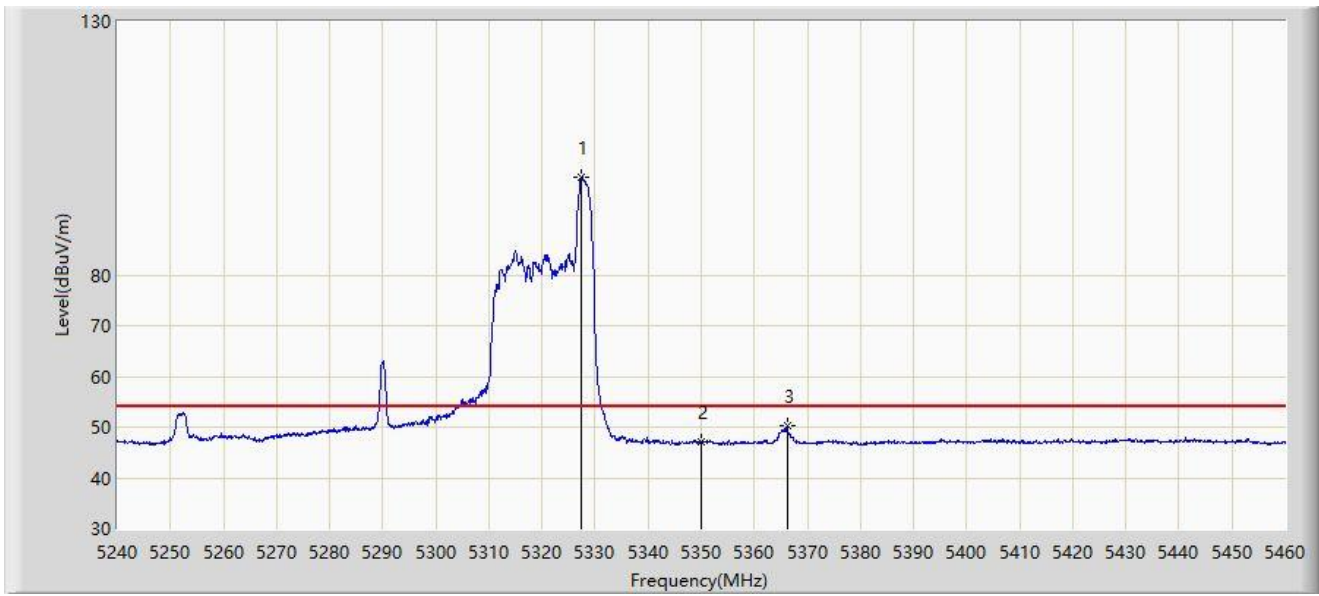


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5327.450	99.158	94.674	N/A	N/A	4.485	AV
2		5350.000	47.177	42.758	-6.823	54.000	4.419	AV
3	*	5366.170	50.256	45.684	-3.744	54.000	4.572	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 36 by 5530MHz	

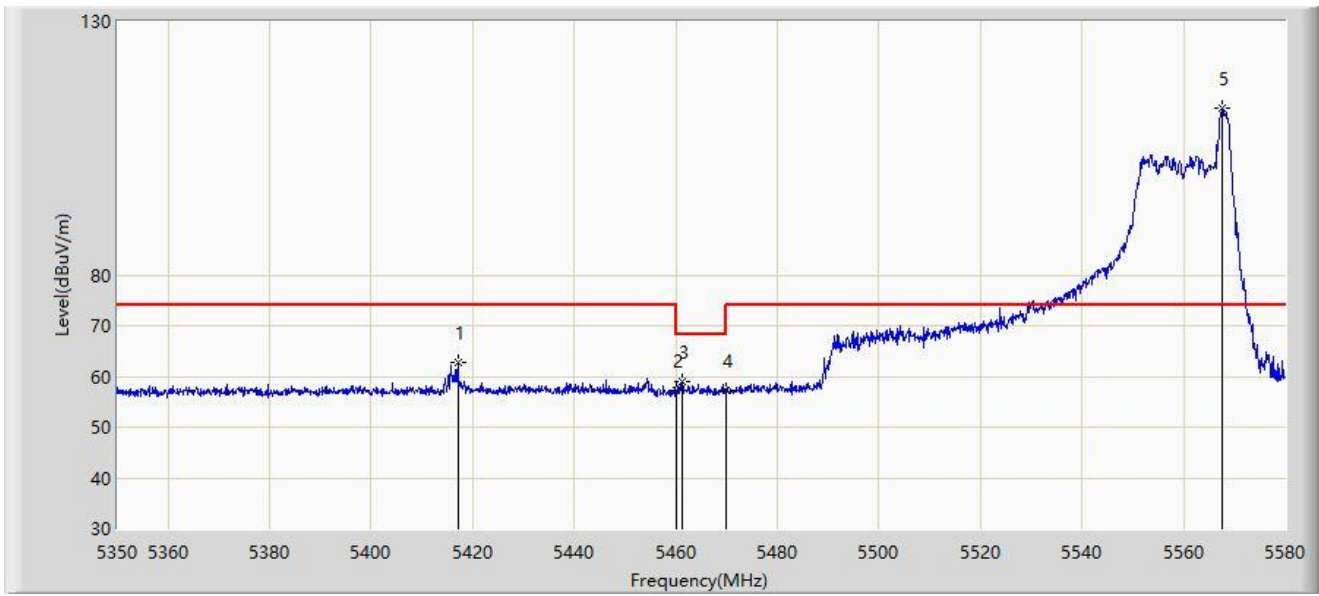


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5417.045	62.612	57.819	-11.388	74.000	4.793	PK
2		5460.000	57.342	52.626	-16.658	74.000	4.716	PK
3	*	5461.205	58.936	54.210	-9.264	68.200	4.726	PK
4		5470.000	57.208	52.407	-10.992	68.200	4.801	PK
5		5567.580	112.847	107.828	N/A	N/A	5.019	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 36 by 5530MHz	

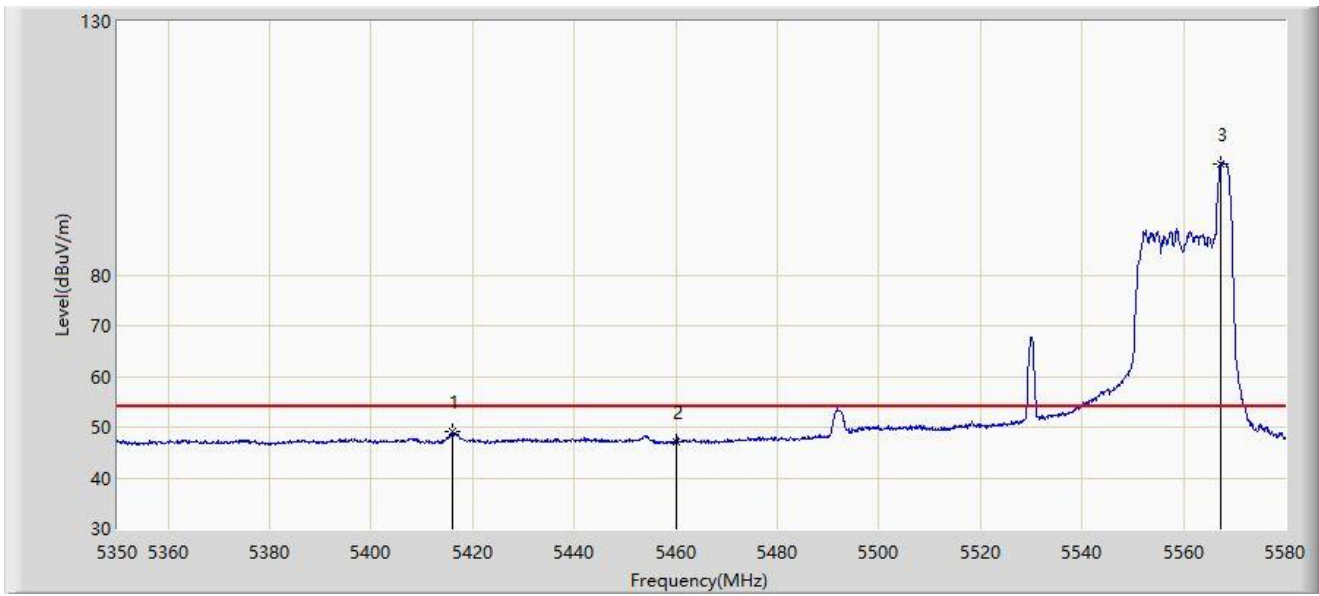


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5416.125	49.066	44.286	-4.934	54.000	4.779	AV
2		5460.000	47.103	42.387	-6.897	54.000	4.716	AV
3		5567.235	101.901	96.881	N/A	N/A	5.019	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 36 by 5530MHz	

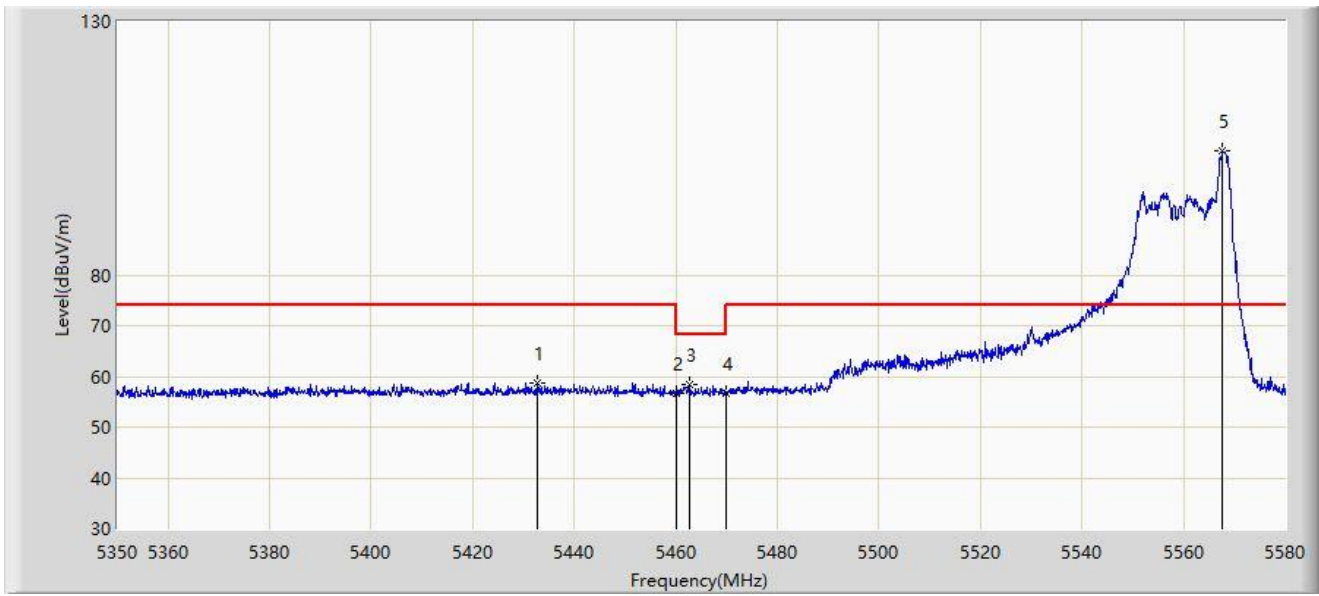

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5432.800	58.800	53.862	-15.200	74.000	4.937	PK
2		5460.000	56.718	52.002	-17.282	74.000	4.716	PK
3	*	5462.815	58.466	53.726	-9.734	68.200	4.739	PK
4		5470.000	56.778	51.977	-11.422	68.200	4.801	PK
5		5567.580	104.510	99.491	N/A	N/A	5.019	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 36 by 5530MHz	

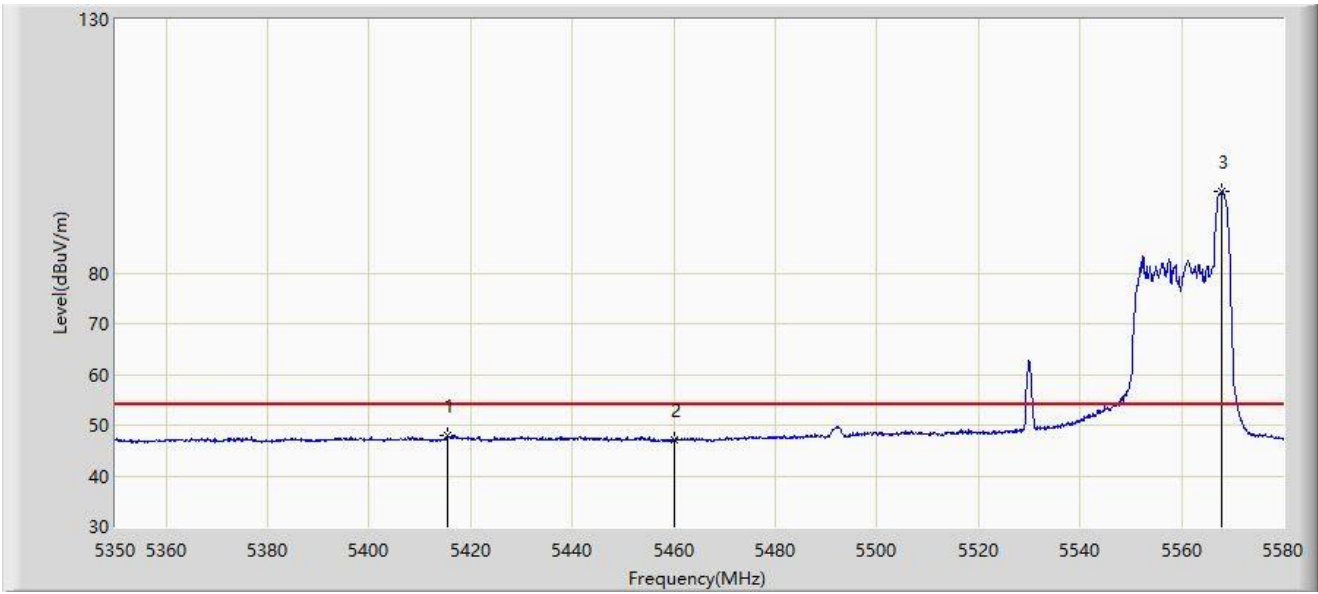


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5415.550	47.844	43.073	-6.156	54.000	4.771	AV
2		5460.000	47.065	42.349	-6.935	54.000	4.716	AV
3		5567.810	96.052	91.034	N/A	N/A	5.019	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 36 by 5610MHz	

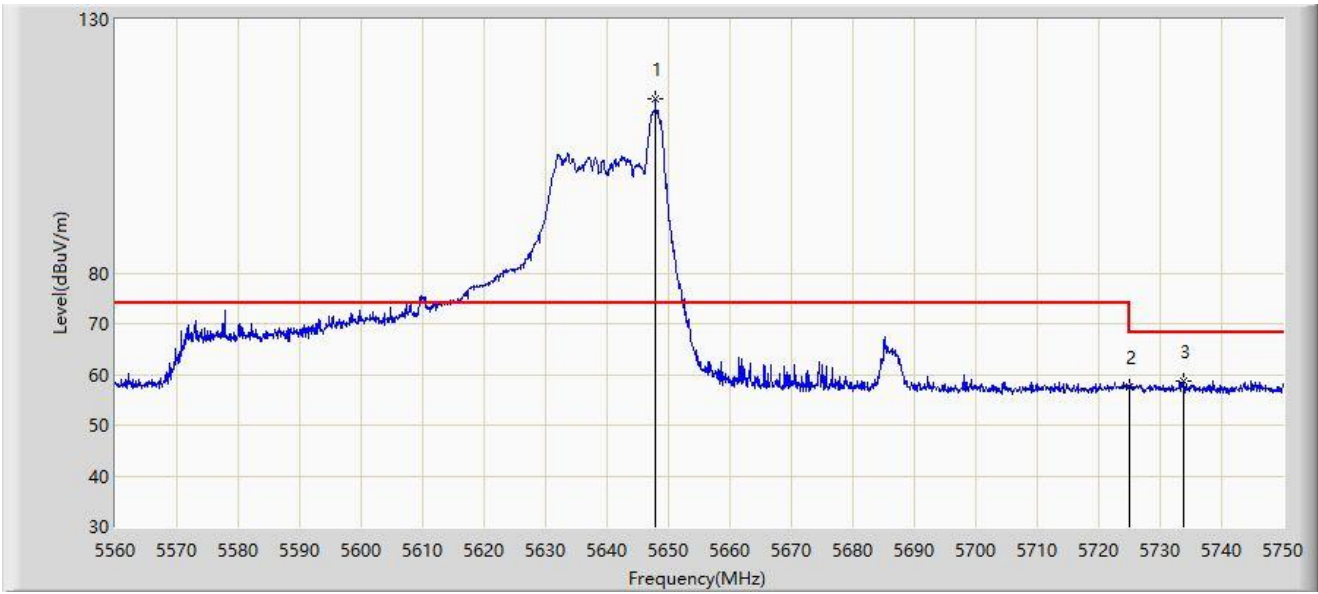


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5647.875	114.306	109.233	N/A	N/A	5.073	PK
2		5725.000	57.424	52.066	-10.776	68.200	5.358	PK
3	*	5733.755	58.736	53.292	-9.464	68.200	5.445	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 36 by 5610MHz	

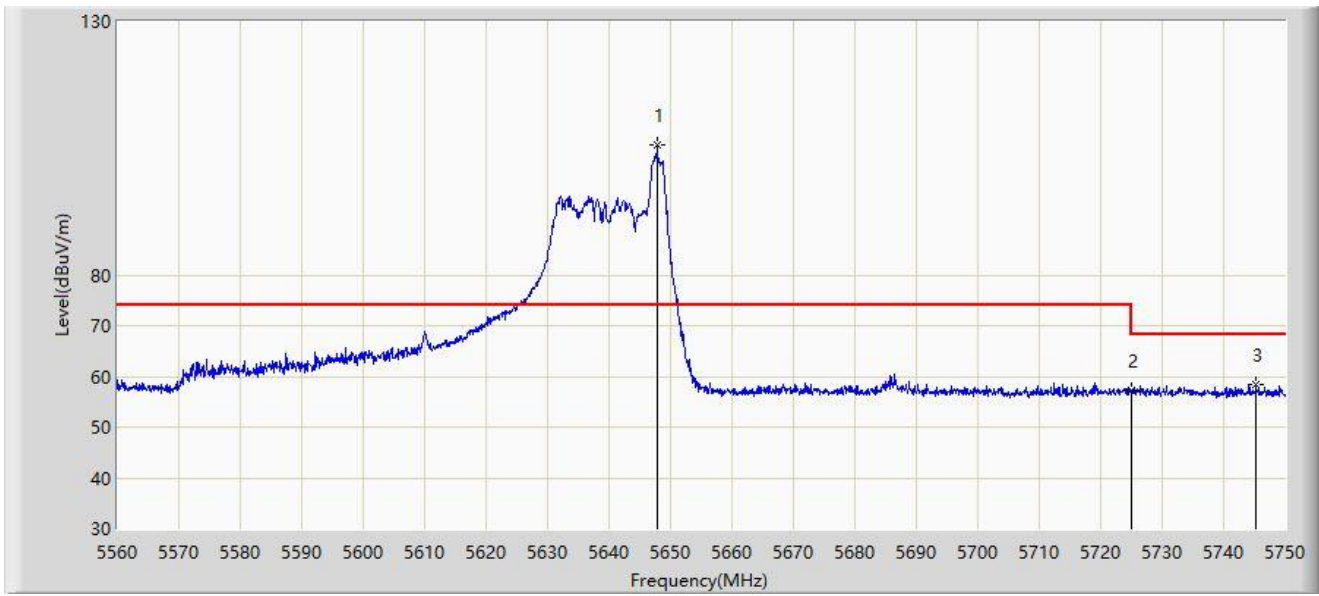


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5647.875	105.567	100.494	N/A	N/A	5.073	PK
2		5725.000	57.359	52.001	-10.841	68.200	5.358	PK
3	*	5745.250	58.330	52.773	-9.870	68.200	5.557	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 36 by 5775MHz	

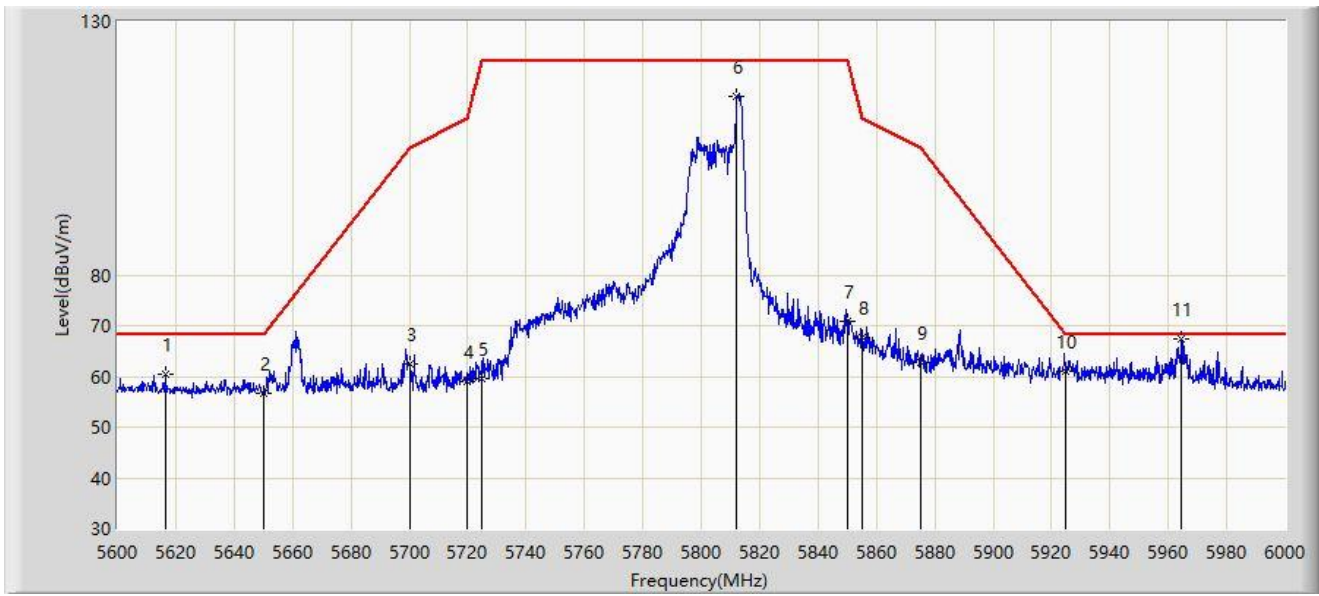


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5616.400	60.531	55.615	-7.669	68.200	4.916	PK
2		5650.000	56.528	51.449	-11.672	68.200	5.080	PK
3		5700.000	62.518	57.133	-42.682	105.200	5.385	PK
4		5720.000	58.981	53.656	-51.819	110.800	5.325	PK
5		5725.000	59.485	54.127	-62.715	122.200	5.358	PK
6		5812.200	115.269	109.555	N/A	N/A	5.714	PK
7		5850.000	70.792	64.908	-51.408	122.200	5.885	PK
8		5855.000	67.714	61.818	-43.086	110.800	5.896	PK
9		5875.000	62.742	56.773	-42.458	105.200	5.968	PK
10		5925.000	60.915	54.551	-7.285	68.200	6.365	PK
11	*	5964.600	67.513	61.112	-0.687	68.200	6.401	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-26 Tone-RU 36 by 5775MHz	

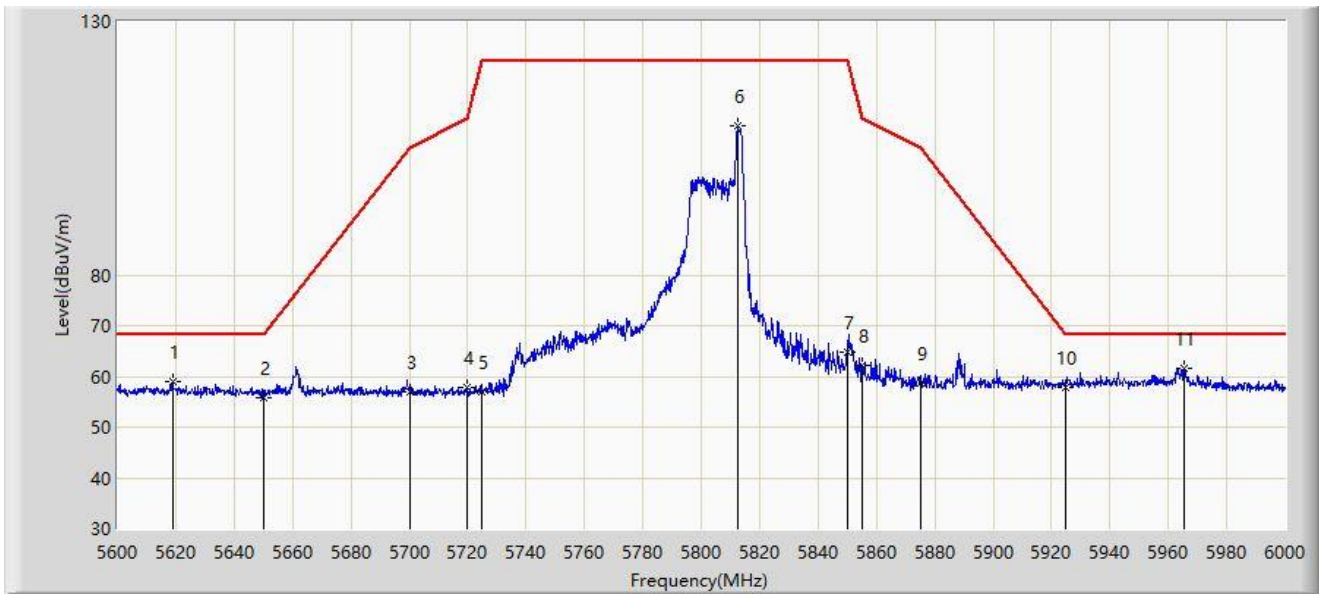


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5619.000	58.893	53.982	-9.307	68.200	4.911	PK
2		5650.000	55.744	50.665	-12.456	68.200	5.080	PK
3		5700.000	56.860	51.475	-48.340	105.200	5.385	PK
4		5720.000	57.933	52.608	-52.867	110.800	5.325	PK
5		5725.000	57.058	51.700	-65.142	122.200	5.358	PK
6		5812.400	109.548	103.831	N/A	N/A	5.717	PK
7		5850.000	64.883	58.999	-57.317	122.200	5.885	PK
8		5855.000	62.045	56.149	-48.755	110.800	5.896	PK
9		5875.000	58.677	52.708	-46.523	105.200	5.968	PK
10		5925.000	57.902	51.538	-10.298	68.200	6.365	PK
11	*	5965.600	61.501	55.111	-6.699	68.200	6.390	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-996 Tone-RU 67 by 5210MHz	

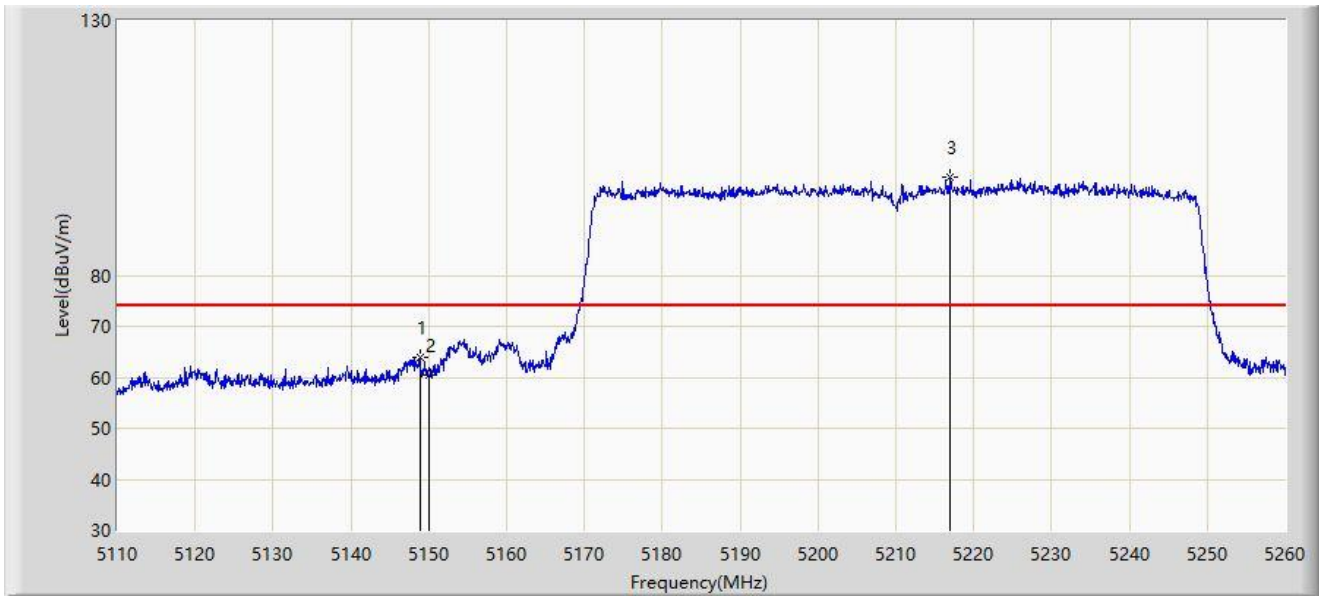


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5148.925	63.846	58.876	-10.154	74.000	4.970	PK
2		5150.000	60.323	55.355	-13.677	74.000	4.967	PK
3		5217.025	99.299	94.361	N/A	N/A	4.938	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-996 Tone-RU 67 by 5210MHz	

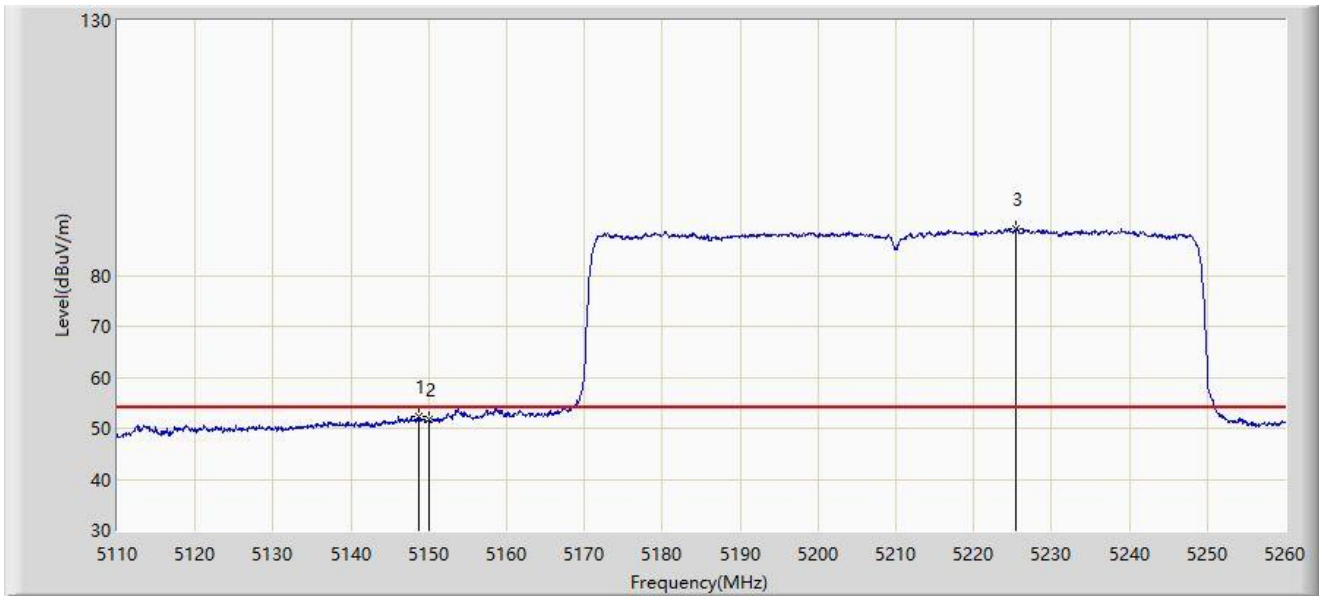


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5148.700	52.366	47.396	-1.634	54.000	4.970	AV
2		5150.000	51.669	46.701	-2.331	54.000	4.967	AV
3		5225.500	89.116	84.213	N/A	N/A	4.903	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-996 Tone-RU 67 by 5210MHz	

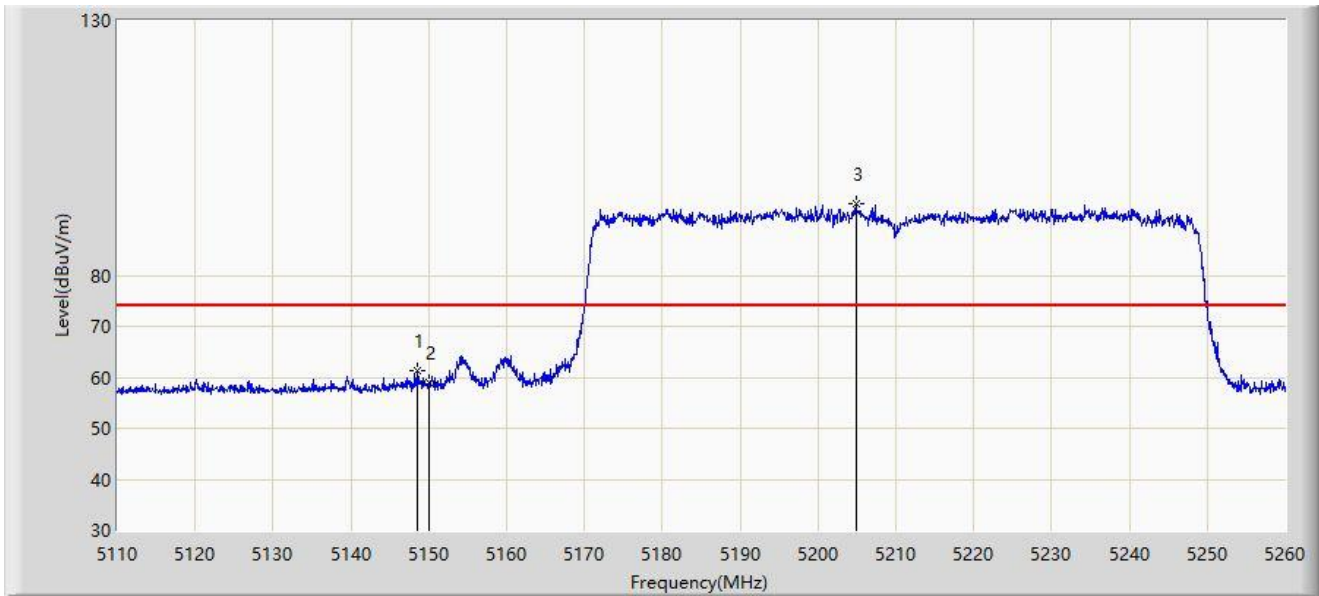

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5148.475	61.169	56.198	-12.831	74.000	4.971	PK
2		5150.000	58.871	53.903	-15.129	74.000	4.967	PK
3		5204.875	93.956	89.350	N/A	N/A	4.606	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-996 Tone-RU 67 by 5210MHz	

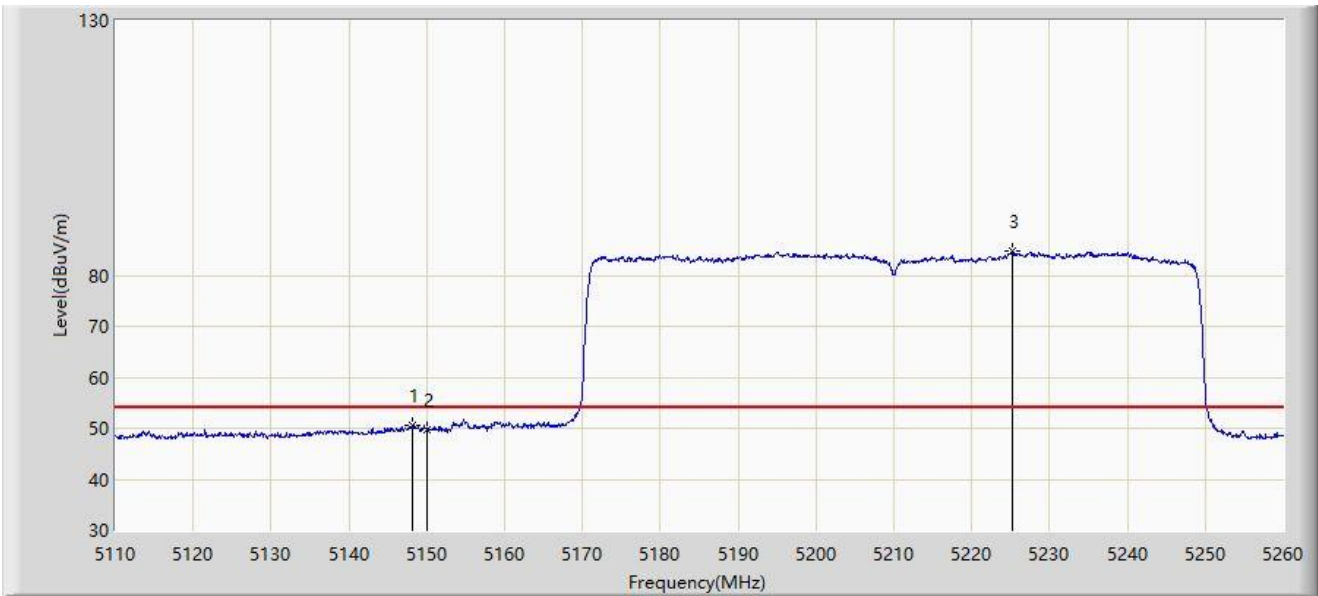


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.250	50.553	45.582	-3.447	54.000	4.971	AV
2		5150.000	49.788	44.820	-4.212	54.000	4.967	AV
3		5225.275	84.837	79.933	N/A	N/A	4.904	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-996 Tone-RU 67 by 5290MHz	

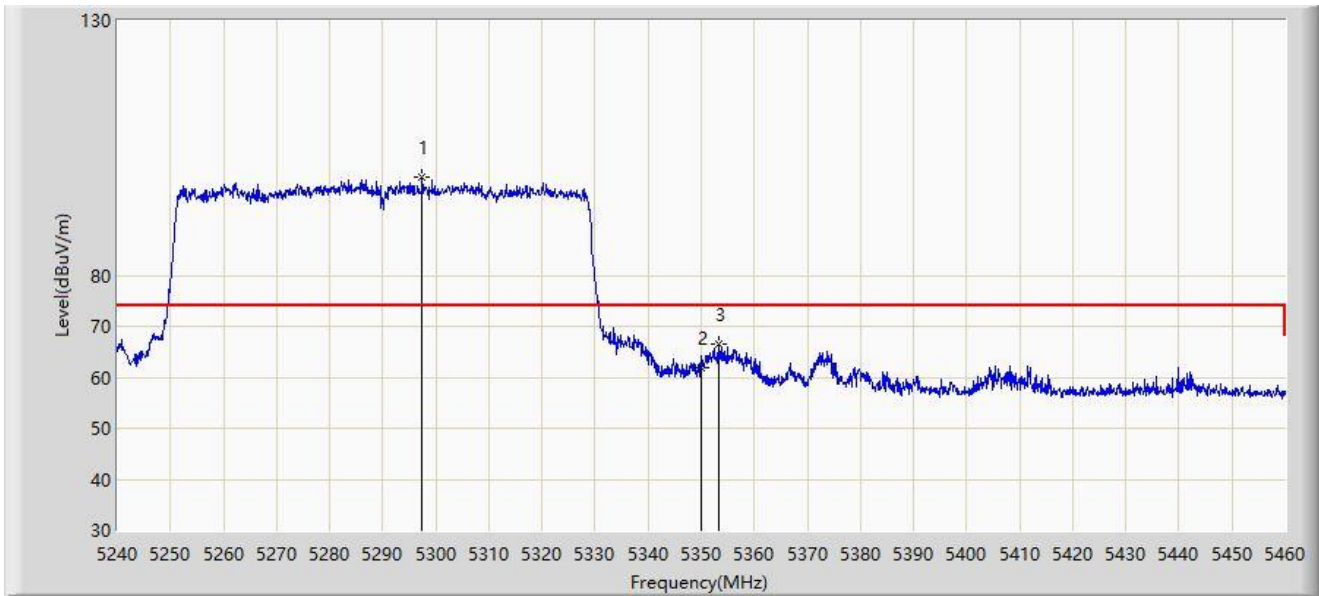


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5297.420	99.187	94.440	N/A	N/A	4.747	PK
2		5350.000	61.952	57.533	-12.048	74.000	4.419	PK
3	*	5353.190	66.519	62.094	-7.481	74.000	4.425	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-996 Tone-RU 67 by 5290MHz	

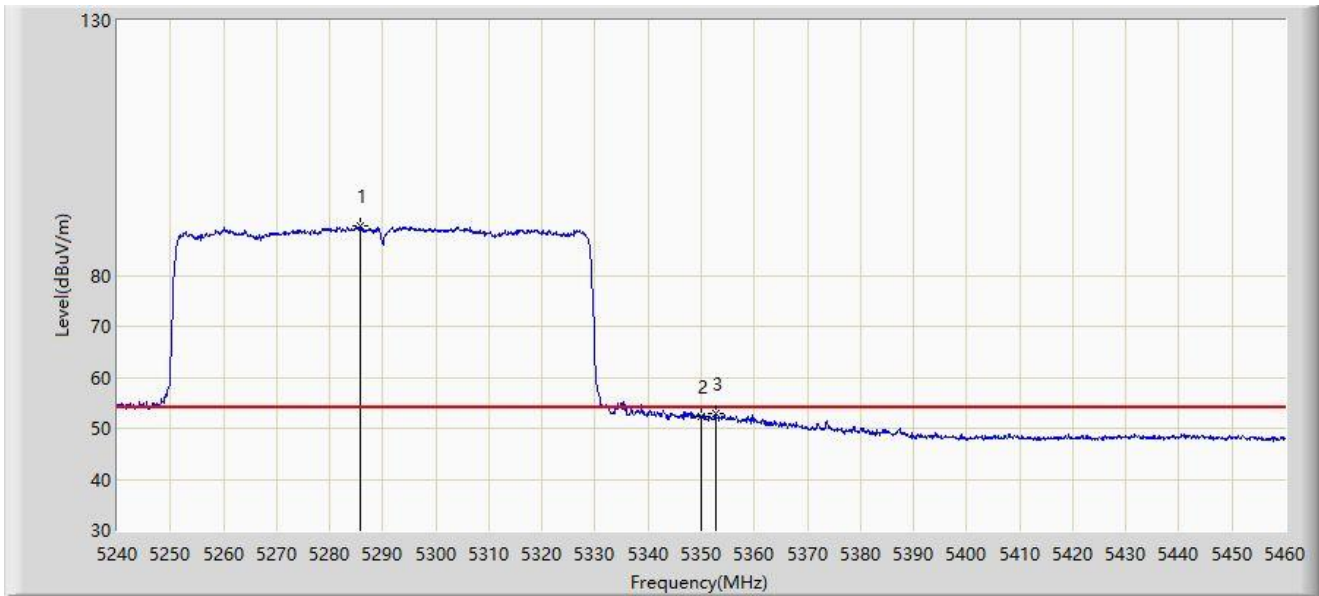


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5285.760	89.728	84.931	N/A	N/A	4.797	AV
2		5350.000	52.208	47.789	-1.792	54.000	4.419	AV
3	*	5352.640	52.869	48.450	-1.131	54.000	4.420	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-996 Tone-RU 67 by 5290MHz	

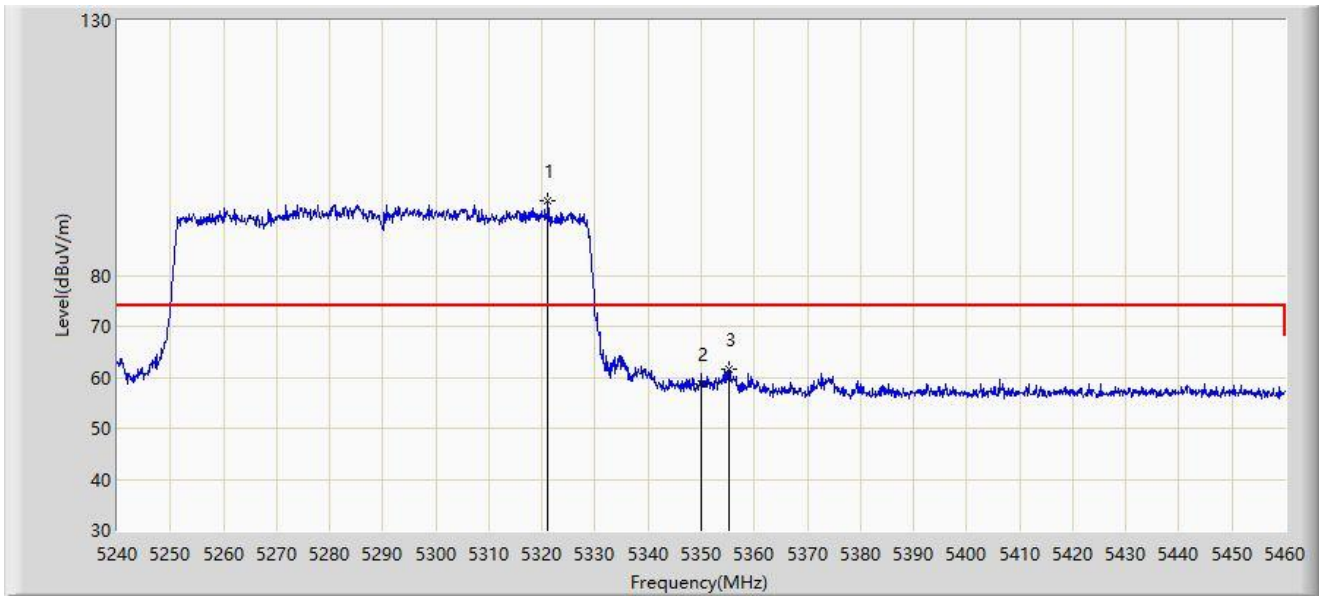

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5321.180	94.564	90.069	N/A	N/A	4.495	PK
2		5350.000	58.840	54.421	-15.160	74.000	4.419	PK
3	*	5355.170	61.657	57.209	-12.343	74.000	4.448	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-996 Tone-RU 67 by 5290MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5279.930	85.390	80.668	N/A	N/A	4.722	AV
2		5350.000	49.626	45.207	-4.374	54.000	4.419	AV
3	*	5352.310	49.690	45.274	-4.310	54.000	4.415	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-996 Tone-RU 67 by 5530MHz	

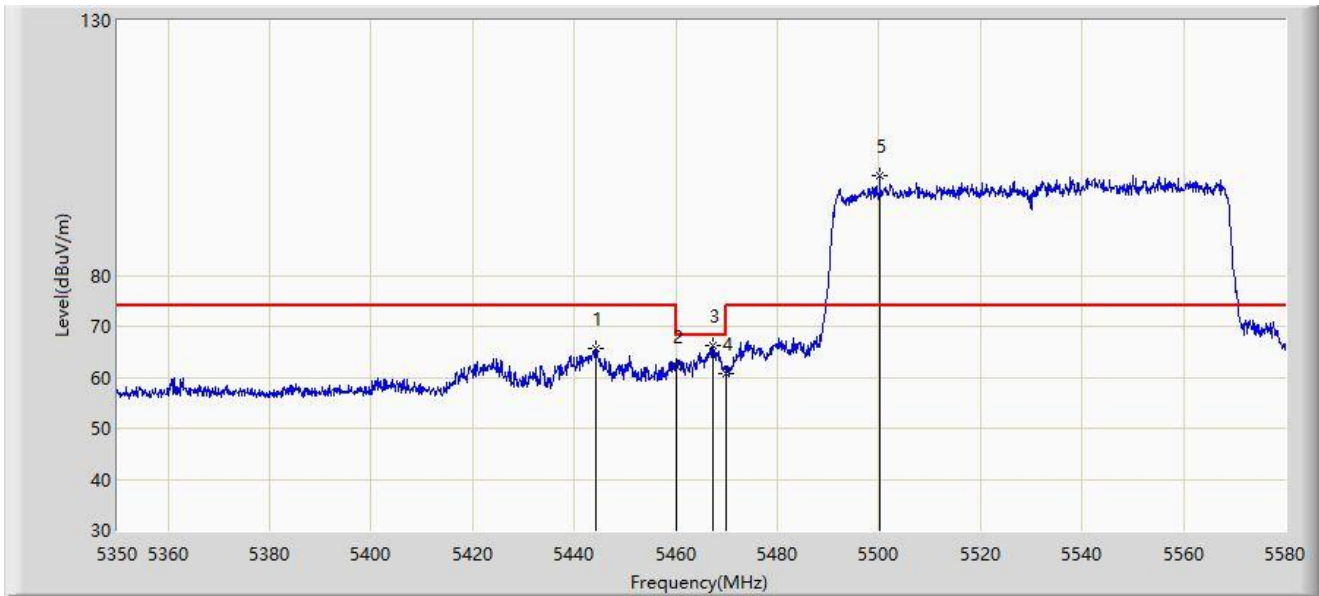


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5444.185	65.591	60.750	-8.409	74.000	4.842	PK
2		5460.000	62.297	57.581	-11.703	74.000	4.716	PK
3	*	5467.185	66.294	61.517	-1.906	68.200	4.778	PK
4		5470.000	60.824	56.023	-7.376	68.200	4.801	PK
5		5500.190	99.627	94.627	N/A	N/A	5.001	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-996 Tone-RU 67 by 5530MHz	

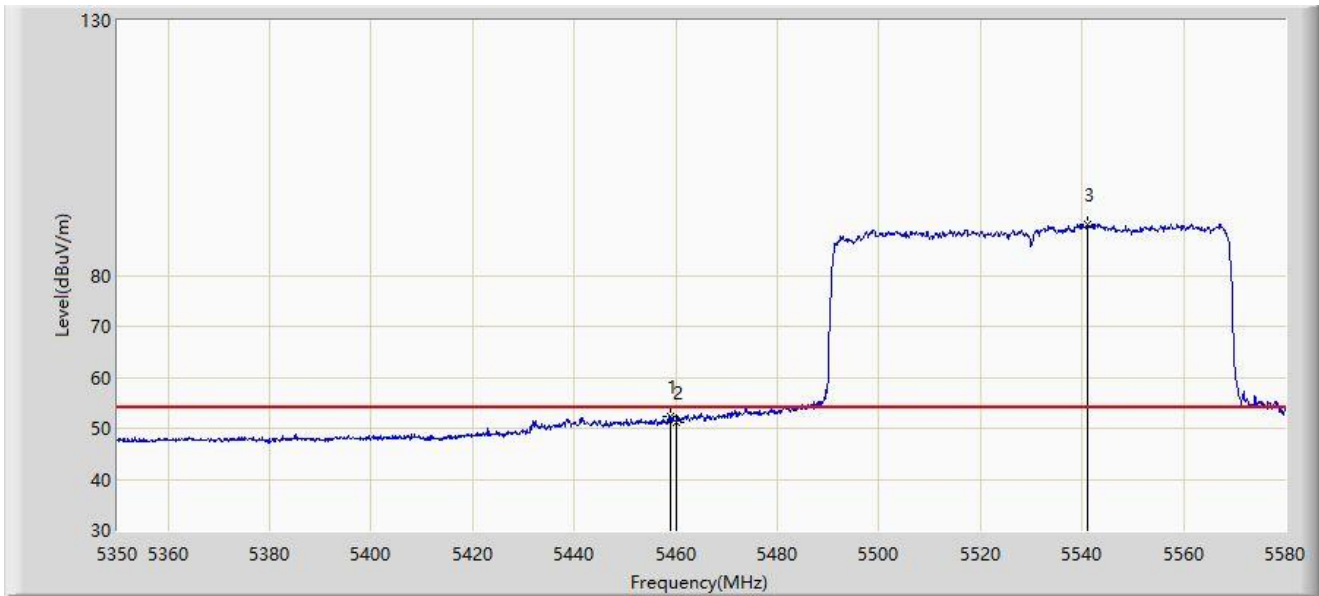


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5458.905	52.342	47.636	-1.658	54.000	4.706	AV
2		5460.000	51.243	46.527	-2.757	54.000	4.716	AV
3		5541.015	90.141	85.304	N/A	N/A	4.837	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-996 Tone-RU 67 by 5530MHz	

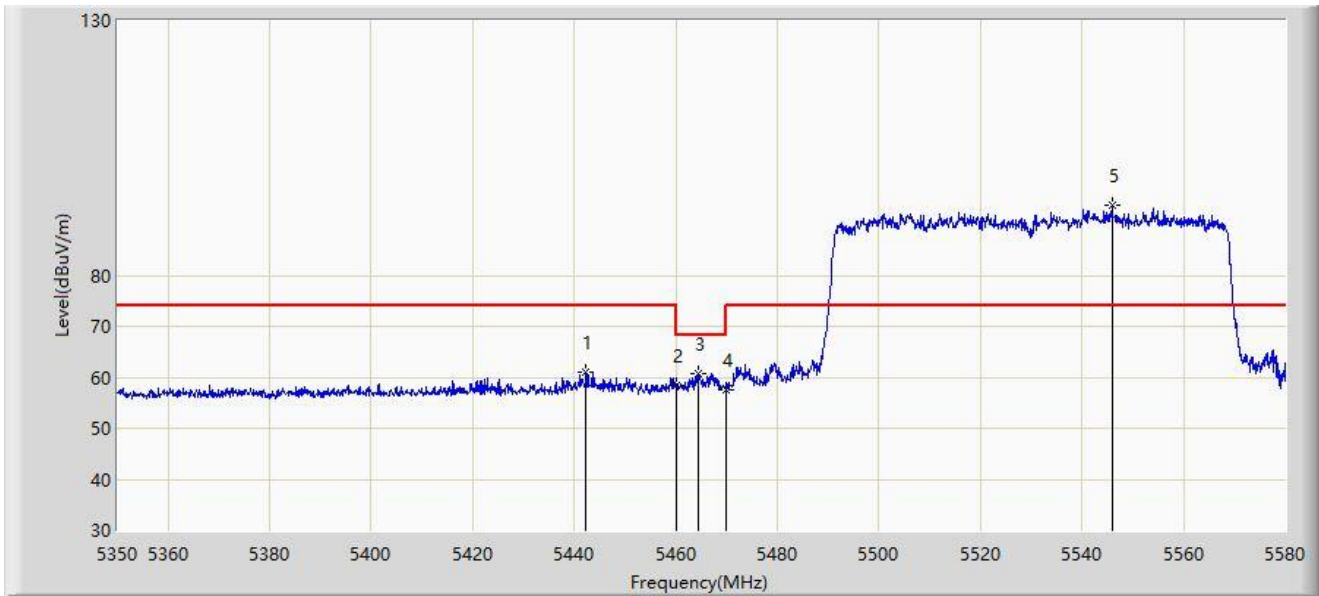

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5442.345	60.875	56.001	-13.125	74.000	4.875	PK
2		5460.000	58.456	53.740	-15.544	74.000	4.716	PK
3	*	5464.540	60.705	55.950	-7.495	68.200	4.754	PK
4		5470.000	57.516	52.715	-10.684	68.200	4.801	PK
5		5545.960	93.794	88.889	N/A	N/A	4.905	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-996 Tone-RU 67 by 5530MHz	

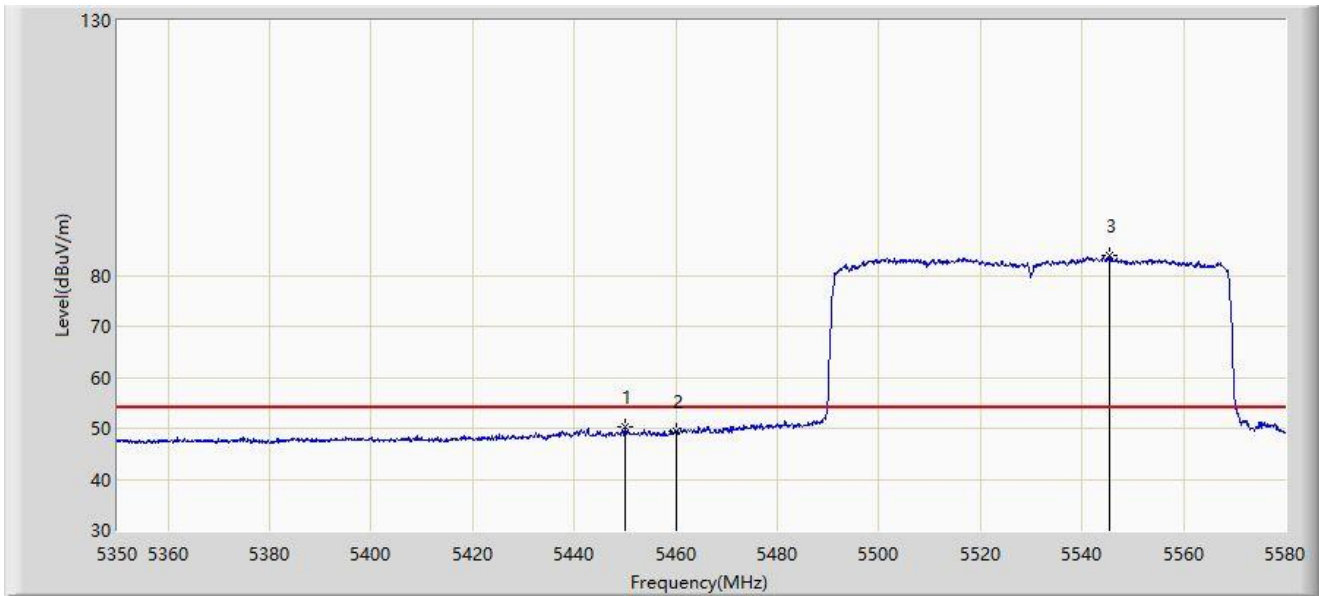


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5450.050	50.177	45.442	-3.823	54.000	4.735	AV
2		5460.000	49.500	44.784	-4.500	54.000	4.716	AV
3		5545.385	83.861	78.964	N/A	N/A	4.897	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-996 Tone-RU 67 by 5610MHz	

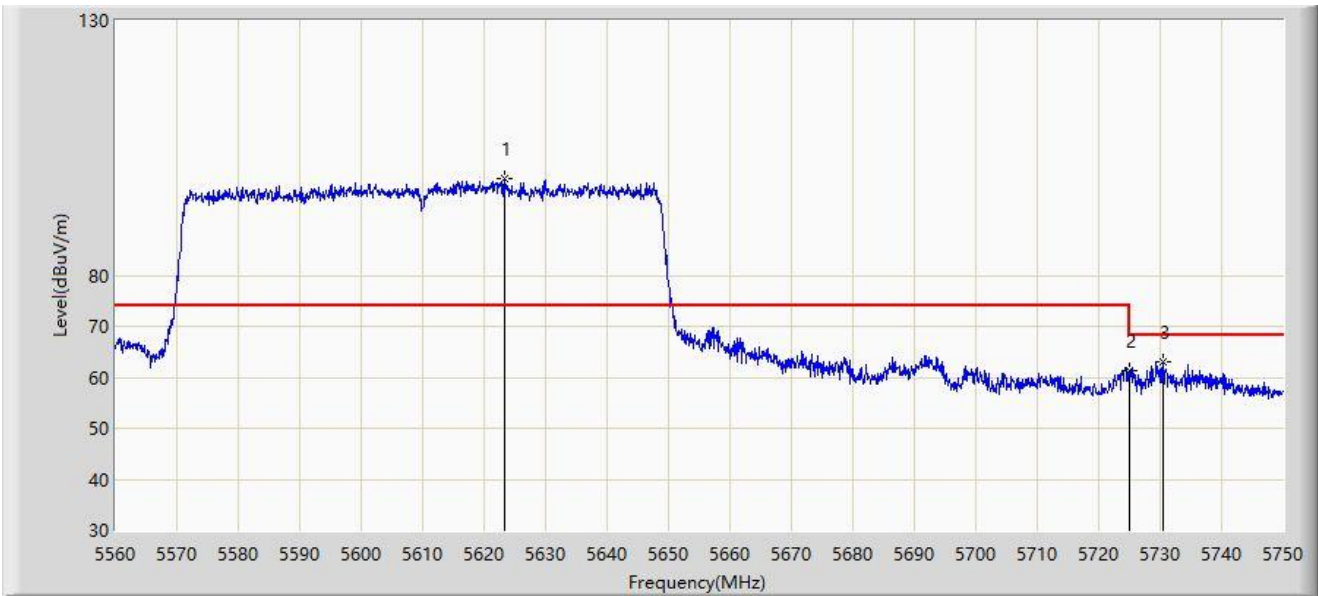


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5623.270	98.941	94.038	N/A	N/A	4.903	PK
2		5725.000	61.208	55.850	-6.992	68.200	5.358	PK
3	*	5730.430	63.014	57.604	-5.186	68.200	5.410	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-996 Tone-RU 67 by 5610MHz	

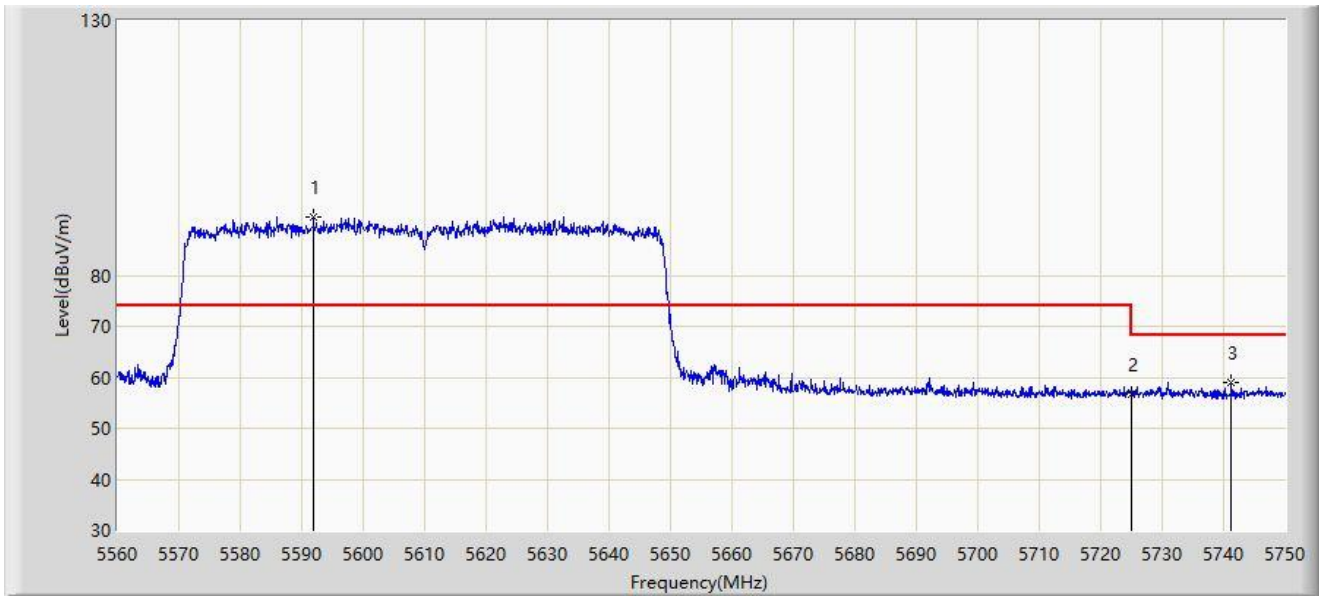


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5591.920	91.478	86.735	N/A	N/A	4.744	PK
2		5725.000	56.620	51.262	-11.580	68.200	5.358	PK
3	*	5741.260	58.978	53.458	-9.222	68.200	5.520	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-996 Tone-RU 67 by 5775MHz	

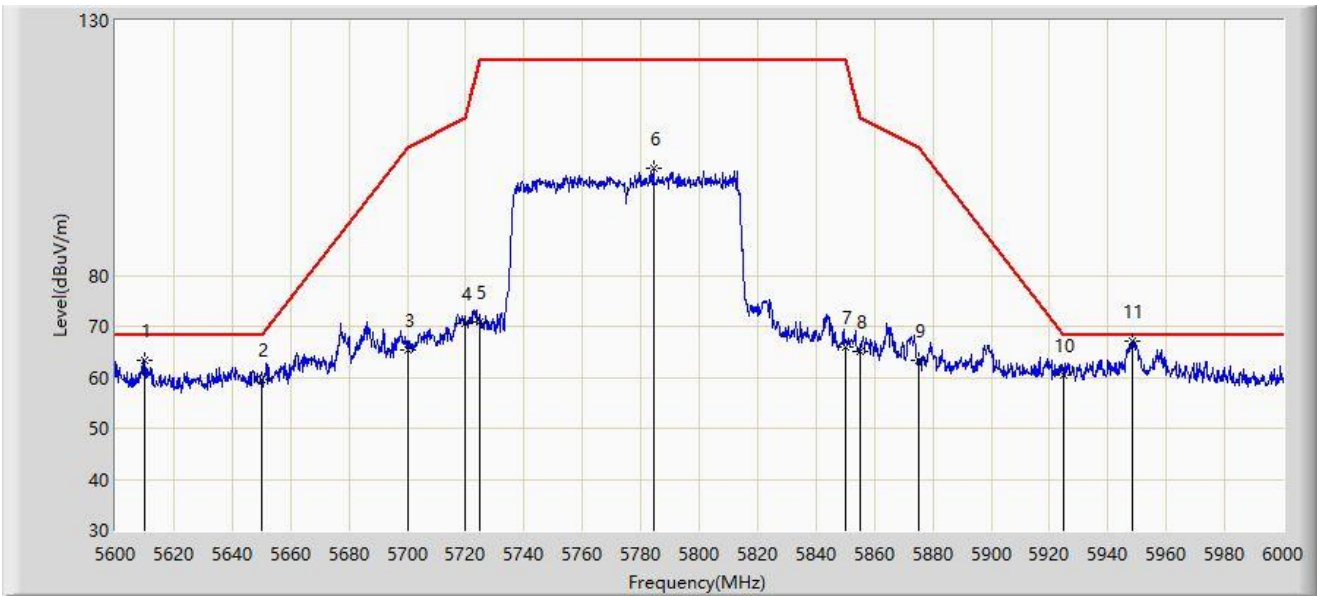


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5609.800	63.293	58.365	-4.907	68.200	4.928	PK
2		5650.000	59.705	54.626	-8.495	68.200	5.080	PK
3		5700.000	65.428	60.043	-39.772	105.200	5.385	PK
4		5720.000	70.584	65.259	-40.216	110.800	5.325	PK
5		5725.000	70.990	65.632	-51.210	122.200	5.358	PK
6		5784.400	100.955	95.319	N/A	N/A	5.636	PK
7		5850.000	65.803	59.919	-56.397	122.200	5.885	PK
8		5855.000	64.994	59.098	-45.806	110.800	5.896	PK
9		5875.000	63.361	57.392	-41.839	105.200	5.968	PK
10		5925.000	60.409	54.045	-7.791	68.200	6.365	PK
11	*	5948.200	67.223	60.665	-0.977	68.200	6.557	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-04-02
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax80-996 Tone-RU 67 by 5775MHz	

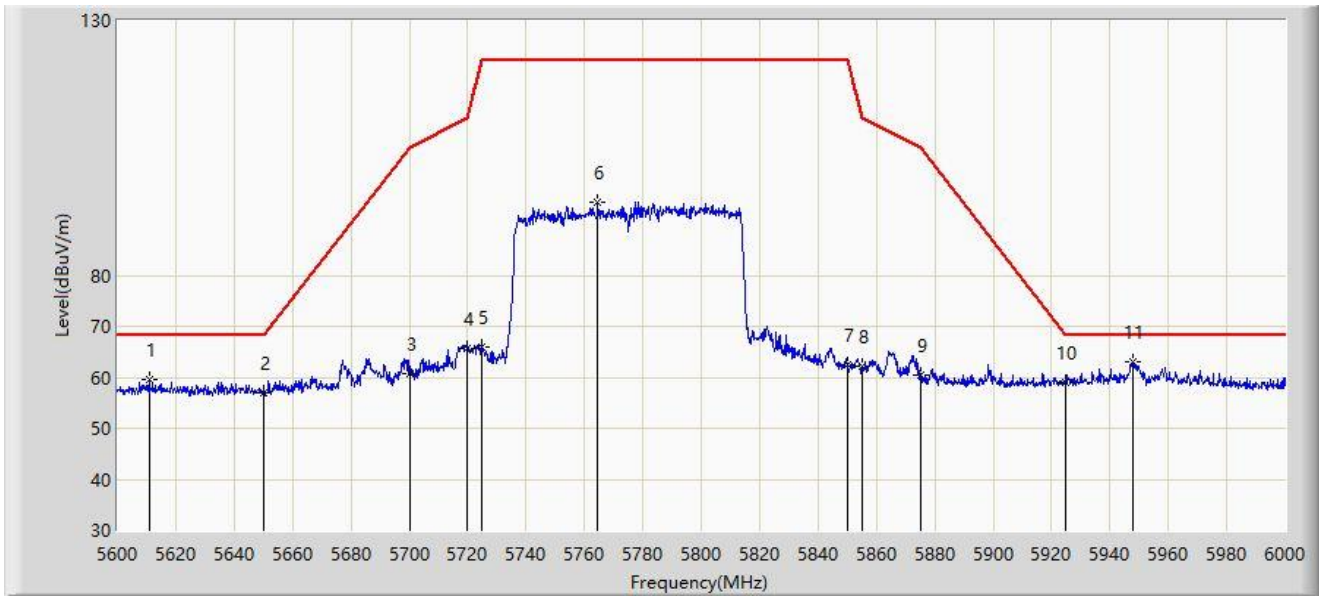

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5610.800	59.547	54.621	-8.653	68.200	4.926	PK
2		5650.000	56.815	51.736	-11.385	68.200	5.080	PK
3		5700.000	60.731	55.346	-44.469	105.200	5.385	PK
4		5720.000	65.585	60.260	-45.215	110.800	5.325	PK
5		5725.000	65.960	60.602	-56.240	122.200	5.358	PK
6		5764.400	94.223	88.570	N/A	N/A	5.653	PK
7		5850.000	62.528	56.644	-59.672	122.200	5.885	PK
8		5855.000	62.119	56.223	-48.681	110.800	5.896	PK
9		5875.000	60.294	54.325	-44.906	105.200	5.968	PK
10		5925.000	59.106	52.742	-9.094	68.200	6.365	PK
11	*	5947.800	63.155	56.594	-5.045	68.200	6.562	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

**A.9 AC Conducted Emissions Test Result**

Site: NS-SR2	Test Date: 2023-03-29
Limit: FCC_Part15.207_CE_AC Power	Engineer: Flag Yang
Probe: ENV216_102493_0.15MHz~30MHz	Polarity: Line
EUT: Tablet Computer	Power: AC 120V/60Hz
<b>Test Mode:</b> Transmit by 802.11a at channel 5785MHz	

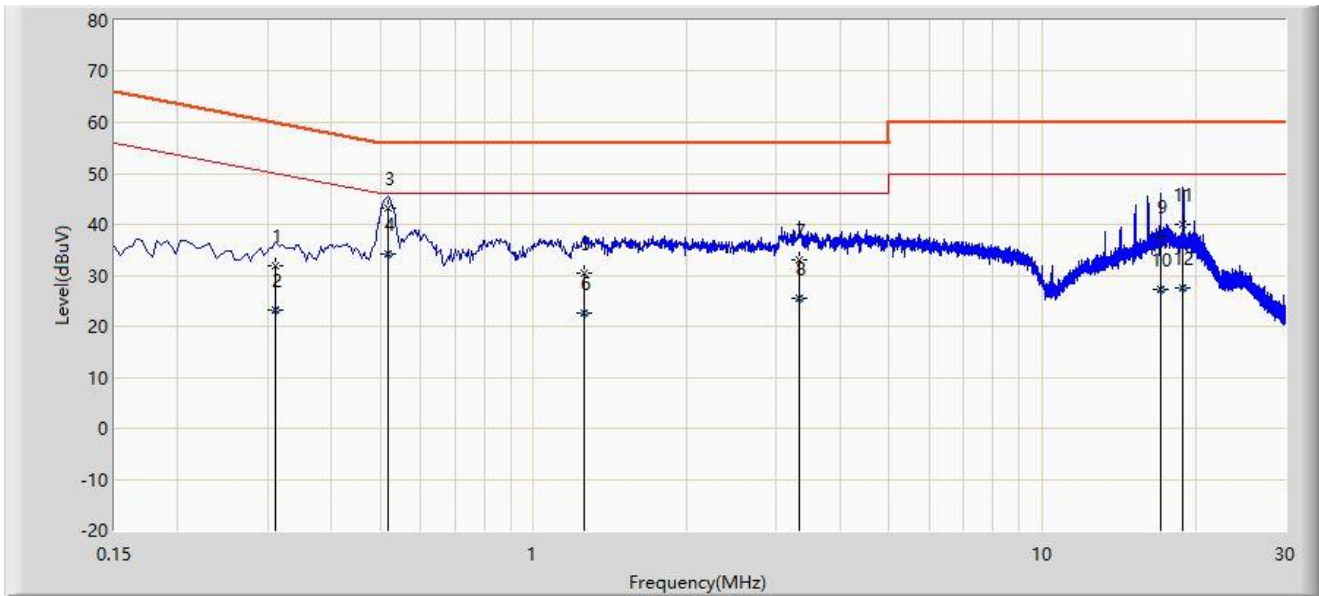


No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.310	31.876	22.326	-28.095	59.970	9.550	QP
2		0.310	23.285	13.735	-26.685	49.970	9.550	AV
3		0.518	43.149	33.580	-12.851	56.000	9.568	QP
4	*	0.518	34.153	24.585	-11.847	46.000	9.568	AV
5		1.254	30.312	20.708	-25.688	56.000	9.604	QP
6		1.254	22.482	12.878	-23.518	46.000	9.604	AV
7		3.322	33.126	23.472	-22.874	56.000	9.653	QP
8		3.322	25.568	15.915	-20.432	46.000	9.653	AV
9		17.038	37.745	27.773	-22.255	60.000	9.972	QP
10		17.038	27.164	17.192	-22.836	50.000	9.972	AV
11		18.930	40.126	30.099	-19.874	60.000	10.027	QP
12		18.930	27.486	17.458	-22.514	50.000	10.027	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: NS-SR2	Test Date: 2023-03-29
Limit: FCC_Part15.207_CE_AC Power	Engineer: Flag Yang
Probe: ENV216_102493_0.15MHz~30MHz	Polarity: Neutral
EUT: Tablet Computer	Power: AC 120V/60Hz
<b>Test Mode:</b> Transmit by 802.11a at channel 5785MHz	

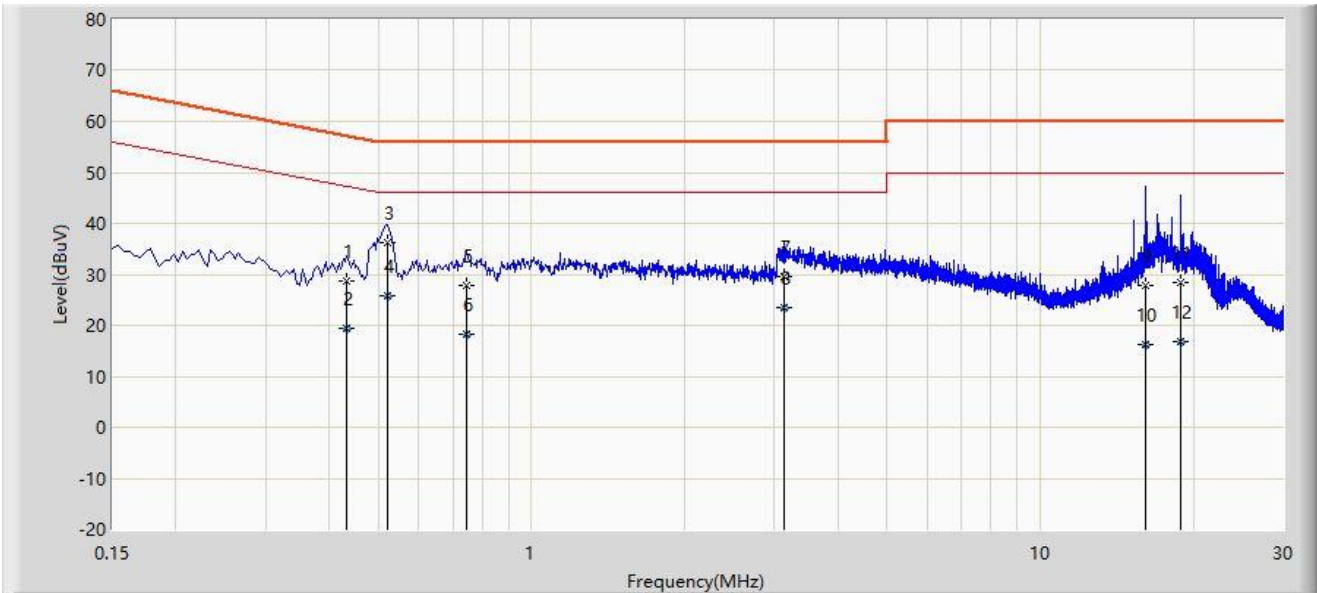

No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.434	28.639	19.084	-28.537	57.176	9.555	QP
2		0.434	19.326	9.771	-27.850	47.176	9.555	AV
3	*	0.522	36.199	26.639	-19.801	56.000	9.560	QP
4		0.522	25.769	16.209	-20.231	46.000	9.560	AV
5		0.746	27.781	18.203	-28.219	56.000	9.578	QP
6		0.746	18.389	8.811	-27.611	46.000	9.578	AV
7		3.126	29.460	19.811	-26.540	56.000	9.649	QP
8		3.126	23.535	13.886	-22.465	46.000	9.649	AV
9		16.082	27.773	17.855	-32.227	60.000	9.918	QP
10		16.082	16.334	6.417	-33.666	50.000	9.918	AV
11		18.922	28.528	18.558	-31.472	60.000	9.970	QP
12		18.922	16.753	6.783	-33.247	50.000	9.970	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

## Appendix B - Test Setup Photograph

Refer to "2301RSU043-UT" file.



## Appendix C - EUT Photograph

Refer to "2301RSU043-UE" file.

\_\_\_\_\_ The End \_\_\_\_\_