


Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11n-HT40 at 5190MHz	

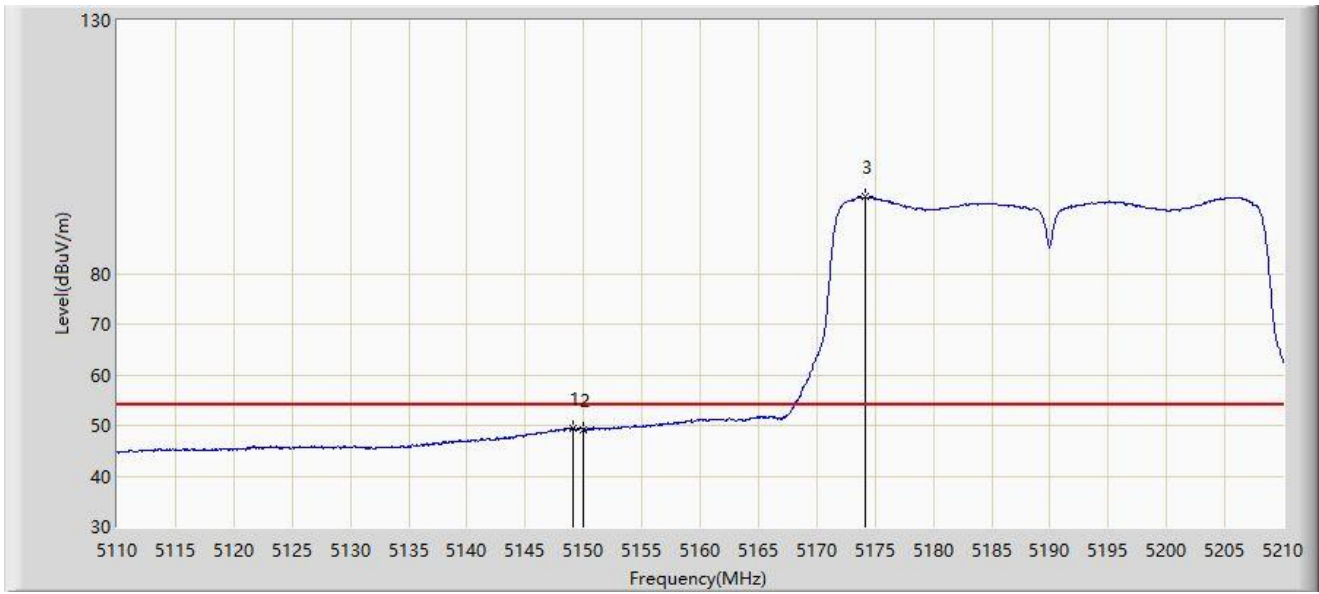


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5149.050	49.489	46.923	-4.511	54.000	2.566	AV
2		5150.000	49.137	46.578	-4.863	54.000	2.559	AV
3		5174.150	95.089	92.932	N/A	N/A	2.157	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11n-HT40 at 5190MHz	

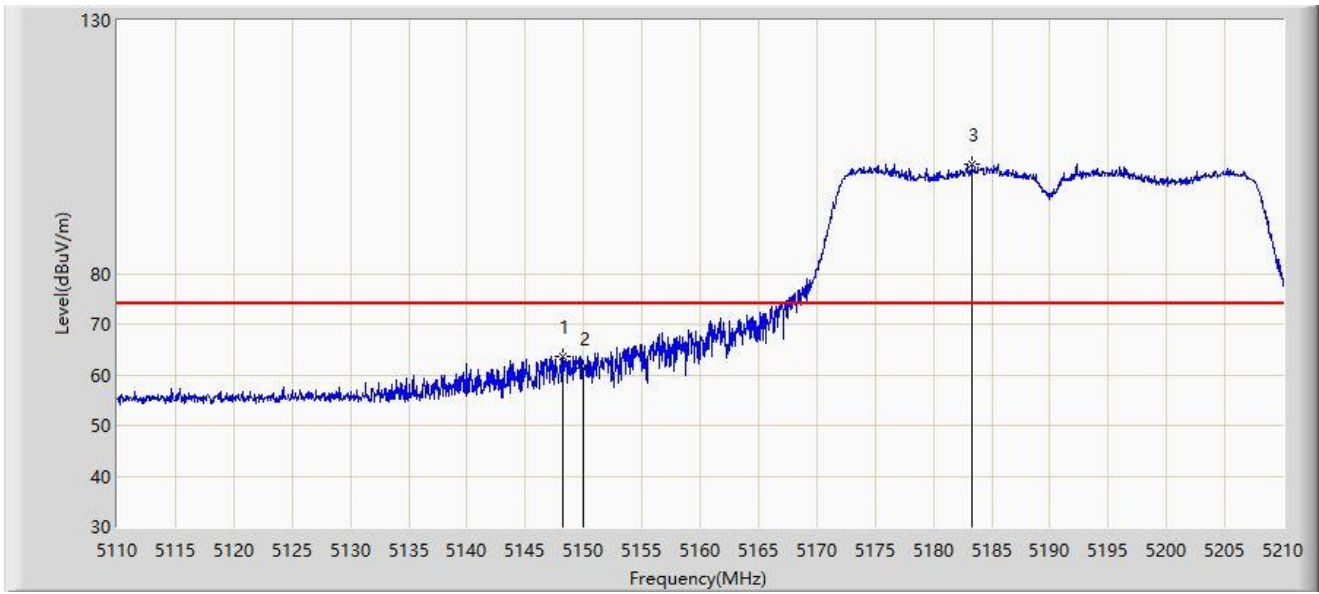


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5148.250	63.760	61.189	-10.240	74.000	2.571	PK
2		5150.000	61.428	58.869	-12.572	74.000	2.559	PK
3		5183.250	101.579	99.687	N/A	N/A	1.892	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11n-HT40 at 5190MHz	

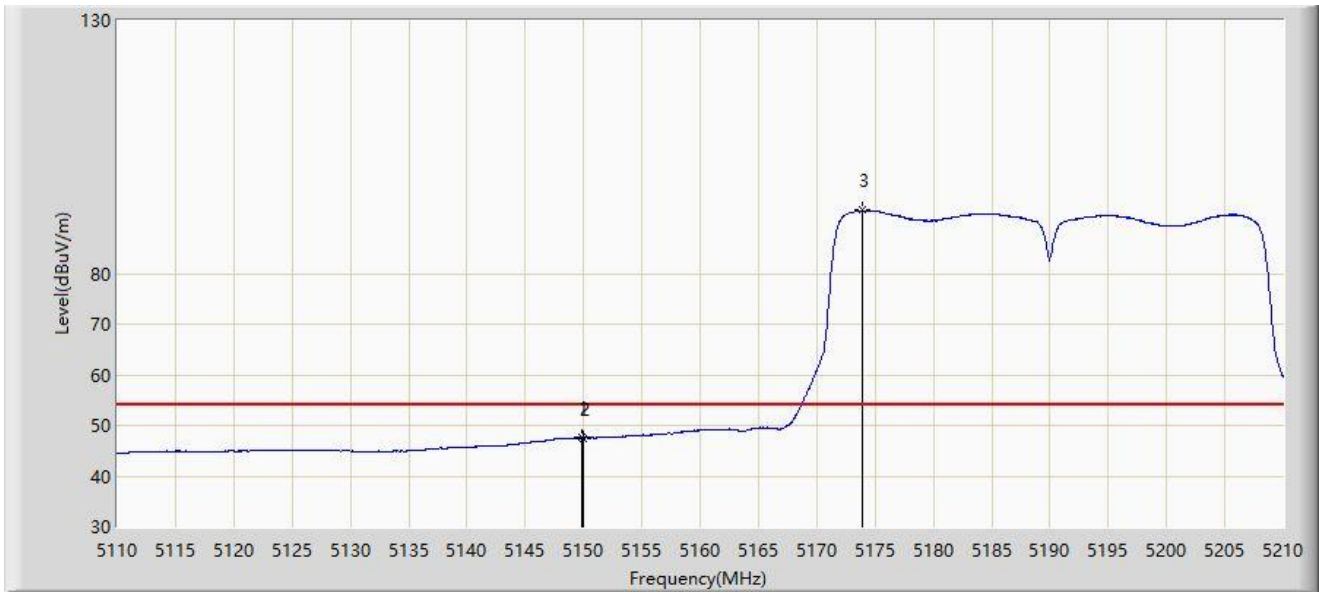


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.850	47.594	45.034	-6.406	54.000	2.560	AV
2		5150.000	47.499	44.940	-6.501	54.000	2.559	AV
3		5173.850	92.475	90.308	N/A	N/A	2.166	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11n-HT40 at 5310MHz	

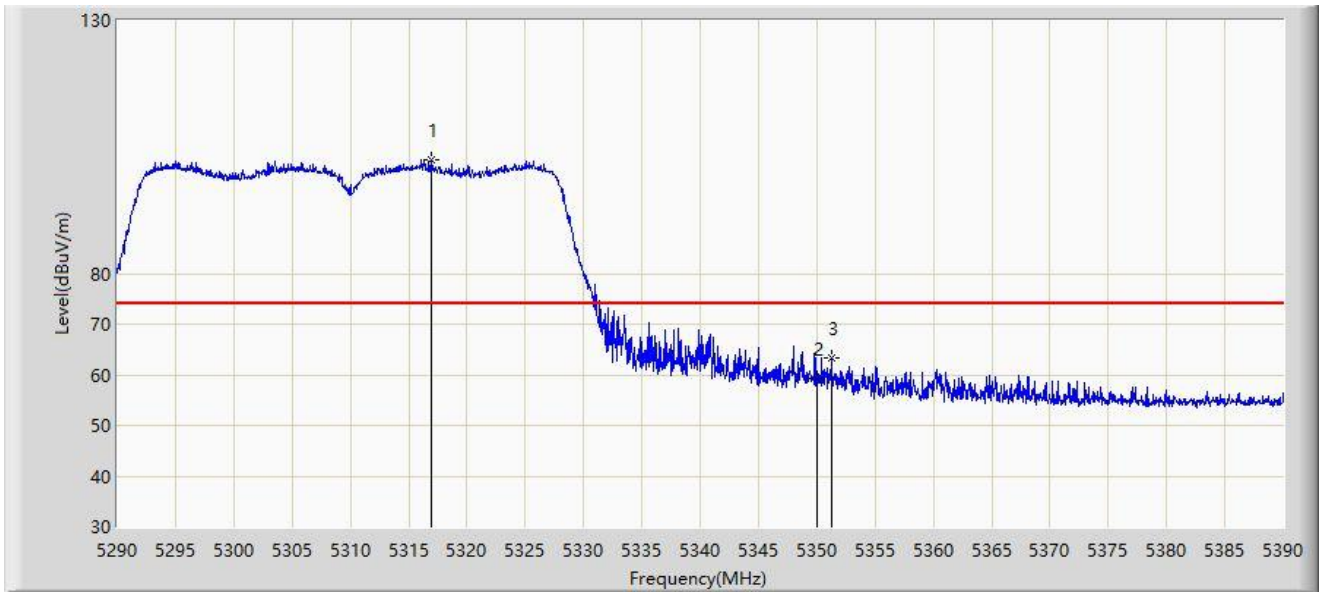


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5317.000	102.499	100.933	N/A	N/A	1.566	PK
2		5350.000	59.140	57.630	-14.860	74.000	1.510	PK
3	*	5351.250	63.288	61.780	-10.712	74.000	1.508	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11n-HT40 at 5310MHz	

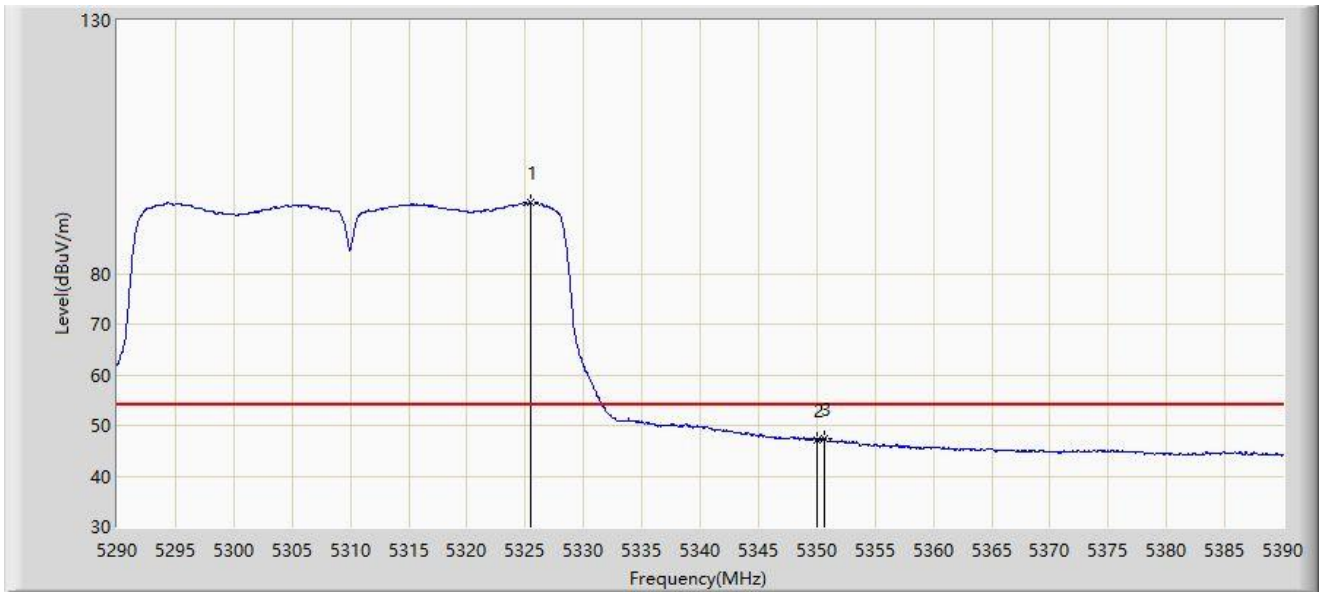


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5325.450	94.077	92.528	N/A	N/A	1.549	AV
2		5350.000	47.069	45.559	-6.931	54.000	1.510	AV
3	*	5350.700	47.431	45.922	-6.569	54.000	1.509	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11n-HT40 at 5310MHz	

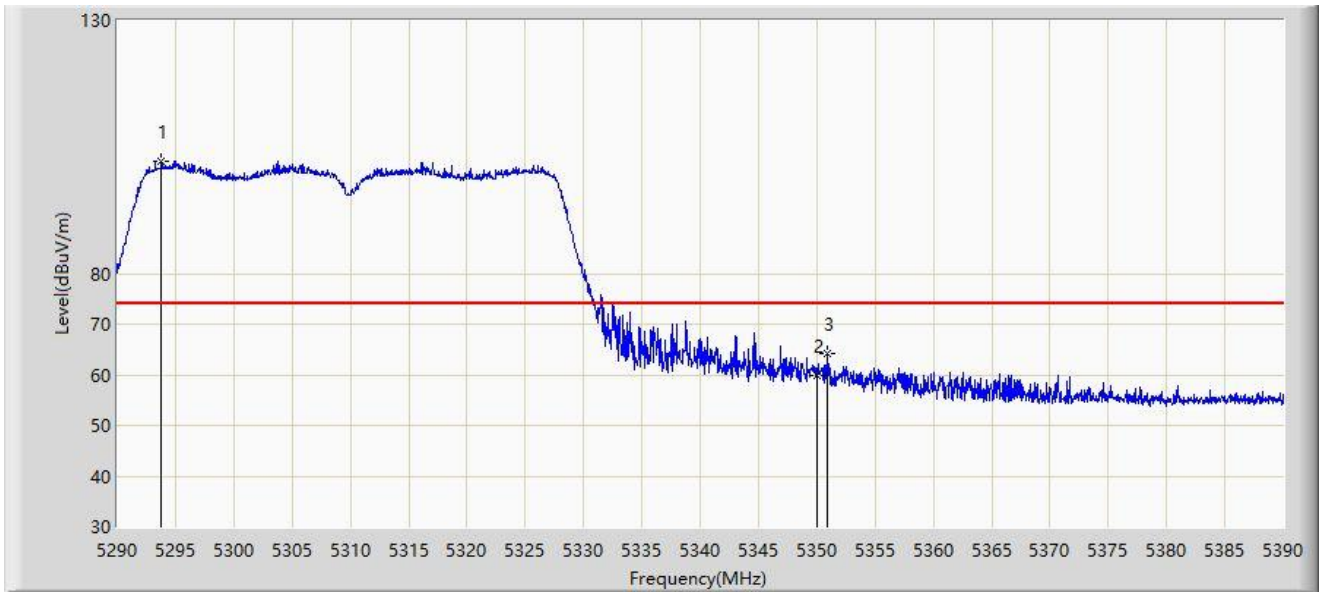


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5293.800	102.270	100.460	N/A	N/A	1.810	PK
2		5350.000	59.883	58.373	-14.117	74.000	1.510	PK
3	*	5350.900	64.141	62.633	-9.859	74.000	1.509	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11n-HT40 at 5310MHz	

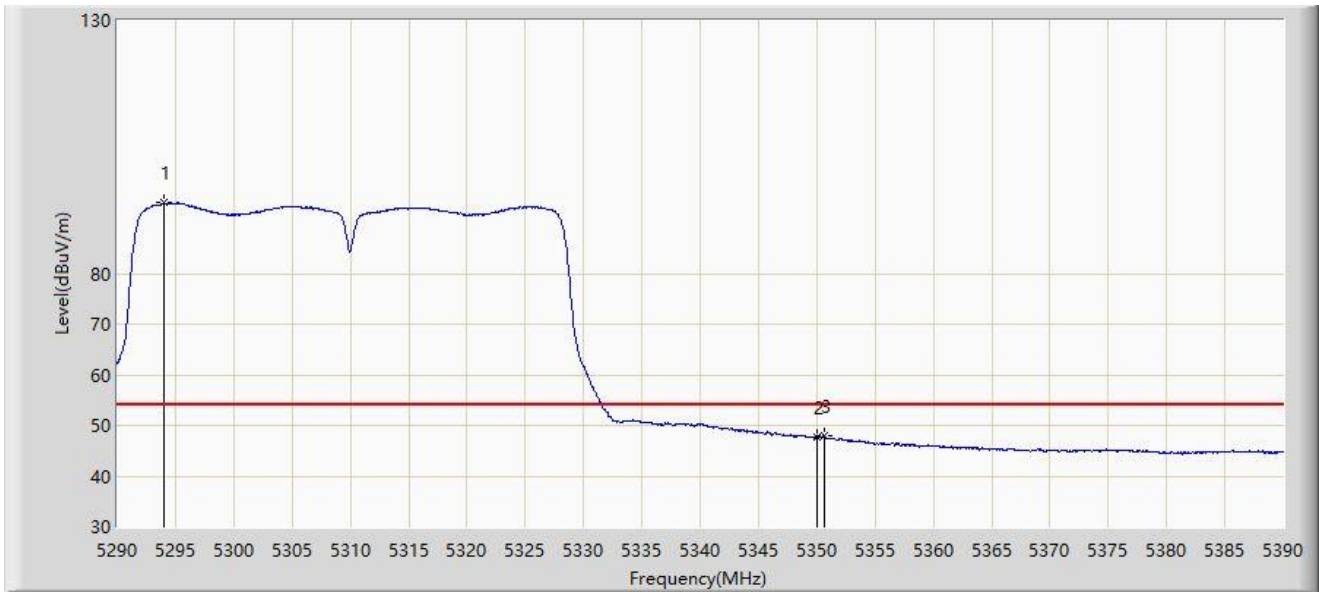


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5294.000	93.970	92.161	N/A	N/A	1.809	AV
2		5350.000	47.609	46.099	-6.391	54.000	1.510	AV
3	*	5350.650	47.851	46.342	-6.149	54.000	1.509	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11n-HT40 at 5510MHz	

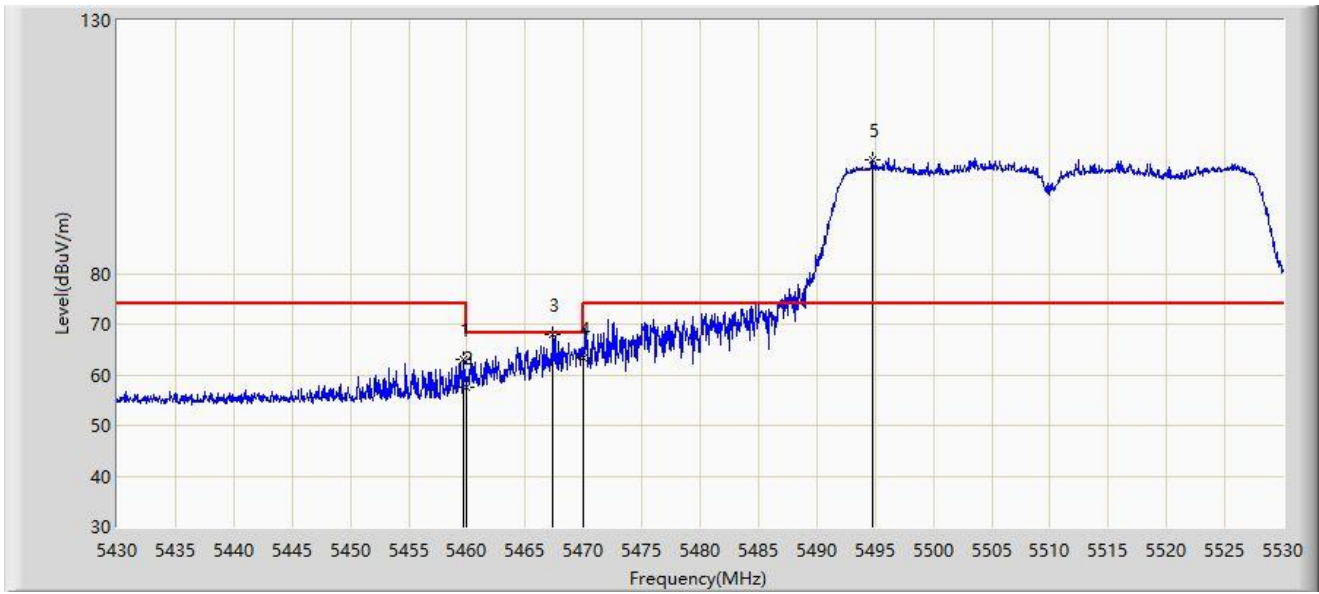


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5459.750	62.906	60.801	-11.094	74.000	2.104	PK
2		5460.000	57.670	55.563	-16.330	74.000	2.108	PK
3	*	5467.400	68.036	65.851	-0.164	68.200	2.186	PK
4		5470.000	63.249	61.037	-4.951	68.200	2.212	PK
5		5494.750	102.504	99.979	N/A	N/A	2.525	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11n-HT40 at 5510MHz	

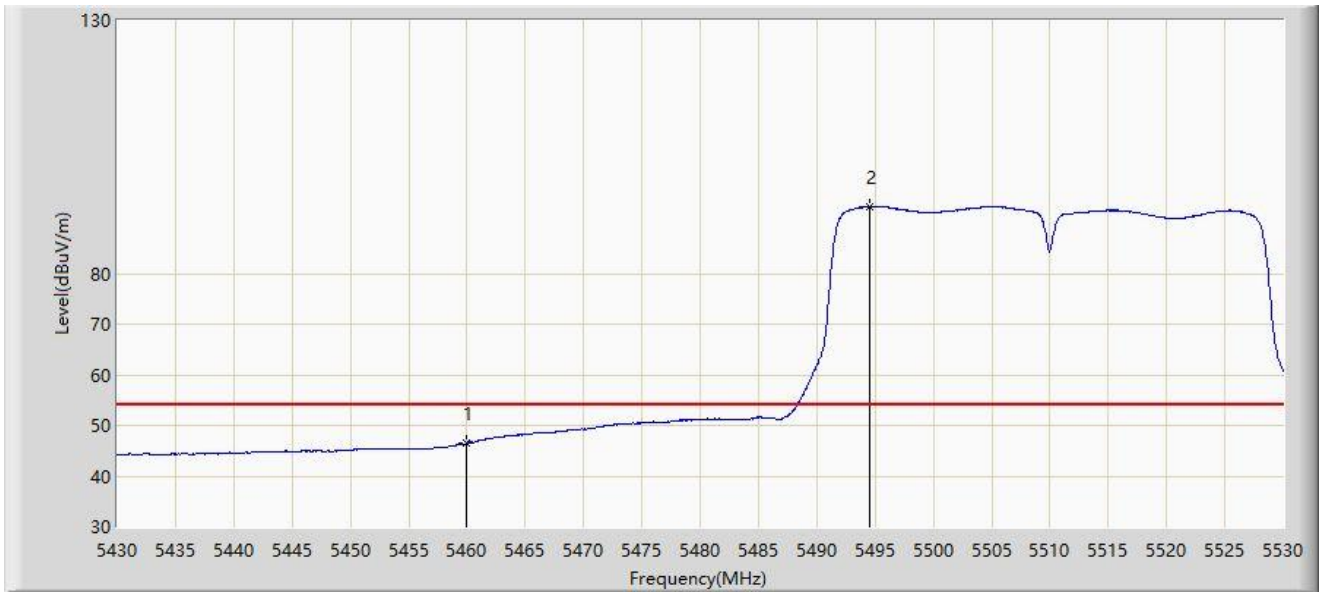


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5460.000	46.417	44.310	-7.583	54.000	2.108	AV
2		5494.550	93.247	90.719	N/A	N/A	2.527	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11n-HT40 at 5510MHz	

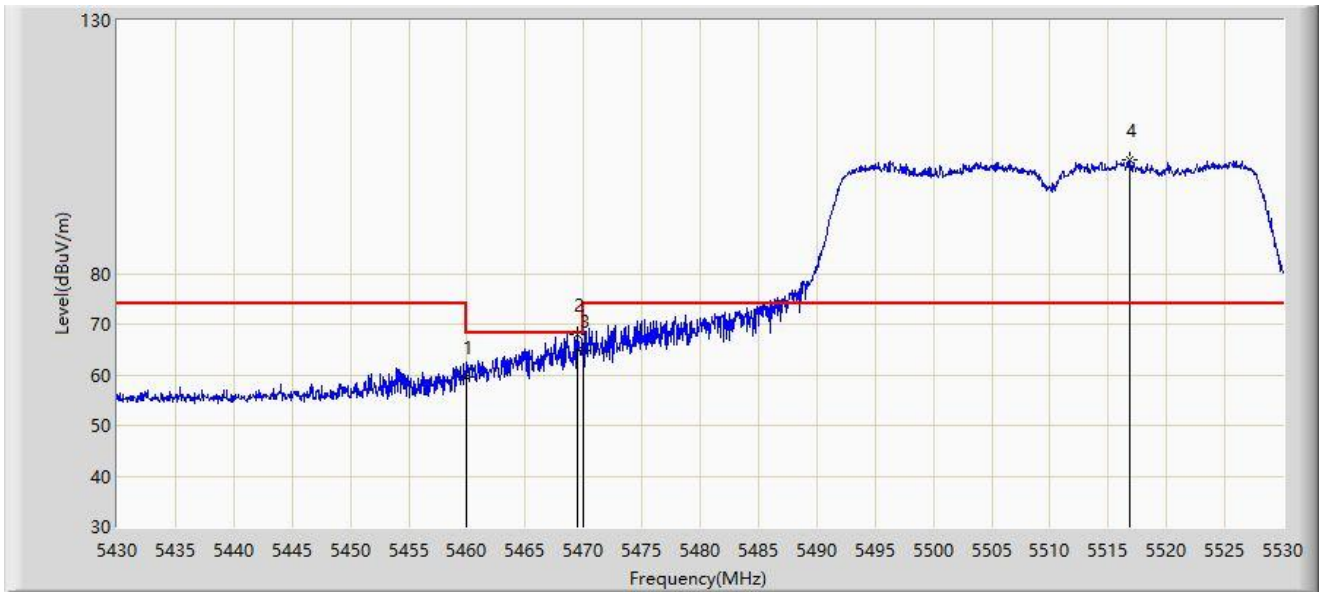


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5460.000	59.421	57.314	-14.579	74.000	2.108	PK
2	*	5469.500	68.001	65.794	-0.199	68.200	2.207	PK
3		5470.000	64.693	62.481	-3.507	68.200	2.212	PK
4		5516.800	102.556	100.529	N/A	N/A	2.026	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11n-HT40 at 5510MHz	

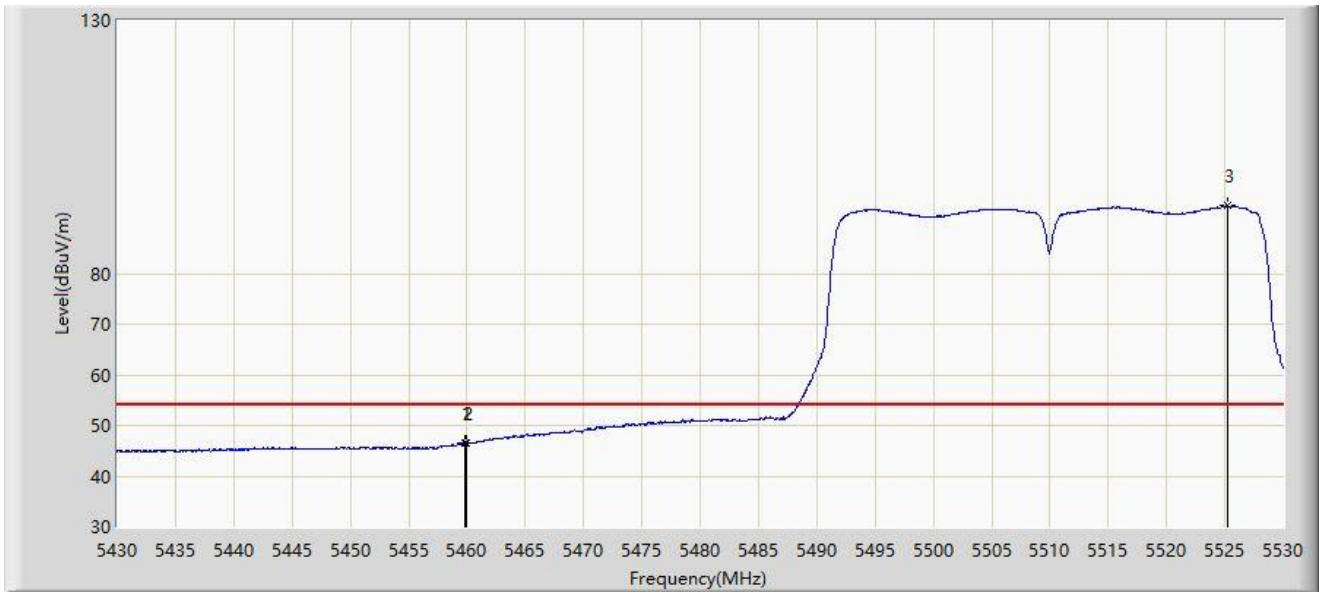


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5459.800	46.580	44.475	-7.420	54.000	2.105	AV
2		5460.000	46.423	44.316	-7.577	54.000	2.108	AV
3		5525.250	93.413	91.473	N/A	N/A	1.940	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11n-HT40 at 5670MHz	

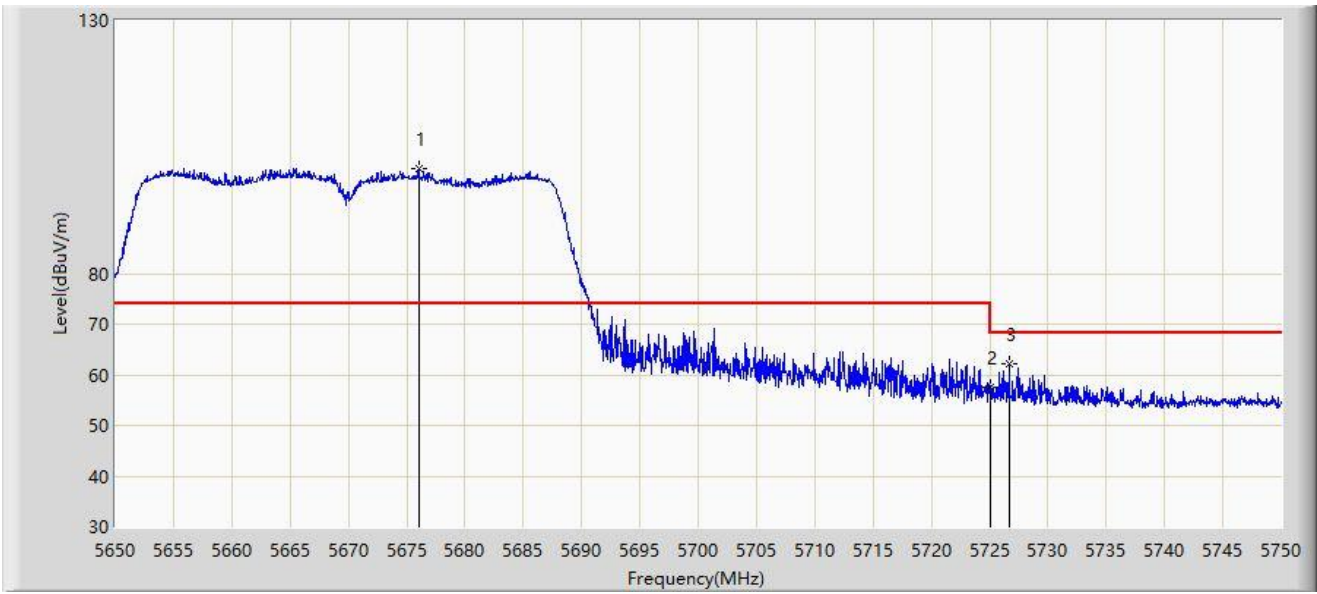


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5676.050	100.819	98.253	N/A	N/A	2.566	PK
2		5725.000	57.556	54.712	-10.644	68.200	2.844	PK
3	*	5726.700	62.063	59.205	-6.137	68.200	2.858	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11n-HT40 at 5670MHz	

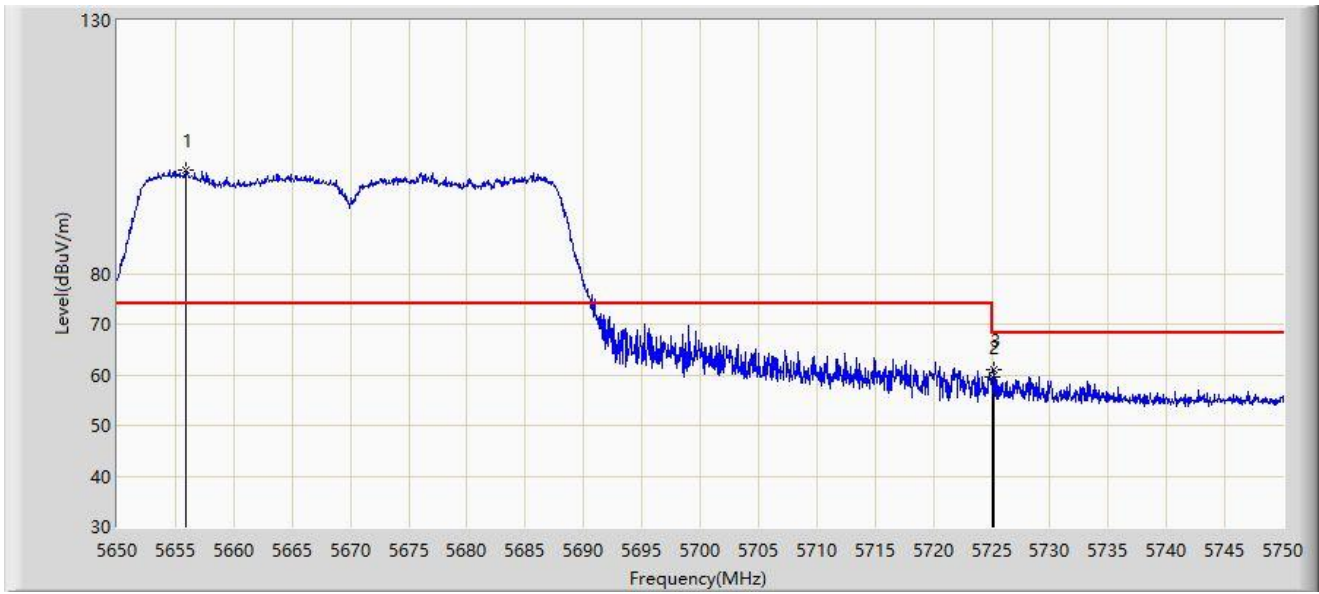


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5655.900	100.490	97.923	N/A	N/A	2.567	PK
2		5725.000	59.497	56.653	-8.703	68.200	2.844	PK
3	*	5725.250	61.030	58.184	-7.170	68.200	2.846	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11n-HT40 at 5755MHz	

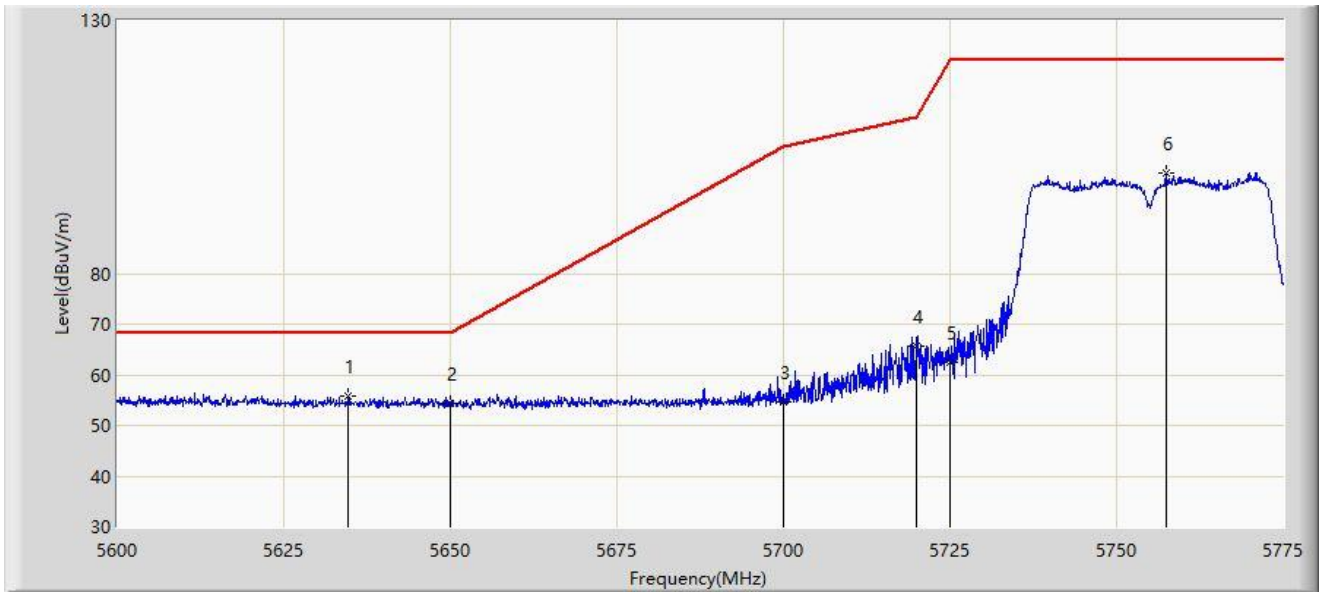


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5634.737	55.699	53.223	-12.501	68.200	2.475	PK
2		5650.000	54.298	51.747	-13.902	68.200	2.552	PK
3		5700.000	54.672	51.805	-50.528	105.200	2.867	PK
4		5720.000	65.576	62.766	-45.224	110.800	2.810	PK
5		5725.000	62.484	59.640	-59.716	122.200	2.844	PK
6		5757.413	99.908	96.759	N/A	N/A	3.150	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11n-HT40 at 5755MHz	

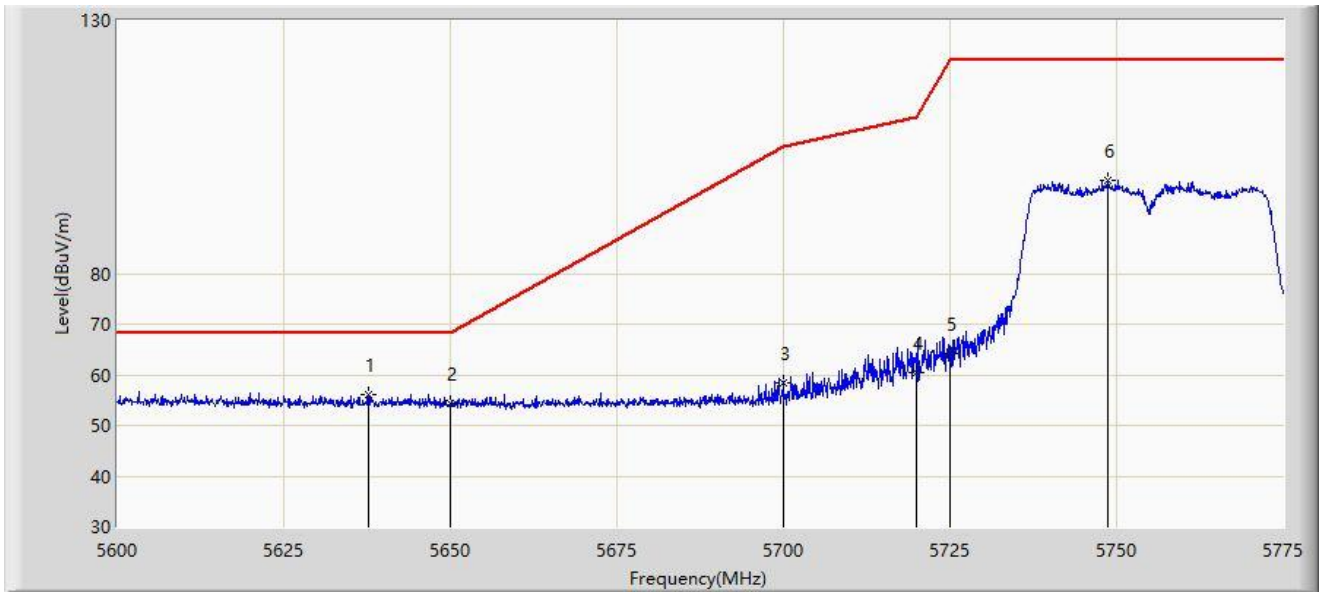


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5637.625	55.981	53.481	-12.219	68.200	2.500	PK
2		5650.000	54.250	51.699	-13.950	68.200	2.552	PK
3		5700.000	58.265	55.398	-46.935	105.200	2.867	PK
4		5720.000	60.338	57.528	-50.462	110.800	2.810	PK
5		5725.000	64.278	61.434	-57.922	122.200	2.844	PK
6		5748.575	98.320	95.245	N/A	N/A	3.075	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11n-HT40 at 5795MHz	

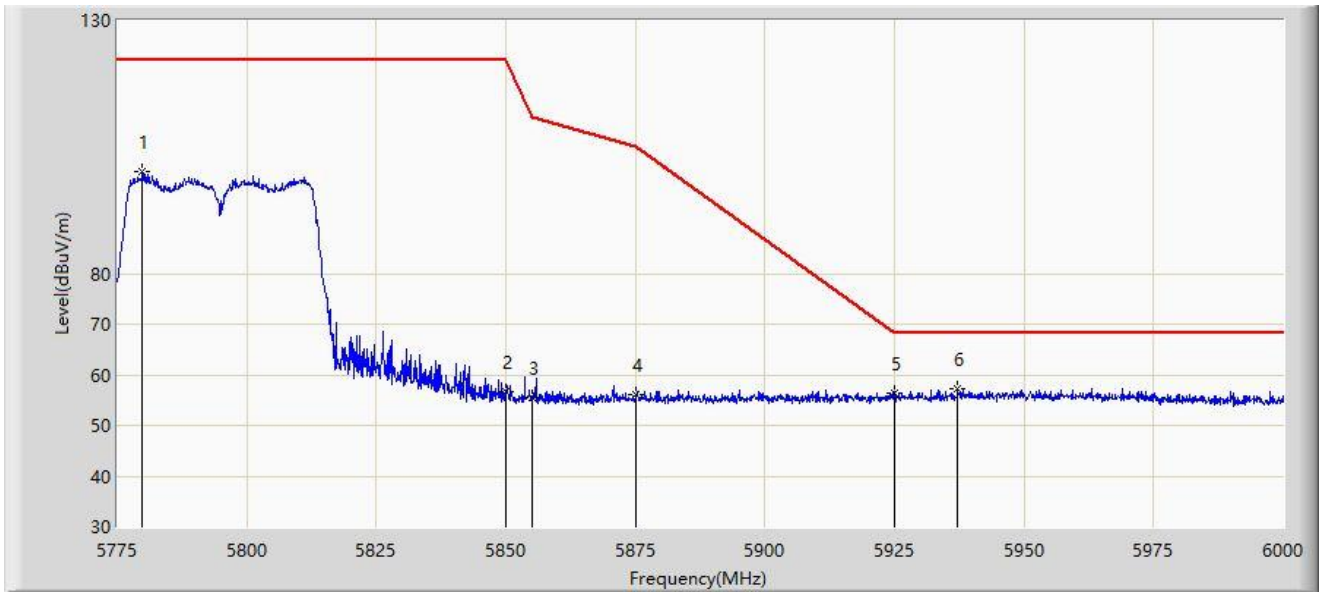


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5779.837	100.069	96.999	N/A	N/A	3.070	PK
2		5850.000	56.616	53.284	-65.584	122.200	3.333	PK
3		5855.000	55.640	52.300	-55.160	110.800	3.340	PK
4		5875.000	55.968	52.574	-49.232	105.200	3.393	PK
5		5925.000	56.340	52.575	-11.860	68.200	3.766	PK
6	*	5937.225	57.198	53.287	-11.002	68.200	3.911	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11n-HT40 at 5795MHz	

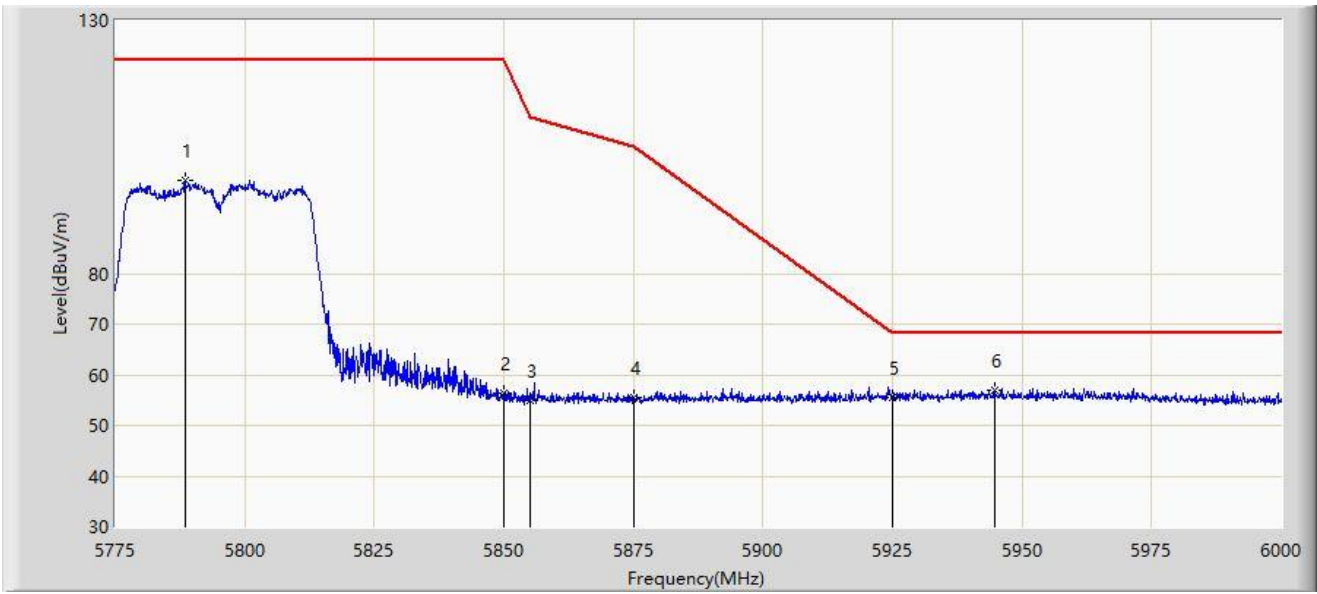


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5788.500	98.355	95.203	N/A	N/A	3.152	PK
2		5850.000	56.360	53.028	-65.840	122.200	3.333	PK
3		5855.000	54.833	51.493	-55.967	110.800	3.340	PK
4		5875.000	55.563	52.169	-49.637	105.200	3.393	PK
5		5925.000	55.385	51.620	-12.815	68.200	3.766	PK
6	*	5944.650	56.997	53.041	-11.203	68.200	3.956	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

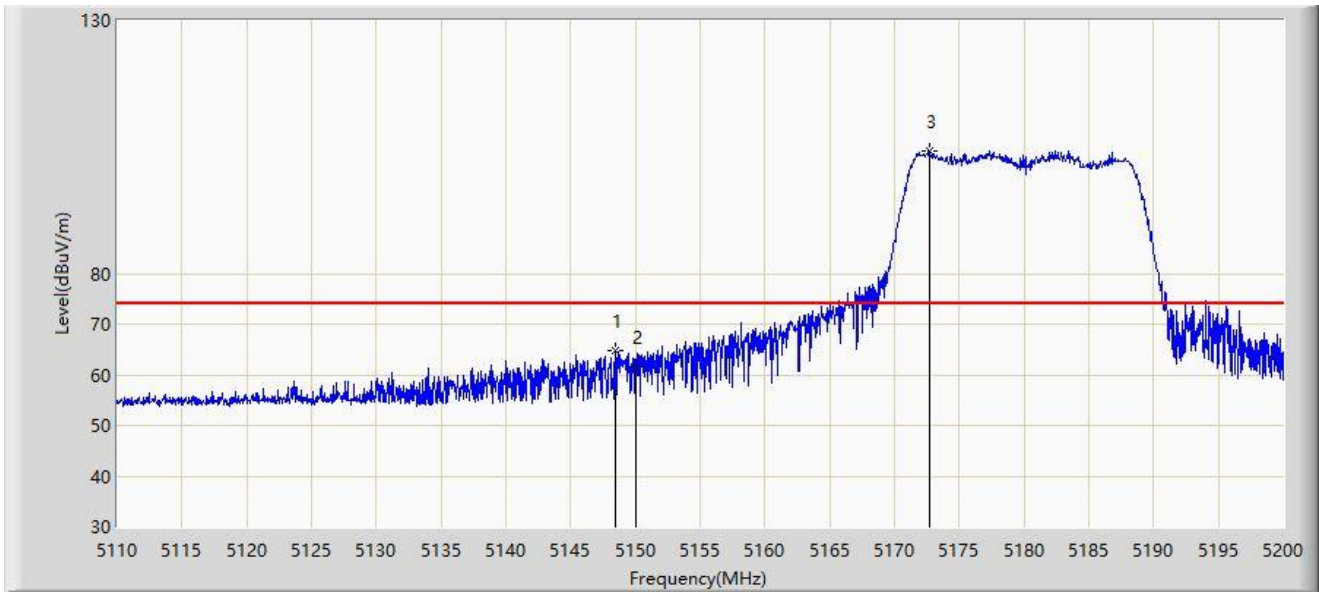


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.430	64.783	62.213	-9.217	74.000	2.570	PK
2		5150.000	61.485	58.926	-12.515	74.000	2.559	PK
3		5172.730	104.278	102.075	N/A	N/A	2.204	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

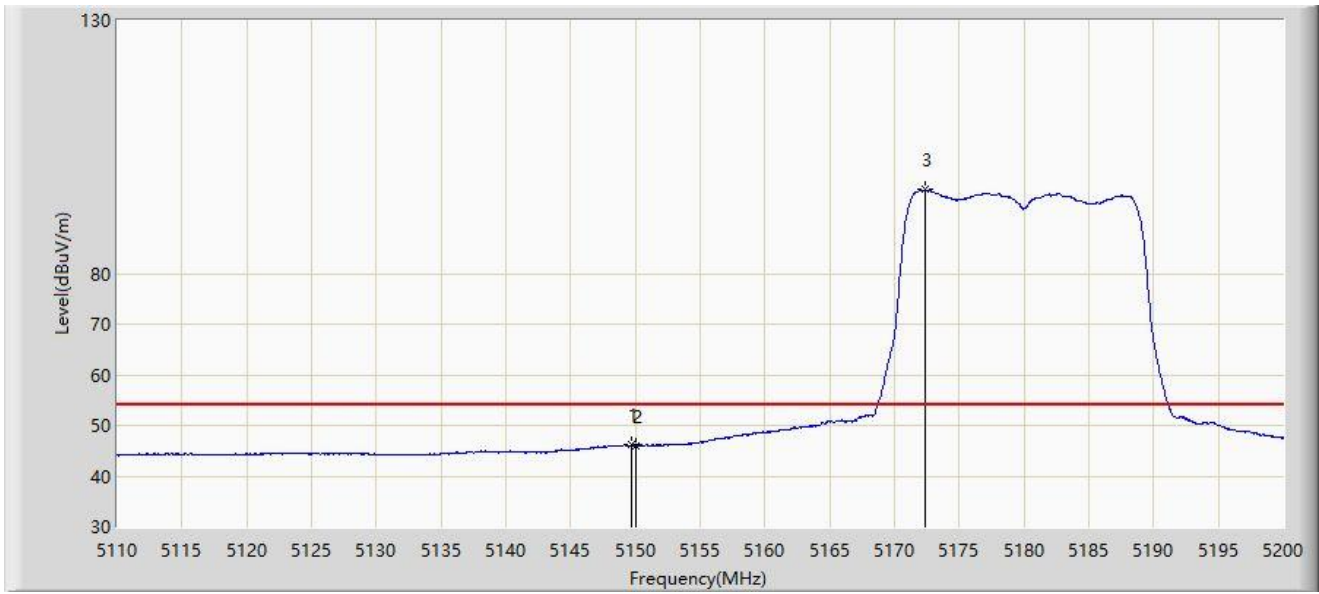


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.690	46.171	43.610	-7.829	54.000	2.561	AV
2		5150.000	46.054	43.495	-7.946	54.000	2.559	AV
3		5172.415	96.538	94.325	N/A	N/A	2.214	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

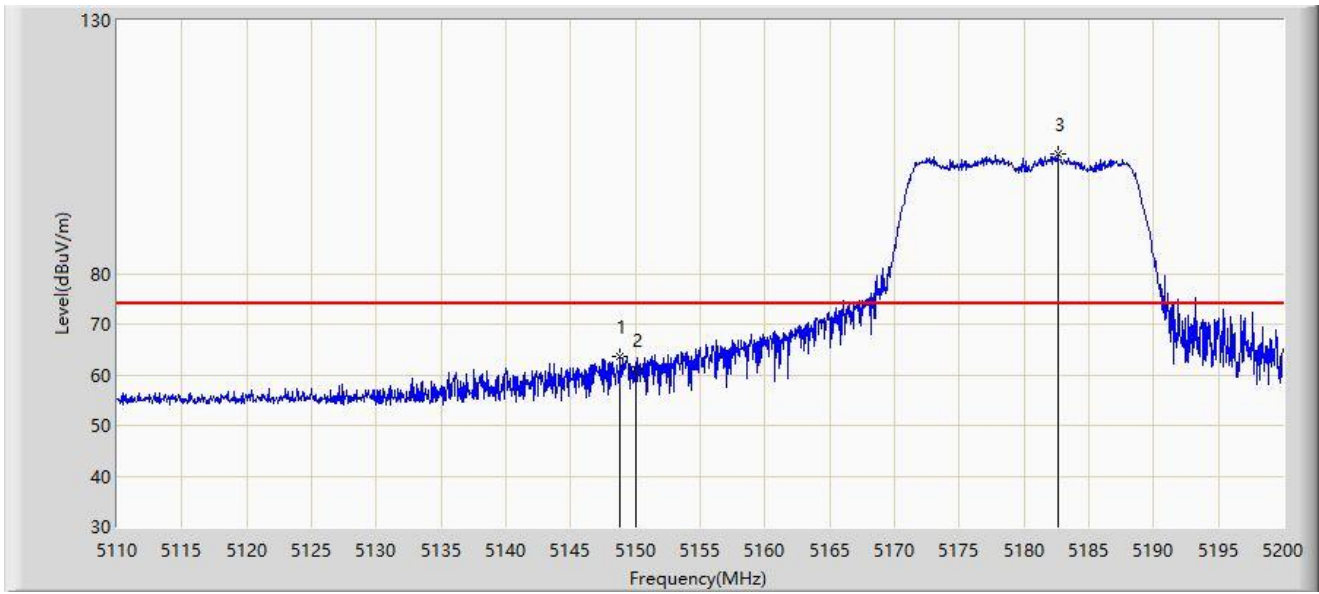


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.835	63.720	61.153	-10.280	74.000	2.567	PK
2		5150.000	60.995	58.436	-13.005	74.000	2.559	PK
3		5182.585	103.596	101.699	N/A	N/A	1.897	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

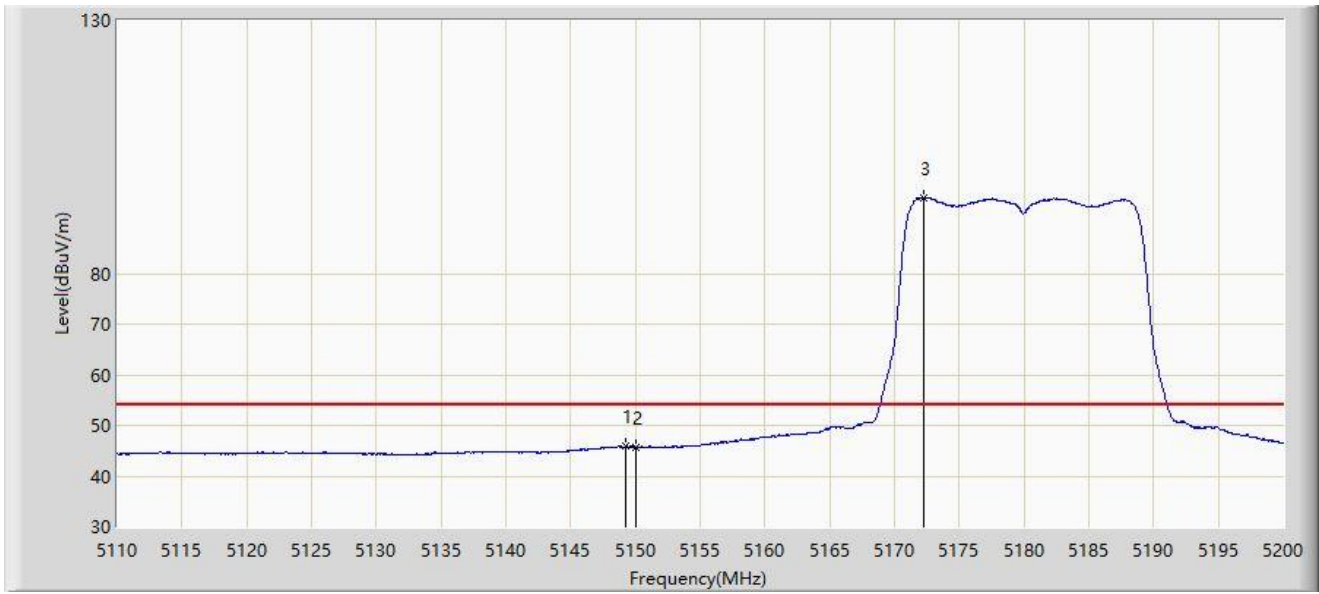


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5149.285	45.875	43.311	-8.125	54.000	2.564	AV
2		5150.000	45.624	43.065	-8.376	54.000	2.559	AV
3		5172.280	95.015	92.797	N/A	N/A	2.218	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

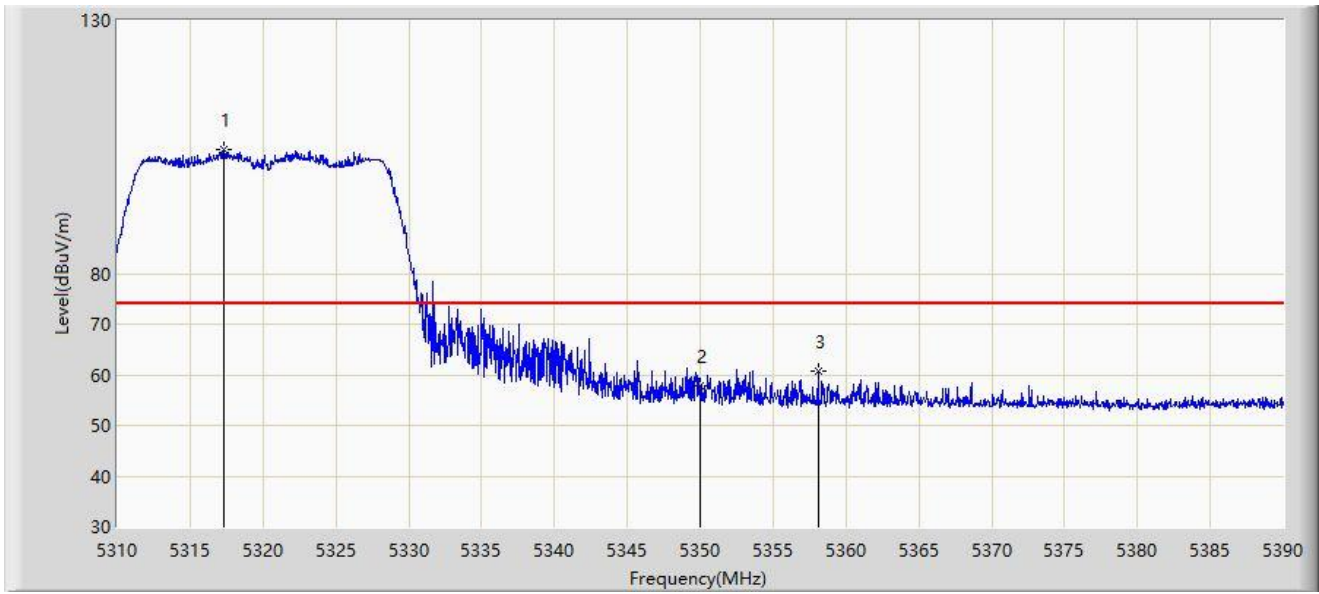


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5317.360	104.517	102.956	N/A	N/A	1.561	PK
2		5350.000	57.707	56.197	-16.293	74.000	1.510	PK
3	*	5358.080	60.636	59.045	-13.364	74.000	1.591	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

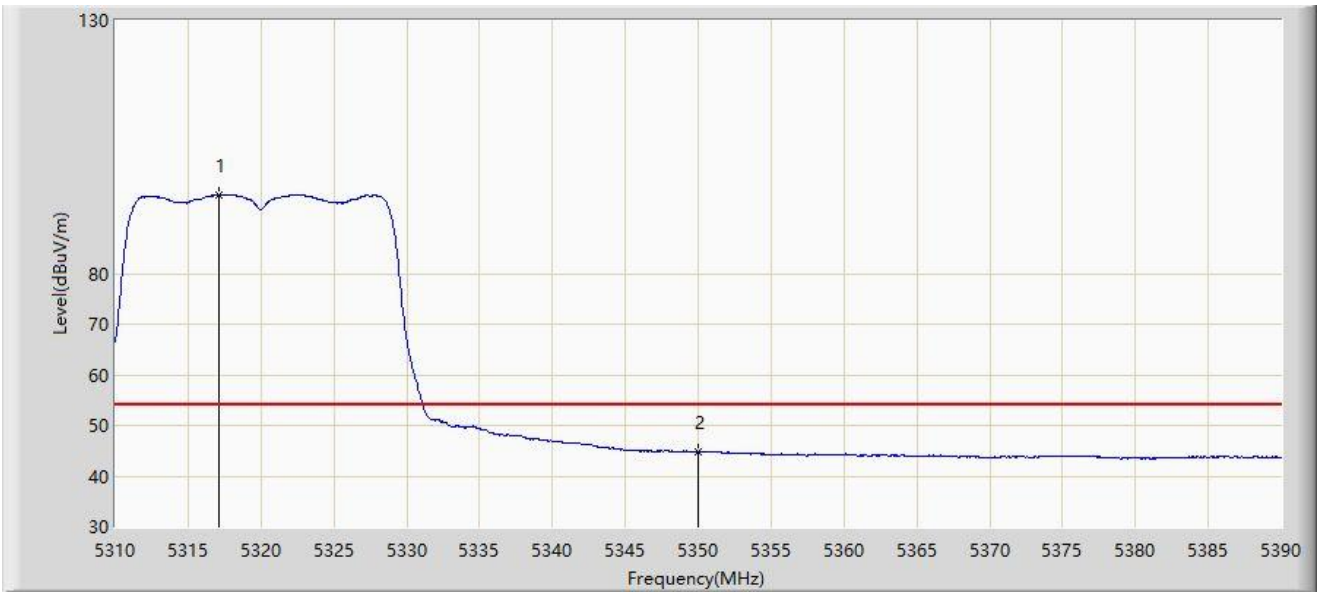


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5317.080	95.621	94.056	N/A	N/A	1.564	AV
2	*	5350.000	44.796	43.286	-9.204	54.000	1.510	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

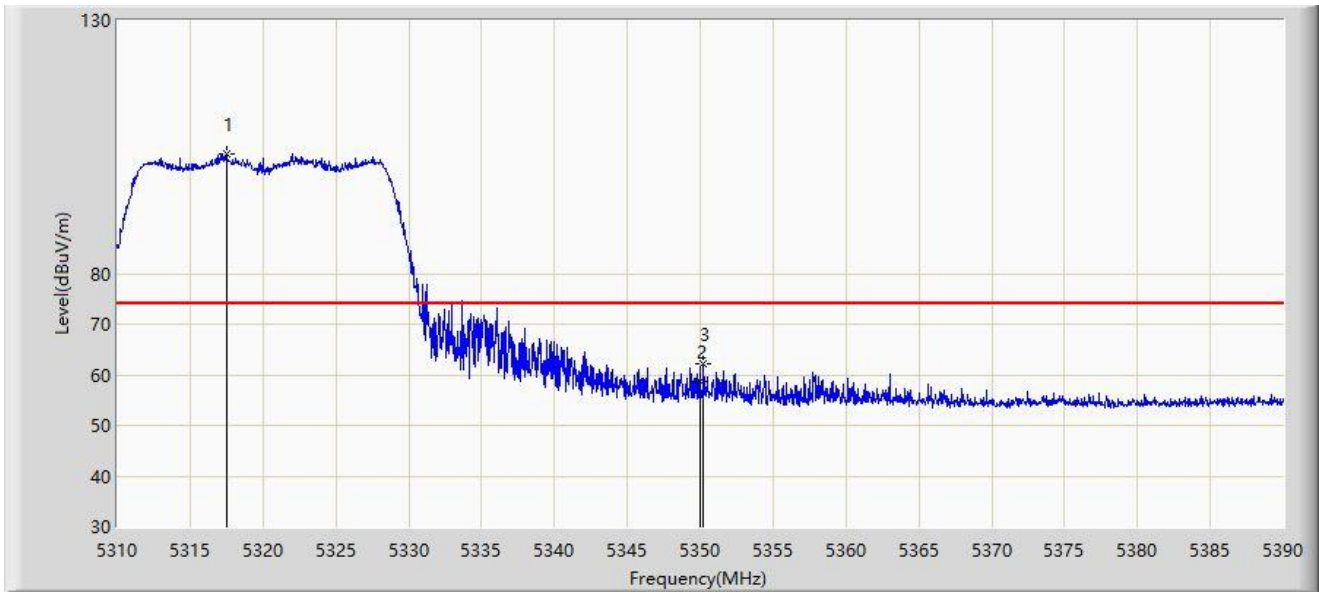


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5317.480	103.701	102.141	N/A	N/A	1.559	PK
2		5350.000	58.720	57.210	-15.280	74.000	1.510	PK
3	*	5350.240	62.102	60.592	-11.898	74.000	1.510	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

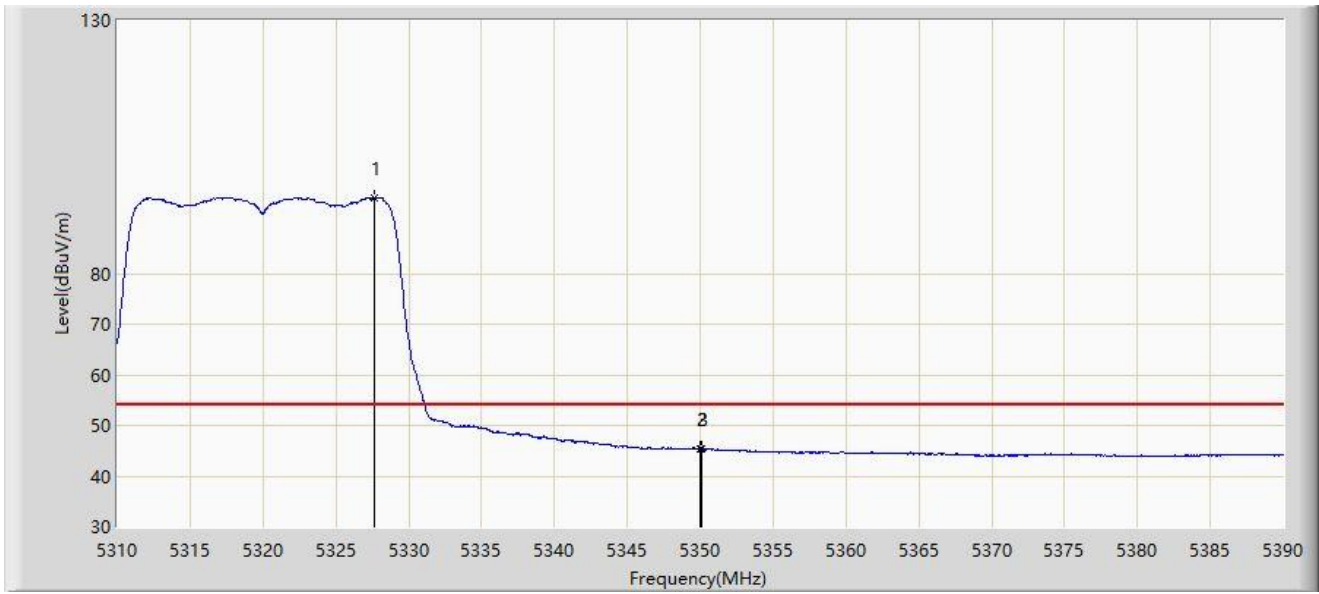


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5327.680	95.035	93.488	N/A	N/A	1.547	AV
2		5350.000	45.260	43.750	-8.740	54.000	1.510	AV
3	*	5350.120	45.415	43.905	-8.585	54.000	1.510	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

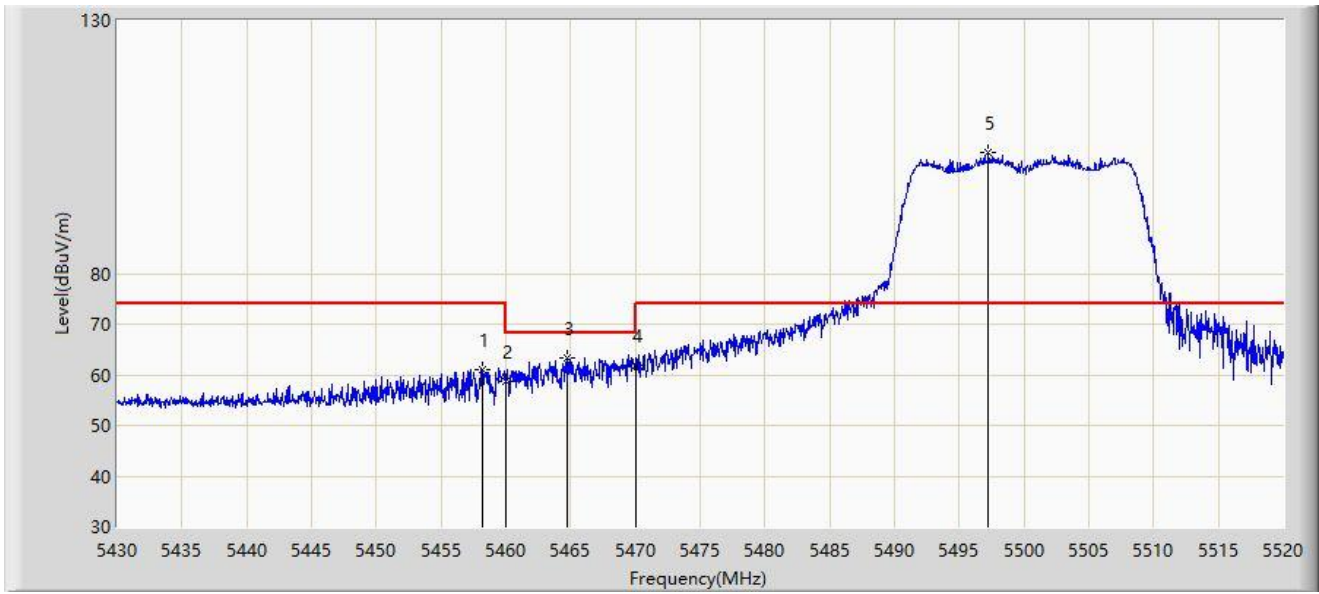


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5458.215	60.965	58.877	-13.035	74.000	2.088	PK
2		5460.000	58.593	56.486	-15.407	74.000	2.108	PK
3	*	5464.695	63.210	61.053	-4.990	68.200	2.157	PK
4		5470.000	61.922	59.710	-6.278	68.200	2.212	PK
5		5497.230	103.894	101.396	N/A	N/A	2.498	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

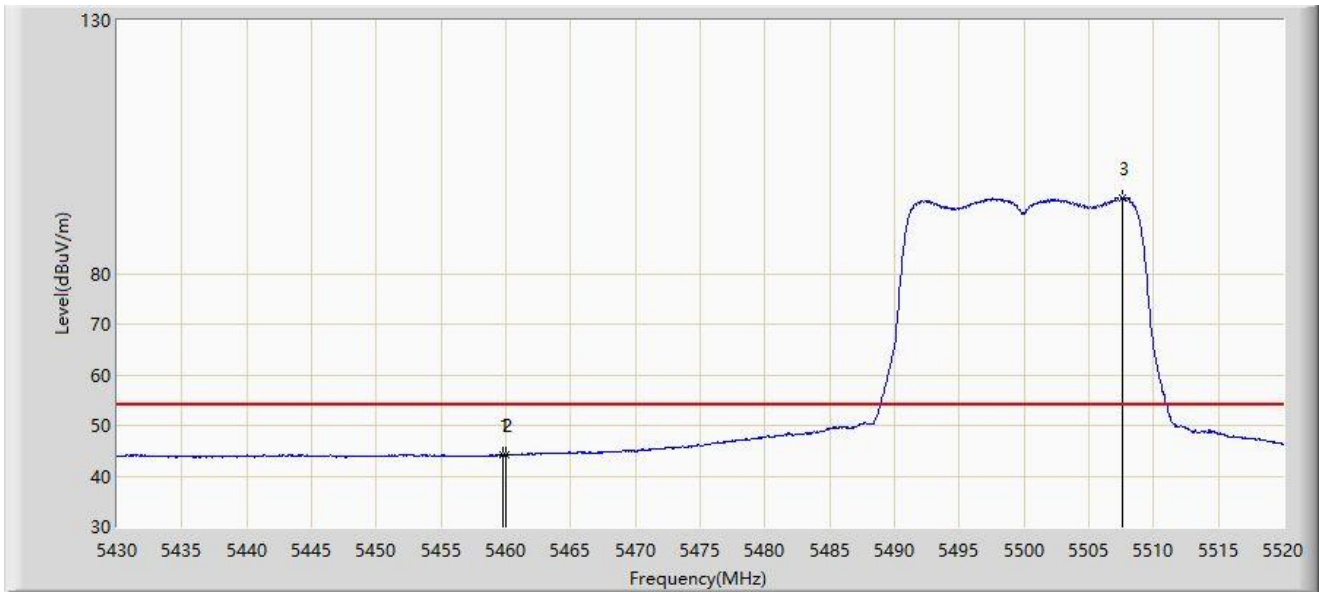


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5459.790	44.178	42.073	-9.822	54.000	2.105	AV
2		5460.000	44.099	41.992	-9.901	54.000	2.108	AV
3		5507.580	94.935	92.607	N/A	N/A	2.327	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

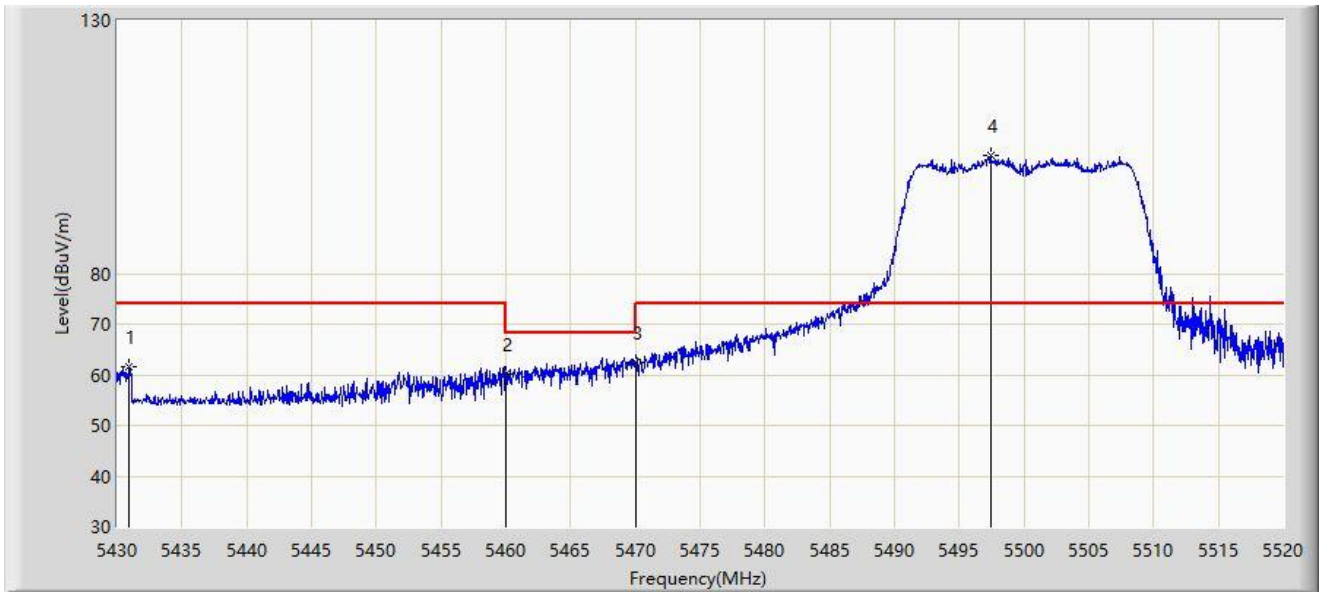


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5430.945	61.543	59.304	-12.457	74.000	2.239	PK
2		5460.000	60.105	57.998	-13.895	74.000	2.108	PK
3	*	5470.000	62.558	60.346	-5.642	68.200	2.212	PK
4		5497.410	103.311	100.815	N/A	N/A	2.496	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

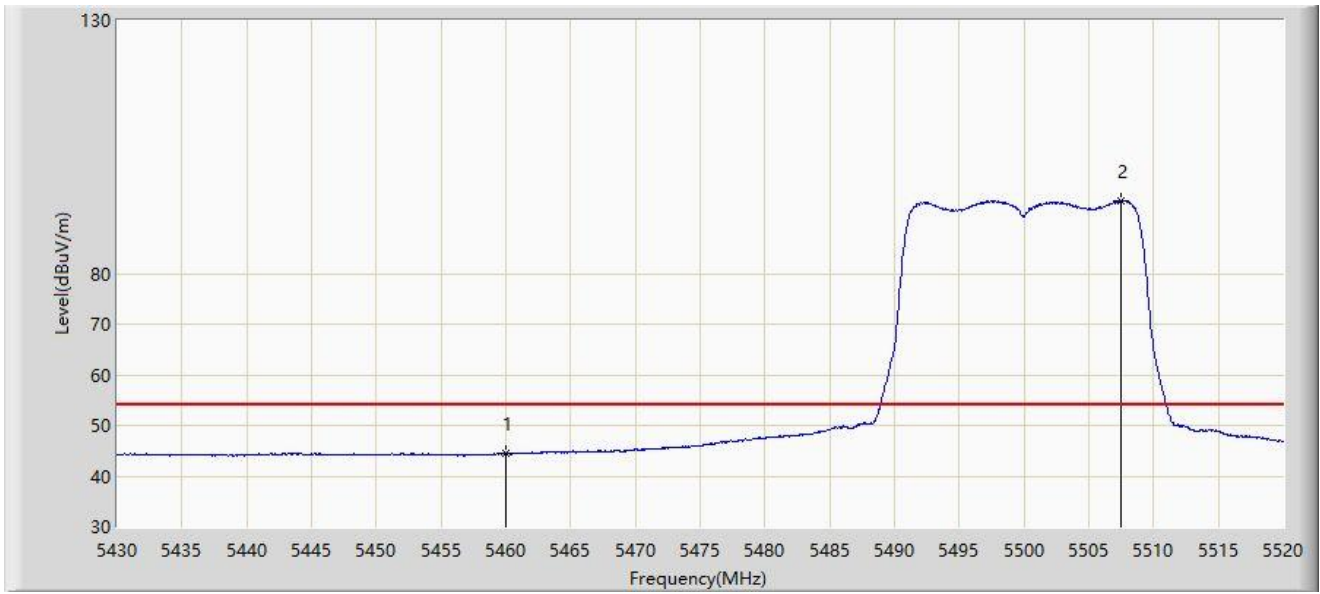


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	44.531	42.424	-9.469	54.000	2.108	AV
2		5507.490	94.436	92.105	N/A	N/A	2.330	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT20 at 5700MHz	

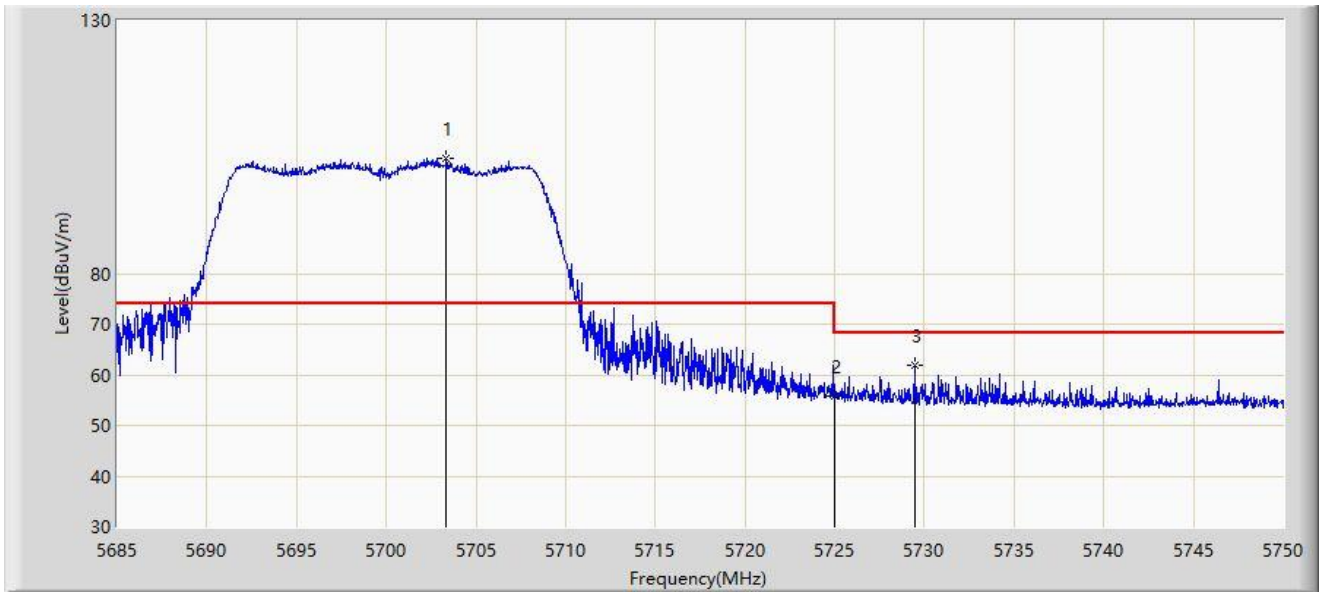


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5703.362	102.829	100.011	N/A	N/A	2.818	PK
2		5725.000	55.838	52.994	-12.362	68.200	2.844	PK
3	*	5729.460	61.832	58.945	-6.368	68.200	2.887	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT20 at 5700MHz	

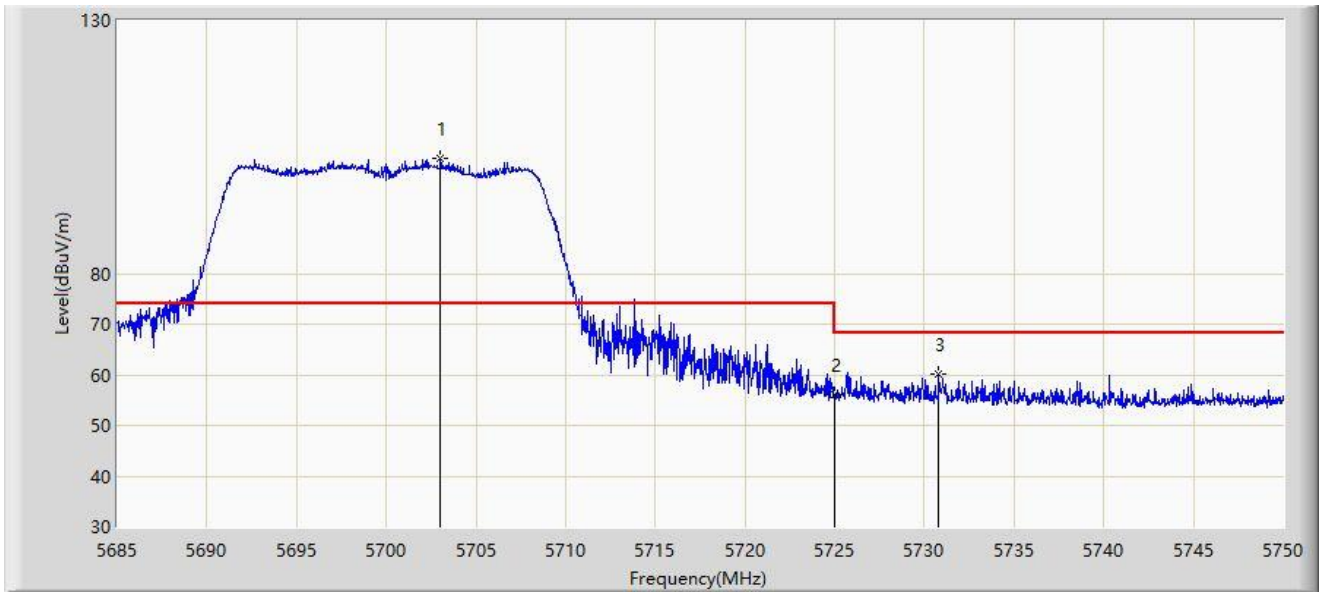


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5703.038	102.798	99.975	N/A	N/A	2.822	PK
2		5725.000	56.062	53.218	-12.138	68.200	2.844	PK
3	*	5730.792	60.091	57.190	-8.109	68.200	2.901	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT20 at 5745MHz	

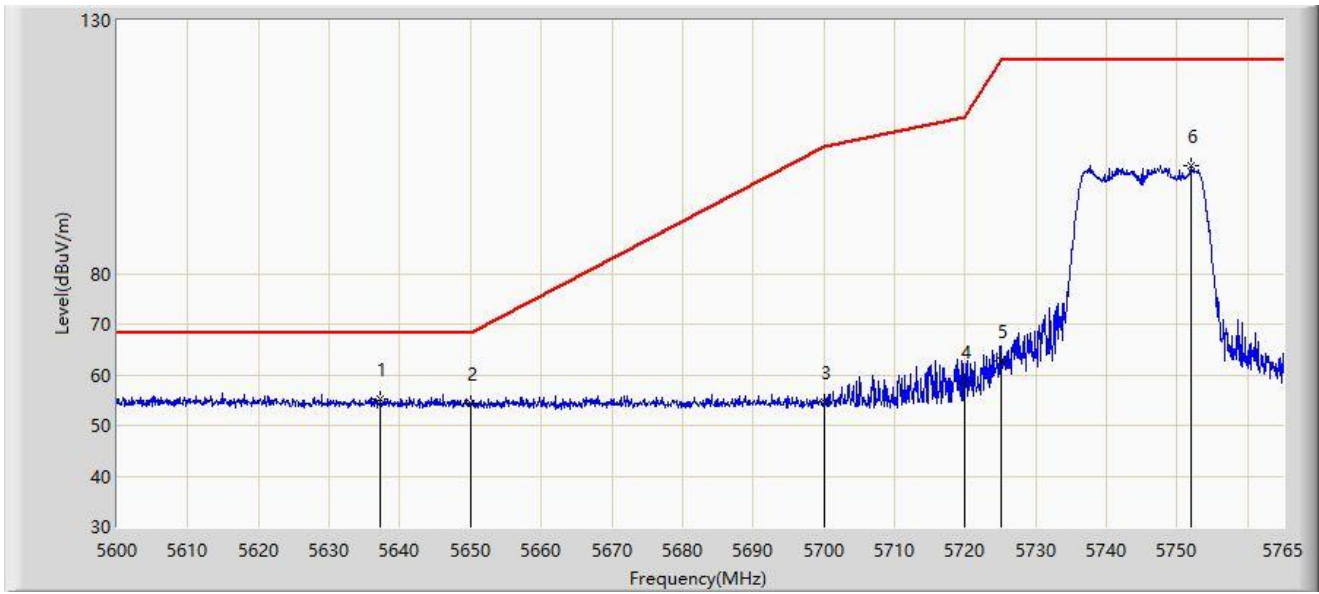


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5637.290	55.351	52.854	-12.849	68.200	2.496	PK
2		5650.000	54.236	51.685	-13.964	68.200	2.552	PK
3		5700.000	54.514	51.647	-50.686	105.200	2.867	PK
4		5720.000	58.555	55.745	-52.245	110.800	2.810	PK
5		5725.000	62.661	59.817	-59.539	122.200	2.844	PK
6		5751.882	101.351	98.248	N/A	N/A	3.103	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT20 at 5745MHz	

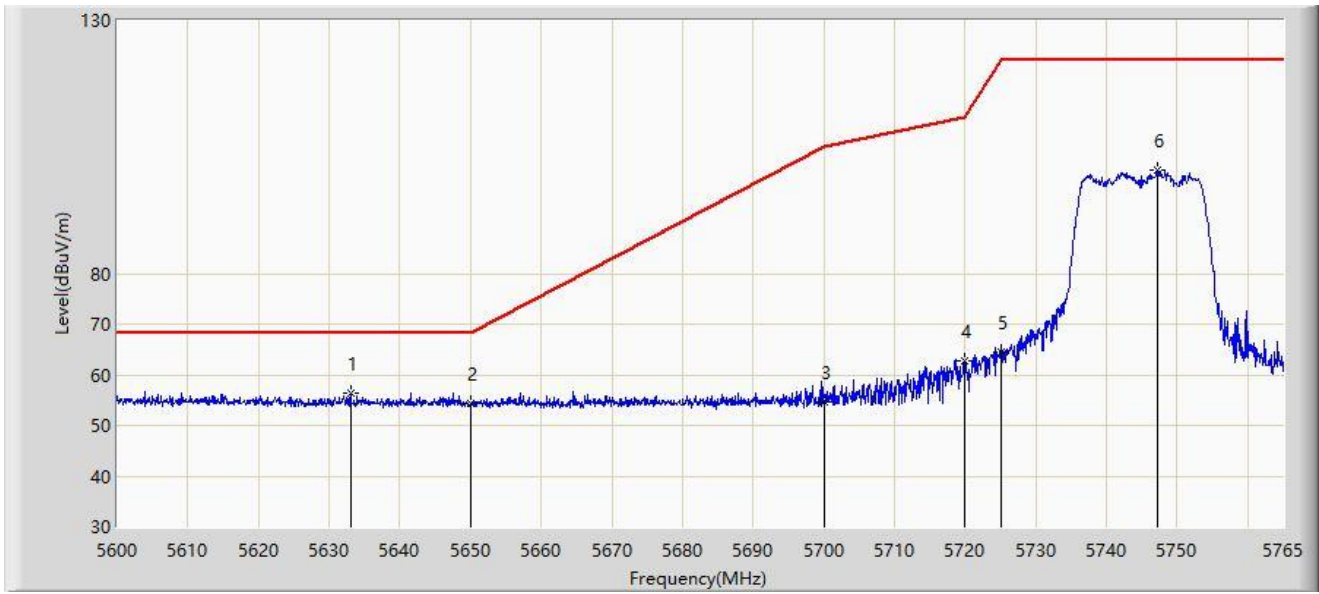


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5633.000	56.337	53.876	-11.863	68.200	2.462	PK
2		5650.000	54.461	51.910	-13.739	68.200	2.552	PK
3		5700.000	54.674	51.807	-50.526	105.200	2.867	PK
4		5720.000	62.649	59.839	-48.151	110.800	2.810	PK
5		5725.000	64.502	61.658	-57.698	122.200	2.844	PK
6		5747.263	100.519	97.455	N/A	N/A	3.064	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT20 at 5825MHz	

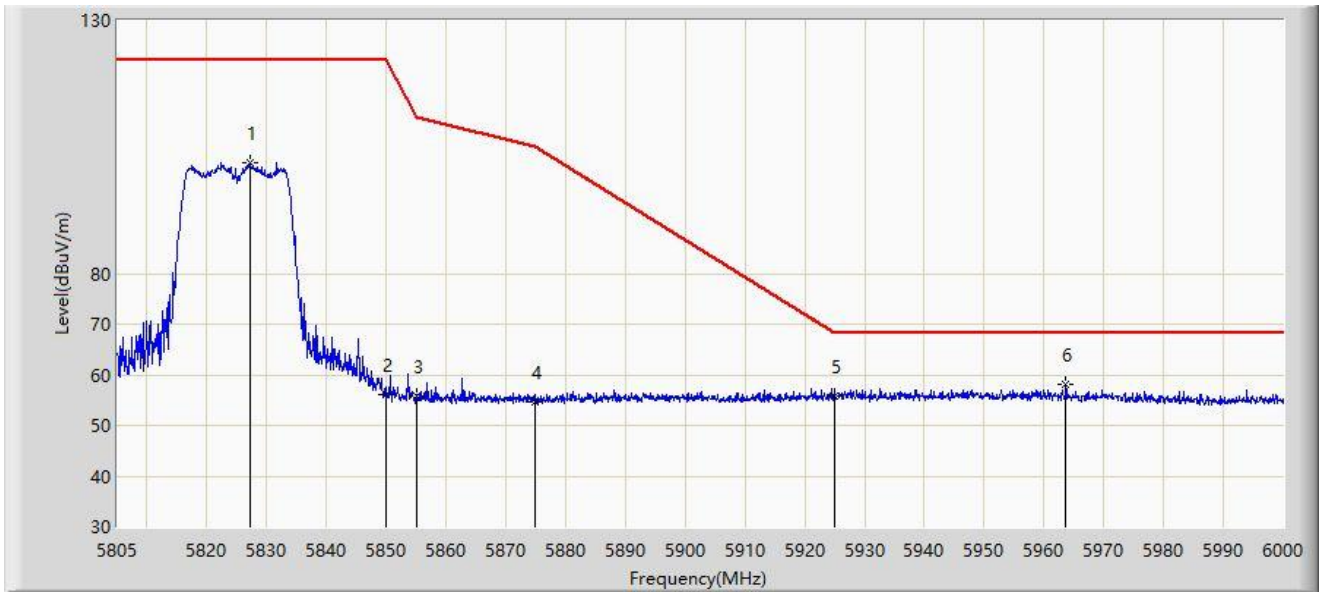


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5827.132	101.953	98.510	N/A	N/A	3.443	PK
2		5850.000	56.036	52.704	-66.164	122.200	3.333	PK
3		5855.000	55.910	52.570	-54.890	110.800	3.340	PK
4		5875.000	54.765	51.371	-50.435	105.200	3.393	PK
5		5925.000	55.868	52.103	-12.332	68.200	3.766	PK
6	*	5963.632	57.997	54.180	-10.203	68.200	3.817	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT20 at 5825MHz	

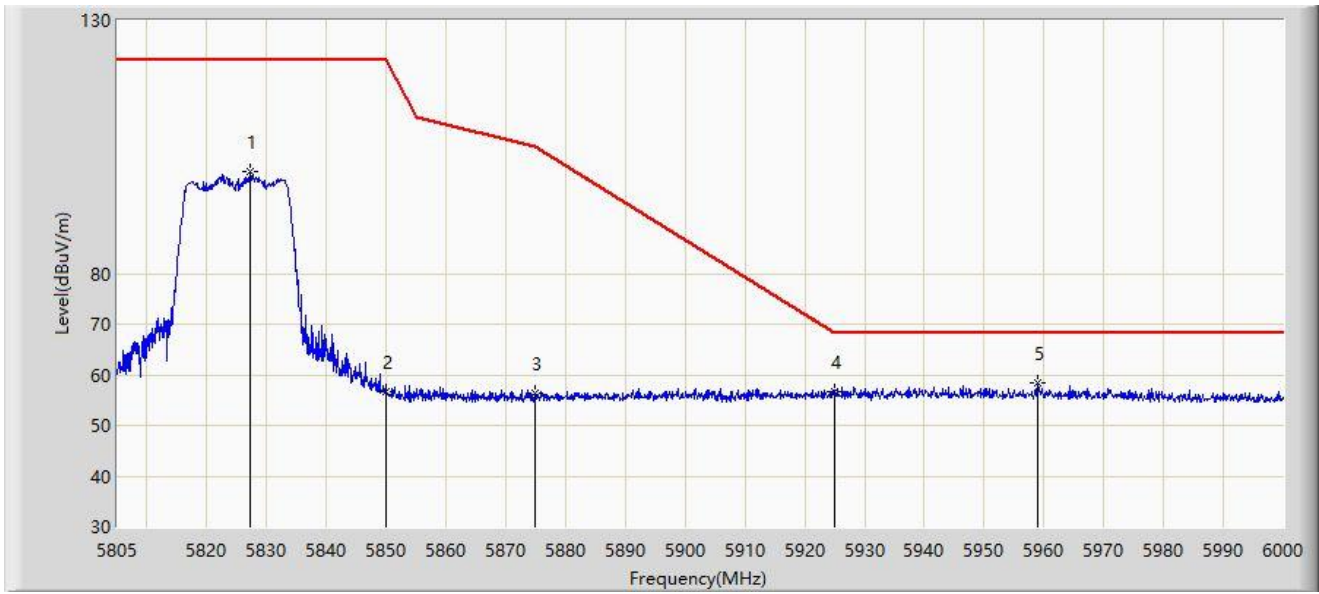


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5827.328	100.208	96.762	N/A	N/A	3.445	PK
2		5850.000	56.647	53.315	-65.553	122.200	3.333	PK
3		5875.000	56.325	52.931	-48.875	105.200	3.393	PK
4		5925.000	56.706	52.941	-11.494	68.200	3.766	PK
5	*	5958.855	58.337	54.476	-9.863	68.200	3.862	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

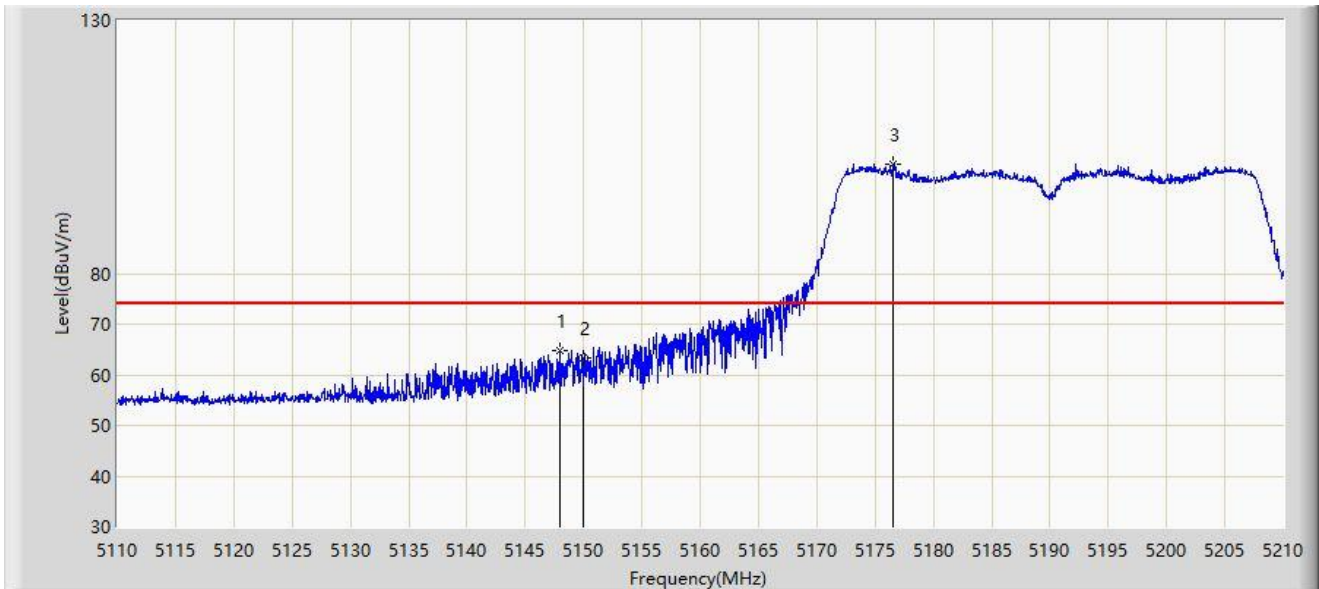


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.000	64.891	62.318	-9.109	74.000	2.573	PK
2		5150.000	63.195	60.636	-10.805	74.000	2.559	PK
3		5176.500	101.597	99.517	N/A	N/A	2.080	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

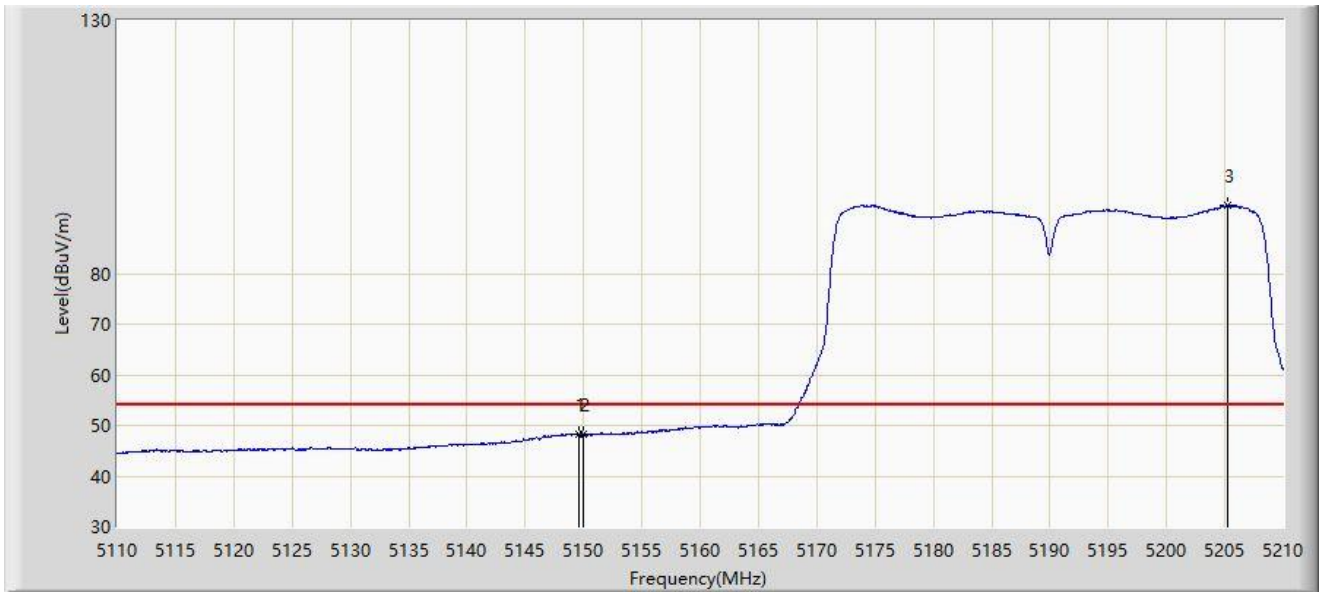


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.600	48.404	45.842	-5.596	54.000	2.562	AV
2		5150.000	48.177	45.618	-5.823	54.000	2.559	AV
3		5205.250	93.442	91.500	N/A	N/A	1.942	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

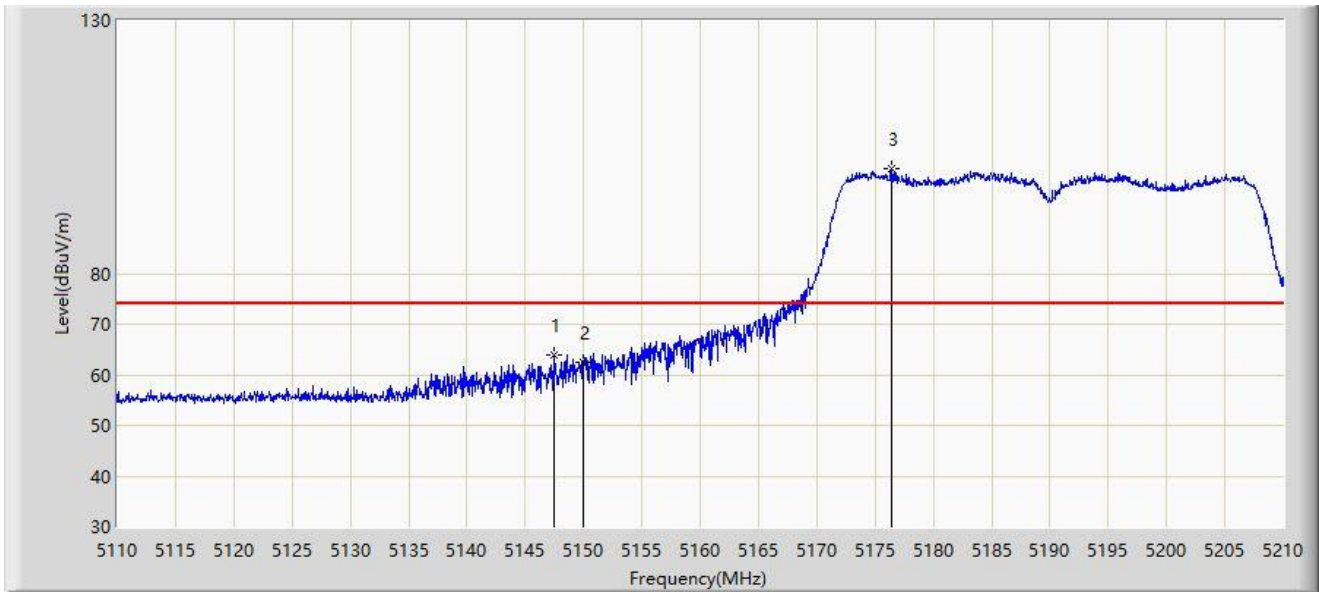


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5147.500	63.946	61.384	-10.054	74.000	2.562	PK
2		5150.000	62.423	59.864	-11.577	74.000	2.559	PK
3		5176.450	100.661	98.579	N/A	N/A	2.082	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

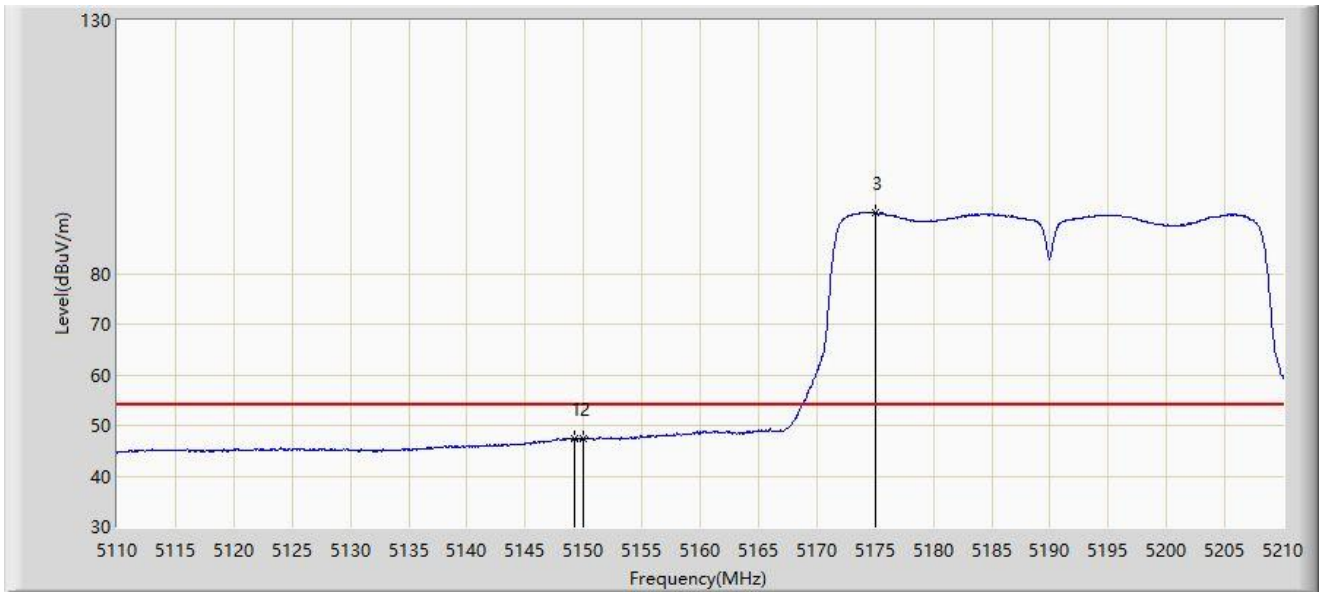


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5149.200	47.414	44.849	-6.586	54.000	2.564	AV
2		5150.000	47.412	44.853	-6.588	54.000	2.559	AV
3		5175.000	92.133	90.004	N/A	N/A	2.129	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

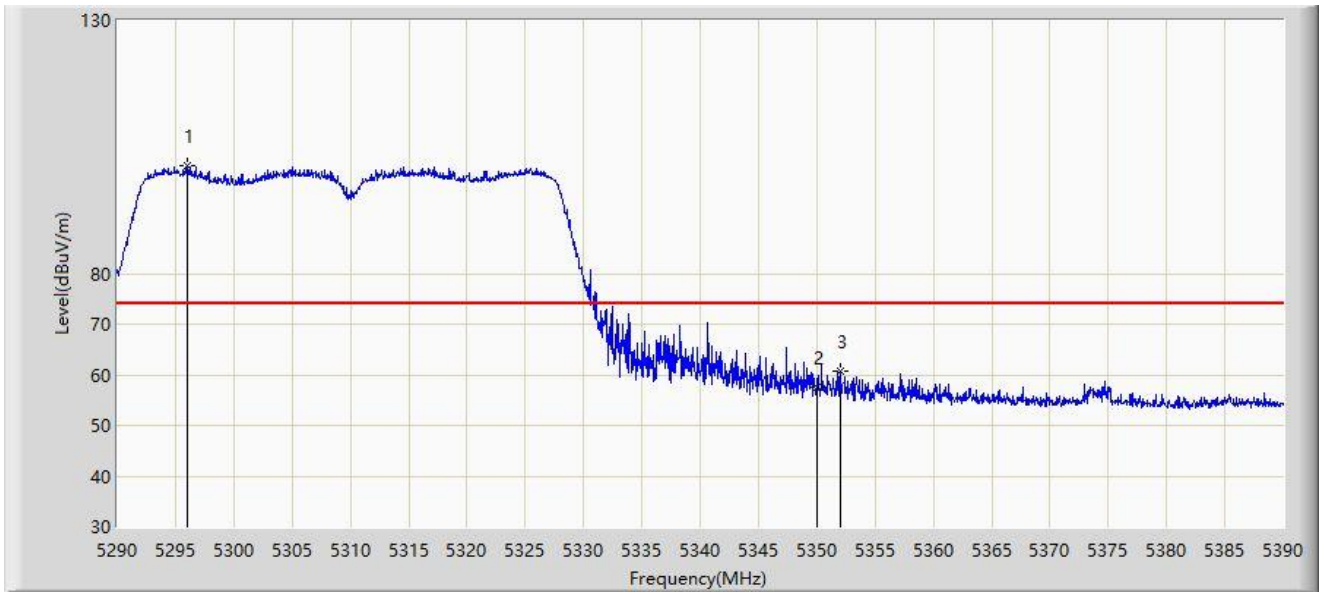


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5296.050	101.177	99.381	N/A	N/A	1.797	PK
2		5350.000	57.453	55.943	-16.547	74.000	1.510	PK
3	*	5352.000	60.821	59.315	-13.179	74.000	1.506	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

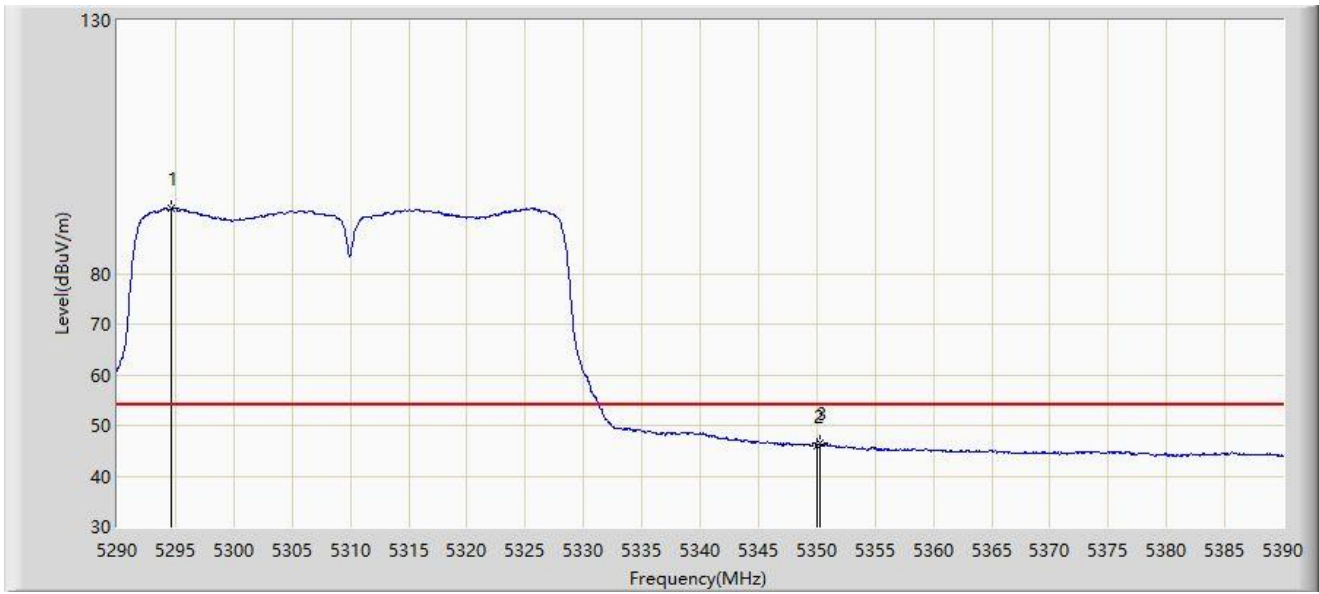


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5294.650	92.862	91.057	N/A	N/A	1.805	AV
2		5350.000	46.009	44.499	-7.991	54.000	1.510	AV
3	*	5350.250	46.403	44.893	-7.597	54.000	1.510	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

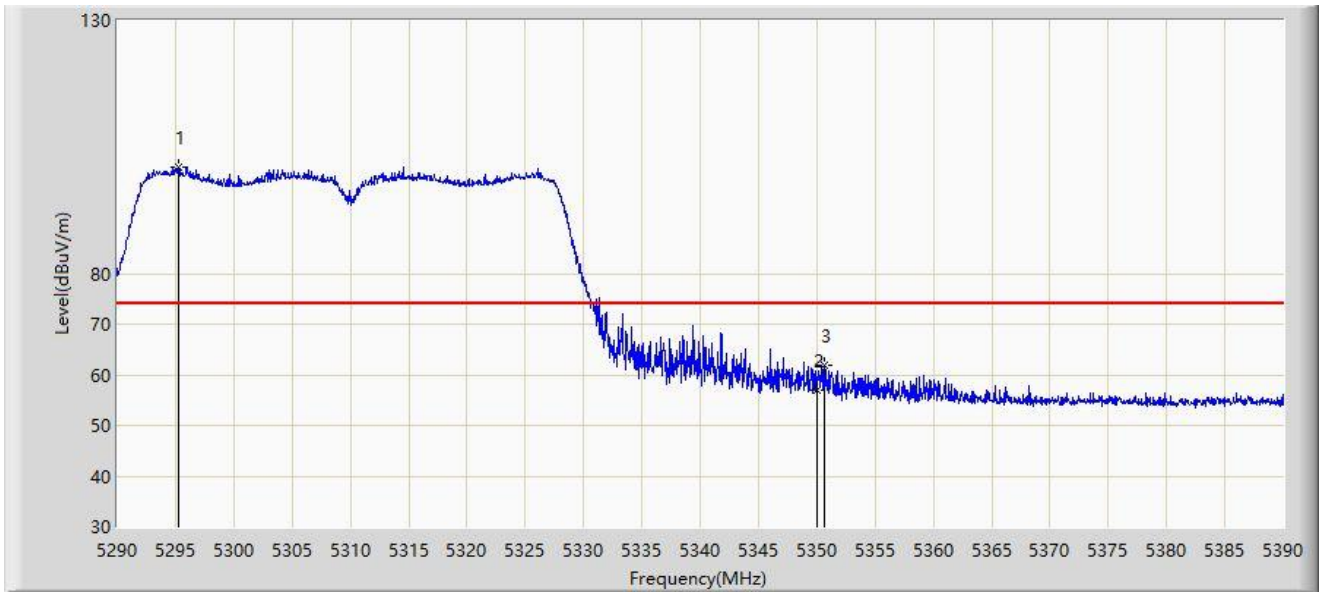


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5295.300	101.114	99.313	N/A	N/A	1.802	PK
2		5350.000	57.011	55.501	-16.989	74.000	1.510	PK
3	*	5350.700	61.830	60.321	-12.170	74.000	1.509	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

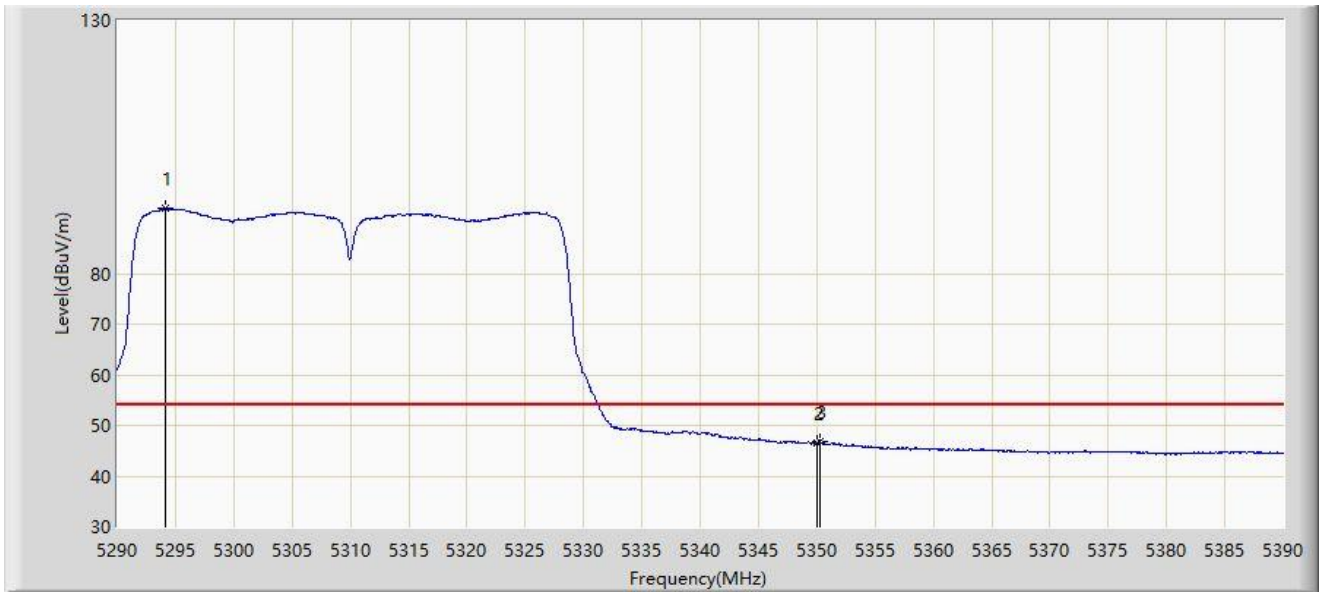


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5294.100	92.860	91.052	N/A	N/A	1.808	AV
2		5350.000	46.649	45.139	-7.351	54.000	1.510	AV
3	*	5350.300	46.712	45.202	-7.288	54.000	1.510	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

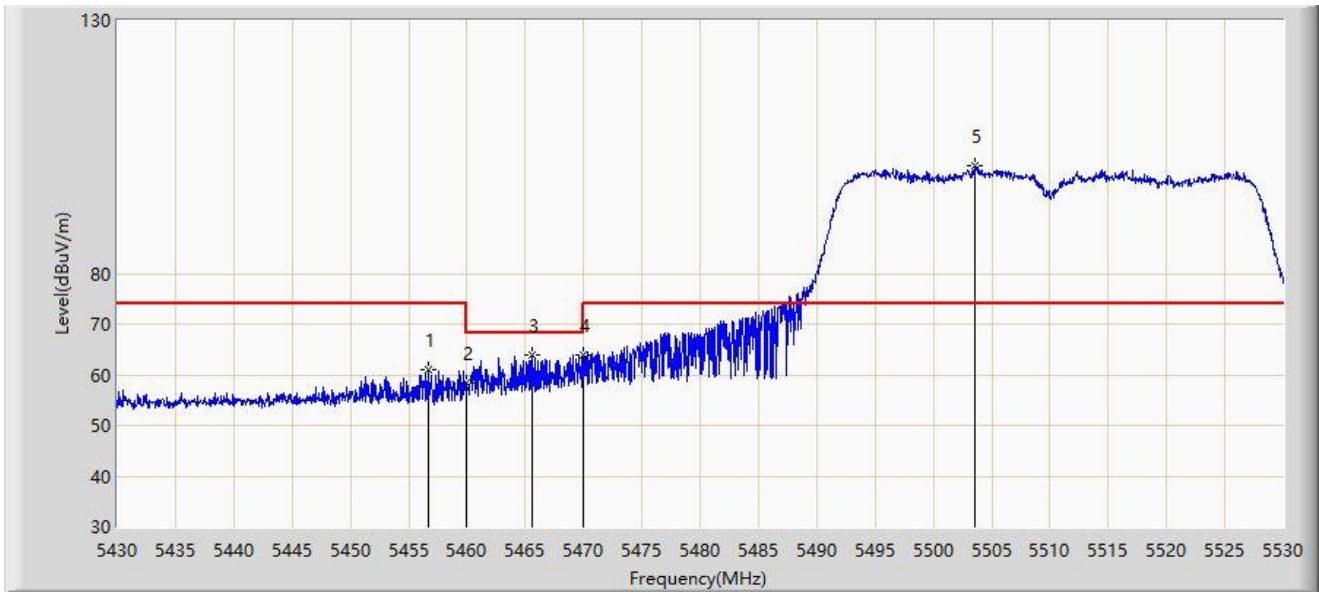


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5456.750	60.941	58.868	-13.059	74.000	2.073	PK
2		5460.000	58.321	56.214	-15.679	74.000	2.108	PK
3		5465.550	63.799	61.633	-4.401	68.200	2.165	PK
4	*	5470.000	63.819	61.607	-4.381	68.200	2.212	PK
5		5503.600	101.383	98.956	N/A	N/A	2.427	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

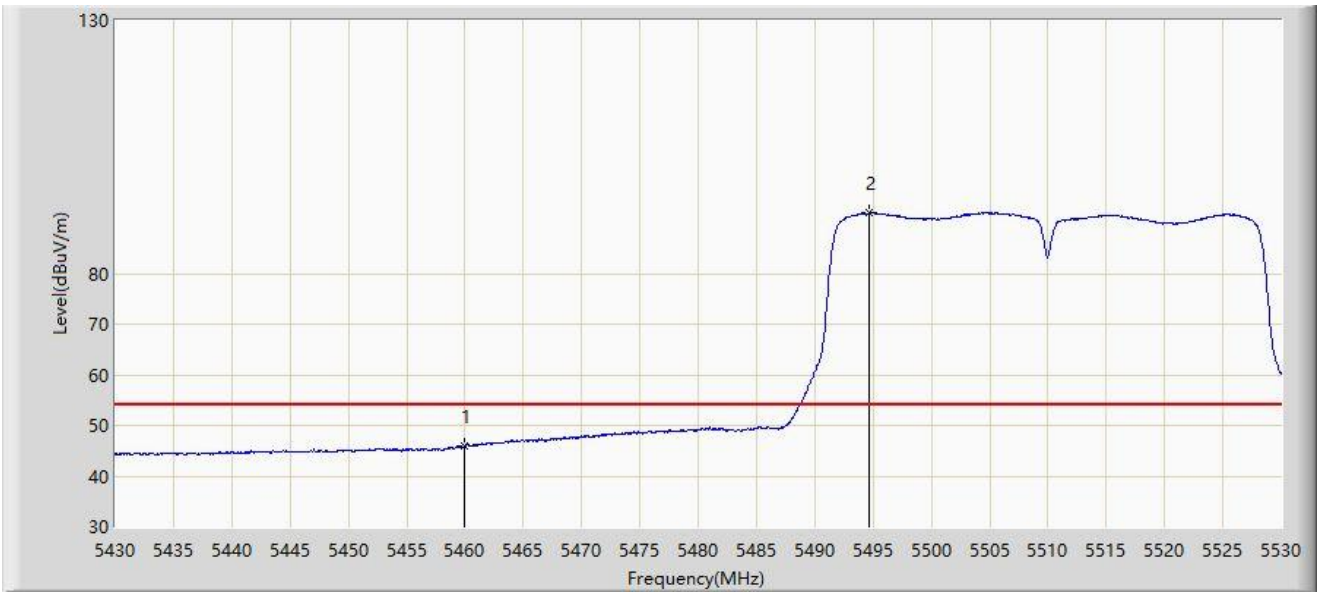


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	46.001	43.894	-7.999	54.000	2.108	AV
2		5494.650	91.911	89.385	N/A	N/A	2.527	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

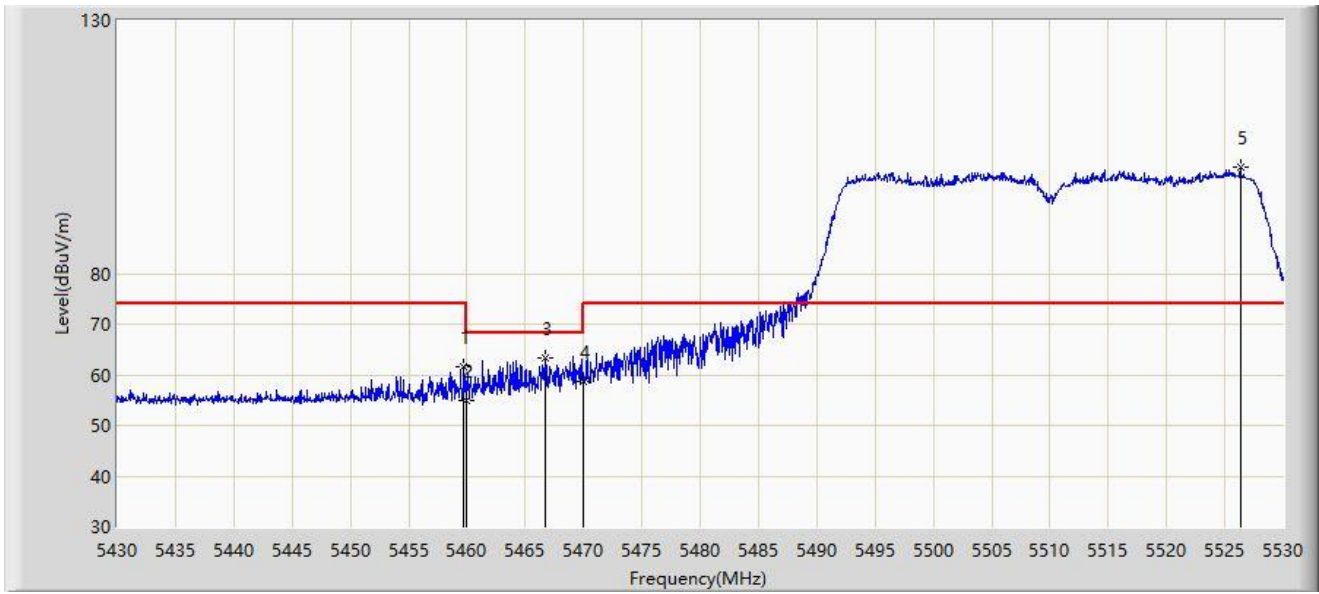


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5459.750	61.671	59.566	-12.329	74.000	2.104	PK
2		5460.000	54.986	52.879	-19.014	74.000	2.108	PK
3	*	5466.750	63.340	61.162	-4.860	68.200	2.179	PK
4		5470.000	58.655	56.443	-9.545	68.200	2.212	PK
5		5526.350	100.925	98.956	N/A	N/A	1.969	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

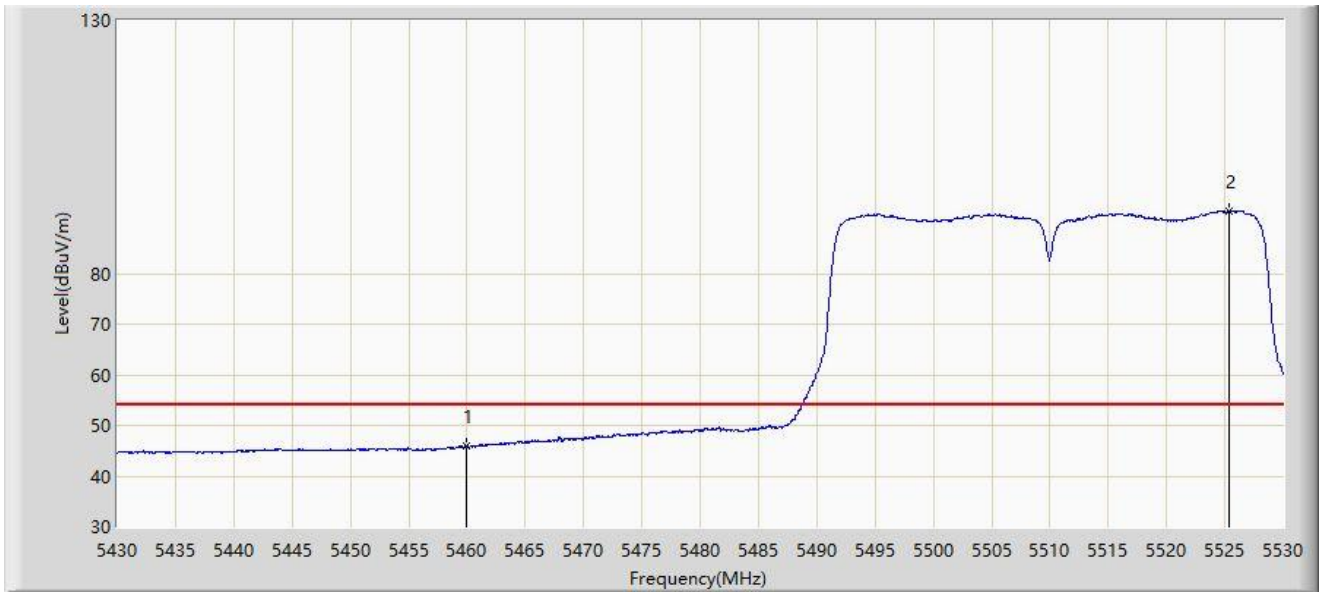


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	45.885	43.778	-8.115	54.000	2.108	AV
2		5525.400	92.451	90.507	N/A	N/A	1.944	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHz	

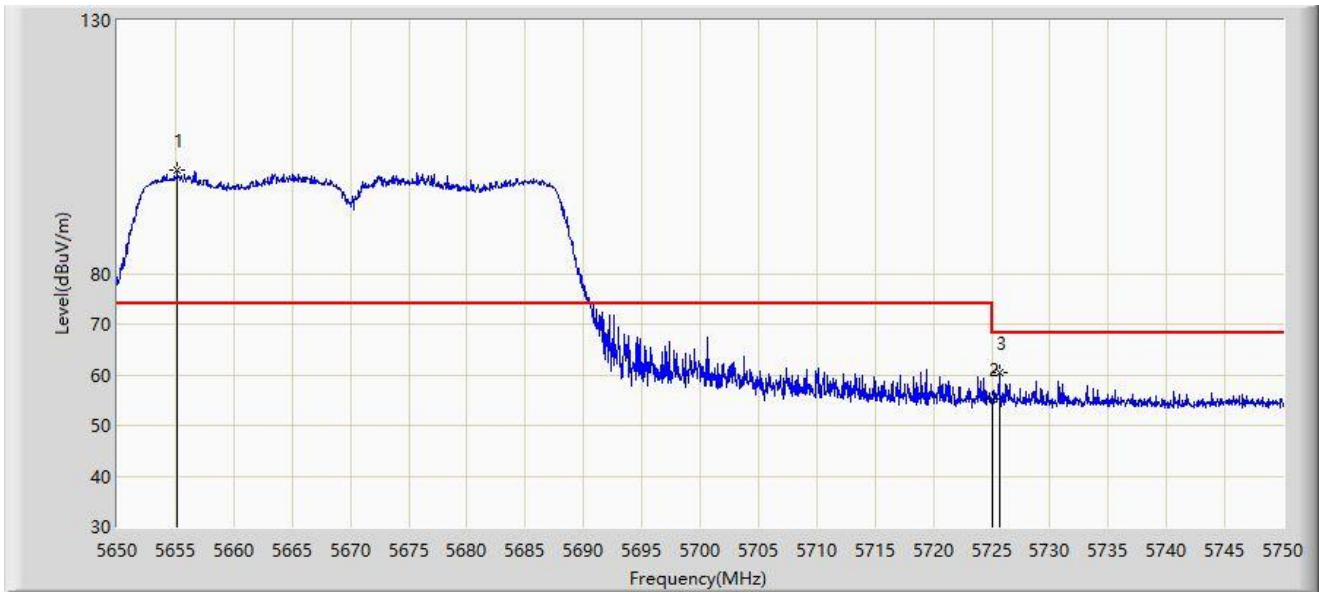


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5655.150	100.363	97.798	N/A	N/A	2.564	PK
2		5725.000	55.349	52.505	-12.851	68.200	2.844	PK
3	*	5725.650	60.489	57.640	-7.711	68.200	2.848	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHz	

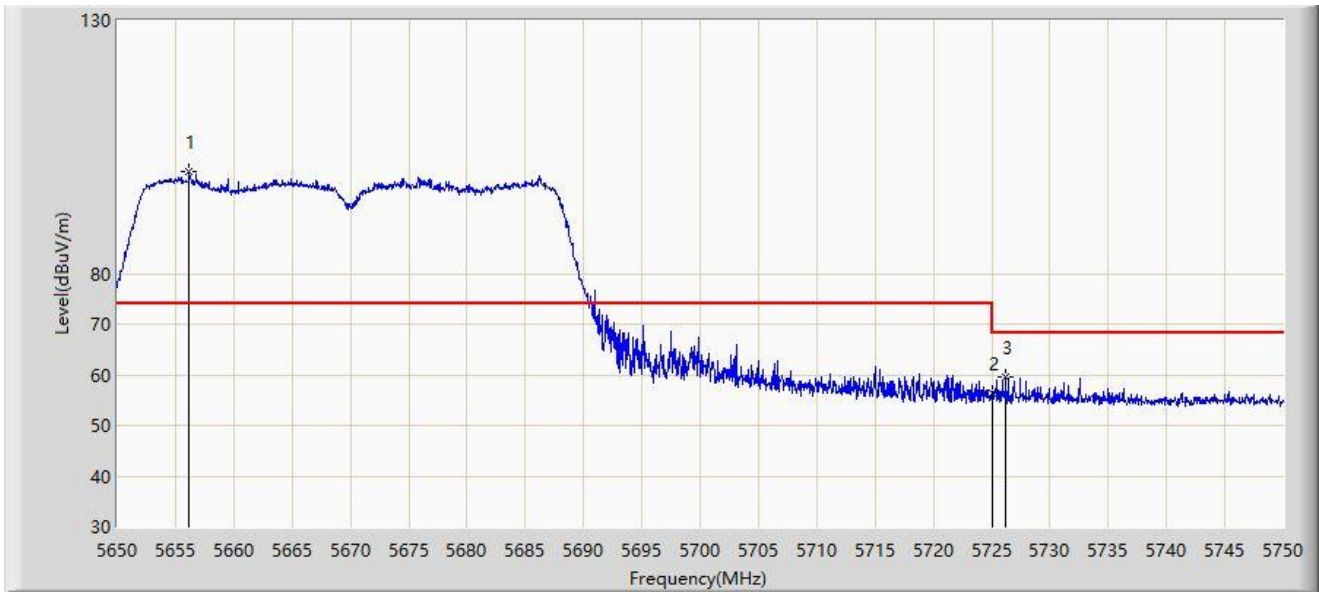


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5656.200	100.054	97.487	N/A	N/A	2.567	PK
2		5725.000	56.339	53.495	-11.861	68.200	2.844	PK
3	*	5726.200	59.669	56.816	-8.531	68.200	2.853	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT40 at 5755MHz	

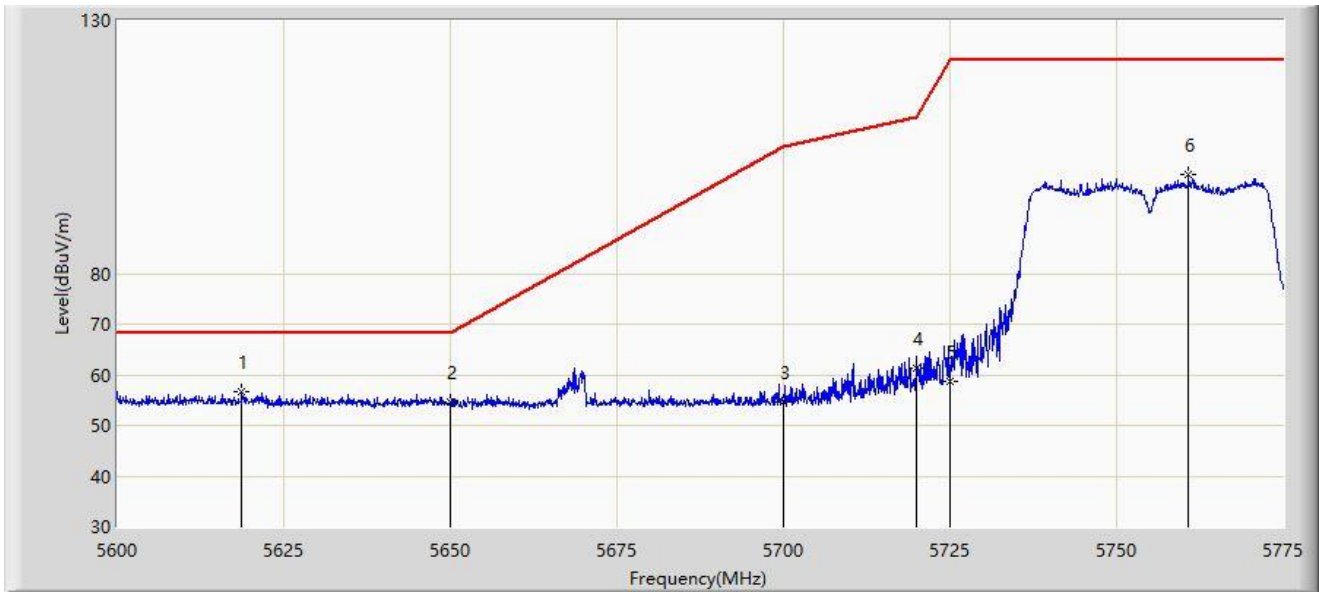


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5618.725	56.676	54.278	-11.524	68.200	2.399	PK
2		5650.000	54.510	51.959	-13.690	68.200	2.552	PK
3		5700.000	54.668	51.801	-50.532	105.200	2.867	PK
4		5720.000	61.233	58.423	-49.567	110.800	2.810	PK
5		5725.000	58.718	55.874	-63.482	122.200	2.844	PK
6		5760.825	99.524	96.359	N/A	N/A	3.165	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT40 at 5755MHz	

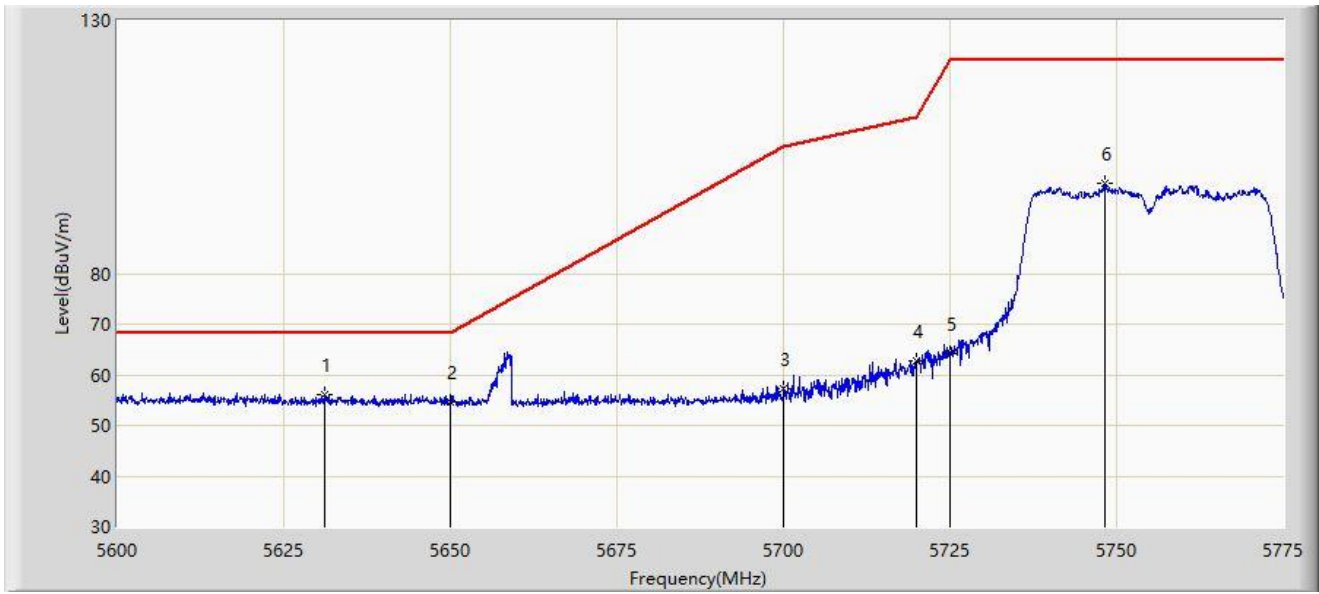


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5631.237	55.973	53.527	-12.227	68.200	2.447	PK
2		5650.000	54.556	52.005	-13.644	68.200	2.552	PK
3		5700.000	57.199	54.332	-48.001	105.200	2.867	PK
4		5720.000	62.781	59.971	-48.019	110.800	2.810	PK
5		5725.000	64.096	61.252	-58.104	122.200	2.844	PK
6		5748.312	97.743	94.670	N/A	N/A	3.073	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT40 at 5795MHz	

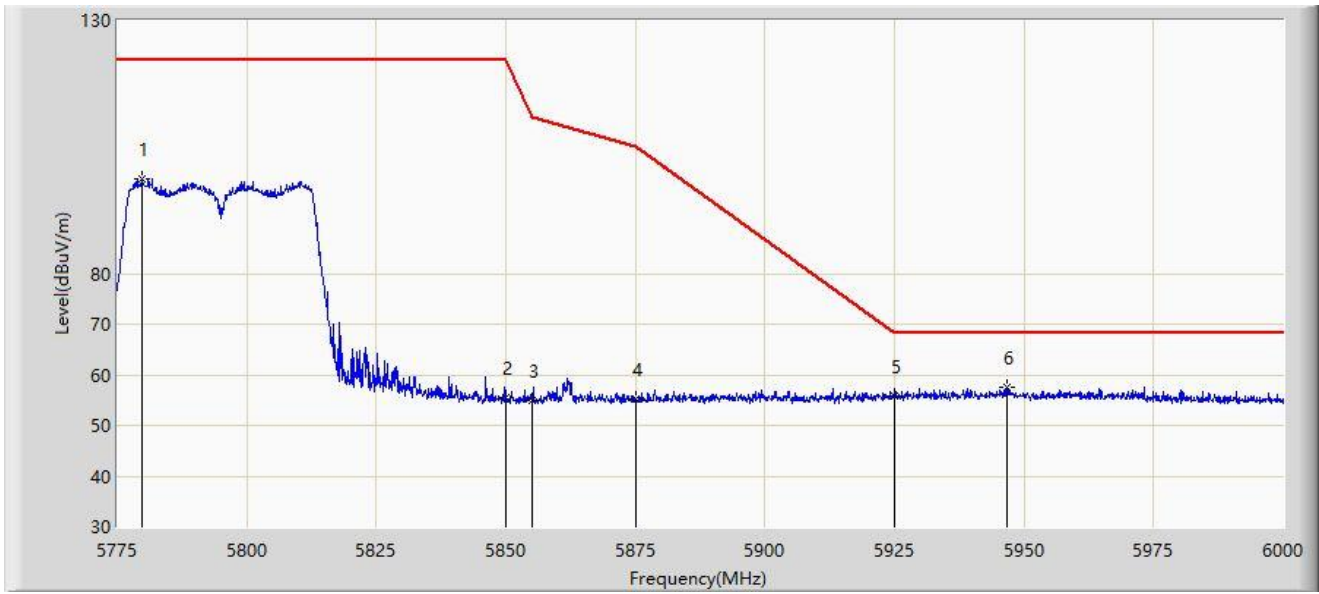


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5779.725	98.680	95.611	N/A	N/A	3.069	PK
2		5850.000	55.365	52.033	-66.835	122.200	3.333	PK
3		5855.000	54.883	51.543	-55.917	110.800	3.340	PK
4		5875.000	55.196	51.802	-50.004	105.200	3.393	PK
5		5925.000	55.787	52.022	-12.413	68.200	3.766	PK
6	*	5946.675	57.652	53.684	-10.548	68.200	3.968	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT40 at 5795MHz	

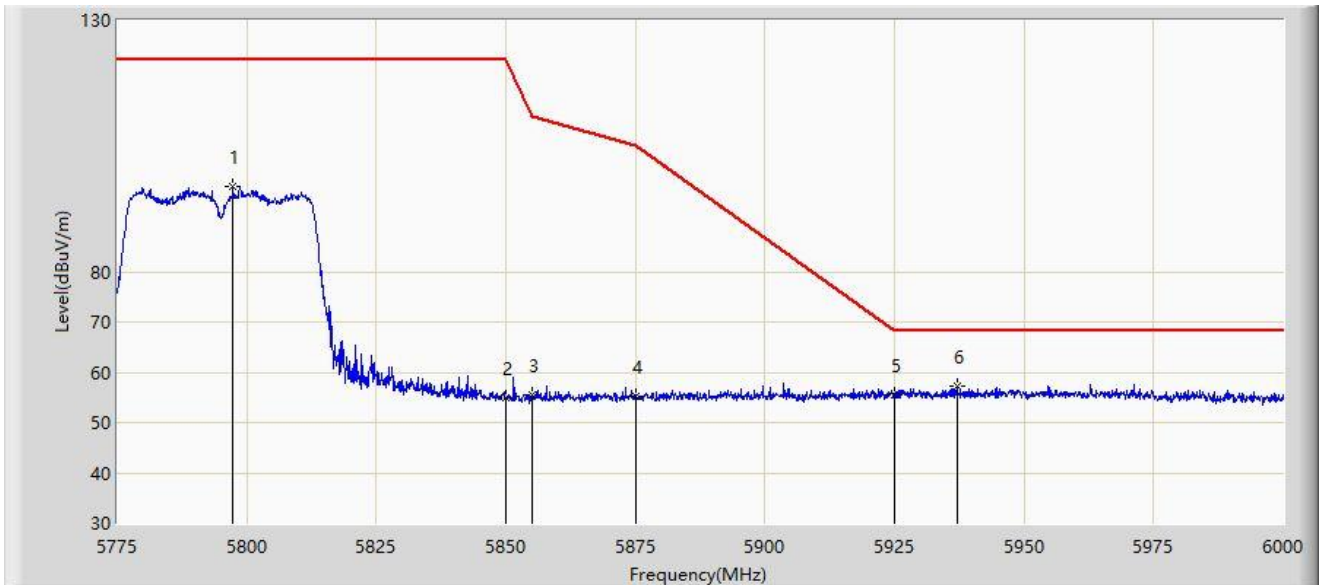


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5797.275	96.952	93.757	N/A	N/A	3.195	PK
2		5850.000	54.829	51.497	-67.371	122.200	3.333	PK
3		5855.000	55.598	52.258	-55.202	110.800	3.340	PK
4		5875.000	55.101	51.707	-50.099	105.200	3.393	PK
5		5925.000	55.583	51.818	-12.617	68.200	3.766	PK
6	*	5937.112	57.255	53.345	-10.945	68.200	3.909	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

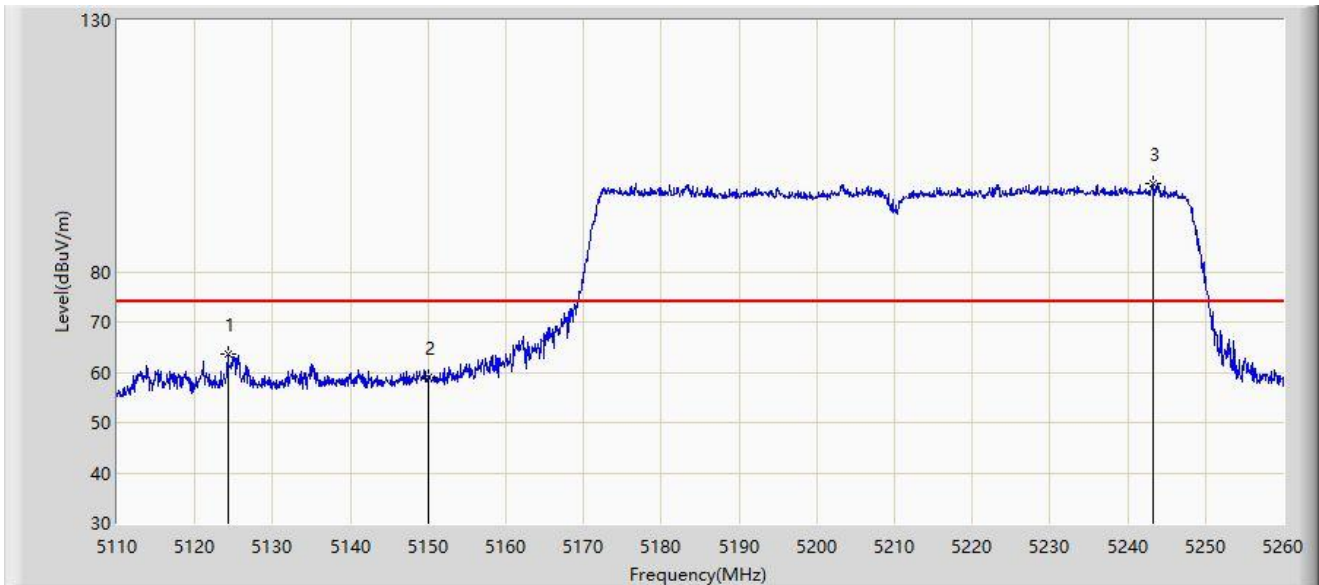


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5124.250	63.647	61.435	-10.353	74.000	2.211	PK
2		5150.000	58.983	56.424	-15.017	74.000	2.559	PK
3		5243.275	97.544	95.675	N/A	N/A	1.868	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

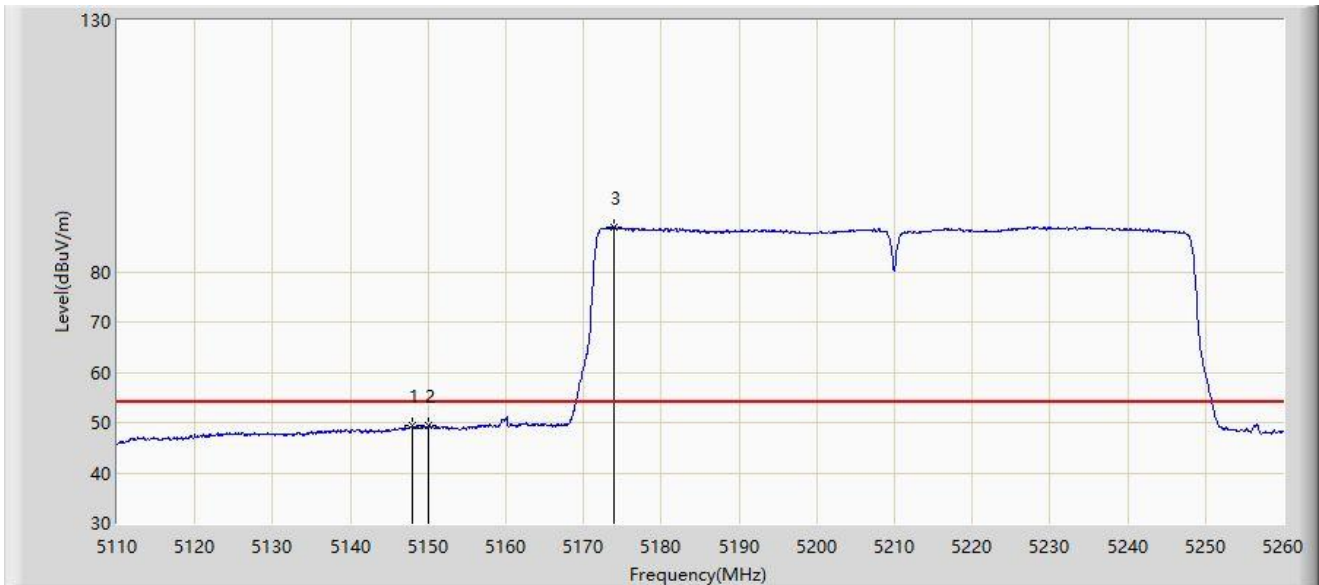


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5147.950	49.329	46.757	-4.671	54.000	2.572	AV
2		5150.000	49.288	46.729	-4.712	54.000	2.559	AV
3		5173.900	88.930	86.765	N/A	N/A	2.165	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

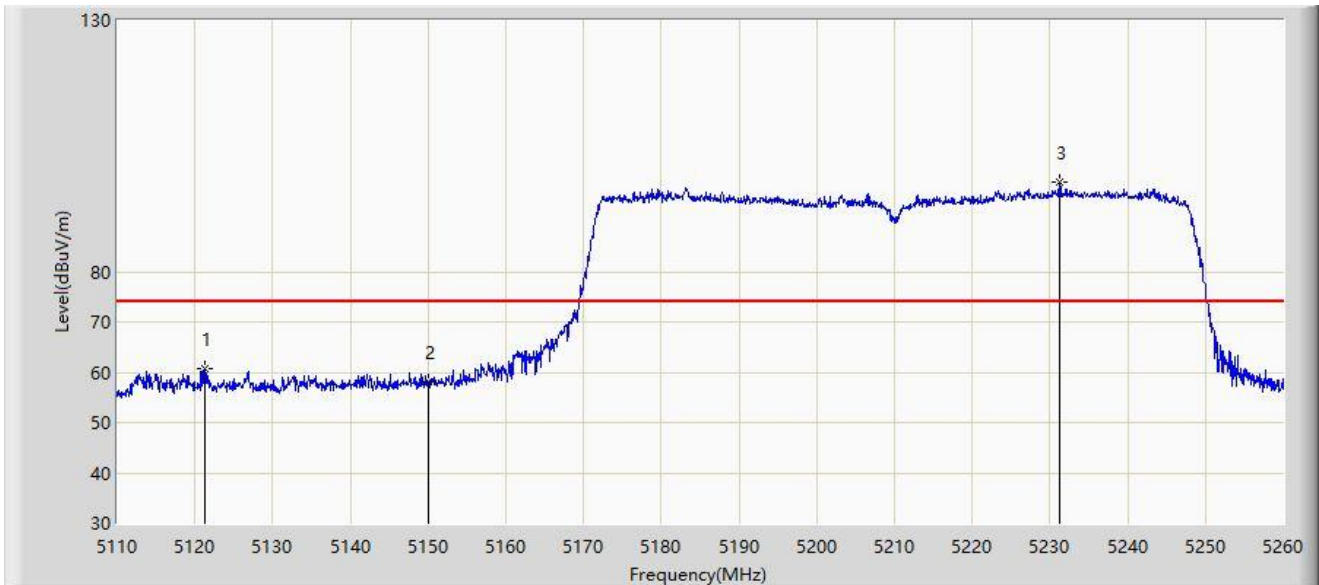


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5121.325	60.646	58.427	-13.354	74.000	2.219	PK
2		5150.000	58.117	55.558	-15.883	74.000	2.559	PK
3		5231.200	97.895	95.802	N/A	N/A	2.093	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

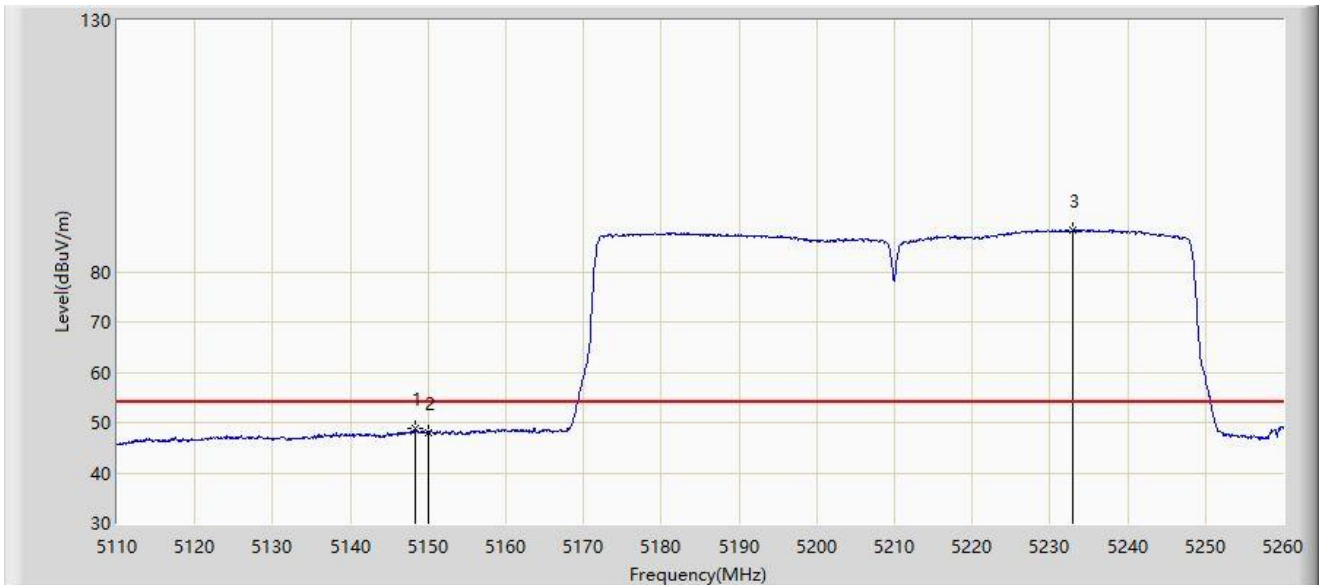


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5148.325	48.709	46.138	-5.291	54.000	2.571	AV
2		5150.000	47.947	45.388	-6.053	54.000	2.559	AV
3		5232.925	88.243	86.164	N/A	N/A	2.078	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

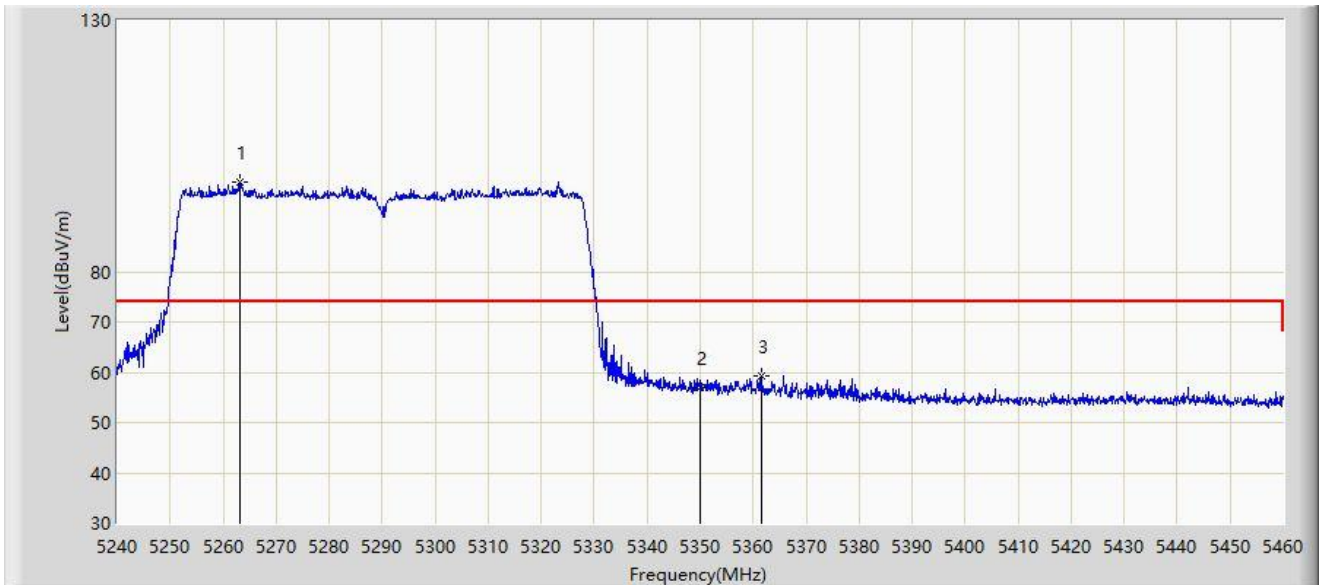


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5263.210	97.830	96.233	N/A	N/A	1.597	PK
2		5350.000	56.913	55.403	-17.087	74.000	1.510	PK
3	*	5361.550	59.267	57.627	-14.733	74.000	1.640	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

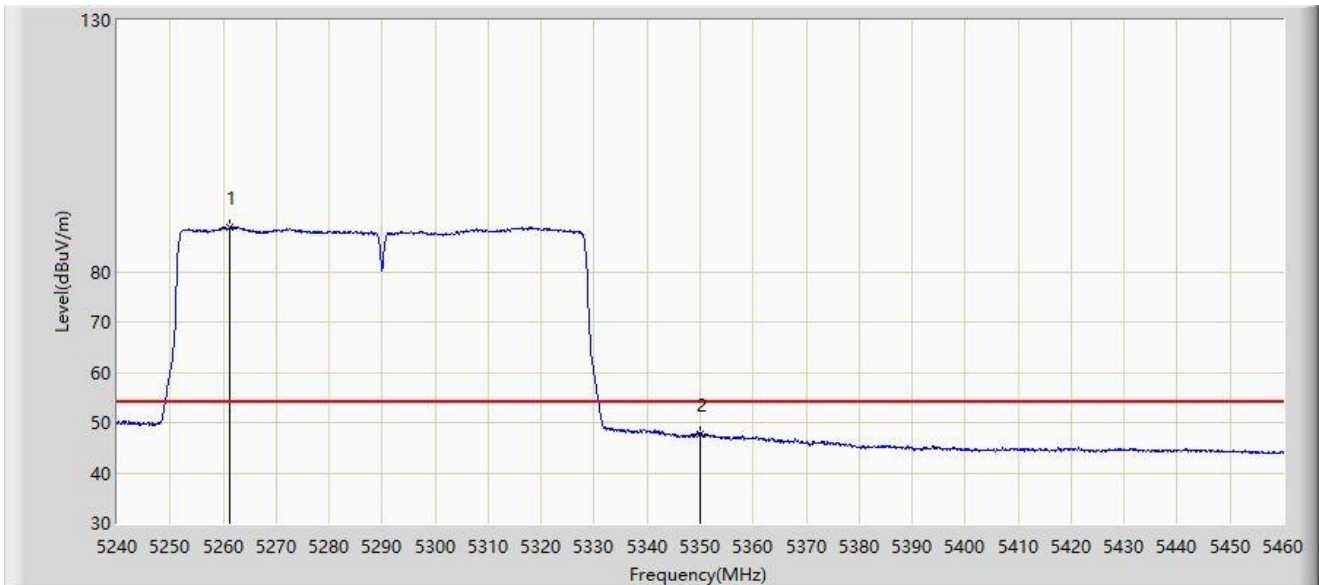


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5261.340	88.849	87.233	N/A	N/A	1.616	AV
2	*	5350.000	47.719	46.209	-6.281	54.000	1.510	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

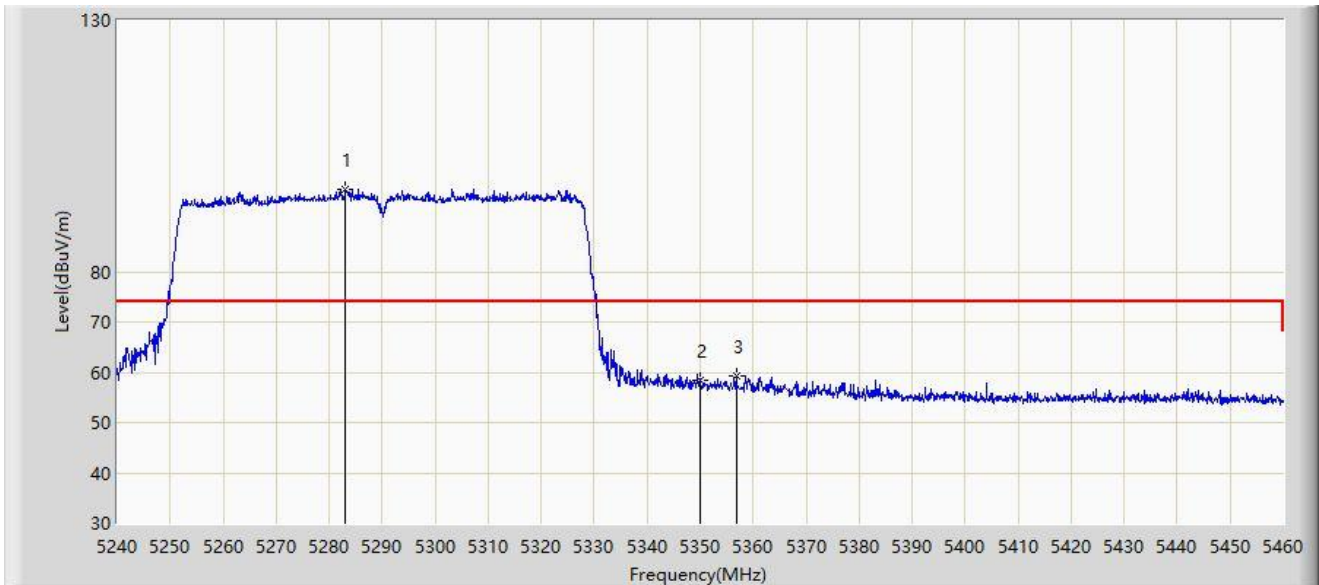


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5283.010	96.382	94.530	N/A	N/A	1.851	PK
2		5350.000	58.543	57.033	-15.457	74.000	1.510	PK
3	*	5356.820	59.215	57.642	-14.785	74.000	1.574	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

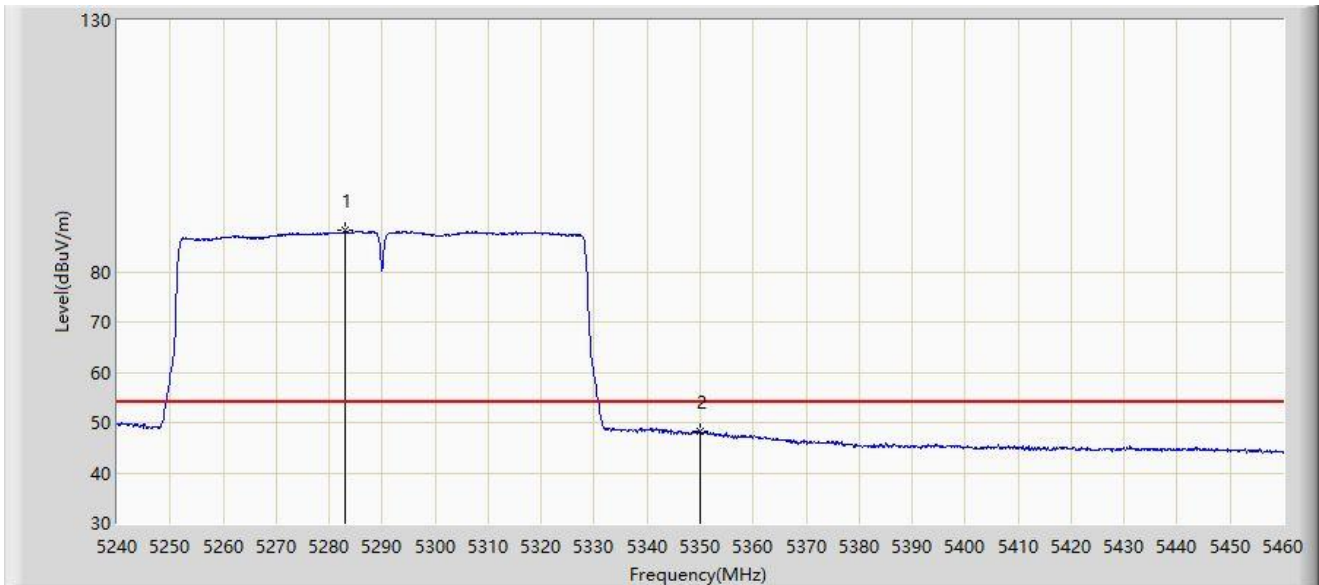


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5282.900	88.122	86.272	N/A	N/A	1.850	AV
2	*	5350.000	48.241	46.731	-5.759	54.000	1.510	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

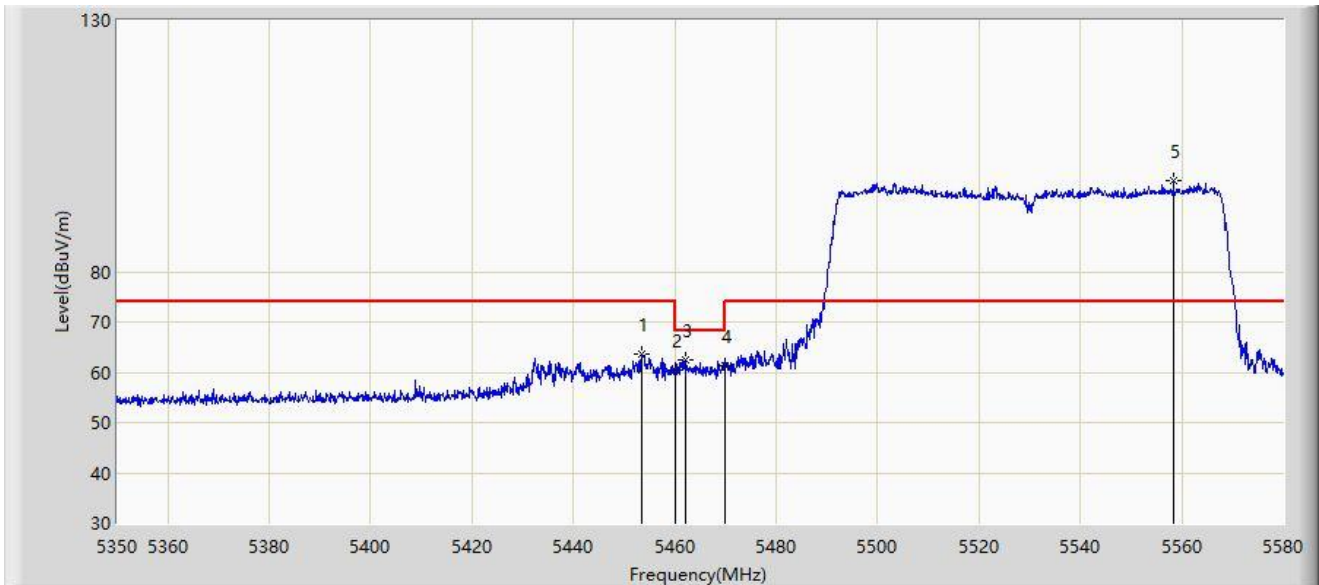


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5453.615	63.677	61.627	-10.323	74.000	2.050	PK
2		5460.000	60.341	58.234	-13.659	74.000	2.108	PK
3	*	5462.010	62.454	60.326	-5.746	68.200	2.129	PK
4		5470.000	61.191	58.979	-7.009	68.200	2.212	PK
5		5558.380	98.027	95.499	N/A	N/A	2.527	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

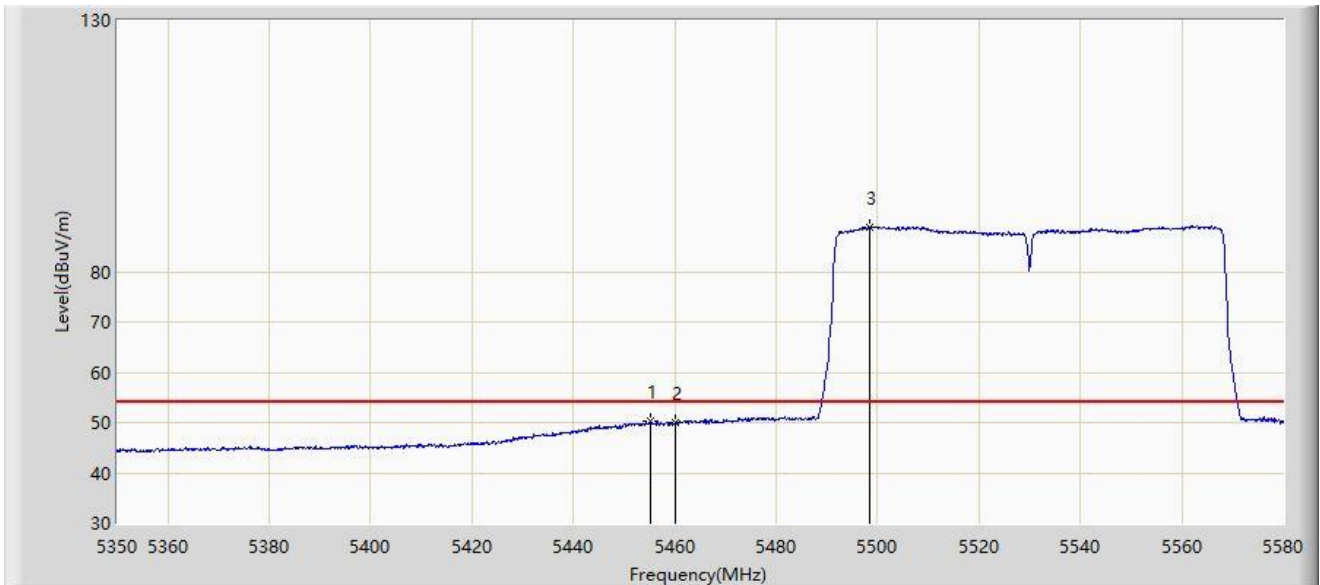


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5455.225	50.327	48.270	-3.673	54.000	2.057	AV
2		5460.000	49.934	47.827	-4.066	54.000	2.108	AV
3		5498.465	88.909	86.425	N/A	N/A	2.485	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

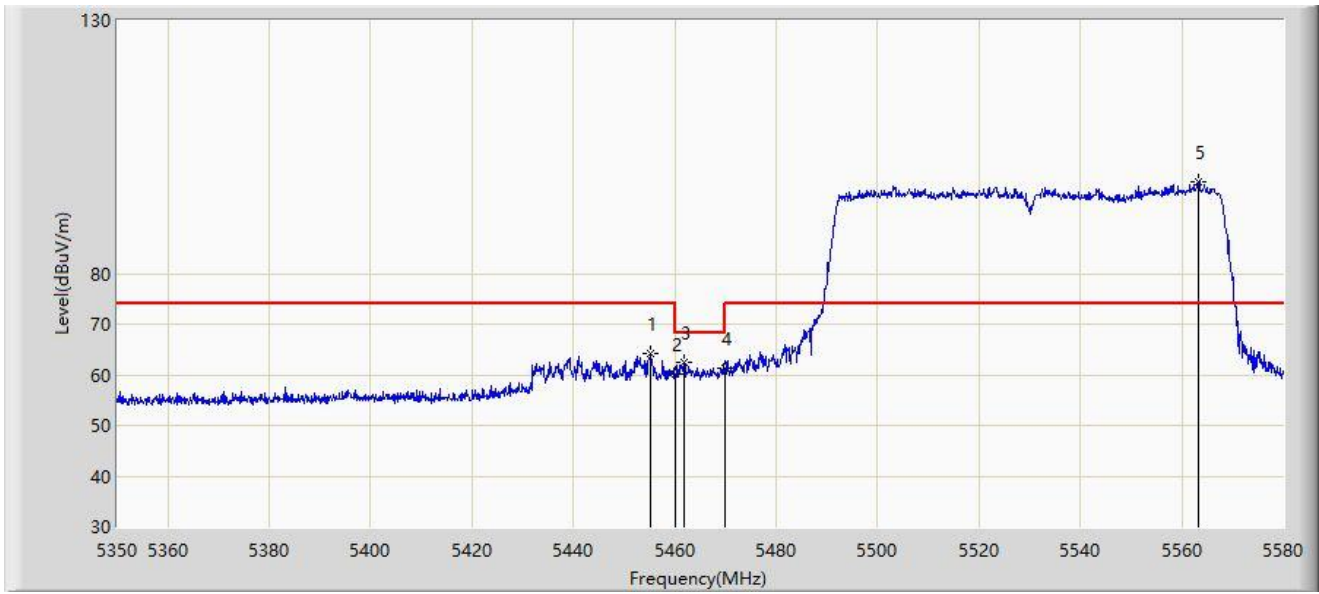


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5455.225	64.155	62.098	-9.845	74.000	2.057	PK
2		5460.000	60.282	58.175	-13.718	74.000	2.108	PK
3	*	5461.780	62.527	60.401	-5.673	68.200	2.126	PK
4		5470.000	61.353	59.141	-6.847	68.200	2.212	PK
5		5563.210	98.093	95.574	N/A	N/A	2.518	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

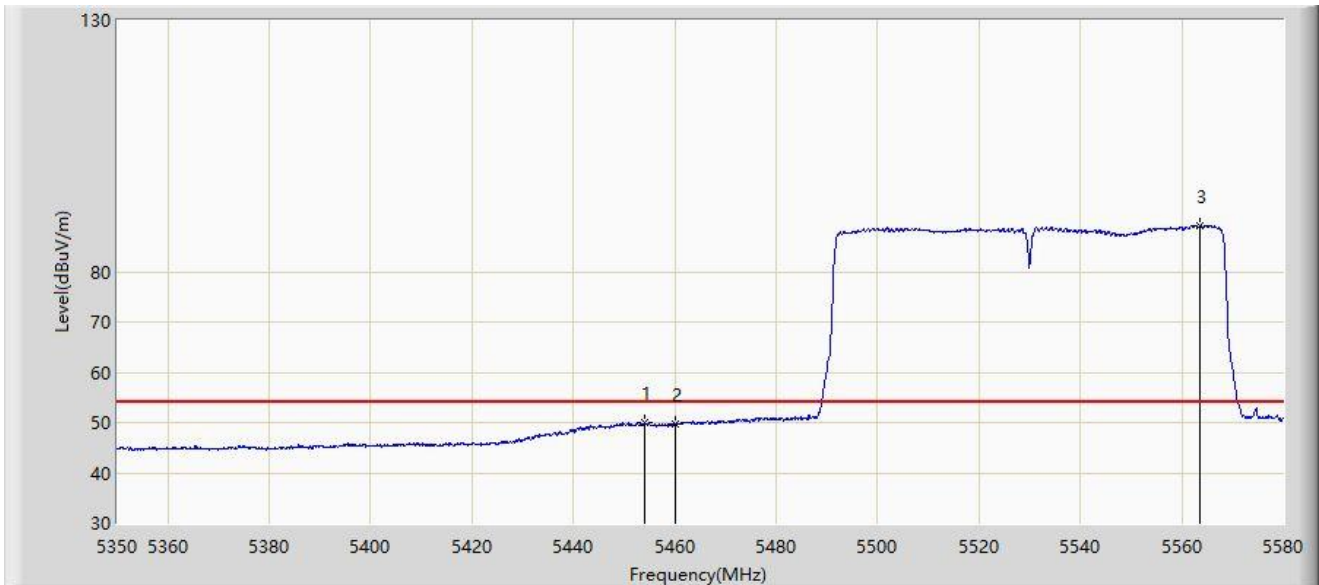


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5453.960	50.016	47.971	-3.984	54.000	2.045	AV
2		5460.000	49.754	47.647	-4.246	54.000	2.108	AV
3		5563.670	89.188	86.670	N/A	N/A	2.518	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

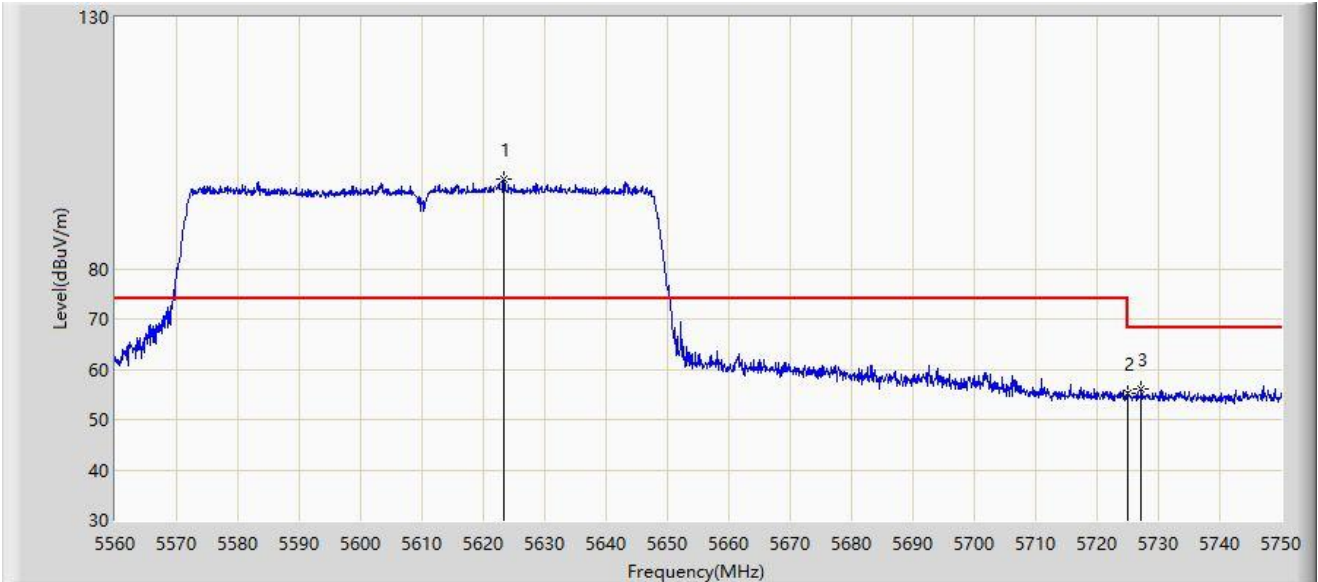


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5623.365	97.774	95.387	N/A	N/A	2.388	PK
2		5725.000	55.218	52.374	-12.982	68.200	2.844	PK
3	*	5727.200	55.990	53.127	-12.210	68.200	2.864	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

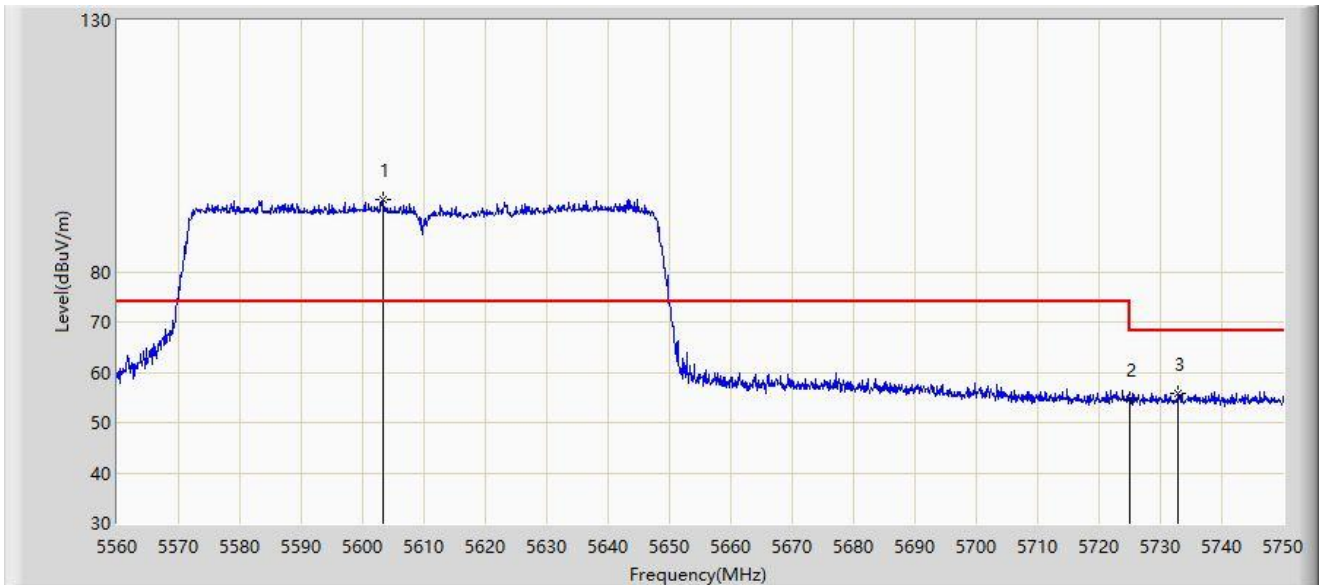


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5603.320	94.259	91.879	N/A	N/A	2.380	PK
2		5725.000	54.614	51.770	-13.586	68.200	2.844	PK
3	*	5732.900	55.806	52.883	-12.394	68.200	2.923	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

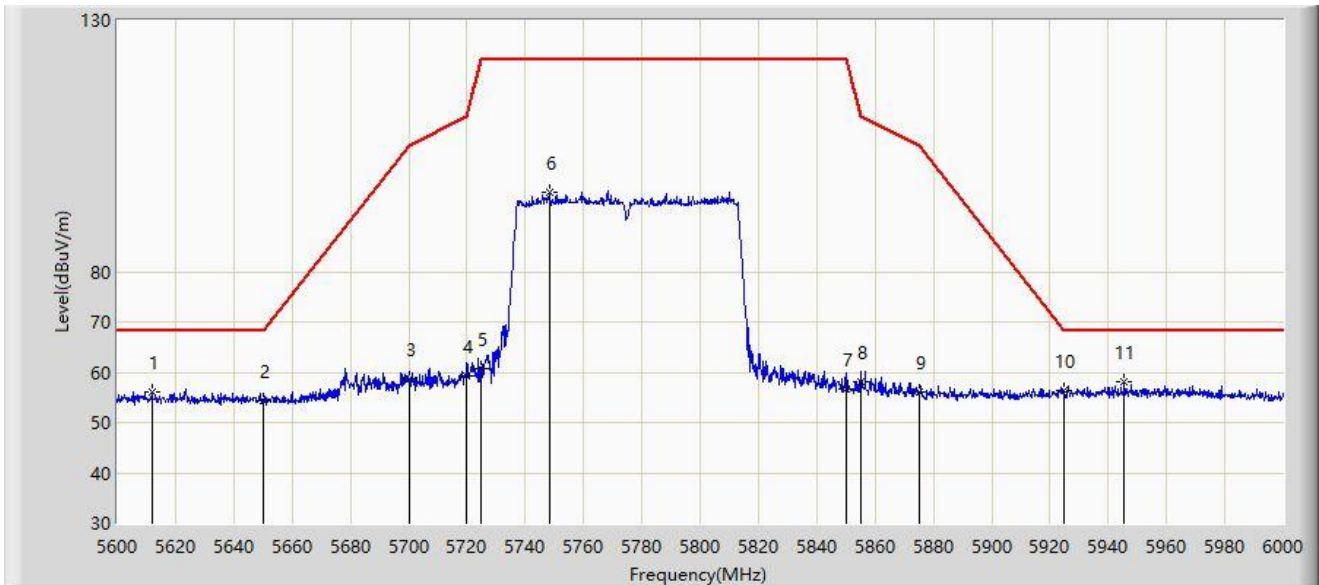


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5611.800	56.194	53.779	-12.006	68.200	2.415	PK
2		5650.000	54.365	51.814	-13.835	68.200	2.552	PK
3		5700.000	58.687	55.820	-46.513	105.200	2.867	PK
4		5720.000	59.291	56.481	-51.509	110.800	2.810	PK
5		5725.000	60.691	57.847	-61.509	122.200	2.844	PK
6		5748.200	95.842	92.770	N/A	N/A	3.072	PK
7		5850.000	56.706	53.374	-65.494	122.200	3.333	PK
8		5855.000	58.130	54.790	-52.670	110.800	3.340	PK
9		5875.000	55.986	52.592	-49.214	105.200	3.393	PK
10		5925.000	56.266	52.501	-11.934	68.200	3.766	PK
11	*	5945.600	58.018	54.056	-10.182	68.200	3.961	PK
12		58750.000	55.745	29.190	NaN	NaN	26.555	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-08-08
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

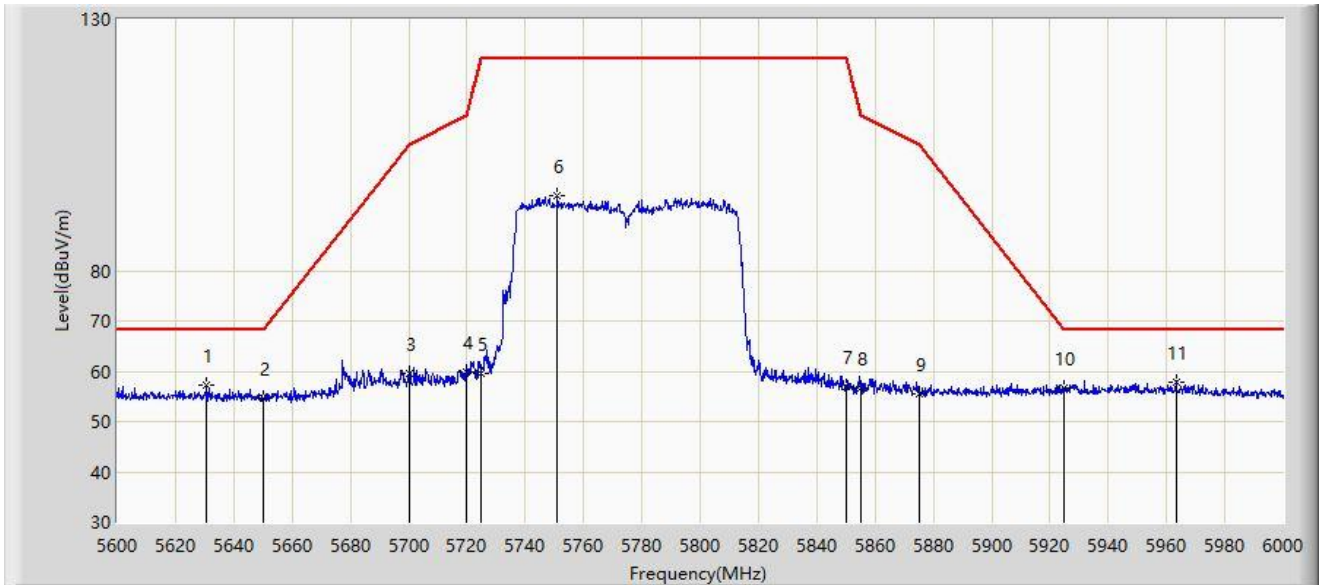

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5630.600	57.157	54.716	-11.043	68.200	2.442	PK
2		5650.000	54.505	51.954	-13.695	68.200	2.552	PK
3		5700.000	59.464	56.597	-45.736	105.200	2.867	PK
4		5720.000	59.739	56.929	-51.061	110.800	2.810	PK
5		5725.000	59.478	56.634	-62.722	122.200	2.844	PK
6		5751.000	94.887	91.792	N/A	N/A	3.095	PK
7		5850.000	56.939	53.607	-65.261	122.200	3.333	PK
8		5855.000	56.785	53.445	-54.015	110.800	3.340	PK
9		5875.000	55.482	52.088	-49.718	105.200	3.393	PK
10		5925.000	56.784	53.019	-11.416	68.200	3.766	PK
11	*	5963.200	57.971	54.150	-10.229	68.200	3.821	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

A.9 AC Conducted Emissions Test Result

Site: NS-SR2	Test Date: 2023-08-09
Temperature: 25.1°C	Humidity: 48%
Limit: FCC_Part15.207_CE_AC Power	Engineer: Flag Yang
Probe: ENV216_102493_0.15MHz~30MHz-C	Polarity: Line
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmitter by 802.11a at 5500MHz	

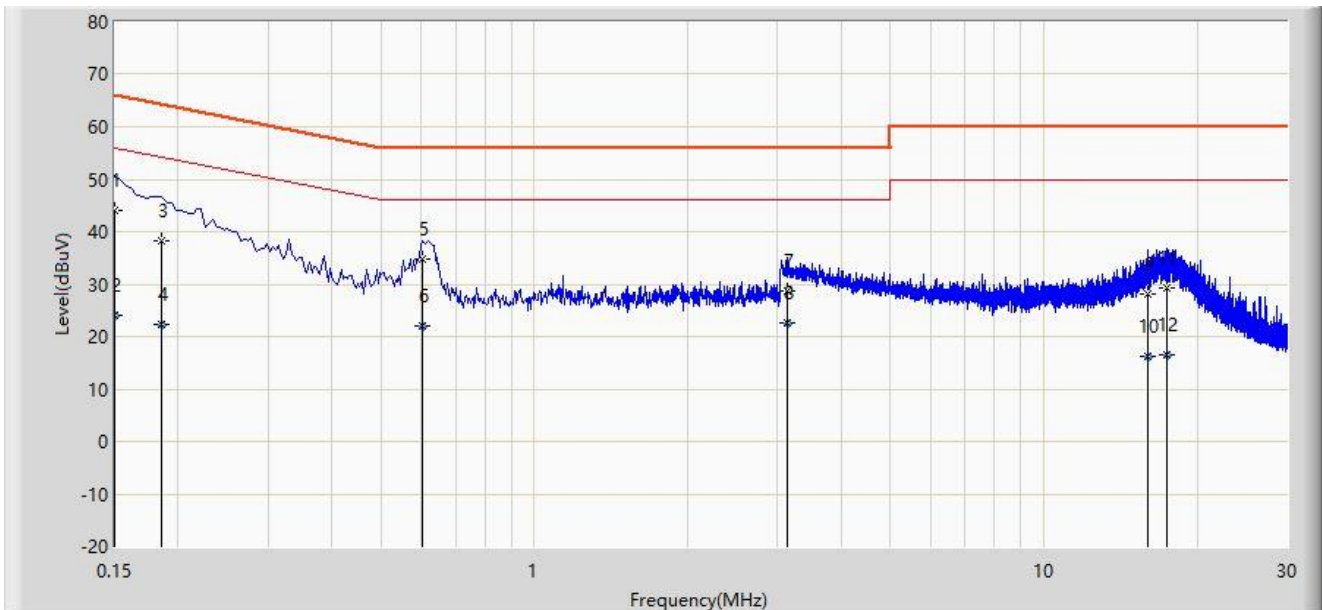


No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.150	43.934	34.247	-22.066	66.000	9.687	QP
2		0.150	24.146	14.459	-31.854	56.000	9.687	AV
3		0.186	38.374	28.685	-25.839	64.213	9.689	QP
4		0.186	22.232	12.543	-31.981	54.213	9.689	AV
5	*	0.602	34.689	24.964	-21.311	56.000	9.725	QP
6		0.602	21.897	12.173	-24.103	46.000	9.725	AV
7		3.142	28.641	18.841	-27.359	56.000	9.799	QP
8		3.142	22.551	12.752	-23.449	46.000	9.799	AV
9		15.970	28.015	17.945	-31.985	60.000	10.070	QP
10		15.970	16.230	6.160	-33.770	50.000	10.070	AV
11		17.410	29.181	19.077	-30.819	60.000	10.103	QP
12		17.410	16.643	6.539	-33.357	50.000	10.103	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: NS-SR2	Test Date: 2023-08-09
Temperature: 25.1°C	Humidity: 48%
Limit: FCC_Part15.207_CE_AC Power	Engineer: Flag Yang
Probe: ENV216_102493_0.15MHz~30MHz-C	Polarity: Neutral
EUT: Wireless Module	Power: Powered by Test Fixture
Test Mode: Transmitter by 802.11a at 5500MHz	

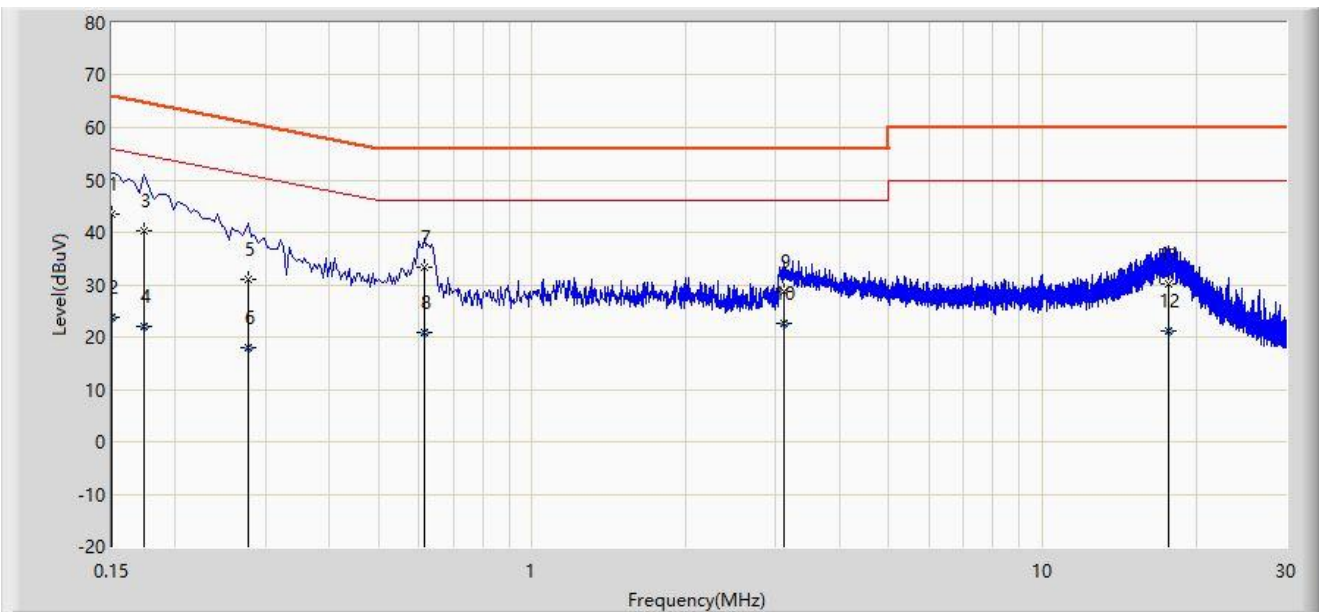

No	Mark	Frequency (MHz)	Measure Level (dBµV)	Reading Level (dBµV)	Margin (dB)	Limit (dBµV)	Factor (dB)	Type
1	*	0.150	43.341	33.694	-22.659	66.000	9.647	QP
2		0.150	23.864	14.217	-32.136	56.000	9.647	AV
3		0.174	40.250	30.591	-24.517	64.767	9.659	QP
4		0.174	22.019	12.359	-32.749	54.767	9.659	AV
5		0.278	30.954	21.306	-29.922	60.875	9.648	QP
6		0.278	17.908	8.260	-32.968	50.875	9.648	AV
7		0.614	33.319	23.646	-22.681	56.000	9.673	QP
8		0.614	20.957	11.284	-25.043	46.000	9.673	AV
9		3.118	28.555	18.785	-27.445	56.000	9.770	QP
10		3.118	22.612	12.842	-23.388	46.000	9.770	AV
11		17.698	30.121	19.822	-29.879	60.000	10.300	QP
12		17.698	21.268	10.968	-28.732	50.000	10.300	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBµV) = Reading Level (dBµV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Appendix B - Test Setup Photograph

Refer to "2305RSU049-UT" file.

Appendix C - EUT Photograph

Refer to "2305RSU049-UE" file.

The End
