

Prüfbericht - Nr.:
Test Report No.:

IN2391GP 001

Seite 156 von 229
Page 156 of 229

Modulation: 802.11n_HT40
Data Rate: MCS7

Channel Frequency (MHz)	Antenna Polarization	Measured Frequency (MHz)	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2422	Vertical	2422(Pk)	106.14	-	-
		2422(Av)	90.31	-	-
		2390(Pk)	62.24	74*	-11.76
		2390(Av)	44.05	54*	-9.95
		4844(Pk)	41.30	74	-32.70
		4844(Av)	29.25	54	-24.75
		7266(Pk)	47.26	74	-26.74
	7266(Av)	35.10	54	-18.90	
	Horizontal	2422(Pk)	107.65	-	-
		2422(Av)	92.19	-	-
		2390(Pk)	69.23	74*	-4.77
		2390(Av)	49.76	54*	-4.24
		4844(Pk)	41.37	74	-32.63
		4844(Av)	29.33	54	-24.67
7266(Pk)		47.13	74	-26.87	
7266(Av)	35.04	54	-18.96		
2437	Vertical	2437(Pk)	101.39	-	-
		2437(Av)	58.41	-	-
		4874(Pk)	41.19	74	-32.81
		4874(Av)	29.23	54	-24.77
		7311(Pk)	47.26	74	-26.74
	7311(Av)	35.14	54	-18.86	
	Horizontal	2437(Pk)	107.91	-	-
		2437(Av)	92.74	-	-
		4874(Pk)	42.24	74	-31.76
		4874(Av)	29.71	54	-24.29
7311(Pk)		46.90	74	-27.10	
7311(Av)	35.05	54	-18.95		
2452	Vertical	2452(Pk)	101.95	-	-
		2452(Av)	86.46	-	-
		2483.5(Pk)	61.37	74*	-12.63
		2483.5(Av)	41.76	54*	-12.24
		4904(Pk)	41.02	74	-32.98
		4904(Av)	29.16	54	-24.84
		7356(Pk)	46.77	74	-27.23
	7356(Av)	34.77	54	-19.23	
	Horizontal	2452(Pk)	103.83	-	-
		2452(Av)	88.79	-	-
		2483.5(Pk)	65.07	74*	-8.93
		2483.5(Av)	42.64	54*	-11.36
		4904(Pk)	40.84	74	-33.16
		4904(Av)	29.37	54	-24.63
7356(Pk)		46.97	74	-27.03	
7356(Av)	34.82	54	-19.18		

*- : Indicate restricted band of operation §15.205
Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:
Test Report No.:

IN2391GP 001

Seite 157 von 229
Page 157 of 229

Modulation: 802.11ac_VHT40
Data Rate: MCS0

Channel Frequency (MHz)	Antenna Polarization	Measured Frequency (MHz)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2422	Vertical	2422(Pk)	104.84	-	-
		2422(Av)	94.25	-	-
		2390(Pk)	61.73	74*	-12.27
		2390(Av)	46.07	54*	-7.93
		4844(Pk)	41.77	74	-32.23
		4844(Av)	29.31	54	-24.69
		7266(Pk)	47.37	74	-26.63
	7266(Av)	35.03	54	-18.97	
	Horizontal	2422(Pk)	106.63	-	-
		2422(Av)	96.06	-	-
		2390(Pk)	68.09	74*	-5.91
		2390(Av)	52.65	54*	-1.35
		4844(Pk)	41.50	74	-32.50
		4844(Av)	29.29	54	-24.71
7266(Pk)		46.95	74	-27.05	
7266(Av)	35.07	54	-18.93		
2437	Vertical	2437(Pk)	108.71	-	-
		2437(Av)	98.20	-	-
		4874(Pk)	41.52	74	-32.48
		4874(Av)	29.36	54	-24.64
		7311(Pk)	46.97	74	-27.03
	7311(Av)	35.29	54	-18.71	
	Horizontal	2437(Pk)	111.03	-	-
		2437(Av)	98.94	-	-
		4874(Pk)	46.18	74	-27.82
		4874(Av)	32.09	54	-21.91
7311(Pk)		47.02	74	-26.98	
7311(Av)	35.27	54	-18.73		
2452	Vertical	2452(Pk)	101.98	-	-
		2452(Av)	90.64	-	-
		2483.5(Pk)	64.46	74*	-9.54
		2483.5(Av)	44.71	54*	-9.29
		4904(Pk)	41.23	74	-32.77
		4904(Av)	29.15	54	-24.85
		7356(Pk)	47.07	74	-26.93
	7356(Av)	34.78	54	-19.22	
	Horizontal	2452(Pk)	103.84	-	-
		2452(Av)	93.43	-	-
		2483.5(Pk)	66.82	74*	-7.18
		2483.5(Av)	47.24	54*	-6.76
		4904(Pk)	42.06	74	-31.94
		4904(Av)	29.34	54	-24.66
7356(Pk)		46.21	74	-27.79	
7356(Av)	34.80	54	-19.20		

*- : Indicate restricted band of operation §15.205
Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:
Test Report No.:

IN2391GP 001

Seite 158 von 229
Page 158 of 229

Modulation: 802.11ac_VHT40
Data Rate: MCS8

Channel Frequency (MHz)	Antenna Polarization	Measured Frequency (MHz)	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2422	Vertical	2422(Pk)	104.84	-	-
		2422(Av)	89.9	-	-
		2390(Pk)	58.57	74*	-15.43
		2390(Av)	39.27	54*	-14.73
		4844(Pk)	41.59	74	-32.41
		4844(Av)	29.21	54	-24.79
		7266(Pk)	47.74	74	-26.26
	7266(Av)	35.01	54	-18.99	
	Horizontal	2422(Pk)	106.97	-	-
		2422(Av)	91.48	-	-
		2390(Pk)	64.79	74*	-9.21
		2390(Av)	46.11	54*	-7.89
		4844(Pk)	40.74	74	-33.26
		4844(Av)	29.31	54	-24.69
7266(Pk)		46.59	74	-27.41	
7266(Av)	35.02	54	-18.98		
2437	Vertical	2437(Pk)	105.39	-	-
		2437(Av)	89.18	-	-
		4874(Pk)	41.06	74	-32.94
		4874(Av)	29.21	54	-24.79
		7311(Pk)	47.18	74	-26.82
	7311(Av)	34.89	54	-19.11	
	Horizontal	2437(Pk)	107.42	-	-
		2437(Av)	90.83	-	-
		4874(Pk)	41.38	74	-32.62
		4874(Av)	29.64	54	-24.36
7311(Pk)		46.86	74	-27.14	
7311(Av)	34.96	54	-19.04		
2452	Vertical	2452(Pk)	104.52	-	-
		2452(Av)	87.95	-	-
		2483.5(Pk)	68.53	74*	-5.47
		2483.5(Av)	47.46	54*	-6.54
		4904(Pk)	40.84	74	-33.16
		4904(Av)	29.12	54	-24.88
		7356(Pk)	45.87	74	-28.13
	7356(Av)	34.81	54	-19.19	
	Horizontal	2452(Pk)	106.42	-	-
		2452(Av)	90.03	-	-
		2483.5(Pk)	70.62	74*	-3.38
		2483.5(Av)	48.10	54*	-5.90
		4904(Pk)	41.69	74	-32.31
		4904(Av)	29.48	54	-24.52
7356(Pk)		46.70	74	-27.30	
7356(Av)	34.76	54	-19.24		

*- : Indicate restricted band of operation §15.205
Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN2391GP 001

Seite 159 von 229

Page 159 of 229

Modulation: 802.11ax_HE40

Data Rate: MCS0

Channel Frequency (MHz)	Antenna Polarization	Measured Frequency (MHz)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2422	Vertical	2422(Pk)	106.17	-	-
		2422(Av)	93.23	-	-
		2390(Pk)	59.43	74*	-14.57
		2390(Av)	43.52	54*	-10.48
		4844(Pk)	41.14	74	-32.86
		4844(Av)	29.30	54	-24.70
		7266(Pk)	46.83	74	-27.17
		7266(Av)	35.02	54	-18.98
	Horizontal	2422(Pk)	108.68	-	-
		2422(Av)	95.63	-	-
		2390(Pk)	67.15	74*	-6.85
		2390(Av)	50.95	54*	-3.05
		4844(Pk)	41.41	74	-32.59
		4844(Av)	29.30	54	-24.70
2437	Vertical	2437(Pk)	111.27	-	-
		2437(Av)	98.19	-	-
		4874(Pk)	41.02	74	-32.98
		4874(Av)	29.21	54	-24.79
		7311(Pk)	47.90	74	-26.10
	7311(Av)	35.84	54	-18.16	
	Horizontal	2437(Pk)	113.89	-	-
		2437(Av)	98.48	-	-
		4874(Pk)	44.81	74	-29.19
		4874(Av)	31.95	54	-22.05
7311(Pk)		47.15	74	-26.85	
7311(Av)	35.31	54	-18.69		
2452	Vertical	2452(Pk)	104.34	-	-
		2452(Av)	90.47	-	-
		2483.5(Pk)	60.73	74*	-13.27
		2483.5(Av)	42.09	54*	-11.91
		4904(Pk)	42.56	74	-31.44
		4904(Av)	29.14	54	-24.86
		7356(Pk)	46.08	74	-27.92
		7356(Av)	34.73	54	-19.27
	Horizontal	2452(Pk)	105.81	-	-
		2452(Av)	91.76	-	-
		2483.5(Pk)	67.63	74*	-6.37
		2483.5(Av)	47.65	54*	-6.35
		4904(Pk)	41.84	74	-32.16
		4904(Av)	29.30	54	-24.70
7356(Pk)	47.82	74	-26.18		
7356(Av)	34.79	54	-19.21		

*- : Indicate restricted band of operation §15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:
Test Report No.:

IN2391GP 001

Seite 160 von 229
Page 160 of 229

Modulation: 802.11ax_HE40
Data Rate: MCS7

Channel Frequency (MHz)	Antenna Polarization	Measured Frequency (MHz)	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2422	Vertical	2422(Pk)	104.92	-	-
		2422(Av)	88.09	-	-
		2390(Pk)	56.09	74*	-17.91
		2390(Av)	35.05	54*	-18.95
		4844(Pk)	40.89	74	-33.11
		4844(Av)	29.24	54	-24.76
		7266(Pk)	47.24	74	-26.76
	7266(Av)	35.01	54	-18.99	
	Horizontal	2422(Pk)	107.05	-	-
		2422(Av)	89.35	-	-
		2390(Pk)	59.74	74*	-14.26
		2390(Av)	41.51	54*	-12.49
		4844(Pk)	41.02	74	-32.98
		4844(Av)	29.23	54	-24.77
7266(Pk)		46.41	74	-27.59	
7266(Av)	35.00	54	-19.00		
2437	Vertical	2437(Pk)	102.49	-	-
		2437(Av)	85.52	-	-
		4874(Pk)	40.81	74	-33.19
		4874(Av)	29.21	54	-24.79
		7311(Pk)	46.90	74	-27.10
	7311(Av)	34.88	54	-19.12	
	Horizontal	2437(Pk)	107.70	-	-
		2437(Av)	89.86	-	-
		4874(Pk)	41.70	74	-32.30
		4874(Av)	29.64	54	-24.36
7311(Pk)		46.30	74	-27.70	
7311(Av)	34.94	54	-19.06		
2452	Vertical	2452(Pk)	103.99	-	-
		2452(Av)	86.84	-	-
		2483.5(Pk)	66.42	74*	-7.58
		2483.5(Av)	44.17	54*	-9.83
		4904(Pk)	41.25	74	-32.75
		4904(Av)	29.17	54	-24.83
		7356(Pk)	46.53	74	-27.47
		7356(Av)	34.75	54	-19.25
	Horizontal	2452(Pk)	106.35	-	-
		2452(Av)	89.23	-	-
		2483.5(Pk)	67.03	74*	-6.97
		2483.5(Av)	45.94	54*	-8.06
		4904(Pk)	41.18	74	-32.82
		4904(Av)	29.38	54	-24.62
7356(Pk)	46.55	74	-27.45		
7356(Av)	34.73	54	-19.27		

*- : Indicate restricted band of operation §15.205
Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:
Test Report No.:

IN2391GP 001

Seite 161 von 229
Page 161 of 229

Antenna Type: FPA3020-10A Flex/PCB MIMO Antenna Results

Modulation: 802.11b

Data Rate: 1Mbps

Channel Frequency (MHz)	Antenna Polarization	Measured Frequency (MHz)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2412	Vertical	2412(Pk)	98.34	-	-
		2412(Av)	95.82	-	-
		2390(Pk)	47.64	74*	-26.36
		2390(Av)	37.31	54*	-16.69
		4824(Pk)	41.68	74	-32.32
		4824(Av)	30.02	54	-23.98
		7236(Pk)	47.50	74	-26.50
	7236(Av)	35.55	54	-18.45	
	Horizontal	2412(Pk)	101.40	-	-
		2412(Av)	98.73	-	-
		2390(Pk)	46.96	74*	-27.04
		2390(Av)	36.80	54*	-17.20
		4824(Pk)	42.70	74	-31.30
		4824(Av)	30.08	54	-23.92
7236(Pk)		48.03	74	-25.97	
7236(Av)	37.20	54	-16.80		
2437	Vertical	2437(Pk)	102.67	-	-
		2437(Av)	100.00	-	-
		4874(Pk)	42.18	74	-31.82
		4874(Av)	30.43	54	-23.57
		7311(Pk)	50.70	74	-23.30
	7311(Av)	41.27	54	-12.73	
	Horizontal	2437(Pk)	107.08	-	-
		2437(Av)	104.45	-	-
		4874(Pk)	43.25	74	-30.75
		4874(Av)	32.00	54	-22.00
7311(Pk)		47.61	74	-26.39	
7311(Av)	36.98	54	-17.02		
2462	Vertical	2462(Pk)	98.71	-	-
		2462(Av)	95.96	-	-
		2483.5(Pk)	45.74	74*	-28.26
		2483.5(Av)	37.92	54*	-16.08
		4924(Pk)	42.59	74	-31.41
		4924(Av)	31.53	54	-22.47
		7386(Pk)	48.20	74	-25.80
	7386(Av)	37.55	54	-16.45	
	Horizontal	2462(Pk)	103.22	-	-
		2462(Av)	100.62	-	-
		2483.5(Pk)	48.63	74*	-25.37
		2483.5(Av)	39.01	54*	-14.99
		4924(Pk)	43.26	74	-30.74
		4924(Av)	31.17	54	-22.83
7386(Pk)		47.33	74	-26.67	
7386(Av)	35.89	54	-18.11		

*- : Indicate restricted band of operation §15.205
Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:
Test Report No.:

IN2391GP 001

Seite 162 von 229
Page 162 of 229

Modulation: 802.11b
Data Rate: 11Mbps

Channel Frequency (MHz)	Antenna Polarization	Measured Frequency (MHz)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2412	Vertical	2412(Pk)	104.79	-	-
		2412(Av)	95.72	-	-
		2390(Pk)	49.36	74*	-24.64
		2390(Av)	36.59	54*	-17.41
		4824(Pk)	41.02	74	-32.98
		4824(Av)	29.86	54	-24.14
		7236(Pk)	50.91	74	-23.09
		7236(Av)	37.31	54	-16.69
	Horizontal	2412(Pk)	107.12	-	-
		2412(Av)	97.84	-	-
		2390(Pk)	47.27	74*	-26.73
		2390(Av)	34.68	54*	-19.32
		4824(Pk)	42.84	74	-31.16
		4824(Av)	30.06	54	-23.94
		7236(Pk)	49.34	74	-24.66
		7236(Av)	36.94	54	-17.06
2437	Vertical	2437(Pk)	107.07	-	-
		2437(Av)	97.76	-	-
		4874(Pk)	41.75	74	-32.25
		4874(Av)	30.04	54	-23.96
		7311(Pk)	52.95	74	-21.05
	7311(Av)	39.76	54	-14.24	
	Horizontal	2437(Pk)	111.39	-	-
		2437(Av)	102.29	-	-
		4874(Pk)	41.69	74	-32.31
		4874(Av)	30.34	54	-23.66
7311(Pk)		48.44	74	-25.56	
7311(Av)	36.18	54	-17.82		
2462	Vertical	2462(Pk)	103.02	-	-
		2462(Av)	93.75	-	-
		2483.5(Pk)	46.19	74*	-27.81
		2483.5(Av)	32.95	54*	-21.05
		4924(Pk)	42.48	74	-31.52
		4924(Av)	30.34	54	-23.66
		7386(Pk)	52.25	74	-21.75
		7386(Av)	38.79	54	-15.21
	Horizontal	2462(Pk)	106.33	-	-
		2462(Av)	97.00	-	-
		2483.5(Pk)	49.18	74*	-24.82
		2483.5(Av)	36.35	54*	-17.65
		4924(Pk)	29.99	74	-44.01
		4924(Av)	42.60	54	-11.40
7386(Pk)	47.23	74	-26.77		
7386(Av)	35.59	54	-18.41		

*- : Indicate restricted band of operation §15.205
Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:
Test Report No.:

IN2391GP 001

Seite 163 von 229
Page 163 of 229

Modulation: 802.11g
Data Rate: 6Mbps

Channel Frequency (MHz)	Antenna Polarization	Measured Frequency (MHz)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2412	Vertical	2412(Pk)	102.19	-	-
		2412(Av)	92.83	-	-
		2390(Pk)	68.83	74*	-5.17
		2390(Av)	48.36	54*	-5.64
		4824(Pk)	42.43	74	-31.57
		4824(Av)	30.01	54	-23.99
		7236(Pk)	47.50	74	-26.50
		7236(Av)	35.99	54	-18.01
	Horizontal	2412(Pk)	104.71	-	-
		2412(Av)	95.39	-	-
		2390(Pk)	68.14	74*	-5.86
		2390(Av)	47.11	54*	-6.89
		4824(Pk)	41.91	74	-32.09
		4824(Av)	29.67	54	-24.33
2437	Vertical	2437(Pk)	108.63	-	-
		2437(Av)	98.01	-	-
		4874(Pk)	41.54	74	-32.46
		4874(Av)	30.10	54	-23.90
		7311(Pk)	50.38	74	-23.62
		7311(Av)	37.45	54	-16.55
	Horizontal	2437(Pk)	110.27	-	-
		2437(Av)	100.86	-	-
		4874(Pk)	42.56	74	-31.44
		4874(Av)	30.00	54	-24.00
		7311(Pk)	48.26	74	-25.74
		7311(Av)	36.28	54	-17.72
2462	Vertical	2462(Pk)	101.12	-	-
		2462(Av)	91.09	-	-
		2483.5(Pk)	59.75	74*	-14.25
		2483.5(Av)	41.55	54*	-12.45
		4924(Pk)	41.36	74	-32.64
		4924(Av)	29.73	54	-24.27
		7386(Pk)	50.05	74	-23.95
		7386(Av)	37.31	54	-16.69
	Horizontal	2462(Pk)	105.05	-	-
		2462(Av)	95.61	-	-
		2483.5(Pk)	64.98	74*	-9.02
		2483.5(Av)	46.67	54*	-7.33
		4924(Pk)	41.76	74	-32.24
		4924(Av)	29.70	54	-24.30
		7386(Pk)	47.32	74	-26.68
		7386(Av)	35.64	54	-18.36

*- : Indicate restricted band of operation §15.205
Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:
Test Report No.:

IN2391GP 001

Seite 164 von 229
Page 164 of 229

Modulation: 802.11g
Data Rate: 54Mbps

Channel Frequency (MHz)	Antenna Polarization	Measured Frequency (MHz)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2412	Vertical	2412(Pk)	101.32	-	-
		2412(Av)	87.18	-	-
		2390(Pk)	58.37	74*	-15.63
		2390(Av)	40.85	54*	-13.15
		4824(Pk)	41.58	74	-32.42
		4824(Av)	29.96	54	-24.04
		7236(Pk)	47.19	74	-26.81
		7236(Av)	35.66	54	-18.34
	Horizontal	2412(Pk)	103.88	-	-
		2412(Av)	89.65	-	-
		2390(Pk)	58.05	74*	-15.95
		2390(Av)	40.16	54*	-13.84
		4824(Pk)	41.63	74	-32.37
		4824(Av)	29.87	54	-24.13
		7236(Pk)	46.97	74	-27.03
		7236(Av)	35.54	54	-18.46
2437	Vertical	2437(Pk)	104.84	-	-
		2437(Av)	90.67	-	-
		4874(Pk)	41.46	74	-32.54
		4874(Av)	29.96	54	-24.04
		7311(Pk)	49.83	74	-24.17
	Horizontal	7311(Av)	36.42	54	-17.58
		2437(Pk)	107.97	-	-
		2437(Av)	93.98	-	-
		4874(Pk)	41.29	74	-32.71
		4874(Av)	29.90	54	-24.10
2462	Vertical	7311(Pk)	47.29	74	-26.71
		7311(Av)	35.66	54	-18.34
		2462(Pk)	102.18	-	-
		2462(Av)	88.15	-	-
		2483.5(Pk)	60.46	74*	-13.54
		2483.5(Av)	40.95	54*	-13.05
		4924(Pk)	42.32	74	-31.68
		4924(Av)	29.82	54	-24.18
	Horizontal	7386(Pk)	46.80	74	-27.20
		7386(Av)	35.42	54	-18.58
		2462(Pk)	104.89	-	-
		2462(Av)	91.37	-	-
		2483.5(Pk)	61.96	74*	-12.04
		2483.5(Av)	43.13	54*	-10.87
	4924(Pk)	42.33	74	-31.67	
	4924(Av)	29.72	54	-24.28	
	7386(Pk)	46.93	74	-27.07	
	7386(Av)	35.39	54	-18.61	

*- : Indicate restricted band of operation §15.205
Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN2391GP 001

Seite 165 von 229

Page 165 of 229

Modulation: 802.11n_HT20

Data Rate: MCS0

Channel Frequency (MHz)	Antenna Polarization	Measured Frequency (MHz)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2412	Vertical	2412(Pk)	100.53	-	-
		2412(Av)	89.72	-	-
		2390(Pk)	63.80	74*	-10.20
		2390(Av)	44.66	54*	-9.34
		4824(Pk)	42.36	74	-31.64
		4824(Av)	29.89	54	-24.11
		7236(Pk)	47.69	74	-26.31
	7236(Av)	35.94	54	-18.06	
	Horizontal	2412(Pk)	102.68	-	-
		2412(Av)	92.84	-	-
		2390(Pk)	64.35	74*	-9.65
		2390(Av)	44.27	54*	-9.73
		4824(Pk)	42.80	74	-31.20
		4824(Av)	29.85	54	-24.15
7236(Pk)		47.93	74	-26.07	
7236(Av)	36.58	54	-17.42		
2437	Vertical	2437(Pk)	108.76	-	-
		2437(Av)	97.20	-	-
		4874(Pk)	42.05	74	-31.95
		4874(Av)	30.03	54	-23.97
		7311(Pk)	50.44	74	-23.56
		7311(Av)	38.07	54	-15.93
	Horizontal	2437(Pk)	109.98	-	-
		2437(Av)	100.12	-	-
		4874(Pk)	41.39	74	-32.61
		4874(Av)	29.98	54	-24.02
		7311(Pk)	47.77	74	-26.23
		7311(Av)	35.60	54	-18.40
2462	Vertical	2462(Pk)	102.95	-	-
		2462(Av)	91.51	-	-
		2483.5(Pk)	68.24	74*	-5.76
		2483.5(Av)	40.68	54*	-13.32
		4924(Pk)	43.96	74	-30.04
		4924(Av)	29.72	54	-24.28
		7386(Pk)	47.90	74	-26.10
	7386(Av)	35.57	54	-18.43	
	Horizontal	2462(Pk)	105.25	-	-
		2462(Av)	95.38	-	-
		2483.5(Pk)	70.40	74*	-3.60
		2483.5(Av)	50.11	54*	-3.89
		4924(Pk)	41.43	74	-32.57
		4924(Av)	29.75	54	-24.25
7386(Pk)		47.61	74	-26.39	
7386(Av)	35.40	54	-18.60		

*- : Indicate restricted band of operation §15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:
Test Report No.:

IN2391GP 001

Seite 166 von 229
Page 166 of 229

Modulation: 802.11n_HT20
Data Rate: MCS7

Channel Frequency (MHz)	Antenna Polarization	Measured Frequency (MHz)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2412	Vertical	2412(Pk)	102.00	-	-
		2412(Av)	86.10	-	-
		2390(Pk)	64.77	74*	-9.23
		2390(Av)	40.30	54*	-13.70
		4824(Pk)	41.49	74	-32.51
		4824(Av)	29.95	54	-24.05
		7236(Pk)	47.15	74	-26.85
	7236(Av)	35.86	54	-18.14	
	Horizontal	2412(Pk)	103.04	-	-
		2412(Av)	87.23	-	-
		2390(Pk)	61.27	74*	-12.73
		2390(Av)	38.24	54*	-15.76
		4824(Pk)	41.22	74	-32.78
		4824(Av)	29.73	54	-24.27
7236(Pk)		47.79	74	-26.21	
7236(Av)	35.55	54	-18.45		
2437	Vertical	2437(Pk)	104.11	-	-
		2437(Av)	88.98	-	-
		4874(Pk)	42.16	74	-31.84
		4874(Av)	29.99	54	-24.01
		7311(Pk)	47.43	74	-26.57
	7311(Av)	35.50	54	-18.50	
	Horizontal	2437(Pk)	106.43	-	-
		2437(Av)	91.30	-	-
		4874(Pk)	42.34	74	-31.66
		4874(Av)	29.93	54	-24.07
7311(Pk)		47.44	74	-26.56	
7311(Av)	35.44	54	-18.56		
2462	Vertical	2462(Pk)	103.49	-	-
		2462(Av)	86.80	-	-
		2483.5(Pk)	61.24	74*	-12.76
		2483.5(Av)	38.63	54*	-15.37
		4924(Pk)	41.78	74	-32.22
		4924(Av)	29.71	54	-24.29
		7386(Pk)	47.48	74	-26.52
	7386(Av)	35.62	54	-18.38	
	Horizontal	2462(Pk)	105.28	-	-
		2462(Av)	90.03	-	-
		2483.5(Pk)	63.60	74*	-10.40
		2483.5(Av)	41.50	54*	-12.50
		4924(Pk)	44.69	74	-29.31
		4924(Av)	29.69	54	-24.31
7386(Pk)		47.81	74	-26.19	
7386(Av)	35.37	54	-18.63		

*- : Indicate restricted band of operation §15.205
Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN2391GP 001

Seite 167 von 229

Page 167 of 229

Modulation: 802.11ac_VHT20

Data Rate: MCS0

Channel Frequency (MHz)	Antenna Polarization	Measured Frequency (MHz)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2412	Vertical	2412(Pk)	104.89	-	-
		2412(Av)	92.91	-	-
		2390(Pk)	72.41	74*	-1.59
		2390(Av)	52.75	54*	-1.25
		4824(Pk)	42.27	74	-31.73
		4824(Av)	30.10	54	-23.90
		7236(Pk)	47.74	74	-26.26
	7236(Av)	36.11	54	-17.89	
	Horizontal	2412(Pk)	104.58	-	-
		2412(Av)	95.52	-	-
		2390(Pk)	72.00	74*	-2.00
		2390(Av)	51.73	54*	-2.27
		4824(Pk)	42.39	74	-31.61
		4824(Av)	29.85	54	-24.15
7236(Pk)		47.70	74	-26.30	
7236(Av)	35.98	54	-18.02		
2437	Vertical	2437(Pk)	108.83	-	-
		2437(Av)	97.51	-	-
		4874(Pk)	41.68	74	-32.32
		4874(Av)	29.94	54	-24.06
		7311(Pk)	50.25	74	-23.75
	7311(Av)	38.01	54	-15.99	
	Horizontal	2437(Pk)	109.05	-	-
		2437(Av)	99.50	-	-
		4874(Pk)	41.85	74	-32.15
		4874(Av)	29.92	54	-24.08
7311(Pk)		48.32	74	-25.68	
7311(Av)	35.91	54	-18.09		
2462	Vertical	2462(Pk)	102.76	-	-
		2462(Av)	92.07	-	-
		2483.5(Pk)	66.45	74*	-7.55
		2483.5(Av)	46.04	54*	-7.96
		4924(Pk)	41.62	74	-32.38
		4924(Av)	29.71	54	-24.29
		7386(Pk)	47.84	74	-26.16
	7386(Av)	35.78	54	-18.22	
	Horizontal	2462(Pk)	105.86	-	-
		2462(Av)	95.72	-	-
		2483.5(Pk)	70.93	74*	-3.07
		2483.5(Av)	49.41	54*	-4.59
		4924(Pk)	42.36	74	-31.64
		4924(Av)	29.63	54	-24.37
7386(Pk)		47.06	74	-26.94	
7386(Av)	35.48	54	-18.52		

*- : Indicate restricted band of operation §15.205

Pk: Peak Detector; Av : Average Detector

Prüfbericht - Nr.:
Test Report No.:

IN2391GP 001

Seite 168 von 229
Page 168 of 229

Modulation: 802.11ac_VHT20
Data Rate: MCS8

Channel Frequency (MHz)	Antenna Polarization	Measured Frequency (MHz)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2412	Vertical	2412(Pk)	100.2	-	-
		2412(Av)	84.63	-	-
		2390(Pk)	64.07	74*	-9.93
		2390(Av)	39.15	54*	-14.85
		4824(Pk)	41.23	74	-32.77
		4824(Av)	29.71	54	-24.29
		7236(Pk)	47.20	74	-26.80
		7236(Av)	35.48	54	-18.52
	Horizontal	2412(Pk)	102.18	-	-
		2412(Av)	85.66	-	-
		2390(Pk)	61.49	74*	-12.51
		2390(Av)	37.51	54*	-16.49
		4824(Pk)	42.53	74	-31.47
		4824(Av)	29.75	54	-24.25
		7236(Pk)	47.73	74	-26.27
		7236(Av)	35.32	54	-18.68
2437	Vertical	2437(Pk)	102.94	-	-
		2437(Av)	87.50	-	-
		4874(Pk)	41.66	74	-32.34
		4874(Av)	29.79	54	-24.21
		7311(Pk)	47.07	74	-26.93
	Horizontal	7311(Av)	35.39	54	-18.61
		2437(Pk)	106.12	-	-
		2437(Av)	89.91	-	-
		4874(Pk)	41.48	74	-32.52
		4874(Av)	29.70	54	-24.30
2462	Vertical	7311(Pk)	48.13	74	-25.87
		7311(Av)	35.35	54	-18.65
		2462(Pk)	101.24	-	-
		2462(Av)	85.11	-	-
		2483.5(Pk)	58.62	74*	-15.38
		2483.5(Av)	35.98	54*	-18.02
		4924(Pk)	40.93	74	-33.07
		4924(Av)	29.51	54	-24.49
	Horizontal	7386(Pk)	46.75	74	-27.25
		7386(Av)	35.20	54	-18.80
		2462(Pk)	104.48	-	-
		2462(Av)	88.57	-	-
		2483.5(Pk)	61.85	74*	-12.15
		2483.5(Av)	39.32	54*	-14.68
	4924(Pk)	41.38	74	-32.62	
	4924(Av)	29.53	54	-24.47	
	7386(Pk)	47.78	74	-26.22	
	7386(Av)	35.17	54	-18.83	

*- : Indicate restricted band of operation §15.205
Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:
Test Report No.:

IN2391GP 001

Seite 169 von 229
Page 169 of 229

Modulation: 802.11ax_HE20
Data Rate: MCS0

Channel Frequency (MHz)	Antenna Polarization	Measured Frequency (MHz)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2412	Vertical	2412(Pk)	104.03	-	-
		2412(Av)	90.94	-	-
		2390(Pk)	69.09	74*	-4.91
		2390(Av)	49.25	54*	-4.75
		4824(Pk)	41.72	74	-32.28
		4824(Av)	29.65	54	-24.35
		7236(Pk)	50.53	74	-23.47
	7236(Av)	31.12	54	-22.88	
	Horizontal	2412(Pk)	107.73	-	-
		2412(Av)	94.70	-	-
		2390(Pk)	70.97	74*	-3.03
		2390(Av)	50.80	54*	-3.20
		4824(Pk)	42.81	74	-31.19
		4824(Av)	29.64	54	-24.36
7236(Pk)		47.87	74	-26.13	
7236(Av)	35.52	54	-18.48		
2437	Vertical	2437(Pk)	109.85	-	-
		2437(Av)	97.34	-	-
		4874(Pk)	41.77	74	-32.23
		4874(Av)	29.84	54	-24.16
		7311(Pk)	50.45	74	-23.55
		7311(Av)	37.84	54	-16.16
	Horizontal	2437(Pk)	112.75	-	-
		2437(Av)	100.03	-	-
		4874(Pk)	41.35	74	-32.65
		4874(Av)	29.74	54	-24.26
		7311(Pk)	47.88	74	-26.12
		7311(Av)	36.07	54	-17.93
2462	Vertical	2462(Pk)	103.39	-	-
		2462(Av)	90.01	-	-
		2483.5(Pk)	65.68	74*	-8.32
		2483.5(Av)	44.38	54*	-9.62
		4924(Pk)	41.74	74	-32.26
		4924(Av)	29.50	54	-24.50
		7386(Pk)	47.31	74	-26.69
	7386(Av)	35.25	54	-18.75	
	Horizontal	2462(Pk)	106.49	-	-
		2462(Av)	93.31	-	-
		2483.5(Pk)	69.57	74*	-4.43
		2483.5(Av)	47.09	54*	-6.91
		4924(Pk)	41.46	74	-32.54
		4924(Av)	29.45	54	-24.55
7386(Pk)		47.26	74	-26.74	
7386(Av)	35.12	54	-18.88		

*- : Indicate restricted band of operation §15.205
Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:
Test Report No.:

IN2391GP 001

Seite 170 von 229
Page 170 of 229

Modulation: 802.11ax_HE20
Data Rate: MCS11

Channel Frequency (MHz)	Antenna Polarization	Measured Frequency (MHz)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2412	Vertical	2412(Pk)	102.13	-	-
		2412(Av)	83.11	-	-
		2390(Pk)	62.11	74*	-11.89
		2390(Av)	37.76	54*	-16.24
		4824(Pk)	42.10	74	-31.90
		4824(Av)	29.54	54	-24.46
		7236(Pk)	47.62	74	-26.38
		7236(Av)	35.24	54	-18.76
	Horizontal	2412(Pk)	103.01	-	-
		2412(Av)	84.17	-	-
		2390(Pk)	60.21	74*	-13.79
		2390(Av)	35.77	54*	-18.23
		4824(Pk)	41.44	74	-32.56
		4824(Av)	29.59	54	-24.41
		7236(Pk)	47.56	74	-26.44
		7236(Av)	35.25	54	-18.75
2437	Vertical	2437(Pk)	103.42	-	-
		2437(Av)	85.71	-	-
		4874(Pk)	41.95	74	-32.05
		4874(Av)	29.64	54	-24.36
		7311(Pk)	47.29	74	-26.71
	7311(Av)	35.19	54	-18.81	
	Horizontal	2437(Pk)	106.63	-	-
		2437(Av)	88.37	-	-
		4874(Pk)	42.45	74	-31.55
		4874(Av)	29.63	54	-24.37
7311(Pk)		46.90	74	-27.10	
7311(Av)	35.17	54	-18.83		
2462	Vertical	2462(Pk)	101.68	-	-
		2462(Av)	82.91	-	-
		2483.5(Pk)	60.25	74*	-13.75
		2483.5(Av)	35.26	54*	-18.74
		4924(Pk)	41.75	74	-32.25
		4924(Av)	29.43	54	-24.57
		7386(Pk)	46.84	74	-27.16
		7386(Av)	35.16	54	-18.84
	Horizontal	2462(Pk)	105.91	-	-
		2462(Av)	87.42	-	-
		2483.5(Pk)	61.96	74*	-12.04
		2483.5(Av)	38.37	54*	-15.63
		4924(Pk)	42.26	74	-31.74
		4924(Av)	29.38	54	-24.62
7386(Pk)	46.75	74	-27.25		
7386(Av)	35.03	54	-18.97		

*- : Indicate restricted band of operation §15.205
Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN2391GP 001

Seite 171 von 229

Page 171 of 229

Modulation: 802.11n_HT40

Data Rate: MCS0

Channel Frequency (MHz)	Antenna Polarization	Measured Frequency (MHz)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2422	Vertical	2422(Pk)	100.58	-	-
		2422(Av)	90.96	-	-
		2390(Pk)	64.58	74*	-9.42
		2390(Av)	45.32	54*	-8.68
		4844(Pk)	41.34	74	-32.66
		4844(Av)	29.30	54	-24.70
		7266(Pk)	47.30	74	-26.70
	7266(Av)	35.40	54	-18.60	
	Horizontal	2422(Pk)	100.93	-	-
		2422(Av)	91.21	-	-
		2390(Pk)	62.42	74*	-11.58
		2390(Av)	46.61	54*	-7.39
		4844(Pk)	41.18	74	-32.82
		4844(Av)	29.28	54	-24.72
7266(Pk)		47.34	74	-26.66	
7266(Av)	34.98	54	-19.02		
2437	Vertical	2437(Pk)	104.35	-	-
		2437(Av)	94.00	-	-
		4874(Pk)	41.64	74	-32.36
		4874(Av)	29.44	54	-24.56
		7311(Pk)	50.26	74	-23.74
	7311(Av)	37.42	54	-16.58	
	Horizontal	2437(Pk)	104.15	-	-
		2437(Av)	93.55	-	-
		4874(Pk)	41.54	74	-32.46
		4874(Av)	29.44	54	-24.56
7311(Pk)		46.59	74	-27.41	
7311(Av)	34.96	54	-19.04		
2452	Vertical	2452(Pk)	97.95	-	-
		2452(Av)	88.40	-	-
		2483.5(Pk)	68.96	74*	-5.04
		2483.5(Av)	49.17	54*	-4.83
		4904(Pk)	40.64	74	-33.36
		4904(Av)	29.17	54	-24.83
		7356(Pk)	46.06	74	-27.94
	7356(Av)	34.82	54	-19.18	
	Horizontal	2452(Pk)	97.97	-	-
		2452(Av)	87.69	-	-
		2483.5(Pk)	66.84	74*	-7.16
		2483.5(Av)	48.94	54*	-5.06
		4904(Pk)	41.01	74	-32.99
		4904(Av)	29.16	54	-24.84
7356(Pk)		46.83	74	-27.17	
7356(Av)	34.80	54	-19.20		

* - : Indicate restricted band of operation §15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:
Test Report No.:

IN2391GP 001

Seite 172 von 229
Page 172 of 229

Modulation: 802.11n_HT40
Data Rate: MCS7

Channel Frequency (MHz)	Antenna Polarization	Measured Frequency (MHz)	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2422	Vertical	2422(Pk)	101.10	-	-
		2422(Av)	85.59	-	-
		2390(Pk)	63.02	74*	-10.98
		2390(Av)	43.58	54*	-10.42
		4844(Pk)	41.07	74	-32.93
		4844(Av)	29.31	54	-24.69
		7266(Pk)	47.58	74	-26.42
	7266(Av)	35.28	54	-18.72	
	Horizontal	2422(Pk)	100.25	-	-
		2422(Av)	84.60	-	-
		2390(Pk)	59.25	74*	-14.75
		2390(Av)	40.56	54*	-13.44
		4844(Pk)	41.32	74	-32.68
		4844(Av)	29.26	54	-24.74
7266(Pk)		47.23	74	-26.77	
7266(Av)	34.98	54	-19.02		
2437	Vertical	2437(Pk)	105.05	-	-
		2437(Av)	88.71	-	-
		4874(Pk)	41.24	74	-32.76
		4874(Av)	29.41	54	-24.59
		7311(Pk)	48.89	74	-25.11
	7311(Av)	36.29	54	-17.71	
	Horizontal	2437(Pk)	104.85	-	-
		2437(Av)	88.60	-	-
		4874(Pk)	40.94	74	-33.06
		4874(Av)	29.31	54	-24.69
7311(Pk)		46.93	74	-27.07	
7311(Av)	35.26	54	-18.74		
2452	Vertical	2452(Pk)	101.52	-	-
		2452(Av)	86.20	-	-
		2483.5(Pk)	72.19	74*	-1.81
		2483.5(Av)	51.70	54*	-2.30
		4904(Pk)	41.3	74	-32.70
		4904(Av)	29.22	54	-24.78
		7356(Pk)	46.67	74	-27.33
	7356(Av)	34.89	54	-19.11	
	Horizontal	2452(Pk)	101.20	-	-
		2452(Av)	85.88	-	-
		2483.5(Pk)	71.69	74*	-2.31
		2483.5(Av)	51.65	54*	-2.35
		4904(Pk)	40.75	74	-33.25
		4904(Av)	29.26	54	-24.74
7356(Pk)		46.24	74	-27.76	
7356(Av)	34.76	54	-19.24		

*- : Indicate restricted band of operation §15.205
Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:
Test Report No.:

IN2391GP 001

Seite 173 von 229
Page 173 of 229

Modulation: 802.11ac_VHT40
Data Rate: MCS0

Channel Frequency (MHz)	Antenna Polarization	Measured Frequency (MHz)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2422	Vertical	2422(Pk)	101.27	-	-
		2422(Av)	91.71	-	-
		2390(Pk)	67.00	74*	-7.00
		2390(Av)	52.56	54*	-1.44
		4844(Pk)	40.80	74	-33.20
		4844(Av)	29.29	54	-24.71
		7266(Pk)	47.15	74	-26.85
	7266(Av)	35.42	54	-18.58	
	Horizontal	2422(Pk)	101.48	-	-
		2422(Av)	91.46	-	-
		2390(Pk)	67.09	74*	-6.91
		2390(Av)	52.24	54*	-1.76
		4844(Pk)	41.56	74	-32.44
		4844(Av)	29.28	54	-24.72
7266(Pk)		47.53	74	-26.47	
7266(Av)	35.04	54	-18.96		
2437	Vertical	2437(Pk)	104.64	-	-
		2437(Av)	92.70	-	-
		4874(Pk)	41.06	74	-32.94
		4874(Av)	29.38	54	-24.62
		7311(Pk)	50.66	74	-23.34
	7311(Av)	37.55	54	-16.45	
	Horizontal	2437(Pk)	104.21	-	-
		2437(Av)	92.48	-	-
		4874(Pk)	40.80	74	-33.20
		4874(Av)	29.36	54	-24.64
7311(Pk)		46.62	74	-27.38	
7311(Av)	35.13	54	-18.87		
2452	Vertical	2452(Pk)	98.86	-	-
		2452(Av)	88.90	-	-
		2483.5(Pk)	69.85	74*	-4.15
		2483.5(Av)	49.69	54*	-4.31
		4904(Pk)	40.99	74	-33.01
		4904(Av)	29.21	54	-24.79
		7356(Pk)	46.62	74	-27.38
	7356(Av)	34.83	54	-19.17	
	Horizontal	2452(Pk)	98.48	-	-
		2452(Av)	88.53	-	-
		2483.5(Pk)	66.47	74*	-7.53
		2483.5(Av)	49.23	54*	-4.77
		4904(Pk)	40.63	74	-33.37
		4904(Av)	29.15	54	-24.85
7356(Pk)		46.91	74	-27.09	
7356(Av)	34.79	54	-19.21		

*- : Indicate restricted band of operation §15.205
Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN2391GP 001

Seite 174 von 229

Page 174 of 229

Modulation: 802.11ac_VHT40

Data Rate: MCS8

Channel Frequency (MHz)	Antenna Polarization	Measured Frequency (MHz)	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2422	Vertical	2422(Pk)	100.69	-	-
		2422(Av)	83.94	-	-
		2390(Pk)	64.63	74*	-9.37
		2390(Av)	44.64	54*	-9.36
		4844(Pk)	41.18	74	-32.82
		4844(Av)	29.30	54	-24.70
		7266(Pk)	47.72	74	-26.28
	7266(Av)	35.30	54	-18.70	
	Horizontal	2422(Pk)	100.43	-	-
		2422(Av)	84.16	-	-
		2390(Pk)	64.76	74*	-9.24
		2390(Av)	44.21	54*	-9.79
		4844(Pk)	41.73	74	-32.27
		4844(Av)	29.3	54	-24.70
7266(Pk)		47.14	74	-26.86	
7266(Av)	35.04	54	-18.96		
2437	Vertical	2437(Pk)	103.41	-	-
		2437(Av)	87.45	-	-
		4874(Pk)	41.29	74	-32.71
		4874(Av)	29.44	54	-24.56
		7311(Pk)	50.29	74	-23.71
	7311(Av)	36.42	54	-17.58	
	Horizontal	2437(Pk)	101.72	-	-
		2437(Av)	86.88	-	-
		4874(Pk)	41.14	74	-32.86
		4874(Av)	29.34	54	-24.66
7311(Pk)		46.95	74	-27.05	
7311(Av)	35.21	54	-18.79		
2452	Vertical	2452(Pk)	98.65	-	-
		2452(Av)	81.90	-	-
		2483.5(Pk)	63.26	74*	-10.74
		2483.5(Av)	42.13	54*	-11.87
		4904(Pk)	41.03	74	-32.97
		4904(Av)	29.13	54	-24.87
		7356(Pk)	46.26	74	-27.74
		7356(Av)	34.84	54	-19.16
	Horizontal	2452(Pk)	98.38	-	-
		2452(Av)	81.32	-	-
		2483.5(Pk)	64.70	74*	-9.30
		2483.5(Av)	43.01	54*	-10.99
		4904(Pk)	40.91	74	-33.09
		4904(Av)	29.18	54	-24.82
7356(Pk)	47.21	74	-26.79		
7356(Av)	34.99	54	-19.01		

*- : Indicate restricted band of operation §15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:
Test Report No.:

IN2391GP 001

Seite 175 von 229
Page 175 of 229

Modulation: 802.11ax_HE40
Data Rate: MCS0

Channel Frequency (MHz)	Antenna Polarization	Measured Frequency (MHz)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2422	Vertical	2422(Pk)	103.30	-	-
		2422(Av)	89.59	-	-
		2390(Pk)	64.31	74*	-9.69
		2390(Av)	46.21	54*	-7.79
		4844(Pk)	41.48	74	-32.52
		4844(Av)	29.36	54	-24.64
		7266(Pk)	47.20	74	-26.80
		7266(Av)	35.44	54	-18.56
	Horizontal	2422(Pk)	102.25	-	-
		2422(Av)	88.97	-	-
		2390(Pk)	63.46	74*	-10.54
		2390(Av)	47.01	54*	-6.99
		4844(Pk)	41.07	74	-32.93
		4844(Av)	29.32	54	-24.68
2437	Vertical	2437(Pk)	104.63	-	-
		2437(Av)	91.39	-	-
		4874(Pk)	41.29	74	-32.71
		4874(Av)	29.47	54	-24.53
		7311(Pk)	50.32	74	-23.68
	7311(Av)	37.16	54	-16.84	
	Horizontal	2437(Pk)	104.09	-	-
		2437(Av)	91.12	-	-
		4874(Pk)	42.02	74	-31.98
		4874(Av)	29.37	54	-24.63
7311(Pk)		46.91	74	-27.09	
7311(Av)	35.36	54	-18.64		
2452	Vertical	2452(Pk)	102.01	-	-
		2452(Av)	88.31	-	-
		2483.5(Pk)	67.87	74*	-6.13
		2483.5(Av)	51.13	54*	-2.87
		4904(Pk)	41.84	74	-32.16
		4904(Av)	29.15	54	-24.85
		7356(Pk)	46.79	74	-27.21
		7356(Av)	34.98	54	-19.02
	Horizontal	2452(Pk)	101.23	-	-
		2452(Av)	88.18	-	-
		2483.5(Pk)	67.79	74*	-6.21
		2483.5(Av)	49.90	54*	-4.10
		4904(Pk)	42.22	74	-31.78
		4904(Av)	29.18	54	-24.82
7356(Pk)	46.31	74	-27.69		
7356(Av)	34.82	54	-19.18		

*- : Indicate restricted band of operation §15.205
Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:
Test Report No.:

IN2391GP 001

Seite 176 von 229
Page 176 of 229

Modulation: 802.11ax_HE40
Data Rate: MCS11

Channel Frequency (MHz)	Antenna Polarization	Measured Frequency (MHz)	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2422	Vertical	2422(Pk)	101.21	-	-
		2422(Av)	84.37	-	-
		2390(Pk)	64.46	74*	-9.54
		2390(Av)	41.65	54*	-12.35
		4844(Pk)	40.82	74	-33.18
		4844(Av)	29.22	54	-24.78
		7266(Pk)	47.14	74	-26.86
	7266(Av)	35.16	54	-18.84	
	Horizontal	2422(Pk)	101.40	-	-
		2422(Av)	84.05	-	-
		2390(Pk)	62.51	74*	-11.49
		2390(Av)	39.42	54*	-14.58
		4844(Pk)	40.87	74	-33.13
		4844(Av)	29.23	54	-24.77
7266(Pk)		46.31	74	-27.69	
7266(Av)	34.97	54	-19.03		
2437	Vertical	2437(Pk)	102.32	-	-
		2437(Av)	84.89	-	-
		4874(Pk)	42.00	74	-32.00
		4874(Av)	29.26	54	-24.74
		7311(Pk)	47.14	74	-26.86
	7311(Av)	35.52	54	-18.48	
	Horizontal	2437(Pk)	101.03	-	-
		2437(Av)	83.34	-	-
		4874(Pk)	41.40	74	-32.60
		4874(Av)	29.19	54	-24.81
7311(Pk)		46.84	74	-27.16	
7311(Av)	34.83	54	-19.17		
2452	Vertical	2452(Pk)	101.43	-	-
		2452(Av)	83.08	-	-
		2483.5(Pk)	69.79	74*	-4.21
		2483.5(Av)	47.18	54*	-6.82
		4904(Pk)	40.72	74	-33.28
		4904(Av)	29.28	54	-24.72
		7356(Pk)	47.04	74	-26.96
		7356(Av)	34.94	54	-19.06
	Horizontal	2452(Pk)	101.09	-	-
		2452(Av)	82.40	-	-
		2483.5(Pk)	67.77	74*	-6.23
		2483.5(Av)	45.67	54*	-8.33
		4904(Pk)	41.54	74	-32.46
		4904(Av)	29.28	54	-24.72
7356(Pk)	46.78	74	-27.22		
7356(Av)	34.84	54	-19.16		

*- : Indicate restricted band of operation §15.205
Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:
Test Report No.:

IN2391GP 001

Seite 177 von 229
Page 177 of 229

Simultaneous Operation:


Combination of Wi-Fi 2.4GHz and Bluetooth 2.4GHz:

Data Rate (Mbps)	Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
1	2412	4824(Pk)	Vertical	50.33	74	-23.67
		4824(Av)		46.97	54	-7.03
		7236(Pk)		49.24	74	-24.76
		7236(Av)		38.40	54	-15.60
	2480	4960(Pk)		55.77	74	-18.23
		4960(Av)		43.79	54	-10.21
		7440(Pk)		48.56	74	-25.44
		7440(Av)		35.42	54	-18.58
	2412	4824(Pk)	Horizontal	42.96	74	-31.04
		4824(Av)		34.18	54	-19.82
		7236(Pk)		47.52	74	-26.48
		7236(Av)		34.35	54	-19.65
	2480	4960(Pk)		40.51	74	-33.49
		4960(Av)		30.30	54	-23.70
		7440(Pk)		46.39	74	-27.61
		7440(Av)		34.32	54	-19.68

Worst Case Plots are Reported


Modulation: 802.11b

Data Rate : 11Mbps

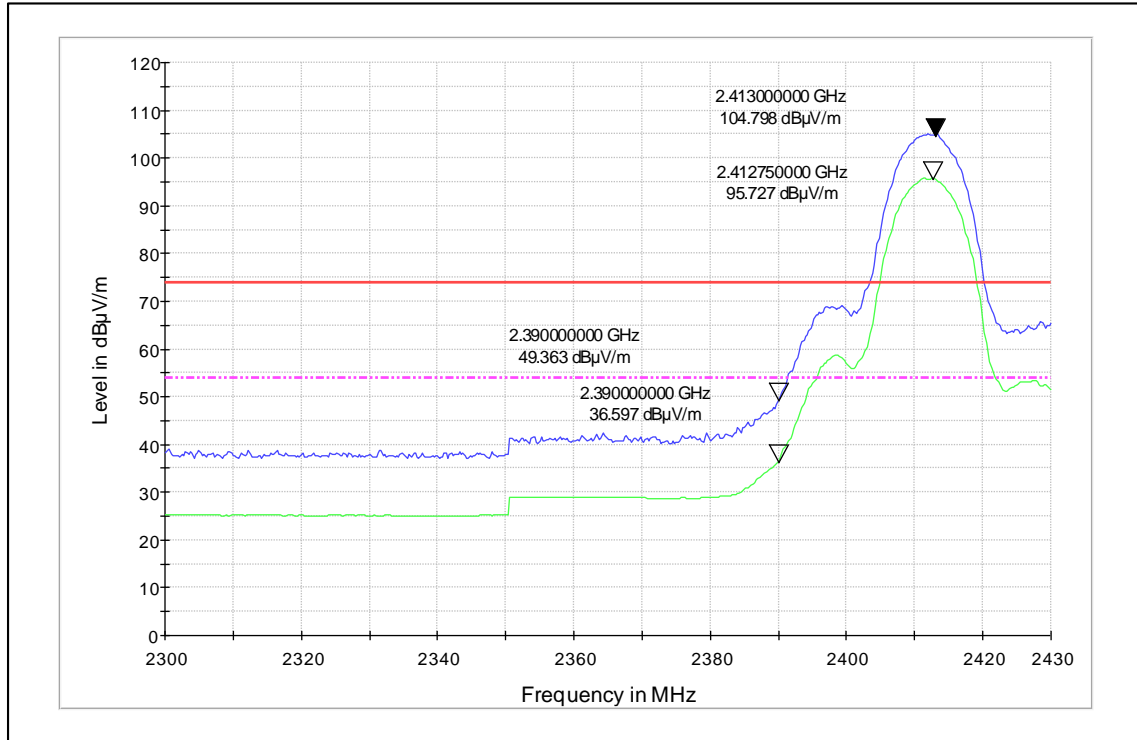


Channel frequency - 2412MHz

Polarization – Vertical

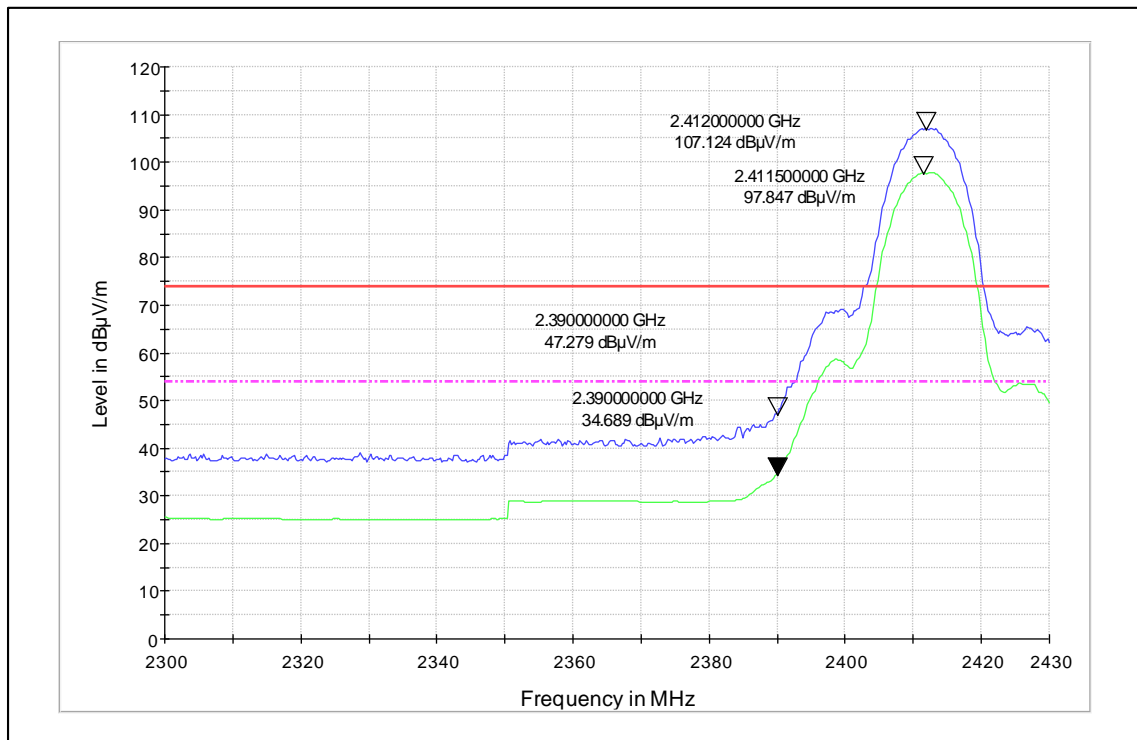


Channel frequency - 2412MHz

Polarization – Horizontal

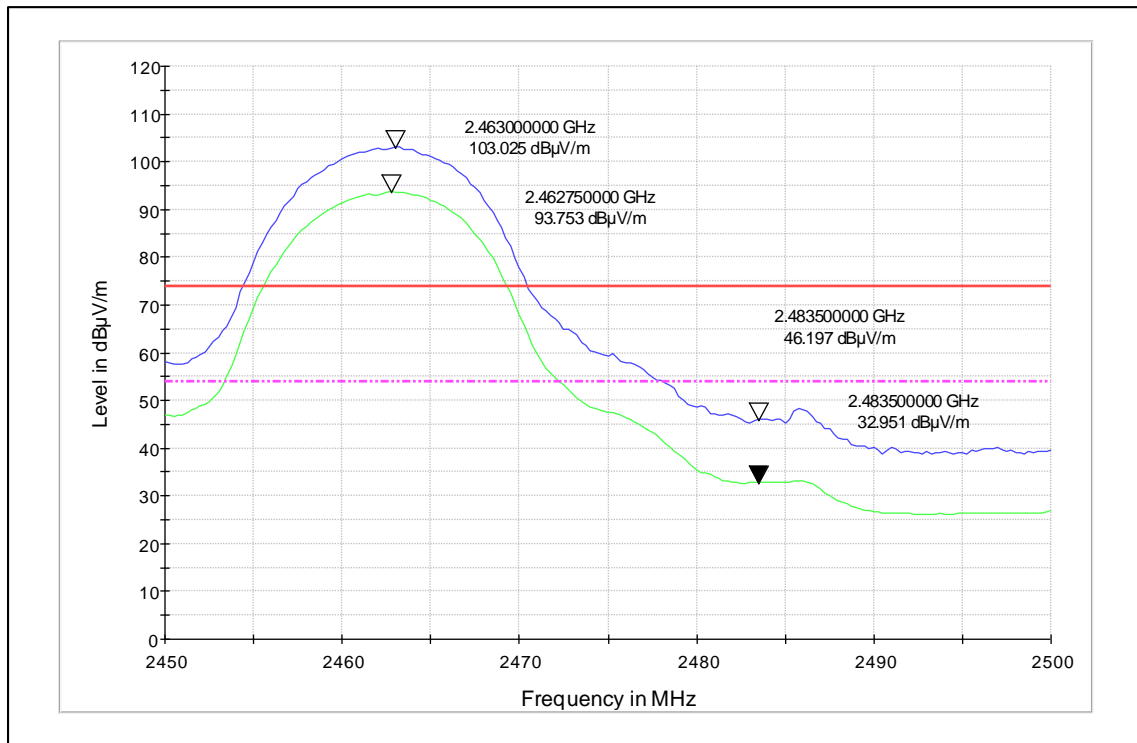


Channel frequency - 2462MHz

Polarization – Vertical

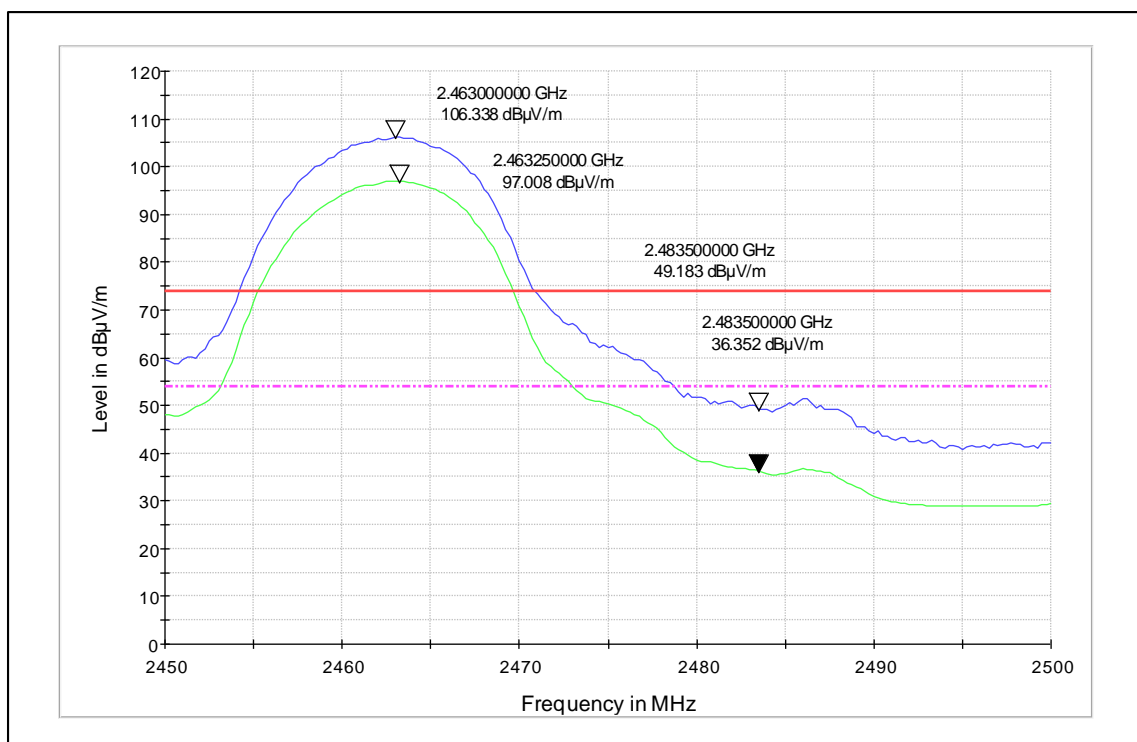


Channel frequency - 2462MHz

Polarization – Horizontal

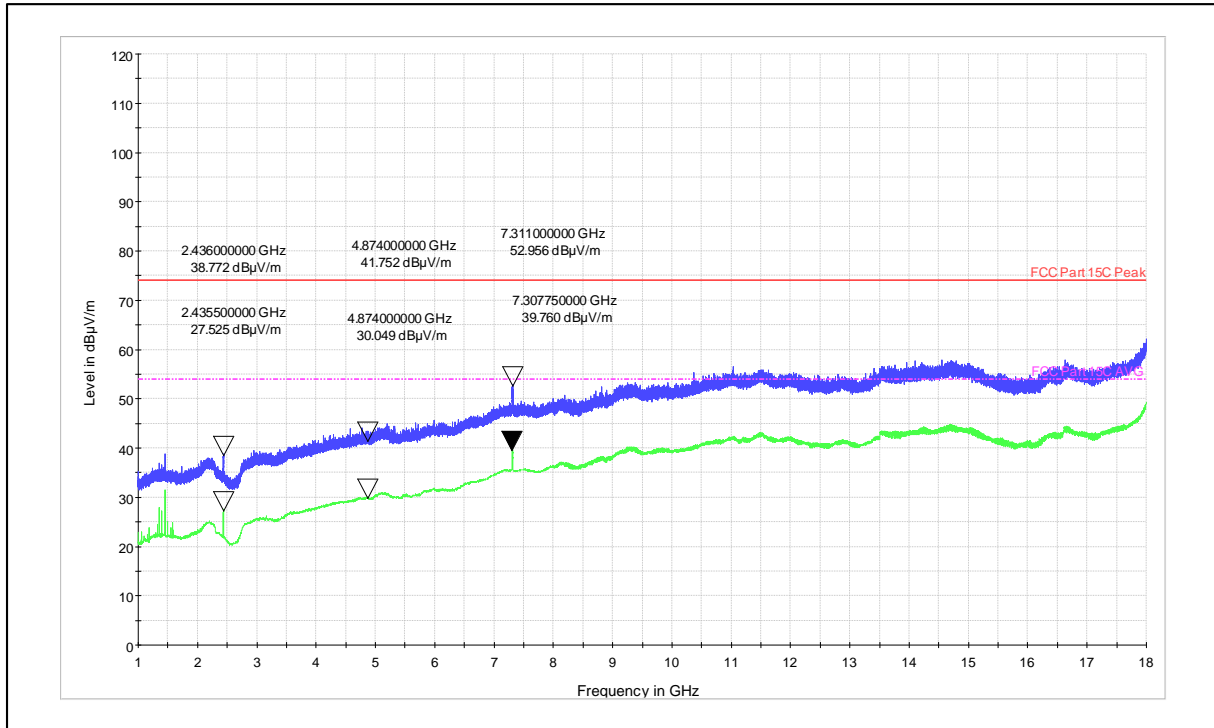

Channel frequency - 2437MHz


Polarization – Vertical

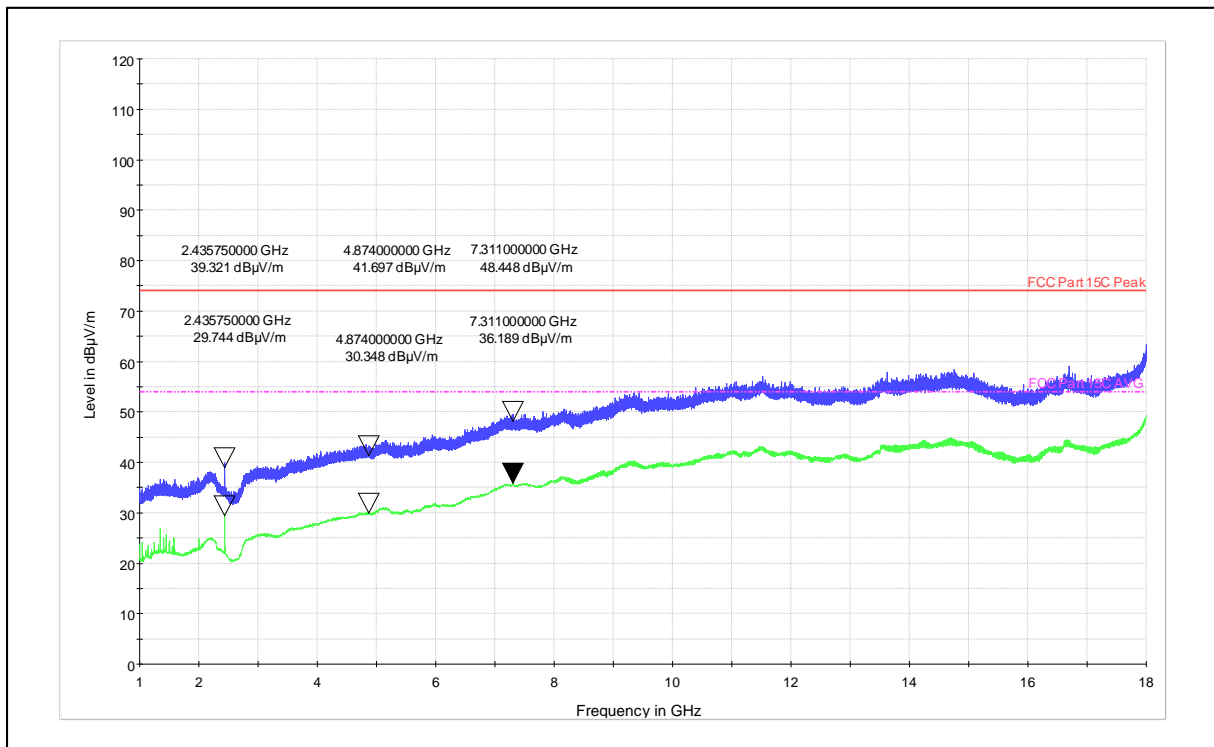

Channel frequency - 2437MHz


Polarization – Horizontal

Modulation: 802.11g
Data Rate : 6Mbps

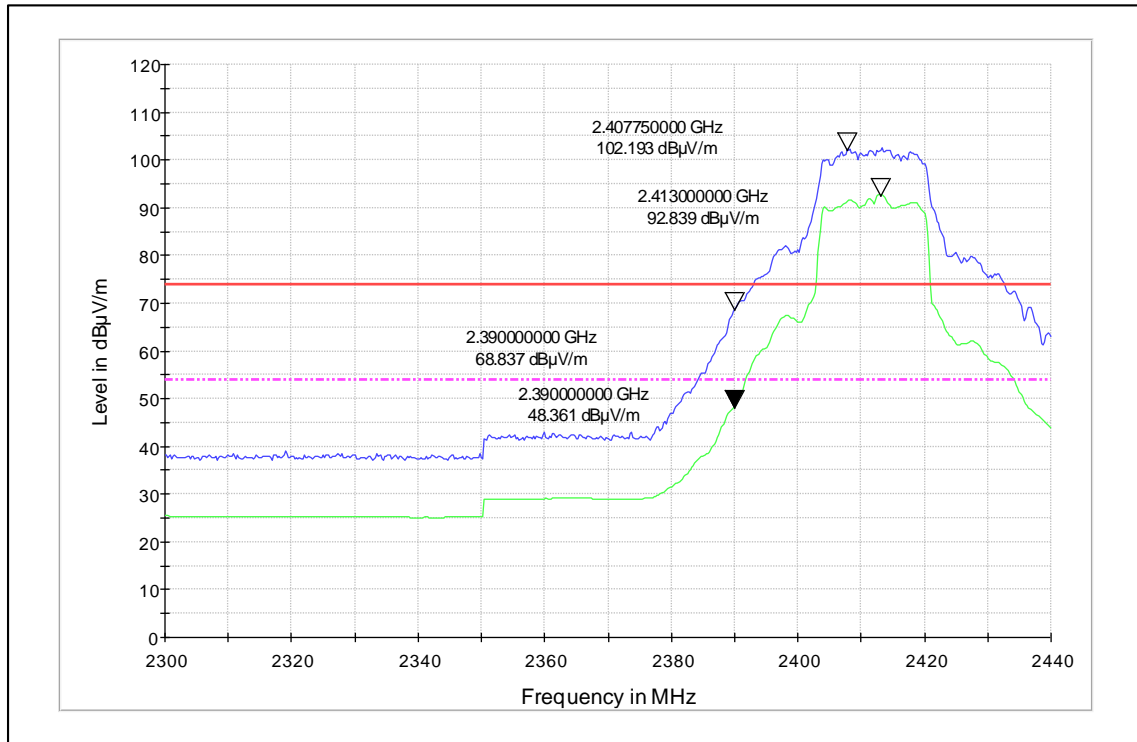


Channel Frequency - 2412MHz

Polarization – Vertical

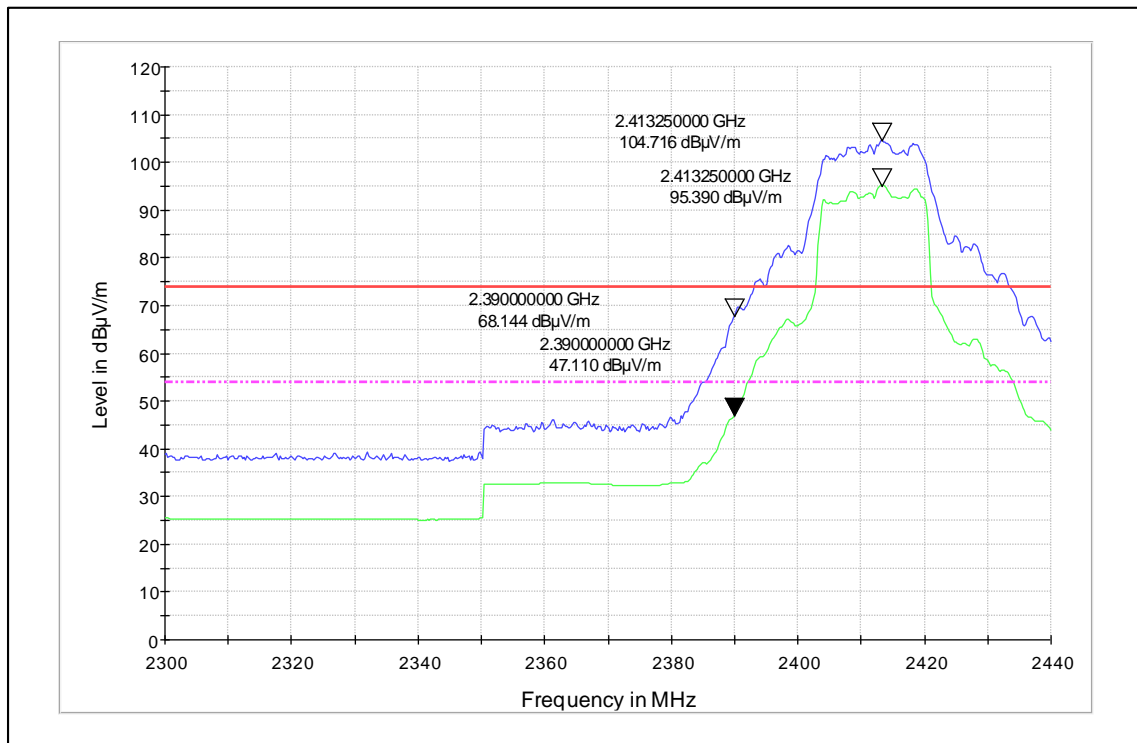


Channel Frequency - 2412MHz

Polarization – Horizontal

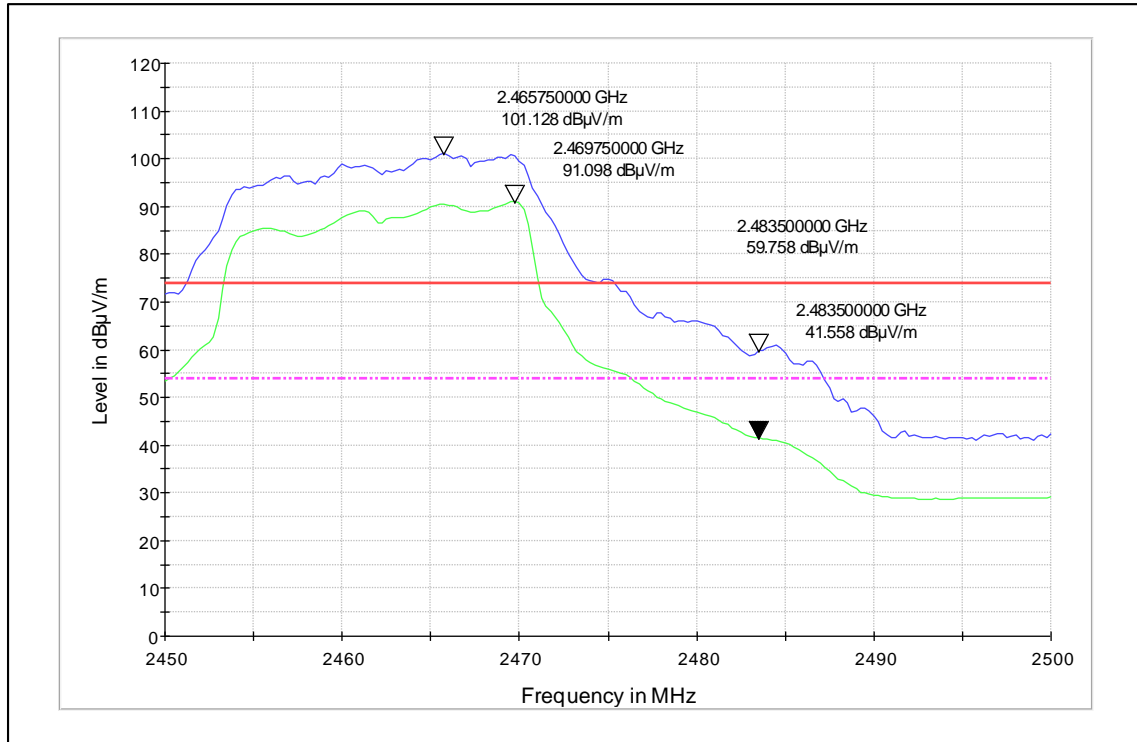


Channel Frequency – 2462MHz

Polarization – Vertical

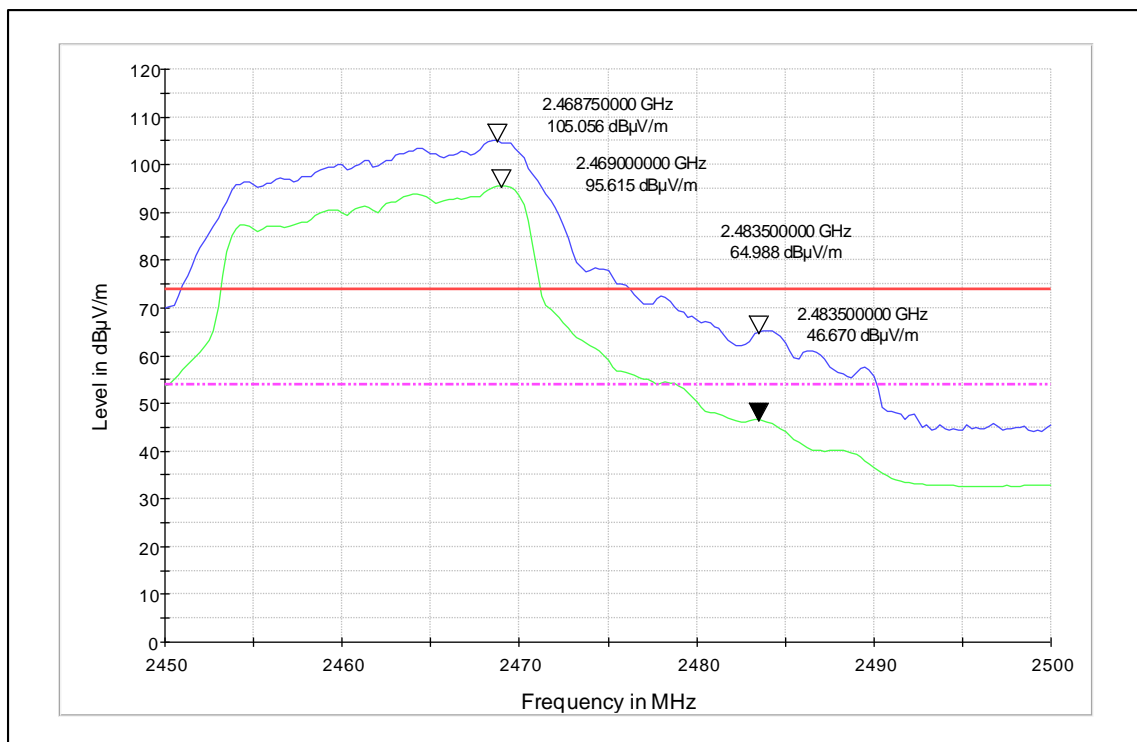


Channel Frequency - 2462MHz

Polarization – Horizontal

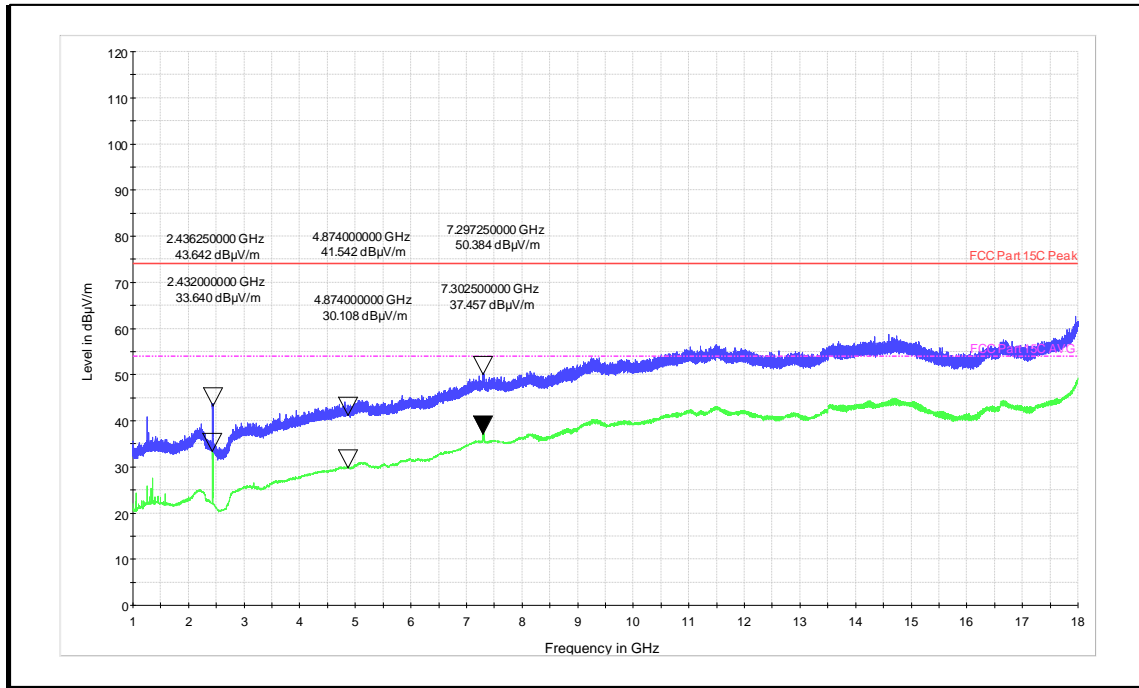

Channel Frequency - 2437MHz

Polarization – Vertical

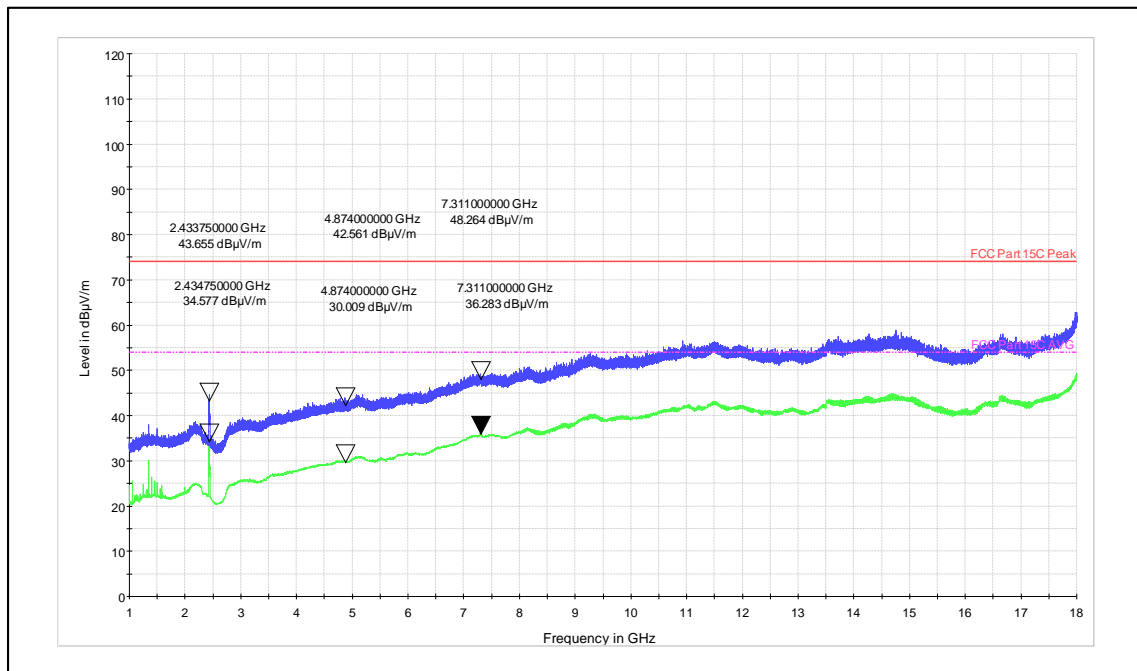


Channel Frequency - 2437MHz

Polarization – Horizontal


Modulation: 802.11n-HT_20

Data Rate : MCS 0

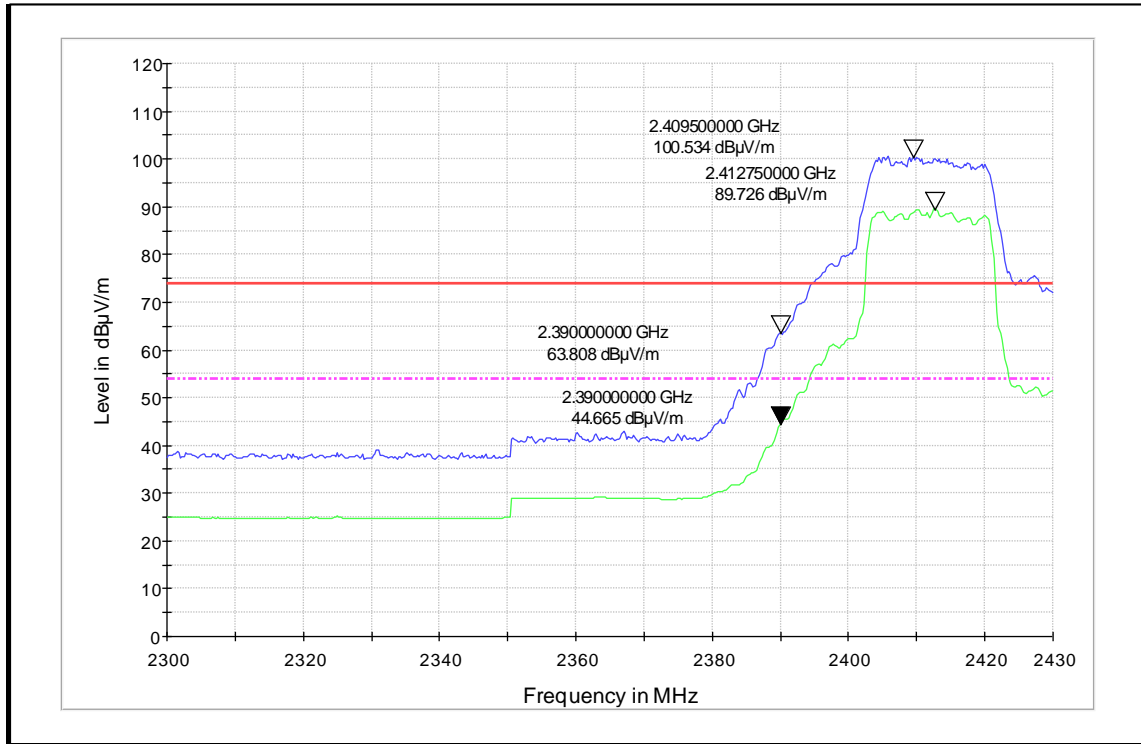


Channel Frequency - 2412MHz

Polarization – Vertical

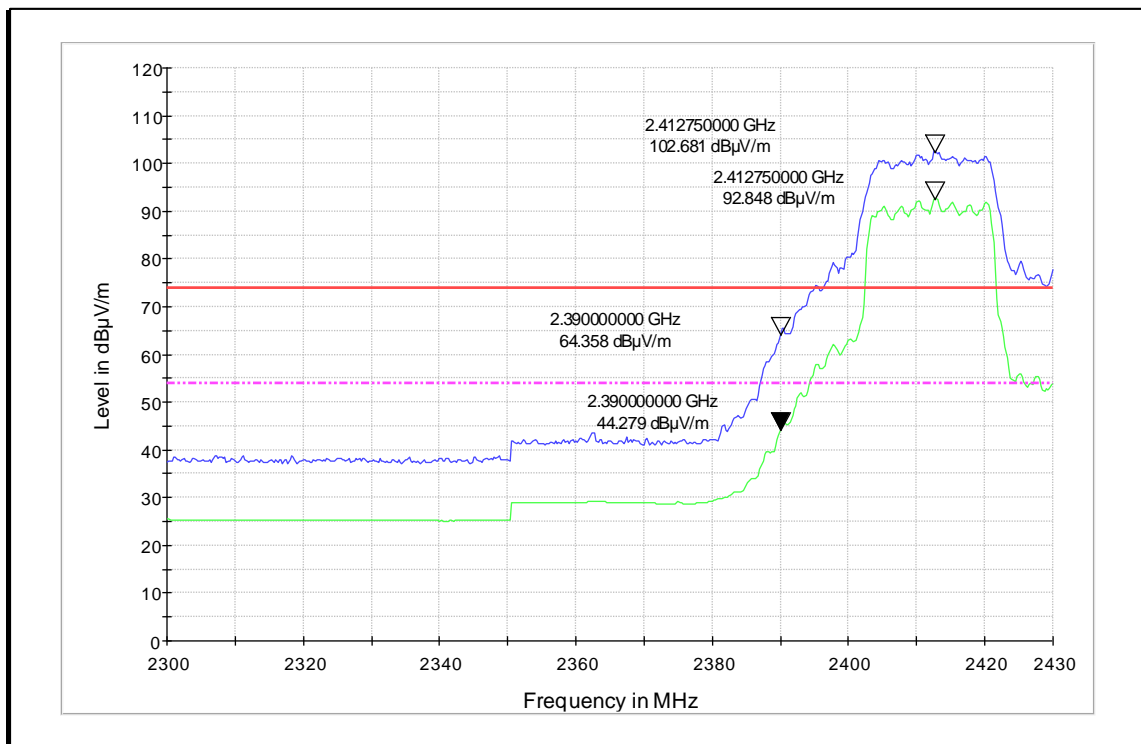


Channel Frequency - 2412MHz

Polarization – Horizontal

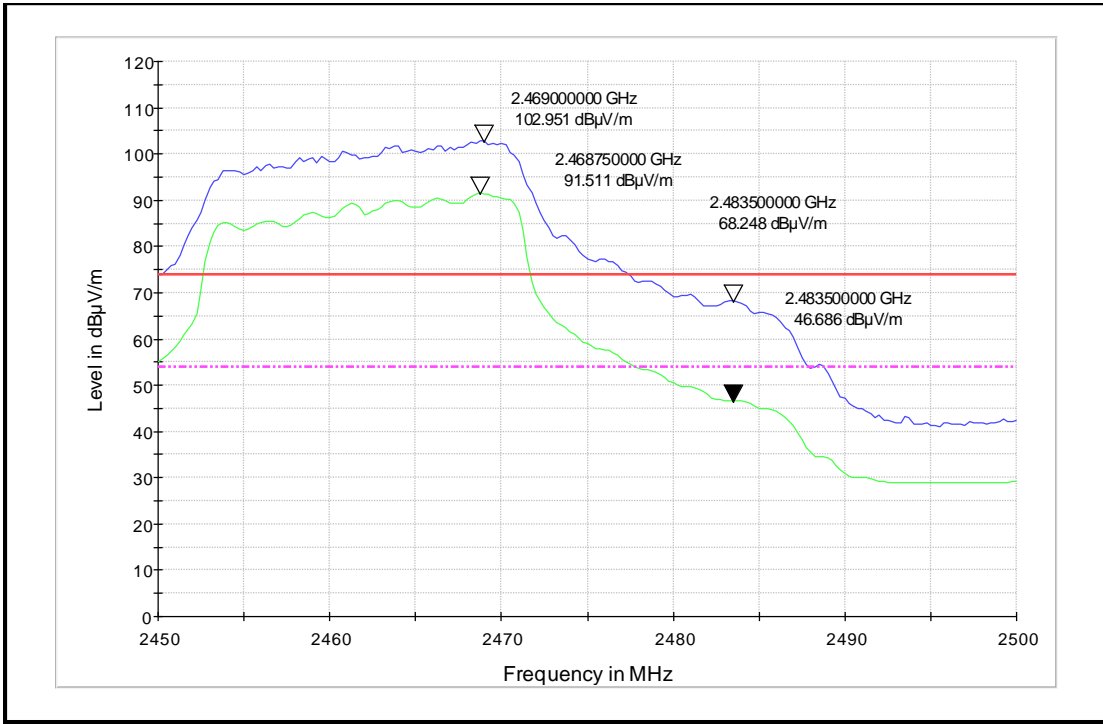


Channel Frequency - 2462MHz

Polarization – Vertical

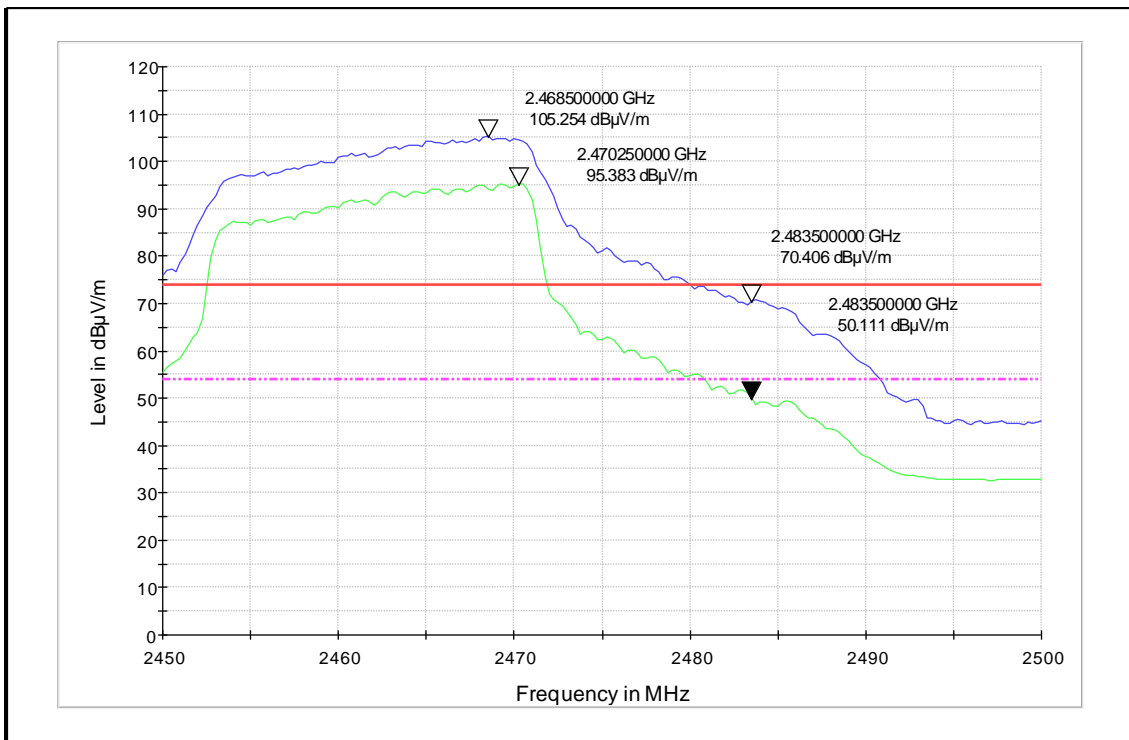


Channel Frequency - 2462MHz

Polarization – Horizontal

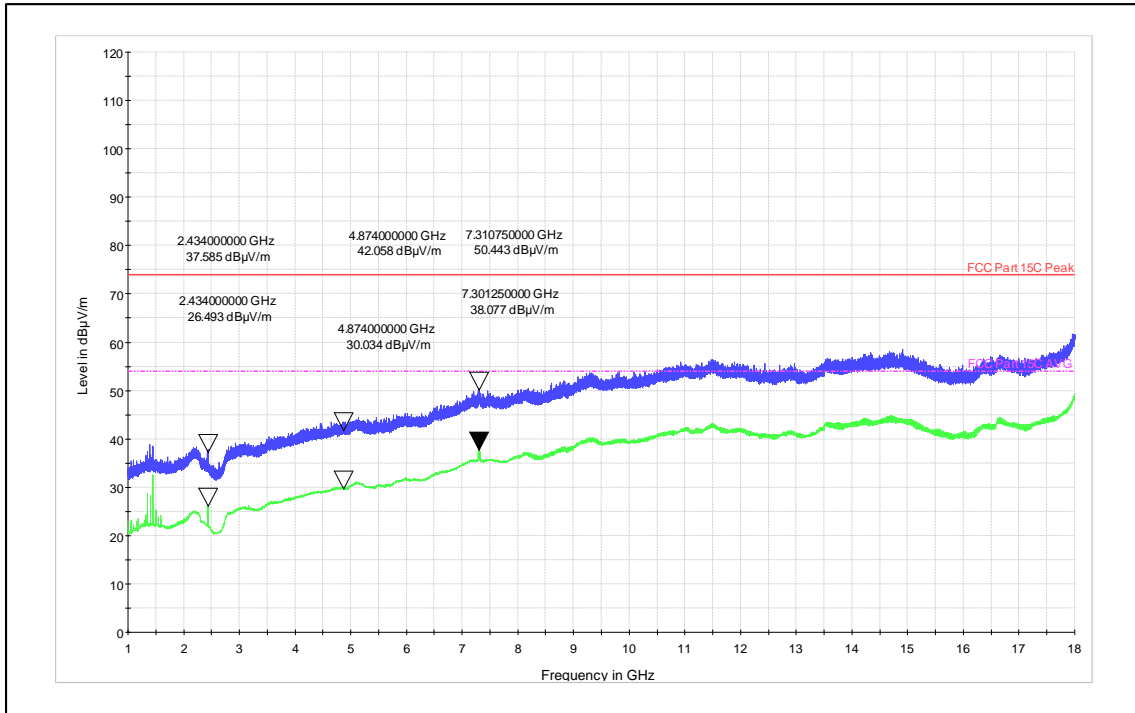

Channel Frequency - 2462MHz


Polarization – Vertical

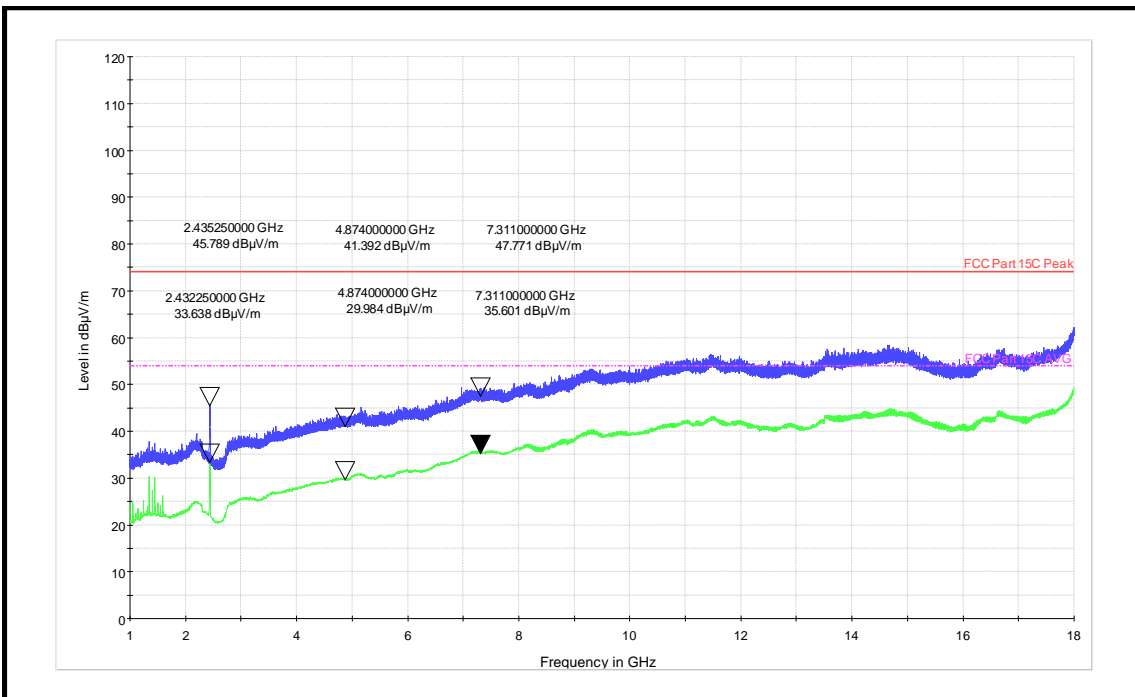

Channel Frequency - 2462MHz


Polarization – Horizontal

Modulation: 802.11ac-VHT_20
Data Rate : MCS 0

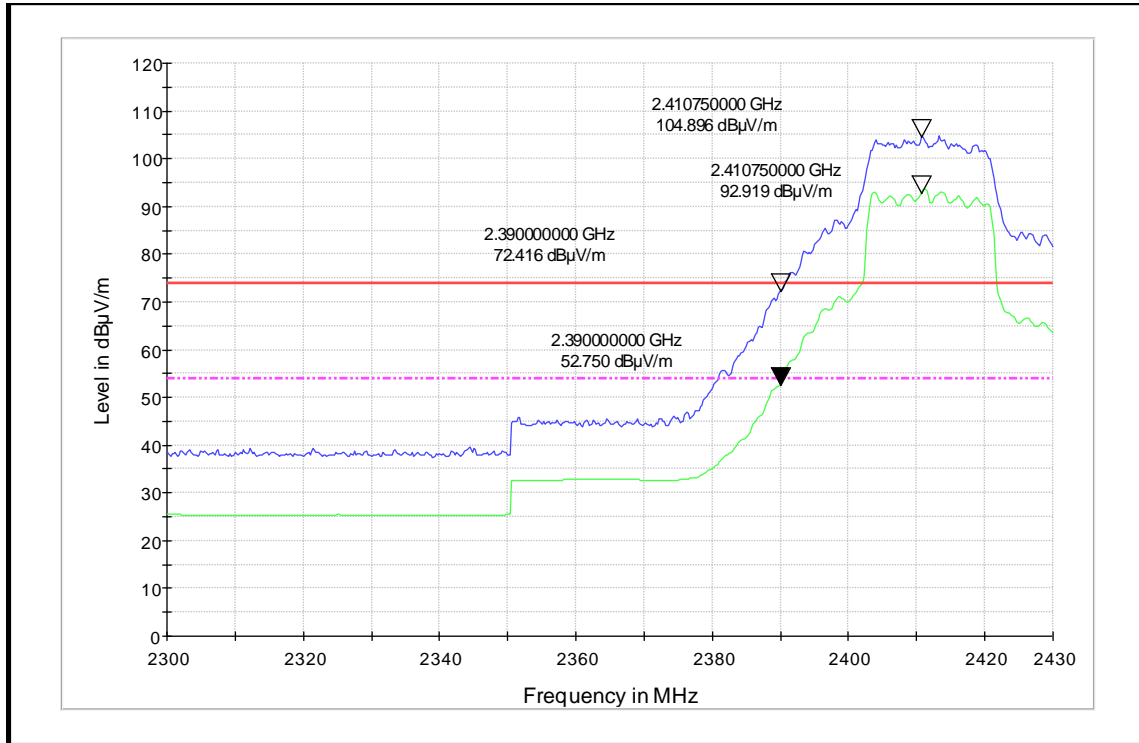


Channel Frequency - 2412MHz

Polarization – Vertical

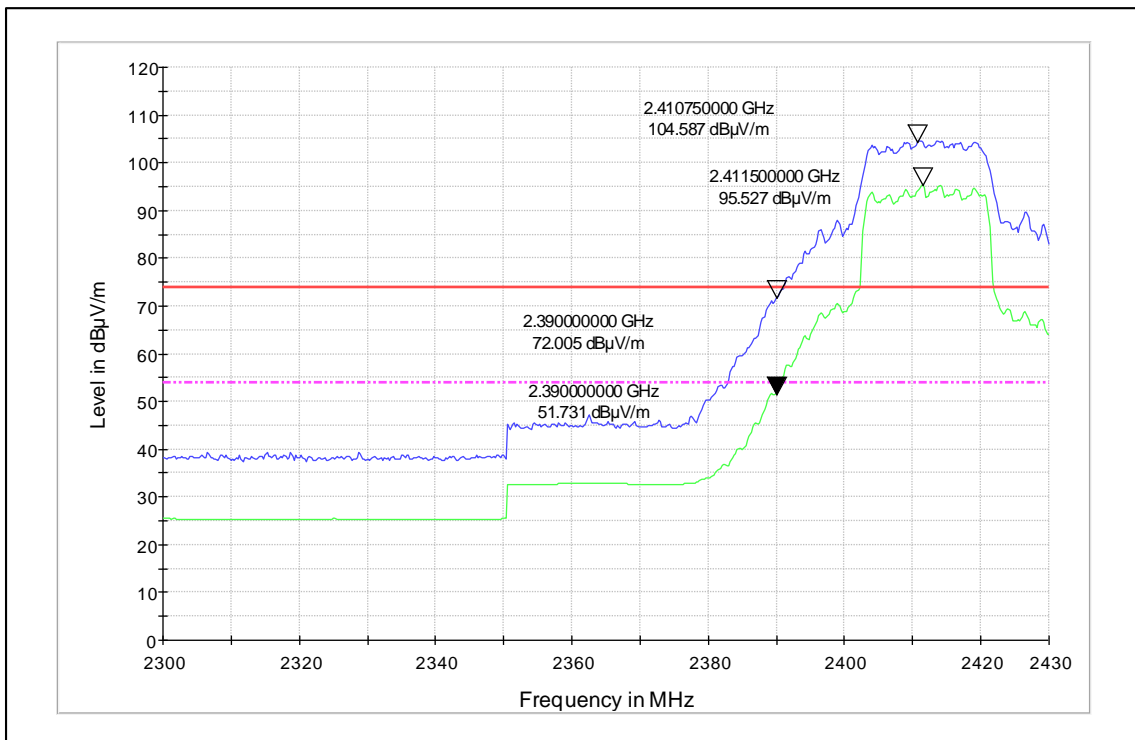


Channel Frequency - 2412MHz

Polarization – Horizontal

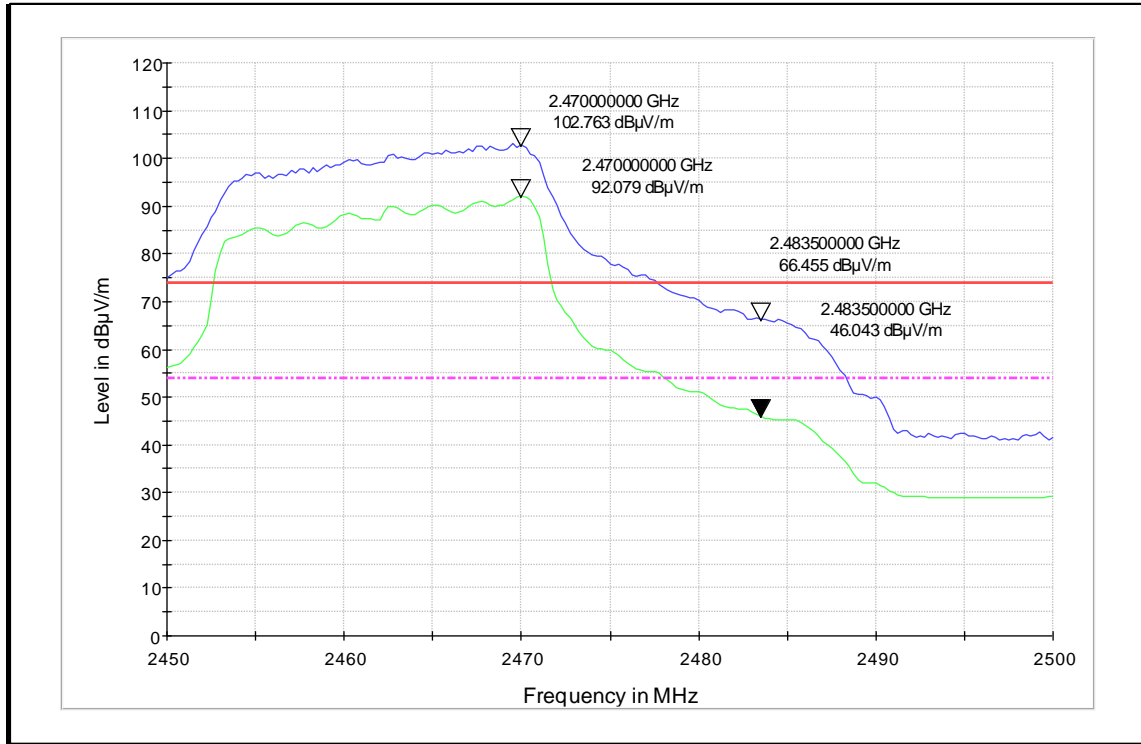


Channel Frequency - 2462MHz

Polarization – Vertical

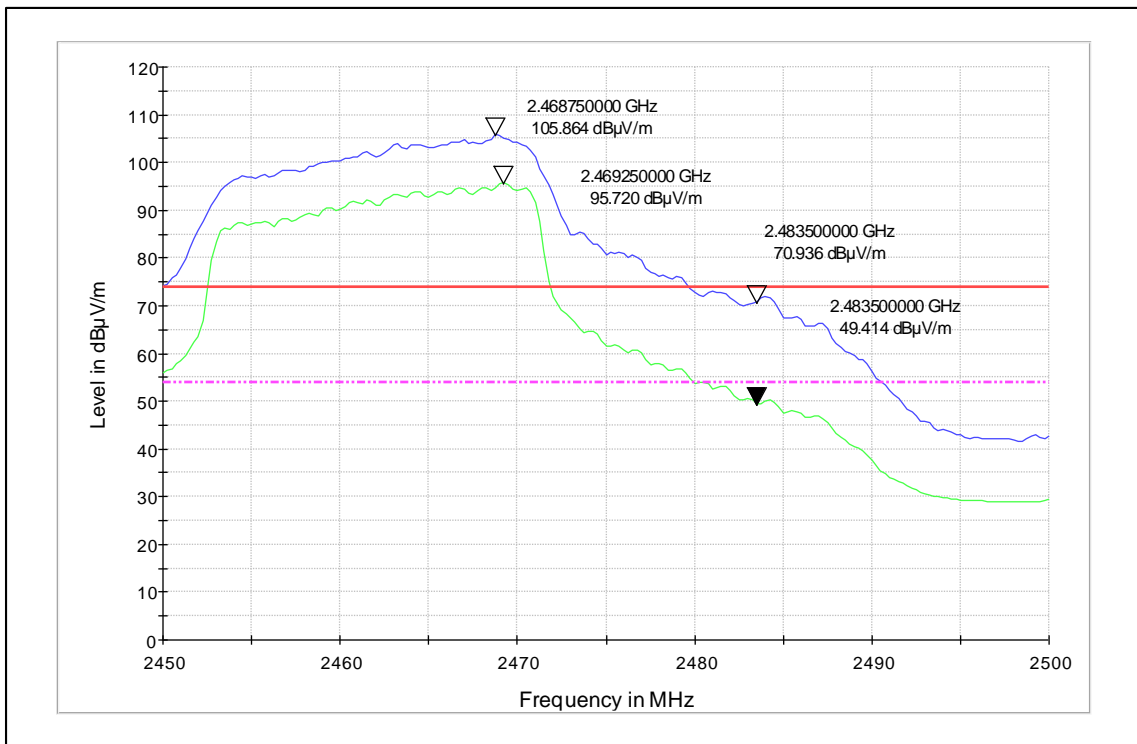


Channel Frequency - 2462MHz

Polarization – Horizontal

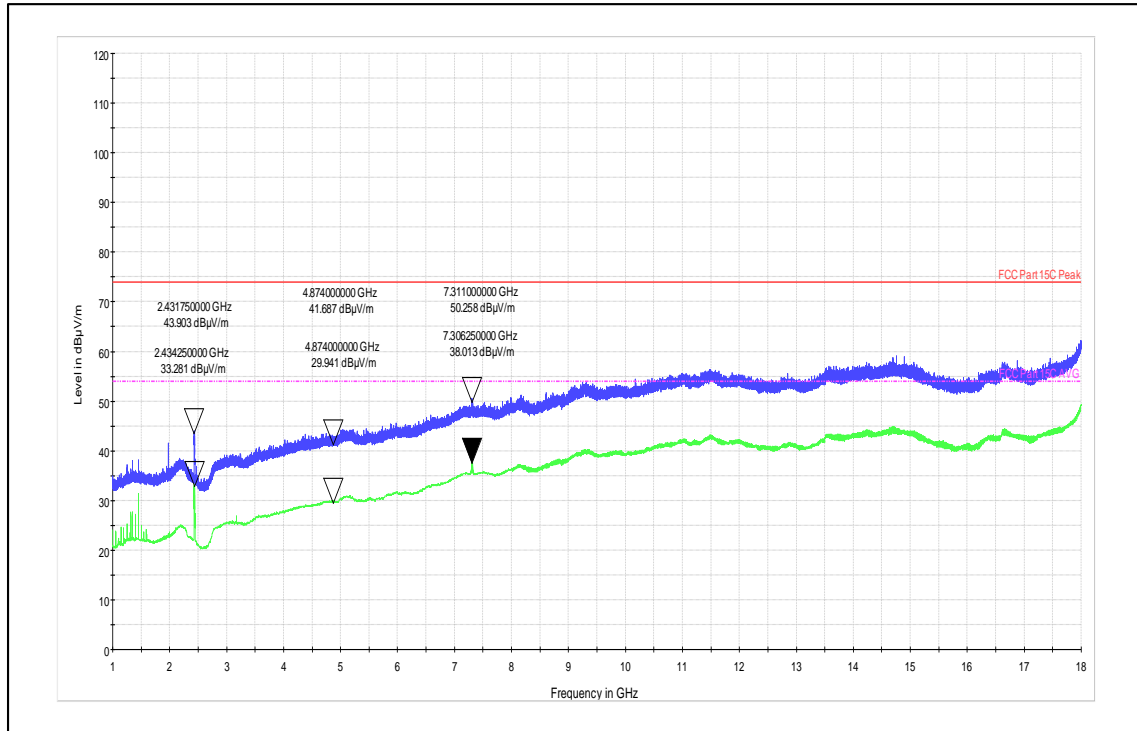

Channel Frequency - 2437MHz

Polarization – Vertical

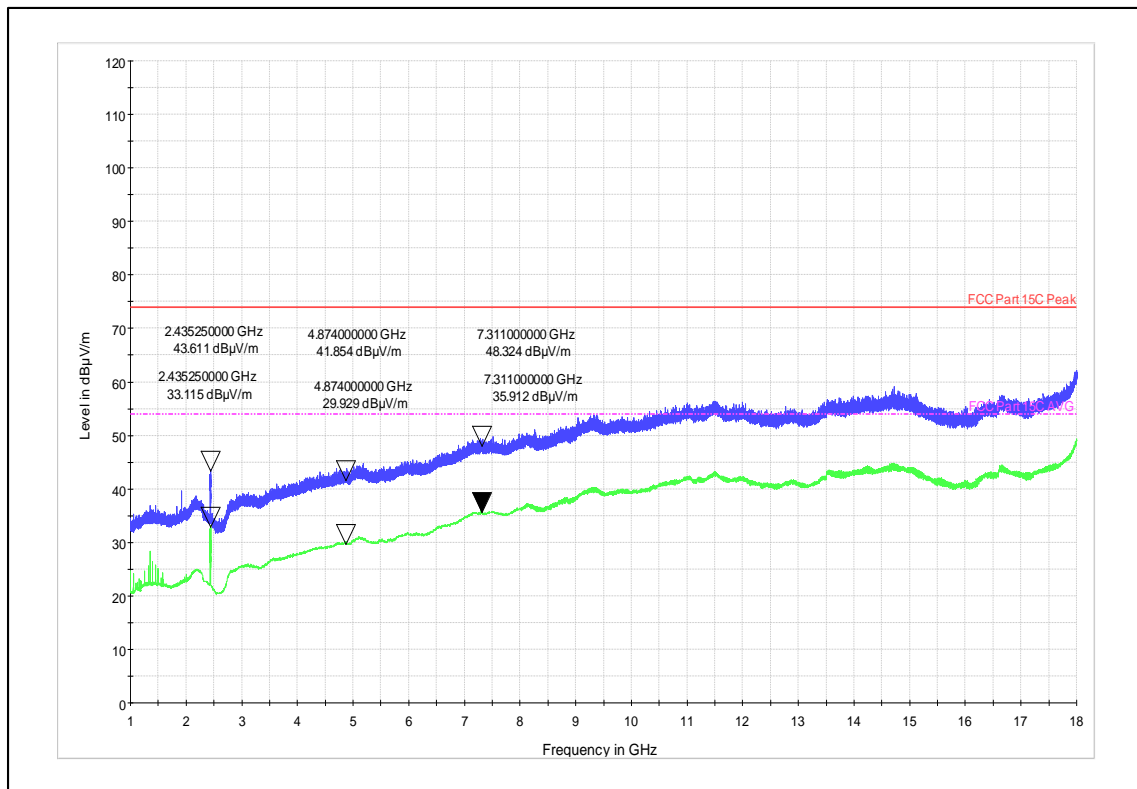


Channel Frequency - 2437MHz

Polarization – Horizontal


Modulation: 802.11ax-HE_20

Data Rate : MCS0

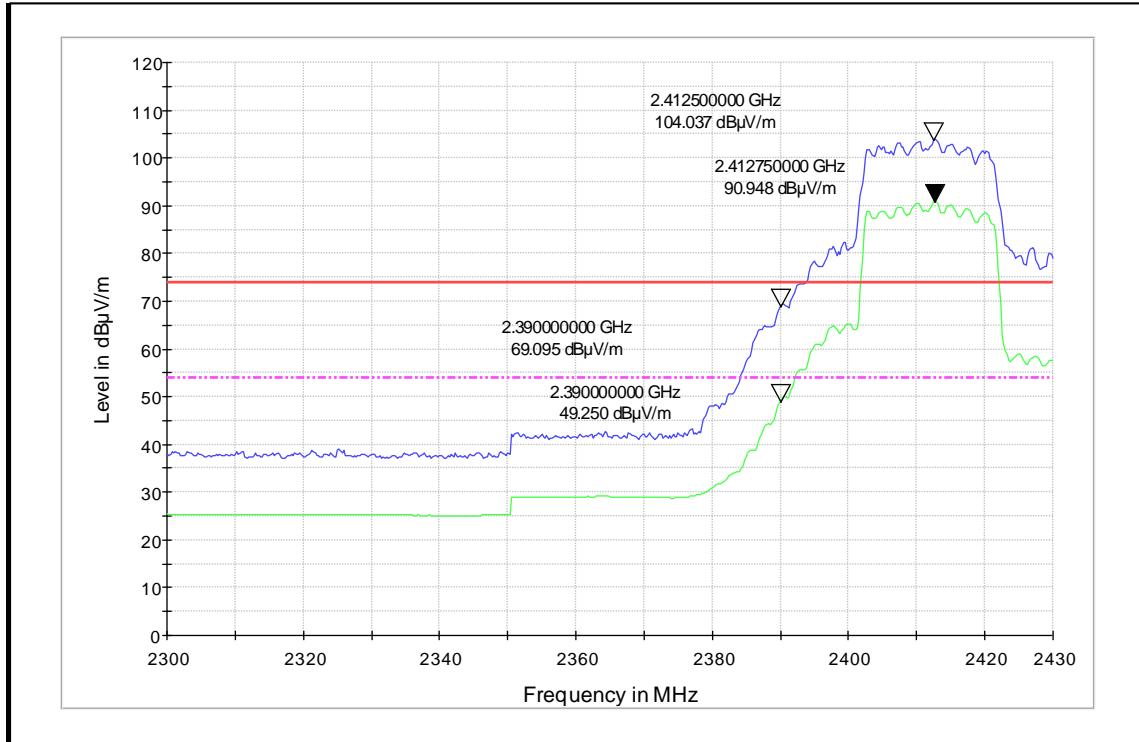


Channel Frequency - 2412MHz

Polarization – Vertical

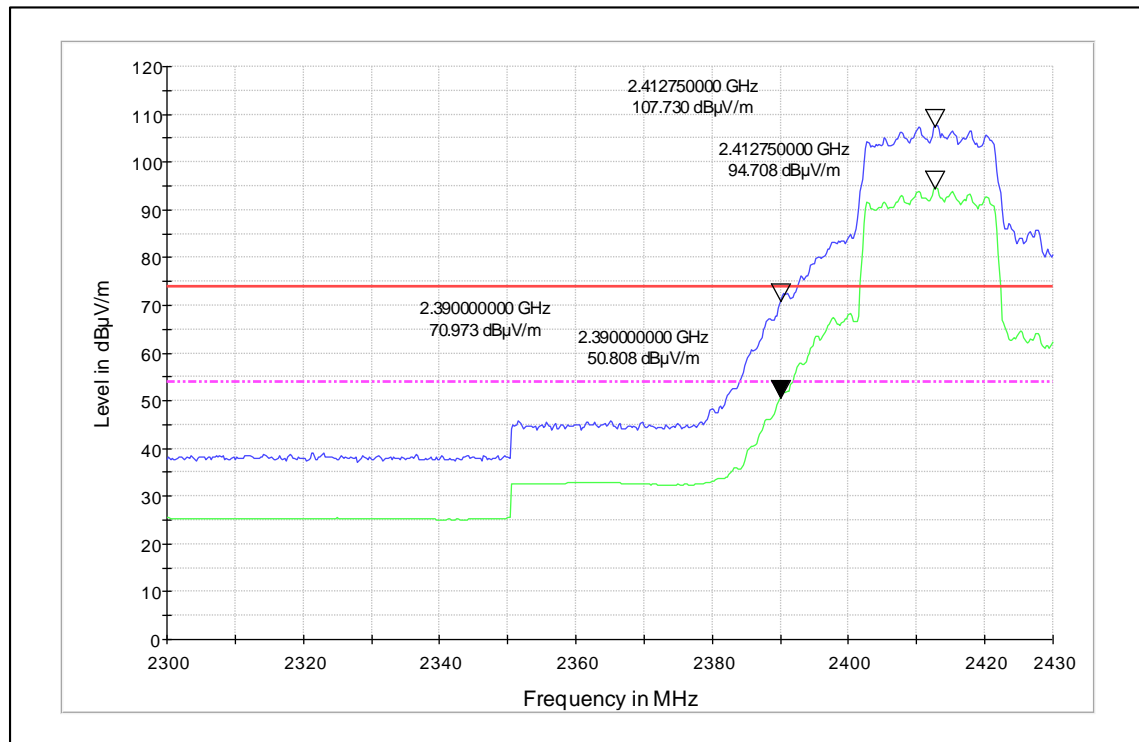


Channel Frequency - 2412MHz

Polarization – Horizontal

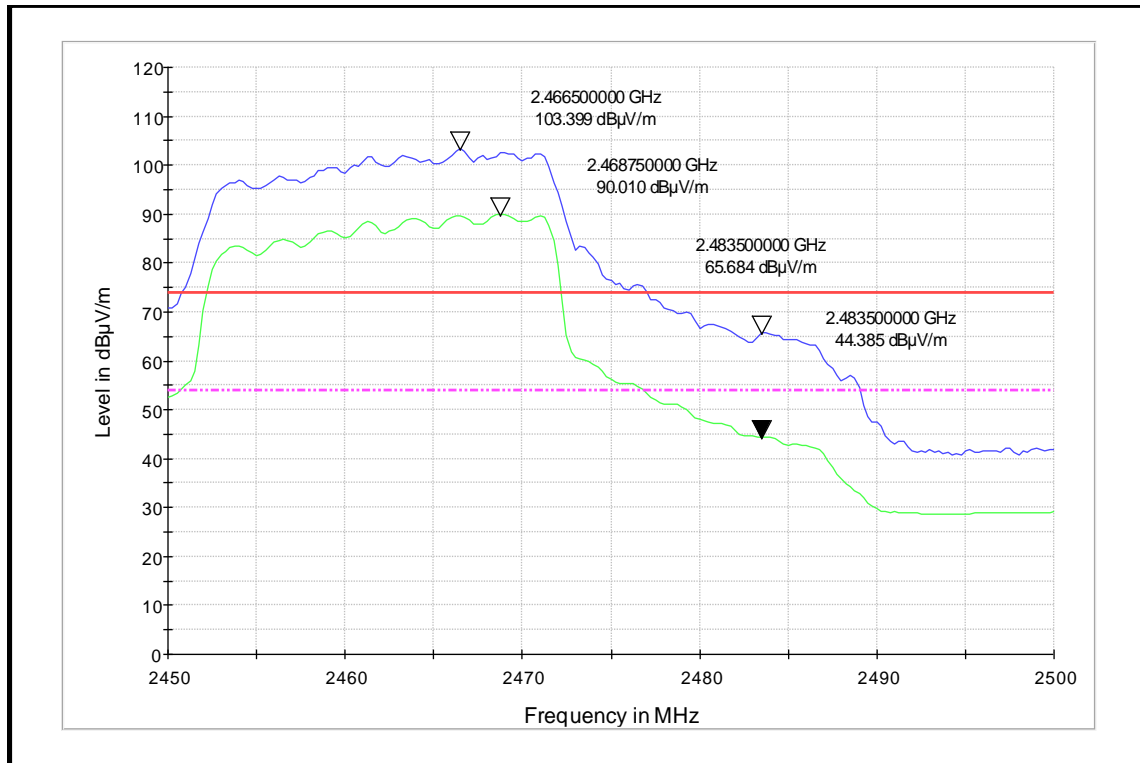


Channel Frequency - 2462MHz

Polarization – Vertical

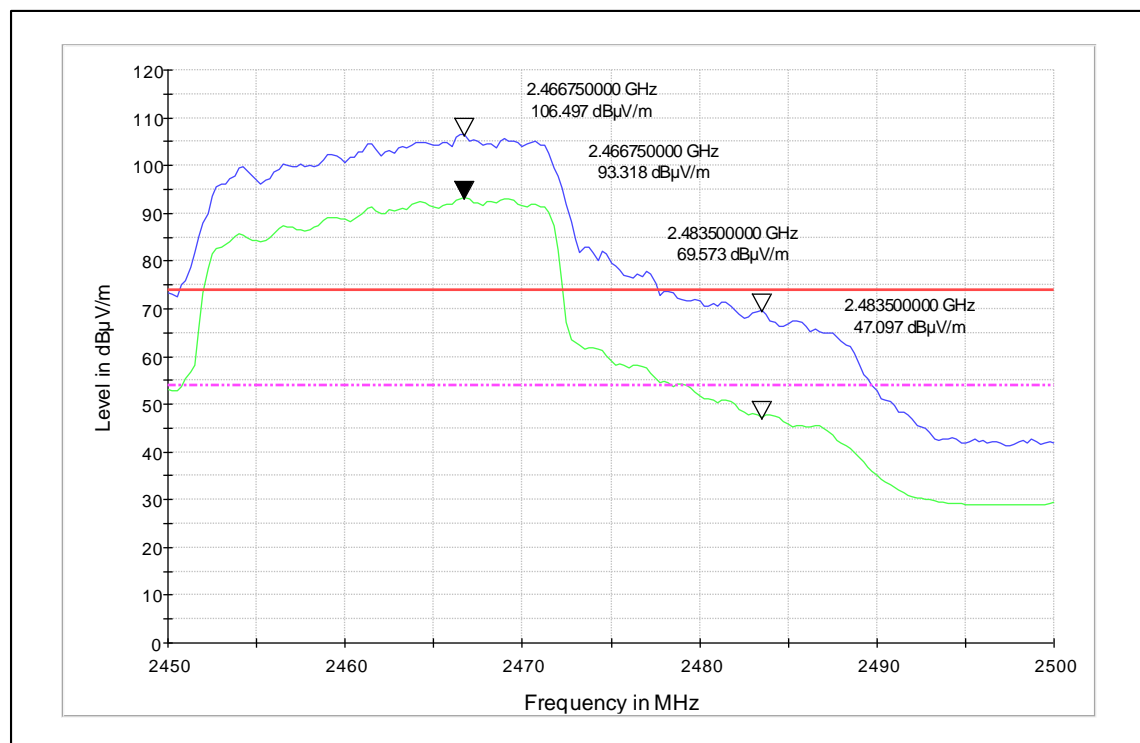


Channel Frequency - 2462MHz

Polarization – Horizontal

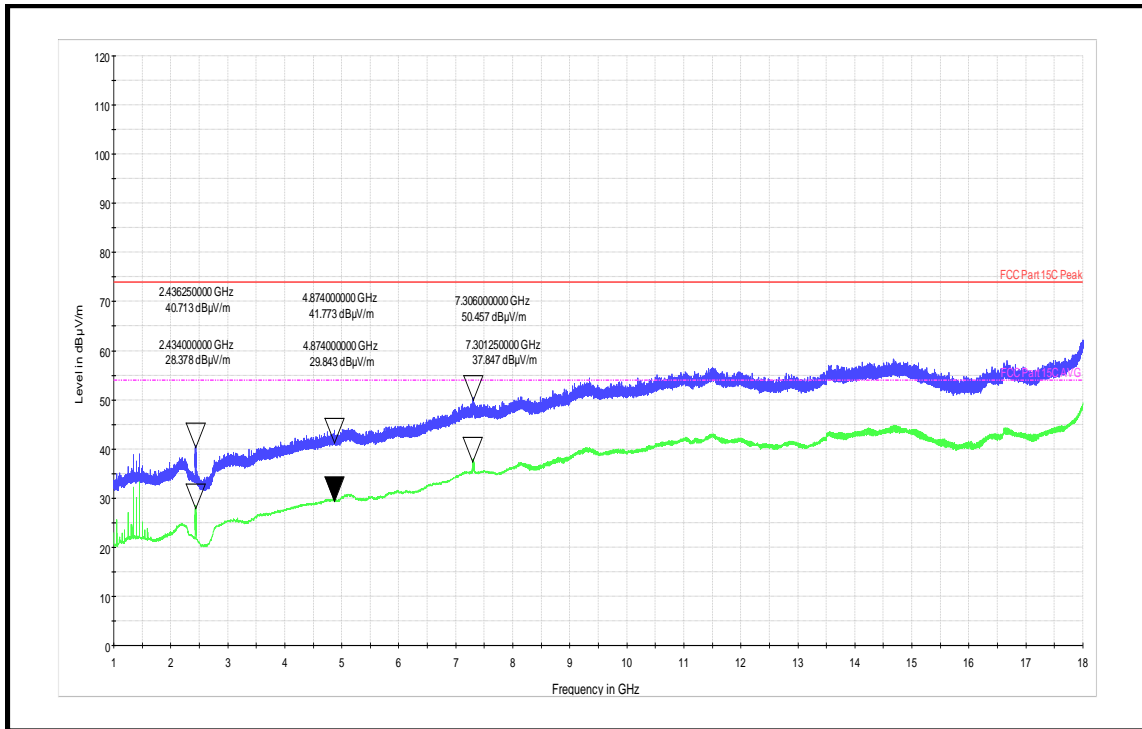

Channel Frequency - 2437MHz


Polarization – Vertical

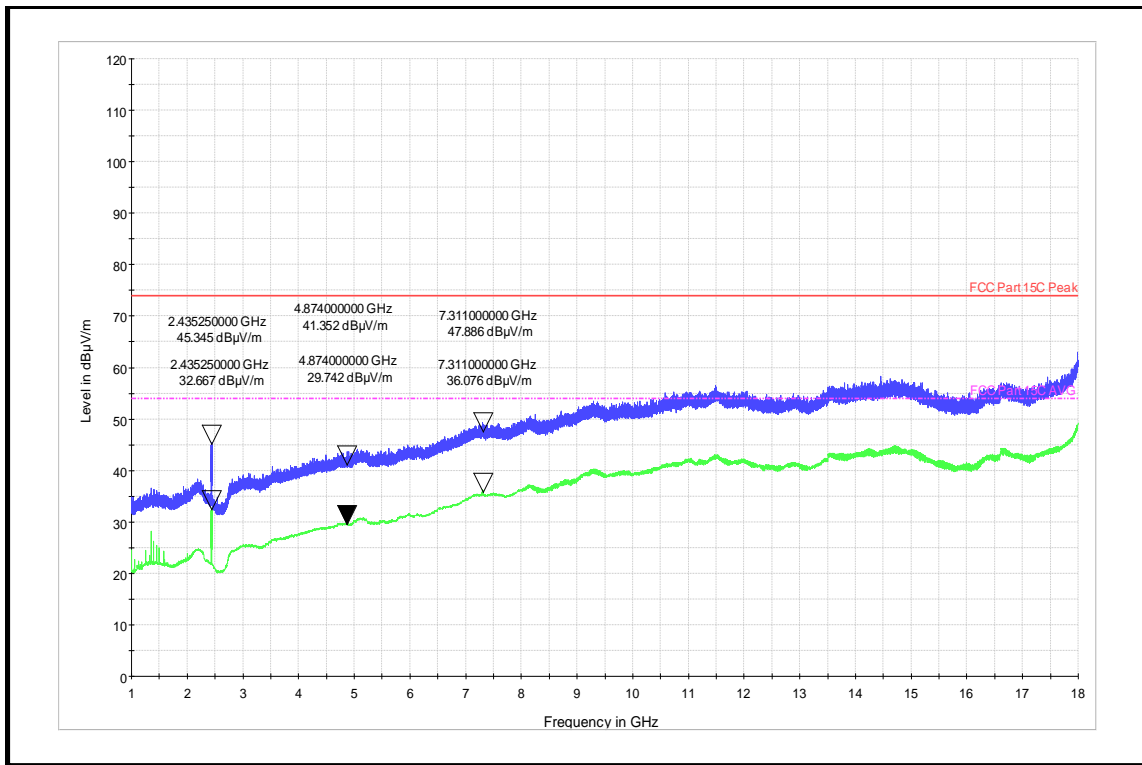

Channel Frequency - 2437MHz


Polarization – Horizontal

Modulation: 802.11n-HT_40
Data Rate : MCS 7

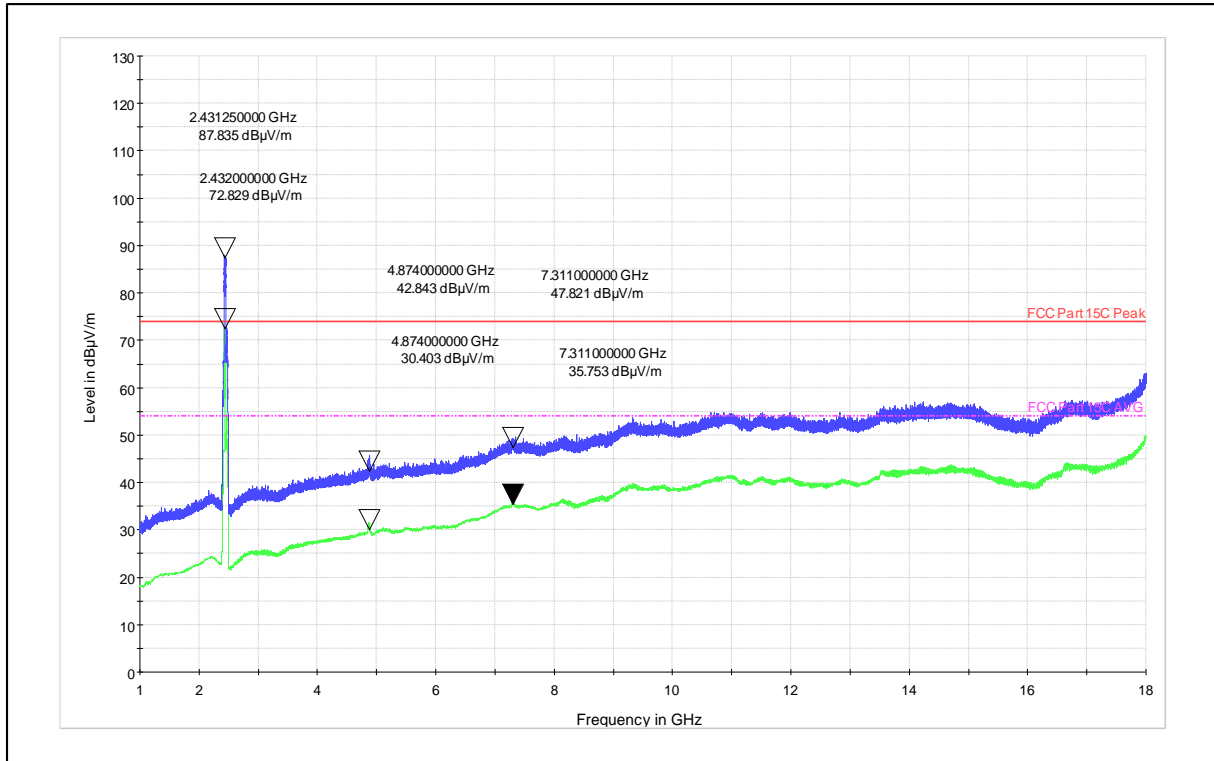

Channel Frequency - 2437MHz


Polarization – Vertical

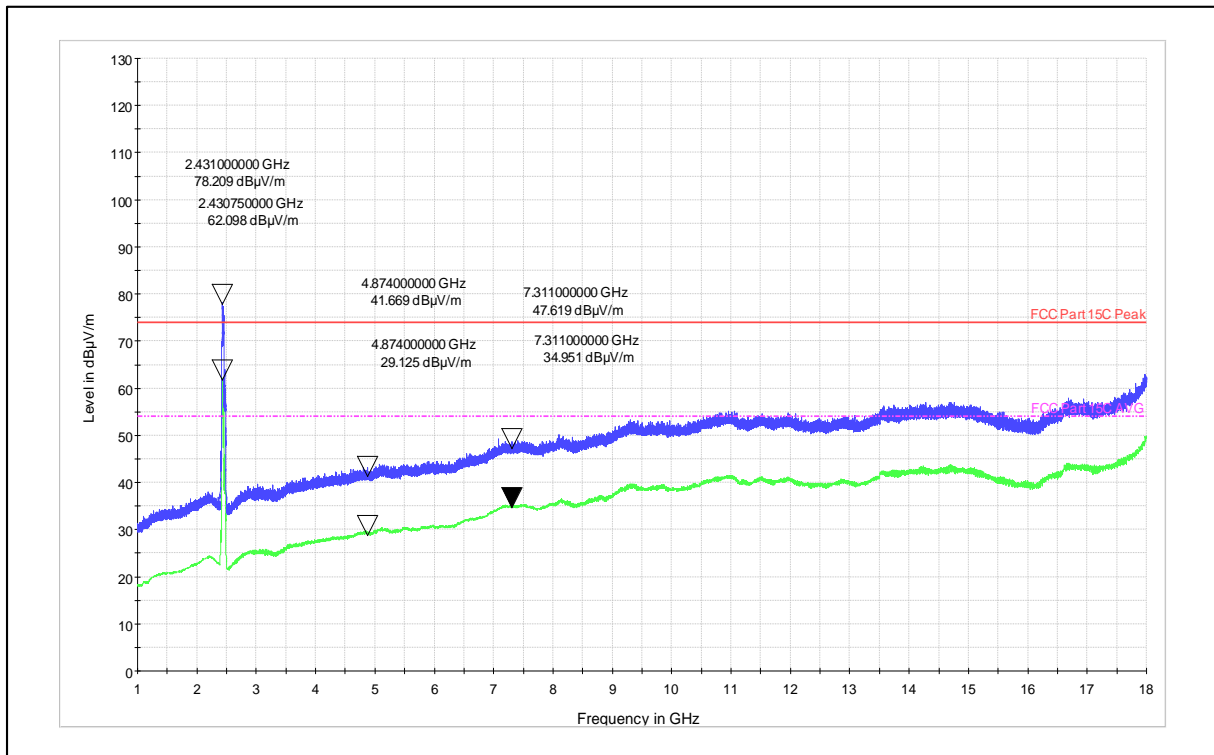

Channel Frequency - 2437MHz


Polarization – Horizontal

Modulation: 802.11ac-VHT_40
Data Rate : MCS 9

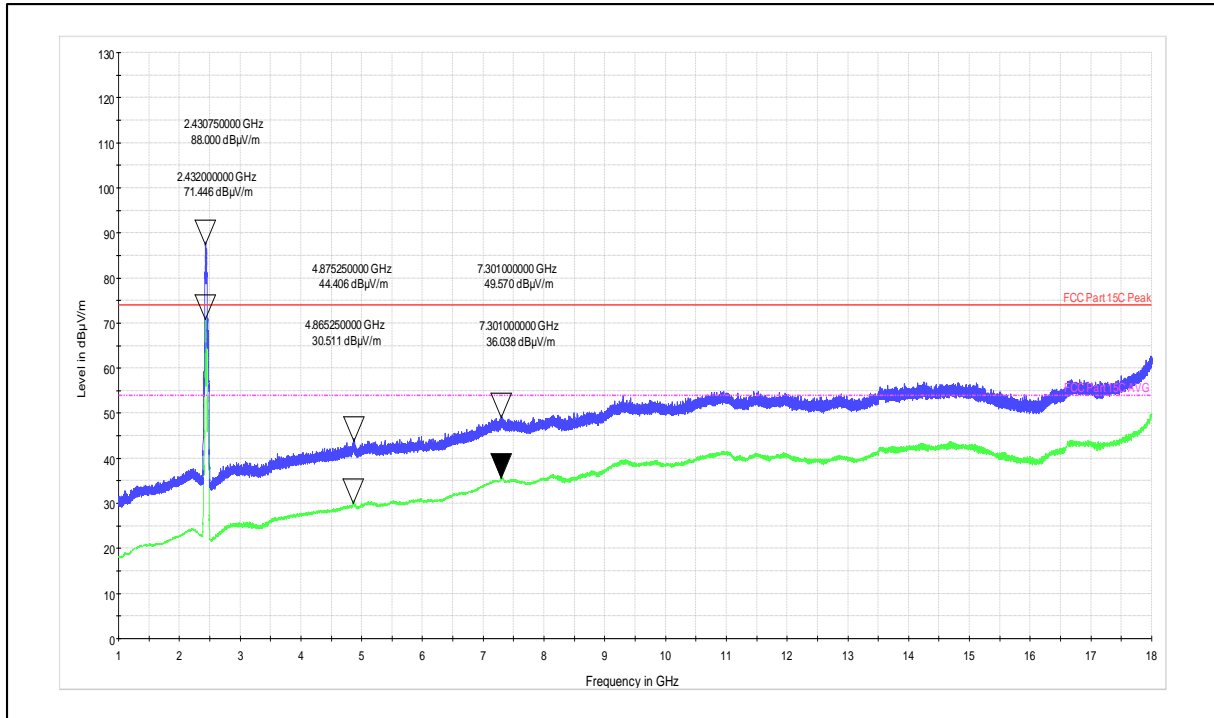

Channel Frequency - 2437MHz


Polarization – Vertical

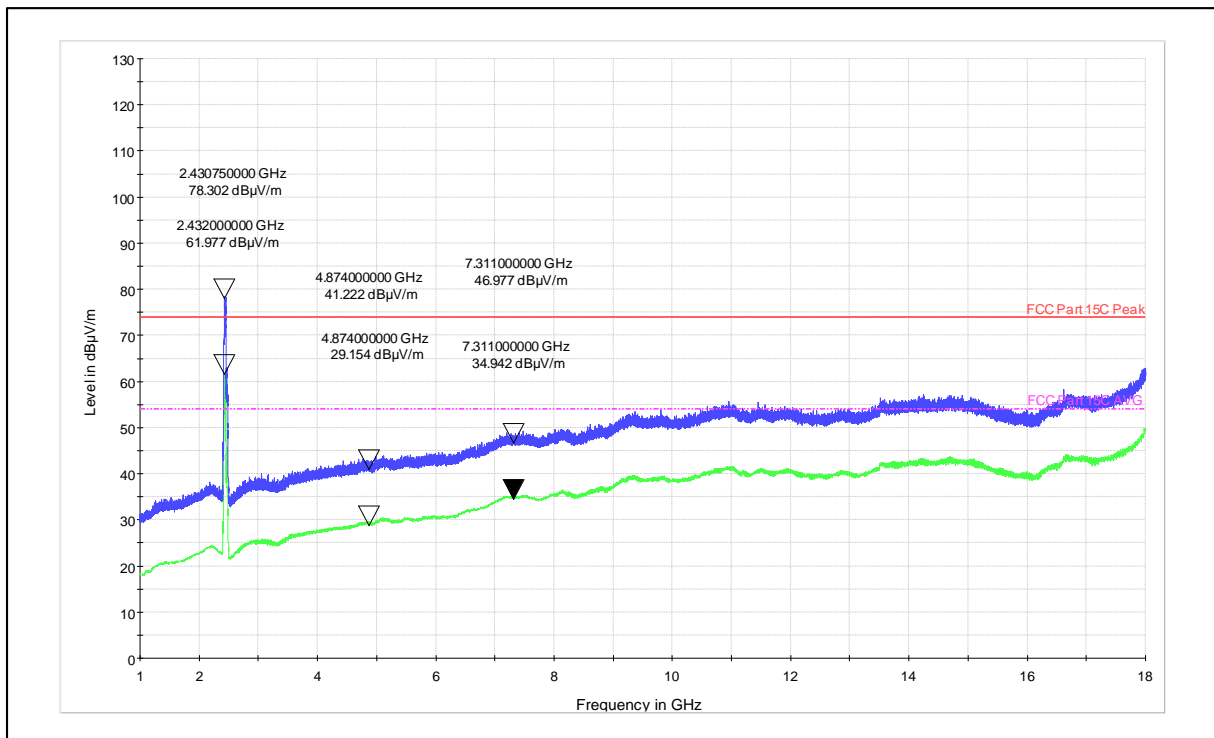

Channel Frequency - 2437MHz


Polarization – Horizontal

Modulation: 802.11ax-HE_40
Data Rate : MCS 0

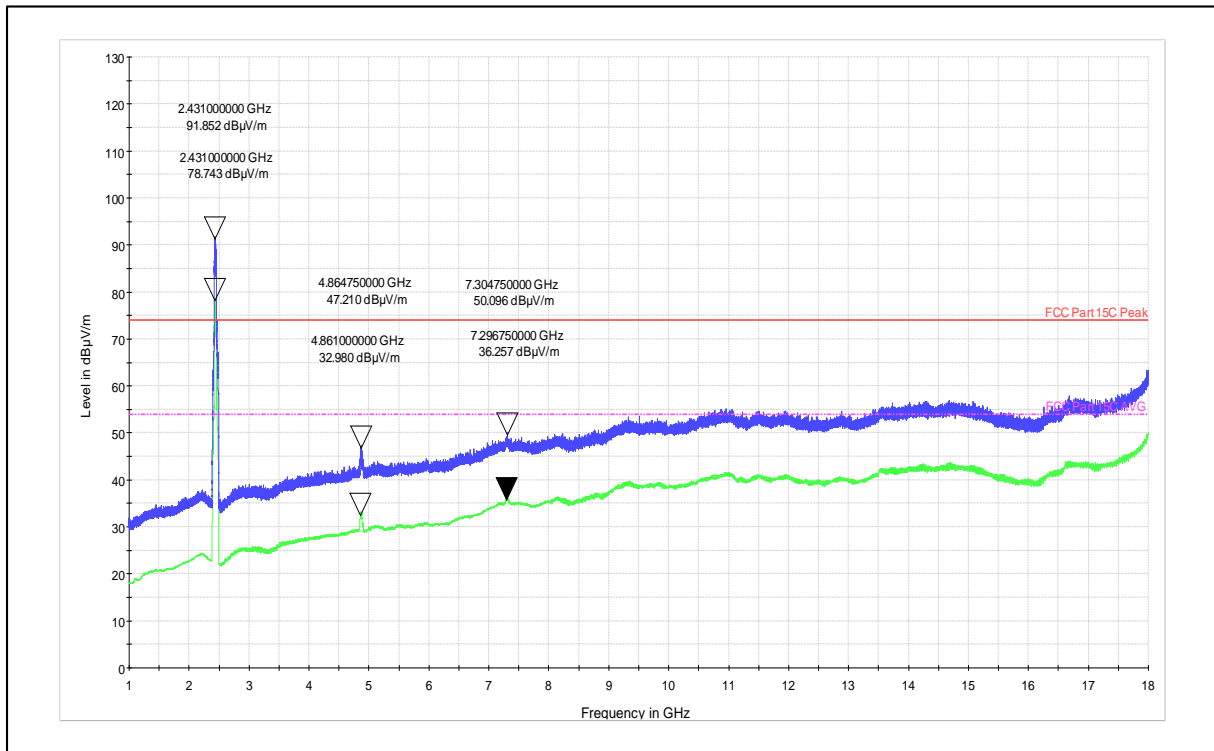

Channel Frequency - 2437MHz

Polarization – Vertical

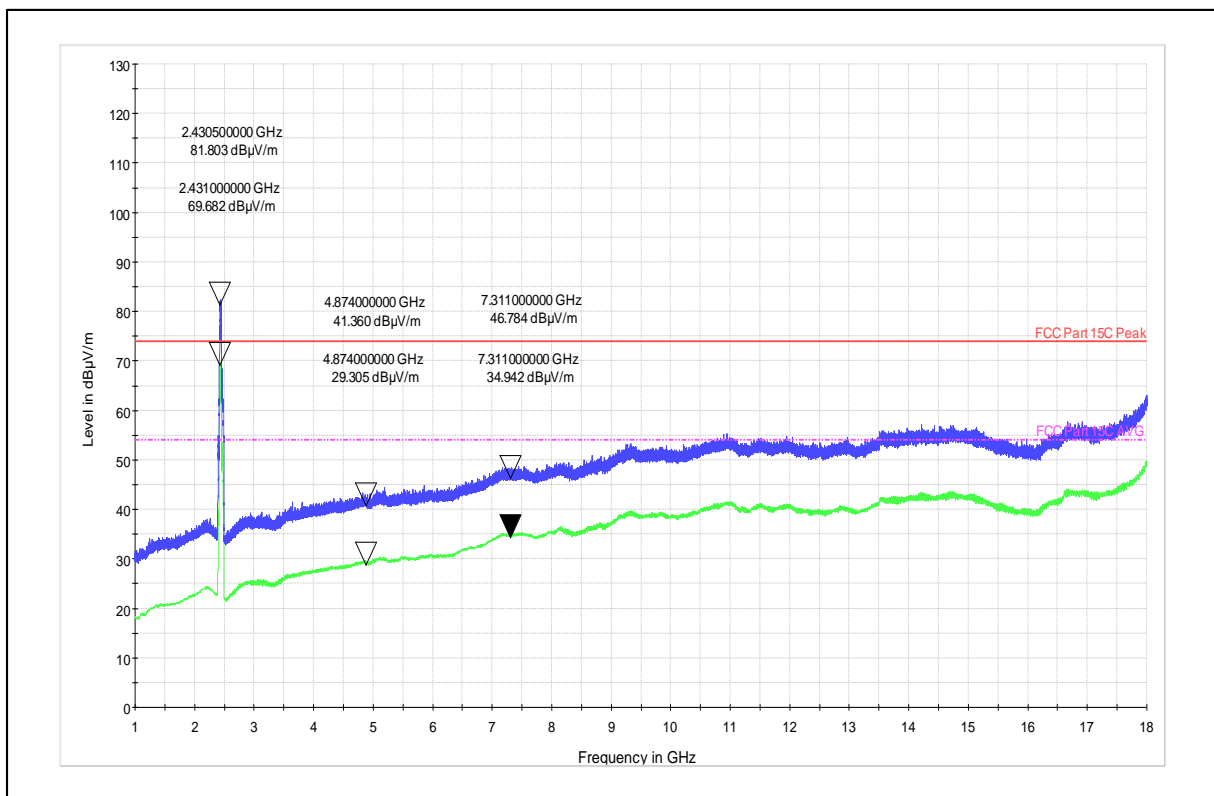


Channel Frequency - 2437MHz


Polarization – Horizontal

Simultaneous Operation:

Combination of Wi-Fi 2.4GHz and Bluetooth 2.4GHz:

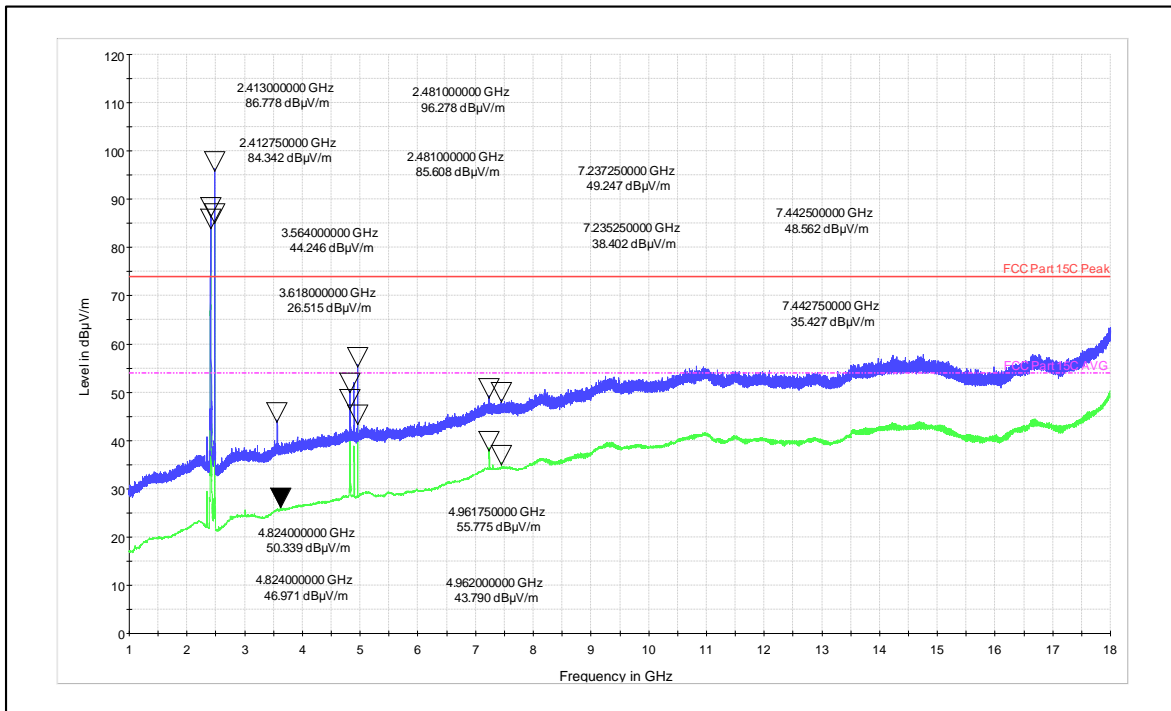


Channel Frequency -2412MHz and Channel Frequency 2480MHz _Vertical Polarization_1-18GHz

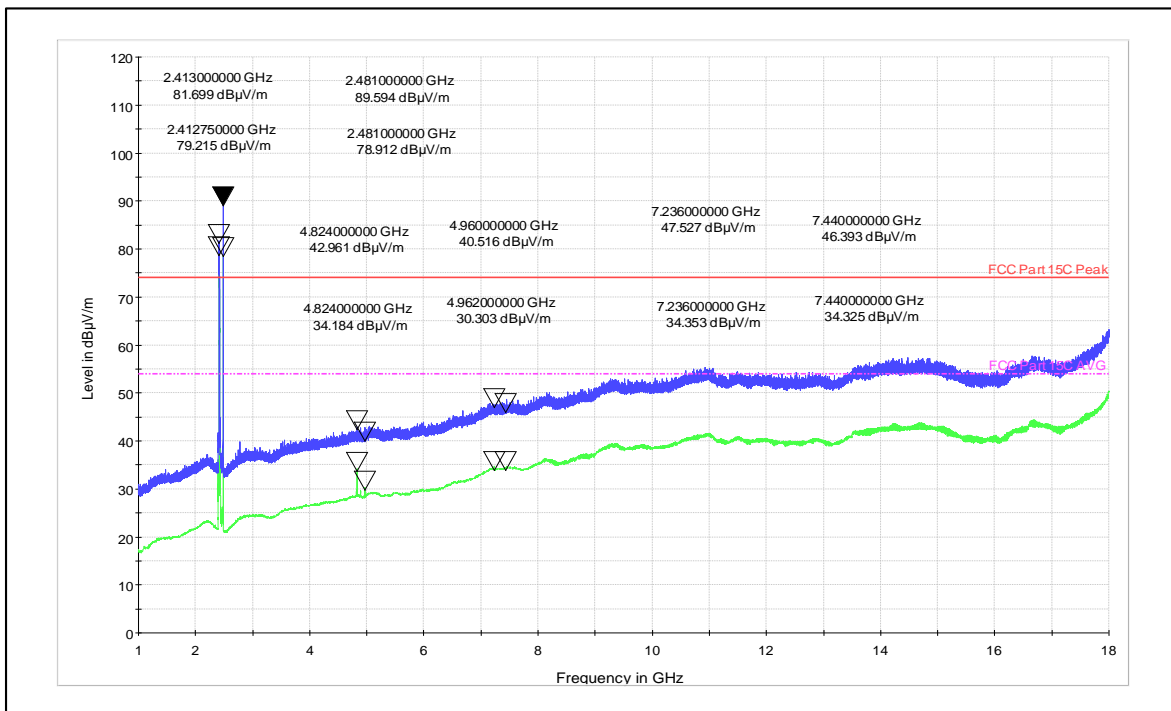


Channel Frequency -2412MHz and Channel Frequency 2480MHz_Horizontal Polarization_1-18GHz

Channel Frequency-Vertical_18GHz - 40GHz

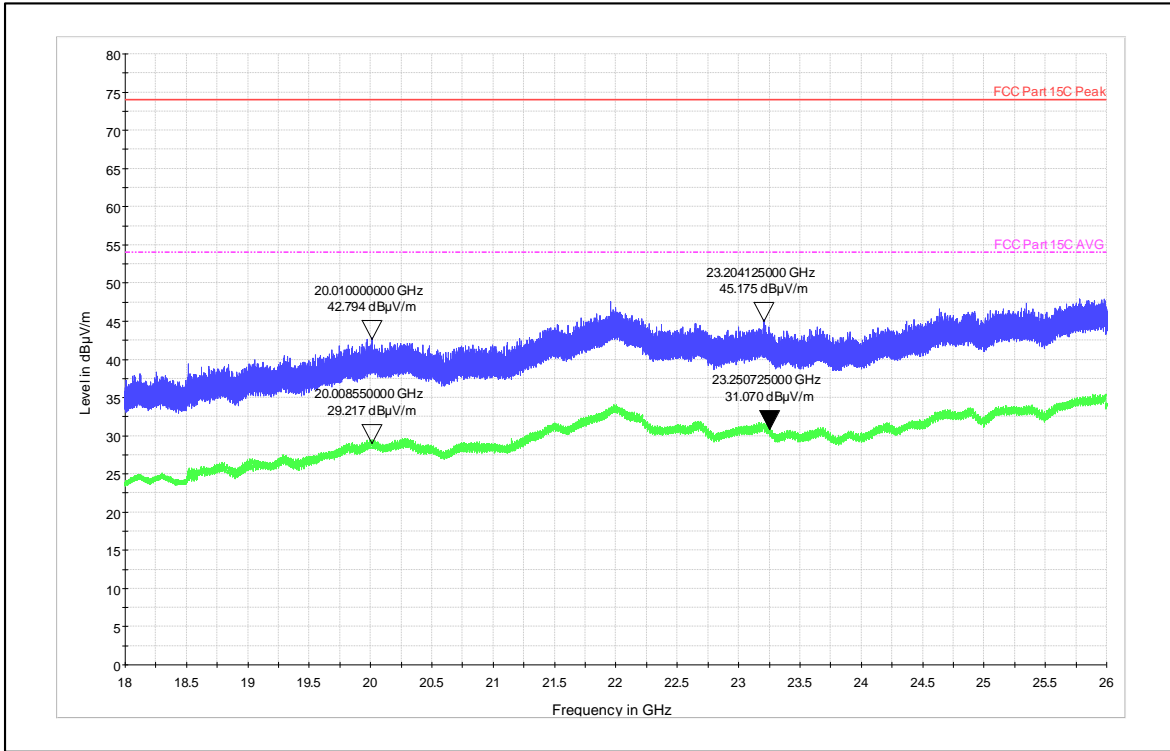

Channel Frequency-Horizontal_18GHz - 40GHz

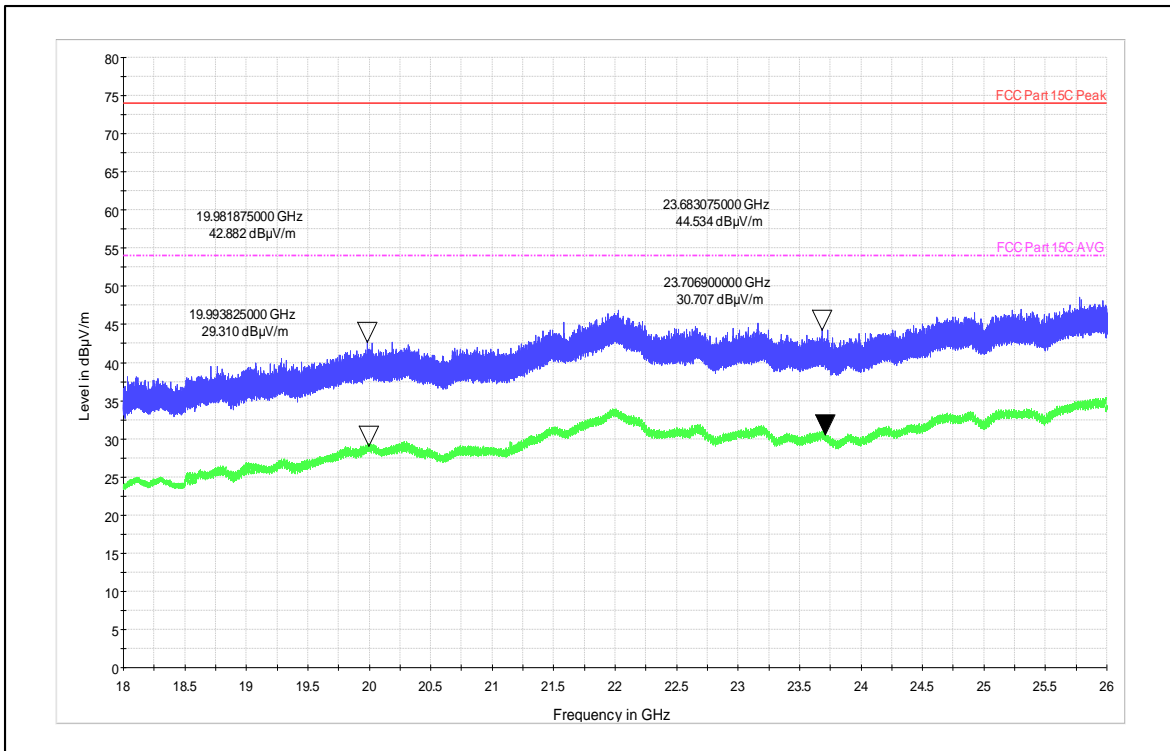

Prüfbericht - Nr.:
Test Report No.:

IN2391GP 001

Seite 198 von 229
Page 198 of 229


8 TEST RESULTS FOR BLUETOOTH LOW ENERGY

8.1 Maximum Peak Conducted Output Power

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (b)(3) / RSS 247 Issue 2, Section 5.4 (d)
Test Method	Subclause 11.9.1.1 of ANSI C63.10
Measurement Bandwidth	1MHz
Detector	Peak
Port of testing	Antenna port
Requirement	Power ≤ 1 W (30 dBm) & e.i.r.p ≤ 4 W (36 dBm)

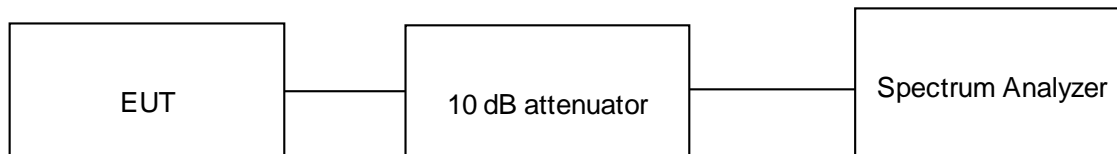

Test Condition

Normal Test Condition:

Temperature (Norm) = + 25 °C Voltage = 3.3 V DC through AC to Dc adaptor Relative humidity: 62%

KDB Guidelines applied:

Measurements were made as per section 8.3.1 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Prüfbericht - Nr.:
Test Report No.:

IN2391GP 001

Seite 199 von 229
Page 199 of 229


Test results:

Note:


1. All the losses are included during measurement and final values are mentioned in the test report.
2. Total Peak Output power (dBm) = Measured Peak power (dBm) + Attenuator factor (10dB) + Cable loss (1.4dB)

Antenna Type	Data Rate (Mbps)	Channel Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)	Maximum (e.i.r.p)	Power Limit (dBm)	Limit (e.i.r.p)
1001932PT MIMO Antenna	1	2402	7.91	10.41	30.00	36
		2440	7.69	10.19	30.00	36
		2480	7.44	9.94	30.00	36
	2	2402	7.66	10.16	30.00	36
		2440	7.76	10.26	30.00	36
		2480	7.65	10.15	30.00	36
FPA3020-10A MIMO Antenna	1	2402	7.91	12.14	30.00	36
		2440	7.69	11.92	30.00	36
		2480	7.44	11.67	30.00	36
	2	2402	7.66	11.89	30.00	36
		2440	7.76	11.99	30.00	36
		2480	7.65	11.88	30.00	36


Data Rate: 1Mbps

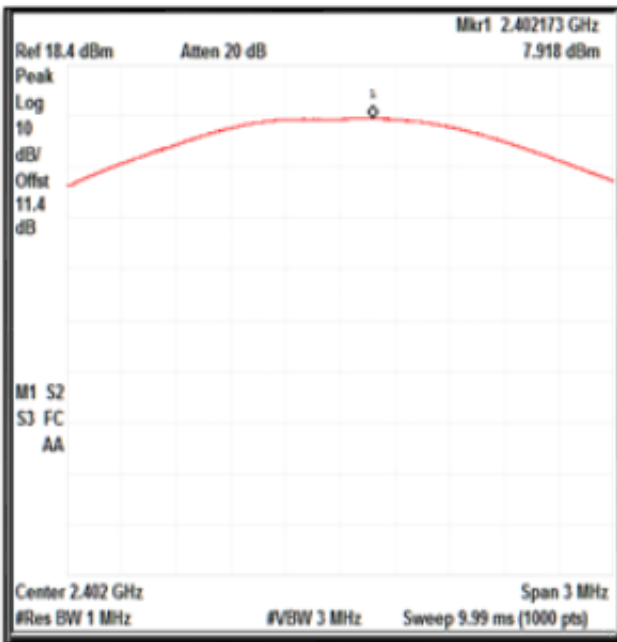

Channel Frequency 2402MHz

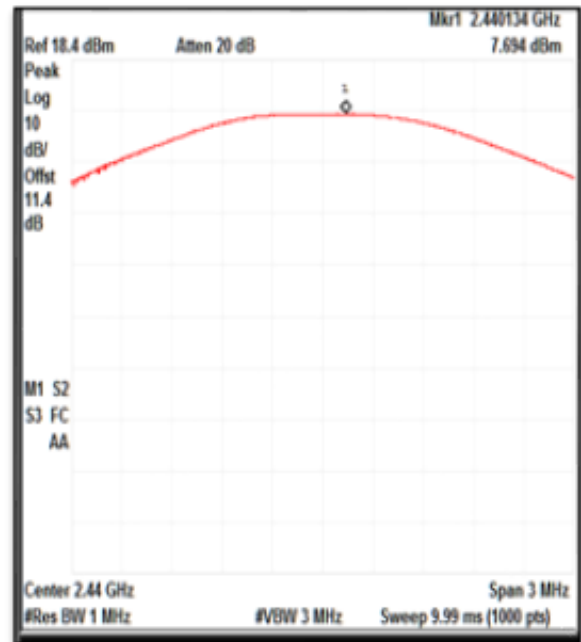

Channel Frequency 2440MHz

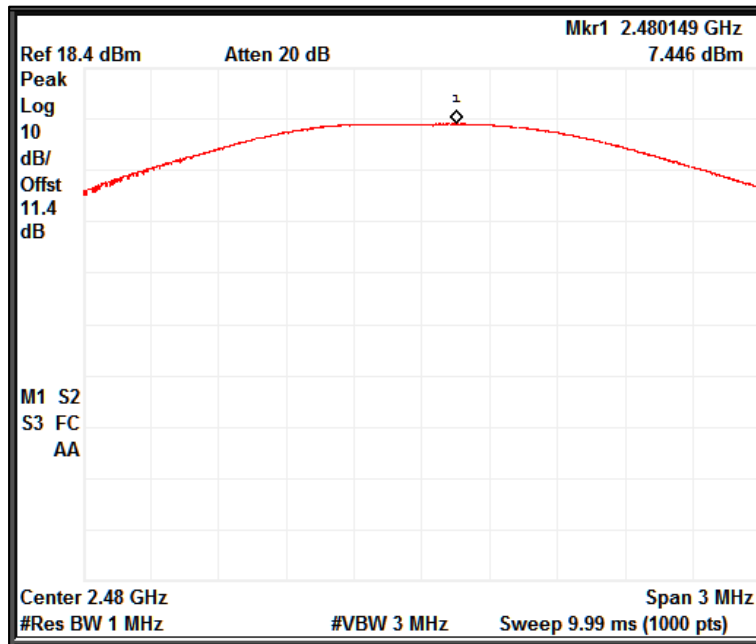

Channel Frequency: 2480MHz

Prüfbericht - Nr.:
Test Report No.:

IN2391GP 001

Seite 201 von 229
Page 201 of 229


8.2 Maximum Power Spectral Density

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (e) / RSS 247 Issue 2, Section 5.2 (b)
Test Method	Subclause 11.10.2 of ANSI C63.10
Measurement Bandwidth	100 kHz
Detector	Peak detector
Port of testing	Antenna port
Requirement	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm

Test Method:

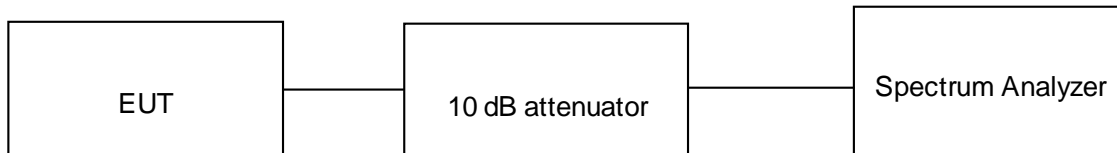

Test Condition

Normal Test Condition:

Temperature (Norm) = + 25°C Voltage = 3.3 V DC through AC to Dc adaptor Relative humidity: 62 %

KDB Guidelines applied:

Measurements were made as per section 8.4 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Prüfbericht - Nr.:
Test Report No.:

IN2391GP 001


Seite 202 von 229
Page 202 of 229

Test results:


Note:

1. All the losses are included during measurement and final values are mentioned in the test report.
2. Total Peak PSD (dBm) = Measured Peak PSD (dBm) + Attenuator factor (10dB) + Cable loss (1.4dB)


Antenna Type	Data Rate (Mbps)	Channel Frequency (MHz)	Measured PSD (dBm/kHz)	PSD Limit (dBm/kHz)
1001932PT MIMO Antenna	1	2402	6.88	8.00
		2440	6.92	8.00
		2480	6.66	8.00
	2	2402	5.98	8.00
		2440	6.11	8.00
		2480	5.93	8.00
FPA3020-10A MIMO Antenna	1	2402	6.88	8.00
		2440	6.92	8.00
		2480	6.66	8.00
	2	2402	5.98	8.00
		2440	6.11	8.00
		2480	5.93	8.00

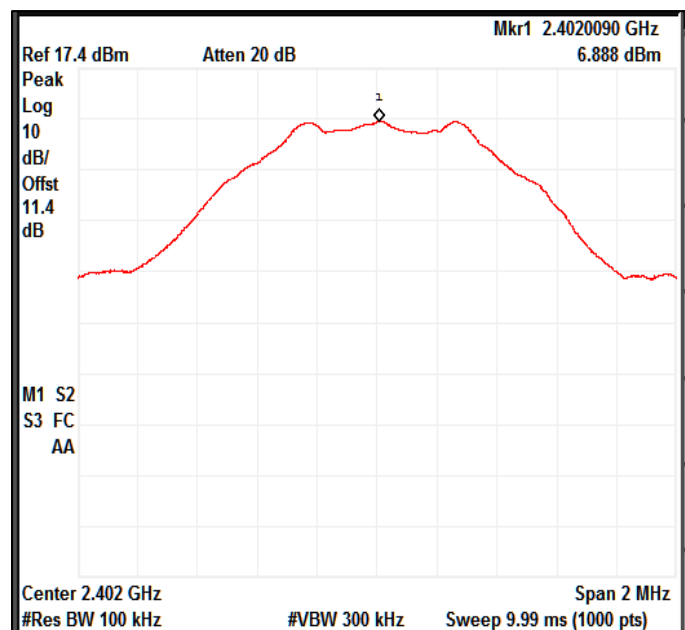

Channel Frequency 2402MHz

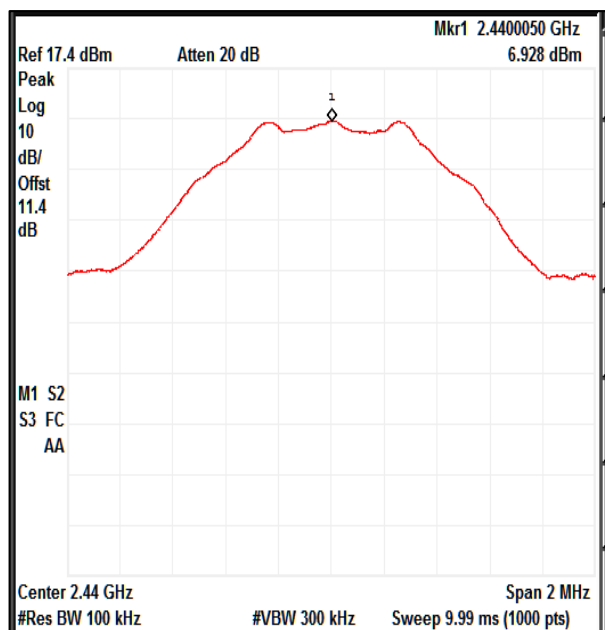

Channel Frequency 2440MHz

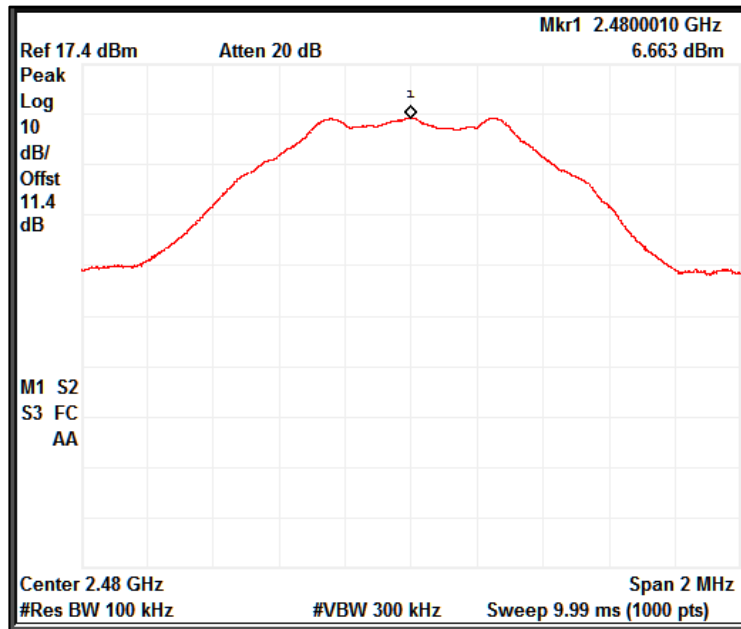

Channel Frequency: 2480MHz

Prüfbericht - Nr.:
Test Report No.:

IN2391GP 001

Seite 204 von 229
Page 204 of 229


8.3 DTS Bandwidth & 99% Bandwidth

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (a) (2) / RSS 247 Issue 2, Section 5.2 (a)
Test Method	Subclause 11.8.1 of ANSI C63.10
Measurement Bandwidth	100 kHz for x dB bandwidth 1 to 5% of OCB for 99% bandwidth
Detector	Peak
Port of testing	Antenna port
Requirement	The minimum 6 dB bandwidth shall be at least 500 kHz

Test Method:

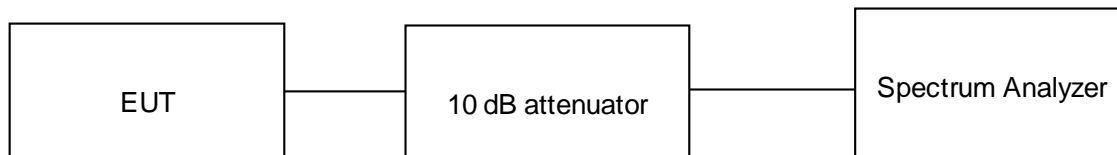

Test Condition

Normal Test Condition:

Temperature (Norm) = + 25 °C Voltage = 3.3 V DC through AC to Dc adaptor Relative humidity: 62 %

KDB Guidelines applied:

Measurements were made as per section 8.2 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Prüfbericht - Nr.:

IN2391GP 001


Test Report No.:

Test results:


Note:

- All the losses are included during measurement and final values are mentioned in the test report.


Data Rate (Mbps)	Channel Frequency (MHz)	Measured 99%Bandwidth (MHz)	Measured 6dB Bandwidth (MHz)	Limit (MHz)
1	2402	1.098	0.73	0.5
	2440	1.092	0.73	0.5
	2480	1.093	0.73	0.5
2	2402	2.049	1.24	0.5
	2440	2.047	1.24	0.5
	2480	2.048	1.24	0.5

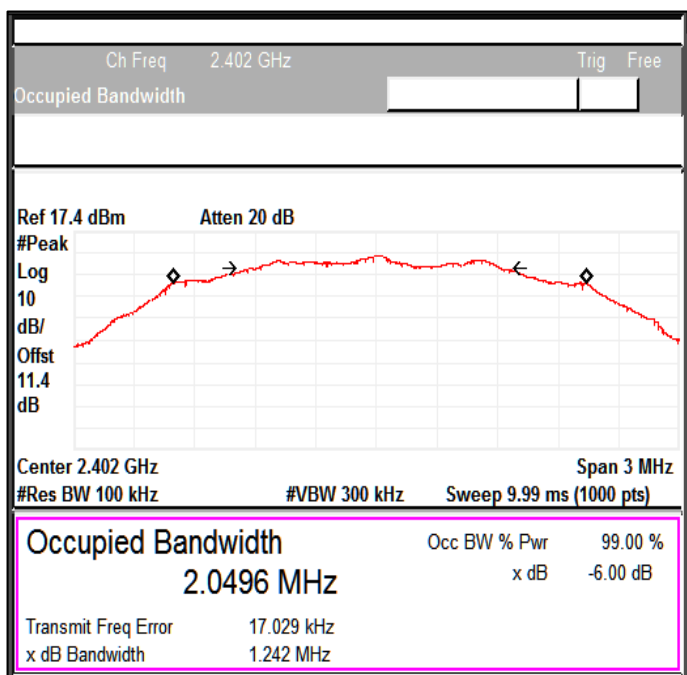

Channel Frequency 2402MHz

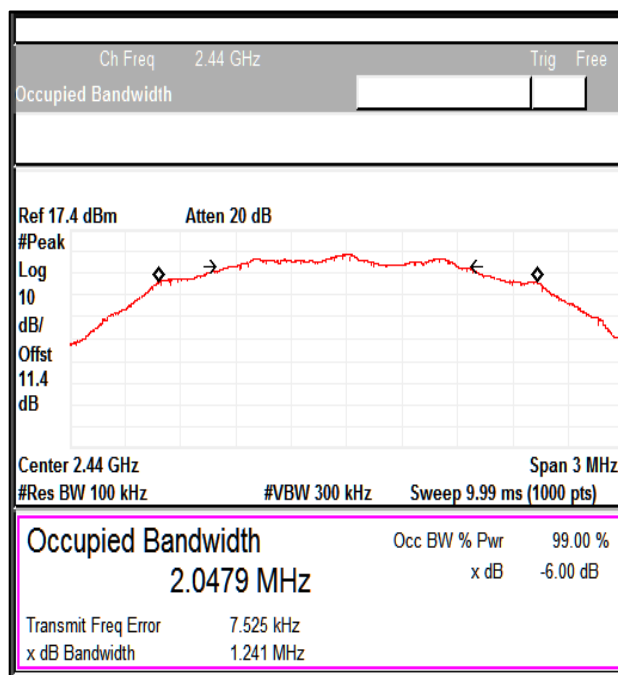

Channel Frequency 2440MHz

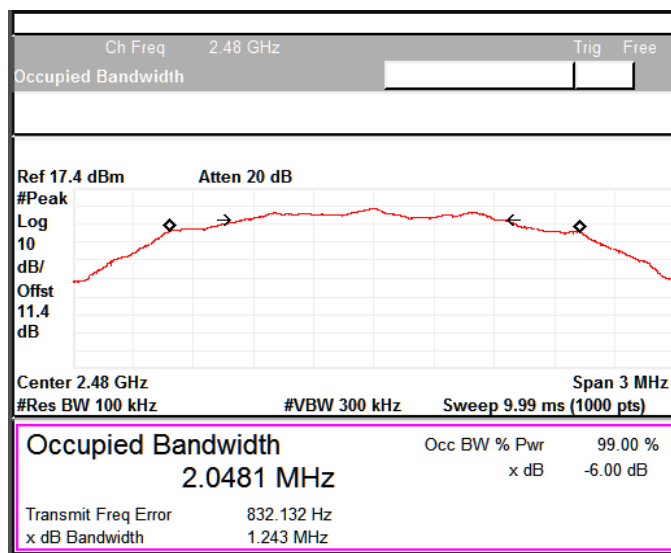

Channel Frequency 2480MHz


8.4 Emissions in non-restricted frequency bands and Conducted Spurious Emission

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (d) / RSS 247 Issue 2, Section 5.5
Test Method	Subclause 11.11 of ANSI C63.10
Measurement Bandwidth	100 kHz
Detector	Peak
Port of testing	Antenna port
Requirement	<p>In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits</p> <p>If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB</p>

Test Method:

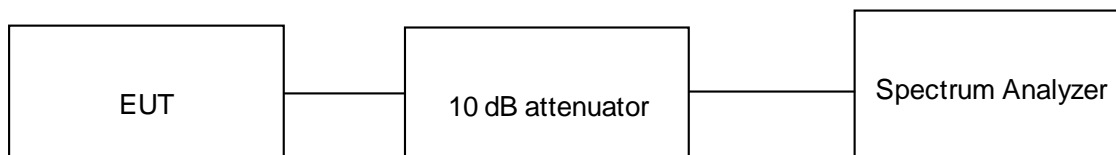

Test Condition

Normal Test Condition:

Temperature (Norm) = +25 °C Voltage = 3.3 V DC through AC to Dc adaptor Relative humidity: 62 %

KDB Guidelines applied:

Measurements were made as per section 8.5 in KDB 558074 D01 15.247 Measurement Guidance v05r02.


Test results:Note:

1. All the losses are included during measurement and final values are mentioned in the test report.
2. Final Value (dBm) = Measured Value (dBm) + Attenuator factor (10dB) + Cable loss (0.5dB)
3. This product do not support additional beamforming gain / directional gain, it uses signal antenna and hence directional gain of the single antenna is 4.23 dBi


8.4.1 Out-Of-Band Emissions

Reference Plots for Conducted Spurious Emission


Data Rate 1Mbps

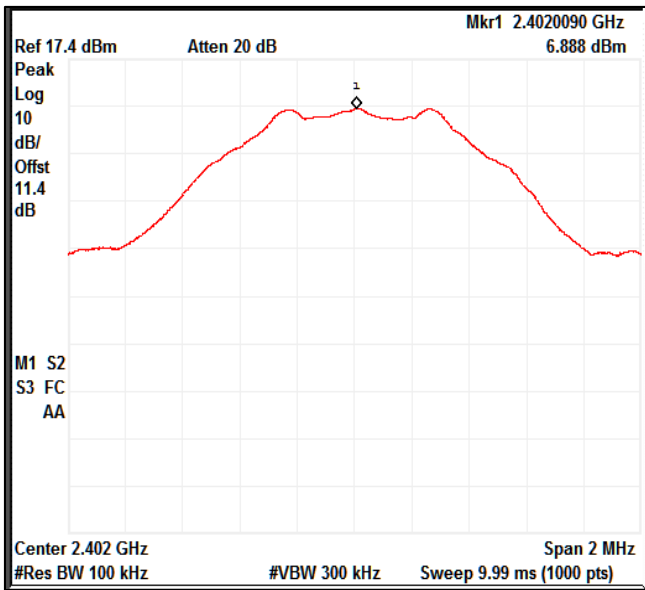

Reference Plot Channel Frequency 2402MHz

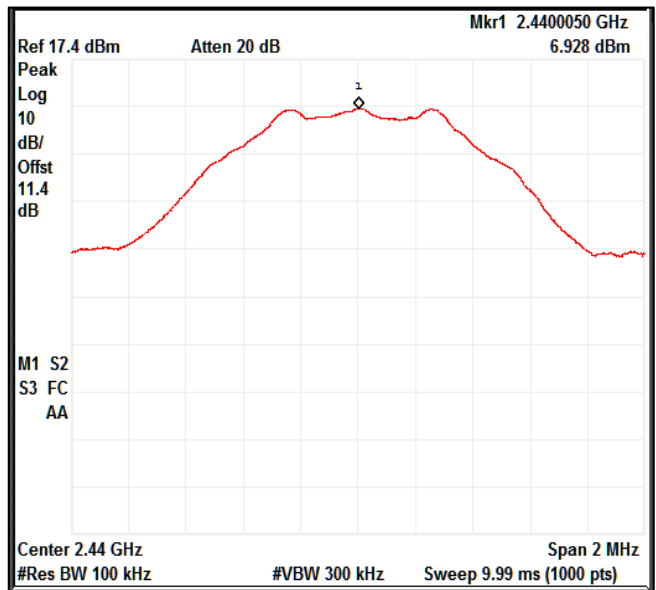


Reference Plot Channel Frequency 2440MHz

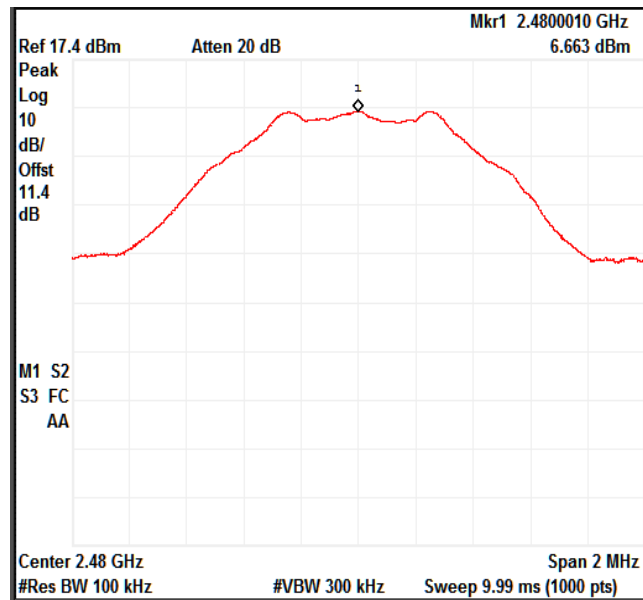


Reference Plot Channel Frequency 2480MHz


Data Rate 2Mbps

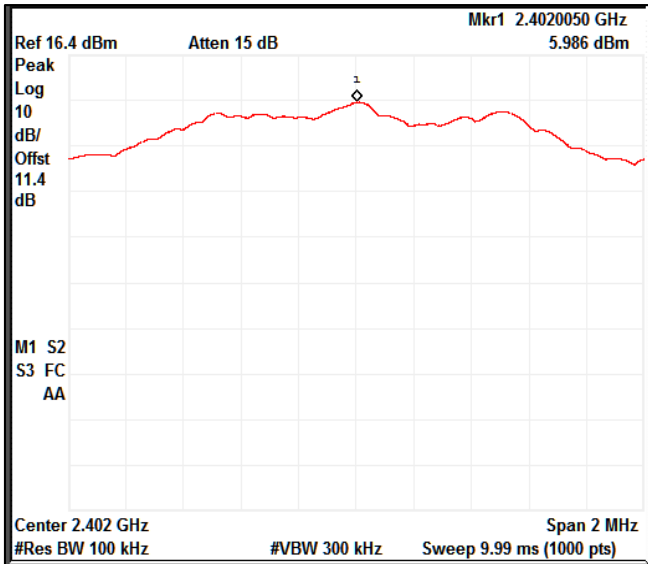





Reference Plot Channel Frequency 2402MHz

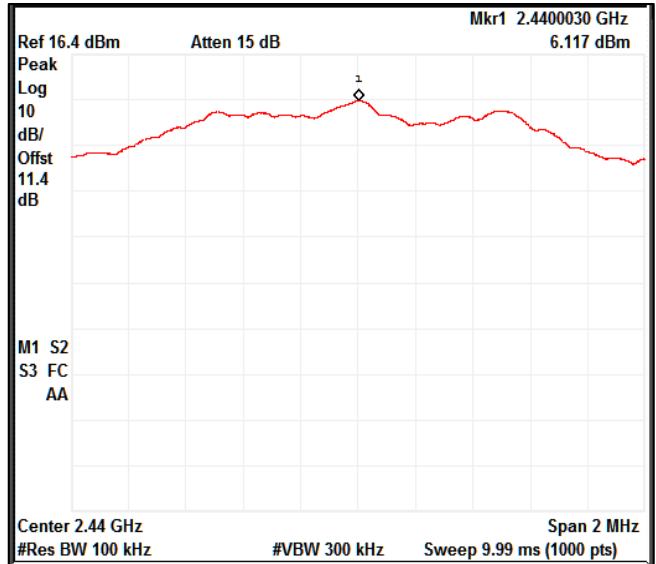

Reference Plot Channel Frequency 2440MHz

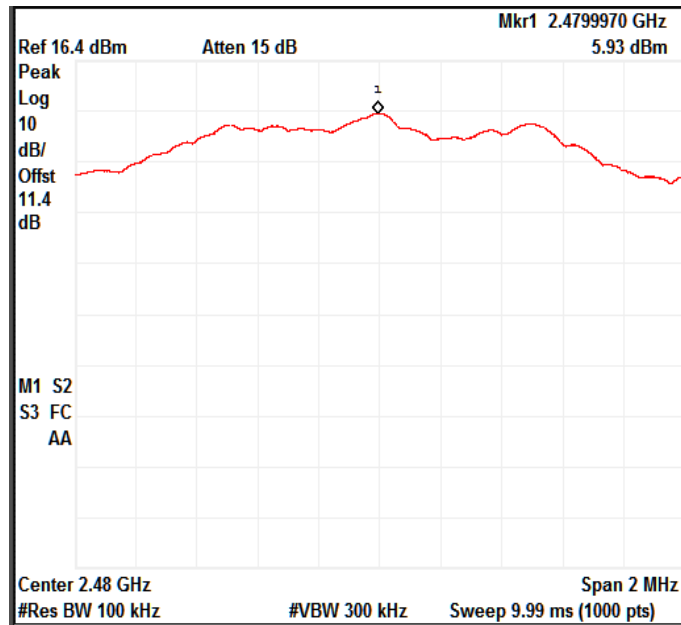


Reference Plot Channel Frequency 2480MHz

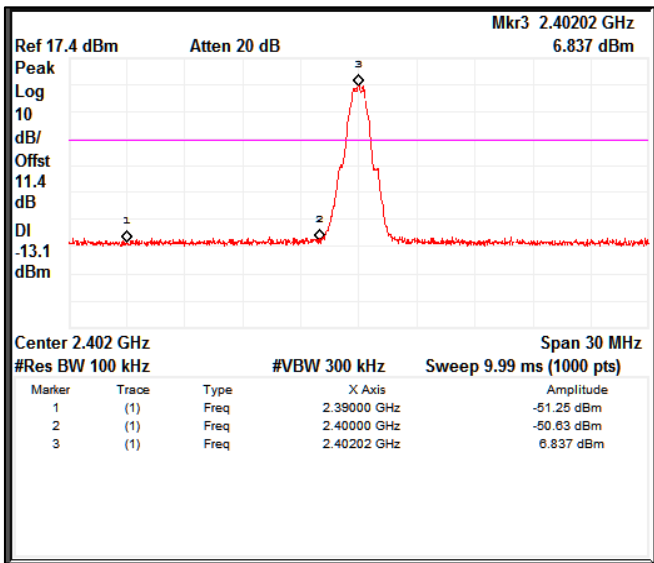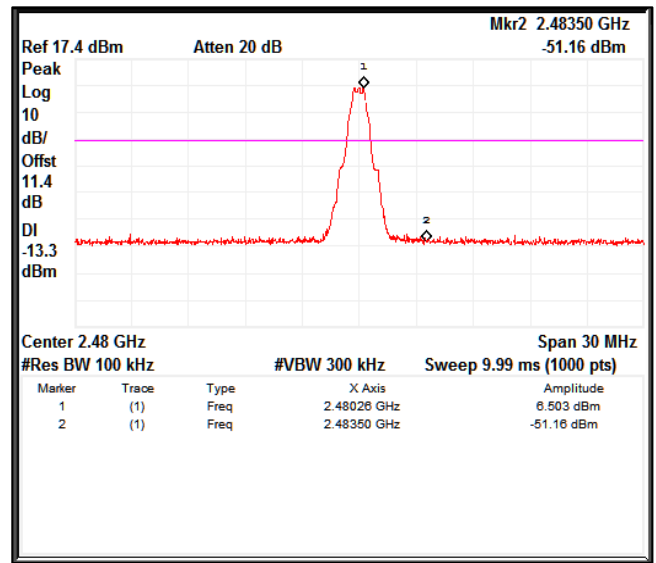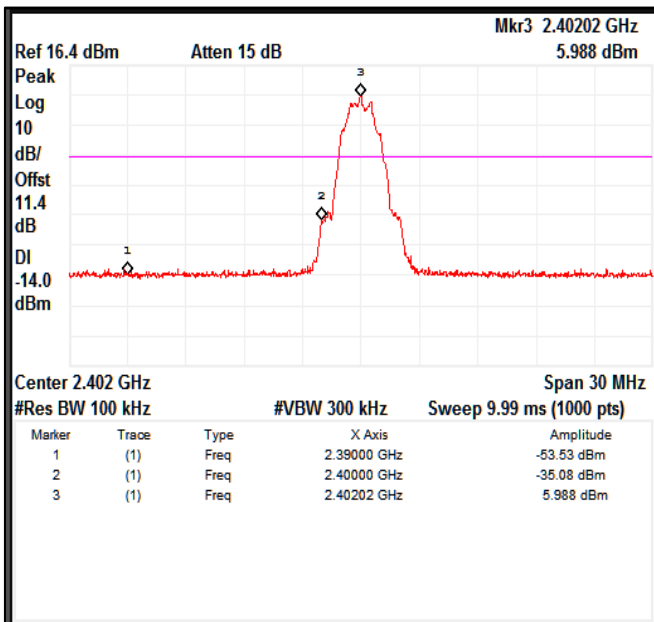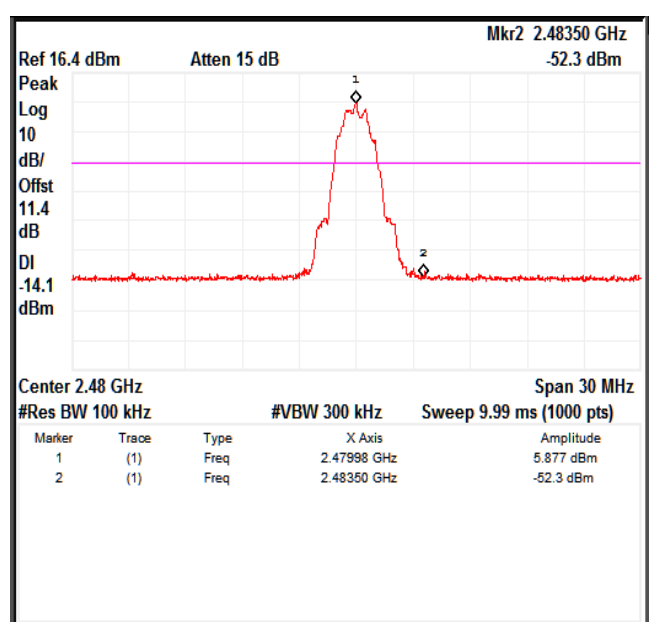
8.4.2 Band edge and reference plots
Data Rate: 1Mbps

Channel Frequency 2402MHz

Channel Frequency 2480MHz
Data Rate: 2Mbps

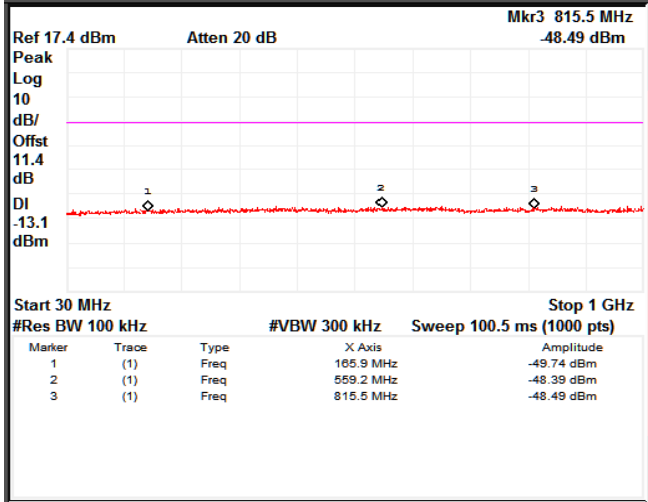Channel Frequency 2402MHz

Channel Frequency 2480MHz

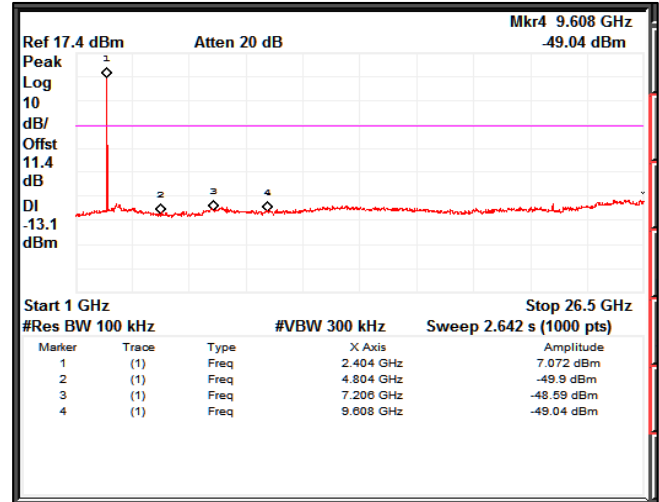8.4.3 Out-Of-Band Emissions


Data Rate: 1Mbps




Channel Frequency 2402MHz Frequency Range 30 MHz – 1GHz




Channel Frequency 2402MHz Frequency Range 1 GHz – 26.5GHz

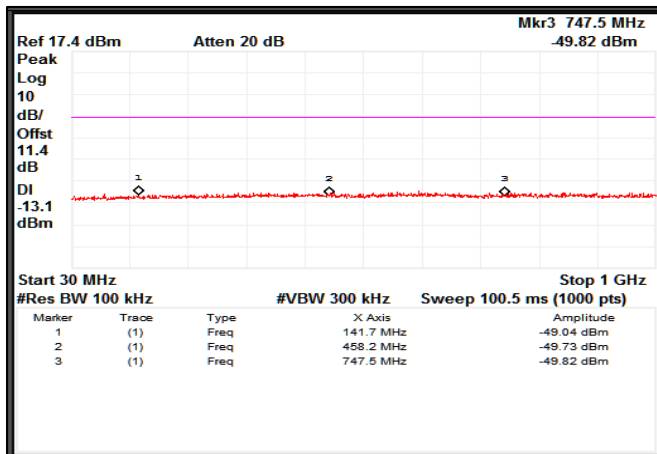


Channel Frequency 2440MHz Frequency Range 30 MHz – 1GHz

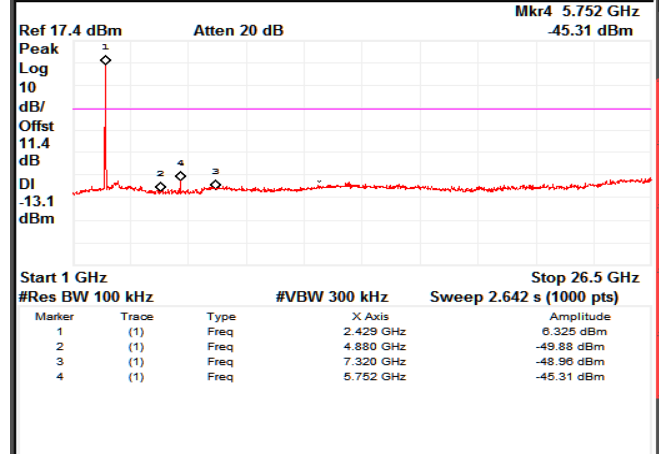

Channel Frequency 2440MHz Frequency Range 1 GHz – 26.5GHz

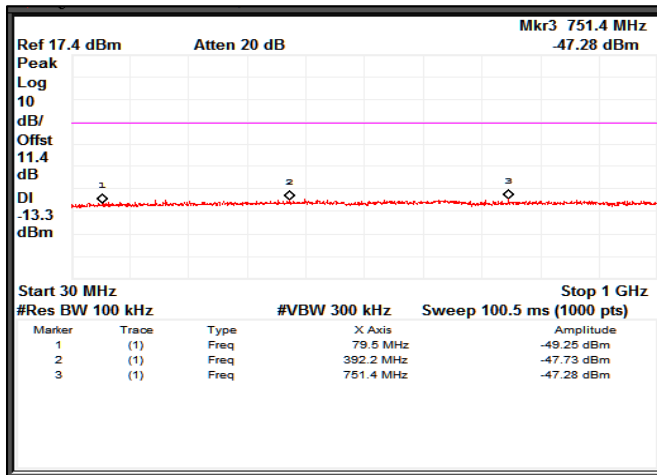


Channel Frequency 2480MHz Frequency Range 30 MHz – 1GHz

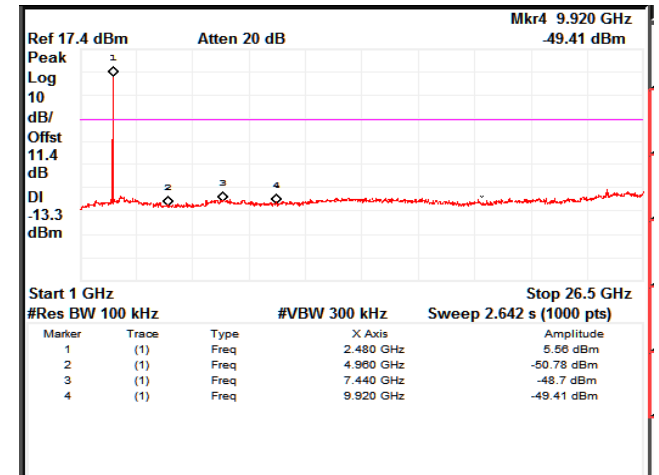


Channel Frequency 2480MHz Frequency Range 1 GHz – 26.5GHz


Data Rate: 2Mbps

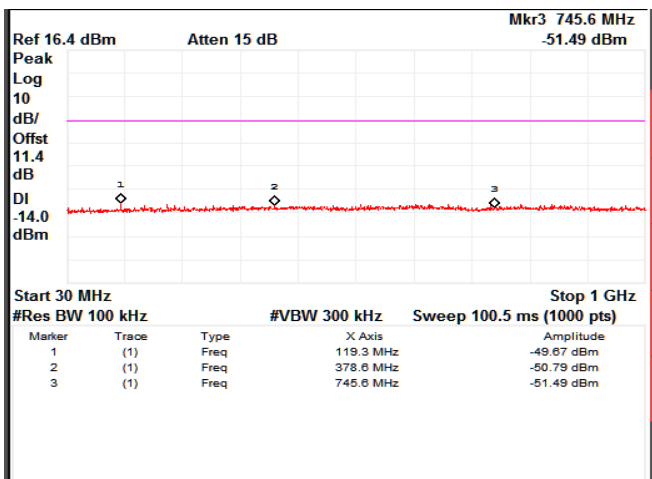


Channel Frequency 2402MHz Frequency Range 30 MHz – 1GHz

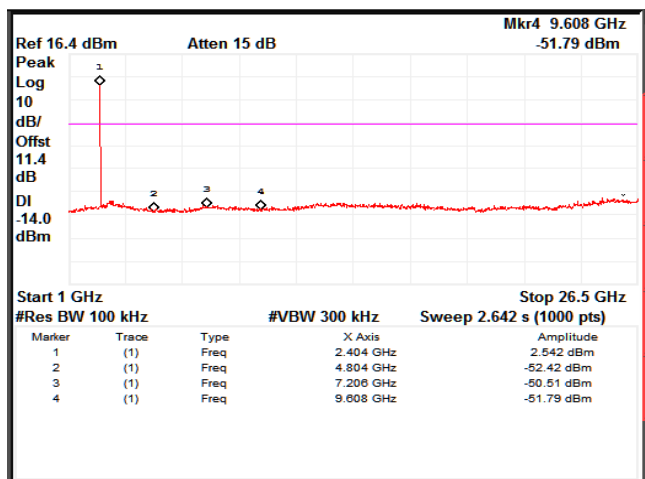


Channel Frequency 2402MHz Frequency Range 1 GHz – 26.5GHz

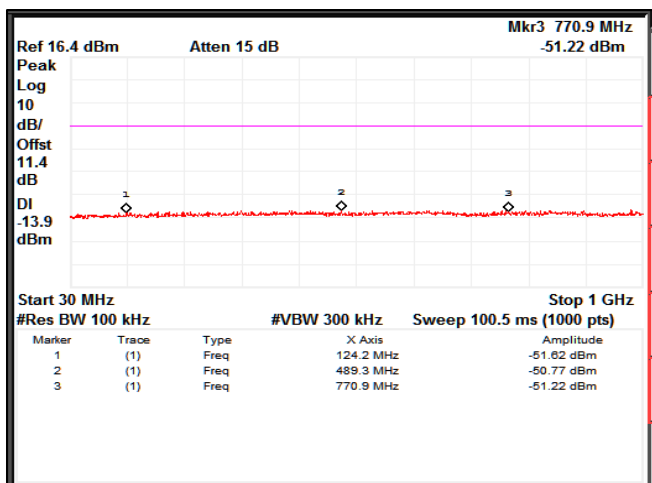


Channel Frequency 2440MHz Frequency Range 30 MHz – 1GHz

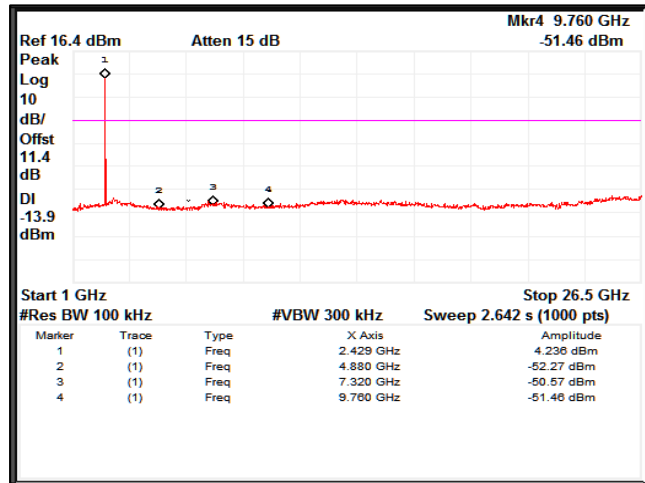

Channel Frequency 2440MHz Frequency Range 1 GHz – 26.5GHz

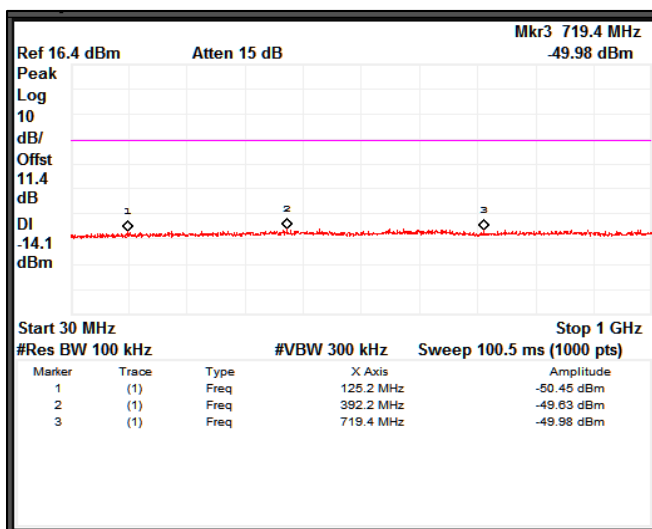

Channel Frequency 2480MHz Frequency Range 30 MHz – 1GHz

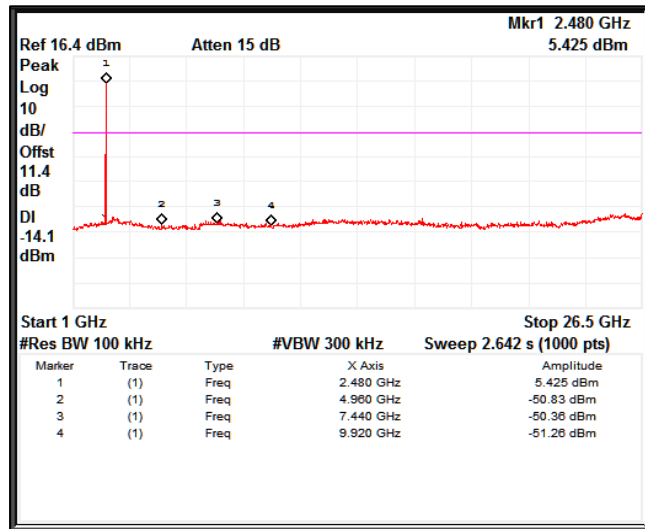

Channel Frequency 2480MHz Frequency Range 1 GHz – 26.5GHz

8.5 Spurious Radiated Emissions & Restricted Bands of Operation

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (d) / (15.209 & 15.205) / IC RSS-GEN, Section 8.9 and 8.10
Test Method	ANSI C63.10
Measurement Location	Semi Anechoic Chamber 30MHz - 1 GHz Fully Anechoic Chamber 1 GHz - 40GHz
Measurement Bandwidth	100 kHz for frequency range < 1GHz 1 MHz for Frequency range >1GHz
Detector	Refer remarks below
Measuring Distance	3 m
Requirement	As per the limits mentioned in the below table
Test setup	Refer TEST METHODOLOGY

Table 8: Transmitter limits for Radiated emission

Frequency (MHz)	Field strength (µV/m)	Field strength (dBµV/m)	Distance of Measurement (m)
0.009 – 0.490	2400/F(kHz)	48.50 – 13.80	300*
0.490 – 1.705	24000/F(kHz)	33.80 – 23.00	30*
1.705 -30	30	29.54	30*
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Remark: * The limit shows in the table above of frequency range 0.009 – 0.490, 0.490 – 1.705 MHz and 1.705-30MHz is at 300 meter, 30 meter and 30 meter range respectively, which corresponds to 128.51 – 93.80, 73.80 – 62.96 and 69.54 dBµV/m at 3m range by extrapolation calculation and the measurement of loop antenna.

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.

Test Conditions:

Temperature (Norm) = + 25 °C Voltage = 3.3 V DC through AC to Dc adaptor Relative humidity = 62 %

Test results:


Note: All the losses are included during measurement and final values are mentioned in the test report. Refer TEST METHODOLOGY for more details

Test results for frequency range 9kHz – 30MHz

No emissions found in frequency range 9 kHz to 30 MHz, and measured levels are below 20dB from the limit line, hence not reported


Test results for frequency range 30MHz – 1GHz

Antenna Polarization	Measured Frequency (MHz)	Measured Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
Vertical	39.54	29.10	40.00	-10.90
	52.68	26.00	40.00	-14.00
	132.00	25.60	43.50	-17.90
	162.00	27.90	43.50	-15.60
	238.64	9.99	46.00	-36.01
	395.99	12.90	46.00	-33.10
	653.45	14.90	46.00	-31.10
Horizontal	39.63	16.20	40.00	-23.80
	57.06	16.60	43.50	-26.90
	127.95	27.00	43.50	-16.50
	157.98	33.93	43.50	-9.57
	263.99	3.93	46.00	-42.07
	395.99	18.70	46.00	-27.30
	659.84	14.20	46.00	-31.80

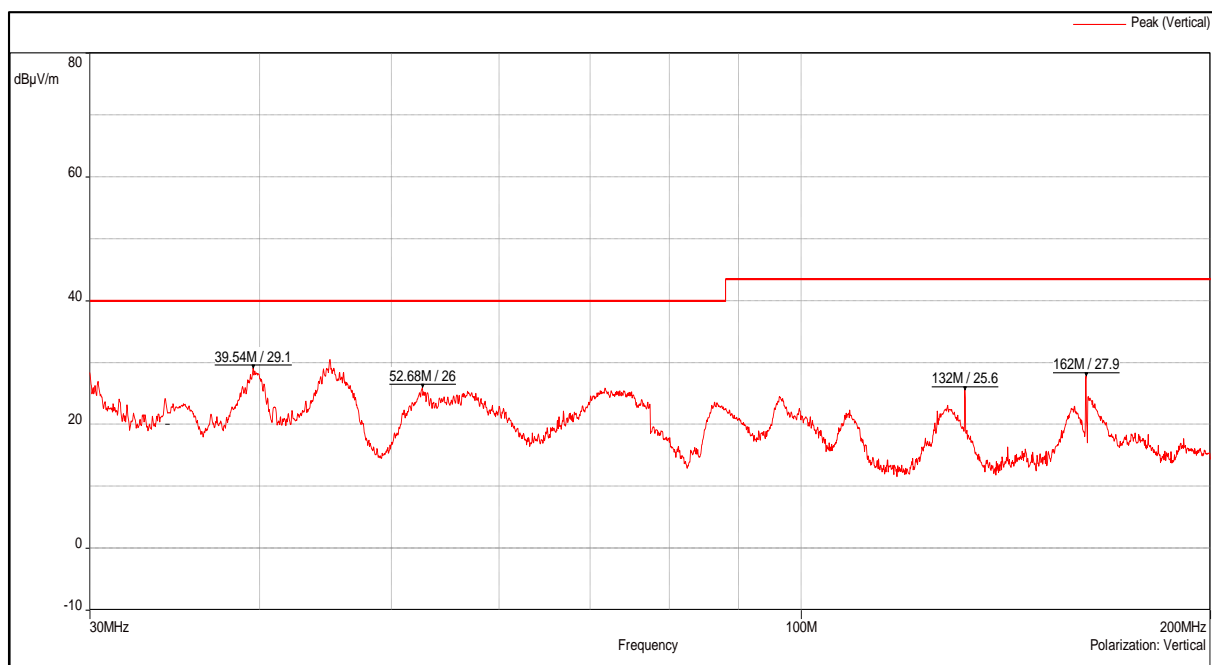


Channel Frequency 30MHz – 200MHz

Polarization Vertical

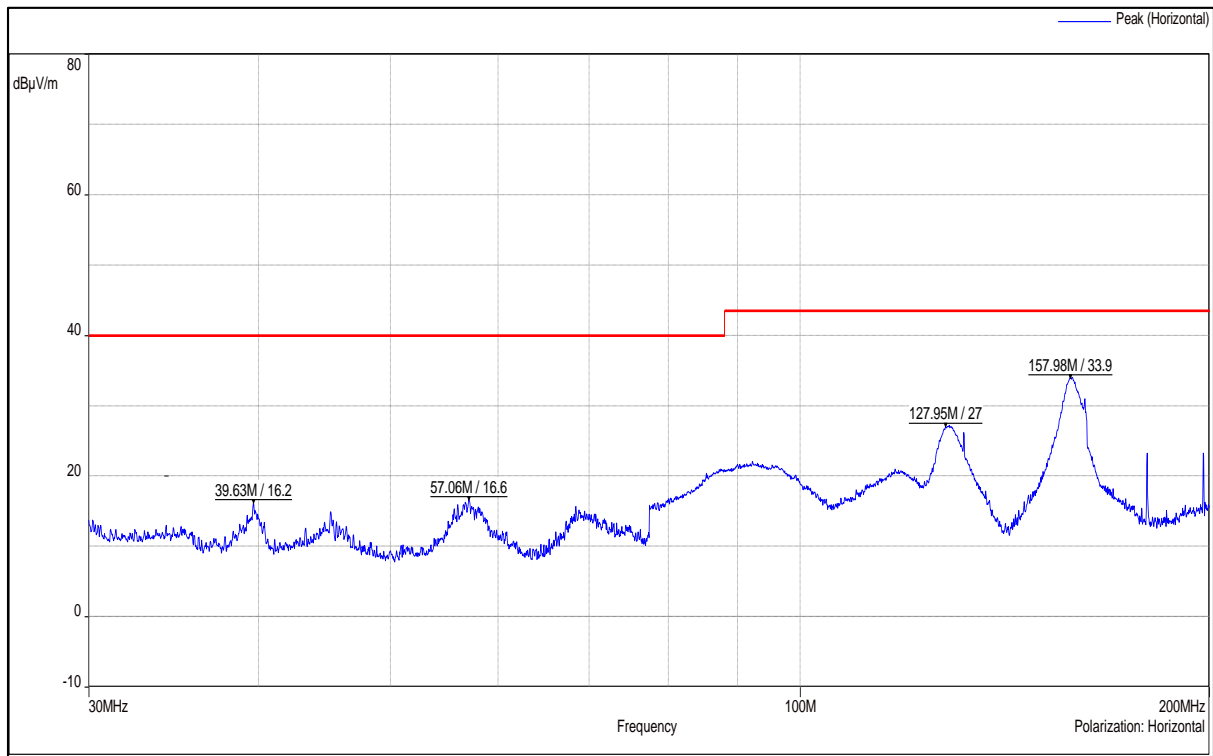

Channel Frequency 30MHz – 200MHz

Polarization Horizontal

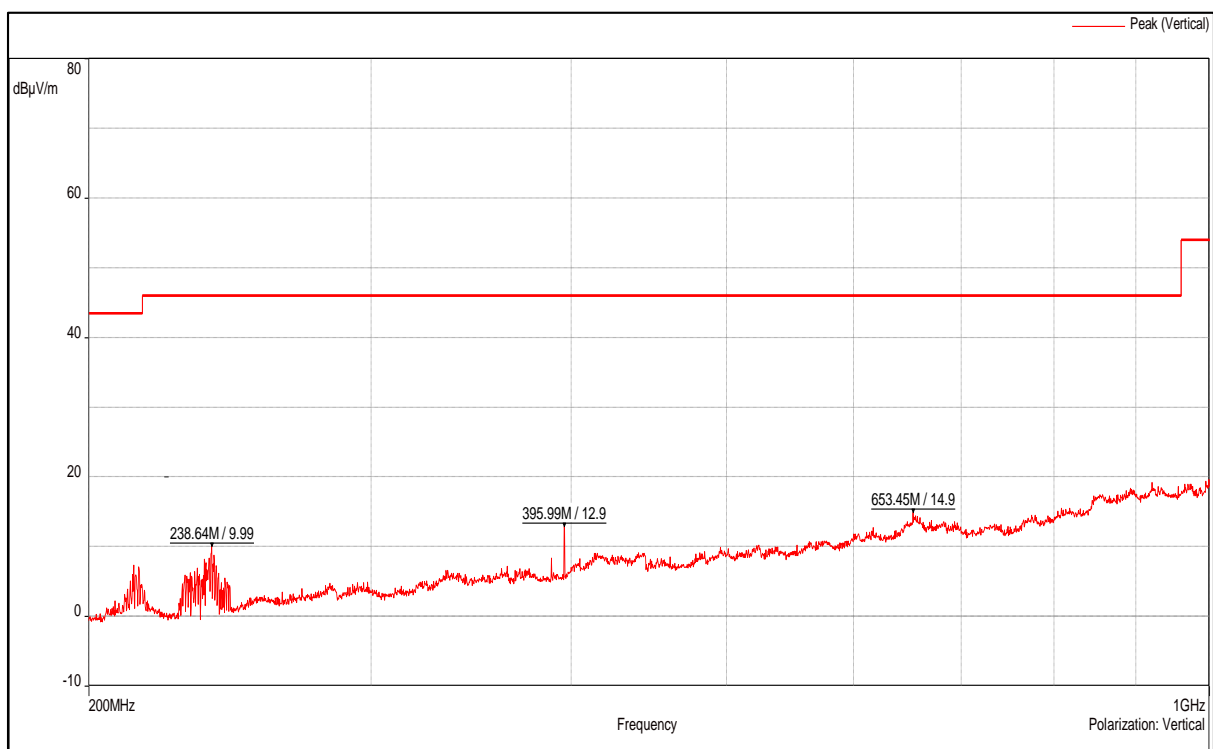


Channel Frequency 200MHz – 1GHz

Polarization Vertical

Prüfbericht - Nr.:
Test Report No.:

IN2391GP 001

Seite 215 von 229
Page 215 of 229

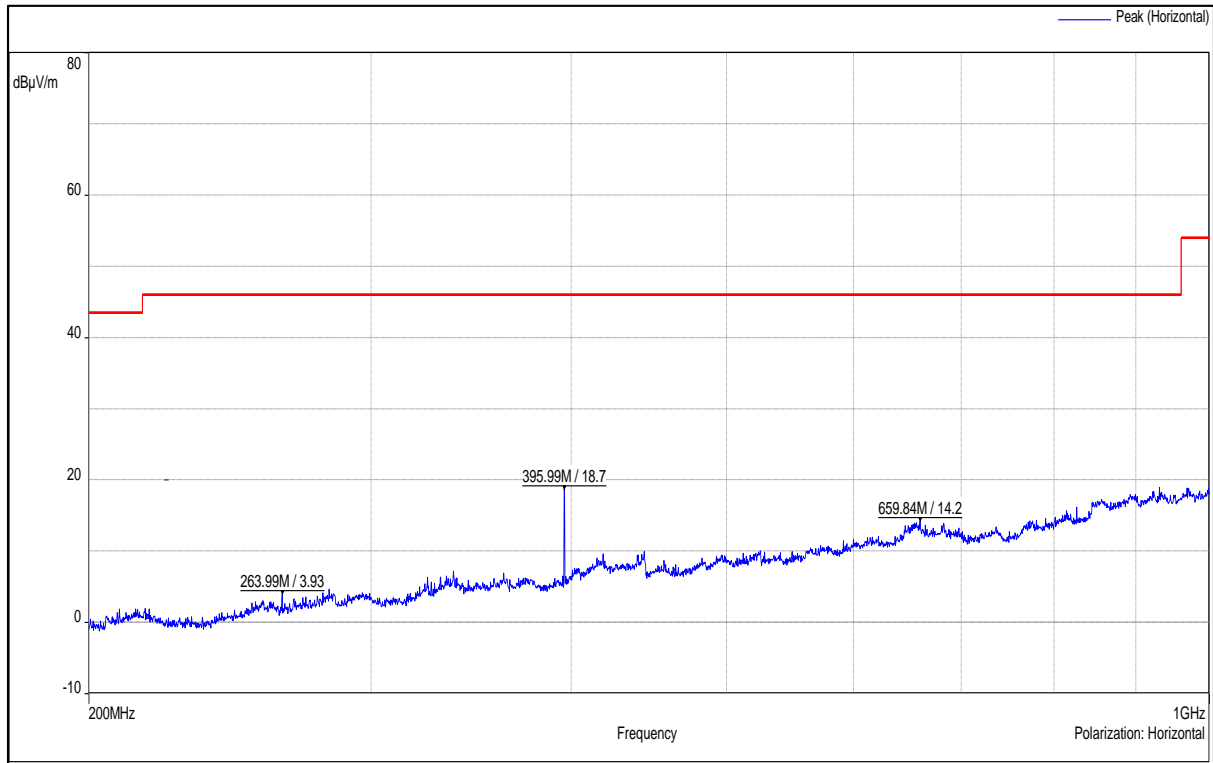

Channel Frequency 200MHz – 1GHz

Polarization Horizontal

Prüfbericht - Nr.:

IN2391GP 001

Seite 216 von 229

Test Report No.:

Page 216 of 229

Test results for the frequencies above 1GHz

Antenna Type: 1001932PT (Flex/PCB) MIMO Antenna Results

Data Rate (Mbps)	Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Measured Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
1	2402	2390(Pk)	Vertical	37.36	74.00*	-36.64
		2390(Av)		24.52	54.00*	-29.48
		2402(Pk)		97.62	-	-
		2402(Av)		91.90	-	-
		4804(Pk)		41.79	74.00	-32.21
		4804(Av)		29.58	54.00	-24.42
		7206(Pk)		47.71	74.00	-26.29
		7206(Av)		35.20	54.00	-18.80
		2390(Pk)		Horizontal	38.37	74.00*
		2390(Av)	25.07		54.00*	-28.93
		2402(Pk)	101.45		-	-
		2402(Av)	95.74		-	-
		4804(Pk)	41.34		74.00	-32.66
		4804(Av)	29.69		54.00	-24.31
		7206(Pk)	47.26		74.00	-26.74
		7206(Av)	35.19		54.00	-18.81
		2440(Pk)	Vertical		98.43	-
		2440(Av)		92.70	-	-
	4880(Pk)	41.72		74.00	-32.28	
	4880(Av)	29.60		54.00	-24.40	
	7320(Pk)	47.82		74.00	-26.18	
	7320(Av)	35.26		54.00	-18.74	
	2440(Pk)	Horizontal	102.60	-	-	
	2440(Av)		96.86	-	-	
	4880(Pk)		43.46	74.00	-30.54	
	4880(Av)		30.08	54.00	-23.92	
	7320(Pk)		48.58	74.00	-25.42	
	7320(Av)		35.23	54.00	-18.77	
	2480(Pk)	Vertical	94.32	-	-	
	2480(Av)		88.53	-	-	
	2483.5(Pk)		38.78	74.00*	-35.22	
	2483.5(Av)		25.70	54.00*	-28.30	
	4960(Pk)		41.72	74.00	-32.28	
	4960(Av)		29.32	54.00	-24.68	
	7440(Pk)		48.16	74.00	-25.84	
	7440(Av)		35.26	54.00	-18.74	
2480(Pk)	Horizontal		100.76	-	-	
2480(Av)			94.98	-	-	
2483.5(Pk)			43.12	74.00*	-30.88	
2483.5(Av)			28.36	54.00*	-25.64	
4960(Pk)		42.16	74.00	-31.84		
4960(Av)		30.25	54.00	-23.75		
7440(Pk)	47.87	74.00	-26.13			
7440(Av)	35.30	54.00	-18.70			

* : Indicate restricted band of operation §15.205

- : Fundamental Frequency

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:
Test Report No.:

IN2391GP 001

Seite 217 von 229
Page 217 of 229

Data Rate (Mbps)	Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Measured Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)	
2	2402	2390(Pk)	Vertical	37.22	74.00*	-36.78	
		2390(Av)		24.49	54.00*	-29.51	
		2402(Pk)		98.08	-	-	
		2402(Av)		84.70	-	-	
		4804(Pk)		41.69	74.00	-32.31	
		4804(Av)		29.58	54.00	-24.42	
		7206(Pk)		46.96	74.00	-27.04	
		7206(Av)		35.16	54.00	-18.84	
		2390(Pk)	Horizontal	37.76	74.00*	-36.24	
		2390(Av)		24.97	54.00*	-29.03	
		2402(Pk)		101.58	-	-	
		2402(Av)		88.24	-	-	
		4804(Pk)		42.32	74.00	-31.68	
		4804(Av)		29.61	54.00	-24.39	
		7206(Pk)		47.80	74.00	-26.20	
		7206(Av)		35.16	54.00	-18.84	
	2440	Vertical	2440(Pk)	Vertical	98.28	-	-
			2440(Av)		84.89	-	-
			4880(Pk)		41.96	74.00	-32.04
			4880(Av)		29.55	54.00	-24.45
			7320(Pk)		47.49	74.00	-26.51
			7320(Av)		35.19	54.00	-18.81
		Horizontal	2440(Pk)	Horizontal	102.66	-	-
			2440(Av)		89.29	-	-
			4880(Pk)		41.44	74.00	-32.56
			4880(Av)		29.63	54.00	-24.37
			7320(Pk)		47.23	74.00	-26.77
			7320(Av)		35.20	54.00	-18.80
	2480	Vertical	2480(Pk)	Vertical	94.60	-	-
			2480(Av)		81.18	-	-
			2483.5(Pk)		39.28	74.00*	-34.72
			2483.5(Av)		25.26	54.00*	-28.74
			4960(Pk)		41.02	74.00	-32.98
			4960(Av)		29.32	54.00	-24.68
			7440(Pk)		47.22	74.00	-26.78
			7440(Av)		35.27	54.00	-18.73
		Horizontal	2480(Pk)	Horizontal	100.87	-	-
			2480(Av)		87.45	-	-
			2483.5(Pk)		42.57	74.00*	-31.43
			2483.5(Av)		27.18	54.00*	-26.82
			4960(Pk)		42.07	74.00	-31.93
			4960(Av)		29.50	54.00	-24.50
	7440(Pk)	48.34	74.00	-25.66			
	7440(Av)	35.24	54.00	-18.76			

* : Indicate restricted band of operation §15.205
- : Fundamental Frequency
Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

IN2391GP 001

Antenna Type: FPA3020-10A (Flex/PCB) MIMO Antenna Results

Data Rate (Mbps)	Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Measured Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)	
1	2402	2390(Pk)	Vertical	38.09	74.00*	-35.91	
		2390(Av)		24.66	54.00*	-29.34	
		2402(Pk)		95.89	-	-	
		2402(Av)		90.13	-	-	
		4804(Pk)		41.72	74.00	-32.28	
		4804(Av)		29.63	54.00	-24.37	
		7206(Pk)		46.97	74.00	-27.03	
		7206(Av)		35.25	54.00	-18.75	
		2390(Pk)		Horizontal	37.68	74.00*	-36.32
		2390(Av)	24.63		54.00*	-29.37	
		2402(Pk)	96.68		-	-	
		2402(Av)	90.93		-	-	
		4804(Pk)	41.90		74.00	-32.10	
		4804(Av)	29.62		54.00	-24.38	
		7206(Pk)	47.31		74.00	-26.69	
		7206(Av)	35.20		54.00	-18.80	
		2440(Pk)	Vertical		2440(Pk)	95.86	-
		2440(Av)		90.06	-	-	
	4880(Pk)	41.88		74.00	-32.12		
	4880(Av)	29.58		54.00	-24.42		
	7320(Pk)	47.47		74.00	-26.53		
	7320(Av)	35.22		54.00	-18.78		
	2440(Pk)	Horizontal	2440(Pk)	97.63	-	-	
	2440(Av)		91.84	-	-		
	4880(Pk)		42.91	74.00	-31.09		
	4880(Av)		29.60	54.00	-24.40		
	7320(Pk)		47.45	74.00	-26.55		
	7320(Av)		35.29	54.00	-18.71		
	2480	Vertical	2480(Pk)	91.27	-	-	
			2480(Av)	85.51	-	-	
			2483.5(Pk)	37.86	74.00*	-36.14	
			2483.5(Av)	25.08	54.00*	-28.92	
			4960(Pk)	41.68	74.00	-32.32	
			4960(Av)	29.36	54.00	-24.64	
			7440(Pk)	47.44	74.00	-26.56	
			7440(Av)	35.28	54.00	-18.72	
2480(Pk)			Horizontal	92.26	-	-	
2480(Av)		86.48		-	-		
2483.5(Pk)		37.78		74.00*	-36.22		
2483.5(Av)		25.17		54.00*	-28.83		
4960(Pk)		41.85		74.00	-32.15		
4960(Av)		29.36		54.00	-24.64		
7440(Pk)		48.03		74.00	-25.97		
7440(Av)		35.27		54.00	-18.73		

* : Indicate restricted band of operation §15.205

- : Fundamental Frequency

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:
Test Report No.:

IN2391GP 001

Seite 219 von 229
Page 219 of 229

Data rate (Mbps)	Channel Frequency (MHz)	Measured Frequency (MHz)	Anteena Polarization	Measured Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)		
2	2402	2390(Pk)	Vertical	37.39	74.00	-36.61		
		2390(Av)		24.57	54.00	-29.43		
		2402(Pk)		96.34	-	-		
		2402(Av)		82.92	-	-		
		4804(Pk)		42.08	74.00	-31.92		
		4804(Av)		29.63	54.00	-24.37		
		7206(Pk)		47.98	74.00	-26.02		
		7206(Av)		35.24	54.00	-18.76		
		2390(Pk)		Horizontal	37.94	74.00	-36.06	
		2390(Av)	24.59		54.00	-29.41		
		2402(Pk)	97.59		-	-		
		2402(Av)	84.16		-	-		
		4804(Pk)	41.87		74.00	-32.13		
		4804(Av)	29.62		54.00	-24.38		
		7206(Pk)	47.14		74.00	-26.86		
		7206(Av)	35.20		54.00	-18.80		
		2440	Vertical		2440(Pk)	Vertical	96.05	-
				2440(Av)	82.59		-	-
	4880(Pk)			41.62	74.00		-32.38	
	4880(Av)			29.62	54.00		-24.38	
	7320(Pk)			46.95	74.00		-27.05	
	7320(Av)			35.32	54.00		-18.68	
	Horizontal		2440(Pk)	Horizontal	97.56	-	-	
			2440(Av)		84.11	-	-	
			4880(Pk)		41.48	74.00	-32.52	
			4880(Av)		29.62	54.00	-24.38	
			7320(Pk)		47.63	74.00	-26.37	
			7320(Av)		35.24	54.00	-18.76	
	2480	Vertical	2480(Pk)	Vertical	91.45	-	-	
			2480(Av)		78.04	-	-	
			2483.5(Pk)		38.36	74.00	-35.64	
			2483.5(Av)		24.81	54.00	-29.19	
			4960(Pk)		41.93	74.00	-32.07	
			4960(Av)		29.41	54.00	-24.59	
			7440(Pk)		47.52	74.00	-26.48	
			7440(Av)		35.34	54.00	-18.66	
Horizontal			2480(Pk)		Horizontal	92.61	-	-
		2480(Av)	79.16	-		-		
		2483.5(Pk)	39.46	74.00		-34.54		
		2483.5(Av)	25.00	54.00		-29.00		
		4960(Pk)	41.44	74.00		-32.56		
		4960(Av)	29.39	54.00		-24.61		
		7440(Pk)	48.16	74.00		-25.84		
		7440(Av)	35.33	54.00		-18.67		


* : Indicate restricted band of operation §15.205

- : Fundamental Frequency


Pk: Peak Detector; Av: Average Detector

Worst Case Plots reported


Channel Frequency-2402MHz_Vertical

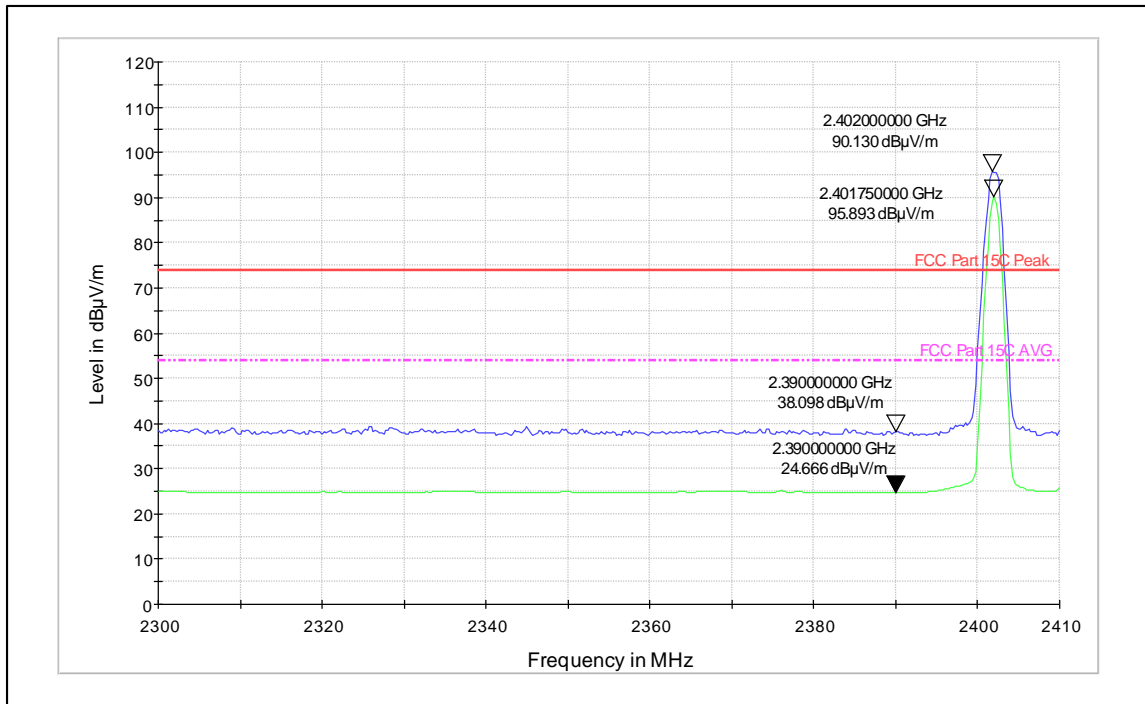


Channel Frequency-2402MHz_Horizontal

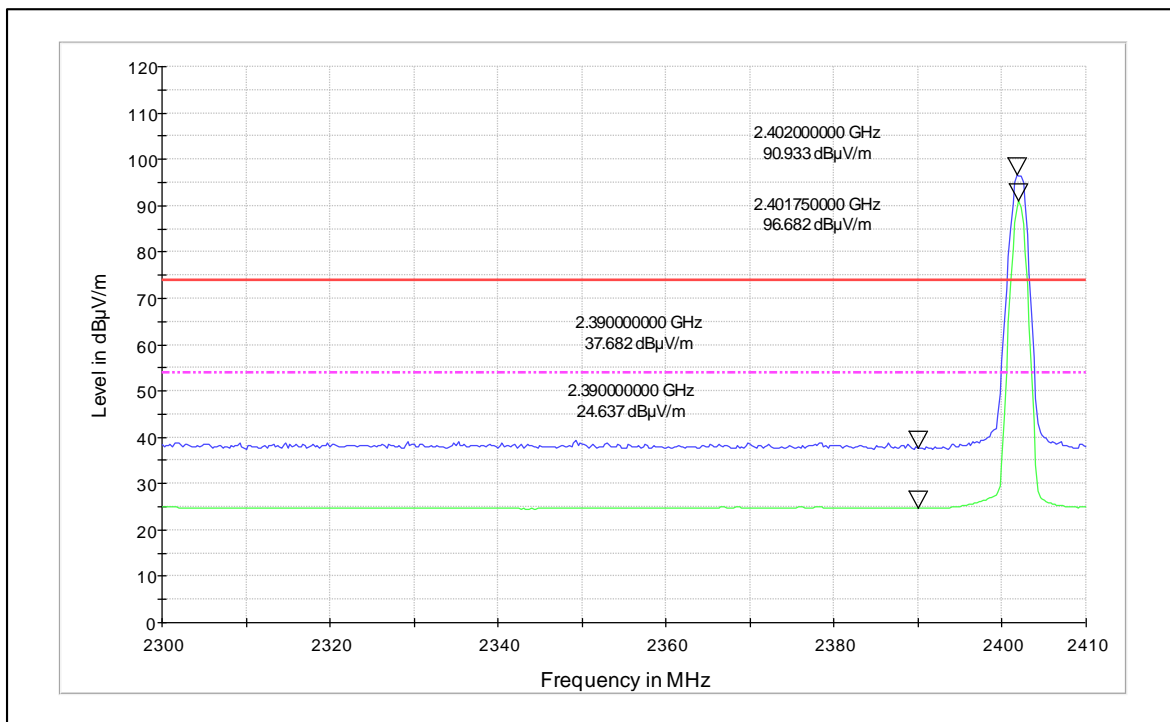


Channel Frequency-2440MHz_Vertical

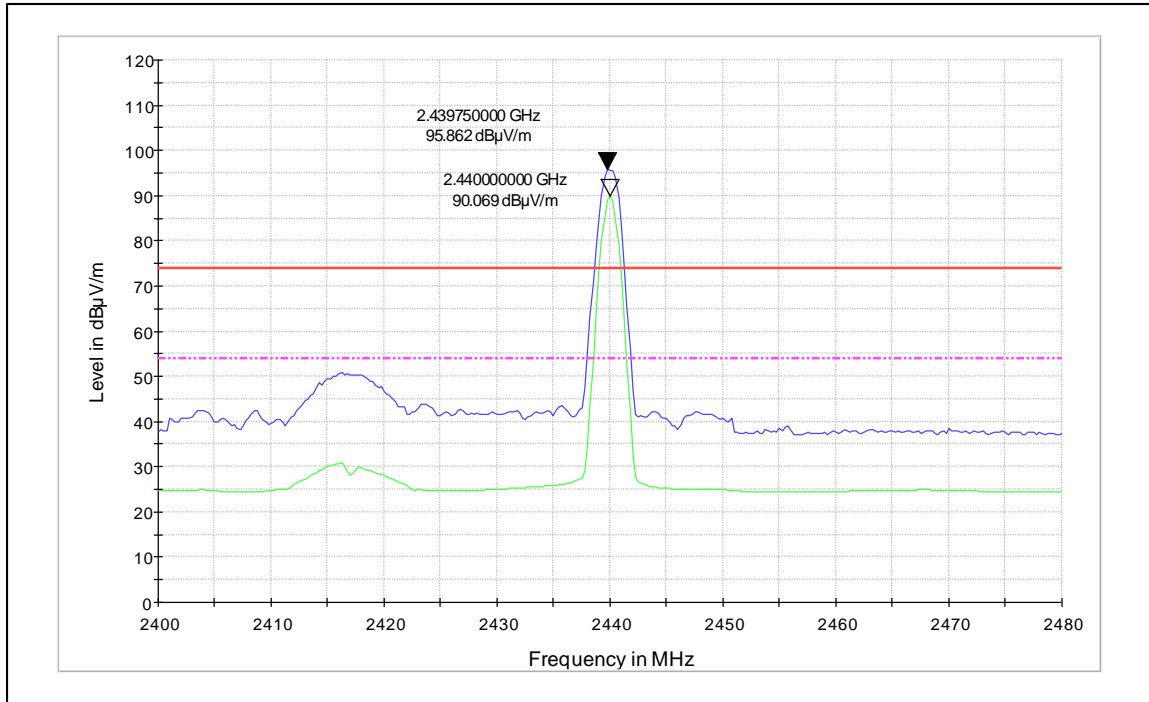


Channel Frequency-2440MHz_Horizontal

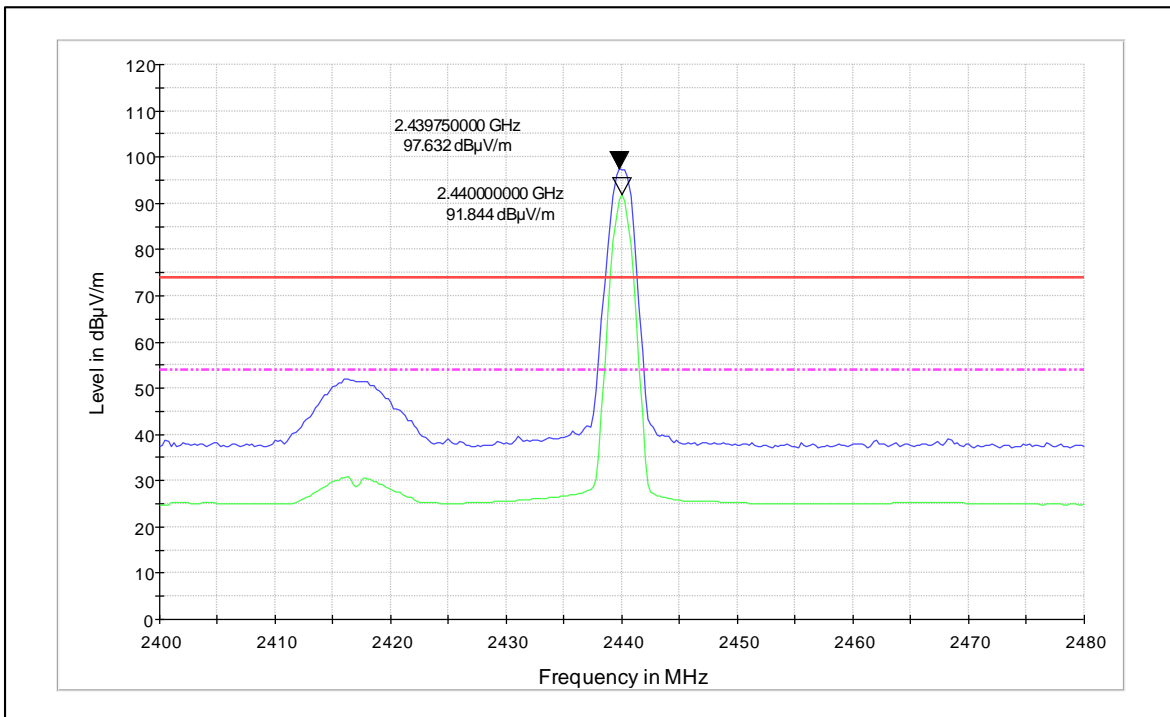


Channel Frequency-2480MHz_Vertical

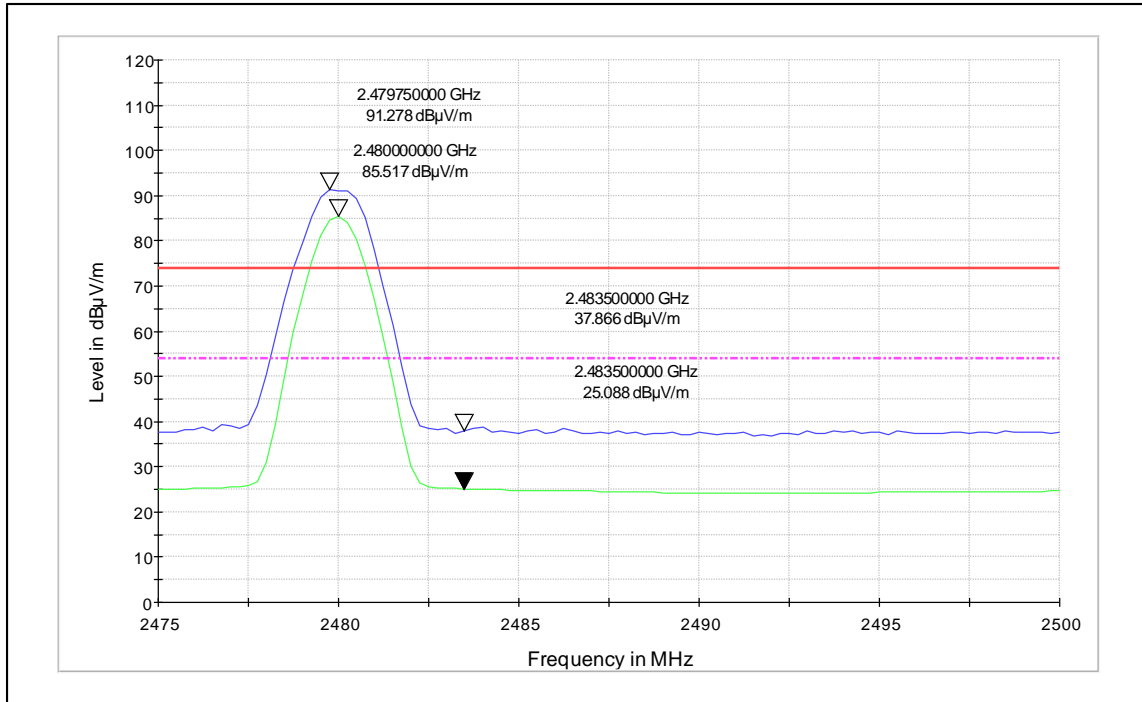


Channel Frequency-2480MHz_Horizontal

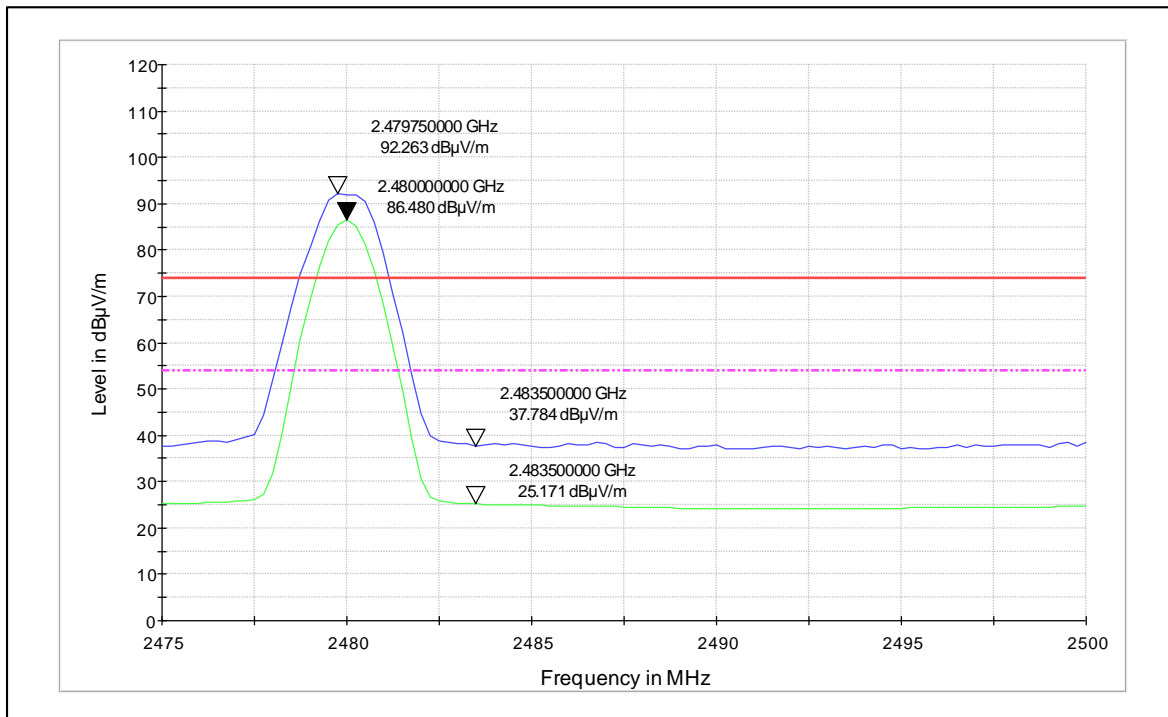


Channel Frequency-2402MHz_Veritical_1-18GHz

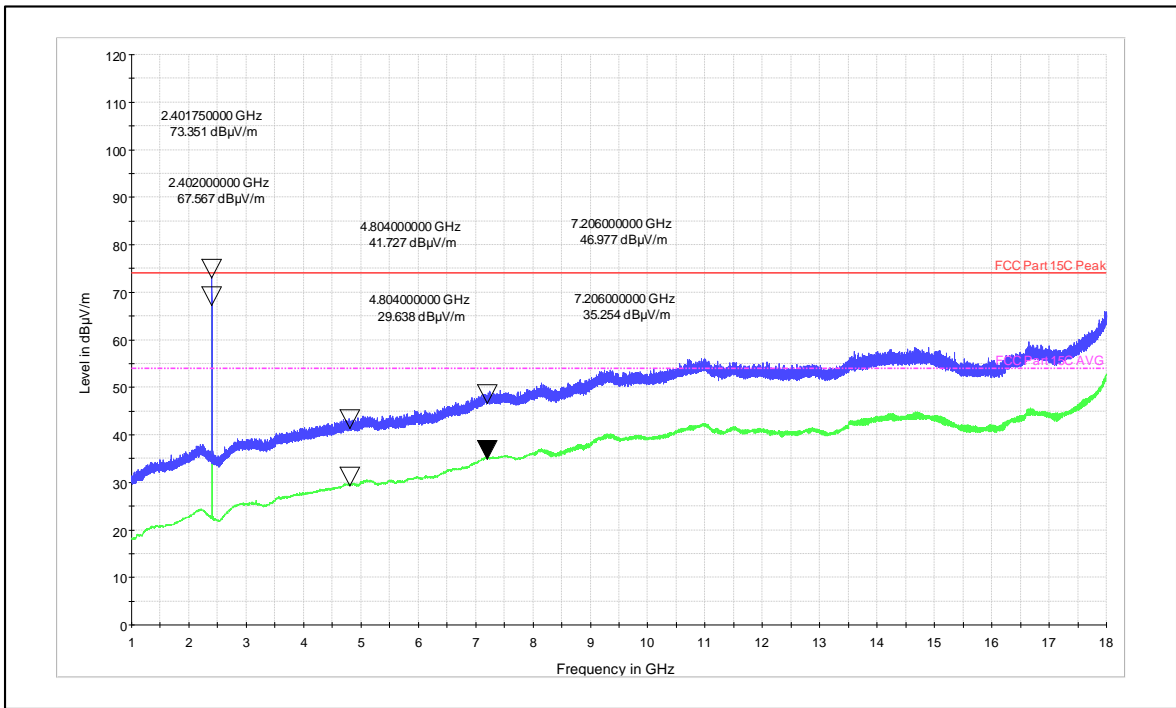


Channel Frequency-2402MHz_Horizontal_1-18GHz

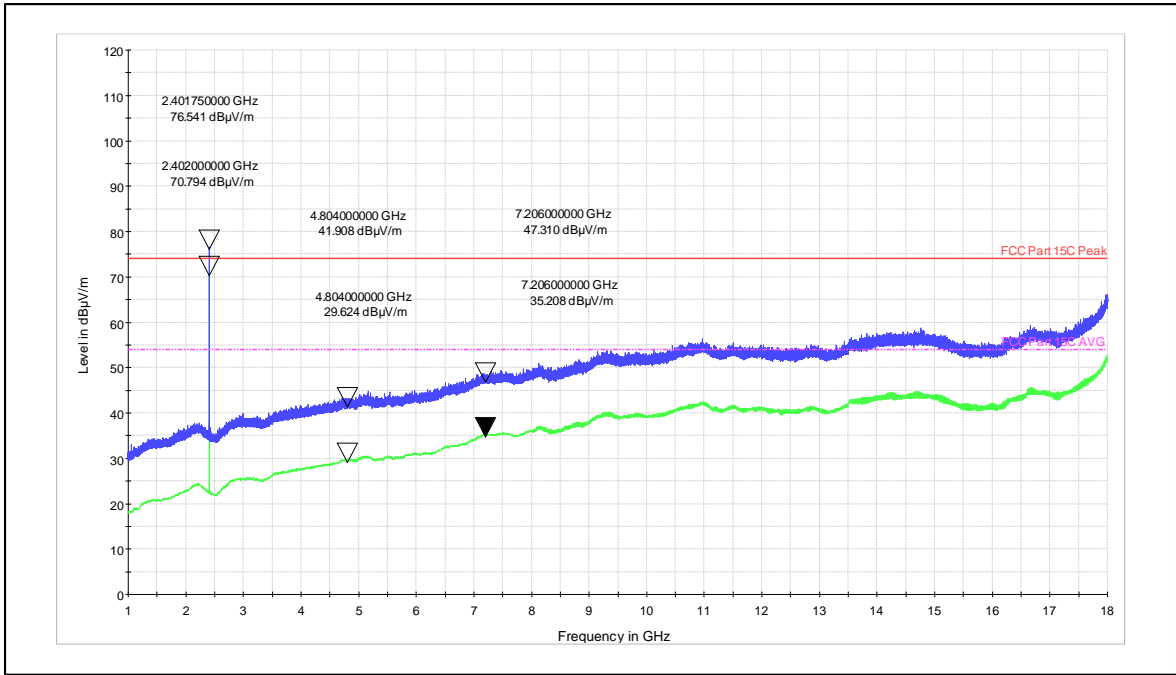

Channel Frequency-Vertical_18GHz - 40GHz

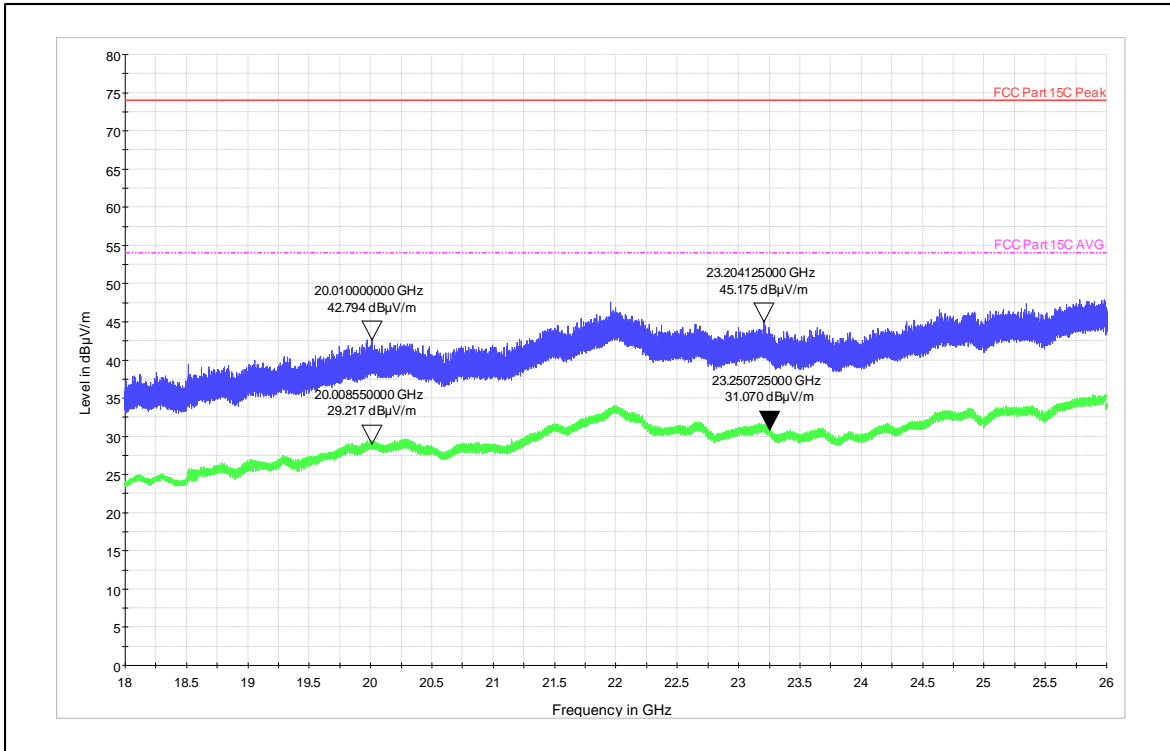

Channel Frequency-Horizontal_18GHz - 40GHz

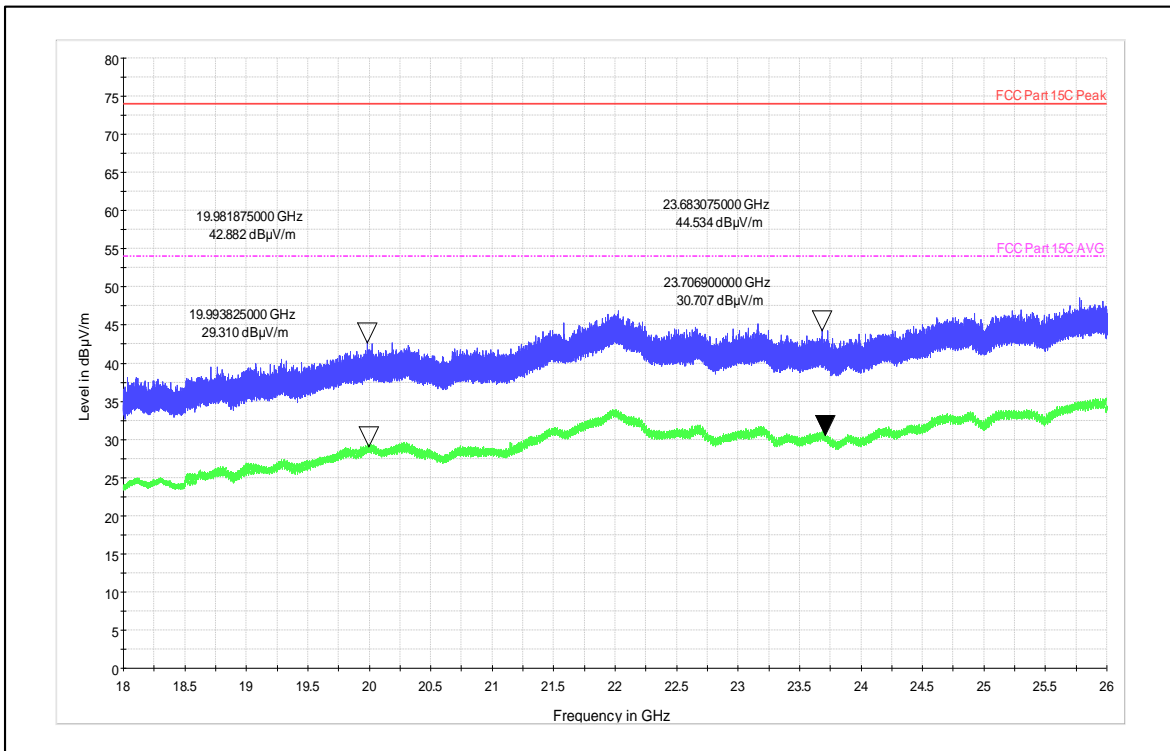

Prüfbericht - Nr.:
Test Report No.:

IN2391GP 001

Seite 225 von 229
Page 225 of 229

9 Conducted Spurious Emission Test on AC Power Line

Result

Pass

Test Specification : FCC Part 15 Section 15.207 / RSS Gen Issue 5 Section 8.8
 Test Method : ANSI C 63.10-2013
 Testing Location : Screened room
 Measurement Bandwidth : 9kHz
 Frequency Range : 150kHz – 30MHz
 Supply Voltage : 110VAC,60Hz
 Test Method : Refer TEST METHODOLOGY

Limits of section 15.207

Frequency of emission (MHz)	QP Limit (dBμV)	AV Limit (dBμV)
0.15 – 0.5	66 – 56*	56 – 46*
0.5 – 5	56	46
5 – 30	60	50


* Decreases with the logarithm of the frequency

Test Conditions:

Normal Temperature = +24°C Voltage (V norm) = 110V AC (Through AC to DC Adapter) Relative Humidity = 64%

Test result:

Power: 110V 60HZ_LINE

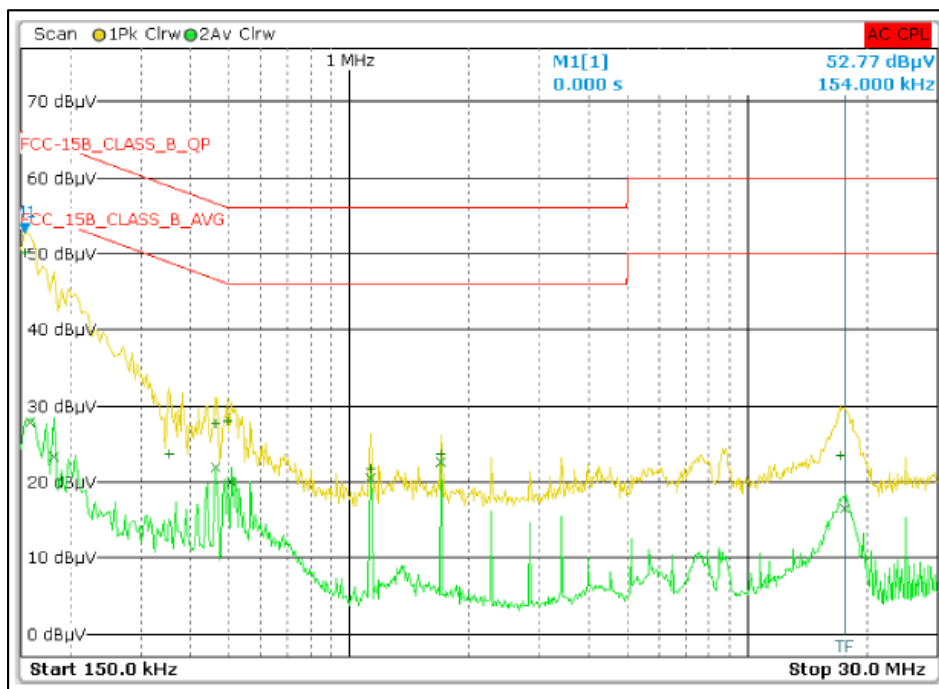


Line Graph

Trace	Frequency	Level (dBµV)	Phase	Detector	Delta Limit/dB
1	154.00000000 kHz	50.20		Quasi Peak	-15.58
2	1.70200000 MHz	22.70		Average	-23.30
2	462.00000000 kHz	21.96		Average	-24.70
2	1.13400000 MHz	20.59		Average	-25.41
2	506.00000000 kHz	19.96		Average	-26.04
2	158.00000000 kHz	27.82		Average	-27.75
1	494.00000000 kHz	27.97		Quasi Peak	-28.13
1	462.00000000 kHz	27.73		Quasi Peak	-28.93
2	182.00000000 kHz	23.32		Average	-31.07
1	1.70200000 MHz	23.69		Quasi Peak	-32.31
2	17.55800000 MHz	16.60		Average	-33.40
1	1.13400000 MHz	21.83		Quasi Peak	-34.17
1	354.00000000 kHz	23.74		Quasi Peak	-35.13
1	17.20600000 MHz	23.44		Quasi Peak	-36.56

Line Table

Power: 110V60Hz_NEUTRAL

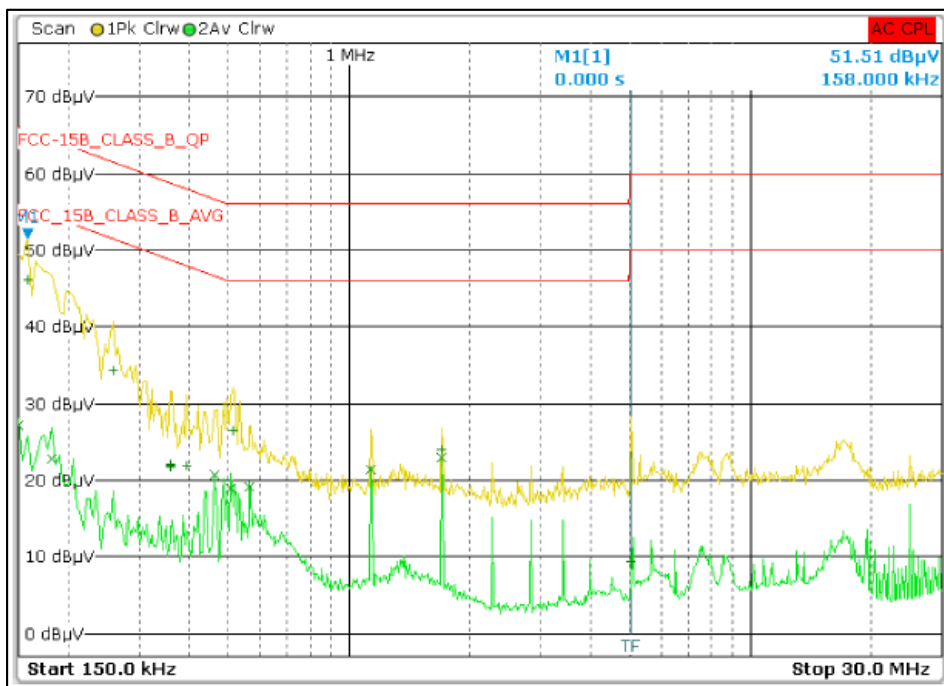

Neutral Graph

Trace	Frequency	Level (dBµV)	Phase	Detector	Delta Limit/dB
1	158.00000000 kHz	46.23		Quasi Peak	-19.34
2	1.70200000 MHz	23.02		Average	-22.98
2	1.13400000 MHz	21.40		Average	-24.60
2	462.00000000 kHz	20.64		Average	-26.02
2	566.00000000 kHz	19.17		Average	-26.83
2	506.00000000 kHz	18.92		Average	-27.08
1	258.00000000 kHz	34.31		Quasi Peak	-27.19
2	150.00000000 kHz	27.21		Average	-28.79
1	514.00000000 kHz	26.41		Quasi Peak	-29.59
2	182.00000000 kHz	22.79		Average	-31.60
1	1.70200000 MHz	24.01		Quasi Peak	-31.99
1	394.00000000 kHz	21.96		Quasi Peak	-36.02
1	394.00000000 kHz	21.90		Quasi Peak	-36.08
1	358.00000000 kHz	22.14		Quasi Peak	-36.63
1	358.00000000 kHz	21.94		Quasi Peak	-36.83
1	358.00000000 kHz	21.68		Quasi Peak	-37.09
1	5.03400000 MHz	9.29		Quasi Peak	-50.71

Neutral Table

10 LIST OF TABLES

Table 1: List of test and measurement instruments.....	7
Table 2: Instrument application Software versions.....	7
Table 3: Ratings and System Details as declared by Client*.....	8
Table 4: Measurement Uncertainty	9
Table 5: List of Wi-Fi center Frequencies	10
Table 6: List of BLE Center frequencies.....	11
Table 7: Transmitter limits for Radiated emission	141
Table 8: Transmitter limits for Radiated emission	212

11 LIST OF FIGURES

Figure 1: Frequency Range 9 kHz- 30 MHz	14
Figure 2: Frequency Range 30 MHz – 200 MHz	14
Figure 3: Frequency Range 200 MHz - 1GHz	15
Figure 4: Frequency Range above 1 GHz	15

12 Power level used for testing

Wi-Fi 2.4GHz

Channel Band Width	Mode	Data rate	Channels	1001932PT (Flex/PCB) Antenna	FPA3020-10A (Flex/PCB) Antenna		
20 MHz	b	1	Low	19.0	19.0		
			Mid	19.0	19.0		
			High	19.0	19.0		
		11	Low	19.0	19.0		
			Mid	19.0	19.0		
			High	19.0	19.0		
	g		6	Low	18.0	18.0	
				Mid	19.0	19.0	
				High	16.0	18.0	
		54	Low	17.0	17.0		
			Mid	17.0	17.0		
			High	17.0	17.0		
	n	MCS 0	Low	16.0	19.0		
			Mid	19.0	19.0		
			High	14.0	17.0		
		MCS 7	Low	16.0	16.0		
			Mid	16.0	16.0		
			High	15.0	16.0		
			ac	MCS 0	Low	17.0	19.0
					Mid	19.0	19.0
					High	14.0	17.0
	MCS 8	Low		15.0	15.0		
		Mid		15.0	15.0		
		High		15.0	15.0		
ax	MCS 0	Low	14.0	18.0			
		Mid	19.0	19.0			
		High	14.0	16.0			
	MCS 11	Low	14.0	14.0			
		Mid	14.0	14.0			
		High	14.0	14.0			

Channel Band Width	Mode	Data rate	Channels	1001932PT (Flex/PCB) Antenna	FPA3020-10A (Flex/PCB) Antenna
40 MHz	n	MCS 0	Low	13.0	16.0
			Mid	19.0	19.0
			High	13.0	15.0
		MCS 7	Low	16.0	16.0
			Mid	16.0	19.0
			High	13.0	17.0
	ac	MCS 0	Low	15.0	17.0
			Mid	19.0	19.0
			High	13.0	15.0
		MCS 8	Low	15.0	17.0
			Mid	15.0	19.0
			High	15.0	15.0
	ax	MCS 0	Low	14.0	17.0
			Mid	19.0	19.0
			High	12.0	16.0
		MCS 11	Low	13.0	14.0
			Mid	14.0	14.0
			High	14.0	14.0

BLE 2.4GHz

Channel BandWidth	Data rate (Mbps)	Channels	1001932PT (Flex/PCB) Antenna	FPA3020-10A (Flex/PCB) Antenna
2MHz	1	Low	8	8
		Mid	8	8
		High	8	8
	2	Low	8	8
		Mid	8	8
		High	8	8

*****END OF TEST REPORT*****