

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

OF

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C AND RSS 247 REQUIREMENT

	OF
FCC Applicant:	Honeywell International Inc. 9680 Old Bailes Road, Fort Mill, SC 29707, USA
IC Applicant:	Honeywell International Inc. 9680 Old Bailes Road, Fort Mill, SC 29707, USA
Product Name:	Vehicle Mount Computer
Brand Name:	Honeywell
Model No.:	VM1A-L0N
Model Difference:	N/A
FCC ID:	HD5-VM1AL0N
IC:	1693B-VM1AL0N
Report Number:	ER/2018/90024
FCC Rule Part:	§15.247, Cat: DSS
IC Rule Part:	RSS-247 issue 2 Feb 2017
Issue Date:	Nov. 08, 2018
Date of Test:	Sep. 12, 2018 ~ Oct. 02, 2018
Date of EUT Received: We hereby certify that:	Sep. 04, 2018

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits. The test results of this report relate only to the tested sample identified in this report.

Tested By:

Louis Chen / Sr. Engineer

Approved By:

CHUN; CHIZEH,

CHUN-CHIEH CHEN / Asst. Supervisor





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ref 另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的玩力。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Revision History

Report Number	Revision	Description	Effected Page	Issue Date	Revised By
ER/2018/90024	Rev.00	Initial creation of docu- ment	All	Oct. 05, 2018	Elle Chang
ER/2018/90024	Rev.01	Section 10 & 15 & 16	36~83, 98~101	Nov. 08, 2018	Allen Tsai

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Table of Contents

1	GENERAL INFORMATION	. 4
2	SYSTEM TEST CONFIGURATION	. 6
3	UMMARY OF TEST RESULTS	. 8
4	DESCRIPTION OF TEST MODES	. 9
5	MEASUREMENT UNCERTAINTY	11
6	CONDUCTED EMISSION TEST	12
7	PEAK OUTPUT POWER MEASUREMENT	16
8	20dB & 99% BANDWIDTH MEASUREMENT	19
9	CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT	25
10	RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	31
11	FREQUENCY SEPARATION	84
12	NUMBER OF HOPPING FREQUENCY	86
13	TIME OF OCCUPANCY (DWELL TIME)	88
14	ANTENNA REQUIREMENT	97

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. <u>SGS Taiwan Ltd.</u> <u>INo. 134. WuKungRoad. New Taipeinforks WukuDistrict NewTaipeiCity.Taiwan24803/新 th. 市 充 股 區 新 th. 產 業 团 區 充 工 終 134 號</u>



GENERAL INFORMATION 1

1.1 Product description

General:

Product Name:	Vehicle N	Nount Computer		
Brand Name:	Honeywe	Honeywell		
Model No.:	VM1A-L0)N		
Model Difference:	N/A			
Product HW/SW version:	VM1AL0N / 85.00.00-0322			
Radio HW/SW version:	V1.0 / V5.1.1.28U			
	10.8Vdc from Rechargeable Li-ion Battery or 15Vdc from AC/DC Adapter.			
Power Supply:	Battery:	Model No.: 163176-0001 Rev C / OVT310L1R00 C, Supplier: TOTEX		
	Adapter:	Model No.: GT-46600-6015-T3, Supplier: GlobTek, Inc.		

Bluetooth_BR+EDR:

Bluetooth Version:	Bluetooth V4.0 Dual Mode
Channel number:	79 channels
Modulation type:	GFSK + π/4DQPSK + 8DPSK
Transmit Power:	5.44 dBm
Frequency Range:	2.402GHz – 2.480GHz
Dwell Time:	<= 0.4s

Antenna Designation

Antenna Type	Supplier	Antenna Model No.	Freq. (MHz)	Transmitter Chain	Peak Antenna Gain (dBi)	Worst An- tenna Gain
External	LARSEN	R380500314	2.4GHz	Ch 0 & Ch 1	1.6	
Di-pole antenna	LAIRD	WTS 2450	2.4GHz	Ch 0 & Ch 1	2.1	V
Internal Printed Antenna	N/A	N/A	2.4GHz	Ch0	1.1	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Report No.: ER/2018/90024 Page 5 of 97



1.2 Test Methodology of Applied Standards

Canada RSS-247 issue 2 Feb. 2017

RSS-Gen. issue 5 Apr. 2018

FCC Part 15, Subpart C §15.247

KDB 558074 D01 v05 DSS Meas. Guidance

ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards.

1.3 Test Facility

SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803 (TAF code 0513)

FCC Registration Numbers are: 509634 / TW0001

Canada Registration Number: 4620A-4

1.4 Special Accessories

There is no special accessory used while test was conducted.

1.5 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ref 另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的玩力。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



SYSTEM TEST CONFIGURATION 2

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 **Conducted Emissions**

The EUT is a placed on as turn table which is 0.8 m above ground plan. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz,. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plan. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated

emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

2.4 Measurement Results Explanation Example

For all conducted test items:


The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ref 另有說明,此報告結果僅對測試之樣品負責、同時此樣品僅保留的玩。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



2.5 Configuration of Tested System

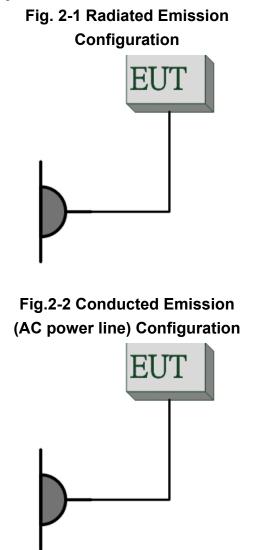



Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1	Bluetooth Test Software	N/A	N/A	N/A	N/A	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Contention is stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relative for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



3 UMMARY OF TEST RESULTS

FCC Rules	IC Rules	Description Of Test	Result
§15.207(a)	RSS-Gen §8.8	AC Power Line Conducted Emission	Compliant
§15.247(b)(1)	RSS-247 §5.4 (2)	Peak Output Power	Compliant
§15.247(a)(1)	RSS-247 §5.1 (1) RSS-Gen §6.7	20dB & 99% Bandwidth	Compliant
§15.247(d)	RSS-247 §5.5	Conducted Band Edge and Spurious Emission	Compliant
§15.247(d)	RSS-247 §5.5 RSS-Gen §8.9 RSS-Gen §8.10	Radiated Band Edge and Spurious Emission	Compliant
§15.247(a)(1)	RSS-247 §5.1 (2)	Frequency Separation	Compliant
§15.247(a)(1)(iii)	RSS-247 §5.1 (4)	Number of hopping frequency	Compliant
§15.247(a)(1)(iii)	RSS-247 §5.1 (4)	Time of Occupancy	Compliant
§15.203 §15.247(b)	RSS- Gen §6.8	Antenna Requirement	Compliant

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. <u>SGS Taiwan Ltd.</u> <u>INo. 134. WuKungRoad. New Taipeinforks WukuDistrict NewTaipeiCity.Taiwan24803/新 th. 市 充 股 區 新 th. 產 業 团 區 充 工 終 134 號</u>



DESCRIPTION OF TEST MODES 4

4.1 Operated in 2400 ~ 2483.5MHz Band

79 channels are provided for Bluetooth

ITEM	FREQUENCY	ITEM	FREQUENCY	ITEM	FREQUENCY	ITEM	FREQUENCY
1	2402 MHz	21	2422 MHz	41	2442 MHz	71	2462 MHz
2	2403 MHz	22	2423 MHz	42	2443 MHz	72	2463 MHz
3	2404 MHz	23	2424 MHz	43	2444 MHz	73	2464 MHz
4	2405 MHz	24	2425 MHz	44	2445 MHz	74	2465 MHz
5	2406 MHz	25	2426 MHz	45	2446 MHz	75	2466 MHz
6	2407 MHz	26	2427 MHz	46	2447 MHz	76	2467 MHz
7	2408 MHz	27	2428 MHz	47	2448 MHz	77	2468 MHz
8	2409 MHz	28	2429 MHz	48	2449 MHz	78	2469 MHz
9	2410 MHz	29	2430 MHz	49	2450 MHz	79	2470 MHz
10	2411 MHz	30	2431 MHz	50	2451 MHz	70	2471 MHz
11	2412 MHz	31	2432 MHz	51	2452 MHz	71	2472 MHz
12	2413 MHz	32	2433 MHz	52	2453 MHz	72	2473 MHz
13	2414 MHz	33	2434 MHz	53	2454 MHz	73	2474 MHz
14	2415 MHz	34	2435 MHz	54	2455 MHz	74	2475 MHz
15	2416 MHz	35	2436 MHz	55	2456 MHz	75	2476 MHz
16	2417 MHz	36	2437 MHz	56	2457 MHz	76	2477 MHz
17	2418 MHz	37	2438 MHz	57	2458 MHz	77	2478 MHz
18	2419 MHz	38	2439 MHz	58	2459 MHz	78	2479 MHz
19	2420 MHz	39	2440 MHz	59	2460 MHz	79	2480 MHz
20	2421 MHz	40	2441 MHz	60	2461 MHz		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



4.2 The Worst Test Modes and Channel Details

- The EUT has been tested under operating condition. 1
- 2 Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
- Investigation has been done on all the possible configurations for searching the worst 3 case.

RADIATED EMISSION TEST:

RADIATED EMISSION TEST (BELOW 1 GHz)						
MODE	AVAILABLE FREQUENCY (MHz)	TESTED FREQUENCY (MHz)	MODULATION	PACKET TYPE		
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK	DH5		
	RADIATED EMISSION TEST (ABOVE 1 GHz)					
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK	DH5		

Note:


The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth BR+EDR Transmitter for channel Low, Mid and High, the worst case E2 position was reported.

ANTENNA PORT CONDUCTED MEASUREMENT:

	CONDUCTED TEST					
		Peak Output Power,	20dB Band Width			
MODE	AVAILABLE FREQUENCY (MHz)	TESTED FREQUENCY (MHz)	MODULATION	PACKET TYPE		
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK, π/4-DQPSK, 8-DQPK	DH5		
Band Edge						
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK	DH5		
		Frequency S	Separation			
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK	DH5		
		Number of hopp	ing frequency			
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK	DH5		
	Time of Occupancy (Dwell time)					
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK, π/4-DQPSK, 8-DQPK	DH1/DH3/DH5		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ref 另有說明,此報告結果僅對測試之樣品負責、同時此樣品僅保留的玩。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law SGS Taiwan Ltd.





MEASUREMENT UNCERTAINTY 5

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
Peak Output Power	+/- 0.84 dB
20dB Bandwidth	+/- 51.33 Hz
100 KHz Bandwidth Of Frequency Band Edges	+/- 0.84 dB
Frequency Separation	+/- 51.33 Hz
Number of hopping frequency	+/- 51.33 Hz
Time of Occupancy	+/- 51.33 Hz
Temperature	+/- 0.65 °C
Humidity	+/- 4.6 %
DC / AC Power Source	DC= +/- 0.13%, AC= +/- 0.2%

Radiated Spurious Emission:

	9kHz – 30MHz: +/- 2.87 dB
Measurement uncertainty (Polarization : Vertical)	30MHz - 180MHz: +/- 3.37dB
	180MHz -417MHz: +/- 3.19dB
	0.417GHz-1GHz: +/- 3.19dB
	1GHz - 18GHz: +/- 4.04dB
	18GHz - 40GHz: +/- 4.04dB

	9kHz – 30MHz: +/- 2.87 dB
	30MHz - 167MHz: +/- 4.22dB
Measurement uncertainty	167MHz -500MHz: +/- 3.44dB
(Polarization : Horizontal)	0.5GHz-1GHz: +/- 3.39dB
	1GHz - 18GHz: +/- 4.08dB
	18GHz - 40GHz: +/- 4.08dB

This uncertainty represents an expanded uncertainty expressed at approximately the

95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relative to so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



6 CONDUCTED EMISSION TEST

6.1 Standard Applicable

Frequency within 150 kHz to 30MHz shall not exceed the limit table as below.

Frequency range	Limits dB(uV)			
MHz	Quasi-peak	Average		
0.15 to 0.50	66 to 56	56 to 46		
0.50 to 5	56	46		
5 to 30	60	50		

Note

1. The lower limit shall apply at the transition frequencies

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

6.2 Measurement Equipment Used

	Conducted Emission Test Site								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.				
TYPE		NUMBER	NUMBER	CAL.					
EMI Test Re-	R&S	ESCI7	100335	02/02/2018	02/01/2010				
ceiver	Ras	ESCI	100335	02/02/2018	02/01/2019				
LISN	SCHWARZBECK	NSLK 8127	8127-649	05/18/2018	05/17/2019				

6.3 EUT Setup

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI 63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



6.4 Test SET-UP (Block Diagram of Configuration)

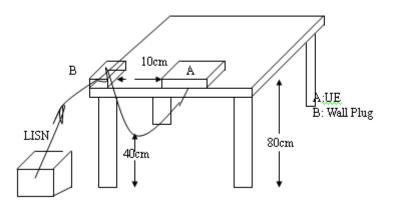

6.5 Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plan.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

6.6 Measurement Result

Note: Refer to next page for measurement data and plots. Note2: The * reveals the worst-case results that closet to the limit


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



AC POWER LINE CONDUCTED EMISSION TEST DATA

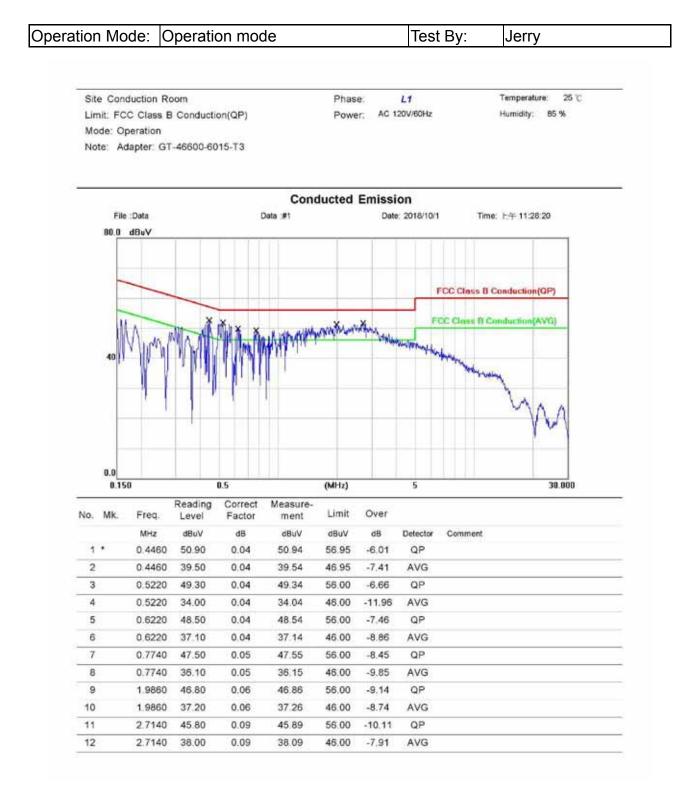

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



25 °C Temperature: Site Conduction Room Phase: N AC 120V/60Hz Humidity: 85 % Limit: FCC Class B Conduction(QP) Power: Mode: Operation Note: Adapter: GT-46600-6015-T3

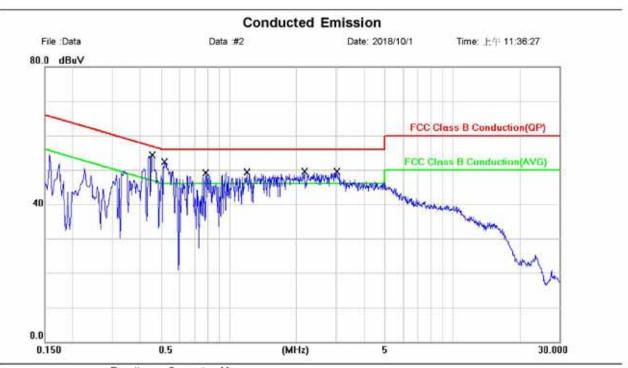

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.4540	53.20	0.04	53.24	56.80	-3.56	QP	
2	•	0.4540	44.50	0.04	44.54	46.80	-2.26	AVG	
3		0.5180	50.10	0.04	50.14	56.00	-5.86	QP	
4		0.5180	42.60	0.04	42.64	46.00	-3.36	AVG	
5		0.7900	44.00	0.05	44.05	56.00	-11.95	QP	
6		0.7900	31,50	0.05	31.55	46.00	-14.45	AVG	
7		1.1980	43.50	0.05	43.55	56.00	-12,45	QP	
8		1.1980	36.00	0.05	36.05	46.00	-9.95	AVG	
9		2.1700	43.10	0.08	43.18	56.00	-12.82	QP	
10		2.1700	37.60	0.08	37.68	46.00	-8.32	AVG	
11		3.0260	42.70	0.11	42.81	56.00	-13,19	QP	
12		3.0260	36.80	0.11	36.91	46.00	-9.09	AVG	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



7 PEAK OUTPUT POWER MEASUREMENT


7.1 Standard Applicable

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, The Limit: 1Watt. For all other frequency hopping systems in the 2400 – 2483.5MHz band: The Limit: 0.125 Watts. The power limit for 1Mbps is 1watt, and 2Mbps, 3Mbps and AFH mode are 0.125 watts and the e.i.r.p. shall not exceed 0.5 W if the hop set uses less than 75 hopping channels.

7.2 Measurement Equipment Used

	Conducted Emission Test Site								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.				
TYPE		NUMBER	NUMBER	CAL.					
EXA Spectrum	Agilent	N9010A	MY5042019	05/03/2018	05/02/2019				
Analyzer		110010/1	5	00,00,2010	00,02/2010				
DC Block	Mini-Circuits	BLK-18-S+	1	01/02/2018	01/01/2019				
Coaxial Cables	N/A	WK CE Cable	N/A	01/02/2018	01/01/2019				
Power Meter	Anritsu	ML2496A	1804001	02/01/2018	01/31/2019				
Power Sensor	Anritsu	MA2411B	1726104	02/01/2018	01/31/2019				

7.3 Test Set-up:



7.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013. Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Max Hold, Detector = Peak, RBW >=20dB bandwidth)
- 4. Record the max. reading.
- 5. Repeat above procedures until all default test channel is completed.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



7.5 Measurement Result

1M BR mode (Peak):	1M	BR	mode	(Peak):
--------------------	----	----	------	---------

СН	Freq. (MHz)	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)
0	2402	5.44	3.499	1000
39	2441	4.60	2.884	1000
78	2480	5.11	3.243	1000

1M BR mode (Average):

СН	Freq. (MHz)	Max. Output include tune up tolerance Power (dBm)	Output Power (mW)	Limit (mW)
0	2402	4.40	2.754	1000
39	2441	3.55	2.265	1000
78	2480	4.05	2.541	1000

2M EDR mode (Peak):

СН	Freq. (MHz)	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)
0	2402	4.51	2.825	125
39	2441	3.61	2.296	125
78	2480	4.14	2.594	125

2M EDR mode (Average):

	СН	Freq. (MHz)	Max. Avg.Output include	Output Power	Limit
)		(IVI⊓∠)	tune up tolerance	(mW)	(mW)
	0	2402	1.16	1.306	125
	39	2441	0.17	1.040	125
	78	2480	0.69	1.172	125

3M EDR mode (Peak):

СН	Freq. (MHz)	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)
0	2402	4.49	2.812	125
39	2441	3.61	2.296	125
78	2480	4.10	2.570	125

3M EDR mode (Average):

		Max.			
СН	Freq. (MHz) Avg.Output include tune up		Output Power (mW)	Limit (mW)	
		tolerance			
0	2402	1.09	1.285	125	
39	2441	0.09	1.021	125	
78	2480	0.68	1.169	125	

NOTE: cable loss as 1.2dB that offsets in the si

*Note: Max. Output include tune up tolerance Power measured by using average detector.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



1M BR mode EIRP

Channel	Frequency (MHz)	Max. Output include tune up tolerance Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	Limit (mW)
0	2402	4.40	2.10	4.467	4000
39	2441	3.55	2.10	3.673	4000
78	2480	4.05	2.10	4.121	4000

2M EDR mode EIRP

Channel	Frequency (MHz)	Max. Avg.Output include tune up tolerance	Antenna Gain (dBi)	EIRP (mW)	Limit (mW)
0	2402	1.16	2.10	2.118	4000
39	2441	0.17	2.10	1.687	4000
78	2480	0.69	2.10	1.901	4000

3M EDR mode EIRP

Channel	Frequency (MHz)	Max. Avg.Output include tune up tolerance	Antenna Gain (dBi)	EIRP (mW)	Limit (mW)
0	2402	1.09	2.10	2.084	4000
39	2441	0.09	2.10	1.656	4000
78	2480	0.68	2.10	1.897	4000

* Note: EIRP = Average Power + Gain

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. <u>SGS Taiwan Ltd.</u> JNo.134 WuKungRoad. NewTaipeildustrialPark WukuDistrict NewTaipeiCity Taiwan24803/新 t. 市 五 股 區 新 t. 產 業 園 區 五 工 終 134 號



8 20dB & 99% BANDWIDTH MEASUREMENT


8.1 Standard Applicable

For frequency hopping systems operating in the 2400MHz-2483.5 MHz no limit for 20dB bandwidth.

8.2 Measurement Equipment Used

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
ТҮРЕ		NUMBER	NUMBER	CAL.			
Spectrum Analyzer	KEYSIGHT	N9010A	MY54510568	06/20/2017	06/19/2018		
Coaxial Cable 30cm	WOKEN	00100A1F1A195C	RF01	12/12/2016	12/11/2017		
DC Block	PASTERNACK	PE8210	RF29	12/12/2016	12/11/2017		
Attenuator	WOKEN	218FS-10	RF23	12/12/2016	12/11/2017		
DC Power Supply	Agilent	E3640A	MY53140006	05/02/2017	05/01/2018		

8.3 Test Set-up



8.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013. Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set the spectrum analyzer as RBW=10 kHz (1 % of 20 dB Bandwidth.), VBW = 30 kHz, Span= 3MHz, Sweep=auto, Detector = Peak, and Max hold for 20dB Bandwidth test.
- 5. Mark the peak frequency and -20dB (upper and lower) frequency
- 6. Turn on the 99% bandwidth function, max reading.
- 7. Repeat above procedures until all test default channel is completed

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



99%

Bandwidth

(MHz)

1.1728

1.1731

1.1755

8-DPSK

СН

Low

Mid

High

8.5 Measurement Result

GFSK

CH

Low

Mid

High

GFSK			π/4-D	QPSK		8-DPS	SK	
СН	20 dB BW	2/3 BW	СН	20 dB BW	2/3 BW	СН	20 dB BW	2/3 BW
	(MHz)	(MHz)		(MHz)	(MHz)		(MHz)	(MHz)
Low	0.884	0.59	Low	1.309	0.87	Low	1.268	0.85
Mid	0.884	0.59	Mid	1.307	0.87	Mid	1.268	0.85
High	0.884	0.59	High	1.306	0.87	High	1.268	0.85

π/4-DQPSK

CH

Low

Mid

High

99%

Bandwidth

(MHz)

1.1700

1.1703

1.1693

99%

Bandwidth

(MHz)

0.8335

0.8368

0.8352


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained to so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.




OBW 20dB GFSK 1M DH5 2402MHz

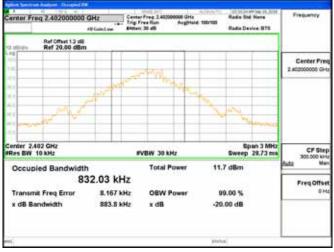

OBW 20dB GFSK 1M DH5 2441MHz




OBW 20dB GFSK 1M DH5 2480MHz

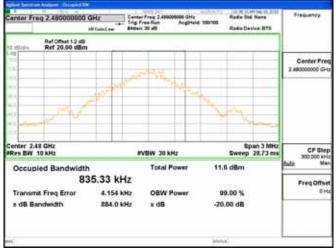

OBW 20dB π/4DQPSK 2M 2402MHz



OBW 20dB π/4DQPSK 2M 2441MHz

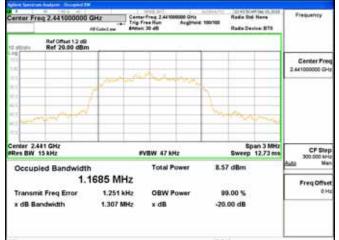

OBW 20dB π/4DQPSK 2M 2480MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

f (886-2) 2298-0488




OBW 20dB 8DPSK 3M DH5 2402MHz



OBW 20dB 8DPSK 3M DH5 2441MHz



OBW 20dB_8DPSK_3M_DH5_2480MHz

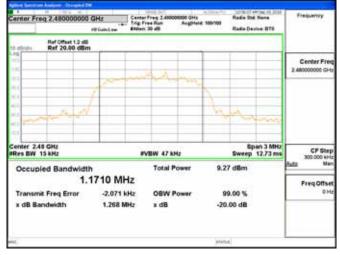


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Re非另有说明,此報告結果僅對測試之樣品員者,同時此樣品僅保留的方法。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms_and_conditions.htm</u> and, for electronic format In social document is issued by the Company subject to its General Conditions of service printed overlear, available on request or accessible at <u>www.sgs.com/terms and conditions</u> for electronic format documents, subject to the service printed overlear, available on request or accessible at <u>www.sgs.com/terms and conditions</u> for electronic format documents, subject to the service printed overlear, available on request or accessible at <u>www.sgs.com/terms and conditions</u> for electronic format documents, subject to the service printed overlear, available on request or accessible at <u>www.sgs.com/terms and conditions</u> for electronic format documents, subject to the service printed overlear, available on request or accessible at <u>www.sgs.com/terms and conditions</u> and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders memory back the full the full that that full that the full that full that the full that may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



IC OBW 99% GFSK 1M DH5 2402MHz

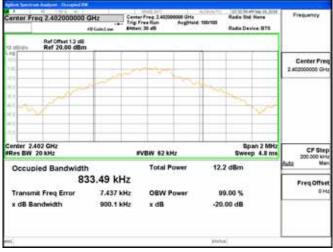


IC OBW 99%_GFSK_1M_DH5_2441MHz




IC OBW 99% GFSK 1M DH5 2480MHz




IC OBW 99% π/4DQPSK 2M 2402MHz

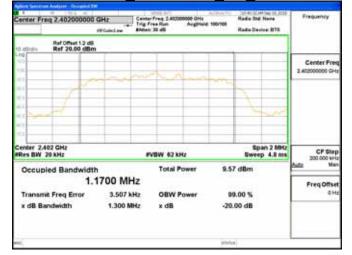

IC OBW 99% π/4DQPSK 2M 2441MHz

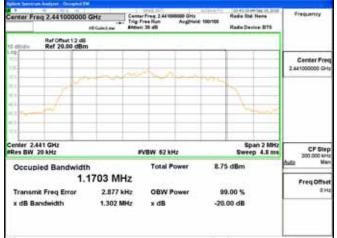

IC OBW 99% π/4DQPSK 2M 2480MHz

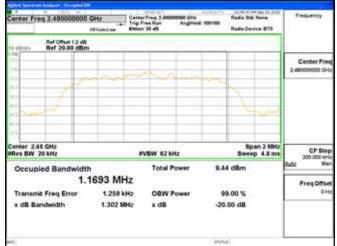

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

biness only more stated the results and the results and report for the angle of t documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

台灣檢驗科技股份有限公司 t (886-2) 2299-3279 f (886-2) 2298-0488

www.tw.sas.com




IC OBW 99% 8DPSK 3M DH5 2402MHz

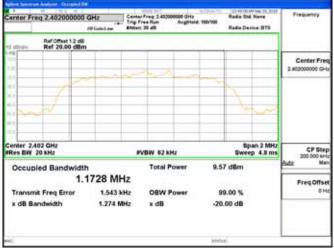

IC OBW 99%_8DPSK_3M_DH5_2441MHz

Center Freq 2.441000000 GHz		-a- Trig I	Cantar Freq 2.431000000 GHz Trig Free Run Arg01aid: 100/100 Antiar: 30 dB		Radio Del Norio Radio Del Norio	Frequency	
10 ellintiv	Ref 20.00 c					_	
102							Center Freq 2.441000000 GHz
	A	~					
	J.		-			ha	-
Center 2.44 Res BW 2				VBW 62 kHz	1	Span 2 M Sweep 4.8 r	
Occupi	Occupied Bandwidth		0.66	Total Power 8.7		77 dBm	Auda Man
		1.1731					FreqOffset
Transmi x dB Bar	t Freq Error ndwidth		37 kHz 74 MHz	OBW Po x dB		19.00 % 0.00 dB	ete
end.					and a		

IC OBW 99% 8DPSK 3M DH5 2480MHz

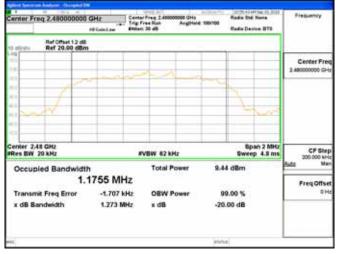

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Re非另有说明,此報告結果僅對測試之樣品員者,同時此樣品僅保留的方法。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms_and_conditions.htm</u> and, for electronic format In social document is issued by the Company subject to its General Conditions of service printed overlear, available on request or accessible at <u>www.sgs.com/terms and conditions</u> for electronic format documents, subject to the service printed overlear, available on request or accessible at <u>www.sgs.com/terms and conditions</u> for electronic format documents, subject to the service printed overlear, available on request or accessible at <u>www.sgs.com/terms and conditions</u> for electronic format documents, subject to the service printed overlear, available on request or accessible at <u>www.sgs.com/terms and conditions</u> for electronic format documents, subject to the service printed overlear, available on request or accessible at <u>www.sgs.com/terms and conditions</u> and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders memory back the full the full that that full that the full that full that the full that may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



9 CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT


9.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) & RSS-Gen §8.9 limit.

9.2 Measurement Equipment Used

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
Spectrum Analyzer	KEYSIGHT	N9010A	MY51440113	06/20/2017	06/19/2018		
Coaxial Cable 30cm	WOKEN	00100A1F1A195C	RF01	12/12/2016	12/11/2017		
DC Block	PASTERNACK	PE8210	RF29	12/12/2016	12/11/2017		
Attenuator	WOKEN	218FS-10	RF23	12/12/2016	12/11/2017		
DC Power Supply	Agilent	E3640A	MY53140006	05/02/2017	05/01/2018		

9.3 Test SET-UP



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新北市五股區新北產業園區五工路 134 號



9.4 Measurement Procedure

Conducted Band Edge:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013. Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = operating frequency.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Sweep = auto
- 6. Mark Peak, 2.3999GHz and 2.4836GHz and record the max. level.
- 7. Repeat above procedures until all frequency measured were complete.

Conducted Spurious Emission:

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows ANSI C63.10:2013. Measurement Guidelines.
- 3. Set RBW = 100 kHz & VBW = 300 kHz, Detector =Peak, Sweep = Auto
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

9.5 Measurement Result

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemntification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unawful and offenders may be prosecuted to the fullest extent of the law.



Band Edge GFSK 1M DH5 2402MHz




Band Edge_GFSK_1M_DH5_2480MHz



Band Edge 8DPSK 3M DH5 2402MHz



Band Edge_8DPSK_3M_DH5_2480MHz

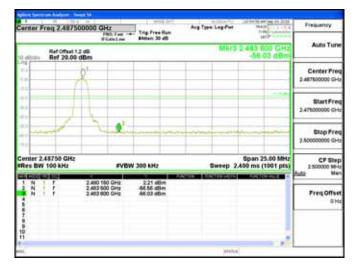

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Re非另有說明,此報告結果僅對測試之樣品員,同時此樣品僅保留的方。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

台灣檢驗科技股份有限公司 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com


Member of SGS Group




Hopping Band Edge_GFSK_1M_DH5_2402MHz




Hopping Band Edge_GFSK_1M_DH5_2480MHz

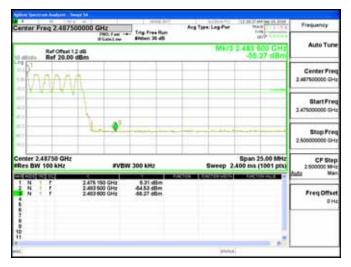

Hopping Band Edge_8DPSK_3M_DH5_2402MHz

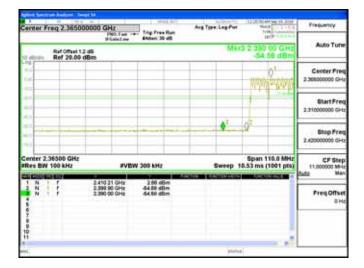

Hopping Band Edge_8DPSK_3M_DH5_2480MHz

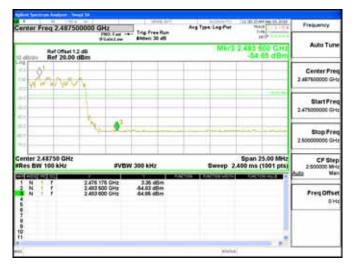

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Spurious Emission_GFSK_1M_DH5_2402MHz

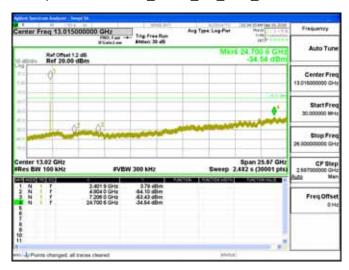

Spurious Emission_GFSK_1M_DH5_2441MHz



Spurious Emission_GFSK_1M_DH5_2480MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

にお手力力が切りした状で的なモロガロペン体の可見すく PiorPioLikeの正式 Biology A でみたい うき Biology A でみたい うき Biology A でみたい うき PiorPioLike A Structure A St pany's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.


Spurious Emission_m/4DQPSK_2M_2402MHz



Spurious Emission_m/4DQPSK_2M_2441MHz



Spurious Emission π/4DQPSK 2M 2480MHz

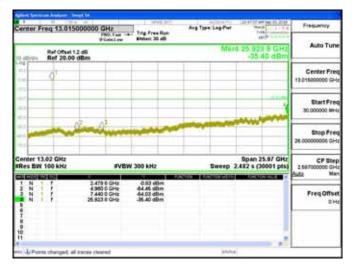

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號


台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sgs.com



Spurious Emission_8DPSK_3M_DH5_2402MHz

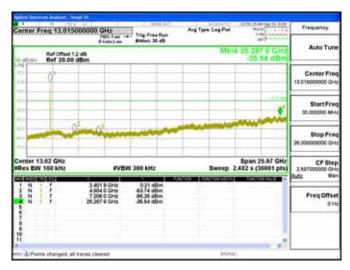

Spurious Emission_8DPSK_3M_DH5_2441MHz



Spurious Emission_8DPSK_3M_DH5_2480MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Contension of the state of the results shown in this test report refer only to the sample(s) tested and such sample(s) are related to 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excert and the company of the target and biling the target an

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司	ů i	f (886-2) 2298-0488	www.tw.sgs.com
	1		Member of SGS Group



10 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

10.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, must also comply with the §15.209 & RSS-Gen §8.10 Table 6 limit.

And according to §15.33(a) (1) & RSS-Gen §8.9 Table 4 & 5, for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- 1. The lower limit shall apply at the transition frequencies.
- Emission level (dBµV/m) = 20 log Emission level (dBµV/m)

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

SGS Taiwan Ltd.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



10.2 Measurement Equipment Used

966 Chamber							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
ТҮРЕ		NUMBER	NUMBER	CAL.			
Bi-log Antenna	SCHWAZBECK	VULB9168	378	12/29/2017	12/28/2018		
Horn Antenna	Schwarzbeck	BBHA9120D	1441	08/16/2018	08/15/2019		
Horn Antenna	Schwarzbeck	BBHA9170	184	12/12/2017	12/11/2018		
Loop Antenna	ETS.LINDGREN	6502	148045	09/24/2017	09/25/2018		
Loop Antenna	ETS.LINDGREN	6502	148045	09/25/2018	09/24/2019		
3m Site NSA	SGS	966 chamber	N/A	01/02/2018	01/01/2019		
Spectrum Analyzer	Agilent	E4446A	MY51100003	05/15/2018	05/14/2019		
EMI Test Receiver	R&S	ESCI7	100335	02/02/2018	02/01/2019		
Pre-Amplifier	HP	8449B	3008A00578	01/02/2018	01/01/2019		
Pre-Amplifier	HP	8447D	2944A07676	01/02/2018	01/01/2019		
Pre-Amplifier	EMC Instru- ments	EMC184045B	980135	10/27/2017	10/26/2018		
Attenuator	Mini-Circuit	BW-S10W2+	2	01/02/2018	01/01/2019		
Filter 2400-2483.5 MHz	EWT	EWT-14-0166	M1	01/02/2018	01/01/2019		
Low Loss Cable	Huber Suhner	966_RX	9	01/02/2018	01/01/2019		


NOTE: N.C.R refers to Not Calibrated Required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. <u>SGS Taiwan Ltd.</u> <u>INo. 134. WuKungRoad. New Taipeinforks WukuDistrict NewTaipeiCity.Taiwan24803/新 th. 市 充 股 區 新 th. 產 業 团 區 充 工 終 134 號</u>




10.3 Test SET-UP


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

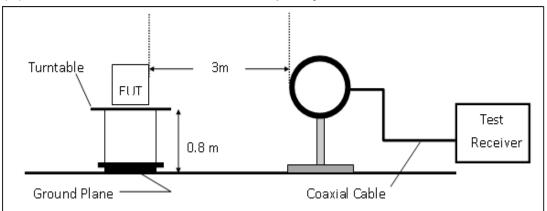

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

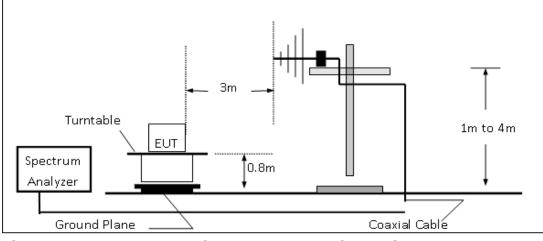

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

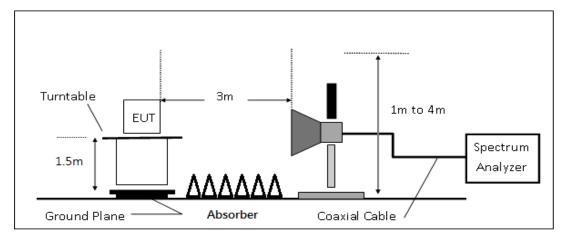

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relative to so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



10.4 Measurement Procedure

Radiated Emission

- 1. The testing follows ANSI C63.10:2013. Measurement Guidelines.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 0.8m for frequency> 1GHz above ground plan.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. Use the follow spectrum analyzer setting:
 - (1) Span = wide enough to fully capture the emission being measured
 - (2) RBW = 1 MHz for $f \ge 1$ GHz, 100 kHz for f < 1 GHz, VBW \ge RBW, Sweep = auto, Detector function = peak, Trace = max hold
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c)

Duty Cycle = On time/100 milliseconds

On time = N1*L1=N2*L2+...+N(n-1)*LN(n-1)+N(n)*L(n)

Where N1 is number of type 1 pulses, L1 is length of type 1 pulses, etc.

Average Emission Level = Peak Emission Level + 20*log (duty Cycle)

- 6. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 7. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 8. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 9. Repeat above procedures until all frequency of the interest measured were complete.

Gines Statement is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law SGS Taiwan Ltd.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



10.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

The limit of the emission level is expressed in dBuV/m, which converts 20*log(uV/m)

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

10.6 Test Results of Radiated Spurious Emissions form 9 KHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

10.7 Measurement Result

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Radiated Band Edge Measurement Result:

External Antenna (Type: Dipole antenna, Model no: WTS2405)

:BR(1M)	Test Date	:2018-09-18
:2402 MHz	Temp./Humi.	:23 deg_C / 62 RH
:Bandedge CH LOW	Engineer	:Wei
:E2 Plane	Measurement Antenna Pol.	:VERTICAL
	:2402 MHz :Bandedge CH LOW	:2402 MHz Temp./Humi. :Bandedge CH LOW Engineer

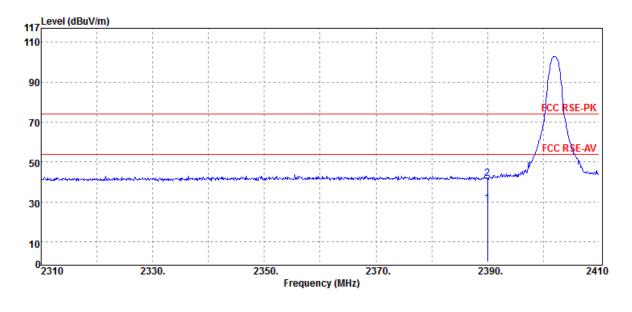

Detector	Spectrum	Factor	Actual	Limit	Margin	
Mode	Reading Level		FS	@3m		
PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	_
Average	29.14	0.20	29.34	54.00	-24.66	
Peak	41.59	0.20	41.79	74.00	-32.21	
	Mode PK/QP/AV Average	ModeReading LevelPK/QP/AVdBµVAverage29.14	ModeReading LevelPK/QP/AVdBµVdBAverage29.140.20	ModeReading LevelFSPK/QP/AVdBµVdBdBµV/mAverage29.140.2029.34	Mode Reading Level FS @3m PK/QP/AV dBμV dB dBμV/m dBμV/m Average 29.14 0.20 29.34 54.00	Mode Reading Level FS @3m PK/QP/AV dBµV dB dBµV/m dB Average 29.14 0.20 29.34 54.00 -24.66

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained to so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

Report No.: ER/2018/90024 Page 37 of 97




Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:BR(1M) :2402 MHz :Bandedge CH LOW :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-09-18 :23 deg_C / 62 RH :Wei :HORIZONTAL

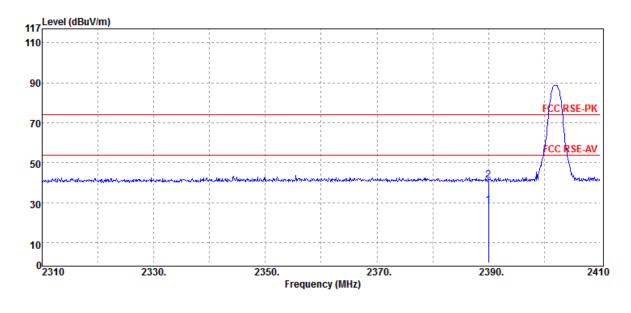

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	28.69	0.20	28.89	54.00	-25.11
2390.00	Peak	41.24	0.20	41.44	74.00	-32.56

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90024 Page 38 of 97




Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:BR(1M) :2480 MHz :Bandedge CH HIGH :E2 Plane

Test Date Temp./Humi. Engineer :Wei Measurement Antenna Pol.

:2018-09-18 :23 deg_C / 62 RH :VERTICAL

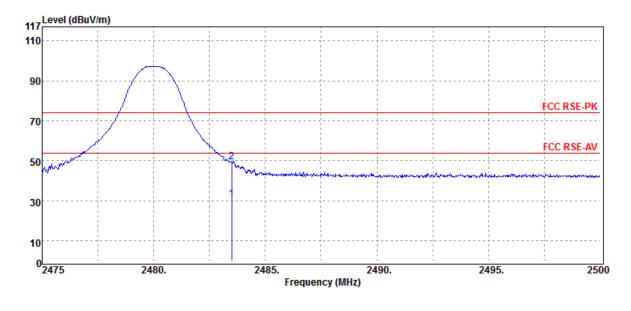

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	30.37	0.53	30.90	54.00	-23.10
2483.50	Peak	48.68	0.53	49.21	74.00	-24.79

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90024 Page 39 of 97




Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:BR(1M) :2480 MHz :Bandedge CH HIGH :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-09-18 :23 deg_C / 62 RH :Wei :HORIZONTAL

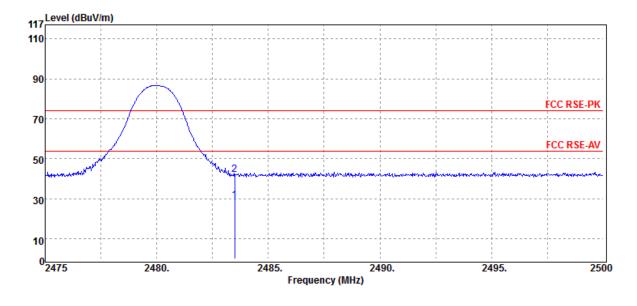

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	28.61	0.53	29.14	54.00	-24.86
2483.50	Peak	41.50	0.53	42.03	74.00	-31.97


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90024 Page 40 of 97



Operation Band :EDR(3M) Fundamental Frequency :2402 MHz **Operation Mode** :Bandedge CH LOW EUT Pol. :E2 Plane

Test Date :2018-09-18 Temp./Humi. :23 deg_C / 62 RH Engineer :Wei Measurement Antenna Pol. :VERTICAL

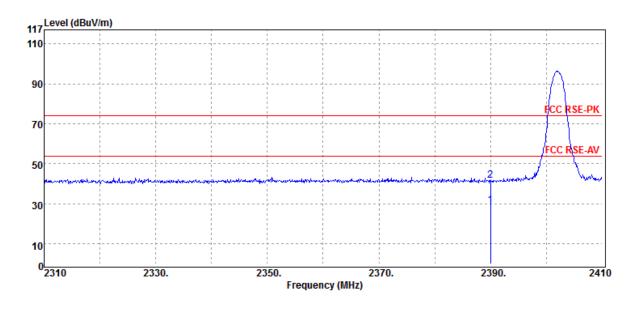

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	28.85	0.20	29.05	54.00	-24.95
2390.00	Peak	41.54	0.20	41.74	74.00	-32.26

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90024 Page 41 of 97




Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:EDR(3M) :2402 MHz :Bandedge CH LOW :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-09-18 :23 deg_C / 62 RH :Wei :HORIZONTAL

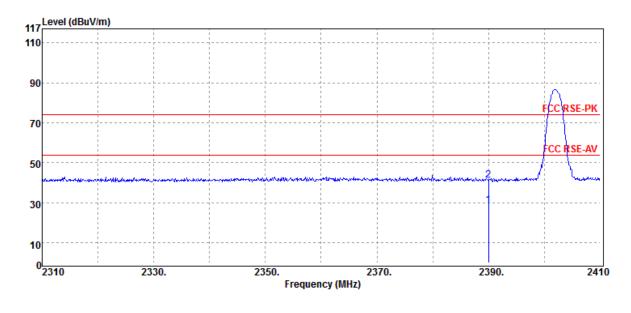

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	28.36	0.20	28.56	54.00	-25.44
2390.00	Peak	40.94	0.20	41.14	74.00	-32.86

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90024 Page 42 of 97




Operation Band :EDR(3M) **Fundamental Frequency Operation Mode** EUT Pol.

:2480 MHz :Bandedge CH HIGH :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-09-18 :23 deg_C / 62 RH :Wei :VERTICAL

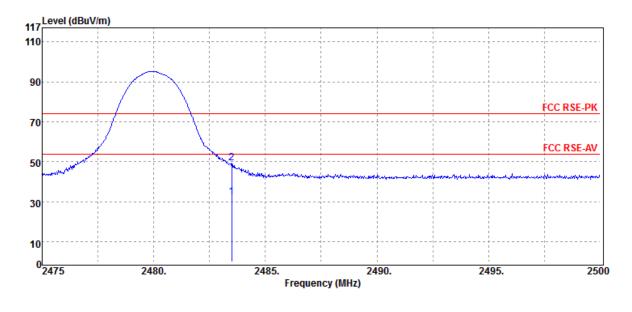

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	31.70	0.53	32.23	54.00	-21.77
2483.50	Peak	48.73	0.53	49.26	74.00	-24.74

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Report No.: ER/2018/90024 Page 43 of 97



Operation Band :EDR(3M) **Fundamental Frequency** :2480 MHz **Operation Mode** :Bandedge CH HIGH EUT Pol. :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-09-18 :23 deg_C / 62 RH :Wei :HORIZONTAL

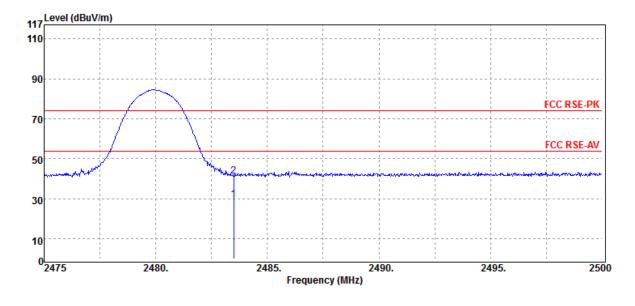

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	28.96	0.53	29.49	54.00	-24.51
2483.50	Peak	40.88	0.53	41.41	74.00	-32.59

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90024 Page 44 of 97




Operation Band Fundamental Frequency Operation Mode EUT Pol.

:BR Hopping :2402 MHz :Bandedge CH LOW :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-09-18 :23 deg_C / 62 RH :Wei :VERTICAL

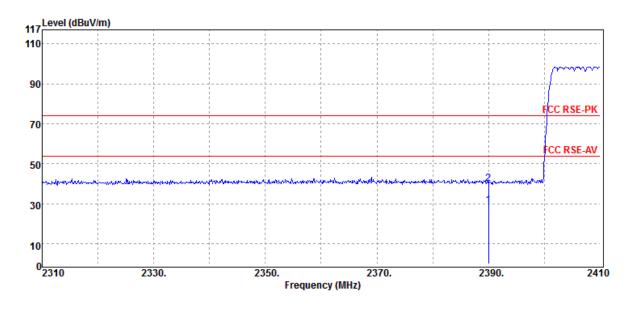

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	28.86	0.20	29.06	54.00	-24.94
2390.00	Peak	39.96	0.20	40.16	74.00	-33.84

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90024 Page 45 of 97




Operation Band Fundamental Frequency Operation Mode EUT Pol.

:BR Hopping :2402 MHz :Bandedge CH LOW :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-09-18 :23 deg_C / 62 RH :Wei :HORIZONTAL

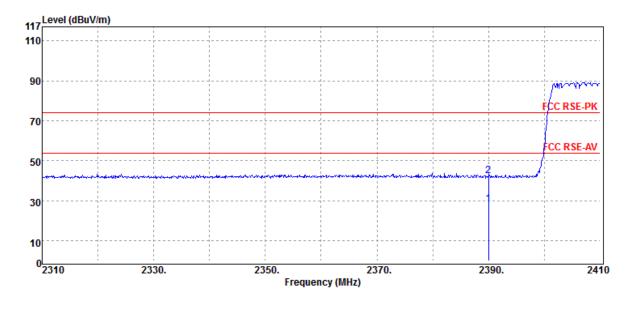

Detector	Spectrum	Factor	Actual	Limit	Margin
Mode	Reading Level		FS	@3m	
PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
Average	28.23	0.20	28.43	54.00	-25.57
Peak	42.18	0.20	42.38	74.00	-31.62
	Mode PK/QP/AV Average	ModeReading LevelPK/QP/AVdBµVAverage28.23	ModeReading LevelPK/QP/AVdBµVdBAverage28.230.20	ModeReading LevelFSPK/QP/AVdBµVdBdBµV/mAverage28.230.2028.43	Mode Reading Level FS @3m PK/QP/AV dBμV dB dBμV/m dBμV/m Average 28.23 0.20 28.43 54.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90024 Page 46 of 97




Operation Band Fundamental Frequency Operation Mode EUT Pol.

:BR Hopping :2480 MHz :Bandedge CH HIGH :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-09-18 :23 deg_C / 62 RH :Wei :VERTICAL

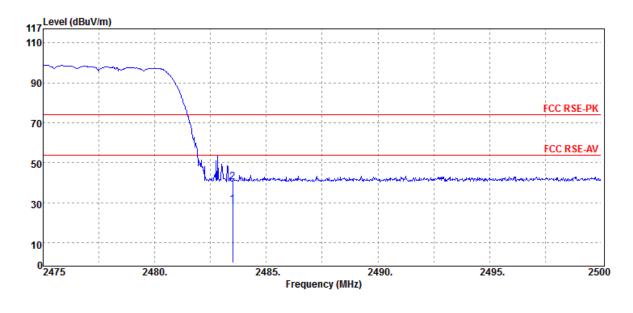

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	28.79	0.53	29.32	54.00	-24.68
2483.50	Peak	40.04	0.53	40.57	74.00	-33.43

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90024 Page 47 of 97




Operation Band Fundamental Frequency Operation Mode EUT Pol.

:BR Hopping :2480 MHz :Bandedge CH HIGH :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-09-18 :23 deg_C / 62 RH :Wei :HORIZONTAL

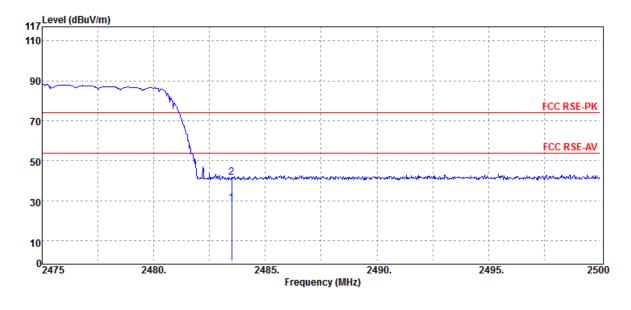

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	28.27	0.53	28.80	54.00	-25.20
2483.50	Peak	41.08	0.53	41.61	74.00	-32.39

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90024 Page 48 of 97




Operation Band Fundamental Frequency Operation Mode EUT Pol.

:EDR Hopping :2402 MHz :Bandedge CH LOW :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-09-18 :23 deg_C / 62 RH :Wei :VERTICAL

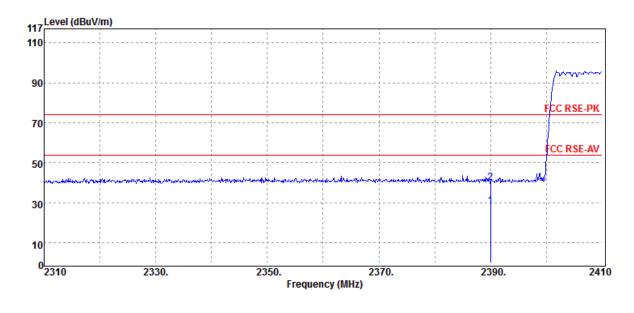

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	28.26	0.20	28.46	54.00	-25.54
2390.00	Peak	39.95	0.20	40.15	74.00	-33.85

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90024 Page 49 of 97




Operation Band Fundamental Frequency Operation Mode EUT Pol.

:EDR Hopping :2402 MHz :Bandedge CH LOW :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-09-18 :23 deg_C / 62 RH :Wei :HORIZONTAL

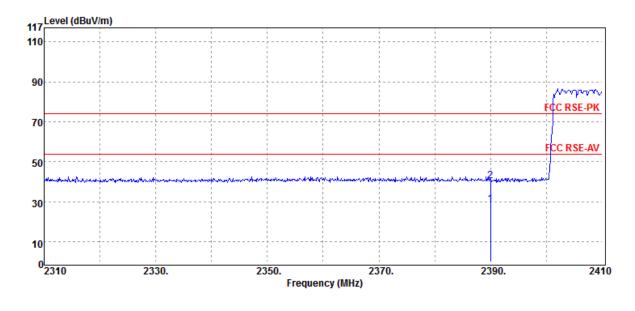

Detector	Spectrum	Factor	Actual	Limit	Margin
Mode	Reading Level		FS	@3m	
PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
Average	28.57	0.20	28.77	54.00	-25.23
Peak	40.12	0.20	40.32	74.00	-33.68
	Mode PK/QP/AV Average	ModeReading LevelPK/QP/AVdBµVAverage28.57	ModeReading LevelPK/QP/AVdBµVdBAverage28.570.20	ModeReading LevelFSPK/QP/AVdBµVdBdBµV/mAverage28.570.2028.77	Mode Reading Level FS @3m PK/QP/AV dBµV dB dBµV/m dBµV/m Average 28.57 0.20 28.77 54.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90024 Page 50 of 97




Operation Band Fundamental Frequency Operation Mode EUT Pol.

:EDR Hopping :2480 MHz :Bandedge CH HIGH :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-09-18 :23 deg_C / 62 RH :Wei :VERTICAL

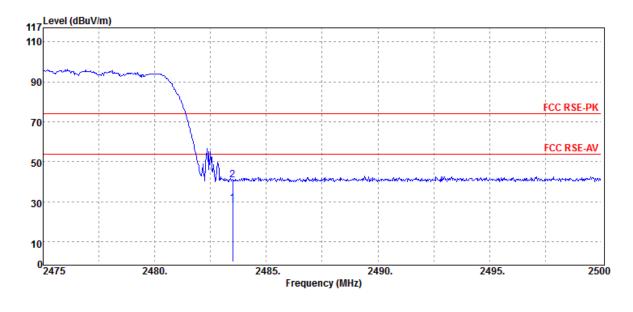

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	28.77	0.53	29.30	54.00	-24.70
2483.50	Peak	40.50	0.53	41.03	74.00	-32.97

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90024 Page 51 of 97




Operation Band Fundamental Frequency Operation Mode EUT Pol.

:EDR Hopping :2480 MHz :Bandedge CH HIGH :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-09-18 :23 deg_C / 62 RH :Wei :HORIZONTAL

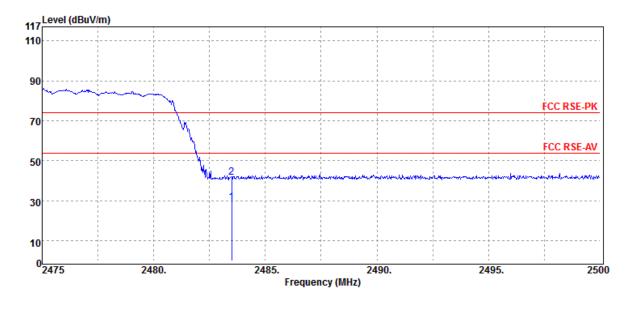

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	28.71	0.53	29.24	54.00	-24.76
2483.50	Peak	41.15	0.53	41.68	74.00	-32.32

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Internal Antenna (Type: Printed antenna, Model no: N/A)

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:BR(1M) :2402 MHz :Bandedge CH LOW :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-09-25 :23 deg_C / 62 RH :Wei :VERTICAL

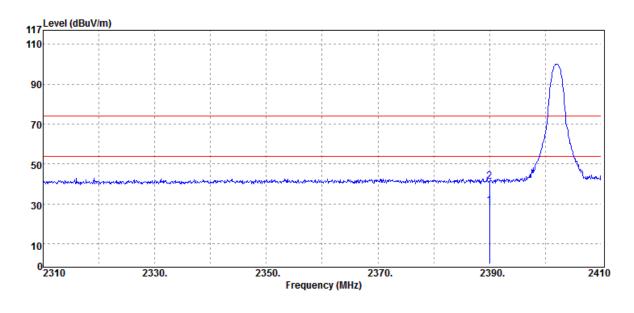

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	28.80	0.20	29.00	54.00	-25.00
2390.00	Peak	41.17	0.20	41.37	74.00	-32.63

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90024 Page 53 of 97




Operation Band Fundamental Frequency Operation Mode EUT Pol.

:BR(1M) :2402 MHz :Bandedge CH LOW :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-09-25 :23 deg_C / 62 RH :Wei :HORIZONTAL

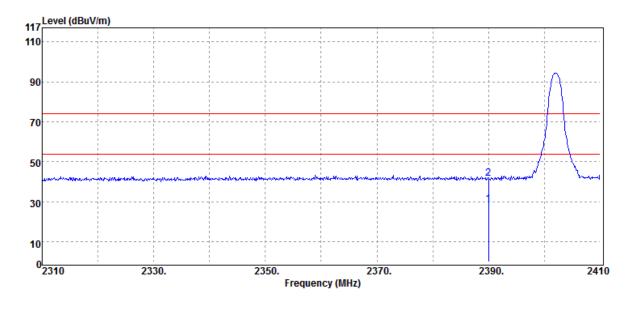

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	28.63	0.20	28.83	54.00	-25.17
2390.00	Peak	41.42	0.20	41.62	74.00	-32.38


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90024 Page 54 of 97



Operation Band :BR(1M) **Fundamental Frequency** :2480 MHz :Bandedge CH HIGH **Operation Mode** EUT Pol. :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol. :2018-09-25 :23 deg_C / 62 RH :Wei :VERTICAL

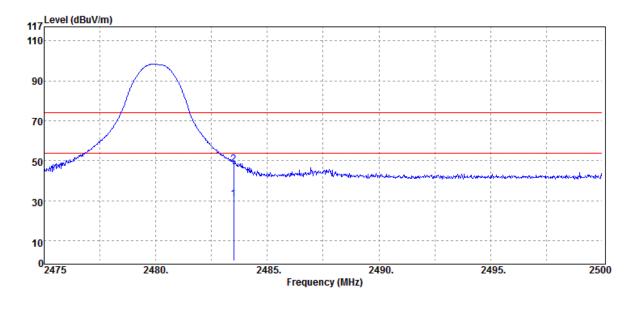

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	_
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	30.28	0.53	30.81	54.00	-23.19
2483.50	Peak	47.73	0.53	48.26	74.00	-25.74

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90024 Page 55 of 97




Operation Band Fundamental Frequency Operation Mode EUT Pol.

:BR(1M) :2480 MHz :Bandedge CH HIGH :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-09-25 :23 deg_C / 62 RH :Wei :HORIZONTAL

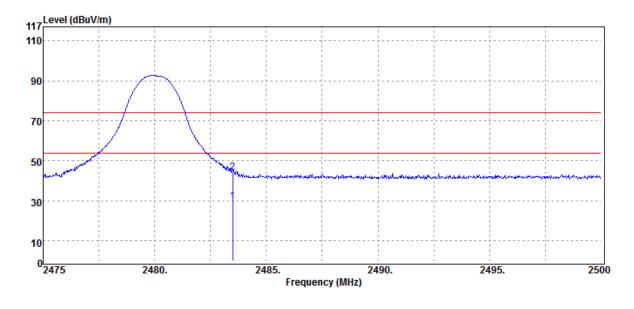

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	29.03	0.53	29.56	54.00	-24.44
2483.50	Peak	43.58	0.53	44.11	74.00	-29.89


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90024 Page 56 of 97



Operation Band :EDR(3M) **Fundamental Frequency** :2402 MHz **Operation Mode** :Bandedge CH LOW EUT Pol. :E2 Plane

Test Date :2018-09-25 Temp./Humi. :23 deg_C / 62 RH Engineer :Wei Measurement Antenna Pol. :VERTICAL

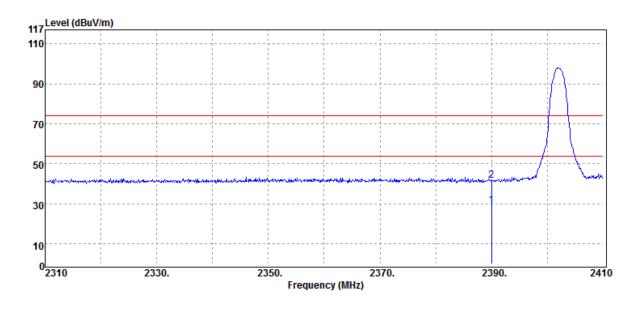

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	29.07	0.20	29.27	54.00	-24.73
2390.00	Peak	41.66	0.20	41.86	74.00	-32.14

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90024 Page 57 of 97




Operation Band Fundamental Frequency Operation Mode EUT Pol.

:EDR(3M) :2402 MHz :Bandedge CH LOW :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-09-25 :23 deg_C / 62 RH :Wei :HORIZONTAL

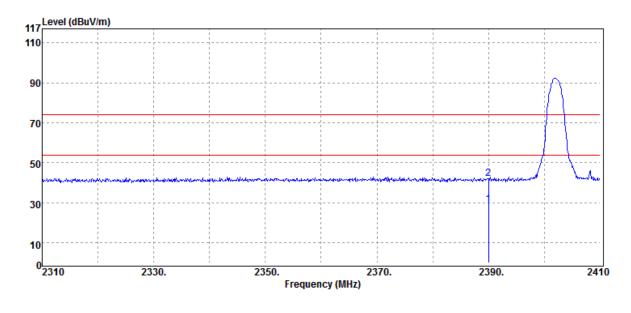

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	28.76	0.20	28.96	54.00	-25.04
2390.00	Peak	41.83	0.20	42.03	74.00	-31.97


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90024 Page 58 of 97



Operation Band :EDR(3M) **Fundamental Frequency** :2480 MHz :Bandedge CH HIGH **Operation Mode** EUT Pol. :E2 Plane

Test Date :2018-09-25 Temp./Humi. :23 deg_C / 62 RH Engineer :Wei Measurement Antenna Pol. :VERTICAL

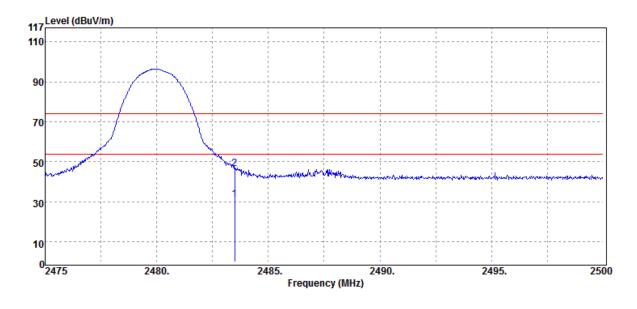

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	30.61	0.53	31.14	54.00	-22.86
2483.50	Peak	46.06	0.53	46.59	74.00	-27.41

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Report No.: ER/2018/90024 Page 59 of 97



Operation Band :EDR(3M) **Fundamental Frequency** :2480 MHz :Bandedge CH HIGH **Operation Mode** EUT Pol. :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-09-25 :23 deg_C / 62 RH :Wei :HORIZONTAL

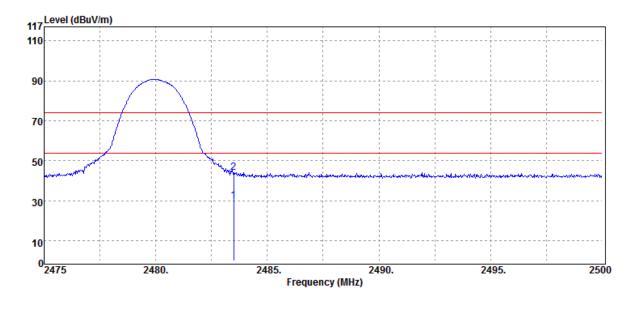

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	29.31	0.53	29.84	54.00	-24.16
2483.50	Peak	43.79	0.53	44.32	74.00	-29.68

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90024 Page 60 of 97




Operation Band Fundamental Frequency Operation Mode EUT Pol.

:BR Hopping :2402 MHz :Bandedge CH LOW :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-09-25 :23 deg_C / 62 RH :Wei :VERTICAL

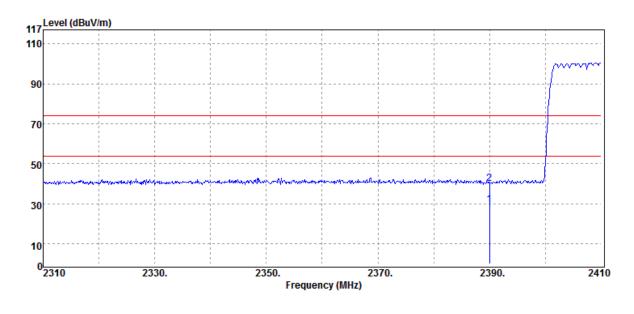

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	29.17	0.20	29.37	54.00	-24.63
2390.00	Peak	39.97	0.20	40.17	74.00	-33.83

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90024 Page 61 of 97




Operation Band Fundamental Frequency Operation Mode EUT Pol.

:BR Hopping :2402 MHz :Bandedge CH LOW :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-09-25 :23 deg_C / 62 RH :Wei :HORIZONTAL

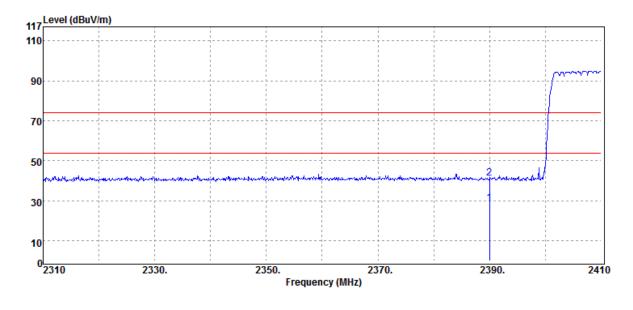

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	28.71	0.20	28.91	54.00	-25.09
2390.00	Peak	41.21	0.20	41.41	74.00	-32.59

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90024 Page 62 of 97




Operation Band Fundamental Frequency Operation Mode EUT Pol.

:BR Hopping :2480 MHz :Bandedge CH HIGH :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-09-25 :23 deg_C / 62 RH :Wei :VERTICAL

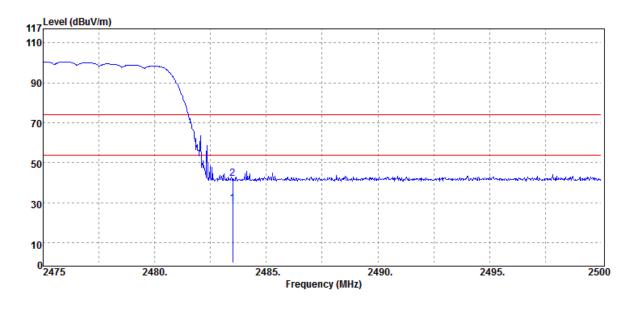

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	29.13	0.53	29.66	54.00	-24.34
2483.50	Peak	41.54	0.53	42.07	74.00	-31.93

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90024 Page 63 of 97




Operation Band Fundamental Frequency Operation Mode EUT Pol.

:BR Hopping :2480 MHz :Bandedge CH HIGH :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-09-25 :23 deg_C / 62 RH :Wei :HORIZONTAL

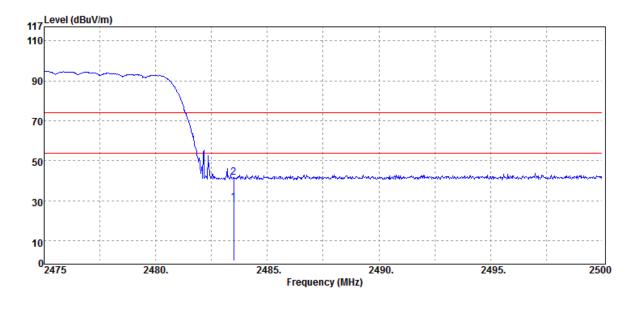

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	28.65	0.53	29.18	54.00	-24.82
2483.50	Peak	41.04	0.53	41.57	74.00	-32.43

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90024 Page 64 of 97




Operation Band Fundamental Frequency Operation Mode EUT Pol.

:EDR Hopping :2402 MHz :Bandedge CH LOW :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-09-25 :23 deg_C / 62 RH :Wei :VERTICAL

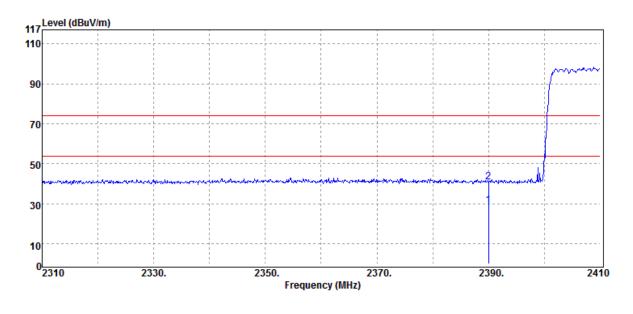

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	28.80	0.20	29.00	54.00	-25.00
2390.00	Peak	40.52	0.20	40.72	74.00	-33.28

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90024 Page 65 of 97




Operation Band Fundamental Frequency Operation Mode EUT Pol.

:EDR Hopping :2402 MHz :Bandedge CH LOW :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-09-25 :23 deg_C / 62 RH :Wei :HORIZONTAL

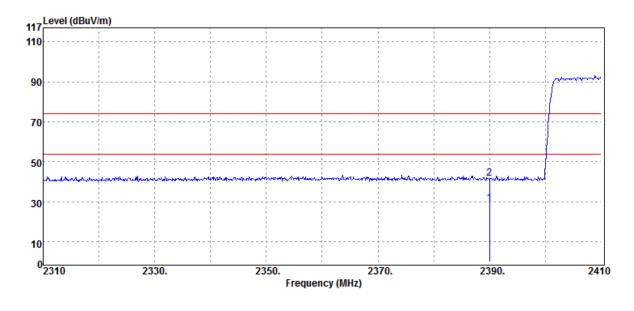

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	28.80	0.20	29.00	54.00	-25.00
2390.00	Peak	41.35	0.20	41.55	74.00	-32.45

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90024 Page 66 of 97




Operation Band Fundamental Frequency Operation Mode EUT Pol.

:EDR Hopping :2480 MHz :Bandedge CH HIGH :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-09-25 :23 deg_C / 62 RH :Wei :VERTICAL

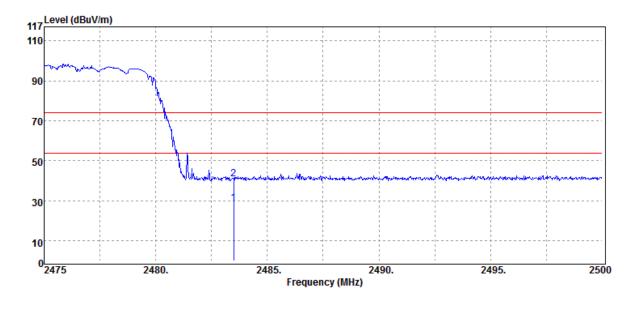

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	28.33	0.53	28.86	54.00	-25.14
2483.50	Peak	40.26	0.53	40.79	74.00	-33.21

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90024 Page 67 of 97




Operation Band Fundamental Frequency Operation Mode EUT Pol.

:EDR Hopping :2480 MHz :Bandedge CH HIGH :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-09-25 :23 deg_C / 62 RH :Wei :HORIZONTAL

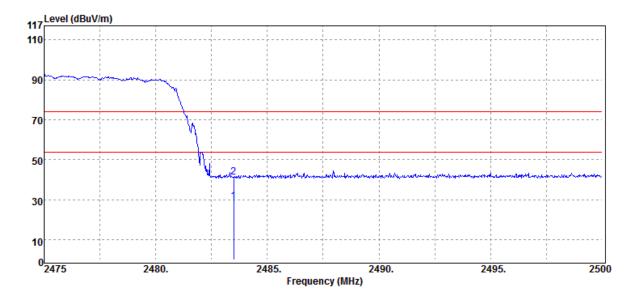

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	28.54	0.53	29.07	54.00	-24.93
2483.50	Peak	40.95	0.53	41.48	74.00	-32.52

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Radiated Spurious Emission Measurement Result:

Frequency form 30MHz to 1000MHz

External Antenna (Type: Dipole antenna, Model no: WTS2405)

Operation Band	:BR(1M)	Test Date	:2018-09-20
Fundamental Frequency	:2441 MHz	Temp./Humi.	:23 deg_C / 62 RH
Operation Mode	:Tx CH MID	Engineer	:Wei
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

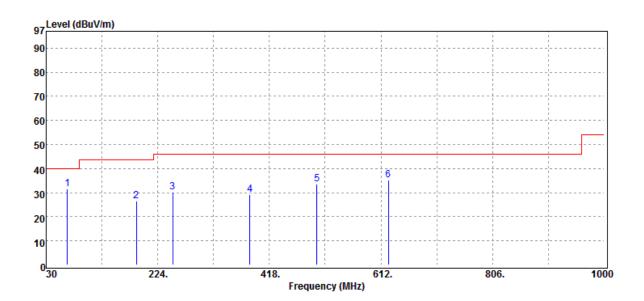

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
66.86	Peak	41.02	-9.42	31.60	40.00	-8.40
187.14	Peak	35.15	-8.78	26.37	43.50	-17.13
250.19	Peak	37.69	-7.40	30.29	46.00	-15.71
384.05	Peak	33.01	-3.79	29.22	46.00	-16.78
500.45	Peak	35.89	-2.36	33.53	46.00	-12.47
624.61	Peak	34.41	0.71	35.12	46.00	-10.88

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Report No.: ER/2018/90024 Page 69 of 97



Operation Band :BR(1M) Fundamental Frequency :2441 MHz **Operation Mode** :Tx CH MID EUT Pol. :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-09-20 :23 deg_C / 62 RH :Wei :HORIZONTAL

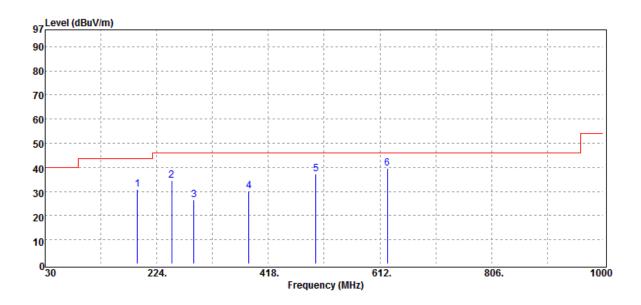


Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
190.05	Peak	39.89	-8.96	30.93	43.50	-12.57
250.19	Peak	42.01	-7.40	34.61	46.00	-11.39
288.99	Peak	32.41	-5.86	26.55	46.00	-19.45
384.05	Peak	33.92	-3.79	30.13	46.00	-15.87
500.45	Peak	39.66	-2.36	37.30	46.00	-8.70
624.61	Peak	38.96	0.71	39.67	46.00	-6.33

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Internal Antenna (Type: Printed antenna, Model no: N/A)

Operation Band	:BR(1M)	Test Date	:2018-09-28
Fundamental Frequency	:2441 MHz	Temp./Humi.	:23 deg_C / 62 RH
Operation Mode	:Tx CH MID	Engineer	:Wei
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

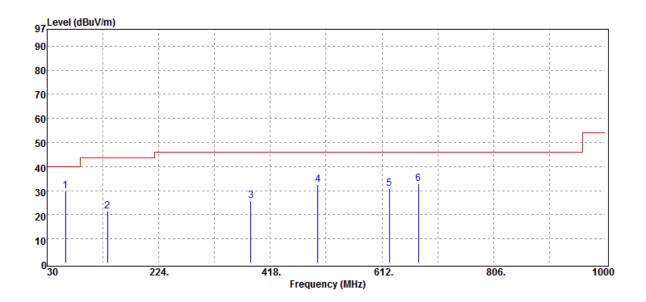

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
62.01	Peak	38.31	-8.28	30.03	40.00	-9.97
134.76	Peak	29.87	-8.55	21.32	43.50	-22.18
384.05	Peak	29.74	-3.79	25.95	46.00	-20.05
500.45	Peak	34.89	-2.36	32.53	46.00	-13.47
624.61	Peak	30.18	0.71	30.89	46.00	-15.11
675.05	Peak	31.52	1.37	32.89	46.00	-13.11


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90024 Page 71 of 97

deg_C / 62 RH



Operation Band	:BR(1M)	Test Date	:2018-09-28
Fundamental Frequency	:2441 MHz	Temp./Humi.	:23 deg_C / 62
Operation Mode	:Tx CH MID	Engineer	:Wei
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

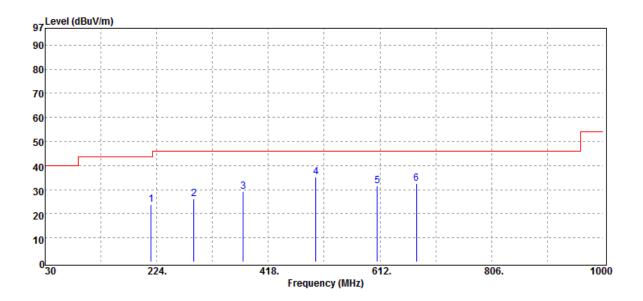

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
214.30	Peak	32.94	-9.17	23.77	43.50	-19.73
288.99	Peak	31.91	-5.86	26.05	46.00	-19.95
374.35	Peak	33.16	-3.96	29.20	46.00	-16.80
500.45	Peak	37.72	-2.36	35.36	46.00	-10.64
607.15	Peak	32.04	-0.38	31.66	46.00	-14.34
675.05	Peak	31.05	1.37	32.42	46.00	-13.58

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Frequency above 1 GHz


External Antenna (Type: Dipole antenna, Model no: WTS2405)

Operation Band Fundamental Frequency Operation Mode EUT Pol.

:BR(1M) :2402 MHz :Tx CH LOW :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-09-18 :23 deg_C / 62 RH :Wei :VERTICAL

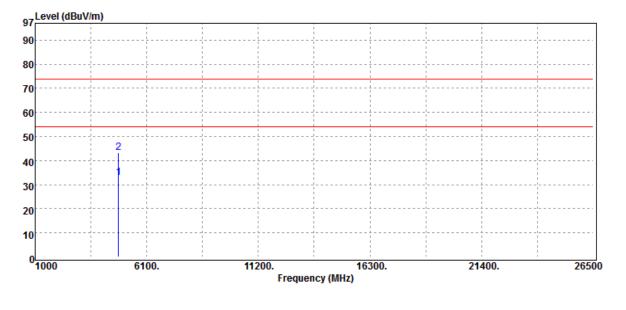

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
_	4804.00	Average	27.41	5.65	33.06	54.00	-20.94
	4804.00	Peak	37.52	5.65	43.17	74.00	-30.83

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Gines Galaxie in state and state tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Report No.: ER/2018/90024 Page 73 of 97



Operation Band	:BR(1M)	Test Date
Fundamental Frequency	:2402 MHz	Temp./Humi.
Operation Mode	:Tx CH LOW	Engineer
EUT Pol.	:E2 Plane	Measurement Antenna Pol.

:2018-09-18 :23 deg_C / 62 RH :Wei :HORIZONTAL

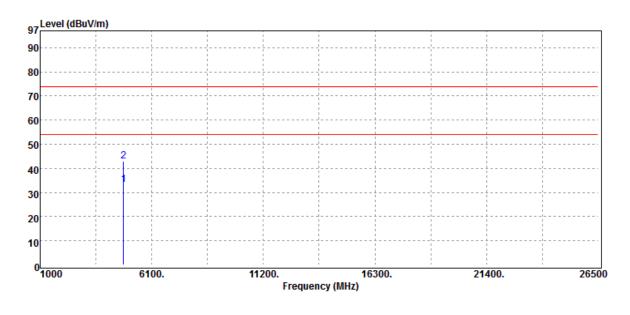


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4804.00	Average	27.43	5.65	33.08	54.00	-20.92
4804.00	Peak	37.30	5.65	42.95	74.00	-31.05

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90024 Page 74 of 97



|--|

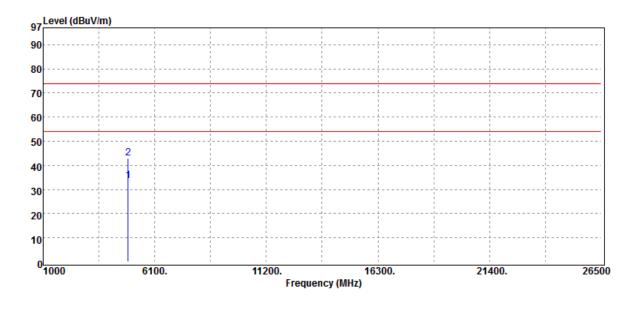


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4882.00	Average	27.74	5.90	33.64	54.00	-20.36
4882.00	Peak	37.09	5.90	42.99	74.00	-31.01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90024 Page 75 of 97



Operation Band	:BR(1M)	Test Date	:2018-09-18
Fundamental Frequency	:2441 MHz	Temp./Humi.	:23 deg_C / 62 RH
Operation Mode	:Tx CH MID	Engineer	:Wei
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

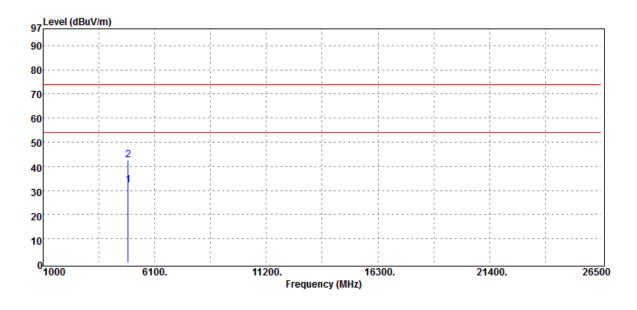


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4882.00	Average	26.24	5.90	32.14	54.00	-21.86
4882.00	Peak	36.62	5.90	42.52	74.00	-31.48

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90024 Page 76 of 97



Operation Band :BR(1M) Test Date Fundamental Frequency :2480 MHz Temp./Humi. **Operation Mode** :Tx CH HIGH Engineer EUT Pol. :E2 Plane Measurement Antenna Pol. :2018-09-18 :23 deg_C / 62 RH :Wei :VERTICAL

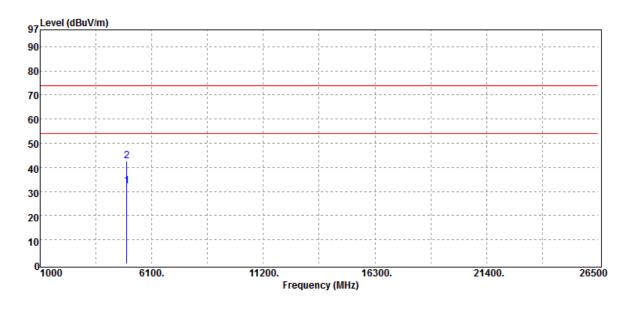

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4960.00	Average	26.25	6.05	32.30	54.00	-21.70
4960.00	Peak	36.52	6.05	42.57	74.00	-31.43

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Report No.: ER/2018/90024 Page 77 of 97



Operation Band :BR(1M) Fundamental Frequency :2480 MHz **Operation Mode** :Tx CH HIGH EUT Pol. :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-09-18 :23 deg_C / 62 RH :Wei :HORIZONTAL

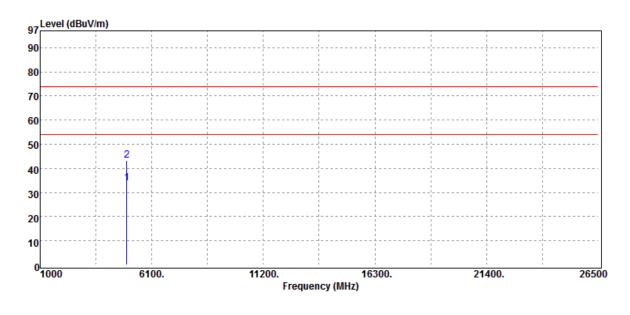


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4960.00	Average	27.76	6.05	33.81	54.00	-20.19
4960.00	Peak	37.41	6.05	43.46	74.00	-30.54

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Internal Antenna (Type: Printed antenna, Model no: N/A)

Operation Band	:BR(1M)	Test Date	:2018-09-28
Fundamental Frequency	:2402 MHz	Temp./Humi.	:23 deg_C / 62 RH
Operation Mode	:Tx CH LOW	Engineer	:Wei
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	

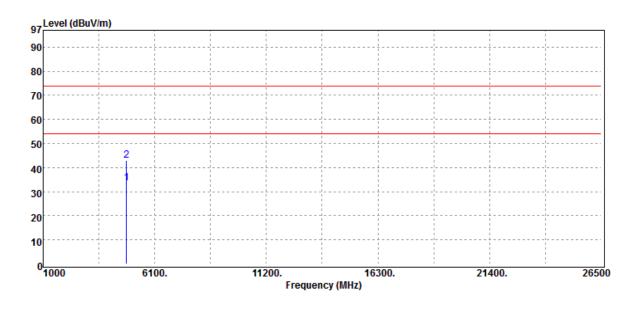

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4804.00	Average	27.89	5.65	33.54	54.00	-20.46
4804.00	Peak	37.41	5.65	43.06	74.00	-30.94


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90024 Page 79 of 97



Operation Band	:BR(1M)	Test Date
Fundamental Frequency	:2402 MHz	Temp./Humi.
Operation Mode	:Tx CH LOW	Engineer
EUT Pol.	:E2 Plane	Measurement Antenna Pol.

:2018-09-28 :23 deg_C / 62 RH :Wei :HORIZONTAL

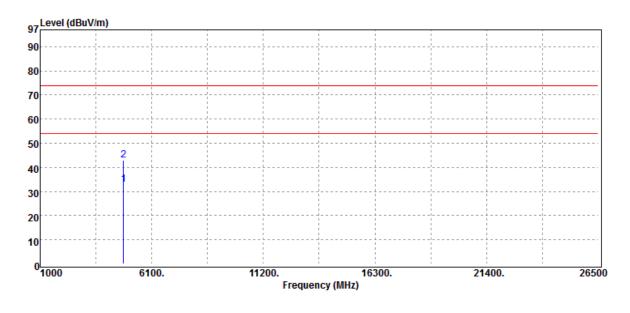


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4804.00	Average	27.28	5.65	32.93	54.00	-21.07
4804.00	Peak	37.42	5.65	43.07	74.00	-30.93

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90024 Page 80 of 97



Operation Band	:BR(1M)	Test Date	:2018-09-28
Fundamental Frequency	:2441 MHz	Temp./Humi.	:23 deg_C / 62 RH
Operation Mode	:Tx CH MID	Engineer	:Wei
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

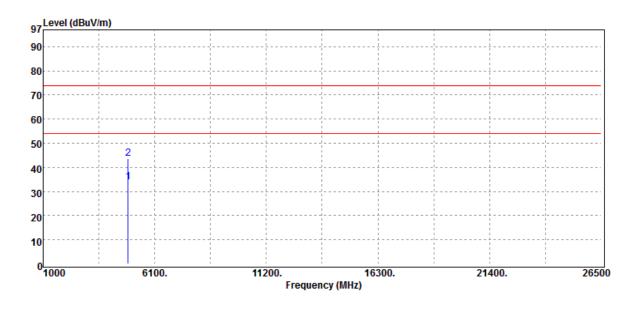

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4882.00	Average	27.84	5.90	33.74	54.00	-20.26
4882.00	Peak	37.76	5.90	43.66	74.00	-30.34


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90024 Page 81 of 97

62 RH



Operation Band	:BR(1M)	Test Date	:2018-09-28
Fundamental Frequency	:2441 MHz	Temp./Humi.	:23 deg_C / 62
Operation Mode	:Tx CH MID	Engineer	:Wei
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

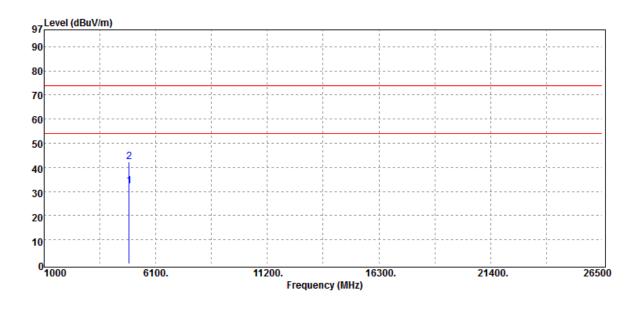


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4882.00	Average	26.16	5.90	32.06	54.00	-21.94
4882.00	Peak	36.47	5.90	42.37	74.00	-31.63

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90024 Page 82 of 97



Operation Band :BR(1M) Test Date Fundamental Frequency :2480 MHz Temp./Humi. **Operation Mode** :Tx CH HIGH Engineer EUT Pol. :E2 Plane Measurement Antenna Pol. :2018-09-28 :23 deg_C / 62 RH :Wei :VERTICAL

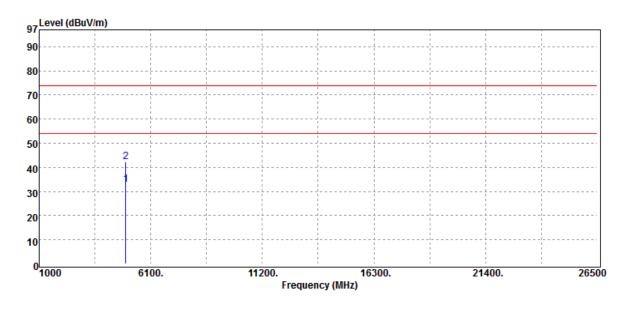

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4960.00	Average	26.78	6.05	32.83	54.00	-21.17
4960.00	Peak	36.16	6.05	42.21	74.00	-31.79

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Report No.: ER/2018/90024 Page 83 of 97



Operation Band :BR(1M) Fundamental Frequency :2480 MHz **Operation Mode** :Tx CH HIGH EUT Pol. :E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-09-28 :23 deg_C / 62 RH :Wei :HORIZONTAL

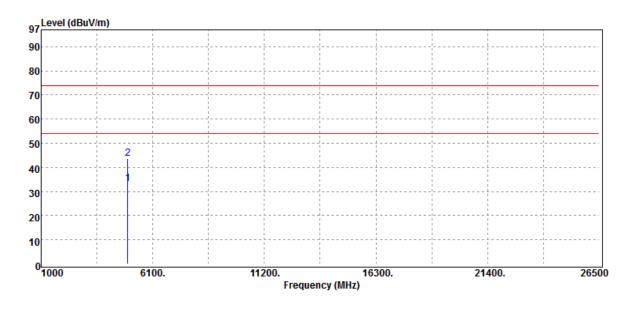

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4960.00	Average	27.25	6.05	33.30	54.00	-20.70
4960.00	Peak	37.71	6.05	43.76	74.00	-30.24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



11 FREQUENCY SEPARATION


11.1 **Standard Applicable**

Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25 kHz or the 2/3*20dB bandwidth of the hopping channel, whichever is greater.

11.2 Measurement Equipment Used

Conducted Emission Test Site								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
TYPE		NUMBER	NUMBER	CAL.				
EXA Spectrum Analyzer	Agilent	N9010A	MY5042019 5	05/03/2018	05/02/2019			
DC Block	Mini-Circuits	BLK-18-S+	1	01/02/2018	01/01/2019			
Coaxial Cables	N/A	WK CE Cable	N/A	01/02/2018	01/01/2019			
Power Meter	Anritsu	ML2496A	1804001	02/01/2018	01/31/2019			
Power Sensor	Anritsu	MA2411B	1726104	02/01/2018	01/31/2019			

Test Set-up 11.3



11.4 **Measurement Procedure**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013. Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = middle of hopping channel.
- 5. Set the spectrum analyzer as RBW, VBW=100 kHz, Adjust Span to 5MHz, Sweep = auto.
- 6. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



11.5 Measurement Result

Channel separation (MHz)	Limit	Result
1	>=25 kHz or 2/3 times 20dB bandwidth	PASS

Frequency Separation Test Data

Frequency Separation_GFSK_1M_DH5_CH0CH1CH2



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

で解す另有説明、此報告結果僅對測試之様品負責。同時此様品僅保留90.tr。本報告未經本公司書面許可,不可能份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



12 NUMBER OF HOPPING FREQUENCY


12.1 Standard Applicable

Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

12.2 Measurement Equipment Used

Conducted Emission Test Site								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
TYPE		NUMBER	NUMBER	CAL.				
EXA Spectrum Analyzer	Agilent	N9010A	MY50420195	05/03/2018	05/02/2019			
DC Block	Mini-Circuits	BLK-18-S+	1	01/02/2018	01/01/2019			
Coaxial Cables	N/A	WK CE Cable	N/A	01/02/2018	01/01/2019			
Power Meter	Anritsu	ML2496A	1804001	02/01/2018	01/31/2019			
Power Sensor	Anritsu	MA2411B	1726104	02/01/2018	01/31/2019			

12.3 Test Set-up



12.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013. Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- 5. Set the spectrum analyzer as RBW=430 kHz, VBW=1.5MHz., Detector = Peak
- 6. Max hold, view and count how many channel in the band.

12.5 Measurement Result

Tabular Data of Total Channel Number


	Channel Number	Limit
2.4 GHz – 2.441GHz	40	
2.441 GHz – 2.4835GHz	39	>15
2.4GHz ~2.4835GHz	(40+39) = 79	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




Channel Number

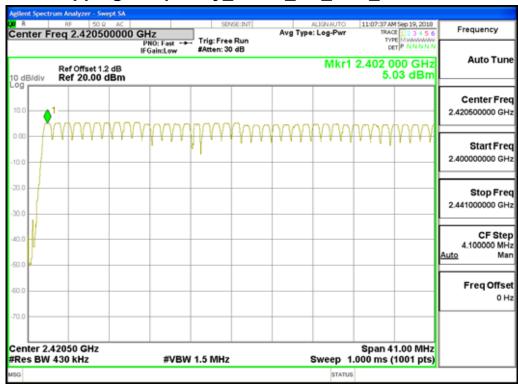

Hopping Frequency_GFSK_1M_DH5_2400-2441

Hopping Frequency_GFSK_1M_DH5_2441-2480

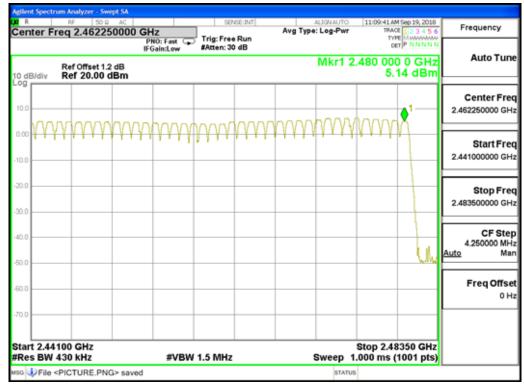

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



13 TIME OF OCCUPANCY (DWELL TIME)


13.1 Standard Applicable

Frequency hopping systems operating in the 2400MHz-2483.5MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

13.2 Measurement Equipment Used

Conducted Emission Test Site							
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.		
EXA Spectrum Analyzer	Agilent	N9010A	MY50420195	05/03/2018	05/02/2019		
DC Block	Mini-Circuits	BLK-18-S+	1	01/02/2018	01/01/2019		
Coaxial Cables	N/A	WK CE Cable	N/A	01/02/2018	01/01/2019		
Power Meter	Anritsu	ML2496A	1804001	02/01/2018	01/31/2019		
Power Sensor	Anritsu	MA2411B	1726104	02/01/2018	01/31/2019		

13.3 Test Set-up



13.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013. Measurement Guidelines.
- 3.Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = operating frequency.
- 5. Set the spectrum analyzer as RBW, VBW=1MHz, 3MHz, Span = 0Hz , Detector = Peak, Adjust Sweep = 2~8ms.
- 6. Repeat above procedures until all frequency of the interest measured were complete.

Formula Deduced: time occupancy of one time slot X Hopping rate / total slot in one channel / total channel that hops X period of working channels.

Where, standard hopping rate is 1600 hops/s, slot in one channel for DH1, DH3, and DH5 is 2, 4, and 6, respectively.



DH1 consists of single time slot of the uplink, and one slot of the downlink Total Slot: 2 DH3 consists of three time slot of the uplink, and one slot of the downlink. Total Slot: 4 DH5 consists of five time slot of the uplink, and one slot of the downlink. Total Slot: 6

In AFH mode, hopping rate is 800 hop/s with 6 slots in 20 hopping channels with channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 * 20) (S), Hop Over Occupancy Time comes to (800 / 6 / 20)*(0.4 * 20) = 53.33

Note: the result of the complete test default channel at 1Mbps is recorded on the test report, 2Mbps, and 3Mbps only records the measurement result at middle channel that reveals no much deviation.

13.5 Tabular Result of the Measurement

GFSK (1Mbps)

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)	1/T (kHz)	VBW setting (kHz)
	DH1	123.20	400ms	2.60	3.00
0	DH3	262.40	400ms	0.61	1.00
	DH5	307.20	400ms	0.35	1.00
	DH1	121.60	400ms	2.63	3.00
39	DH3	260.80	400ms	0.61	1.00
	DH5	307.20	400ms	0.35	1.00
	DH1	121.60	400ms	2.63	3.00
78	DH3	262.40	400ms	0.61	1.00
	DH5	307.20	400ms	0.00	1.00

π/4 DQPSK (2Mbps)

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)	1/T (kHz)	VBW setting (kHz)
39	2DH1	123.20	400ms	2.60	3.00
	2DH3	262.40	400ms	0.61	1.00
	2DH5	308.80	400ms	0.35	1.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



8-DPSK (3Mbps)

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)	1/T (kHz)	VBW setting (kHz)
39	3DH1	123.20	400ms	2.60	3.00
	3DH3	262.40	400ms	0.61	1.00
	3DH5	308.80	400ms	0.35	1.00

A period time = 0.4 (s) * 79 = 31.6 (s)

GFSK (1Mbps):

CH Low	DH1 time slot = DH3 time slot = DH5 time slot =	0.385 * 1.640 * 2.880 *	(1600/2/79) * (1600/4/79) * (1600/6/79) *		123.20 (ms) 262.40 (ms) 307.20 (ms)	
CH Mid	DH1 time slot = DH3 time slot = DH5 time slot =	0.380 * 1.630 * 2.880 *	(1600/2/79) * (1600/4/79) * (1600/6/79) *	31.6 =	121.60 (ms) 260.80 (ms) 307.20 (ms)	
CH High	DH1 time slot = DH3 time slot = DH5 time slot =	0.380 * 1.640 * 2.880 *	(1600/2/79) * (1600/4/79) * (1600/6/79) *		121.60 (ms) 262.40 (ms) 307.20 (ms)	
π/4 -DQPSK (2Mbps):						
CH Mid	2DH1 time slo = 2DH3 time slo = 2DH5 time slo =	0.385 * 1.640 * 2.895 *	(1600/2/79) * (1600/4/79) * (1600/6/79) *		123.20 (ms) 262.40 (ms) 308.80 (ms)	

8-DPSK (3Mbps):

CH Mid	3DH1 time slo =	0.385 *	(1600/2/79) *	31.6 =	123.20 (ms)
	3DH3 time slo =	1.640 *	(1600/4/79) *	31.6 =	262.40 (ms)
	3DH5 time slo =	2.895 *	(1600/6/79) *	31.6 =	308.80 (ms)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



GFSK (1Mbps) for AFH Mode						
Hopping Channel	PACKET TYPE	Measurement	Limit			
Number	PACKETTTPE	Result (ms)	(ms)			
20	DH5	153.60	400ms			
π/4 DQPSK (2Mbps) for AFH Mode						
Hopping Channel	PACKET TYPE	Measurement	Limit			
Number	PACKETTIPE	Result (ms)	(ms)			
20	2DH5	154.40	400ms			
8-DPSK (3Mbps) for AFH Mode						
Hopping Channel	PACKET TYPE	Measurement	Limit			
Number	FAGRETTIPE	Result (ms)	(ms)			
20	3DH5	154.40	400ms			

GFSK (1Mbps):

DH5 time s =	2.880	(ms) *	(800/6/20 * 8 =	153.60 (ms)
π/4 -DQPSK (2Mbp:				
2DH5 time =	2.895	(ms) *	(800/6/20 * 8 =	154.40 (ms)
8-DPSK (3Mbps):				
3DH5 time =	2.895	(ms) *	(800/6/20 * 8 =	154.40 (ms)

13.6 **Measurement Result**


Note: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Dwell Time_GFSK_1M_DH1_2402MHz

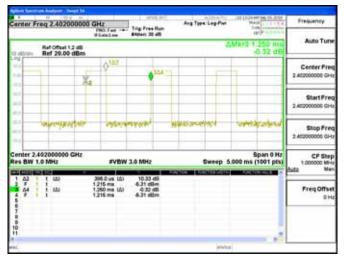


Dwell Time_GFSK_1M_DH1_2441MHz

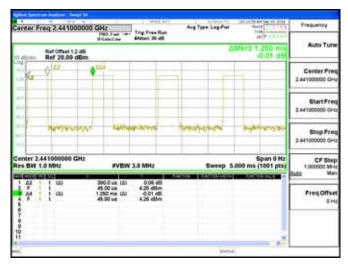


Dwell Time_GFSK_1M_DH1_2480MHz

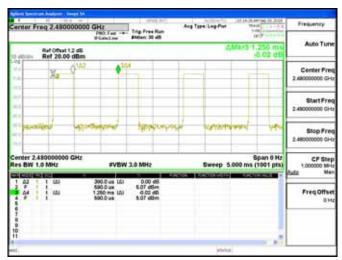


Dwell Time_GFSK_1M_DH3_2402MHz

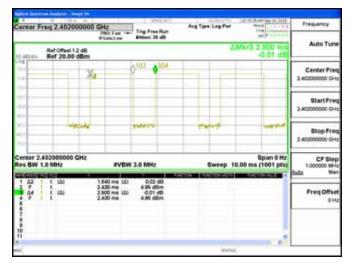

Dwell Time_GFSK_1M_DH3_2441MHz

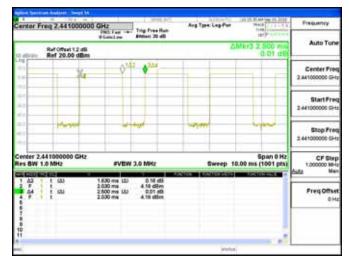

Dwell Time_GFSK_1M_DH3_2480MHz

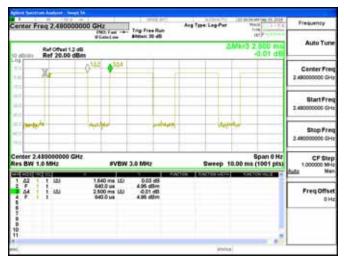

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. | No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司



Dwell Time_GFSK_1M_DH5_2402MHz

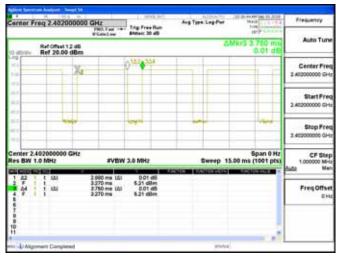

Dwell Time_GFSK_1M_DH5_2441MHz




Dwell Time_GFSK_1M_DH5_2480MHz




Dwell Time_ π /4DQPSK_2M_2402MHz



Dwell Time_ π /4DQPSK_2M_2441MHz

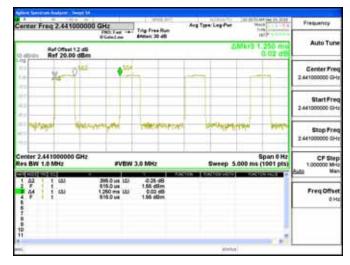

Dwell Time_ π /4DQPSK_2M_2480MHz

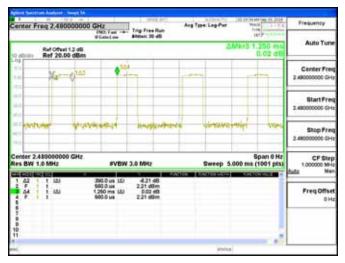

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. | No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

```
www.tw.sgs.com
```




Dwell Time_π/4DQPSK_2M_2402MHz




Dwell Time_π/4DQPSK_2M_2441MHz



Dwell Time_π/4DQPSK_2M_2480MHz

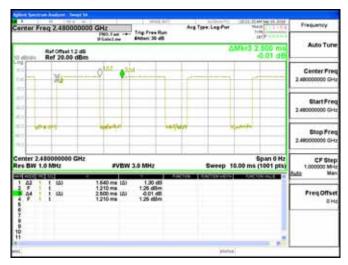

Dwell Time_ π /4DQPSK_2M_2402MHz

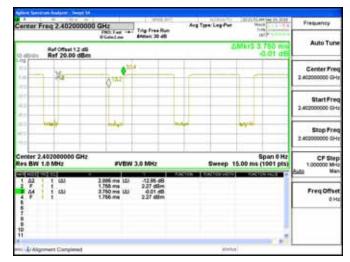

Dwell Time_ π /4DQPSK_2M_2441MHz



Dwell Time_ π /4DQPSK_2M_2480MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. | No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司




Dwell Time_8DPSK_3M_DH1_2402MHz




Dwell Time_8DPSK_3M_DH1_2441MHz



Dwell Time_8DPSK_3M_DH1_2480MHz

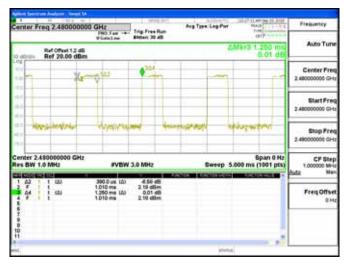



Dwell Time_8DPSK_3M_DH3_2402MHz

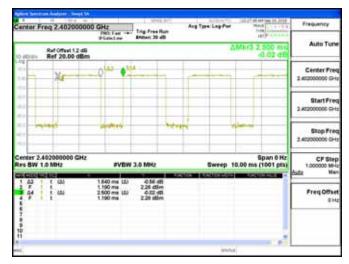

Dwell Time_8DPSK_3M_DH3_2441MHz





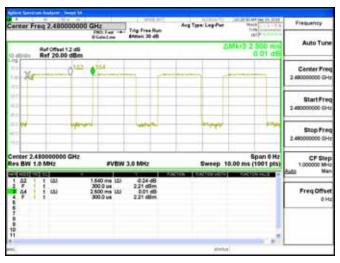

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製.


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司



Dwell Time_8DPSK_3M_DH5_2402MHz

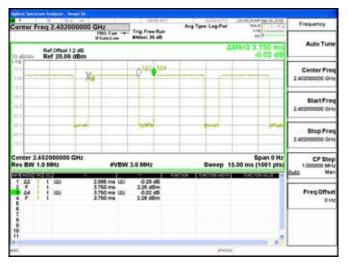

Dwell Time_8DPSK_3M_DH5_2441MHz



Dwell Time_8DPSK_3M_DH5_2480MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Contension of the state of the results shown in this test report refer only to the sample(s) tested and such sample(s) are related to 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excert and the company of the target and biling the target an

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司	t (886-2) 2299-3279	f (886-2) 2298-0488	www.tw.sgs.com
	1		Member of SGS Group



14 ANTENNA REQUIREMENT

14.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device. If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

14.2 Antenna Connected Construction

The antenna is designed with unique RF connector and no consideration of replacement. Please see EUT photo for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.