

## Innovative **Technology** for a **Connected** World





## **FEATURES**


- Covers 2.4 to 2.5 GHz for 802.11b, and 4.9 to 6 GHz for 802.11a and all US, European, and Japanese WLAN applications
- Omni-directional patterns at all frequencies with increased gain in upper bands for optimal coverage

PARAMETER	SPECIFICATION	
Frequency	2.4 - 2.5 GHz 4.9 - 5.875 GHz	
Gain	2.1 dBi (2.45 GHz) 2.4 dBi (4.9 GHz) 2.6 dBi (5.25 GHz) 3.4 dBi (5.875 GHz)	
Polarization	Vertical, Omni-directional	
Nominal Impedance	50 ohms	
VSWR	2:1 max across all bands	
Size	95.9 mm (180° straight) or 75.4 mm (90° bent) x 9.3 mm dia.	



## FREQUENCIES AND CONNECTORS

MODEL#	PART #	COLOR	CONNECTOR
WTSB2450- RPSMA	MAF94051	Black	RP-SMA
WTS2450- RPSMA	MAF94110	White	RP-SMA
WTSB2450- SMA	MAF94271	Black	SMA

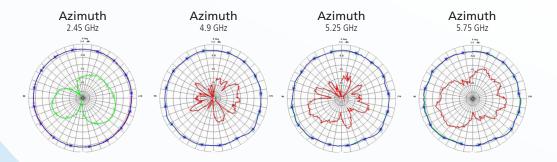

## global solutions: local support ™

Americas: +1.847 839.6907 IAS-AmericasEastSales@lairdtech.com

Europe: +1.32.80.7866.12 IAS-EUSales@lairdtech.com Asia: +1.65.6.243.8022 IAS-AsiaSales@lairdtech.com

www.lairdtech.com

ANT-DS-WTS 2450 0710

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials rests with the end use; since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Echnologies, the laible for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies. Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2010 Laird Technologies, Inc. All Rights Reserved, Laird, Laird Technologies, the Laird Technologies