

Appendix G. FCC 3G SAR Measurement Procedures for CDMA2000

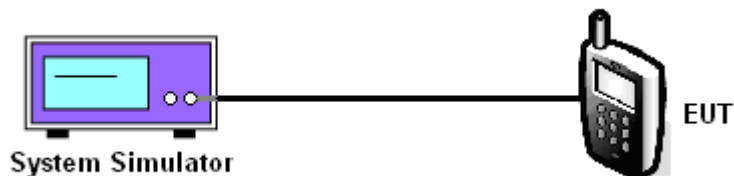
Conducted Output Power:

The EUT was tested according to the requirements of the FCC 3G procedures and the 3.1.2.3.4.

A detailed analysis of the output power verification is provided as the table below:

Function Type	Reverse Traffic Channel	Test Mode	Radio Configuration		Service Option	Data Rates (kbps)	Power Control	Low Ch	Mid. Ch	High Ch
			Forward Traffic Channel (Fwd)	Reverse Traffic Channel (Rvs)				1013	384	777
CDMA2000 Cellular	FCH	1	1	1	55	Full	All Up	23.75	23.92	23.79
		3	3	3	55	Full	All Up	23.76	23.85	23.75
		3	3	3	32	Full	All Up	23.74	23.73	23.73
	FCH+SCH	3	3	3	32	FCH:Full,SCH 9.6	All Up	23.75	23.78	23.72
	EVDO Rev.0	Subtype:0				RTAP 153.6	All Up	23.73	23.80	23.76
	EVDO Rev.A	Subtype:0				RETAP 4096	All Up	23.79	23.95	23.82

Function Type	Reverse Traffic Channel	Test Mode	Radio Configuration		Service Option	Data Rates (kbps)	Power Control	Low Ch	Mid. Ch	High Ch
			Forward Traffic Channel (Fwd)	Reverse Traffic Channel (Rvs)				25	600	1175
CDMA2000 PCS	FCH	1	1	1	55	Full	All Up	23.97	23.83	23.67
		3	3	3	55	Full	All Up	23.98	23.85	23.65
		3	3	3	32	Full	All Up	23.93	23.83	23.64
	FCH+SCH	3	3	3	32	FCH:Full,SCH 9.6	All Up	23.96	23.84	23.63
	EVDO Rev.0	Subtype:0				RTAP 153.6	All Up	23.95	23.89	23.66
	EVDO Rev.A	Subtype:0				RETAP 4096	All Up	23.96	23.95	23.78

CDMA2000 Setup Configuration:

Setup Configuration

1. The EUT was connected to System Simulator, Agilent 8960. Refer to the drawing of Setup Configuration.
2. The RF path losses were compensated into the measurements.
3. A call was established between EUT and System Simulator with following setting:
 - a. For 1xRTT, set the Radio Configuration and the Service Option
 - b. For 1xEV-DO, set the Protocol Release and Data Rate
 - c. Set the Power Control to All Up Bits
4. The transmitted maximum output power was recorded.

Call Setup Screen									
Call Control	Active Cell Operating Mode						Call Parm		
Close Menu	Mobile Station Information						Cell Power		
	ESN (Hex):						-86.00		
	ESN (Dec):						dBm/1.23 MHz		
	NCC:						Cell Band		
	INC:						US PCS		
	NSIN:						Channel		
	Slot Class:						1175		
	Slot Cycle Index: ----						Protocol Rev		
	Protocol Revision:						6 (IS-2000-0)		
	FCH Service Option Setup						Value		
Service Option for Fud1, Rvs1						S055 (Loopback)			
Service Option for S01 (Voice)						S09 (Loopback)			
Service Option for S02 (Loopback)						S055 (Loopback)			
Service Option for S03 (Voice)						S055 (Loopback)			
Service Option for S06 (SMS)						S055 (Loopback)			
S055 (Loopback)						Radio Config			
S068 (Voice)						(Fud1, Rvs1)			
						S055 (Loopback)			
						FCH Service Option Setup			
Active Cell						Sys Type: IS-2000			
Idle									
IntRef Offset						1 of 4			

1xRTT setting for Radio Configuration 1 with Service Option 55

Call Setup Screen									
Call Control		Active Cell Operating Mode						Call Parms	
		Mobile Station Information ESN (Hex): ESN (Dec): MCC: MNC: MSIN: Slot Class: Slot Cycle Index: ---- Protocol Revision:						Cell Power -86.00	
		dBm/1.23 MHz							
		Cell Band US PCS							
		Channel 1175							
		Protocol Rev 6 (IS-2000-0)							
		Radio Config (Fud3, Rvs3) S055 (Loopback)							
		FCH Service Option Setup							
		Close Menu							
		Service Option S01 (Voice) S02 (Loopback) S03 (Voice) S06 (SMS) S055 (Loopback) S032 (+ F-SCH)						Value S055 (Loopback) S09 (Loopback) S055 (Loopback) S055 (Loopback) S055 (Loopback)	
		Active Cell Sys Type: IS-2000							
		Idle							
		IntRef Offset							
		1 of 4							

1xRTT setting for Radio Configuration 3 with Service Option 55

Call Setup Screen									
Call Control		Active Cell Operating Mode						Call Parms	
Mobile Station Information ESN (Hex): ESN (Dec): NCC: NMC: NSIN: Slot Class: Slot Cycle Index: ----- Protocol Revision:		FCH Service Option Setup				Value		Cell Power	
		Service Option for Fud3 Bus				S055 (Loopback)		-86.00	
		Service Option for Fud3 Bus				S09 (Loopback)		dBm/1.23 MHz	
		Service Option for Fud3 Bus				S032 (+ SCH)		Cell Band	
		Service Option for Fud3 Bus				S055 (Loopback)		US PCS	
		Service Option for Fud3 Bus				S055 (Loopback)		Channel	
		Service Option for Fud3 Bus				S032 (+ F-SCH)		1175	
		Service Option for Fud3 Bus				S032 (+ SCH)		Protocol Rev	
		Service Option for Fud3 Bus				S032 (+ SCH)		6 (IS-2000-0)	
		Service Option for Fud3 Bus				S032 (+ SCH)		Radio Config	
Service Option for Fud3 Bus				S032 (+ SCH)		(Fud3, Rvs3)			
Service Option for Fud3 Bus				S032 (+ SCH)		S032 (+ SCH)			
Service Option for Fud3 Bus				S032 (+ SCH)		FCH Service Option Setup			
Close Menu		Active Cell				Sys Type: IS-2000			
		Idle							
		IntRef Offset							
								1 of 4	

1xRTT setting for Radio Configuration 3 with Service Option 32

Call Setup Screen									
Call Control		Active Cell Operating Mode					Call Params		
Operating Mode		Access Terminal Information (AT Reported) Session Seed: Hardware ID Type (Hex): Hardware ID (Hex): Hardware ID (Decimal):					Rvs Power Ctrl		
Active Cell							Rvs Power Ctrl	Active bits	
Start Data Connection		Access Terminal Information (AN Assigned) UATI 024: ---- UATI Color Code: ---- NAC Index: ----					Pur Ctrl Step	1.0 dB	
							Call Drop Timer	On	
Close Session		Protocol Release Session App: 0 (1xEV-DO) Test Applica: A (1xEV-DO-A) Limited TAP: B (1xEV-DO-B) AT Directed: DRC Value Fi: ACK Channel:					Call Limit Mode	Off	
Handoff Setup							Protocol Rel	0 (1xEV-DO)	
AT Max Power	23 dBm/1.23MHz								
		Active Cell		Sys Type: IS-856					
		Idle							
1 of 3		IntRef	Offset	PLSub0	RTAP		2 of 3		

1xEV-DO setting for Protocol Release (Rev.0 or Rev.A)

Call Setup Screen									
Call Control		Active Cell Operating Mode					Call Params		
Operating Mode		Access Terminal Information (AT Reported) Session Seed: Hardware ID Type (Hex): Hardware ID (Hex): Hardware ID (Decimal):					Cell Power	-86.00	
Active Cell							Cell Power	dBm/1.23 MHz	
Start Data Connection		Access Terminal Information (AN Assigned) UATI 024: ---- UATI Color Code: ---- NAC Index: ----					Cell Band	US PCS	
							Channel	1175	
Close Session		RTAP Rate Session App: 9.6 kbps Test Applica: 19.2 kbps Limited TAP: 38.4 kbps AT Directed: 76.8 kbps DRC Value Fi: 153.6 kbps ACK Channel:					Application Config		
Handoff Setup							FTAP Rate	307.2 kbps (2 Slot, QPSK)	
AT Max Power	23 dBm/1.23MHz						RTAP Rate	9.6 kbps	
		Active Cell		Sys Type: IS-856					
		Idle							
1 of 3		IntRef	Offset	PLSub0	RTAP		1 of 3		

1xEV-DO setting for RTAP data rate (153.6 kbps)



Call Setup Screen						
Call Control		Active Cell Operating Mode			Call Params	
Operating Mode	Active Cell	Access Terminal Information (AT Reported)			Cell Power	
		Session Seed:			-86.00	
		Hardware ID Type (Hex):			dBm/1.23 MHz	
		Hardware ID (Hex):			Cell Band	
		Hardware ID (Decimal):			US PCS	
		Access Terminal Information (AN Assigned)			Channel	
	Start Data Connection	UATI 024: ----			1175	
		UATI Color Code: ----				
		MAC Index: ----				
	Close Session	Application Configuration			Application Config	
		R-Data Packet Size			F-Traffic Format	
		Session App: 128			4 (1024,2,128)	
		Enhanced Te: 256			(307.2k, QPSK)	
		AT Directed: 512			R-Data Pkt Size	
		DRC Value F: 768			128	
	Handoff Setup	ACK Channel: 1024			bits	
		ACK Channel: 1536				
	AT Max Power	Expected En: 1536				
	23 dBm/1.23MHz					
		Active Cell		Sys Type: IS-856		
		Idle				
1 of 3		IntRef	Offset	PLSub0	RETAP	1 of 3

1xEV-DO setting for RETAP data rate (4096 bits)



Reference:

- [1] SAR Measurement Procedures for 3G Devices CDMA 2000/Ev-Do/WCDMA/HSDPA, June 2006
Laboratory Division Office of Engineering and Technology Federal Communications Commission
- [2] 3.1.2.3.4 Maximum RF Output Power 3GPP2 C.S0033-0 Version 2.0, Date: 12 December 2003
Recommended Minimum Performance Standards for cdma2000 High Rate Packet Data Access
Terminal