

#06 HAC_E_GSM850_Ch128_Keypad1**DUT: 0D0904-01**

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2010/6/15
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn913; Calibrated: 2010/11/18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch128/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 182.9 V/m

Probe Modulation Factor = 2.64

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 72.4 V/m; Power Drift = -0.100 dB

Hearing Aid Near-Field Category: M3 (AWF -5 dB)

Peak E-field in V/m


Grid 1 145.2 M4	Grid 2 160.1 M3	Grid 3 161.5 M3
Grid 4 135.7 M4	Grid 5 182.9 M3	Grid 6 192.6 M3
Grid 7 131.4 M4	Grid 8 185.1 M3	Grid 9 197.0 M3

Cursor:

Total = 197.0 V/m

E Category: M3

Location: -19, 15, 8.7 mm

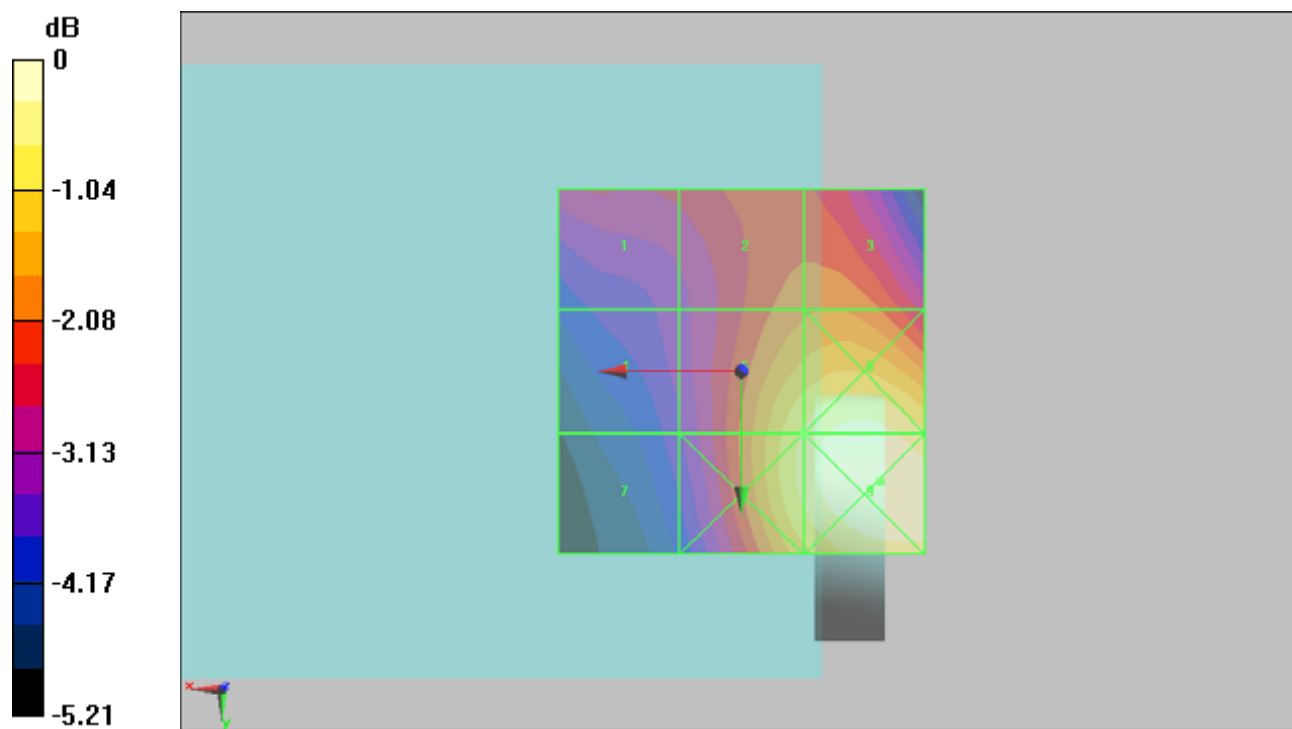

#07 HAC_E_GSM850_Ch189_Keypad1**DUT: 0D0904-01**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2010/6/15
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn913; Calibrated: 2010/11/18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch189/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 208.0 V/m

Probe Modulation Factor = 2.64

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 81 V/m; Power Drift = -0.013 dB

Hearing Aid Near-Field Category: M3 (AWF -5 dB)

Peak E-field in V/m


Grid 1 162.8 M3	Grid 2 180.7 M3	Grid 3 182.8 M3
Grid 4 152.1 M3	Grid 5 208.0 M3	Grid 6 220.5 M3
Grid 7 148.2 M4	Grid 8 211.2 M3	Grid 9 226.1 M3

Cursor:

Total = 226.1 V/m

E Category: M3

Location: -18.5, 15, 8.7 mm

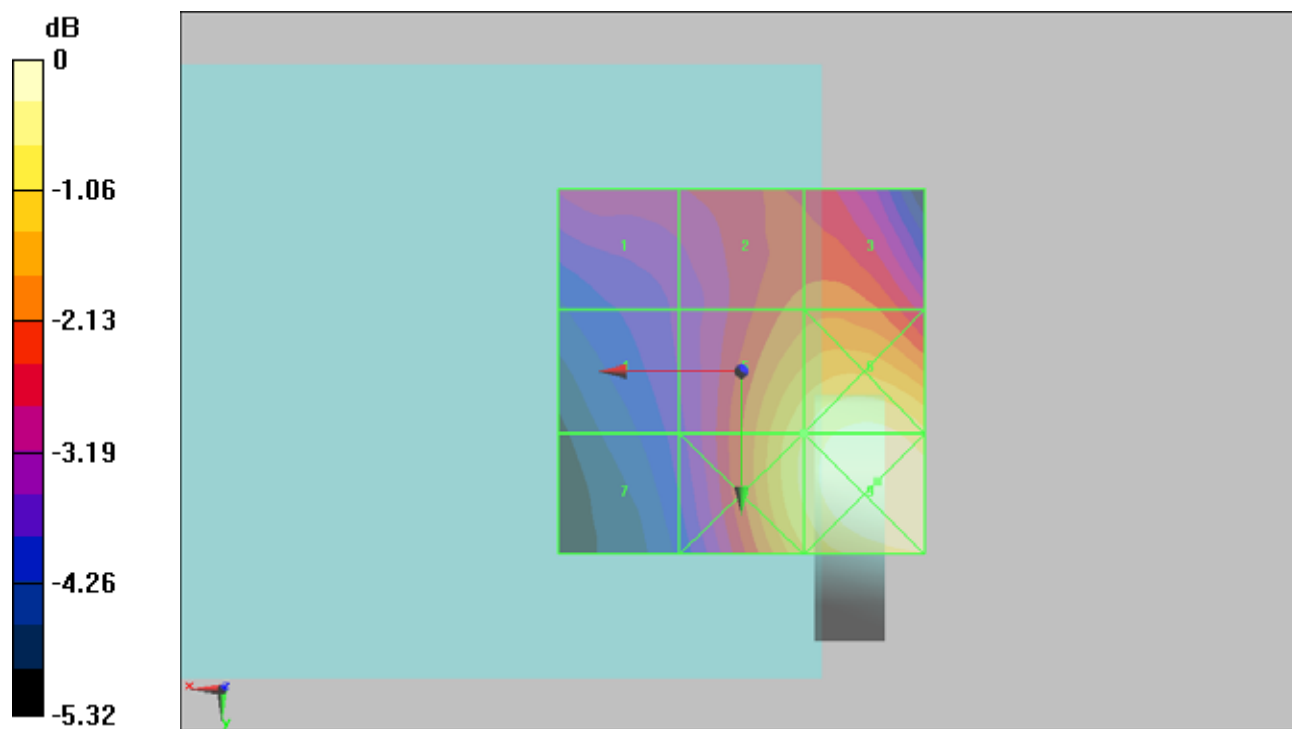

0 dB = 226.1V/m

#08 HAC_E_GSM850_Ch251_Keypad1**DUT: 0D0904-01**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2010/6/15
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn913; Calibrated: 2010/11/18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch251/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 215.8 V/m

Probe Modulation Factor = 2.64

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 82.5 V/m; Power Drift = -0.025 dB

Hearing Aid Near-Field Category: M3 (AWF -5 dB)

Peak E-field in V/m


Grid 1 164.4 M3	Grid 2 184.3 M3	Grid 3 187.7 M3
Grid 4 154.1 M3	Grid 5 215.8 M3	Grid 6 229.7 M3
Grid 7 151.6 M3	Grid 8 219.9 M3	Grid 9 236.7 M3

Cursor:

Total = 236.7 V/m

E Category: M3

Location: -19.5, 16, 8.7 mm

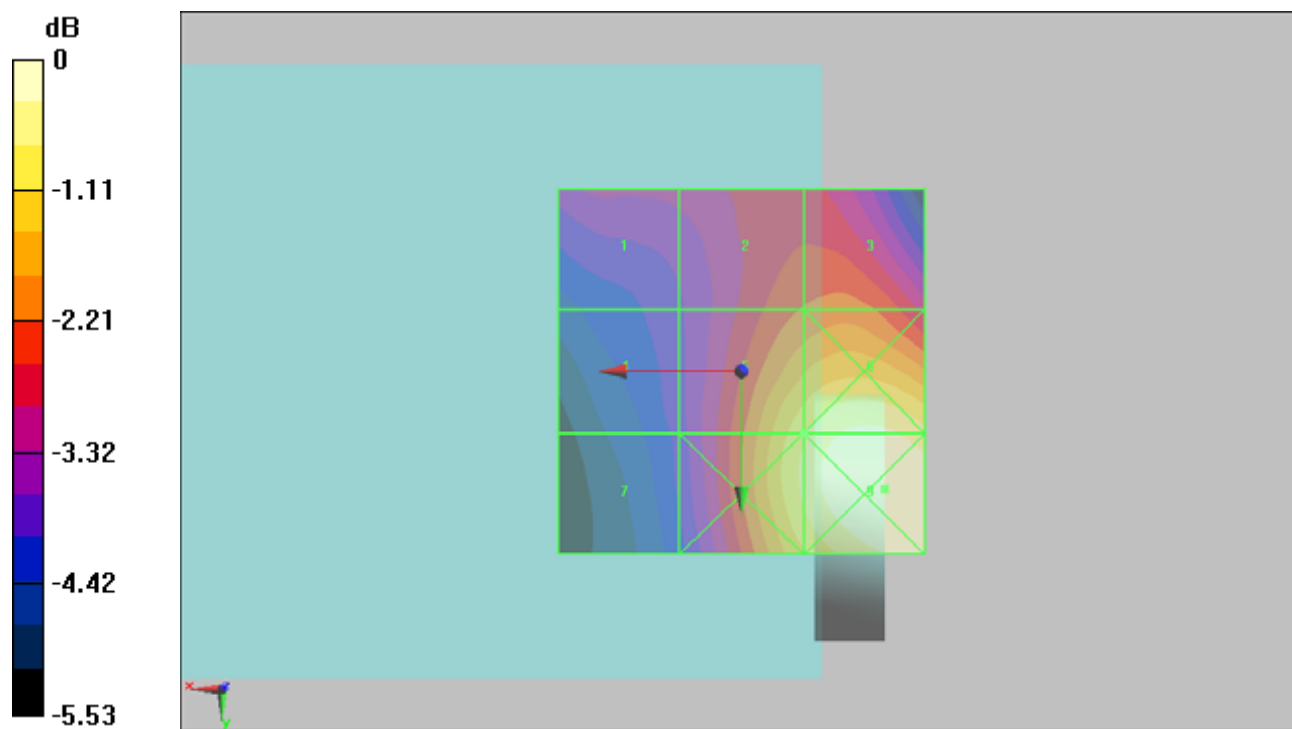

#01 HAC_E_GSM1900_Ch512_Keypad1**DUT: 0D0904-01**

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2010/6/15

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn913; Calibrated: 2010/11/18

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch512/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 63.4 V/m

Probe Modulation Factor = 2.7

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 20.4 V/m; Power Drift = -0.022 dB

Hearing Aid Near-Field Category: M3 (AWF -5 dB)

Peak E-field in V/m


Grid 1	Grid 2	Grid 3
61.3 M3	63.4 M3	63.3 M3
Grid 4	Grid 5	Grid 6
50.9 M3	58.6 M3	58.6 M3
Grid 7	Grid 8	Grid 9
77.3 M3	83.4 M3	82.4 M3

Cursor:

Total = 83.4 V/m

E Category: M3

Location: -4, 25, 8.7 mm

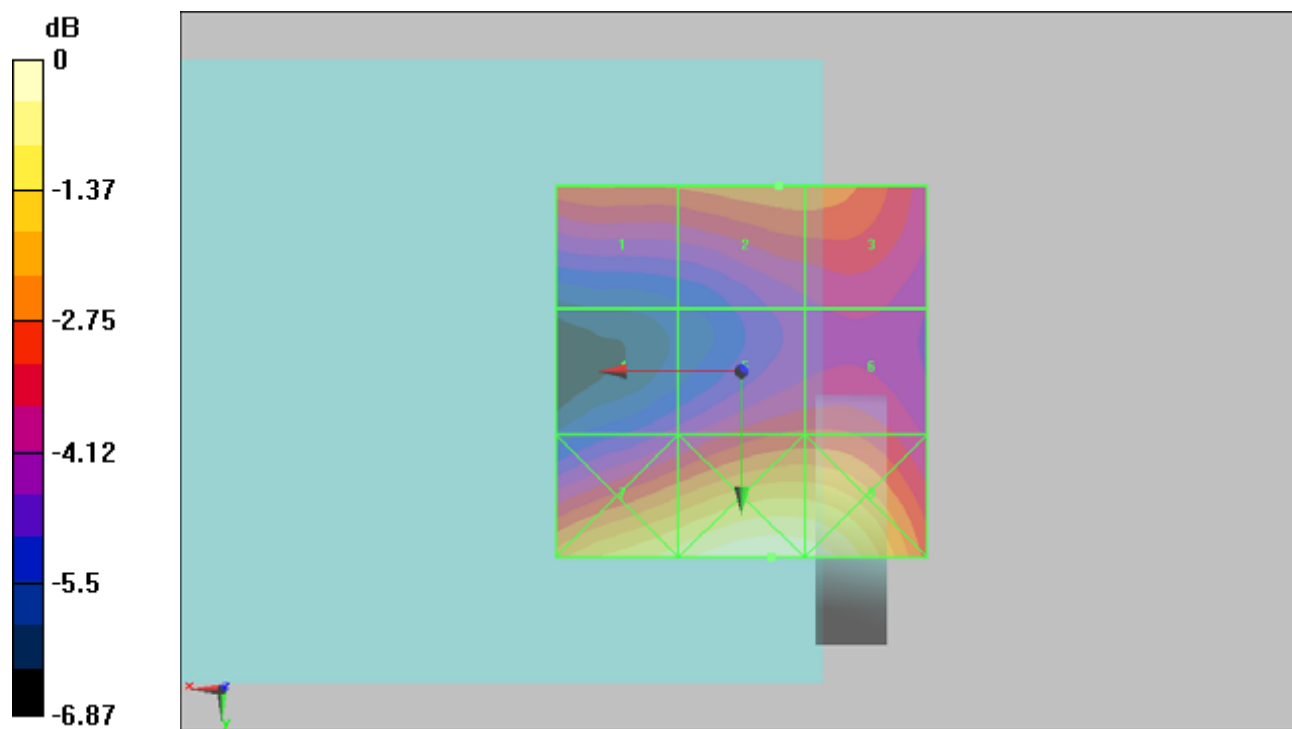

0 dB = 83.4V/m

#02 HAC_E_GSM1900_Ch661_Keypad1**DUT: 0D0904-01**

Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2010/6/15
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn913; Calibrated: 2010/11/18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch661/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 74.3 V/m

Probe Modulation Factor = 2.7

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 25.2 V/m; Power Drift = -0.00499 dB

Hearing Aid Near-Field Category: M3 (AWF -5 dB)

Peak E-field in V/m


Grid 1 72 M3	Grid 2 74.3 M3	Grid 3 74.3 M3
Grid 4 63.5 M3	Grid 5 73.1 M3	Grid 6 73.1 M3
Grid 7 97 M2	Grid 8 104.2 M2	Grid 9 102.7 M2

Cursor:

Total = 104.2 V/m

E Category: M2

Location: -2.5, 25, 8.7 mm

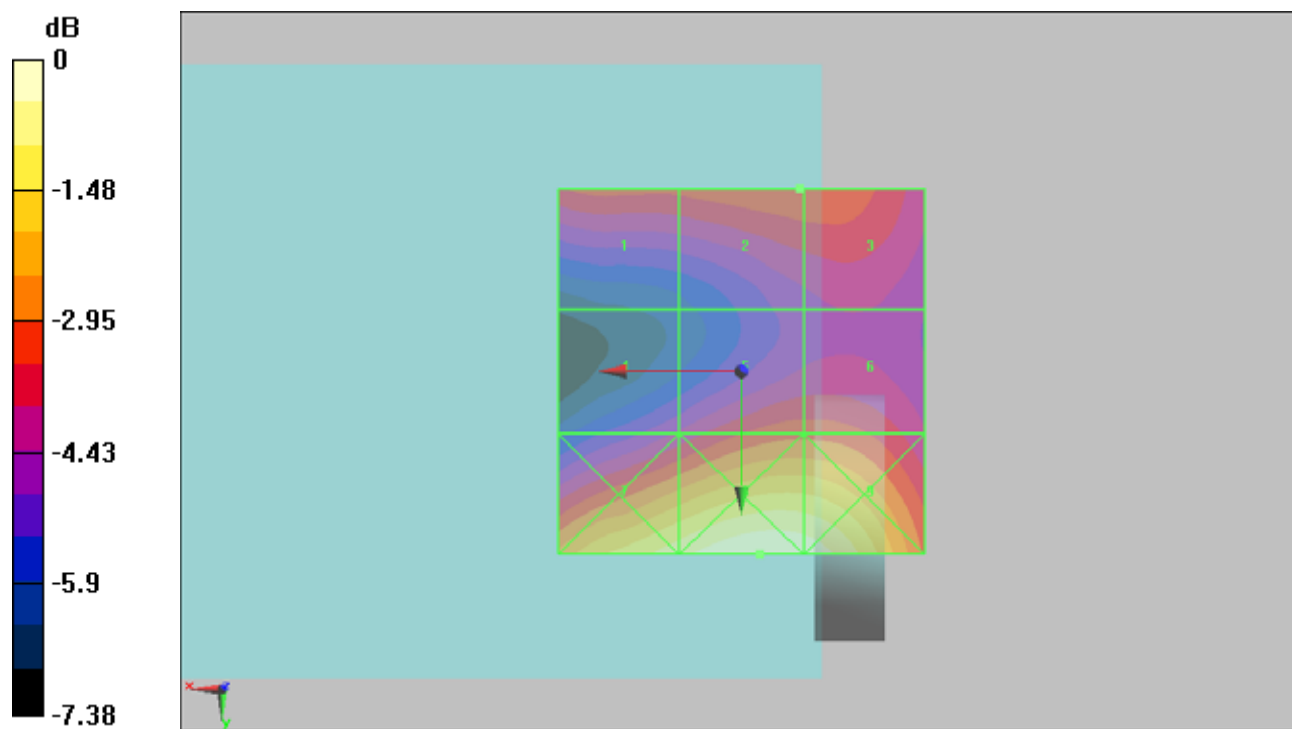

#03 HAC_E_GSM1900_Ch810_Keypad1**DUT: 0D0904-01**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2010/6/15
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn913; Calibrated: 2010/11/18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch810/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 72.4 V/m

Probe Modulation Factor = 2.7

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 24.5 V/m; Power Drift = 0.026 dB

Hearing Aid Near-Field Category: M3 (AWF -5 dB)

Peak E-field in V/m


Grid 1 69.4 M3	Grid 2 72.4 M3	Grid 3 72.4 M3
Grid 4 61.7 M3	Grid 5 68.7 M3	Grid 6 68.7 M3
Grid 7 93.5 M2	Grid 8 98.1 M2	Grid 9 95 M2

Cursor:

Total = 98.1 V/m

E Category: M2

Location: -0.5, 25, 8.7 mm

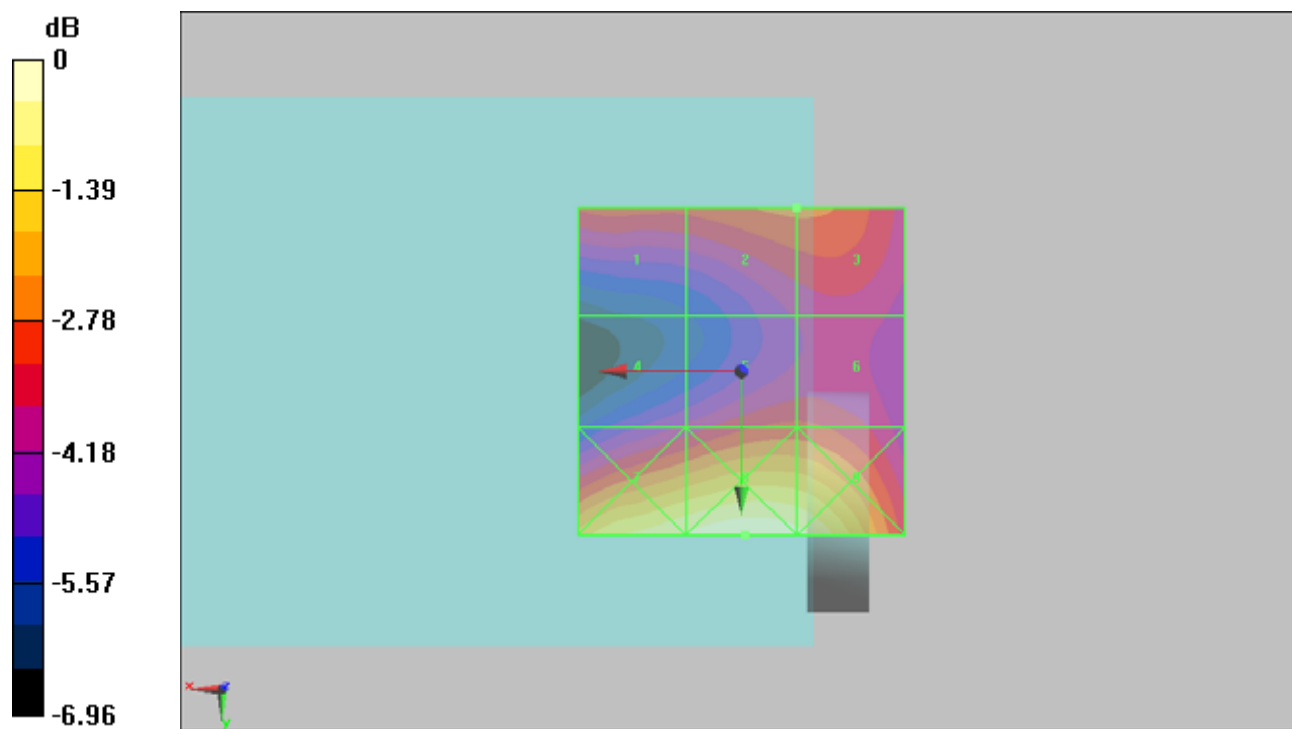

0 dB = 98.1V/m

#16 HAC_E_WCDMA V_RMC12.2K_Ch4132_Keypad1

DUT: 0D0904-01

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2010/6/15
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn913; Calibrated: 2010/11/18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch4132/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 71.1 V/m

Probe Modulation Factor = 0.960

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 77.2 V/m; Power Drift = -0.148 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m


Grid 1	Grid 2	Grid 3
56.7 M4	62.7 M4	63.8 M4
Grid 4	Grid 5	Grid 6
52.9 M4	71.1 M4	76.4 M4
Grid 7	Grid 8	Grid 9
50.9 M4	71.9 M4	78.1 M4

Cursor:

Total = 78.1 V/m

E Category: M4

Location: -17, 14.5, 8.7 mm

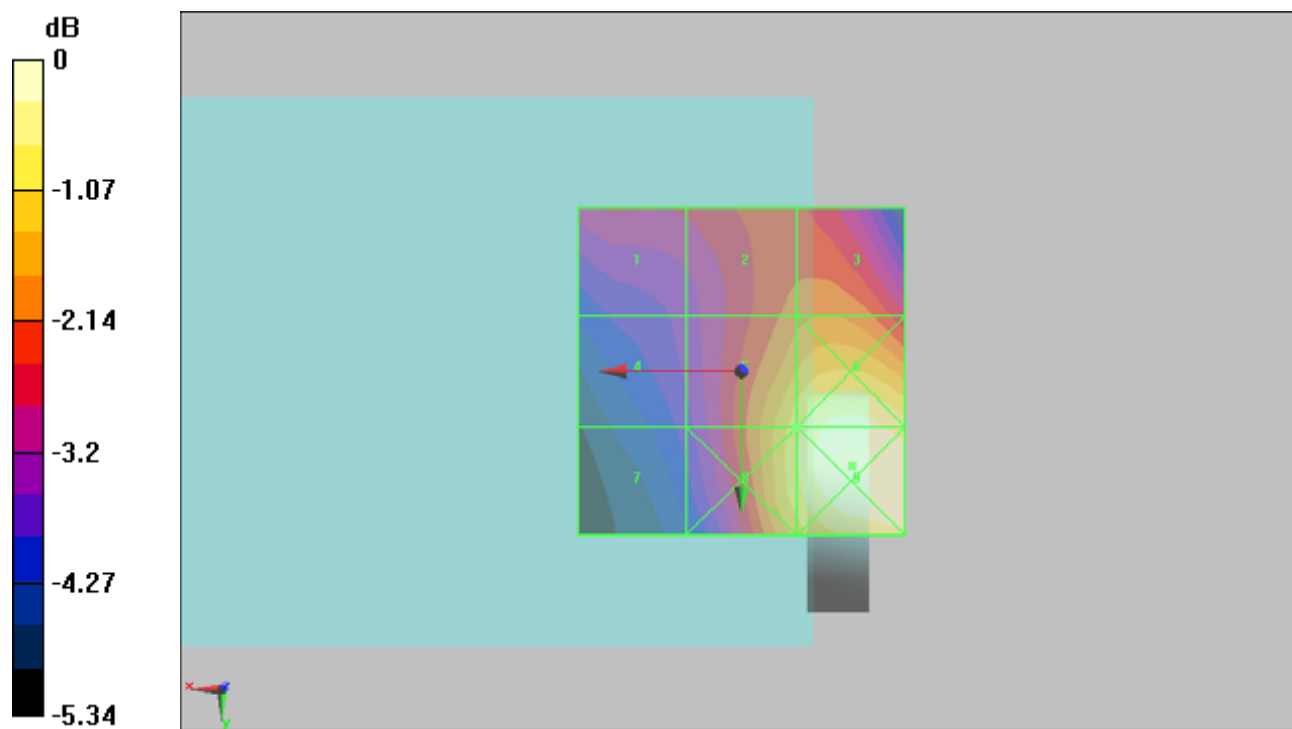

#17 HAC_E_WCDMA V_RMC12.2K_Ch4182_Keypad1**DUT: 0D0904-01**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2010/6/15
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn913; Calibrated: 2010/11/18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch4182/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 76.3 V/m

Probe Modulation Factor = 0.960

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 80.1 V/m; Power Drift = 0.115 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m


Grid 1	Grid 2	Grid 3
60.1 M4	66.7 M4	67.9 M4
Grid 4	Grid 5	Grid 6
55.9 M4	76.3 M4	82.3 M4
Grid 7	Grid 8	Grid 9
54.1 M4	77.4 M4	84.6 M4

Cursor:

Total = 84.6 V/m

E Category: M4

Location: -20.5, 16, 8.7 mm

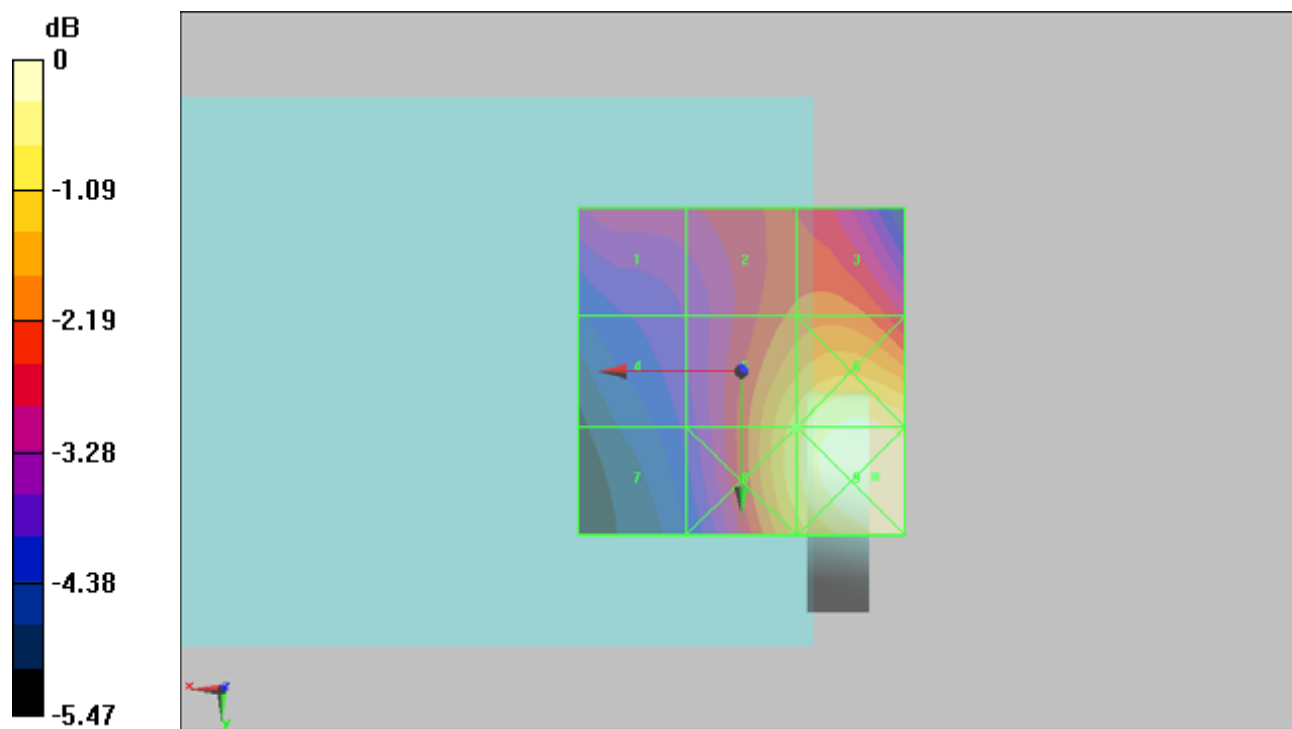

#18 HAC_E_WCDMA V_RMC12.2K_Ch4233_Keypad1**DUT: 0D0904-01**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2010/6/15

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn913; Calibrated: 2010/11/18

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch4233/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 79.4 V/m

Probe Modulation Factor = 0.960

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 84.7 V/m; Power Drift = -0.169 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m


Grid 1 61.8 M4	Grid 2 68.8 M4	Grid 3 70.2 M4
Grid 4 57.4 M4	Grid 5 79.4 M4	Grid 6 86.5 M4
Grid 7 56.6 M4	Grid 8 80.8 M4	Grid 9 88.9 M4

Cursor:

Total = 88.9 V/m

E Category: M4

Location: -20.5, 16, 8.7 mm

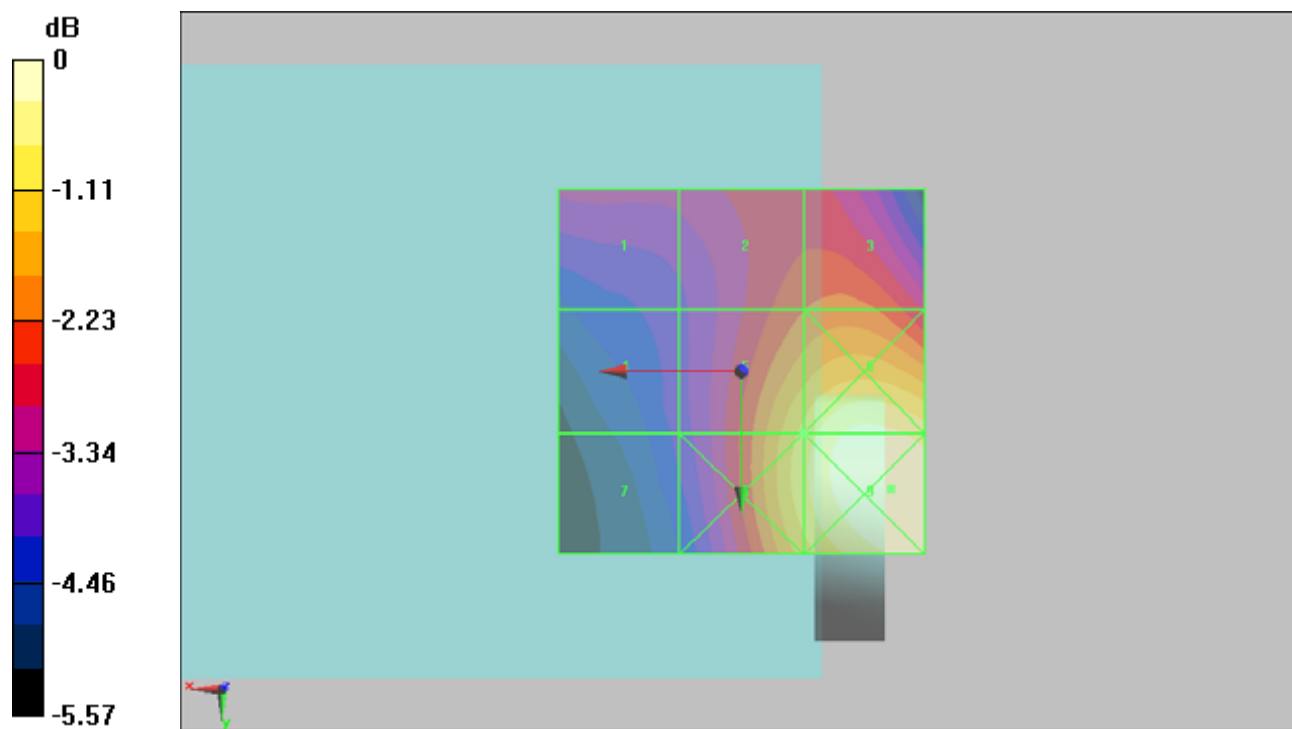

#11 HAC_E_WCDMA II_RMC12.2K_Ch9262_Keypad1**DUT: 0D0904-01**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2010/6/15
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn913; Calibrated: 2010/11/18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch9262/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 40.3 V/m

Probe Modulation Factor = 1

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 34.5 V/m; Power Drift = -0.063 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m


Grid 1	Grid 2	Grid 3
39.1 M4	40.3 M4	40.2 M4
Grid 4	Grid 5	Grid 6
31.9 M4	37.6 M4	37.7 M4
Grid 7	Grid 8	Grid 9
49.1 M4	53.7 M4	53.2 M4

Cursor:

Total = 53.7 V/m

E Category: M4

Location: -4.5, 25, 8.7 mm

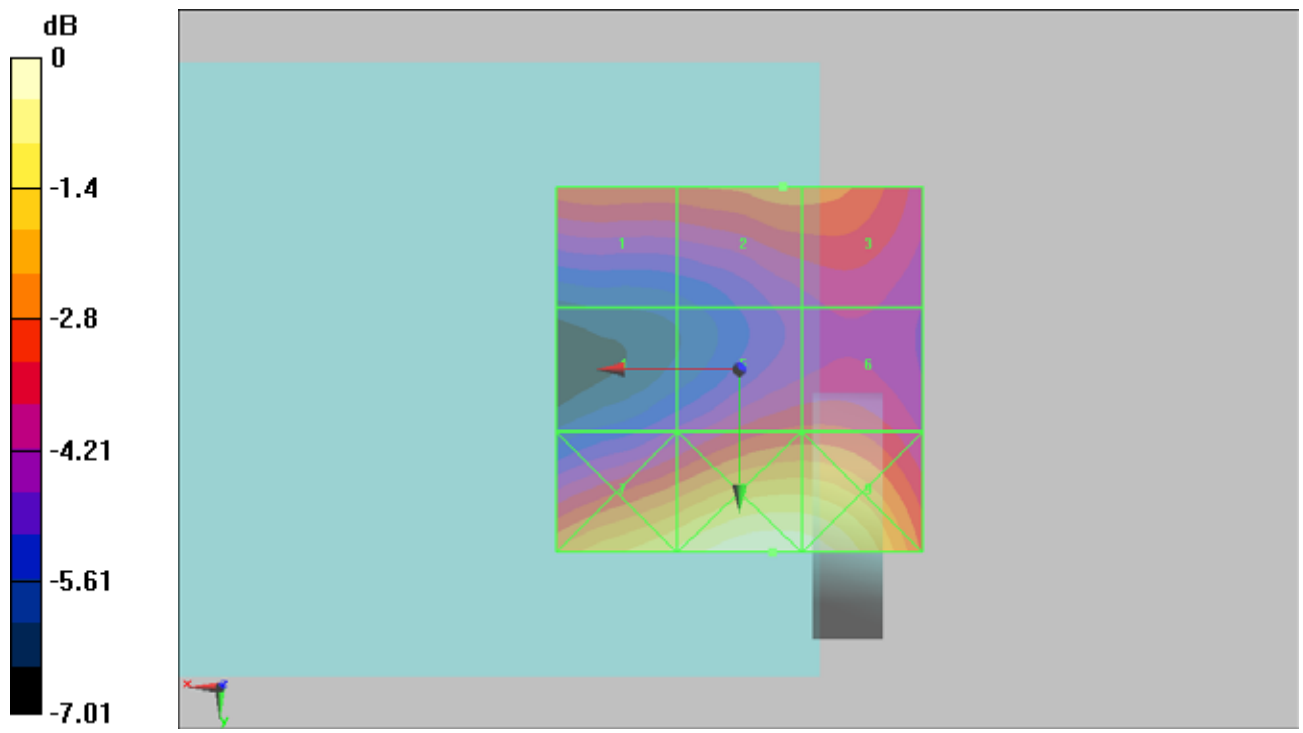

#12 HAC_E_WCDMA II_RMC12.2K_Ch9400_Keypad1

DUT: 0D0904-01

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2010/6/15

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn913; Calibrated: 2010/11/18

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch9400/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 41 V/m

Probe Modulation Factor = 1

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 37.5 V/m; Power Drift = -0.021 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m


Grid 1 39.2 M4	Grid 2 41 M4	Grid 3 41 M4
Grid 4 34.7 M4	Grid 5 40.4 M4	Grid 6 40.5 M4
Grid 7 52.6 M4	Grid 8 57.4 M4	Grid 9 56.7 M4

Cursor:

Total = 57.4 V/m

E Category: M4

Location: -4, 25, 8.7 mm

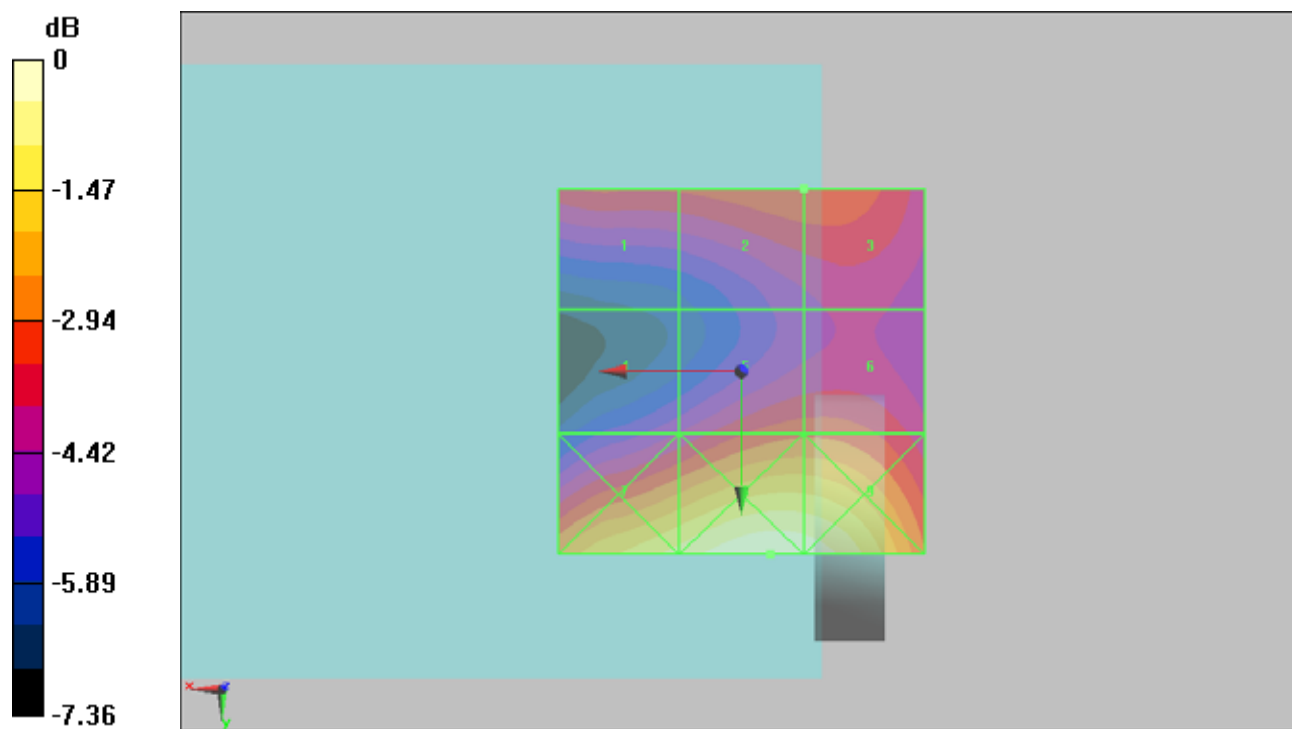

0 dB = 57.4V/m

#13 HAC_E_WCDMA II_RMC12.2K_Ch9538_Keypad1

DUT: 0D0904-01

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2010/6/15
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn913; Calibrated: 2010/11/18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch9538/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 39.9 V/m

Probe Modulation Factor = 1

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 37.3 V/m; Power Drift = -0.180 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m


Grid 1	Grid 2	Grid 3
38.8 M4	39.9 M4	39.9 M4
Grid 4	Grid 5	Grid 6
34.6 M4	38.6 M4	38.5 M4
Grid 7	Grid 8	Grid 9
51.8 M4	54.3 M4	53 M4

Cursor:

Total = 54.3 V/m

E Category: M4

Location: -3, 25, 8.7 mm

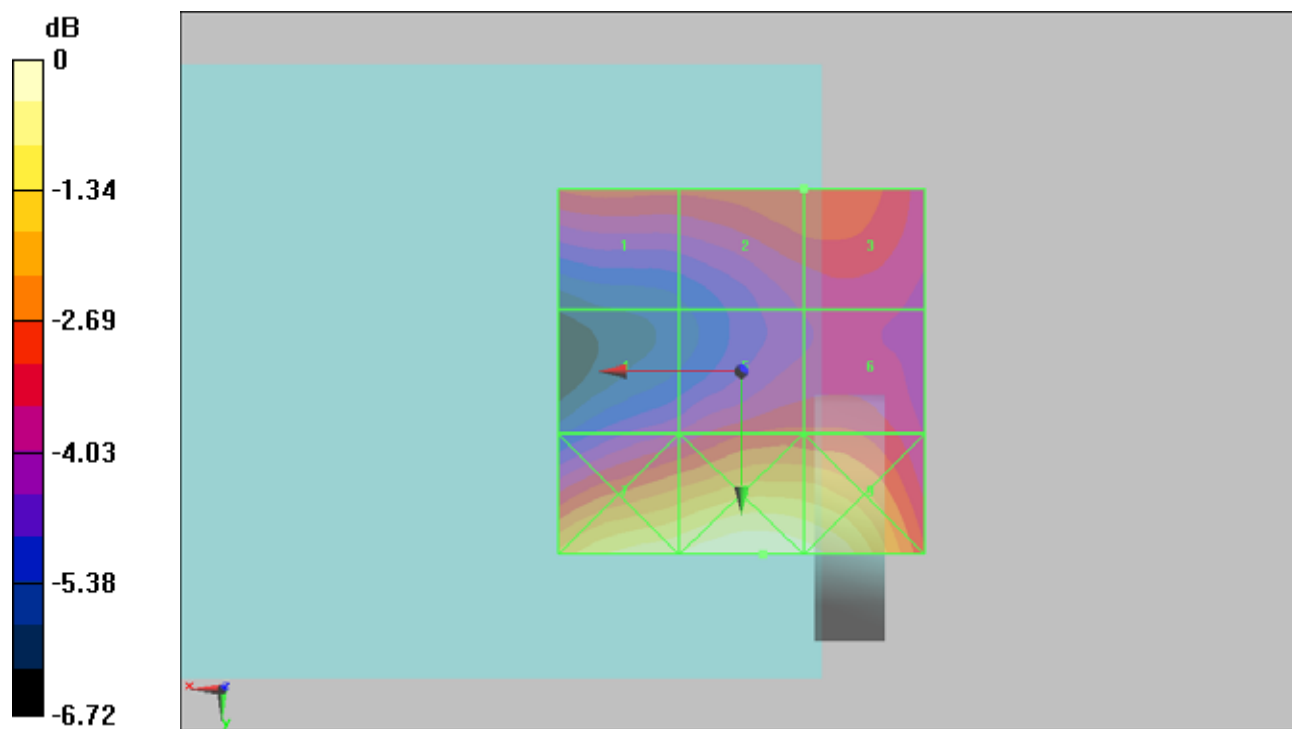

#41 HAC_E_WCDMA IV_RMC12.2K_Ch1312_Keypad1**DUT: 0D0904-01**

Communication System: WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2010/6/15

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn913; Calibrated: 2010/11/18

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch1213/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 32.9 V/m

Probe Modulation Factor = 0.980

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 26.4 V/m; Power Drift = -0.229 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m


Grid 1 29.3 M4	Grid 2 32.9 M4	Grid 3 32.6 M4
Grid 4 21.2 M4	Grid 5 25.1 M4	Grid 6 25.2 M4
Grid 7 29.3 M4	Grid 8 33.1 M4	Grid 9 33 M4

Cursor:

Total = 33.1 V/m

E Category: M4

Location: -5.5, 25, 8.7 mm

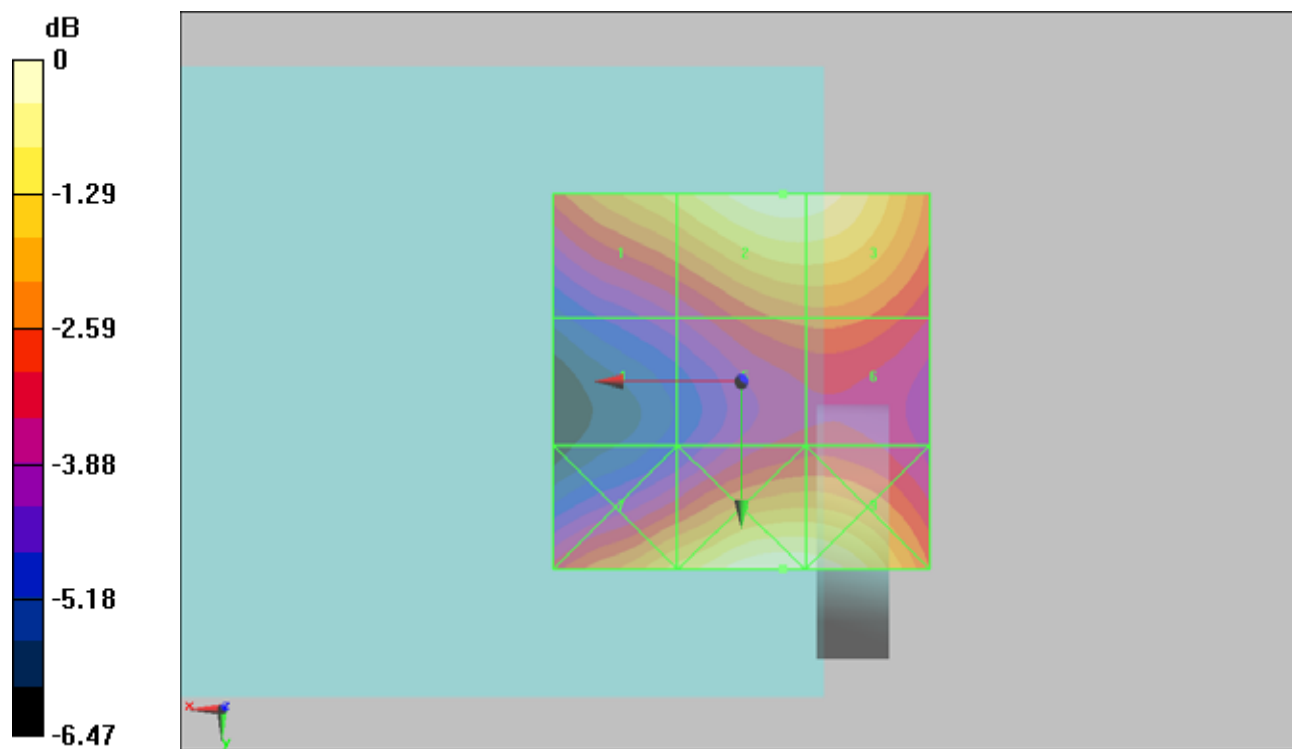

#42 HAC_E_WCDMA IV_RMC12.2K_Ch1413_Keypad1

DUT: 0D0904-01

Communication System: WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2010/6/15
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn913; Calibrated: 2010/11/18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch1413/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 41 V/m

Probe Modulation Factor = 0.980

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 30.8 V/m; Power Drift = 0.191 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m


Grid 1 37.4 M4	Grid 2 41 M4	Grid 3 40.6 M4
Grid 4 26 M4	Grid 5 31.4 M4	Grid 6 31.6 M4
Grid 7 37.2 M4	Grid 8 43 M4	Grid 9 42.8 M4

Cursor:

Total = 43 V/m

E Category: M4

Location: -4.5, 25, 8.7 mm

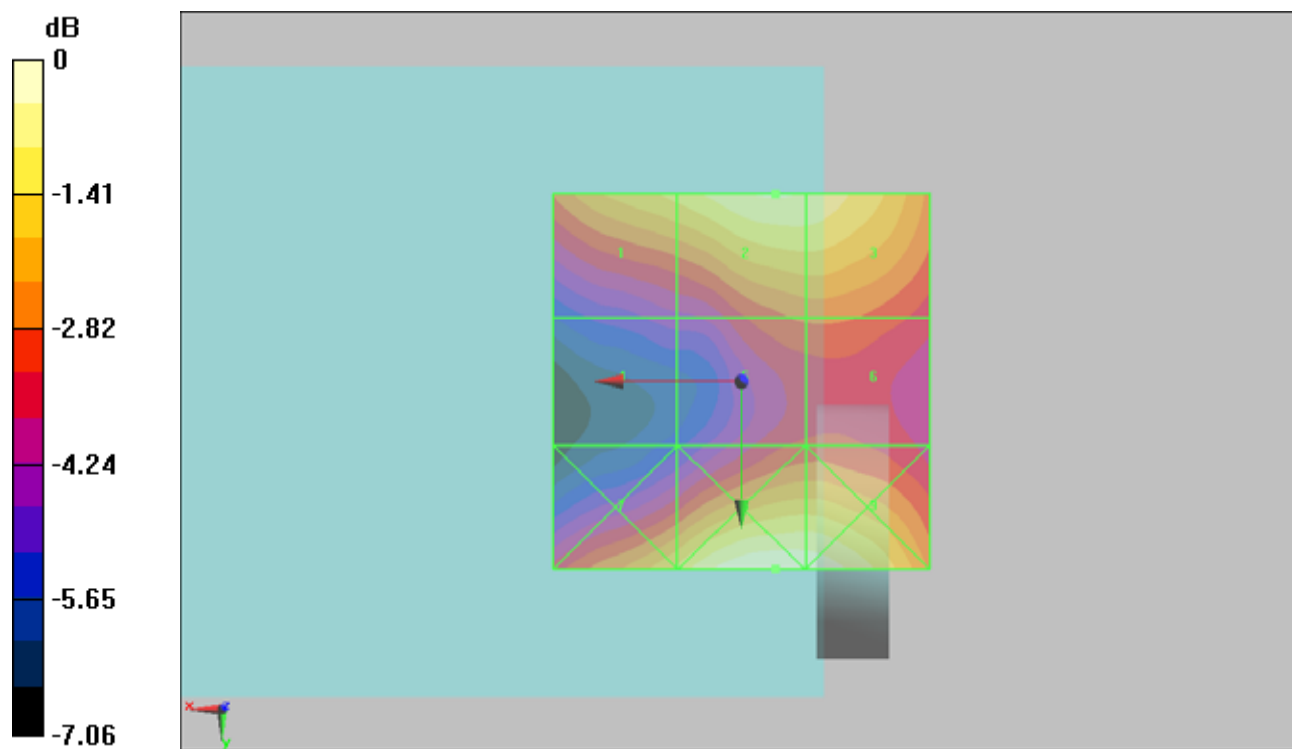

#43 HAC_E_WCDMA IV_RMC12.2K_Ch1513_Keypad1**DUT: 0D0904-01**

Communication System: WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2010/6/15

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn913; Calibrated: 2010/11/18

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch1513/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 39.6 V/m

Probe Modulation Factor = 0.980

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 30.3 V/m; Power Drift = 0.013 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m


Grid 1	Grid 2	Grid 3
36.5 M4	39.6 M4	39.3 M4
Grid 4	Grid 5	Grid 6
25.3 M4	30.3 M4	30.6 M4
Grid 7	Grid 8	Grid 9
36.5 M4	42.2 M4	41.9 M4

Cursor:

Total = 42.2 V/m

E Category: M4

Location: -5.5, 25, 8.7 mm

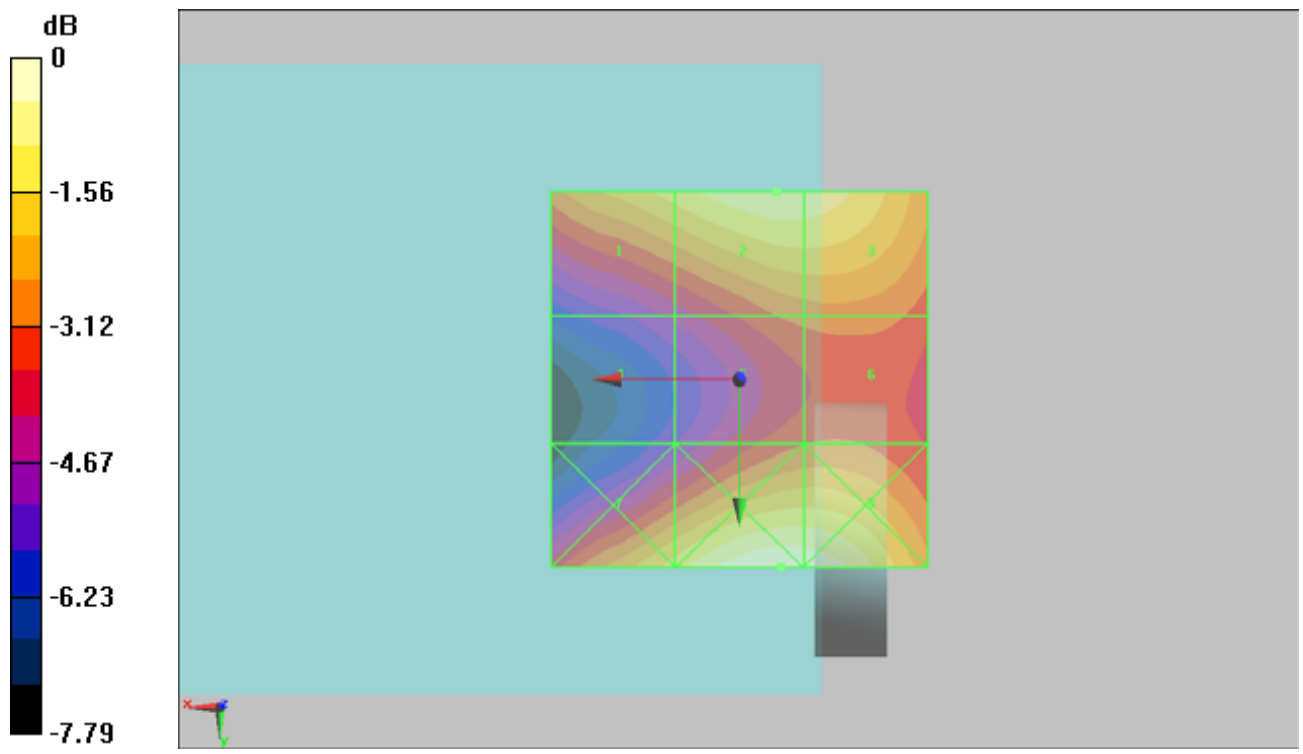

#26 HAC_H_GSM850_Ch128_Keypad1**DUT: 0D0904-01**

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5

DASY5 Configuration:

- Probe: H3DV6 - SN6187; ; Calibrated: 2010/6/15

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn913; Calibrated: 2010/11/18

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch128/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.242 A/m

Probe Modulation Factor = 1.42

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.184 A/m; Power Drift = 0.613 dB

Hearing Aid Near-Field Category: M4 (AWF -5 dB)

Peak H-field in A/m


Grid 1 0.180 M4	Grid 2 0.203 M4	Grid 3 0.203 M4
Grid 4 0.216 M4	Grid 5 0.242 M4	Grid 6 0.241 M4
Grid 7 0.231 M4	Grid 8 0.253 M4	Grid 9 0.250 M4

Cursor:

Total = 0.253 A/m

H Category: M4

Location: -4, 20, 9.2 mm

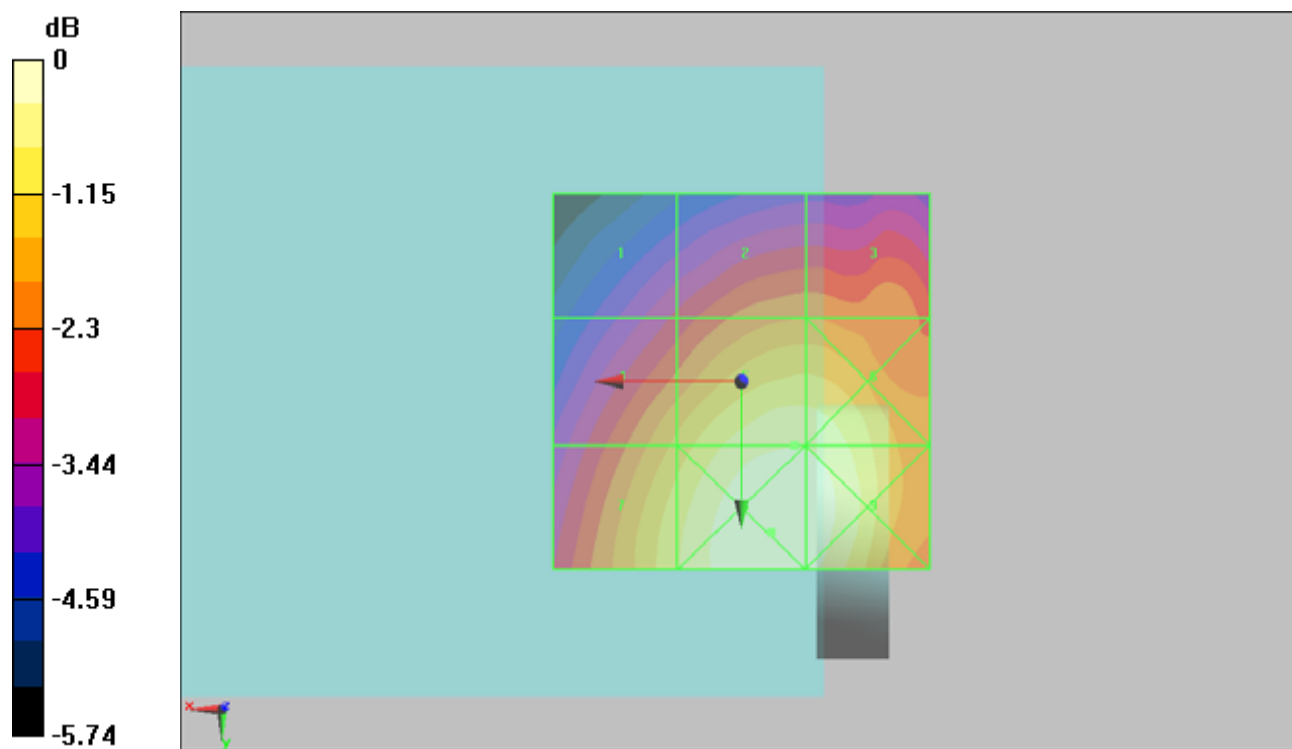

0 dB = 0.253 A/m

#27 HAC_H_GSM850_Ch189_Keypad1

DUT: 0D0904-01

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5

DASY5 Configuration:

- Probe: H3DV6 - SN6187; ; Calibrated: 2010/6/15
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn913; Calibrated: 2010/11/18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch189/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.296 A/m

Probe Modulation Factor = 1.42

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.223 A/m; Power Drift = -0.027 dB

Hearing Aid Near-Field Category: M4 (AWF -5 dB)

Peak H-field in A/m


Grid 1 0.220 M4	Grid 2 0.246 M4	Grid 3 0.246 M4
Grid 4 0.265 M4	Grid 5 0.296 M4	Grid 6 0.295 M4
Grid 7 0.287 M4	Grid 8 0.311 M4	Grid 9 0.307 M4

Cursor:

Total = 0.311 A/m

H Category: M4

Location: -3.5, 21.5, 9.2 mm

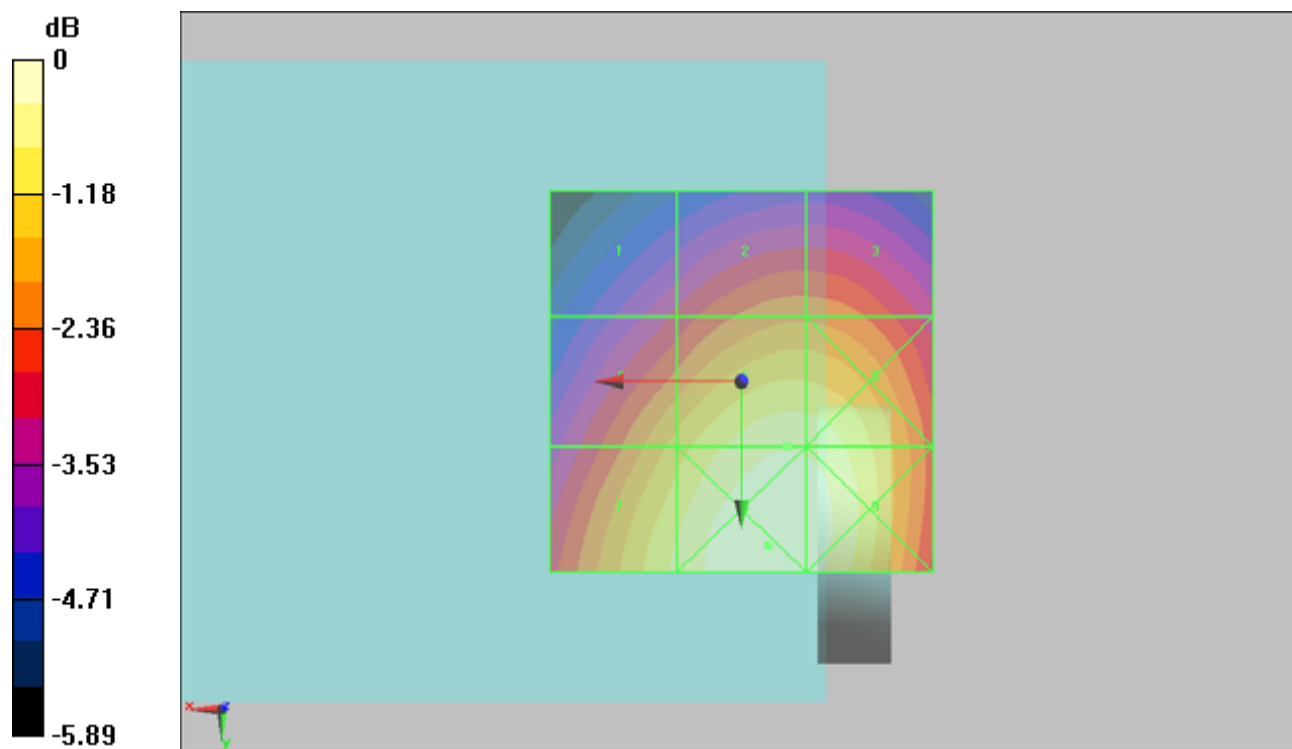

#28 HAC_H_GSM850_Ch251_Keypad1

DUT: 0D0904-01

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5

DASY5 Configuration:

- Probe: H3DV6 - SN6187; ; Calibrated: 2010/6/15
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn913; Calibrated: 2010/11/18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch251/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.311 A/m

Probe Modulation Factor = 1.42

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.234 A/m; Power Drift = 0.012 dB

Hearing Aid Near-Field Category: M4 (AWF -5 dB)

Peak H-field in A/m


Grid 1 0.235 M4	Grid 2 0.261 M4	Grid 3 0.261 M4
Grid 4 0.279 M4	Grid 5 0.311 M4	Grid 6 0.310 M4
Grid 7 0.305 M4	Grid 8 0.329 M4	Grid 9 0.322 M4

Cursor:

Total = 0.329 A/m

H Category: M4

Location: -4, 21, 9.2 mm

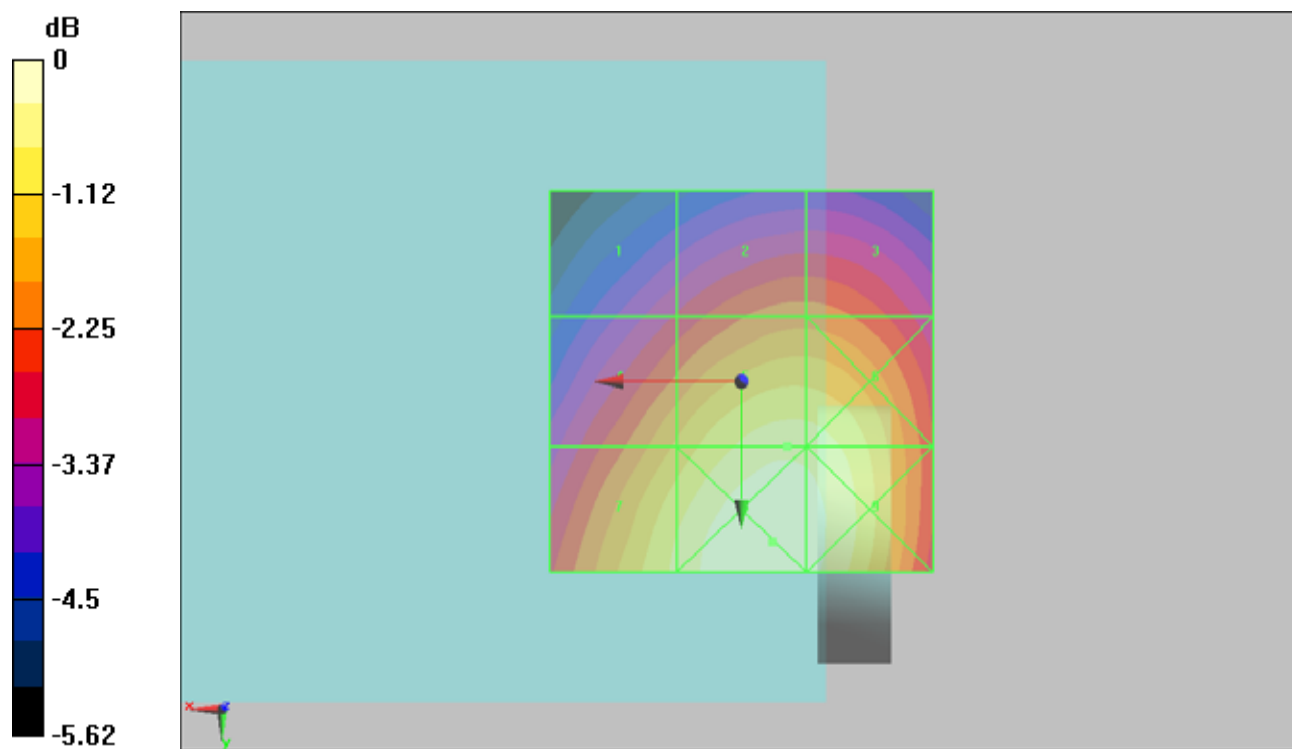

0 dB = 0.329A/m

#21 HAC_H_GSM1900_Ch512_Keypad1

DUT: 0D0904-01

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5

DASY5 Configuration:

- Probe: H3DV6 - SN6187; ; Calibrated: 2010/6/15

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn913; Calibrated: 2010/11/18

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch512/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.110 A/m

Probe Modulation Factor = 1.28

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.094 A/m; Power Drift = -0.777 dB

Hearing Aid Near-Field Category: M4 (AWF -5 dB)

Peak H-field in A/m


Grid 1 0.093 M4	Grid 2 0.095 M4	Grid 3 0.087 M4
Grid 4 0.108 M4	Grid 5 0.110 M4	Grid 6 0.097 M4
Grid 7 0.111 M4	Grid 8 0.113 M4	Grid 9 0.097 M4

Cursor:

Total = 0.113 A/m

H Category: M4

Location: 6, 19, 9.2 mm

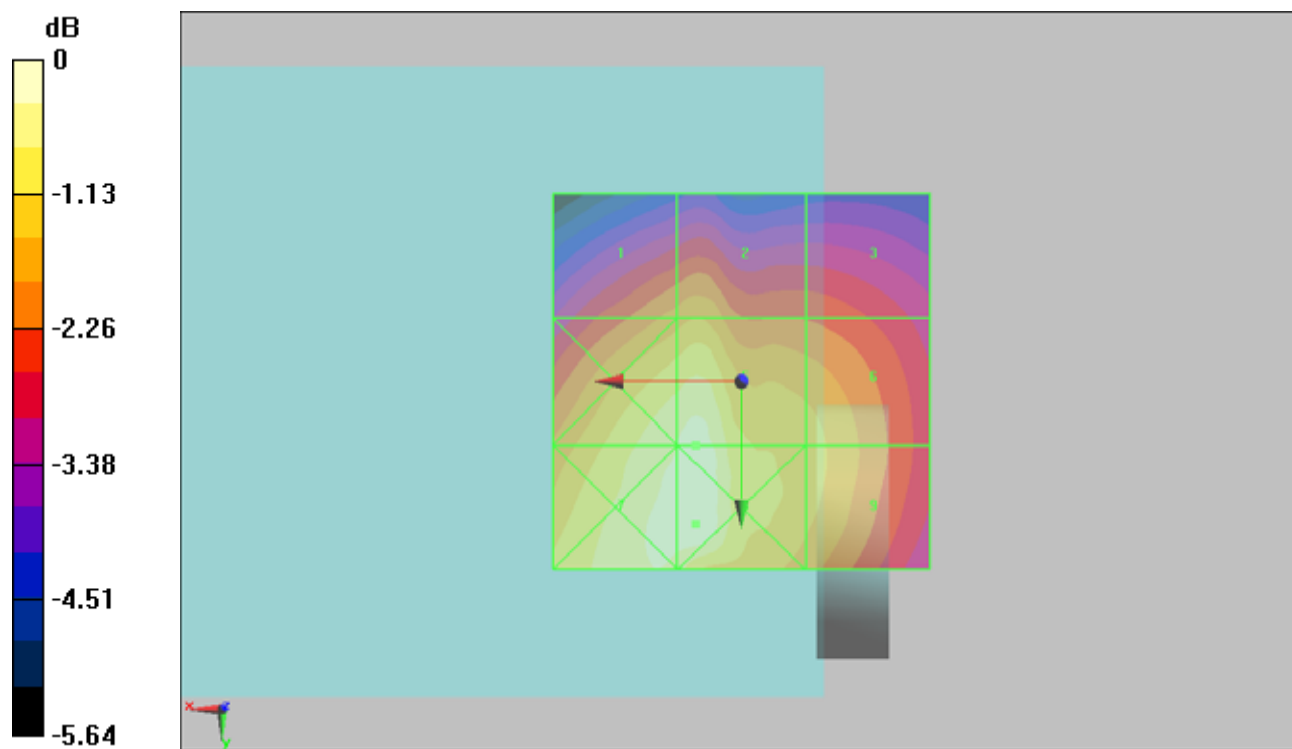

#22 HAC_H_GSM1900_Ch661_Keypad1

DUT: 0D0904-01

Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.6

DASY5 Configuration:

- Probe: H3DV6 - SN6187; ; Calibrated: 2010/6/15

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn913; Calibrated: 2010/11/18

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch661/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.127 A/m

Probe Modulation Factor = 1.28

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.109 A/m; Power Drift = -0.017 dB

Hearing Aid Near-Field Category: M4 (AWF -5 dB)

Peak H-field in A/m


Grid 1 0.108 M4	Grid 2 0.110 M4	Grid 3 0.108 M4
Grid 4 0.125 M4	Grid 5 0.127 M4	Grid 6 0.120 M4
Grid 7 0.127 M4	Grid 8 0.128 M4	Grid 9 0.121 M4

Cursor:

Total = 0.128 A/m

H Category: M4

Location: 4, 13, 9.2 mm

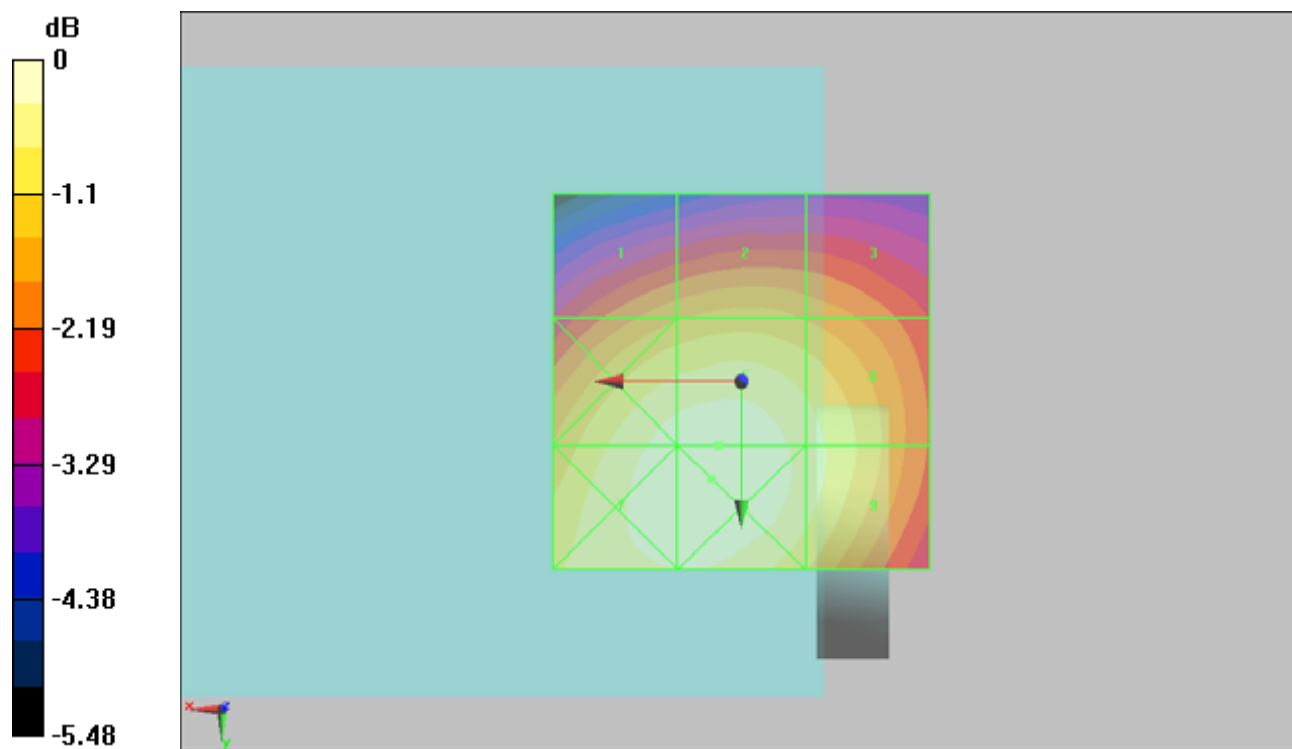

#23 HAC_H_GSM1900_Ch810_Keypad1

DUT: 0D0904-01

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.6

DASY5 Configuration:

- Probe: H3DV6 - SN6187; ; Calibrated: 2010/6/15
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn913; Calibrated: 2010/11/18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch810/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.120 A/m

Probe Modulation Factor = 1.28

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.101 A/m; Power Drift = 0.017 dB

Hearing Aid Near-Field Category: M4 (AWF -5 dB)

Peak H-field in A/m


Grid 1 0.103 M4	Grid 2 0.103 M4	Grid 3 0.098 M4
Grid 4 0.120 M4	Grid 5 0.120 M4	Grid 6 0.113 M4
Grid 7 0.122 M4	Grid 8 0.123 M4	Grid 9 0.115 M4

Cursor:

Total = 0.123 A/m

H Category: M4

Location: 5.5, 15.5, 9.2 mm

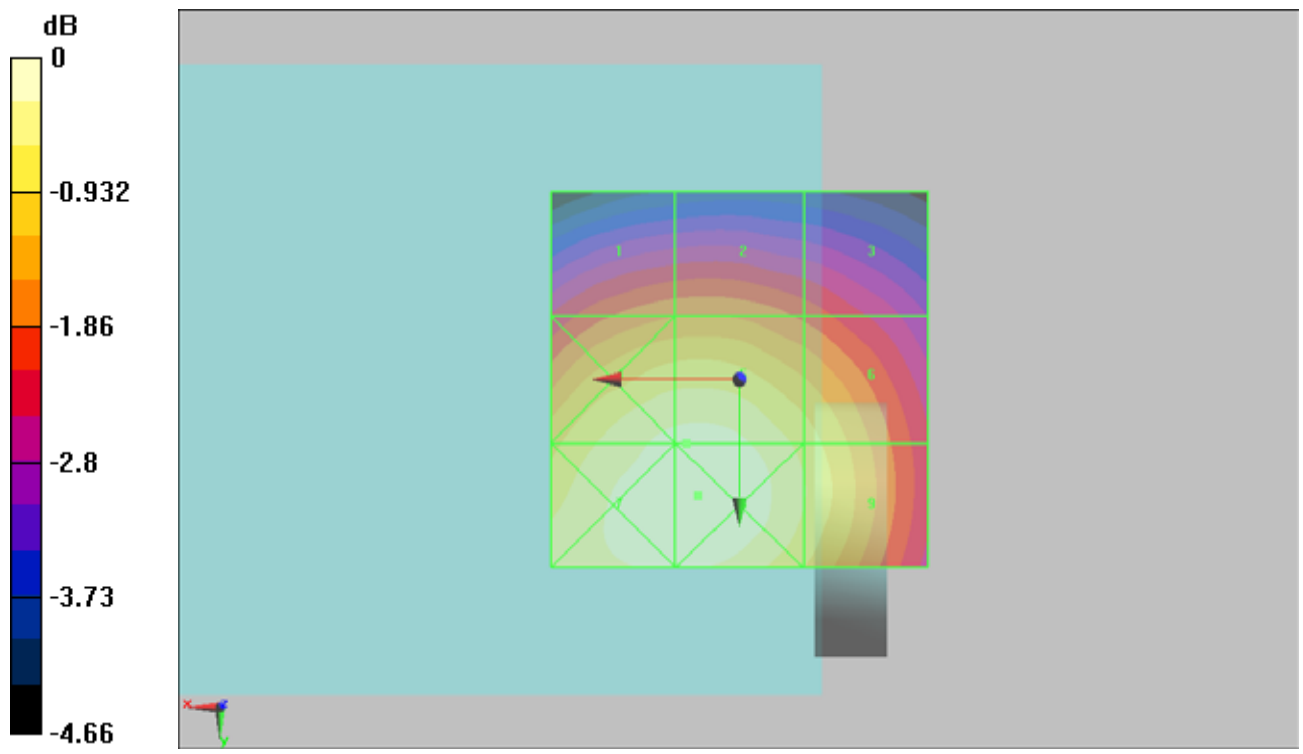

#36 HAC_H_WCDMA V_RMC12.2K_Ch4132_Keypad1

DUT: 0D0904-01

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.6

DASY5 Configuration:

- Probe: H3DV6 - SN6187; ; Calibrated: 2010/6/15

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn913; Calibrated: 2010/11/18

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch4132/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.143 A/m

Probe Modulation Factor = 0.770

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.203 A/m; Power Drift = -0.233 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m


Grid 1 0.107 M4	Grid 2 0.121 M4	Grid 3 0.121 M4
Grid 4 0.127 M4	Grid 5 0.143 M4	Grid 6 0.142 M4
Grid 7 0.134 M4	Grid 8 0.148 M4	Grid 9 0.146 M4

Cursor:

Total = 0.148 A/m

H Category: M4

Location: -4.5, 19, 9.2 mm

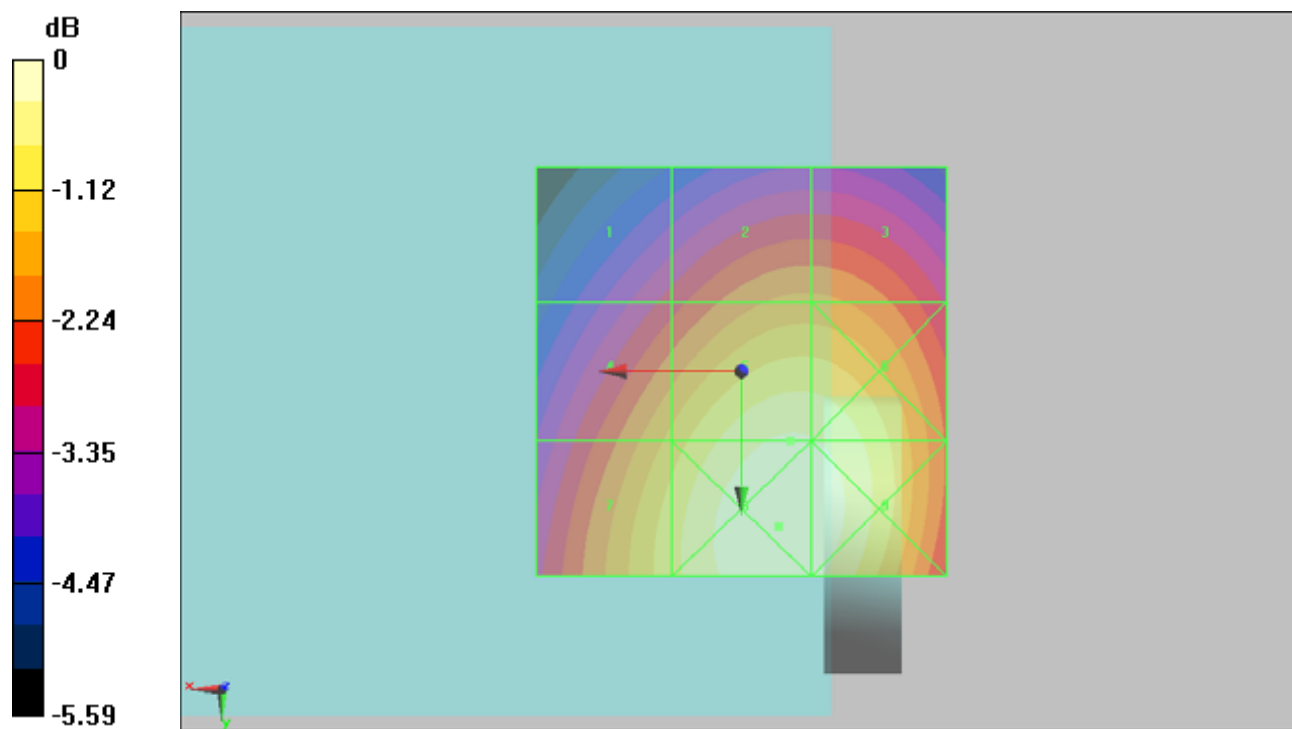

0 dB = 0.148A/m

#37 HAC_H_WCDMA V_RMC12.2K_Ch4182_Keypad1

DUT: 0D0904-01

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5

DASY5 Configuration:

- Probe: H3DV6 - SN6187; ; Calibrated: 2010/6/15

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn913; Calibrated: 2010/11/18

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch4182/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.152 A/m

Probe Modulation Factor = 0.770

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.209 A/m; Power Drift = -0.019 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m


Grid 1 0.115 M4	Grid 2 0.129 M4	Grid 3 0.129 M4
Grid 4 0.136 M4	Grid 5 0.152 M4	Grid 6 0.151 M4
Grid 7 0.144 M4	Grid 8 0.157 M4	Grid 9 0.156 M4

Cursor:

Total = 0.157 A/m

H Category: M4

Location: -5.5, 16, 9.2 mm

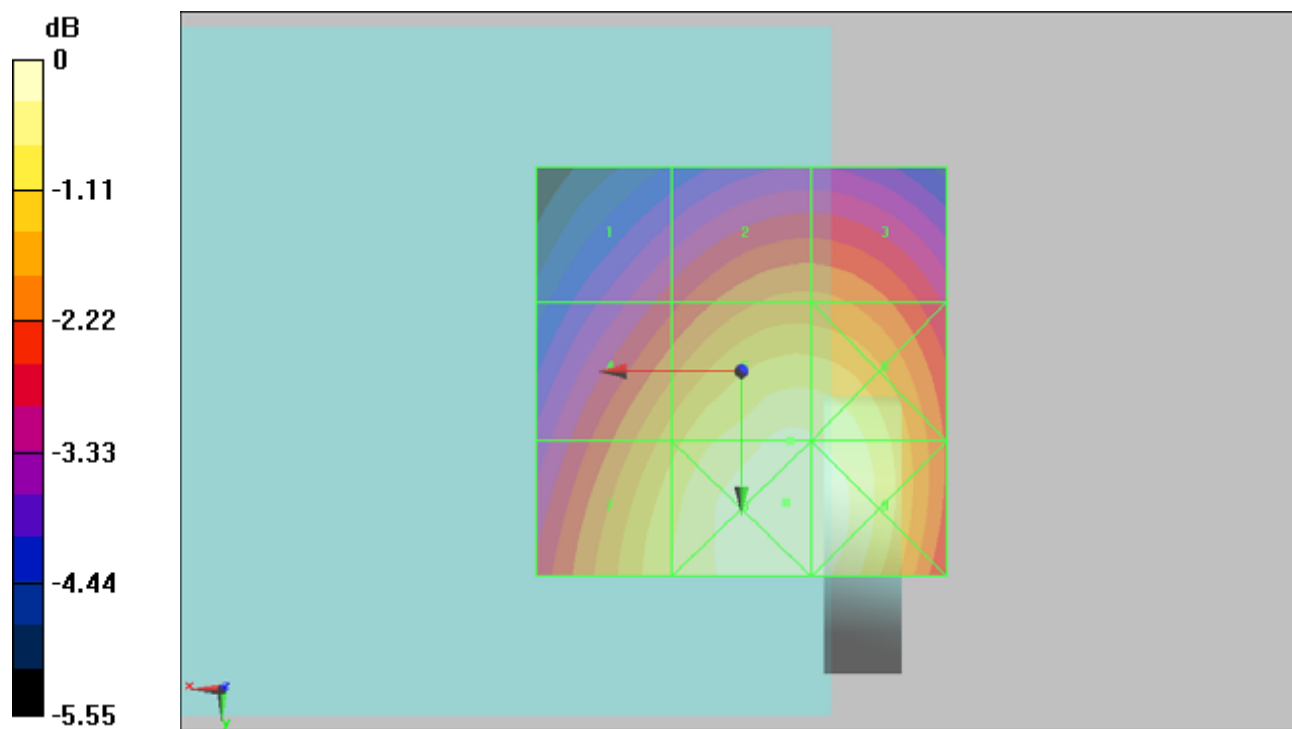

0 dB = 0.157A/m

#38 HAC_H_WCDMA V_RMC12.2K_Ch4233_Keypad1

DUT: 0D0904-01

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.6

DASY5 Configuration:

- Probe: H3DV6 - SN6187; ; Calibrated: 2010/6/15

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn913; Calibrated: 2010/11/18

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch4233/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.162 A/m

Probe Modulation Factor = 0.770

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.225 A/m; Power Drift = -0.039 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m


Grid 1 0.123 M4	Grid 2 0.139 M4	Grid 3 0.138 M4
Grid 4 0.145 M4	Grid 5 0.162 M4	Grid 6 0.162 M4
Grid 7 0.154 M4	Grid 8 0.167 M4	Grid 9 0.165 M4

Cursor:

Total = 0.167 A/m

H Category: M4

Location: -4, 20, 9.2 mm

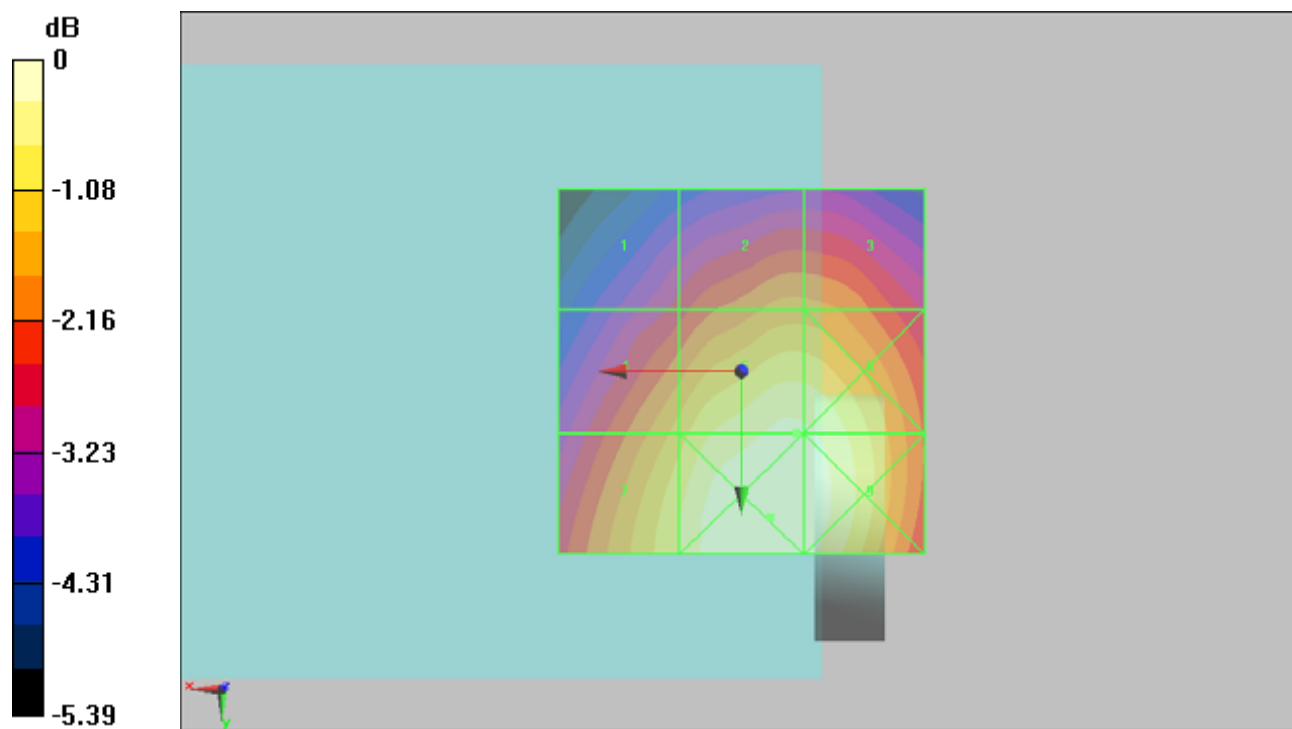

#31 HAC_H_WCDMA II_RMC12.2K_Ch9262_Keypad1

DUT: 0D0904-01

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.4

DASY5 Configuration:

- Probe: H3DV6 - SN6187; ; Calibrated: 2010/6/15

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn913; Calibrated: 2010/11/18

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch9262/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.070 A/m

Probe Modulation Factor = 0.530

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.144 A/m; Power Drift = -0.157 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m


Grid 1 0.058 M4	Grid 2 0.061 M4	Grid 3 0.061 M4
Grid 4 0.068 M4	Grid 5 0.070 M4	Grid 6 0.068 M4
Grid 7 0.069 M4	Grid 8 0.071 M4	Grid 9 0.069 M4

Cursor:

Total = 0.071 A/m

H Category: M4

Location: 1.5, 15.5, 9.2 mm

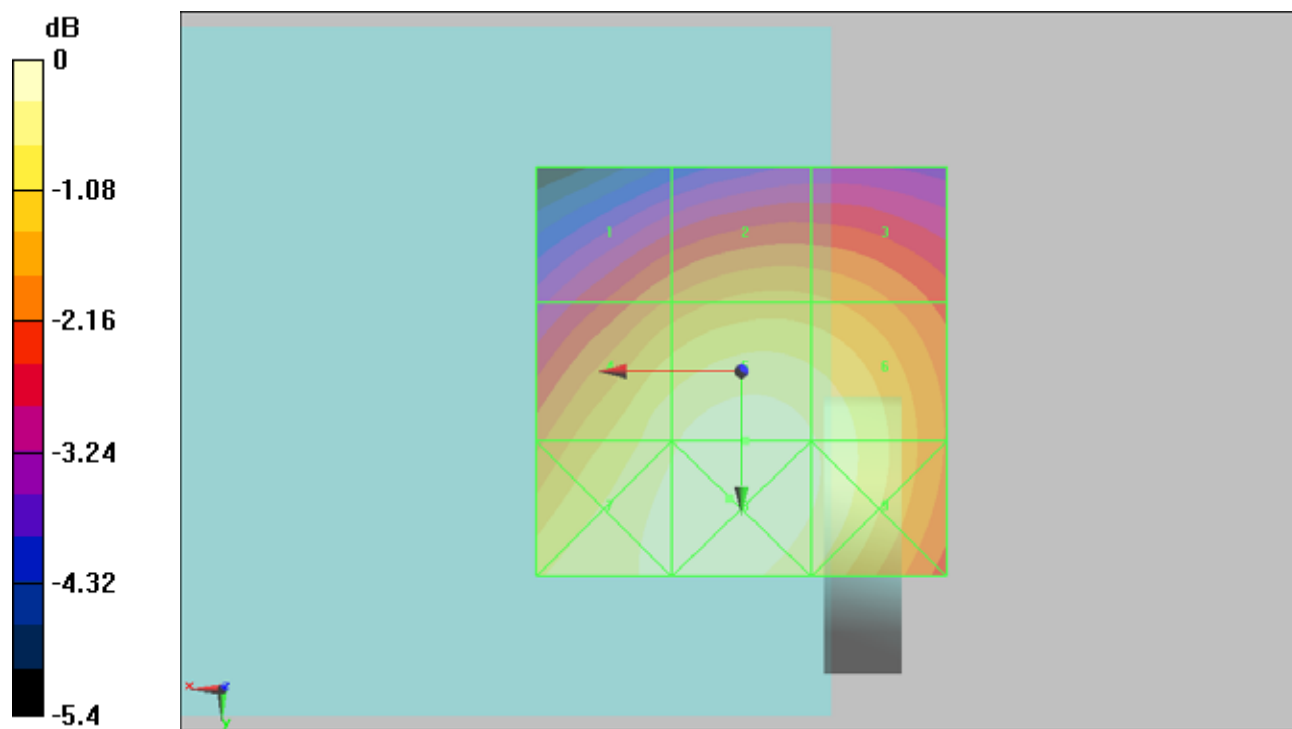

0 dB = 0.071A/m

#32 HAC_H_WCDMA II_RMC12.2K_Ch9400_Keypad1

DUT: 0D0904-01

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.4

DASY5 Configuration:

- Probe: H3DV6 - SN6187; ; Calibrated: 2010/6/15

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn913; Calibrated: 2010/11/18

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch9400/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.073 A/m

Probe Modulation Factor = 0.530

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.147 A/m; Power Drift = 0.060 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m


Grid 1 0.061 M4	Grid 2 0.064 M4	Grid 3 0.063 M4
Grid 4 0.071 M4	Grid 5 0.073 M4	Grid 6 0.070 M4
Grid 7 0.072 M4	Grid 8 0.073 M4	Grid 9 0.070 M4

Cursor:

Total = 0.073 A/m

H Category: M4

Location: 0.5, 14, 9.2 mm

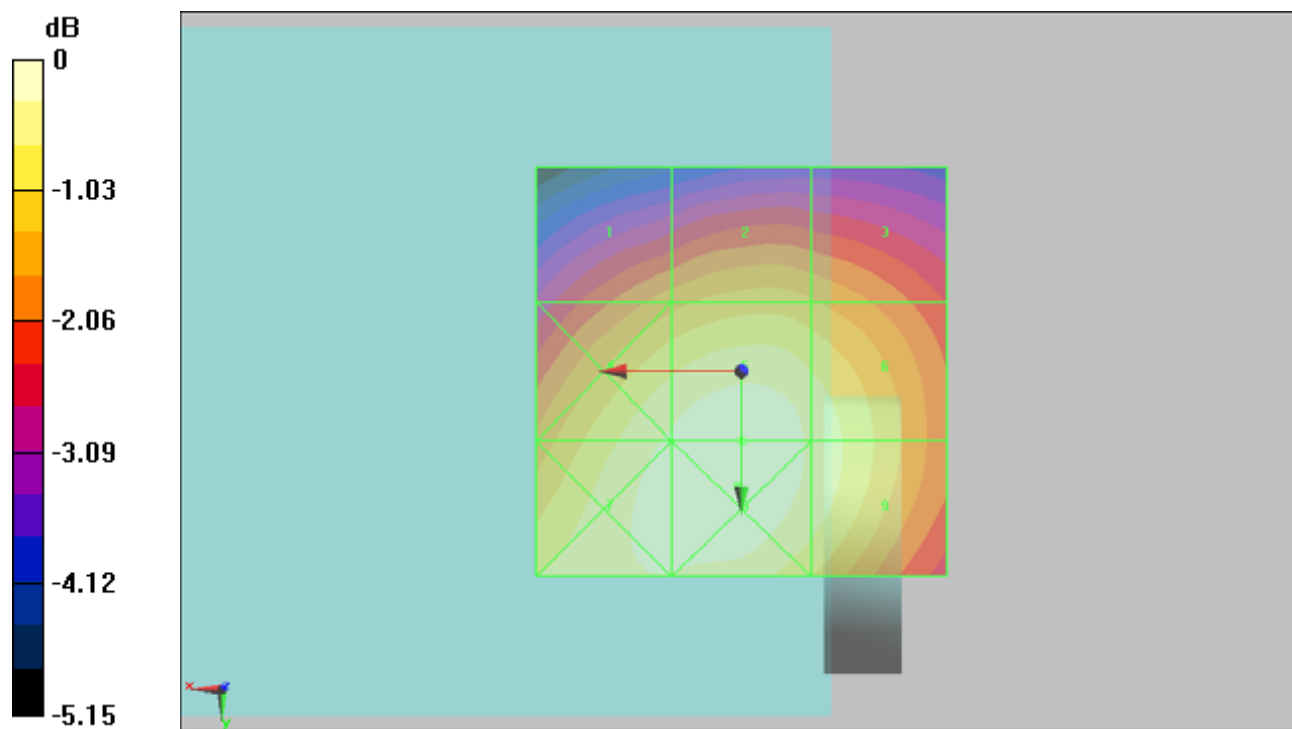

0 dB = 0.073 A/m

#33 HAC_H_WCDMA II_RMC12.2K_Ch9538_Keypad1

DUT: 0D0904-01

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.6

DASY5 Configuration:

- Probe: H3DV6 - SN6187; ; Calibrated: 2010/6/15

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn913; Calibrated: 2010/11/18

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch9538/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.070 A/m

Probe Modulation Factor = 0.530

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.141 A/m; Power Drift = -0.028 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m


Grid 1 0.058 M4	Grid 2 0.060 M4	Grid 3 0.059 M4
Grid 4 0.068 M4	Grid 5 0.070 M4	Grid 6 0.068 M4
Grid 7 0.070 M4	Grid 8 0.071 M4	Grid 9 0.068 M4

Cursor:

Total = 0.071 A/m

H Category: M4

Location: 5.5, 19.5, 9.2 mm

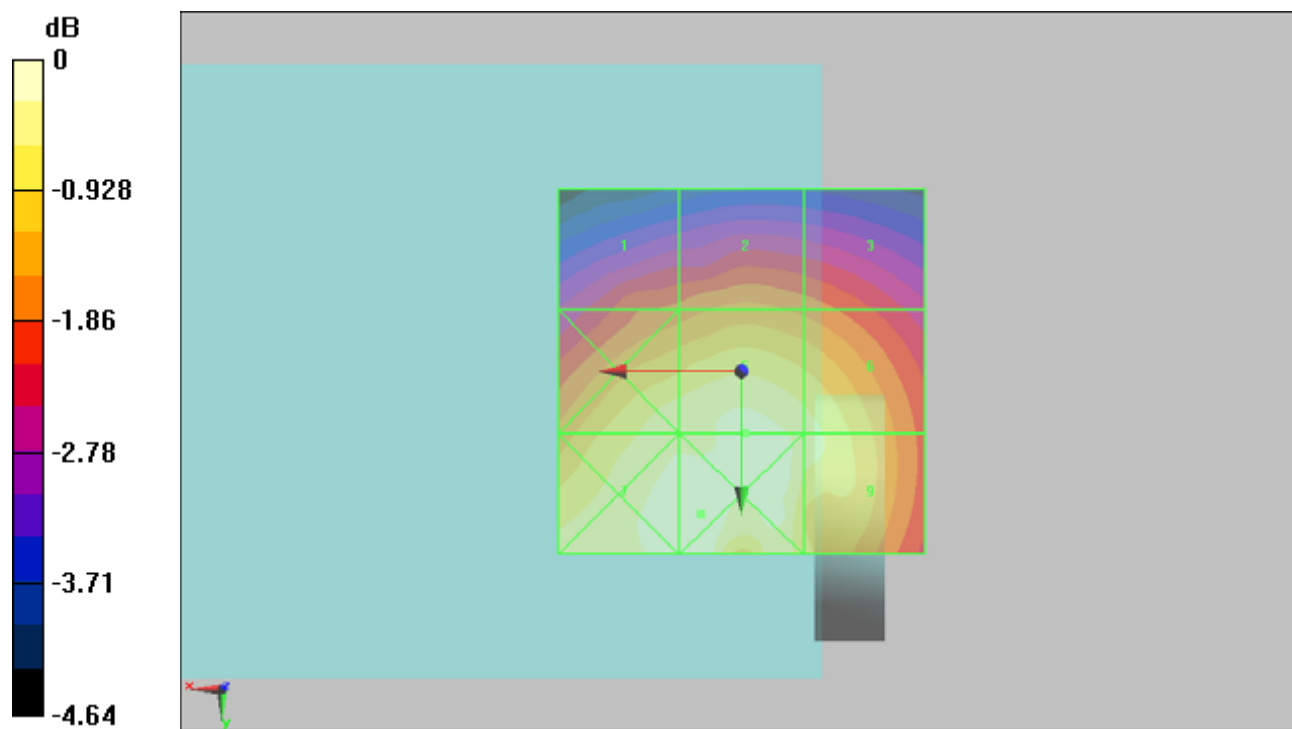

0 dB = 0.071A/m

#46 HAC_H_WCDMA IV_RMC12.2K_Ch1312_Keypad1**DUT: 0D0904-01**

Communication System: WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.4

DASY5 Configuration:

- Probe: H3DV6 - SN6187; ; Calibrated: 2010/6/15
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn913; Calibrated: 2010/11/18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch1312/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.047 A/m

Probe Modulation Factor = 0.520

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.098 A/m; Power Drift = 0.094 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m


Grid 1 0.035 M4	Grid 2 0.040 M4	Grid 3 0.040 M4
Grid 4 0.043 M4	Grid 5 0.047 M4	Grid 6 0.047 M4
Grid 7 0.045 M4	Grid 8 0.048 M4	Grid 9 0.047 M4

Cursor:

Total = 0.048 A/m

H Category: M4

Location: -4.5, 12.5, 9.2 mm

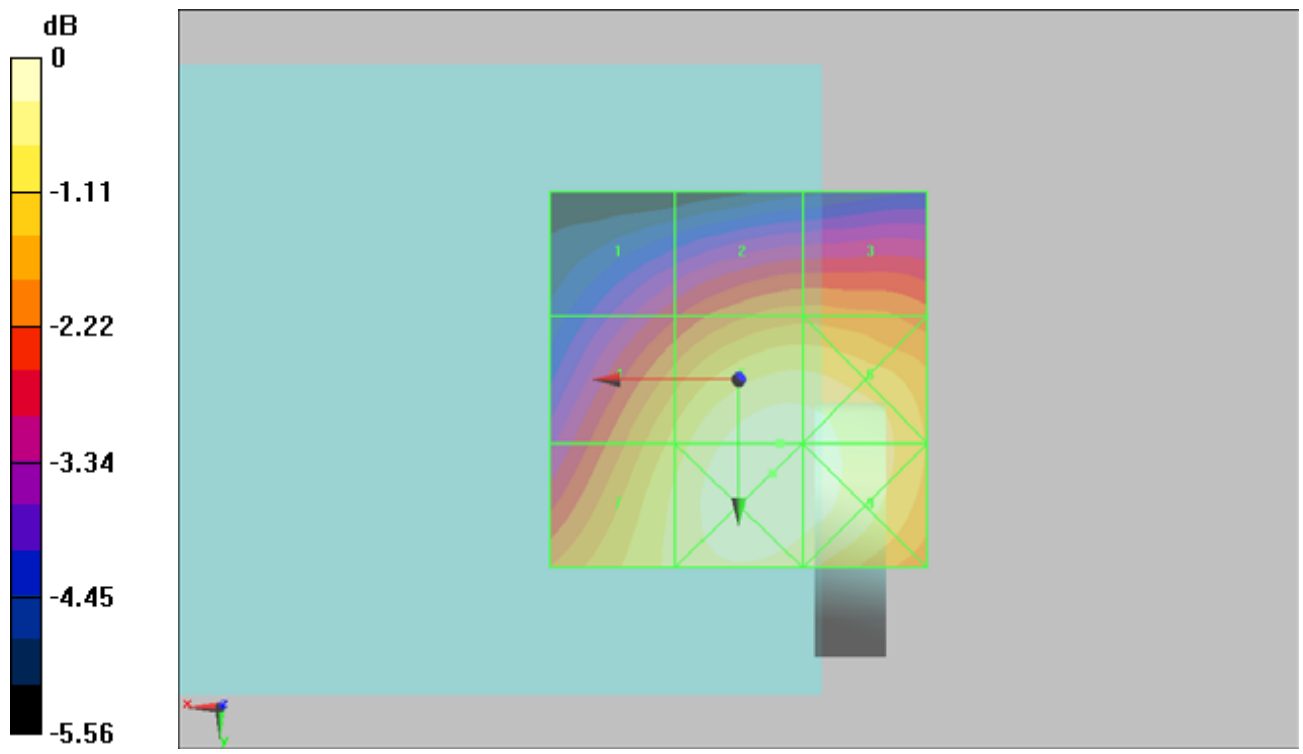

#47 HAC_H_WCDMA IV_RMC12.2K_Ch1413_Keypad1**DUT: 0D0904-01**

Communication System: WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.4

DASY5 Configuration:

- Probe: H3DV6 - SN6187; ; Calibrated: 2010/6/15
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn913; Calibrated: 2010/11/18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch1413/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.059 A/m

Probe Modulation Factor = 0.520

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.124 A/m; Power Drift = -0.055 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m


Grid 1 0.044 M4	Grid 2 0.050 M4	Grid 3 0.050 M4
Grid 4 0.054 M4	Grid 5 0.059 M4	Grid 6 0.059 M4
Grid 7 0.057 M4	Grid 8 0.060 M4	Grid 9 0.059 M4

Cursor:

Total = 0.060 A/m

H Category: M4

Location: -3, 13, 9.2 mm

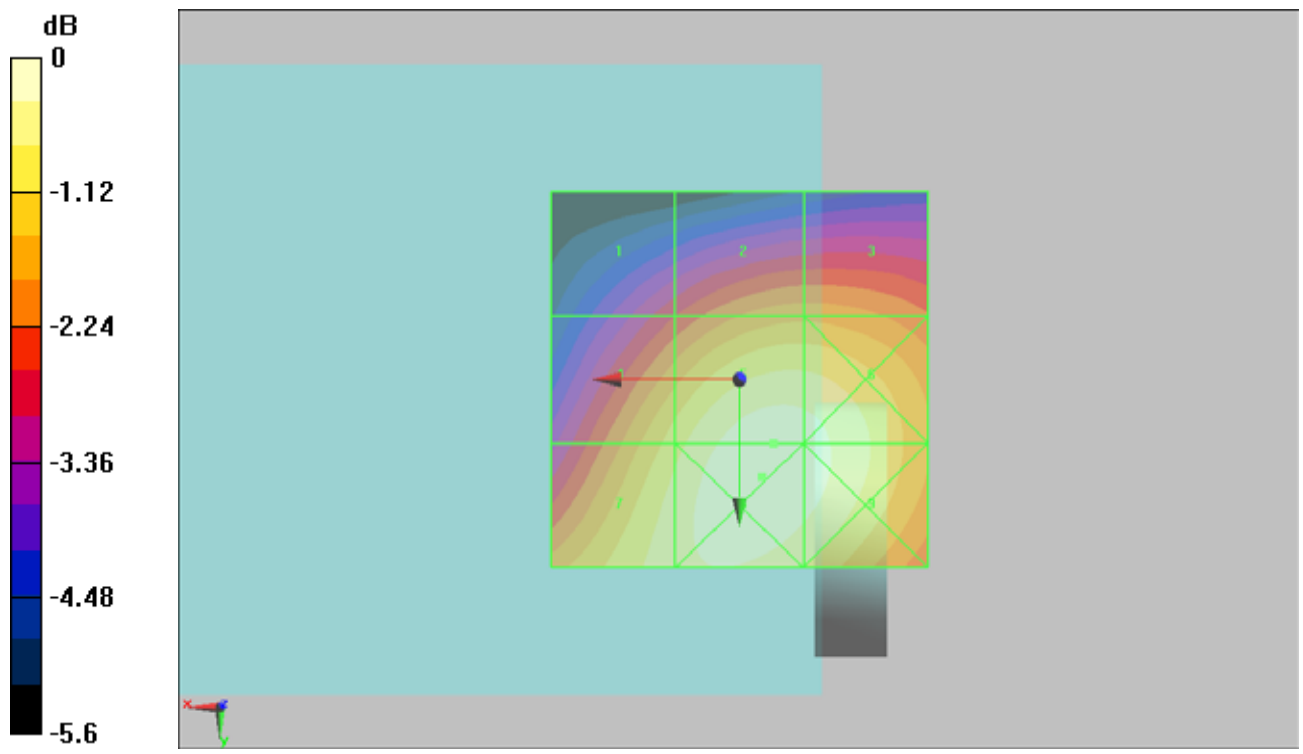

#48 HAC_H_WCDMA IV_RMC12.2K_Ch1513_Keypad1**DUT: 0D0904-01**

Communication System: WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.4

DASY5 Configuration:

- Probe: H3DV6 - SN6187; ; Calibrated: 2010/6/15
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn913; Calibrated: 2010/11/18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch1513/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.057 A/m

Probe Modulation Factor = 0.520

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.121 A/m; Power Drift = 0.067 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m


Grid 1	Grid 2	Grid 3
0.044 M4	0.050 M4	0.050 M4
Grid 4	Grid 5	Grid 6
0.053 M4	0.057 M4	0.057 M4
Grid 7	Grid 8	Grid 9
0.054 M4	0.057 M4	0.057 M4

Cursor:

Total = 0.057 A/m

H Category: M4

Location: -4, 11, 9.2 mm

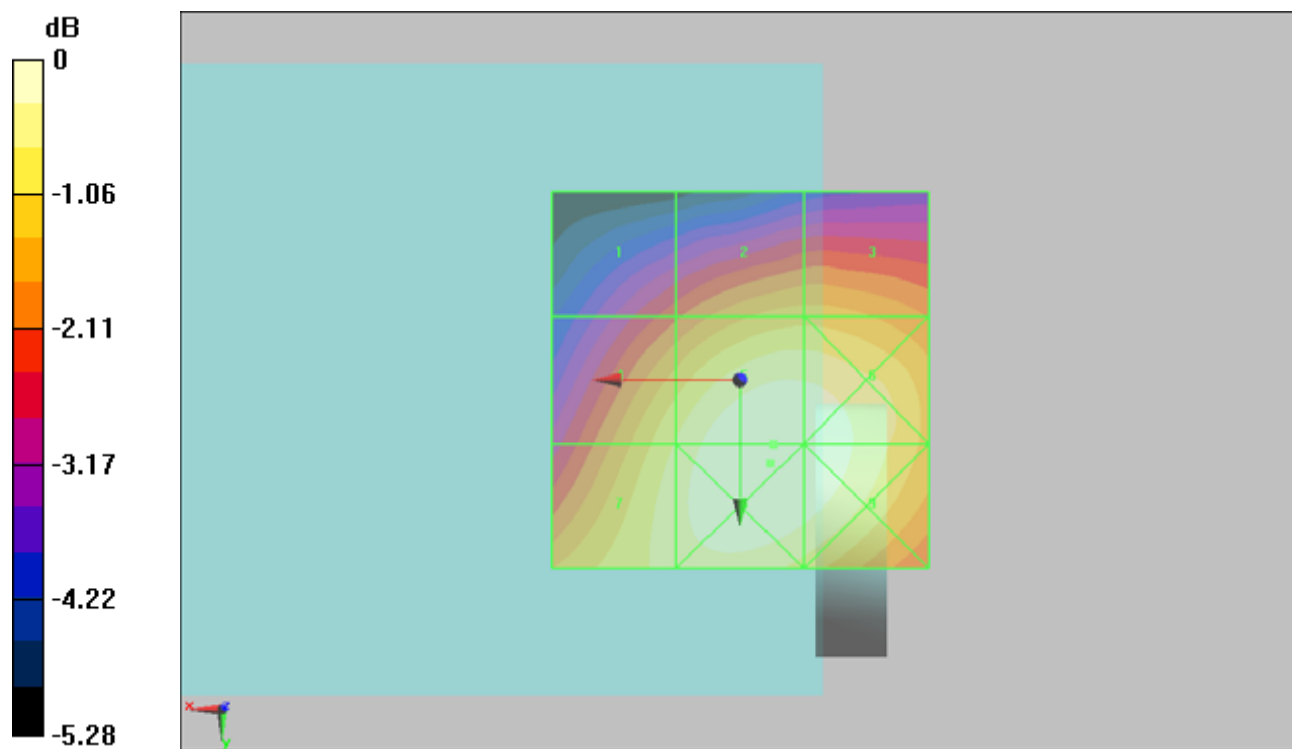

0 dB = 0.057A/m