


Site: AC1	Time: 2020/07/06 - 22:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 0	

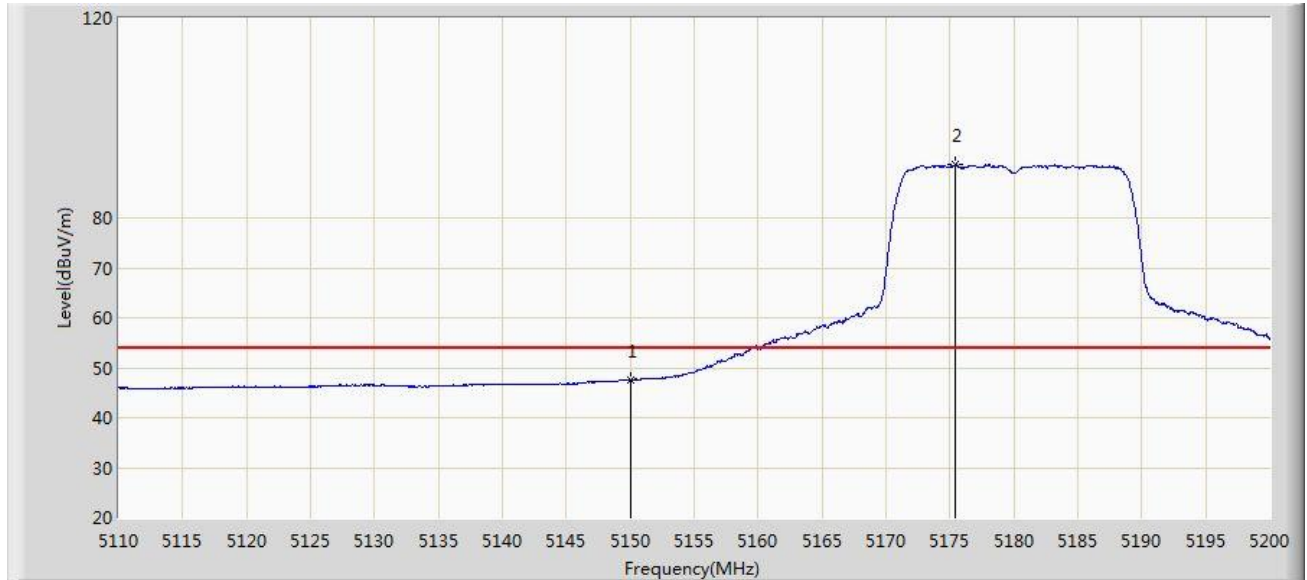


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.576	41.124	-6.424	54.000	6.452	AV
2		*	5175.430	90.678	84.194	N/A	N/A	6.485	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 22:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 0	

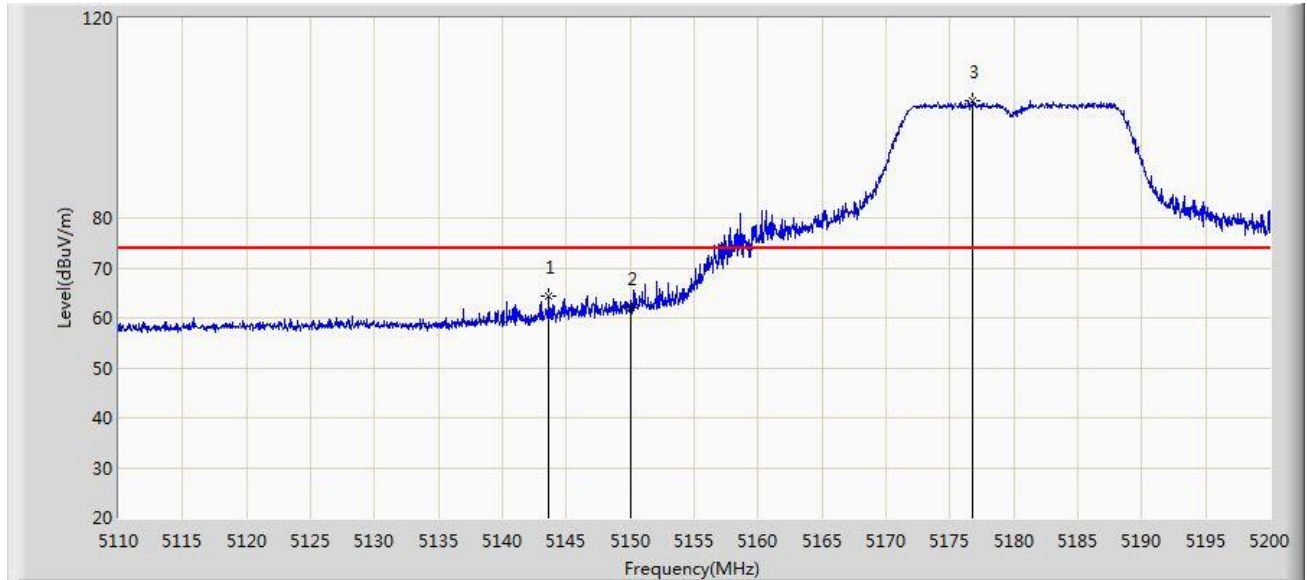


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5143.660	64.461	57.931	-9.539	74.000	6.529	PK
2			5150.000	62.024	55.572	-11.976	74.000	6.452	PK
3		*	5176.780	103.612	97.119	N/A	N/A	6.493	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 22:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 0	

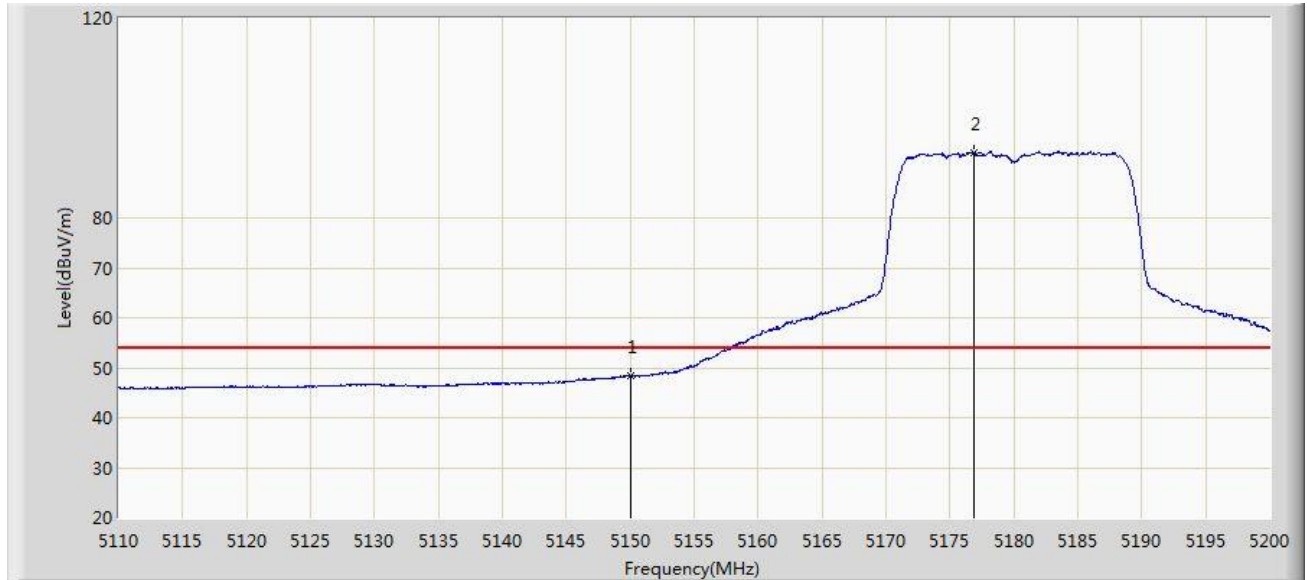


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.330	41.878	-5.670	54.000	6.452	AV
2		*	5176.825	93.179	86.685	N/A	N/A	6.493	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 22:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz Ant 0	

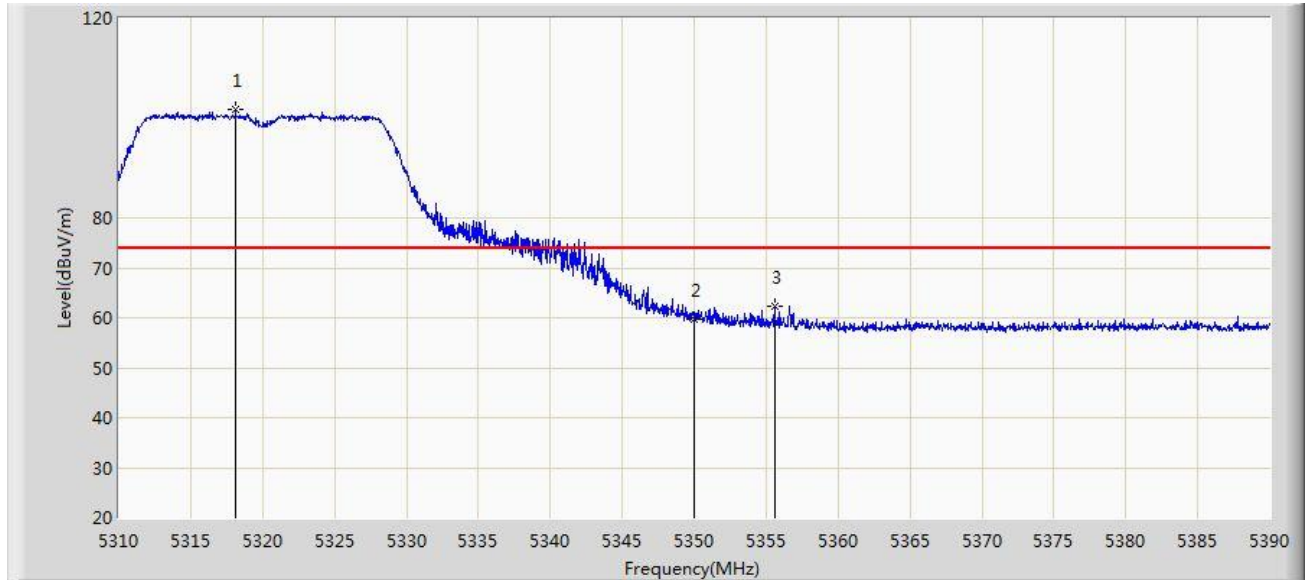


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.120	101.761	95.659	N/A	N/A	6.102	PK
2			5350.000	59.764	53.306	-14.236	74.000	6.458	PK
3			5355.600	62.208	55.906	-11.792	74.000	6.302	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 22:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz Ant 0	

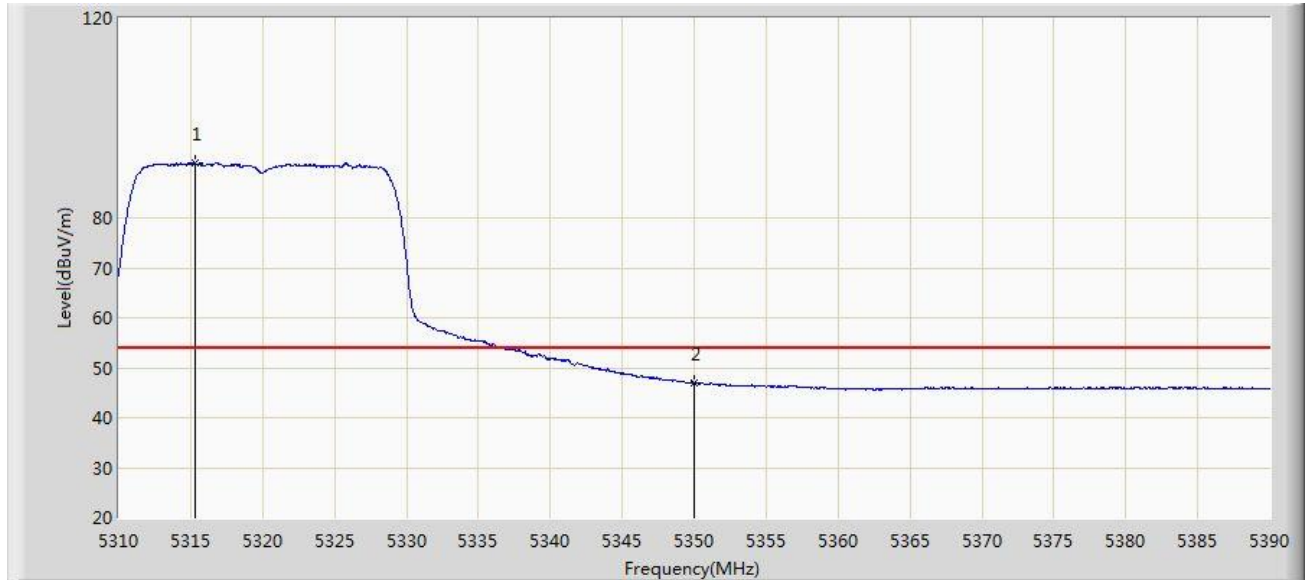


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.320	90.963	84.921	N/A	N/A	6.043	AV
2			5350.000	46.977	40.519	-7.023	54.000	6.458	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 22:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz Ant 0	

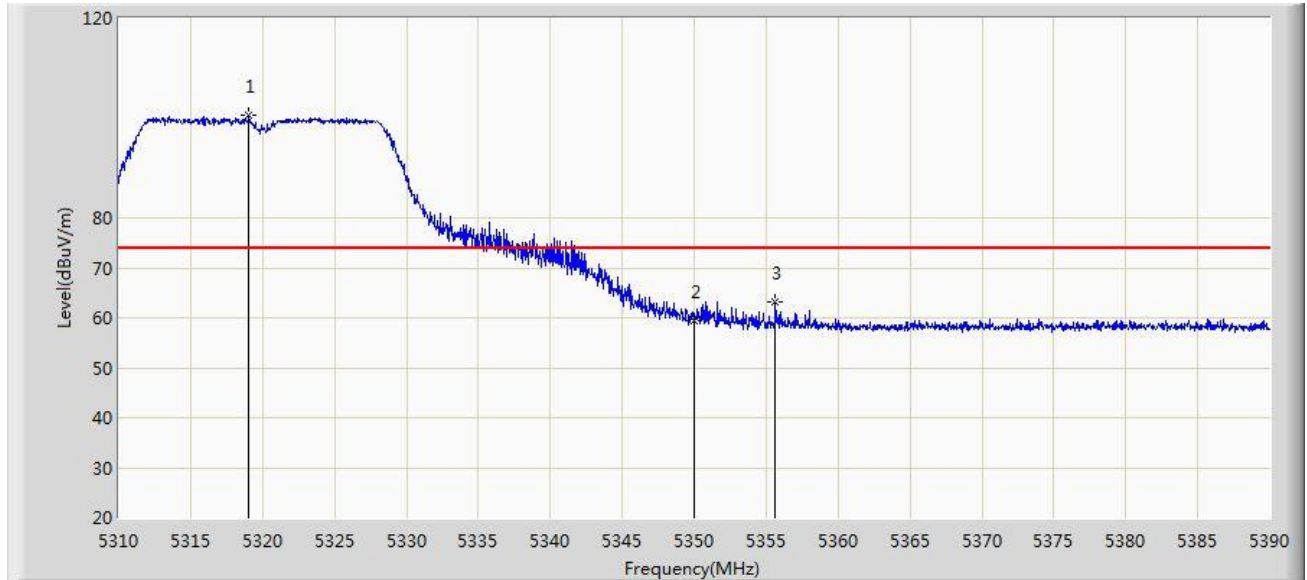


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5319.040	100.622	94.497	N/A	N/A	6.125	PK
2			5350.000	59.375	52.917	-14.625	74.000	6.458	PK
3			5355.640	63.217	56.916	-10.783	74.000	6.301	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 22:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz Ant 0	

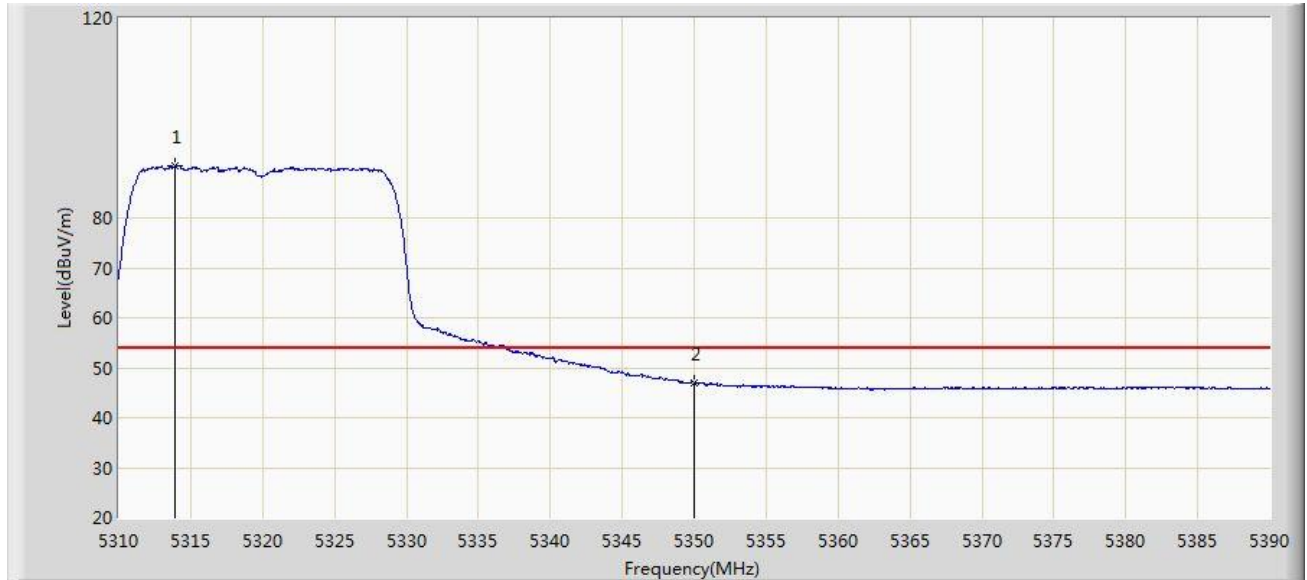


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.920	90.382	84.370	N/A	N/A	6.012	AV
2			5350.000	47.060	40.602	-6.940	54.000	6.458	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz Ant 0	

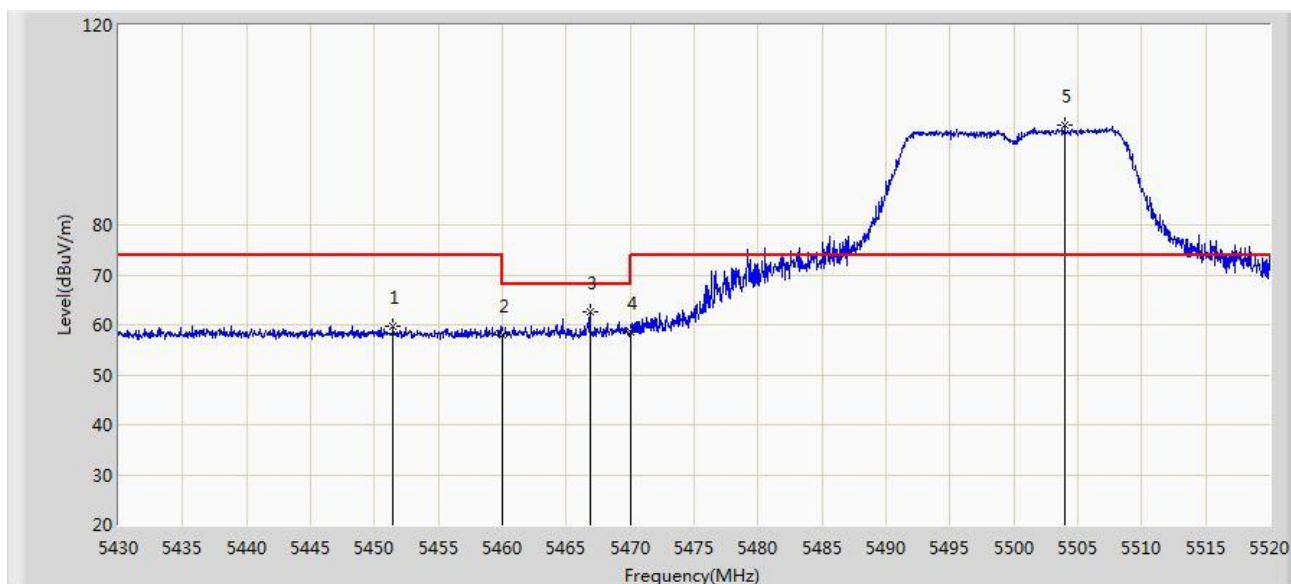


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5451.420	59.640	53.180	-14.360	74.000	6.460	PK
2			5460.000	57.873	51.387	-16.127	74.000	6.486	PK
3			5466.855	62.508	55.995	-5.692	68.200	6.512	PK
4			5470.000	58.511	51.986	-9.689	68.200	6.524	PK
5		*	5503.980	100.085	93.552	N/A	N/A	6.533	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz Ant 0	

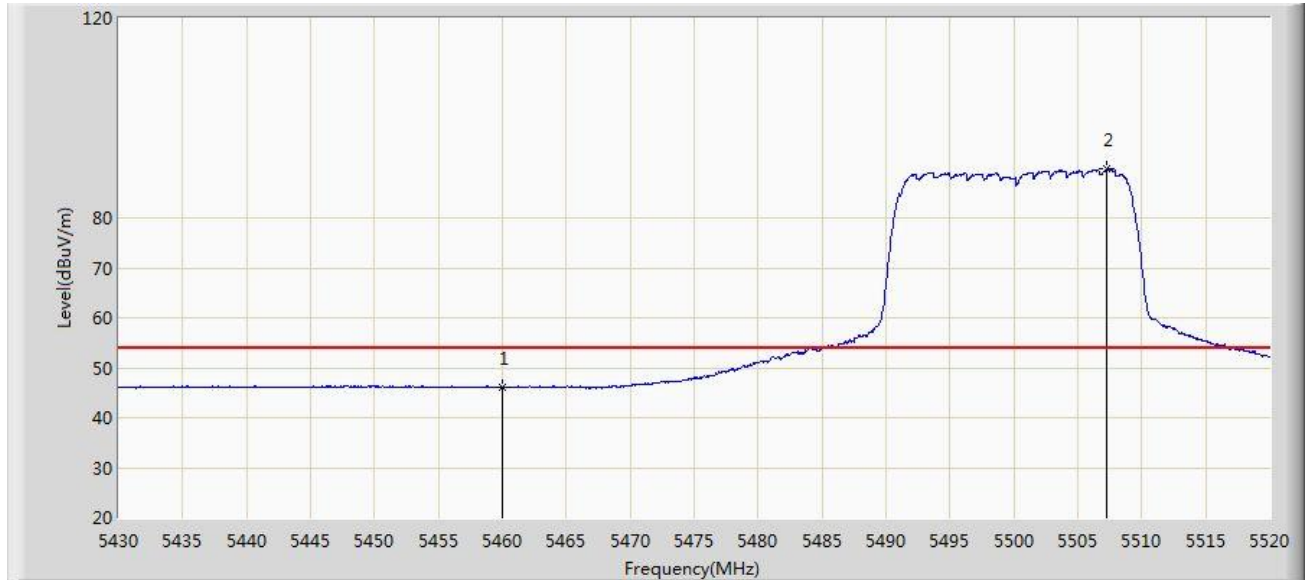


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.101	39.615	-7.899	54.000	6.486	AV
2		*	5507.310	89.737	83.241	N/A	N/A	6.496	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz Ant 0	

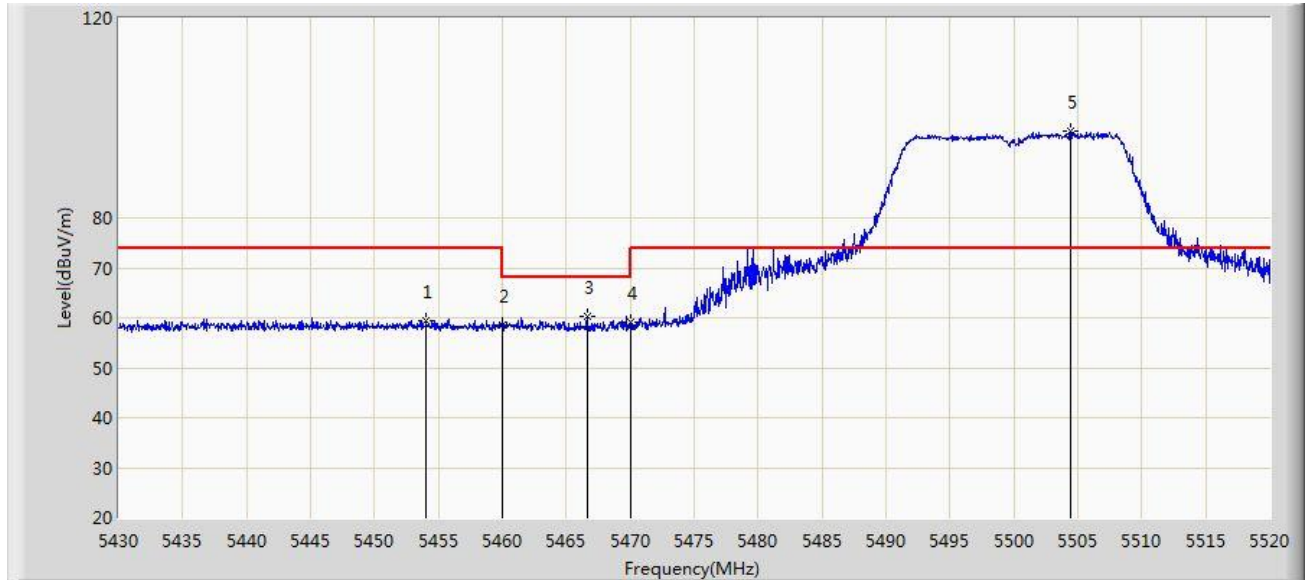


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5454.075	59.292	52.830	-14.708	74.000	6.462	PK
2			5460.000	58.555	52.069	-15.445	74.000	6.486	PK
3			5466.630	60.398	53.886	-7.802	68.200	6.512	PK
4			5470.000	59.028	52.503	-9.172	68.200	6.524	PK
5		*	5504.475	97.534	90.999	N/A	N/A	6.535	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz Ant 0	

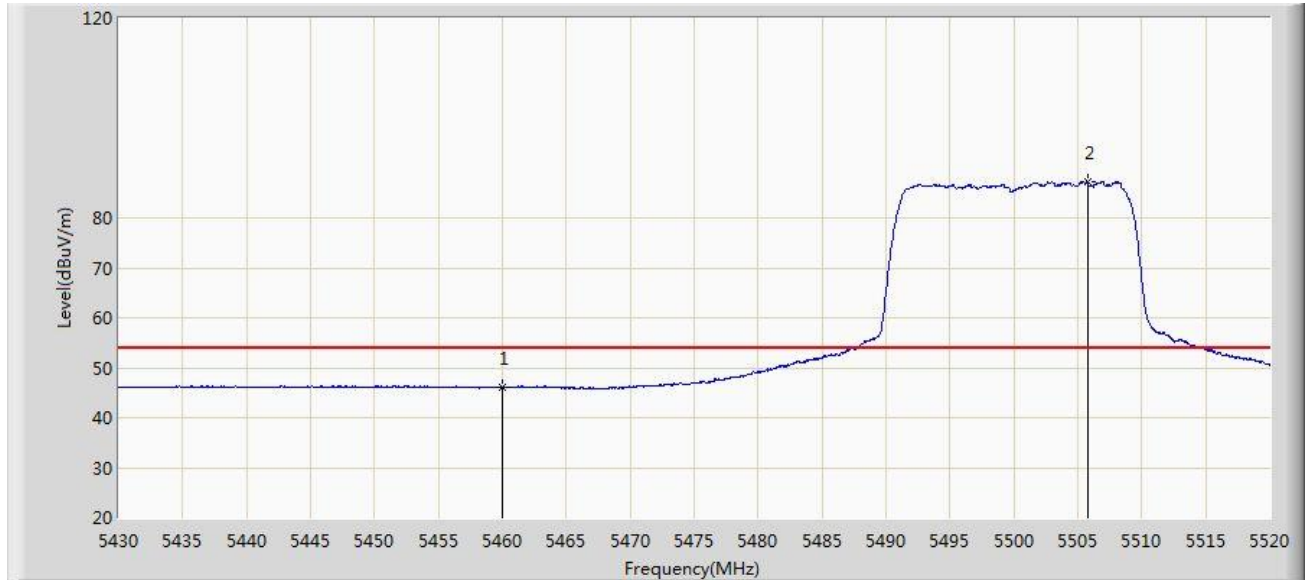


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.189	39.703	-7.811	54.000	6.486	AV
2		*	5505.735	87.252	80.728	N/A	N/A	6.525	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 01:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5700MHz Ant 0	

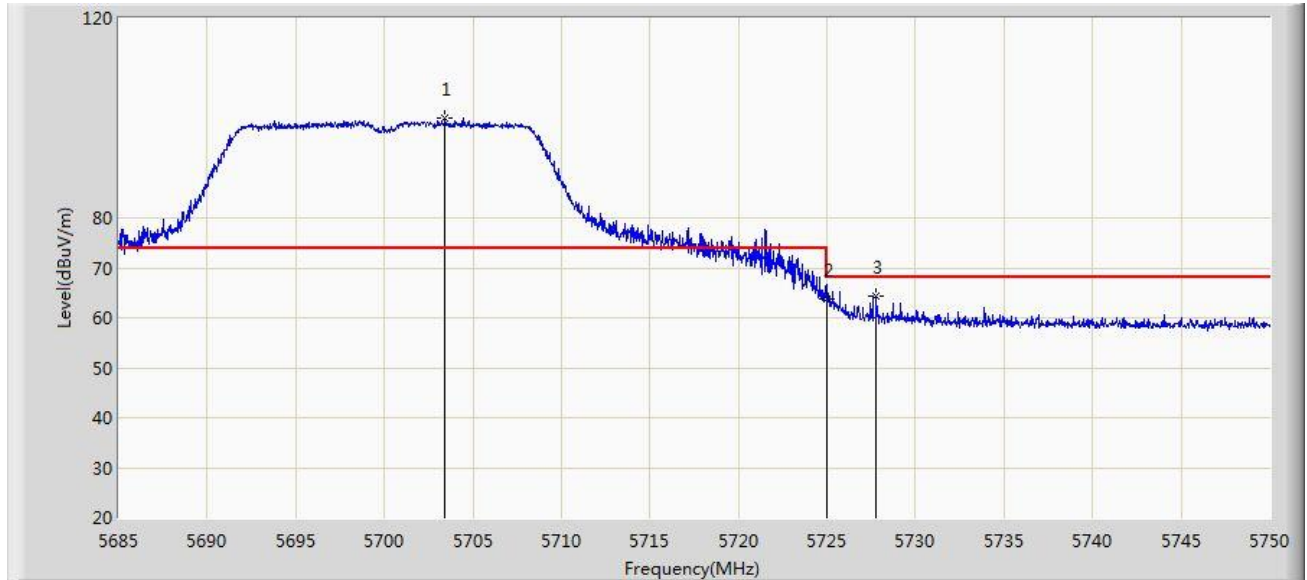


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5703.428	100.057	93.608	N/A	N/A	6.450	PK
2			5725.000	63.640	57.216	-4.560	68.200	6.424	PK
3			5727.803	64.408	57.929	-3.792	68.200	6.478	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 01:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5700MHz Ant 0	

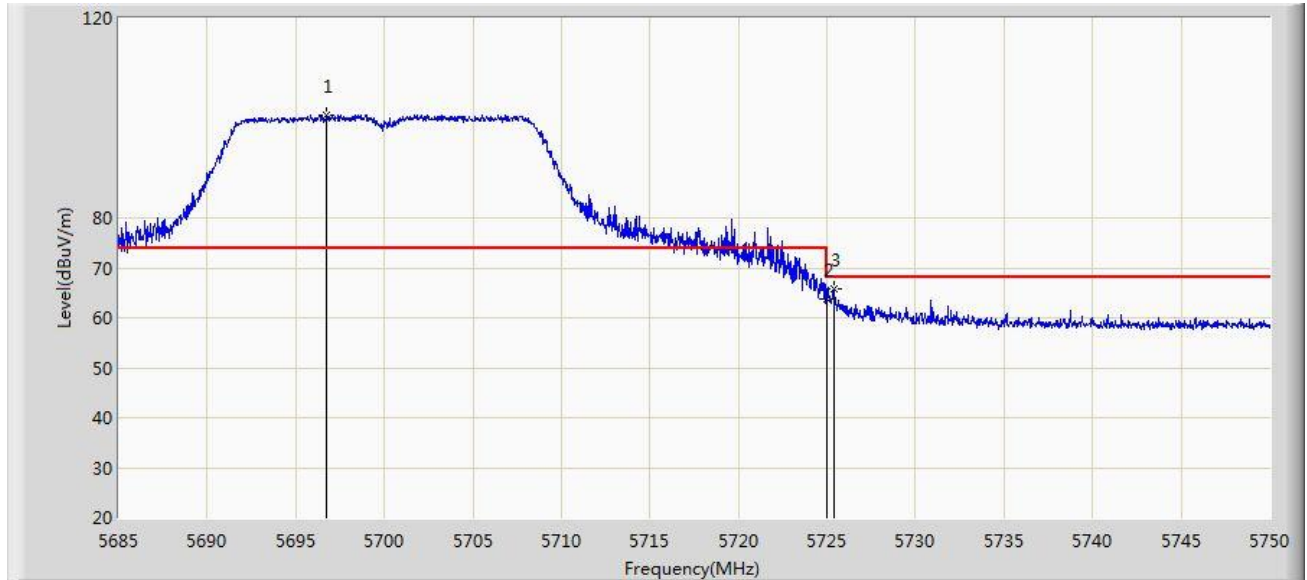


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5696.765	100.596	94.193	N/A	N/A	6.402	PK
2			5725.000	63.859	57.435	-4.341	68.200	6.424	PK
3			5725.365	65.733	59.302	-2.467	68.200	6.432	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 01:11
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5745MHz Ant 0	

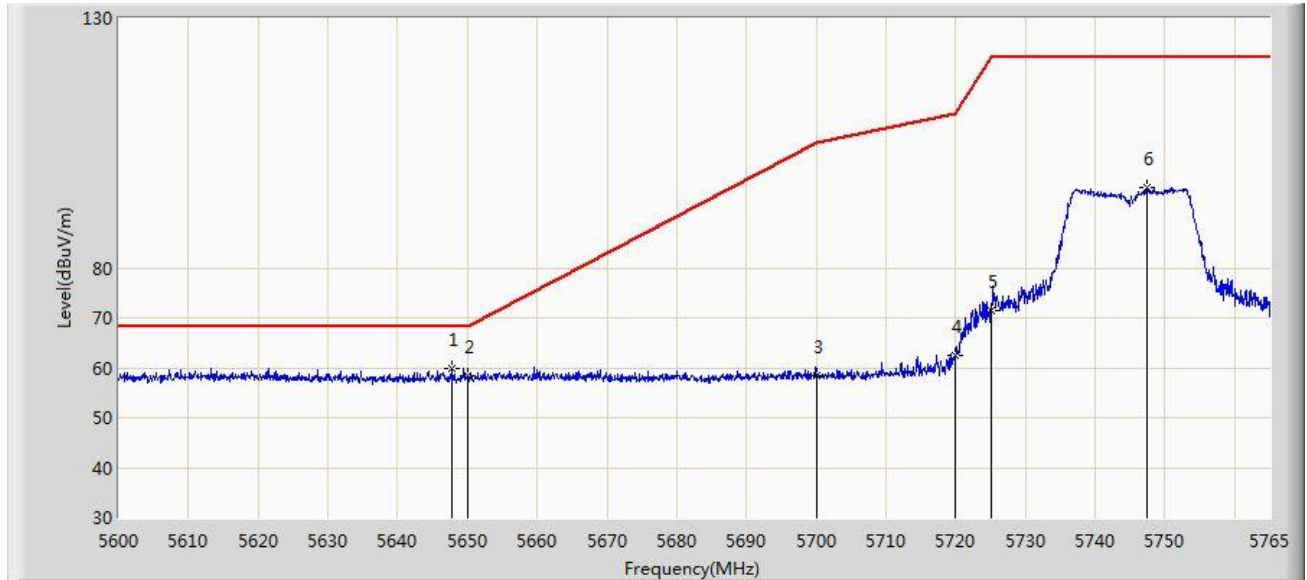


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5647.685	59.906	53.696	-8.294	68.200	6.210	PK
2			5650.000	58.465	52.206	-9.735	68.200	6.258	PK
3			5700.000	58.265	51.840	-46.935	105.200	6.426	PK
4			5720.000	62.423	56.038	-48.377	110.800	6.386	PK
5			5725.000	71.507	65.083	-50.693	122.200	6.424	PK
6			5747.510	96.052	89.271	N/A	N/A	6.781	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 01:13
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5745MHz Ant 0	

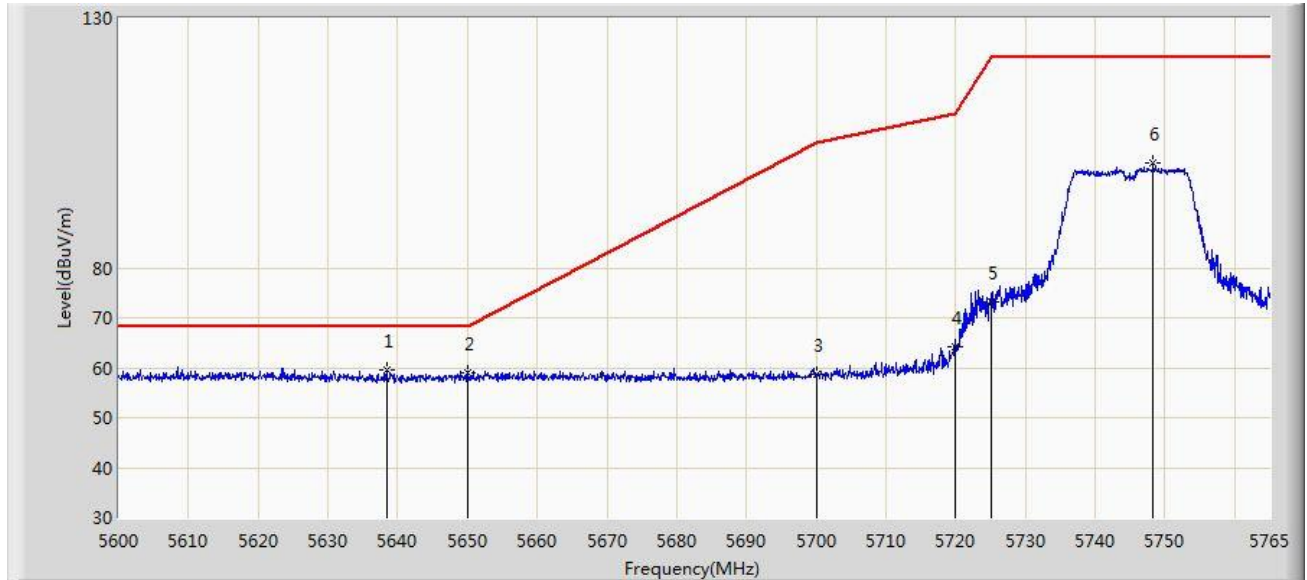


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5638.362	59.556	53.492	-8.644	68.200	6.063	PK
2			5650.000	59.092	52.833	-9.108	68.200	6.258	PK
3			5700.000	58.572	52.147	-46.628	105.200	6.426	PK
4			5720.000	64.226	57.841	-46.574	110.800	6.386	PK
5			5725.000	73.123	66.699	-49.077	122.200	6.424	PK
6			5748.335	100.916	94.129	N/A	N/A	6.787	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:12
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5825MHz Ant 0	

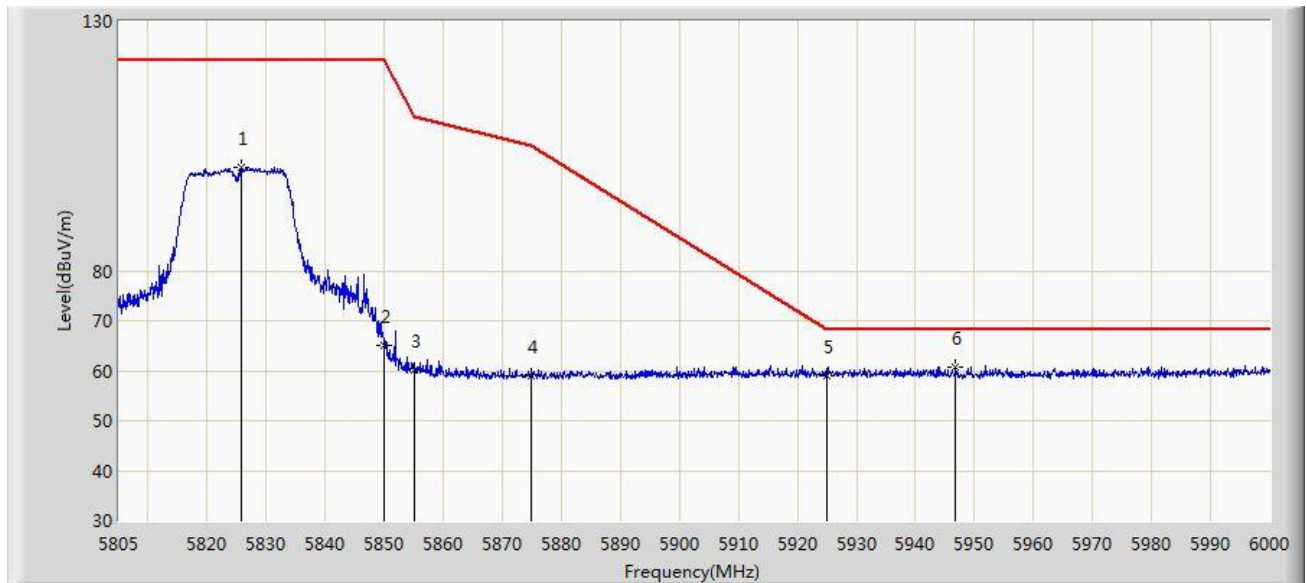


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5825.865	100.785	93.733	N/A	N/A	7.052	PK
2			5850.000	65.139	58.331	-57.061	122.200	6.808	PK
3			5855.000	60.160	53.340	-50.640	110.800	6.820	PK
4			5875.000	58.995	52.077	-46.205	105.200	6.918	PK
5			5925.000	59.101	52.004	-9.099	68.200	7.097	PK
6		*	5946.765	60.704	53.601	-7.496	68.200	7.103	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:16
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5825MHz Ant 0	

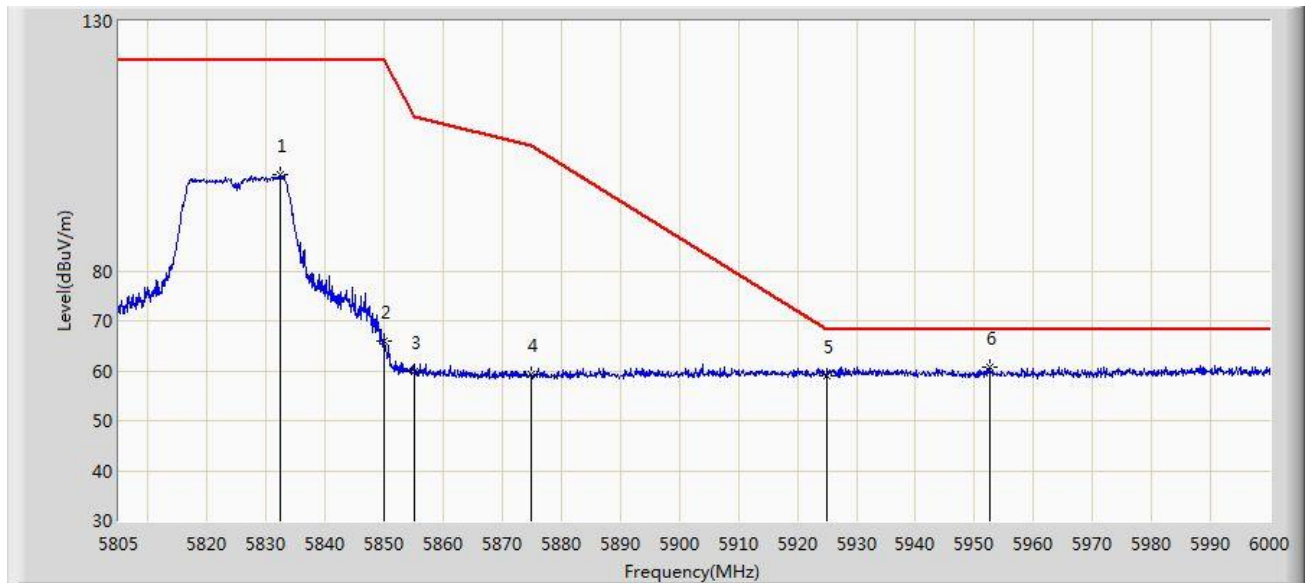


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5832.397	99.205	92.153	N/A	N/A	7.052	PK
2			5850.000	66.031	59.223	-56.169	122.200	6.808	PK
3			5855.000	59.906	53.086	-50.894	110.800	6.820	PK
4			5875.000	59.338	52.420	-45.862	105.200	6.918	PK
5			5925.000	59.061	51.964	-9.139	68.200	7.097	PK
6		*	5952.518	60.623	53.569	-7.577	68.200	7.053	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 0	

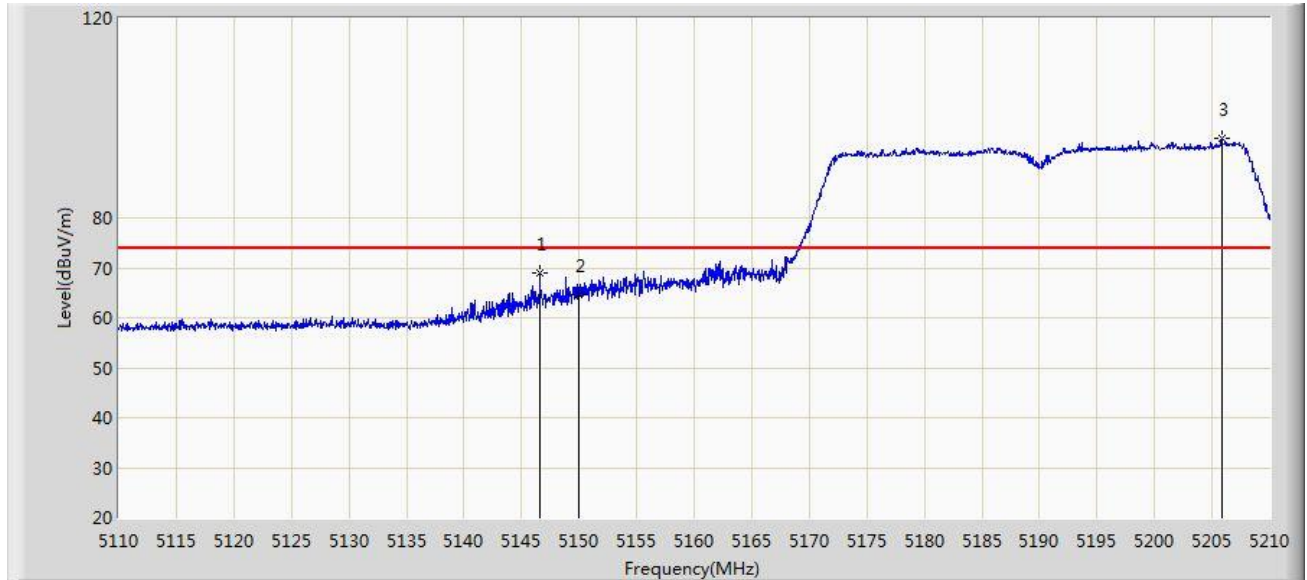


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.600	68.912	62.434	-5.088	74.000	6.479	PK
2			5150.000	64.743	58.291	-9.257	74.000	6.452	PK
3		*	5205.850	95.836	89.576	N/A	N/A	6.260	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 0	

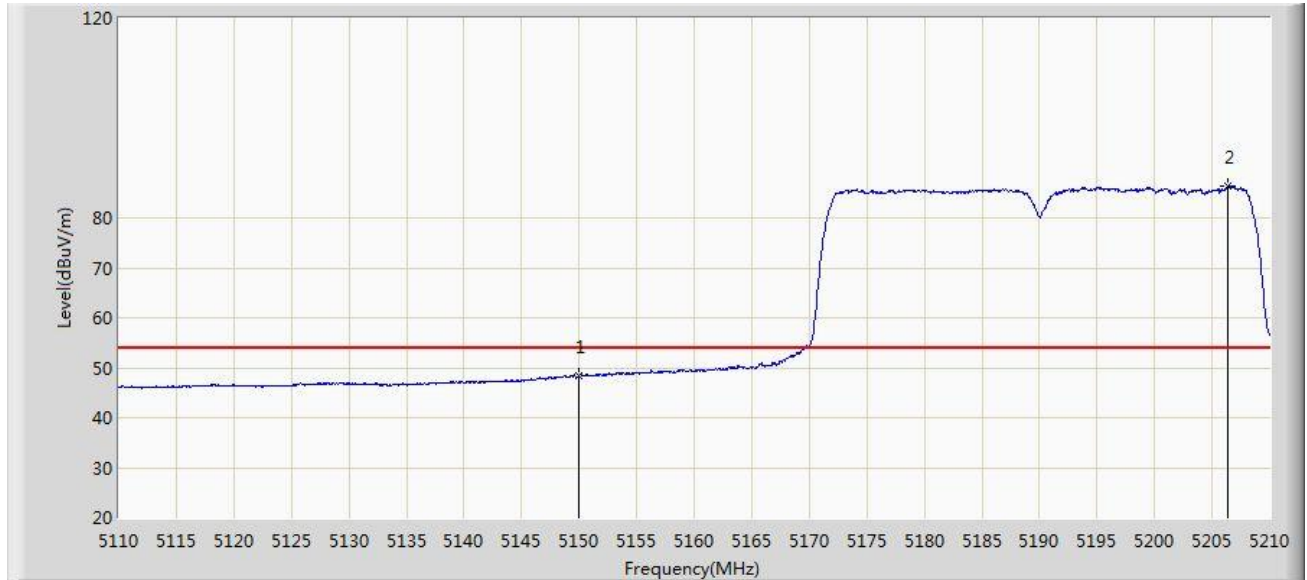


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.506	42.054	-5.494	54.000	6.452	AV
2		*	5206.400	86.380	80.129	N/A	N/A	6.251	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 0	

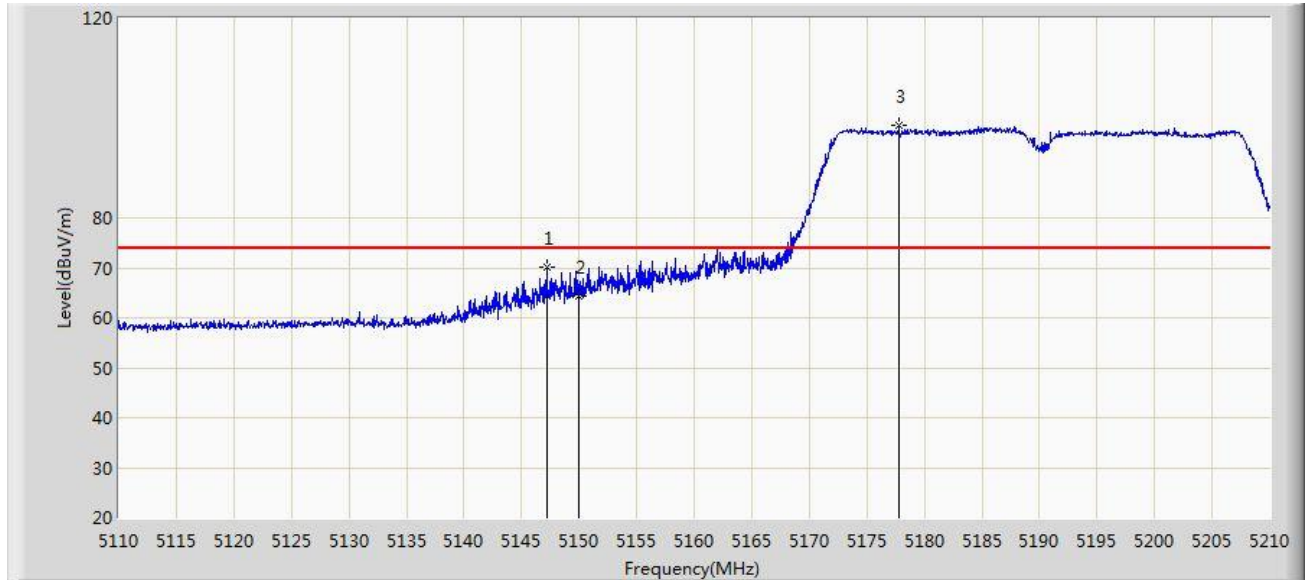


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.200	70.271	63.803	-3.729	74.000	6.469	PK
2			5150.000	64.460	58.008	-9.540	74.000	6.452	PK
3		*	5177.800	98.424	91.924	N/A	N/A	6.500	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 0	

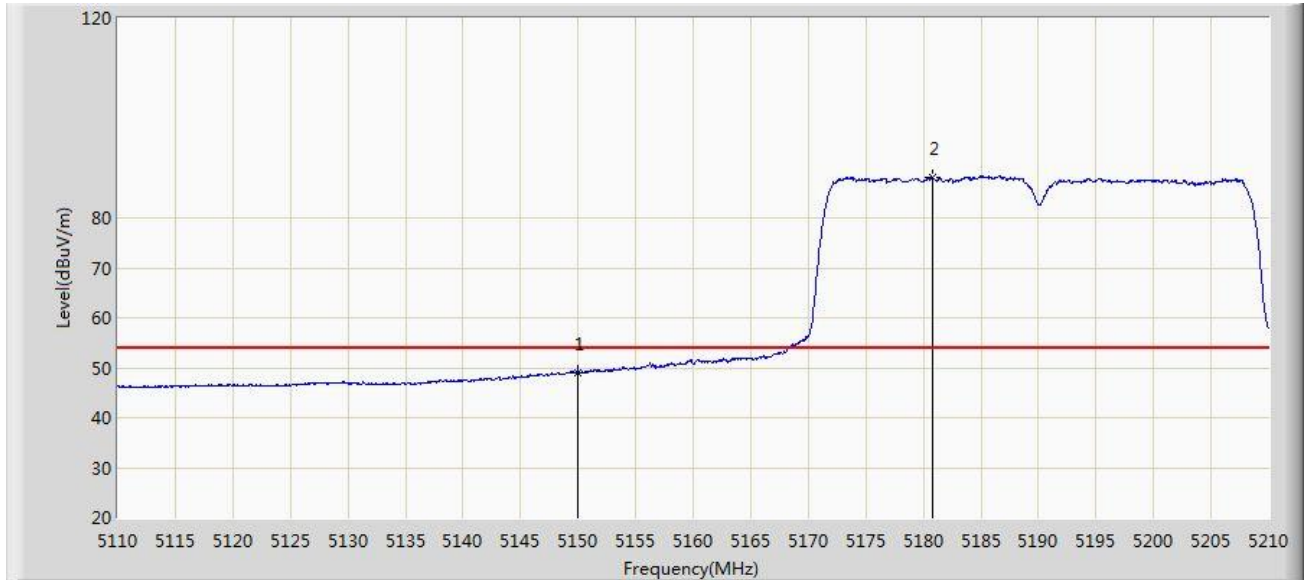


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.899	42.447	-5.101	54.000	6.452	AV
2		*	5180.800	88.240	81.720	N/A	N/A	6.520	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz Ant 0	

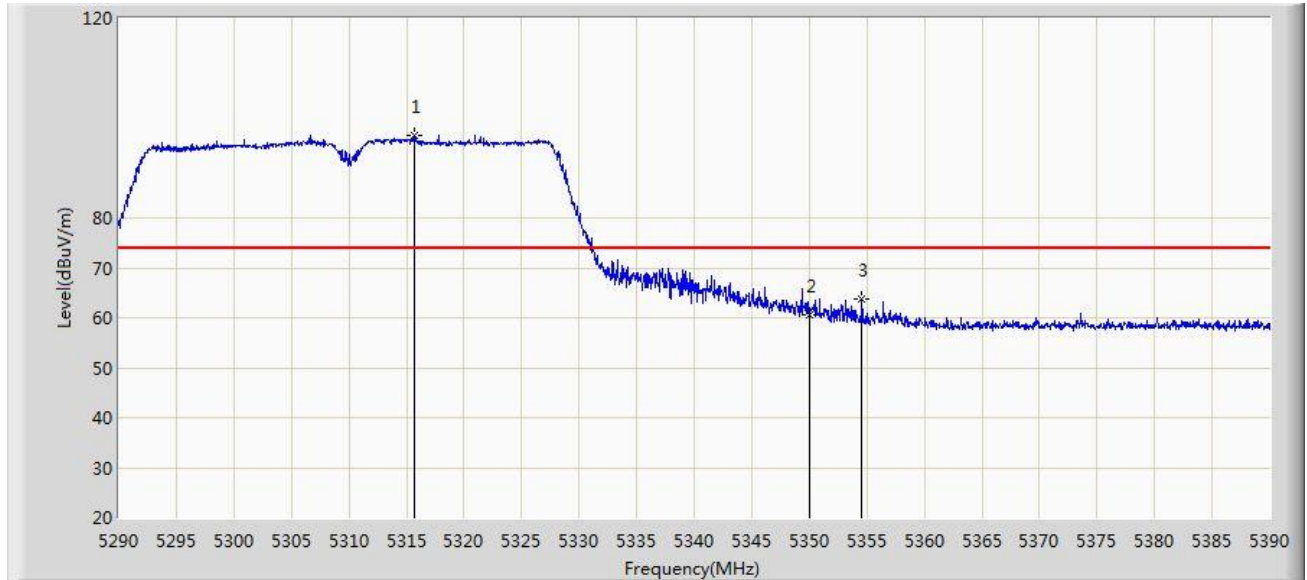


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.650	96.657	90.608	N/A	N/A	6.050	PK
2			5350.000	60.672	54.214	-13.328	74.000	6.458	PK
3			5354.550	63.732	57.403	-10.268	74.000	6.329	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz Ant 0	

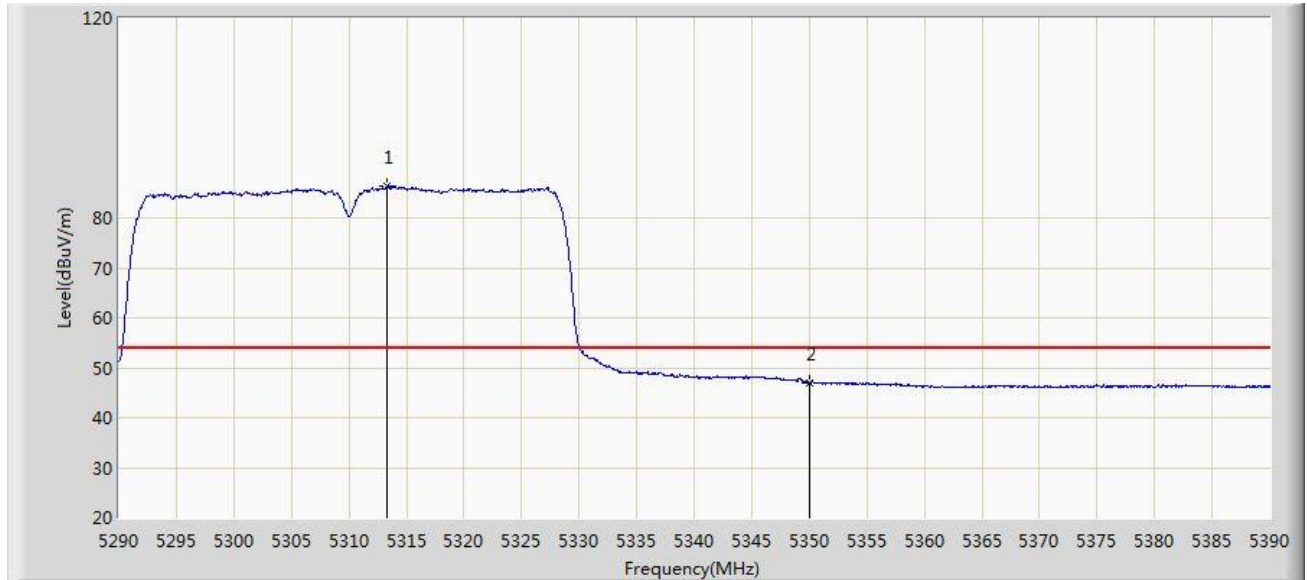


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.350	86.317	80.317	N/A	N/A	6.000	AV
2			5350.000	46.978	40.520	-7.022	54.000	6.458	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz Ant 0	

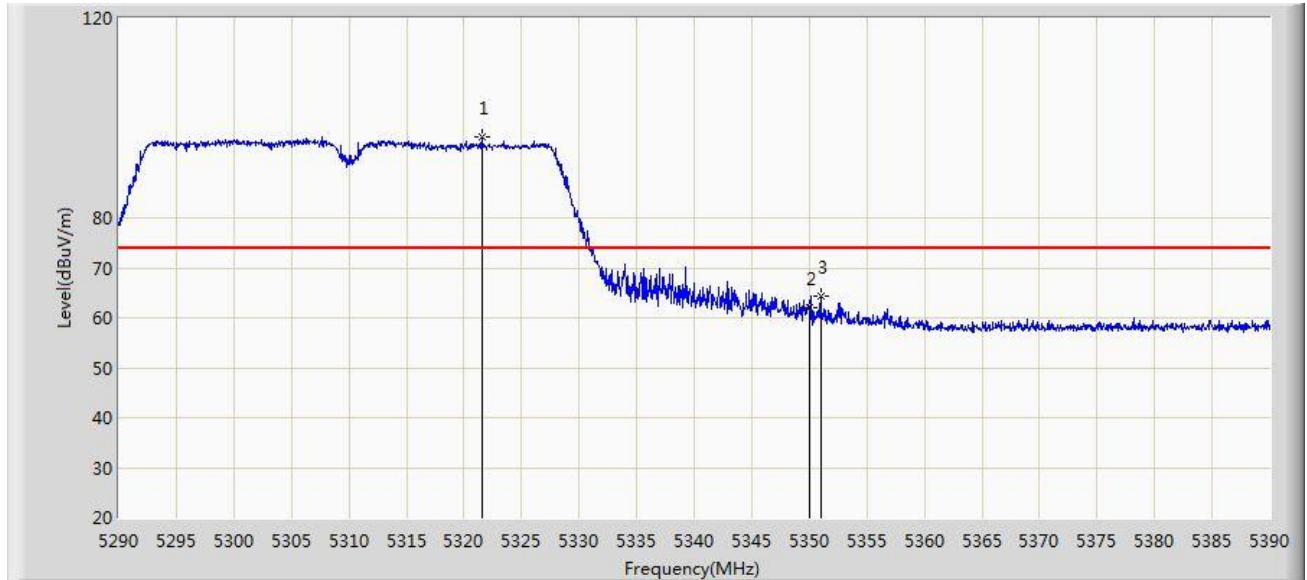


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.550	96.265	90.076	N/A	N/A	6.189	PK
2			5350.000	62.034	55.576	-11.966	74.000	6.458	PK
3			5351.000	64.383	57.957	-9.617	74.000	6.427	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz Ant 0	

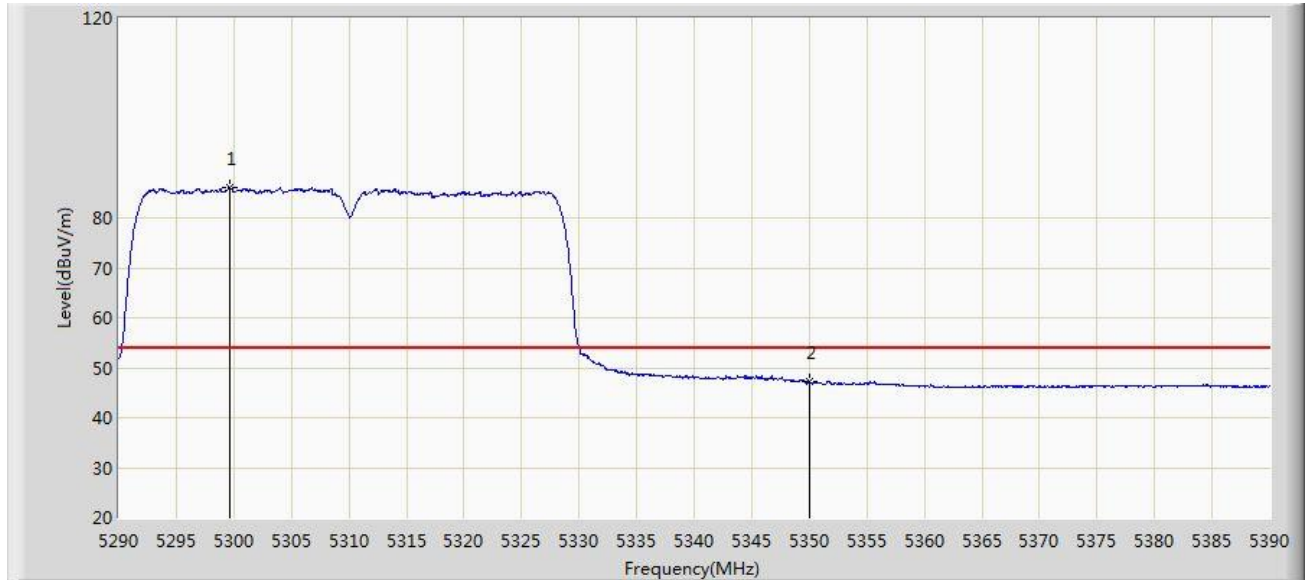


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5299.600	86.000	80.042	N/A	N/A	5.958	AV
2			5350.000	47.112	40.654	-6.888	54.000	6.458	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz Ant 0	

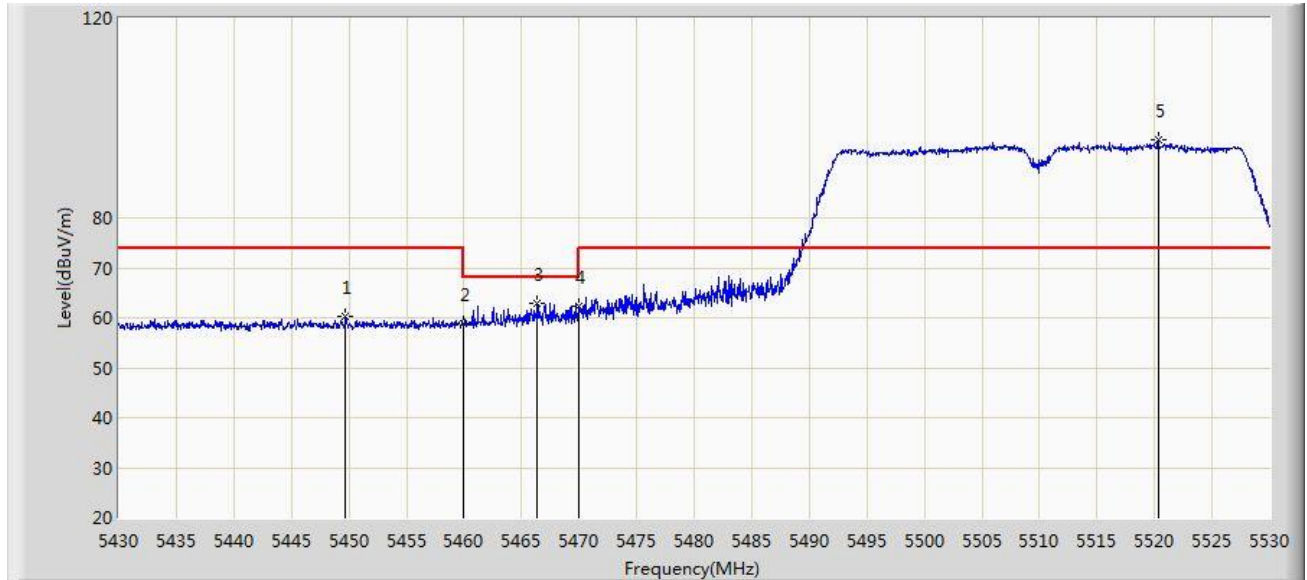


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5449.700	60.232	53.777	-13.768	74.000	6.456	PK
2			5460.000	58.732	52.246	-15.268	74.000	6.486	PK
3			5466.400	62.819	56.308	-5.381	68.200	6.511	PK
4			5470.000	62.181	55.656	-6.019	68.200	6.524	PK
5		*	5520.300	95.686	89.316	N/A	N/A	6.370	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz Ant 0	

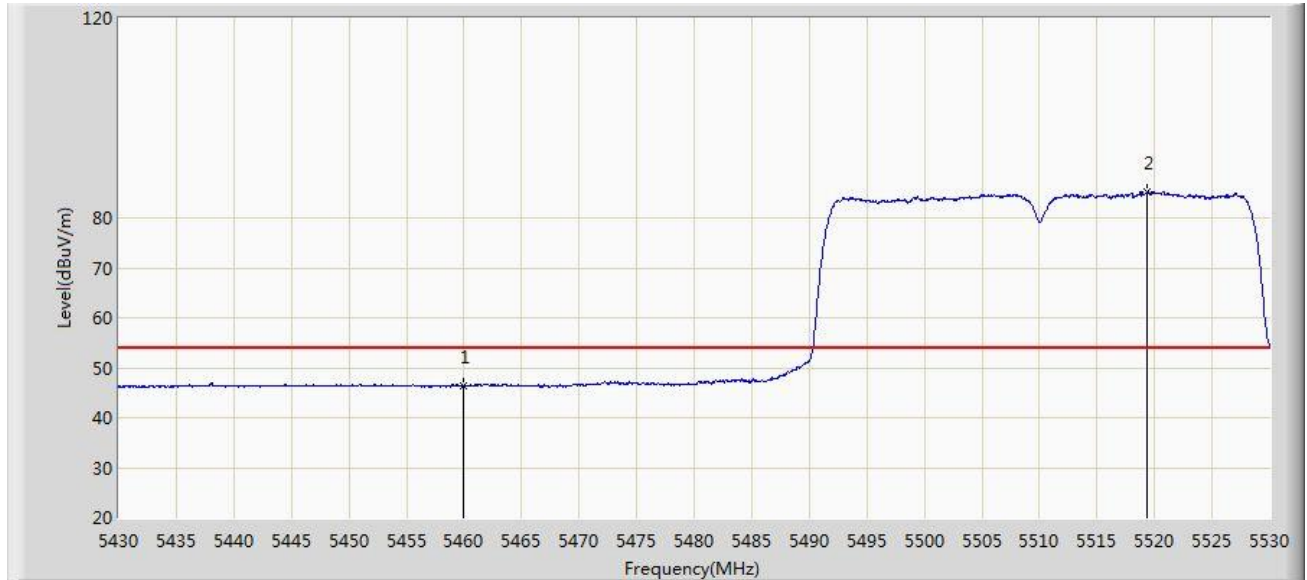


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.511	40.025	-7.489	54.000	6.486	AV
2		*	5519.300	85.119	78.739	N/A	N/A	6.380	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz Ant 0	

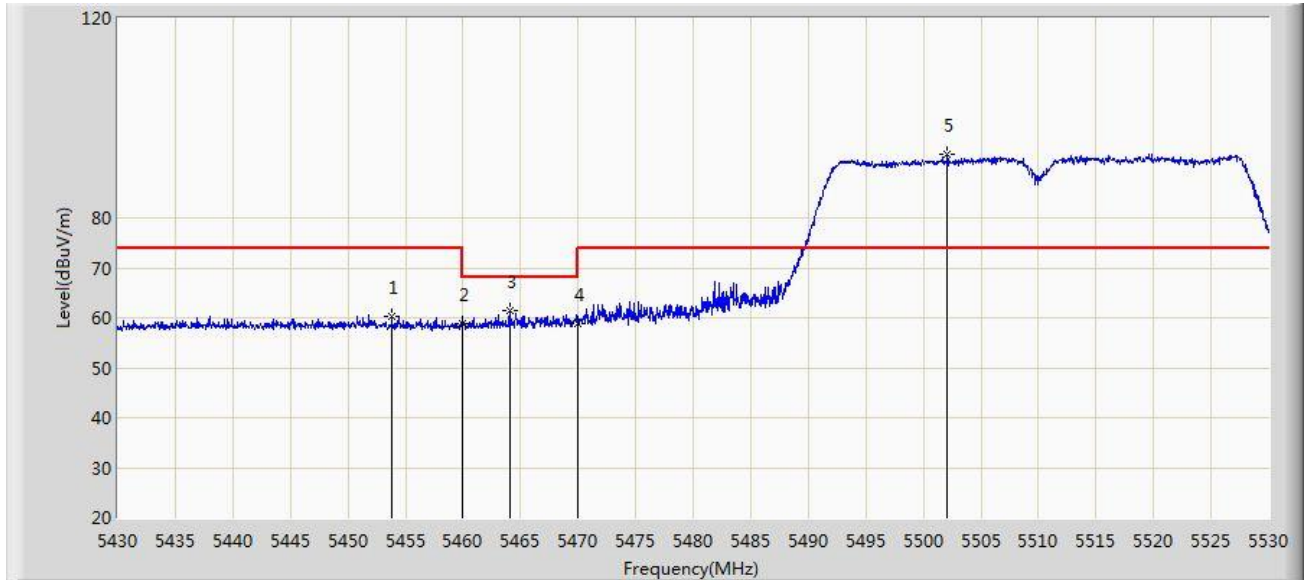


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5453.800	60.249	53.786	-13.751	74.000	6.464	PK
2			5460.000	58.908	52.422	-15.092	74.000	6.486	PK
3			5464.050	61.561	55.059	-6.639	68.200	6.501	PK
4			5470.000	58.924	52.399	-9.276	68.200	6.524	PK
5		*	5502.100	92.842	86.318	N/A	N/A	6.524	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz Ant 0	

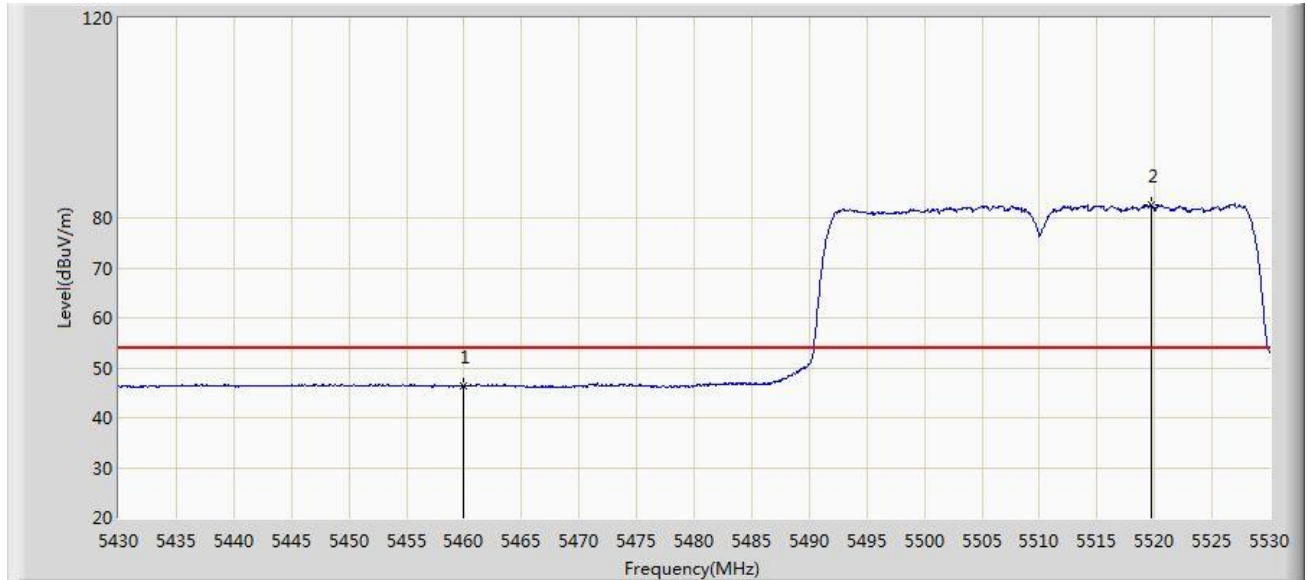


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.376	39.890	-7.624	54.000	6.486	AV
2		*	5519.700	82.690	76.314	N/A	N/A	6.376	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 01:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5670MHz Ant 0	

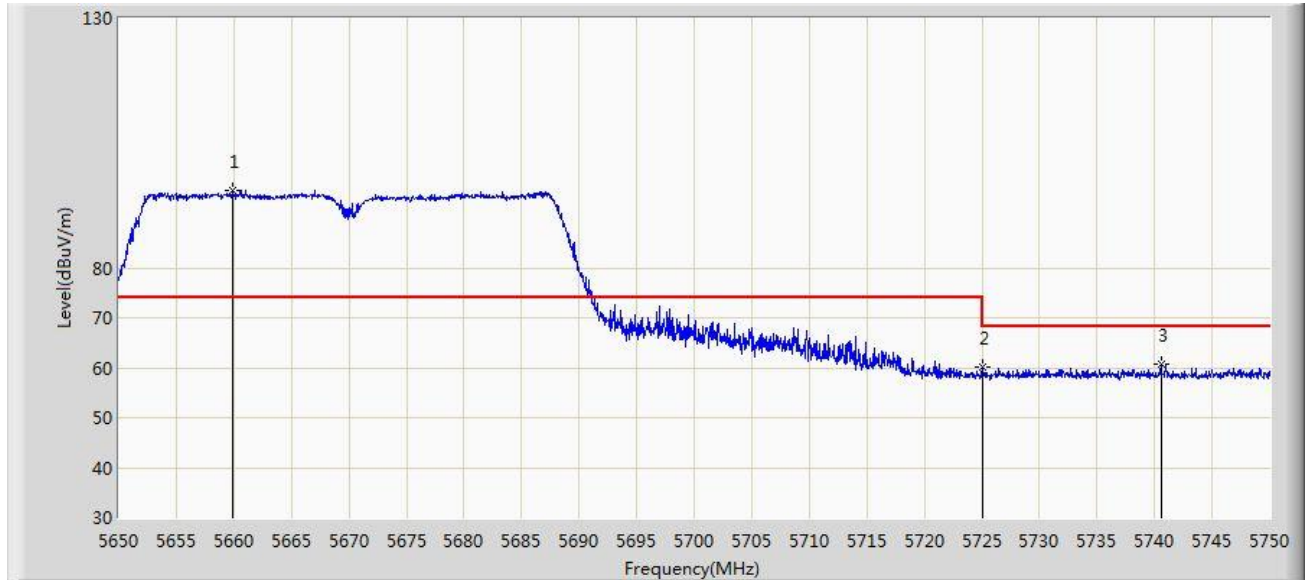


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5659.900	95.515	89.121	N/A	N/A	6.394	PK
2			5725.000	60.098	53.674	-8.102	68.200	6.424	PK
3			5740.550	60.865	54.149	-7.335	68.200	6.715	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 01:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5670MHz Ant 0	

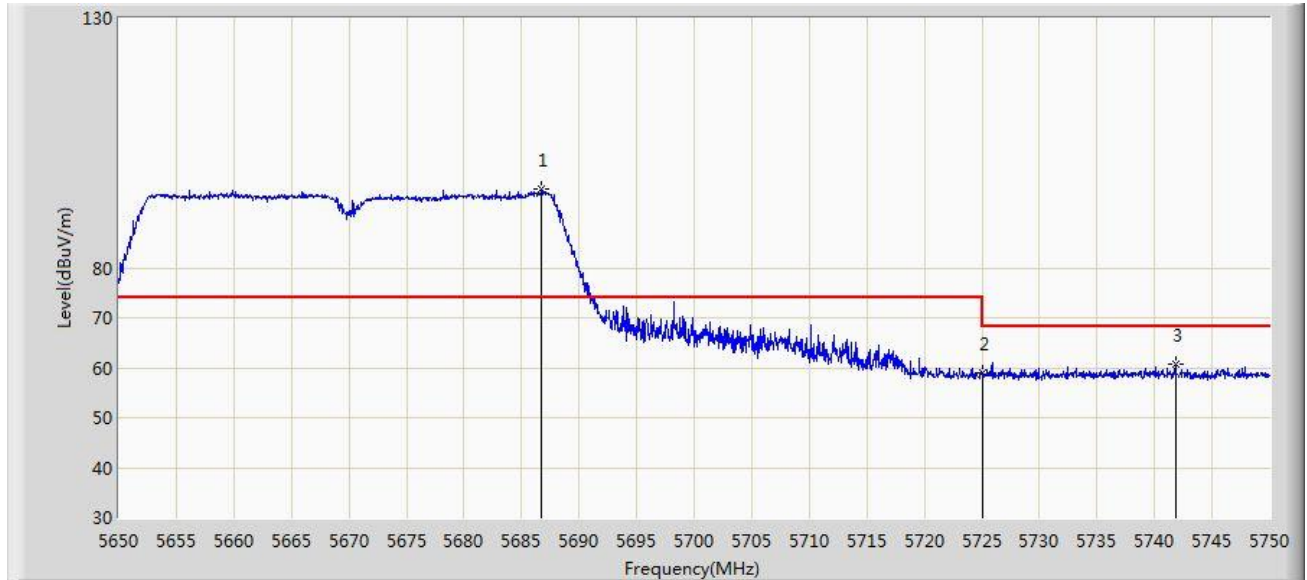


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5686.750	95.685	89.386	N/A	N/A	6.298	PK
2			5725.000	58.924	52.500	-9.276	68.200	6.424	PK
3			5741.800	60.637	53.901	-7.563	68.200	6.735	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 01:28
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5755MHz Ant 0	

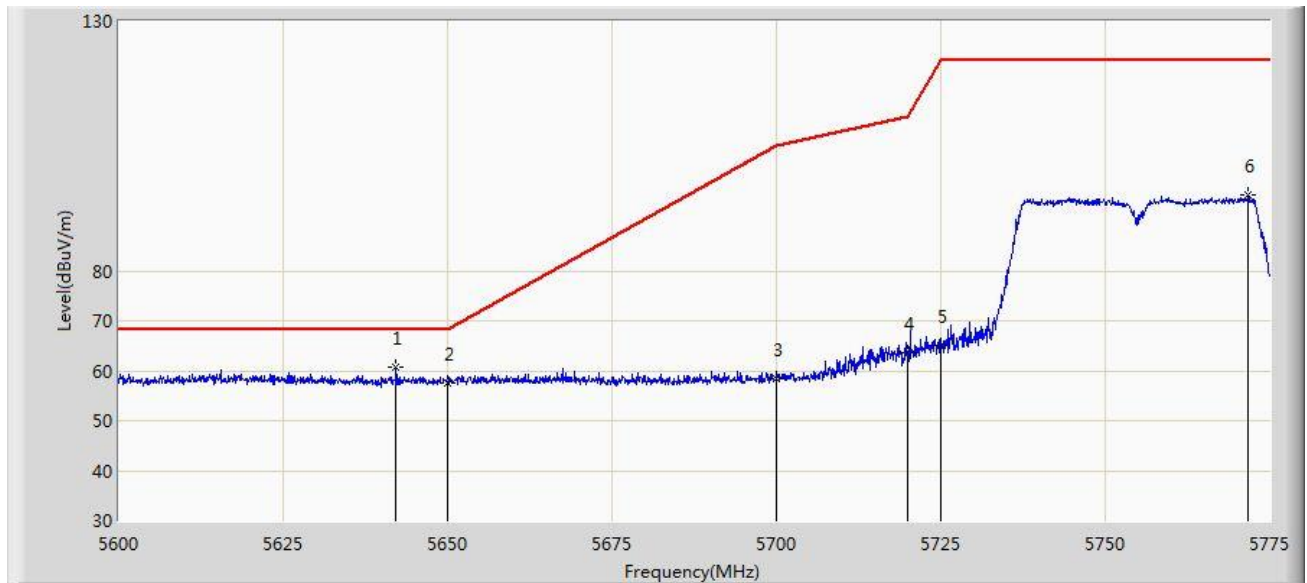


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5642.087	60.691	54.597	-7.509	68.200	6.094	PK
2			5650.000	57.609	51.350	-10.591	68.200	6.258	PK
3			5700.000	58.374	51.949	-46.826	105.200	6.426	PK
4			5720.000	63.484	57.099	-47.316	110.800	6.386	PK
5			5725.000	65.095	58.671	-57.105	122.200	6.424	PK
6			5771.763	95.200	88.477	N/A	N/A	6.722	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 01:35
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5755MHz Ant 0	

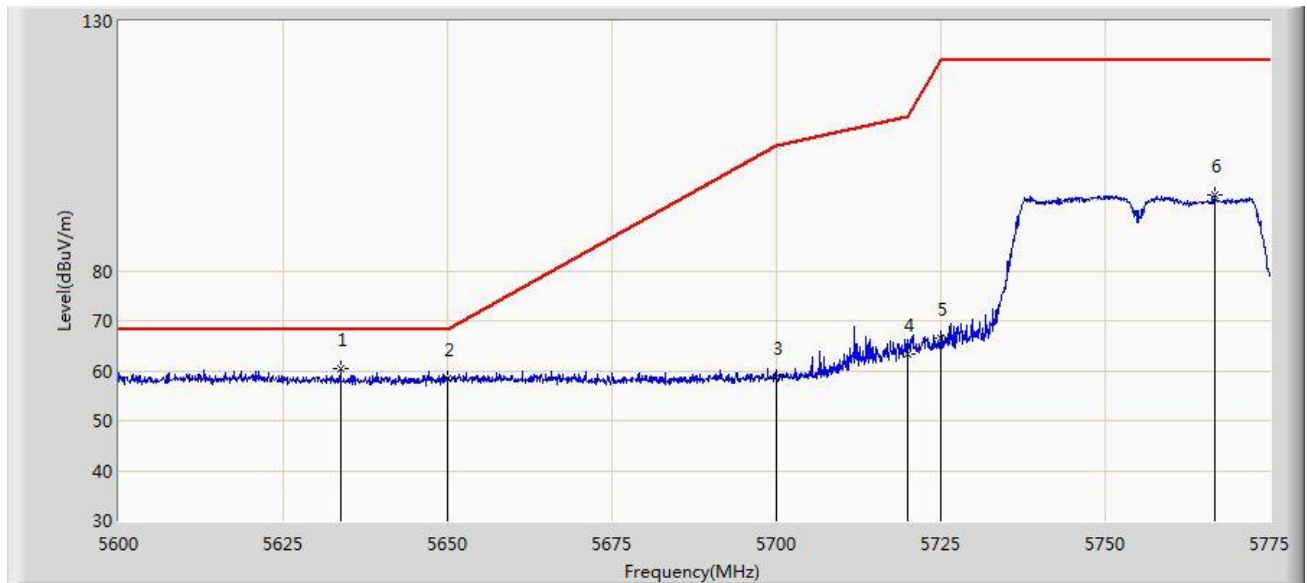


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5633.775	60.338	54.288	-7.862	68.200	6.049	PK
2			5650.000	58.318	52.059	-9.882	68.200	6.258	PK
3			5700.000	58.762	52.337	-46.438	105.200	6.426	PK
4			5720.000	63.389	57.004	-47.411	110.800	6.386	PK
5			5725.000	66.398	59.974	-55.802	122.200	6.424	PK
6			5766.600	95.191	88.417	N/A	N/A	6.774	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:57
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5795MHz Ant 0	

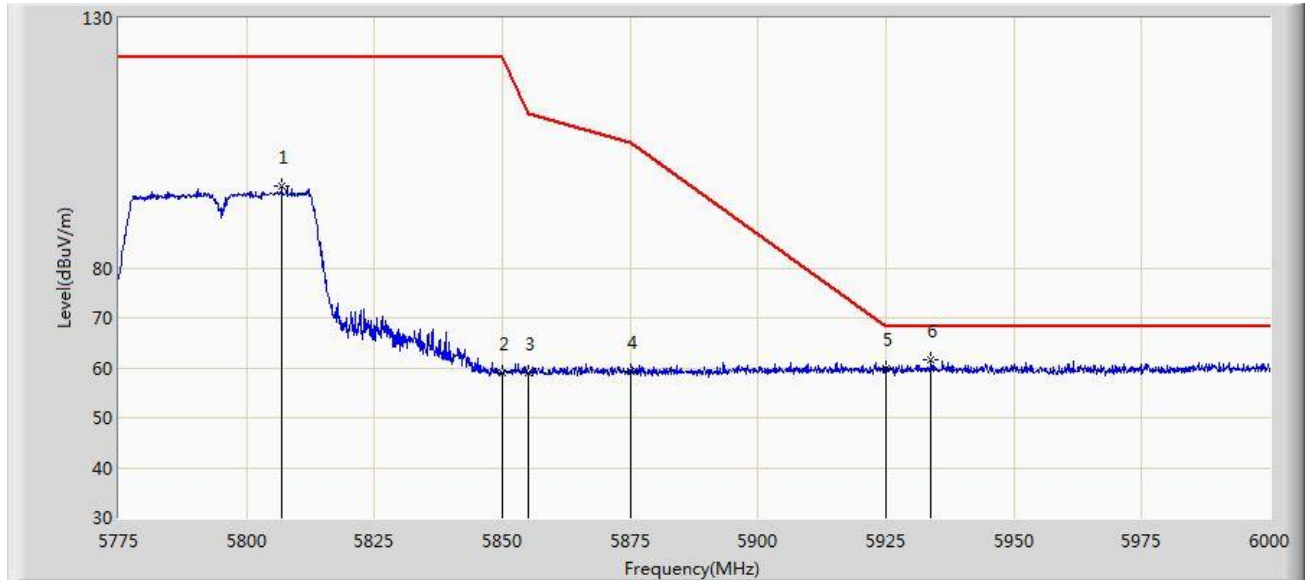


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5806.837	96.395	89.617	N/A	N/A	6.778	PK
2			5850.000	58.920	52.112	-63.280	122.200	6.808	PK
3			5855.000	58.984	52.164	-51.816	110.800	6.820	PK
4			5875.000	59.194	52.276	-46.006	105.200	6.918	PK
5			5925.000	59.943	52.846	-8.257	68.200	7.097	PK
6		*	5933.850	61.709	54.527	-6.491	68.200	7.181	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 00:00
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5795MHz Ant 0	

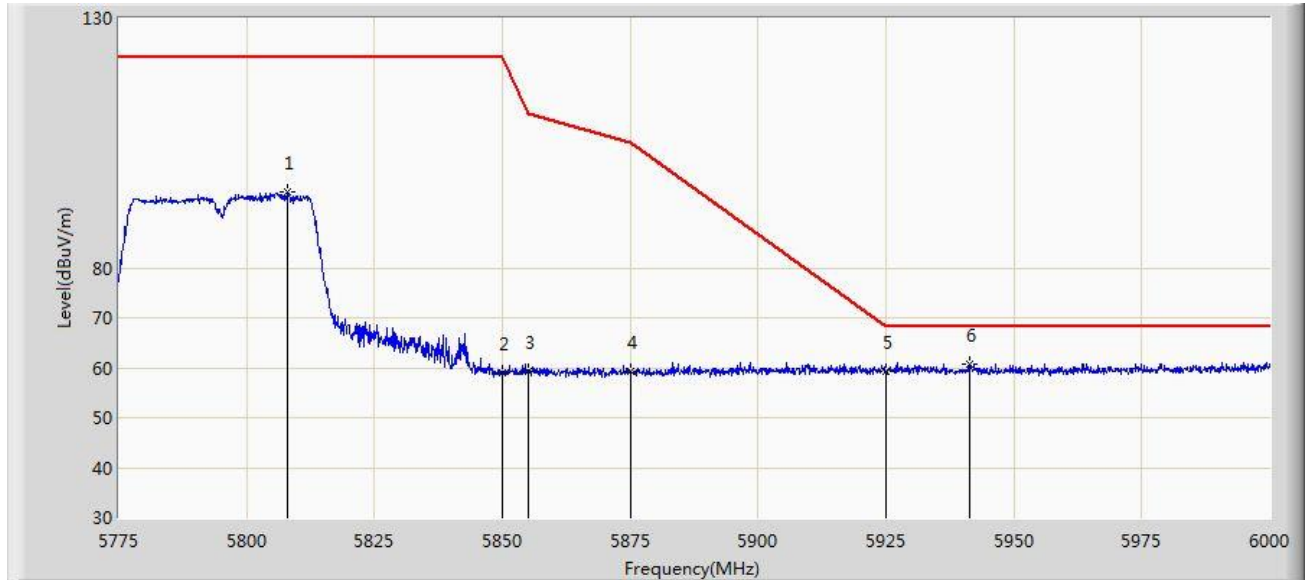


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5808.075	95.162	88.378	N/A	N/A	6.784	PK
2			5850.000	59.125	52.317	-63.075	122.200	6.808	PK
3			5855.000	59.207	52.387	-51.593	110.800	6.820	PK
4			5875.000	59.216	52.298	-45.984	105.200	6.918	PK
5			5925.000	59.203	52.106	-8.997	68.200	7.097	PK
6		*	5941.275	60.839	53.662	-7.361	68.200	7.177	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 00:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 0	

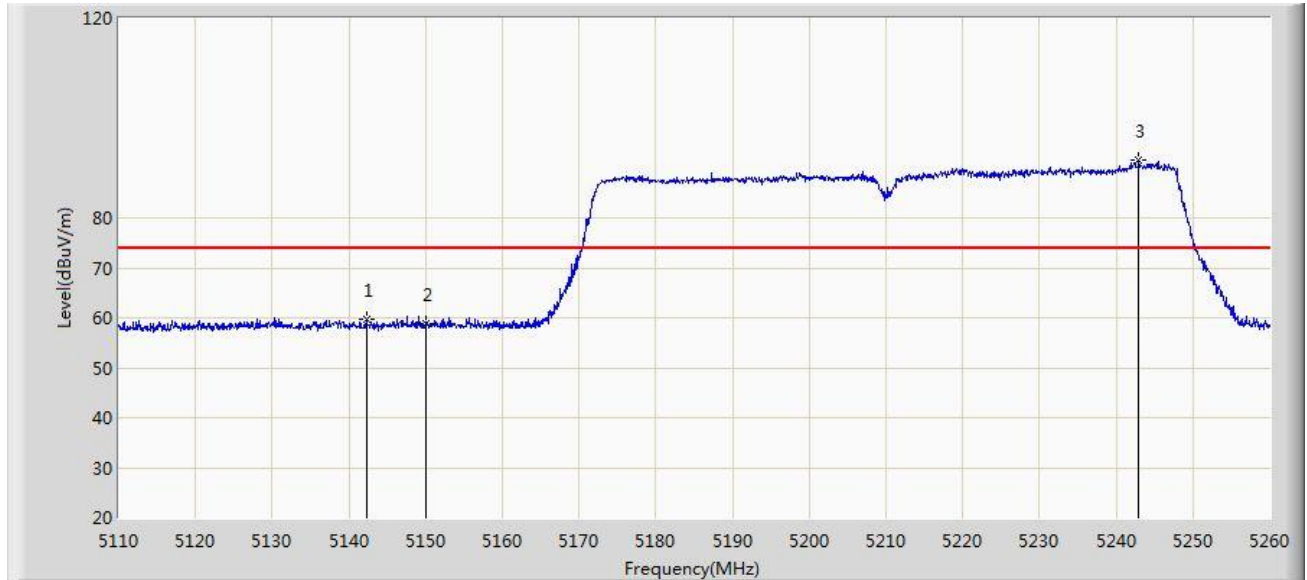


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5142.250	59.800	53.245	-14.200	74.000	6.555	PK
2			5150.000	58.940	52.488	-15.060	74.000	6.452	PK
3		*	5242.900	91.618	85.476	N/A	N/A	6.142	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 00:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 0	

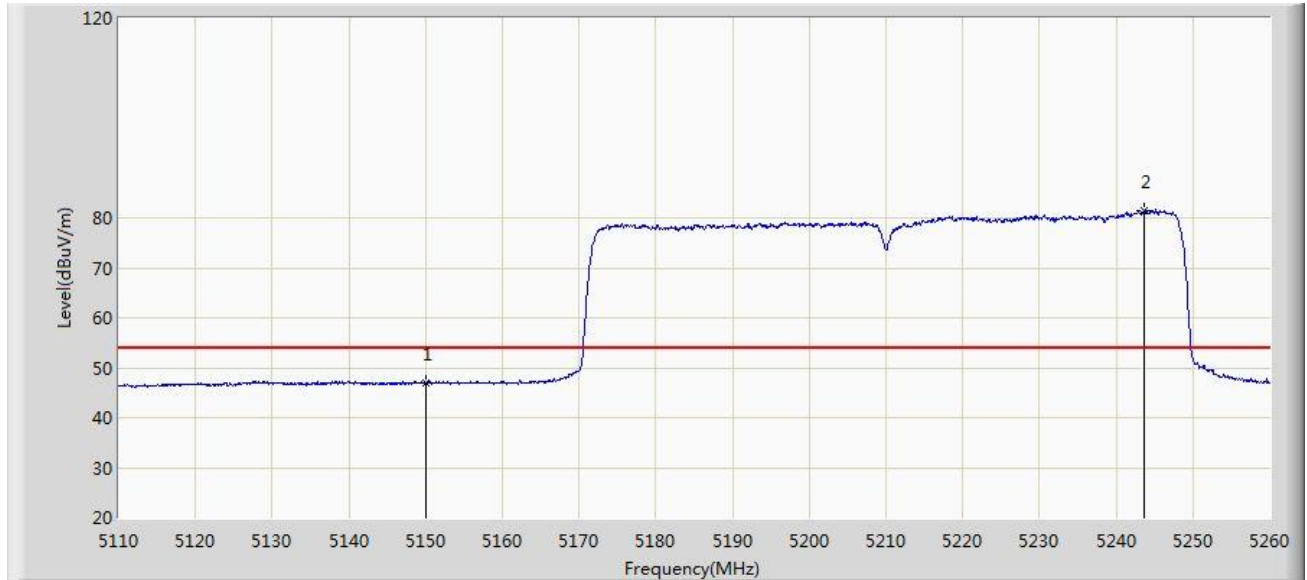


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.892	40.440	-7.108	54.000	6.452	AV
2		*	5243.575	81.374	75.224	N/A	N/A	6.149	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 00:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 0	

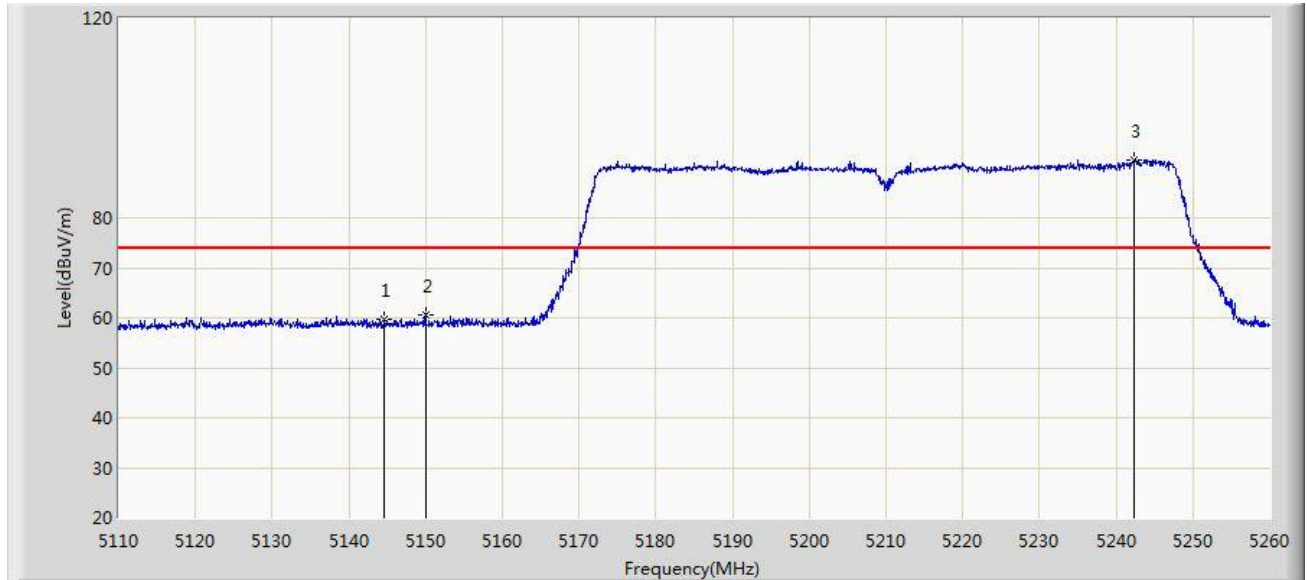


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5144.650	59.622	53.109	-14.378	74.000	6.513	PK
2			5150.000	60.627	54.175	-13.373	74.000	6.452	PK
3		*	5242.300	91.667	85.532	N/A	N/A	6.135	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 00:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 0	

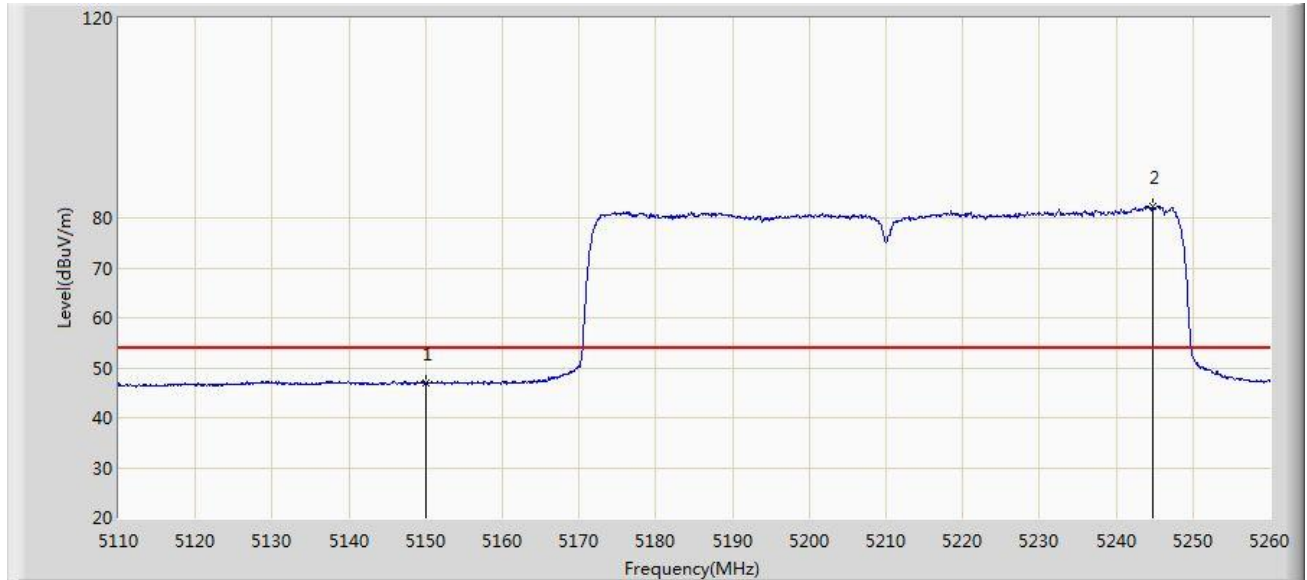


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.030	40.578	-6.970	54.000	6.452	AV
2		*	5244.775	82.321	76.157	N/A	N/A	6.163	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 00:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz Ant 0	

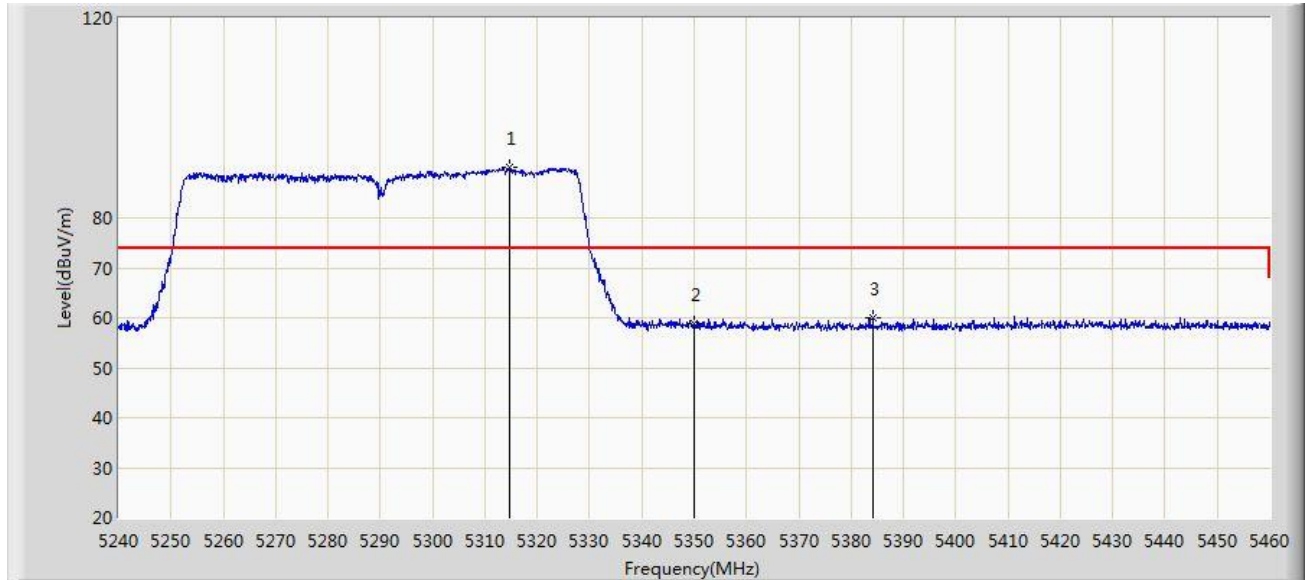


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5314.800	90.097	84.066	N/A	N/A	6.031	PK
2			5350.000	58.849	52.391	-15.151	74.000	6.458	PK
3			5384.210	59.910	53.622	-14.090	74.000	6.287	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 00:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz Ant 0	

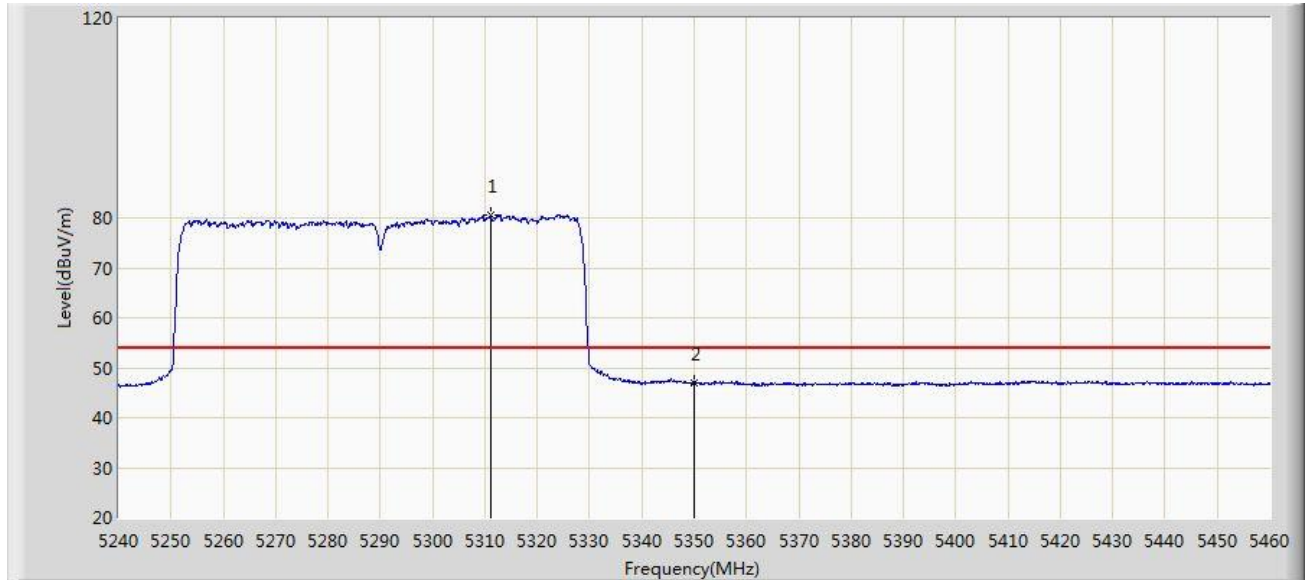


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5311.170	80.435	74.481	N/A	N/A	5.954	AV
2			5350.000	46.935	40.477	-7.065	54.000	6.458	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 00:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz Ant 0	

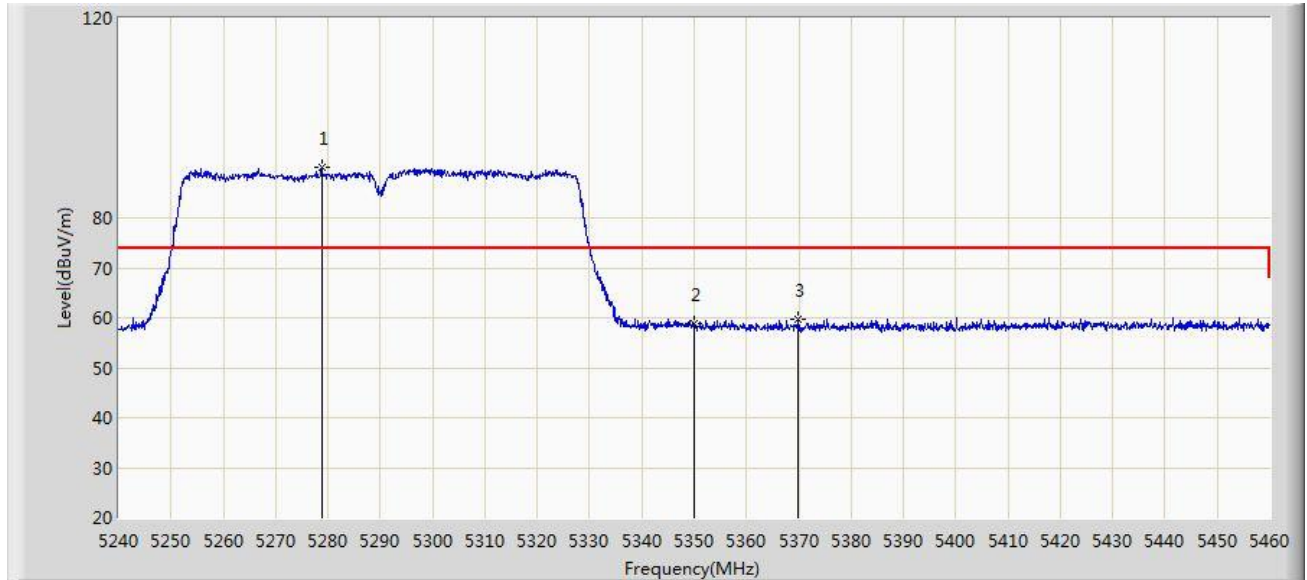


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5278.830	90.183	84.318	N/A	N/A	5.865	PK
2			5350.000	58.696	52.238	-15.304	74.000	6.458	PK
3			5369.910	59.642	53.518	-14.358	74.000	6.124	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 00:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz Ant 0	

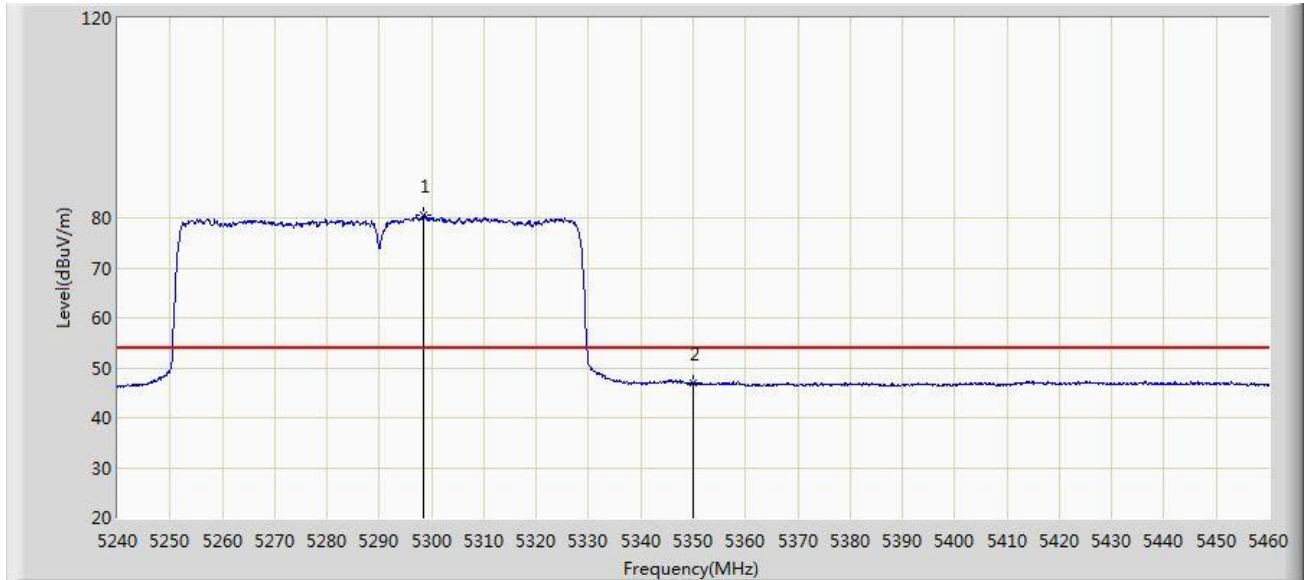


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5298.520	80.520	74.565	N/A	N/A	5.955	AV
2			5350.000	47.073	40.615	-6.927	54.000	6.458	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 00:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz Ant 0	

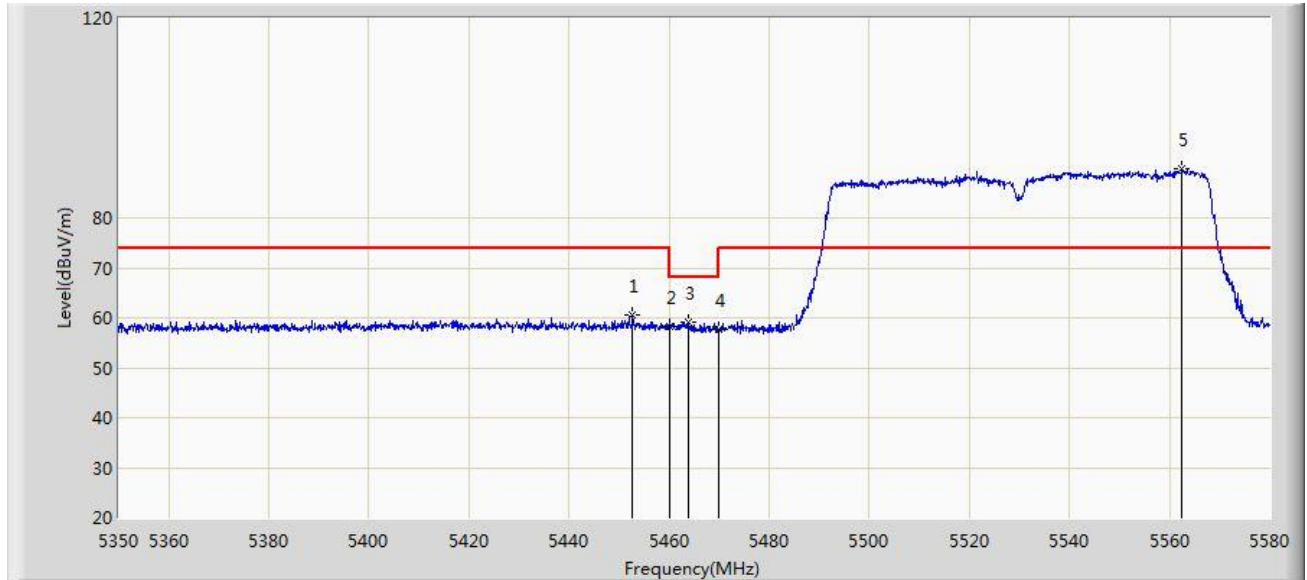


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5452.695	60.586	54.122	-13.414	74.000	6.463	PK
2			5460.000	58.133	51.647	-15.867	74.000	6.486	PK
3			5463.735	59.163	52.663	-9.037	68.200	6.500	PK
4			5470.000	57.747	51.222	-10.453	68.200	6.524	PK
5		*	5562.520	89.767	83.129	N/A	N/A	6.638	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 00:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz Ant 0	

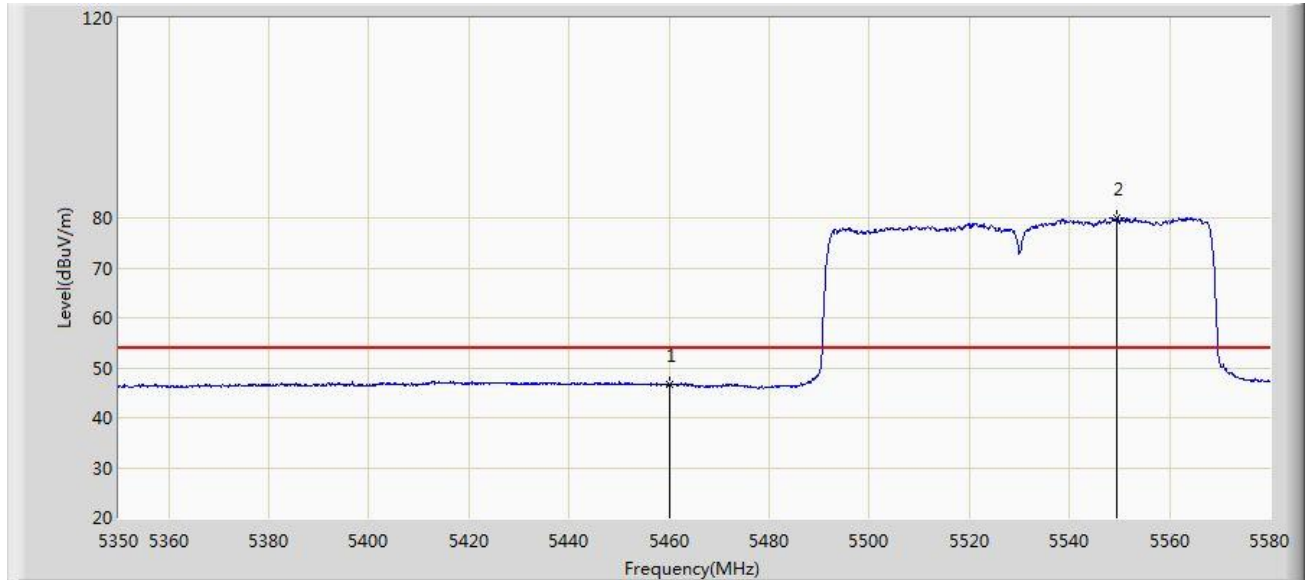


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.619	40.133	-7.381	54.000	6.486	AV
2		*	5549.525	80.118	73.320	N/A	N/A	6.798	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 00:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz Ant 0	

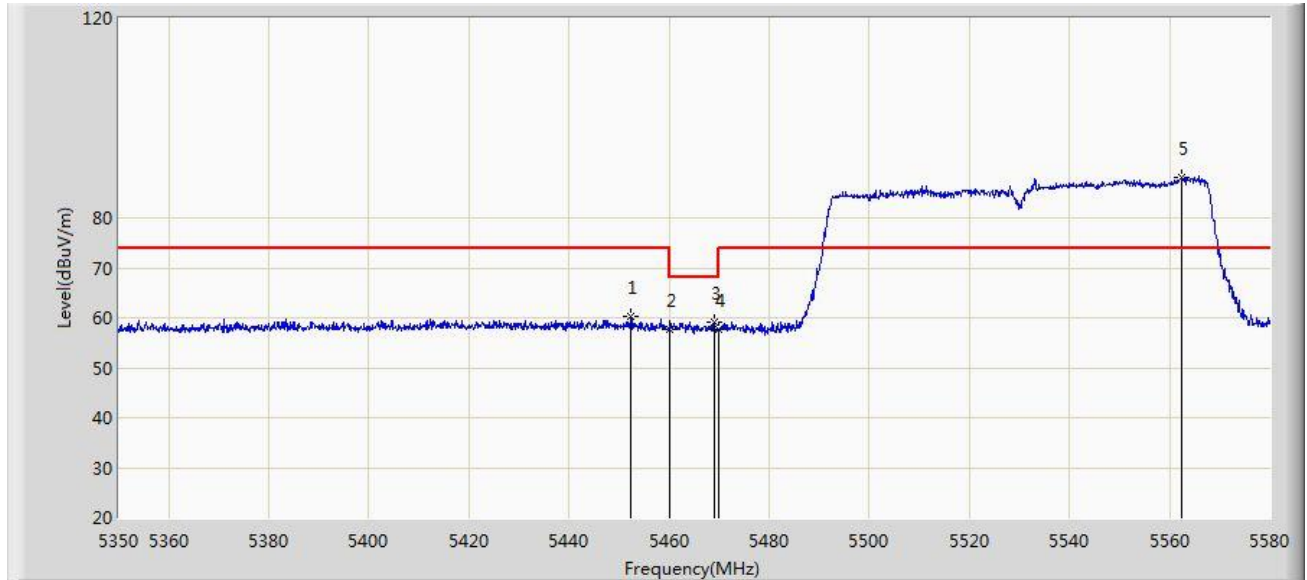


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5452.350	60.151	53.688	-13.849	74.000	6.462	PK
2			5460.000	57.766	51.280	-16.234	74.000	6.486	PK
3			5469.025	59.232	52.711	-8.968	68.200	6.521	PK
4			5470.000	57.772	51.247	-10.428	68.200	6.524	PK
5		*	5562.290	88.173	81.535	N/A	N/A	6.637	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 00:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz Ant 0	

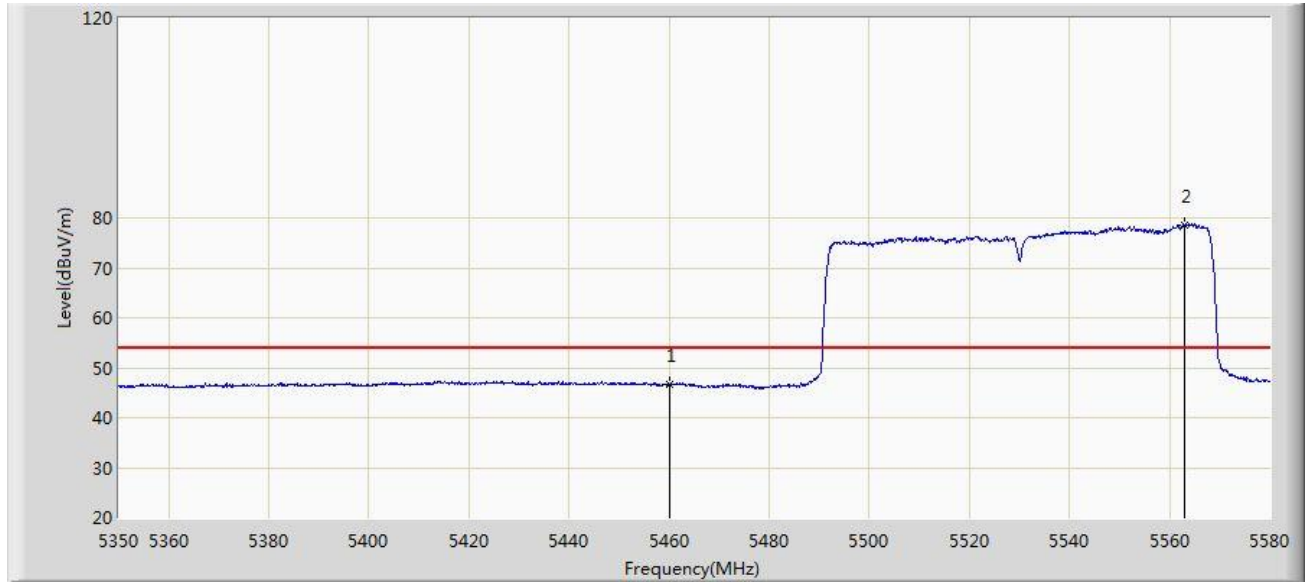


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.575	40.089	-7.425	54.000	6.486	AV
2		*	5563.095	78.693	72.054	N/A	N/A	6.640	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 00:36
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5775MHz Ant 0	

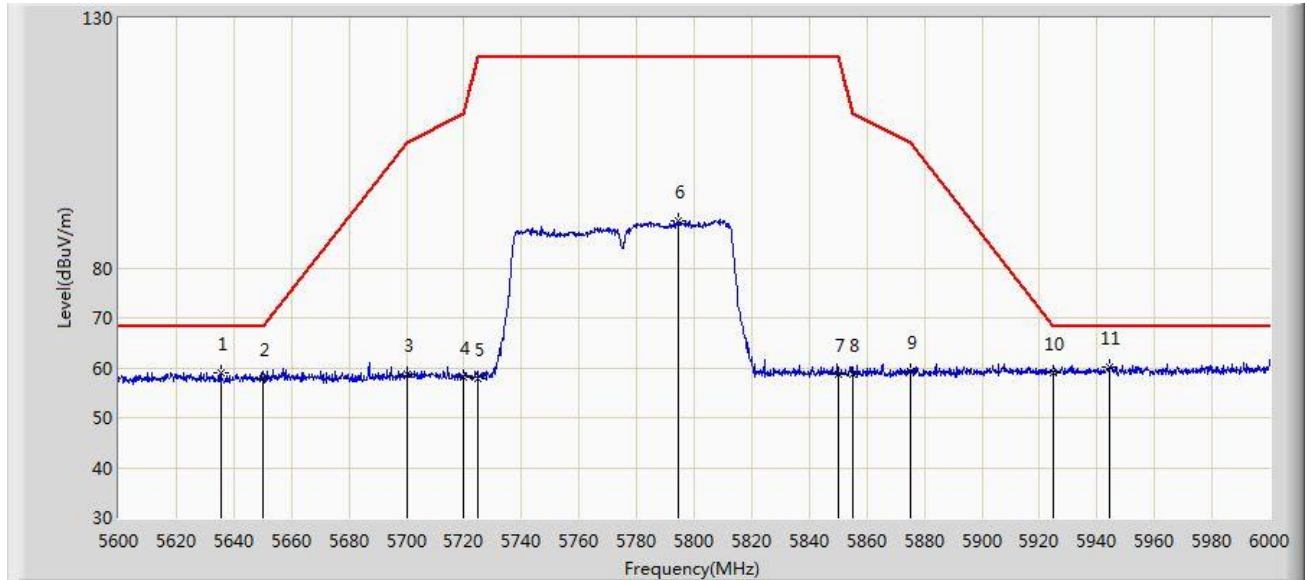


N o	Fl ag	M ar k	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5635.600	59.093	53.038	-9.107	68.200	6.055	PK
2			5650.000	57.874	51.615	-10.326	68.200	6.258	PK
3			5700.000	58.605	52.180	-46.595	105.200	6.426	PK
4			5720.000	58.045	51.660	-52.755	110.800	6.386	PK
5			5725.000	57.723	51.299	-64.477	122.200	6.424	PK
6			5794.400	89.547	82.823	N/A	N/A	6.724	PK
7			5850.000	58.681	51.873	-63.519	122.200	6.808	PK
8			5855.000	58.756	51.936	-52.044	110.800	6.820	PK
9			5875.000	59.376	52.458	-45.824	105.200	6.918	PK
10			5925.000	58.890	51.793	-9.310	68.200	7.097	PK
11		*	5944.400	60.251	53.116	-7.949	68.200	7.135	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 00:38
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5775MHz Ant 0	

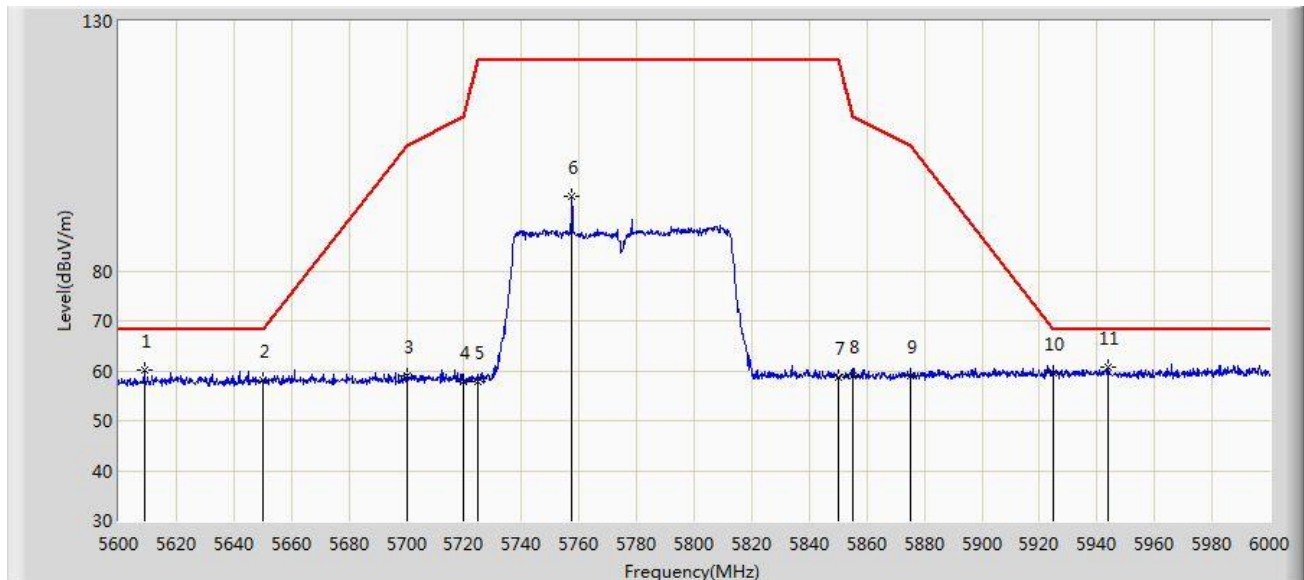


N o	Fl ag	M ar k	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5608.800	60.288	53.766	-7.912	68.200	6.522	PK
2			5650.000	58.021	51.762	-10.179	68.200	6.258	PK
3			5700.000	58.942	52.517	-46.258	105.200	6.426	PK
4			5720.000	57.696	51.311	-53.104	110.800	6.386	PK
5			5725.000	57.949	51.525	-64.251	122.200	6.424	PK
6			5757.400	94.815	87.970	N/A	N/A	6.844	PK
7			5850.000	58.837	52.029	-63.363	122.200	6.808	PK
8			5855.000	59.032	52.212	-51.768	110.800	6.820	PK
9			5875.000	59.113	52.195	-46.087	105.200	6.918	PK
10			5925.000	59.575	52.478	-8.625	68.200	7.097	PK
11		*	5943.800	60.753	53.610	-7.447	68.200	7.142	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 01:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 0 + 1	

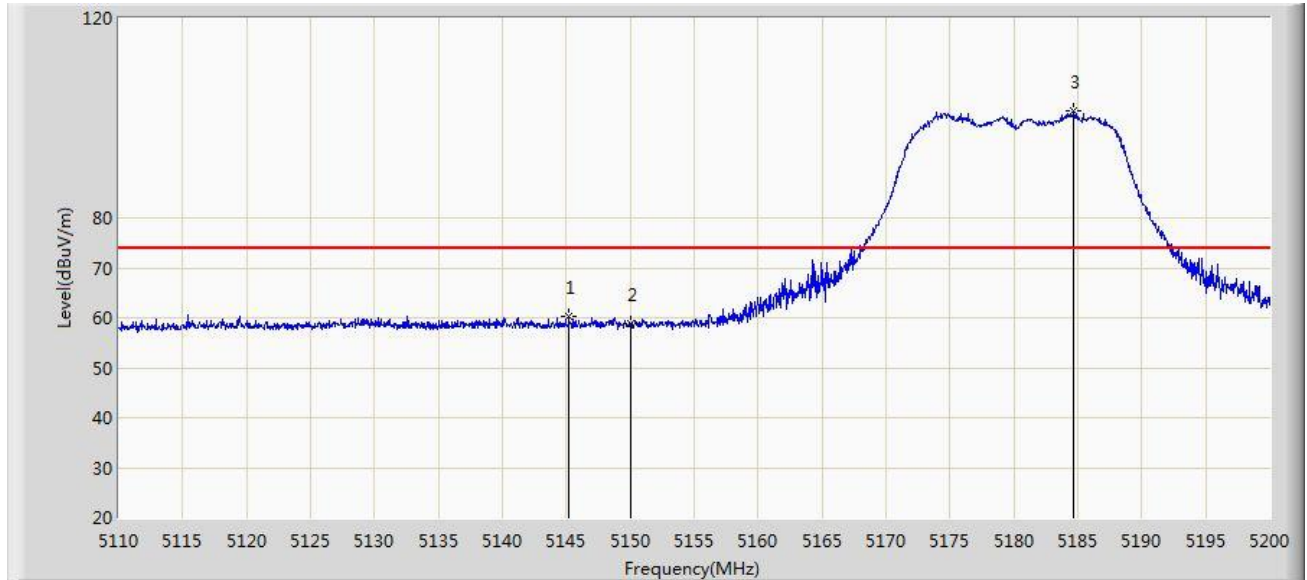


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5145.190	60.365	53.862	-13.635	74.000	6.503	PK
2			5150.000	58.701	52.249	-15.299	74.000	6.452	PK
3		*	5184.700	101.379	94.861	N/A	N/A	6.517	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 01:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 0 + 1	

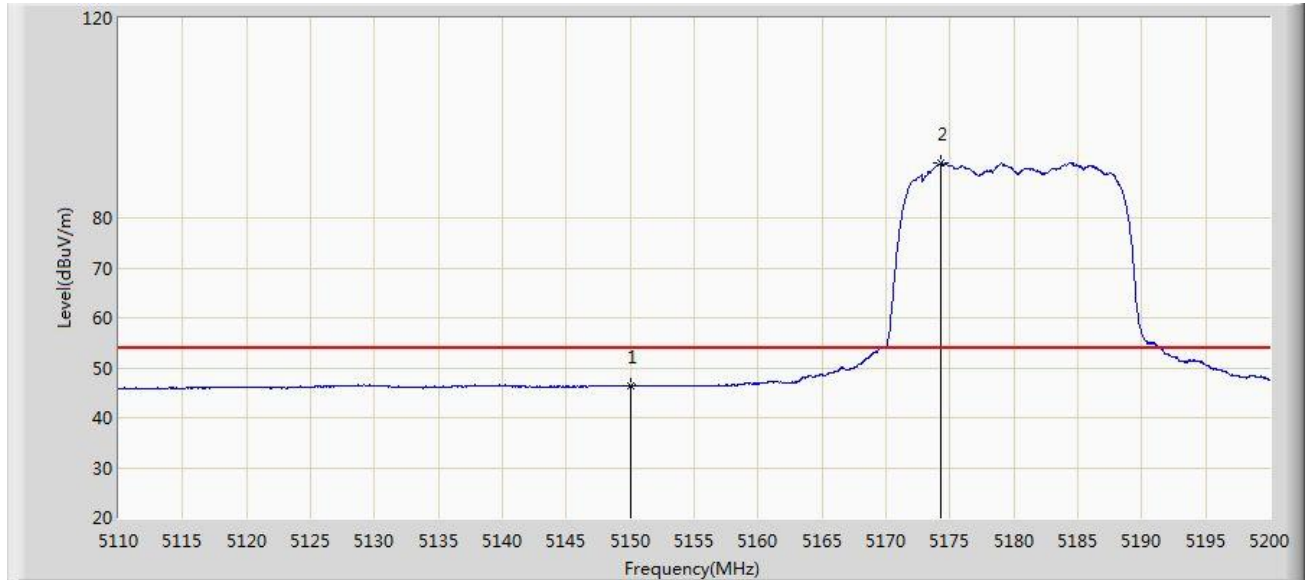


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.424	39.972	-7.576	54.000	6.452	AV
2		*	5174.305	90.967	84.490	N/A	N/A	6.476	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 01:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20at channel 5180MHz Ant 0 + 1	

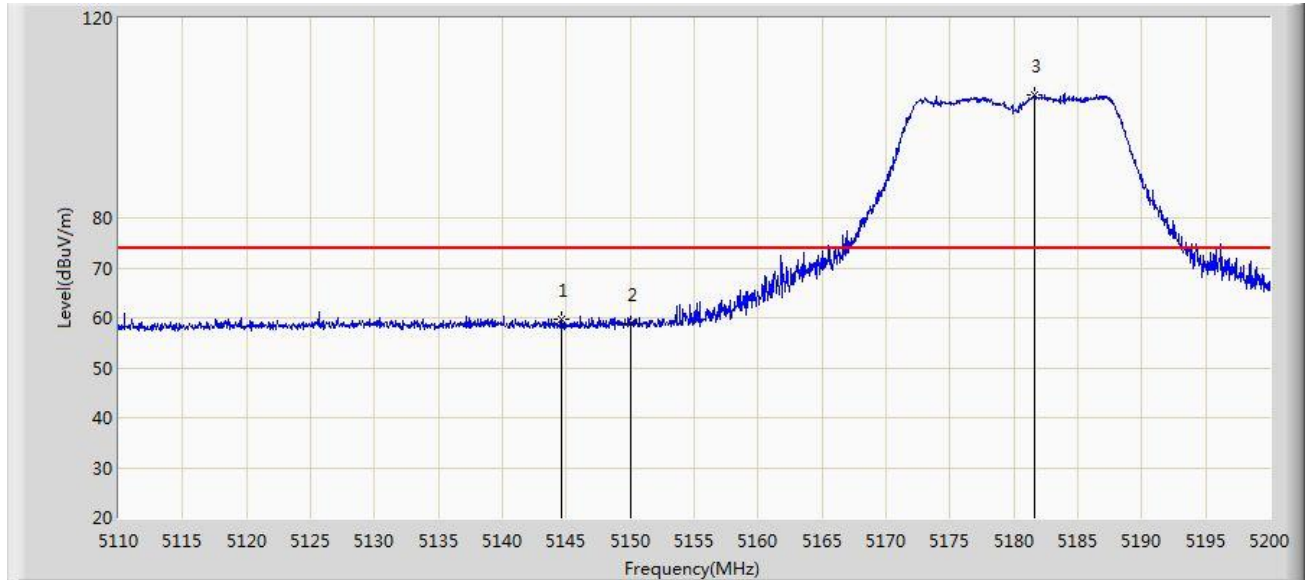


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5144.605	59.712	53.199	-14.288	74.000	6.513	PK
2			5150.000	58.830	52.378	-15.170	74.000	6.452	PK
3		*	5181.595	104.677	98.151	N/A	N/A	6.525	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 01:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20at channel 5180MHz Ant 0 + 1	

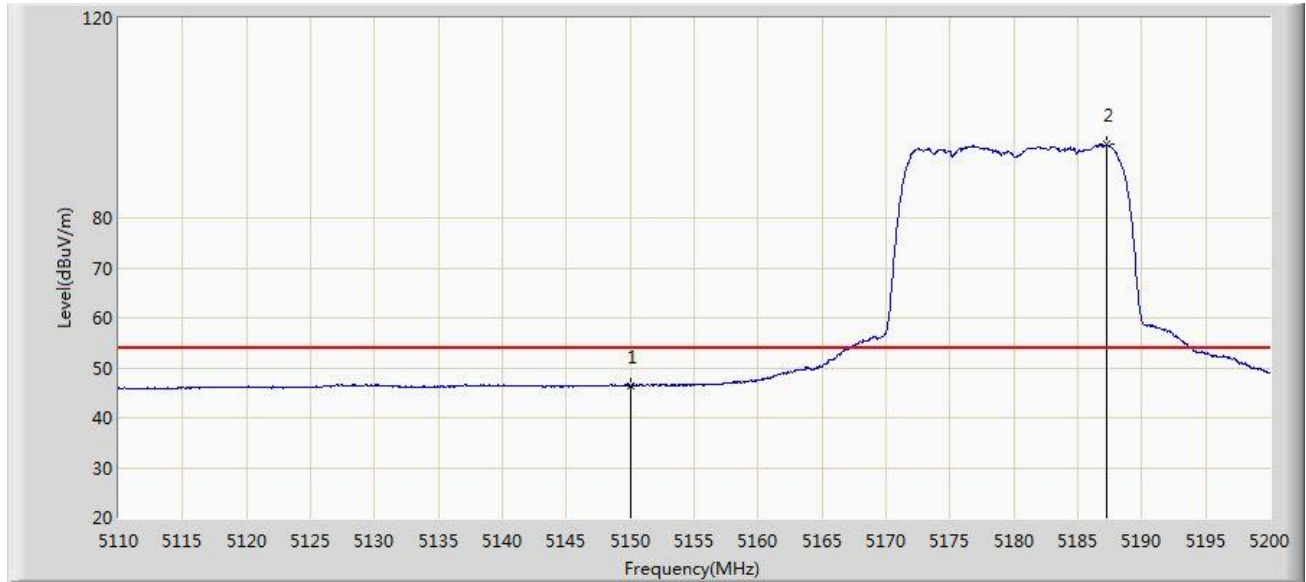


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.407	39.955	-7.593	54.000	6.452	AV
2		*	5187.310	94.721	88.236	N/A	N/A	6.485	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 01:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz Ant 0 + 1	

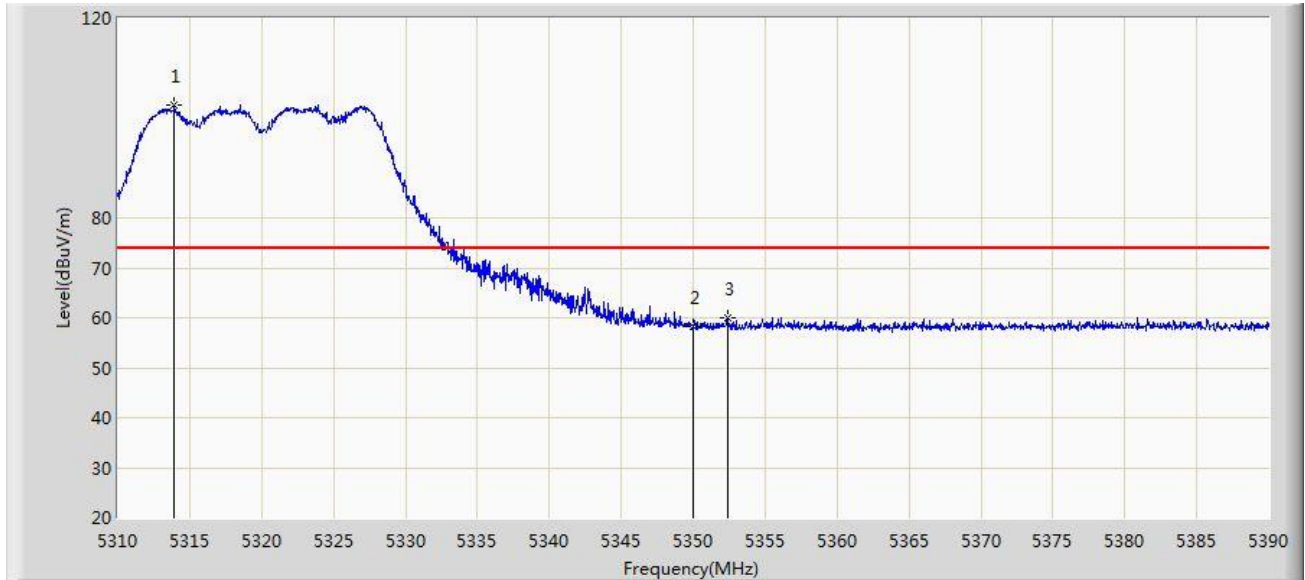


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.920	102.626	96.614	N/A	N/A	6.012	PK
2			5350.000	58.308	51.850	-15.692	74.000	6.458	PK
3			5352.360	59.911	53.526	-14.089	74.000	6.386	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 01:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz Ant 0 + 1	

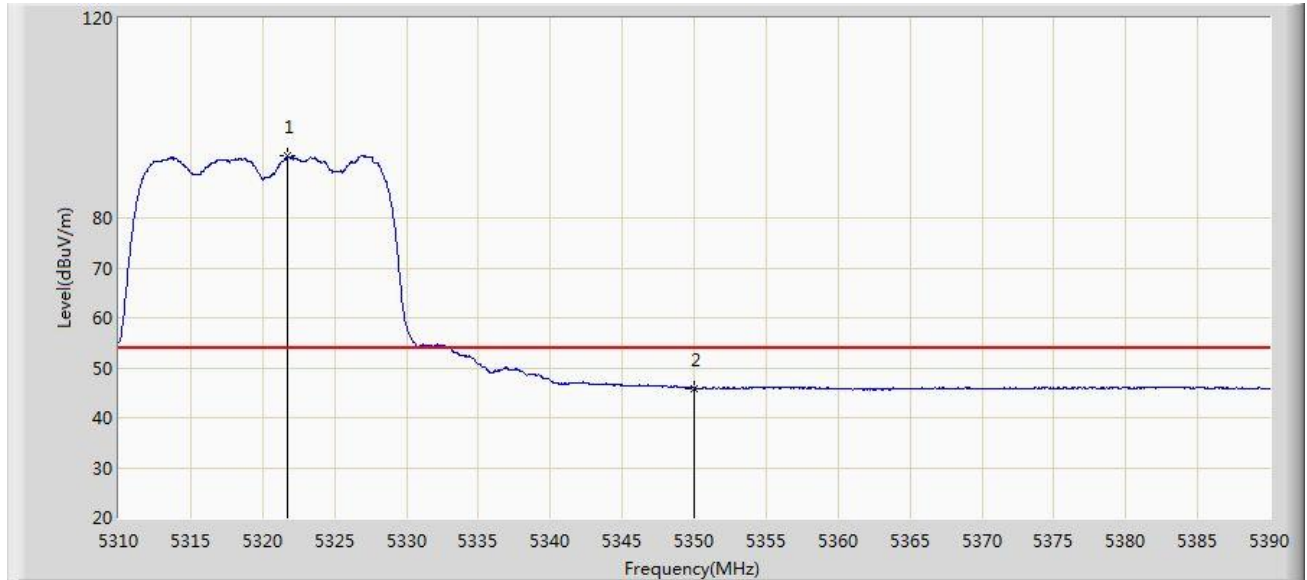


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.760	92.346	86.151	N/A	N/A	6.195	AV
2			5350.000	45.928	39.470	-8.072	54.000	6.458	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 01:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz Ant 0 + 1	

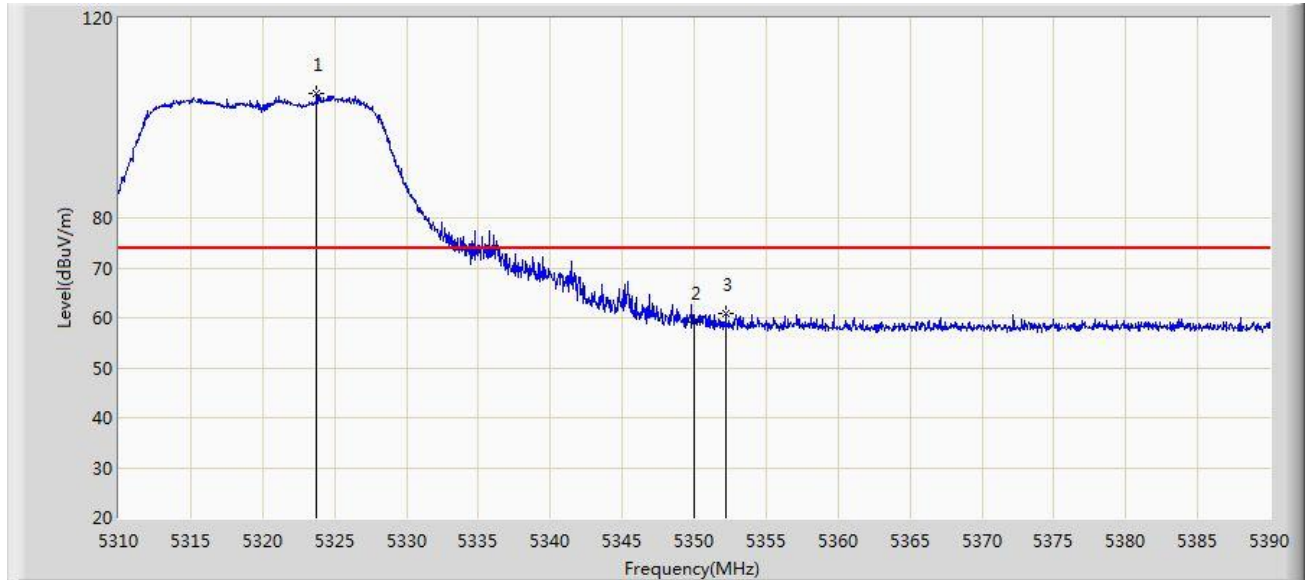


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5323.760	104.833	98.588	N/A	N/A	6.246	PK
2			5350.000	59.209	52.751	-14.791	74.000	6.458	PK
3			5352.200	60.832	54.443	-13.168	74.000	6.389	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 01:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz Ant 0 + 1	

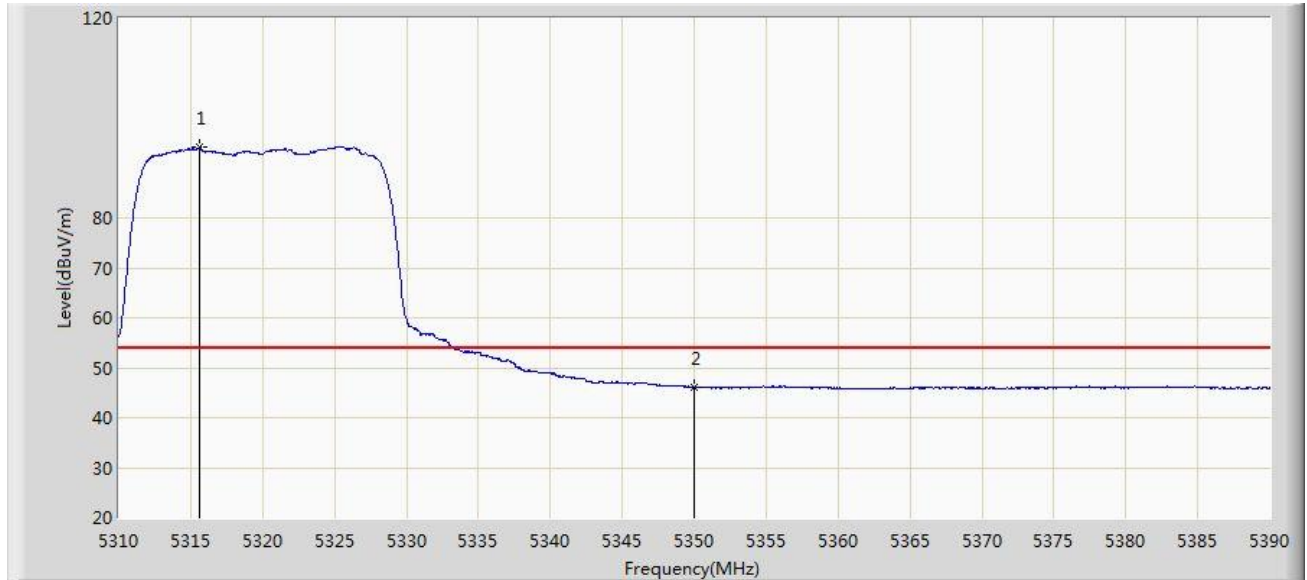


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.640	94.097	88.048	N/A	N/A	6.049	AV
2			5350.000	46.156	39.698	-7.844	54.000	6.458	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 01:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz Ant 0 + 1	

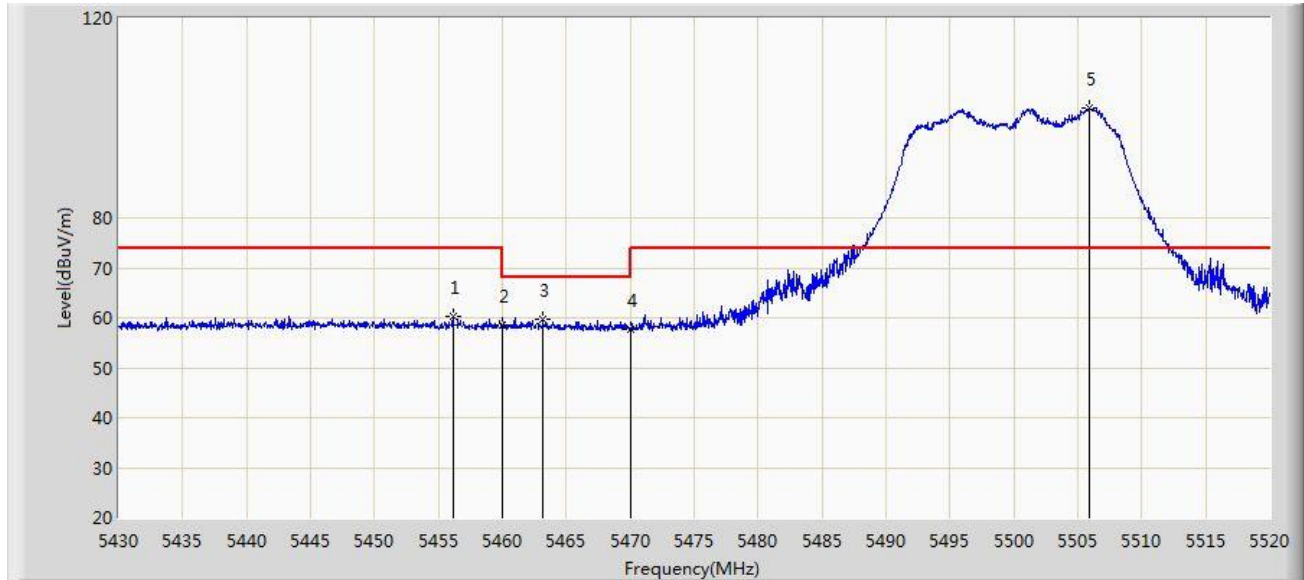


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.145	60.250	53.779	-13.750	74.000	6.471	PK
2			5460.000	58.455	51.969	-15.545	74.000	6.486	PK
3			5463.165	59.745	53.247	-8.455	68.200	6.498	PK
4			5470.000	57.628	51.103	-10.572	68.200	6.524	PK
5		*	5505.870	102.020	95.499	N/A	N/A	6.522	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 01:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz Ant 0 + 1	

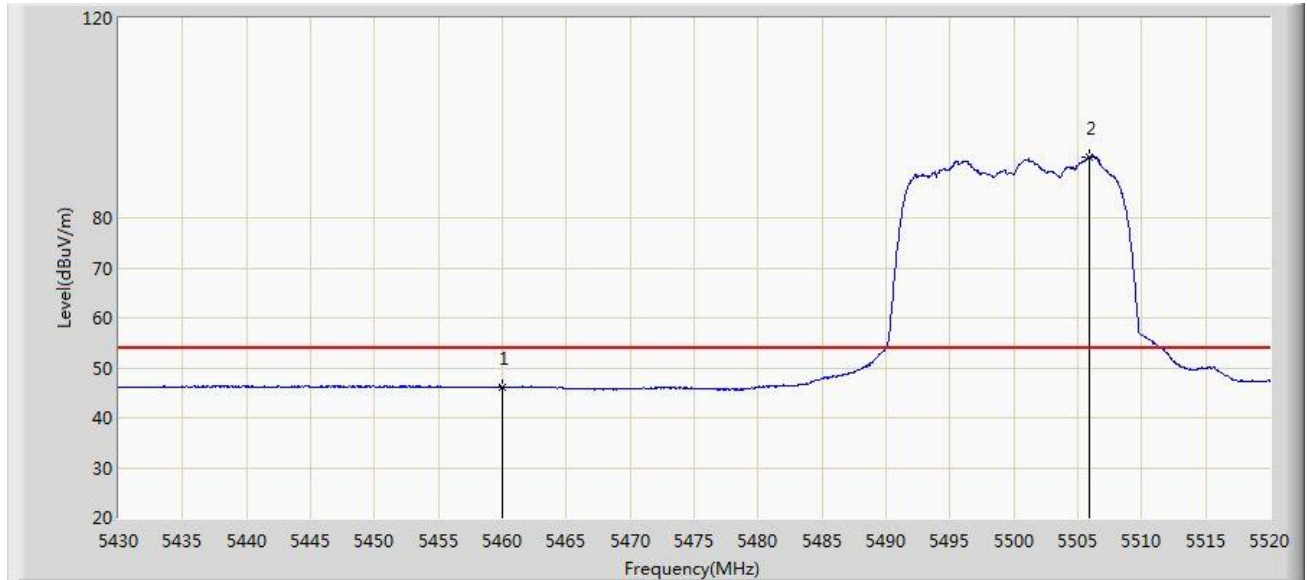


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.080	39.594	-7.920	54.000	6.486	AV
2		*	5505.915	92.280	85.759	N/A	N/A	6.521	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 02:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz Ant 0 + 1	

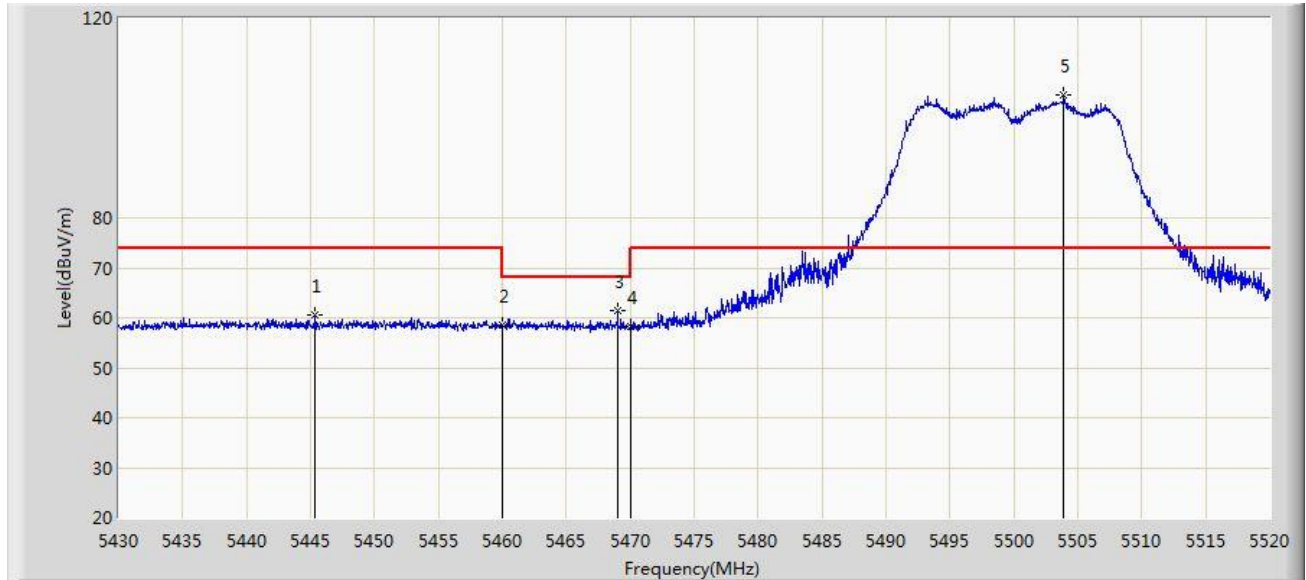


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5445.390	60.682	54.239	-13.318	74.000	6.443	PK
2			5460.000	58.521	52.035	-15.479	74.000	6.486	PK
3			5469.015	61.451	54.930	-6.749	68.200	6.521	PK
4			5470.000	58.184	51.659	-10.016	68.200	6.524	PK
5		*	5503.890	104.572	98.040	N/A	N/A	6.532	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 02:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz Ant 0 + 1	

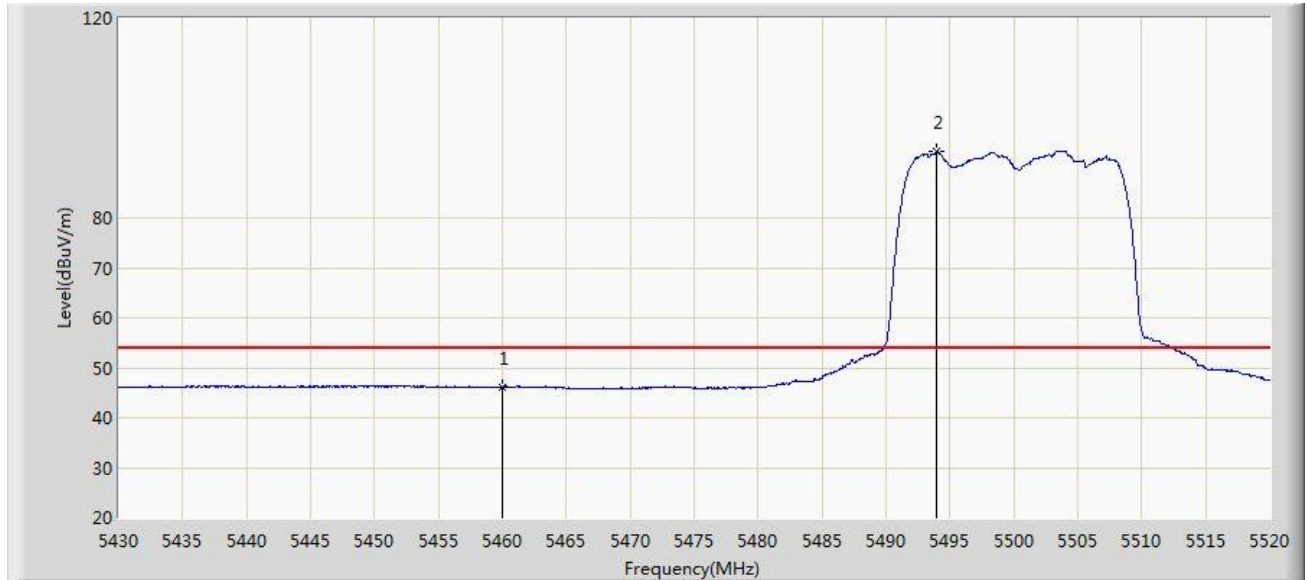


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.037	39.551	-7.963	54.000	6.486	AV
2		*	5493.945	93.219	86.730	N/A	N/A	6.489	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 03:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5700MHz Ant 0 + 1	

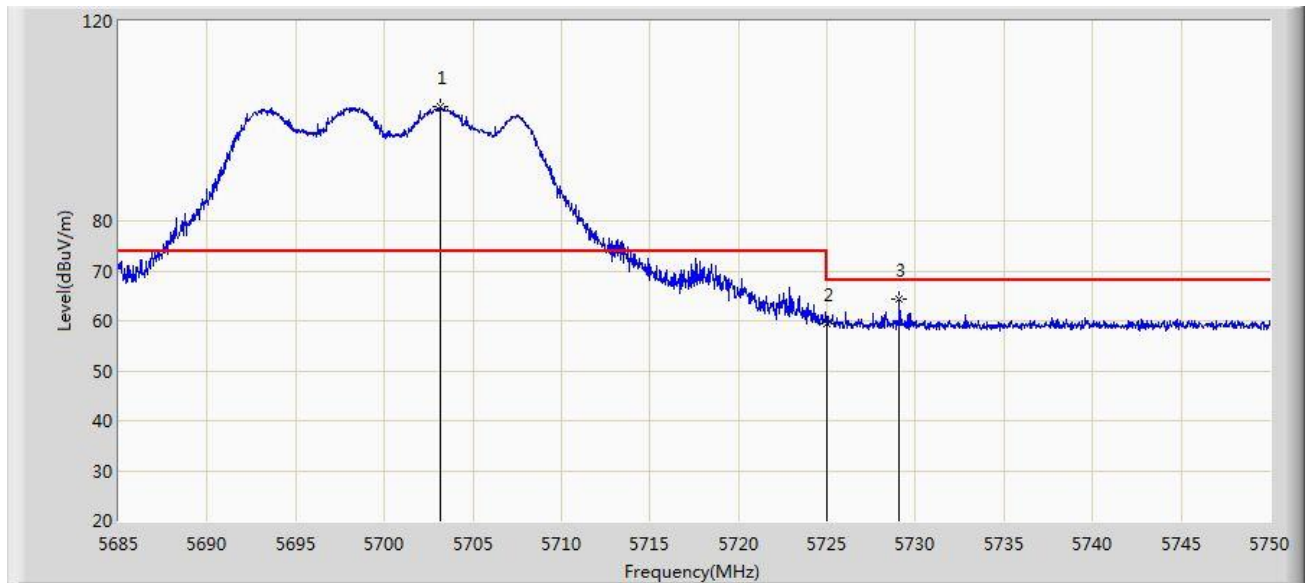


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5703.167	102.769	96.322	N/A	N/A	6.447	PK
2			5725.000	59.554	53.130	-8.646	68.200	6.424	PK
3			5729.103	64.330	57.827	-3.870	68.200	6.502	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 03:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5700MHz Ant 0 + 1	

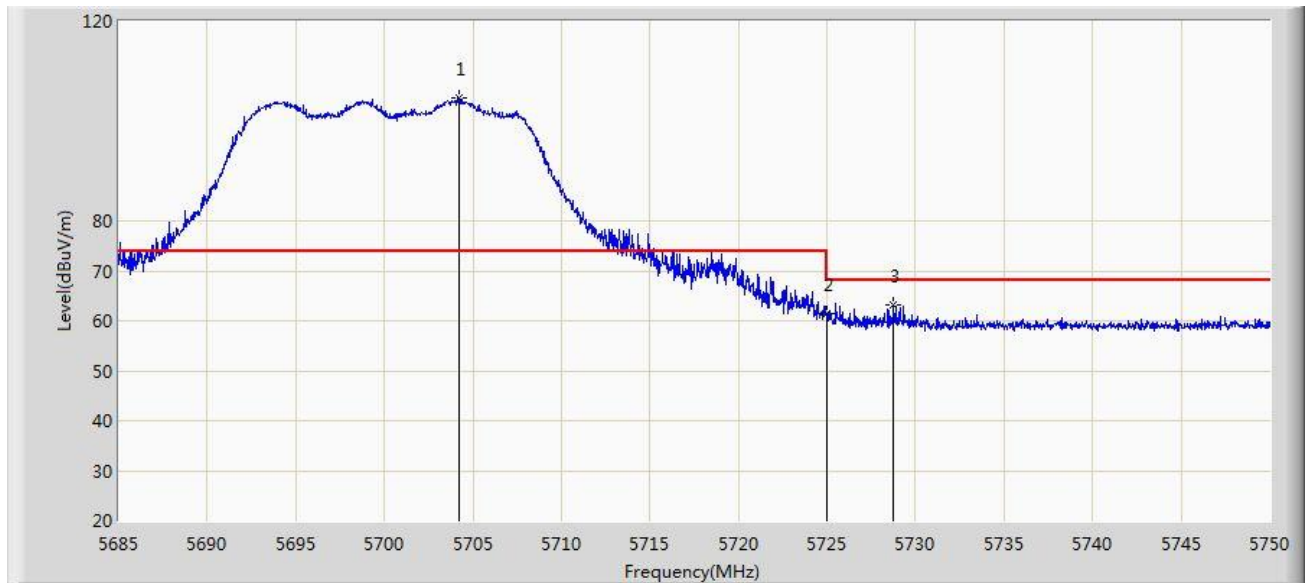


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5704.240	104.681	98.226	N/A	N/A	6.455	PK
2			5725.000	61.396	54.972	-6.804	68.200	6.424	PK
3			5728.777	63.157	56.660	-5.043	68.200	6.496	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 03:23
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5745MHz Ant 0 + 1	

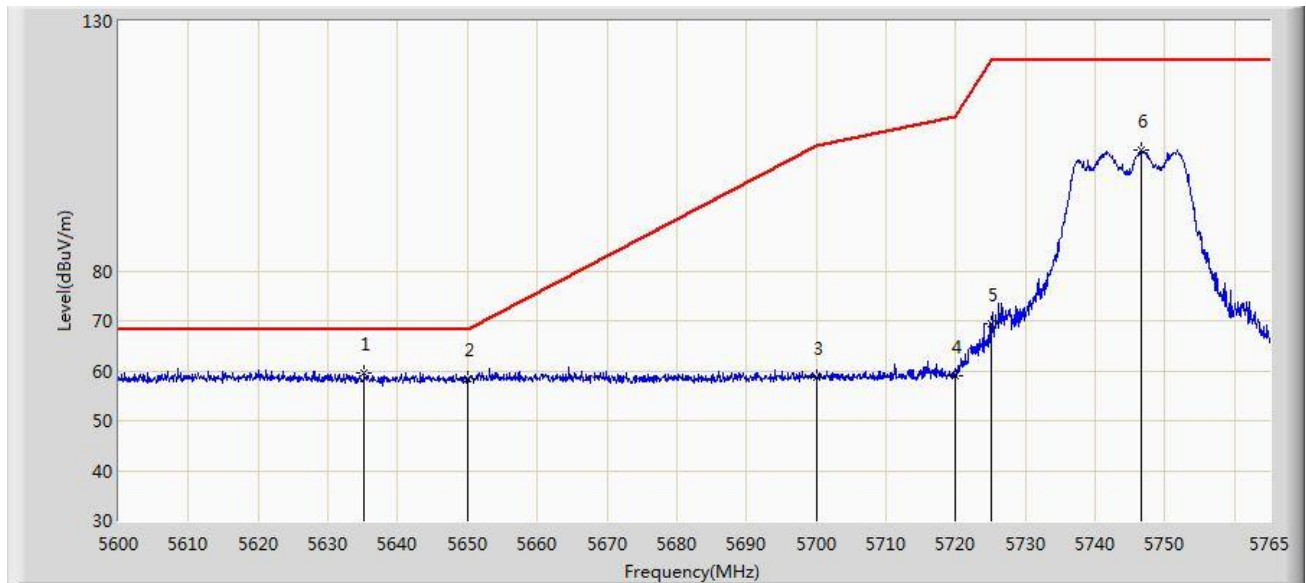


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5635.145	59.696	53.642	-8.504	68.200	6.053	PK
2			5650.000	58.333	52.074	-9.867	68.200	6.258	PK
3			5700.000	58.567	52.142	-46.633	105.200	6.426	PK
4			5720.000	59.025	52.640	-51.775	110.800	6.386	PK
5			5725.000	69.498	63.074	-52.702	122.200	6.424	PK
6			5746.685	104.188	97.412	N/A	N/A	6.776	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 03:26
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5745MHz Ant 0 + 1	

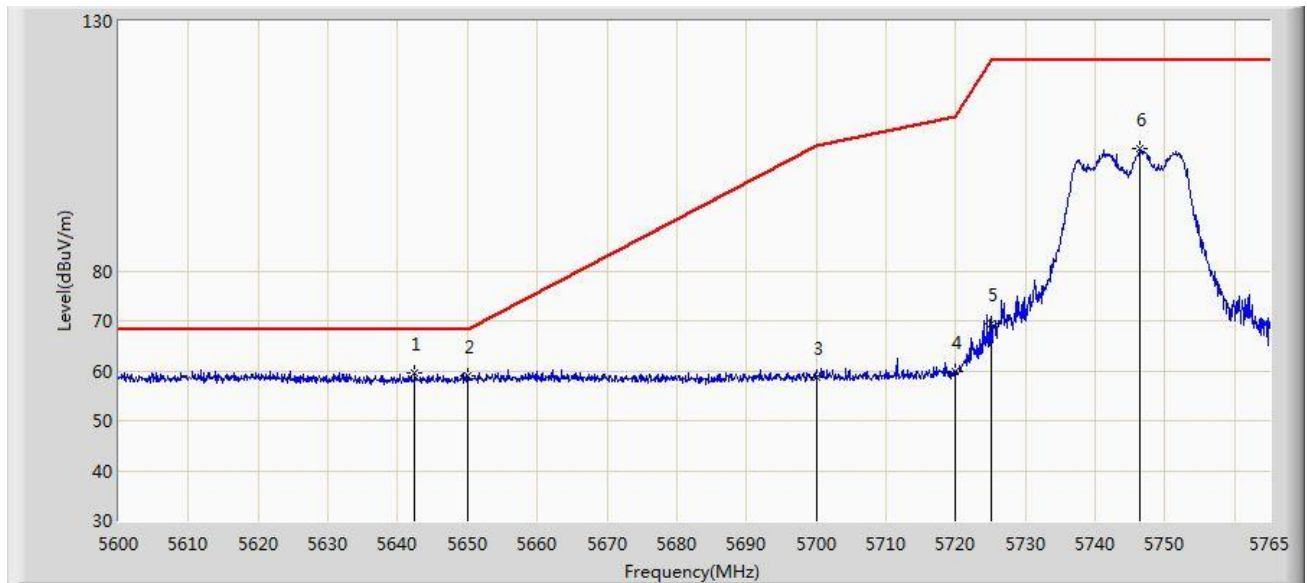


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5642.487	59.450	53.347	-8.750	68.200	6.103	PK
2			5650.000	58.996	52.737	-9.204	68.200	6.258	PK
3			5700.000	58.687	52.262	-46.513	105.200	6.426	PK
4			5720.000	59.841	53.456	-50.959	110.800	6.386	PK
5			5725.000	69.529	63.105	-52.671	122.200	6.424	PK
6			5746.355	104.414	97.640	N/A	N/A	6.773	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 03:29
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5825MHz Ant 0 + 1	

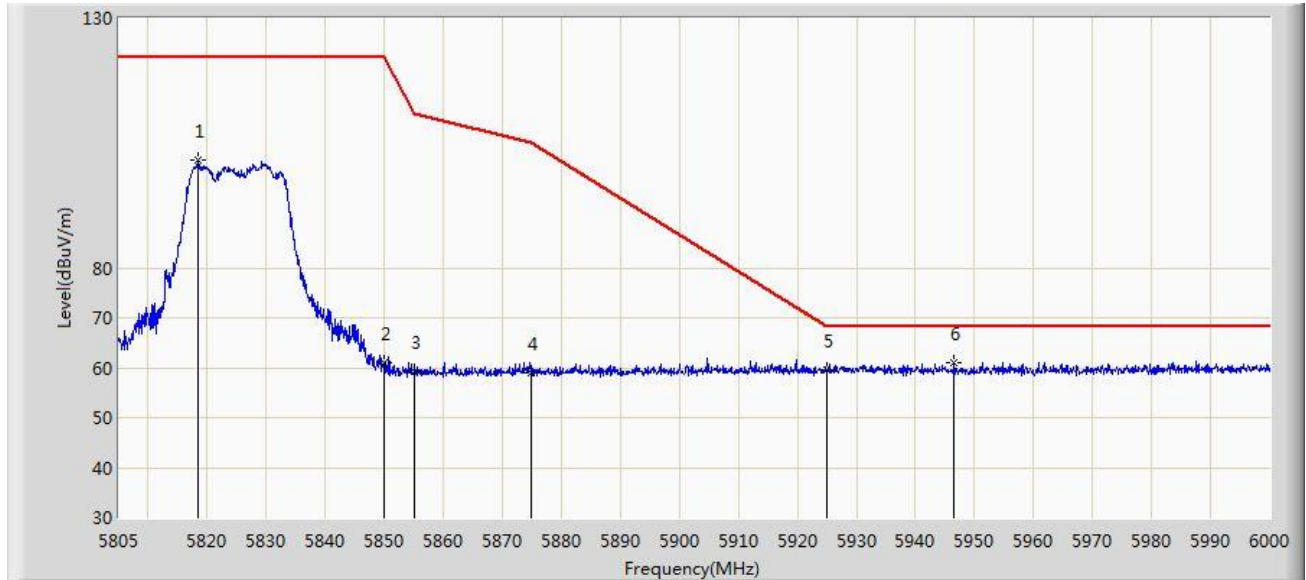


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5818.357	101.659	94.732	N/A	N/A	6.927	PK
2			5850.000	60.938	54.130	-61.262	122.200	6.808	PK
3			5855.000	59.259	52.439	-51.541	110.800	6.820	PK
4			5875.000	59.121	52.203	-46.079	105.200	6.918	PK
5			5925.000	59.429	52.332	-8.771	68.200	7.097	PK
6		*	5946.570	60.945	53.840	-7.255	68.200	7.105	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 03:32
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5825MHz Ant 0 + 1	

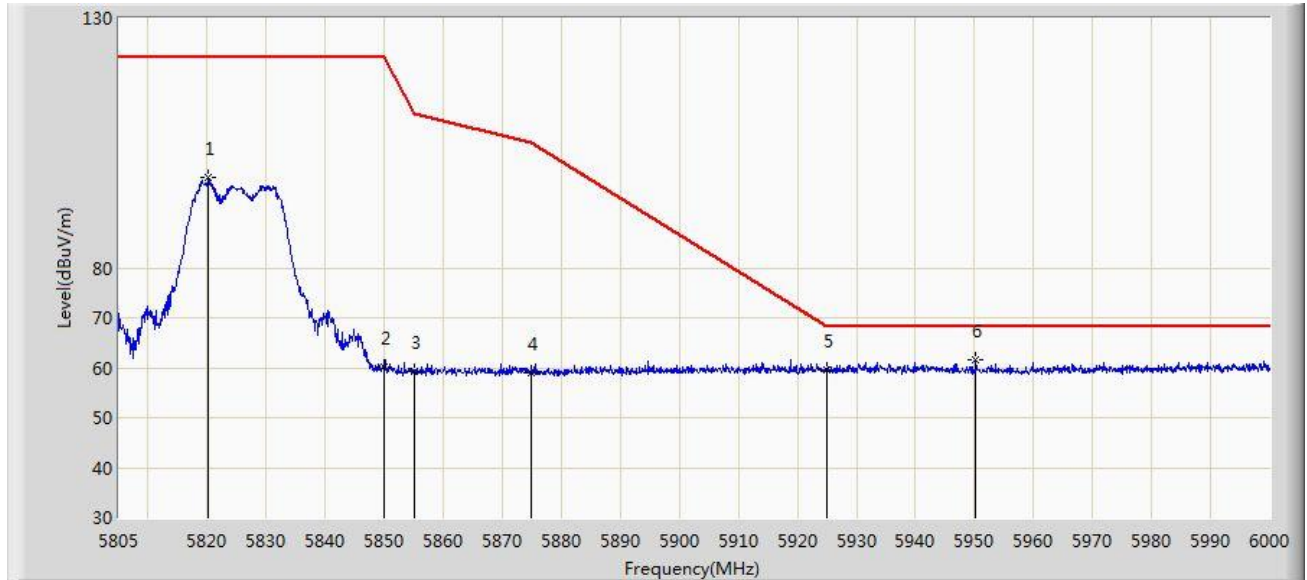


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5820.210	98.020	91.062	N/A	N/A	6.958	PK
2			5850.000	60.095	53.287	-62.105	122.200	6.808	PK
3			5855.000	59.395	52.575	-51.405	110.800	6.820	PK
4			5875.000	58.865	51.947	-46.335	105.200	6.918	PK
5			5925.000	59.516	52.419	-8.684	68.200	7.097	PK
6		*	5950.178	61.467	54.394	-6.733	68.200	7.073	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 03:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 0 + 1	

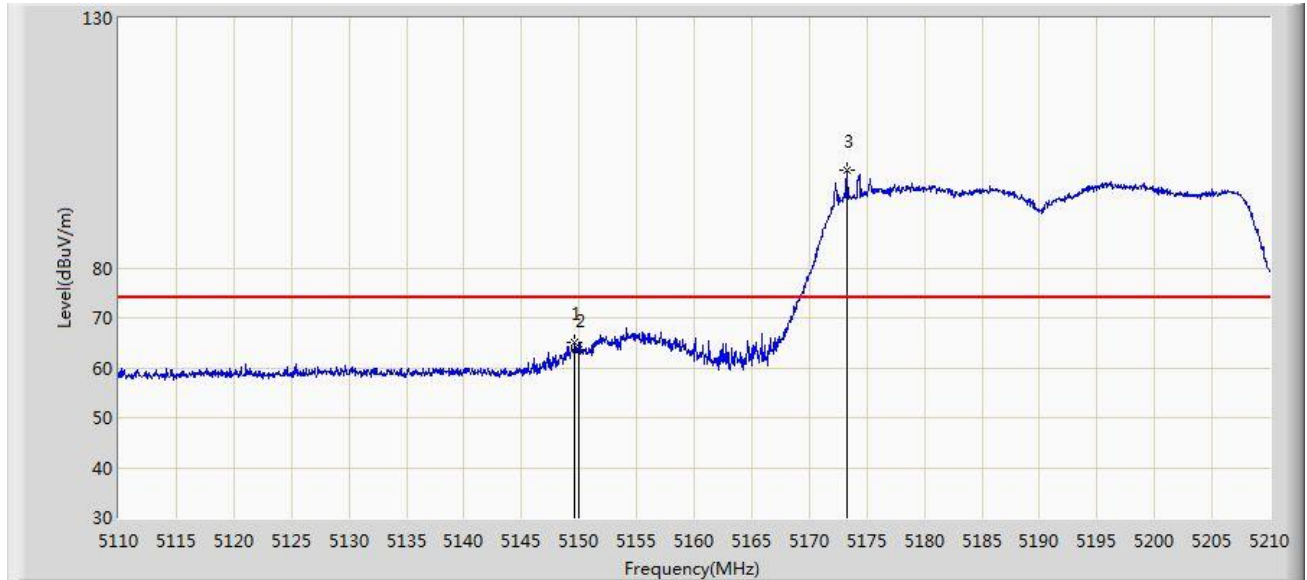


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.600	65.052	58.600	-8.948	74.000	6.453	PK
2			5150.000	63.571	57.119	-10.429	74.000	6.452	PK
3		*	5173.250	99.501	93.031	N/A	N/A	6.469	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 03:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 0 + 1	

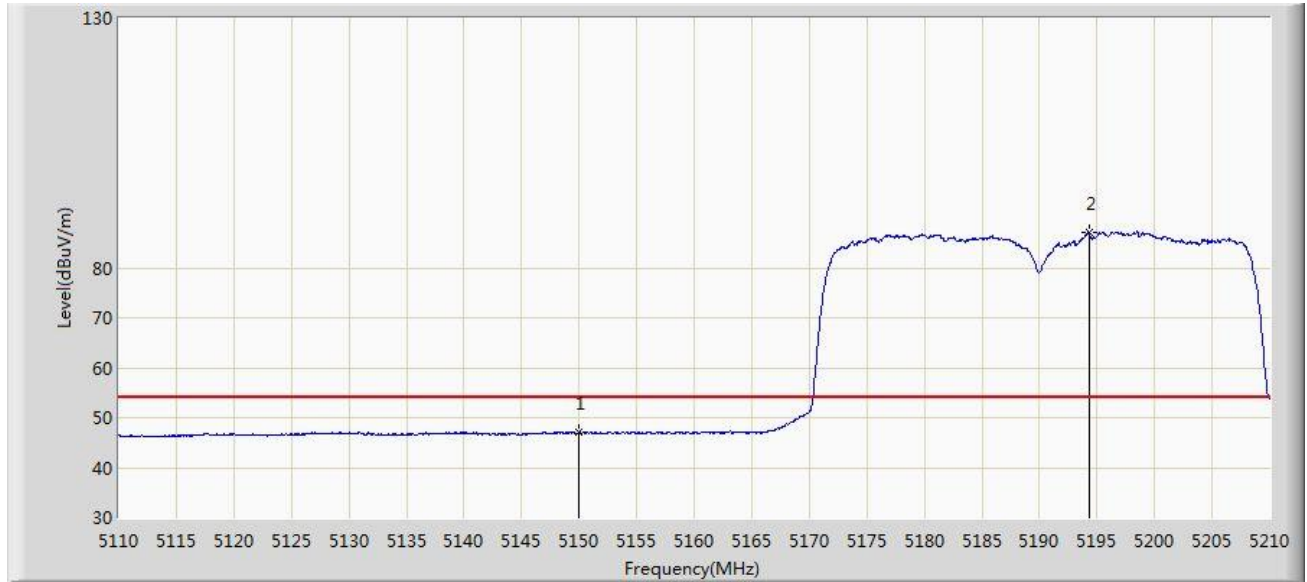


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.045	40.593	-6.955	54.000	6.452	AV
2		*	5194.300	87.077	80.681	N/A	N/A	6.396	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 03:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 0 + 1	

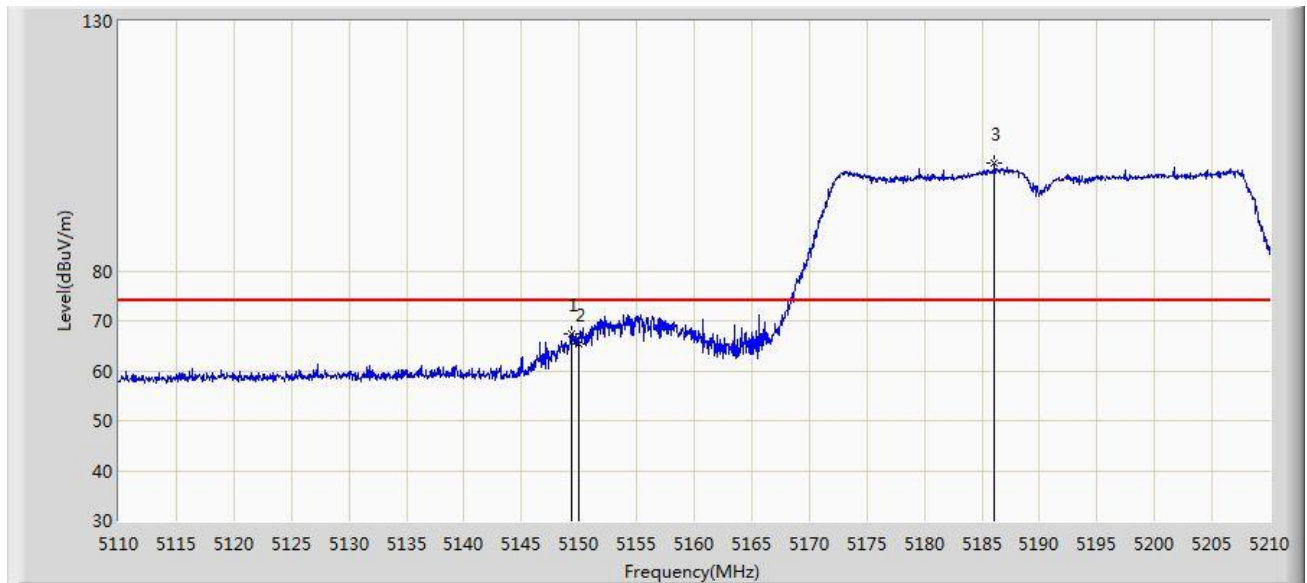


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.300	67.454	61.001	-6.546	74.000	6.453	PK
2			5150.000	65.239	58.787	-8.761	74.000	6.452	PK
3		*	5186.100	101.462	94.962	N/A	N/A	6.501	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 03:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 0 + 1	

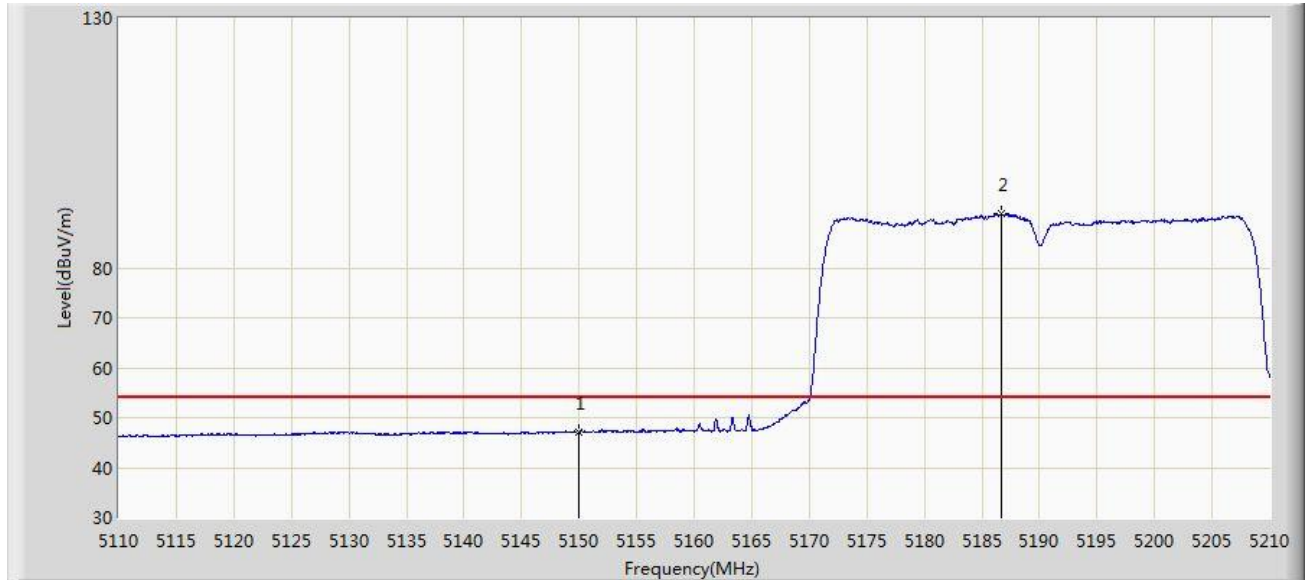


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.199	40.747	-6.801	54.000	6.452	AV
2		*	5186.650	90.766	84.273	N/A	N/A	6.493	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 03:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz Ant 0 + 1	

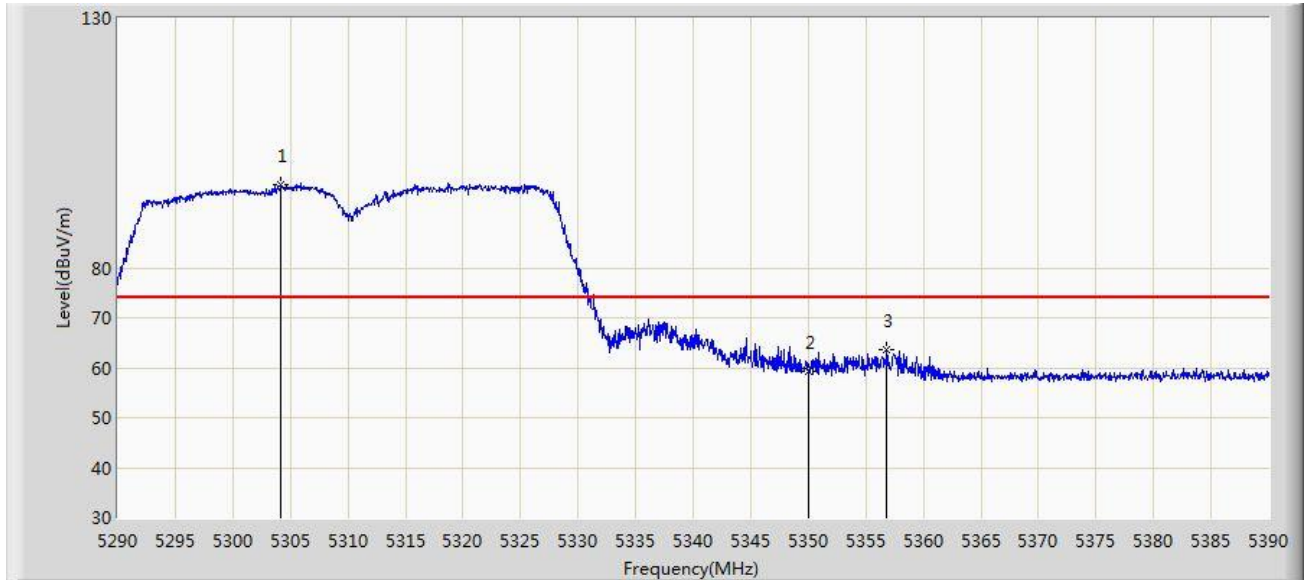


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5304.200	96.642	90.695	N/A	N/A	5.947	PK
2			5350.000	59.227	52.769	-14.773	74.000	6.458	PK
3			5356.850	63.541	57.272	-10.459	74.000	6.270	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 04:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz Ant 0 + 1	

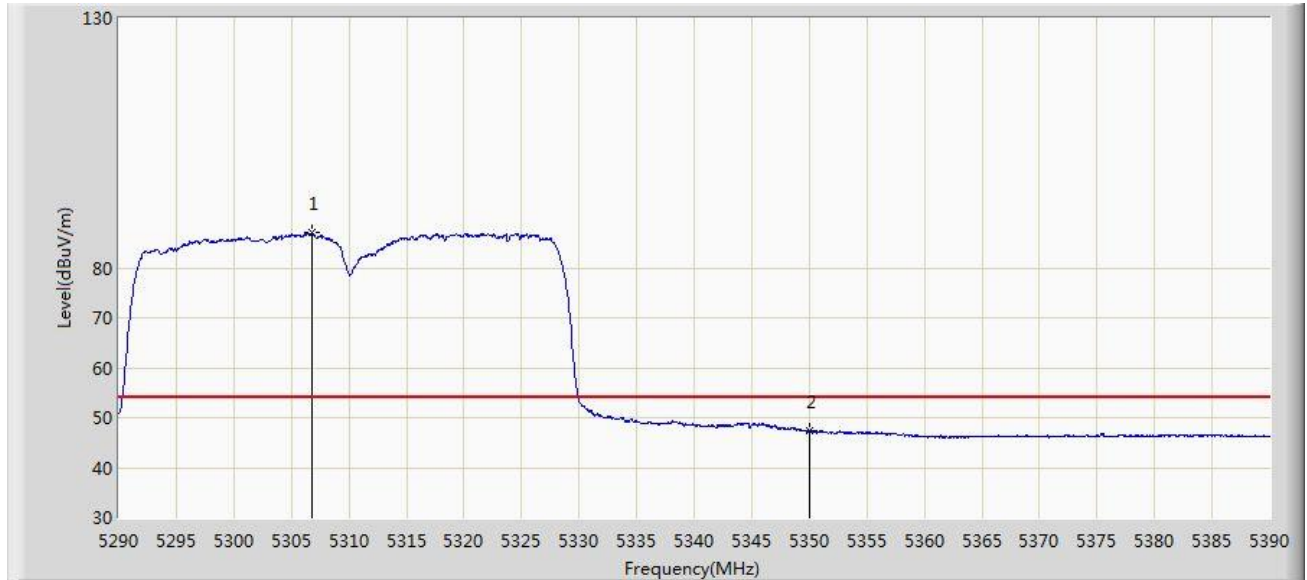


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5306.800	86.995	81.060	N/A	N/A	5.935	AV
2			5350.000	47.282	40.824	-6.718	54.000	6.458	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 04:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz Ant 0 + 1	

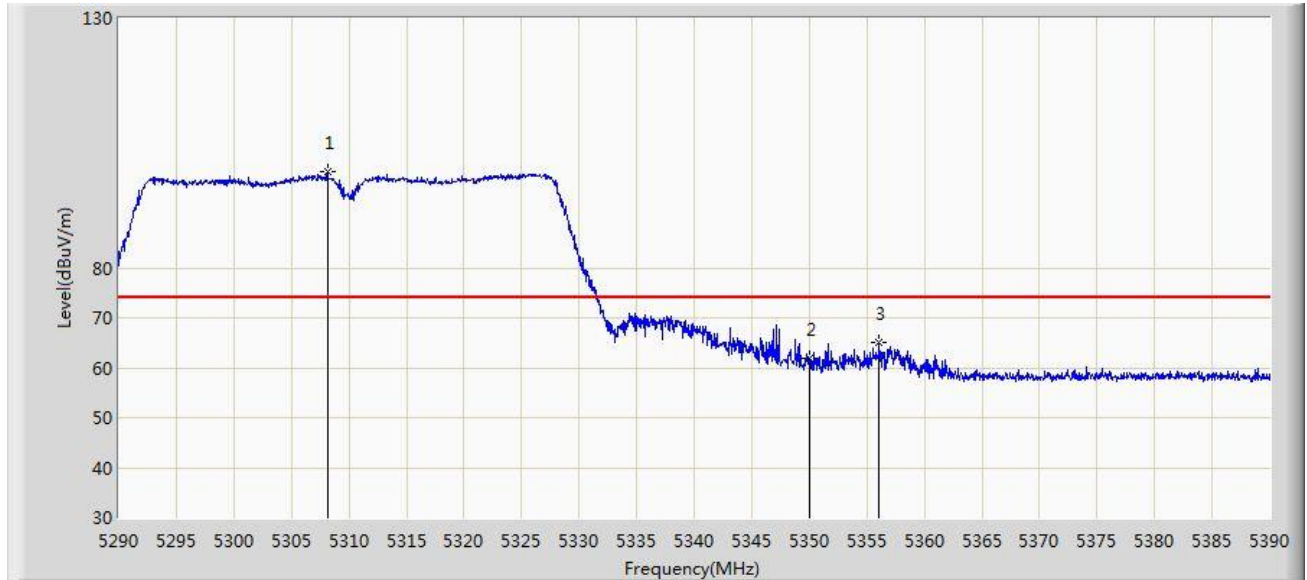


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5308.150	99.397	93.468	N/A	N/A	5.929	PK
2			5350.000	61.869	55.411	-12.131	74.000	6.458	PK
3			5356.100	64.992	58.703	-9.008	74.000	6.289	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 04:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz Ant 0 + 1	

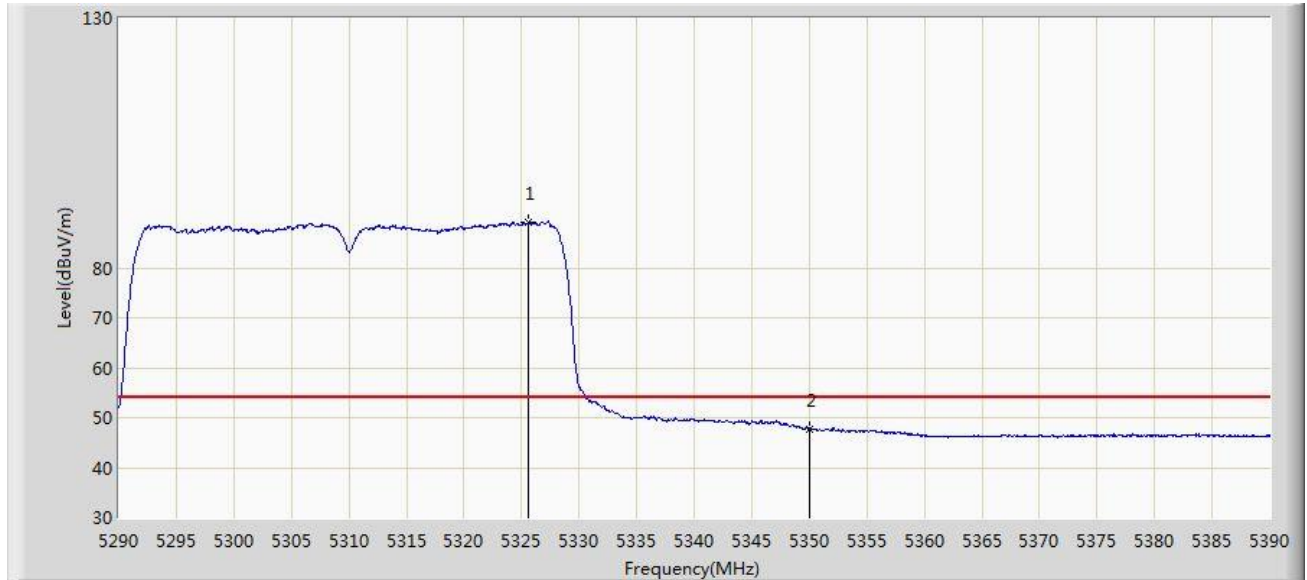


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5325.550	89.173	82.882	N/A	N/A	6.291	AV
2			5350.000	47.615	41.157	-6.385	54.000	6.458	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 04:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz Ant 0 + 1	

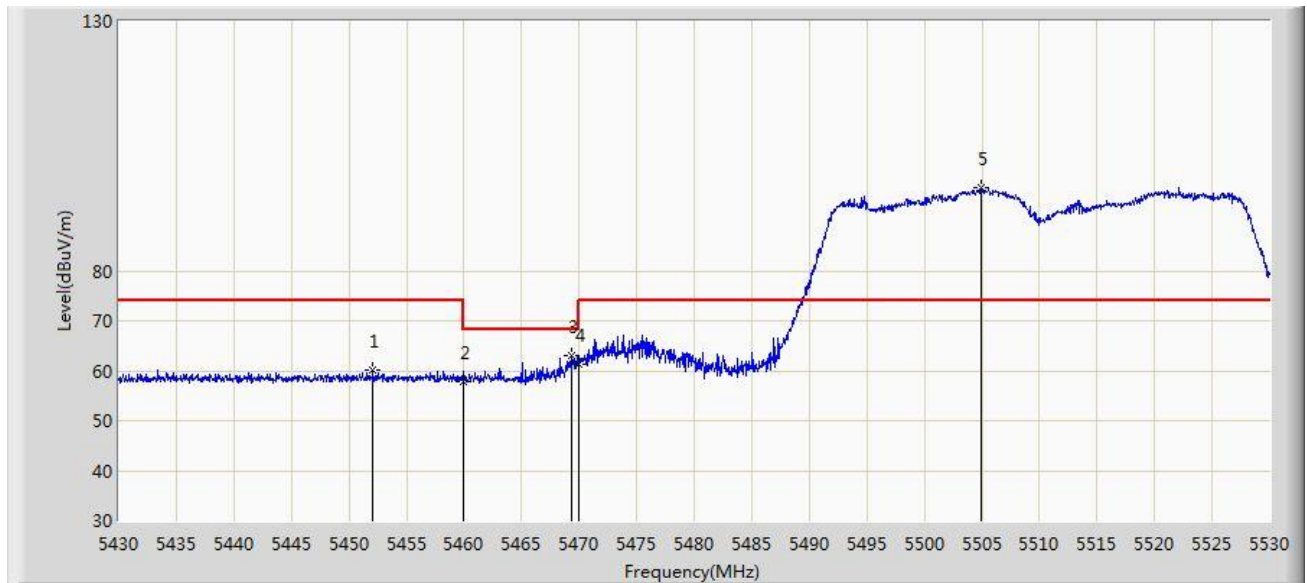


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5452.100	60.080	53.618	-13.920	74.000	6.462	PK
2			5460.000	57.770	51.284	-16.230	74.000	6.486	PK
3			5469.300	63.119	56.597	-5.081	68.200	6.522	PK
4			5470.000	61.209	54.684	-6.991	68.200	6.524	PK
5		*	5504.950	96.761	90.224	N/A	N/A	6.537	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 04:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz Ant 0 + 1	

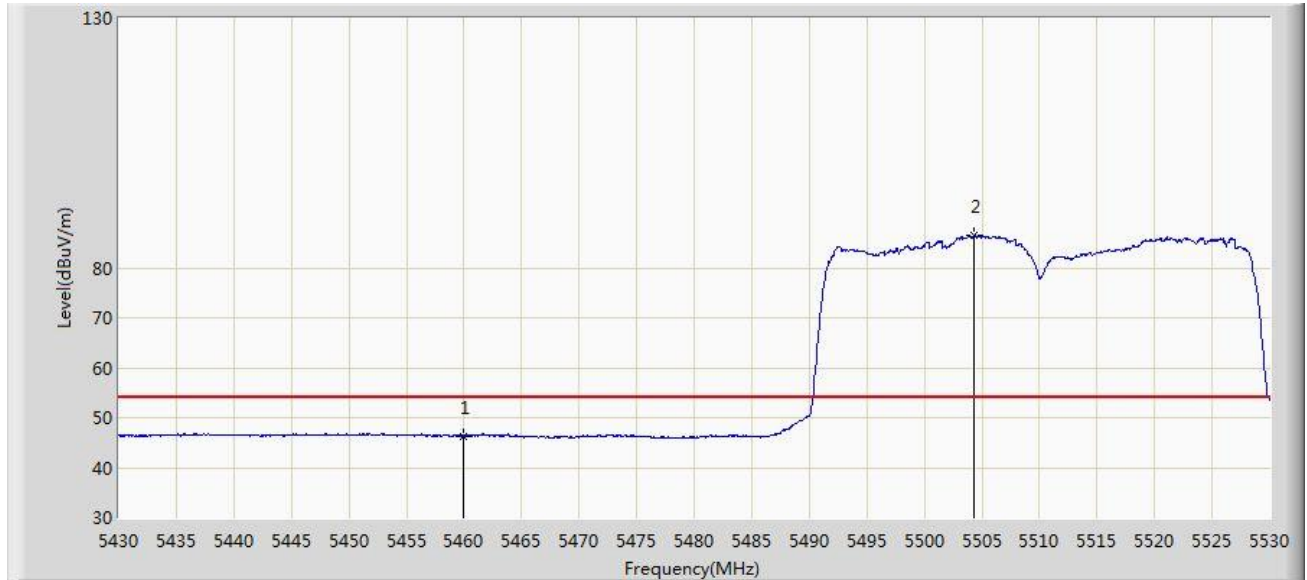


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.326	39.840	-7.674	54.000	6.486	AV
2		*	5504.300	86.379	79.845	N/A	N/A	6.533	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 04:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz Ant 0 + 1	

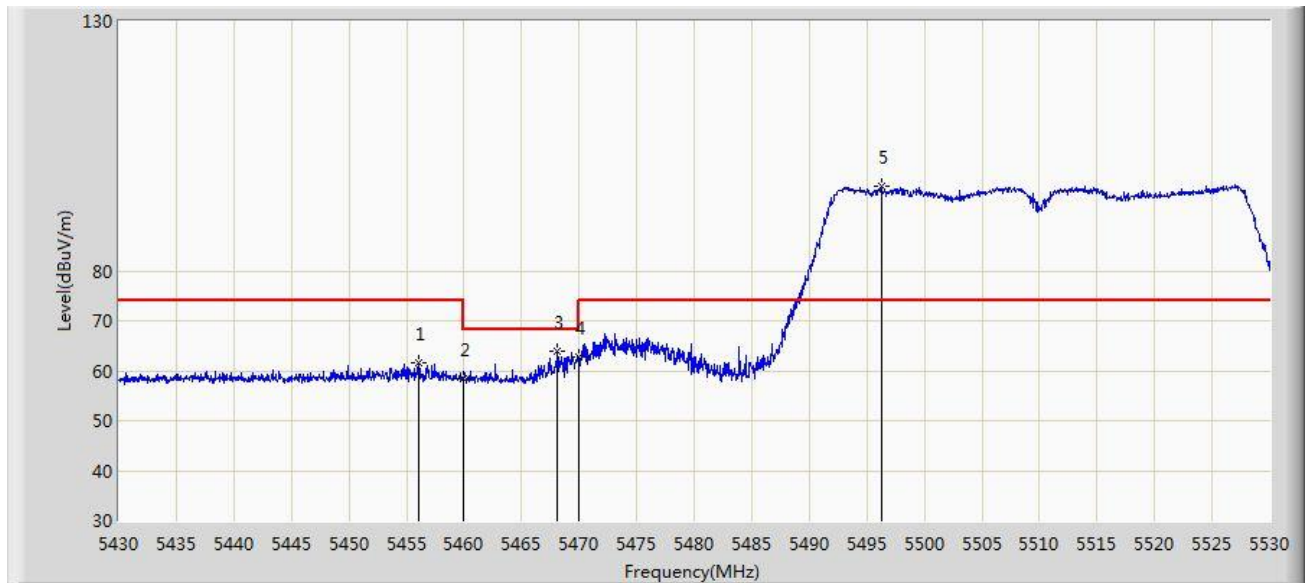


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.100	61.581	55.111	-12.419	74.000	6.470	PK
2			5460.000	58.345	51.859	-15.655	74.000	6.486	PK
3			5468.100	63.807	57.289	-4.393	68.200	6.518	PK
4			5470.000	62.854	56.329	-5.346	68.200	6.524	PK
5		*	5496.250	97.027	90.528	N/A	N/A	6.499	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 04:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz Ant 0 + 1	

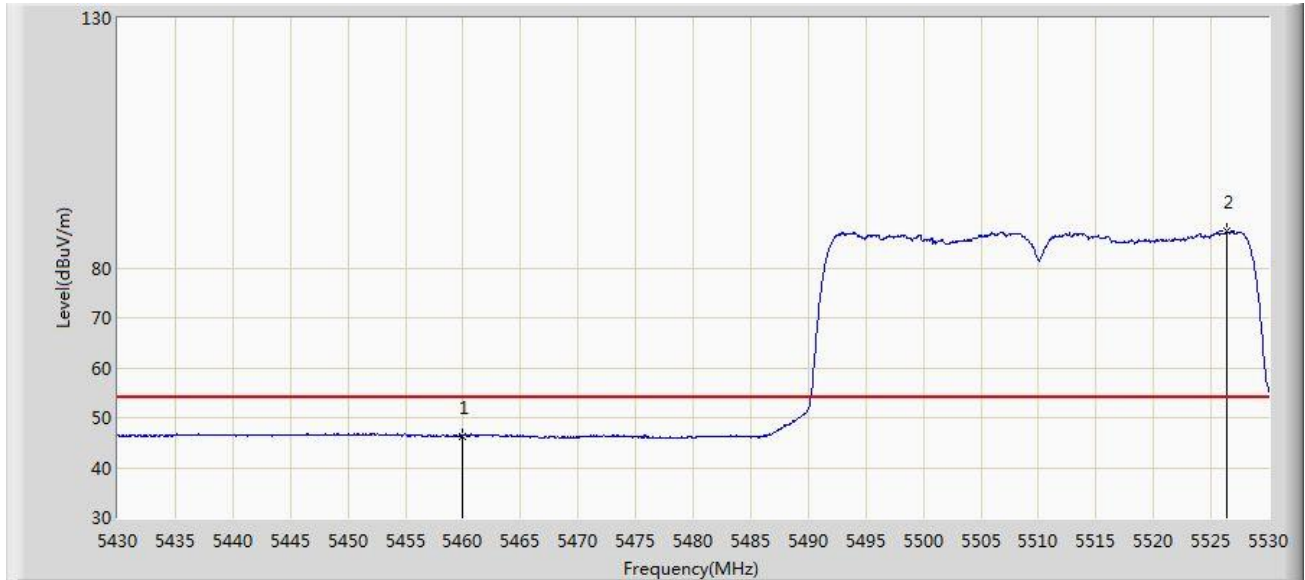


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.360	39.874	-7.640	54.000	6.486	AV
2		*	5526.400	87.315	80.925	N/A	N/A	6.391	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 04:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5670MHz Ant 0 + 1	

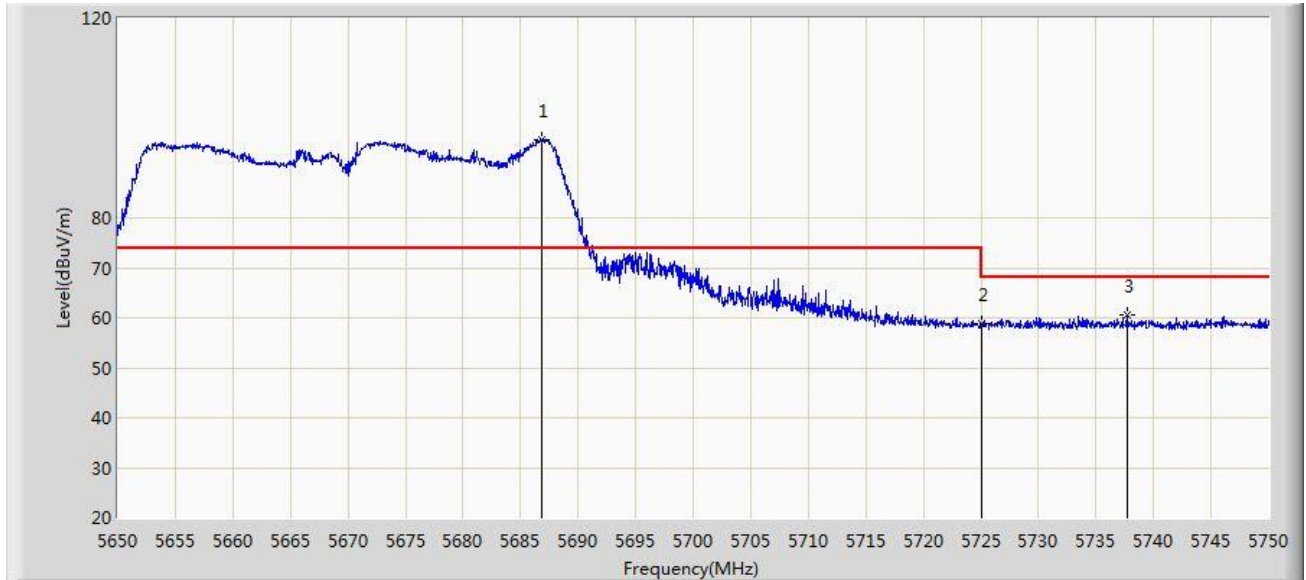


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5686.850	95.679	89.381	N/A	N/A	6.298	PK
2			5725.000	58.858	52.434	-9.342	68.200	6.424	PK
3			5737.700	60.682	54.019	-7.518	68.200	6.663	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 04:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5670MHz Ant 0 + 1	

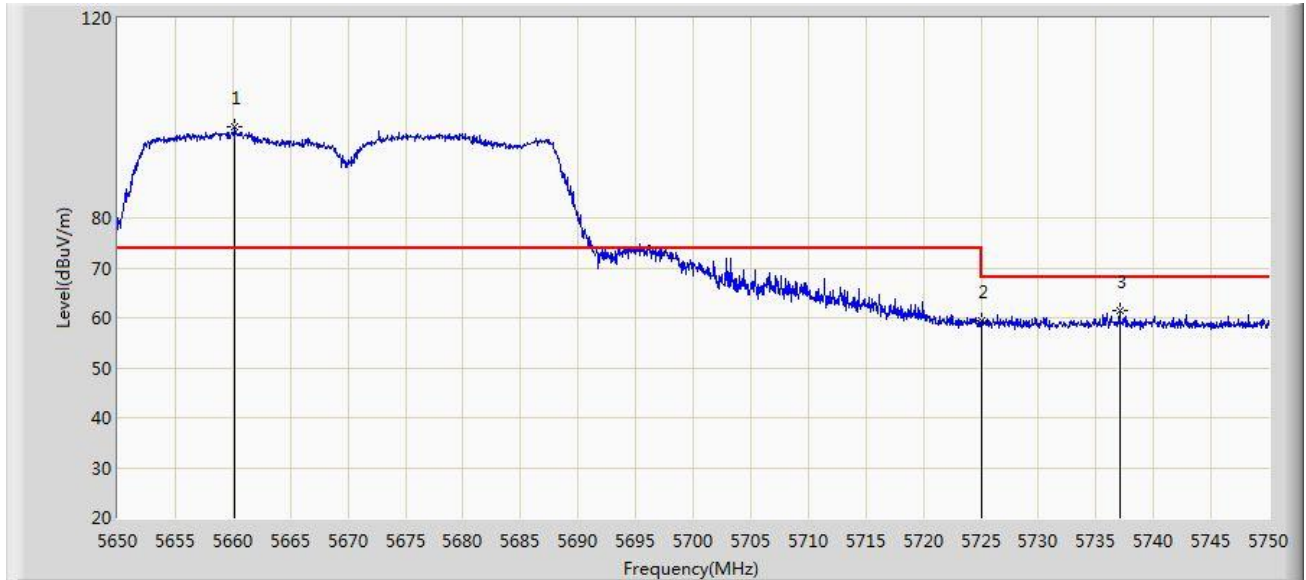


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5660.200	98.192	91.798	N/A	N/A	6.393	PK
2			5725.000	59.414	52.990	-8.786	68.200	6.424	PK
3			5737.050	61.532	54.881	-6.668	68.200	6.650	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 04:29
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5755MHz Ant 0 + 1	

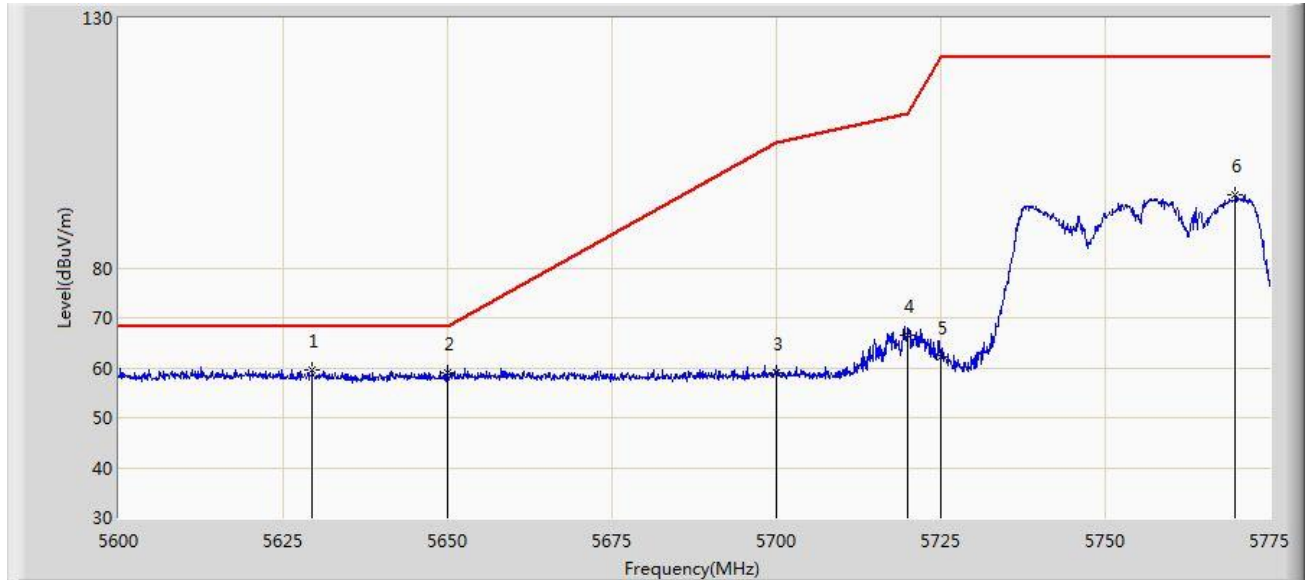


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5629.487	59.708	53.565	-8.492	68.200	6.143	PK
2			5650.000	59.038	52.779	-9.162	68.200	6.258	PK
3			5700.000	58.856	52.431	-46.344	105.200	6.426	PK
4			5720.000	66.625	60.240	-44.175	110.800	6.386	PK
5			5725.000	62.250	55.826	-59.950	122.200	6.424	PK
6			5769.837	94.641	87.899	N/A	N/A	6.741	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 04:31
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5755MHz Ant 0 + 1	

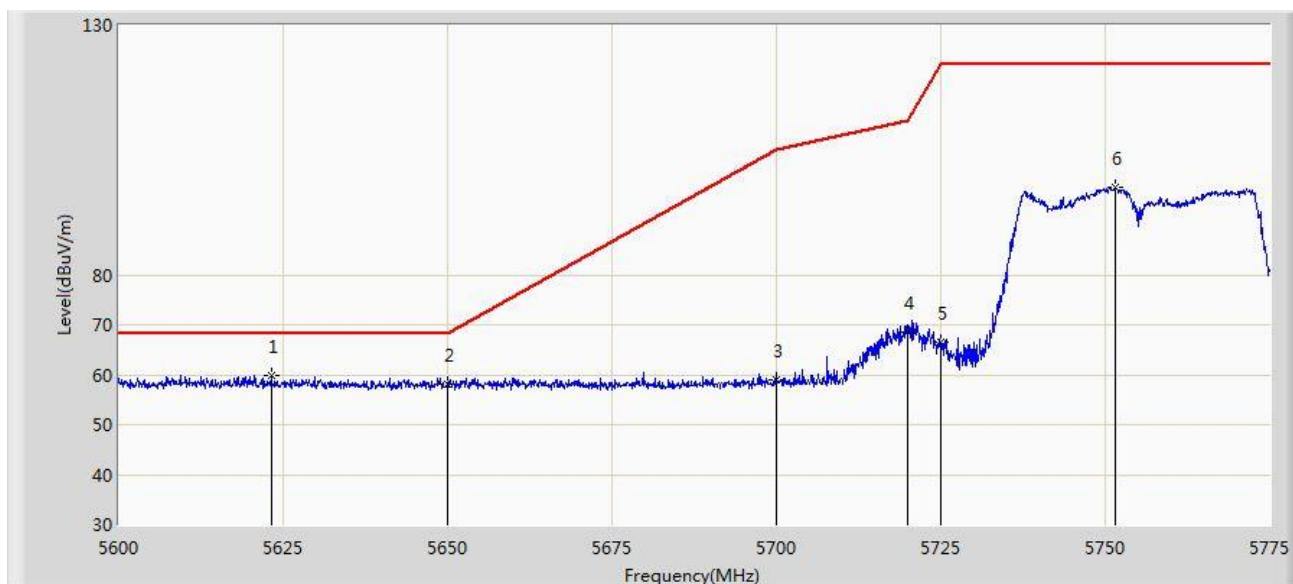


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5623.187	59.817	53.511	-8.383	68.200	6.306	PK
2			5650.000	58.079	51.820	-10.121	68.200	6.258	PK
3			5700.000	59.118	52.693	-46.082	105.200	6.426	PK
4			5720.000	68.647	62.262	-42.153	110.800	6.386	PK
5			5725.000	66.564	60.140	-55.636	122.200	6.424	PK
6			5751.462	97.554	90.747	N/A	N/A	6.807	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 04:34
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5795MHz Ant 0 + 1	

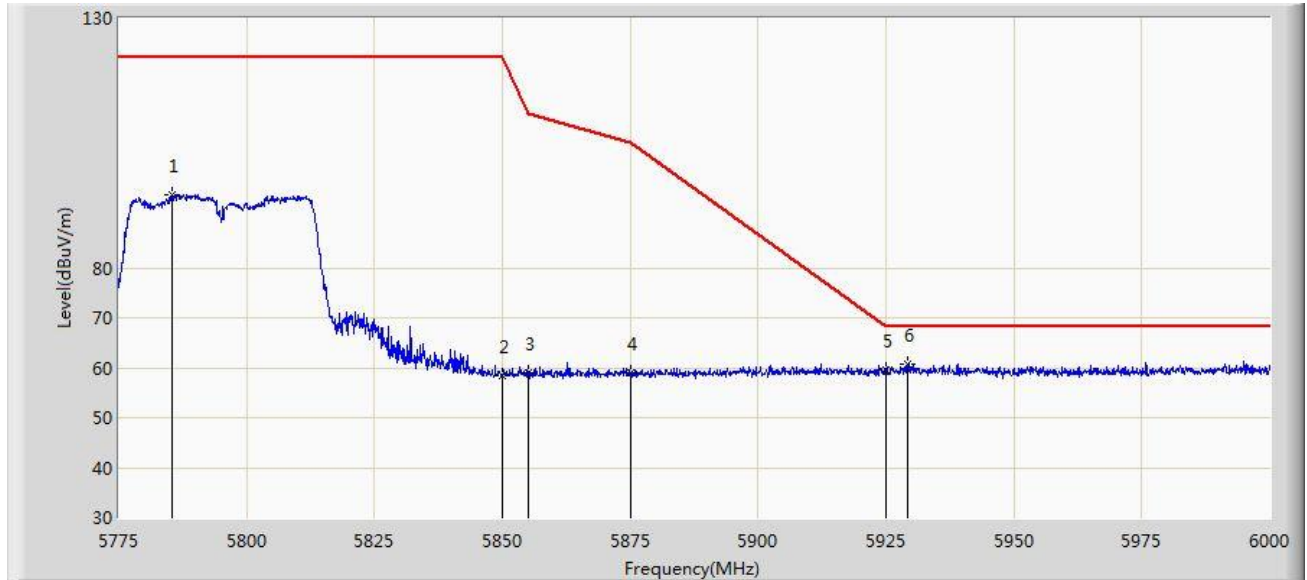


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5785.462	94.537	87.840	N/A	N/A	6.696	PK
2			5850.000	58.445	51.637	-63.755	122.200	6.808	PK
3			5855.000	59.090	52.270	-51.710	110.800	6.820	PK
4			5875.000	58.846	51.928	-46.354	105.200	6.918	PK
5			5925.000	59.570	52.473	-8.630	68.200	7.097	PK
6		*	5929.350	60.709	53.557	-7.491	68.200	7.151	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 04:37
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5795MHz Ant 0 + 1	

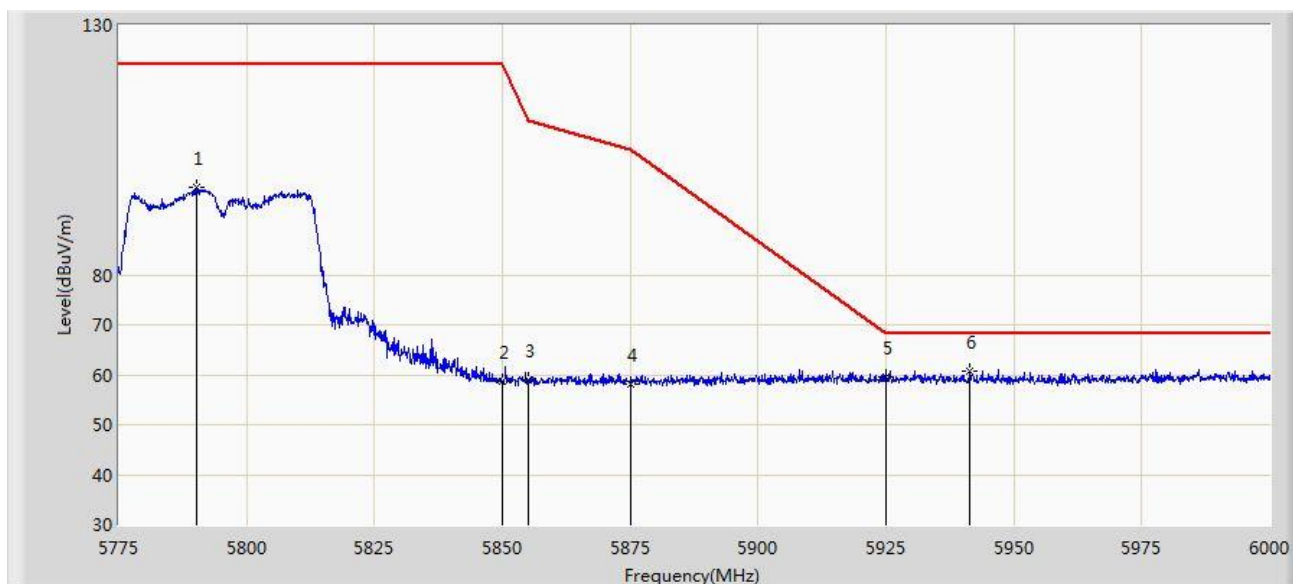


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5790.187	97.579	90.868	N/A	N/A	6.711	PK
2			5850.000	58.646	51.838	-63.554	122.200	6.808	PK
3			5855.000	59.088	52.268	-51.712	110.800	6.820	PK
4			5875.000	58.153	51.235	-47.047	105.200	6.918	PK
5			5925.000	59.618	52.521	-8.582	68.200	7.097	PK
6		*	5941.388	60.679	53.504	-7.521	68.200	7.176	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 21:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 0 + 1	

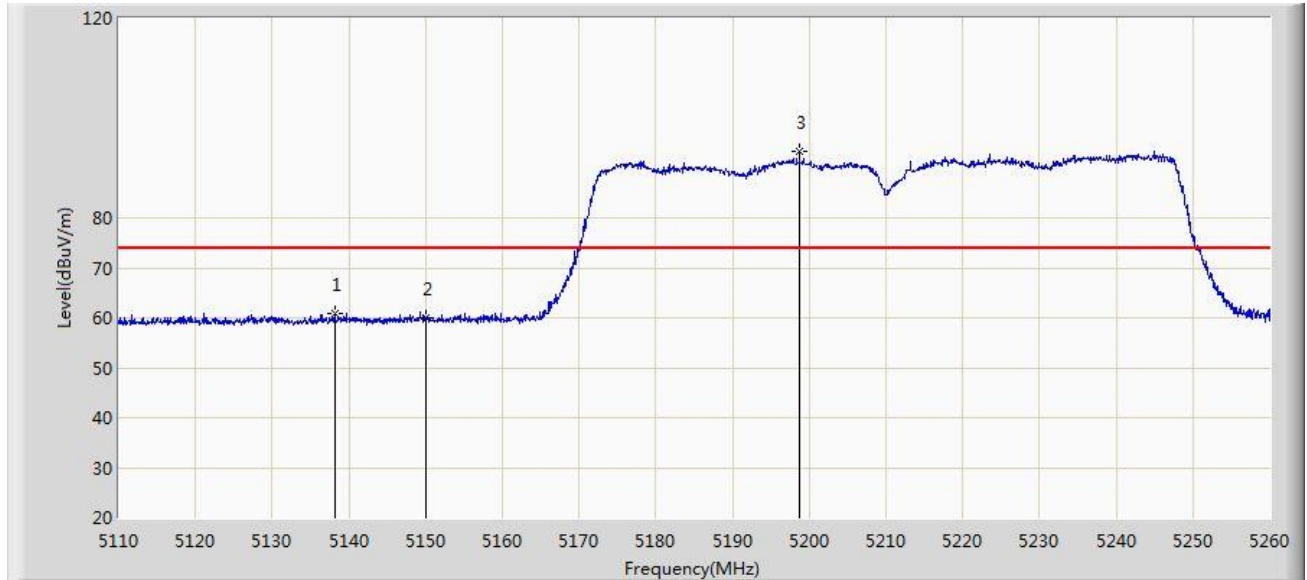

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5138.125	60.991	54.364	-13.009	74.000	6.628	PK
2			5150.000	59.867	53.415	-14.133	74.000	6.452	PK
3		*	5198.725	93.454	87.114	N/A	N/A	6.339	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 21:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 0 + 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.267	40.815	-6.733	54.000	6.452	AV
2		*	5244.175	82.604	76.447	N/A	N/A	6.157	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 21:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 0 + 1	

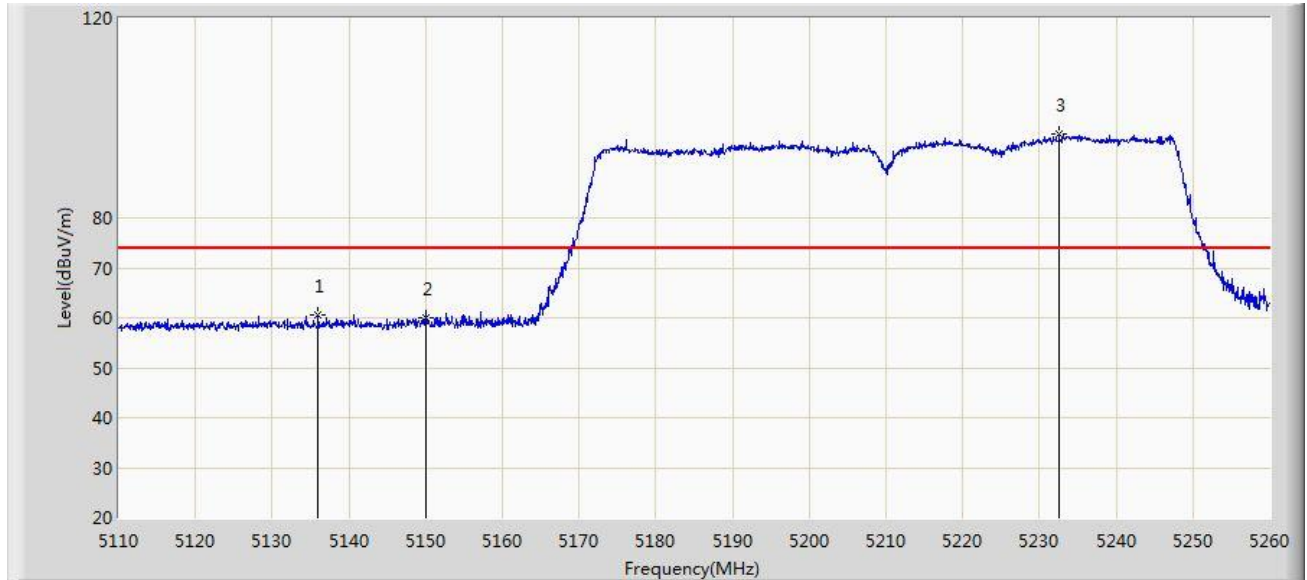


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5136.025	60.666	54.002	-13.334	74.000	6.664	PK
2			5150.000	60.120	53.668	-13.880	74.000	6.452	PK
3		*	5232.550	96.687	90.569	N/A	N/A	6.119	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 21:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 0 + 1	

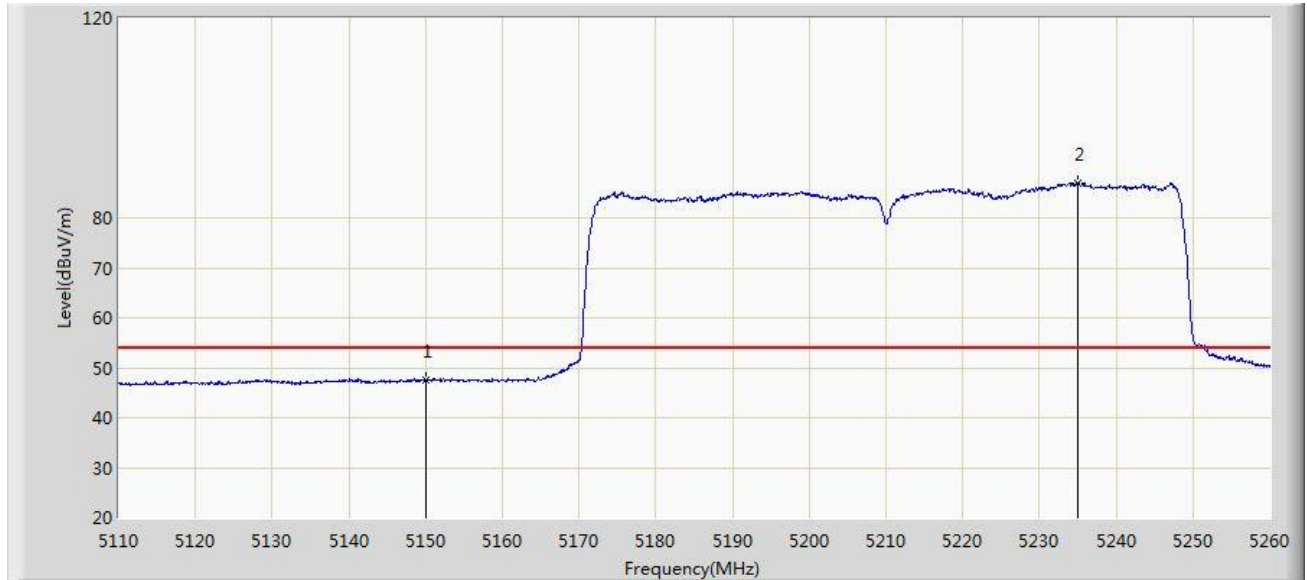


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.535	41.083	-6.465	54.000	6.452	AV
2		*	5235.025	87.021	80.918	N/A	N/A	6.103	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 21:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz Ant 0 + 1	

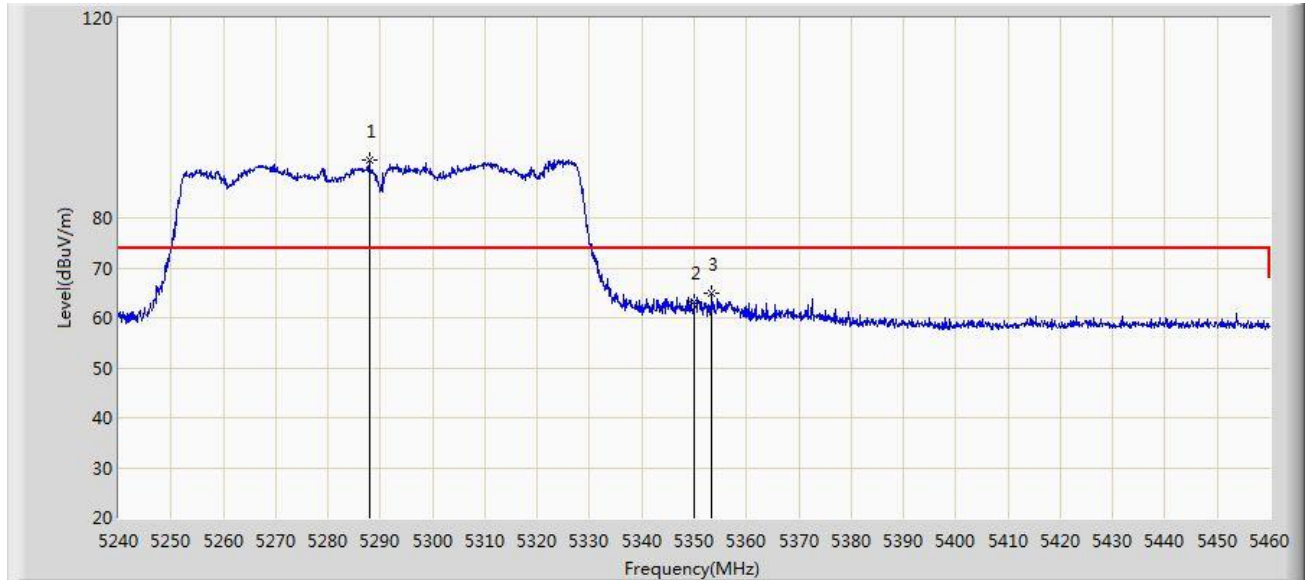


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5287.850	91.580	85.695	N/A	N/A	5.884	PK
2			5350.000	63.265	56.807	-10.735	74.000	6.458	PK
3			5353.300	65.060	58.699	-8.940	74.000	6.361	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 21:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz Ant 0 + 1	

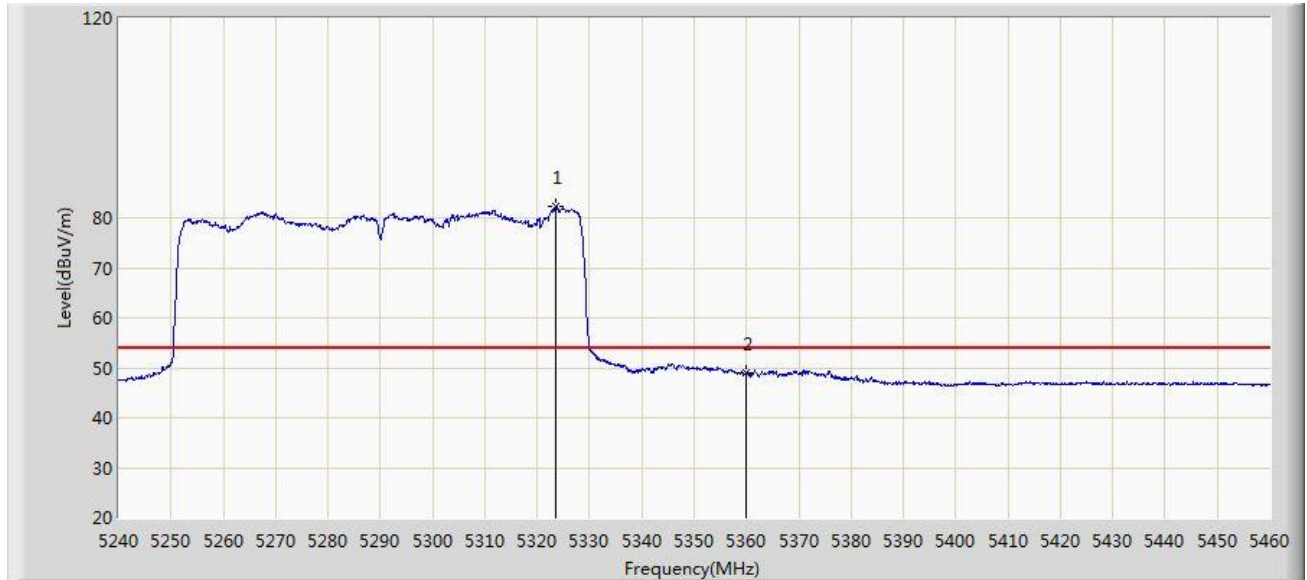


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5323.600	82.398	76.157	N/A	N/A	6.241	AV
2			5360.000	48.996	42.808	-5.004	54.000	6.188	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 21:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz Ant 0 + 1	

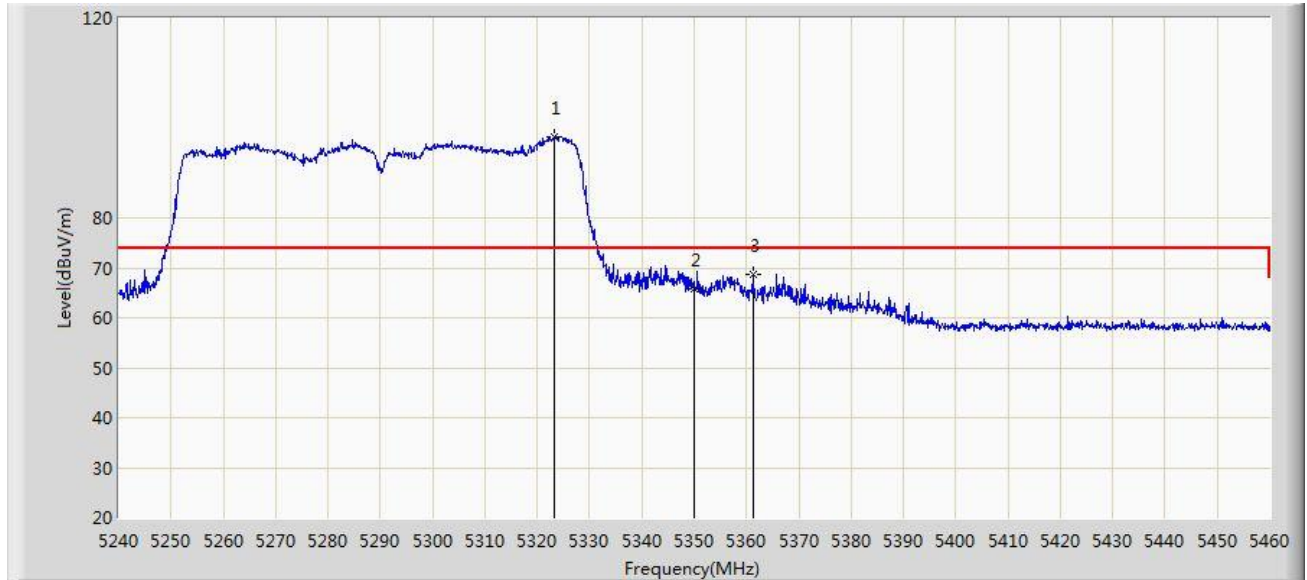


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5323.380	96.365	90.129	N/A	N/A	6.236	PK
2			5350.000	65.875	59.417	-8.125	74.000	6.458	PK
3			5361.220	68.622	62.466	-5.378	74.000	6.157	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 21:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz Ant 0 + 1	

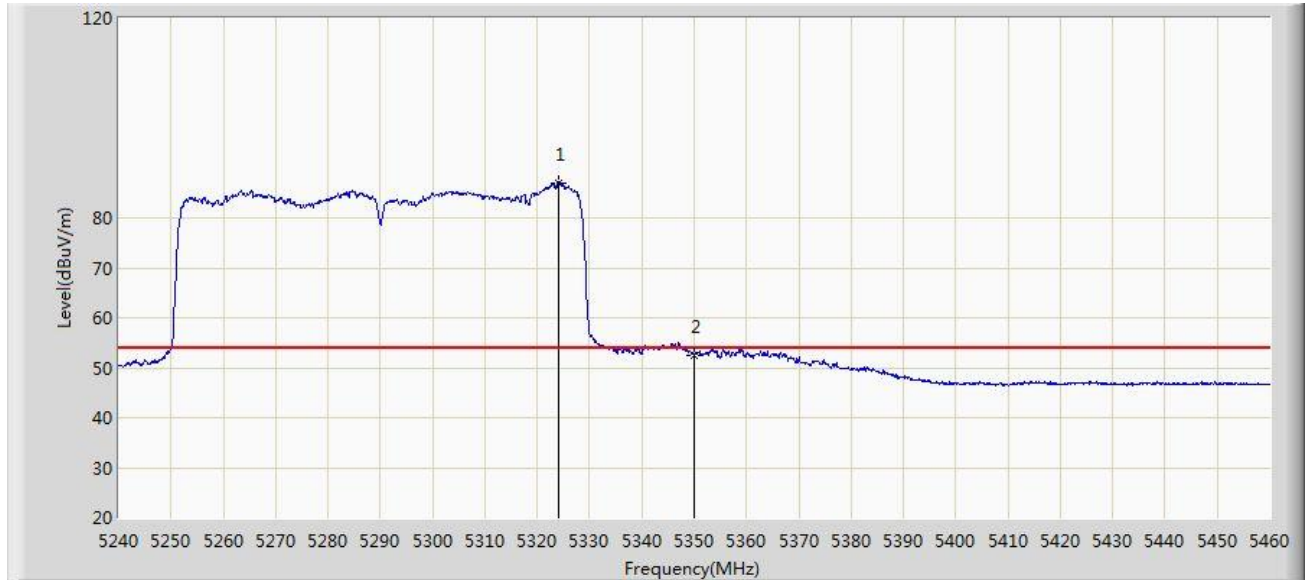


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5324.040	87.036	80.783	N/A	N/A	6.252	AV
2			5350.000	52.564	46.106	-1.436	54.000	6.458	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 22:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz Ant 0 + 1	

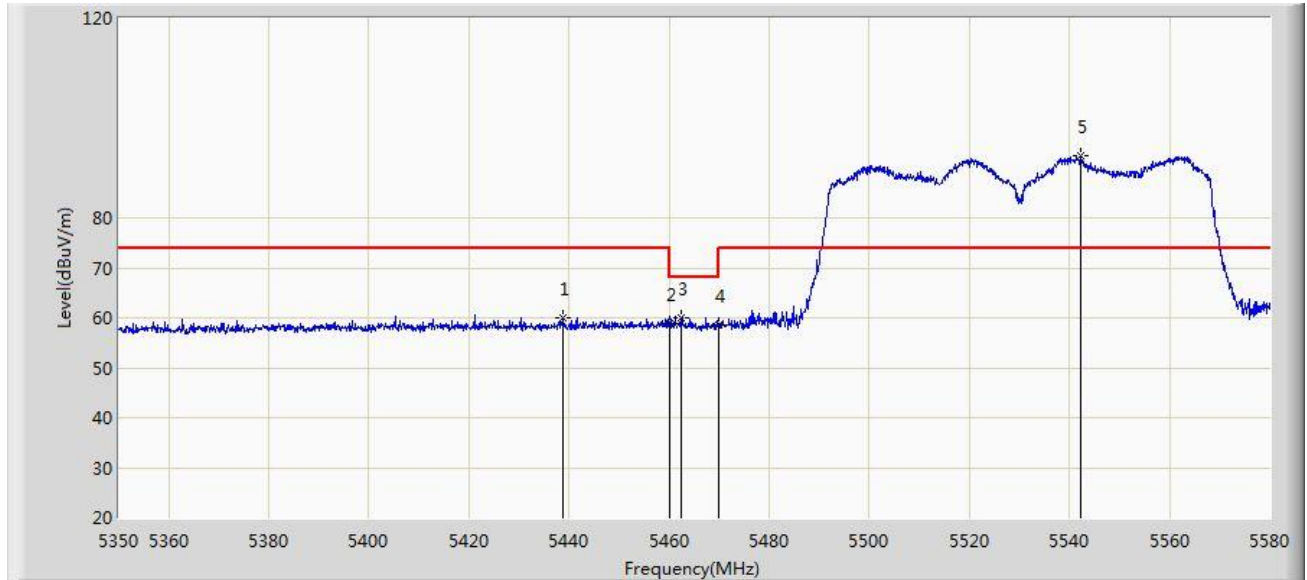


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5438.665	59.965	53.540	-14.035	74.000	6.425	PK
2			5460.000	58.758	52.272	-15.242	74.000	6.486	PK
3			5462.470	59.950	53.455	-8.250	68.200	6.494	PK
4			5470.000	58.486	51.961	-9.714	68.200	6.524	PK
5		*	5542.165	92.559	85.714	N/A	N/A	6.845	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 22:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz Ant 0 + 1	

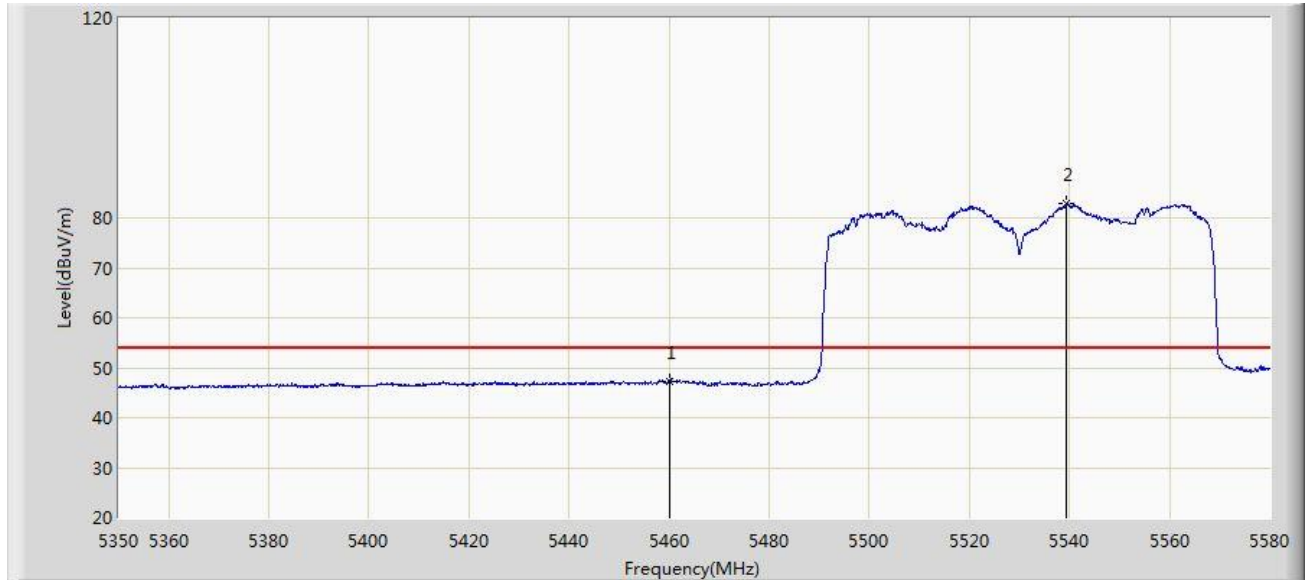


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.255	40.769	-6.745	54.000	6.486	AV
2		*	5539.405	82.774	76.025	N/A	N/A	6.749	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 22:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz Ant 0 + 1	

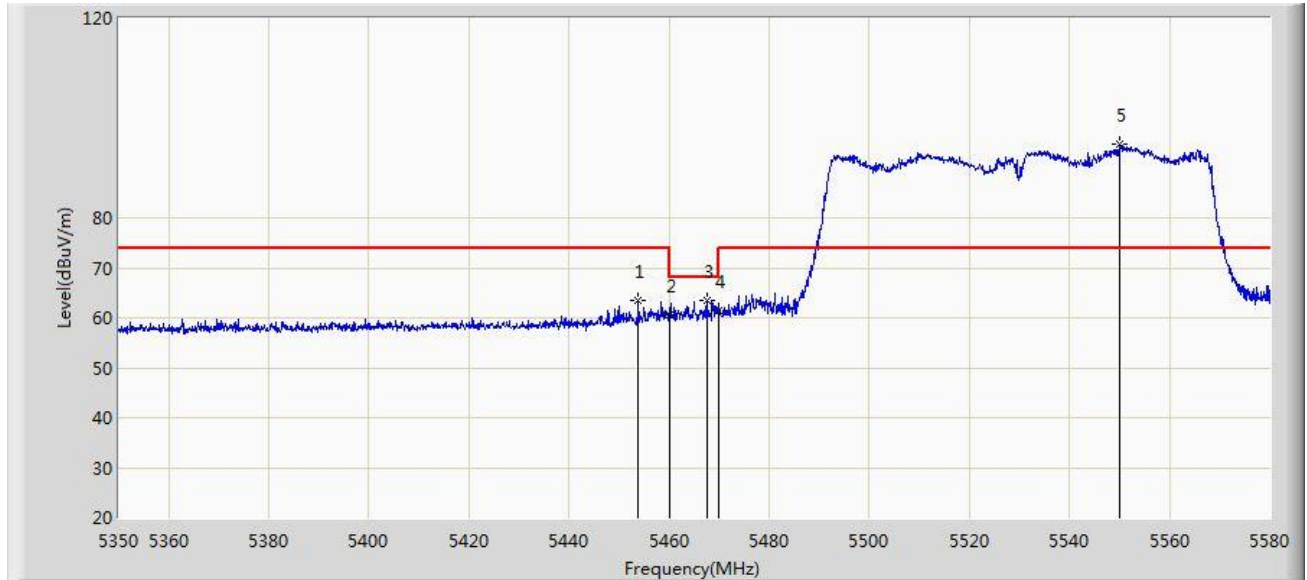


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5453.845	63.527	57.064	-10.473	74.000	6.463	PK
2			5460.000	60.713	54.227	-13.287	74.000	6.486	PK
3			5467.530	63.590	57.075	-4.610	68.200	6.515	PK
4			5470.000	61.332	54.807	-6.868	68.200	6.524	PK
5		*	5549.985	94.883	88.092	N/A	N/A	6.792	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 22:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz Ant 0 + 1	

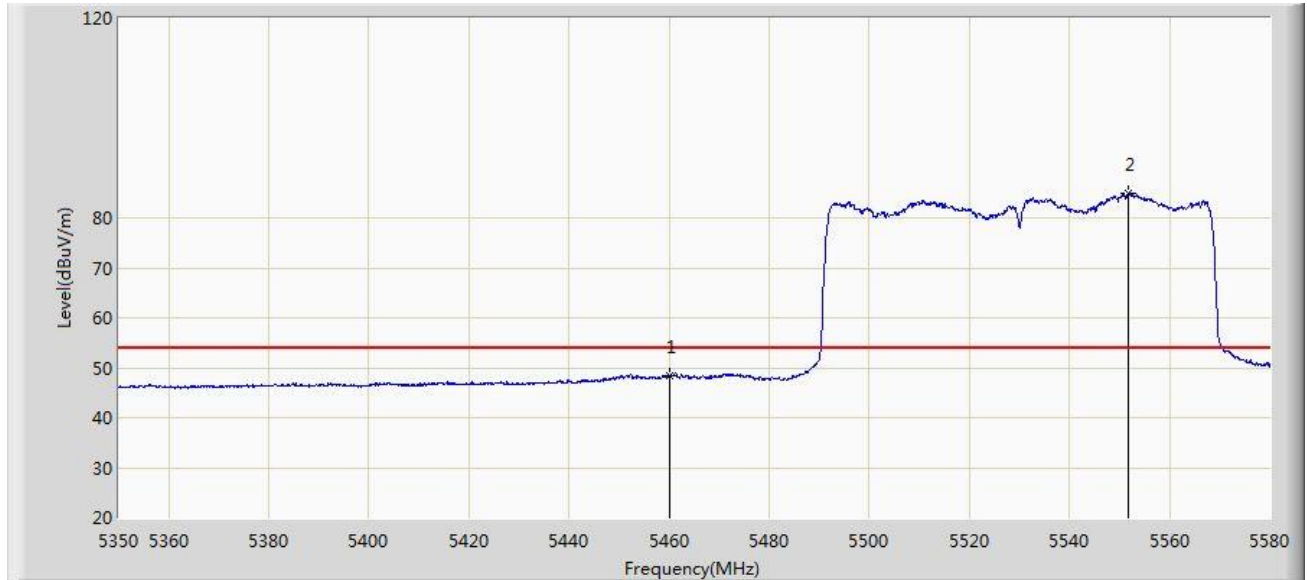


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.269	41.783	-5.731	54.000	6.486	AV
2		*	5551.710	84.807	78.040	N/A	N/A	6.767	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 22:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5610MHz Ant 0 + 1	

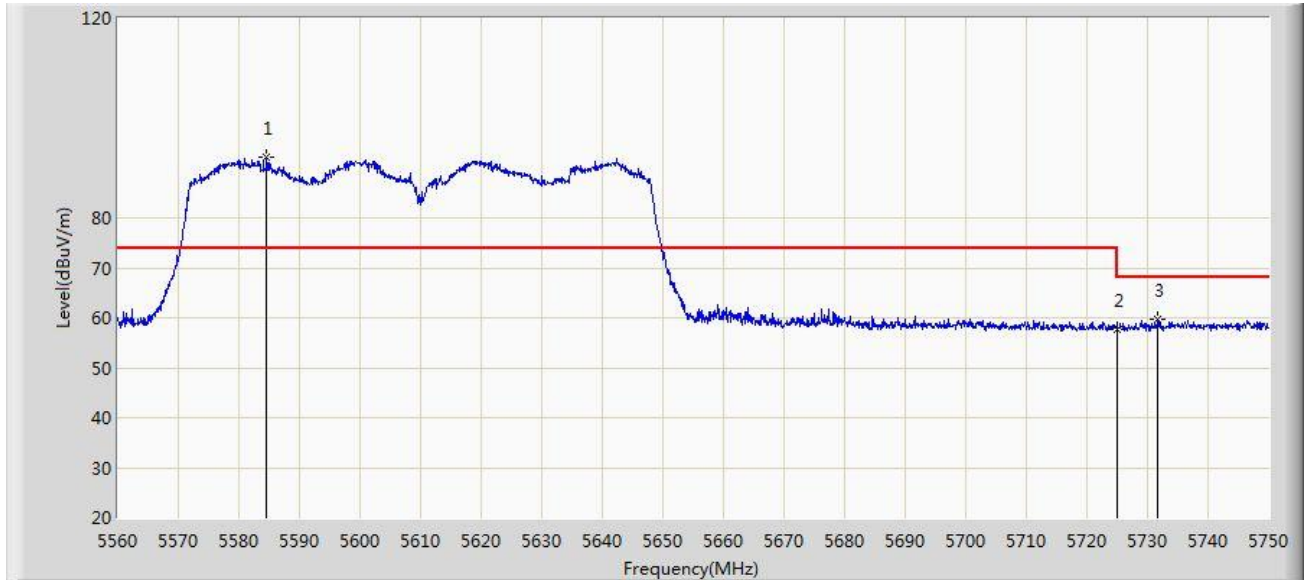


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5584.510	92.084	85.433	N/A	N/A	6.651	PK
2			5725.000	57.759	51.335	-10.441	68.200	6.424	PK
3			5731.760	59.779	53.227	-8.421	68.200	6.552	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 22:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5610MHz Ant 0 + 1	

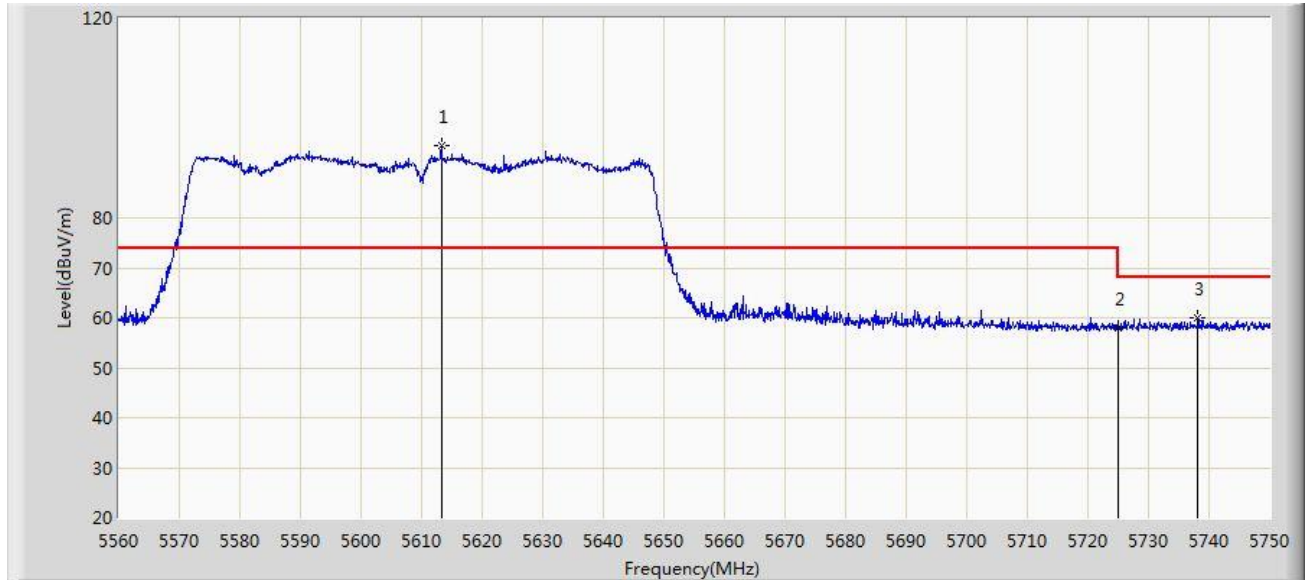


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5613.295	94.485	87.958	N/A	N/A	6.527	PK
2			5725.000	58.057	51.633	-10.143	68.200	6.424	PK
3			5738.125	59.920	53.249	-8.280	68.200	6.671	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 22:22
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5775MHz Ant 0 + 1	

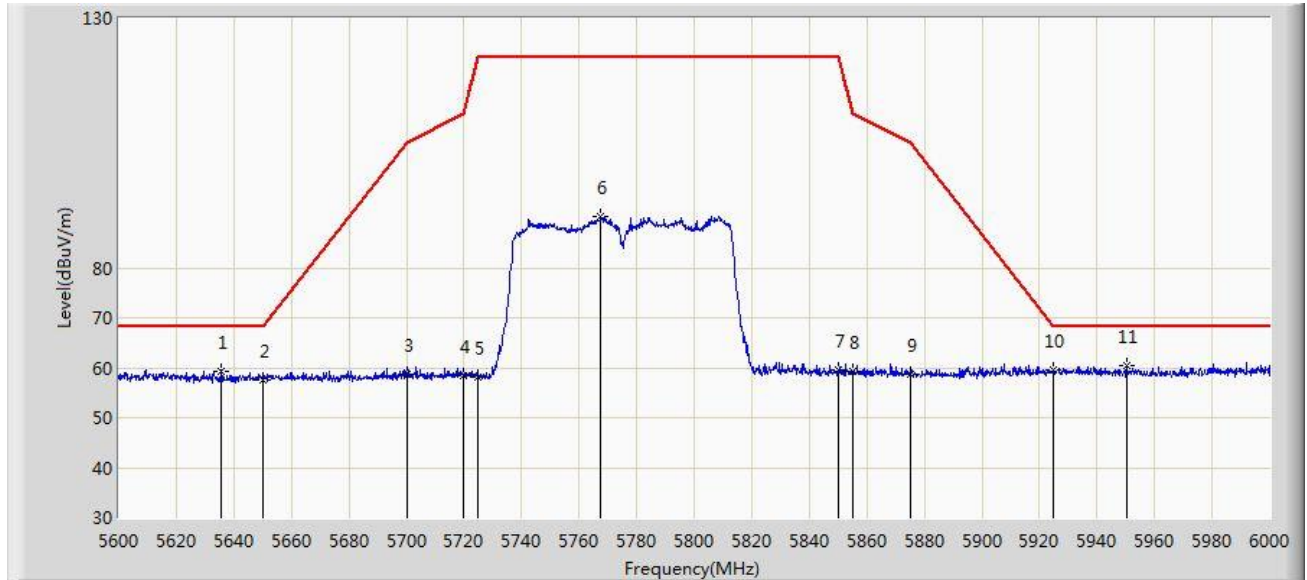


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5635.400	59.414	53.359	-8.786	68.200	6.054	PK
2			5650.000	57.558	51.299	-10.642	68.200	6.258	PK
3			5700.000	58.732	52.307	-46.468	105.200	6.426	PK
4			5720.000	58.469	52.084	-52.331	110.800	6.386	PK
5			5725.000	58.194	51.770	-64.006	122.200	6.424	PK
6			5767.400	90.146	83.380	N/A	N/A	6.766	PK
7			5850.000	59.710	52.902	-62.490	122.200	6.808	PK
8			5855.000	59.314	52.494	-51.486	110.800	6.820	PK
9			5875.000	58.733	51.815	-46.467	105.200	6.918	PK
10			5925.000	59.552	52.455	-8.648	68.200	7.097	PK
11		*	5950.400	60.298	53.227	-7.902	68.200	7.071	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 22:23
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5775MHz Ant 0 + 1	

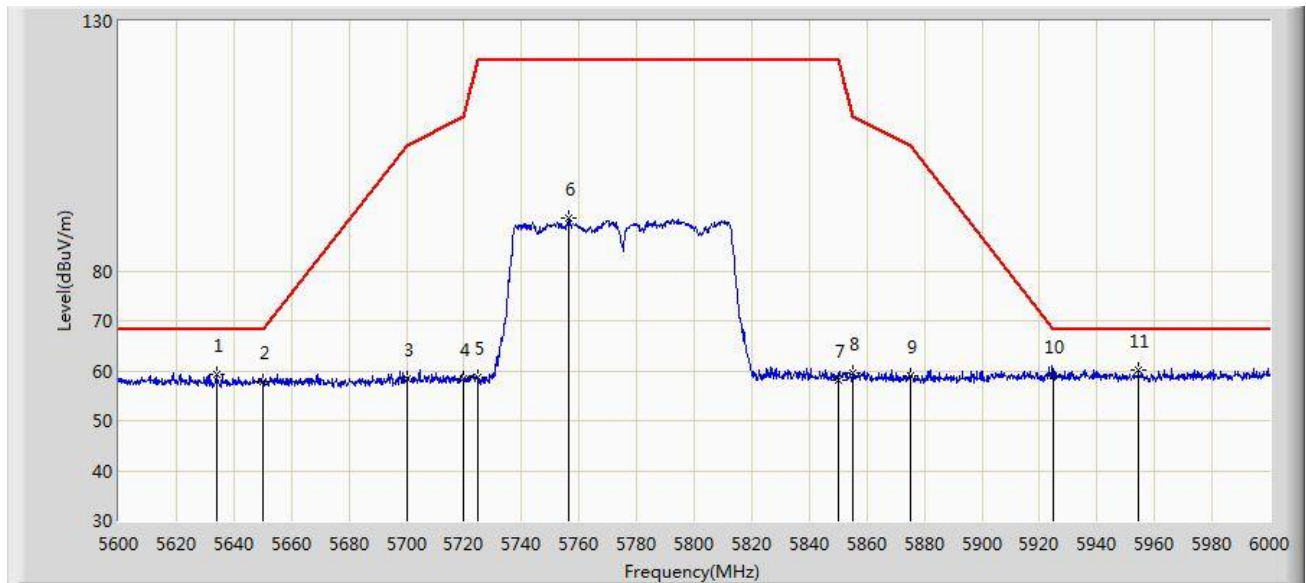

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5634.200	59.260	53.209	-8.940	68.200	6.050	PK
2			5650.000	57.731	51.472	-10.469	68.200	6.258	PK
3			5700.000	58.383	51.958	-46.817	105.200	6.426	PK
4			5720.000	58.268	51.883	-52.532	110.800	6.386	PK
5			5725.000	58.753	52.329	-63.447	122.200	6.424	PK
6			5756.200	90.700	83.863	N/A	N/A	6.838	PK
7			5850.000	58.019	51.211	-64.181	122.200	6.808	PK
8			5855.000	59.441	52.621	-51.359	110.800	6.820	PK
9			5875.000	59.082	52.164	-46.118	105.200	6.918	PK
10			5925.000	58.928	51.831	-9.272	68.200	7.097	PK
11		*	5954.400	60.084	53.046	-8.116	68.200	7.038	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

7.10. AC Conducted Emissions Measurement


7.10.1. TestLimit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.10.2. Test Setup

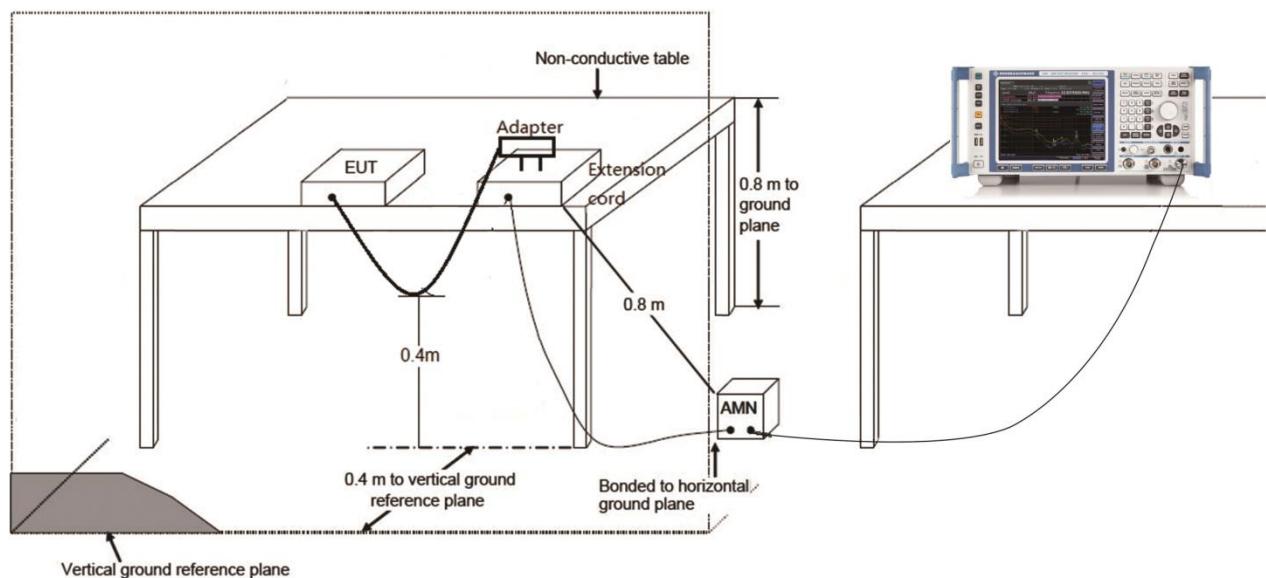

7.10.3.Test Result

Site: SR2	Time: 2020/07/13 - 17:51
Limit: FCC_Part15.207_CE_AC Power	Engineer: Hyde Yu
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5180MHz	

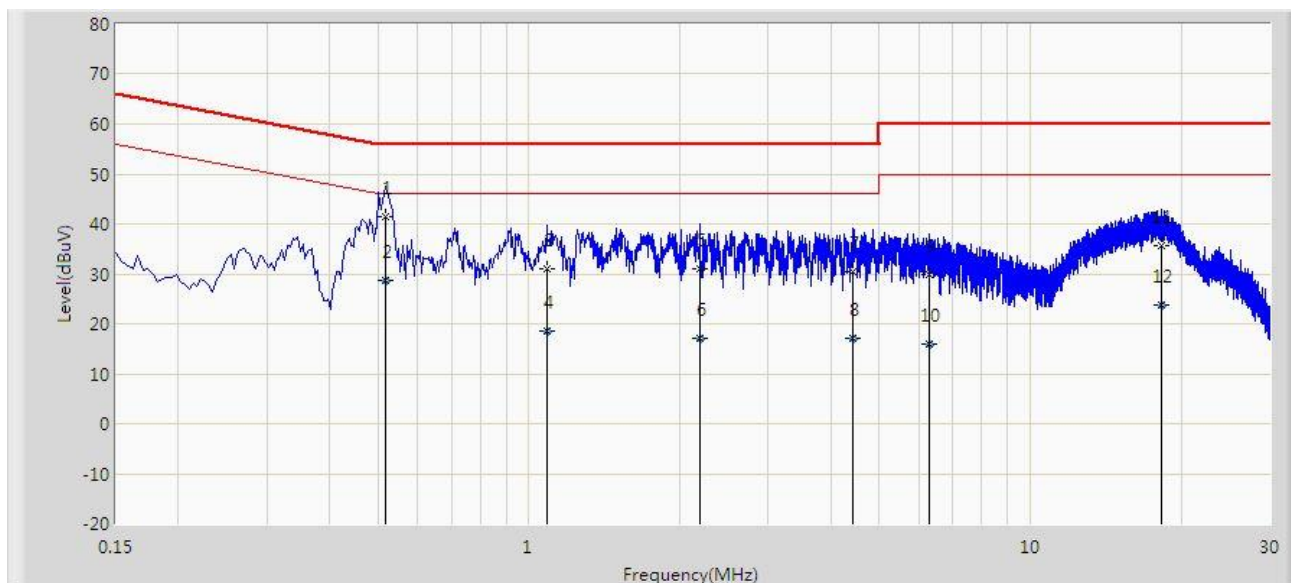


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor	Type
1		*	0.518	41.428	31.688	-14.572	56.000	9.740	QP
2			0.518	28.572	18.832	-17.428	46.000	9.740	AV
3			1.086	30.920	21.079	-25.080	56.000	9.840	QP
4			1.086	18.419	8.578	-27.581	46.000	9.840	AV
5			2.194	30.978	21.143	-25.022	56.000	9.834	QP
6			2.194	17.153	7.318	-28.847	46.000	9.834	AV
7			4.434	30.539	20.445	-25.461	56.000	10.095	QP
8			4.434	16.984	6.889	-29.016	46.000	10.095	AV
9			6.294	29.859	19.560	-30.141	60.000	10.299	QP
10			6.294	16.057	5.758	-33.943	50.000	10.299	AV
11			18.226	35.775	25.463	-24.225	60.000	10.313	QP
12			18.226	23.832	13.519	-26.168	50.000	10.313	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2020/07/13 - 17:55
Limit: FCC_Part15.207_CE_AC Power	Engineer: Hyde Yu
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5180MHz	

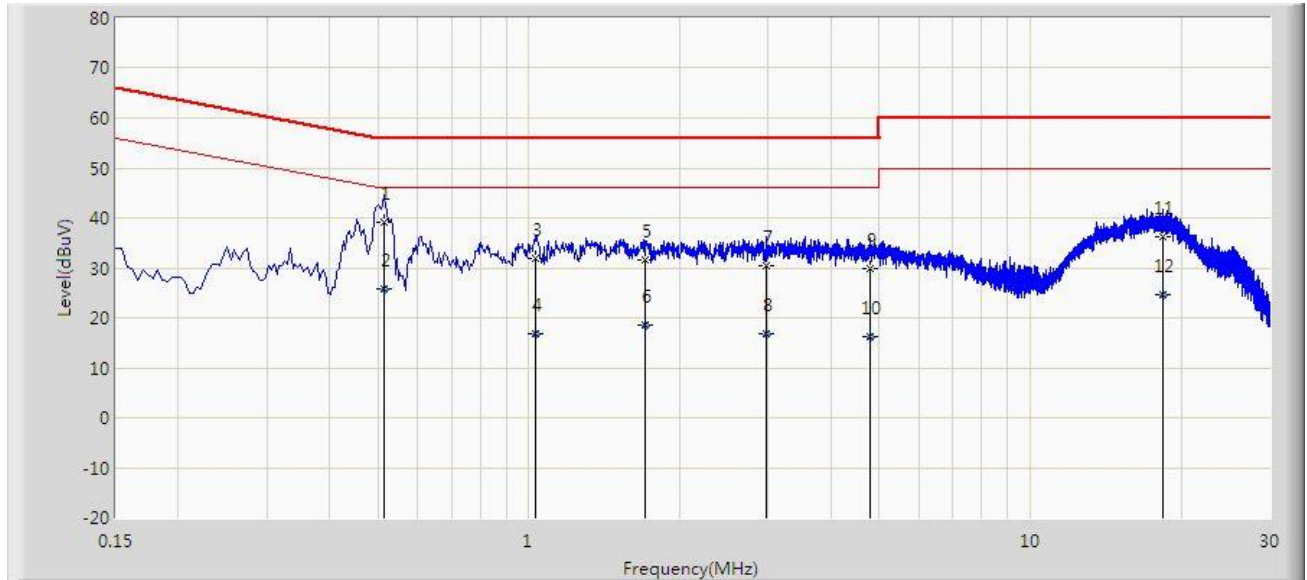

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor	Type
1		*	0.514	39.182	29.523	-16.818	56.000	9.659	QP
2			0.514	25.835	16.176	-20.165	46.000	9.659	AV
3			1.034	31.892	22.195	-24.108	56.000	9.697	QP
4			1.034	16.882	7.184	-29.118	46.000	9.697	AV
5			1.702	31.585	21.832	-24.415	56.000	9.753	QP
6			1.702	18.503	8.750	-27.497	46.000	9.753	AV
7			2.982	30.398	20.584	-25.602	56.000	9.815	QP
8			2.982	16.688	6.873	-29.312	46.000	9.815	AV
9			4.782	29.745	19.674	-26.255	56.000	10.071	QP
10			4.782	16.327	6.256	-29.673	46.000	10.071	AV
11			18.322	36.254	25.992	-23.746	60.000	10.262	QP
12			18.322	24.642	14.380	-25.358	50.000	10.262	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC rules.

The End

Appendix A - Test Setup Photograph

Refer to “2006RSU069-UT” file.

Appendix B - EUT Photograph

Refer to "2006RSU069-UE" file.