



**FCC 47 CFR PART 15 SUBPART C
INDUSTRY CANADA RSS-247 ISSUE 1**

**CERTIFICATION TEST REPORT
For**

Dolphin CT50

**MODEL NUMBER: CT50L0N
FCC ID: HD5-CT50L0N
IC ID: 1693B-CT50L0N**

**REPORT NUMBER: 15U20259-E8
ISSUE DATE: JUNE 05, 2015**

Prepared for
**HONEYWELL INTERNATIONAL INC
HONEYWELL SCANNING & MOBILITY
9680 OLD BAILES ROAD
FORT MILL, SOUTH CAROLINA 29715, USA**

Prepared by
**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	06/05/15	Initial Issue	C.S.OOI

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION	6
4.3. MEASUREMENT UNCERTAINTY.....	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT	7
5.2. MAXIMUM OUTPUT POWER.....	7
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	7
5.4. SOFTWARE AND FIRMWARE.....	7
5.5. WORST-CASE CONFIGURATION AND MODE.....	7
5.6. DESCRIPTION OF TEST SETUP.....	8
6. TEST AND MEASUREMENT EQUIPMENT	10
7. SUMMARY TABLE	11
8. ANTENNA PORT TEST RESULTS	12
8.1. 20 dB AND 99% BANDWIDTH	12
8.1.1. BASIC DATA RATE GFSK MODULATION	12
8.1.2. ENHANCED DATA RATE 8PSK MODULATION	12
8.1.3. 20 dB AND 99% BANDWIDTH PLOTS.....	13
8.2. HOPPING FREQUENCY SEPARATION	25
8.3. NUMBER OF HOPPING CHANNELS.....	27
8.4. AVERAGE TIME OF OCCUPANCY.....	32
8.5. OUTPUT POWER.....	39
8.5.1. BASIC DATA RATE GFSK MODULATION	39
8.5.2. ENHANCED DATA RATE 8PSK MODULATION	39
8.5.3. OUTPUT POWER PLOTS.....	40
8.6. AVERAGE POWER.....	46
8.6.1. BASIC DATA RATE GFSK MODULATION	46
8.6.2. DATA RATE PI/4-DQPSK MODULATION	46
8.6.3. ENHANCED DATA RATE 8PSK MODULATION	47
8.7. CONDUCTED SPURIOUS EMISSIONS.....	48
8.7.1. BASIC DATA RATE GFSK MODULATION	49
8.7.2. ENHANCED DATA RATE 8PSK MODULATION	57
9. RADIATED TEST RESULTS.....	65

9.1.	LIMITS AND PROCEDURE	65
9.2.	TRANSMITTER ABOVE 1 GHz	66
9.2.1.	BASIC DATA RATE GFSK MODULATION	66
9.2.2.	ENHANCED DATA RATE 8PSK MODULATION	79
9.3.	WORST-CASE BELOW 1 GHz.....	92
10.	AC POWER LINE CONDUCTED EMISSIONS	95
11.	SETUP PHOTOS	98
	END OF REPORT	99

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: HONEYWELL INTERNATIONAL INC
HONEYWELL SCANNING & MOBILITY

EUT DESCRIPTION: Dolphin CT50

MODEL: CT50L0N

SERIAL NUMBER: 15099404A2

DATE TESTED: MAY 11 – JUNE 4, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-247 ISSUE 1	Pass
INDUSTRY CANADA RSS-GEN ISSUE 4	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



CHOON OOI
CONSUMER TECHNOLOGY DIVISION
PROJECT LEAD
UL Verification Services Inc.

Tested By:



STEVEN TRAN
CONSUMER TECHNOLOGY DIVISION
WISE LAB ENGINEER
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2009 for FCC and ANSI C63.10-2013 for IC, RSS-GEN Issue 4, RSS-247 Issue 1.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A(IC: 2324B-1)	☐ Chamber D(IC: 2324B-4)
☐ Chamber B(IC: 2324B-2)	☐ Chamber E(IC: 2324B-5)
☒ Chamber C(IC: 2324B-3)	☐ Chamber F(IC: 2324B-6)
	☐ Chamber G(IC: 2324B-7)
	☐ Chamber H(IC: 2324B-8)

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a Dolphin CT50 Mobile Computer (Terminal).

The model CT50L0N shares the same enclosure and circuit board as model CT50LFN. The unlicensed radios (WLAN/BT/NFC) including antenna, are identical between the two units.

Difference is CT50L0N has only unlicensed radio but CT50LFN has unlicensed radio and licensed radio.

After confirming through preliminary radiated emissions that the performance of the CT50LFN data remains representative of this model (CT50L0N), CT50L0N leveraged test data from CT50LFN.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Basic GFSK	5.97	3.95
2402 - 2480	Enhanced 8PSK	6.55	4.52

Note: GFSK, Pi/4-DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on this mode to showing compliance. For average power data please refer to section 8.6.

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an embedded antenna, with a maximum gain of 1.7 dBi.

5.4. SOFTWARE AND FIRMWARE

Software version was FTM Tool version 1.7

5.5. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	PHIHONG	PSA10F-050Q	N/A	N/A
USB CUP Adapter	Honeywell	N/A	N/A	N/A


I/O CABLES

N/A

TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests.
EUT was set in the Hidden menu mode to enable BT communications.

SETUP DIAGRAM FOR TESTS

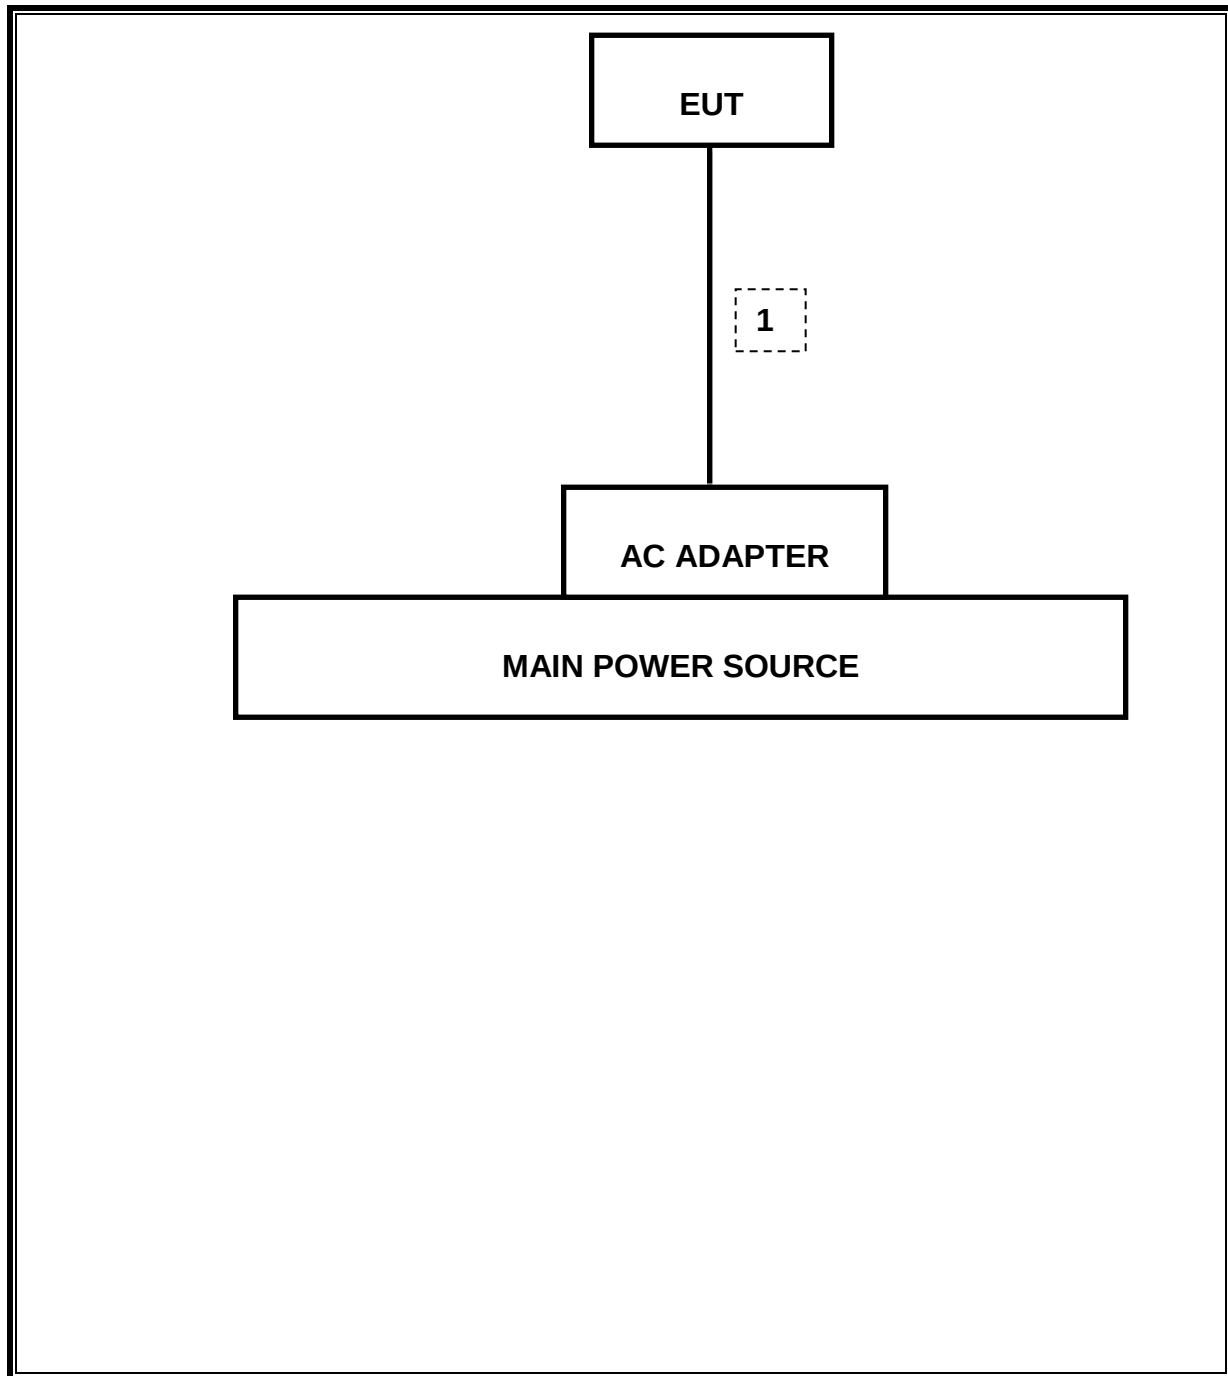

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Biconolog, 30MHz-1 GHz	Sunol Sciences	JB1	C01171	02/13/16
Antenna, Horn, 18GHz	EMCO	3115	C00783	10/25/15
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00980	11/14/15
RF Preamplifier, 100KHz -> 1300MHz	HP	8447D	T10	01/06/16
RF Preamplifier, 1GHz - 18GHz	Miteq	NSP4000-SP2	924343	03/23/16
RF Preamplifier, 1GHz - 26.5GHz	HP	8449B	F00351	06/27/15
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	12/20/15
CBT Bluetooth Tester	R & S	CBT	None	07/12/15
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/15
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/15
LISN, 30 MHz	FCC	50/250-25-2	C00626	01/14/16
Reject Filter, 2.4GHz	Micro-Tronics	BRM50702	N02684	CNR
Radiated Software	UL	UL EMC	Ver 9.5, July 22, 2014	
Conducted Software	UL	UL EMC	Ver 9.5, May 17 2012	
CLT Software	UL	UL RF	Ver 1.0, Feb 2 2015	
Antenna Port Software	UL	UL RF	Ver 2.1.1.1, Jan 20 2015	

7. SUMMARY TABLE

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
2.1049	RSS-GEN 6.6	Occupied Band width (99%)	N/A	Conducted	Pass	673 kHz
2.1051, 15.247 (d)	RSS-247 5.5	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-44 dBm
15.247 (b)(1)	RSS-247 5.4(1)	TX conducted output power	<21dBm		Pass	6.55 dBm
15.247 (a)(1)	RSS-247 5.1 (1)	Hopping frequency separation	> 25KHz		Pass	1 MHz
15.247 (a)(1)(iii)	RSS-247 5.1(4)	Number of Hopping channels	More than 15 non-overlapping channels		Pass	79 channels
15.247 (a)(1)(iii)	RSS-247 5.1(4)	Avg Time of Occupancy	< 0.4sec		Pass	0.092 s
15.207 (a)	RSS-GEN 8.8	AC Power Line conducted emissions	Section 10	Radiated	Pass	51.63 dBuV (QP)
15.205, 15.209	RSS-GEN 8.9	Radiated Spurious Emission	< 54dBuV/m		Pass	27.1 dBuV/m

8. ANTENNA PORT TEST RESULTS

8.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to $\geq$ RBW. The sweep time is coupled.

RESULTS

8.1.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	0.673	0.60124
Middle	2441	0.6761	0.67306
High	2480	0.6716	0.52592
Worst		0.6761	0.67306


8.1.2. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.0837	0.41036
Middle	2441	1.0809	0.34237
High	2480	1.0759	0.35447
Worst		1.0837	0.41036


8.1.3. 20 dB AND 99% BANDWIDTH PLOTS

GFSK 20 dB BANDWIDTH

LOW CHANNEL

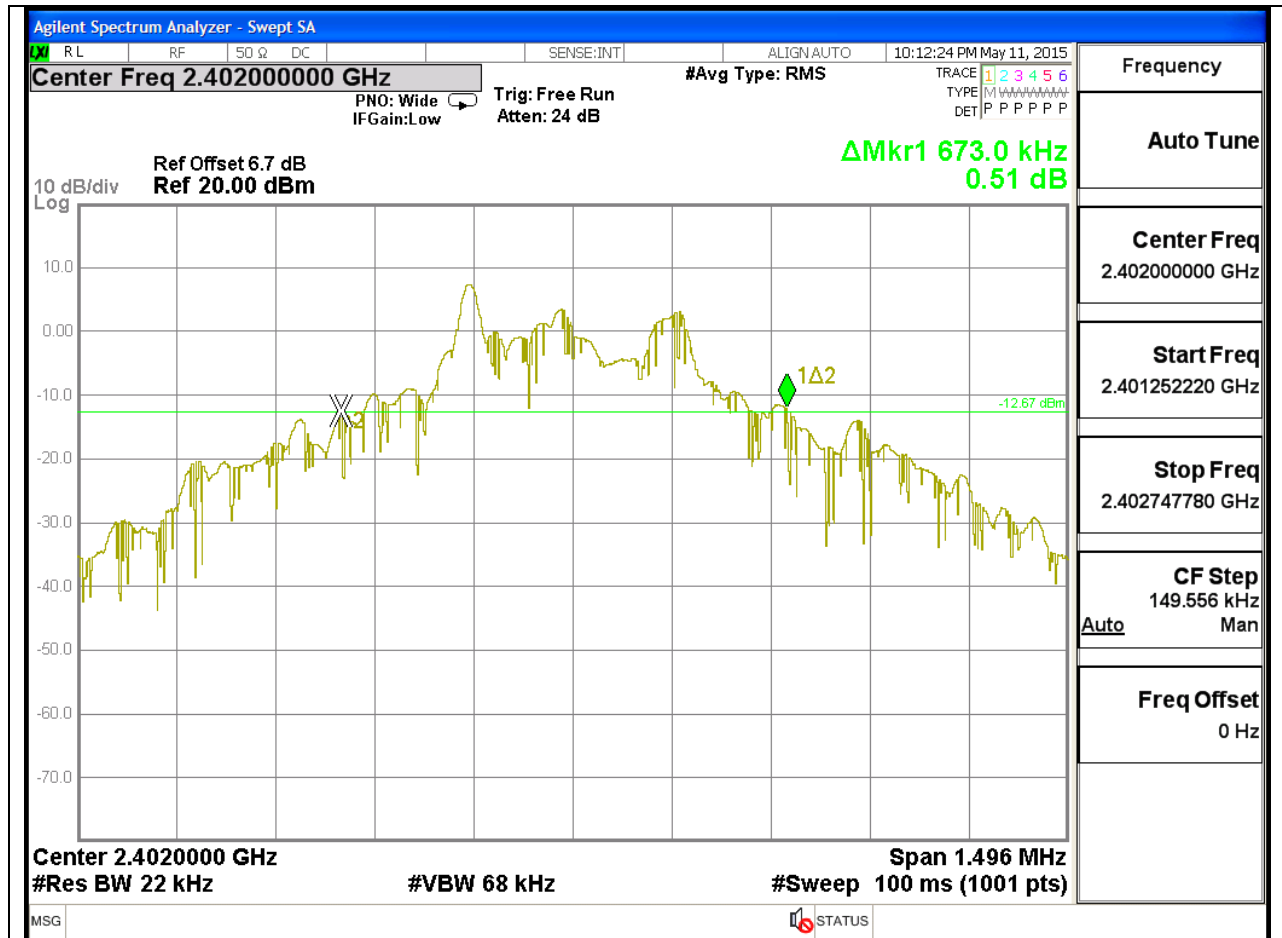

MID CHANNEL

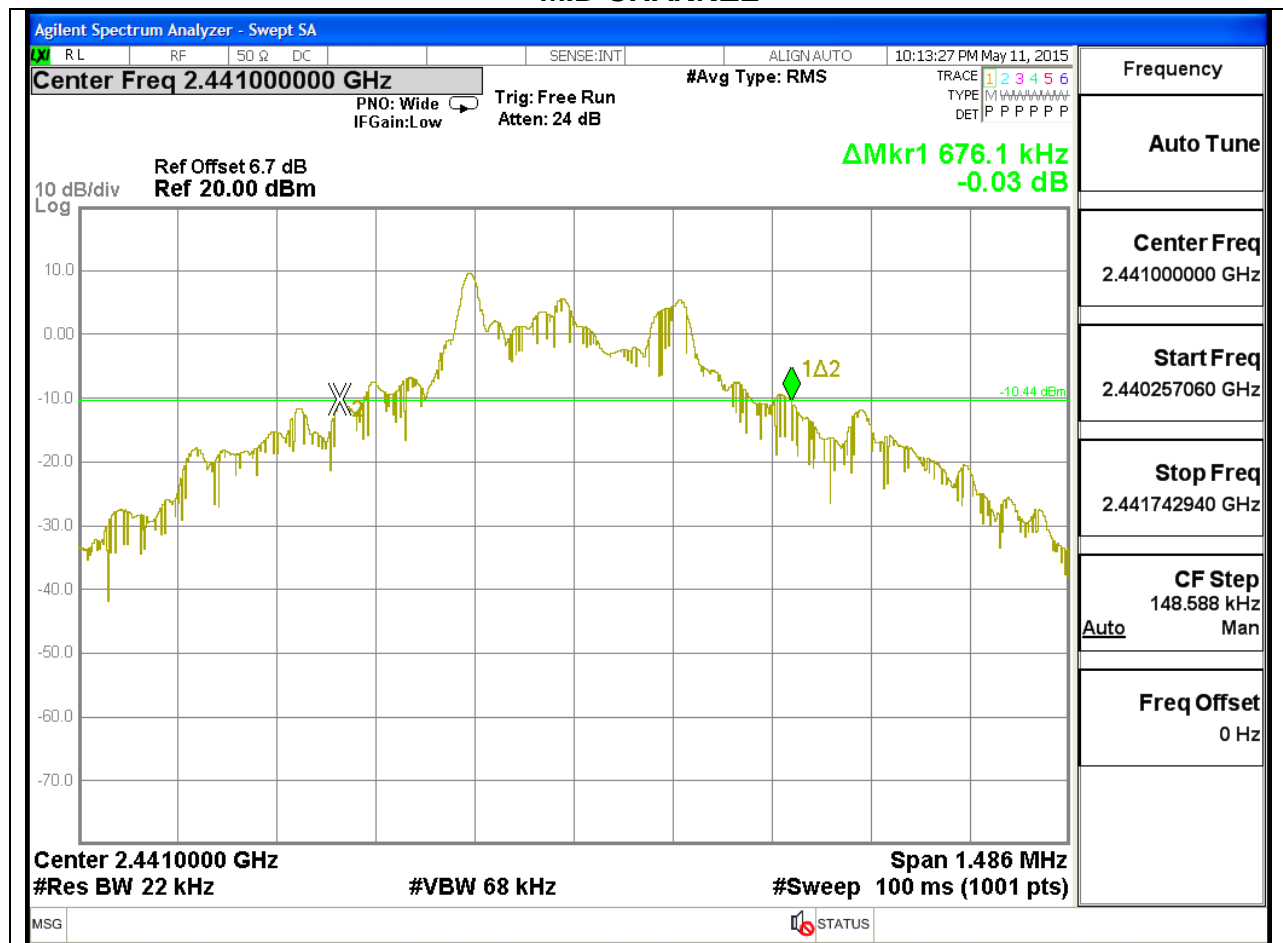


HIGH CHANNEL




GFSK 99% BANDWIDTH


LOW CHANNEL

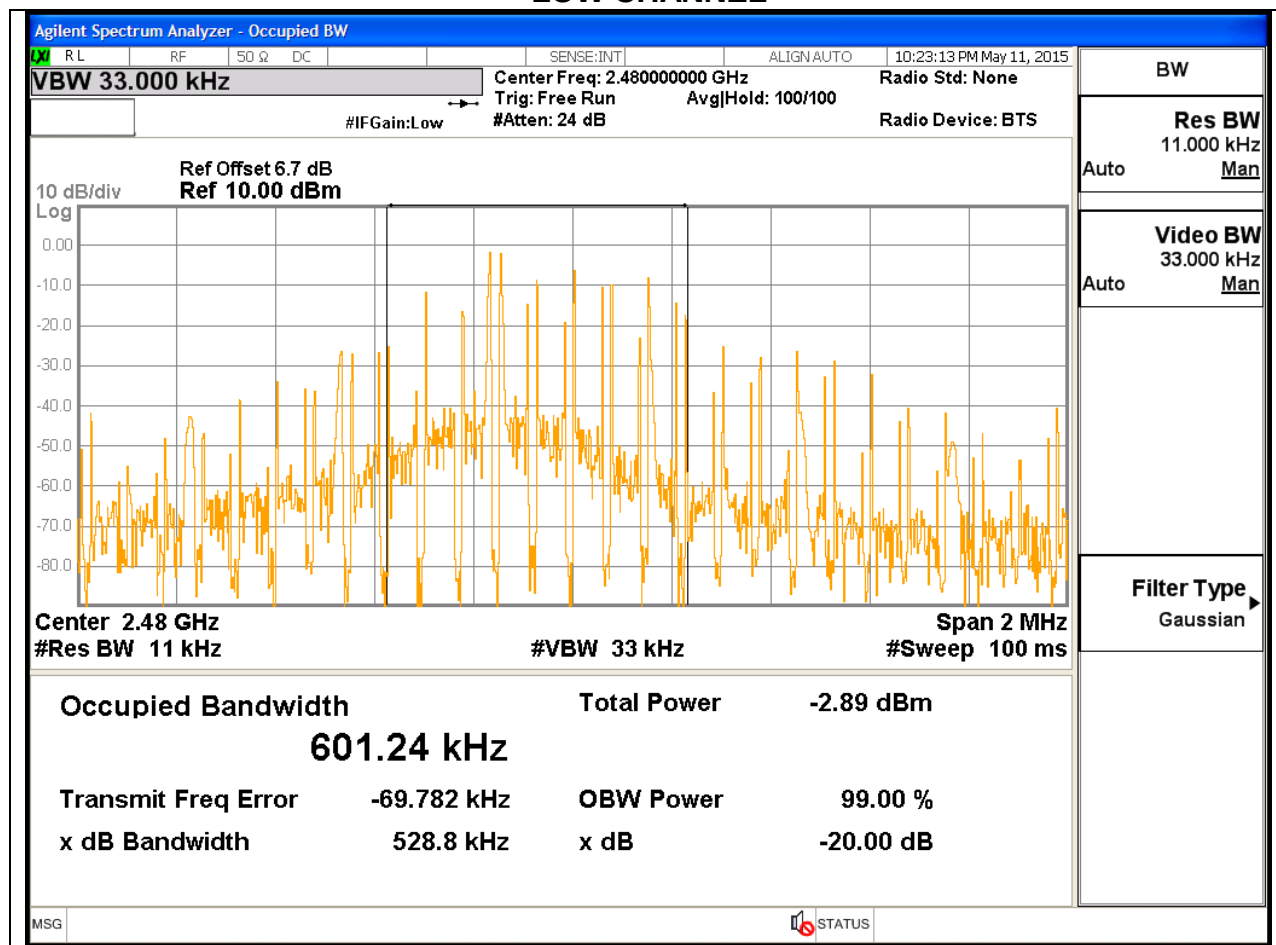

MID CHANNEL

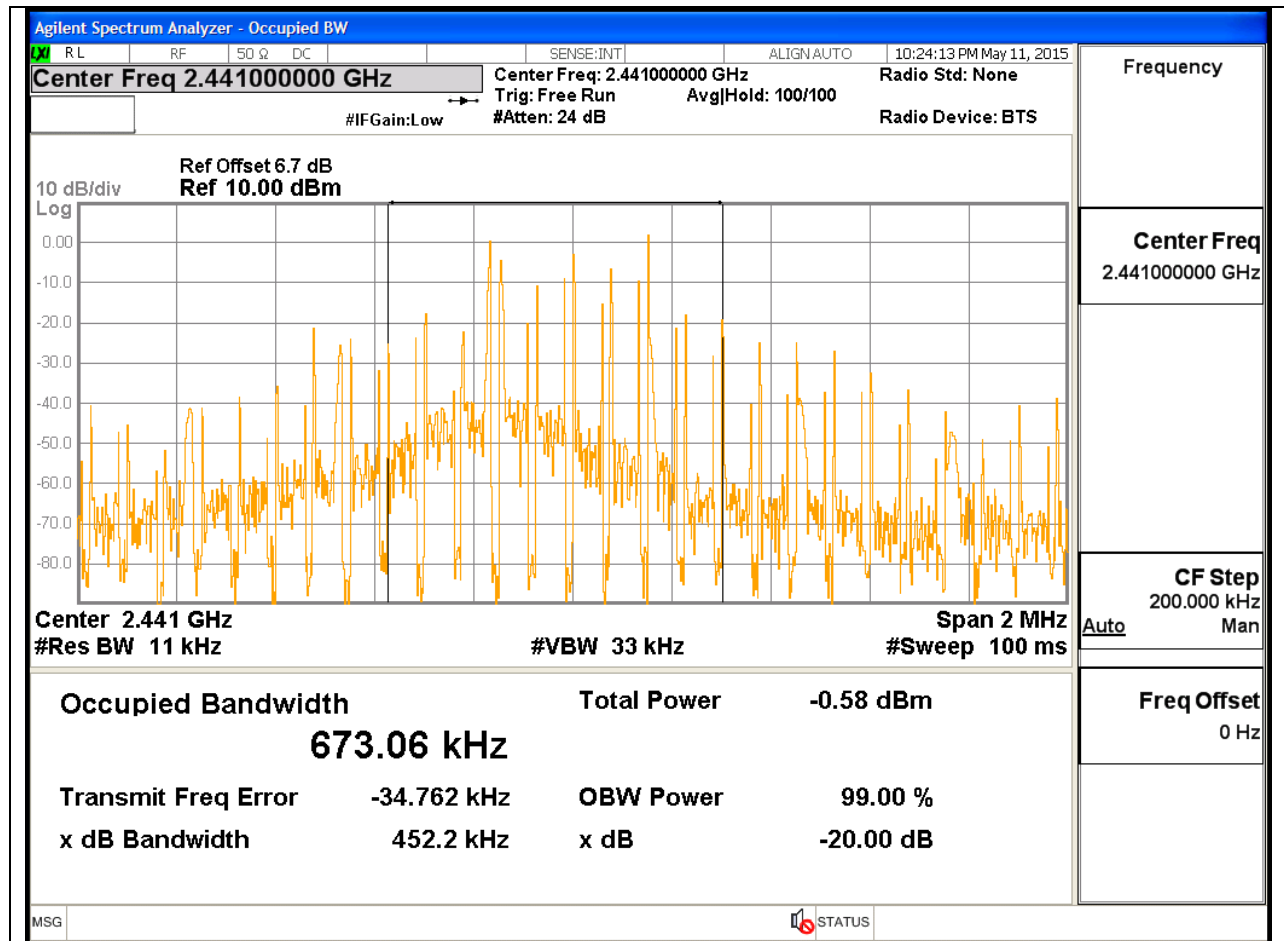

HIGH CHANNEL

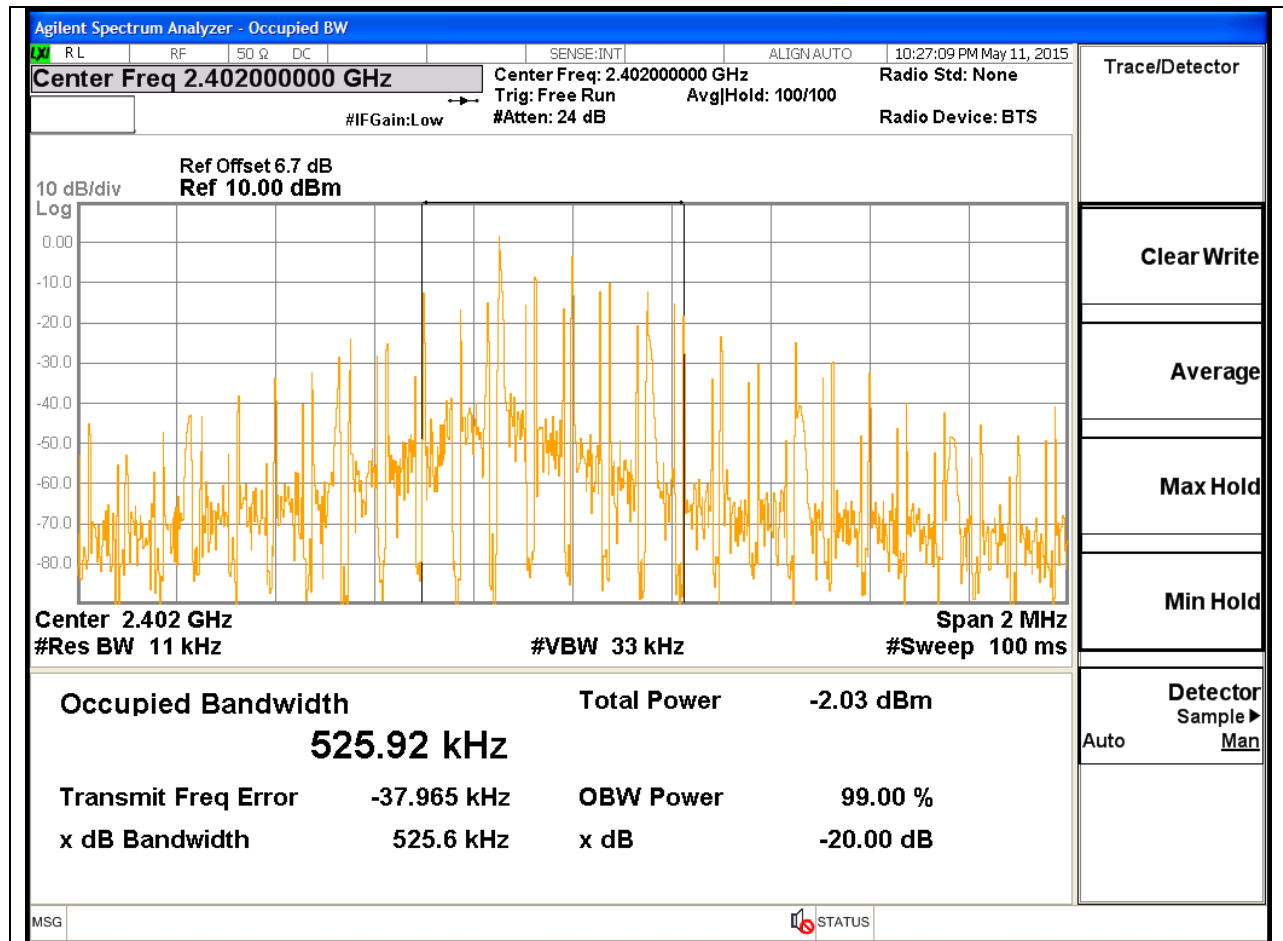

8PSK 20 dB BANDWIDTH

LOW CHANNEL



MID CHANNEL




HIGH CHANNEL




8PSK 99% BANDWIDTH


LOW CHANNEL

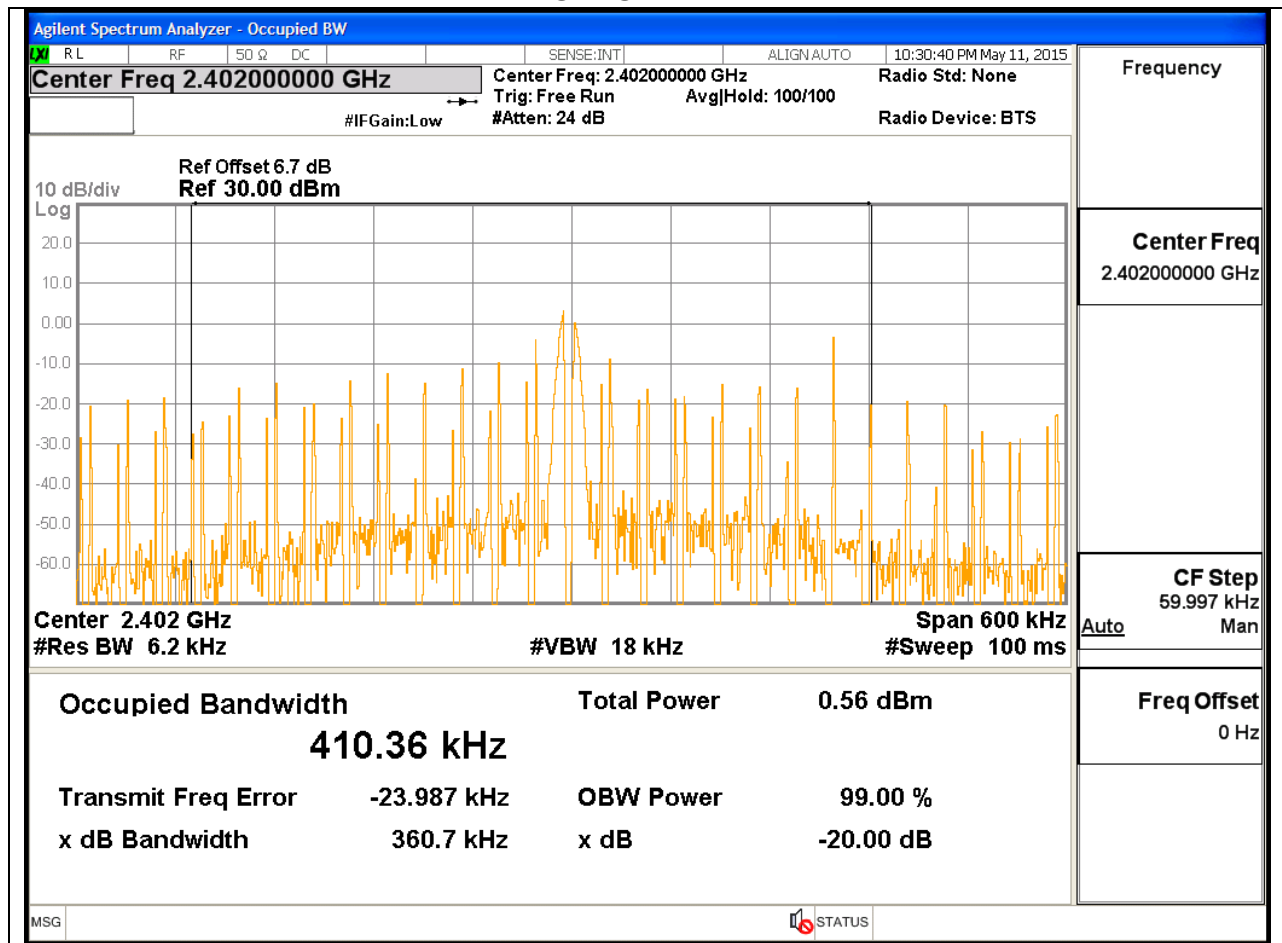

MID CHANNEL

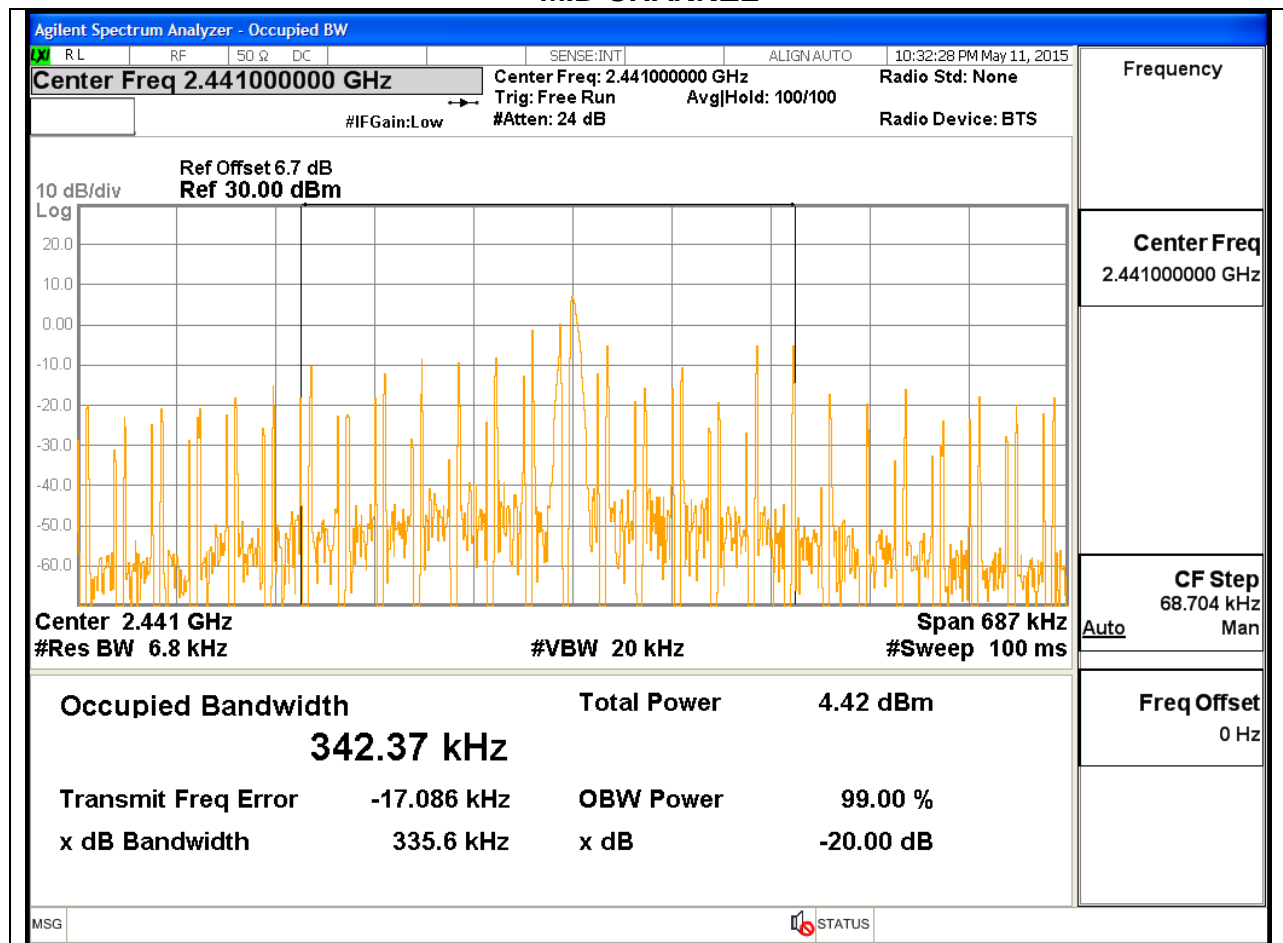

HIGH CHANNEL

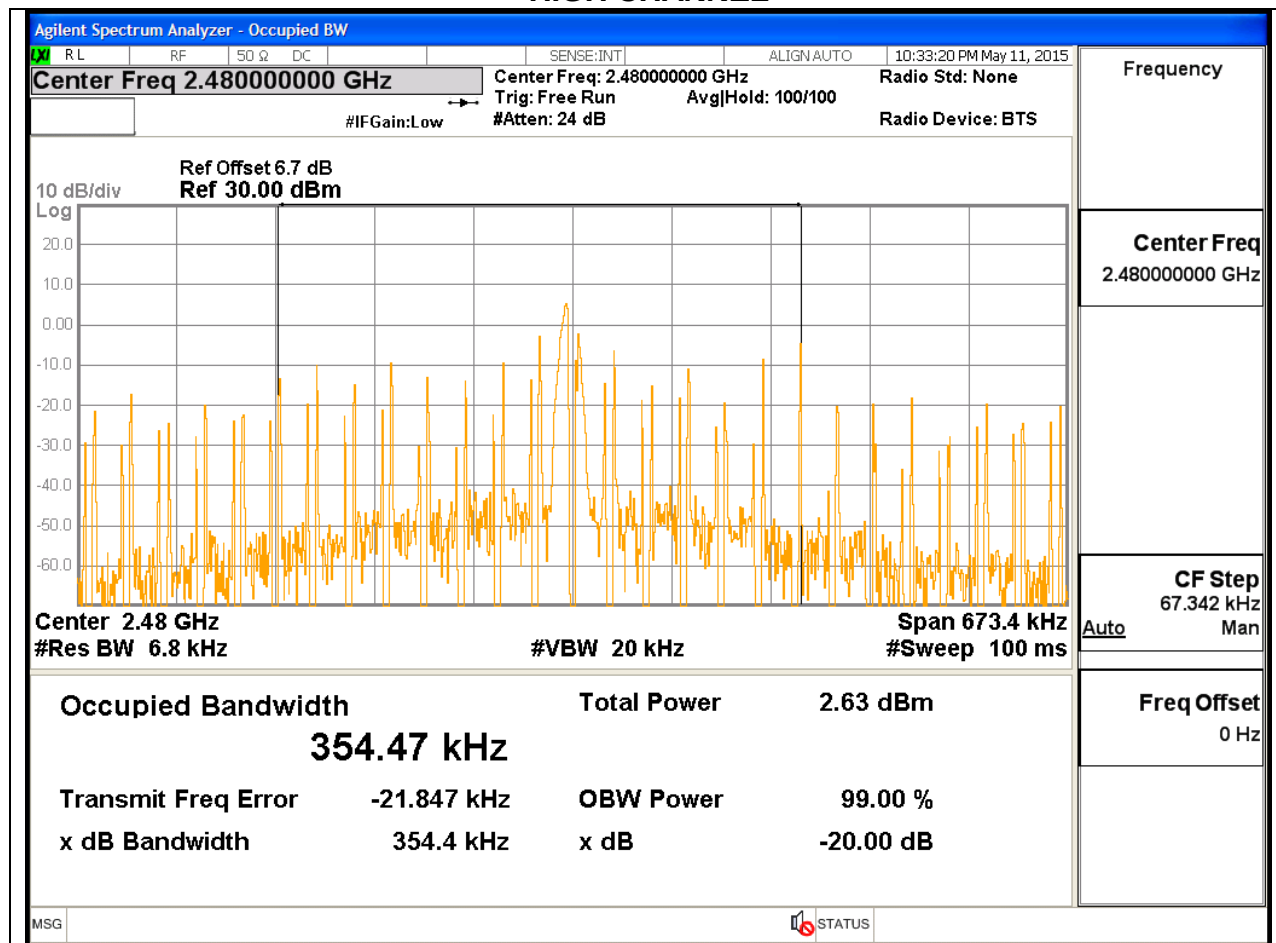

8.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-247 5.1(1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION PLOT

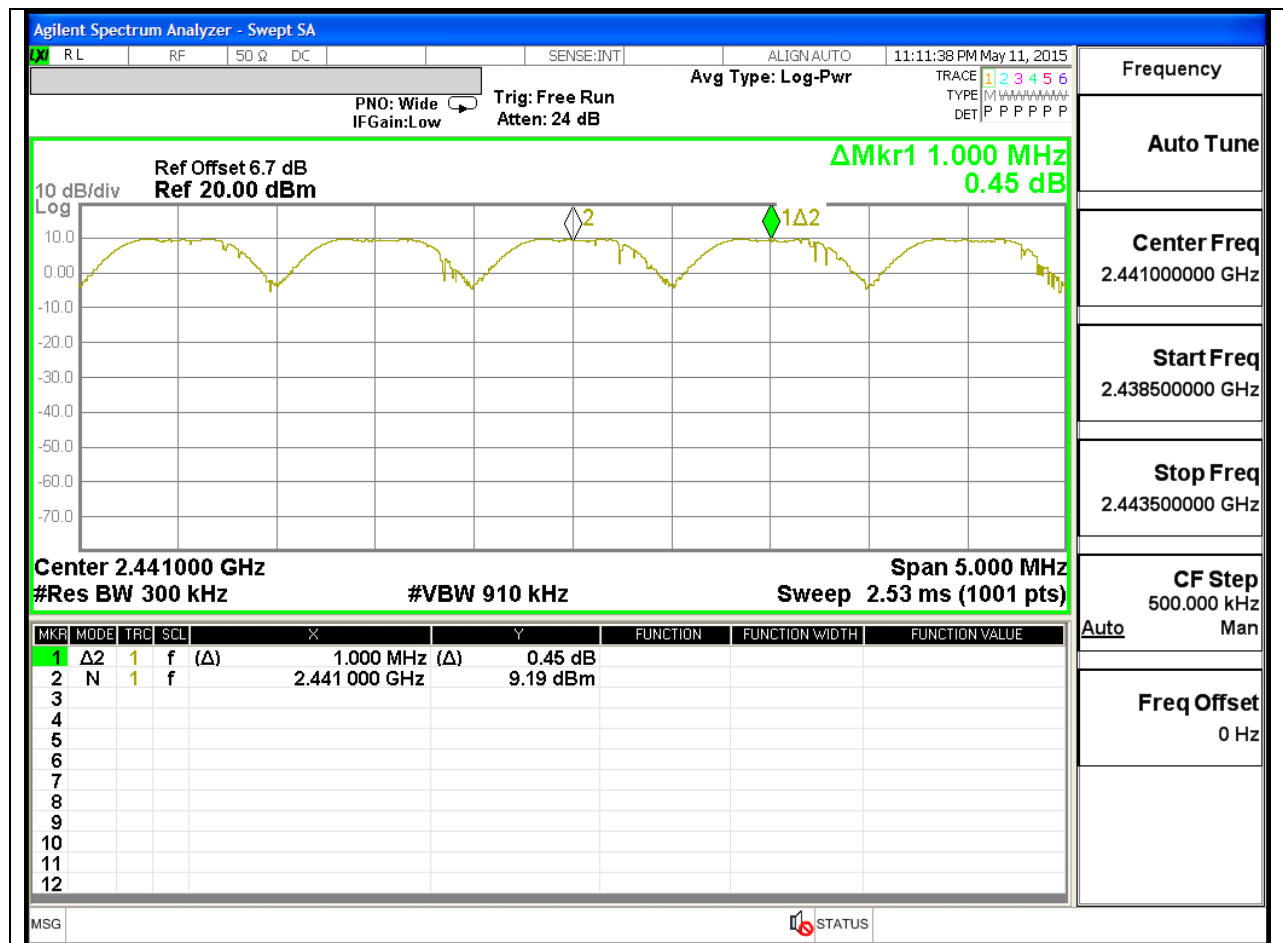

8.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-247 5.1(4)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

TEST PROCEDURE


DA 00-705: The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS


Normal Mode: 79 Channels observed.

NUMBER OF HOPPING CHANNELS PLOTS


NUMBER OF HOPPING CHANNELS (100 MHZ SPAN)

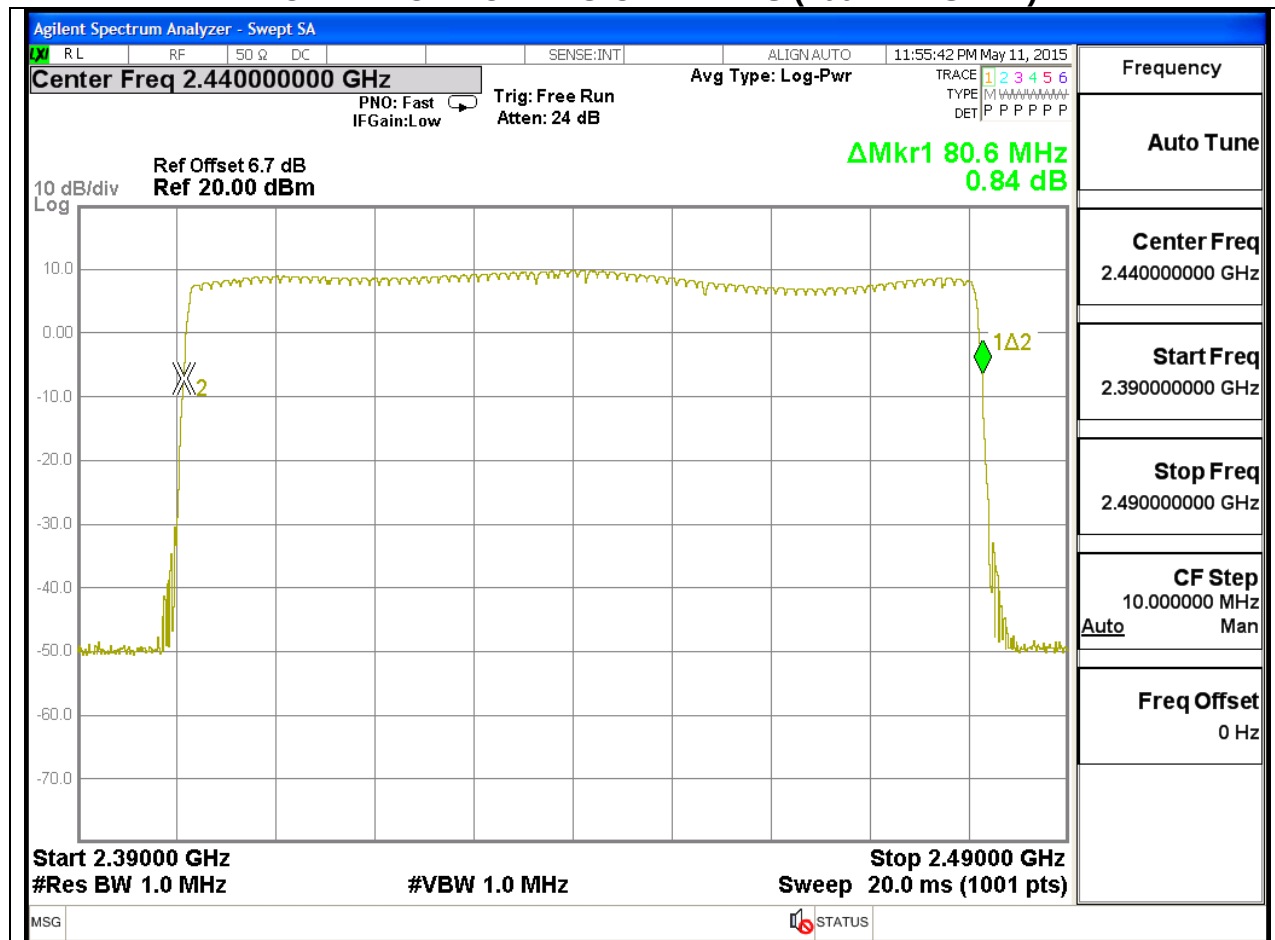


NUMBER OF HOPPING CHANNELS (30 MHz SPAN, FIRST SEGMENT)

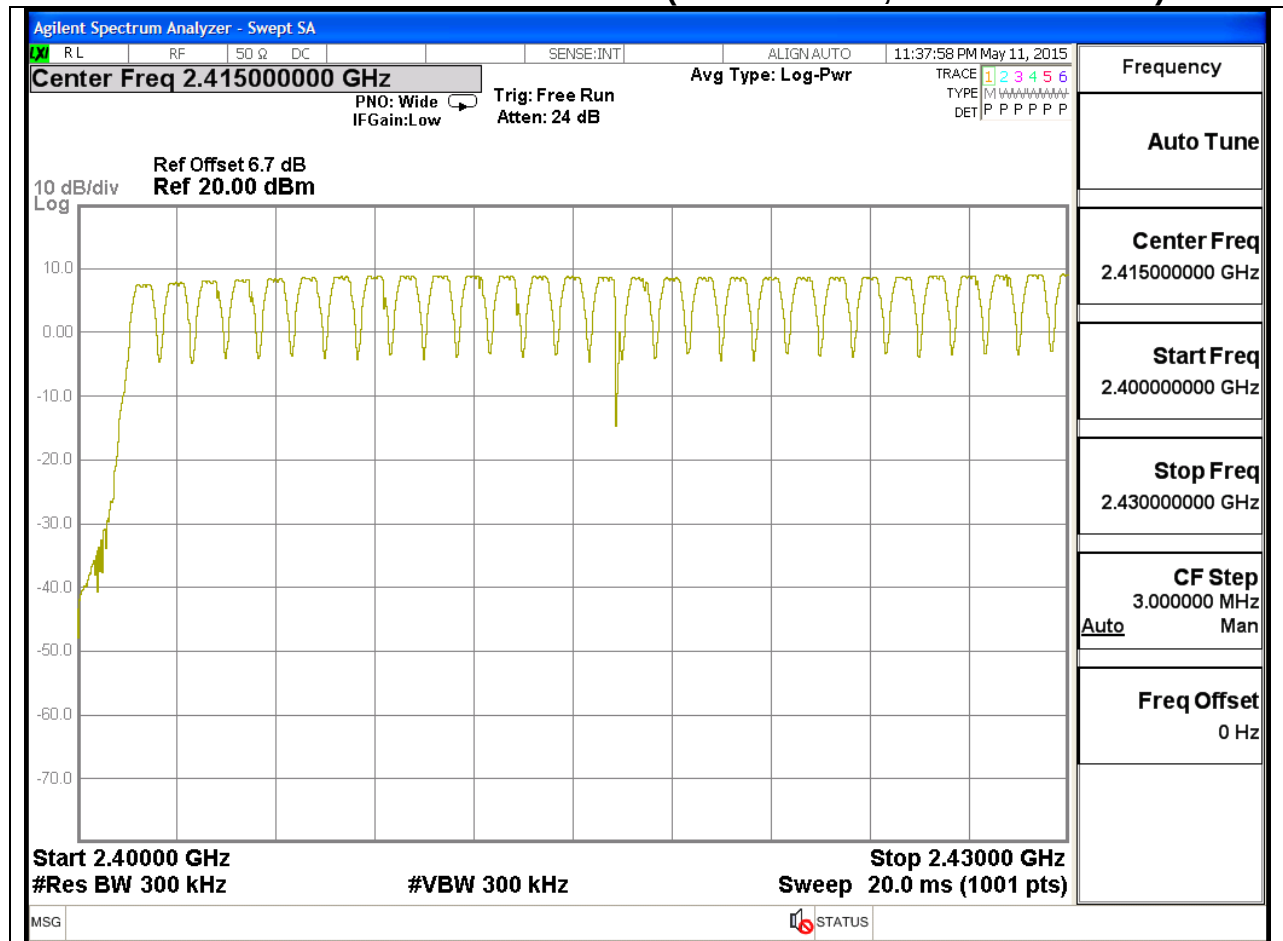

NUMBER OF HOPPING CHANNELS (30 MHZ SPAN, SECOND SEGMENT)

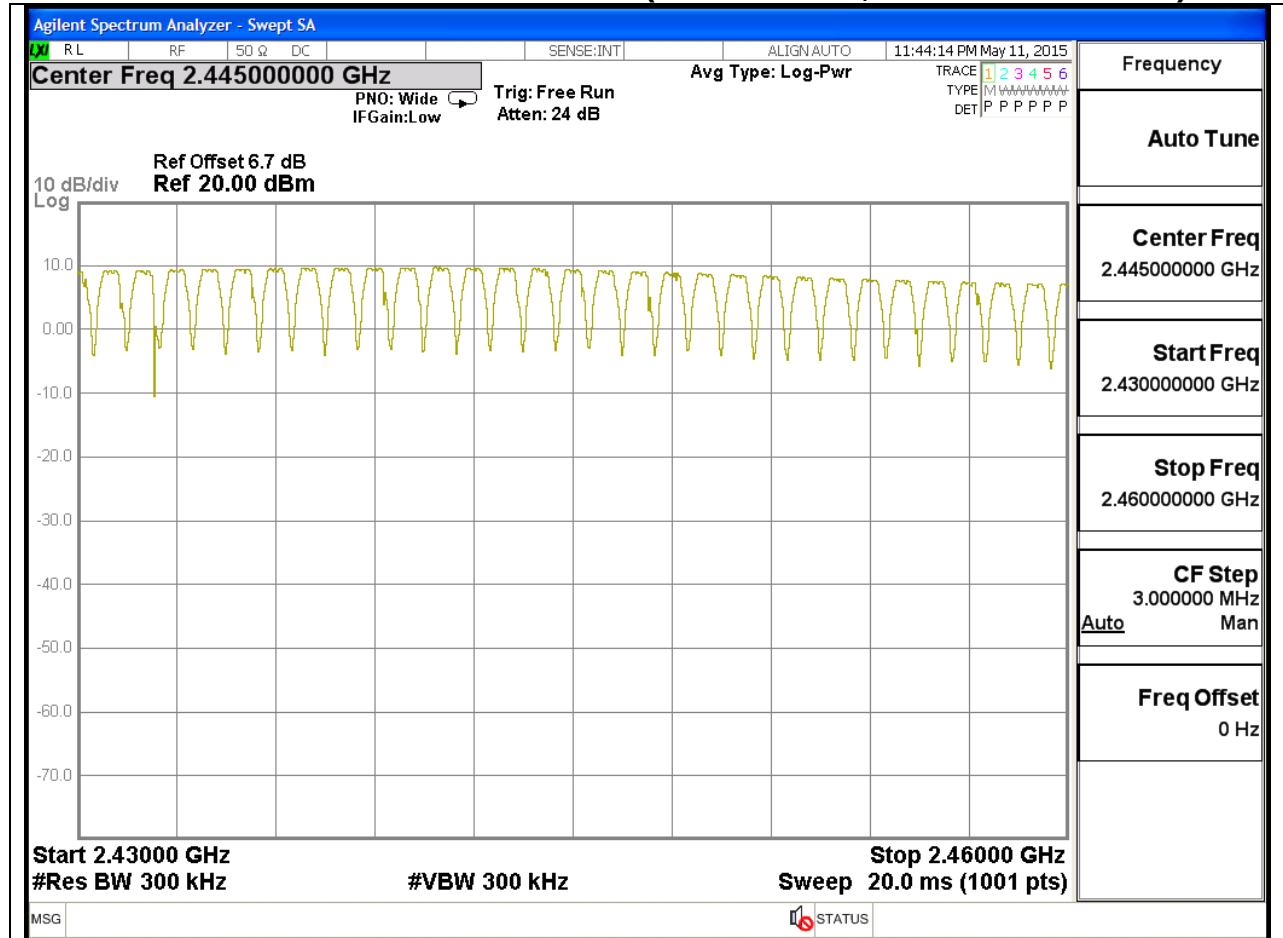

NUMBER OF HOPPING CHANNELS (30 MHz SPAN, THIRD SEGMENT)

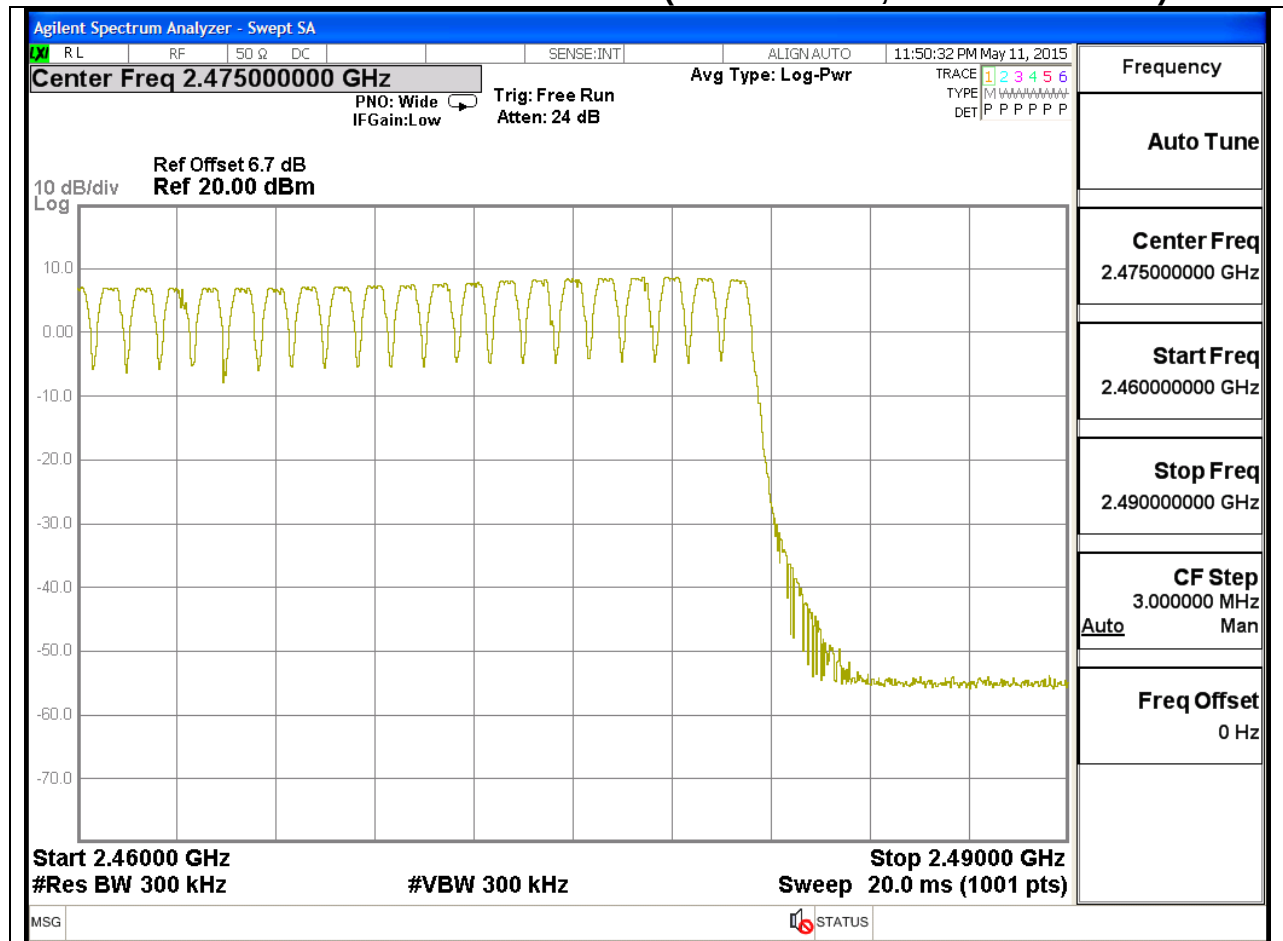

8.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-247 5.1(4)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{pulse width}$.


RESULTS

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.299	31	0.09269	0.4	-0.30731
DH3	0.308	19	0.05852	0.4	-0.34148
DH5	0.304	11	0.03344	0.4	-0.36656
DH Packet	Pulse Width (msec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
DH1	0.299	7.75	0.0231725	0.4	-0.37683
DH3	0.308	4.75	0.01463	0.4	-0.38537
DH5	0.304	2.75	0.00836	0.4	-0.39164


PULSE WIDTH - DH1

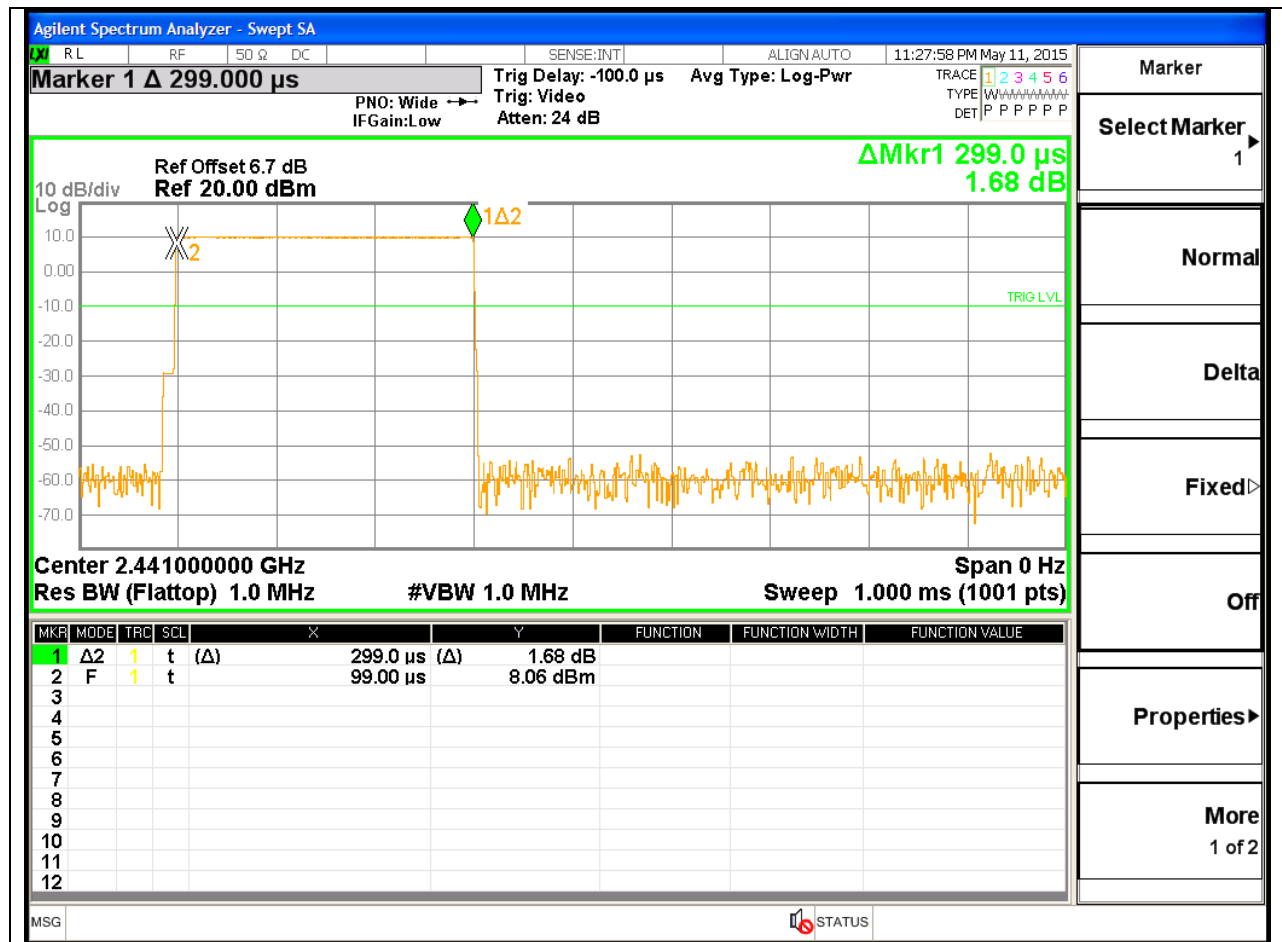


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD - DH1

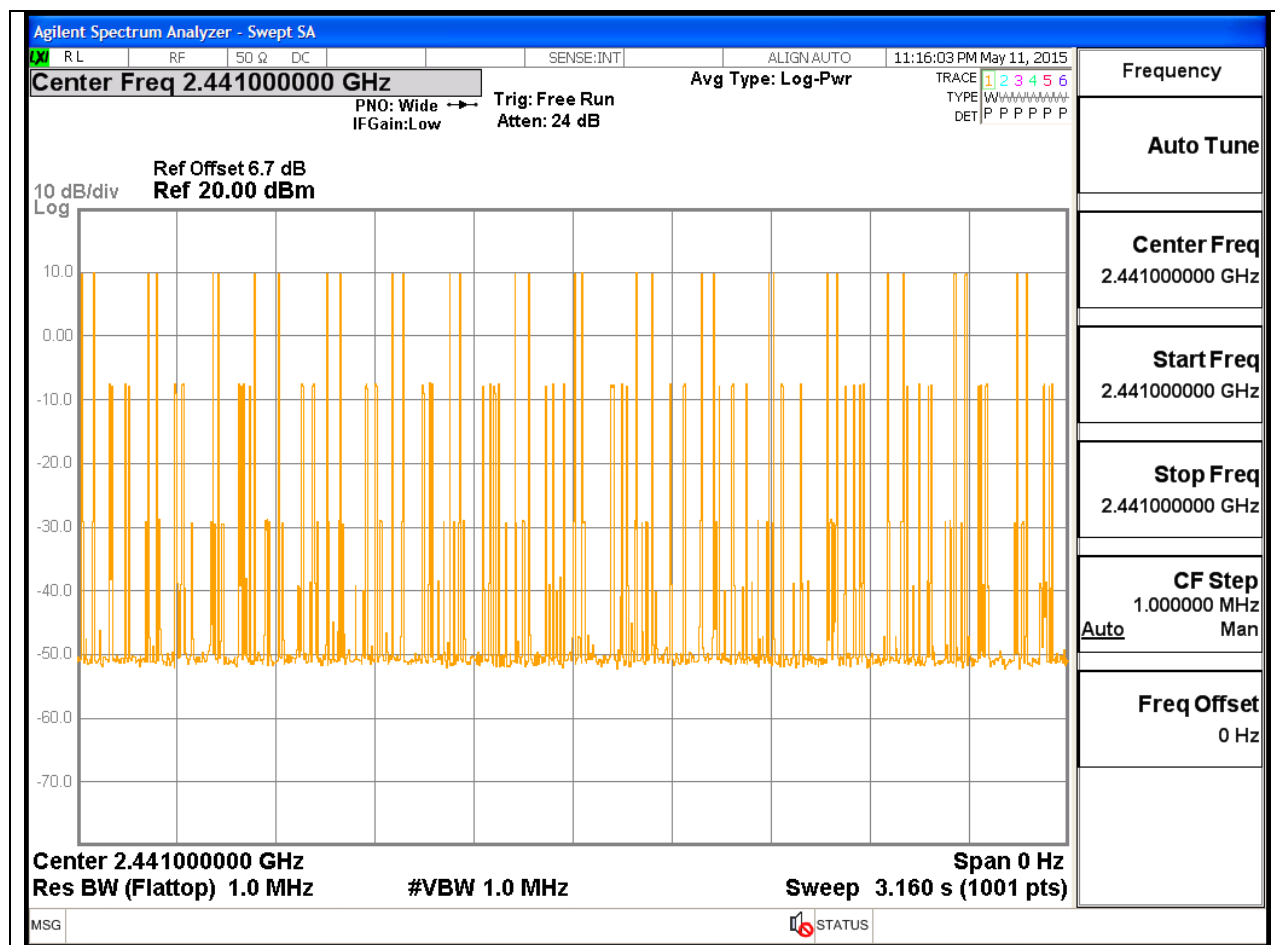


PULSE WIDTH - DH3

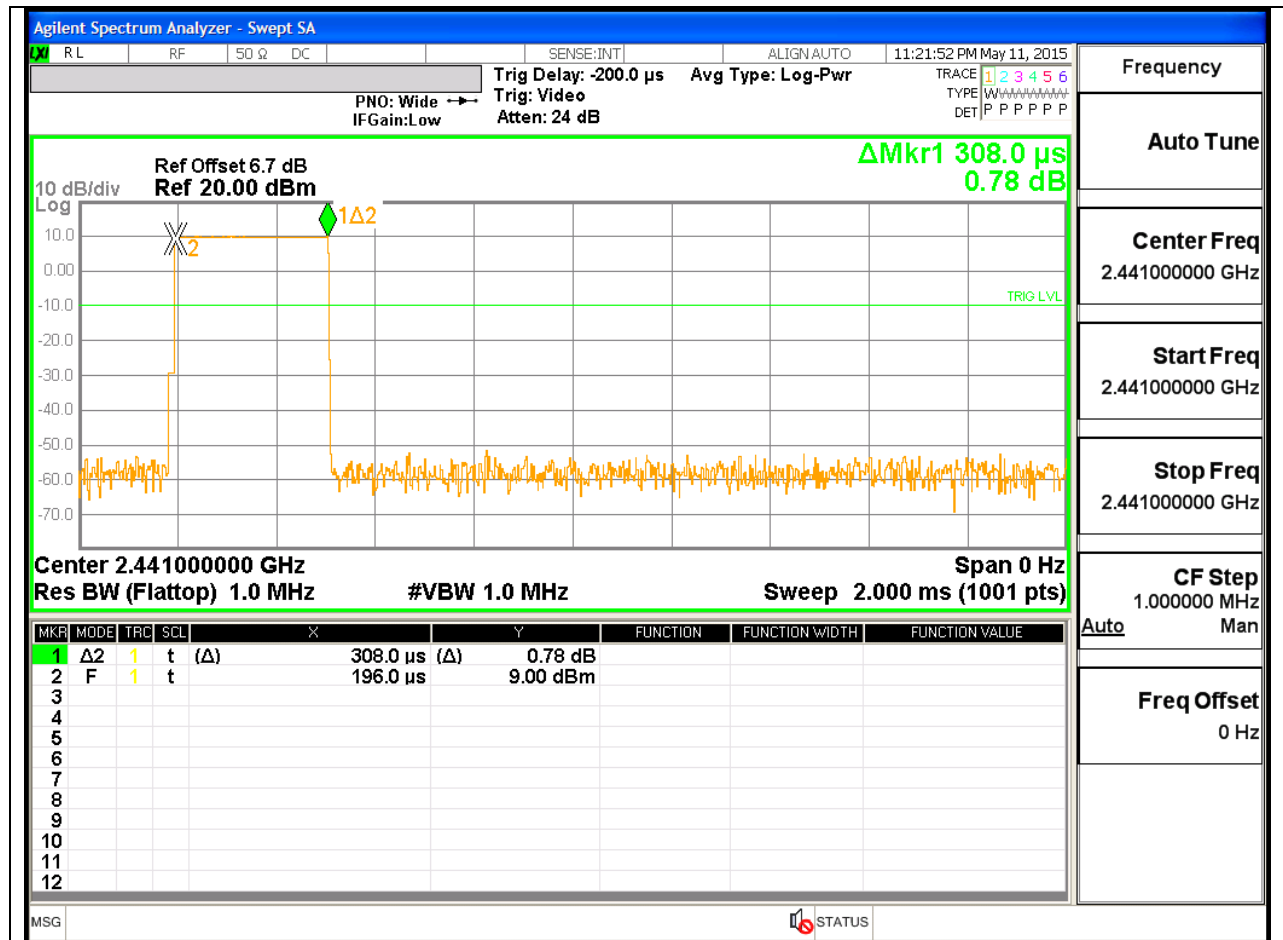

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD - DH3

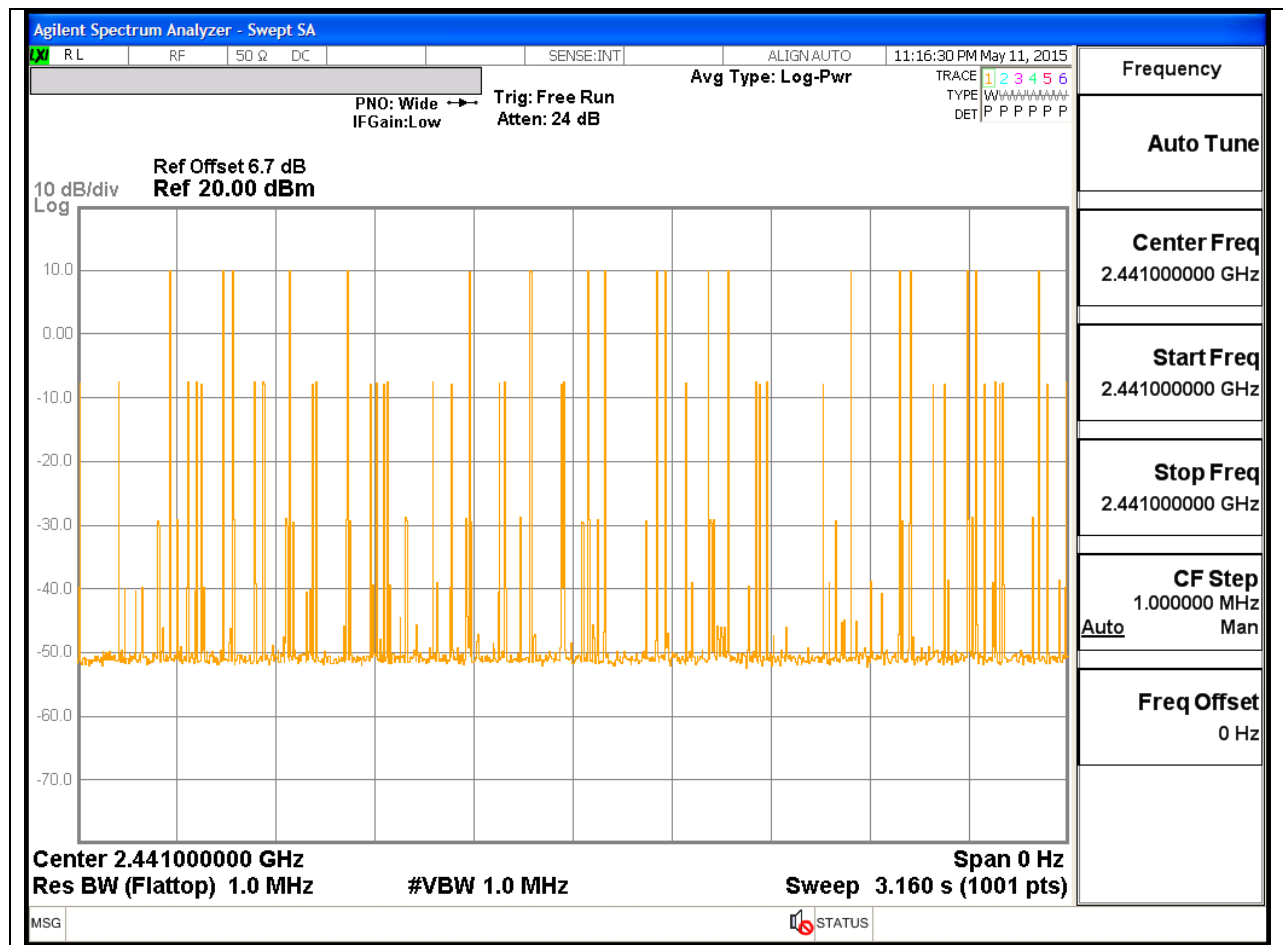

PULSE WIDTH - DH5

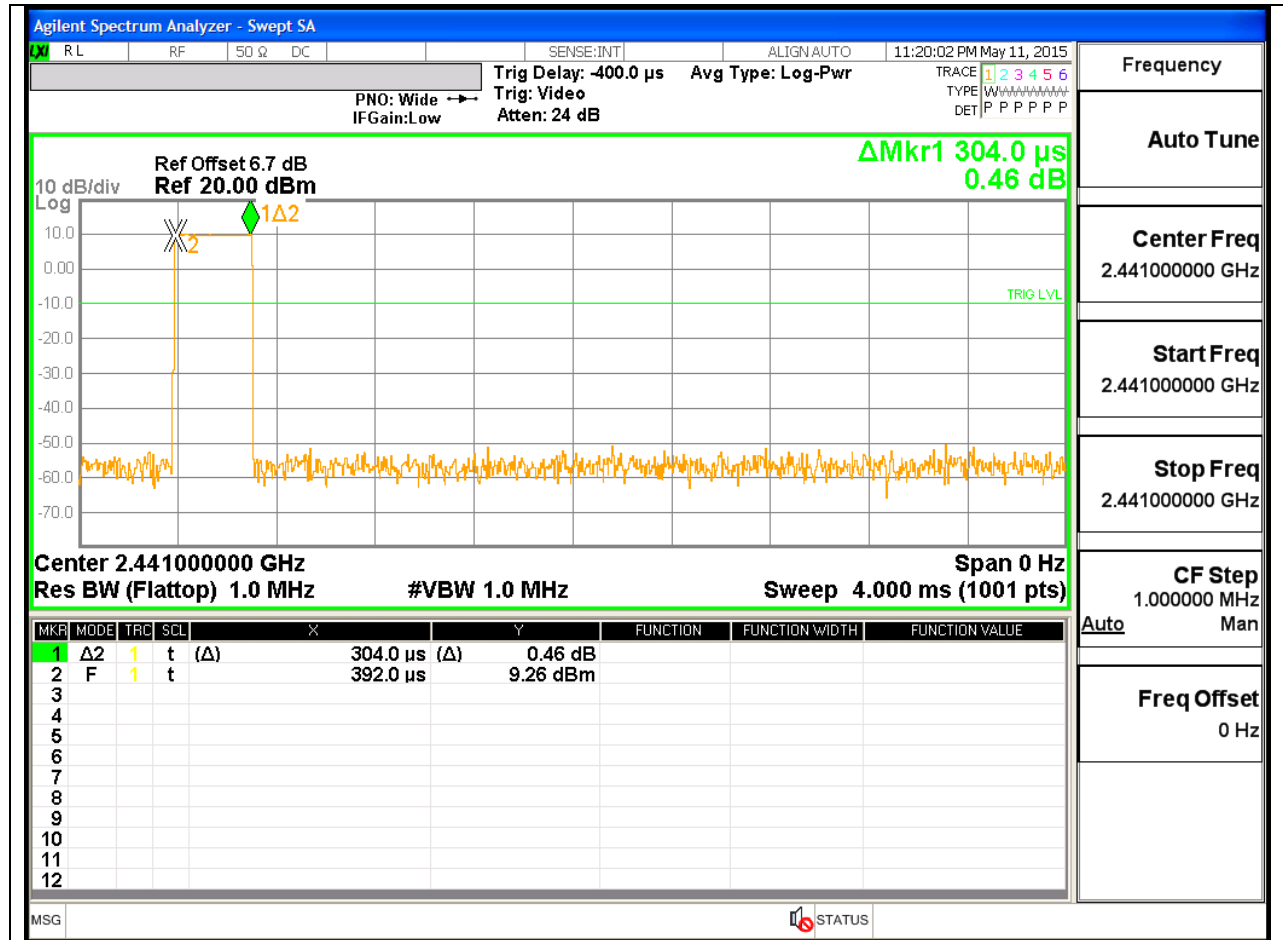

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD - DH5



8.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-247 5.4(1)

The maximum antenna gain is less than 6 dBi, therefore the limit is 21 dBm.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS


8.5.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	3.84	21	-17.156
Middle	2441	5.97	21	-15.03
High	2480	4.45	21	-16.546
Worst		5.97		-15.03


8.5.2. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	4.45	21	-16.547
Middle	2441	6.55	21	-14.453
High	2480	5.02	21	-15.978
Worst		6.55		-14.453

MID CHANNEL

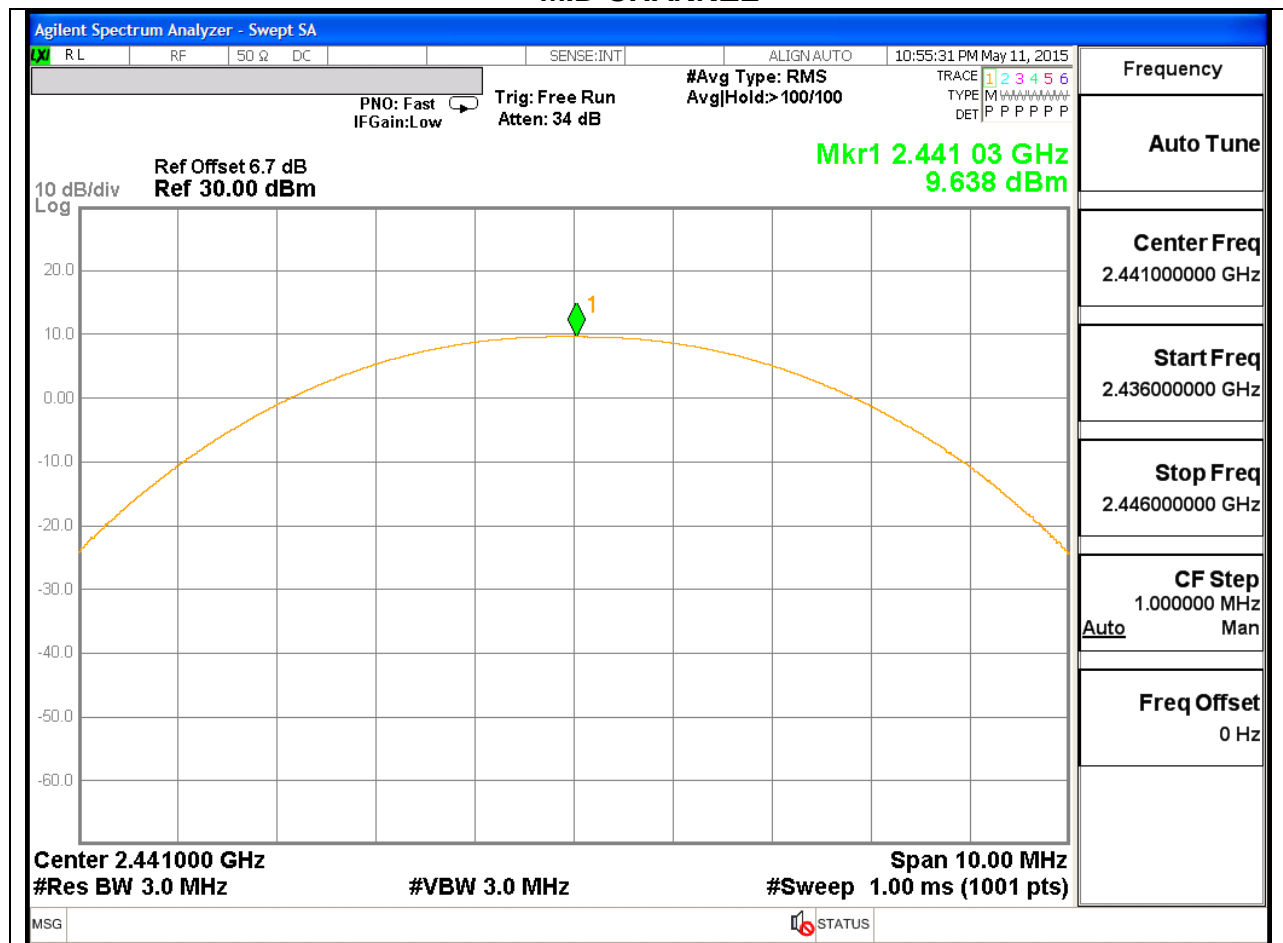


HIGH CHANNEL

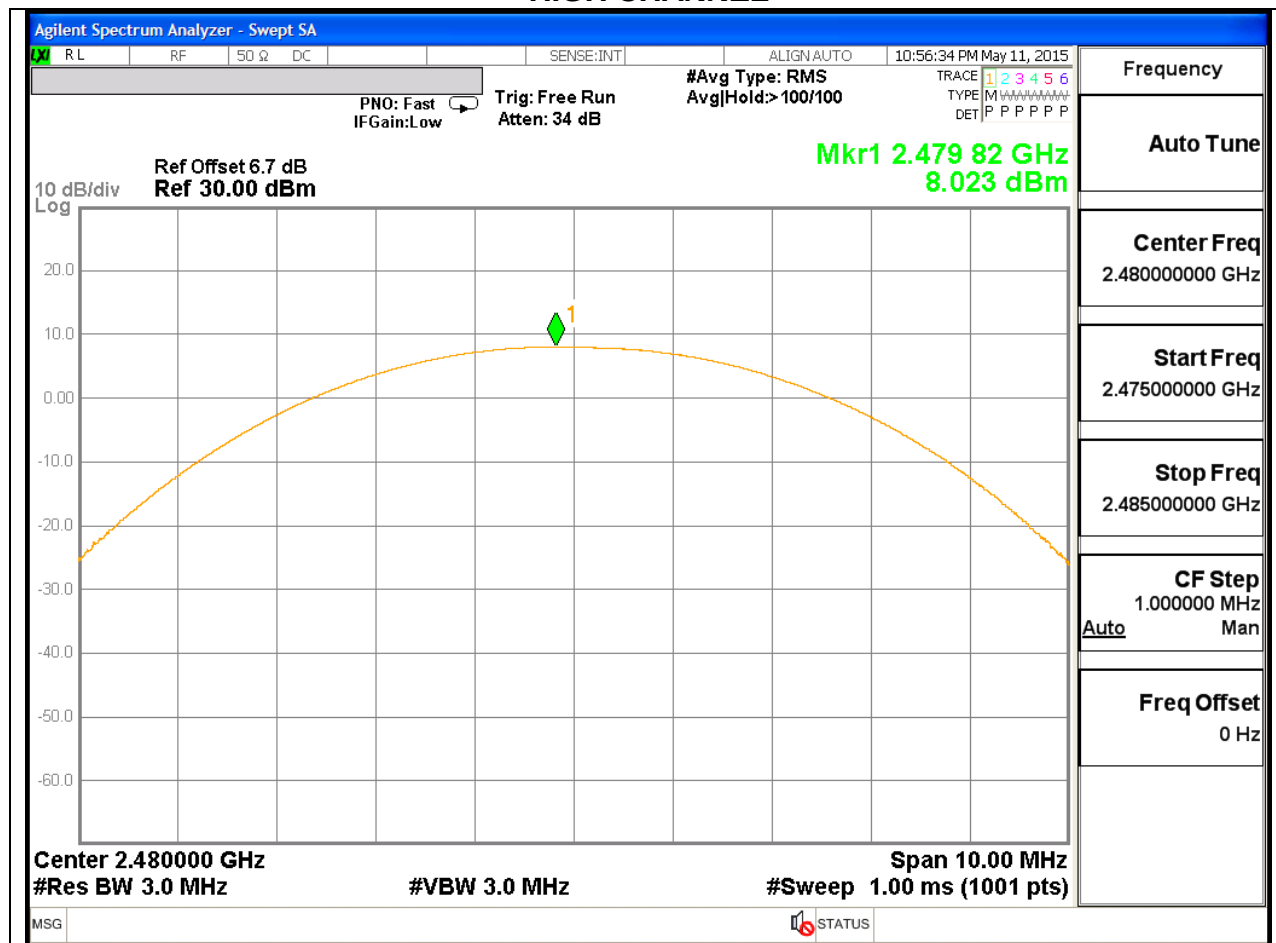


8PSK OUTPUT POWER


LOW CHANNEL

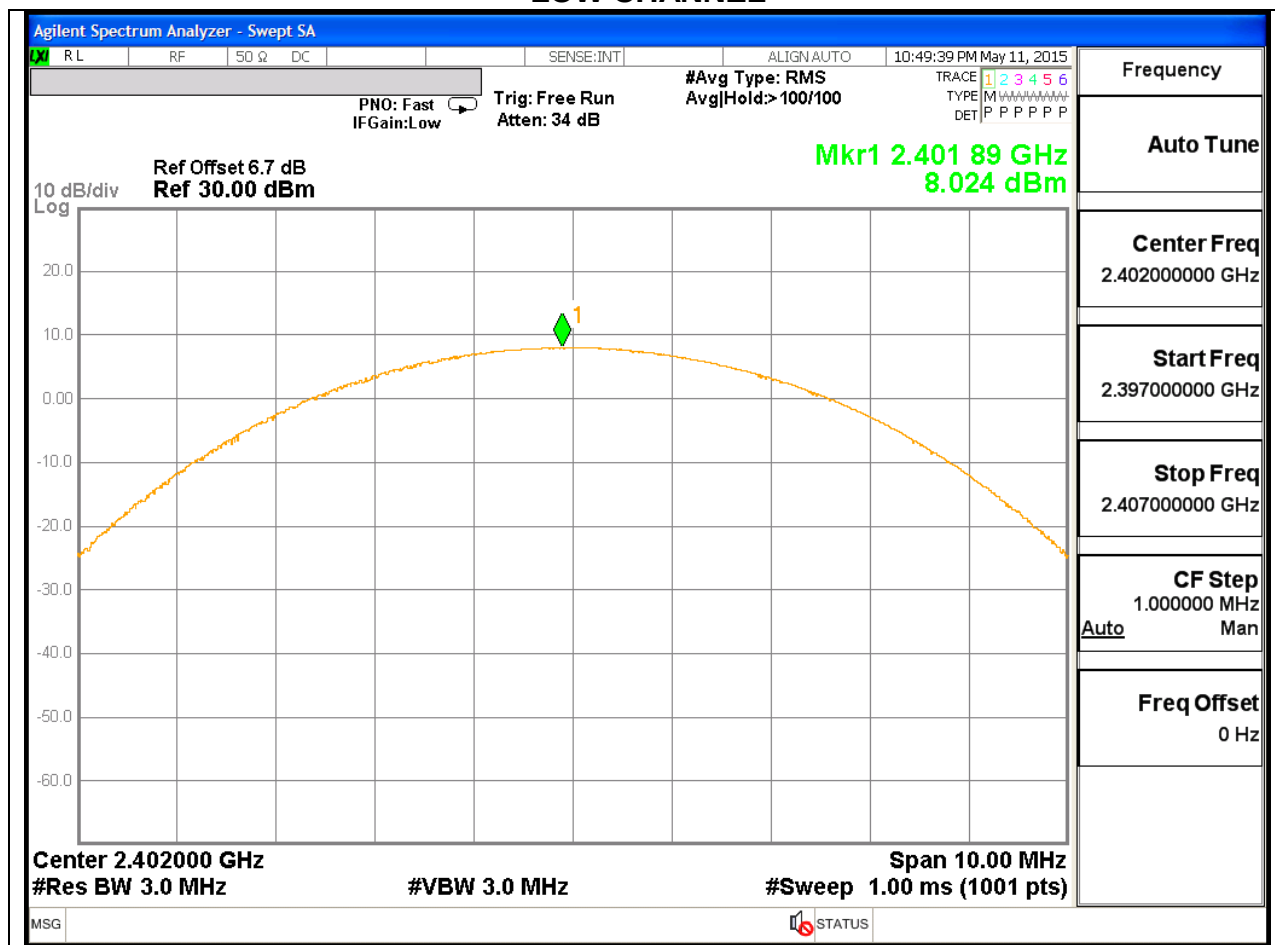

MID CHANNEL

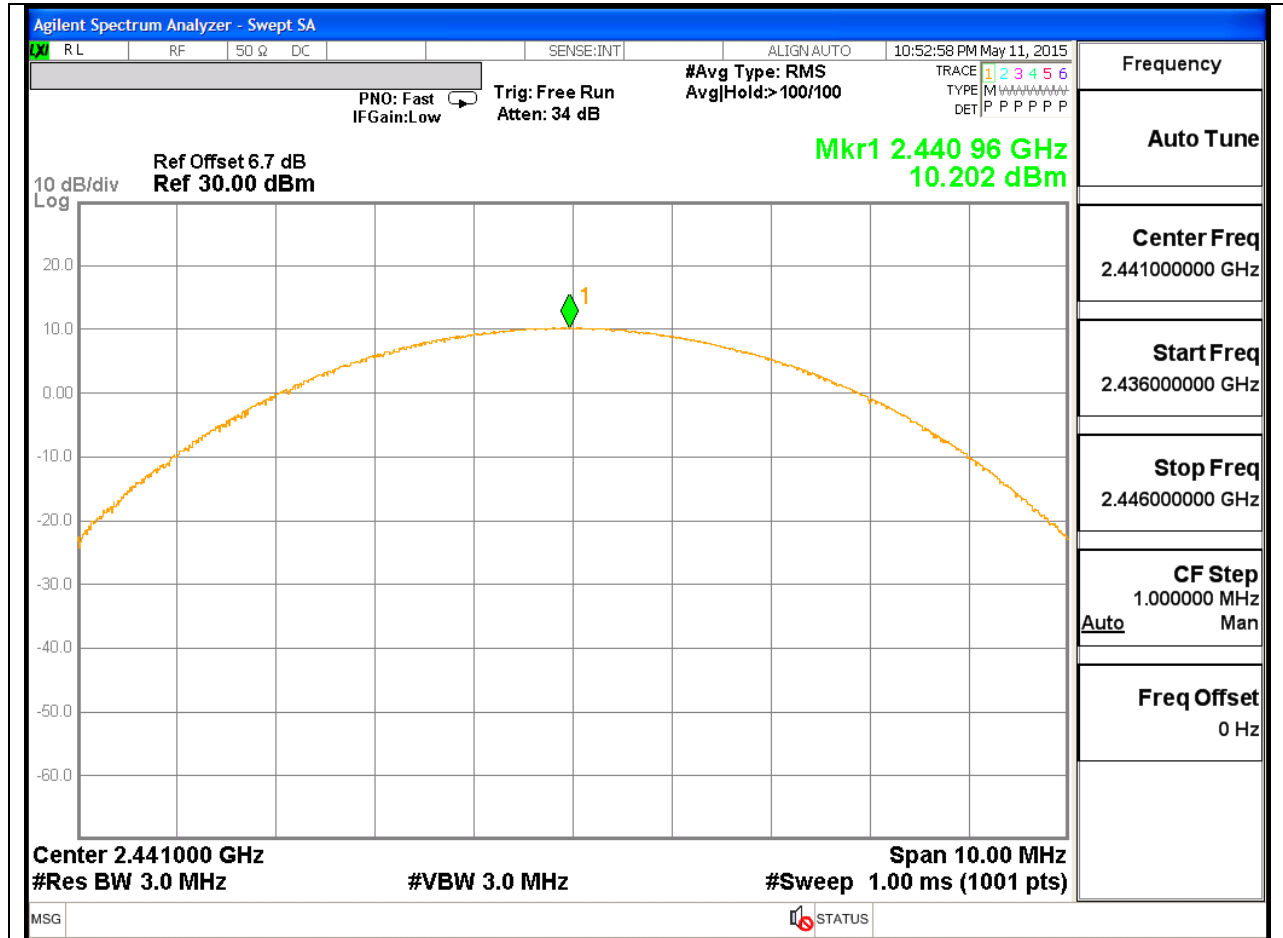

HIGH CHANNEL

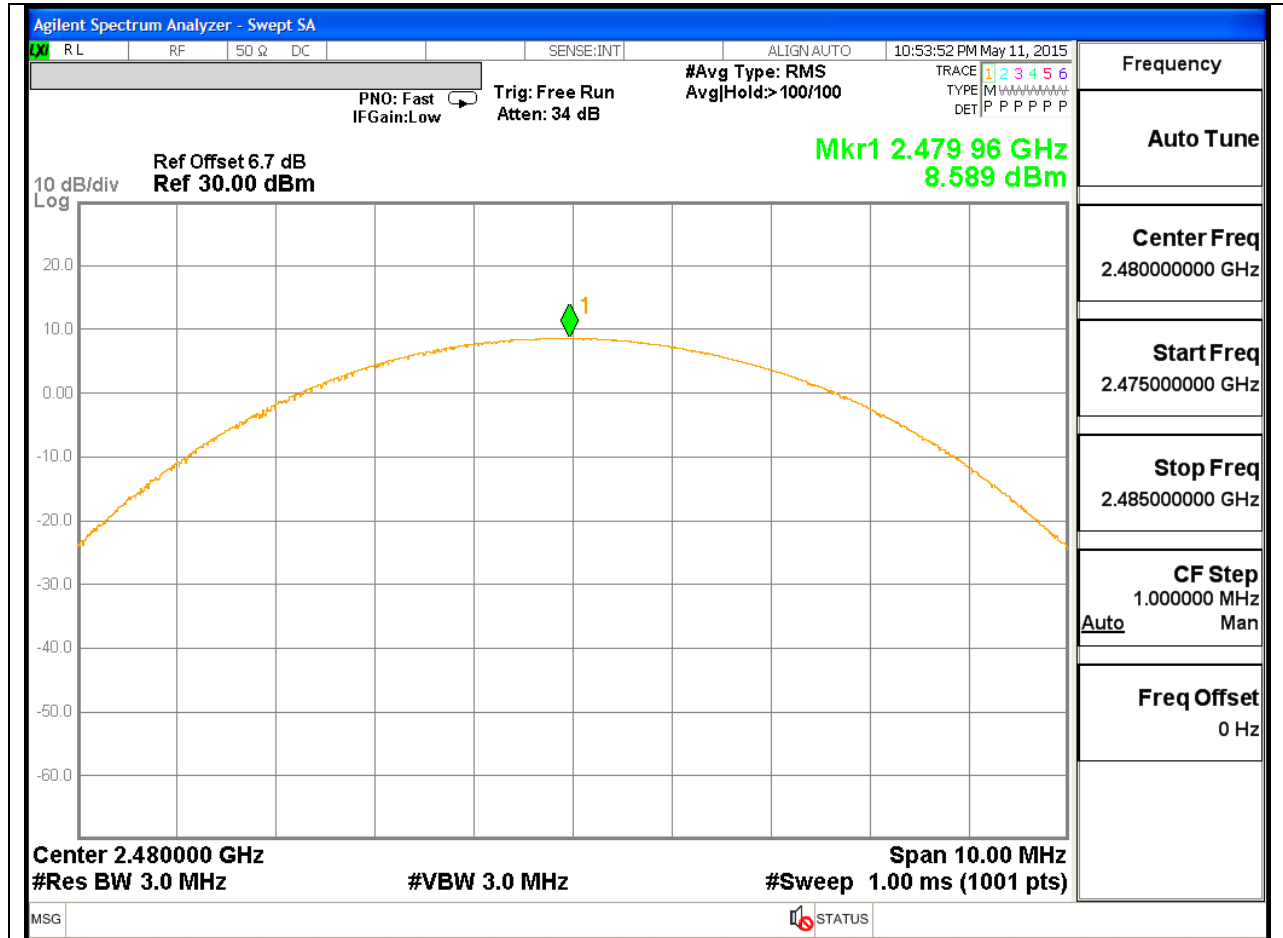

8.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 10.7 dB (including 10 dB pad and 0.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

8.6.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	3.6
Middle	2441	5.8
High	2480	4.4
Worst		5.8

8.6.2. DATA RATE PI/4-DQPSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	2.30
Middle	2441	4.30
High	2480	2.90
Worst		4.30

8.6.3. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	2.2
Middle	2441	4.3
High	2480	2.9
Worst		4.3

8.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-247 5.5

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS


8.7.1. BASIC DATA RATE GFSK MODULATION

SPURIOUS EMISSIONS, LOW CHANNEL


LOW CHANNEL BANDEDGE

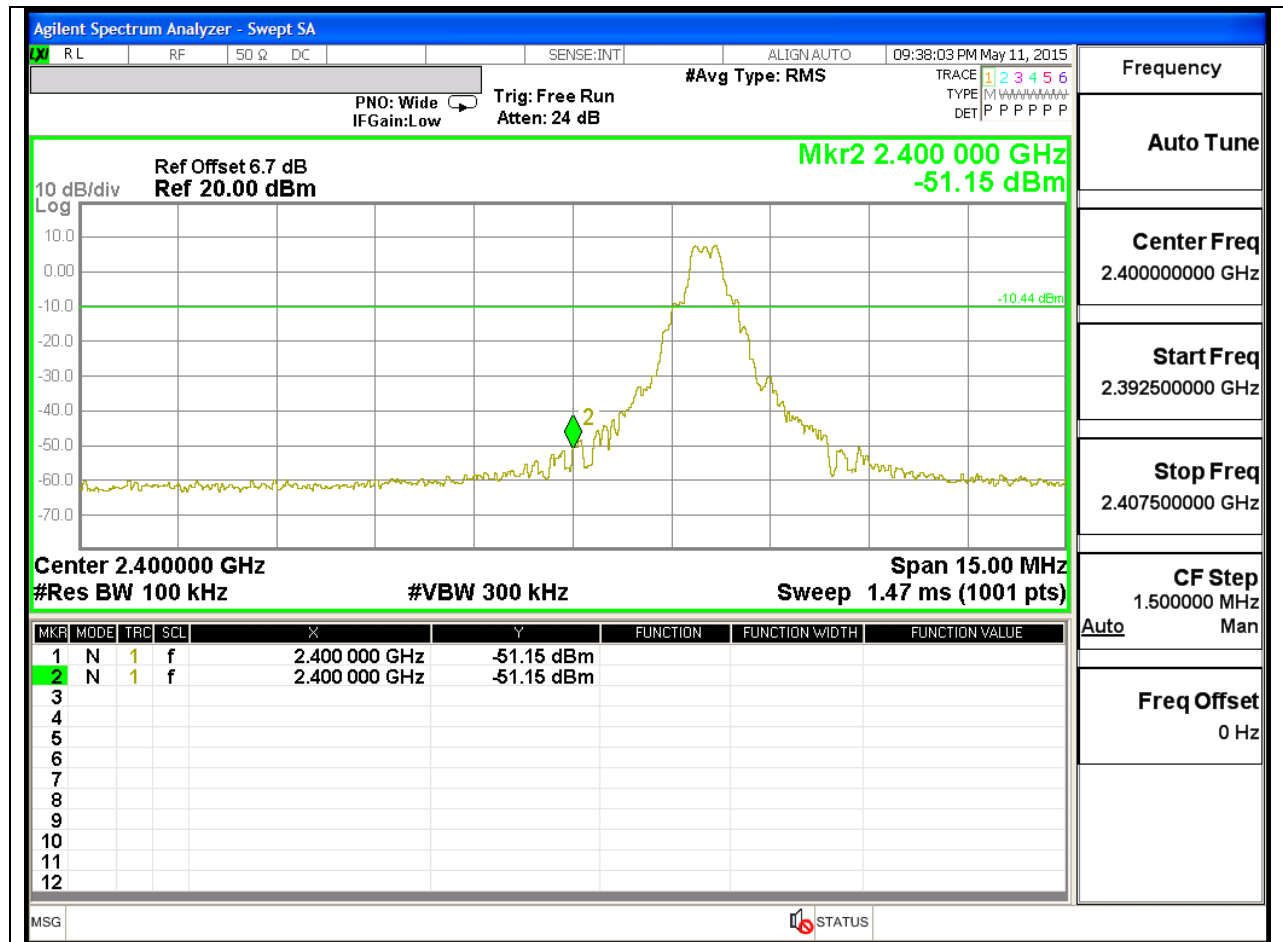

LOW CHANNEL SPURIOUS

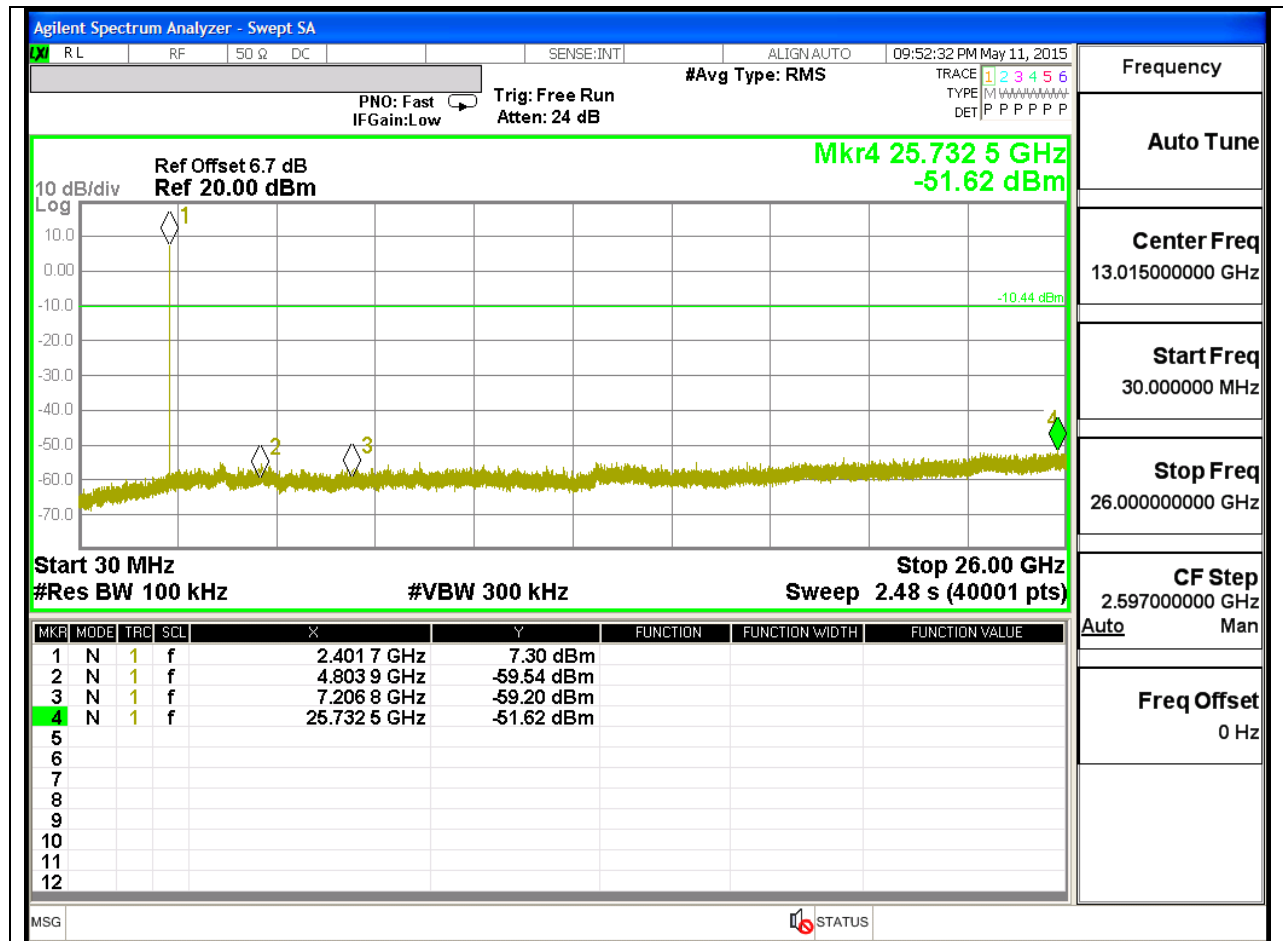


MID CHANNEL SPURIOUS

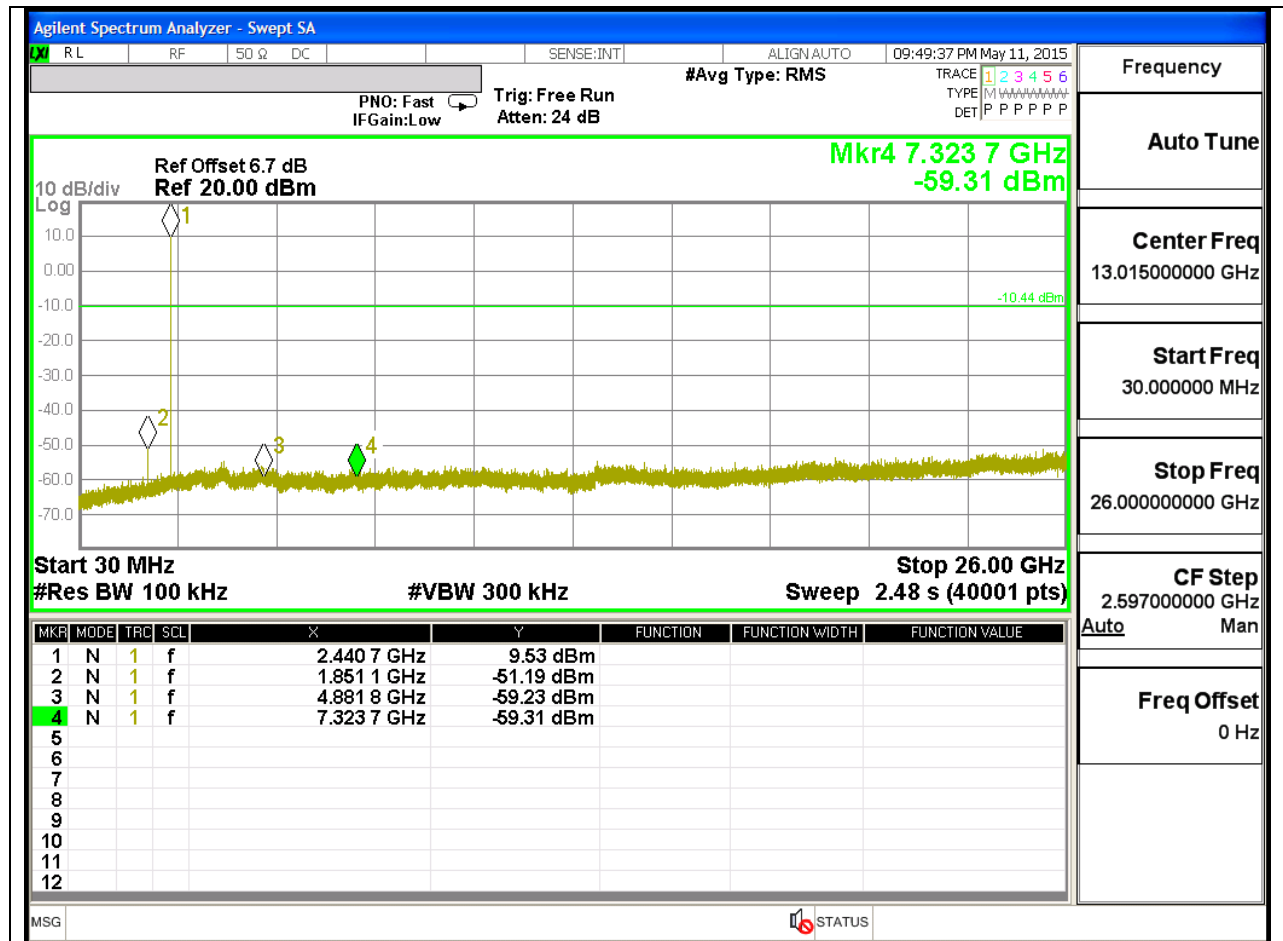


SPURIOUS EMISSIONS, HIGH CHANNEL

HIGH CHANNEL BANDEDGE

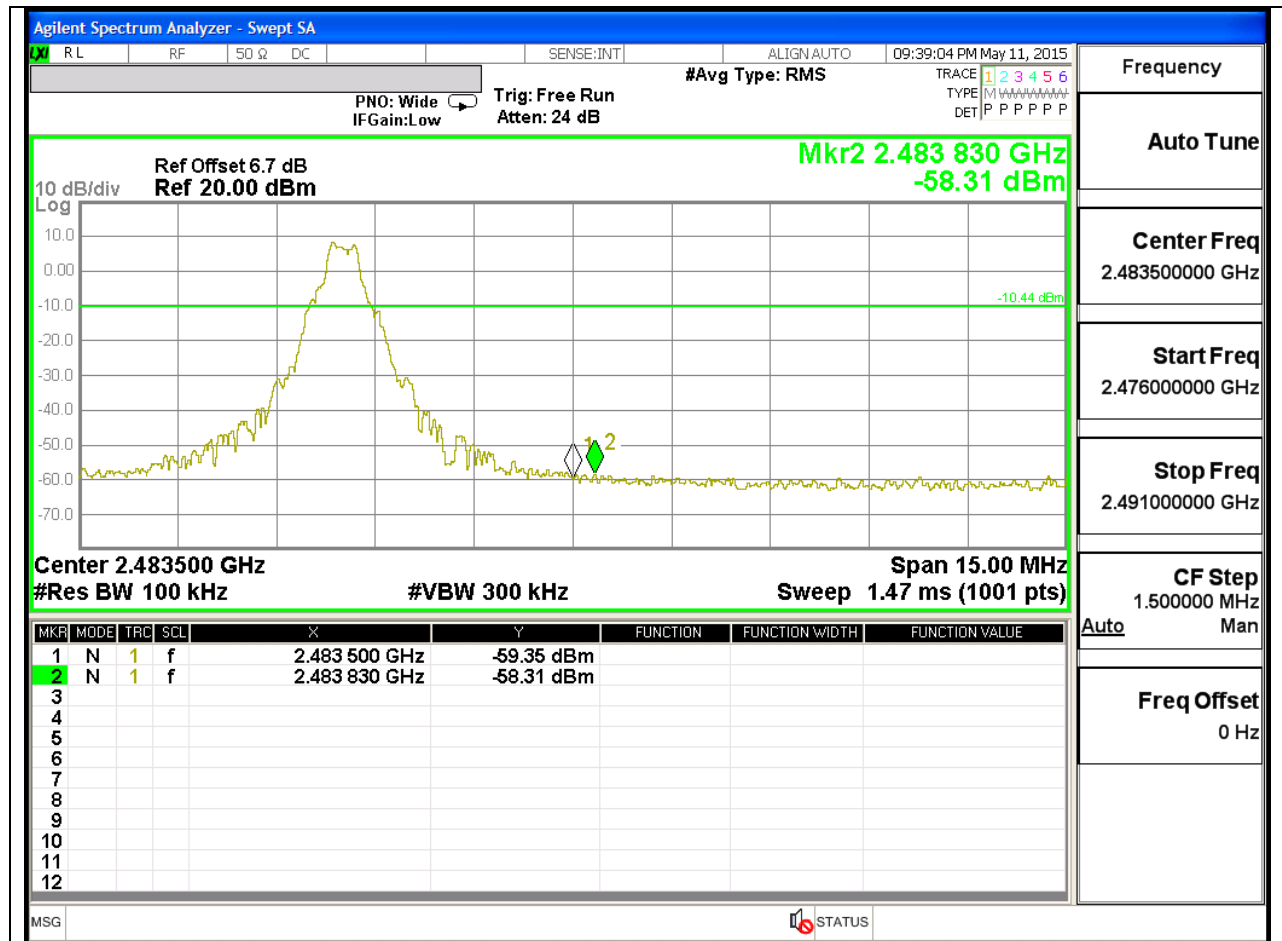


HIGH CHANNEL SPURIOUS

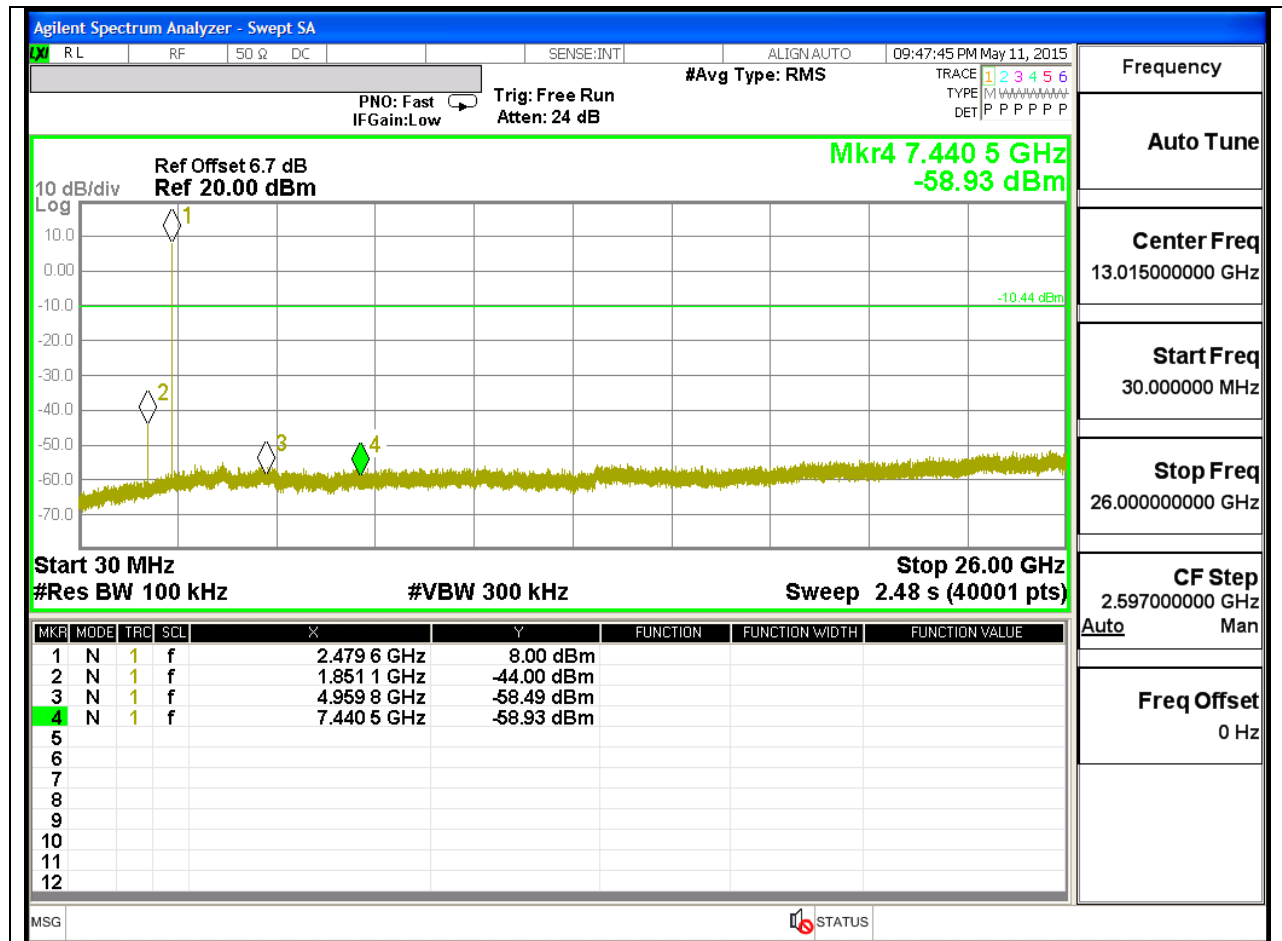

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON


LOW BANDEDGE WITH HOPPING ON

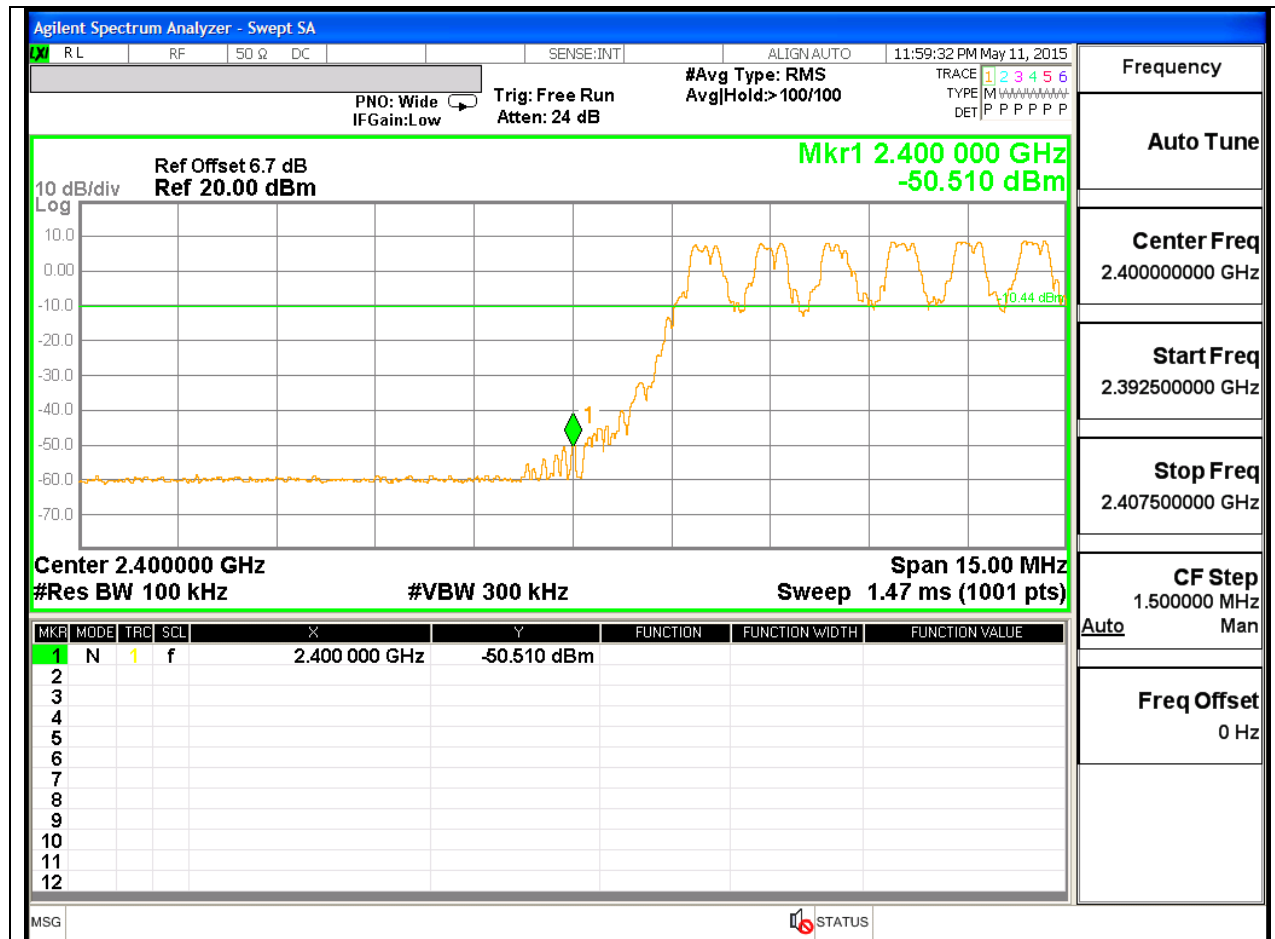


HIGH BANDEDGE WITH HOPPING ON



LOW CHANNEL SPURIOUS

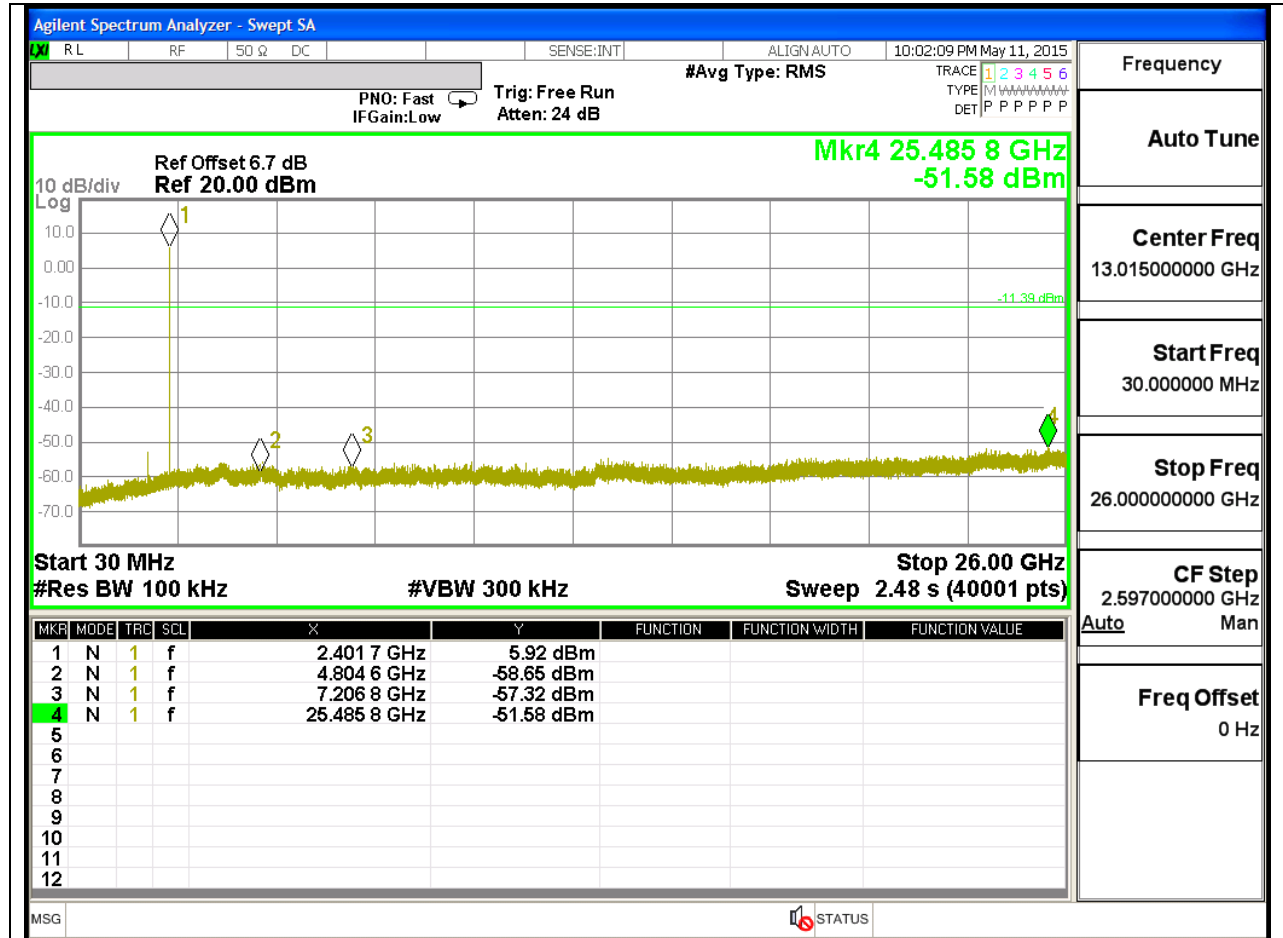


MID CHANNEL SPURIOUS

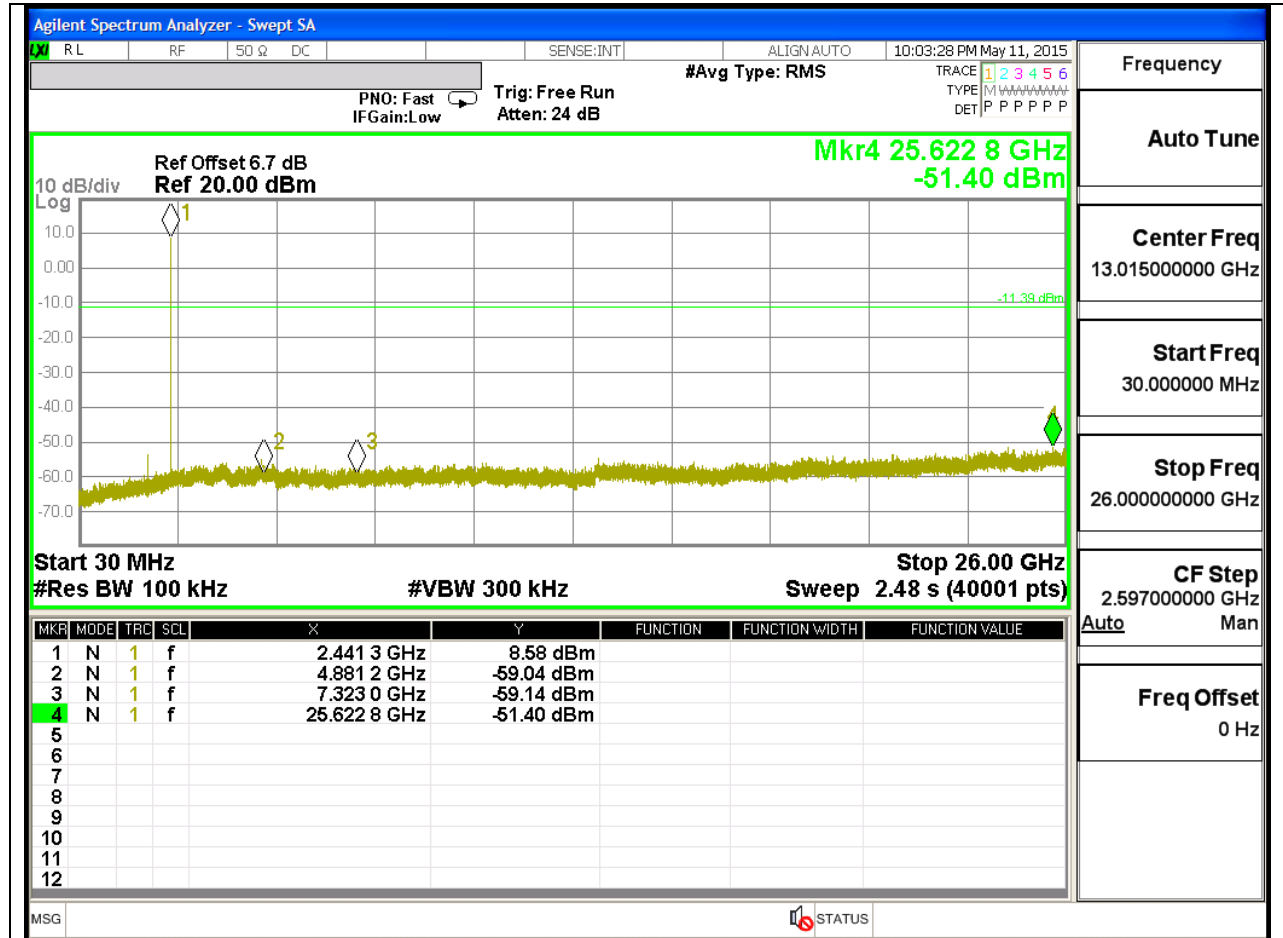


SPURIOUS EMISSIONS, HIGH CHANNEL

HIGH CHANNEL BANDEDGE

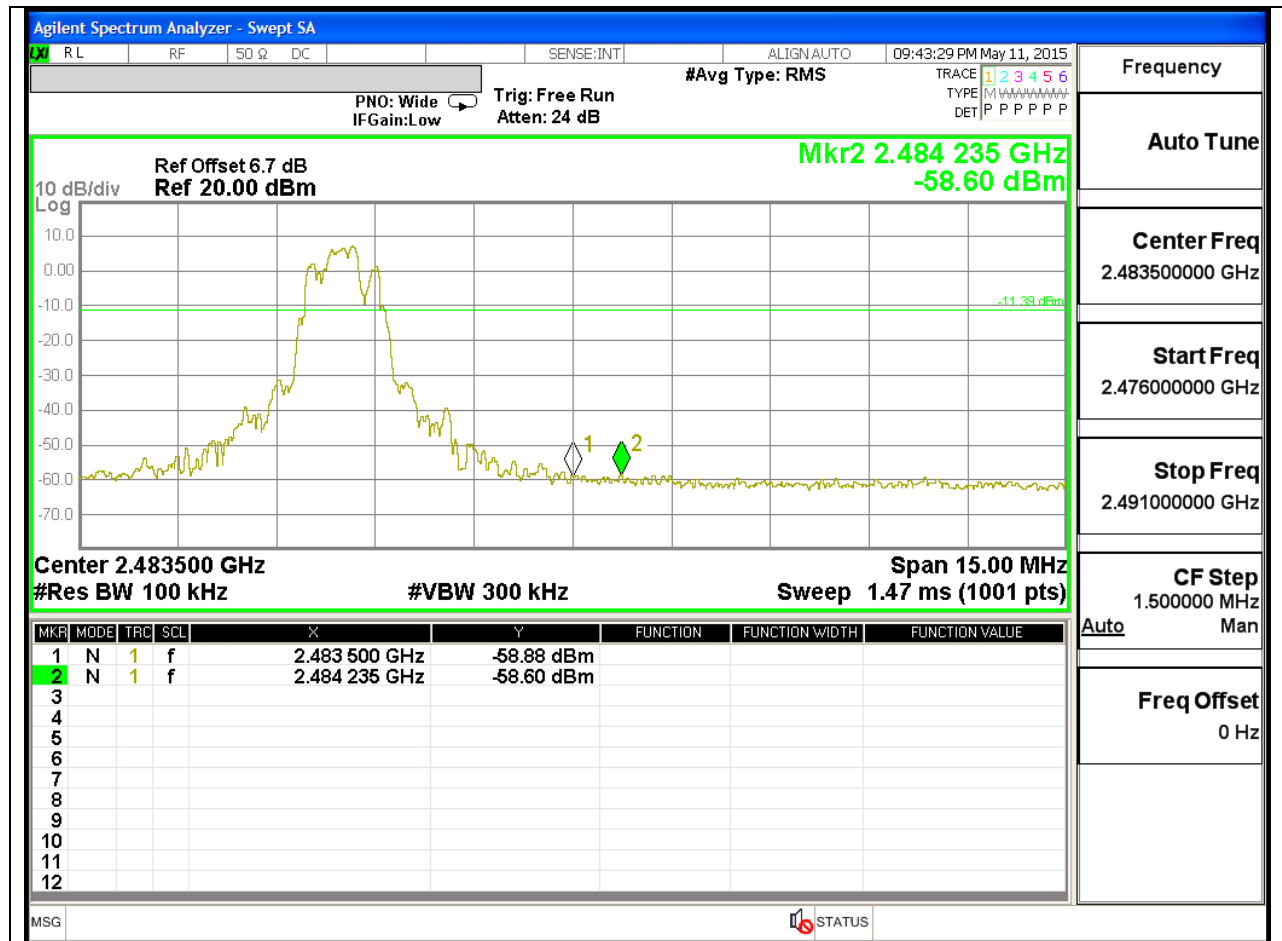


HIGH CHANNEL SPURIOUS

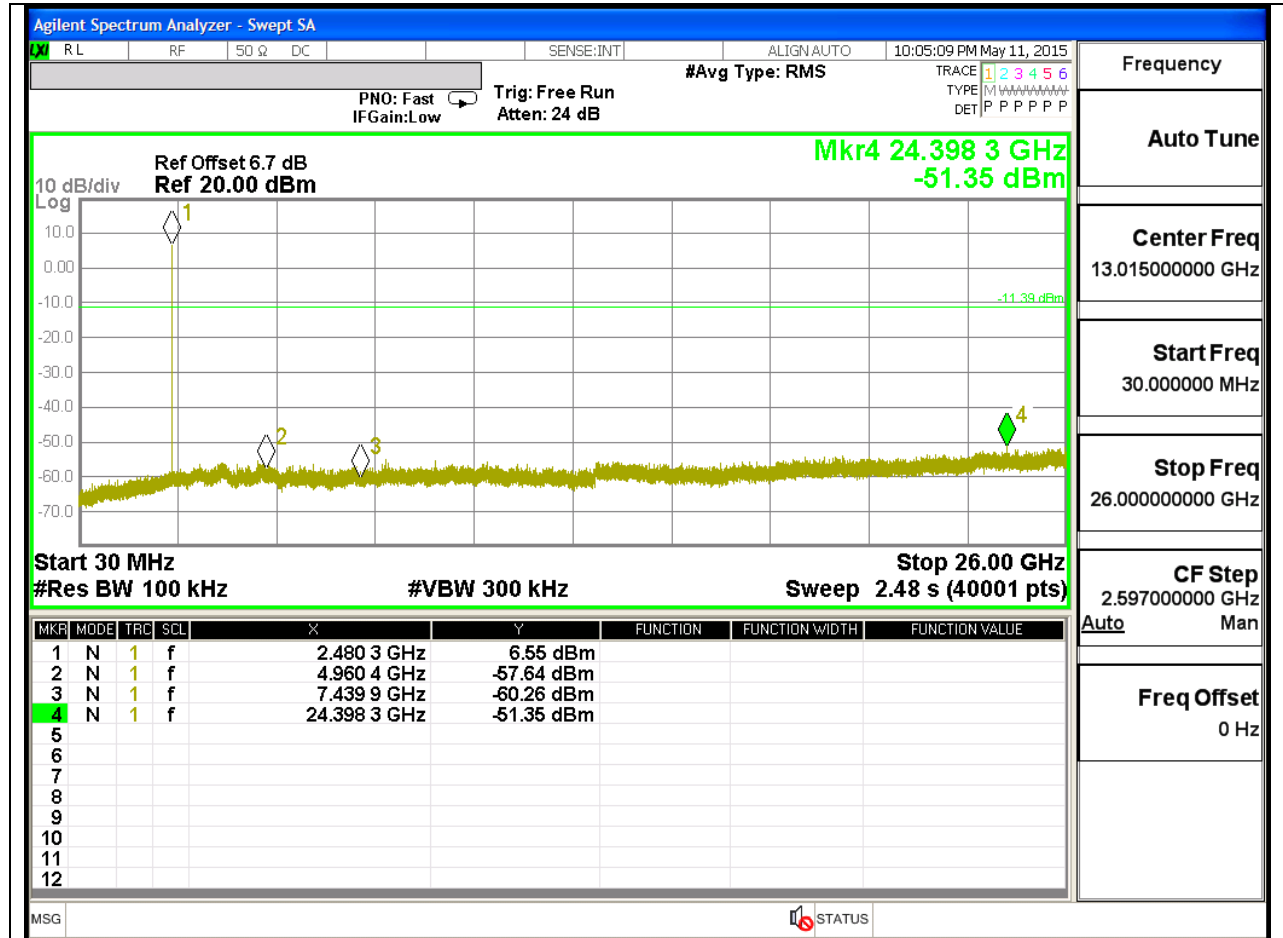

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

LOW BANDEDGE WITH HOPPING ON

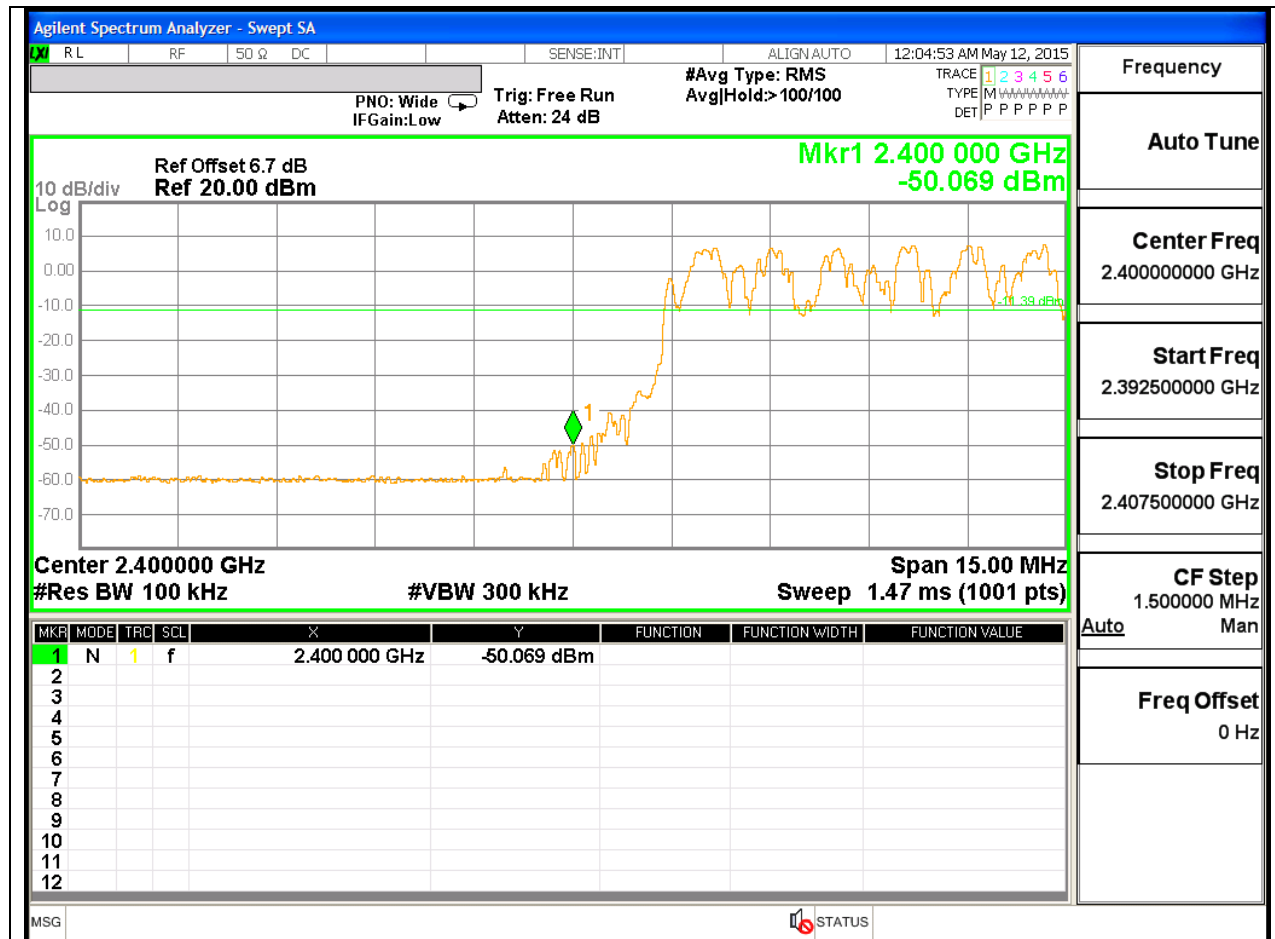

HIGH BANDEDGE WITH HOPPING ON



9. RADIATED TEST RESULTS

9.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-GEN Clause 8.9 (Transmitter)

IC RSS-GEN Clause 7 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For band edge measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 1/T (on time) for average measurement.

GFSK = $1/T = 1 / 0.0028S = 360Hz$.

8PSK = $1/T = 1 / 0.0028S = 360Hz$

The spectrum from 1GHzHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

9.2. TRANSMITTER ABOVE 1 GHz

9.2.1. BASIC DATA RATE GFSK MODULATION

RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

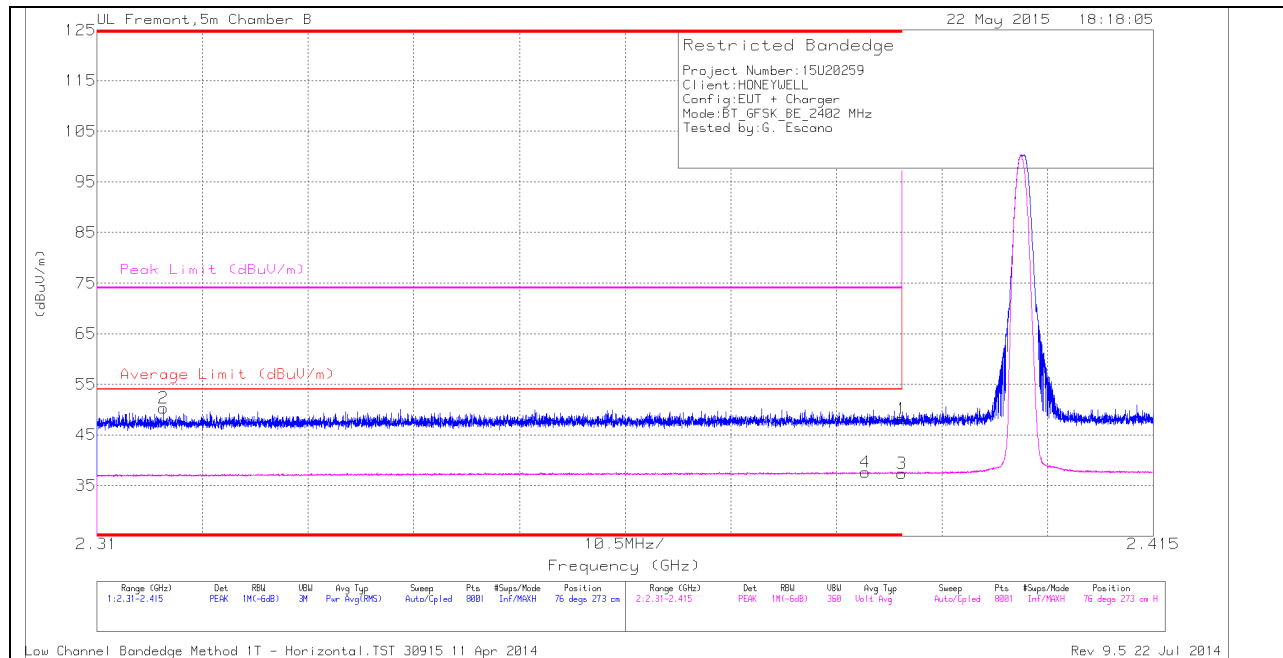

HORIZONTAL DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	38.74	PK	32	-22.6	48.14	-	-	74	-25.86	76	273	H
2	* 2.317	41.34	PK	31.6	-22.7	50.24	-	-	74	-23.76	76	273	H
3	* 2.39	28.02	VB1T	32	-22.6	37.42	54	-16.58	-	-	76	273	H
4	* 2.386	28.23	VB1T	32	-22.6	37.63	54	-16.37	-	-	76	273	H

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

VERTICAL PEAK AND AVERAGE PLOT

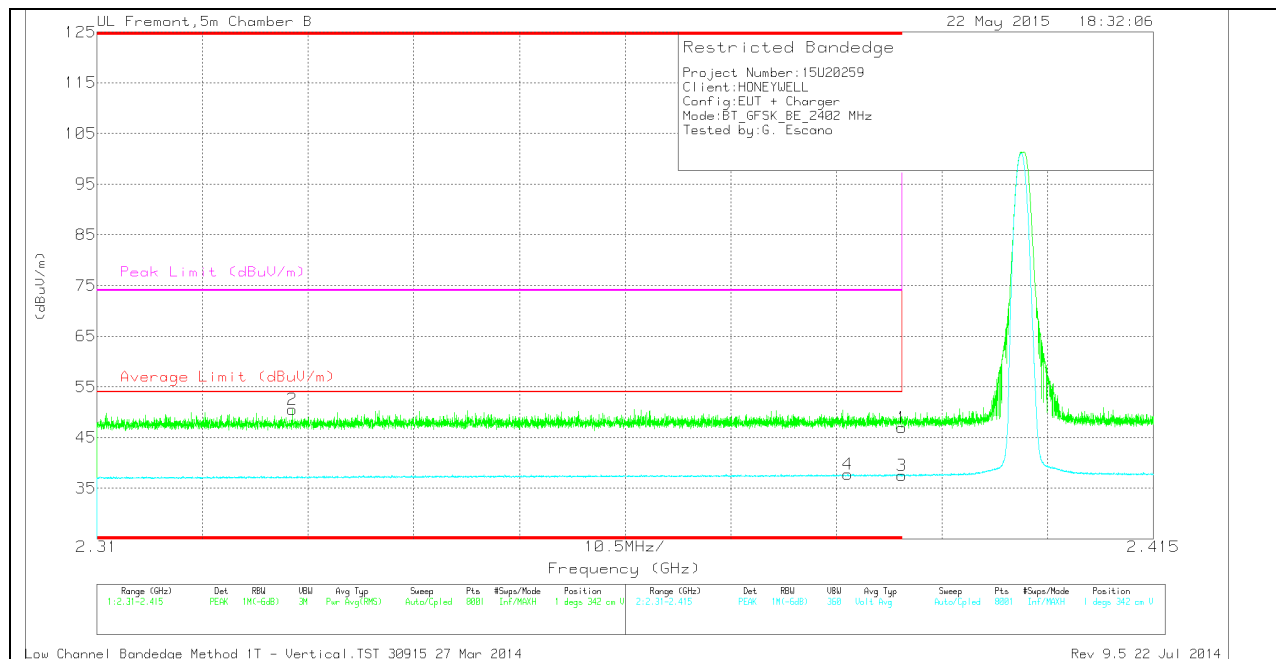

VERTICAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	37.49	PK	32	-22.6	46.89	-	-	74	-27.11	1	342	V
2	* 2.329	41.53	PK	31.7	-22.7	50.53	-	-	74	-23.47	1	342	V
3	* 2.39	28.1	VB1T	32	-22.6	37.5	54	-16.5	-	-	1	342	V
4	* 2.385	28.38	VB1T	32	-22.6	37.78	54	-16.22	-	-	1	342	V


* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

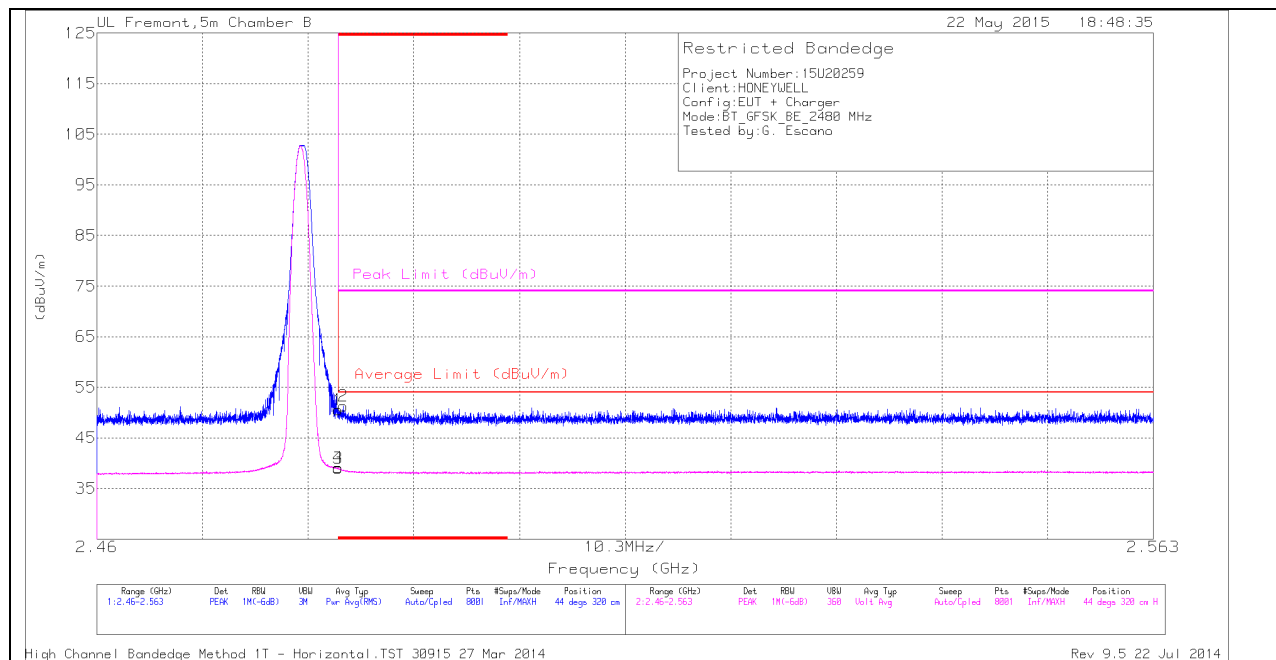

HORIZONTAL DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	40.43	PK	32.5	-22.4	50.53	-	-	74	-23.47	44	320	H
2	* 2.484	41.17	PK	32.5	-22.4	51.27	-	-	74	-22.73	44	320	H
3	* 2.484	28.92	VB1T	32.5	-22.4	39.02	54	-14.98	-	-	44	320	H
4	* 2.484	28.99	VB1T	32.5	-22.4	39.09	54	-14.91	-	-	44	320	H

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

VERTICAL PEAK AND AVERAGE PLOT

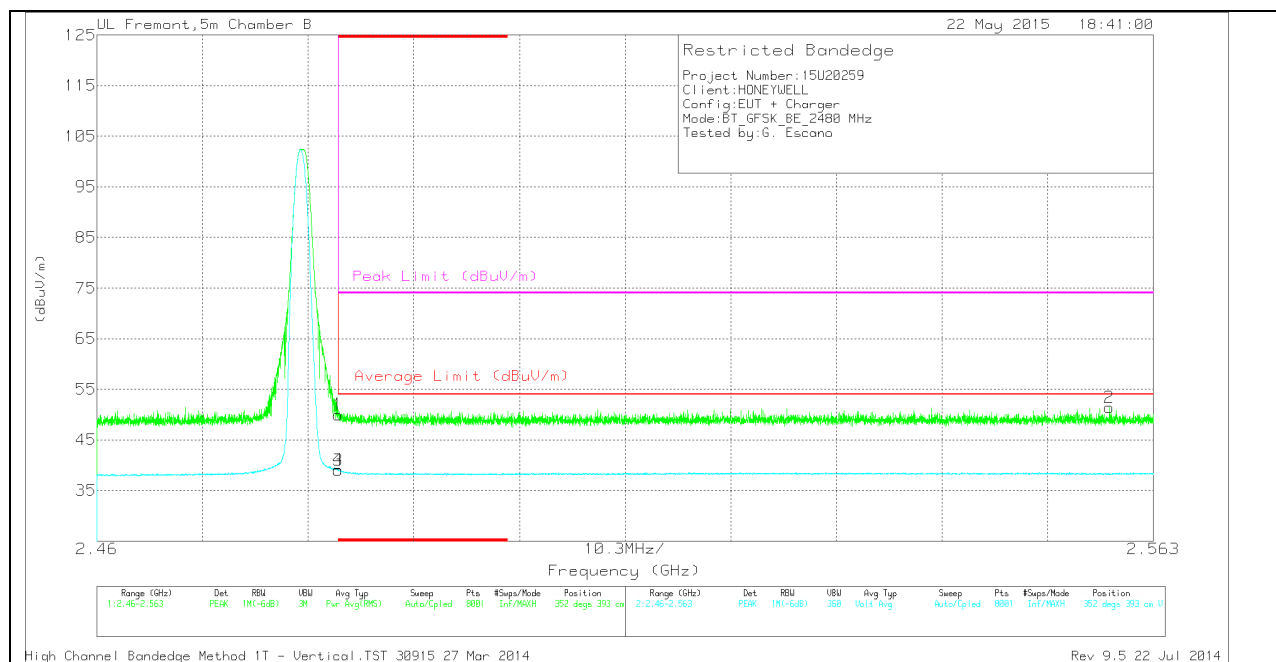

VERTICAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	39.88	PK	32.5	-22.4	49.98	-	-	74	-24.02	352	393	V
3	* 2.484	28.95	VB1T	32.5	-22.4	39.05	54	-14.95	-	-	352	393	V
4	* 2.484	28.96	VB1T	32.5	-22.4	39.06	54	-14.94	-	-	352	393	V
2	2.559	41.13	PK	32.7	-22.4	51.43	-	-	74	-22.57	352	393	V


* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet


HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

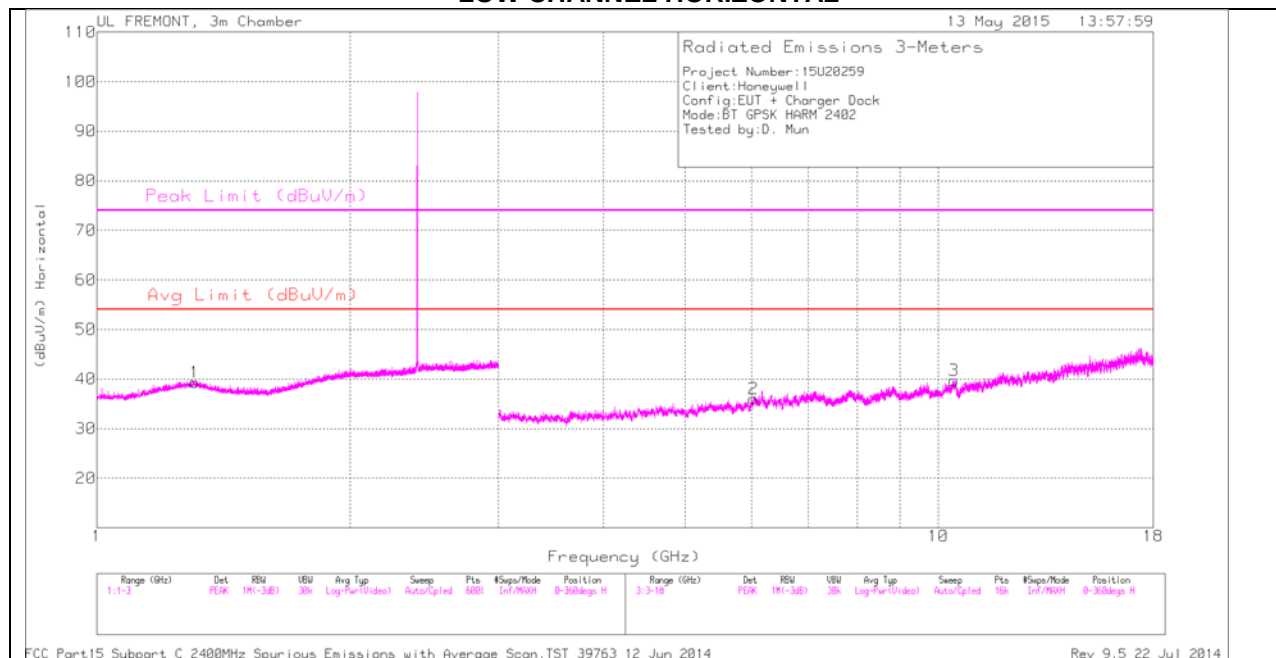

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL VERTICAL

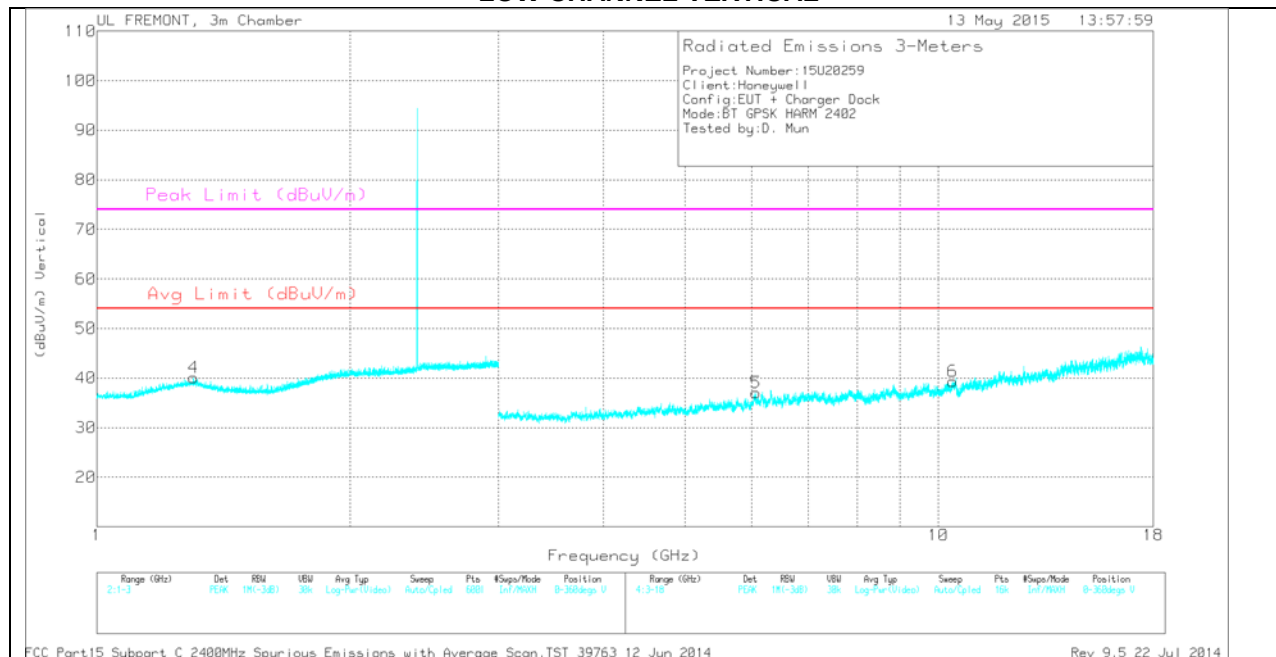

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA


TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	1.302	33.94	PK	29.9	-23.8	40.04	-	-	74	-33.96	0-360	200	V
1	1.308	33.38	PK	29.8	-23.8	39.38	-	-	74	-34.62	0-360	200	H
2	6.031	30.46	PK	35.2	-29.6	36.06	-	-	-	-	0-360	200	H
5	6.066	30.94	PK	35.2	-29.1	37.04	-	-	-	-	0-360	100	V
6	10.4	27.29	PK	37.3	-25.3	39.29	-	-	-	-	0-360	100	V
3	10.437	27.77	PK	37.3	-25.3	39.77	-	-	-	-	0-360	100	H

PK - Peak detector


FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

MID CHANNEL HORIZONTAL

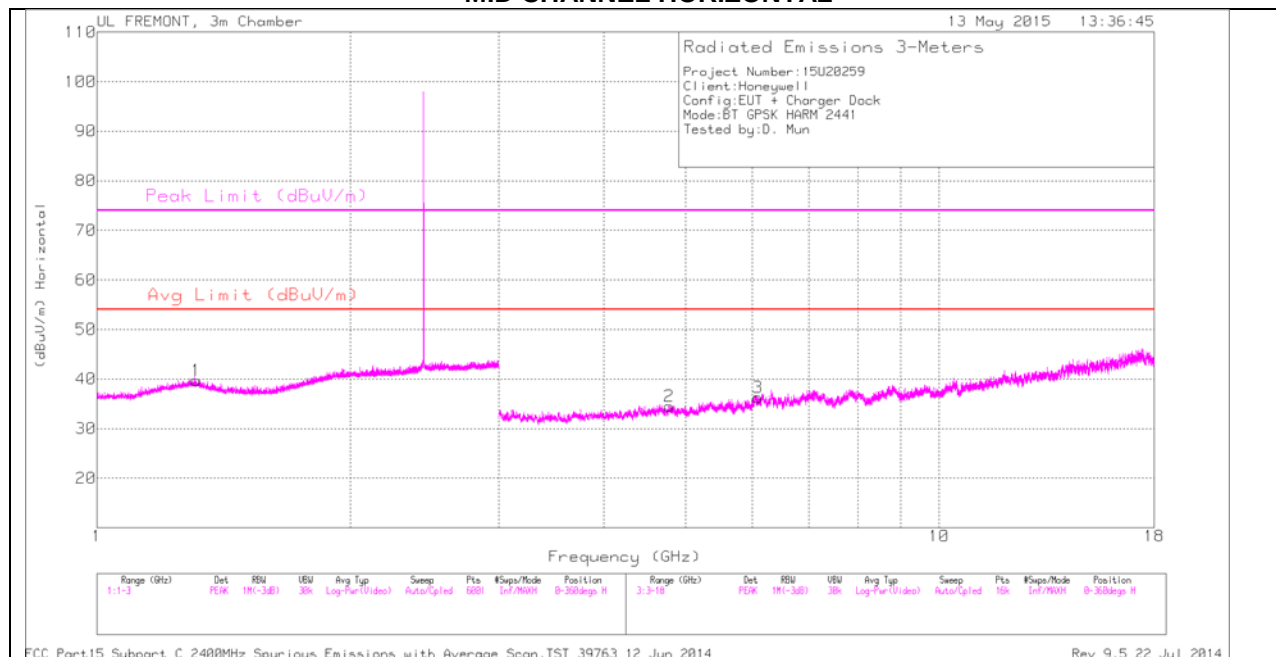

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL VERTICAL

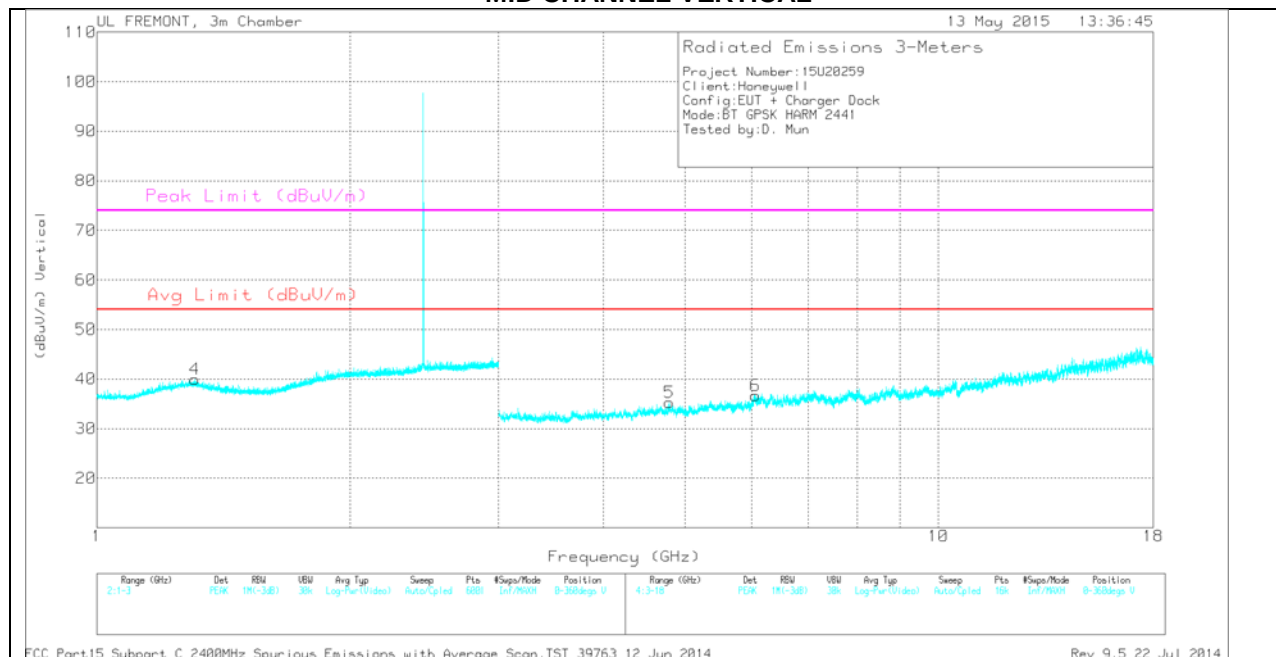

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA


TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	1.308	33.94	PK	29.8	-23.8	39.94	-	-	74	-34.06	0-360	100	V
1	1.312	33.8	PK	29.7	-23.8	39.7	-	-	74	-34.3	0-360	200	H
2	4.782	30.9	PK	34	-30.4	34.5	-	-	74	-39.5	0-360	100	H
5	4.791	31.71	PK	34	-30.4	35.31	-	-	74	-38.69	0-360	200	V
6	6.057	30.55	PK	35.2	-29.1	36.65	-	-	-	-	0-360	200	V
3	6.088	30	PK	35.2	-28.9	36.3	-	-	-	-	0-360	100	H

PK - Peak detector


FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

HIGH CHANNEL HORIZONTAL

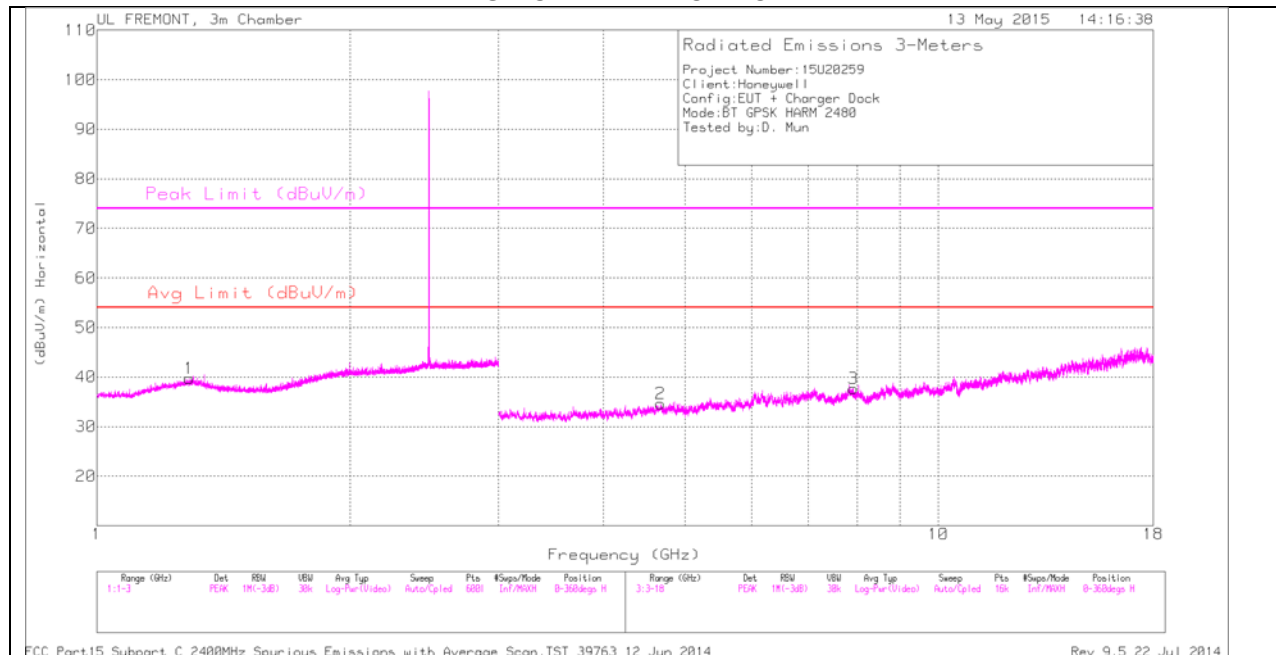

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL VERTICAL

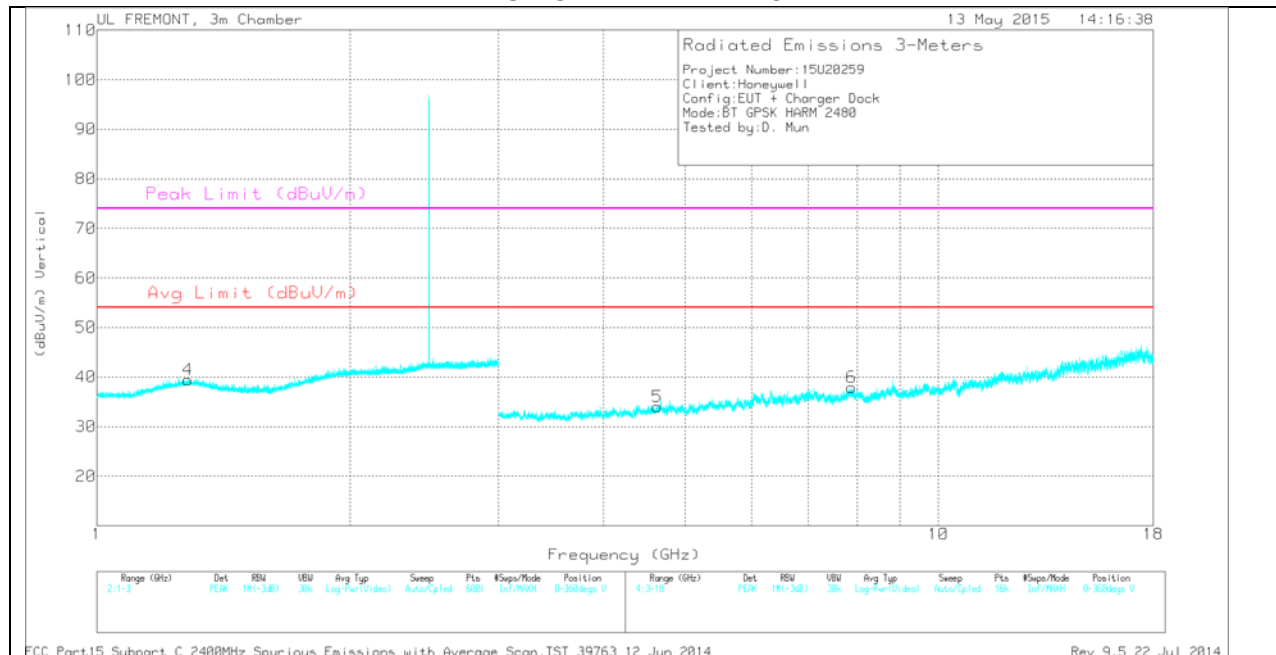

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

TRACE MARKERS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	1.282	33.52	PK	29.7	-23.8	39.42	-	-	74	-34.58	0-360	100	V
1	1.287	33.56	PK	29.8	-23.7	39.66	-	-	74	-34.34	0-360	100	H
5	4.634	31.03	PK	33.9	-30.9	34.03	-	-	74	-39.97	0-360	100	V
2	4.677	31.35	PK	34	-30.7	34.65	-	-	74	-39.35	0-360	100	H
6	7.883	29.41	PK	35.8	-27.3	37.91	-	-	-	-	0-360	200	V
3	7.924	29.69	PK	35.8	-27.8	37.69	-	-	-	-	0-360	100	H

PK - Peak detector

FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

9.2.2. ENHANCED DATA RATE 8PSK MODULATION RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

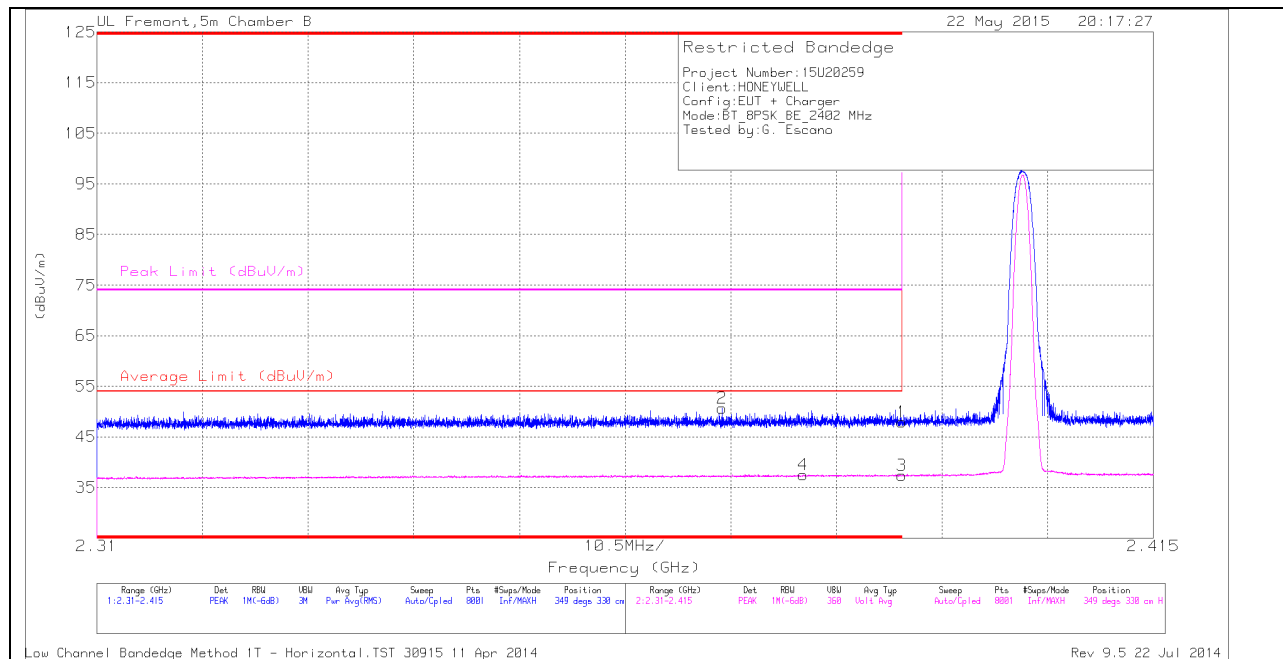

HORIZONTAL DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	38.53	PK	32	-22.6	47.93	-	-	74	-26.07	349	330	H
2	* 2.372	41.35	PK	31.9	-22.6	50.65	-	-	74	-23.35	349	330	H
3	* 2.39	27.96	VB1T	32	-22.6	37.36	54	-16.64	-	-	349	330	H
4	* 2.38	28.16	VB1T	32	-22.6	37.56	54	-16.44	-	-	349	330	H

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

VERTICAL PEAK AND AVERAGE PLOT

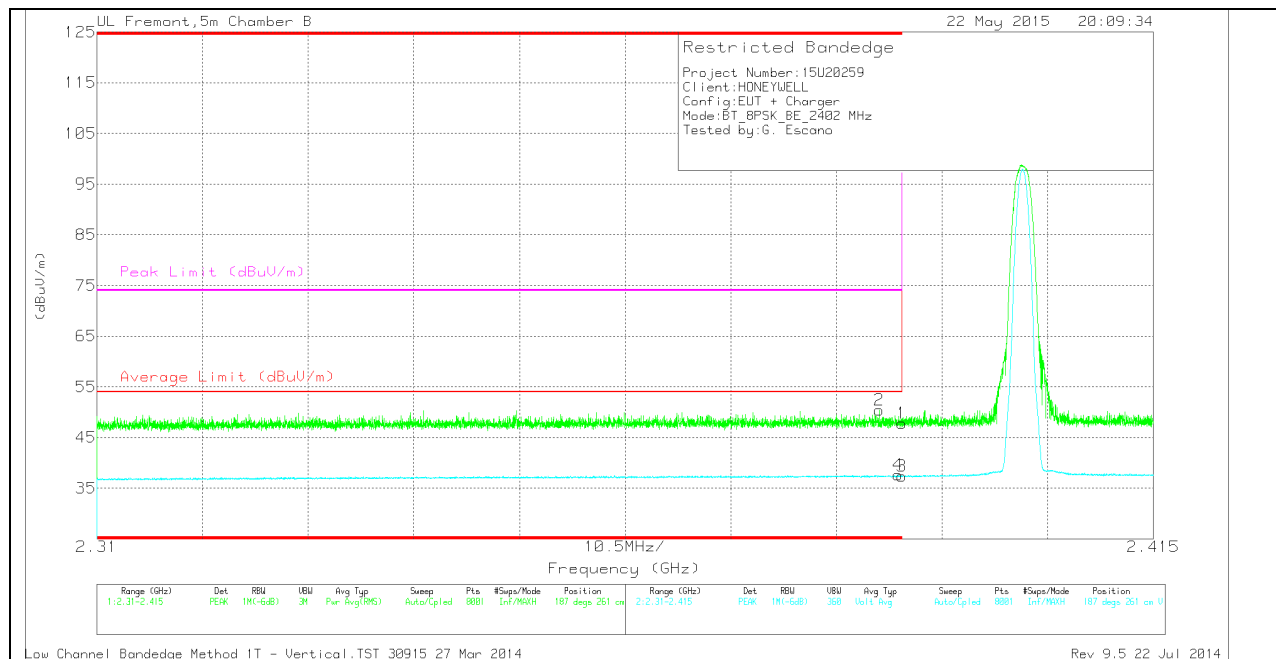

VERTICAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	38.43	PK	32	-22.6	47.83	-	-	74	-26.17	187	261	V
2	* 2.388	41	PK	32	-22.6	50.4	-	-	74	-23.6	187	261	V
3	* 2.39	28.02	VB1T	32	-22.6	37.42	54	-16.58	-	-	187	261	V
4	* 2.39	28.18	VB1T	32	-22.6	37.58	54	-16.42	-	-	187	261	V


* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

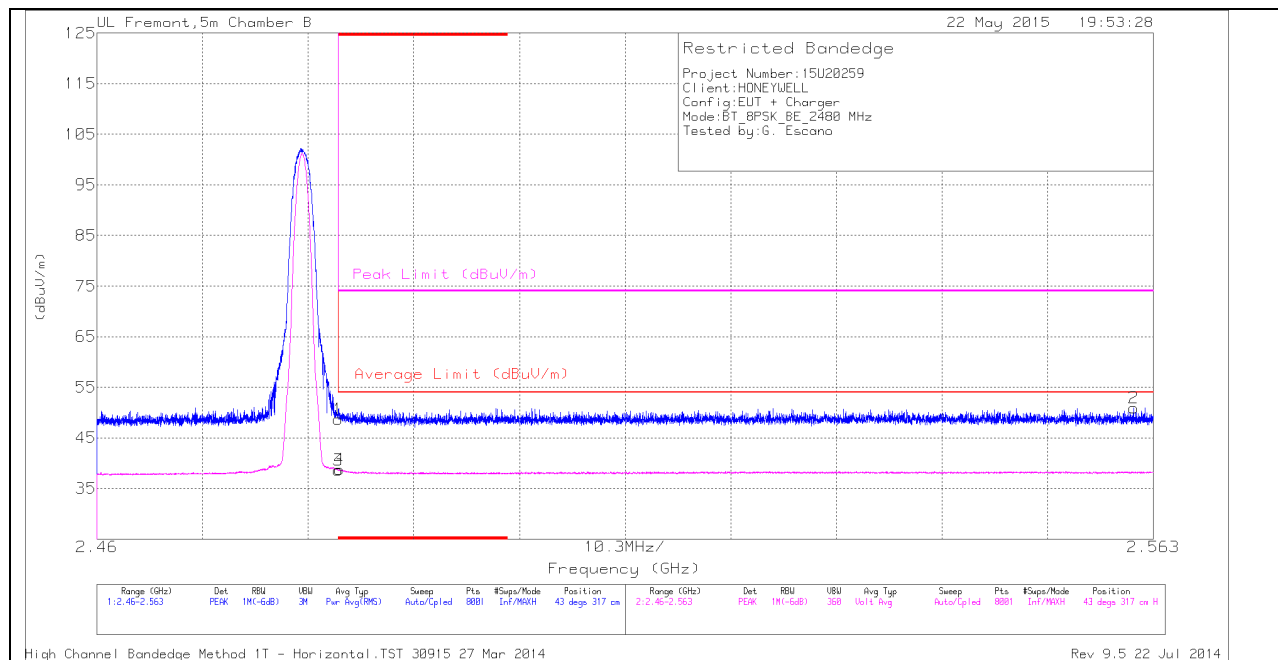

HORIZONTAL DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	38.53	PK	32.5	-22.4	48.63	-	-	74	-25.37	43	317	H
3	* 2.484	28.47	VB1T	32.5	-22.4	38.57	54	-15.43	-	-	43	317	H
4	* 2.484	28.59	VB1T	32.5	-22.4	38.69	54	-15.31	-	-	43	317	H
2	2.561	40.56	PK	32.7	-22.3	50.96	-	-	74	-23.04	43	317	H

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

VERTICAL PEAK AND AVERAGE PLOT

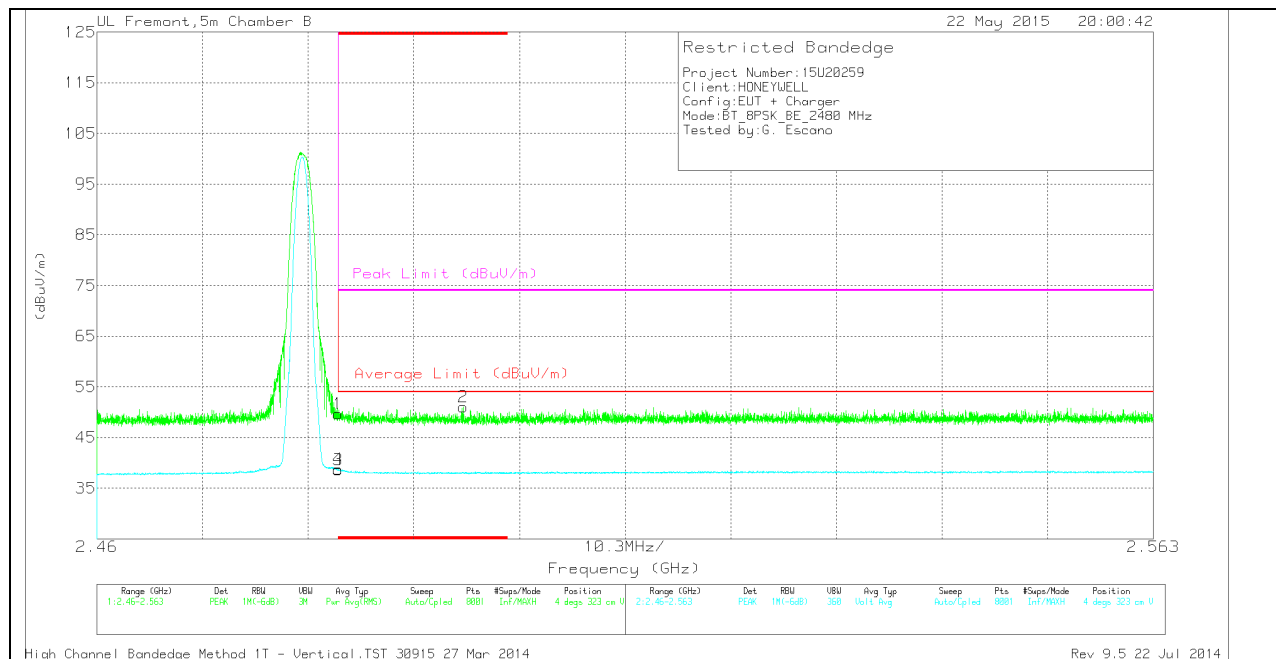

VERTICAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	39.58	PK	32.5	-22.4	49.68	-	-	74	-24.32	4	323	V
2	* 2.496	40.89	PK	32.5	-22.4	50.99	-	-	74	-23.01	4	323	V
3	* 2.484	28.48	VB1T	32.5	-22.4	38.58	54	-15.42	-	-	4	323	V
4	* 2.484	28.6	VB1T	32.5	-22.4	38.7	54	-15.3	-	-	4	323	V


* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet


HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

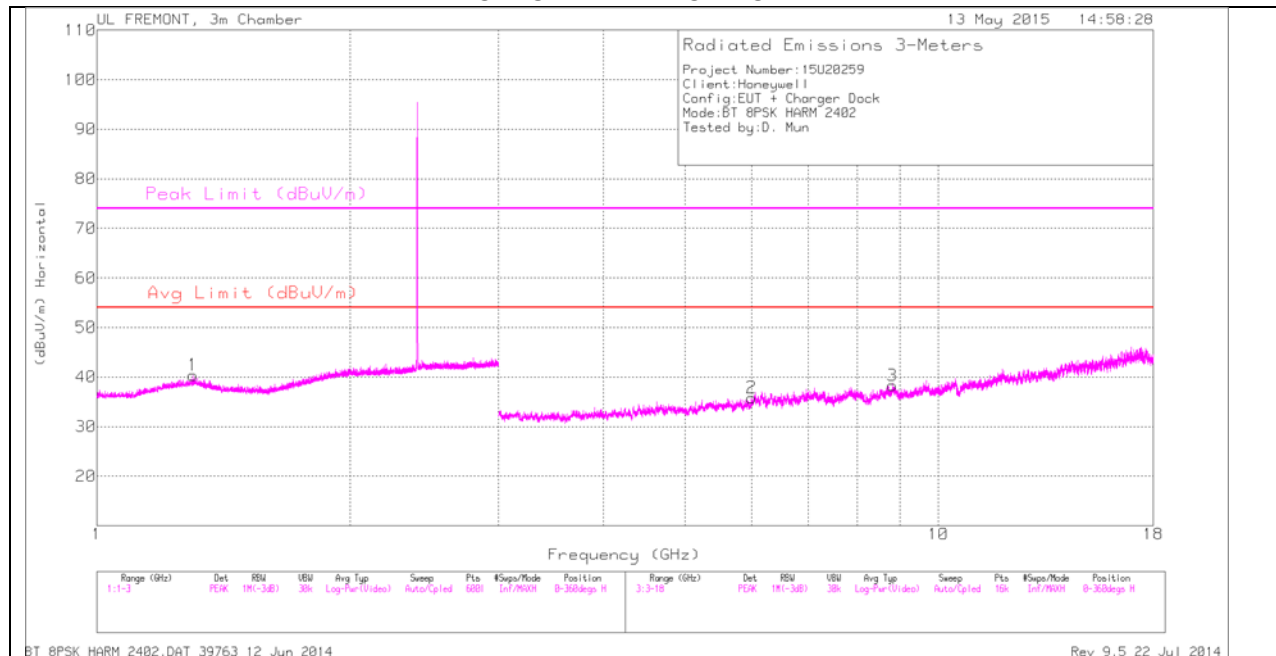

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL VERTICAL

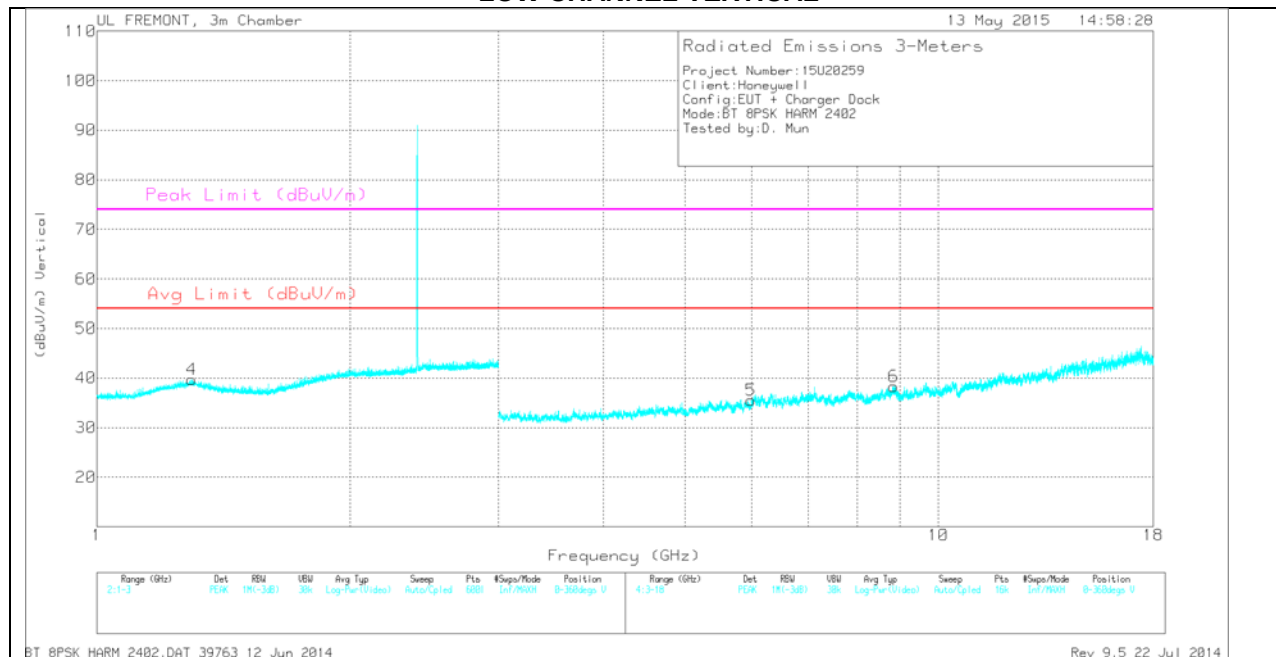

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA


TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	1.296	33.6	PK	29.9	-23.8	39.7	-	-	74	-34.3	0-360	100	V
1	1.301	34.31	PK	29.9	-23.8	40.41	-	-	74	-33.59	0-360	100	H
5	5.992	30.74	PK	35.2	-30.4	35.54	-	-	-	-	0-360	100	V
2	5.998	30.84	PK	35.2	-30.2	35.84	-	-	-	-	0-360	100	H
3	8.822	29.03	PK	35.9	-26.6	38.33	-	-	-	-	0-360	200	H
6	8.842	28.97	PK	35.9	-26.6	38.27	-	-	-	-	0-360	100	V

PK - Peak detector


FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

MID CHANNEL HORIZONTAL

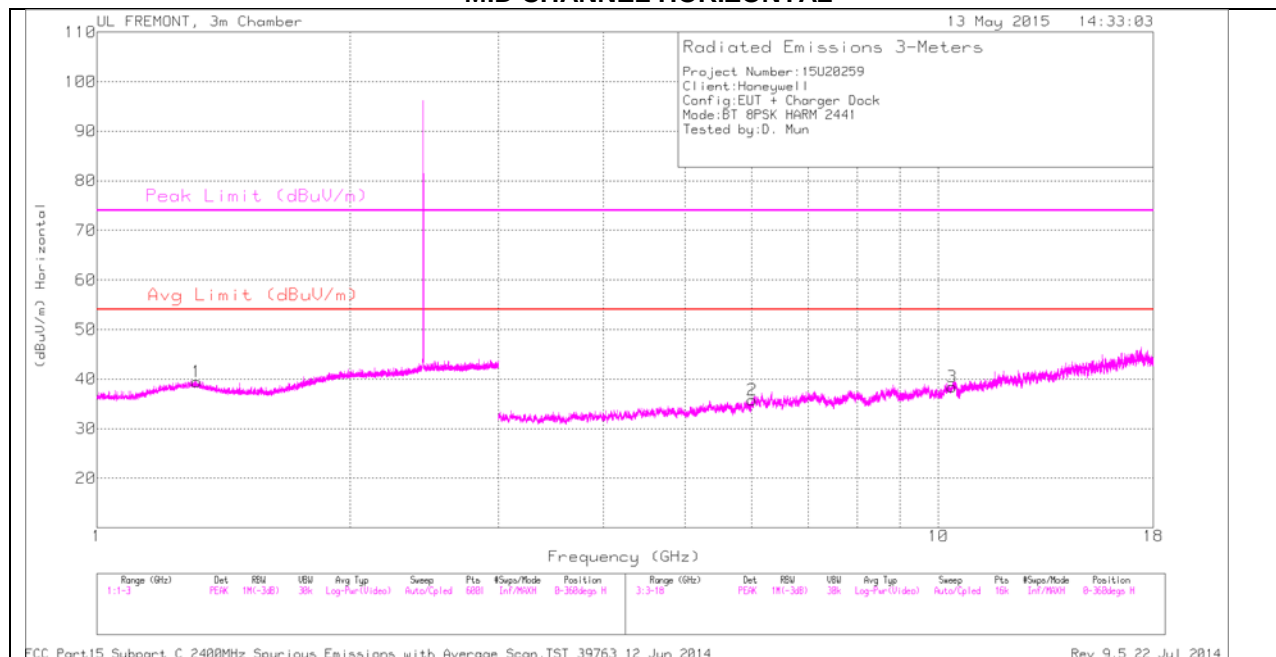

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL VERTICAL

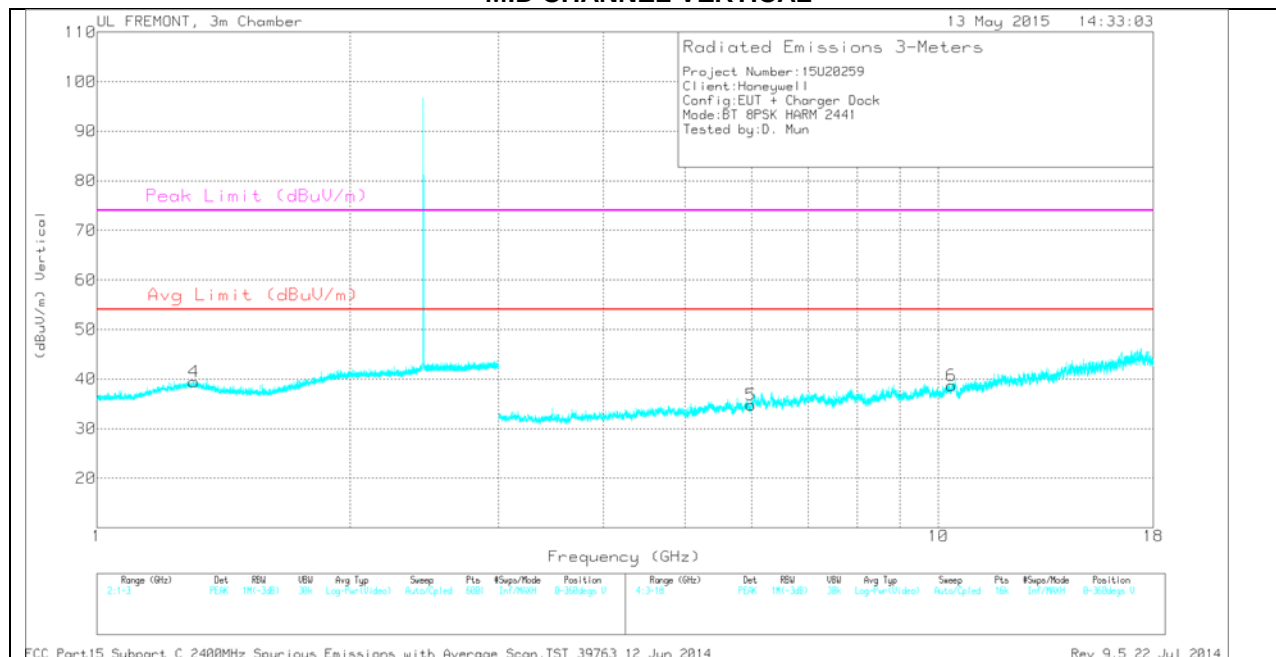

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA


TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	1.304	33.42	PK	29.8	-23.8	39.42	-	-	74	-34.58	0-360	200	V
1	1.315	33.59	PK	29.7	-23.8	39.49	-	-	74	-34.51	0-360	200	H
5	5.983	30.1	PK	35.2	-30.5	34.8	-	-	-	-	0-360	200	V
2	6.007	30.63	PK	35.2	-30.1	35.73	-	-	-	-	0-360	200	H
6	10.355	27.21	PK	37.2	-25.7	38.71	-	-	-	-	0-360	200	V
3	10.378	26.97	PK	37.2	-25.7	38.47	-	-	-	-	0-360	200	H

PK - Peak detector


FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

HIGH CHANNEL HORIZONTAL

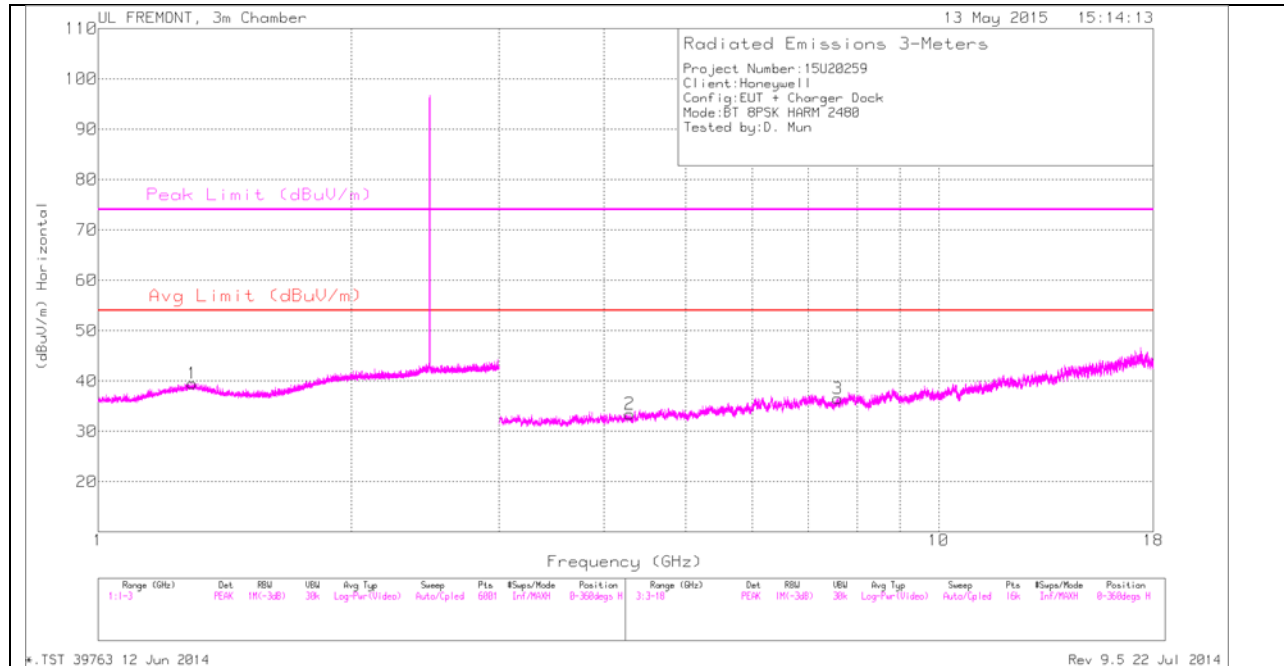

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL VERTICAL

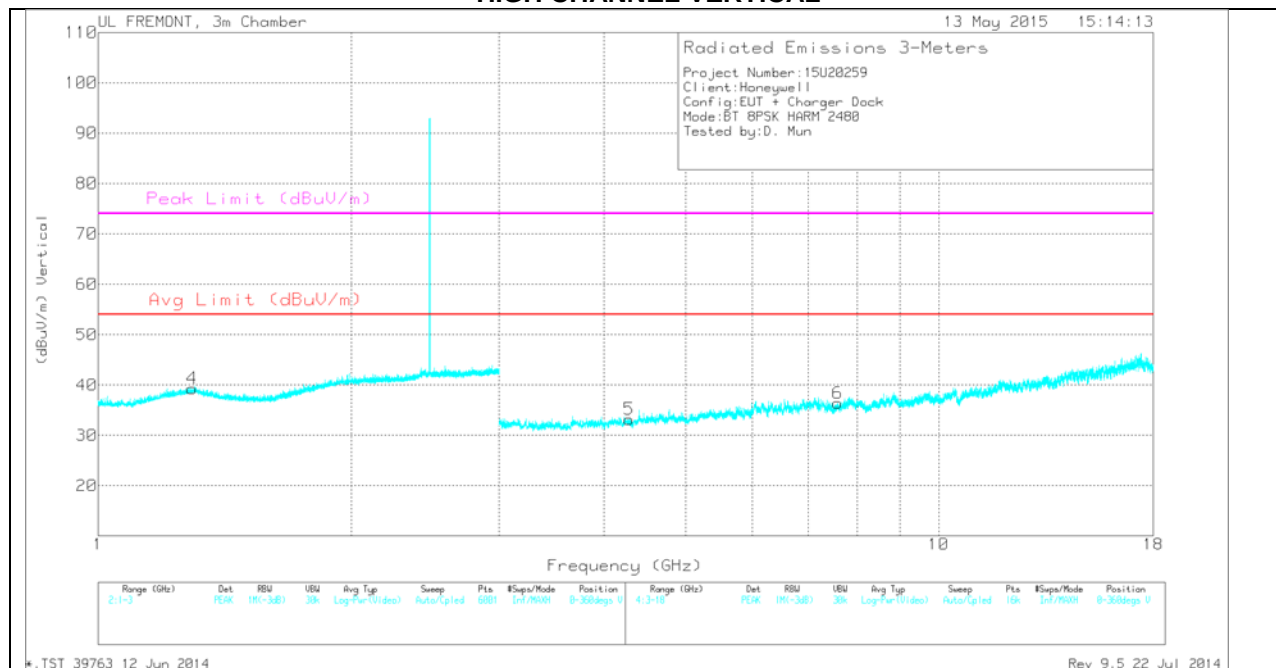

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	1.294	33.3	PK	29.8	-23.8	39.3	-	-	74	-34.7	0-360	200	V
1	1.296	33.52	PK	29.8	-23.8	39.52	-	-	74	-34.48	0-360	200	H
5	4.281	30.79	PK	33.5	-31.1	33.19	-	-	74	-40.81	0-360	100	V
2	4.293	31.06	PK	33.5	-31.1	33.46	-	-	74	-40.54	0-360	100	H
6	7.588	28.78	PK	35.7	-28.1	36.38	-	-	74	-37.62	0-360	100	V
3	7.589	28.92	PK	35.7	-28.1	36.52	-	-	74	-37.48	0-360	100	H


PK - Peak detector

FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013


9.3. WORST-CASE BELOW 1 GHz

GFSK SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL PLOT

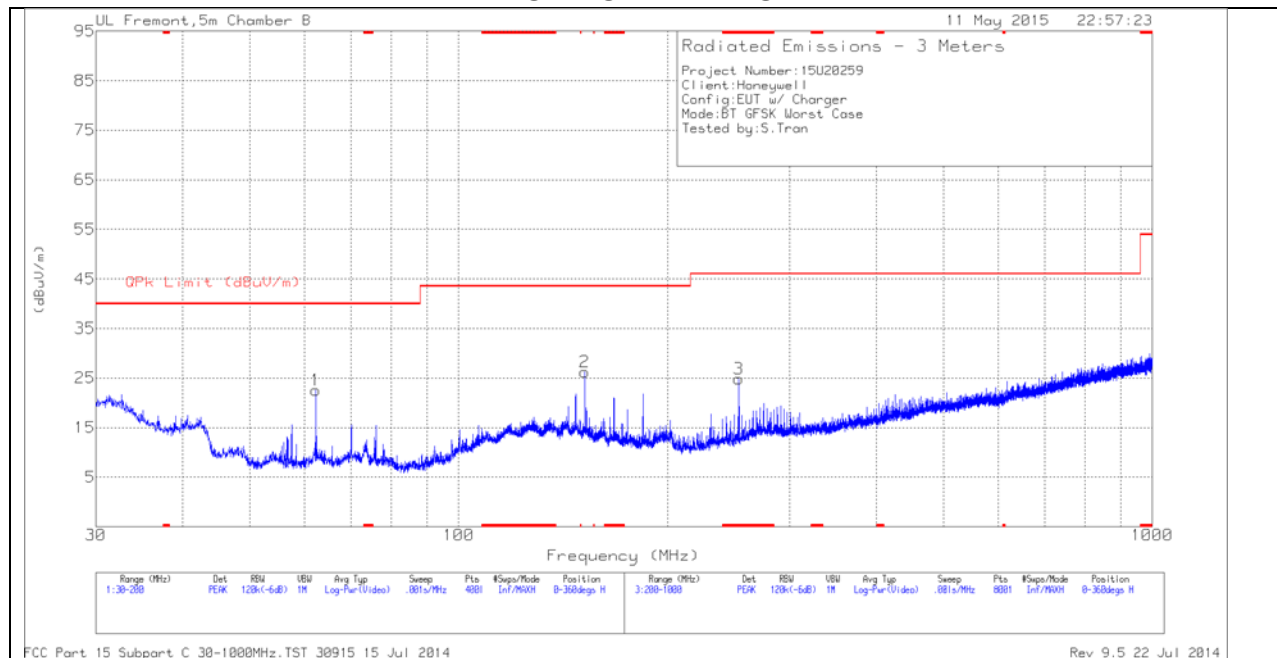

VERTICAL PLOT

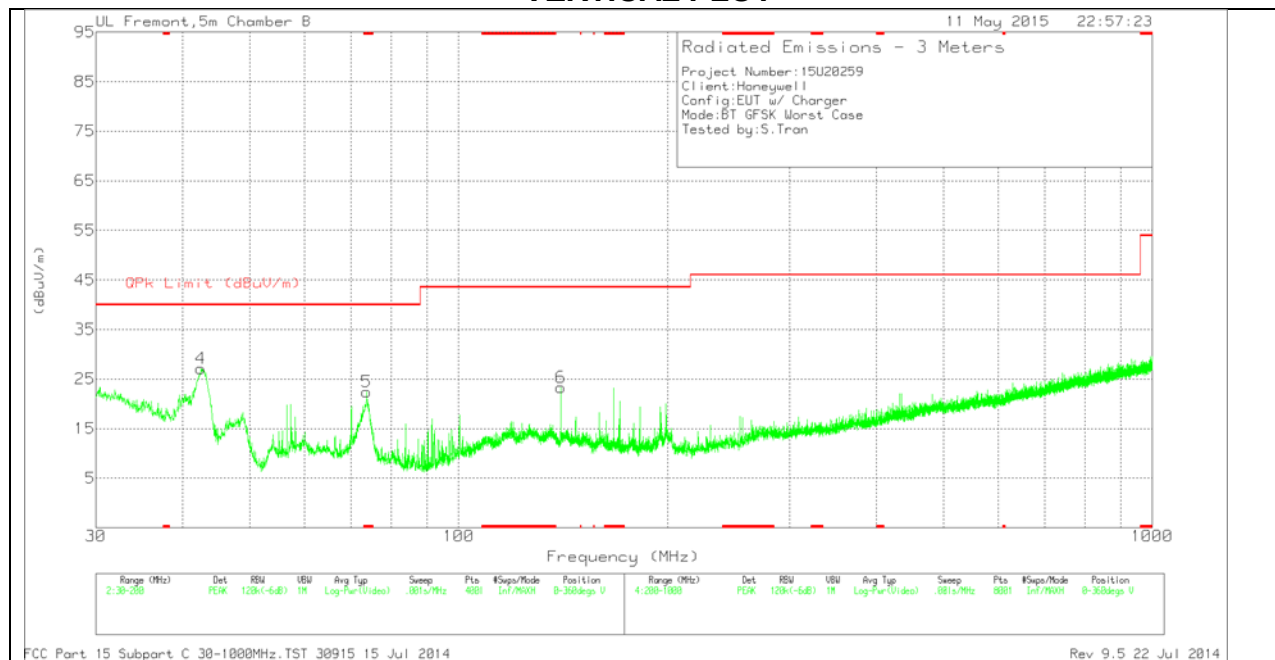

BELOW 1 GHz TABLE

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T243 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 73.7325	42.83	PK	8	-28.4	22.43	40	-17.57	0-360	101	V
3	* 253.6	39.5	PK	11.7	-26.4	24.8	46.02	-21.22	0-360	101	H
4	42.495	43.5	PK	12.3	-28.7	27.1	40	-12.9	0-360	101	V
1	62.2575	43.3	PK	7.7	-28.5	22.5	40	-17.5	0-360	300	H
6	140.5	37.93	PK	13	-27.6	23.33	43.52	-20.19	0-360	101	V
2	151.9325	41.31	PK	12.4	-27.5	26.21	43.52	-17.31	0-360	300	H

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

6 WORST EMISSIONS

LINE 1 PLOT

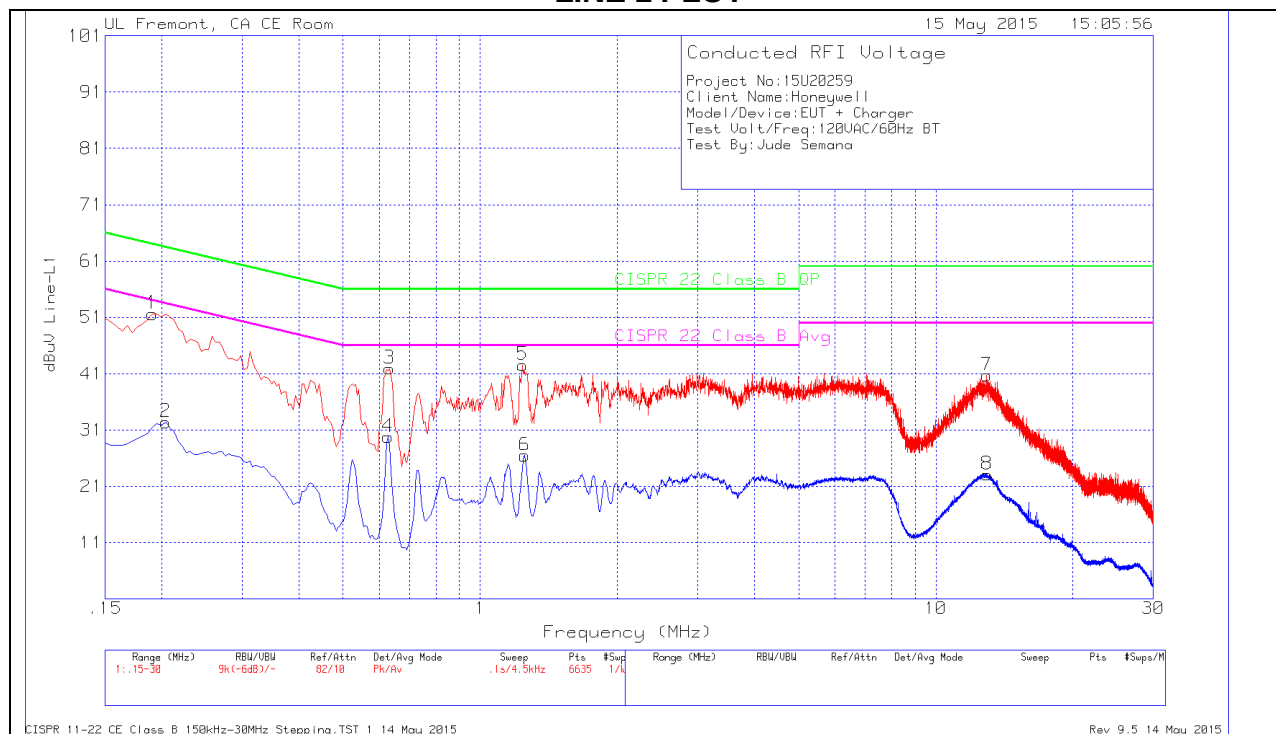


LINE 1 RESULTS

Range 1: Line-L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1	LC Cables 1&3	Corrected Reading dBuV	CISPR 22 Class B QP	Margin (dB)	CISPR 22 Class B Avg	Margin (dB)
1	.1905	50.63	Pk	1	0	51.63	64.01	-12.38		
2	.204	31.52	Av	.9	0	32.42	-	-	53.45	-21.03
3	.6315	41.63	Pk	.3	0	41.93	56	-14.07		
4	.627	29.47	Av	.3	0	29.77	-	-	46	-16.23
5	1.239	42.35	Pk	.2	0	42.55	56	-13.45		
6	1.2525	26.27	Av	.2	0	26.47	-	-	46	-19.53
7	12.939	40.29	Pk	.2	.2	40.69	60	-19.31		
8	12.9525	22.7	Av	.2	.2	23.1	-	-	50	-26.9

LINE 2 PLOT

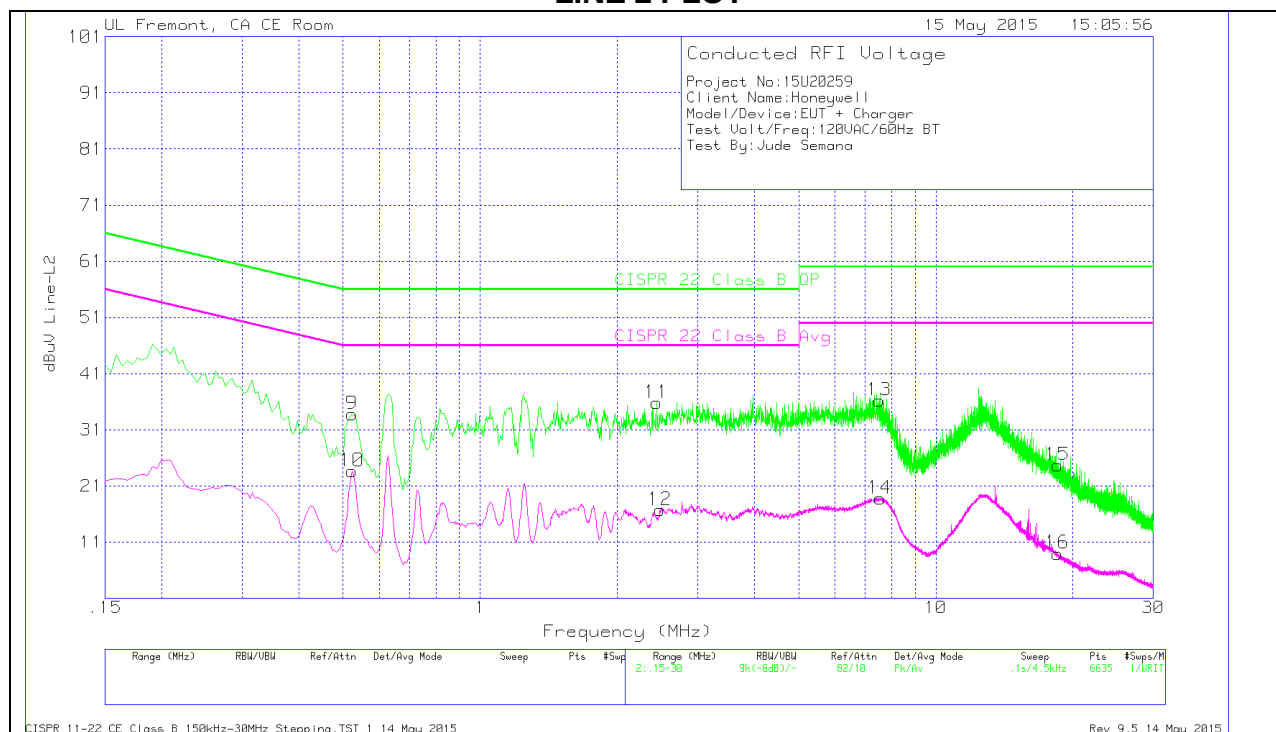

LINE 2 RESULTS

Range 2: Line-L2 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2	LC Cables 2&3	Corrected Reading dBuV	CISPR 22 Class B QP	Margin (dB)	CISPR 22 Class B Avg	Margin (dB)
9	.5235	33.42	Pk	.4	0	33.82	56	-22.18		
10	.5235	23.24	Av	.4	0	23.64	-	-	46	-22.36
11	2.4405	35.5	Pk	.2	.1	35.8	56	-20.2		
12	2.481	16.42	Av	.2	.1	16.72	-	-	46	-29.28
13	7.5165	35.94	Pk	.2	.1	36.24	60	-23.76		
14	7.539	18.48	Av	.2	.1	18.78	-	-	50	-31.22
15	18.4965	24.23	Pk	.3	.2	24.73	60	-35.27		
16	18.4875	8.49	Av	.3	.2	8.99	-	-	50	-41.01