

FCC Test Report

(PART 27)

Report No.: RF171122C17-2

FCC ID: HD5-CT60L1N

Test Model: CT60L1N

Received Date: Nov. 22, 2017

Test Date: Dec. 06, 2017 ~ Dec. 24, 2017

Issued Date: Jan. 08, 2017

Applicant: Honeywell International Inc.

Address: 9680 Old Bailes Road, Fort Mill, SC 29707 USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan
(R.O.C)

Test Location: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei Shan Hsiang, Taoyuan
Hsien 333, Taiwan, R.O.C.

FCC Registration /
Designation Number: 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agency.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results.....	5
2.1 Measurement Uncertainty.....	5
2.2 Test Site and Instruments	6
3 General Information	8
3.1 General Description of EUT	8
3.2 Configuration of System under Test.....	10
3.2.1 Description of Support Units	10
3.3 Test Mode Applicability and Tested Channel Detail	11
3.4 EUT Operating Conditions	14
3.5 General Description of Applied Standards.....	14
4 Test Types and Results	15
4.1 Output Power Measurement.....	15
4.1.1 Limits of Output Power Measurement	15
4.1.2 Test Procedures.....	15
4.1.3 Test Setup.....	16
4.1.4 Test Results	17
4.2 Frequency Stability Measurement	32
4.2.1 Limits of Frequency Stability Measurement.....	32
4.2.2 Test Procedure	32
4.2.3 Test Setup.....	32
4.2.4 Test Results	33
4.3 Occupied Bandwidth Measurement.....	45
4.3.1 Limits of Occupied Bandwidth Measurement	45
4.3.2 Test Procedure	45
4.3.3 Test Setup.....	45
4.3.4 Test Result	46
4.4 Out-of-Band Emissions Measurement.....	52
4.4.1 Limits of Out-of-Band Emissions Measurement	52
4.4.2 Test Setup.....	52
4.4.3 Test Procedures.....	52
4.4.4 Test Results	53
4.5 Peak to Average Ratio	77
4.5.1 Limits of Peak to Average Ratio Measurement	77
4.5.2 Test Setup.....	77
4.5.3 Test Procedures.....	77
4.5.4 Test Results	78
4.6 Conducted Spurious Emissions	84
4.6.1 Limits of Conducted Spurious Emissions Measurement.....	84
4.6.2 Test Setup.....	84
4.6.3 Test Procedure	84
4.6.4 Test Results	85
4.7 Radiated Emission Measurement.....	121
4.7.1 Limits of Radiated Emission Measurement	121
4.7.2 Test Procedure	121
4.7.3 Deviation from Test Standard	121
4.7.4 Test Setup.....	122
4.7.5 Test Results	123
5 Pictures of Test Arrangements.....	141
Appendix – Information on the Testing Laboratories	142

Release Control Record

Issue No.	Description	Date Issued
RF171122C17-2	Original Release	Jan. 08, 2017

1 Certificate of Conformity

Product: Dolphin CT60

Brand: Honeywell

Test Model: CT60L1N

Sample Status: Engineering sample

Applicant: Honeywell International Inc.

Test Date: Dec. 06, 2017 ~ Dec. 24, 2017

Standards: FCC Part 27, Subpart C, M

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Evonne Liu, **Date:** Jan. 08, 2017
Evonne Liu / Specialist

Approved by : Dylan Chiou, **Date:** Jan. 08, 2017
Dylan Chiou / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 27 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(h)	Equivalent Isotropic Radiated Power	Pass	Meet the requirement of limit.
2.1055 27.54	Frequency Stability	Pass	Meet the requirement of limit.
2.1049	Occupied Bandwidth	Pass	Meet the requirement of limit.
--	Peak to Average Ratio	Pass	Meet the requirement of limit.
2.1051 27.53(l)	Out-of-Band Emissions Measurements	Pass	Meet the requirement of limit.
2.1051 27.53(m)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 27.53(m)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -12.37 dB at 7518 MHz.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Conducted Emissions at mains ports	150 kHz ~ 30 MHz	2.44 dB
Radiated Emissions up to 1 GHz	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Feb. 17, 2017	Feb. 16, 2018
Spectrum Analyzer Agilent	N9010A	MY52220314	Dec. 16, 2016	Dec. 15, 2017
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	100115	Nov. 23, 2017	Nov. 22, 2018
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Dec. 13, 2016	Dec. 12, 2017
			Dec. 06, 2017	Dec. 05, 2018
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Dec. 27, 2016	Dec. 26, 2017
Double Ridge Guide Horn Antenna EMCO	3115	5619	Dec. 15, 2016	Dec. 14, 2017
BILOG Antenna SCHWARZBECK	VULB 9168	9168-153	Dec. 13, 2016	Dec. 12, 2017
			Dec. 06, 2017	Dec. 05, 2018
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Dec. 14, 2016	Dec. 13, 2017
			Dec. 01, 2017	Nov. 30, 2018
RF signal cable ETS-LINDGREN	5D-FB	Cable-CH1-01(R FC-SMS-100-SM S-120+RFC-SMS -100-SMS-400)	Jun. 23, 2017	Jun. 22, 2018
MXG Vector signal generator Agilent	N5182B	MY53050430	Oct. 24, 2017	Oct. 23, 2018
Loop Antenna	EM-6879	269	Aug. 11, 2017	Aug. 10, 2018
Preamplifier EMCI	EMC001340	980201	Nov. 01, 2017	Oct. 30, 2018
Bluetooth Tester	CBT	100946	Jul. 29, 2016	Jul. 28, 2018
Preamplifier EMCI	EMC 012645	980115	Oct. 20, 2017	Oct. 19, 2018
Preamplifier EMCI	EMC 184045	980116	Oct. 20, 2017	Oct. 19, 2018
Preamplifier EMCI	EMC 330H	980112	Oct. 13, 2017	Oct. 12, 2018
Power Meter Anritsu	ML2495A	1012010	Aug. 15, 2017	Aug. 14, 2018
Power Sensor Anritsu	MA2411B	1315050	Aug. 15, 2017	Aug. 14, 2018

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
RF Coaxial Cable HUBER+SUHNNER	EMC104-SM-SM-8 000&3000	140811+170717	Oct. 20, 2017	Oct. 19, 2018
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM- 1000(140807)	Oct. 20, 2017	Oct. 19, 2018
RF Coaxial Cable Worken	8D-FB	Cable-Ch10-01	Oct. 20, 2017	Oct. 19, 2018
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 10.
3. The horn antenna and preamplifier (model: EMC 184045) are used only for the measurement of emission frequency above 1 GHz if tested.
4. The IC Site Registration No. is IC7450F-10.

3 General Information

3.1 General Description of EUT

Product	Dolphin CT60	
Brand	Honeywell	
Test Model	CT60L1N	
Status of EUT	Engineering sample	
HW Version	V1.0	
HW P/N	DVT3	
SW Version	OS.01.001-HON.01.003	
SW P/N	329D	
Power Supply Rating	3.6 Vdc (Li-ion battery)	
Modulation Type	QPSK, 16QAM, 64QAM	
Frequency Range	LTE Band 7 (Channel Bandwidth: 5 MHz)	2502.5 ~ 2567.5 MHz
	LTE Band 7 (Channel Bandwidth: 10 MHz)	2505 ~ 2565 MHz
	LTE Band 7 (Channel Bandwidth: 15 MHz)	2507.5 ~ 2562.5 MHz
	LTE Band 7 (Channel Bandwidth: 20 MHz)	2510 ~ 2560 MHz
	LTE Band 38 (Channel Bandwidth: 5 MHz)	2572.5 ~ 2617.5 MHz
	LTE Band 38 (Channel Bandwidth: 10 MHz)	2575.0 ~ 2615.0 MHz
	LTE Band 38 (Channel Bandwidth: 15 MHz)	2577.5 ~ 2612.5 MHz
	LTE Band 38 (Channel Bandwidth: 20 MHz)	2580.0 ~ 2610.0 MHz
	LTE Band 41 (Channel Bandwidth: 5 MHz)	2498.5 ~ 2687.5 MHz
	LTE Band 41 (Channel Bandwidth: 10 MHz)	2501.0 ~ 2685.0 MHz
	LTE Band 41 (Channel Bandwidth: 15 MHz)	2503.5 ~ 2682.5 MHz
	LTE Band 41 (Channel Bandwidth: 20 MHz)	2506.0 ~ 2680.0 MHz
Max. EIRP Power	LTE Band 7 (Channel Bandwidth: 5 MHz)	184.50 mW
	LTE Band 7 (Channel Bandwidth: 10 MHz)	209.41 mW
	LTE Band 7 (Channel Bandwidth: 15 MHz)	213.80 mW
	LTE Band 7 (Channel Bandwidth: 20 MHz)	219.79 mW
	LTE Band 38 (Channel Bandwidth: 5 MHz)	358.92 mW
	LTE Band 38 (Channel Bandwidth: 10 MHz)	432.51 mW
	LTE Band 38 (Channel Bandwidth: 15 MHz)	446.68 mW
	LTE Band 38 (Channel Bandwidth: 20 MHz)	461.32 mW
	LTE Band 41 (Channel Bandwidth: 5 MHz)	403.65 mW
	LTE Band 41 (Channel Bandwidth: 10 MHz)	436.52 mW
	LTE Band 41 (Channel Bandwidth: 15 MHz)	459.20 mW
	LTE Band 41 (Channel Bandwidth: 20 MHz)	472.06 mW
Emission Designator	LTE Band 7 (Channel Bandwidth: 5 MHz)	4M50W7D
	LTE Band 7 (Channel Bandwidth: 10 MHz)	8M99G7D
	LTE Band 7 (Channel Bandwidth: 15 MHz)	13M5G7D
	LTE Band 7 (Channel Bandwidth: 20 MHz)	17M9W7D
	LTE Band 38 (Channel Bandwidth: 5 MHz)	4M50W7D
	LTE Band 38 (Channel Bandwidth: 10 MHz)	8M97W7D
	LTE Band 38 (Channel Bandwidth: 15 MHz)	13M4G7D
	LTE Band 38 (Channel Bandwidth: 20 MHz)	17M9W7D

	LTE Band 41 (Channel Bandwidth: 5 MHz)	4M50W7D
	LTE Band 41 (Channel Bandwidth: 10 MHz)	8M96W7D
	LTE Band 41 (Channel Bandwidth: 15 MHz)	13M4G7D
	LTE Band 41 (Channel Bandwidth: 20 MHz)	17M9W7D
Antenna Type	PIFA Antenna	
Accessory Device	Refer to Note as below	
Data Cable Supplied	Refer to Note as below	

Note:


1. The EUT contains following accessory devices.

Product	Brand	Model	Description
Battery	Inventus	CT50-BTSC	3.6 Vdc, 4040 mAh, 14.6Wh


2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

<Radiated Emission Test>

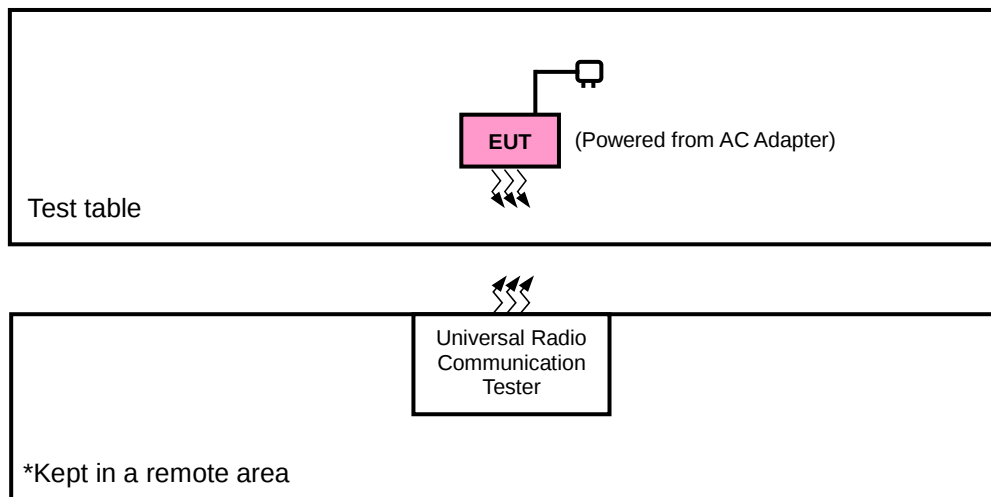

<E.I.R.P. Test>

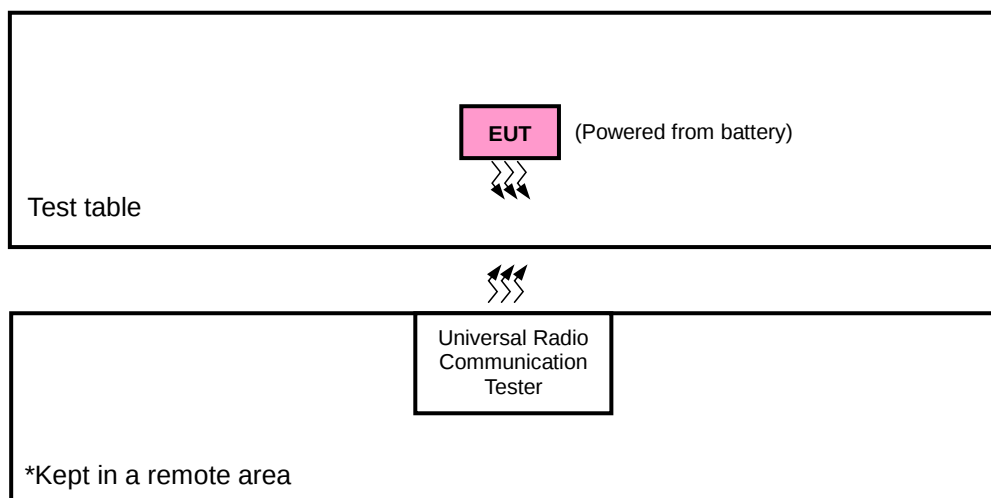

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports.

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	EIRP	Radiated Emission
LTE Band 7	Y-plane	X-axis
LTE Band 38	Y-plane	Z-axis
LTE Band 41	Y-plane	Y-axis

LTE Band 7

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	20775 to 21425	20775, 21100, 21425	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 12 RB Offset
		20800 to 21400	20800, 21100, 21400	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 24 RB Offset
		20825 to 21375	20825, 21100, 21375	15 MHz	QPSK, 16QAM, 64QAM	1 RB / 37 RB Offset
		20850 to 21350	20850, 21100 21350	20 MHz	QPSK, 16QAM, 64QAM	1 RB / 50 RB Offset
-	Frequency Stability	20775 to 21425	20775, 21425	5 MHz	QPSK	1 RB / 12 RB Offset
		20800 to 21400	20800, 21400	10 MHz	QPSK	1 RB / 24 RB Offset
		20825 to 21375	20825, 21375	15 MHz	QPSK	1 RB / 37 RB Offset
		20850 to 21350	20850, 21350	20 MHz	QPSK	1 RB / 50 RB Offset
-	Occupied Bandwidth	20775 to 21425	20775, 21100, 21425	5 MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
		20800 to 21400	20800, 21100, 21400	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
		20825 to 21375	20825, 21100, 21375	15 MHz	QPSK, 16QAM, 64QAM	75 RB / 0 RB Offset
		20850 to 21350	20850, 21100 21350	20 MHz	QPSK, 16QAM, 64QAM	100 RB / 0 RB Offset
-	Peak to Average Ratio	20775 to 21425	20775, 21100, 21425	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 12 RB Offset
		20800 to 21400	20800, 21100, 21400	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 24 RB Offset
		20825 to 21375	20825, 21100, 21375	15 MHz	QPSK, 16QAM, 64QAM	1 RB / 37 RB Offset
		20850 to 21350	20850, 21100 21350	20 MHz	QPSK, 16QAM, 64QAM	1 RB / 50 RB Offset
-	Out-of-Band Emissions	20775 to 21425	20775, 21425	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		20800 to 21400	20800, 21400	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
		20825 to 21375	20825, 21375	15 MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		20850 to 21350	20850, 21350	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
-	Conducted Emission	20775 to 21425	20775, 21100, 21425	5 MHz	QPSK	1 RB / 12 RB Offset
		20800 to 21400	20800, 21100, 21400	10 MHz	QPSK	1 RB / 24 RB Offset
		20825 to 21375	20825, 21100, 21375	15 MHz	QPSK	1 RB / 37 RB Offset
		20850 to 21350	20850, 21100 21350	20 MHz	QPSK	1 RB / 50 RB Offset
-	Radiated Emission	20850 to 21350	20850, 21100 21350	20 MHz	QPSK	1 RB / 50 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

LTE Band 38

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	37775 to 38225	37775, 38000, 38225	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		37800 to 38200	37800, 38000, 38200	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		37825 to 38175	37825, 38000, 38175	15 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		37850 to 38150	37850, 38000, 38150	20 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
-	Frequency Stability	37775 to 38225	37775, 38225	5 MHz	QPSK	1 RB / 0 RB Offset
		37800 to 38200	37800, 38200	10 MHz	QPSK	1 RB / 0 RB Offset
		37825 to 38175	37825, 38175	15 MHz	QPSK	1 RB / 0 RB Offset
		37850 to 38150	37850, 38150	20 MHz	QPSK	1 RB / 0 RB Offset
-	Occupied Bandwidth	37775 to 38225	37775, 38000, 38225	5 MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
		37800 to 38200	37800, 38000, 38200	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
		37825 to 38175	37825, 38000, 38175	15 MHz	QPSK, 16QAM, 64QAM	75 RB / 0 RB Offset
		37850 to 38150	37850, 38000, 38150	20 MHz	QPSK, 16QAM, 64QAM	100 RB / 0 RB Offset
-	Peak to Average Ratio	37775 to 38225	37775, 38000, 38225	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		37800 to 38200	37800, 38000, 38200	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		37825 to 38175	37825, 38000, 38175	15 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		37850 to 38150	37850, 38000, 38150	20 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
-	Out-of-Band Emissions	37775 to 38225	37775, 38225	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		37800 to 38200	37800, 38200	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
		37825 to 38175	37825, 38175	15 MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		37850 to 38150	37850, 38150	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
-	Conducted Emission	37775 to 38225	37775, 38000, 38225	5 MHz	QPSK	1 RB / 0 RB Offset
		37800 to 38200	37800, 38000, 38200	10 MHz	QPSK	1 RB / 0 RB Offset
		37825 to 38175	37825, 38000, 38175	15 MHz	QPSK	1 RB / 0 RB Offset
		37850 to 38150	37850, 38000, 38150	20 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	37850 to 38150	37850, 38000, 38150	20 MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

LTE Band 41

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	39675 to 41565	39675, 40620, 41565	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 12 RB Offset
		39700 to 41540	39700, 40620, 41540	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 24 RB Offset
		39725 to 41515	39725, 40620, 41515	15 MHz	QPSK, 16QAM, 64QAM	1 RB / 37 RB Offset
		39750 to 41490	39750, 40620, 41490	20 MHz	QPSK, 16QAM, 64QAM	1 RB / 50 RB Offset
-	Frequency Stability	39675 to 41565	39675, 41565	5 MHz	QPSK	1 RB / 12 RB Offset
		39700 to 41540	39700, 41540	10 MHz	QPSK	1 RB / 24 RB Offset
		39725 to 41515	39725, 41515	15 MHz	QPSK	1 RB / 37 RB Offset
		39750 to 41490	39750, 41490	20 MHz	QPSK	1 RB / 50 RB Offset
-	Occupied Bandwidth	39675 to 41565	39675, 40620, 41565	5 MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
		39700 to 41540	39700, 40620, 41540	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
		39725 to 41515	39725, 40620, 41515	15 MHz	QPSK, 16QAM, 64QAM	75 RB / 0 RB Offset
		39750 to 41490	39750, 40620, 41490	20 MHz	QPSK, 16QAM, 64QAM	100 RB / 0 RB Offset
-	Peak to Average Ratio	39675 to 41565	39675, 40620, 41565	5 MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
		39700 to 41540	39700, 40620, 41540	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		39725 to 41515	39725, 40620, 41515	15 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		39750 to 41490	39750, 40620, 41490	20 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
-	Out-of-Band Emissions	39675 to 41565	39675, 41565	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		39700 to 41540	39700, 41540	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
		39725 to 41515	39725, 41515	15 MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		39750 to 41490	39750, 41490	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
-	Conducted Emission	39675 to 41565	39675, 40620, 41565	5 MHz	QPSK	1 RB / 12 RB Offset
		39700 to 41540	39700, 40620, 41540	10 MHz	QPSK	1 RB / 24 RB Offset
		39725 to 41515	39725, 40620, 41515	15 MHz	QPSK	1 RB / 37 RB Offset
		39750 to 41490	39750, 40620, 41490	20 MHz	QPSK	1 RB / 50 RB Offset
-	Radiated Emission	39750 to 41490	39750, 40620, 41490	20 MHz	QPSK	1 RB / 50 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
EIRP	25 deg. C, 65 % RH	3.6 Vdc	Wayne Lin
Frequency Stability	25 deg. C, 65 % RH	3.6 Vdc	Wayne Lin
Occupied Bandwidth	25 deg. C, 65 % RH	3.6 Vdc	Wayne Lin
Out-of-Band Emissions	25 deg. C, 65 % RH	3.6 Vdc	Wayne Lin
Peak to Average Ratio	25 deg. C, 65 % RH	3.6 Vdc	Wayne Lin
Conducted Emission	25 deg. C, 65 % RH	3.6 Vdc	Wayne Lin
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Jisyong Wang

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

KDB 971168 D01 Power Meas License Digital Systems v02r02

ANSI/TIA/EIA-603-E 2016

ANSI 63.26-2015

Note: All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

The radiated peak output power shall be according to the specific rule Part 27.50(h)(2) that “User stations are limited to 2 watts” and 27.50(i) specific that “Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.”

4.1.2 Test Procedures

EIRP Measurement:

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 10 MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step b. Record the power level of S.G.
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$


Conducted Power Measurement:

- a. The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.3 Test Setup

EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

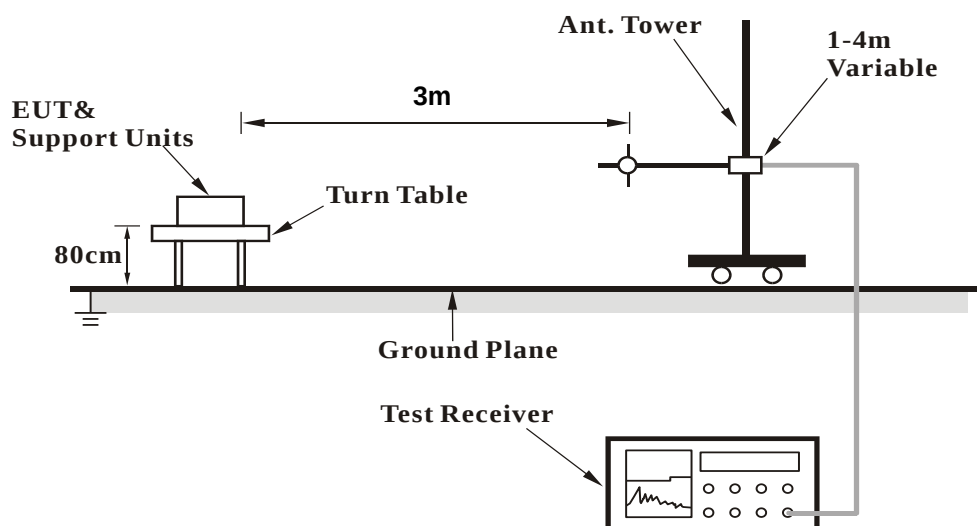


<Radiated Emission above 1 GHz>

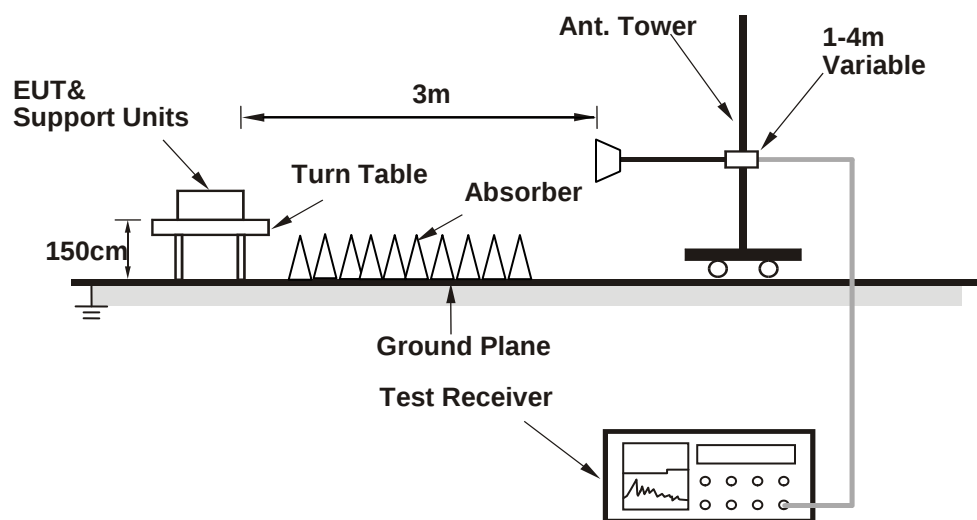

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:



4.1.4 Test Results

Conducted Output Power (dBm)

LTE Band 7															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20850	21100	21350				Channel		20825	21100	21375	
		Frequency (MHz)		2510.0	2535.0	2560.0				Frequency (MHz)		2507.5	2535.0	2562.5	
20M	QPSK	1	0	23.52	23.75	23.59	0	15M	QPSK	1	0	23.45	23.68	23.52	0
		1	50	23.61	23.56	23.17	0			1	37	23.54	23.49	23.10	0
		1	99	23.63	23.64	23.12	0			1	74	23.56	23.57	23.05	0
		50	0	22.71	22.91	22.75	1			36	0	22.64	22.84	22.68	1
		50	25	22.79	22.90	22.90	1			36	19	22.72	22.83	22.83	1
		50	50	22.88	22.84	22.75	1			36	39	22.81	22.77	22.68	1
		100	0	22.80	22.82	22.73	1			75	0	22.73	22.75	22.66	1
		1	0	22.82	22.94	22.63	1		16QAM	1	0	22.75	22.87	22.56	1
	16QAM	1	50	22.89	22.91	22.44	1			1	37	22.82	22.84	22.37	1
		1	99	22.92	22.92	22.31	1			1	74	22.85	22.85	22.24	1
		50	0	21.67	21.77	21.65	2			36	0	21.60	21.70	21.58	2
		50	25	22.00	21.93	22.00	2			36	19	21.93	21.86	21.93	2
		50	50	21.85	21.85	21.89	2			36	39	21.78	21.78	21.82	2
		100	0	21.67	21.85	21.90	2			75	0	21.60	21.78	21.83	2
		1	0	21.85	21.97	21.66	2		64QAM	1	0	21.78	21.90	21.59	2
	64QAM	1	50	21.92	21.94	21.47	2			1	37	21.85	21.87	21.40	2
		1	99	21.95	21.95	21.34	2			1	74	21.88	21.88	21.27	2
		50	0	20.70	20.80	20.68	3			36	0	20.63	20.73	20.61	3
		50	25	20.93	20.96	20.91	3			36	19	20.86	20.89	20.84	3
		50	50	20.88	20.88	20.92	3			36	39	20.81	20.81	20.85	3
		100	0	20.70	20.88	20.93	3			75	0	20.63	20.81	20.86	3
		1	0	21.85	21.97	21.66	2			1	0	21.78	21.90	21.59	2
10M	QPSK	1	0	23.39	23.62	23.46	0	5M	QPSK	1	0	23.31	23.54	23.38	0
		1	24	23.48	23.43	23.04	0			1	12	23.40	23.35	22.96	0
		1	49	23.50	23.51	22.99	0			1	24	23.42	23.43	22.91	0
		25	0	22.58	22.78	22.62	1			12	0	22.50	22.70	22.54	1
		25	12	22.66	22.77	22.77	1			12	6	22.58	22.69	22.69	1
		25	25	22.75	22.71	22.62	1			12	13	22.67	22.63	22.54	1
		50	0	22.67	22.69	22.60	1			25	0	22.59	22.61	22.52	1
		1	0	22.69	22.81	22.50	1		16QAM	1	0	22.61	22.73	22.42	1
	16QAM	1	24	22.76	22.78	22.31	1			1	12	22.68	22.70	22.23	1
		1	49	22.79	22.79	22.18	1			1	24	22.71	22.71	22.10	1
		25	0	21.54	21.64	21.52	2			12	0	21.46	21.56	21.44	2
		25	12	21.87	21.80	21.87	2			12	6	21.79	21.72	21.79	2
		25	25	21.72	21.72	21.76	2			12	13	21.64	21.64	21.68	2
		50	0	21.54	21.72	21.77	2			25	0	21.46	21.64	21.69	2
		1	0	21.72	21.84	21.53	2		64QAM	1	0	21.64	21.76	21.45	2
	64QAM	1	24	21.79	21.81	21.34	2			1	12	21.71	21.73	21.26	2
		1	49	21.82	21.82	21.21	2			1	24	21.74	21.74	21.13	2
		25	0	20.57	20.67	20.55	3			12	0	20.49	20.59	20.47	3
		25	12	20.80	20.83	20.78	3			12	6	20.72	20.75	20.70	3
		25	25	20.75	20.75	20.79	3			12	13	20.67	20.67	20.71	3
		50	0	20.57	20.75	20.80	3			25	0	20.49	20.67	20.72	3

LTE Band 38															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		37850	38000	38150				Channel		37825	38000	38175	
		Frequency (MHz)		2580.0	2595.0	2610.0				Frequency (MHz)		2577.5	2595.0	2612.5	
20M	QPSK	1	0	23.66	23.84	23.76	0	15M	QPSK	1	0	23.53	23.71	23.63	0
		1	50	23.63	23.81	23.73	0			1	37	23.50	23.68	23.60	0
		1	99	23.60	23.78	23.70	0			1	74	23.47	23.65	23.57	0
		50	0	22.80	22.98	22.90	1			36	0	22.67	22.85	22.77	1
		50	25	22.78	22.96	22.88	1			36	19	22.65	22.83	22.75	1
		50	50	22.74	22.92	22.84	1			36	39	22.61	22.79	22.71	1
		100	0	22.70	22.88	22.80	1			75	0	22.57	22.75	22.67	1
		1	0	22.64	22.82	22.74	1		16QAM	1	0	22.51	22.69	22.61	1
	16QAM	1	50	22.61	22.79	22.71	1			1	37	22.48	22.66	22.58	1
		1	99	22.58	22.76	22.68	1			1	74	22.45	22.63	22.55	1
		50	0	21.78	21.96	21.88	2			36	0	21.65	21.83	21.75	2
		50	25	21.76	21.94	21.86	2			36	19	21.63	21.81	21.73	2
		50	50	21.72	21.90	21.82	2			36	39	21.59	21.77	21.69	2
		100	0	21.68	21.86	21.78	2			75	0	21.55	21.73	21.65	2
	64QAM	1	0	21.61	21.79	21.71	2		64QAM	1	0	21.48	21.66	21.58	2
		1	50	21.58	21.76	21.68	2			1	37	21.45	21.63	21.55	2
		1	99	21.55	21.73	21.65	2			1	74	21.42	21.60	21.52	2
		50	0	20.75	20.93	20.85	3			36	0	20.62	20.80	20.72	3
		50	25	20.73	20.91	20.83	3			36	19	20.60	20.78	20.70	3
		50	50	20.69	20.87	20.79	3			36	39	20.56	20.74	20.66	3
		100	0	20.65	20.83	20.75	3			75	0	20.52	20.70	20.62	3
10M	QPSK	1	0	23.44	23.62	23.54	0	5M	QPSK	1	0	23.30	23.48	23.40	0
		1	24	23.41	23.59	23.51	0			1	12	23.27	23.45	23.37	0
		1	49	23.38	23.56	23.48	0			1	24	23.24	23.42	23.34	0
		25	0	22.58	22.76	22.68	1			12	0	22.44	22.62	22.54	1
		25	12	22.56	22.74	22.66	1			12	6	22.42	22.60	22.52	1
		25	25	22.52	22.70	22.62	1			12	13	22.38	22.56	22.48	1
		50	0	22.48	22.66	22.58	1			25	0	22.34	22.52	22.44	1
		1	0	22.42	22.60	22.52	1		16QAM	1	0	22.28	22.46	22.38	1
	16QAM	1	24	22.39	22.57	22.49	1			1	12	22.25	22.43	22.35	1
		1	49	22.36	22.54	22.46	1			1	24	22.22	22.40	22.32	1
		25	0	21.56	21.74	21.66	2			12	0	21.42	21.60	21.52	2
		25	12	21.54	21.72	21.64	2			12	6	21.40	21.58	21.50	2
		25	25	21.50	21.68	21.60	2			12	13	21.36	21.54	21.46	2
		50	0	21.46	21.64	21.56	2			25	0	21.32	21.50	21.42	2
	64QAM	1	0	21.39	21.57	21.49	2		64QAM	1	0	21.25	21.43	21.35	2
		1	24	21.36	21.54	21.46	2			1	12	21.22	21.40	21.32	2
		1	49	21.33	21.51	21.43	2			1	24	21.19	21.37	21.29	2
		25	0	20.53	20.71	20.63	3			12	0	20.39	20.57	20.49	3
		25	12	20.51	20.69	20.61	3			12	6	20.37	20.55	20.47	3
		25	25	20.47	20.65	20.57	3			12	13	20.33	20.51	20.43	3
		50	0	20.43	20.61	20.53	3			25	0	20.29	20.47	20.39	3

LTE Band 41															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		39750	40620	41490				Channel		39725	40620	41515	
		Frequency (MHz)		2506.0	2593.0	2680.0				Frequency (MHz)		2503.5	2593.0	2682.5	
20M	QPSK	1	0	23.86	23.51	23.56	0	15M	QPSK	1	0	23.79	23.44	23.49	0
		1	50	23.79	23.83	23.45	0			1	37	23.72	23.76	23.38	0
		1	99	23.66	23.71	23.40	0			1	74	23.59	23.64	23.33	0
		50	0	22.99	22.86	22.75	1			36	0	22.92	22.79	22.68	1
		50	25	22.93	22.97	22.81	1			36	19	22.86	22.90	22.74	1
		50	50	22.88	22.85	22.72	1			36	39	22.81	22.78	22.65	1
		100	0	22.95	22.76	22.65	1			75	0	22.88	22.69	22.58	1
		1	0	22.95	22.90	22.58	1		16QAM	1	0	22.88	22.83	22.51	1
	16QAM	1	50	22.91	22.80	22.93	1			1	37	22.84	22.73	22.86	1
		1	99	22.89	22.91	22.71	1			1	74	22.82	22.84	22.64	1
		50	0	21.74	21.81	21.72	2			36	0	21.67	21.74	21.65	2
		50	25	21.83	21.92	21.78	2			36	19	21.76	21.85	21.71	2
		50	50	21.88	21.82	21.70	2			36	39	21.81	21.75	21.63	2
		100	0	21.89	21.81	21.72	2			75	0	21.82	21.74	21.65	2
		1	0	21.98	21.93	21.61	2		64QAM	1	0	21.91	21.86	21.54	2
	64QAM	1	50	21.94	21.83	21.96	2			1	37	21.87	21.76	21.89	2
		1	99	21.92	21.94	21.74	2			1	74	21.85	21.87	21.67	2
		50	0	20.77	20.84	20.75	3			36	0	20.70	20.77	20.68	3
		50	25	20.86	20.95	20.81	3			36	19	20.79	20.88	20.74	3
		50	50	20.91	20.85	20.73	3			36	39	20.84	20.78	20.66	3
		100	0	20.92	20.84	20.75	3			75	0	20.85	20.77	20.68	3
10M	QPSK	1	0	23.71	23.36	23.41	0	5M	QPSK	1	0	23.65	23.30	23.35	0
		1	24	23.64	23.68	23.30	0			1	12	23.58	23.62	23.24	0
		1	49	23.51	23.56	23.25	0			1	24	23.45	23.50	23.19	0
		25	0	22.84	22.71	22.60	1			12	0	22.78	22.65	22.54	1
		25	12	22.78	22.82	22.66	1			12	6	22.72	22.76	22.60	1
		25	25	22.73	22.70	22.57	1			12	13	22.67	22.64	22.51	1
		50	0	22.80	22.61	22.50	1			25	0	22.74	22.55	22.44	1
		1	0	22.80	22.75	22.43	1		16QAM	1	0	22.74	22.69	22.37	1
	16QAM	1	24	22.76	22.65	22.78	1			1	12	22.70	22.59	22.72	1
		1	49	22.74	22.76	22.56	1			1	24	22.68	22.70	22.50	1
		25	0	21.59	21.66	21.57	2			12	0	21.53	21.60	21.51	2
		25	12	21.68	21.77	21.63	2			12	6	21.62	21.71	21.57	2
		25	25	21.73	21.67	21.55	2			12	13	21.67	21.61	21.49	2
		50	0	21.74	21.66	21.57	2			25	0	21.68	21.60	21.51	2
		1	0	21.83	21.78	21.46	2		64QAM	1	0	21.77	21.72	21.40	2
	64QAM	1	24	21.79	21.68	21.81	2			1	12	21.73	21.62	21.75	2
		1	49	21.77	21.79	21.59	2			1	24	21.71	21.73	21.53	2
		25	0	20.62	20.69	20.60	3			12	0	20.56	20.63	20.54	3
		25	12	20.71	20.80	20.66	3			12	6	20.65	20.74	20.60	3
		25	25	20.76	20.70	20.58	3			12	13	20.70	20.64	20.52	3
		50	0	20.77	20.69	20.60	3			25	0	20.71	20.63	20.54	3

EIRP Power (dBm)

LTE Band 7							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	20775	2502.5	-20.72	38.52	17.80	60.20	H
	21100	2535.0	-20.32	38.36	18.04	63.68	
	21425	2567.5	-20.32	38.58	18.26	66.99	
	20775	2502.5	-16.75	38.92	22.17	164.82	V
	21100	2535.0	-16.83	39.26	22.43	174.98	
	21425	2567.5	-16.56	39.22	22.66	184.50	
Channel Bandwidth: 5 MHz / 16QAM							
Y	20775	2502.5	-22.43	38.52	16.09	40.61	H
	21100	2535.0	-22.19	38.36	16.17	41.40	
	21425	2567.5	-22.18	38.58	16.40	43.65	
	20775	2502.5	-17.82	38.92	21.10	128.82	V
	21100	2535.0	-17.91	39.26	21.35	136.46	
	21425	2567.5	-17.68	39.22	21.54	142.56	
Channel Bandwidth: 5 MHz / 64QAM							
Y	20775	2502.5	-22.92	38.52	15.60	36.27	H
	21100	2535.0	-22.80	38.36	15.56	35.97	
	21425	2567.5	-22.72	38.58	15.86	38.55	
	20775	2502.5	-18.93	38.92	19.99	99.77	V
	21100	2535.0	-19.12	39.26	20.14	103.28	
	21425	2567.5	-18.85	39.22	20.37	108.89	

LTE Band 7							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	20800	2505.0	-20.85	38.65	17.80	60.31	H
	21100	2535.0	-20.20	38.36	18.16	65.46	
	21400	2565.0	-20.04	38.49	18.44	69.89	
	20800	2505.0	-16.25	38.84	22.59	181.55	V
	21100	2535.0	-16.43	39.26	22.83	191.87	
	21400	2565.0	-15.89	39.10	23.21	209.41	
Channel Bandwidth: 10 MHz / 16QAM							
Y	20800	2505.0	-21.69	38.65	16.96	49.70	H
	21100	2535.0	-21.25	38.36	17.11	51.40	
	21400	2565.0	-21.11	38.49	17.37	54.63	
	20800	2505.0	-17.34	38.84	21.50	141.25	V
	21100	2535.0	-17.51	39.26	21.75	149.62	
	21400	2565.0	-16.92	39.10	22.18	165.20	
Channel Bandwidth: 10 MHz / 64QAM							
Y	20800	2505.0	-22.72	38.65	15.93	39.21	H
	21100	2535.0	-22.31	38.36	16.05	40.27	
	21400	2565.0	-22.18	38.49	16.30	42.70	
	20800	2505.0	-18.42	38.84	20.42	110.15	V
	21100	2535.0	-18.56	39.26	20.70	117.49	
	21400	2565.0	-17.99	39.10	21.11	129.12	

LTE Band 7							
Channel Bandwidth: 15 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	20825	2507.5	-20.50	38.52	18.02	63.33	H
	21100	2535.0	-19.94	38.36	18.42	69.50	
	21375	2562.5	-19.94	38.58	18.64	73.11	
	20825	2507.5	-16.16	38.92	22.76	188.80	V
	21100	2535.0	-16.20	39.26	23.06	202.30	
	21375	2562.5	-15.92	39.22	23.30	213.80	
Channel Bandwidth: 15 MHz / 16QAM							
Y	20825	2507.5	-21.54	38.52	16.98	49.84	H
	21100	2535.0	-20.99	38.36	17.37	54.58	
	21375	2562.5	-21.03	38.58	17.55	56.89	
	20825	2507.5	-17.21	38.92	21.71	148.25	V
	21100	2535.0	-17.27	39.26	21.99	158.12	
	21375	2562.5	-16.93	39.22	22.29	169.43	
Channel Bandwidth: 15 MHz / 64QAM							
Y	20825	2507.5	-22.56	38.52	15.96	39.41	H
	21100	2535.0	-22.06	38.36	16.30	42.66	
	21375	2562.5	-22.09	38.58	16.49	44.57	
	20825	2507.5	-18.23	38.92	20.69	117.22	V
	21100	2535.0	-18.32	39.26	20.94	124.17	
	21375	2562.5	-17.98	39.22	21.24	133.05	

LTE Band 7							
Channel Bandwidth: 20 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	20850.0	2510.0	-20.34	38.52	18.18	65.71	H
	21100.0	2535.0	-19.88	38.36	18.48	70.47	
	21350.0	2560.0	-19.86	38.58	18.72	74.47	
	20850.0	2510.0	-16.02	38.92	22.90	194.98	V
	21100.0	2535.0	-16.08	39.26	23.18	207.97	
	21350.0	2560.0	-15.80	39.22	23.42	219.79	
Channel Bandwidth: 20 MHz / 16QAM							
Y	20850.0	2510.0	-21.37	38.52	17.15	51.83	H
	21100.0	2535.0	-20.92	38.36	17.44	55.46	
	21350.0	2560.0	-20.88	38.58	17.70	58.88	
	20850.0	2510.0	-17.08	38.92	21.84	152.76	V
	21100.0	2535.0	-17.17	39.26	22.09	161.81	
	21350.0	2560.0	-16.83	39.22	22.39	173.38	
Channel Bandwidth: 20 MHz / 64QAM							
Y	20850.0	2510.0	-22.46	38.52	16.06	40.33	H
	21100.0	2535.0	-21.94	38.36	16.42	43.85	
	21350.0	2560.0	-21.93	38.58	16.65	46.24	
	20850.0	2510.0	-18.11	38.92	20.81	120.50	V
	21100.0	2535.0	-18.23	39.26	21.03	126.77	
	21350.0	2560.0	-17.88	39.22	21.34	136.14	

LTE Band 38							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	37775	2572.5	-19.16	38.99	19.83	96.16	H
	38000	2595.0	-17.89	38.17	20.28	106.66	
	38225	2617.5	-17.62	38.55	20.93	123.88	
	37775	2572.5	-14.30	39.27	24.97	314.05	V
	38000	2595.0	-13.41	38.68	25.27	336.51	
	38225	2617.5	-13.00	38.55	25.55	358.92	
Channel Bandwidth: 5 MHz / 16QAM							
Y	37775	2572.5	-20.22	38.99	18.77	75.34	H
	38000	2595.0	-18.98	38.17	19.19	82.99	
	38225	2617.5	-18.63	38.55	19.92	98.17	
	37775	2572.5	-15.35	39.27	23.92	246.60	V
	38000	2595.0	-14.44	38.68	24.24	265.46	
	38225	2617.5	-14.01	38.55	24.54	284.45	
Channel Bandwidth: 5 MHz / 64QAM							
Y	37775	2572.5	-21.31	38.99	17.68	58.61	H
	38000	2595.0	-20.04	38.17	18.13	65.01	
	38225	2617.5	-19.64	38.55	18.91	77.80	
	37775	2572.5	-16.42	39.27	22.85	192.75	V
	38000	2595.0	-15.49	38.68	23.19	208.45	
	38225	2617.5	-15.04	38.55	23.51	224.39	

LTE Band 38							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	37800	2575.0	-18.39	38.98	20.59	114.55	H
	38000	2595.0	-17.06	38.17	21.11	129.12	
	38200	2615.0	-16.76	38.45	21.69	147.57	
	37800	2575.0	-13.25	39.04	25.79	379.31	V
	38000	2595.0	-12.56	38.68	26.12	409.26	
	38200	2615.0	-12.24	38.60	26.36	432.51	
Channel Bandwidth: 10 MHz / 16QAM							
Y	37800	2575.0	-19.45	38.98	19.53	89.74	H
	38000	2595.0	-18.12	38.17	20.05	101.16	
	38200	2615.0	-17.82	38.45	20.63	115.61	
	37800	2575.0	-14.27	39.04	24.77	299.92	V
	38000	2595.0	-13.64	38.68	25.04	319.15	
	38200	2615.0	-13.26	38.60	25.34	341.98	
Channel Bandwidth: 10 MHz / 64QAM							
Y	37800	2575.0	-20.54	38.98	18.44	69.82	H
	38000	2595.0	-19.14	38.17	19.03	79.98	
	38200	2615.0	-18.84	38.45	19.61	91.41	
	37800	2575.0	-15.34	39.04	23.70	234.42	V
	38000	2595.0	-14.68	38.68	24.00	251.19	
	38200	2615.0	-14.29	38.60	24.31	269.77	

LTE Band 38							
Channel Bandwidth: 15 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	37825	2577.5	-18.20	39.09	20.89	122.74	H
	38000	2595.0	-16.92	38.17	21.25	133.35	
	38175	2612.5	-16.65	38.52	21.87	153.82	
	37825	2577.5	-13.15	39.04	25.89	388.15	V
	38000	2595.0	-12.46	38.68	26.22	418.79	
	38175	2612.5	-12.16	38.66	26.50	446.68	
Channel Bandwidth: 15 MHz / 16QAM							
Y	37825	2577.5	-19.25	39.09	19.84	96.38	H
	38000	2595.0	-17.98	38.17	20.19	104.47	
	38175	2612.5	-17.66	38.52	20.86	121.90	
	37825	2577.5	-14.18	39.04	24.86	306.20	V
	38000	2595.0	-13.49	38.68	25.19	330.37	
	38175	2612.5	-13.24	38.66	25.42	348.34	
Channel Bandwidth: 15 MHz / 64QAM							
Y	37825	2577.5	-20.34	39.09	18.75	74.99	H
	38000	2595.0	-19.05	38.17	19.12	81.66	
	38175	2612.5	-18.70	38.52	19.82	95.94	
	37825	2577.5	-15.20	39.04	23.84	242.10	V
	38000	2595.0	-14.53	38.68	24.15	260.02	
	38175	2612.5	-14.27	38.66	24.39	274.79	

LTE Band 38							
Channel Bandwidth: 20 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	37850	2580.0	-18.29	39.26	20.97	125.03	H
	38000	2595.0	-16.73	38.17	21.44	139.32	
	38150	2610.0	-16.75	38.71	21.96	157.04	
	37850	2580.0	-13.28	39.33	26.05	402.72	V
	38000	2595.0	-12.30	38.68	26.38	434.51	
	38150	2610.0	-12.12	38.76	26.64	461.32	
Channel Bandwidth: 20 MHz / 16QAM							
Y	37850	2580.0	-19.34	39.26	19.92	98.17	H
	38000	2595.0	-17.75	38.17	20.42	110.15	
	38150	2610.0	-17.82	38.71	20.89	122.74	
	37850	2580.0	-14.35	39.33	24.98	314.77	V
	38000	2595.0	-13.38	38.68	25.30	338.84	
	38150	2610.0	-13.15	38.76	25.61	363.92	
Channel Bandwidth: 20 MHz / 64QAM							
Y	37850	2580.0	-20.40	39.26	18.86	76.91	H
	38000	2595.0	-18.81	38.17	19.36	86.30	
	38150	2610.0	-18.87	38.71	19.84	96.38	
	37850	2580.0	-15.44	39.33	23.89	244.91	V
	38000	2595.0	-14.39	38.68	24.29	268.53	
	38150	2610.0	-14.20	38.76	24.56	285.76	

LTE Band 41							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	39675	2498.5	-18.45	38.99	20.54	113.24	H
	40620	2593.0	-17.05	38.17	21.12	129.42	
	41565	2687.5	-17.05	38.55	21.50	141.25	
	39675	2498.5	-13.89	39.27	25.38	345.14	V
	40620	2593.0	-12.97	38.68	25.71	372.39	
	41565	2687.5	-12.49	38.55	26.06	403.65	
Channel Bandwidth: 5 MHz / 16QAM							
Y	39675	2498.5	-19.51	38.99	19.48	88.72	H
	40620	2593.0	-18.09	38.17	20.08	101.86	
	41565	2687.5	-18.13	38.55	20.42	110.15	
	39675	2498.5	-14.84	39.27	24.43	277.33	V
	40620	2593.0	-13.88	38.68	24.80	302.00	
	41565	2687.5	-13.82	38.55	24.73	297.17	
Channel Bandwidth: 5 MHz / 64QAM							
Y	39675	2498.5	-20.56	38.99	18.43	69.66	H
	40620	2593.0	-19.14	38.17	19.03	79.98	
	41565	2687.5	-19.16	38.55	19.39	86.90	
	39675	2498.5	-15.90	39.27	23.37	217.27	V
	40620	2593.0	-14.95	38.68	23.73	236.05	
	41565	2687.5	-14.47	38.55	24.08	255.86	

LTE Band 41							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	39700	2501.0	-17.98	38.98	21.00	125.89	H
	40620	2593.0	-16.81	38.17	21.36	136.77	
	41540	2685.0	-16.58	38.45	21.87	153.82	
	39700	2501.0	-13.24	39.04	25.80	380.19	V
	40620	2593.0	-12.61	38.68	26.07	404.58	
	41540	2685.0	-12.20	38.60	26.40	436.52	
Channel Bandwidth: 10 MHz / 16QAM							
Y	39700	2501.0	-19.07	38.98	19.91	97.95	H
	40620	2593.0	-17.83	38.17	20.34	108.14	
	41540	2685.0	-17.66	38.45	20.79	119.95	
	39700	2501.0	-14.31	39.04	24.73	297.17	V
	40620	2593.0	-13.64	38.68	25.04	319.15	
	41540	2685.0	-13.27	38.60	25.33	341.19	
Channel Bandwidth: 10 MHz / 64QAM							
Y	39700	2501.0	-20.10	38.98	18.88	77.27	H
	40620	2593.0	-18.91	38.17	19.26	84.33	
	41540	2685.0	-18.70	38.45	19.75	94.41	
	39700	2501.0	-15.37	39.04	23.67	232.81	V
	40620	2593.0	-14.66	38.68	24.02	252.35	
	41540	2685.0	-14.31	38.60	24.29	268.53	

LTE Band 41							
Channel Bandwidth: 15 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	39725	2503.5	-17.99	39.09	21.10	128.82	H
	40620	2593.0	-16.61	38.17	21.56	143.22	
	41515	2682.5	-16.49	38.52	22.03	159.59	
	39725	2503.5	-13.09	39.04	25.95	393.55	V
	40620	2593.0	-12.35	38.68	26.33	429.54	
	41515	2682.5	-12.04	38.66	26.62	459.20	
Channel Bandwidth: 15 MHz / 16QAM							
Y	39725	2503.5	-19.05	39.09	20.04	100.93	H
	40620	2593.0	-17.62	38.17	20.55	113.50	
	41515	2682.5	-17.51	38.52	21.01	126.18	
	39725	2503.5	-14.15	39.04	24.89	308.32	V
	40620	2593.0	-13.37	38.68	25.31	339.63	
	41515	2682.5	-13.07	38.66	25.59	362.24	
Channel Bandwidth: 15 MHz / 64QAM							
Y	39725	2503.5	-20.12	39.09	18.97	78.89	H
	40620	2593.0	-18.69	38.17	19.48	88.72	
	41515	2682.5	-18.52	38.52	20.00	100.00	
	39725	2503.5	-15.22	39.04	23.82	240.99	V
	40620	2593.0	-14.41	38.68	24.27	267.30	
	41515	2682.5	-14.10	38.66	24.56	285.76	

LTE Band 41							
Channel Bandwidth: 20 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	39750	2506.0	-18.04	39.26	21.22	132.43	H
	40620	2593.0	-16.44	38.17	21.73	148.94	
	41490	2680.0	-16.59	38.71	22.12	162.93	
	39750	2506.0	-13.22	39.33	26.11	408.32	V
	40620	2593.0	-12.24	38.68	26.44	440.55	
	41490	2680.0	-12.02	38.76	26.74	472.06	
Channel Bandwidth: 20 MHz / 16QAM							
Y	39750	2506.0	-19.07	39.26	20.19	104.47	H
	40620	2593.0	-17.49	38.17	20.68	116.95	
	41490	2680.0	-17.62	38.71	21.09	128.53	
	39750	2506.0	-14.28	39.33	25.05	319.89	V
	40620	2593.0	-13.30	38.68	25.38	345.14	
	41490	2680.0	-13.08	38.76	25.68	369.83	
Channel Bandwidth: 20 MHz / 64QAM							
Y	39750	2506.0	-20.10	39.26	19.16	82.41	H
	40620	2593.0	-18.50	38.17	19.67	92.68	
	41490	2680.0	-18.63	38.71	20.08	101.86	
	39750	2506.0	-15.33	39.33	24.00	251.19	V
	40620	2593.0	-14.36	38.68	24.32	270.40	
	41490	2680.0	-14.15	38.76	24.61	289.07	

4.2 Frequency Stability Measurement

4.2.1 Limits of Frequency Stability Measurement


The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

4.2.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the ± 0.5 °C during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.2.3 Test Setup

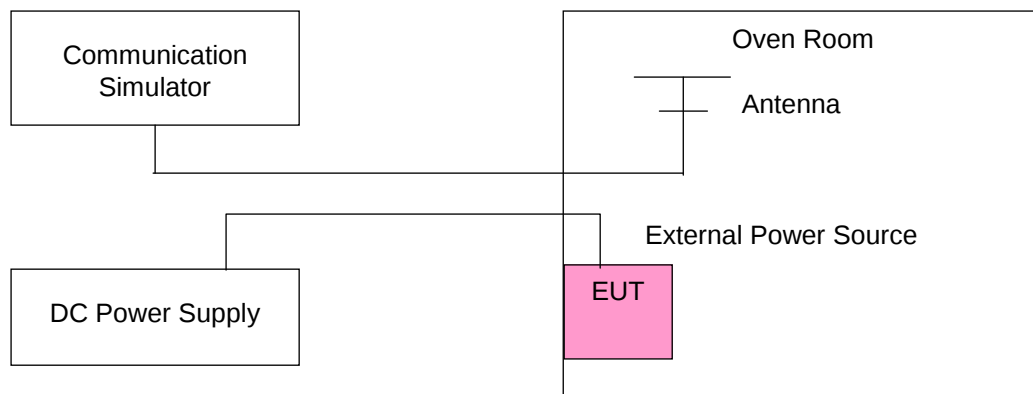

4.2.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 7				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.6	2502.500003	0.001	2567.500001	0.000	2.5
3.3	2502.500002	0.001	2567.500004	0.002	2.5
4.2	2502.500001	0.001	2567.500003	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.3 Vdc to 4.2 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 7				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2502.500001	0.001	2567.500003	0.001	2.5
-20	2502.500003	0.001	2567.500003	0.001	2.5
-10	2502.500001	0.000	2567.500002	0.001	2.5
0	2502.500004	0.002	2567.500003	0.001	2.5
10	2502.500001	0.001	2567.500004	0.001	2.5
20	2502.499998	-0.001	2567.499997	-0.001	2.5
30	2502.499998	-0.001	2567.499998	-0.001	2.5
40	2502.499997	-0.001	2567.499997	-0.001	2.5
50	2502.499997	-0.001	2567.499996	-0.001	2.5
55	2502.499998	-0.001	2567.499997	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 7				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.6	2505.000003	0.001	2565.000001	0.000	2.5
3.3	2505.000004	0.001	2565.000003	0.001	2.5
4.2	2505.000003	0.001	2565.000004	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.3 Vdc to 4.2 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 7				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2505.000002	0.001	2565.000002	0.001	2.5
-20	2505.000002	0.001	2565.000002	0.001	2.5
-10	2505.000002	0.001	2565.000002	0.001	2.5
0	2505.000003	0.001	2565.000002	0.001	2.5
10	2505.000003	0.001	2565.000003	0.001	2.5
20	2504.999997	-0.001	2564.999998	-0.001	2.5
30	2504.999999	-0.001	2564.999997	-0.001	2.5
40	2504.999999	0.000	2564.999997	-0.001	2.5
50	2504.999998	-0.001	2564.999997	-0.001	2.5
55	2504.999996	-0.001	2564.999997	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 7				Limit (ppm)
	Channel Bandwidth: 15 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.6	2507.500004	0.001	2562.500004	0.002	2.5
3.3	2507.500001	0.000	2562.500001	0.001	2.5
4.2	2507.500002	0.001	2562.500003	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.3 Vdc to 4.2 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 7				Limit (ppm)
	Channel Bandwidth: 15 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2507.500003	0.001	2562.500001	0.001	2.5
-20	2507.500003	0.001	2562.500003	0.001	2.5
-10	2507.500002	0.001	2562.500003	0.001	2.5
0	2507.500003	0.001	2562.500001	0.000	2.5
10	2507.500004	0.001	2562.500002	0.001	2.5
20	2507.499997	-0.001	2562.499998	-0.001	2.5
30	2507.499997	-0.001	2562.499999	-0.001	2.5
40	2507.499997	-0.001	2562.499999	-0.001	2.5
50	2507.499997	-0.001	2562.499997	-0.001	2.5
55	2507.499998	-0.001	2562.499997	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 7				Limit (ppm)
	Channel Bandwidth: 20 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.6	2510.000004	0.001	2560.000002	0.001	2.5
3.3	2510.000001	0.000	2560.000003	0.001	2.5
4.2	2510.000002	0.001	2560.000004	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.3 Vdc to 4.2 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 7				Limit (ppm)
	Channel Bandwidth: 20 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2510.000002	0.001	2560.000003	0.001	2.5
-20	2510.000002	0.001	2560.000003	0.001	2.5
-10	2510.000003	0.001	2560.000002	0.001	2.5
0	2510.000004	0.001	2560.000003	0.001	2.5
10	2510.000002	0.001	2560.000002	0.001	2.5
20	2509.999999	0.000	2559.999996	-0.001	2.5
30	2509.999997	-0.001	2559.999998	-0.001	2.5
40	2509.999997	-0.001	2559.999997	-0.001	2.5
50	2509.999999	-0.001	2559.999997	-0.001	2.5
55	2509.999997	-0.001	2559.999999	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 38				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.6	2572.500003	0.001	2617.500002	0.001	2.5
3.3	2572.500003	0.001	2617.500004	0.001	2.5
4.2	2572.500003	0.001	2617.500003	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.3 Vdc to 4.2 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 38				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2572.500001	0.000	2617.500002	0.001	2.5
-20	2572.500001	0.000	2617.500002	0.001	2.5
-10	2572.500004	0.002	2617.500003	0.001	2.5
0	2572.500001	0.001	2617.500004	0.001	2.5
10	2572.500003	0.001	2617.500003	0.001	2.5
20	2572.499996	-0.002	2617.499996	-0.001	2.5
30	2572.499997	-0.001	2617.499997	-0.001	2.5
40	2572.499999	-0.001	2617.499997	-0.001	2.5
50	2572.499997	-0.001	2617.499996	-0.001	2.5
55	2572.499998	-0.001	2617.499997	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 38				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.6	2575.000003	0.001	2615.000002	0.001	2.5
3.3	2575.000004	0.001	2615.000002	0.001	2.5
4.2	2575.000003	0.001	2615.000004	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.3 Vdc to 4.2 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 38				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2575.000004	0.002	2615.000002	0.001	2.5
-20	2575.000004	0.001	2615.000002	0.001	2.5
-10	2575.000002	0.001	2615.000002	0.001	2.5
0	2575.000003	0.001	2615.000004	0.001	2.5
10	2575.000004	0.002	2615.000003	0.001	2.5
20	2574.999999	0.000	2614.999997	-0.001	2.5
30	2574.999998	-0.001	2614.999998	-0.001	2.5
40	2574.999998	-0.001	2614.999998	-0.001	2.5
50	2574.999997	-0.001	2614.999999	0.000	2.5
55	2574.999999	0.000	2614.999998	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 38				Limit (ppm)
	Channel Bandwidth: 15 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.6	2577.500002	0.001	2612.500004	0.001	2.5
3.3	2577.500003	0.001	2612.500001	0.000	2.5
4.2	2577.500004	0.001	2612.500003	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.3 Vdc to 4.2 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 38				Limit (ppm)
	Channel Bandwidth: 15 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2577.500001	0.001	2612.500003	0.001	2.5
-20	2577.500004	0.001	2612.500003	0.001	2.5
-10	2577.500002	0.001	2612.500002	0.001	2.5
0	2577.500003	0.001	2612.500001	0.000	2.5
10	2577.500003	0.001	2612.500002	0.001	2.5
20	2577.499996	-0.002	2612.499998	-0.001	2.5
30	2577.499997	-0.001	2612.499996	-0.001	2.5
40	2577.499997	-0.001	2612.499997	-0.001	2.5
50	2577.499998	-0.001	2612.499999	0.000	2.5
55	2577.499998	-0.001	2612.499997	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 38				Limit (ppm)
	Channel Bandwidth: 20 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.6	2580.000003	0.001	2610.000003	0.001	2.5
3.3	2580.000003	0.001	2610.000003	0.001	2.5
4.2	2580.000003	0.001	2610.000003	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.3 Vdc to 4.2 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 38				Limit (ppm)
	Channel Bandwidth: 20 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2580.000003	0.001	2610.000002	0.001	2.5
-20	2580.000003	0.001	2610.000002	0.001	2.5
-10	2580.000001	0.001	2610.000002	0.001	2.5
0	2580.000001	0.001	2610.000002	0.001	2.5
10	2580.000003	0.001	2610.000002	0.001	2.5
20	2579.999998	-0.001	2609.999999	0.000	2.5
30	2579.999998	-0.001	2609.999998	-0.001	2.5
40	2579.999997	-0.001	2609.999997	-0.001	2.5
50	2579.999998	-0.001	2609.999998	-0.001	2.5
55	2579.999998	-0.001	2609.999996	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 41				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.6	2498.500003	0.001	2687.500003	0.001	2.5
3.3	2498.500001	0.000	2687.500004	0.001	2.5
4.2	2498.500004	0.001	2687.500002	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.3 Vdc to 4.2 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 41				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2498.500003	0.001	2687.500003	0.001	2.5
-20	2498.500003	0.001	2687.500004	0.001	2.5
-10	2498.500001	0.000	2687.500004	0.001	2.5
0	2498.500002	0.001	2687.500004	0.001	2.5
10	2498.500003	0.001	2687.500001	0.001	2.5
20	2498.499997	-0.001	2687.499996	-0.001	2.5
30	2498.499997	-0.001	2687.499998	-0.001	2.5
40	2498.499997	-0.001	2687.499996	-0.001	2.5
50	2498.499997	-0.001	2687.499999	0.000	2.5
55	2498.499998	-0.001	2687.499999	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 41				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.6	2501.000003	0.001	2685.000004	0.001	2.5
3.3	2501.000003	0.001	2685.000001	0.000	2.5
4.2	2501.000002	0.001	2685.000004	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.3 Vdc to 4.2 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 41				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2501.000002	0.001	2685.000002	0.001	2.5
-20	2501.000002	0.001	2685.000004	0.001	2.5
-10	2501.000003	0.001	2685.000004	0.001	2.5
0	2501.000003	0.001	2685.000001	0.000	2.5
10	2501.000002	0.001	2685.000002	0.001	2.5
20	2500.999997	-0.001	2684.999998	-0.001	2.5
30	2500.999997	-0.001	2684.999998	-0.001	2.5
40	2500.999996	-0.002	2684.999998	-0.001	2.5
50	2500.999999	0.000	2684.999999	0.000	2.5
55	2500.999997	-0.001	2684.999997	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 41				Limit (ppm)
	Channel Bandwidth: 15 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.6	2503.500001	0.001	2682.500003	0.001	2.5
3.3	2503.500002	0.001	2682.500003	0.001	2.5
4.2	2503.500002	0.001	2682.500002	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.3 Vdc to 4.2 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 41				Limit (ppm)
	Channel Bandwidth: 15 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2503.500003	0.001	2682.500001	0.000	2.5
-20	2503.500002	0.001	2682.500001	0.000	2.5
-10	2503.500003	0.001	2682.500002	0.001	2.5
0	2503.500001	0.000	2682.500002	0.001	2.5
10	2503.500003	0.001	2682.500001	0.000	2.5
20	2503.499998	-0.001	2682.499998	-0.001	2.5
30	2503.499998	-0.001	2682.499998	-0.001	2.5
40	2503.499998	-0.001	2682.499998	-0.001	2.5
50	2503.499998	-0.001	2682.499998	-0.001	2.5
55	2503.499997	-0.001	2682.499996	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 41				Limit (ppm)
	Channel Bandwidth: 20 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.6	2506.000002	0.001	2680.000002	0.001	2.5
3.3	2506.000003	0.001	2680.000002	0.001	2.5
4.2	2506.000003	0.001	2680.000004	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.3 Vdc to 4.2 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 41				Limit (ppm)
	Channel Bandwidth: 20 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2506.000001	0.001	2680.000003	0.001	2.5
-20	2506.000002	0.001	2680.000003	0.001	2.5
-10	2506.000003	0.001	2680.000003	0.001	2.5
0	2506.000003	0.001	2680.000003	0.001	2.5
10	2506.000002	0.001	2680.000004	0.001	2.5
20	2505.999997	-0.001	2679.999997	-0.001	2.5
30	2505.999996	-0.001	2679.999998	-0.001	2.5
40	2505.999998	-0.001	2679.999997	-0.001	2.5
50	2505.999998	-0.001	2679.999997	-0.001	2.5
55	2505.999999	-0.001	2679.999997	-0.001	2.5

4.3 Occupied Bandwidth Measurement


4.3.1 Limits of Occupied Bandwidth Measurement

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

4.3.2 Test Procedure


- The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.3.3 Test Setup

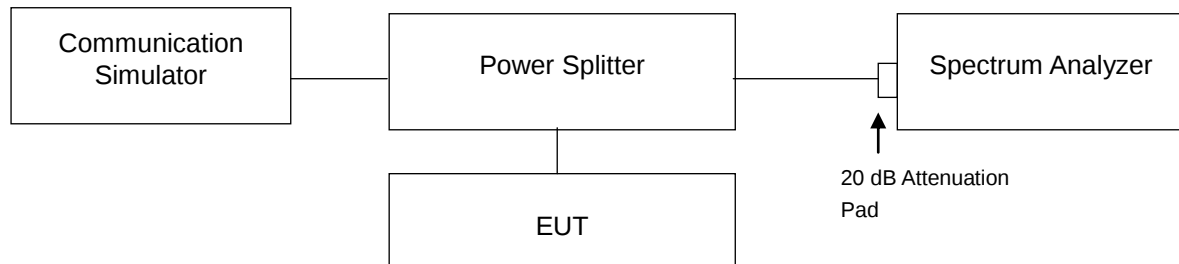

4.3.4 Test Result


LTE Band 7									
Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
20775	2502.5	4.4915	4.4919	4.5016	20800	2505.0	8.9566	8.9616	8.9546
21100	2535.0	4.4918	4.4957	4.5005	21100	2535.0	8.9671	8.9733	8.9748
21425	2567.5	4.4992	4.4973	4.5054	21400	2565.0	8.9974	8.9917	8.9871

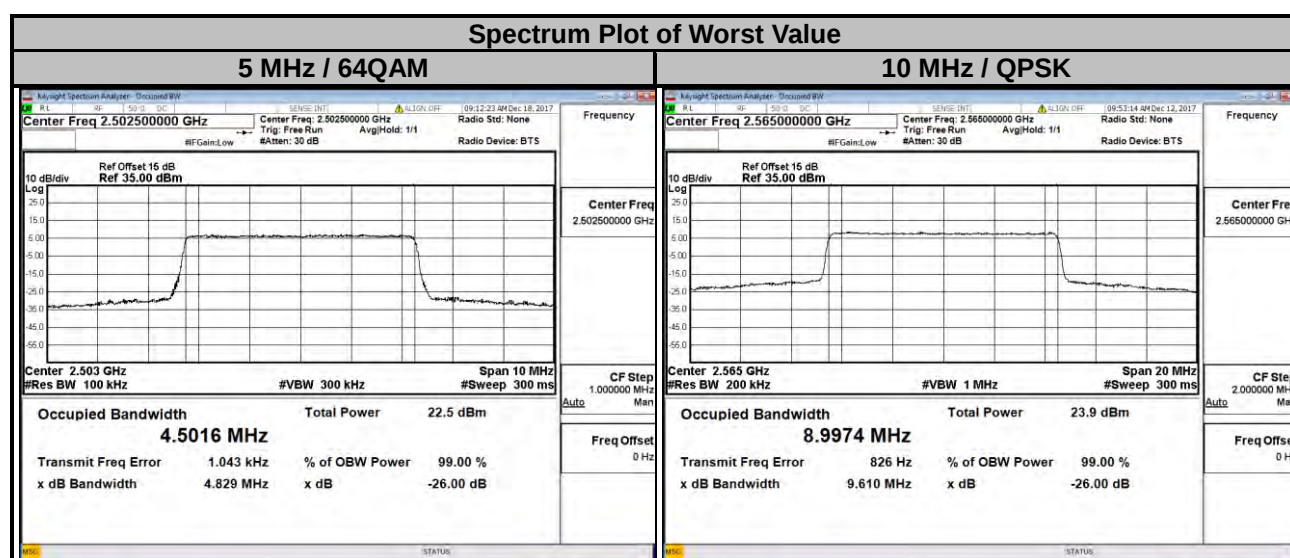

LTE Band 7

Channel Bandwidth: 15 MHz					Channel Bandwidth: 20 MHz				
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
20825	2507.5	13.424	13.419	13.405	20850	2510.0	17.886	17.909	17.901
21100	2535.0	13.446	13.435	13.430	21100	2535.0	17.887	17.912	17.911
21375	2562.5	13.506	13.483	13.466	21350	2560.0	17.975	17.985	17.967


Spectrum Plot of Worst Value

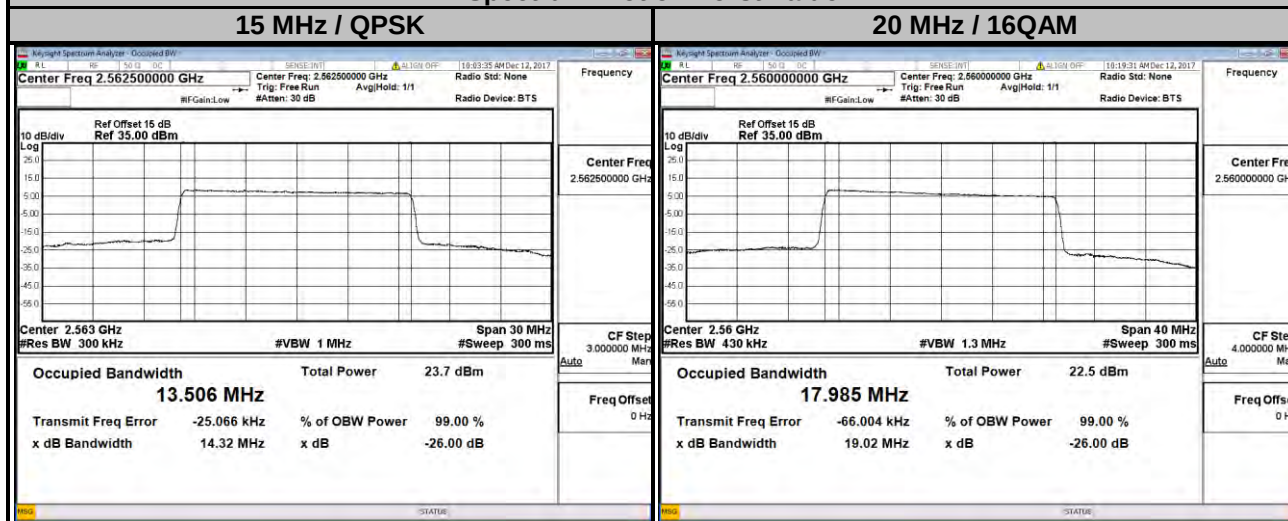

LTE Band 38

Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
37775	2572.5	4.4916	4.4938	4.5042	37800	2575.0	8.9584	8.9714	8.9634
38000	2595.0	4.4935	4.4924	4.5017	38000	2595.0	8.9604	8.9735	8.9677
38225	2617.5	4.4987	4.4963	4.5032	38200	2615.0	8.9647	8.9750	8.9662


Spectrum Plot of Worst Value

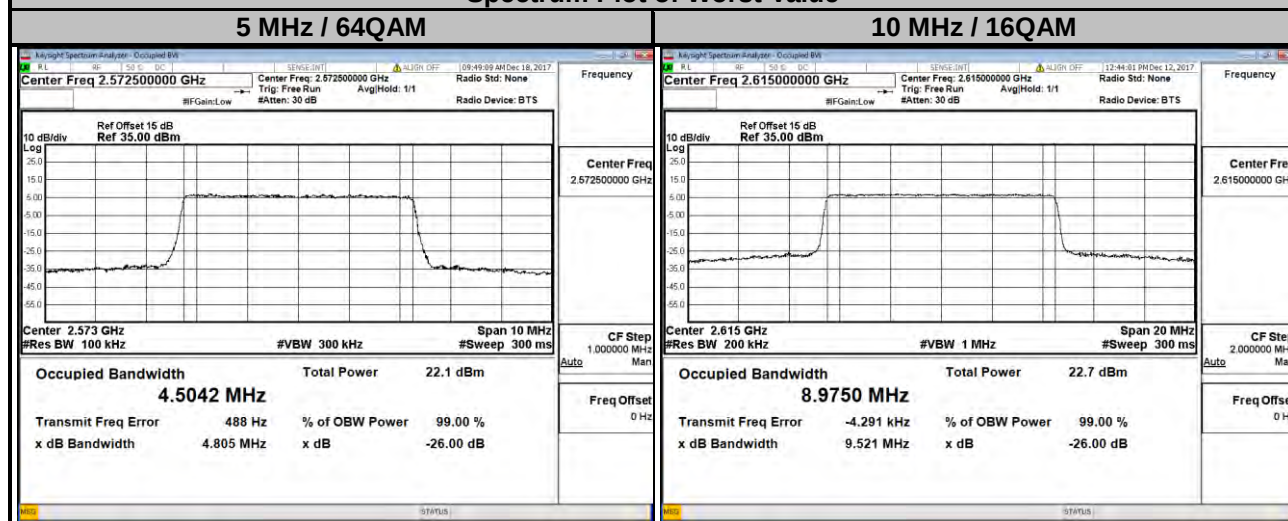

LTE Band 38

Channel Bandwidth: 15 MHz					Channel Bandwidth: 20 MHz				
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
37825	2577.5	13.449	13.442	13.430	37850	2580.0	17.918	17.910	17.916
38000	2595.0	13.446	13.429	13.432	38000	2595.0	17.919	17.903	17.921
38175	2612.5	13.455	13.439	13.439	38150	2610.0	17.915	17.912	17.930

Spectrum Plot of Worst Value

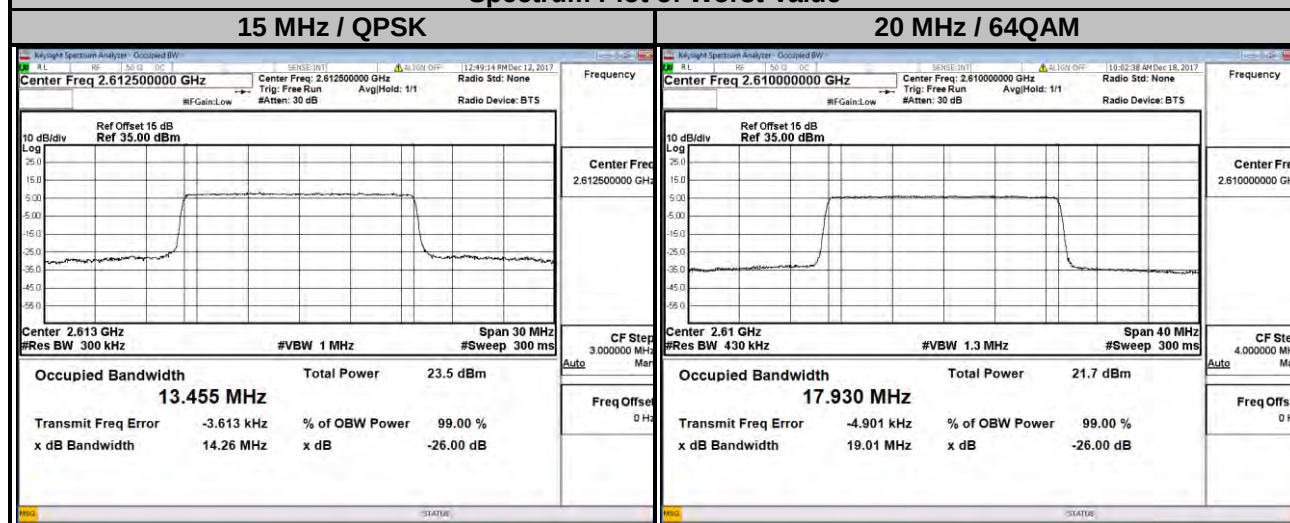


LTE Band 41


Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
39675	2498.5	4.4896	4.4866	4.4996	39700	2501.0	8.9538	8.9649	8.9630
40620	2593.0	4.4932	4.4890	4.5016	40620	2593.0	8.9545	8.9683	8.9654
41565	2687.5	4.4944	4.4921	4.5031	41540	2685.0	8.9601	8.9609	8.9605

Spectrum Plot of Worst Value

5 MHz / 64QAM

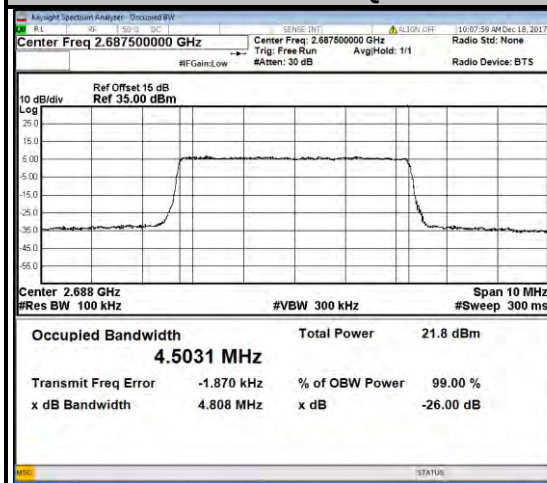


10 MHz / 16QAM

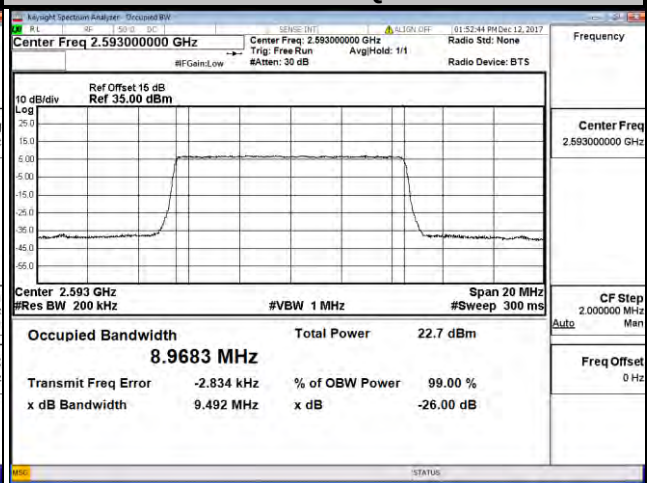

LTE Band 41

Channel Bandwidth: 15 MHz					Channel Bandwidth: 20 MHz				
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
39725	2503.5	13.438	13.414	13.415	39750	2506.0	17.890	17.876	17.904
40620	2593.0	13.440	13.427	13.427	40620	2593.0	17.896	17.889	17.909
41515	2682.5	13.439	13.430	13.430	41490	2680.0	17.900	17.887	17.901

Spectrum Plot of Worst Value

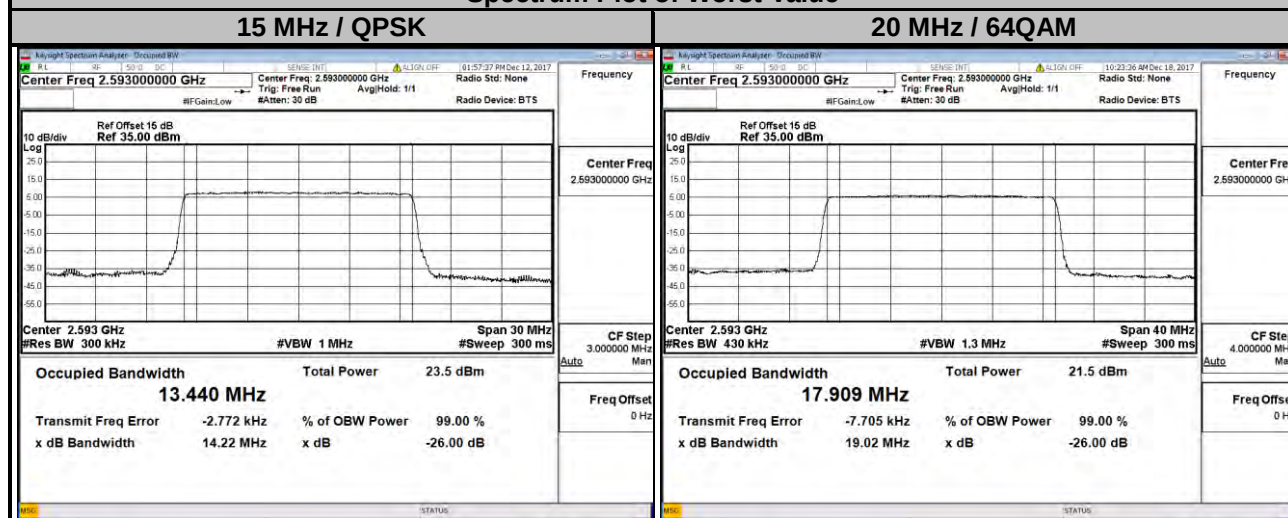


4.4 Out-of-Band Emissions Measurement

4.4.1 Limits of Out-of-Band Emissions Measurement

According to FCC 27.53(l)(4) specified that power of any emission outside of the channel edge must be attenuated below the transmitting power (P) by a factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed, except when the 1 megahertz band is 2495-2496 MHz, in which case a resolution bandwidth of at least one percent may be employed.


4.4.2 Test Setup

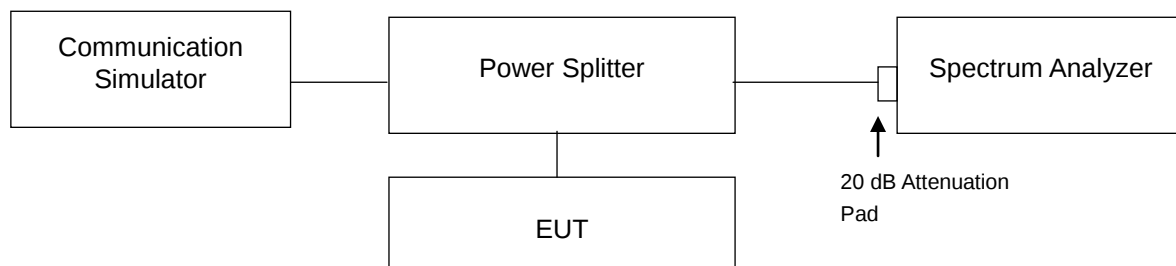



4.4.3 Test Procedures

- The EUT was set up for the maximum peak power with LTE link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels (low and high operational frequency range.).
- The out-of-band emissions measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Record the max. trace plot into the test report.

4.4.4 Test Results

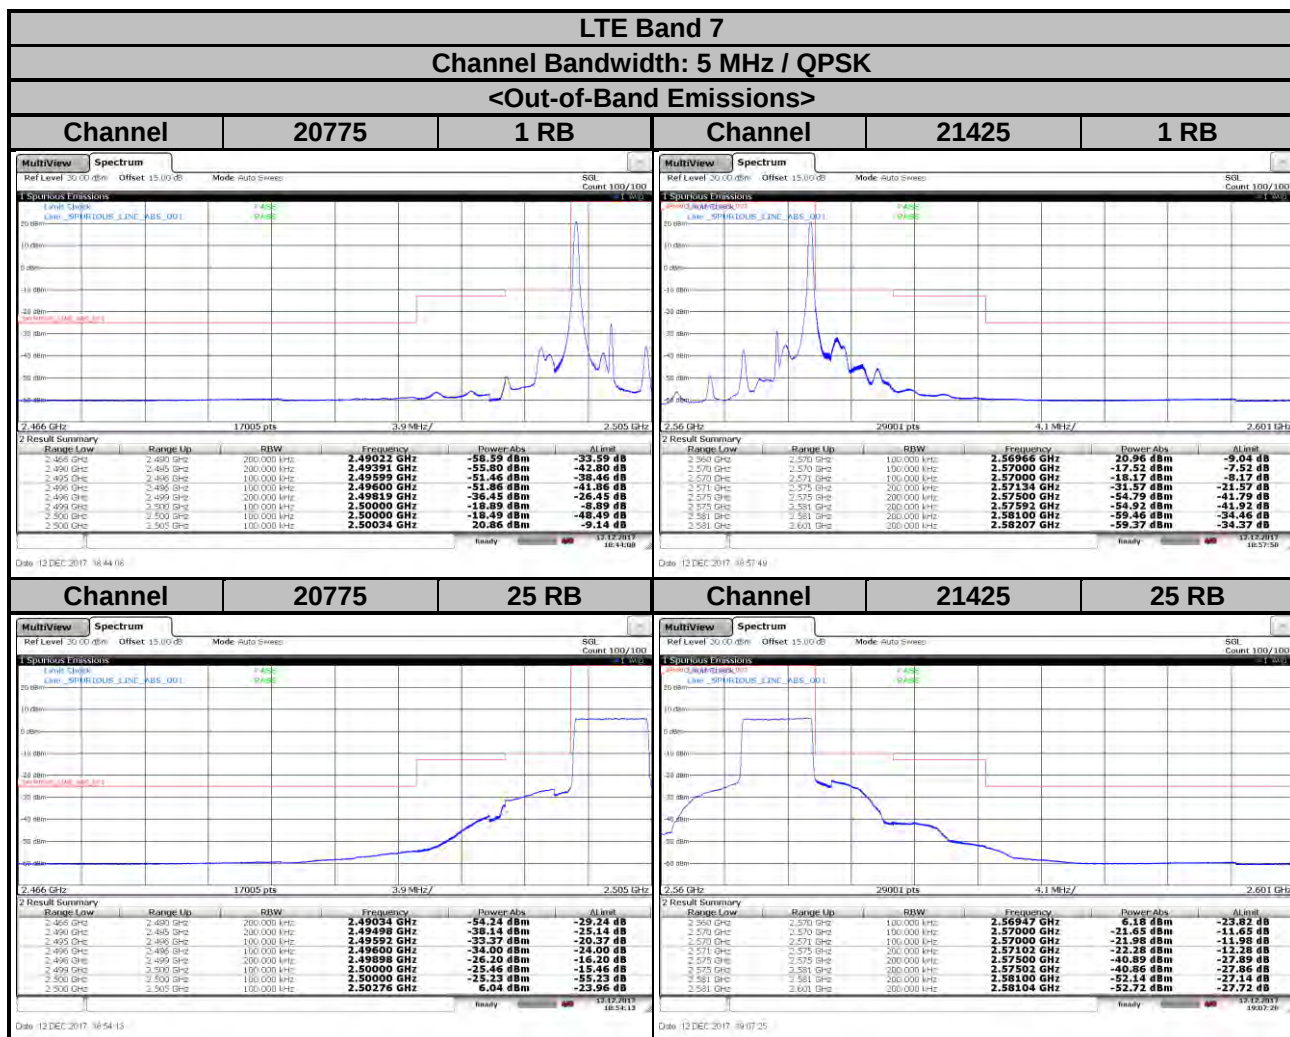

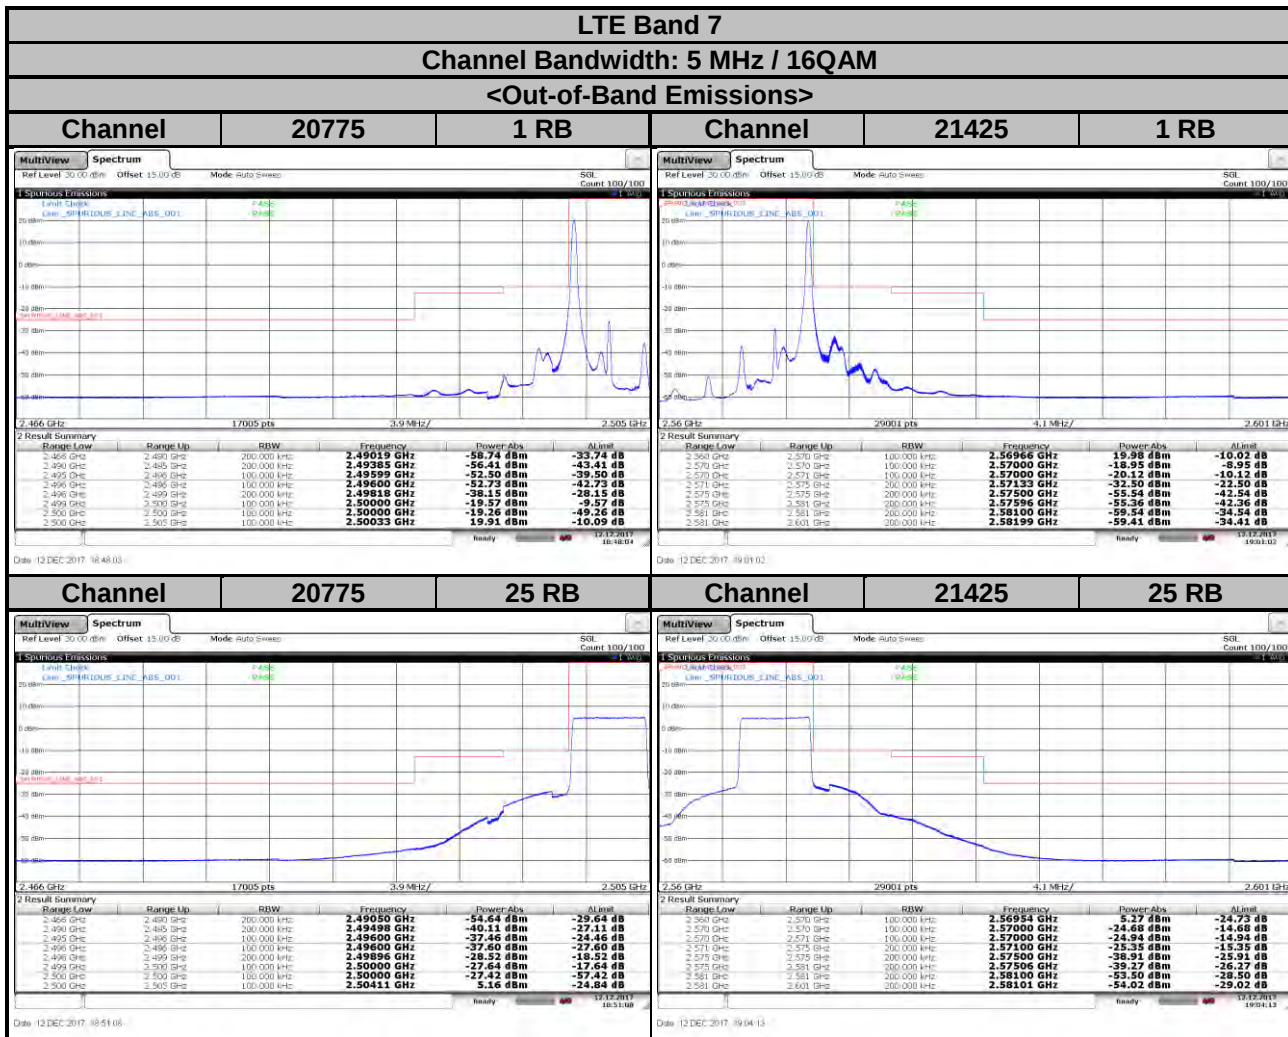


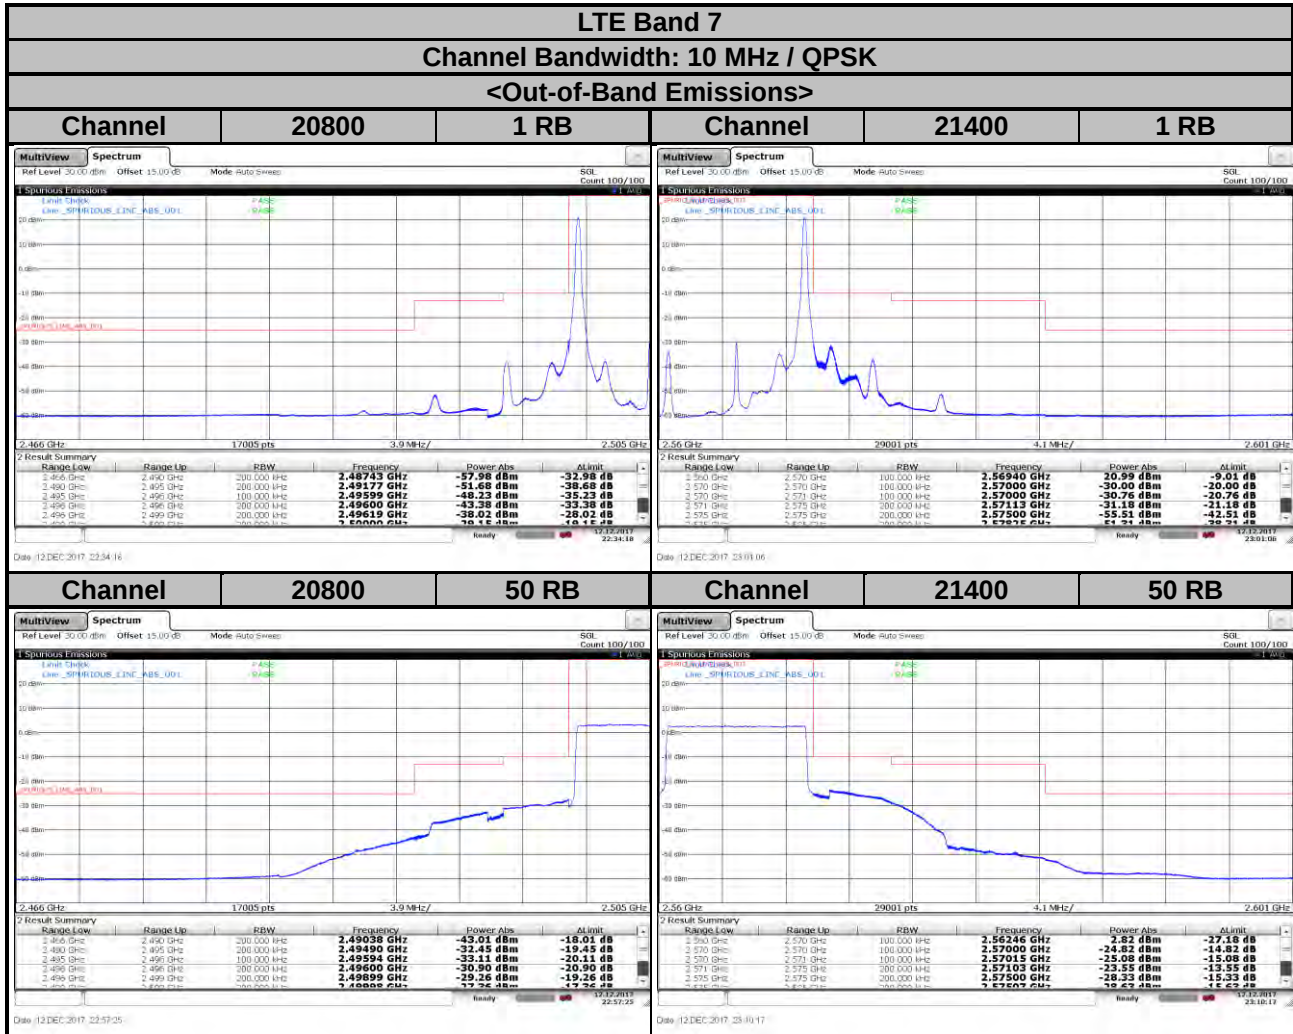

LTE Band 7

Channel Bandwidth: 10 MHz / 16QAM


<Out-of-Band Emissions>

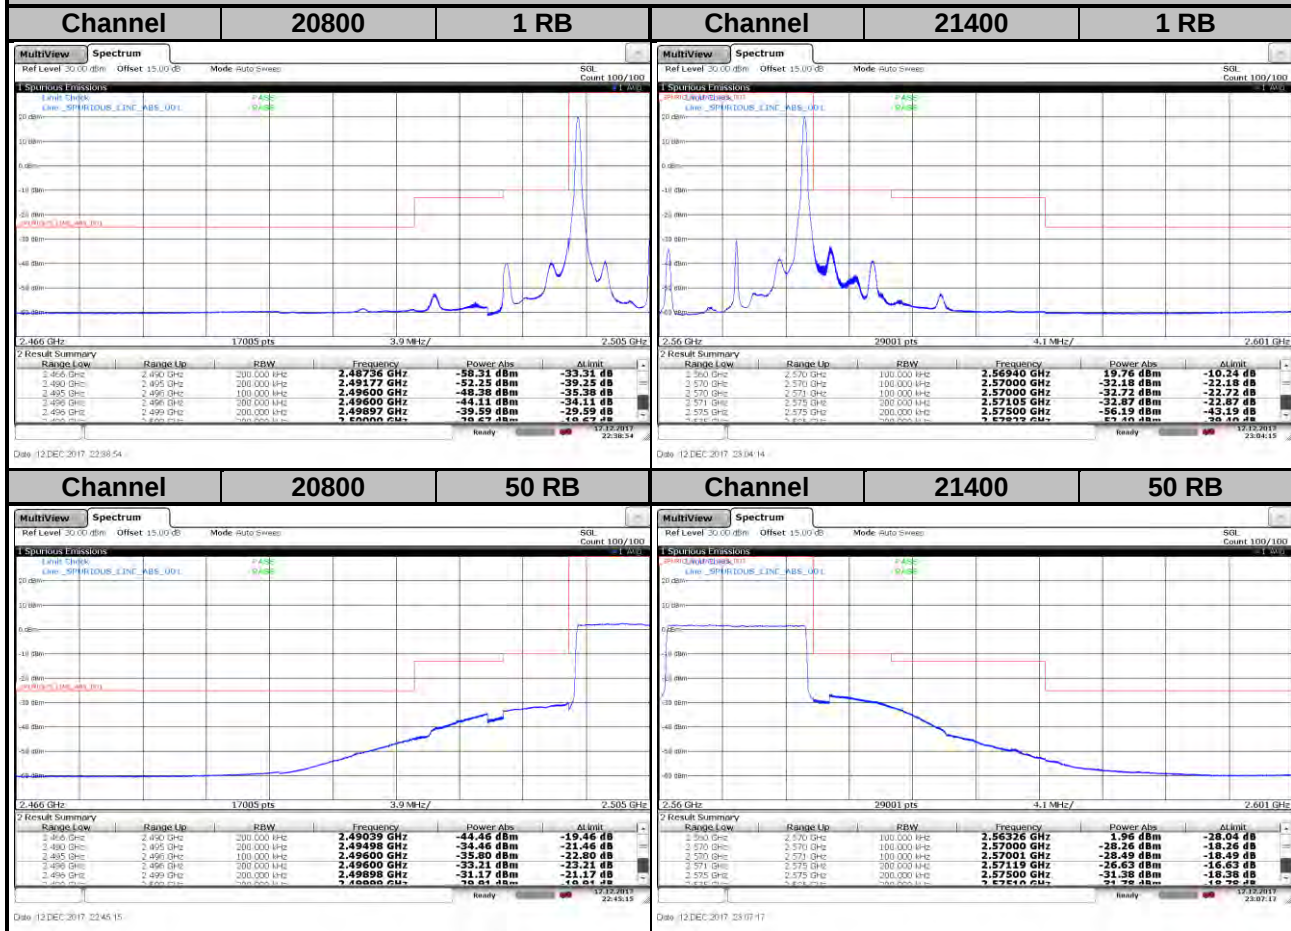

LTE Band 7

Channel Bandwidth: 15 MHz / QPSK


<Out-of-Band Emissions>

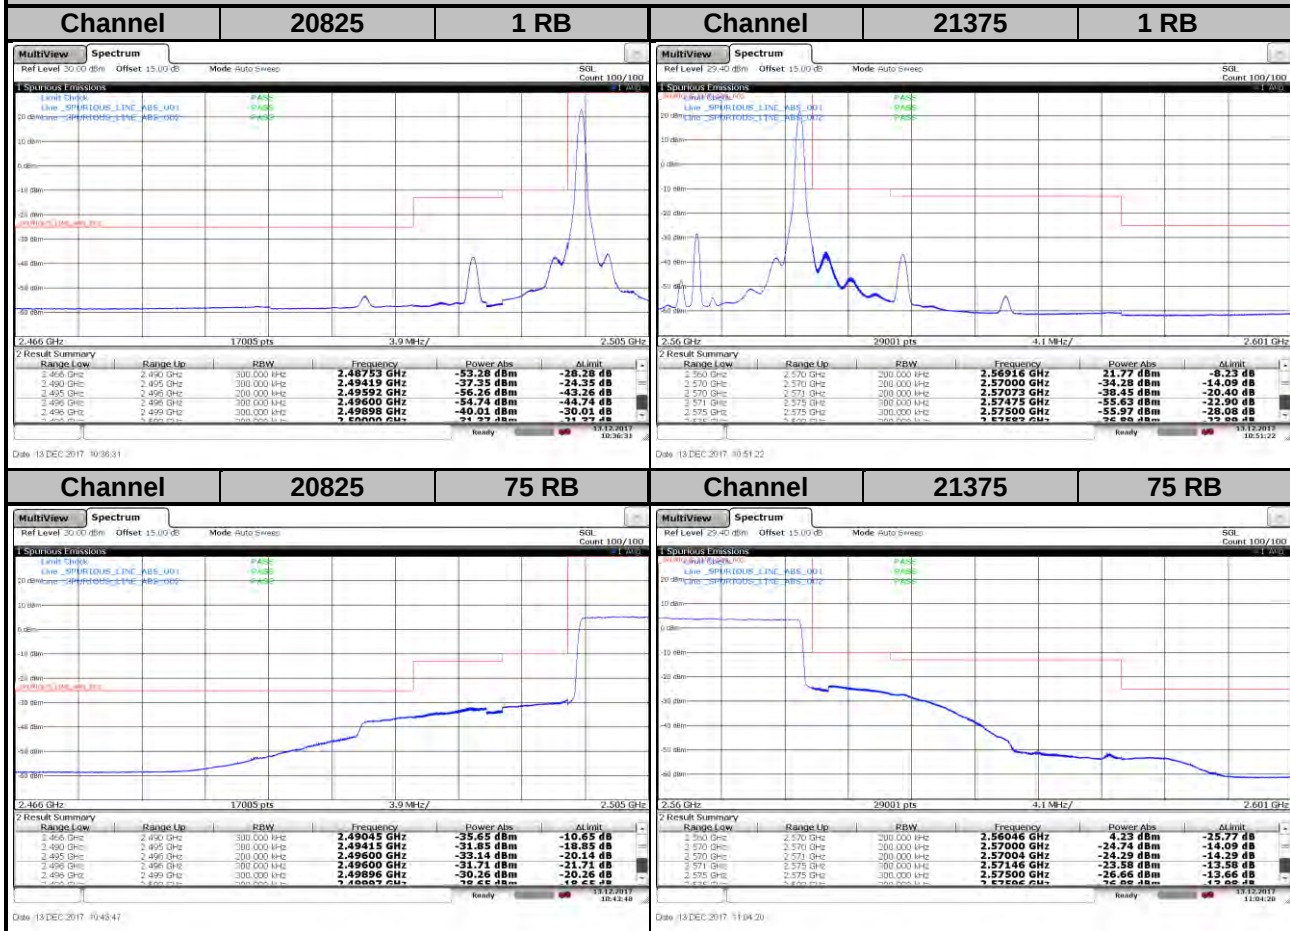



LTE Band 7


Channel Bandwidth: 15 MHz / 16QAM

<Out-of-Band Emissions>

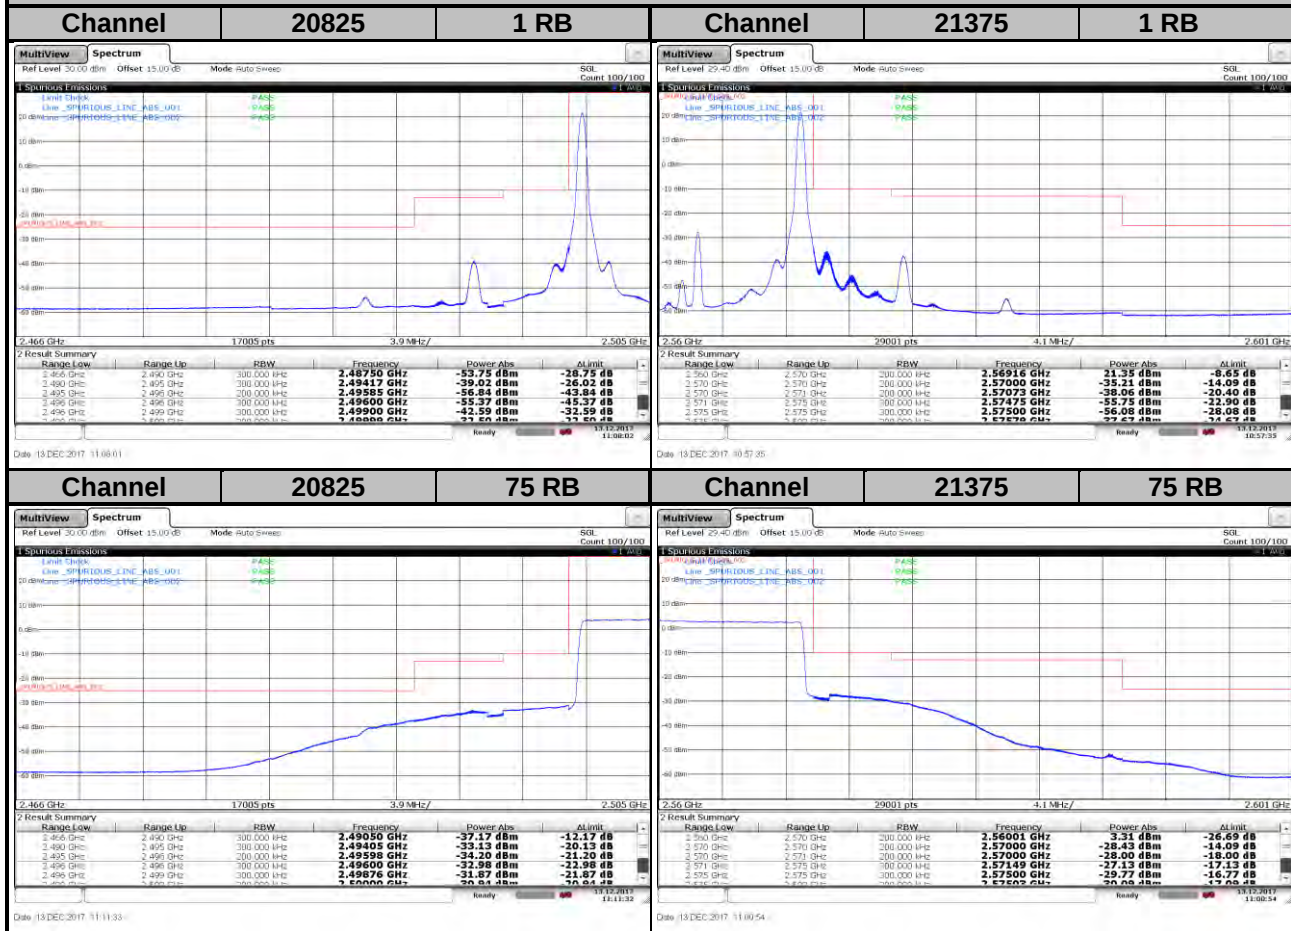

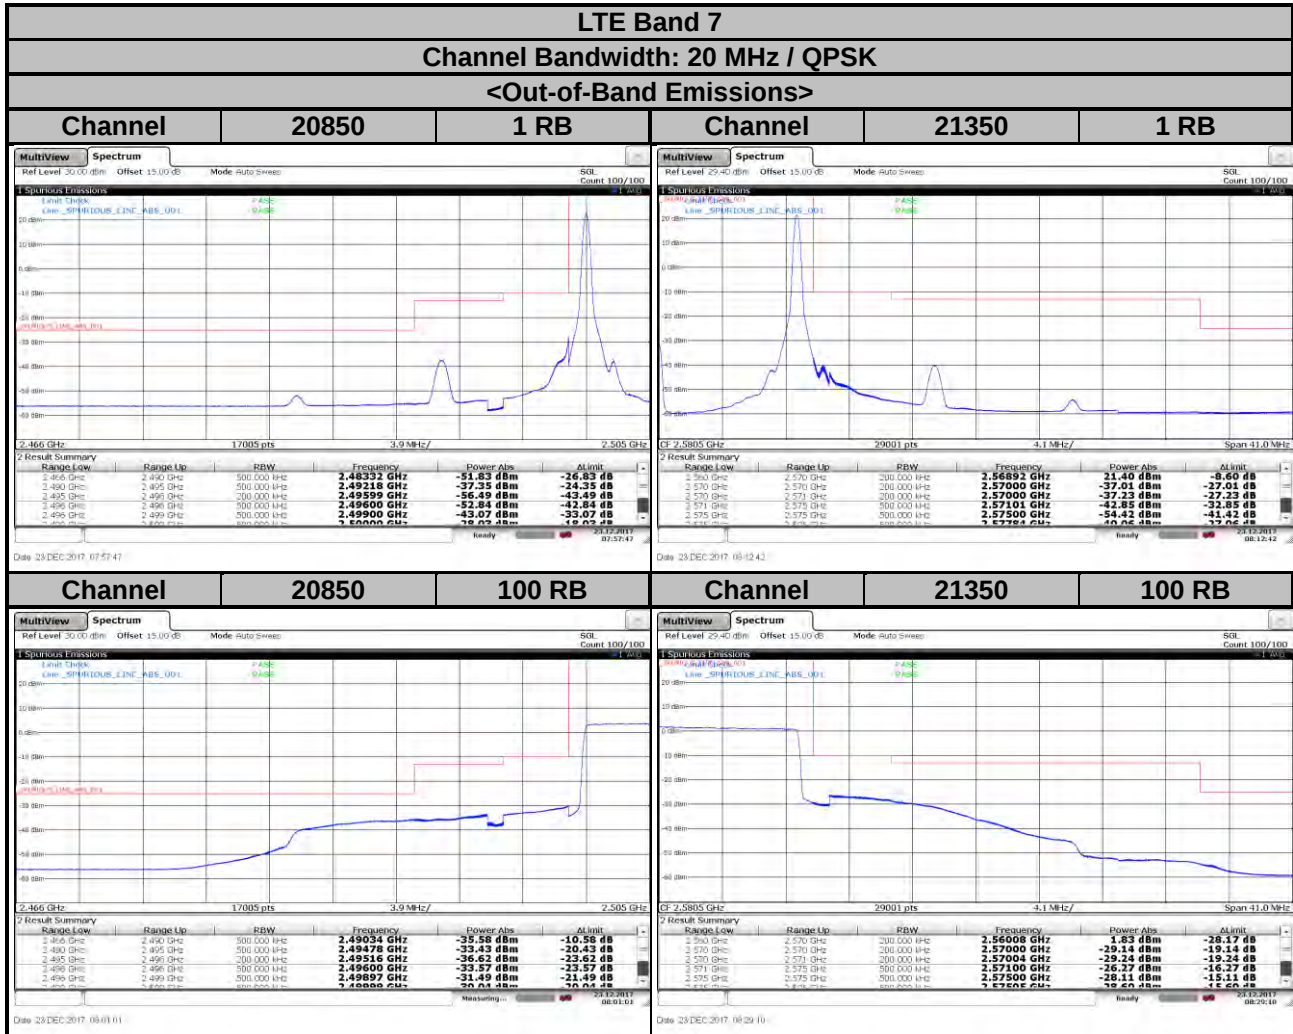

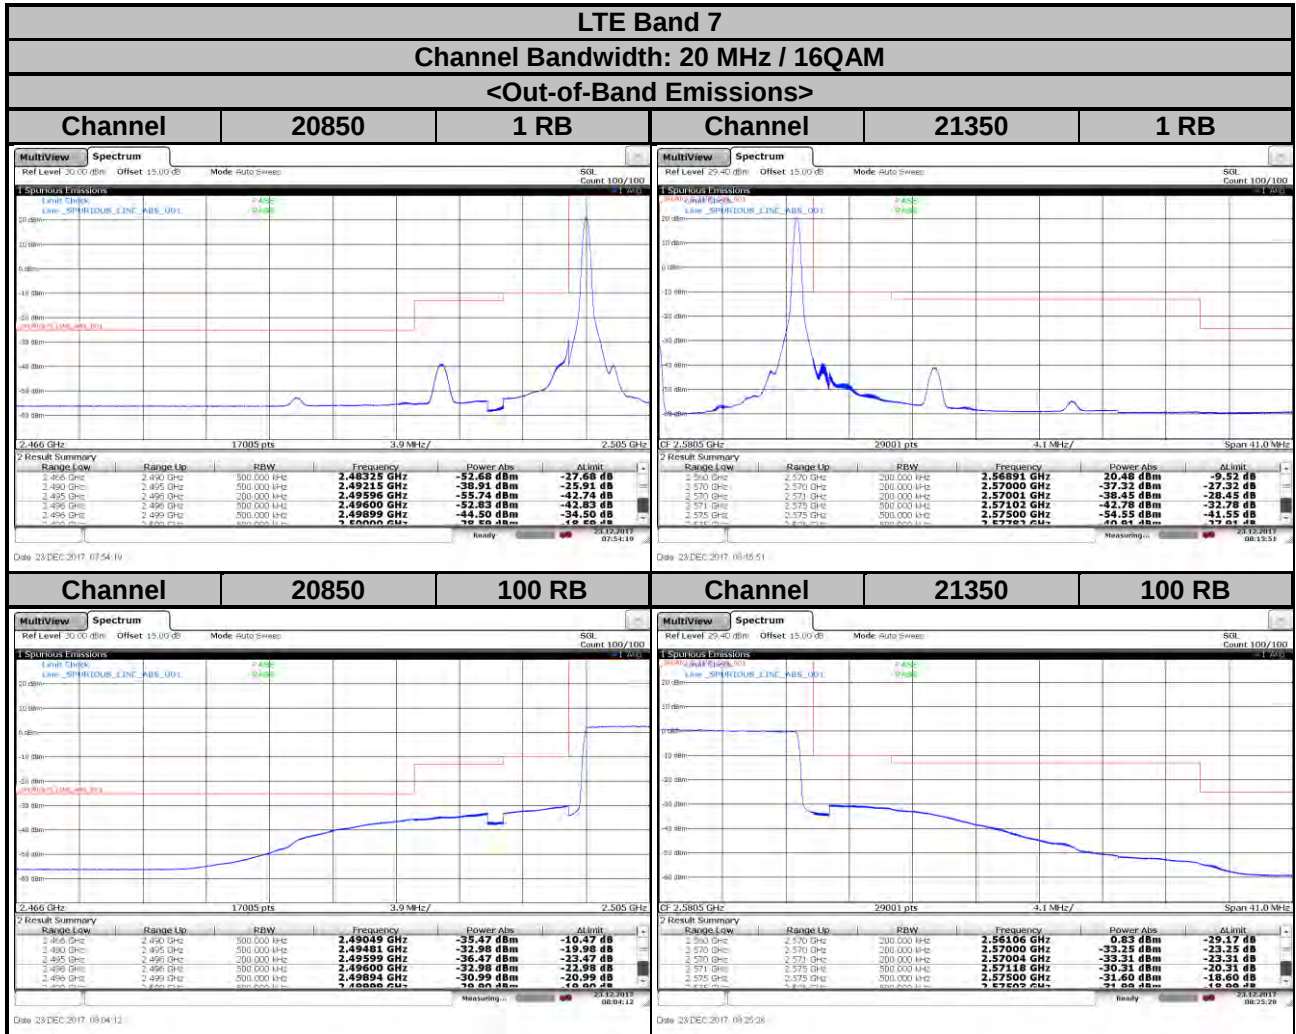

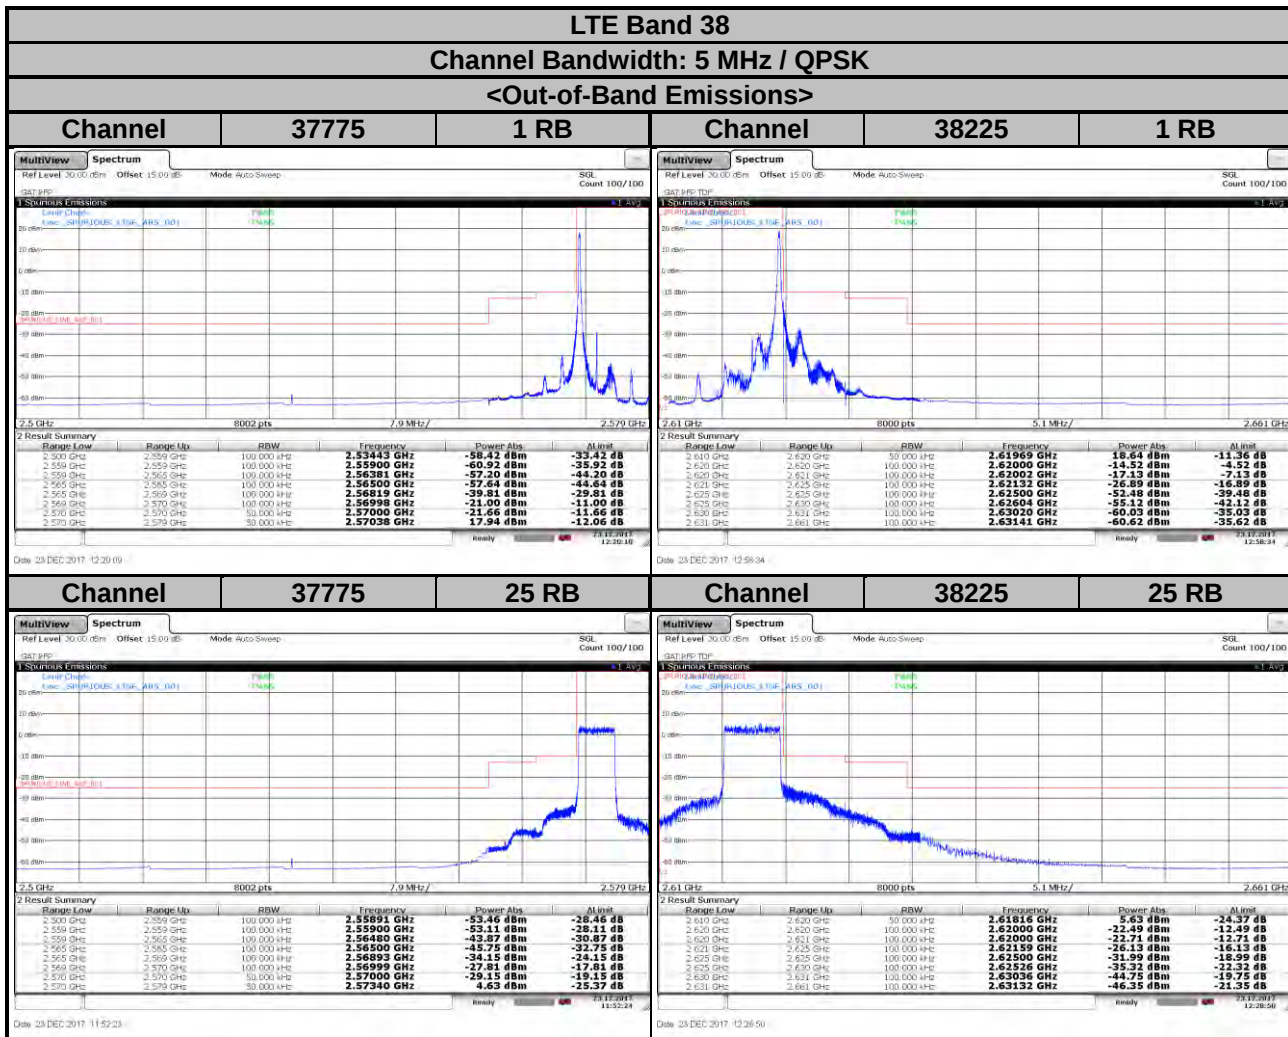


LTE Band 38

Channel Bandwidth: 5 MHz / 16QAM


<Out-of-Band Emissions>

Channel 37775 1 RB

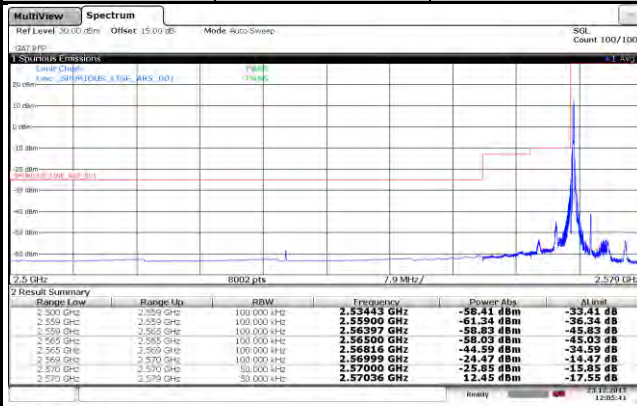


Date: 23 DEC 2017 12:05:41

Channel 38225 1 RB

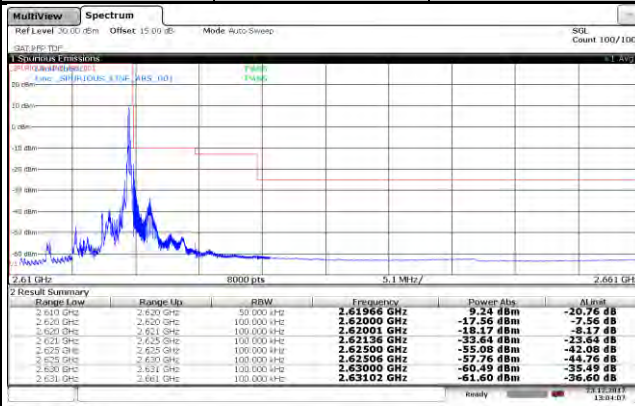


Date: 23 DEC 2017 13:04:07

Channel 37775 25 RB

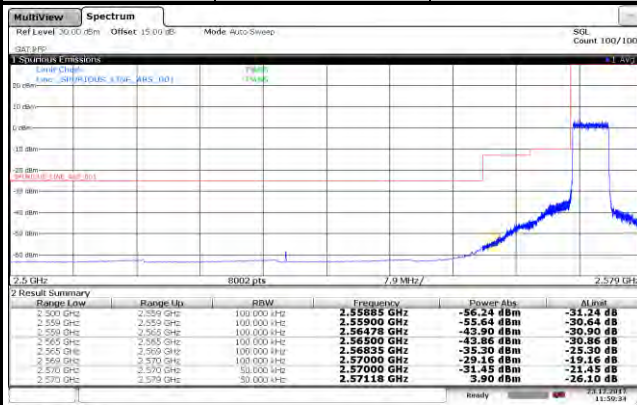



Date: 23 DEC 2017 11:59:34


Channel 38225 25 RB

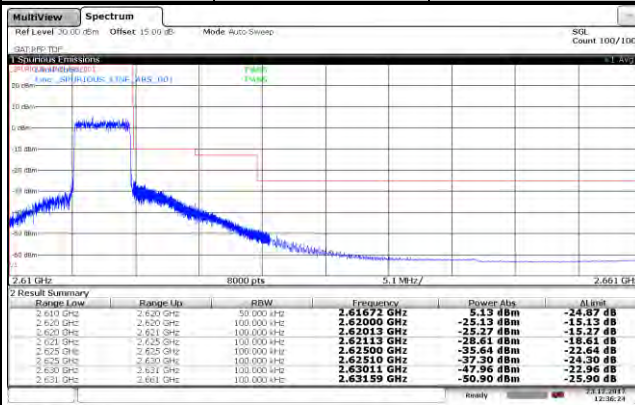



Date: 23 DEC 2017 12:06:24

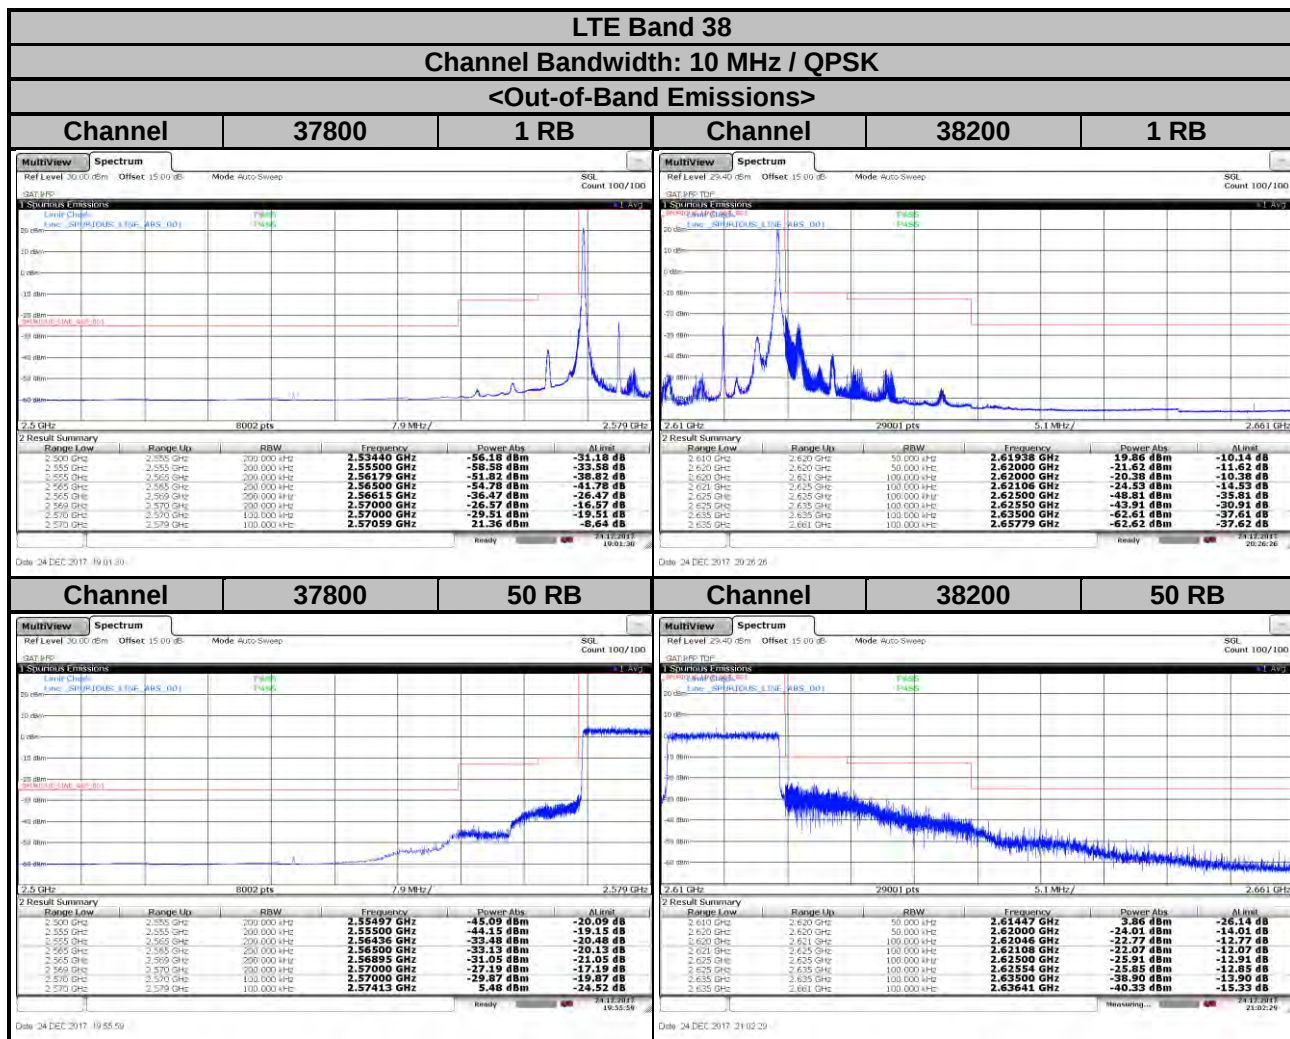


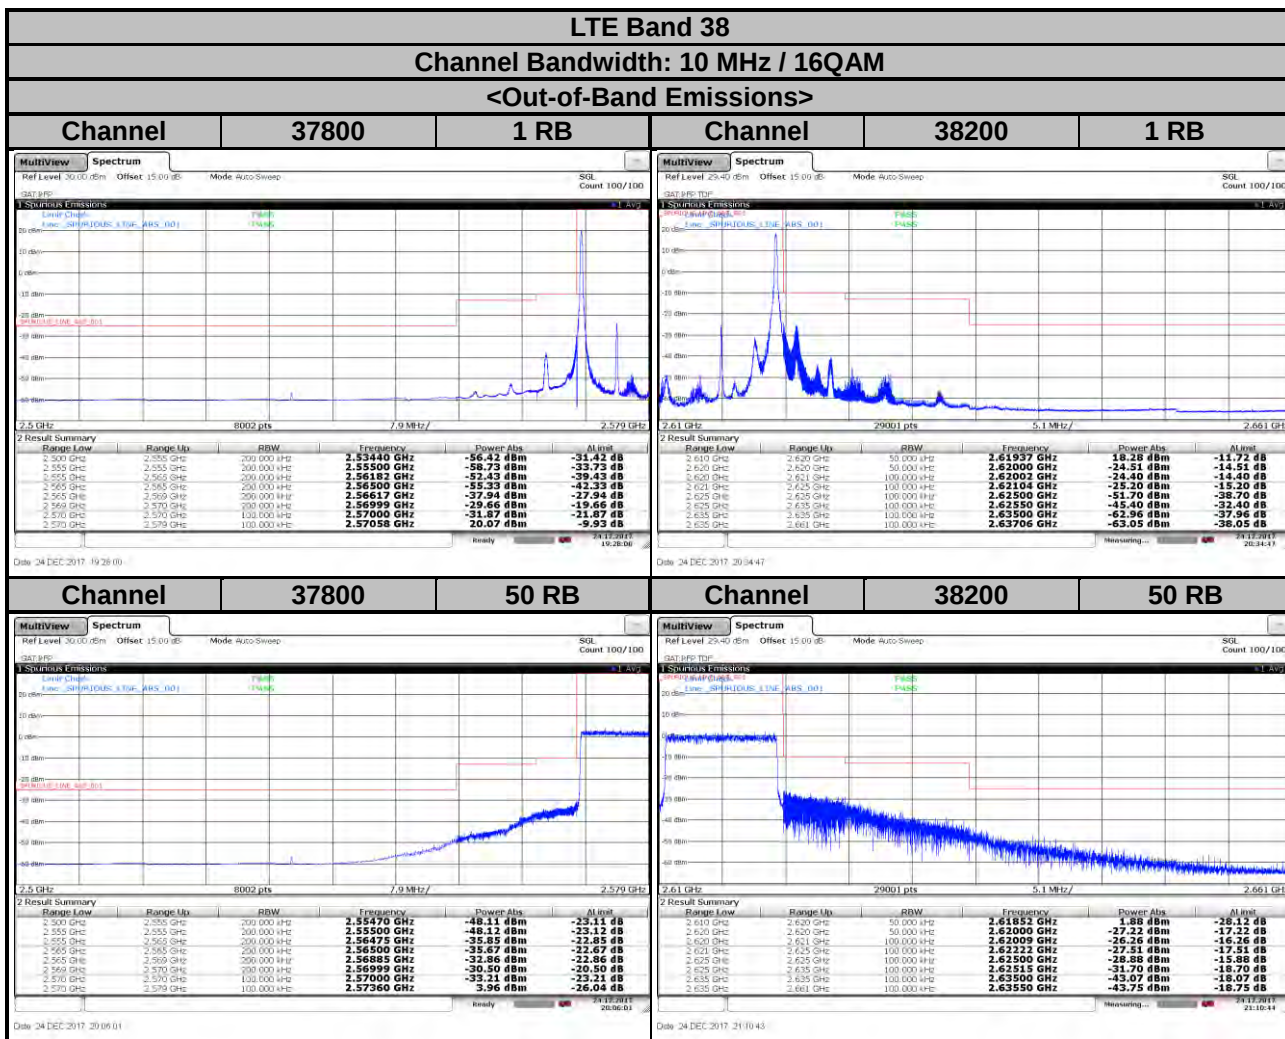


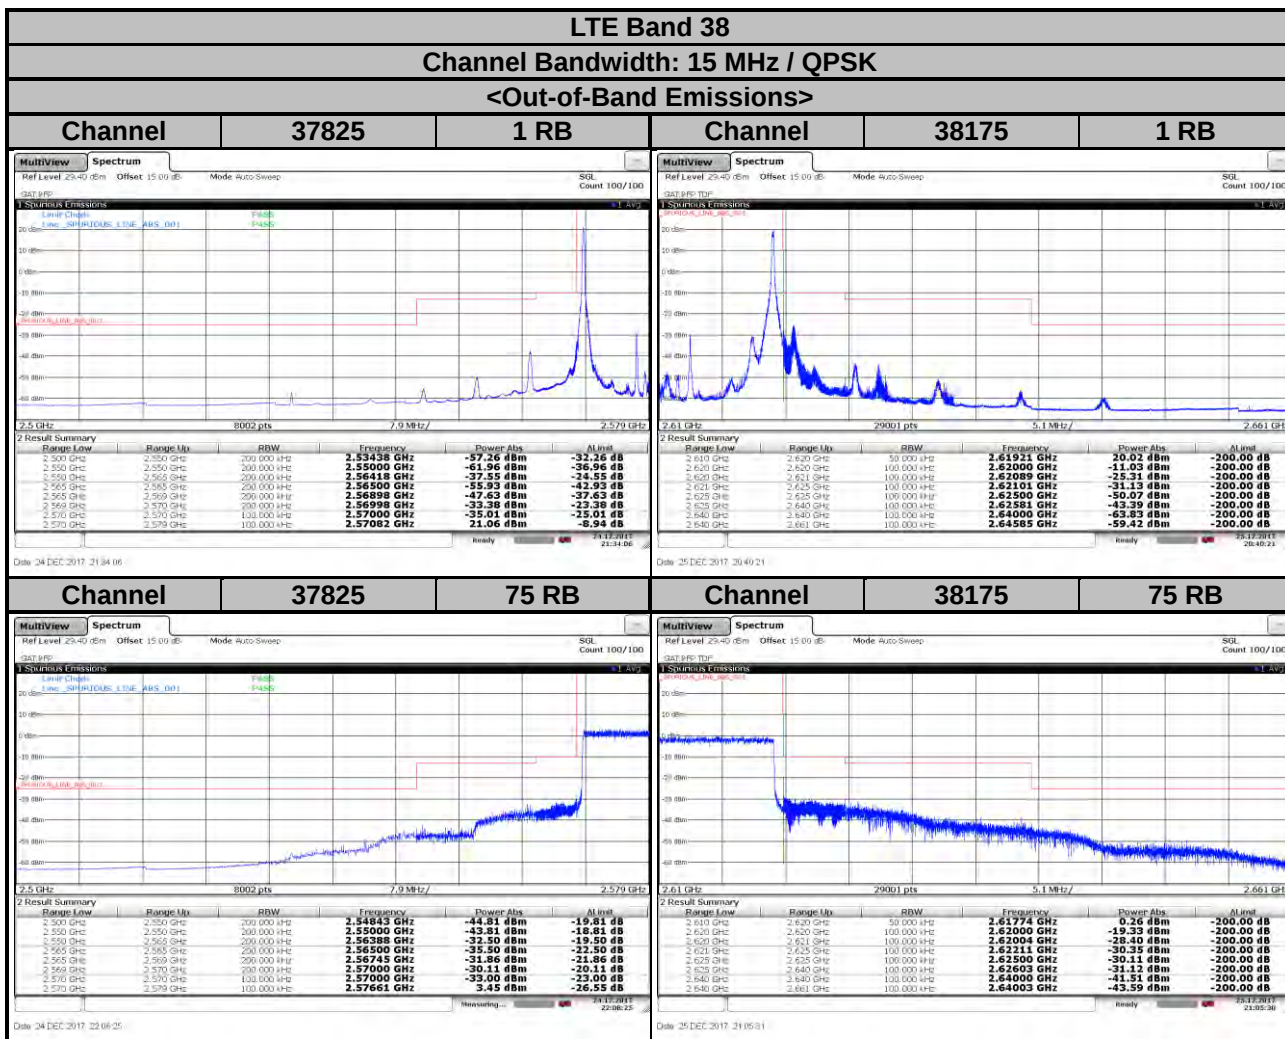

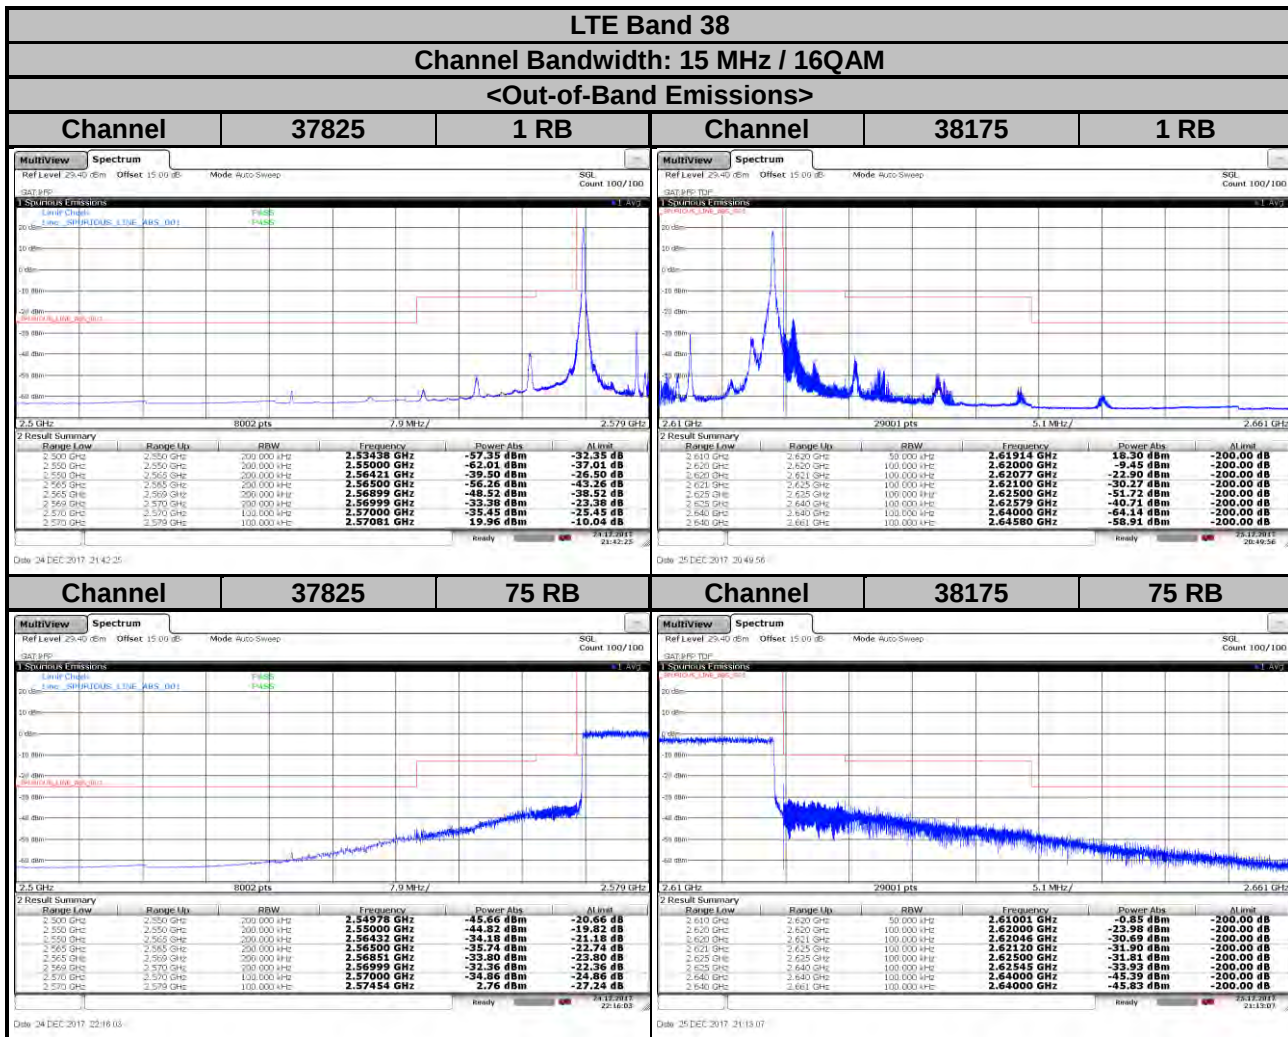

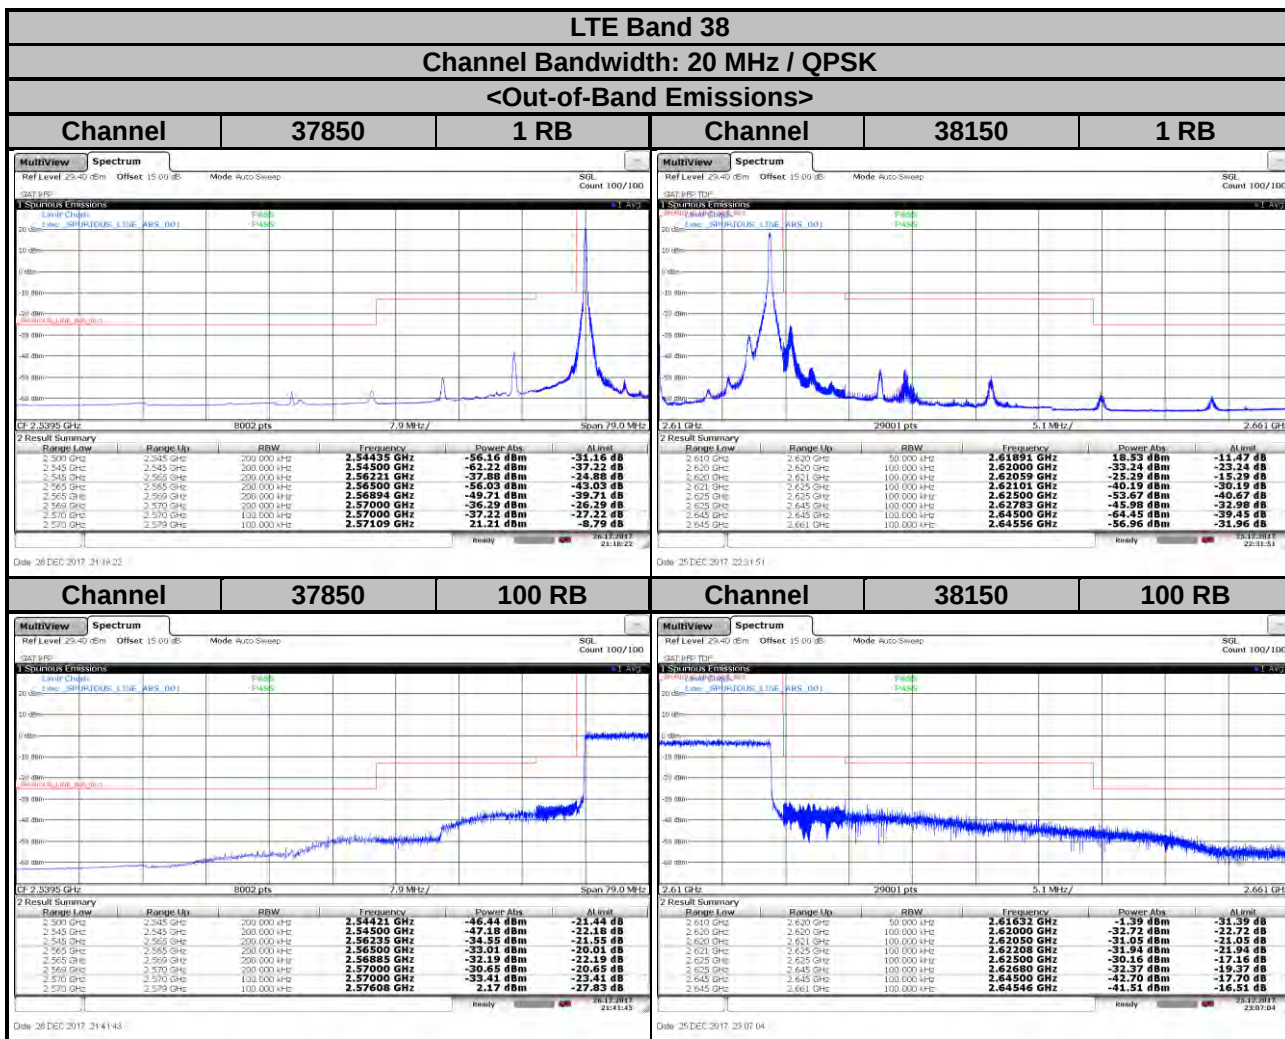

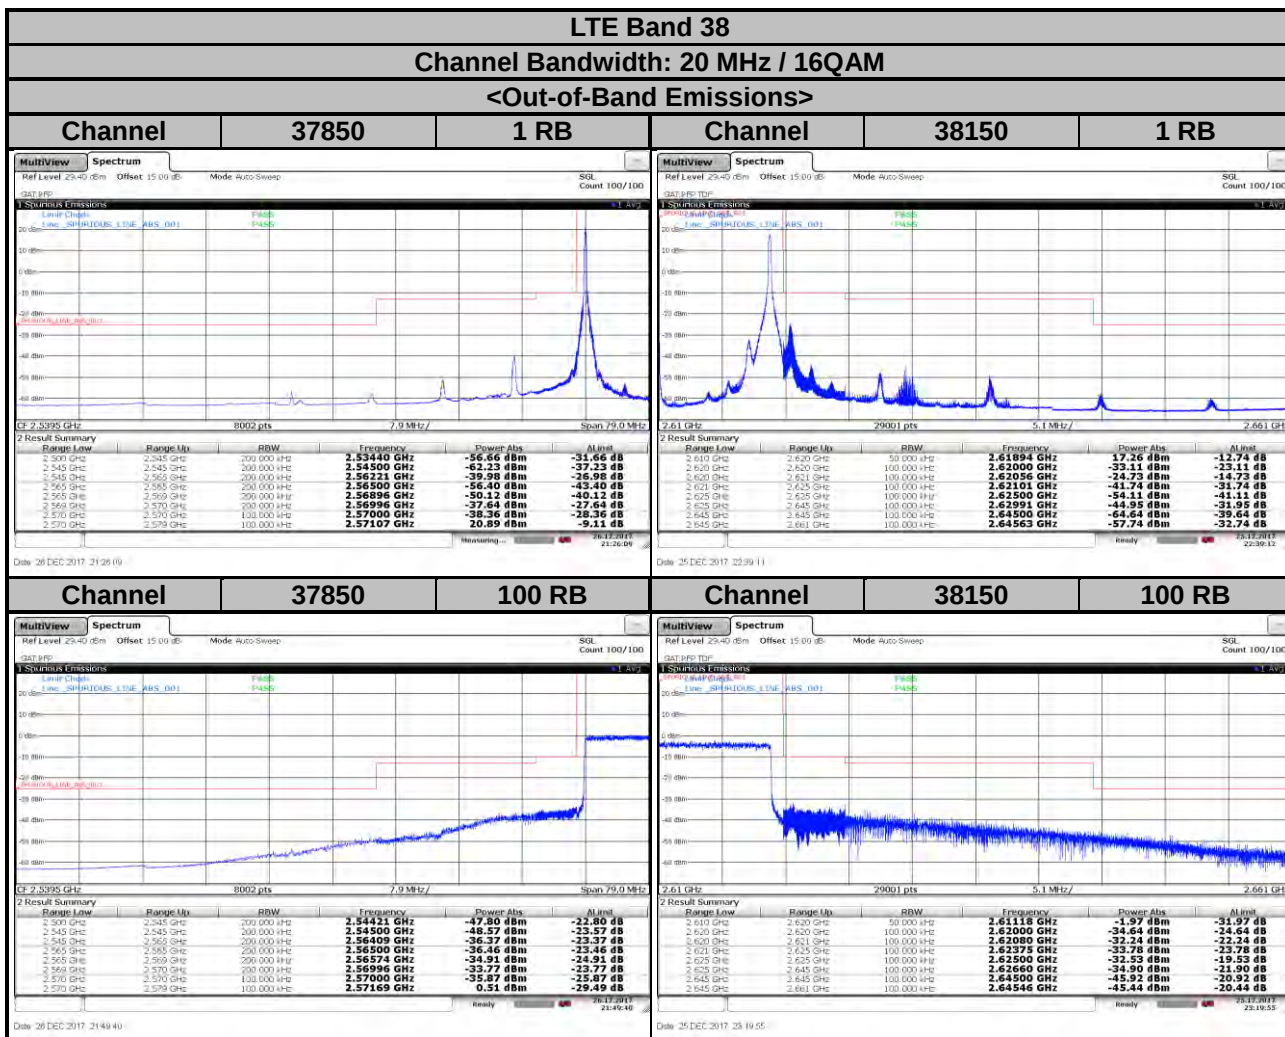


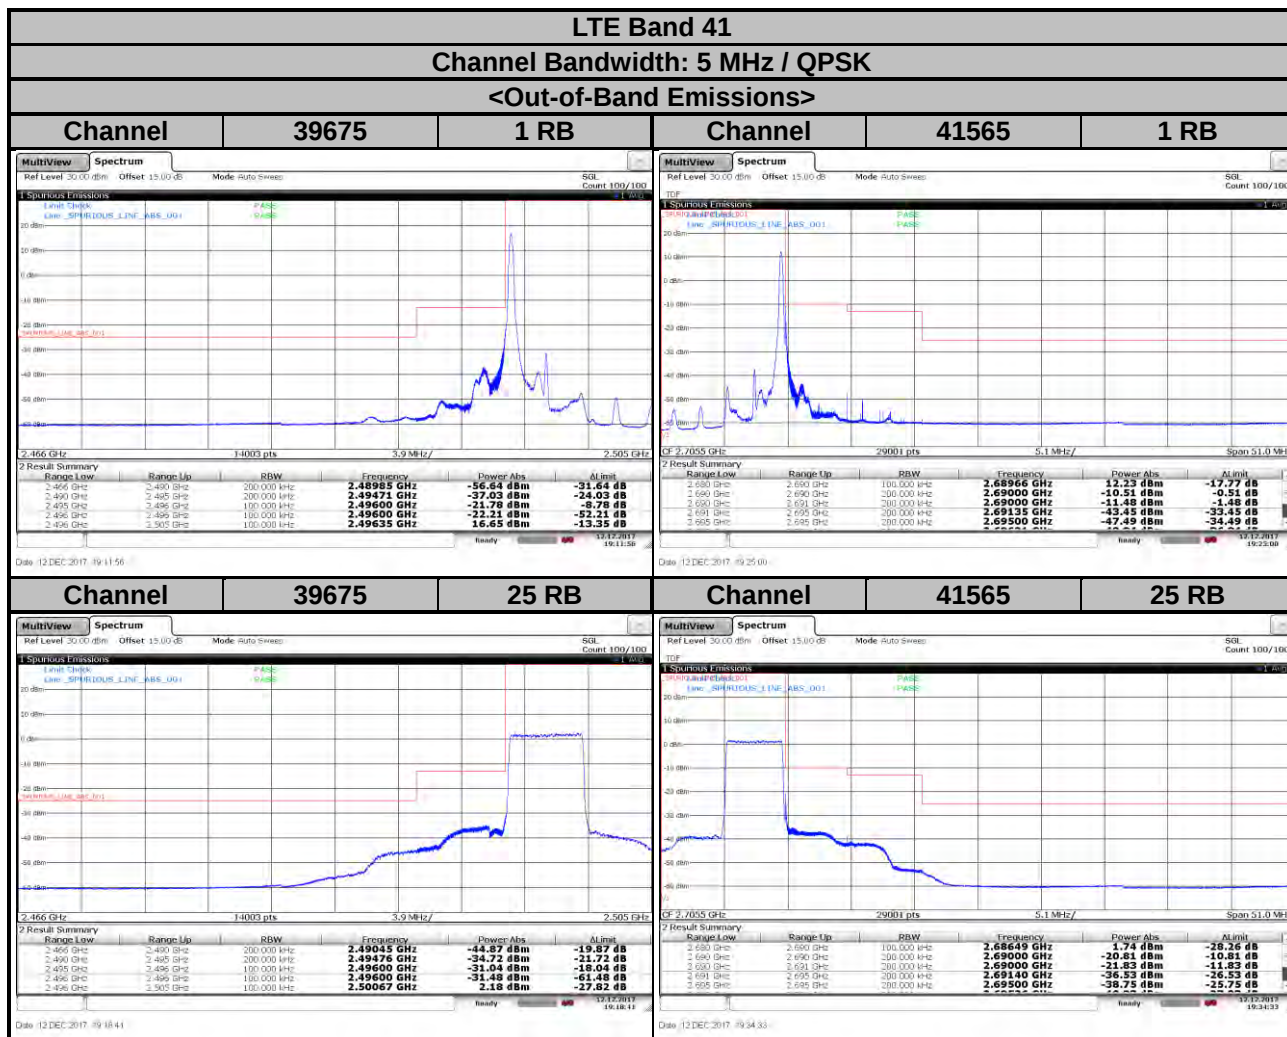



LTE Band 41


Channel Bandwidth: 5 MHz / 16QAM


<Out-of-Band Emissions>

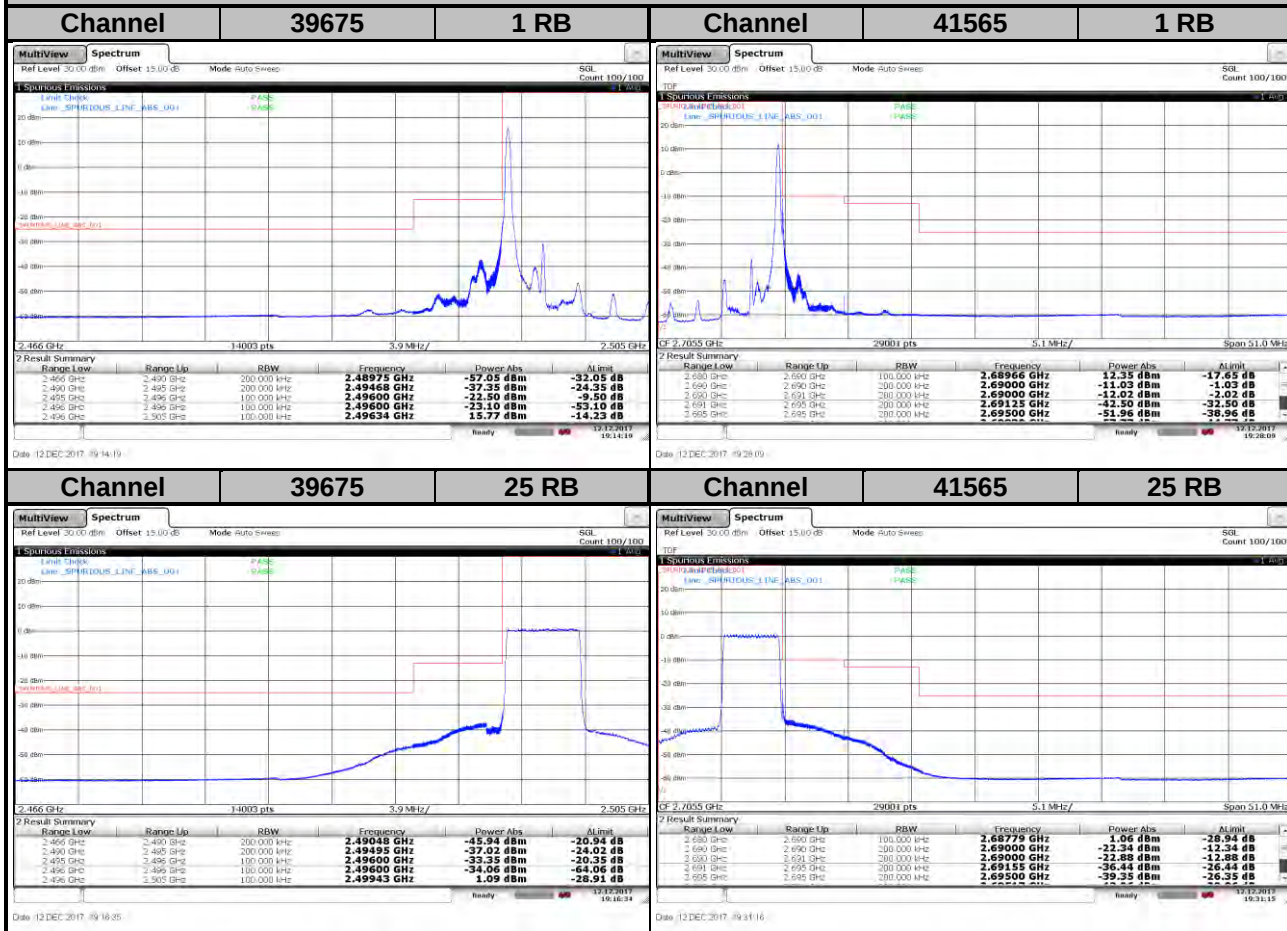


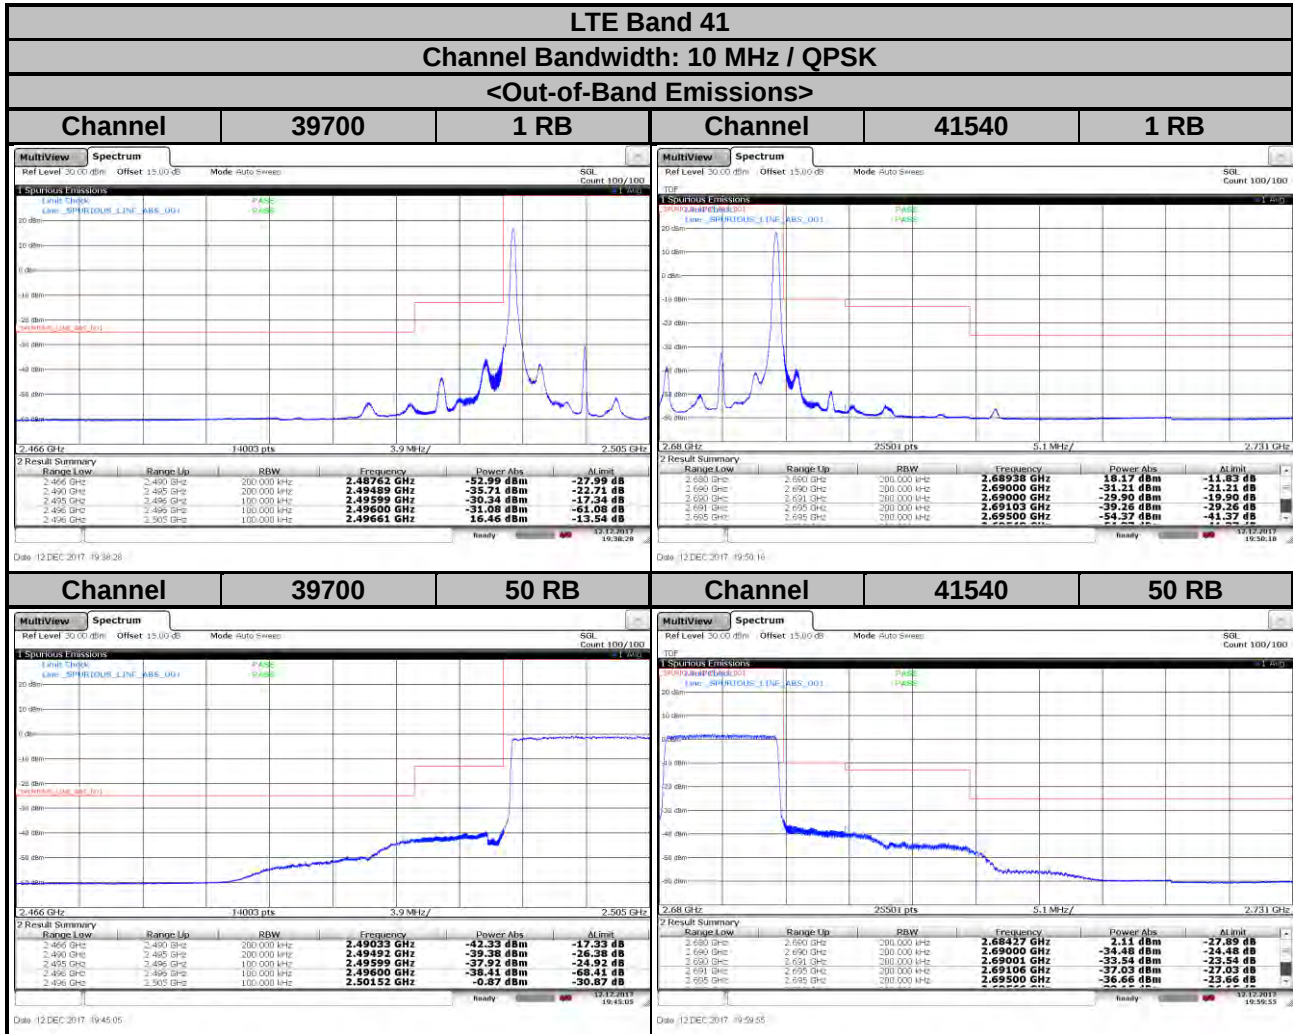


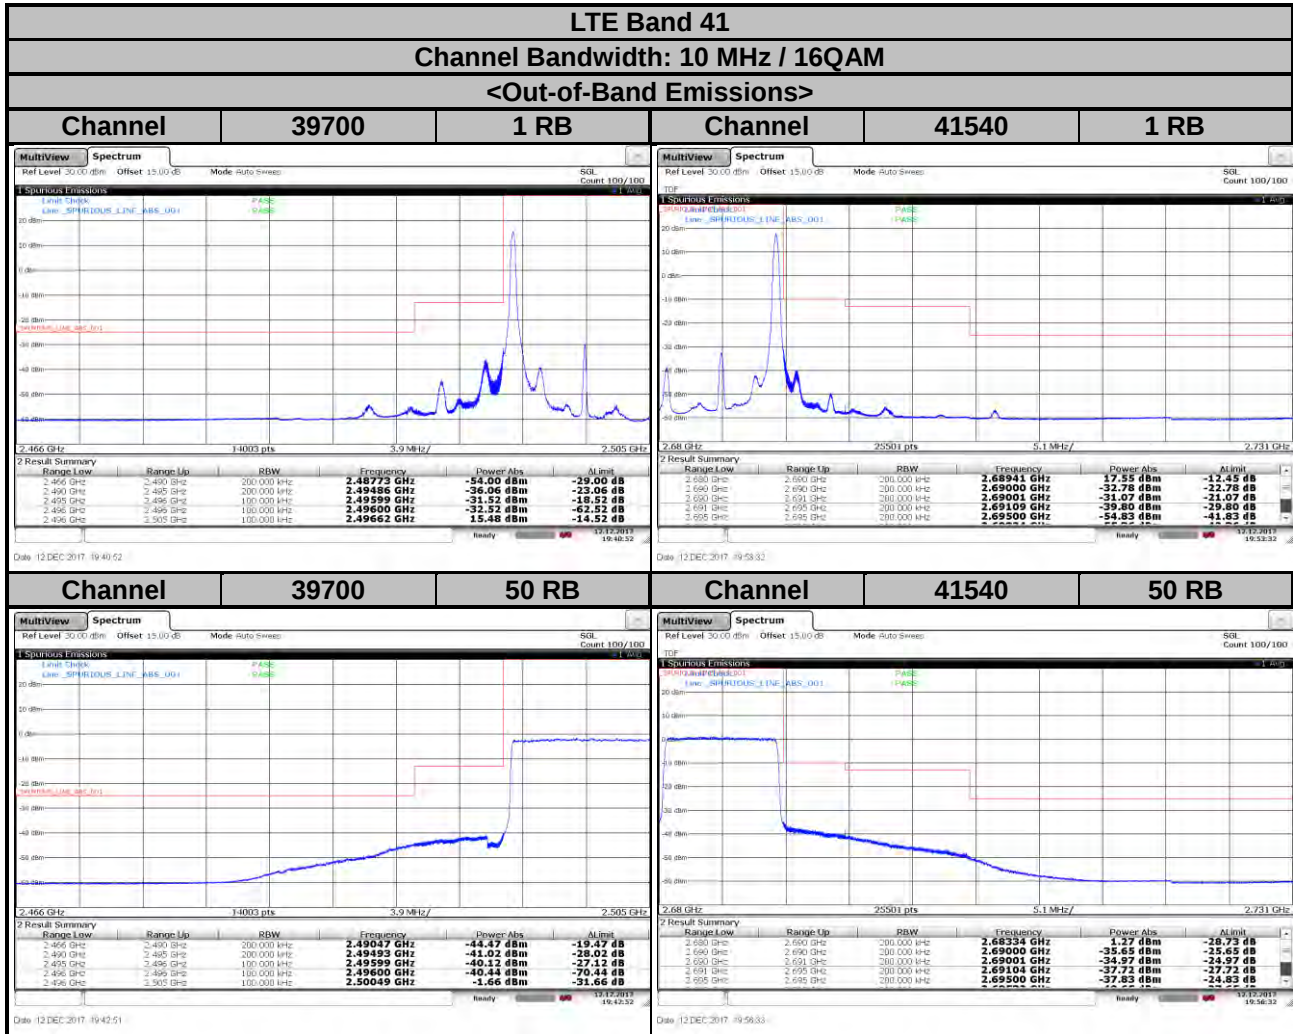

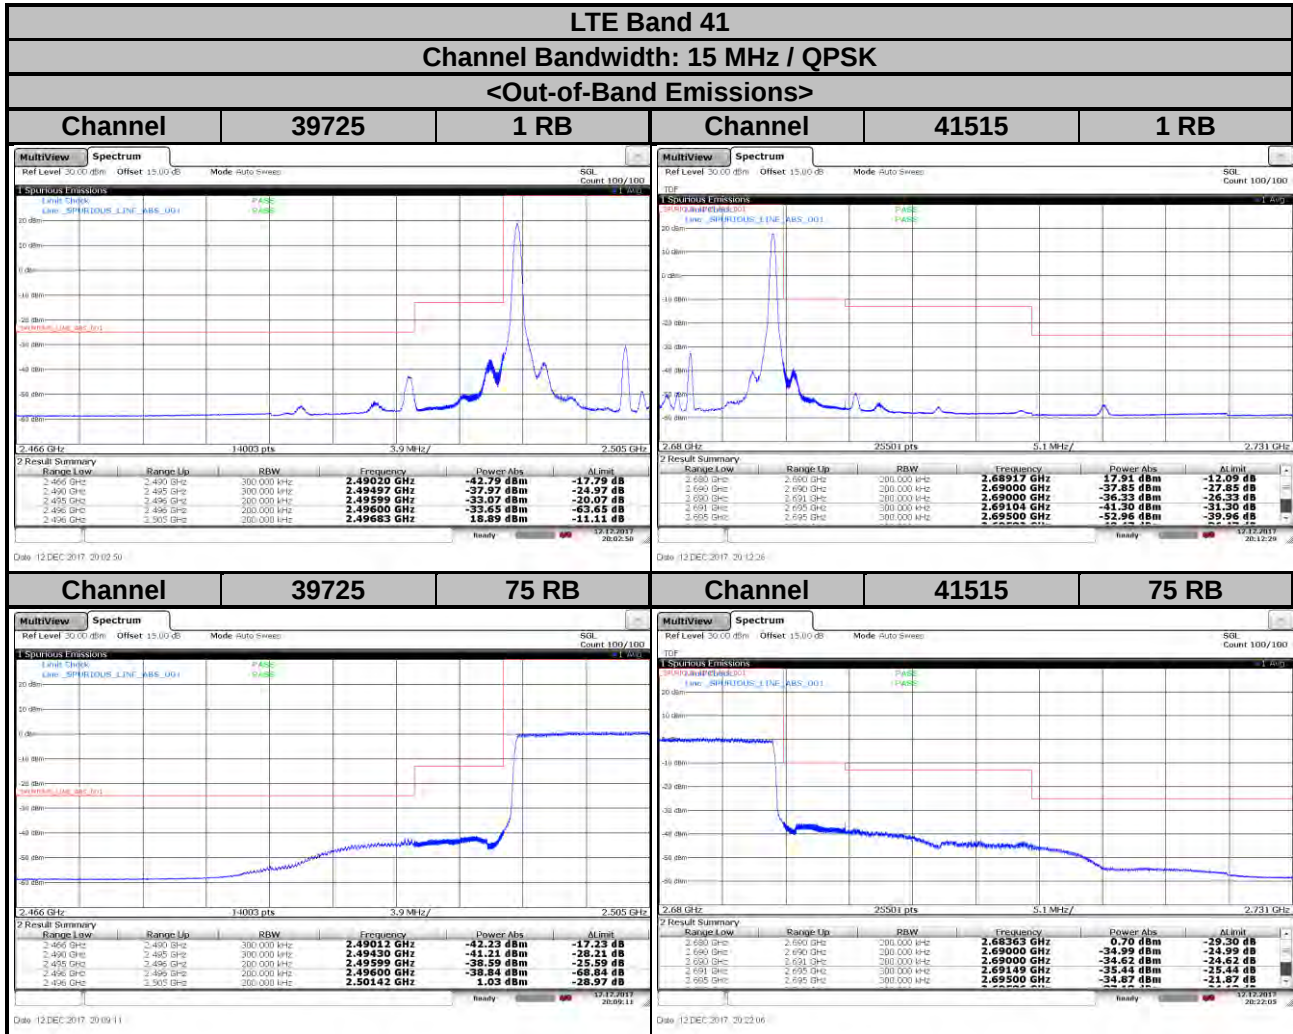

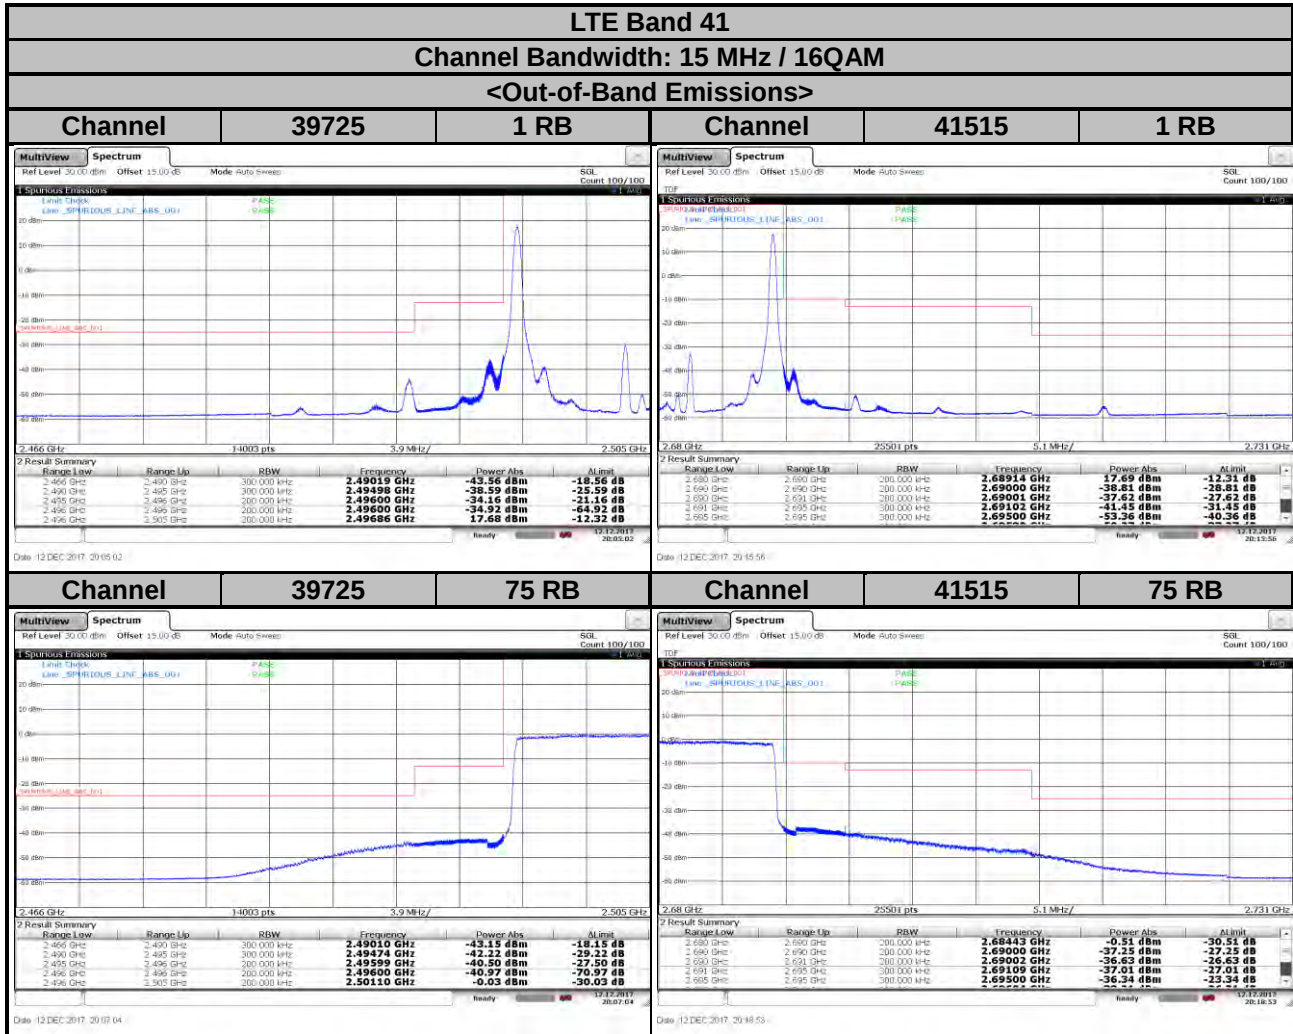

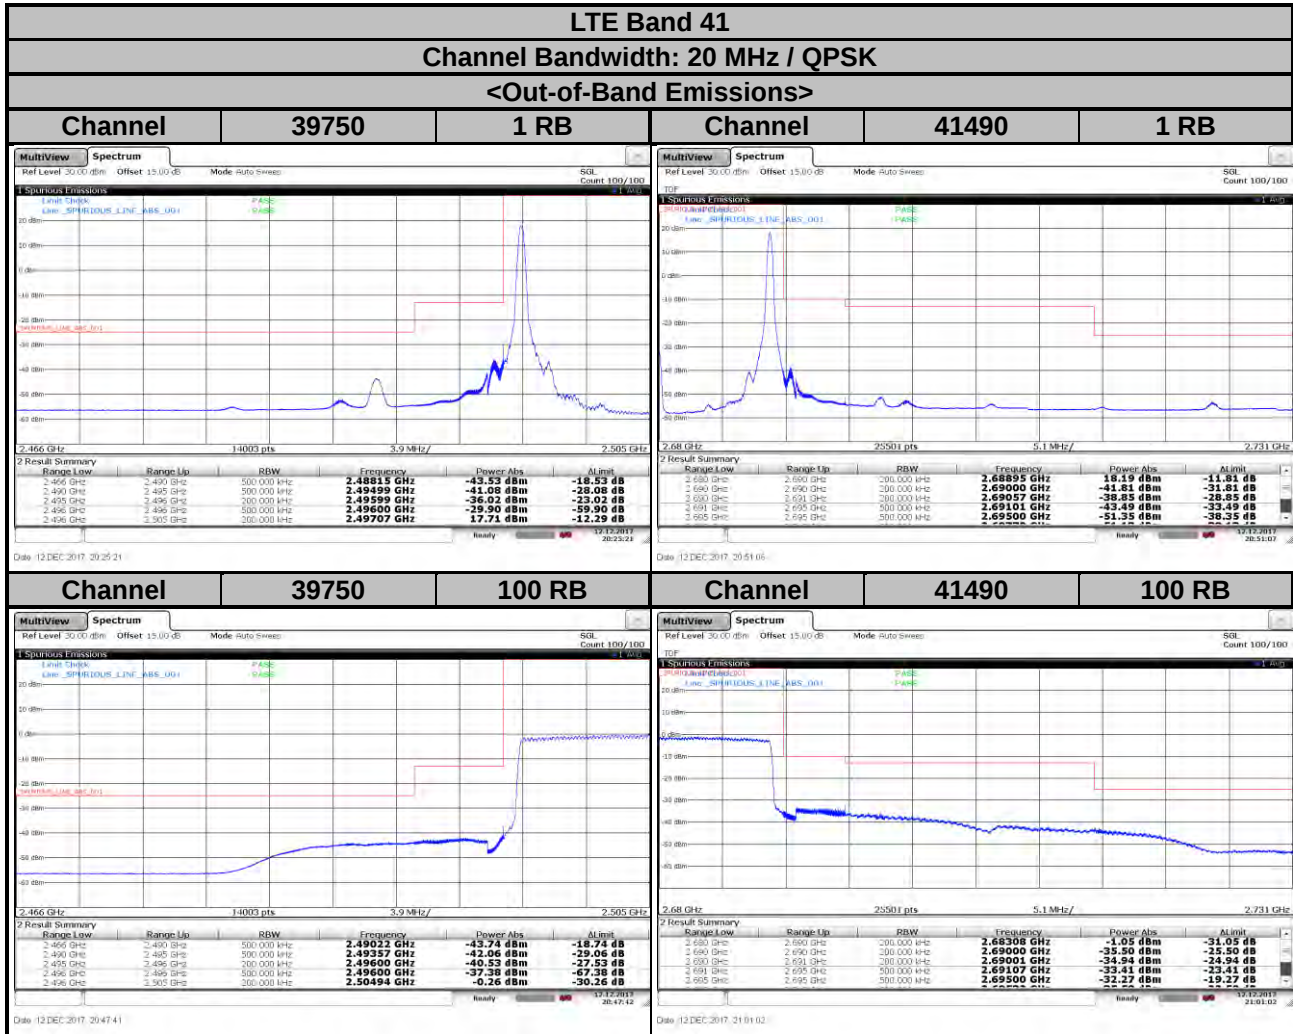

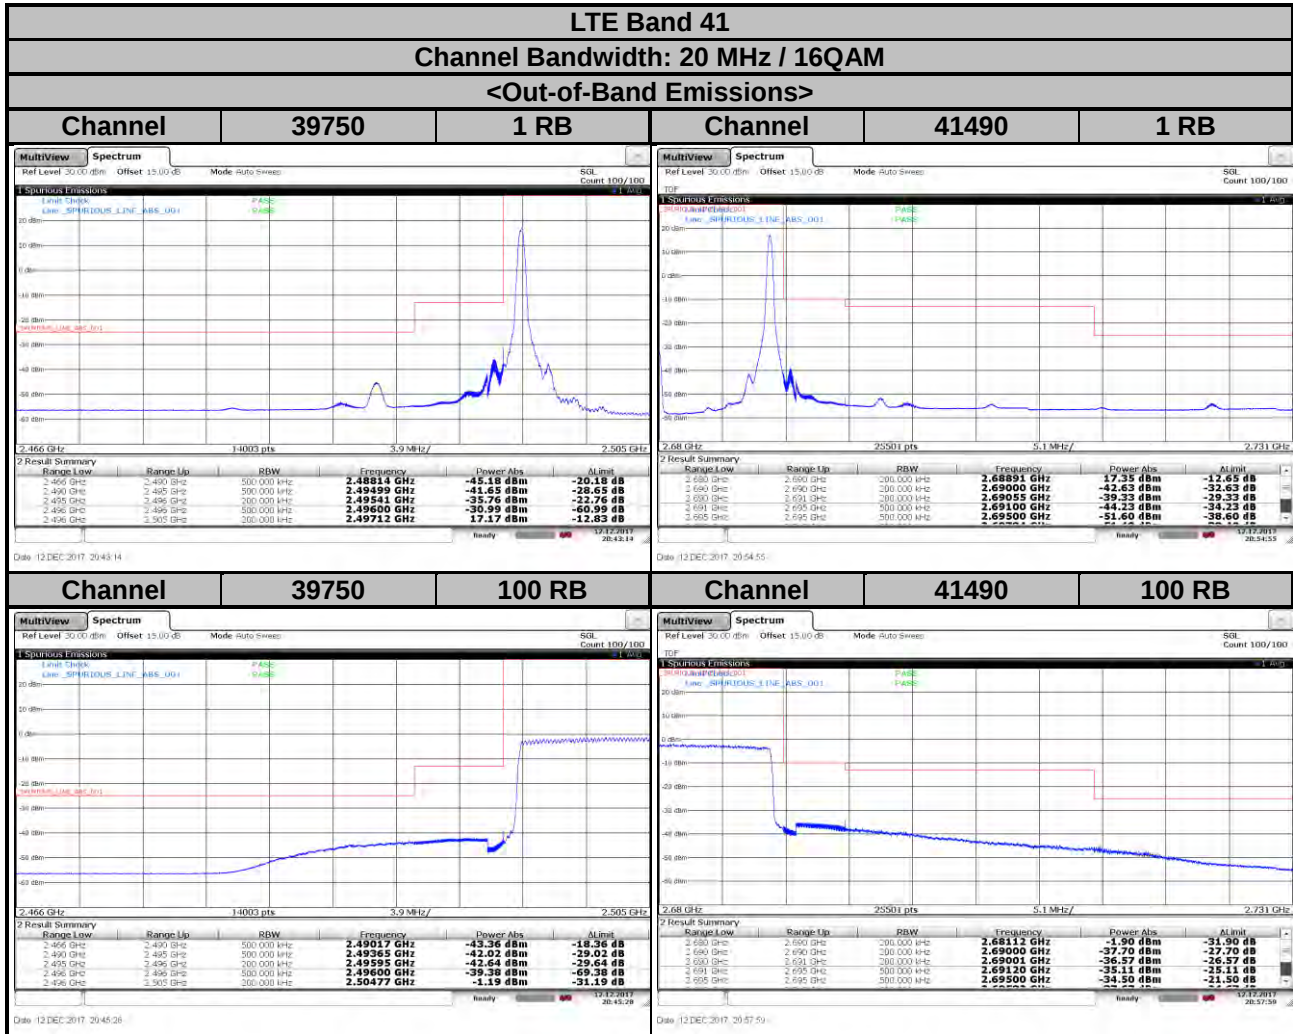


4.5 Peak to Average Ratio

4.5.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.5.2 Test Setup

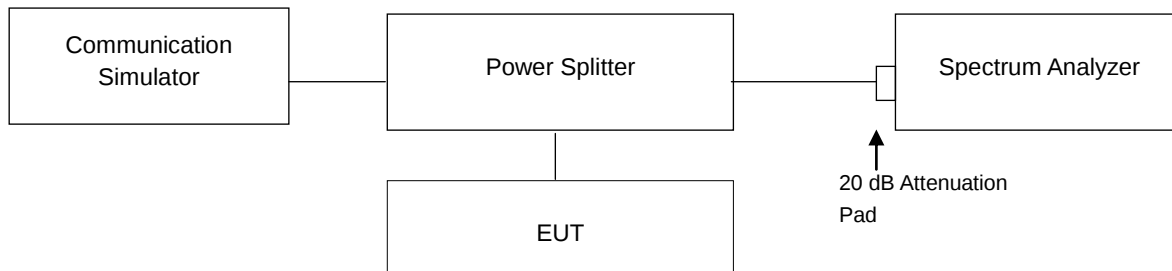


4.5.3 Test Procedures

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1 %.

4.5.4 Test Results

LTE Band 7									
Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)			Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
20775	2502.5	3.49	4.28	4.91	20800	2505.0	3.43	4.22	4.92
21100	2535.0	4.26	5.01	5.74	21100	2535.0	4.47	5.30	6.04
21425	2567.5	3.64	4.38	5.13	21400	2565.0	3.72	4.44	5.22

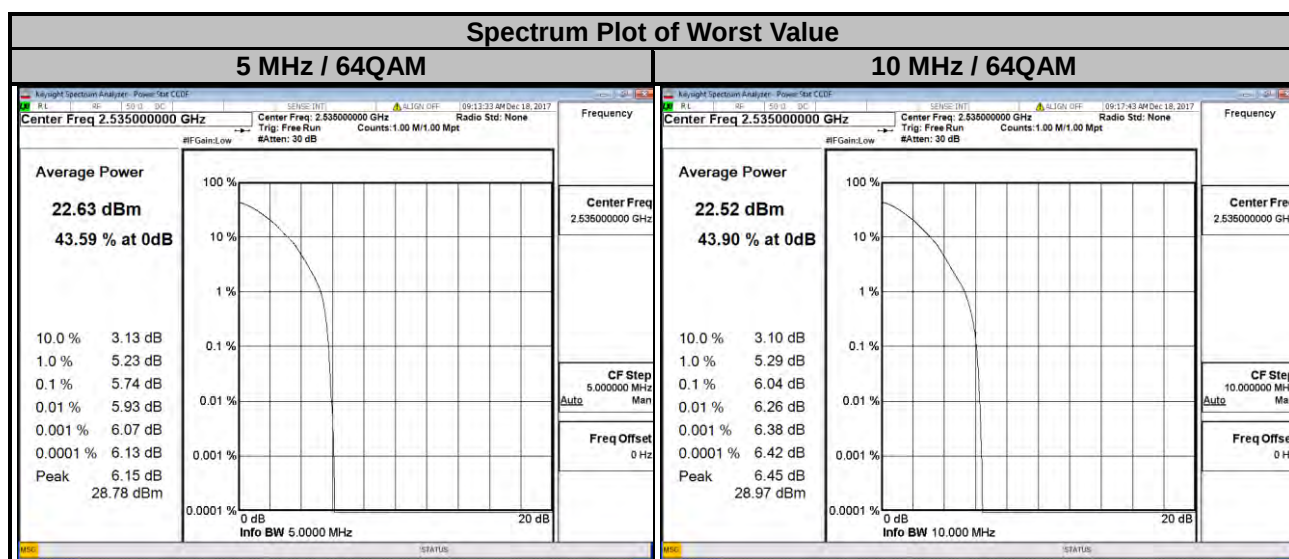


LTE Band 7


Channel Bandwidth: 15 MHz					Channel Bandwidth: 20 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)			Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
20825	2507.5	3.43	4.25	4.85	20850	2510.0	3.43	4.28	4.92
21100	2535.0	4.65	5.46	6.08	21100	2535.0	4.55	5.34	6.17
21375	2562.5	4.06	4.93	5.59	21350	2560.0	4.18	5.11	5.54

Spectrum Plot of Worst Value

15 MHz / 64QAM

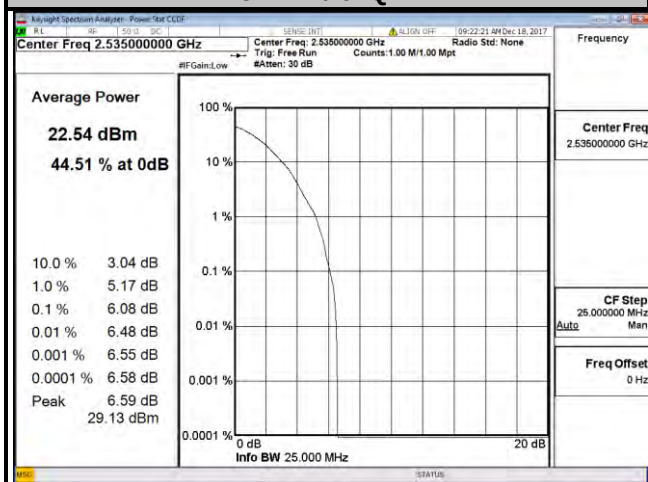

20 MHz / 64QAM

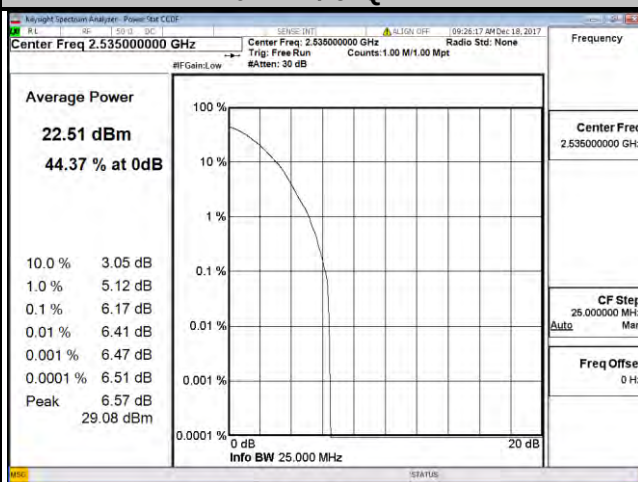


LTE Band 38


Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)			Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
37775	2572.5	8.49	7.99	9.40	37800	2575.0	7.35	7.77	9.33
38000	2595.0	7.48	8.14	9.23	38000	2595.0	7.77	9.21	8.99
38225	2617.5	7.01	7.89	8.99	38200	2615.0	6.99	8.73	9.72

Spectrum Plot of Worst Value

5 MHz / 64QAM

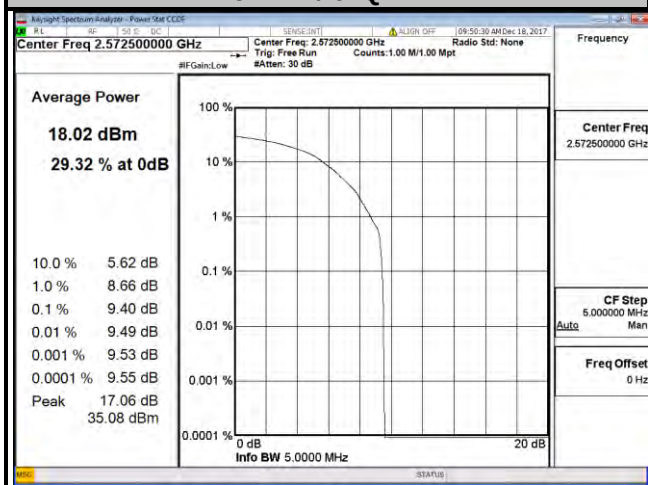

10 MHz / 64QAM

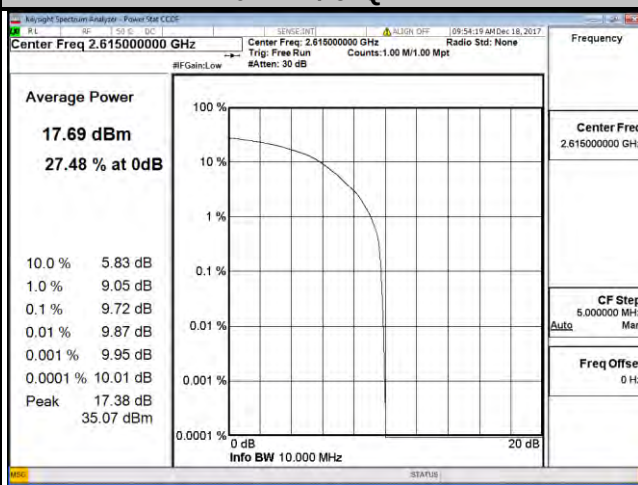


LTE Band 38


Channel Bandwidth: 15 MHz					Channel Bandwidth: 20 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)			Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
37825	2577.5	7.04	9.76	8.32	37850	2580.0	7.85	8.26	9.61
38000	2595.0	7.75	7.87	9.46	38000	2595.0	6.41	7.82	11.35
38175	2612.5	7.55	10.26	9.61	38150	2610.0	8.12	8.55	9.37

Spectrum Plot of Worst Value

15 MHz / 16QAM

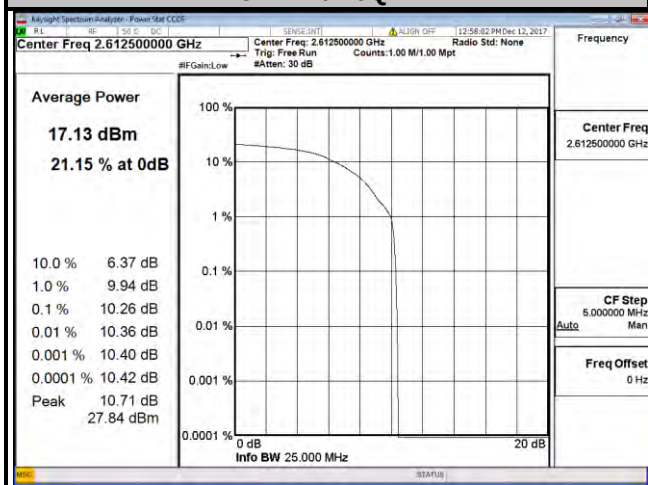

20 MHz / 16QAM

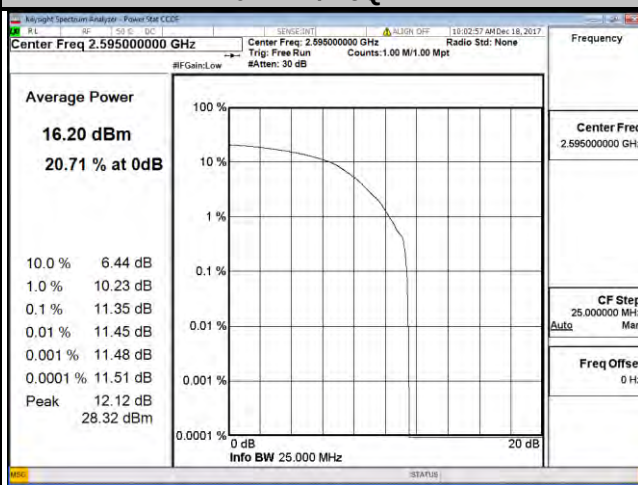


LTE Band 41


Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)			Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
39675	2498.5	7.08	7.77	8.96	39700	2501.0	7.04	7.52	8.50
40620	2593.0	7.61	8.78	9.47	40620	2593.0	7.22	7.52	9.33
41565	2687.5	6.92	7.93	8.96	41540	2685.0	7.11	7.36	8.12

Spectrum Plot of Worst Value

5 MHz / 64QAM

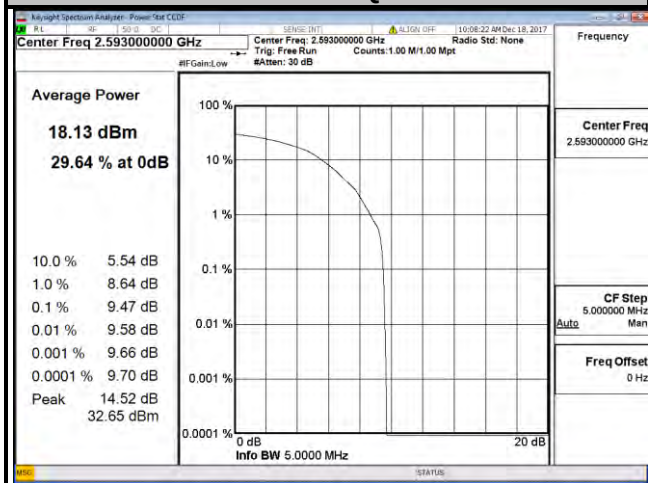

10 MHz / 64QAM

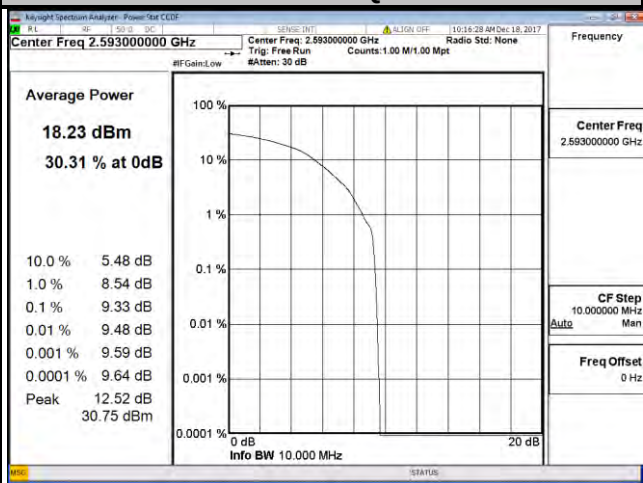


LTE Band 41

Channel Bandwidth: 15 MHz					Channel Bandwidth: 20 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)			Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
39725	2503.5	6.27	7.61	11.02	39750	2506.0	7.18	8.23	9.14
40620	2593.0	6.36	8.38	9.62	40620	2593.0	9.52	8.35	9.62
41515	2682.5	7.59	7.92	8.05	41490	2680.0	5.61	6.98	7.16

Spectrum Plot of Worst Value

15 MHz / 64QAM

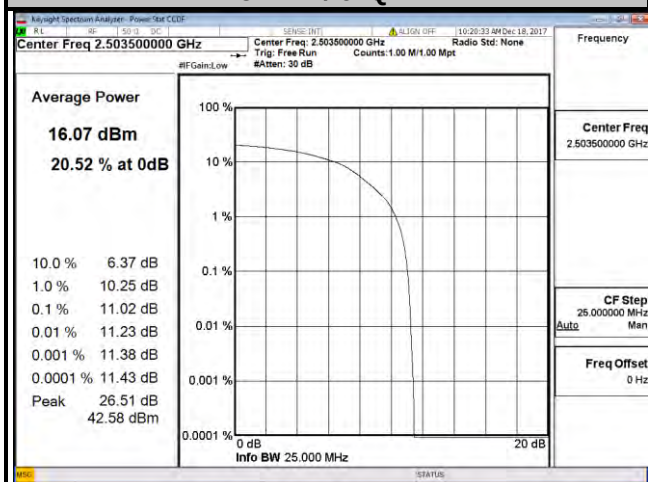

20 MHz / 64QAM

