



FCC RF Test Report

APPLICANT : Honeywell International Inc.
EQUIPMENT : Dolphin CT60
BRAND NAME : Honeywell
MODEL NAME : CT60L1N
FCC ID : HD5-CT60L1N
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Apr. 24, 2020 and testing was completed on May 09, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

James Huang

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	7
1.5 Modification of EUT	8
1.6 Testing Location	8
1.7 Test Software.....	8
1.8 Applicable Standards.....	9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1 Carrier Frequency and Channel	10
2.2 Test Mode.....	11
2.3 Connection Diagram of Test System.....	13
2.4 Support Unit used in test configuration and system	14
2.5 EUT Operation Test Setup	14
2.6 Measurement Results Explanation Example.....	14
3 TEST RESULT	15
3.1 26dB & 99% Occupied Bandwidth Measurement	15
3.2 Maximum Conducted Output Power Measurement	17
3.3 Power Spectral Density Measurement	19
3.4 Unwanted Emissions Measurement.....	23
3.5 AC Conducted Emission Measurement.....	28
3.6 Automatically Discontinue Transmission	30
3.7 Antenna Requirements	31
4 LIST OF MEASURING EQUIPMENT	32
5 UNCERTAINTY OF EVALUATION	33
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR042407B	Rev. 01	Initial issue of report	Jun. 11, 2020

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	2.1049 & 15.403(i)	26dB & 99% Bandwidth	-	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	Pass	Under limit 2.12 dB at 5350.00 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 12.84 dB at 0.452 MHz
3.6	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.7	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Honeywell International Inc.

9680 Old Bailes Road, Fort Mill, SC 29707 USA

1.2 Manufacturer

Honeywell International Inc.

9680 Old Bailes Road, Fort Mill, SC 29707 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Dolphin CT60
Brand Name	Honeywell
Model Name	CT60L1N
FCC ID	HD5-CT60L1N
EUT supports Radios application	CDMA/GSM/WCDMA/LTE/NFC/GNSS WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 2.4GHz 802.11ac VHT20/VHT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
IMEI Code	Conducted: 990010901594838 Conduction: 990010901597139 Radiation: 990010901594474
HW Version	V1.0
HW P/N	DVT
SW Version	OS.03.003-HON.02.001
SW P/N	88.00.00-DEBUG(0579)
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. This is a variant report for CT60L1N (Original FCC ID: HD5-CT60L1N, Model: CT60L1N, approval date: 01/31/2018). For change note, please refer to the change list as below. According to the difference, all test items for full test.



the detail differences between Original and Variant product are list in the following table:

Object	Original	Variant	Remark
Carrier Board	Scanner N6703 imager	Scanner change to N6803 imager	

CT60L1N have the following new parts:

RF Module	Under fill Modified
RF Module	LPDDR4x Layout Optimization
RF Module	Wi-Fi Layout Optimization
RF Module	WWAN Path Optimization
RF Module	WWAN Shielding Frame Optimization
RF Module	WWAN PA Power Optimization
RF Module	SOM PAD Mask Optimization
RF Module	Change DC regulator and WLAN amplifier DC power
RF Module	BOM Change for Optimization **
RF Module	B25 Duplexer-AVAGO-ACMD-6225-TR1
RF Module	B40 TRX filter-AVAGO-ACPF-8240-TR1
RF Module	Add New power inductor in BOM
RF Module	Remove un-used CLK trace WCN_CLK
Carrier Board	Add 1F/2.7V supercap
Carrier Board	Add MAX38888 DC/DC for supercap charge/ change discharge circuit
Carrier Board	Add low battery protection circuit
Carrier Board	Change speaker and add a connector for it
Carrier Board	Change ADS1014 to ADS1015 to add supercap voltage detection
Carrier Board	AUX antenna tuner circuit change placement location
Carrier Board	Upgrade the SOM to SOM4
Carrier Board	Add new model battery
Carrier Board	Add WIFI-AUX layout, RF WIFI AUX Matching
Carrier Board	Modify two n-PTH to PTH to reduce RSE issue.
Carrier Board	Upgrade to gen 8 scanner, adjust 2 spring contacts' location.
Carrier Board	Add a high-G sensor.
WIFI 11b	Power reduction from 18+/-1.5 dB to 17.5+/-1.5 dB
LTE 7	Power reduction from 23.4 + 1 / -2.7 dB to 23 + 1 / -2.7dB
GSM 850	Power reduction for Head with WIFI ON mode from 33.4 + 1 / - 2 dB to 32.8 + 1 / -2 dB
CDMA2K BC0	Power reduction for Head with WIFI ON mode from 24.4 +/- 1 dB to 23.8 +/- 1dB
CDMA2K BC10	Power reduction for Head with WIFI ON mode from 24.4 +/- 1 dB to 23.8 +/- 1dB

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz
Maximum Output Power to Antenna	<MIMO Ant. 1+2> <5180 MHz ~ 5240 MHz> 802.11a : 15.28 dBm / 0.0337 W 802.11n HT20 : 15.70 dBm / 0.0372 W 802.11n HT40 : 15.58 dBm / 0.0361 W 802.11ac VHT20 : 15.76 dBm / 0.0377 W 802.11ac VHT40 : 15.60 dBm / 0.0363 W 802.11ac VHT80 : 13.73 dBm / 0.0236 W <5260 MHz ~ 5320 MHz> 802.11a : 15.17 dBm / 0.0329 W 802.11n HT20 : 15.58 dBm / 0.0361 W 802.11n HT40 : 15.48 dBm / 0.0353 W 802.11ac VHT20 : 15.66 dBm / 0.0368 W 802.11ac VHT40 : 15.51 dBm / 0.0356 W 802.11ac VHT80 : 10.93 dBm / 0.0124 W <5500 MHz ~ 5720 MHz> 802.11a : 15.27 dBm / 0.0337 W 802.11n HT20 : 15.18 dBm / 0.0330 W 802.11n HT40 : 15.73 dBm / 0.0374 W 802.11ac VHT20 : 15.22 dBm / 0.0333 W 802.11ac VHT40 : 15.77 dBm / 0.0378 W 802.11ac VHT80 : 15.24 dBm / 0.0334 W
99% Occupied Bandwidth	<5180 MHz ~ 5240 MHz> 802.11a : 17.98 MHz 802.11ac VHT20 : 19.28 MHz 802.11ac VHT40 : 37.26 MHz 802.11ac VHT80 : 76.24 MHz <5260 MHz ~ 5320 MHz> 802.11a : 18.13 MHz 802.11ac VHT20 : 19.03 MHz 802.11ac VHT40 : 37.46 MHz 802.11ac VHT80 : 75.88 MHz <5500 MHz ~ 5720 MHz> 802.11a : 18.13 MHz 802.11ac VHT20 : 19.38 MHz 802.11ac VHT40 : 37.66 MHz 802.11ac VHT80 : 76.36 MHz
Antenna Type / Gain	<5180 MHz ~ 5240 MHz> <Ant. 1> : PIFA Antenna with gain 1.14 dBi <Ant. 2> : Monopole Antenna with gain 2.10 dBi <5260 MHz ~ 5320 MHz> <Ant. 1> : PIFA Antenna with gain 1.14 dBi <Ant. 2> : Monopole Antenna with gain 2.10 dBi <5500 MHz ~ 5720 MHz> <Ant. 1> : PIFA Antenna with gain 1.14 dBi <Ant. 2> : Monopole Antenna with gain 2.10 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

	802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)		
Antenna Function Description		Ant. 1	Ant. 2
	802.11 a/n/ac SISO/MIMO	V	V

Note:

1. For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing have assessed only 802.11ac VHT20/ VHT40 by referring to their maximum conducted power.
2. For SISO & MIMO mode, the whole testing has assessed MIMO mode by referring to their higher conducted power.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH06-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH06-KS	AUDIX	E3	6.2009-8-24a1
2.	CO01-KS	AUDIX	E3	6.2009-8-24



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210		
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5250-5350 MHz Band 2 (U-NII-2A)	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290		
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5470-5725 MHz Band 3 (U-NII-2C)	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 [#]	5610	128	5640

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138 [#]	5690	144	5720
	142*	5710		

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

MIMO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : GSM 850 Idle + Bluetooth Link + WLAN Link(5G) + USB Link + Snap on Adaptor
Remark: For Radiated Test Cases, The tests were performance with Notebook.	



Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11a	802.11a	802.11a
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140
Straddle		-	-	144


Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11ac VHT20	802.11ac VHT20	802.11ac VHT20
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140
Straddle		-	-	144

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11ac VHT40	802.11ac VHT40	802.11ac VHT40
L	Low	38	54	102
M	Middle	-	-	110
H	High	46	62	134
Straddle		-	-	142


Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11ac VHT80	802.11ac VHT80	802.11ac VHT80
L	Low	-	-	106
M	Middle	42	58	-
H	High	-	-	-
Straddle		-	-	138

2.3 Connection Diagram of Test System

For Conducted Emission:

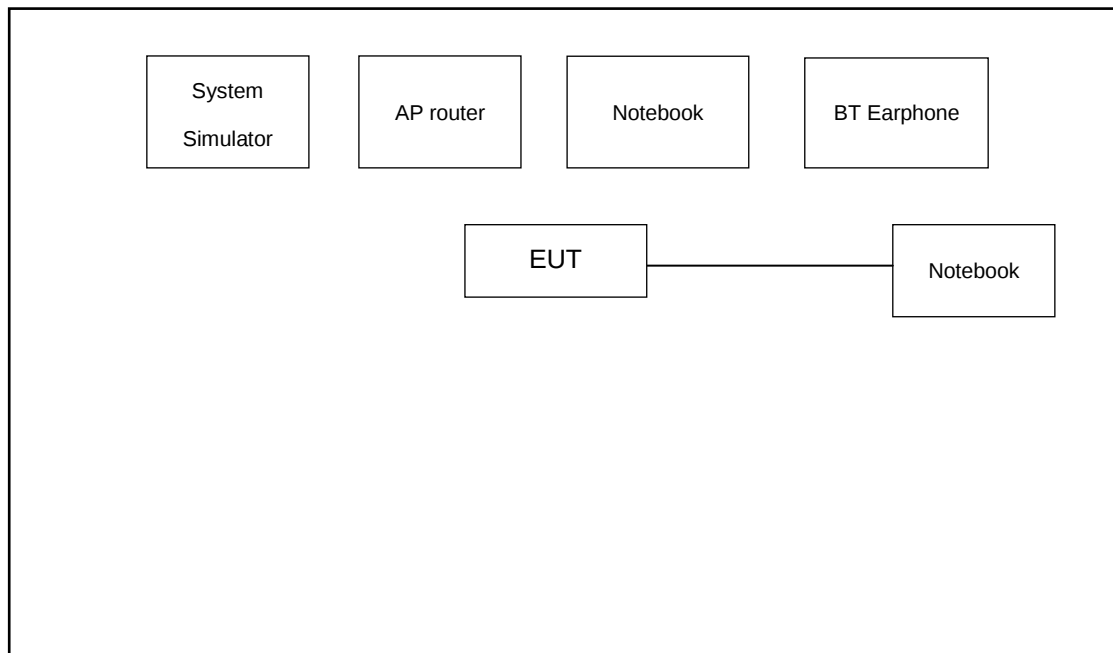

For Radiation:

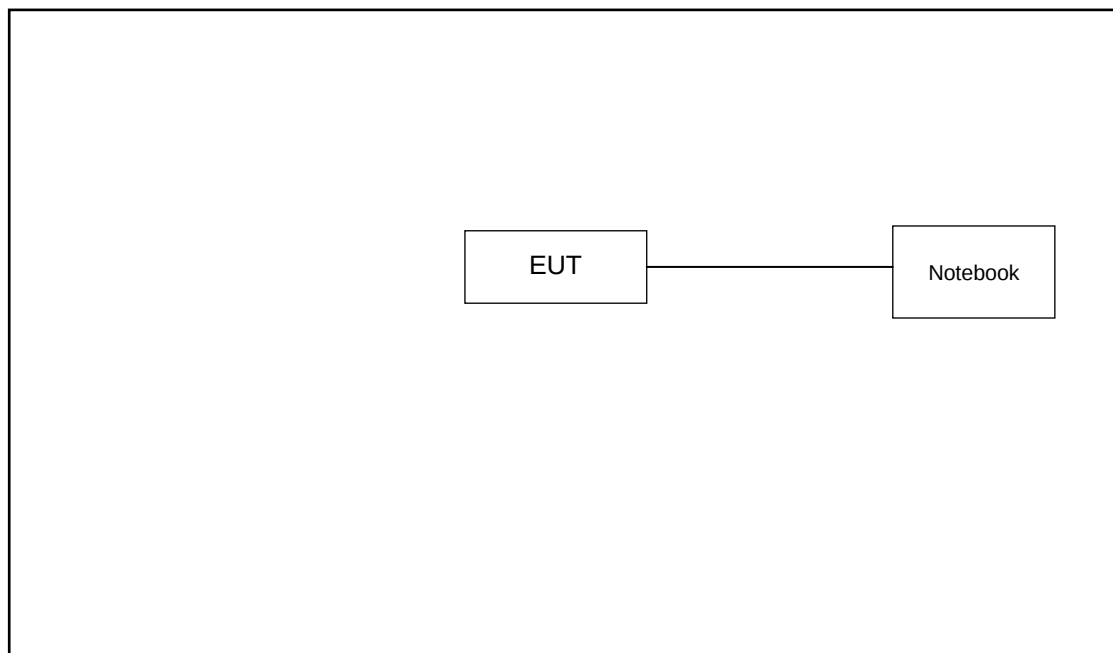

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritus	MT8820C	N/A	N/A	Unshielded, 1.8m
2.	WLAN AP	Lenovo	LBH308	N/A	N/A	Unshielded, 1.8m
3.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded, 1.8m
4.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
5.	Hard Disk	Lenovo	F310	DoC	Shielded, 1.2m	N/A
6.	SD Card	Kingston	8GB	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 8.2 dB.

Offset(dB) = RF cable loss(dB).

= 8.2 (dB)

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1MHz and set the Video bandwidth (VBW) $\geq 3 * \text{RBW}$.
8. Measure and record the results in the test report.

3.1.4 Test Setup

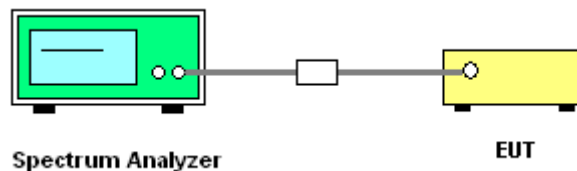

3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

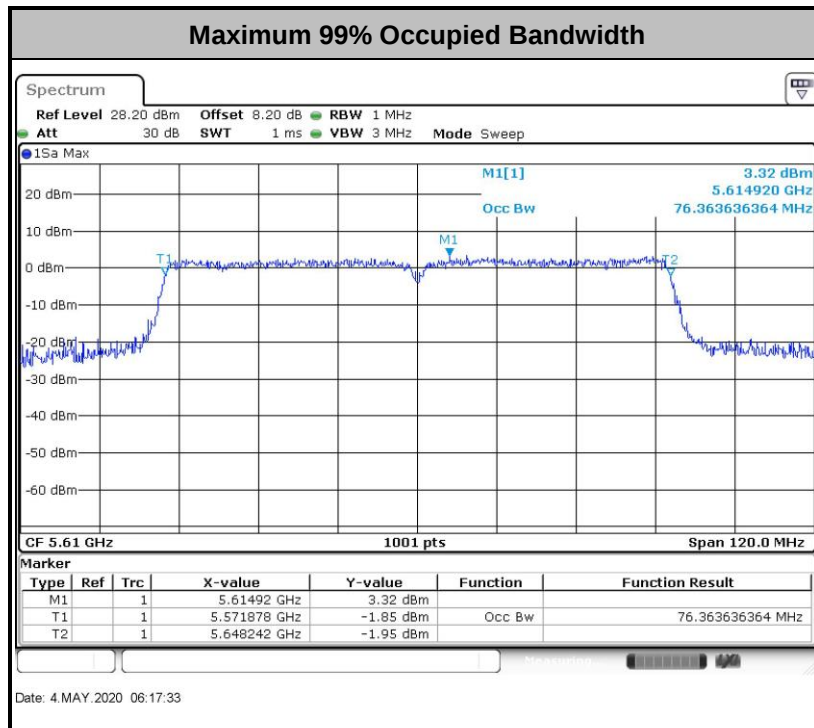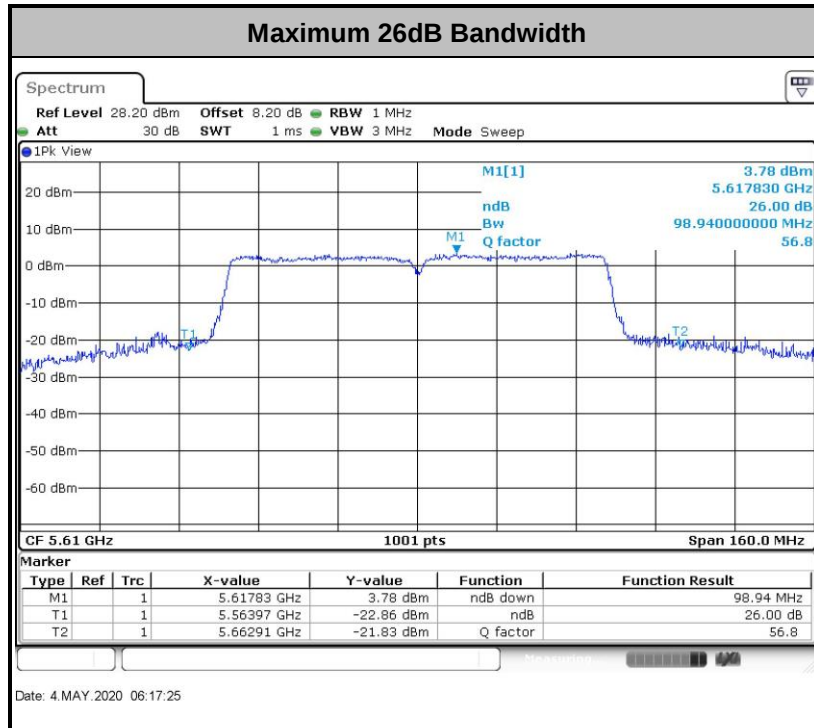

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm 10 log B, where B is the 26 dB emission bandwidth in megahertz.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures


The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.2.4 Test Setup

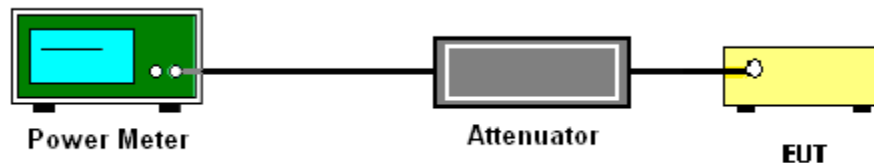

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section F) Maximum power spectral density.

Method SA-2


(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW $\geq$ 3 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
 3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a): Measure and sum the spectra across the outputs.


The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

3.3.4 Test Setup

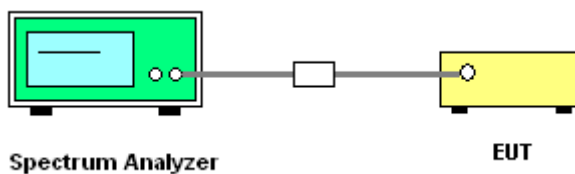

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

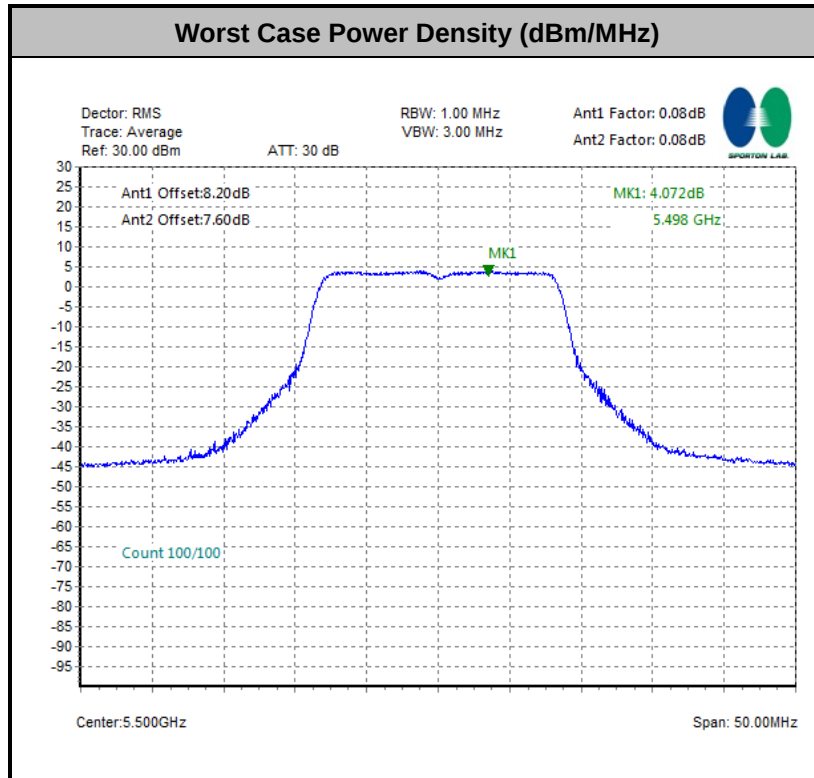

Note: Average Power Density (dB) = Measured value+ Duty Factor

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3



EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

Note: The following formula is used to convert the EIRP to field strength.

$$\text{EIRP} = E_{\text{Meas}} + 20\log(d_{\text{Meas}}) - 104.8$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

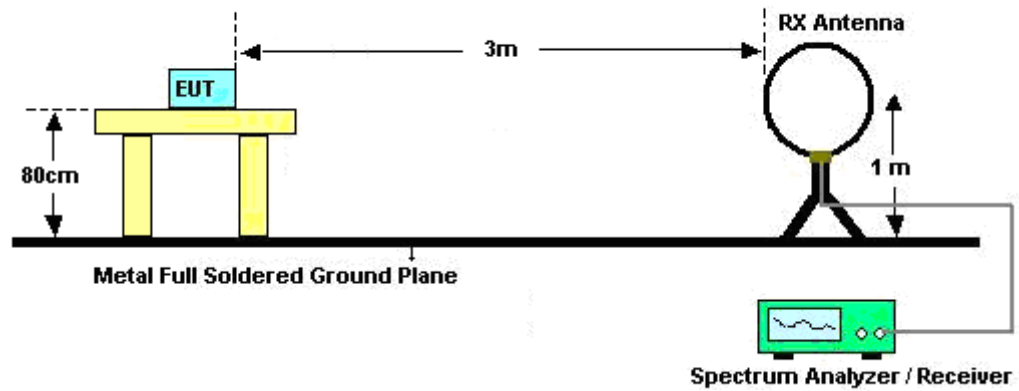

For radiated emissions from 30MHz to 1GHz

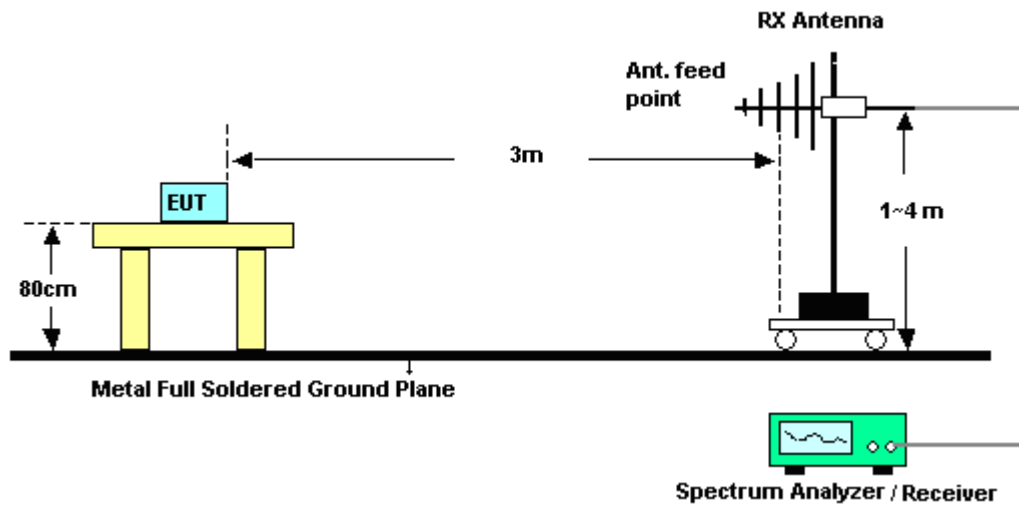

For radiated emissions above 1GHz

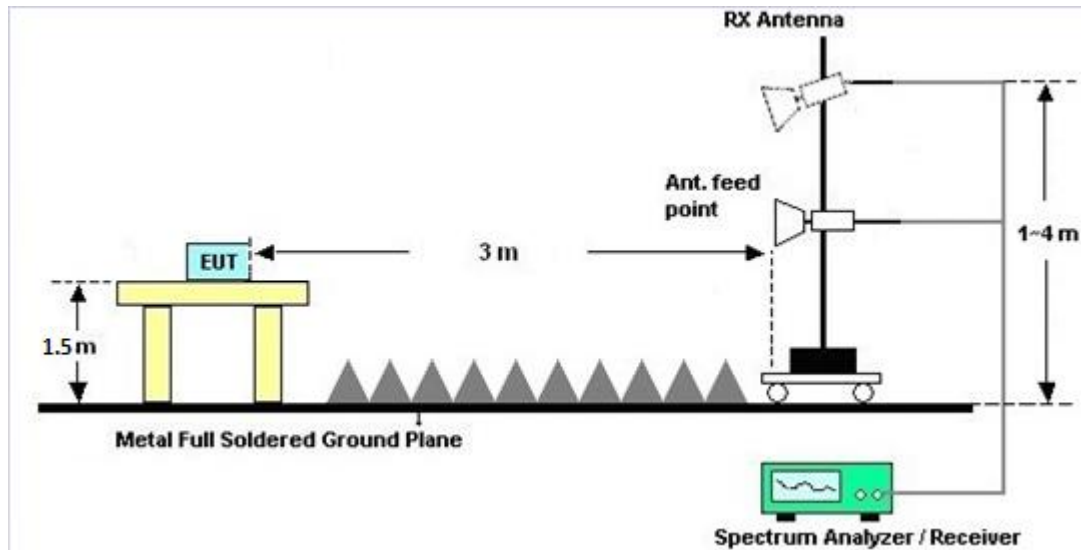

3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

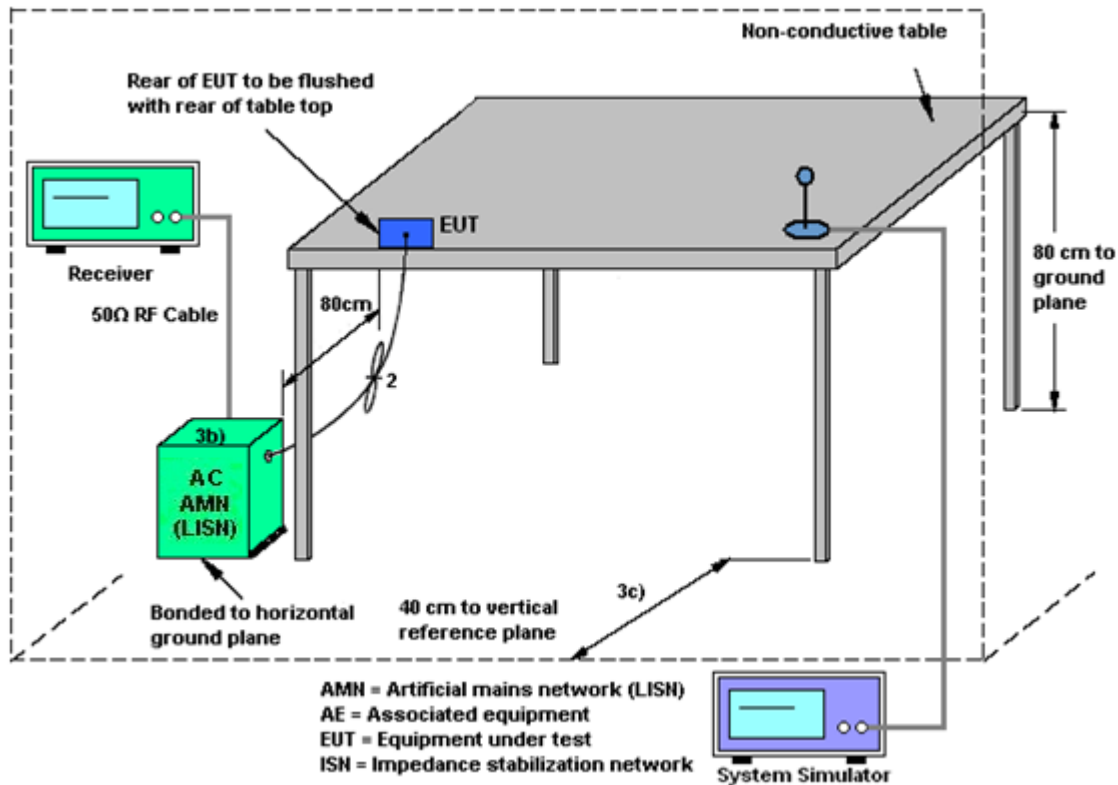

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

3.7 Antenna Requirements

3.7.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = GANT + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = $10 \log(\text{NANT}/\text{NSS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $\text{NANT} \leq 4$.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with GANT set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain GANT is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<CDD Modes>						
	Ant. 1	Ant. 2	DG for Power	DG for PSD	Power Limit Reduction	PSD Limit Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
Band I	1.14	2.10	2.10	4.64	0.00	0.00
Band II	1.14	2.10	2.10	4.64	0.00	0.00
Band III	1.14	2.10	2.10	4.64	0.00	0.00

Power limit reduction = Composite gain – 6dBi, (min = 0)

PSD limit reduction = Composite gain + PSD Array gain – 6dBi, (min = 0)



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 02, 2019	May 04, 2020	Nov. 01, 2020	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 15, 2020	May 04, 2020	Jan. 14, 2021	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 08, 2020	May 04, 2020	Jan. 07, 2021	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY57290157	3Hz~8.5GHz; Max 30dBm	Jul. 18, 2019	May 04, 2020	Jul. 17, 2020	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz~44GHz	Apr. 15, 2020	May 04, 2020	Apr. 16, 2021	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 10, 2019	May 04, 2020	Nov. 09, 2020	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	May 30, 2020	May 04, 2020	May 29, 2021	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 27, 2020	May 04, 2020	Apr. 26, 2021	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 10, 2019	May 04, 2020	Nov. 09, 2020	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	187289	9KHz ~1GHZ	Aug. 06, 2019	May 04, 2020	Aug. 05, 2020	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 08, 2020	May 04, 2020	Jan. 07, 2021	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	1Ghz-18Ghz	Aug. 16, 2019	May 04, 2020	Aug. 15, 2020	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270203	500MHz~26.5GHz	Apr. 15, 2020	May 04, 2020	Apr. 14, 2021	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	May 04, 2020	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	May 04, 2020	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	May 04, 2020	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 14, 2020	May 09, 2020	Apr. 13, 2021	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 18, 2019	May 09, 2020	Oct. 17, 2020	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Oct. 28, 2019	May 09, 2020	Oct. 27, 2020	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 18, 2019	May 09, 2020	Oct. 17, 2020	Conduction (CO01-KS)

NCR: No Calibration Required.

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.9dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------



Appendix A. Conducted Test Results

Report Number : FR042407B

Test Engineer:	Asa Cheng	Temperature:	21~25	°C
Test Date:	2020/5/4	Relative Humidity:	51~54	%

TEST RESULTS DATA
26dB and 99% OBW

Band I													
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	36	5180	17.68	17.68	24.23	23.43	-	-	22.48	-	
11a	6Mbps	2	44	5220	17.58	17.73	24.23	23.23	-	-	22.45	-	
11a	6Mbps	2	48	5240	17.98	17.73	24.53	23.18	-	-	22.49	-	
VHT20	MCS0	2	36	5180	18.88	18.88	25.48	24.73	-	-	22.76	-	
VHT20	MCS0	2	44	5220	19.08	18.88	25.28	24.63	-	-	22.76	-	
VHT20	MCS0	2	48	5240	19.28	18.93	25.33	25.28	-	-	22.77	-	
VHT40	MCS0	2	38	5190	37.26	36.76	44.06	43.16	-	-	23.01	-	
VHT40	MCS0	2	46	5230	37.06	37.16	48.82	43.25	-	-	23.01	-	
VHT80	MCS0	2	42	5210	76.24	76.24	96.70	85.35	-	-	23.01	-	

TEST RESULTS DATA
Average Power Table

FCC Band I														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	36	5180	0.06	0.08	12.67	11.66	15.20	24.00		2.10		Pass
11a	6Mbps	2	44	5220	0.06	0.08	12.70	11.76	15.27	24.00		2.10		Pass
11a	6Mbps	2	48	5240	0.06	0.08	12.73	11.75	15.28	24.00		2.10		Pass
HT20	MCS0	2	36	5180	0.07	0.12	13.12	12.22	15.70	24.00		2.10		Pass
HT20	MCS0	2	44	5220	0.07	0.12	13.18	12.14	15.70	24.00		2.10		Pass
HT20	MCS0	2	48	5240	0.07	0.12	12.55	11.61	15.11	24.00		2.10		Pass
HT40	MCS0	2	38	5190	0.17	0.17	12.48	11.62	15.08	24.00		2.10		Pass
HT40	MCS0	2	46	5230	0.17	0.17	13.00	12.10	15.58	24.00		2.10		Pass
VHT20	MCS0	2	36	5180	0.08	0.08	13.16	12.29	15.76	24.00		2.10		Pass
VHT20	MCS0	2	44	5220	0.08	0.08	13.16	12.18	15.71	24.00		2.10		Pass
VHT20	MCS0	2	48	5240	0.08	0.08	12.65	11.73	15.23	24.00		2.10		Pass
VHT40	MCS0	2	38	5190	0.17	0.17	12.53	11.66	15.12	24.00		2.10		Pass
VHT40	MCS0	2	46	5230	0.17	0.17	13.06	12.08	15.60	24.00		2.10		Pass
VHT80	MCS0	2	42	5210	0.31	0.33	11.29	10.06	13.73	24.00		2.10		Pass

TEST RESULTS DATA
Power Spectral Density

FCC Band I														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	36	5180	0.06	0.08			3.21	11.00		4.64		Pass
11a	6Mbps	2	44	5220	0.06	0.08			3.52	11.00		4.64		Pass
11a	6Mbps	2	48	5240	0.06	0.08			2.90	11.00		4.64		Pass
VHT20	MCS0	2	36	5180	0.08	0.08			3.60	11.00		4.64		Pass
VHT20	MCS0	2	44	5220	0.08	0.08			3.75	11.00		4.64		Pass
VHT20	MCS0	2	48	5240	0.08	0.08			2.99	11.00		4.64		Pass
VHT40	MCS0	2	38	5190	0.17	0.17			0.72	11.00		4.64		Pass
VHT40	MCS0	2	46	5230	0.17	0.17			0.51	11.00		4.64		Pass
VHT80	MCS0	2	42	5210	0.31	0.33			-2.84	11.00		4.64		Pass

TEST RESULTS DATA
26dB and 99% OBW

Band II															
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	52	5260	18.03	17.68	24.38	23.38	23.48		29.48		23.98		
11a	6Mbps	2	60	5300	17.98	17.68	24.78	23.28	23.48		29.48		23.98		
11a	6Mbps	2	64	5320	18.13	17.68	24.73	23.13	23.48		29.48		23.98		
VHT20	MCS0	2	52	5260	19.03	18.88	24.48	24.73	23.76		29.76		23.98		
VHT20	MCS0	2	60	5300	18.98	18.88	25.23	24.88	23.76		29.76		23.98		
VHT20	MCS0	2	64	5320	18.93	18.93	24.63	24.68	23.77		29.77		23.98		
VHT40	MCS0	2	54	5270	37.06	36.86	43.16	42.89	23.98		30.00		23.98		
VHT40	MCS0	2	62	5310	37.46	36.96	62.22	43.16	23.98		30.00		23.98		
VHT80	MCS0	2	58	5290	75.88	75.88	84.40	86.47	23.98		30.00		23.98		

TEST RESULTS DATA
Average Power Table

FCC Band II															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	52	5260	0.06	0.08	12.58	11.63	15.14	23.98	2.10	26.99	Pass		
11a	6Mbps	2	60	5300	0.06	0.08	12.35	11.96	15.17	23.98	2.10	26.99	Pass		
11a	6Mbps	2	64	5320	0.06	0.08	12.40	11.88	15.16	23.98	2.10	26.99	Pass		
HT20	MCS0	2	52	5260	0.07	0.12	13.03	12.07	15.58	23.98	2.10	26.99	Pass		
HT20	MCS0	2	60	5300	0.07	0.12	12.73	12.36	15.55	23.98	2.10	26.99	Pass		
HT20	MCS0	2	64	5320	0.07	0.12	12.79	12.30	15.56	23.98	2.10	26.99	Pass		
HT40	MCS0	2	54	5270	0.17	0.17	12.87	12.03	15.48	23.98	2.10	26.99	Pass		
HT40	MCS0	2	62	5310	0.17	0.17	11.12	10.34	13.75	23.98	2.10	26.99	Pass		
VHT20	MCS0	2	52	5260	0.08	0.08	13.05	12.16	15.64	23.98	2.10	26.99	Pass		
VHT20	MCS0	2	60	5300	0.08	0.08	12.80	12.44	15.64	23.98	2.10	26.99	Pass		
VHT20	MCS0	2	64	5320	0.08	0.08	12.87	12.41	15.66	23.98	2.10	26.99	Pass		
VHT40	MCS0	2	54	5270	0.17	0.17	12.94	12.01	15.51	23.98	2.10	26.99	Pass		
VHT40	MCS0	2	62	5310	0.17	0.17	11.17	10.38	13.80	23.98	2.10	26.99	Pass		
VHT80	MCS0	2	58	5290	0.31	0.33	8.31	7.50	10.93	23.98	2.10	26.99	Pass		

TEST RESULTS DATA
Power Spectral Density

Band II														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	52	5260	0.06	0.08			2.75	11.00		4.64		Pass
11a	6Mbps	2	60	5300	0.06	0.08			2.53	11.00		4.64		Pass
11a	6Mbps	2	64	5320	0.06	0.08			2.63	11.00		4.64		Pass
VHT20	MCS0	2	52	5260	0.08	0.08			3.33	11.00		4.64		Pass
VHT20	MCS0	2	60	5300	0.08	0.08			3.24	11.00		4.64		Pass
VHT20	MCS0	2	64	5320	0.08	0.08			3.50	11.00		4.64		Pass
VHT40	MCS0	2	54	5270	0.17	0.17			-0.11	11.00		4.64		Pass
VHT40	MCS0	2	62	5310	0.17	0.17			-1.89	11.00		4.64		Pass
VHT80	MCS0	2	58	5290	0.31	0.33			-7.23	11.00		4.64		Pass

TEST RESULTS DATA
26dB and 99% OBW

Band III															
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	100	5500	17.88	17.73	24.63	23.08	23.49		29.49		23.98		
11a	6Mbps	2	116	5580	18.03	17.63	24.53	23.33	23.46		29.46		23.98		
11a	6Mbps	2	140	5700	18.03	17.78	24.38	23.48	23.50		29.50		23.98		
11a	6Mbps	2	144	5720	18.13	18.03	24.53	24.33	23.56		29.56		23.98		
VHT20	MCS0	2	100	5500	19.08	19.38	25.23	24.83	23.81		29.81		23.98		
VHT20	MCS0	2	116	5580	19.13	18.83	25.33	24.63	23.75		29.75		23.98		
VHT20	MCS0	2	140	5700	19.13	18.93	25.13	24.93	23.77		29.77		23.98		
VHT20	MCS0	2	144	5720	18.18	18.13	24.13	24.33	23.58		29.58		23.98		
VHT40	MCS0	2	102	5510	37.26	37.06	43.52	43.16	23.98		30.00		23.98		
VHT40	MCS0	2	110	5550	37.06	36.96	43.88	42.80	23.98		30.00		23.98		
VHT40	MCS0	2	134	5670	36.96	37.66	43.52	55.21	23.98		30.00		23.98		
VHT40	mcso	2	142	5710	37.46	37.66	46.93	54.22	23.98		30.00		23.98		
VHT80	MCS0	2	106	5530	76.00	76.00	85.19	84.24	23.98		30.00		23.98		
VHT80	MCS0	2	122	5610	76.36	76.00	98.94	85.03	23.98		30.00		23.98		
VHT80	mcso	2	138	5690	76.00	76.00	85.83	85.83	23.98		30.00		23.98		

TEST RESULTS DATA
Average Power Table


FCC Band III															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	100	5500	0.06	0.08	13.09	11.13	15.23	23.98		2.10		26.99	Pass
11a	6Mbps	2	116	5580	0.06	0.08	12.95	11.32	15.22	23.98		2.10		26.99	Pass
11a	6Mbps	2	140	5700	0.06	0.08	12.35	12.16	15.27	23.98		2.10		26.99	Pass
11a	6Mbps	2	144	5720	0.06	0.08	12.30	12.12	15.22	23.98		2.10		26.99	Pass
HT20	MCS0	2	100	5500	0.07	0.12	12.97	11.07	15.13	23.98		2.10		26.99	Pass
HT20	MCS0	2	116	5580	0.07	0.12	12.88	11.33	15.18	23.98		2.10		26.99	Pass
HT20	MCS0	2	140	5700	0.07	0.12	12.22	12.01	15.12	23.98		2.10		26.99	Pass
HT20	MCS0	2	144	5720	0.07	0.12	12.23	12.02	15.13	23.98		2.10		26.99	Pass
HT40	MCS0	2	102	5510	0.17	0.17	13.05	11.27	15.26	23.98		2.10		26.99	Pass
HT40	MCS0	2	110	5550	0.17	0.17	13.31	12.04	15.73	23.98		2.10		26.99	Pass
HT40	MCS0	2	134	5670	0.17	0.17	12.82	12.41	15.63	23.98		2.10		26.99	Pass
HT40	MCS0	2	142	5710	0.17	0.17	12.78	12.59	15.69	23.98		2.10		26.99	Pass
VHT20	MCS0	2	100	5500	0.08	0.08	13.02	11.14	15.19	23.98		2.10		26.99	Pass
VHT20	MCS0	2	116	5580	0.08	0.08	12.89	11.31	15.18	23.98		2.10		26.99	Pass
VHT20	MCS0	2	140	5700	0.08	0.08	12.30	12.12	15.22	23.98		2.10		26.99	Pass
VHT20	MCS0	2	144	5720	0.08	0.08	12.21	12.05	15.14	23.98		2.10		26.99	Pass
VHT40	MCS0	2	102	5510	0.17	0.17	13.10	11.28	15.29	23.98		2.10		26.99	Pass
VHT40	MCS0	2	110	5550	0.17	0.17	13.37	12.05	15.77	23.98		2.10		26.99	Pass
VHT40	MCS0	2	134	5670	0.17	0.17	12.90	12.44	15.68	23.98		2.10		26.99	Pass
VHT40	MCS0	2	142	5710	0.17	0.17	12.83	12.66	15.75	23.98		2.10		26.99	Pass
VHT80	MCS0	2	106	5530	0.31	0.33	12.78	11.53	15.21	23.98		2.10		26.99	Pass
VHT80	MCS0	2	122	5610	0.31	0.33	12.59	11.66	15.16	23.98		2.10		26.99	Pass
VHT80	MCS0	2	138	5690	0.31	0.33	12.59	11.83	15.24	23.98		2.10		26.99	Pass

TEST RESULTS DATA
Power Spectral Density

Band III														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	100	5500	0.06	0.08			3.74	11.00		4.64		Pass
11a	6Mbps	2	116	5580	0.06	0.08			3.65	11.00		4.64		Pass
11a	6Mbps	2	140	5700	0.06	0.08			3.15	11.00		4.64		Pass
11a	6Mbps	2	144	5720	0.06	0.08			3.40	11.00		4.64		Pass
VHT20	MCS0	2	100	5500	0.08	0.08			4.07	11.00		4.64		Pass
VHT20	MCS0	2	116	5580	0.08	0.08			3.67	11.00		4.64		Pass
VHT20	MCS0	2	140	5700	0.08	0.08			3.14	11.00		4.64		Pass
VHT20	MCS0	2	144	5720	0.08	0.08			3.26	11.00		4.64		Pass
VHT40	MCS0	2	102	5510	0.17	0.17			0.70	11.00		4.64		Pass
VHT40	MCS0	2	110	5550	0.17	0.17			1.01	11.00		4.64		Pass
VHT40	MCS0	2	134	5670	0.17	0.17			0.31	11.00		4.64		Pass
VHT40	MCS0	2	142	5710	0.17	0.17			0.57	11.00		4.64		Pass
VHT80	MCS0	2	106	5530	0.31	0.33			-2.51	11.00		4.64		Pass
VHT80	MCS0	2	122	5610	0.31	0.33			-3.42	11.00		4.64		Pass
VHT80	MCS0	2	138	5690	0.31	0.33			-3.03	11.00		4.64		Pass




Appendix B. AC Conducted Emission Test Results

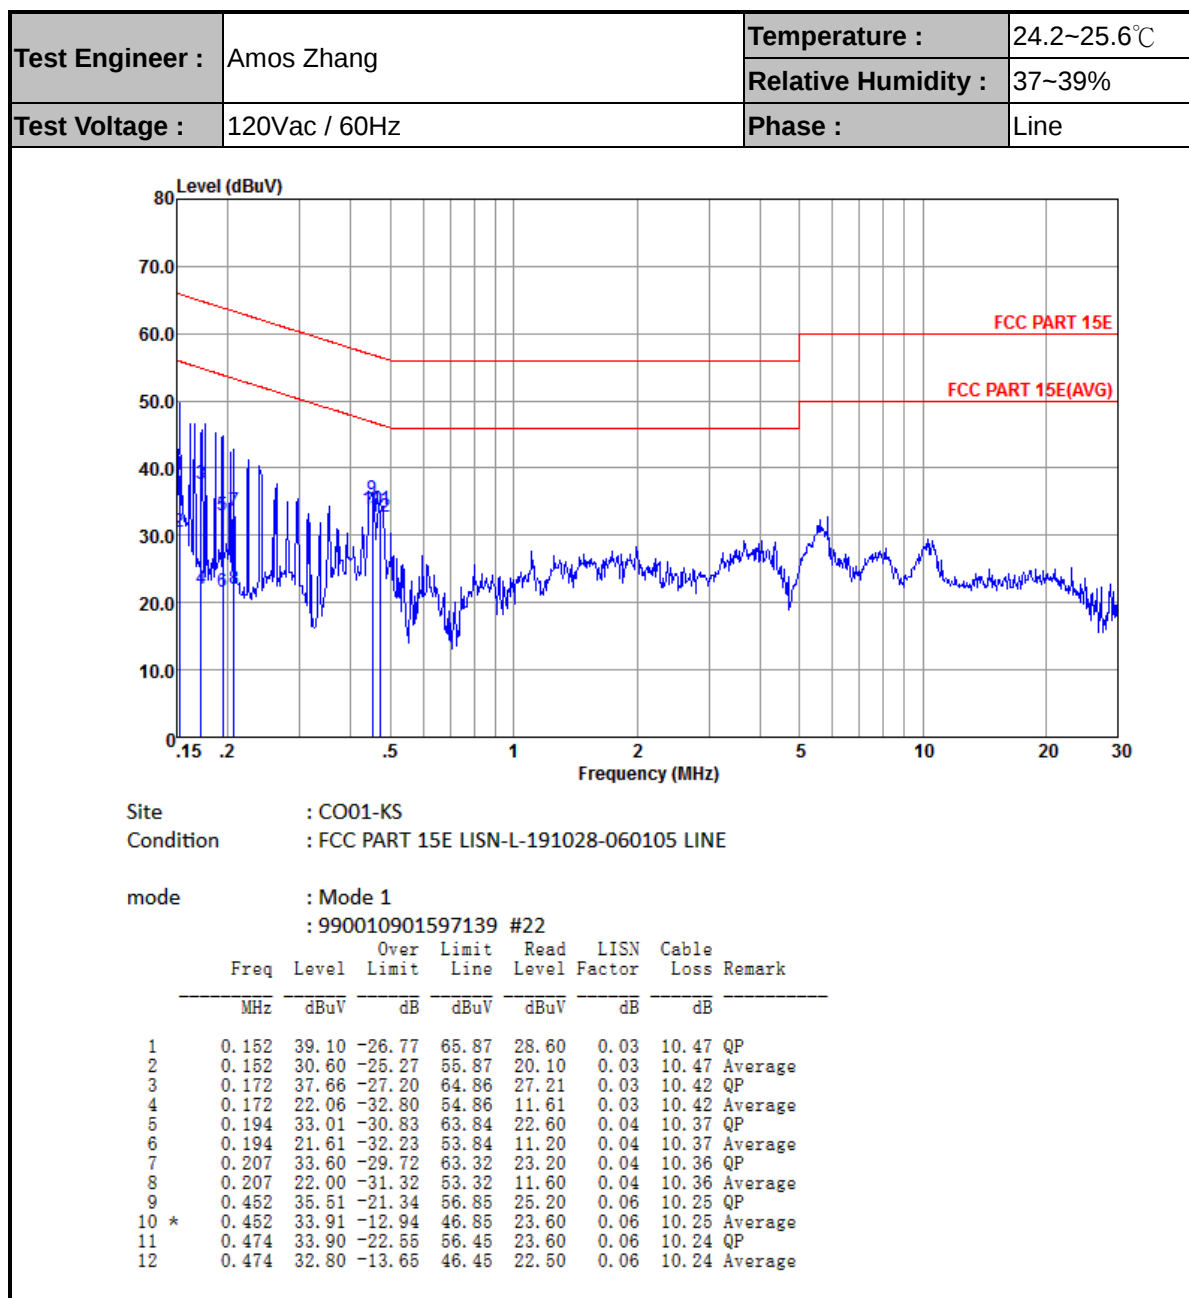



Test Engineer :	Amos Zhang	Temperature :	24.2~25.6℃
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

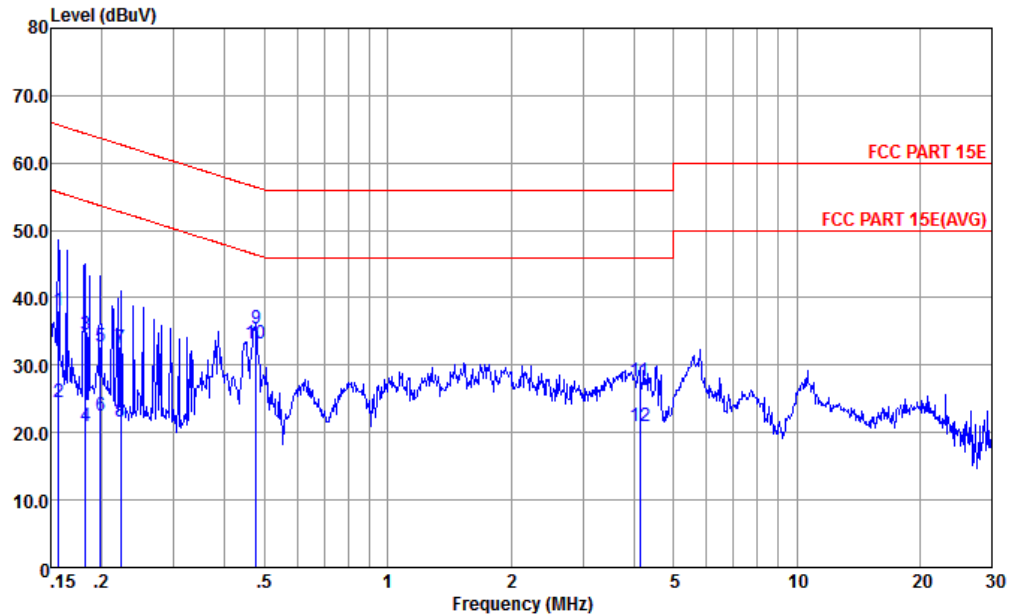

Site : CO01-KS
Condition : FCC PART 15E LISN-N-191028-060105 NEUTRAL

mode : Mode 1
: 990010901597139 #22

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.156	38.09	-27.56	65.65	27.55	0.08	10.46	QP
2	0.156	24.59	-31.06	55.65	14.05	0.08	10.46	Average
3	0.182	34.64	-29.73	64.37	24.16	0.08	10.40	QP
4	0.182	21.04	-33.33	54.37	10.56	0.08	10.40	Average
5	0.199	32.71	-30.96	63.67	22.26	0.08	10.37	QP
6	0.199	22.61	-31.06	53.67	12.16	0.08	10.37	Average
7	0.222	32.49	-30.25	62.74	22.06	0.08	10.35	QP
8	0.222	21.69	-31.05	52.74	11.26	0.08	10.35	Average
9	0.476	35.60	-20.91	56.41	25.16	0.10	10.24	QP
10 *	0.476	33.20	-13.21	46.41	22.86	0.10	10.24	Average
11	4.136	27.59	-28.41	56.00	17.19	0.15	10.25	QP
12	4.136	20.99	-25.01	46.00	10.59	0.15	10.25	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Band 1 - 5150~5250MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 36 5180MHz		5139.36	55.38	-18.62	74	42.52	35.31	10.87	33.32	100	148	P	H
		5146.88	45.09	-8.91	54	32.19	35.33	10.89	33.32	100	148	A	H
	*	5182	105.68	-	-	92.71	35.36	10.93	33.32	100	148	P	H
		5182	98.65	-	-	85.68	35.36	10.93	33.32	100	148	A	H
		5134.08	55.85	-18.15	74	42.99	35.31	10.87	33.32	133	309	P	V
		5141.28	45.36	-8.64	54	32.46	35.33	10.89	33.32	133	309	A	V
	*	5188	104.11	-	-	91.14	35.36	10.93	33.32	133	309	P	V
		5188	96.84	-	-	83.87	35.36	10.93	33.32	133	309	A	V



Band 1 5150~5250MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 36 5180MHz		10358.36	45.96	-22.34	68.3	47.88	37.65	22.42	61.99	100	360	P	H
		10358.36	44.88	-23.42	68.3	46.8	37.65	22.42	61.99	100	360	P	V
802.11a CH 44 5220MHz		10438.44	45.76	-22.54	68.3	47.49	37.73	22.52	61.98	100	132	P	H
		10438.44	43.94	-24.36	68.3	45.67	37.73	22.52	61.98	100	360	P	V
802.11a CH 48 5240MHz		10478.47	43.95	-24.35	68.3	45.56	37.78	22.58	61.97	100	360	P	H
		10478.47	44.59	-23.71	68.3	46.2	37.78	22.58	61.97	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11ac VHT20 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20 CH 36 5180MHz		5148.64	61.55	-12.45	74	48.65	35.33	10.89	33.32	102	154	P	H
		5149.92	46.04	-7.96	54	33.14	35.33	10.89	33.32	102	154	A	H
	*	5182	107.35	-	-	94.38	35.36	10.93	33.32	102	154	P	H
		5182	100.01	-	-	87.04	35.36	10.93	33.32	102	154	A	H
		5141.6	61.09	-12.91	74	48.19	35.33	10.89	33.32	126	308	P	V
		5145.6	45.44	-8.56	54	32.54	35.33	10.89	33.32	126	308	A	V
	*	5182	104.46	-	-	91.49	35.36	10.93	33.32	126	308	P	V
		5182	96.94	-	-	83.97	35.36	10.93	33.32	126	308	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11ac VHT20 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20		10358.36	45.17	-23.13	68.3	47.09	37.65	22.42	61.99	100	360	P	H
CH 36 5180MHz		10358.36	44.93	-23.37	68.3	46.85	37.65	22.42	61.99	100	360	P	V
802.11ac VHT20		10438.44	44.82	-23.48	68.3	46.55	37.73	22.52	61.98	100	360	P	H
CH 44 5220MHz		10438.44	45.23	-23.07	68.3	46.96	37.73	22.52	61.98	100	360	P	V
802.11ac VHT20		10478.47	45.34	-22.96	68.3	46.95	37.78	22.58	61.97	100	360	P	H
CH 48 5240MHz		10478.47	45.47	-22.83	68.3	47.08	37.78	22.58	61.97	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11ac VHT40 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40 CH 38 5190MHz		5149.76	70.47	-3.53	74	56.97	34.3	15.22	36.02	100	247	P	H
		5149.92	51.42	-2.58	54	37.92	34.3	15.22	36.02	100	247	A	H
	*	5206	103.32	-	-	89.61	34.4	15.3	35.99	100	247	P	H
		5206	95.89	-	-	82.18	34.4	15.3	35.99	100	247	A	H
		5373.9	55.56	-18.44	74	41.24	34.63	15.57	35.88	100	247	P	H
		5394.6	45.9	-8.1	54	31.44	34.7	15.62	35.86	100	247	A	H
		5149.76	62.28	-11.72	74	48.78	34.3	15.22	36.02	383	286	P	V
		5149.28	47.57	-6.43	54	34.07	34.3	15.22	36.02	383	286	A	V
	*	5206	99.1	-	-	85.39	34.4	15.3	35.99	383	286	P	V
		5206	91.23	-	-	77.52	34.4	15.3	35.99	383	286	A	V
		5372.28	54.65	-19.35	74	40.33	34.63	15.57	35.88	383	286	P	V
		5398.02	45.64	-8.36	54	31.18	34.7	15.62	35.86	383	286	A	V
802.11ac VHT40 CH 46 5230MHz		5133.92	55.7	-18.3	74	42.26	34.27	15.2	36.03	293	245	P	H
		5139.84	46.2	-7.8	54	32.7	34.3	15.22	36.02	293	245	A	H
	*	5236	101.11	-	-	87.26	34.47	15.35	35.97	293	245	P	H
		5236	93.3	-	-	79.45	34.47	15.35	35.97	293	245	A	H
		5375.88	55.64	-18.36	74	41.32	34.63	15.57	35.88	293	245	P	H
		5374.44	45.61	-8.39	54	31.29	34.63	15.57	35.88	293	245	A	H
		5104.16	56.18	-17.82	74	42.89	34.2	15.14	36.05	129	121	P	V
		5110.4	46.24	-7.76	54	32.88	34.23	15.17	36.04	129	121	A	V
	*	5236	98.82	-	-	84.97	34.47	15.35	35.97	129	121	P	V
		5236	90.89	-	-	77.04	34.47	15.35	35.97	129	121	A	V
		5380.74	54.94	-19.06	74	40.55	34.67	15.59	35.87	129	121	P	V
		5379.3	45.31	-8.69	54	30.92	34.67	15.59	35.87	129	121	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11ac VHT40 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40		10378.38	43.72	-24.58	68.3	45.57	37.68	22.46	61.99	100	360	P	H
CH 38 5190MHz		10378.38	45.52	-22.78	68.3	47.37	37.68	22.46	61.99	100	360	P	V
802.11ac VHT40		10458.46	45.61	-22.69	68.3	47.3	37.75	22.54	61.98	100	360	P	H
CH 46 5230MHz		10458.46	45.67	-22.63	68.3	47.36	37.75	22.54	61.98	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 42 5210MHz		5141.76	64.18	-9.82	74	50.68	34.3	15.22	36.02	300	247	P	H
		5139.84	51.73	-2.27	54	38.23	34.3	15.22	36.02	300	247	A	H
	*	5242	99.18	-	-	85.26	34.5	15.38	35.96	300	247	P	H
		5242	91.2	-	-	77.28	34.5	15.38	35.96	300	247	A	H
		5361.48	54.87	-19.13	74	40.55	34.63	15.57	35.88	300	247	P	H
		5387.58	45.9	-8.1	54	31.51	34.67	15.59	35.87	300	247	A	H
		5135.52	59.35	-14.65	74	45.91	34.27	15.2	36.03	362	247	P	V
		5136	48.45	-5.55	54	35.01	34.27	15.2	36.03	362	247	A	V
	*	5230	96.8	-	-	82.95	34.47	15.35	35.97	362	247	P	V
		5230	88.53	-	-	74.68	34.47	15.35	35.97	362	247	A	V
		5396.58	54.97	-19.03	74	40.51	34.7	15.62	35.86	362	247	P	V
		5375.7	45.61	-8.39	54	31.29	34.63	15.57	35.88	362	247	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Band 1 5150~5250MHz****WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80		10418.42	45.69	-22.61	68.3	47.45	37.72	22.5	61.98	100	360	P	H
CH 42 5210MHz		10418.42	44.03	-24.27	68.3	45.79	37.72	22.5	61.98	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 - 5250~5350MHz
WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 64 5320MHz		5355.4	60.5	-13.5	74	47.19	35.52	11.11	33.32	100	70	P	H
		5361.6	45.66	-8.34	54	32.31	35.54	11.13	33.32	100	70	A	H
	*	5320	106.28	-	-	93.03	35.49	11.08	33.32	100	70	P	H
		5320	99.29	-	-	86.04	35.49	11.08	33.32	100	70	A	H
		5356.3	57.14	-16.86	74	43.83	35.52	11.11	33.32	104	301	P	V
		5376	44.52	-9.48	54	31.16	35.54	11.13	33.31	104	301	A	V
	*	5320	102.52	-	-	89.27	35.49	11.08	33.32	104	301	P	V
		5320	95.79	-	-	82.54	35.49	11.08	33.32	104	301	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 52 5260MHz		10518.52	45.54	-22.76	68.3	47.07	37.82	22.62	61.97	100	360	P	H
		10518.52	45.42	-22.88	68.3	46.95	37.82	22.62	61.97	100	360	P	V
802.11a CH 60 5300MHz		10600	44.93	-29.07	74	46.26	37.9	22.72	61.95	100	360	P	H
		10600	44.66	-29.34	74	45.99	37.9	22.72	61.95	100	360	P	V
802.11a CH 64 5320MHz		10638.63	45.33	-28.67	74	46.62	37.9	22.76	61.95	300	0	P	H
		10638.63	45.16	-28.84	74	46.45	37.9	22.76	61.95	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11ac VHT20 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20 CH 64 5320MHz		5356.4	64.78	-9.22	74	50.42	34.33	10.71	30.68	100	247	P	H
		5354.5	46.14	-7.86	54	31.78	34.33	10.71	30.68	100	247	A	H
	*	5320	108.3	-	-	94.02	34.29	10.66	30.67	100	247	P	H
		5320	100.84	-	-	86.56	34.29	10.66	30.67	100	247	A	H
		5367.3	58.13	-15.87	74	43.74	34.35	10.73	30.69	360	307	5367.3	V
		5350.6	44.48	-9.52	54	30.12	34.33	10.71	30.68	360	307	5350.6	V
	*	5314	103.48	-	-	89.2	34.29	10.66	30.67	360	307	5314	V
		5314	95.85	-	-	81.57	34.29	10.66	30.67	360	307	5314	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11ac VHT20 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20		10518.52	44.67	-23.63	68.3	46.2	37.82	22.62	61.97	100	360	P	H
CH 52 5260MHz		10518.52	47.16	-21.14	68.3	48.69	37.82	22.62	61.97	100	360	P	V
802.11ac VHT20		10600	45.28	-28.72	74	46.61	37.9	22.72	61.95	100	360	P	H
CH 60 5300MHz		10600	44.84	-29.16	74	46.17	37.9	22.72	61.95	100	360	P	V
802.11ac VHT20		10640	41.18	-32.82	74	49.14	37.18	15.48	60.62	100	360	P	H
CH 64 5320MHz		10640	42.27	-31.73	74	50.23	37.18	15.48	60.62	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11ac VHT40 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40 CH 54 5270MHz		5120.96	55.63	-18.37	74	42.27	34.23	15.17	36.04	293	245	P	H
		5130.56	46.17	-7.83	54	32.73	34.27	15.2	36.03	293	245	A	H
	*	5266	102.24	-	-	88.25	34.53	15.41	35.95	293	245	P	H
		5266	94.34	-	-	80.35	34.53	15.41	35.95	293	245	A	H
		5372.5	56.21	-17.79	74	41.89	34.63	15.57	35.88	293	245	P	H
		5366.8	45.95	-8.05	54	31.63	34.63	15.57	35.88	293	245	A	H
		5140.8	55.97	-18.03	74	42.47	34.3	15.22	36.02	129	121	P	V
		5116.64	46.18	-7.82	54	32.82	34.23	15.17	36.04	129	121	A	V
	*	5284	99.47	-	-	85.41	34.57	15.43	35.94	129	121	P	V
		5284	91.44	-	-	77.38	34.57	15.43	35.94	129	121	A	V
		5353	54.49	-19.51	74	40.24	34.6	15.54	35.89	129	121	P	V
		5398.6	45.59	-8.41	54	31.13	34.7	15.62	35.86	129	121	A	V
802.11ac VHT40 CH 62 5310MHz		5145.92	56.23	-17.77	74	42.73	34.3	15.22	36.02	297	245	P	H
		5120.16	46.21	-7.79	54	32.85	34.23	15.17	36.04	297	245	A	H
	*	5326	100.08	-	-	85.91	34.6	15.49	35.92	297	245	P	H
		5326	92.17	-	-	78	34.6	15.49	35.92	297	245	A	H
		5350	51.88	-2.12	54	37.63	34.6	15.54	35.89	297	245	P	H
		5350.1	62.93	-11.07	74	48.68	34.6	15.54	35.89	297	245	A	H
		5120.32	55.88	-18.12	74	42.52	34.23	15.17	36.04	129	121	P	V
		5121.6	46.14	-7.86	54	32.78	34.23	15.17	36.04	129	121	A	V
	*	5326	95.98	-	-	81.81	34.6	15.49	35.92	129	121	P	V
		5326	88.04	-	-	73.87	34.6	15.49	35.92	129	121	A	V
		5366.4	56.24	-17.76	74	41.92	34.63	15.57	35.88	129	121	P	V
		5350.1	46.5	-7.5	54	32.25	34.6	15.54	35.89	129	121	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11ac VHT40 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40		10538.54	44.93	-23.37	68.3	46.42	37.83	22.64	61.96	100	360	P	H
CH 54 5270MHz		10538.54	44.43	-23.87	68.3	45.92	37.83	22.64	61.96	100	360	P	V
802.11ac VHT40		10620	42.36	-31.64	74	50.34	37.17	15.47	60.62	100	360	P	H
CH 62 5310MHz		10620	42.97	-31.03	74	50.95	37.17	15.47	60.62	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 58 5290MHz		5114.56	55.77	-18.23	74	42.41	34.23	15.17	36.04	300	247	P	H
		5101.28	46.59	-7.41	54	33.3	34.2	15.14	36.05	300	247	A	H
	*	5326	95.44	-	-	81.27	34.6	15.49	35.92	300	247	P	H
		5326	87.79	-	-	73.62	34.6	15.49	35.92	300	247	A	H
		5365.9	62.36	-11.64	74	48.04	34.63	15.57	35.88	300	247	P	H
		5350.2	51.83	-2.17	54	37.58	34.6	15.54	35.89	300	247	A	H
		5126.24	55.96	-18.04	74	42.52	34.27	15.2	36.03	130	127	P	V
		5138.4	46.5	-7.5	54	33.06	34.27	15.2	36.03	130	127	A	V
	*	5326	93.22	-	-	79.05	34.6	15.49	35.92	130	127	P	V
		5326	85.27	-	-	71.1	34.6	15.49	35.92	130	127	A	V
		5366.2	59.05	-14.95	74	44.73	34.63	15.57	35.88	130	127	P	V
		5362.5	49.78	-4.22	54	35.46	34.63	15.57	35.88	130	127	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Band 2 5250~5350MHz****WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80		10578.58	43.69	-24.61	68.3	45.1	37.87	22.68	61.96	100	360	P	H
CH 58 5290MHz		10578.58	43.46	-24.84	68.3	44.87	37.87	22.68	61.96	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 100 5500MHz		5457.68	58.11	-15.89	74	44.58	35.62	11.22	33.31	108	67	P	H
		5462.8	59.41	-8.89	68.3	45.84	35.64	11.24	33.31	108	67	P	H
		5456.88	45.92	-8.08	54	32.39	35.62	11.22	33.31	108	67	A	H
	*	5494	107.3	-	-	93.7	35.65	11.26	33.31	108	67	P	H
		5494	100.2	-	-	86.6	35.65	11.26	33.31	108	67	A	H
		5424.56	53.57	-20.43	74	40.1	35.59	11.19	33.31	322	101	P	V
		5464.08	53.35	-14.95	68.3	39.78	35.64	11.24	33.31	322	101	P	V
		5459.6	44.86	-9.14	54	31.33	35.62	11.22	33.31	322	101	A	V
	*	5500	104.33	-	-	90.69	35.67	11.28	33.31	322	101	P	V
		5500	97.35	-	-	83.71	35.67	11.28	33.31	322	101	A	V
802.11a CH 140 5700MHz		5735.56	63.22	-5.08	68.3	49.14	35.85	11.61	33.38	102	67	P	H
	*	5704	106.38	-	-	92.37	35.83	11.55	33.37	102	67	P	H
		5704	99.48	-	-	85.47	35.83	11.55	33.37	102	67	A	H
		5741.4	60.46	-7.84	68.3	46.39	35.85	11.61	33.39	302	102	P	V
	*	5704	105.07	-	-	91.06	35.83	11.55	33.37	302	102	P	V
		5704	97.62	-	-	83.61	35.83	11.55	33.37	302	102	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 100 5500MHz		10999	43.64	-30.36	74	44.45	37.9	23.18	61.89	100	360	P	H
		10999	45.59	-28.41	74	46.4	37.9	23.18	61.89	100	360	P	V
802.11a CH 116 5580MHz		11159.16	45.48	-28.52	74	46.14	37.9	23.3	61.86	100	360	P	H
		11159.16	44.57	-29.43	74	45.23	37.9	23.3	61.86	100	360	P	V
802.11a CH 140 5700MHz		11399.39	45.48	-28.52	74	45.85	38	23.46	61.83	100	360	P	H
		11399.39	45.43	-28.57	74	45.8	38	23.46	61.83	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11ac VHT20 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20 CH 100 5500MHz		5448.4	57.01	-16.99	74	43.48	35.62	11.22	33.31	102	67	P	H
		5469.36	60.41	-7.89	68.3	46.84	35.64	11.24	33.31	102	67	P	H
		5455.28	45.63	-8.37	54	32.1	35.62	11.22	33.31	102	67	A	H
	*	5494	107.31	-	-	93.71	35.65	11.26	33.31	102	67	P	H
		5494	100.23	-	-	86.63	35.65	11.26	33.31	102	67	A	H
		5457.2	54.09	-19.91	74	40.56	35.62	11.22	33.31	317	102	P	V
		5468.08	54.4	-13.9	68.3	40.83	35.64	11.24	33.31	317	102	P	V
		5450.64	44.91	-9.09	54	31.38	35.62	11.22	33.31	317	102	A	V
	*	5506	103.01	-	-	89.37	35.67	11.28	33.31	317	102	P	V
		5506	96.93	-	-	83.29	35.67	11.28	33.31	317	102	A	V
802.11ac VHT20 CH 140 5700MHz		5733.88	65.13	-3.17	68.3	51.09	35.84	11.58	33.38	114	67	P	H
	*	5704	106.17	-	-	92.16	35.83	11.55	33.37	114	67	P	H
		5704	98.94	-	-	84.93	35.83	11.55	33.37	114	67	A	H
		5725.56	61.1	-7.2	68.3	47.06	35.84	11.58	33.38	312	99	P	V
	*	5698	104.75	-	-	90.78	35.82	11.52	33.37	312	99	P	V
		5698	97.42	-	-	83.45	35.82	11.52	33.37	312	99	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz

WIFI 802.11ac VHT20 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20		10999	45.4	-28.6	74	46.21	37.9	23.18	61.89	100	360	P	H
CH 100 5500MHz		10999	45.51	-28.49	74	46.32	37.9	23.18	61.89	100	360	P	V
802.11ac VHT20		11159.16	44.85	-29.15	74	45.51	37.9	23.3	61.86	100	360	P	H
CH 116 5580MHz		11159.16	45.64	-28.36	74	46.3	37.9	23.3	61.86	100	360	P	V
802.11ac VHT20		11399.39	44.27	-29.73	74	44.64	38	23.46	61.83	100	360	P	H
CH 140 5700MHz		11399.39	44.31	-29.69	74	44.68	38	23.46	61.83	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11ac VHT40 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40 CH 102 5510MHz		5446.48	59.71	-14.29	74	45.24	34.6	15.7	35.83	290	247	P	H
		5469.36	59.41	-8.89	68.3	44.91	34.6	15.72	35.82	290	247	P	H
		5458.96	47.38	-6.62	54	32.91	34.6	15.7	35.83	290	247	A	H
	*	5518	104.7	-	-	90.13	34.57	15.79	35.79	290	247	P	H
		5518	95.25	-	-	80.68	34.57	15.79	35.79	290	247	A	H
		5751.72	56.74	-11.56	68.3	41.65	34.73	16.16	35.8	290	247	P	H
		5435.92	54.88	-19.12	74	40.42	34.63	15.67	35.84	104	26	P	V
		5466.16	58.17	-10.13	68.3	43.67	34.6	15.72	35.82	104	26	P	V
		5459.44	45.92	-8.08	54	31.45	34.6	15.7	35.83	104	26	A	V
	*	5524	97.24	-	-	82.67	34.57	15.79	35.79	104	26	P	V
		5524	90.24	-	-	75.67	34.57	15.79	35.79	104	26	A	V
		5734.6	56.16	-12.14	68.3	41.11	34.7	16.13	35.78	104	26	P	V
802.11ac VHT40 CH 134 5670MHz		5435.92	54.66	-19.34	74	40.2	34.63	15.67	35.84	290	247	P	H
		5462.32	55.22	-13.08	68.3	40.75	34.6	15.7	35.83	290	247	P	H
		5453.84	45.76	-8.24	54	31.29	34.6	15.7	35.83	290	247	A	H
	*	5674	103.29	-	-	88.4	34.6	16.03	35.74	290	247	P	H
		5674	94.52	-	-	79.63	34.6	16.03	35.74	290	247	A	H
		5730.12	59.78	-8.52	68.3	44.77	34.67	16.11	35.77	290	247	P	H
		5418.96	55.37	-18.63	74	40.9	34.67	15.65	35.85	104	28	P	V
		5464.56	55.01	-13.29	68.3	40.51	34.6	15.72	35.82	104	28	P	V
		5457.84	45.88	-8.12	54	31.41	34.6	15.7	35.83	104	28	A	V
	*	5686	100.21	-	-	85.31	34.6	16.05	35.75	104	28	P	V
		5686	91.34	-	-	76.44	34.6	16.05	35.75	104	28	A	V
		5725.16	59.56	-8.74	68.3	44.55	34.67	16.11	35.77	104	28	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz

WIFI 802.11ac VHT40 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40		11019.02	44.3	-29.7	74	45.1	37.9	23.19	61.89	100	360	P	H
CH 102 5510MHz		11019.02	45.56	-28.44	74	46.36	37.9	23.19	61.89	100	360	P	V
802.11ac VHT40		11099.1	44.23	-29.77	74	44.95	37.9	23.25	61.87	100	360	P	H
CH 110 5550MHz		11099.1	44.63	-29.37	74	45.35	37.9	23.25	61.87	100	360	P	V
802.11ac VHT40		11339.33	43.83	-30.17	74	44.32	37.93	23.42	61.84	100	360	P	H
CH 134 5670MHz		11339.33	44.58	-29.42	74	45.07	37.93	23.42	61.84	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 5470~5725MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 106 5530MHz		5452.88	62.84	-11.16	74	48.27	34.7	15.7	35.83	305	243	P	H
		5469.2	59.3	-9	68.3	44.7	34.7	15.72	35.82	305	243	P	H
		5457.04	51.64	-2.36	54	37.07	34.7	15.7	35.83	207	243	A	H
	*	5554	99.14	-	-	84.37	34.7	15.84	35.77	305	243	P	H
		5554	91.95	-	-	77.18	34.7	15.84	35.77	305	243	A	H
		5747.4	56.57	-11.73	68.3	41.42	34.8	16.13	35.78	305	243	P	H
		5448.24	58.15	-15.85	74	43.58	34.7	15.7	35.83	325	277	P	V
		5468.4	63.72	-4.58	68.3	49.12	34.7	15.72	35.82	325	277	P	V
		5451.44	49.29	-4.71	54	34.72	34.7	15.7	35.83	325	277	A	V
	*	5530	99.35	-	-	84.65	34.7	15.79	35.79	325	277	P	V
		5530	90.88	-	-	76.18	34.7	15.79	35.79	325	277	A	V
		5764.76	56.78	-11.52	68.3	41.59	34.83	16.16	35.8	325	277	P	V
802.11ac VHT80 CH 122 5610MHz		5443.28	55.23	-18.77	74	40.7	34.7	15.67	35.84	100	334	P	H
		5469.68	55.19	-13.11	68.3	40.59	34.7	15.72	35.82	100	334	P	H
		5453.04	46.42	-7.58	54	31.85	34.7	15.7	35.83	100	334	A	H
	*	5614	100.05	-	-	85.27	34.6	15.92	35.74	100	334	P	H
		5614	91.54	-	-	76.76	34.6	15.92	35.74	100	334	A	H
		5733.88	56.92	-11.38	68.3	41.81	34.77	16.11	35.77	100	334	P	H
		5449.84	55.38	-18.62	74	40.81	34.7	15.7	35.83	325	277	P	V
		5460.72	55.86	-12.44	68.3	41.29	34.7	15.7	35.83	325	277	P	V
		5457.84	46.6	-7.4	54	32.03	34.7	15.7	35.83	325	277	A	V
	*	5638	99.85	-	-	84.93	34.67	15.97	35.72	325	277	P	V
		5638	91.37	-	-	76.45	34.67	15.97	35.72	325	277	A	V
		5733.4	56.5	-11.8	68.3	41.39	34.77	16.11	35.77	325	277	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 5470~5725MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80		11059.05	43.12	-30.88	74	43.88	37.9	23.22	61.88	100	360	P	H
CH 106 5530MHz		11059.05	44.39	-29.61	74	45.15	37.9	23.22	61.88	100	360	P	V
802.11ac VHT80		11219.21	43.28	-30.72	74	43.91	37.9	23.33	61.86	100	360	P	H
CH 122 5610MHz		11219.21	44.26	-29.74	74	44.89	37.9	23.33	61.86	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E Band 3 - Straddle Channel

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 144 5720MHz		5722	107.35	-	-	92.59	34.78	10.8	30.82	100	232	P	H
		5722	99	-	-	84.24	34.78	10.8	30.82	100	232	A	H
		5728	103.98	-	-	89.22	34.78	10.8	30.82	104	269	P	V
		5728	96.21	-	-	81.45	34.78	10.8	30.82	104	269	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E band 3 - Straddle Channel

WIFI 802.11a (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a		11440	42.37	-31.63	74	49.08	37.66	16.07	60.44	100	360	P	H
CH 144		11440	42.97	-31.03	74	49.68	37.66	16.07	60.44	100	360	P	V
5720MHz													
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E band 3 - Straddle Channel
WIFI 802.11ac VHT20 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac		5722	106.02	-	-	91.26	34.78	10.8	30.82	100	242	P	H
VHT20		5722	98.71	-	-	83.95	34.78	10.8	30.82	100	242	A	H
CH 144		5728	103.39	-	-	88.63	34.78	10.8	30.82	100	270	P	V
5720MHz		5728	95.77	-	-	81.01	34.78	10.8	30.82	100	270	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E band 3 - Straddle Channel

WIFI 802.11ac VHT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preampl	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac VHT20		11440	42.8	-31.2	74	49.51	37.66	16.07	60.44	100	360	P	H
CH 144 5720MHz		11440	42.85	-31.15	74	49.56	37.66	16.07	60.44	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E band 3 - Straddle Channel
WIFI 802.11ac VHT40 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac		5728	103.54	-	-	88.78	34.78	10.8	30.82	100	232	P	H
VHT40		5728	96.37	-	-	81.61	34.78	10.8	30.82	100	232	A	H
CH 142		5716	100.82	-	-	86.07	34.76	10.8	30.81	106	270	P	V
5710MHz		5716	93.49	-	-	78.74	34.76	10.8	30.81	106	270	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**15E band 3 - Straddle Channel****WIFI 802.11ac VHT40 (Harmonic @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac VHT40		11420	42.45	-31.55	74	49.19	37.65	16.06	60.45	100	360	P	H
CH 142 5710MHz		11420	42.88	-31.12	74	49.62	37.65	16.06	60.45	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E band 3 - Straddle Channel
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac		5716	100.34	-	-	85.59	34.76	10.8	30.81	100	244	P	H
VHT80		5716	92.51	-	-	77.76	34.76	10.8	30.81	100	244	A	H
CH 138		5716	97.64	-	-	82.89	34.76	10.8	30.81	105	269	P	V
5690MHz		5716	89.81	-	-	75.06	34.76	10.8	30.81	105	269	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E band 3 - Straddle Channel

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac VHT80		11380	41.85	-32.15	74	48.65	37.63	16.03	60.46	100	360	P	H
CH 138 5690MHz		11380	42.72	-31.28	74	49.52	37.63	16.03	60.46	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

WIFI 802.11ac VHT40 (LF @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40 LF		34.85	16.52	-23.48	40	34.42	20.9	1.09	39.89	-	-	P	H
		217.21	19.45	-26.55	46	39.05	16.3	2.6	38.5	-	-	P	H
		426.73	19.25	-26.75	46	30.55	22.18	3.67	37.15	-	-	P	H
		553.8	22.69	-23.31	46	29.65	24.97	4.1	36.03	-	-	P	H
		764.29	26.03	-19.97	46	29.25	25.93	4.85	34	-	-	P	H
		953.44	28.39	-17.61	46	27.69	27.24	5.35	31.89	100	0	P	H
		45.52	22.94	-17.06	40	46.41	15.17	1.28	39.92	100	0	P	V
		65.89	19.07	-20.93	40	46.02	11.6	1.45	40	-	-	P	V
		100.81	18.18	-25.32	43.5	38.29	16.79	1.79	38.69	-	-	P	V
		242.43	18.63	-27.37	46	36.56	17.75	2.82	38.5	-	-	P	V
		458.74	21.65	-24.35	46	32.05	22.72	3.77	36.89	-	-	P	V
		804.06	27.21	-18.79	46	29.77	26.04	4.99	33.59	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



CO-Location

WWAN+WLAN

LTE 41 BW20M +802.11ac VHT40 CH46 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
WWAN + WLAN		5148.16	50.59	-23.41	74	39.52	34.3	12.79	36.02	101	332	P	H
		5145.6	41.53	-12.47	54	30.46	34.3	12.79	36.02	101	332	A	H
		5242	100.43	-	-	88.93	34.5	12.96	35.96	101	332	P	H
	*	5242	93.98	-	-	82.48	34.5	12.96	35.96	101	332	A	H
		5362.38	51.09	-22.91	74	39.23	34.63	13.11	35.88	101	332	P	H
		5376.06	41.96	-12.04	54	30.1	34.63	13.11	35.88	101	332	A	H
		5144.16	54.17	-19.83	74	43.1	34.3	12.79	36.02	100	125	P	V
		5134.56	44.71	-9.29	54	33.71	34.27	12.76	36.03	100	125	A	V
		5236	97.63	-	-	86.19	34.47	12.94	35.97	100	125	P	V
	*	5236	91.16	-	-	79.72	34.47	12.94	35.97	100	125	A	V
		5354.46	53.38	-20.62	74	41.58	34.6	13.09	35.89	100	126	P	V
		5385.42	44.05	-9.95	54	32.12	34.67	13.13	35.87	100	126	A	V

**LTE 41 BW20M +802.11ac VHT40 CH 46(Harmonic @ 3m)**

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
WWAN + WLAN		4992	42.75	-31.25	74	60.8	34	12.43	64.48	200	0	P	H
		5232	44.48	-29.52	74	61.72	34.47	12.94	64.65	200	0	P	H
		7492	50.84	-23.16	74	64.23	35.8	15.64	64.83	200	0	P	H
		10456.23	43.04	-30.96	74	51.1	37.7	19.07	64.83	200	0	P	H
		4992	41.87	-32.13	74	59.92	34	12.43	64.48	200	0	P	V
		5232	49.29	-24.71	74	66.53	34.47	12.94	64.65	200	0	P	V
		7492	48.02	-25.98	74	61.41	35.8	15.64	64.83	200	0	P	V
		10456.23	47.35	-26.65	74	55.41	37.7	19.07	64.83	200	0	P	V



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)


= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.


Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
1 (1+2)	802.11a	95.24	2.029	0.493	0.51kHz
1 (1+2)	802.11ac VHT20	95.65	1.913	0.523	0.56kHz
1 (1+2)	802.11ac VHT40	91.49	0.935	1.070	1.1kHz
2 (1+2)	802.11ac VHT80	84.95	0.458	2.184	2.2kHz


802.11a

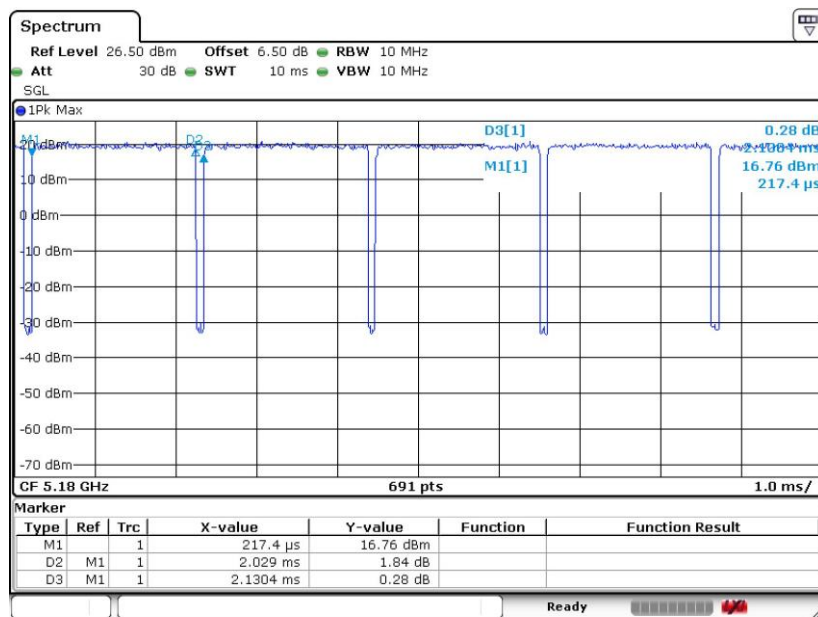

802.11ac VHT20

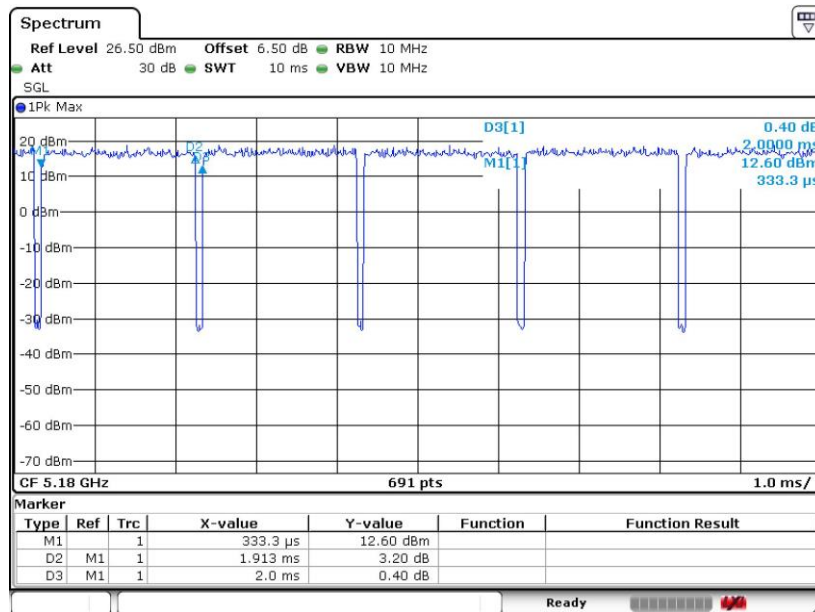

802.11ac VHT40

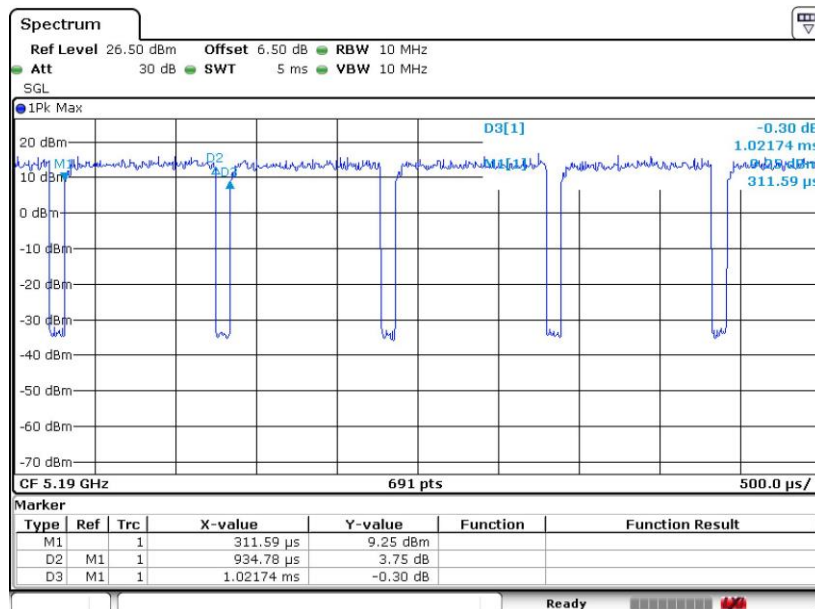

802.11ac VHT80

