

# FCC Test Report

## (PART 27)

**Report No.:** RFBERD-WTW-P22010914-3

**FCC ID:** HD5-CT60L1N

**Test Model:** CT60L1N

**Received Date:** Feb. 03, 2022

**Test Date:** Feb. 24, 2022

**Issued Date:** Apr. 29, 2022

**Applicant:** Honeywell International Inc.

**Address:** 9680 Old Bailes Road, Fort Mill, SC 29707 USA

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location:** No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City  
33383, Taiwan

**FCC Registration /**  
**Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

<b>Release Control Record .....</b>	<b>3</b>
<b>1 Certificate of Conformity .....</b>	<b>4</b>
<b>2 Summary of Test Results.....</b>	<b>5</b>
2.1 Measurement Uncertainty.....	7
2.2 Test Site and Instruments .....	8
<b>3 General Information .....</b>	<b>9</b>
3.1 General Description of EUT .....	9
3.2 Configuration of System under Test.....	11
3.2.1 Description of Support Units.....	11
3.3 Test Mode Applicability and Tested Channel Detail .....	12
3.4 EUT Operating Conditions .....	13
3.5 General Description of Applied Standards and references.....	13
<b>4 Test Types and Results .....</b>	<b>14</b>
4.1 Radiated Emission Measurement.....	14
4.1.1 Limits of Radiated Emission Measurement.....	14
4.1.2 Test Procedure .....	14
4.1.3 Deviation from Test Standard .....	14
4.1.4 Test Setup.....	15
4.1.5 Test Results .....	16
<b>5 Pictures of Test Arrangements.....</b>	<b>26</b>
<b>Appendix – Information of the Testing Laboratories .....</b>	<b>27</b>

### Release Control Record

Issue No.	Description	Date Issued
RFBERD-WTW-P22010914-3	Original Release	Apr. 29, 2022

## 1 Certificate of Conformity

**Product:** Dolphin CT60

**Brand:** Honeywell

**Test Model:** CT60L1N

**Sample Status:** Engineering Sample

**Applicant:** Honeywell International Inc.

**Test Date:** Feb. 24, 2022

**Standards:** FCC Part 27, Subpart C, H, F, L

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :** Vera Huang, **Date:** Apr. 29, 2022  
Vera Huang / Specialist

**Approved by :** Jeremy Lin, **Date:** Apr. 29, 2022  
Jeremy Lin / Project Engineer

## 2 Summary of Test Results

Applied Standard: FCC Part 27 & Part 2 (WCDMA)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(d)(4)	Equivalent Isotropic Radiated Power	N/A	Refer to Note 1
2.1047	Modulation Characteristics	N/A	Refer to Note 1
2.1055 27.54	Frequency Stability	N/A	Refer to Note 1
2.1049	Occupied Bandwidth	N/A	Refer to Note 1
27.50(d)(5)	Peak to Average Ratio	N/A	Refer to Note 1
27.53(h)	Band Edge Measurements	N/A	Refer to Note 1
2.1051 27.53(h)	Conducted Spurious Emissions	N/A	Refer to Note 1
2.1053 27.53(h)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -31.9 dB at 130.88 MHz.

Applied Standard: FCC Part 27 & Part 2 (LTE 4)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(d)(4)	Maximum Peak Output Power	N/A	Refer to Note 1
2.1047	Modulation Characteristics	N/A	Refer to Note 1
2.1055 27.54	Frequency Stability	N/A	Refer to Note 1
2.1049	Occupied Bandwidth	N/A	Refer to Note 1
27.50(d)(5)	Peak to Average Ratio	N/A	Refer to Note 1
27.53(h)	Band Edge Measurements	N/A	Refer to Note 1
2.1051 27.53(h)	Conducted Spurious Emissions	N/A	Refer to Note 1
2.1053 27.53(h)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -37.7 dB at 88.20 MHz.

Applied Standard: FCC Part 27 & Part 2 (LTE 12)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(c)(10)	Maximum Peak Output Power	N/A	Refer to Note 1
2.1047	Modulation Characteristics	N/A	Refer to Note 1
2.1055 27.54	Frequency Stability	N/A	Refer to Note 1
2.1049	Occupied Bandwidth	N/A	Refer to Note 1
---	Peak to Average Ratio	N/A	Refer to Note 1
27.53(g)	Band Edge Measurements	N/A	Refer to Note 1
2.1051 27.53(g)	Conducted Spurious Emissions	N/A	Refer to Note 1
2.1053 27.53(g)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -32.80 dB at 450.98 MHz.

Applied Standard: FCC Part 27 & Part 2 (LTE 13)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(b)(10)	Maximum Peak Output Power	N/A	Refer to Note 1
2.1047	Modulation Characteristics	N/A	Refer to Note 1
2.1055 27.54	Frequency Stability	N/A	Refer to Note 1
2.1049	Occupied Bandwidth	N/A	Refer to Note 1
---	Peak to Average Ratio	N/A	Refer to Note 1
27.53(c)(2)(4)	Band Edge Measurements	N/A	Refer to Note 1
2.1051 27.53(c)(2)&(f)	Conducted Spurious Emissions	N/A	Refer to Note 1
2.1053 27.53(c)(2)&(f)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -33.50 dB at 286.08 MHz.

Applied Standard: FCC Part 27 & Part 2 (LTE 17)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(c)	Equivalent radiated power	N/A	Refer to Note 1
2.1047	Modulation characteristics	N/A	Refer to Note 1
2.1055 27.54	Frequency Stability	N/A	Refer to Note 1
2.1049	Emission Bandwidth	N/A	Refer to Note 1
2.1051 27.53(g)	Out of Band Emission Measurements	N/A	Refer to Note 1
--	Peak To Average Ratio	N/A	Refer to Note 1
2.1051 27.53(g)	Conducted Spurious Emissions	N/A	Refer to Note 1
2.1053 27.53(g)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -34.30 dB at 194.90 MHz.

Note:

- Only radiated spurious emissions below 1GHz test was performed for this addendum. Refer to BV CPS report no.: RF171122C17-3 R1 for other test data.
- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

## 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB

## 2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Dec. 30, 2021	Dec. 29, 2022
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Sep. 15, 2021	Sep. 14, 2022
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Nov. 01, 2021	Oct. 31, 2022
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-1170	Nov. 14, 2021	Nov. 13, 2022
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Oct. 26, 2021	Oct. 25, 2022
Loop Antenna EMCI	EM-6879	269	Sep. 16, 2021	Sep. 15, 2022
Preamplifier Agilent (Below 1GHz)	8447D	2944A10631	Jun. 05, 2021	Jun. 04, 2022
RF Coaxial Cable WOKEN With 5dB PAD	8D-FB	Cable-CH4-01	Jul. 24, 2021	Jul. 23, 2022
RF Coaxial Cable EMCI	EMC102-KM-KM-3000	150929	Jul. 24, 2021	Jul. 23, 2022
RF Coaxial Cable EMCI	EMC102-KM-KM-600	150928	Jul. 24, 2021	Jul. 23, 2022
RF signal cable HUBER+SUHNER	SUCOFLEX 104	MY 13380+295012/04	Jun. 05, 2021	Jun. 04, 2022
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH4-03 (250724)	Jun. 05, 2021	Jun. 04, 2022
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA	NA
Turn Table Controller BV ADT	SC100	SC93021703	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
WIT Standard Temperature And Humidity Chamber	TH-4S-C	W981030	Jun. 01, 2021	May 31, 2022
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA
True RMS Clamp Meter Fluke	325	31130711WS	Jun. 02, 2021	Jun. 01, 2022

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Chamber 4.

### 3 General Information

#### 3.1 General Description of EUT

<b>Product</b>	Dolphin CT60	
<b>Brand</b>	Honeywell	
<b>Test Model</b>	CT60L1N	
<b>Status of EUT</b>	Engineering Sample	
<b>HW Version</b>	V1.1	
<b>HW P/N</b>	DVT	
<b>SW Version</b>	OS.05.001-HON.03.002	
<b>SW P/N</b>	477D	
<b>Power Supply Rating</b>	3.85 Vdc (Li-ion battery)	
<b>Modulation Type</b>	WCDMA	QPSK
	LTE	QPSK, 16QAM, 64QAM
<b>Frequency Range</b>	WCDMA	1712.4 ~ 1752.6 MHz
	LTE Band 4 (Channel Bandwidth: 1.4 MHz)	1710.7 ~ 1754.3 MHz
	LTE Band 4 (Channel Bandwidth: 3 MHz)	1711.5 ~ 1753.5 MHz
	LTE Band 4 (Channel Bandwidth: 5 MHz)	1712.5 ~ 1752.5 MHz
	LTE Band 4 (Channel Bandwidth: 10 MHz)	1715.0 ~ 1750.0 MHz
	LTE Band 4 (Channel Bandwidth: 15 MHz)	1717.5 ~ 1747.5 MHz
	LTE Band 4 (Channel Bandwidth: 20 MHz)	1720.0 ~ 1745.0 MHz
	LTE Band 12 (Channel Bandwidth: 1.4 MHz)	699.7 ~ 715.3 MHz
	LTE Band 12 (Channel Bandwidth: 3 MHz)	700.5 ~ 714.5 MHz
	LTE Band 12 (Channel Bandwidth: 5 MHz)	701.5 ~ 713.5 MHz
	LTE Band 12 (Channel Bandwidth: 10 MHz)	704.0 ~ 711.0 MHz
	LTE Band 13 (Channel Bandwidth: 5 MHz)	779.5 ~ 784.5 MHz
	LTE Band 13 (Channel Bandwidth: 10 MHz)	782.0 MHz
	LTE Band 17 (Channel Bandwidth: 5 MHz)	706.5 ~ 713.5 MHz
	LTE Band 17 (Channel Bandwidth: 10 MHz)	709.0 ~ 711.0 MHz
<b>Antenna Type</b>	PIFA Antenna	
<b>Accessory Device</b>	Battery x 1, comfort cover x 1	
<b>Data Cable Supplied</b>	USB snap-on adapter x1 (1.25m, Shielded with two cores)	

Note:

1. This report is issued as a supplementary report to BV CPS report no.: RF171122C17-3 R1. The difference compared with original report is changing NFC Chip, HW/SW, adding WLAN 2.4G\_n40, and refer to Note 3 for more details. Therefore, only radiated spurious emissions below 1GHz test was verified and recorded in this report.
2. The EUT contains following accessory devices.


Product	Brand	Model	Description
Battery 1	Inventus	CT50-BTSC	3.6 Vdc, 4040 mAh, 14.6Wh
Battery 2 (For test)	Honeywell	CT50-BTSC	3.85Vdc, 4020mAh, 15.5Wh

3. Refer to below table for the change list.

SOM Change list	
RF Module	Underfill Modified
RF Module	LPDDR4x Layout Optimization
RF Module	Wi-Fi Layout Optimization
RF Module	WWAN Path Optimization
RF Module	WWAN Shielding Frame Optimization
RF Module	WWAN PA Power Optimization
RF Module	SOM PAD Mask Optimization
RF Module	Change DC regulator and WLAN amplifier DC power
RF Module	BOM Change for Optimization **
RF Module	B25 Duplexer-AVAGO-ACMD-6225-TR1
RF Module	B40 TRX filter-AVAGO-ACPF-8240-TR1
RF Module	Remove un-used CLK trace WCN_CLK
RF Module	WIFI 11b Power reduction from 18+/-1.5 dB to 17.5+/-1.5 dB **
RF Module	LTE 7 Power reduction from 23.4 + 1 / -2.7 dB to 23 + 1 / -2.7dB **
RF Module	GSM 850 Power reduction for Head with WIFI ON mode from 33.4 + 1 / -2 dB to 32.8 + 1 / -2 dB **
RF Module	CDMA2K BC0 Power reduction for Head with WIFI ON mode from 24.4 +/- 1 dB to 23.8 +/- 1dB **
RF Module	CDMA2K BC10 Power reduction for Head with WIFI ON mode from 24.4 +/- 1 dB to 23.8 +/- 1dB **
RF Module	Enable WIFI 2.4G N40 by software
Carrier board Change list	
Carrier Board	Scanner change to N6703 imager
Carrier Board	Add 1F/2.7V supercap
Carrier Board	Add MAX38888 DC/DC for supercap charge/ change discharge circuit
Carrier Board	Add low battery protection circuit
Carrier Board	Change speaker and add a connector for it
Carrier Board	Change ADS1014 to ADS1015 to add supercap voltage detection
Carrier Board	AUX antenna tuner circuit change placement location
Carrier Board	Upgrade the SOM to SOM4
Carrier Board	Add a new model battery
Carrier Board	NFC Controller from NQ310 to NQ410
Carrier Board	Add the second source (OV13855 Camera, S0703VE insertion
Carrier Board	Add the second source (ESD, ADC, OPT Sensor, Translator, 6-axis sensor, Pressure sensor, Analog switch)

- The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible
- The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

### 3.2 Configuration of System under Test

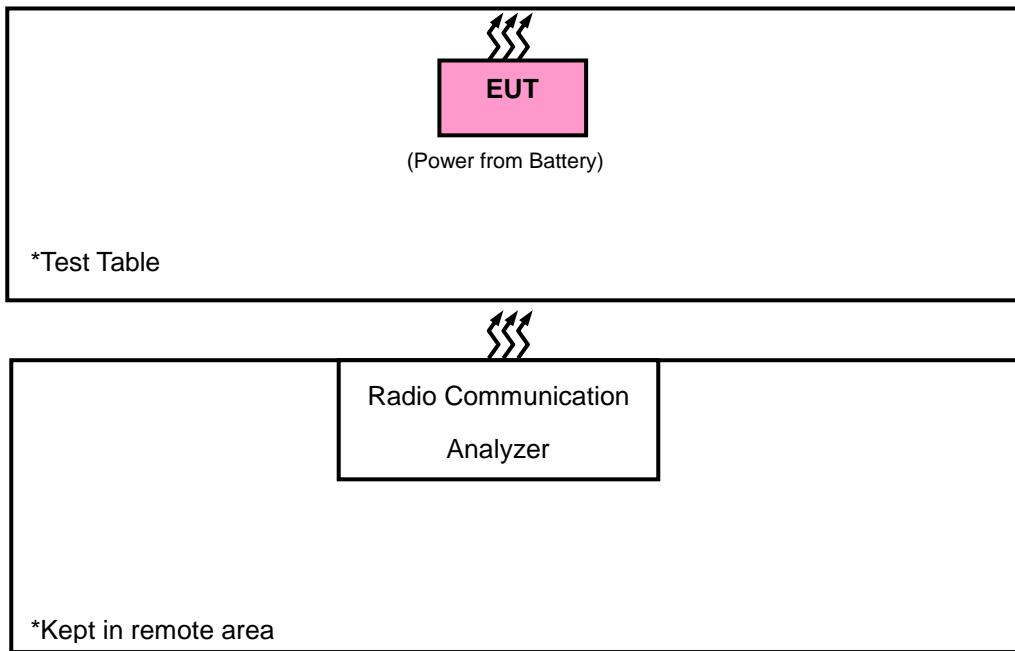

#### 3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1.	Radio Communication Analyzer	Anritsu	MT8820C	6201240431	N/A

Note: Item 1 acted as communication partners to transfer data.

### 3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	Radiated Emission
WCDMA	Y-axis
LTE Band 4	Y-axis
LTE Band 12	Y-axis
LTE Band 13	Y-axis
LTE Band 17	Y-axis

#### WCDMA

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	Radiated Emission	1312 to 1513	1513	WCDMA

#### LTE Band 4

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	Radiated Emission	20050 to 20300	20175	20 MHz	QPSK	1 RB / 99 RB Offset

#### LTE Band 12

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	Radiated Emission	23060 to 23130	23095	10 MHz	QPSK	1 RB / 24 RB Offset

#### LTE Band 13

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	Radiated Emission	23230	23230	10 MHz	QPSK	1 RB / 50 RB Offset

#### LTE Band 17

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	Radiated Emission	23780 to 23800	23790	10 MHz	QPSK	1 RB / 24 RB Offset

#### Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
Radiated Emission	23 deg. C, 66 % RH	3.85 Vdc	Titan Hsu

### **3.4 EUT Operating Conditions**

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

### **3.5 General Description of Applied Standards and references**

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

**Test Standard:**

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 27**

**ANSI/TIA/EIA-603-E 2016**

**ANSI 63.26-2015**

**Note:** All test items have been performed and recorded as per the above standards.

**References Test Guidance:**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

**Note:** All test items have been performed as a reference to the above KDB test guidance.

## 4 Test Types and Results

### 4.1 Radiated Emission Measurement

#### 4.1.1 Limits of Radiated Emission Measurement

For WCDMA band 4, LTE Band 4:

According to FCC 27.53(h), for operations in the 1695-1710MHz, 1710-1755MHz, 1755-1780 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log (P)$  dB.

For LTE Band 12, 17:

According to FCC 27.53(g), for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB. The limit of emissions is equal to -13 dBm.

For LTE Band 13:

According to FCC 27.53(c)(2), for on any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB. The limit of emissions is equal to -13 dBm.

According to FCC 27.53(f), for operations in the 775-788 MHz, emissions in the band 1559-1610MHz shall be limited to -70 dBW/MHz (EIRP). The limit of emissions is equal to -40 dBm.

#### 4.1.2 Test Procedure

- a. In the semi-anechoic chamber, EUT placed on the 0.8m(below or equal 1GHz) and/or 1.5m(above 1GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- d. Following C63.26 section 5.5 and 5.2.7  
 $EIRP \text{ (dBm)} = E \text{ (dB}\mu\text{V/m)} + 20\log(D) - 104.8$ ; where D is the measurement distance (in the far field region) in m.  
 $ERP \text{ (dBm)} = E \text{ (dB}\mu\text{V/m)} + 20\log(D) - 104.8 - 2.15$ ; where D is the measurement distance (in the far field region) in m.


**Note:** The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

#### 4.1.3 Deviation from Test Standard


No deviation.

#### 4.1.4 Test Setup

##### <Radiated Emission below or equal 1 GHz>

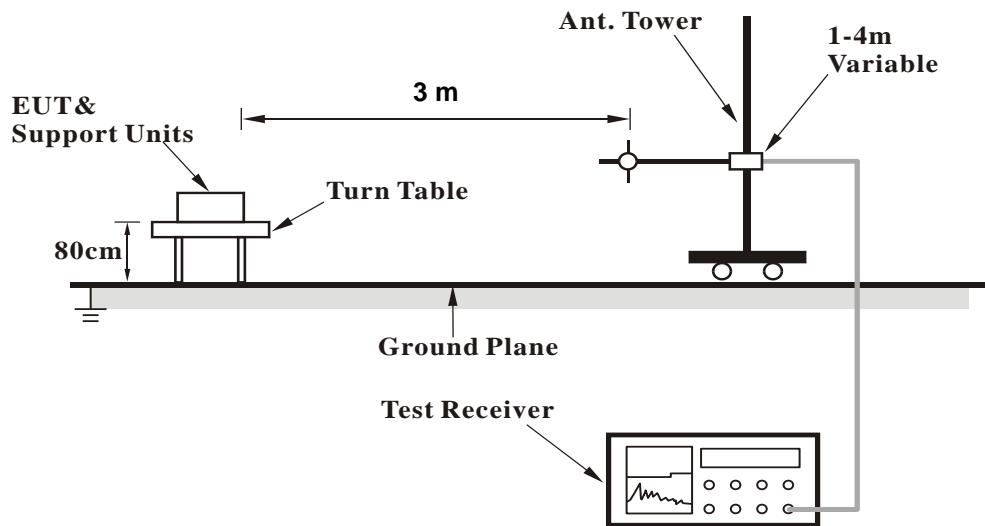

##### <Radiated Emission above 1 GHz>

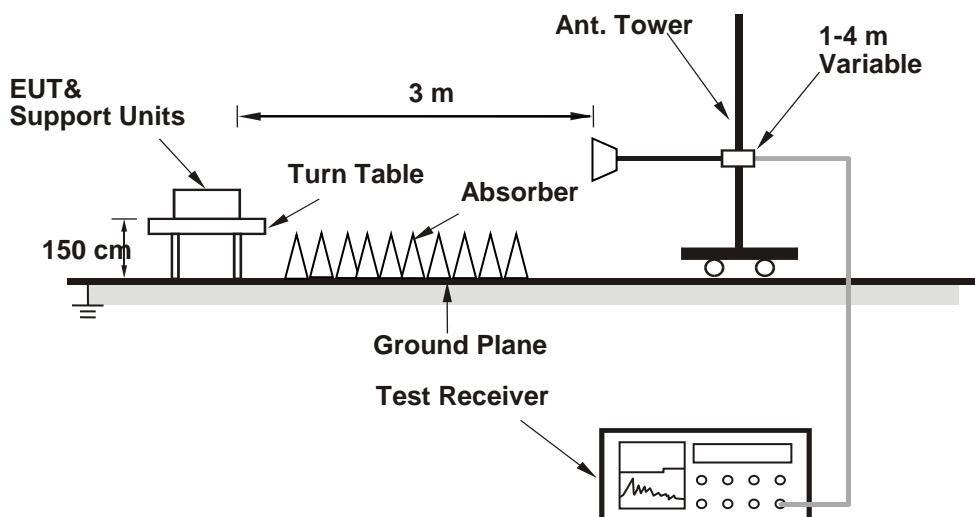

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.5 Test Results


##### WCDMA:

RF Mode	TX WCDMA Band 4	Channel	CH 1513 : 1752.6 MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	78.50	-45.4	-13.0	-32.4	1.50 H	3	62.5	-107.9
2	103.72	-51.5	-13.0	-38.5	1.00 H	70	56.6	-108.1
3	119.24	-59.0	-13.0	-46.0	1.00 H	247	47.6	-106.6
4	309.36	-62.4	-13.0	-49.4	1.50 H	319	40.2	-102.6
5	394.72	-62.1	-13.0	-49.1	1.00 H	248	39.3	-101.4
6	567.38	-59.5	-13.0	-46.5	1.00 H	209	38.9	-98.4

##### Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) +  $20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

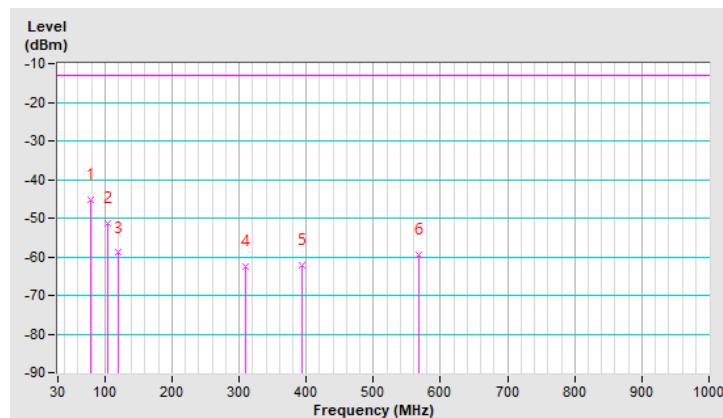


RF Mode	TX WCDMA Band 4	Channel	CH 1513 : 1752.6 MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.88	-56.6	-13.0	-43.6	1.00 V	80	48.8	-105.4
<b>2</b>	<b>130.88</b>	<b>-44.9</b>	<b>-13.0</b>	<b>-31.9</b>	<b>1.00 V</b>	<b>298</b>	<b>60.6</b>	<b>-105.5</b>
3	208.48	-58.6	-13.0	-45.6	1.00 V	59	48.3	-106.9
4	332.64	-54.2	-13.0	-41.2	1.00 V	269	47.9	-102.1
5	489.78	-45.6	-13.0	-32.6	1.00 V	266	54.0	-99.6
6	569.32	-45.2	-13.0	-32.2	1.00 V	315	53.1	-98.3

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)  
+ 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

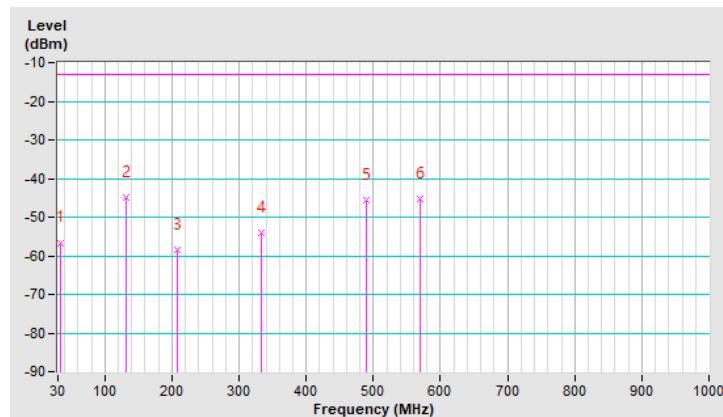


**LTE Band 4**

RF Mode	TX LTE Band 4-20MHz	Channel	CH 20175 : 1732.5 MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	61.04	-58.1	-13.0	-45.1	1.00 H	124	46.5	-104.6
<b>2</b>	<b>88.20</b>	<b>-50.7</b>	<b>-13.0</b>	<b>-37.7</b>	<b>1.50 H</b>	<b>5</b>	<b>58.9</b>	<b>-109.6</b>
3	99.84	-60.9	-13.0	-47.9	1.50 H	12	47.7	-108.6
4	214.30	-68.5	-13.0	-55.5	1.50 H	252	38.3	-106.8
5	307.42	-64.1	-13.0	-51.1	1.00 H	101	38.6	-102.7
6	433.52	-60.5	-13.0	-47.5	1.50 H	124	39.9	-100.4

**Remarks:**

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)  
+ 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

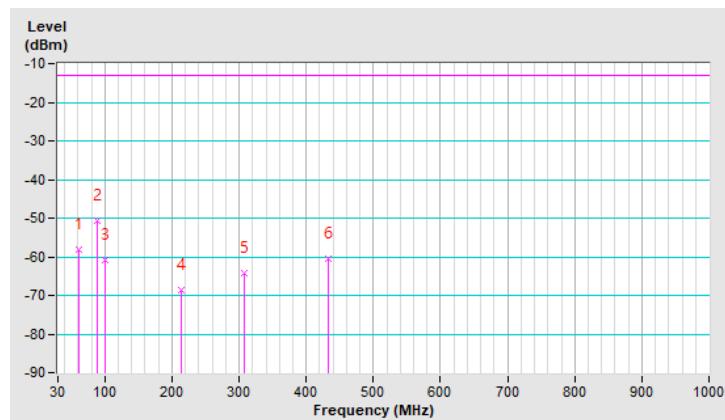


RF Mode	TX LTE Band 4-20MHz	Channel	CH 20175 : 1732.5 MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	109.54	-59.1	-13.0	-46.1	1.00 V	297	48.3	-107.4
2	187.14	-52.9	-13.0	-39.9	1.50 V	51	53.4	-106.3
3	301.60	-60.3	-13.0	-47.3	1.50 V	34	42.4	-102.7
4	394.72	-62.1	-13.0	-49.1	1.50 V	258	39.3	-101.4
5	480.08	-60.3	-13.0	-47.3	1.00 V	131	39.4	-99.7
6	598.42	-58.2	-13.0	-45.2	1.50 V	219	39.2	-97.4

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)  
+ 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

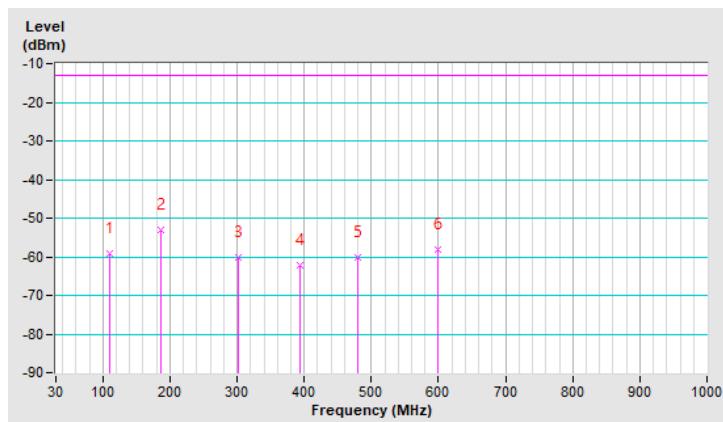


### LTE Band 12

RF Mode	TX LTE Band 12-10MHz	Channel	CH 23095 : 707.5 MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	70.74	-56.30	-13.00	-43.30	1.00 H	264	51.92	-108.22
2	107.60	-63.79	-13.00	-50.79	1.50 H	192	45.85	-109.64
3	156.10	-68.47	-13.00	-55.47	1.50 H	8	37.64	-106.11
4	336.52	-65.32	-13.00	-52.32	1.50 H	177	38.92	-104.24
5	416.06	-63.70	-13.00	-50.70	2.00 H	166	39.33	-103.03
6	516.94	-61.70	-13.00	-48.70	1.50 H	187	39.42	-101.12

#### Remarks:

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value =  $ERP - Limit$  value
4. The other ERP levels were very low against the limit.

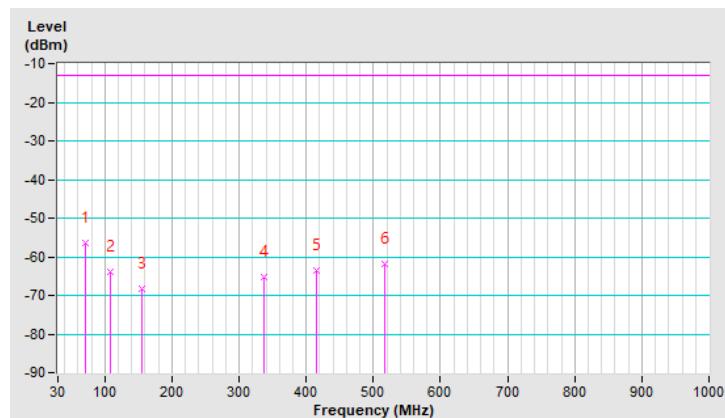


RF Mode	TX LTE Band 12-10MHz	Channel	CH 23095 : 707.5 MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	90.14	-63.10	-13.00	-50.10	1.00 V	101	48.71	-111.81
2	161.92	-66.96	-13.00	-53.96	1.50 V	300	39.17	-106.13
3	282.20	-59.08	-13.00	-46.08	1.50 V	249	46.30	-105.38
<b>4</b>	<b>450.98</b>	<b>-45.80</b>	<b>-13.00</b>	<b>-32.80</b>	<b>1.00 V</b>	<b>43</b>	<b>56.24</b>	<b>-102.04</b>
5	478.14	-55.28	-13.00	-42.28	1.50 V	268	46.55	-101.83
6	555.74	-59.69	-13.00	-46.69	1.50 V	356	41.02	-100.71

Remarks:

1.  $\text{ERP(dBm)} = \text{Raw Value(dBuV)} + \text{Correction Factor(dB/m)}$
2.  $\text{Correction Factor(dB/m)} = \text{Antenna Factor(dB/m)} + \text{Cable Factor(dB)} - \text{Pre-Amplifier Factor(dB)}$   
 $+ 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

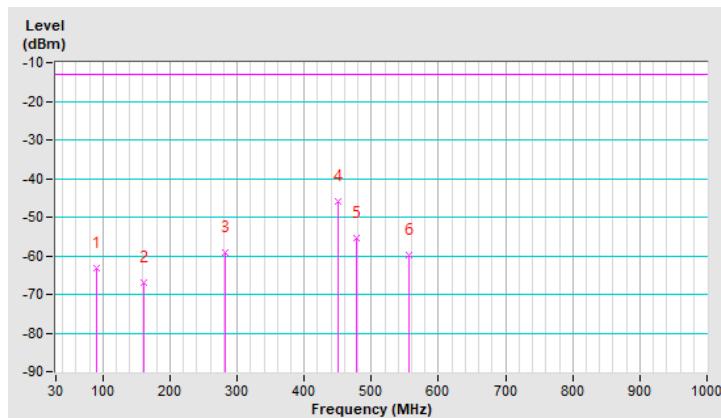


**LTE Band 13**

RF Mode	TX LTE Band 13-10MHz	Channel	CH 23230 : 782 MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	59.10	-61.40	-13.00	-48.40	1.00 H	10	44.97	-106.37
2	94.02	-54.40	-13.00	-41.40	1.50 H	130	57.13	-111.53
3	150.28	-61.79	-13.00	-48.79	1.50 H	45	44.41	-106.20
4	237.58	-65.36	-13.00	-52.36	1.50 H	45	42.26	-107.62
5	402.48	-61.50	-13.00	-48.50	1.00 H	48	41.87	-103.37
6	635.28	-54.15	-13.00	-41.15	1.50 H	39	44.27	-98.42

**Remarks:**

1.  $\text{ERP(dBm)} = \text{Raw Value(dBuV)} + \text{Correction Factor(dB/m)}$
2.  $\text{Correction Factor(dB/m)} = \text{Antenna Factor(dB/m)} + \text{Cable Factor(dB)} - \text{Pre-Amplifier Factor(dB)}$   
 $+ 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

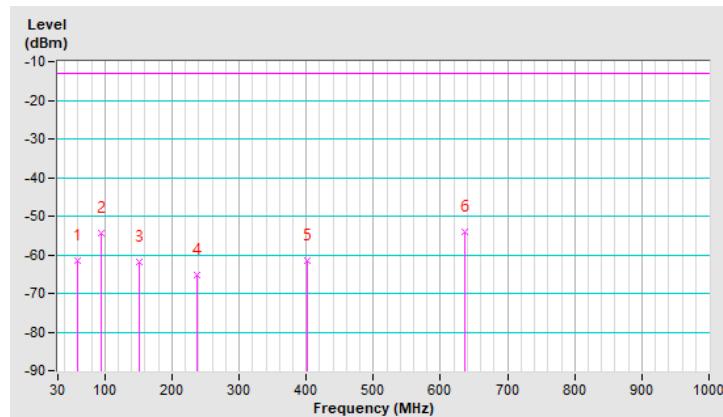


RF Mode	TX LTE Band 13-10MHz	Channel	CH 23230 : 782 MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.88	-61.04	-13.00	-48.04	1.50 V	95	46.51	-107.55
2	82.38	-63.50	-13.00	-50.50	1.50 V	182	47.59	-111.09
3	103.72	-47.03	-13.00	-34.03	1.50 V	284	63.14	-110.17
<b>4</b>	<b>286.08</b>	<b>-46.50</b>	<b>-13.00</b>	<b>-33.50</b>	<b>1.00 V</b>	<b>285</b>	<b>58.78</b>	<b>-105.28</b>
5	328.76	-59.63	-13.00	-46.63	1.50 V	284	44.60	-104.23
6	480.08	-62.49	-13.00	-49.49	1.50 V	18	39.33	-101.82

Remarks:

1.  $\text{ERP(dBm)} = \text{Raw Value(dBuV)} + \text{Correction Factor(dB/m)}$
2.  $\text{Correction Factor(dB/m)} = \text{Antenna Factor(dB/m)} + \text{Cable Factor(dB)} - \text{Pre-Amplifier Factor(dB)}$   
 $+ 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

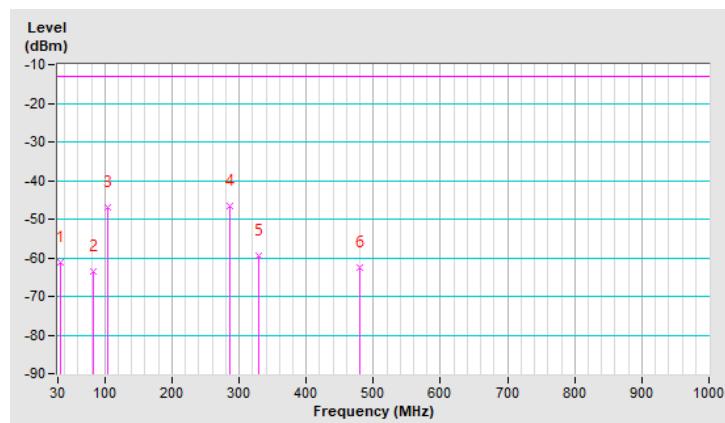


**LTE Band 17:**

RF Mode	TX LTE Band 17-10MHz	Channel	CH 23790 : 710.0 MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.82	-63.70	-13.00	-50.70	1.00 H	197	43.71	-107.41
2	78.50	-53.39	-13.00	-40.39	1.50 H	19	56.68	-110.07
3	161.92	-67.60	-13.00	-54.60	1.50 H	229	38.53	-106.13
4	303.54	-66.54	-13.00	-53.54	1.50 H	282	38.30	-104.84
5	369.50	-65.20	-13.00	-52.20	2.00 H	183	38.57	-103.77
6	522.76	-62.07	-13.00	-49.07	1.50 H	269	38.95	-101.02

**Remarks:**

1.  $\text{ERP(dBm)} = \text{Raw Value(dBuV)} + \text{Correction Factor(dB/m)}$
2.  $\text{Correction Factor(dB/m)} = \text{Antenna Factor(dB/m)} + \text{Cable Factor(dB)} - \text{Pre-Amplifier Factor(dB)}$   
 $+ 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

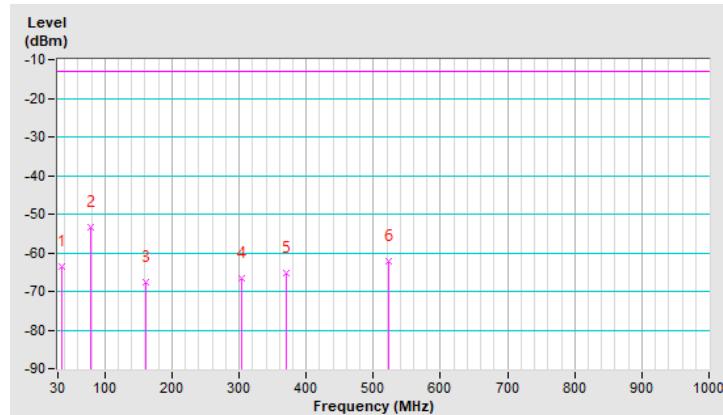


RF Mode	TX LTE Band 17-10MHz	Channel	CH 23790 : 710.0 MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	99.84	-58.30	-13.00	-45.30	1.00 V	65	52.46	-110.76
2	132.82	-60.47	-13.00	-47.47	1.50 V	255	46.81	-107.28
<b>3</b>	<b>194.90</b>	<b>-47.30</b>	<b>-13.00</b>	<b>-34.30</b>	<b>1.50 V</b>	<b>270</b>	<b>61.69</b>	<b>-108.99</b>
4	334.58	-53.15	-13.00	-40.15	1.50 V	48	51.06	-104.21
5	425.76	-55.44	-13.00	-42.44	1.50 V	40	47.28	-102.72
6	470.38	-54.50	-13.00	-41.50	1.00 V	48	47.42	-101.92

Remarks:

1.  $\text{ERP(dBm)} = \text{Raw Value(dBuV)} + \text{Correction Factor(dB/m)}$
2.  $\text{Correction Factor(dB/m)} = \text{Antenna Factor(dB/m)} + \text{Cable Factor(dB)} - \text{Pre-Amplifier Factor(dB)}$   
 $+ 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

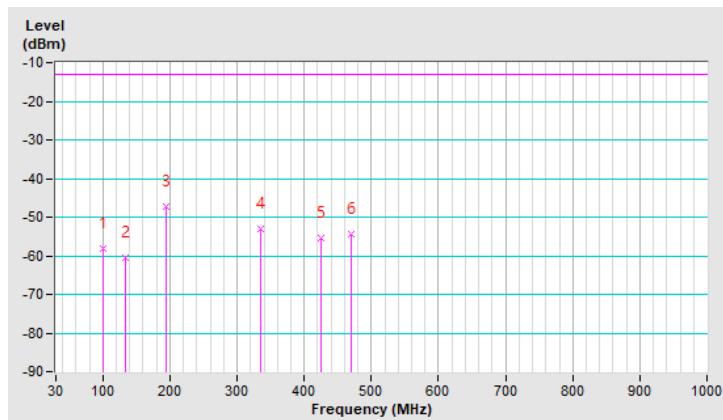

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

### **Lin Kou EMC/RF Lab**

Tel: 886-2-26052180  
Fax: 886-2-26051924

### **Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565  
Fax: 886-3-6668323

### **Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232  
Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---