




Non-beamforming mode

Modulation Mode	ax HE40	Test Freq. (MHz)	5230
Power Phase	Line		

Test by : Joe Liao      Temperature: 22°C      Humidity: 63%

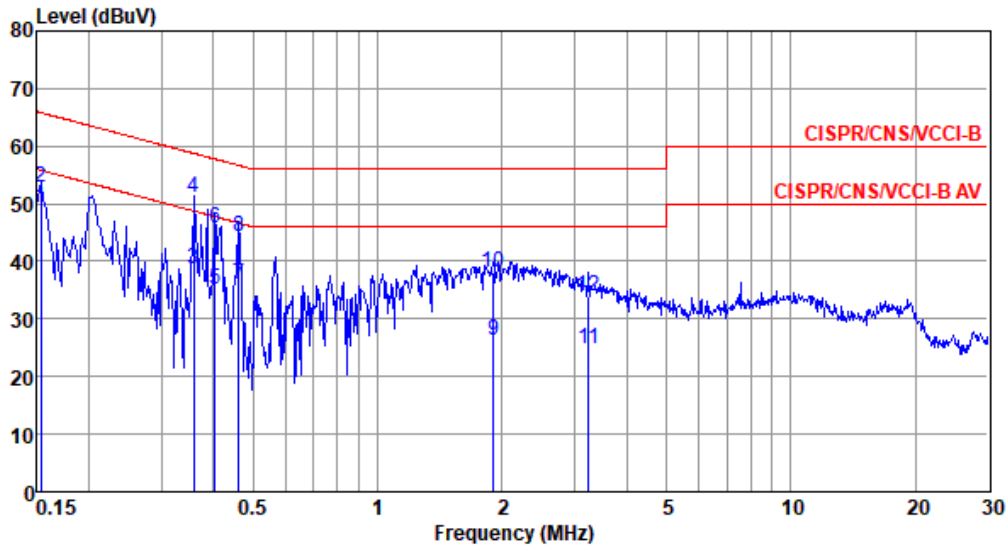


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1*	0.153	49.40	55.82	-6.42	39.53	9.63	0.06	0.18	Average
2	0.153	52.86	65.82	-12.96	42.99	9.63	0.06	0.18	QP
3	0.360	38.63	48.74	-10.11	28.67	9.62	0.06	0.28	Average
4	0.360	51.18	58.74	-7.56	41.22	9.62	0.06	0.28	QP
5	0.404	35.16	47.77	-12.61	25.18	9.62	0.06	0.30	Average
6	0.404	45.83	57.77	-11.94	35.85	9.62	0.06	0.30	QP
7	0.461	36.11	46.67	-10.56	26.12	9.62	0.07	0.30	Average
8	0.461	44.41	56.67	-12.26	34.42	9.62	0.07	0.30	QP
9	1.908	26.29	46.00	-19.71	16.17	9.63	0.13	0.36	Average
10	1.908	37.95	56.00	-18.05	27.83	9.63	0.13	0.36	QP
11	3.241	24.91	46.00	-21.09	14.71	9.64	0.16	0.40	Average
12	3.241	34.02	56.00	-21.98	23.82	9.64	0.16	0.40	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).  
 Note 2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).



Modulation Mode	ax HE40	Test Freq. (MHz)	5230
Power Phase	Neutral		

Test by : Joe Liao      Temperature: 22°C      Humidity: 63%

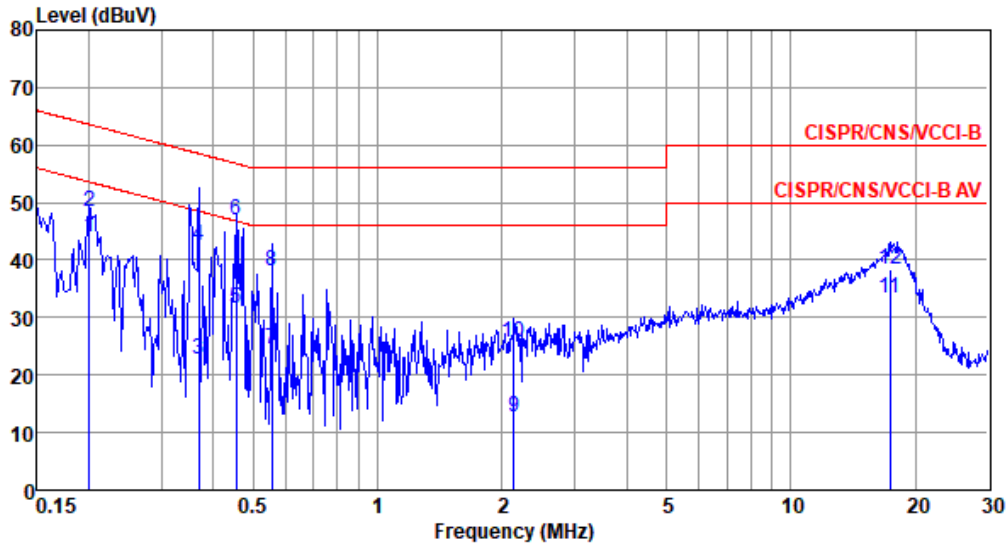


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1*	0.201	44.01	53.58	-9.57	34.13	9.63	0.06	0.19	Average
2	0.201	48.45	63.58	-15.13	38.57	9.63	0.06	0.19	QP
3	0.369	22.80	48.52	-25.72	12.83	9.62	0.06	0.29	Average
4	0.369	42.39	58.52	-16.13	32.42	9.62	0.06	0.29	QP
5	0.454	31.67	46.80	-15.13	21.68	9.62	0.07	0.30	Average
6	0.454	46.93	56.80	-9.87	36.94	9.62	0.07	0.30	QP
7	0.555	24.59	46.00	-21.41	14.58	9.62	0.08	0.31	Average
8	0.555	38.21	56.00	-17.79	28.20	9.62	0.08	0.31	QP
9	2.133	12.73	46.00	-33.27	2.59	9.64	0.13	0.37	Average
10	2.133	25.74	56.00	-30.26	15.60	9.64	0.13	0.37	QP
11	17.383	33.29	50.00	-16.71	22.52	9.78	0.48	0.51	Average
12	17.383	38.38	60.00	-21.62	27.61	9.78	0.48	0.51	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).  
 Note 2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).



Modulation Mode	11a	Test Freq. (MHz)	5745
Power Phase	Line		

Test by : Joe Liao      Temperature: 22°C      Humidity: 63%

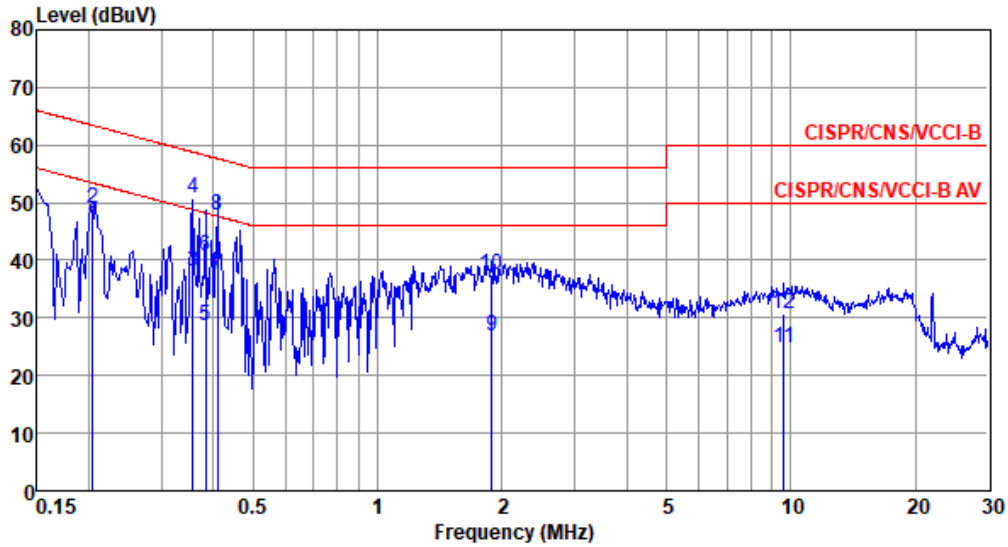


	Freq	Level	Limit	Over	Read	Factor	Cable	Aux	Remark
	MHz	dBuV	Line	Limit	Level	dB	loss	dB	
			dBuV	dB	dBuV		dB		
1*	0.204	46.10	53.45	-7.35	36.23	9.62	0.06	0.19	Average
2	0.204	49.14	63.45	-14.31	39.27	9.62	0.06	0.19	QP
3	0.358	38.07	48.78	-10.71	28.11	9.62	0.06	0.28	Average
4	0.358	50.87	58.78	-7.91	40.91	9.62	0.06	0.28	QP
5	0.383	28.50	48.21	-19.71	18.53	9.62	0.06	0.29	Average
6	0.383	40.85	58.21	-17.36	30.88	9.62	0.06	0.29	QP
7	0.410	37.45	47.64	-10.19	27.47	9.62	0.06	0.30	Average
8	0.410	47.95	57.64	-9.69	37.97	9.62	0.06	0.30	QP
9	1.888	26.95	46.00	-19.05	16.83	9.63	0.13	0.36	Average
10	1.888	37.39	56.00	-18.61	27.27	9.63	0.13	0.36	QP
11	9.603	24.73	50.00	-25.27	14.25	9.69	0.35	0.44	Average
12	9.603	30.79	60.00	-29.21	20.31	9.69	0.35	0.44	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).  
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).



Modulation Mode	11a	Test Freq. (MHz)	5745
Power Phase	Neutral		

Test by : Joe Liao      Temperature: 22°C      Humidity: 63%

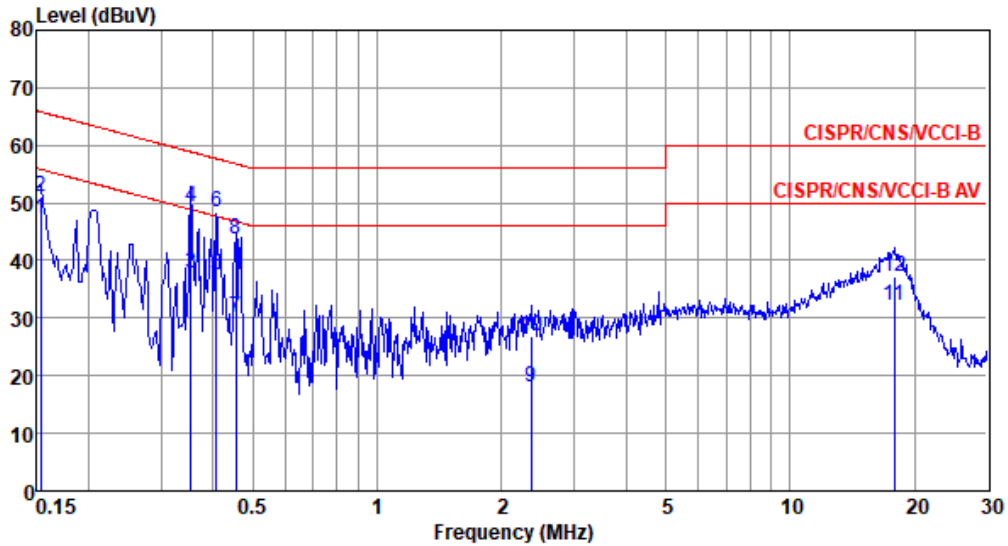

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1*	0.153	47.23	55.82	-8.59	37.36	9.63	0.06	0.18	Average
2	0.153	51.22	65.82	-14.60	41.35	9.63	0.06	0.18	QP
3	0.354	37.78	48.87	-11.09	27.82	9.62	0.06	0.28	Average
4	0.354	49.23	58.87	-9.64	39.27	9.62	0.06	0.28	QP
5	0.408	37.37	47.68	-10.31	27.39	9.62	0.06	0.30	Average
6	0.408	48.31	57.68	-9.37	38.33	9.62	0.06	0.30	QP
7	0.454	30.14	46.80	-16.66	20.15	9.62	0.07	0.30	Average
8	0.454	43.74	56.80	-13.06	33.75	9.62	0.07	0.30	QP
9	2.358	18.13	46.00	-27.87	7.98	9.64	0.14	0.37	Average
10	2.358	26.74	56.00	-29.26	16.59	9.64	0.14	0.37	QP
11	17.849	32.06	50.00	-17.94	21.28	9.79	0.48	0.51	Average
12	17.849	37.31	60.00	-22.69	26.53	9.79	0.48	0.51	QP


Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).  
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).



Beamforming mode

Modulation Mode	ax HE40	Test Freq. (MHz)	5230
Power Phase	Line		

Test by : Joe Liao      Temperature: 22°C      Humidity: 63%

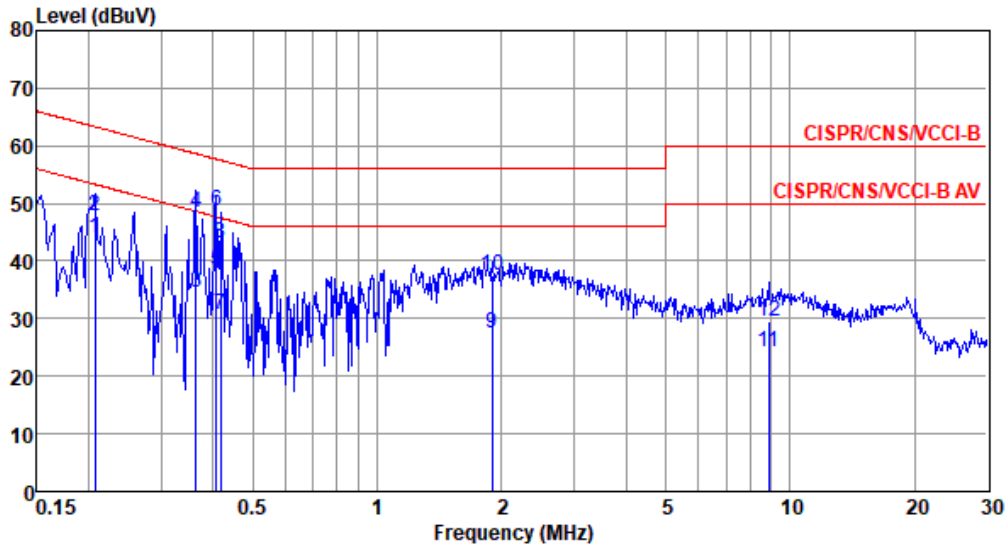


	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.207	44.00	53.32	-9.32	34.12	9.62	0.06	0.20	Average
2	0.207	47.86	63.32	-15.46	37.98	9.62	0.06	0.20	QP
3	0.363	34.56	48.65	-14.09	24.60	9.62	0.06	0.28	Average
4	0.363	48.44	58.65	-10.21	38.48	9.62	0.06	0.28	QP
5	0.408	38.52	47.68	-9.16	28.54	9.62	0.06	0.30	Average
6*	0.408	48.72	57.68	-8.96	38.74	9.62	0.06	0.30	QP
7	0.417	30.58	47.51	-16.93	20.60	9.62	0.06	0.30	Average
8	0.417	43.09	57.51	-14.42	33.11	9.62	0.06	0.30	QP
9	1.898	27.54	46.00	-18.46	17.42	9.63	0.13	0.36	Average
10	1.898	37.37	56.00	-18.63	27.25	9.63	0.13	0.36	QP
11	8.869	24.25	50.00	-25.75	13.79	9.68	0.34	0.44	Average
12	8.869	29.62	60.00	-30.38	19.16	9.68	0.34	0.44	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).  
 Note 2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).



Modulation Mode	ax HE40	Test Freq. (MHz)	5230
Power Phase	Neutral		

Test by : Joe Liao      Temperature: 22°C      Humidity: 63%

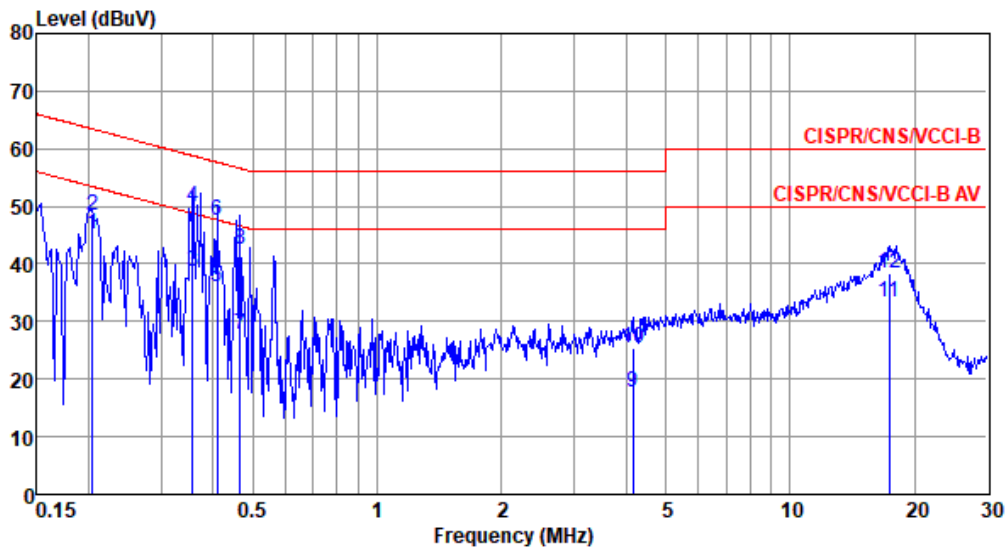


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1*	0.204	45.28	53.45	-8.17	35.40	9.63	0.06	0.19	Average
2	0.204	48.37	63.45	-15.08	38.49	9.63	0.06	0.19	QP
3	0.358	38.53	48.78	-10.25	28.57	9.62	0.06	0.28	Average
4	0.358	49.90	58.78	-8.88	39.94	9.62	0.06	0.28	QP
5	0.410	36.13	47.64	-11.51	26.15	9.62	0.06	0.30	Average
6	0.410	47.63	57.64	-10.01	37.65	9.62	0.06	0.30	QP
7	0.466	27.86	46.58	-18.72	17.86	9.62	0.07	0.31	Average
8	0.466	42.58	56.58	-14.00	32.58	9.62	0.07	0.31	QP
9	4.158	17.65	46.00	-28.35	7.39	9.65	0.19	0.42	Average
10	4.158	25.52	56.00	-30.48	15.26	9.65	0.19	0.42	QP
11	17.383	33.34	50.00	-16.66	22.57	9.78	0.48	0.51	Average
12	17.383	38.25	60.00	-21.75	27.48	9.78	0.48	0.51	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).  
 Note 2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).



Modulation Mode	ax HE20	Test Freq. (MHz)	5745
Power Phase	Line		

Test by : Joe Liao      Temperature: 22°C      Humidity: 63%

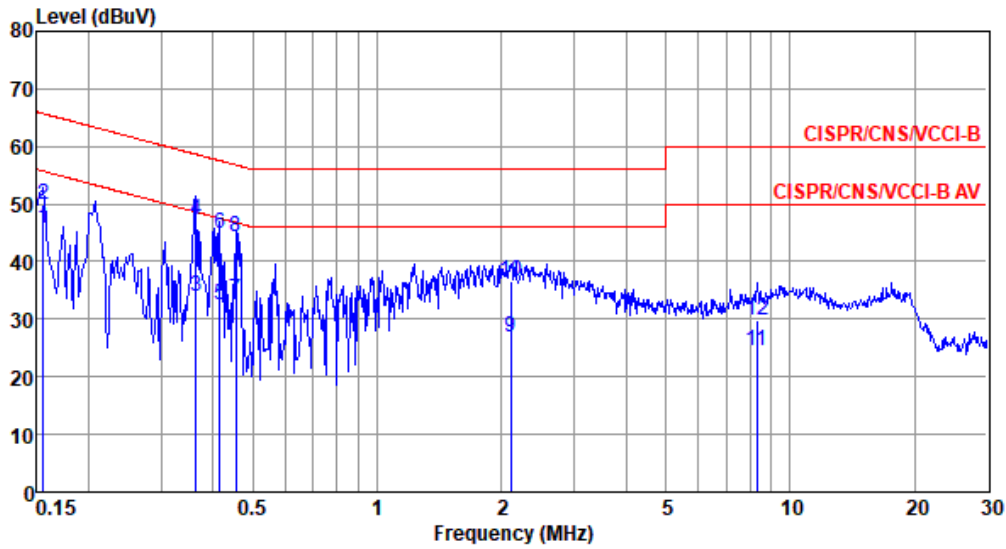


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1*	0.156	45.62	55.69	-10.07	35.75	9.63	0.06	0.18	Average
2	0.156	49.79	65.69	-15.90	39.92	9.63	0.06	0.18	QP
3	0.363	34.06	48.65	-14.59	24.10	9.62	0.06	0.28	Average
4	0.363	47.27	58.65	-11.38	37.31	9.62	0.06	0.28	QP
5	0.415	32.60	47.55	-14.95	22.62	9.62	0.06	0.30	Average
6	0.415	44.76	57.55	-12.79	34.78	9.62	0.06	0.30	QP
7	0.454	33.41	46.80	-13.39	23.42	9.62	0.07	0.30	Average
8	0.454	44.17	56.80	-12.63	34.18	9.62	0.07	0.30	QP
9	2.110	26.75	46.00	-19.25	16.63	9.63	0.13	0.36	Average
10	2.110	36.56	56.00	-19.44	26.44	9.63	0.13	0.36	QP
11	8.323	24.37	50.00	-25.63	13.93	9.68	0.32	0.44	Average
12	8.323	29.85	60.00	-30.15	19.41	9.68	0.32	0.44	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).  
 Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).



Modulation Mode	ax HE20	Test Freq. (MHz)	5745
Power Phase	Neutral		

Test by : Joe Liao      Temperature: 22°C      Humidity: 63%

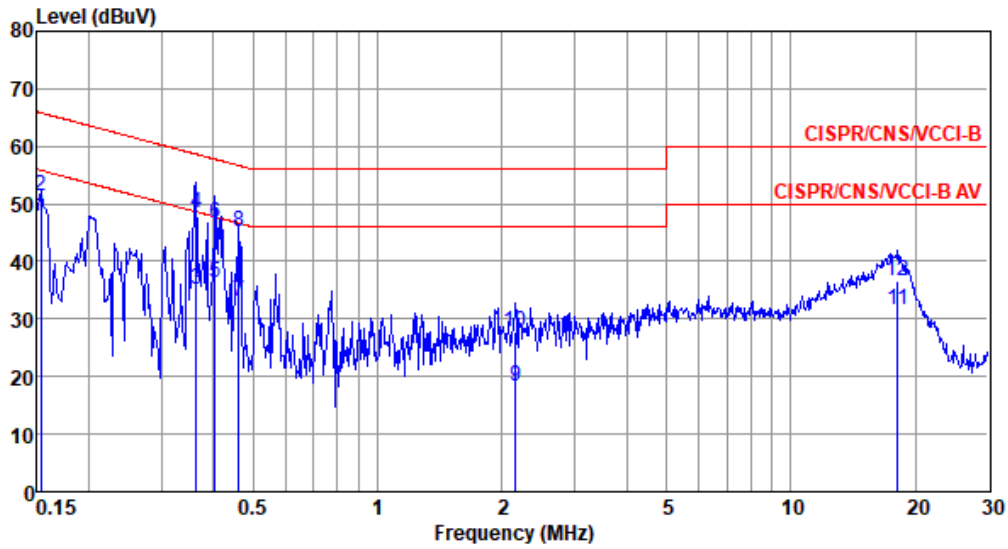

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1*	0.153	47.90	55.82	-7.92	38.03	9.63	0.06	0.18	Average
2	0.153	51.26	65.82	-14.56	41.39	9.63	0.06	0.18	QP
3	0.363	35.15	48.65	-13.50	25.19	9.62	0.06	0.28	Average
4	0.363	48.47	58.65	-10.18	38.51	9.62	0.06	0.28	QP
5	0.404	36.22	47.77	-11.55	26.24	9.62	0.06	0.30	Average
6	0.404	46.67	57.77	-11.10	36.69	9.62	0.06	0.30	QP
7	0.461	32.93	46.67	-13.74	22.94	9.62	0.07	0.30	Average
8	0.461	45.02	56.67	-11.65	35.03	9.62	0.07	0.30	QP
9	2.155	18.17	46.00	-27.83	8.02	9.64	0.14	0.37	Average
10	2.155	27.72	56.00	-28.28	17.57	9.64	0.14	0.37	QP
11	18.135	31.60	50.00	-18.40	20.81	9.79	0.49	0.51	Average
12	18.135	36.73	60.00	-23.27	25.94	9.79	0.49	0.51	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).  
 Note 2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).