







Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
5710MHz Straddle 5.725-5.85GHz	Pass	4.950	-2.00	-1.54	-1.03	-1.43	4.40	30.00	9.35	36.00
5755MHz	Pass	4.950	5.12	5.16	4.18	4.49	10.67	30.00	15.62	36.00
5795MHz	Pass	4.950	5.79	5.03	5.43	6.17	11.57	30.00	16.52	36.00
802.11be EHT80_Nss1,(MCS0)_4TX										
5210MHz	Pass	5.880	-0.27	-0.87	-0.98	-0.92	5.00	17.00	10.88	23.00
5290MHz	Pass	5.440	-2.30	-2.57	-1.91	-2.27	3.43	11.00	8.87	17.00
5530MHz	Pass	5.460	-0.12	-0.38	-0.65	-0.30	5.40	11.00	10.86	17.00
5610MHz	Pass	5.460	-0.95	-0.48	-0.29	-0.06	5.33	11.00	10.79	17.00
5690MHz Straddle 5.47-5.725GHz	Pass	5.460	-0.74	-0.69	0.13	0.34	5.62	11.00	11.08	17.00
5690MHz Straddle 5.725-5.85GHz	Pass	4.950	-5.69	-4.89	-4.21	-5.39	0.71	30.00	5.66	36.00
5775MHz	Pass	4.950	-1.02	-1.18	-0.42	-0.32	5.03	30.00	9.98	36.00
802.11be EHT160_Nss1,(MCS0)_4TX										
5250MHz Straddle 5.15-5.25GHz	Pass	5.880	-8.36	-8.44	-8.03	-8.41	-2.37	17.00	3.51	23.00
5250MHz Straddle 5.25-5.35GHz	Pass	5.440	-8.35	-8.48	-8.28	-8.03	-2.29	11.00	3.15	17.00
5570MHz	Pass	5.460	-6.78	-6.44	-6.72	-6.48	-0.64	11.00	4.82	17.00


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X
 Power Density;


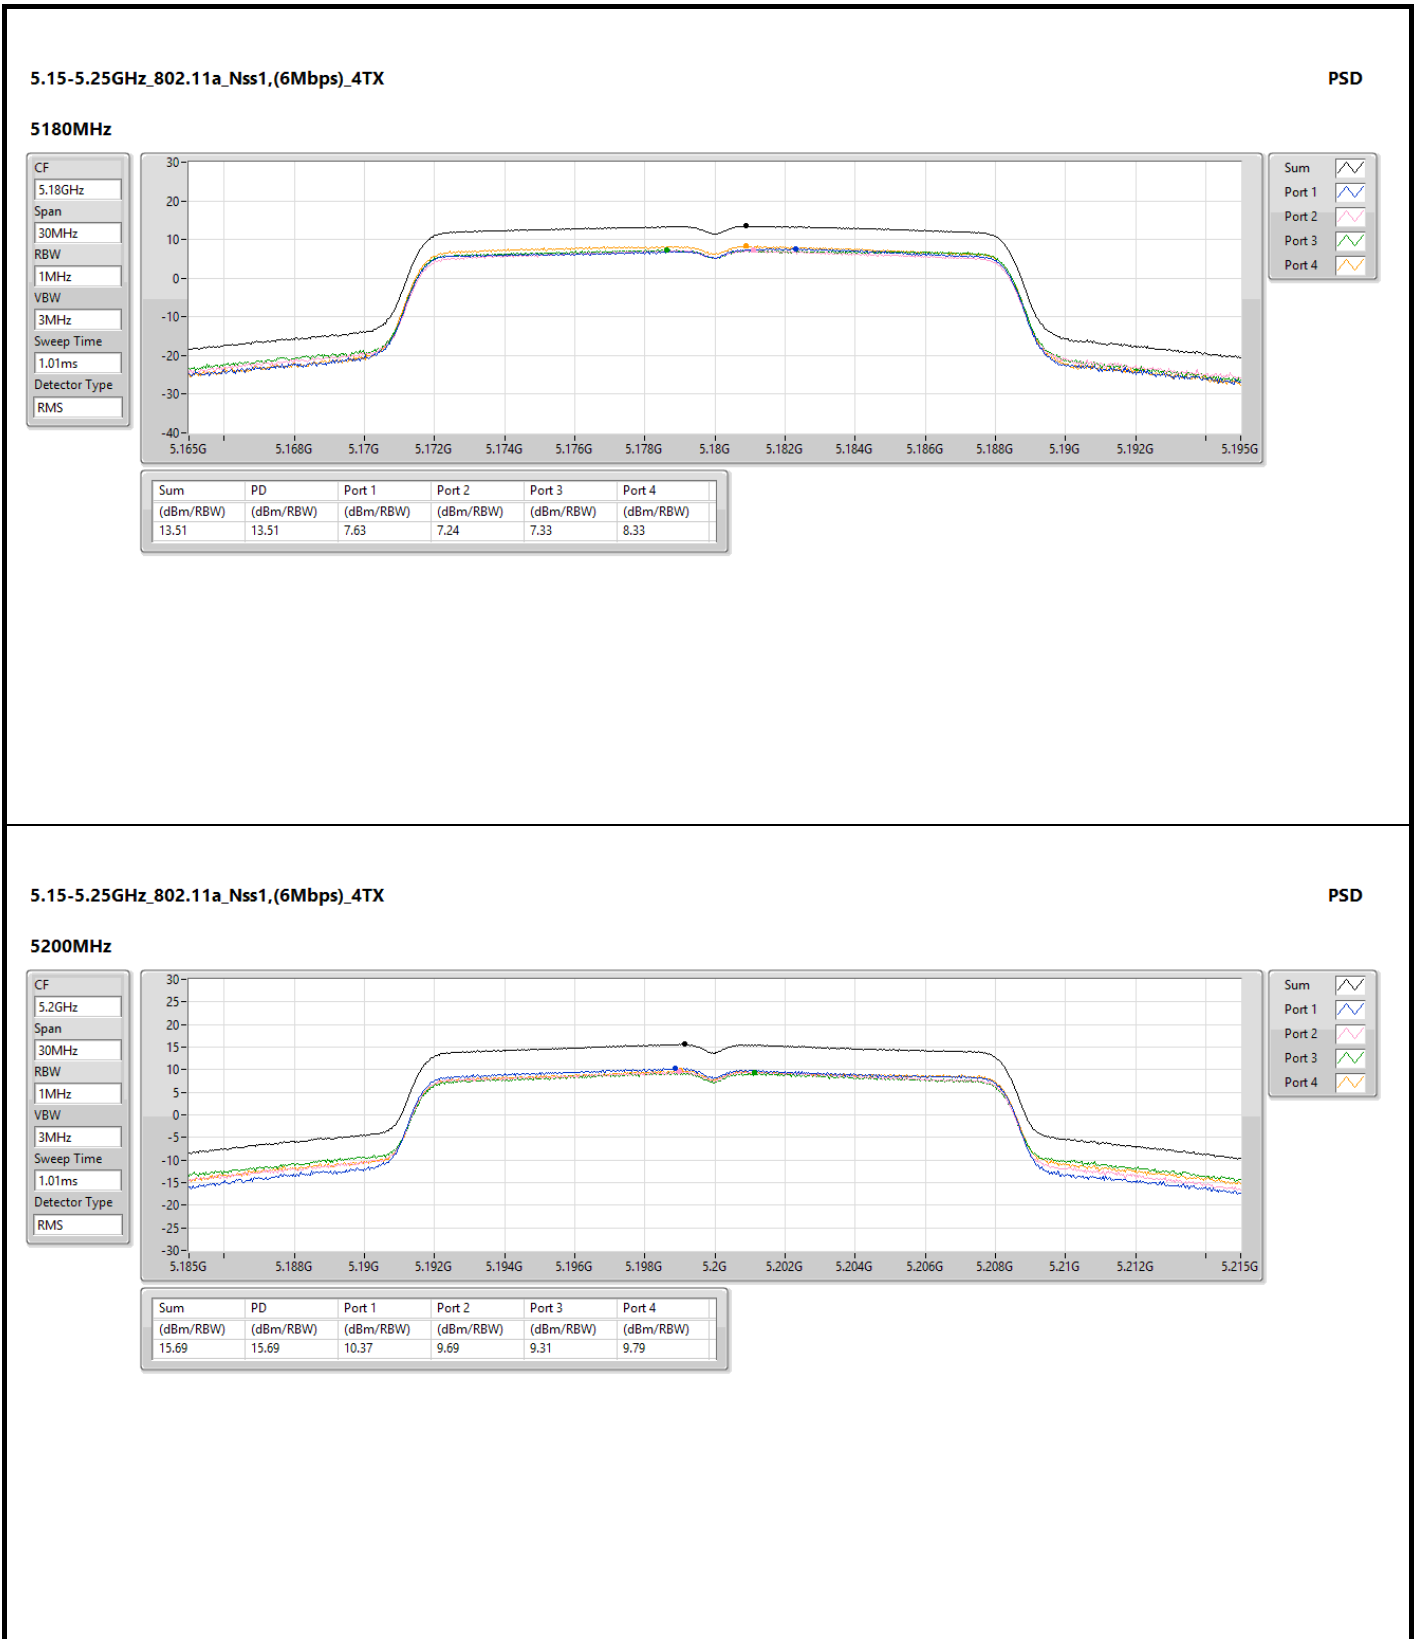



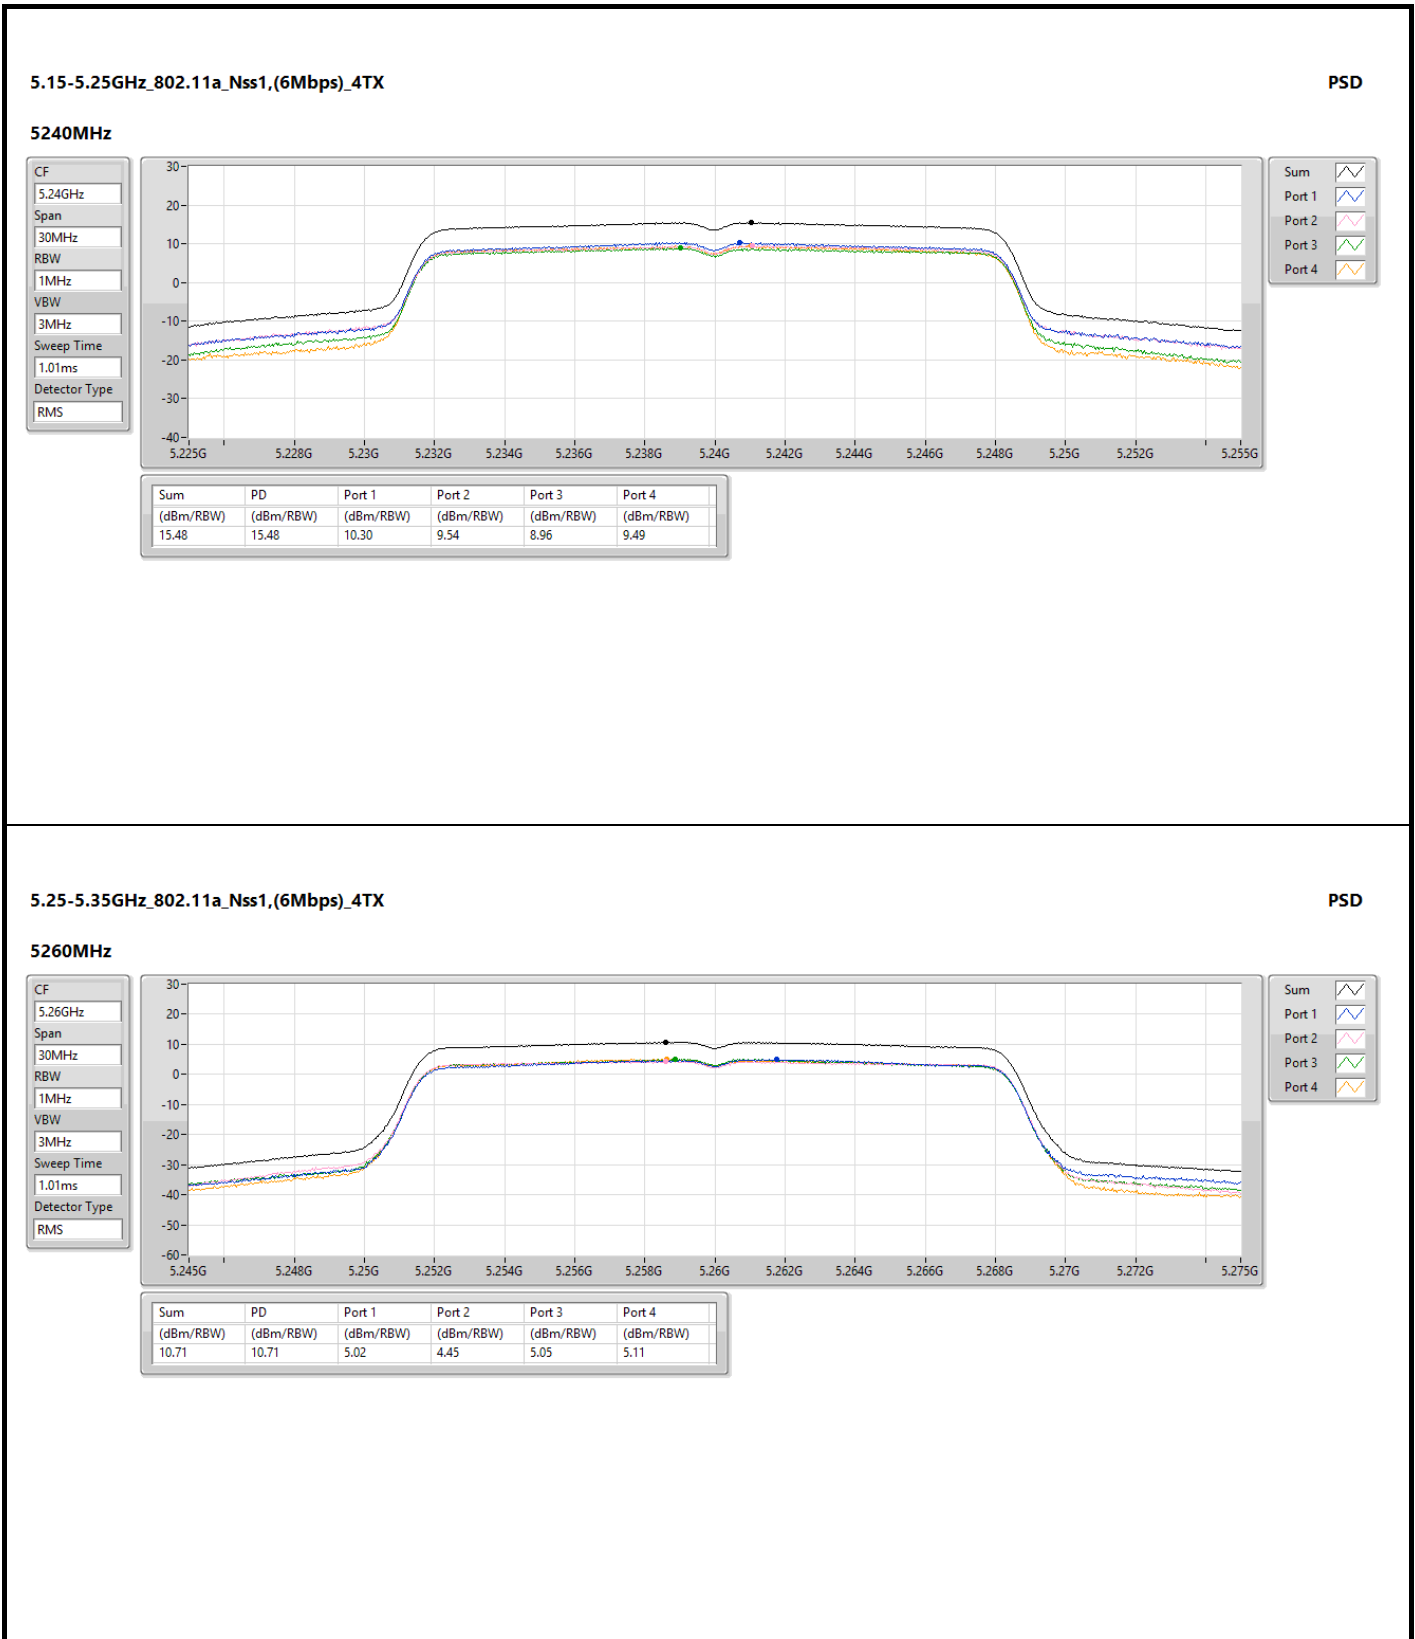


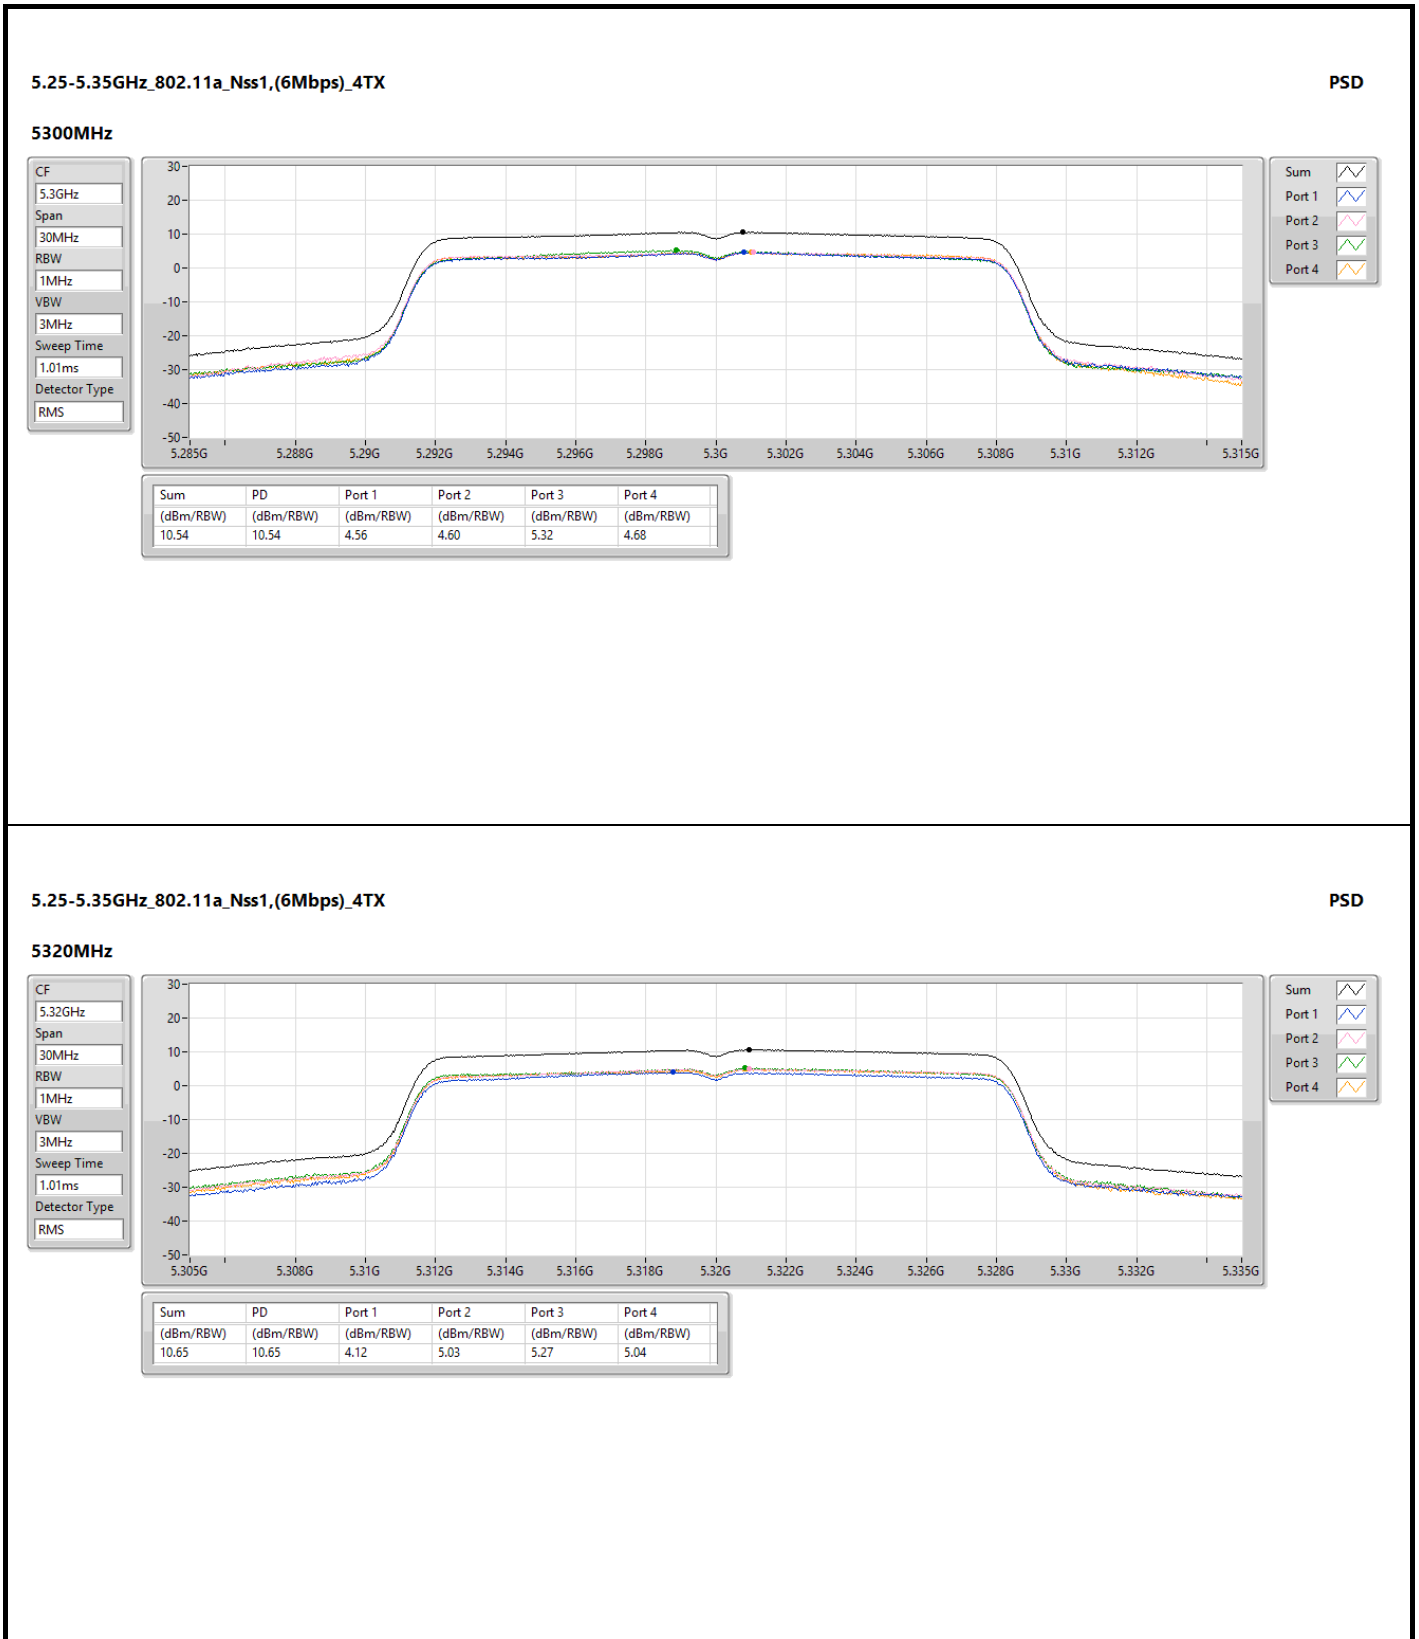


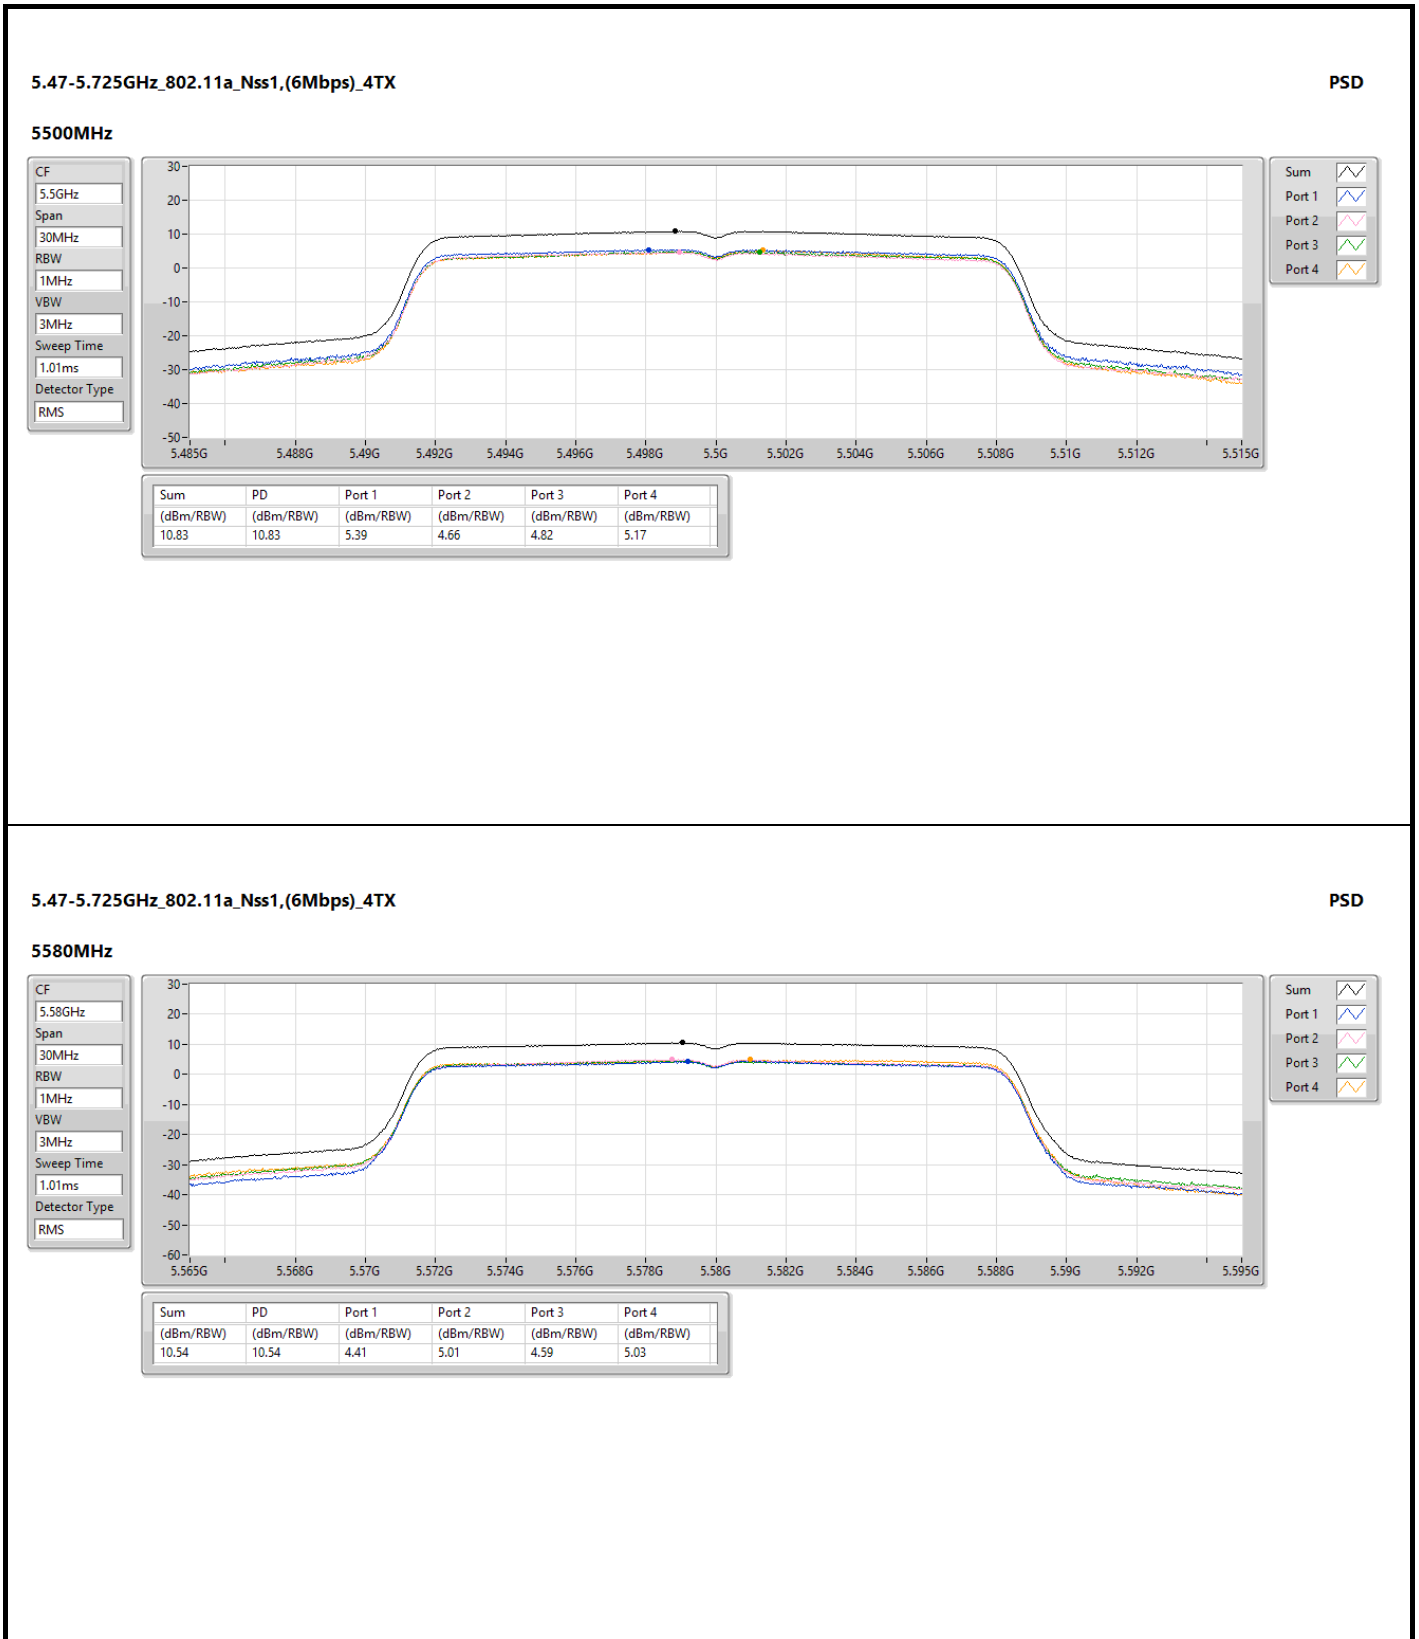


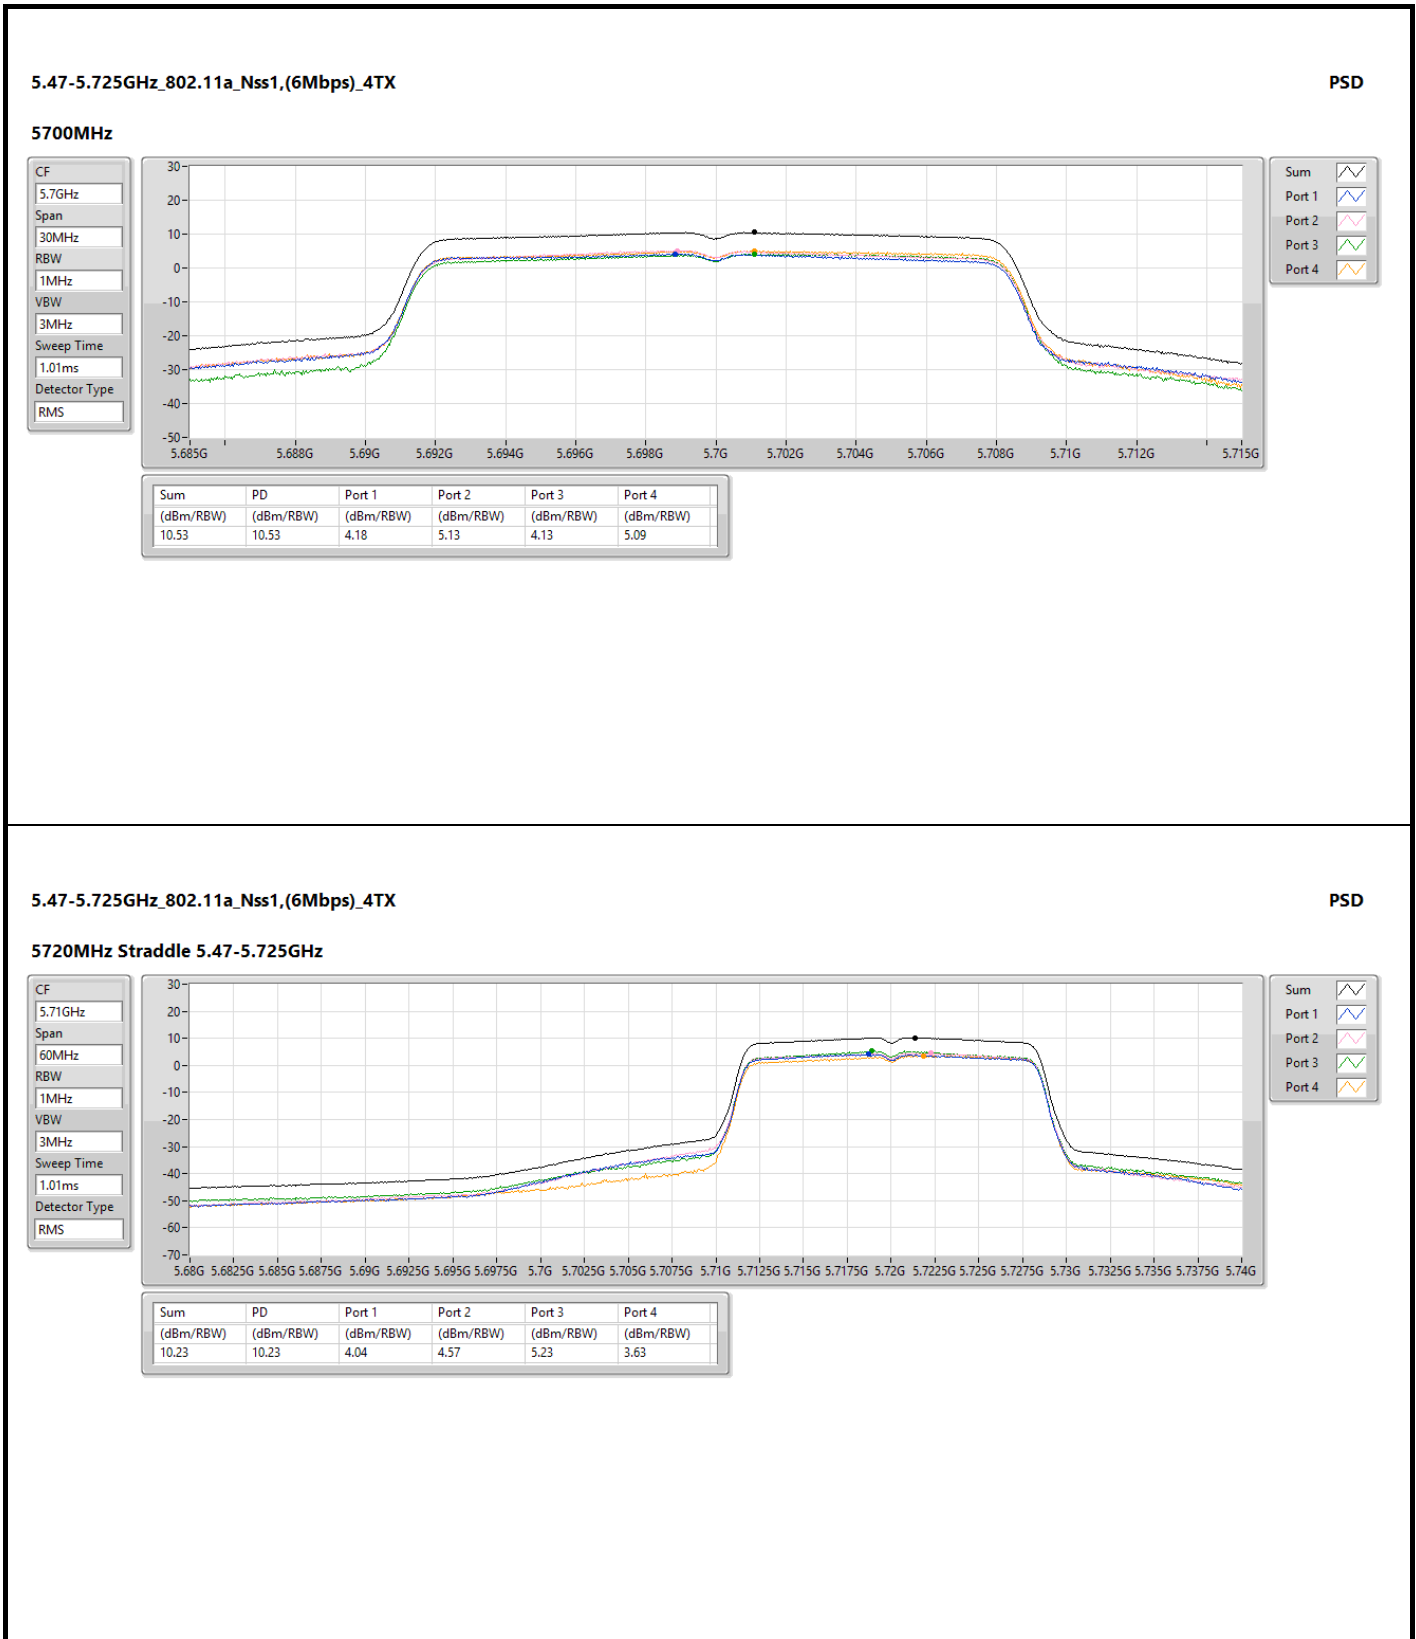


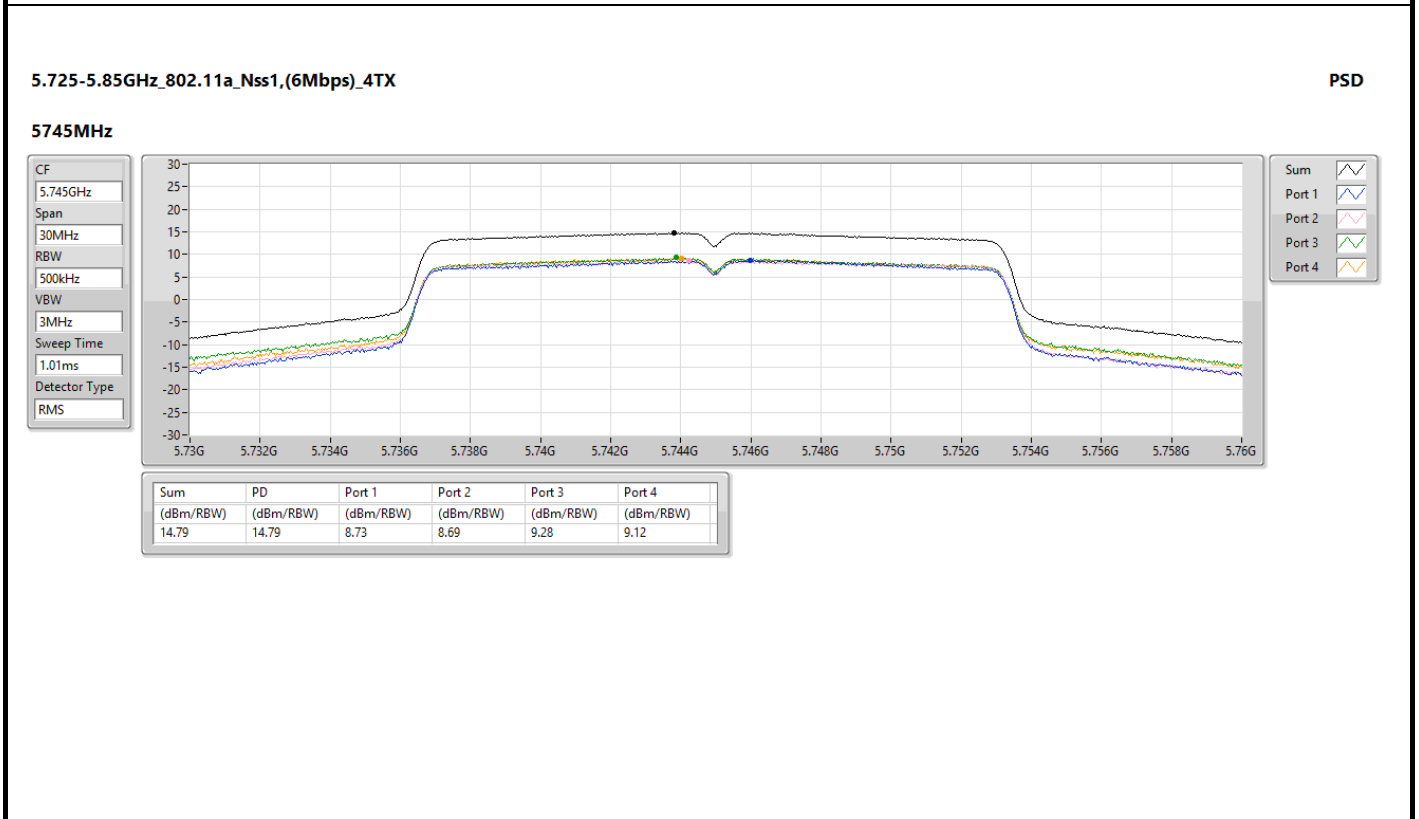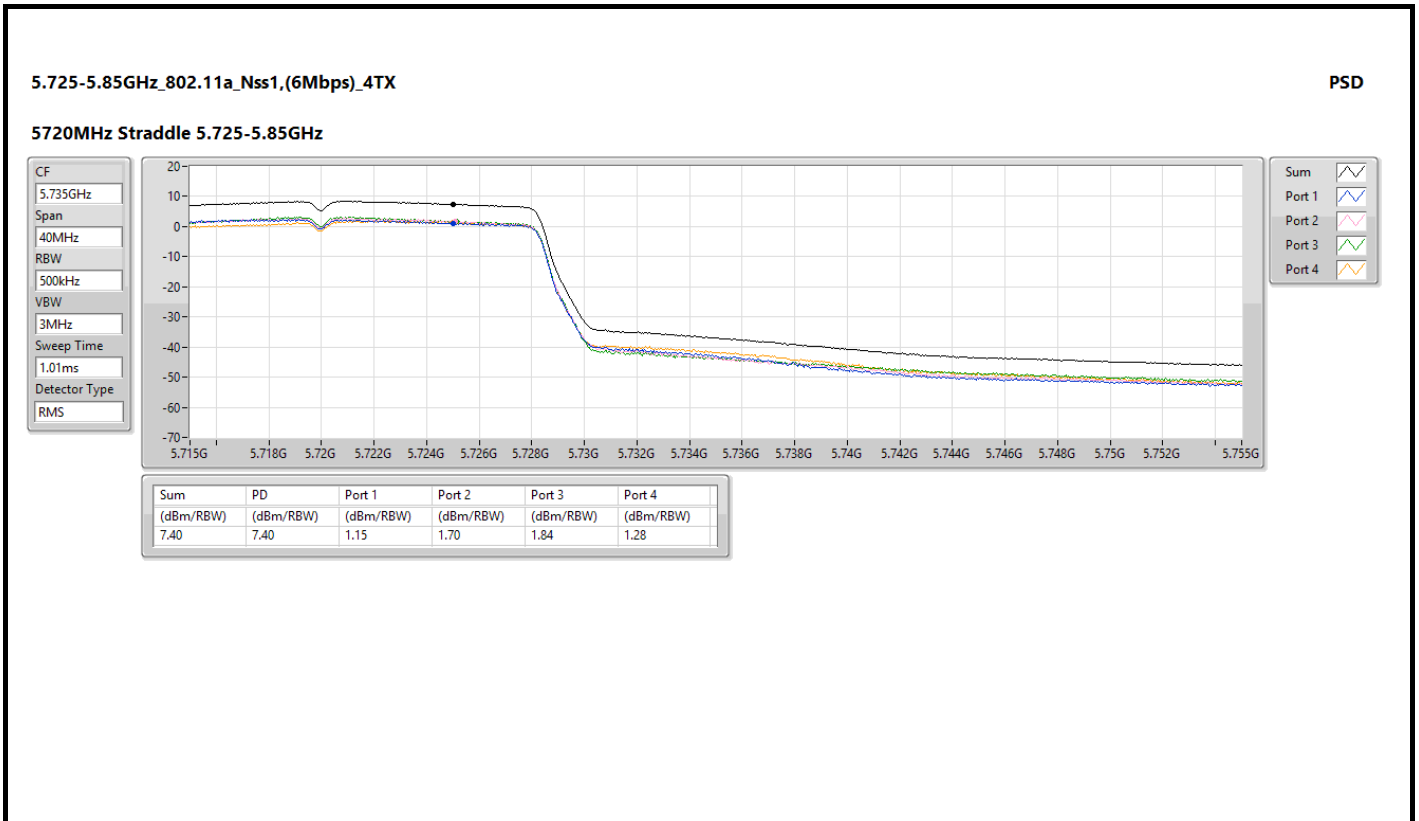


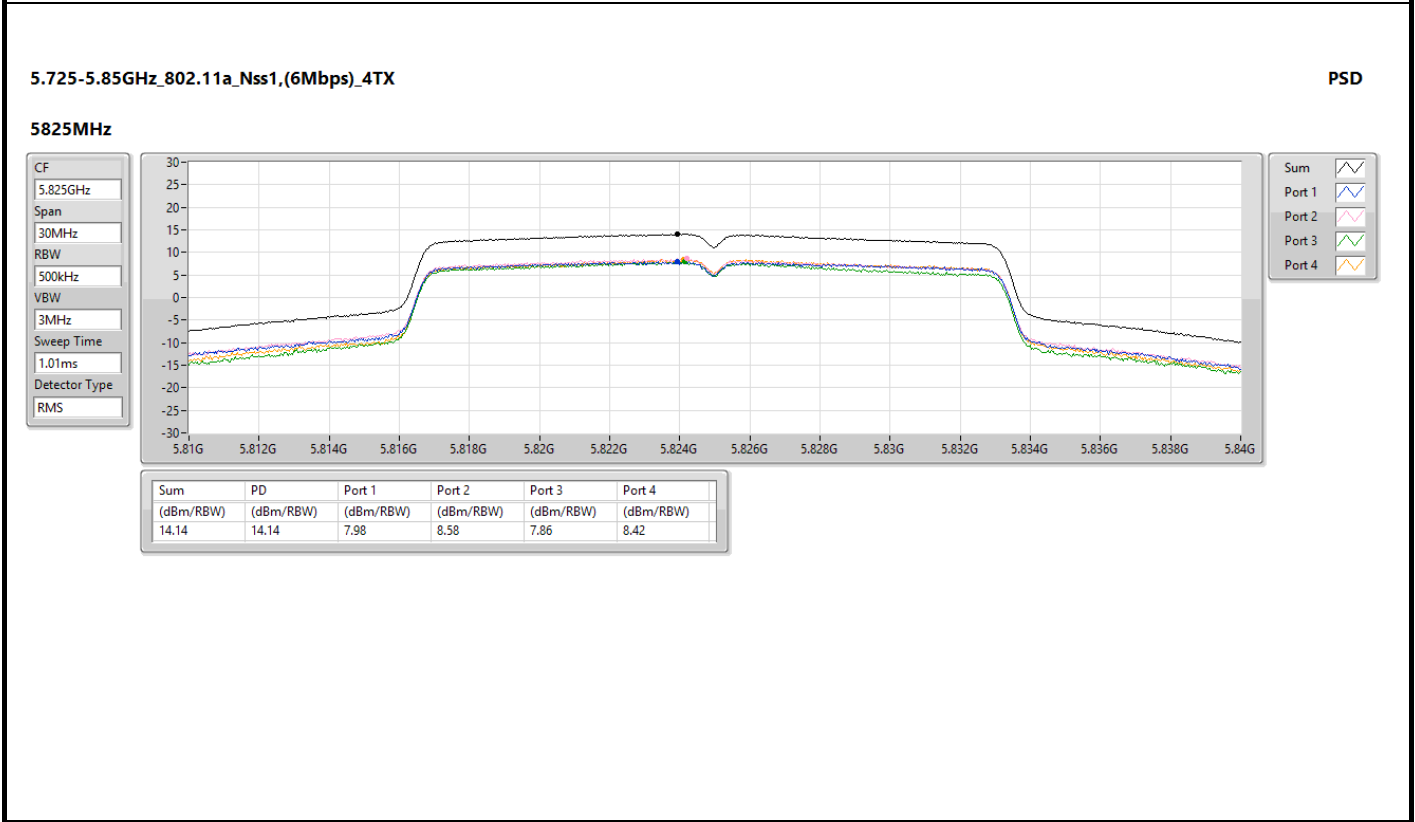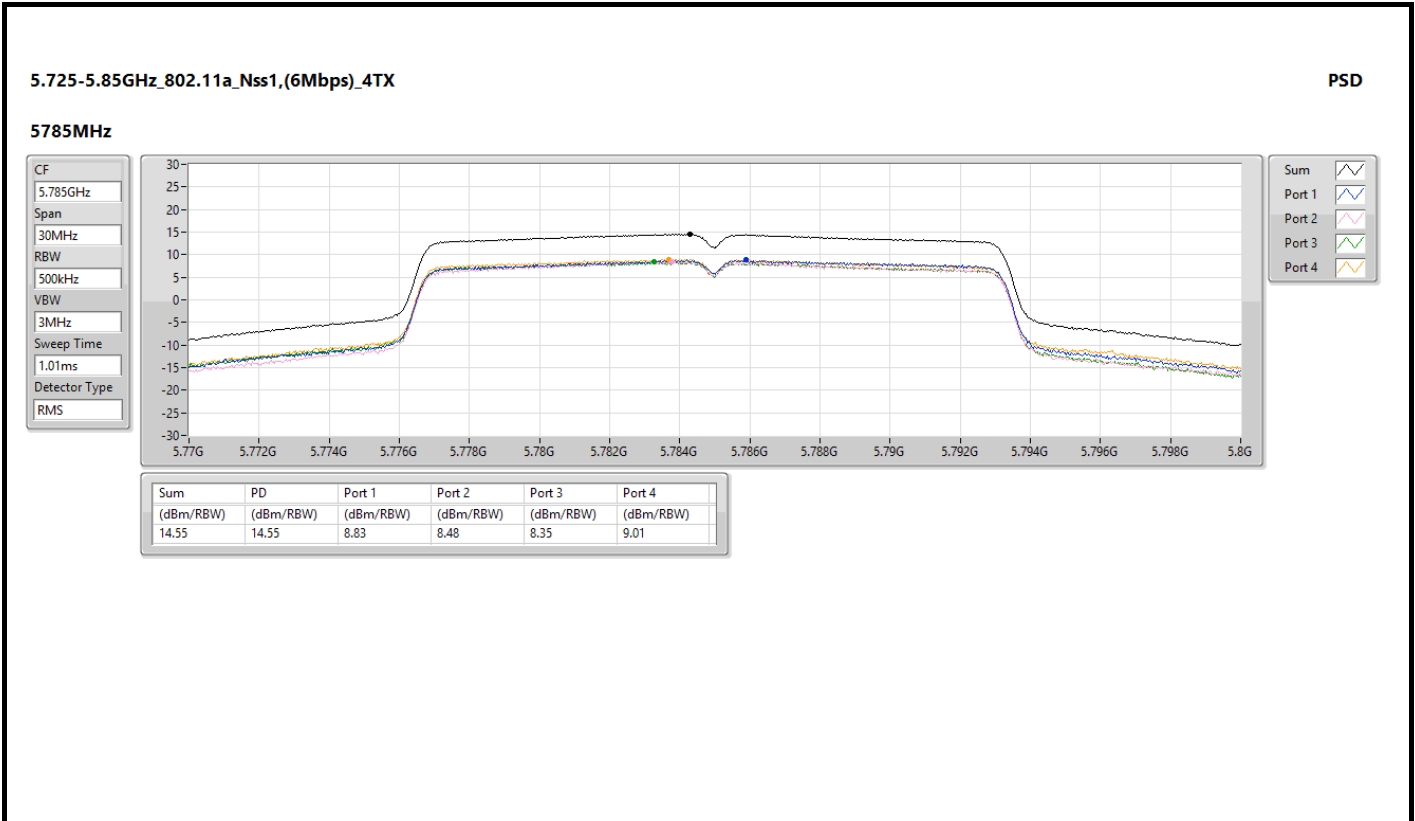


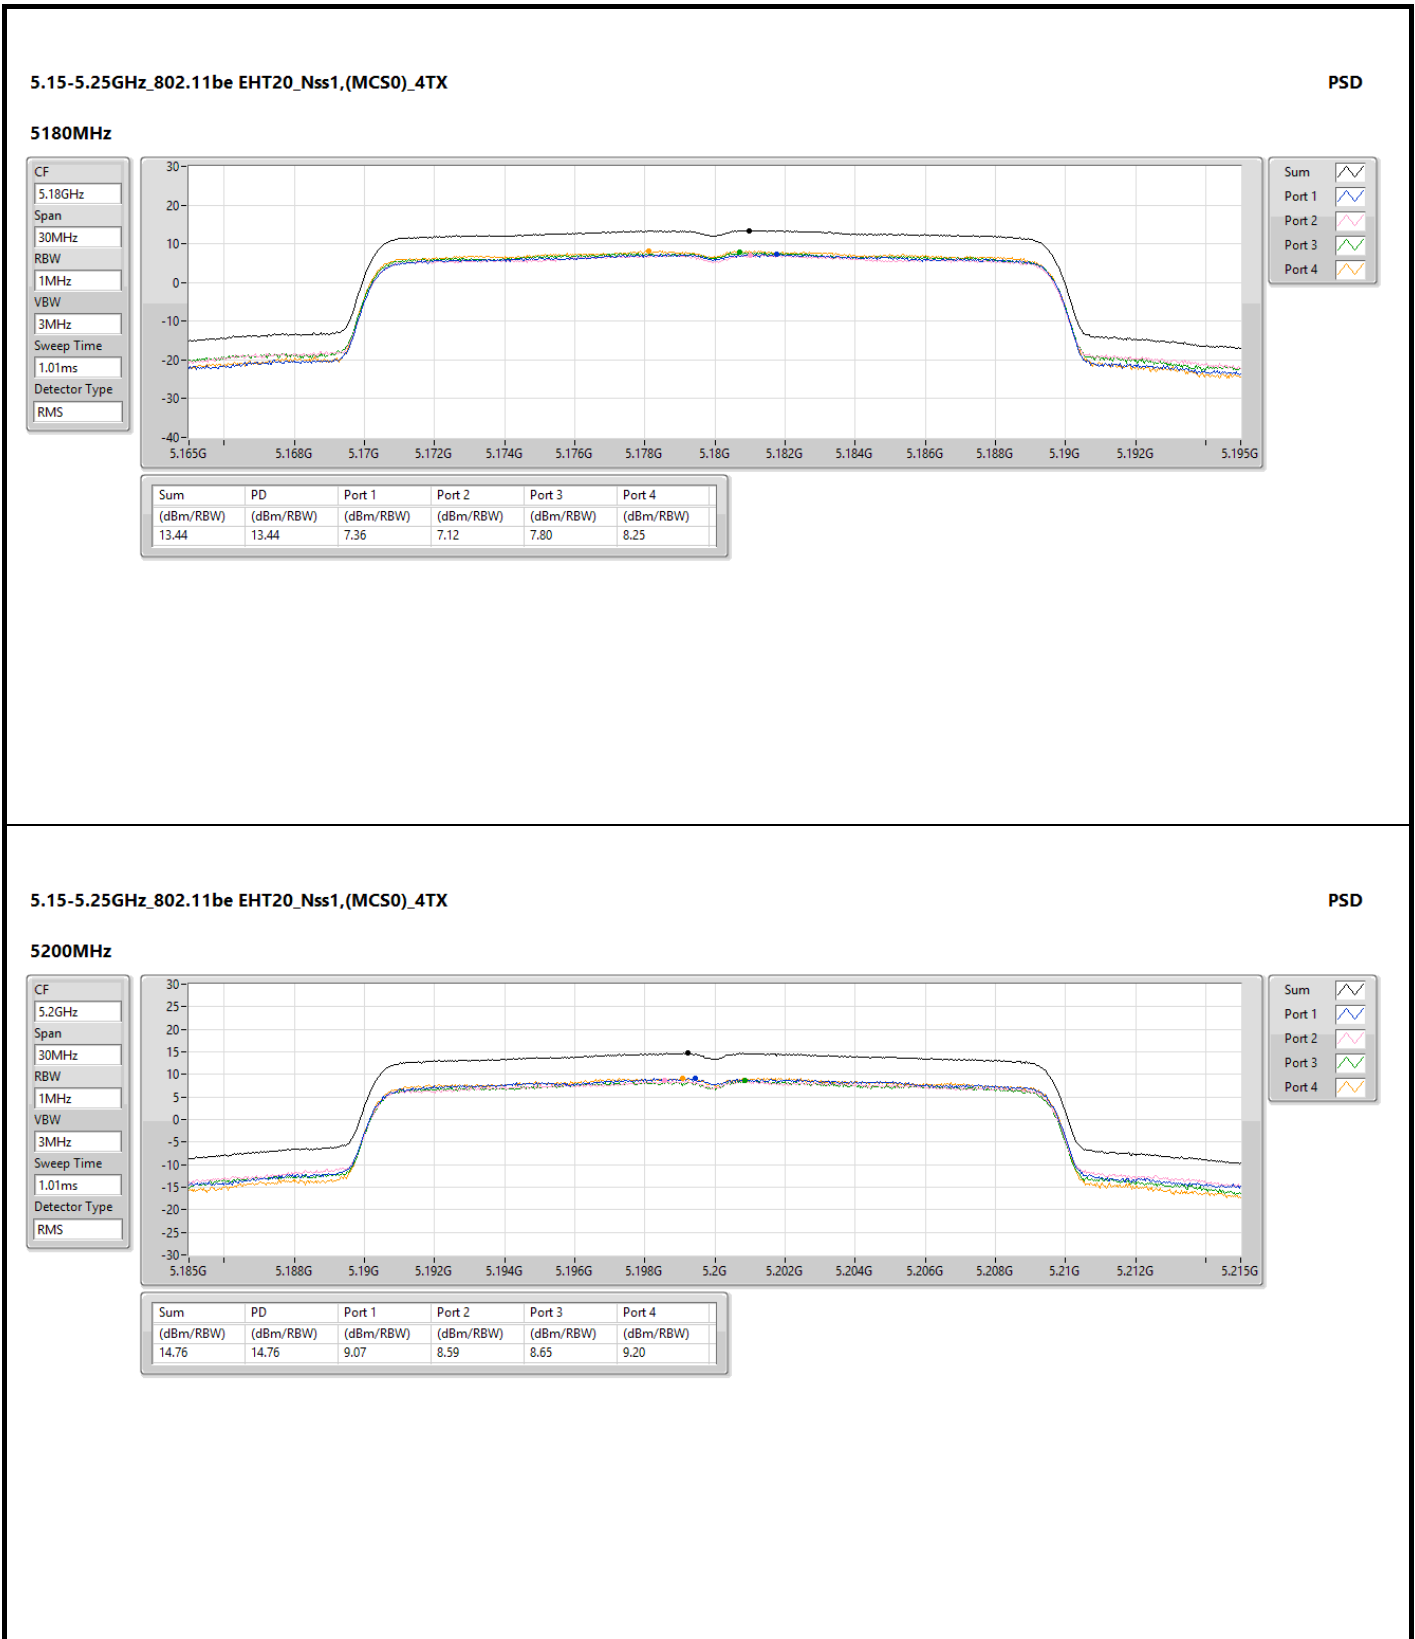

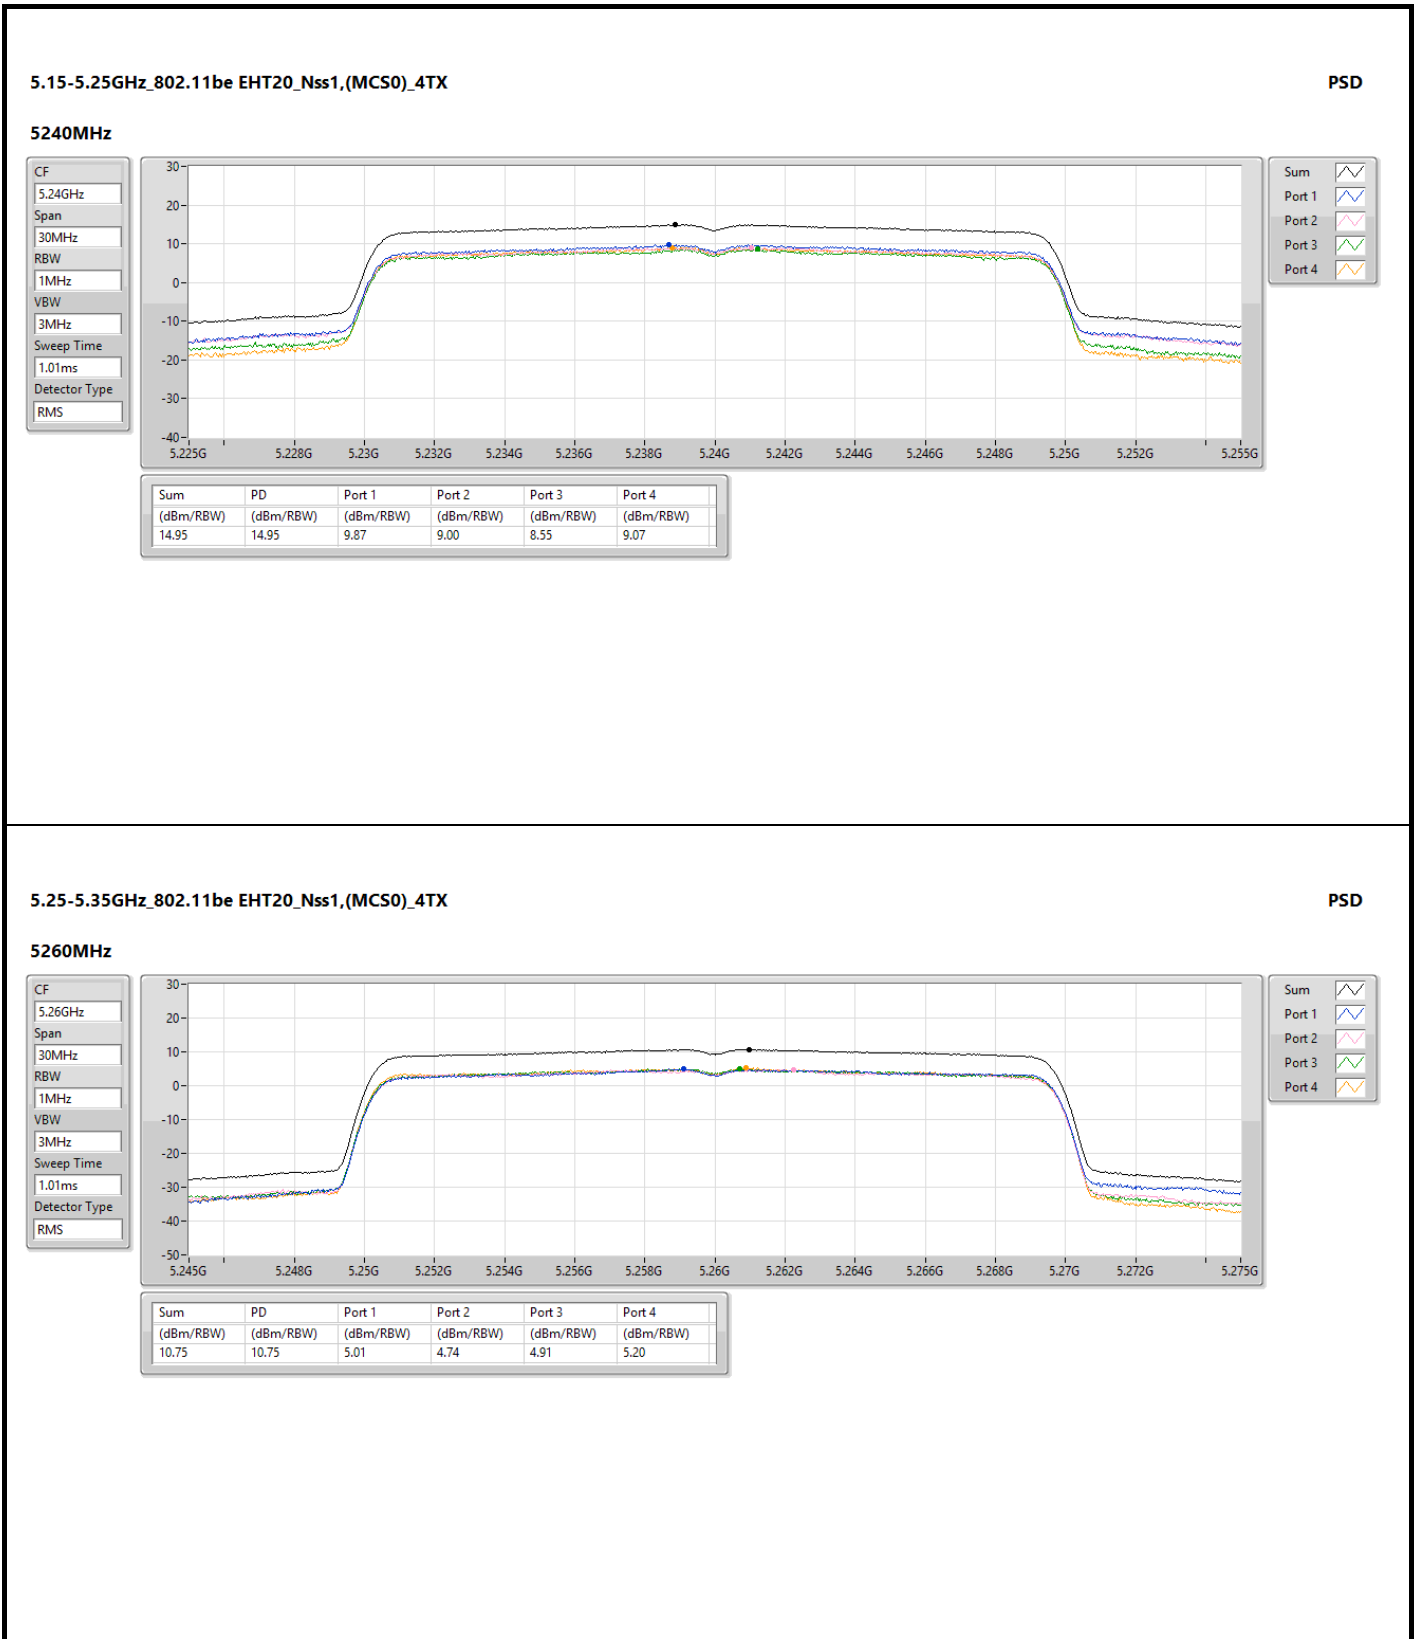


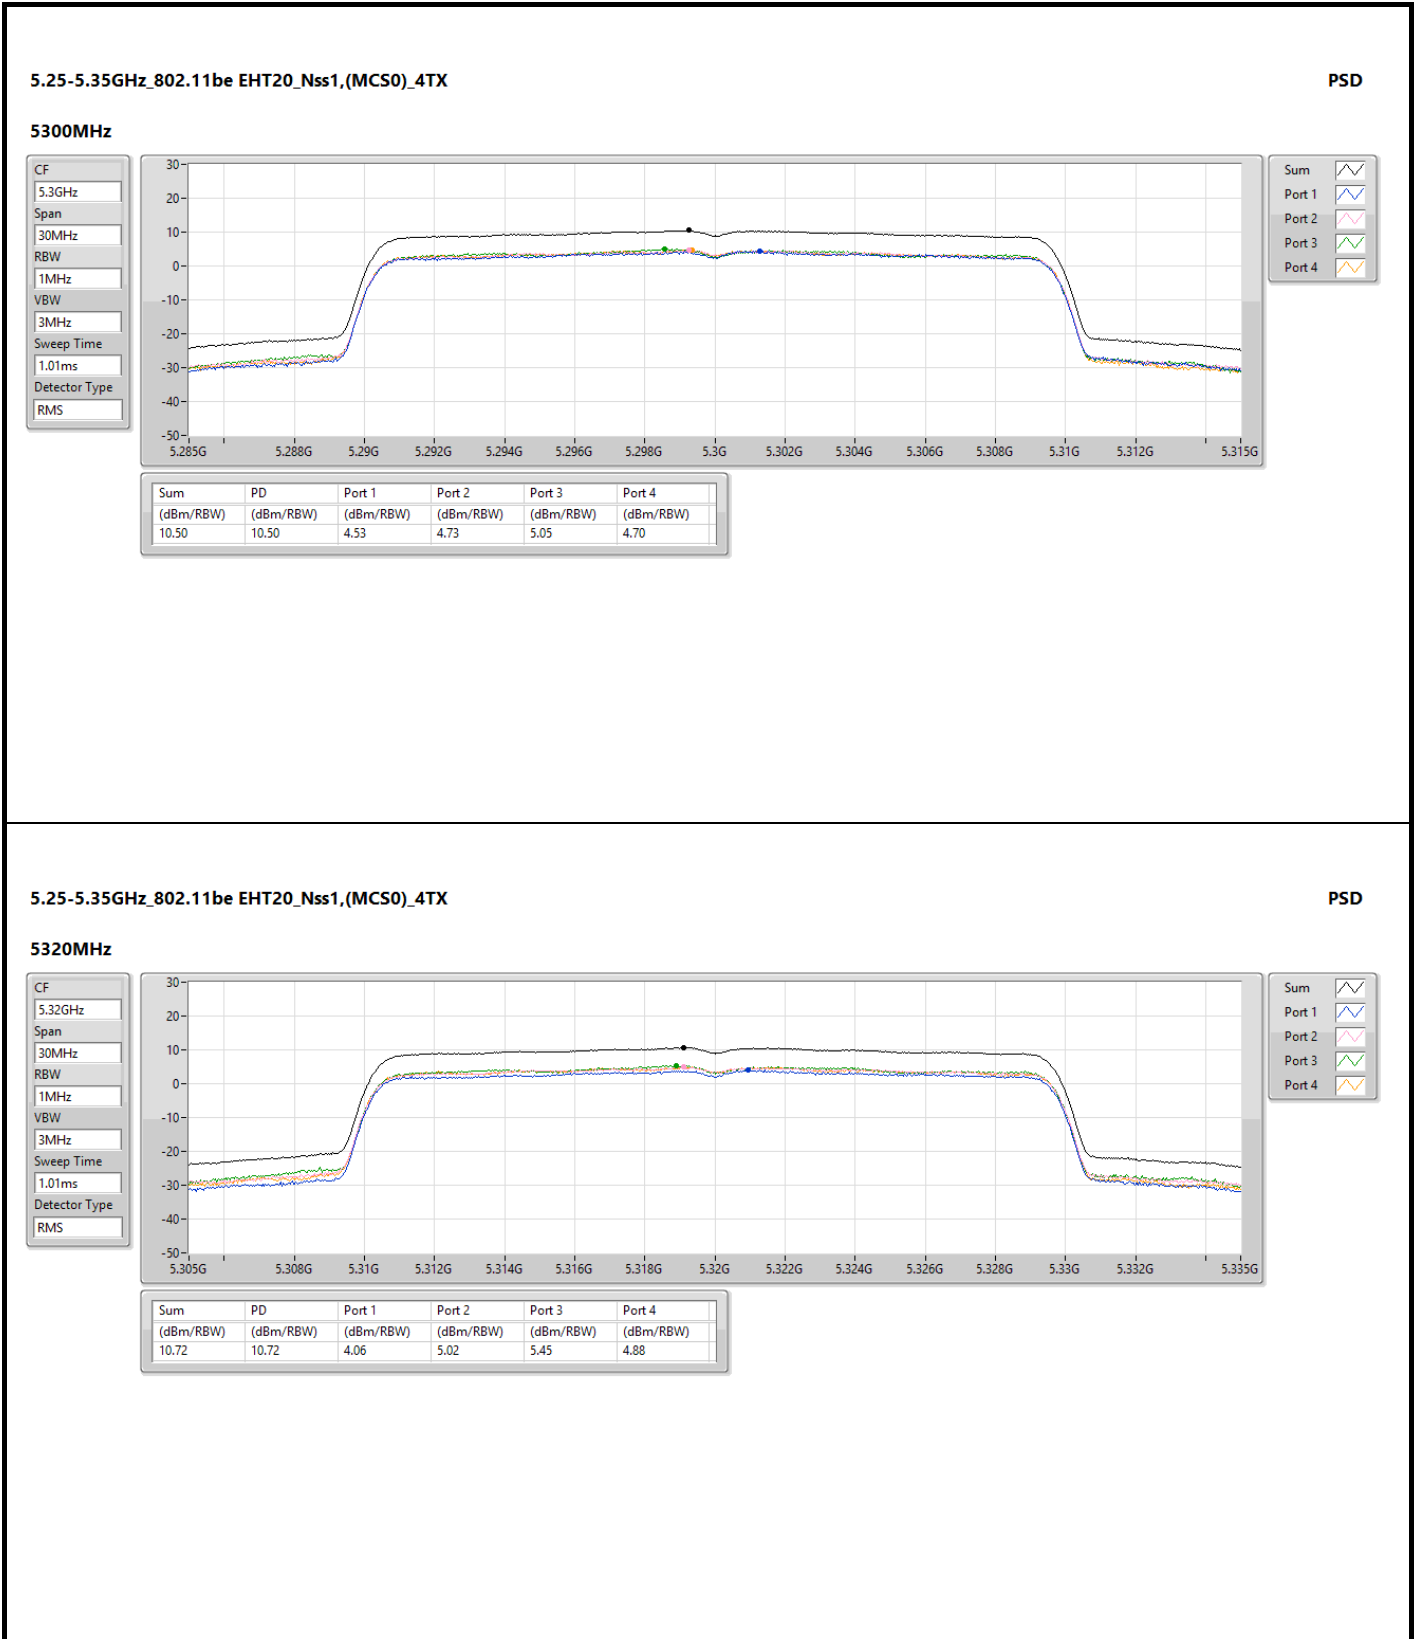


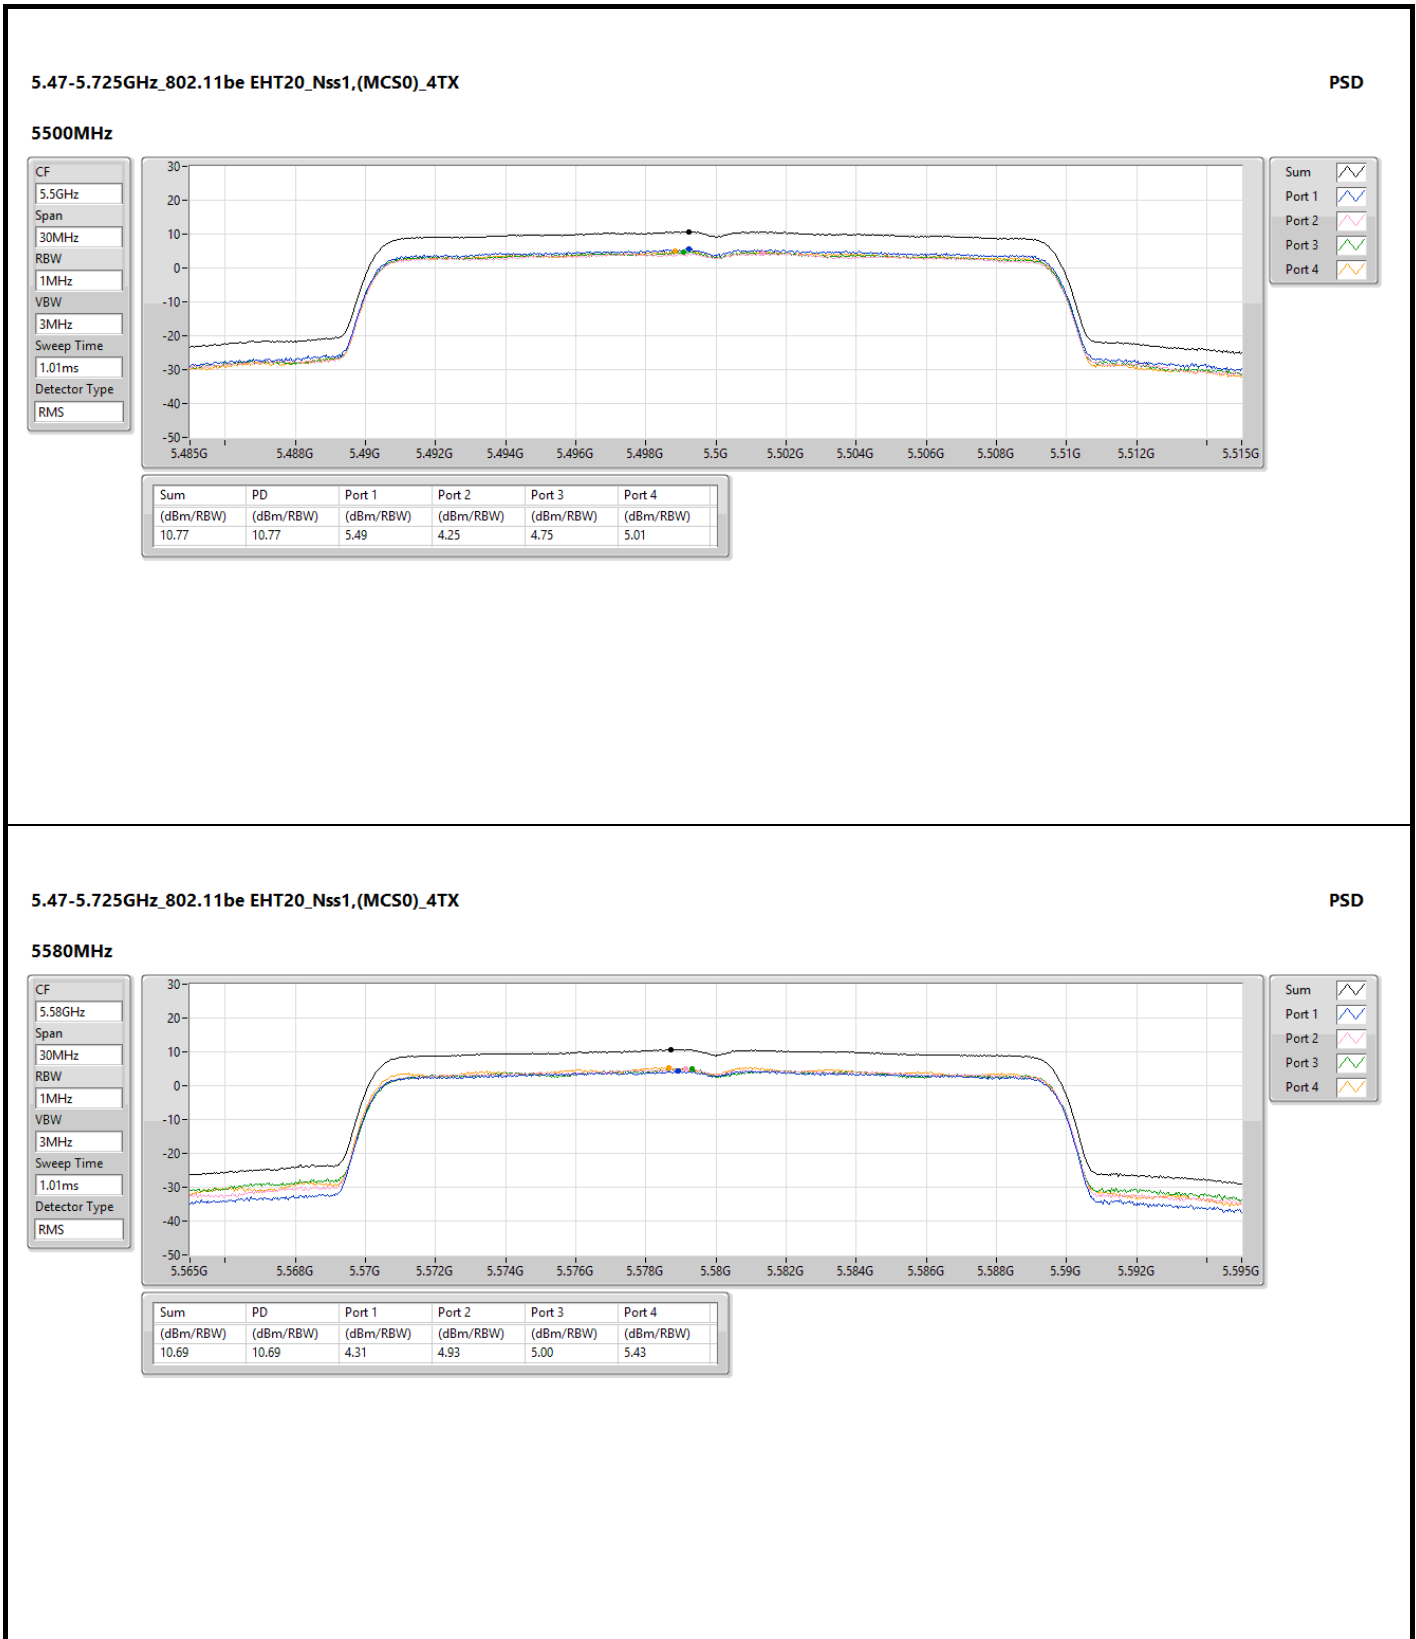


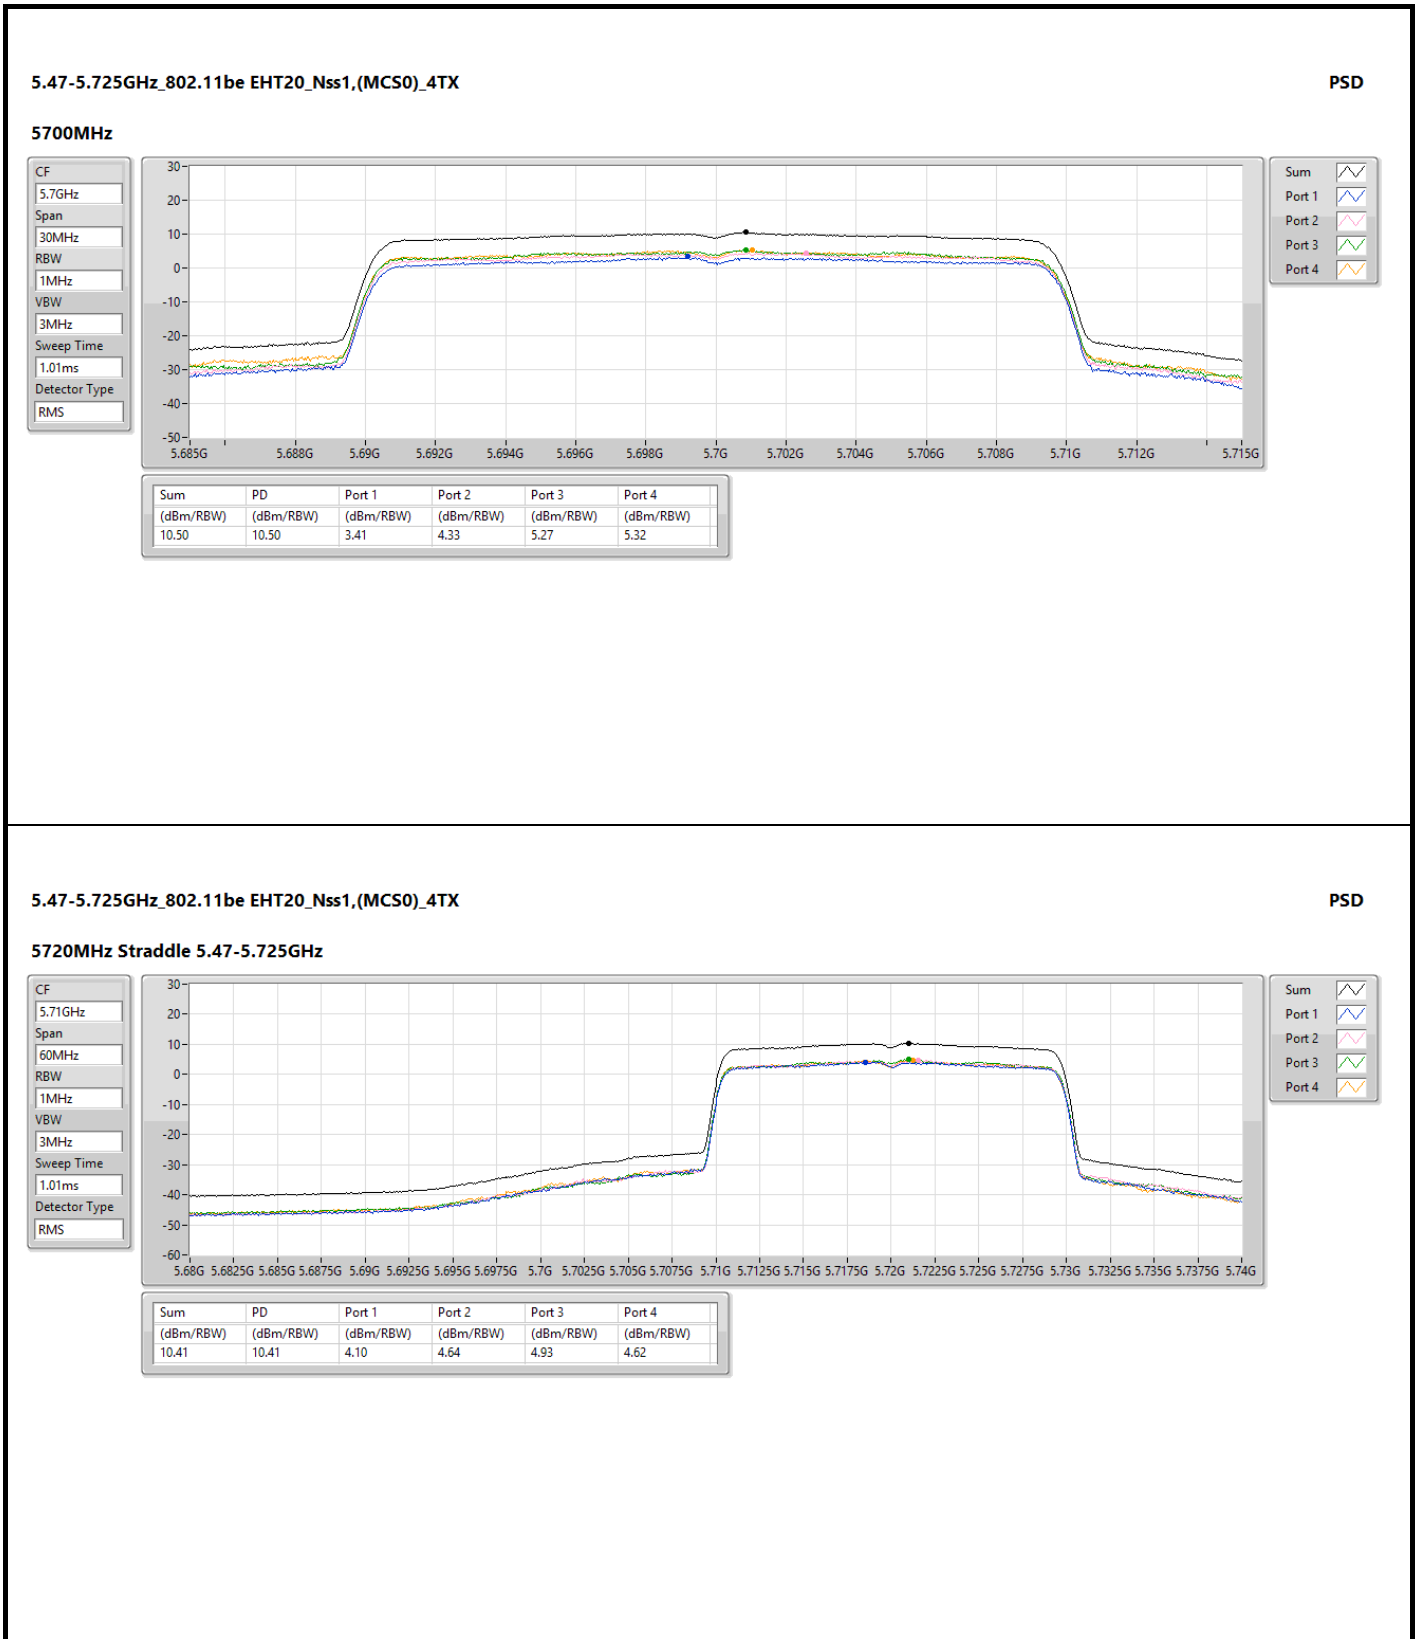






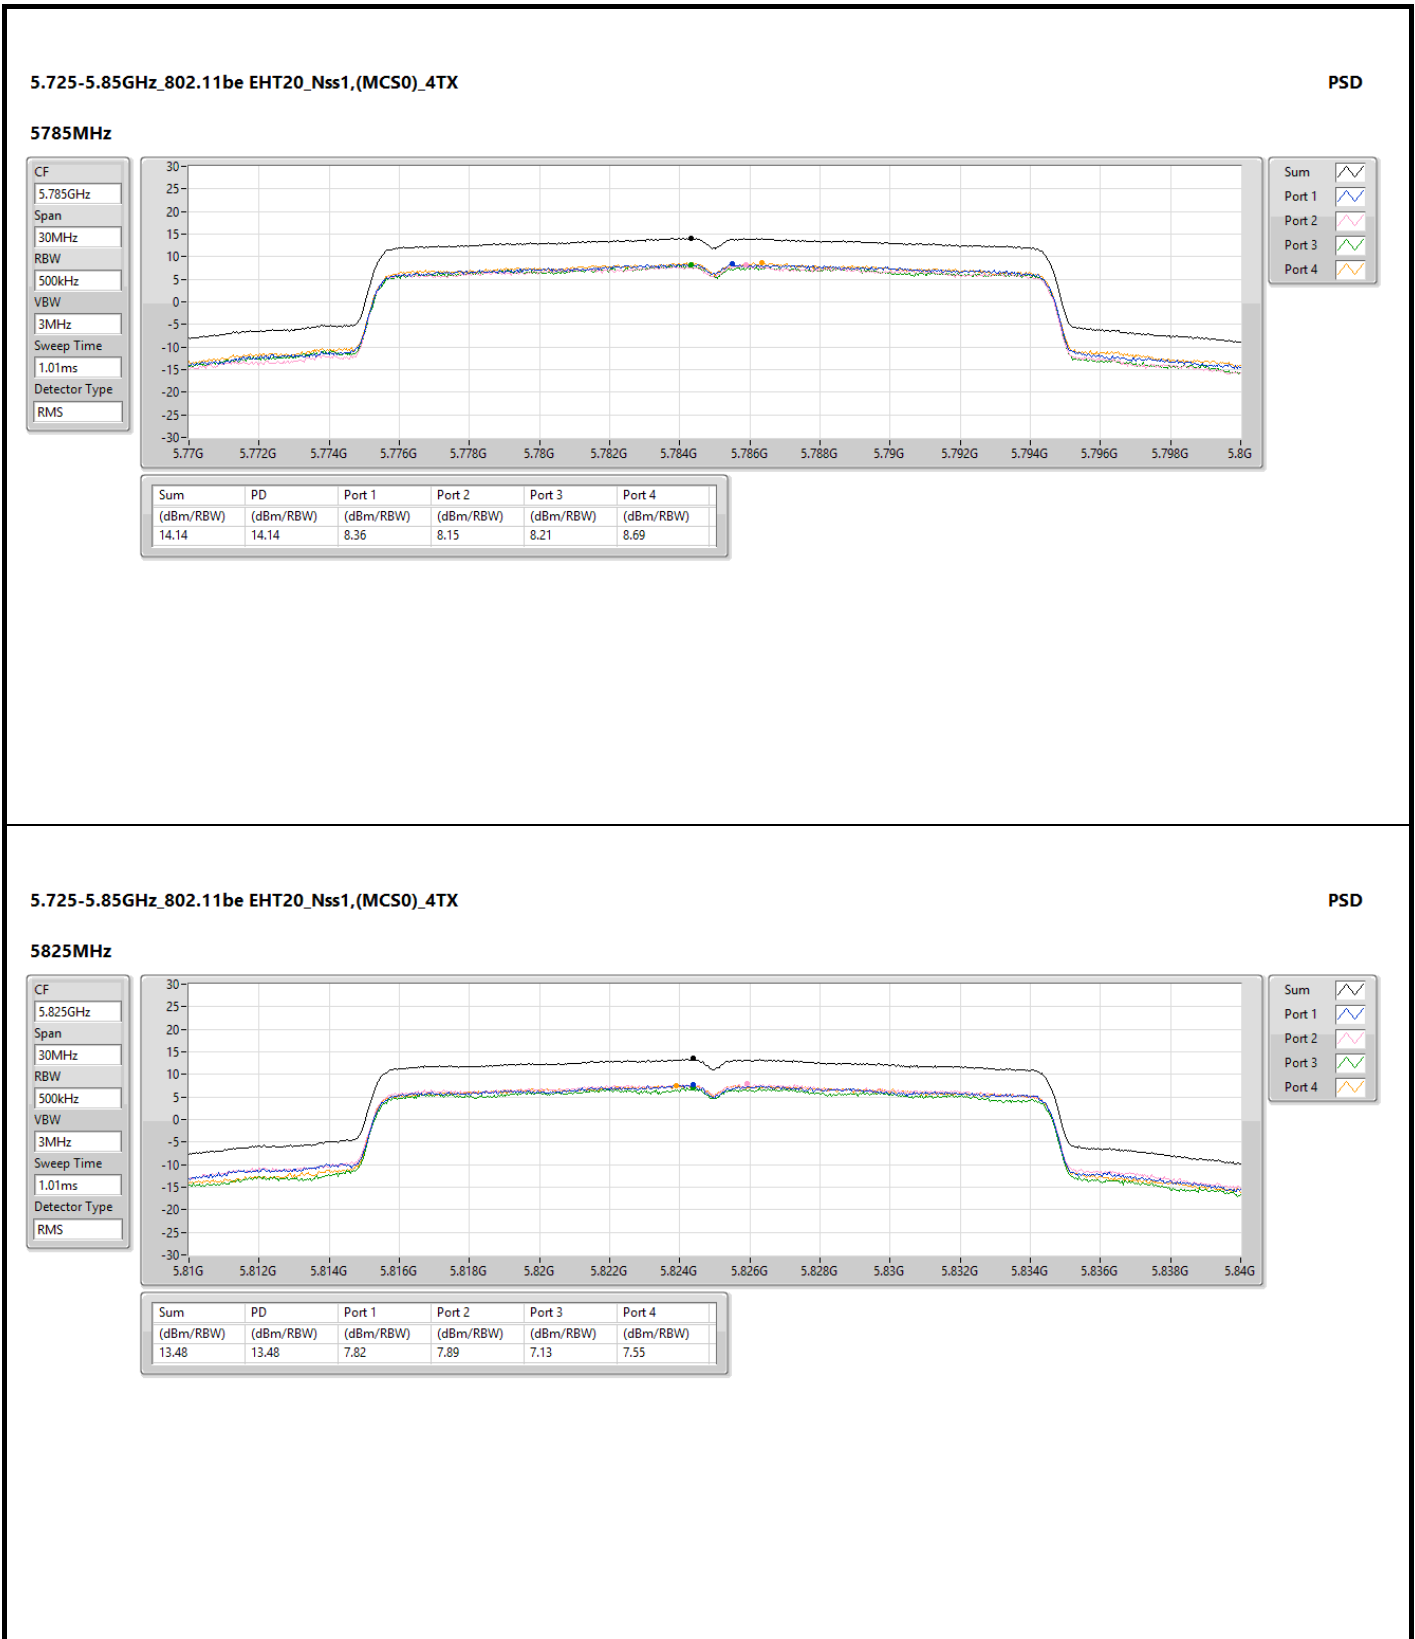


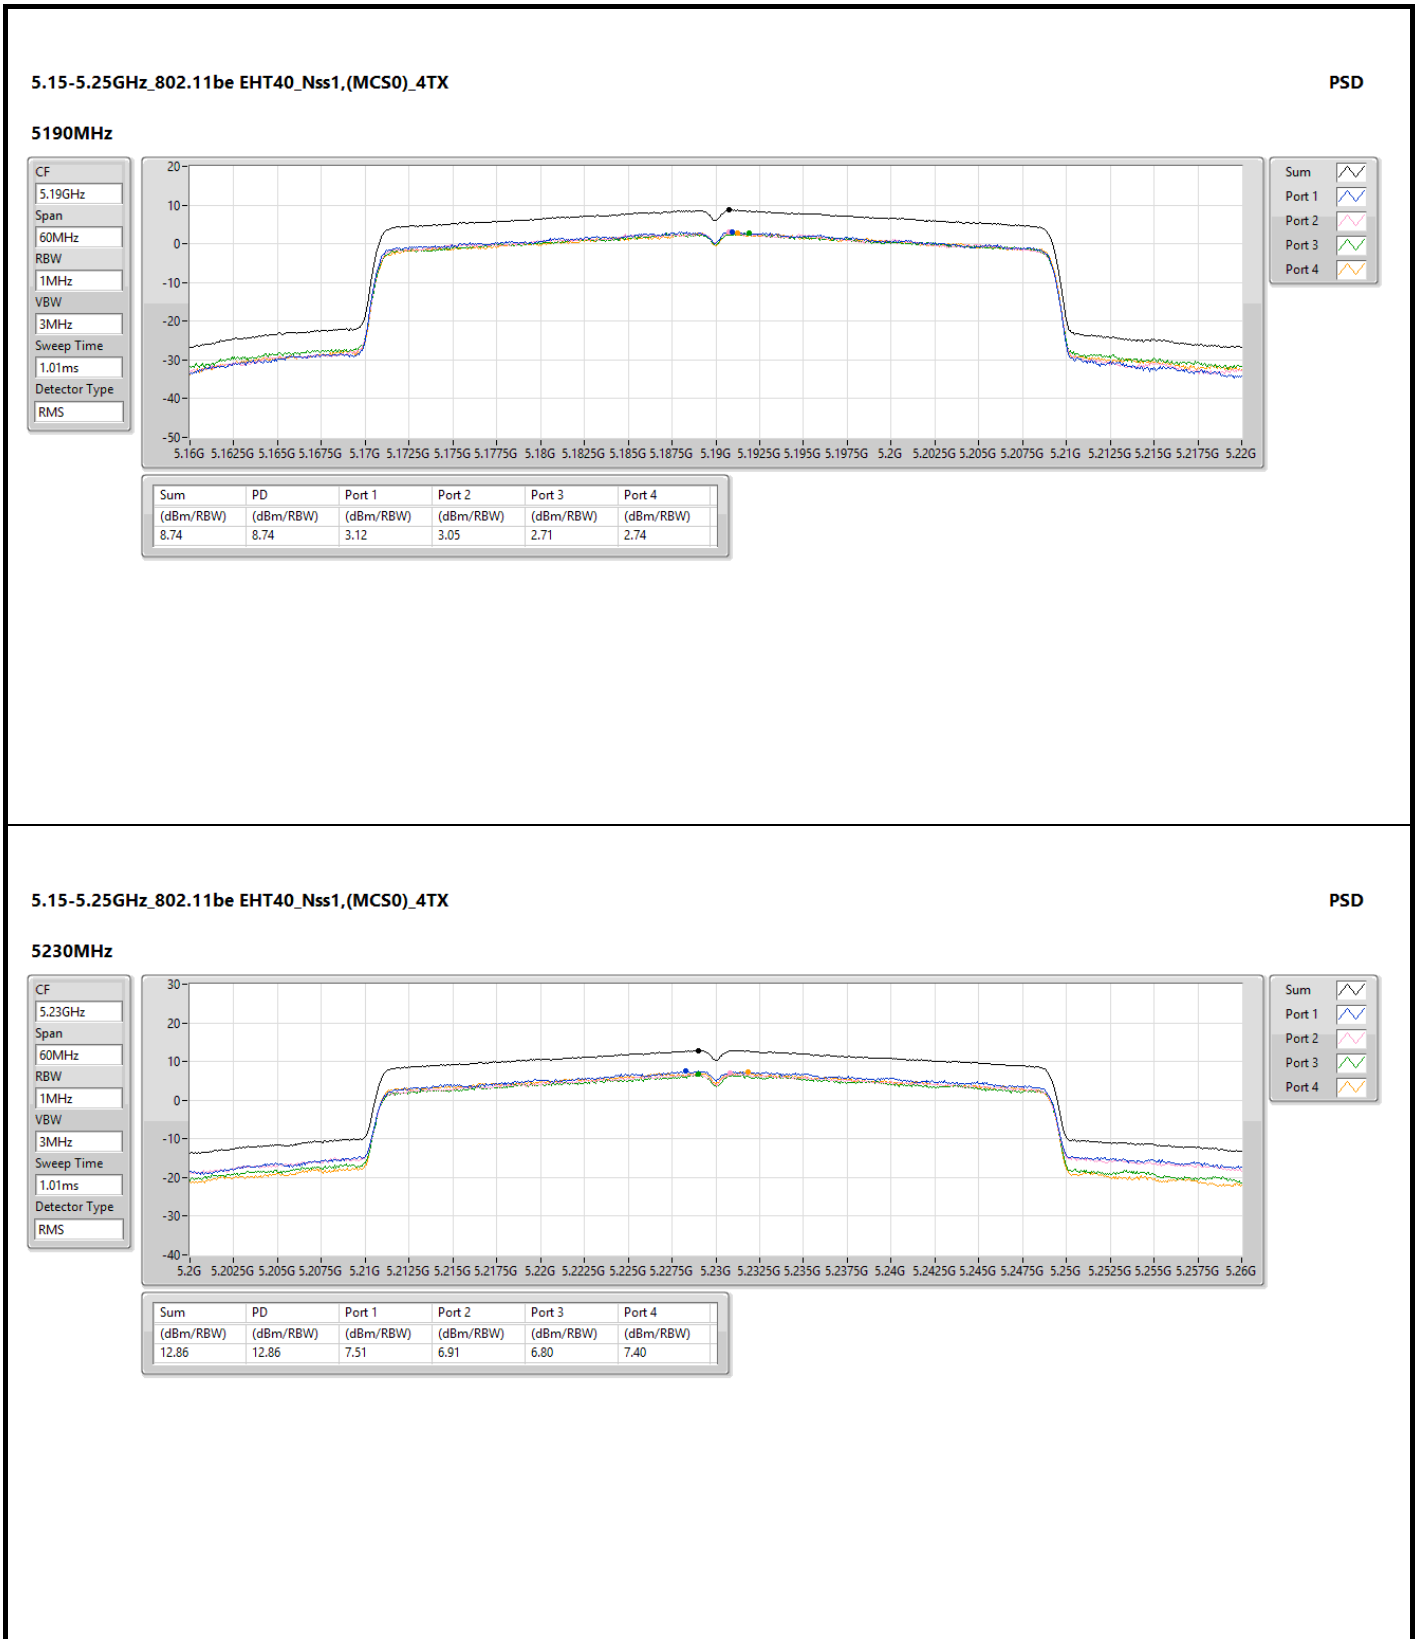



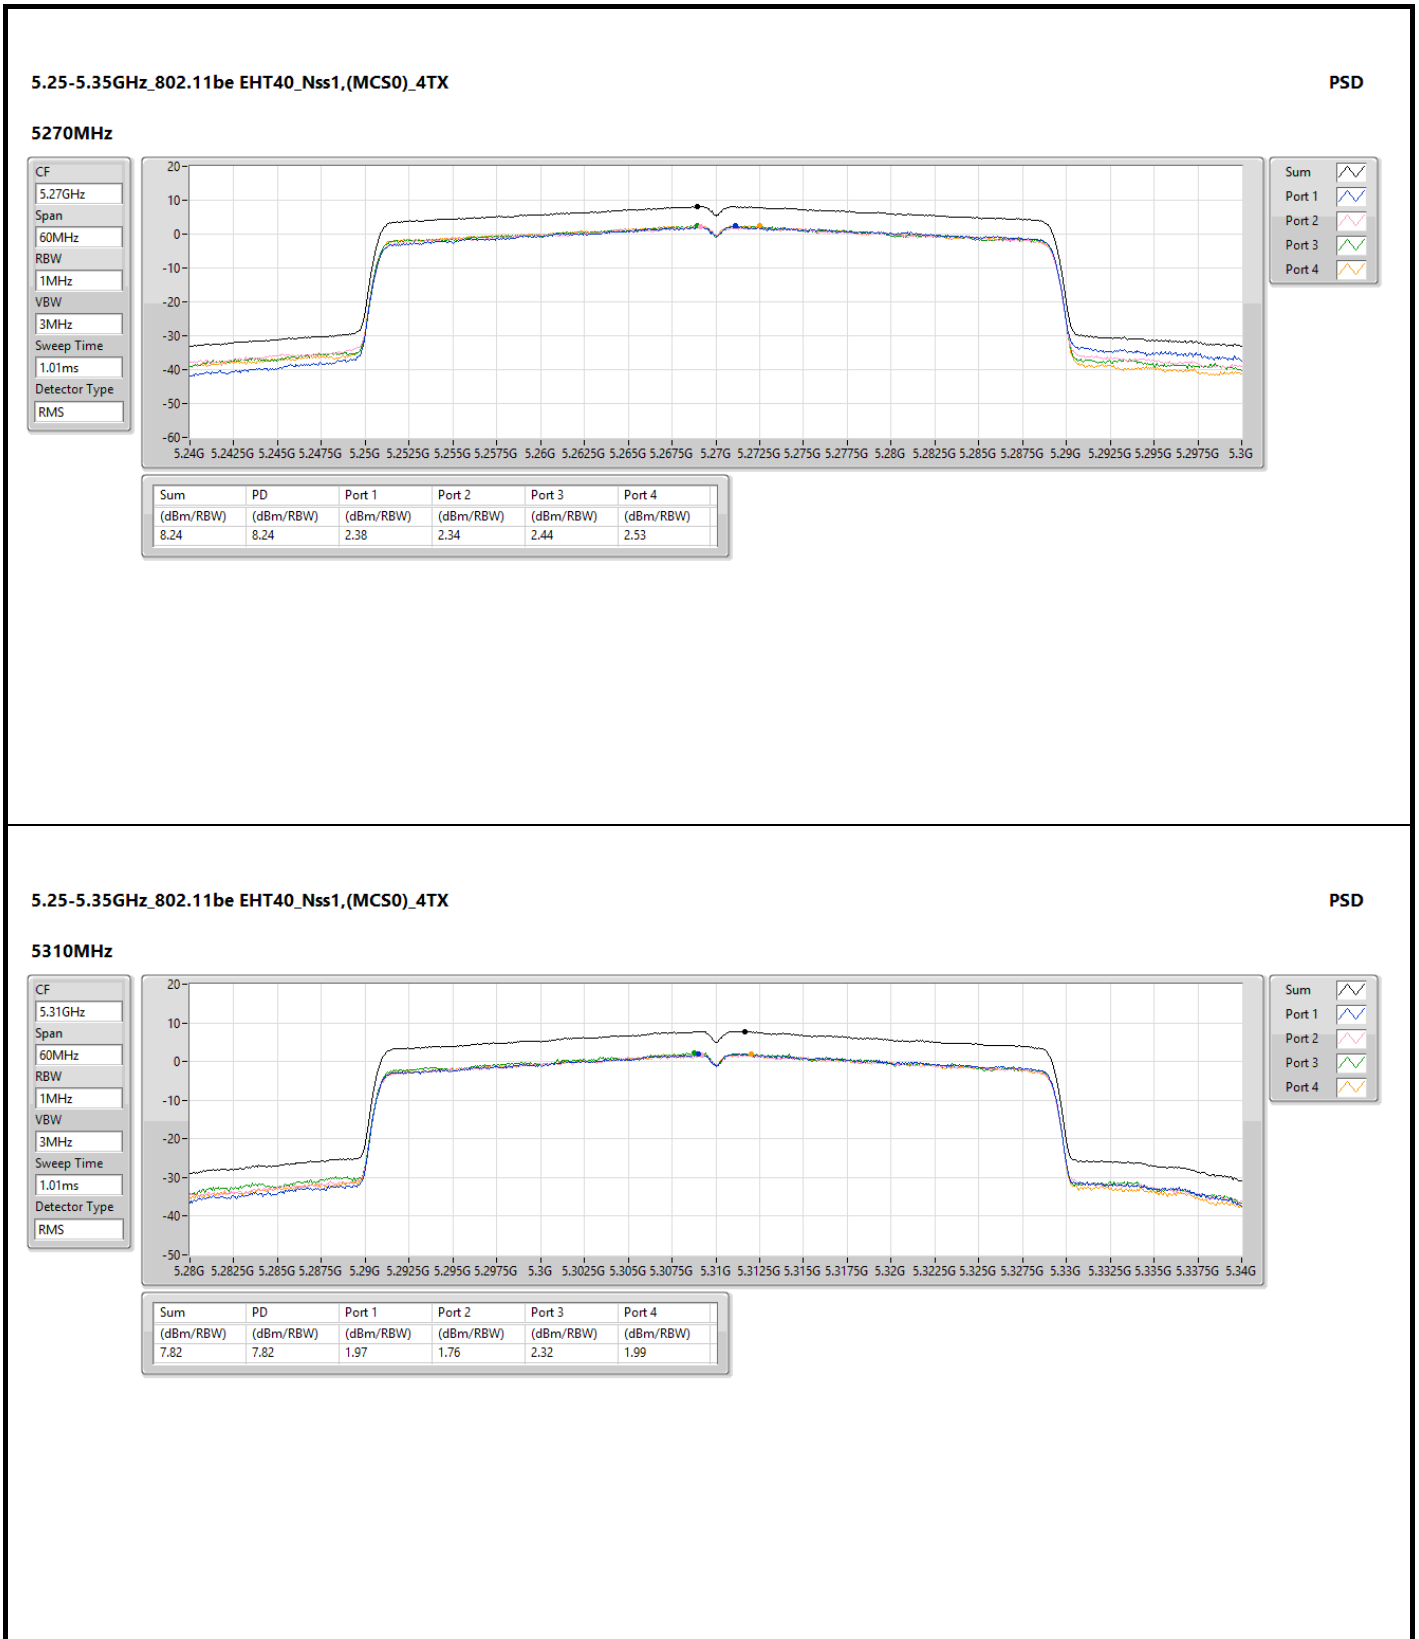


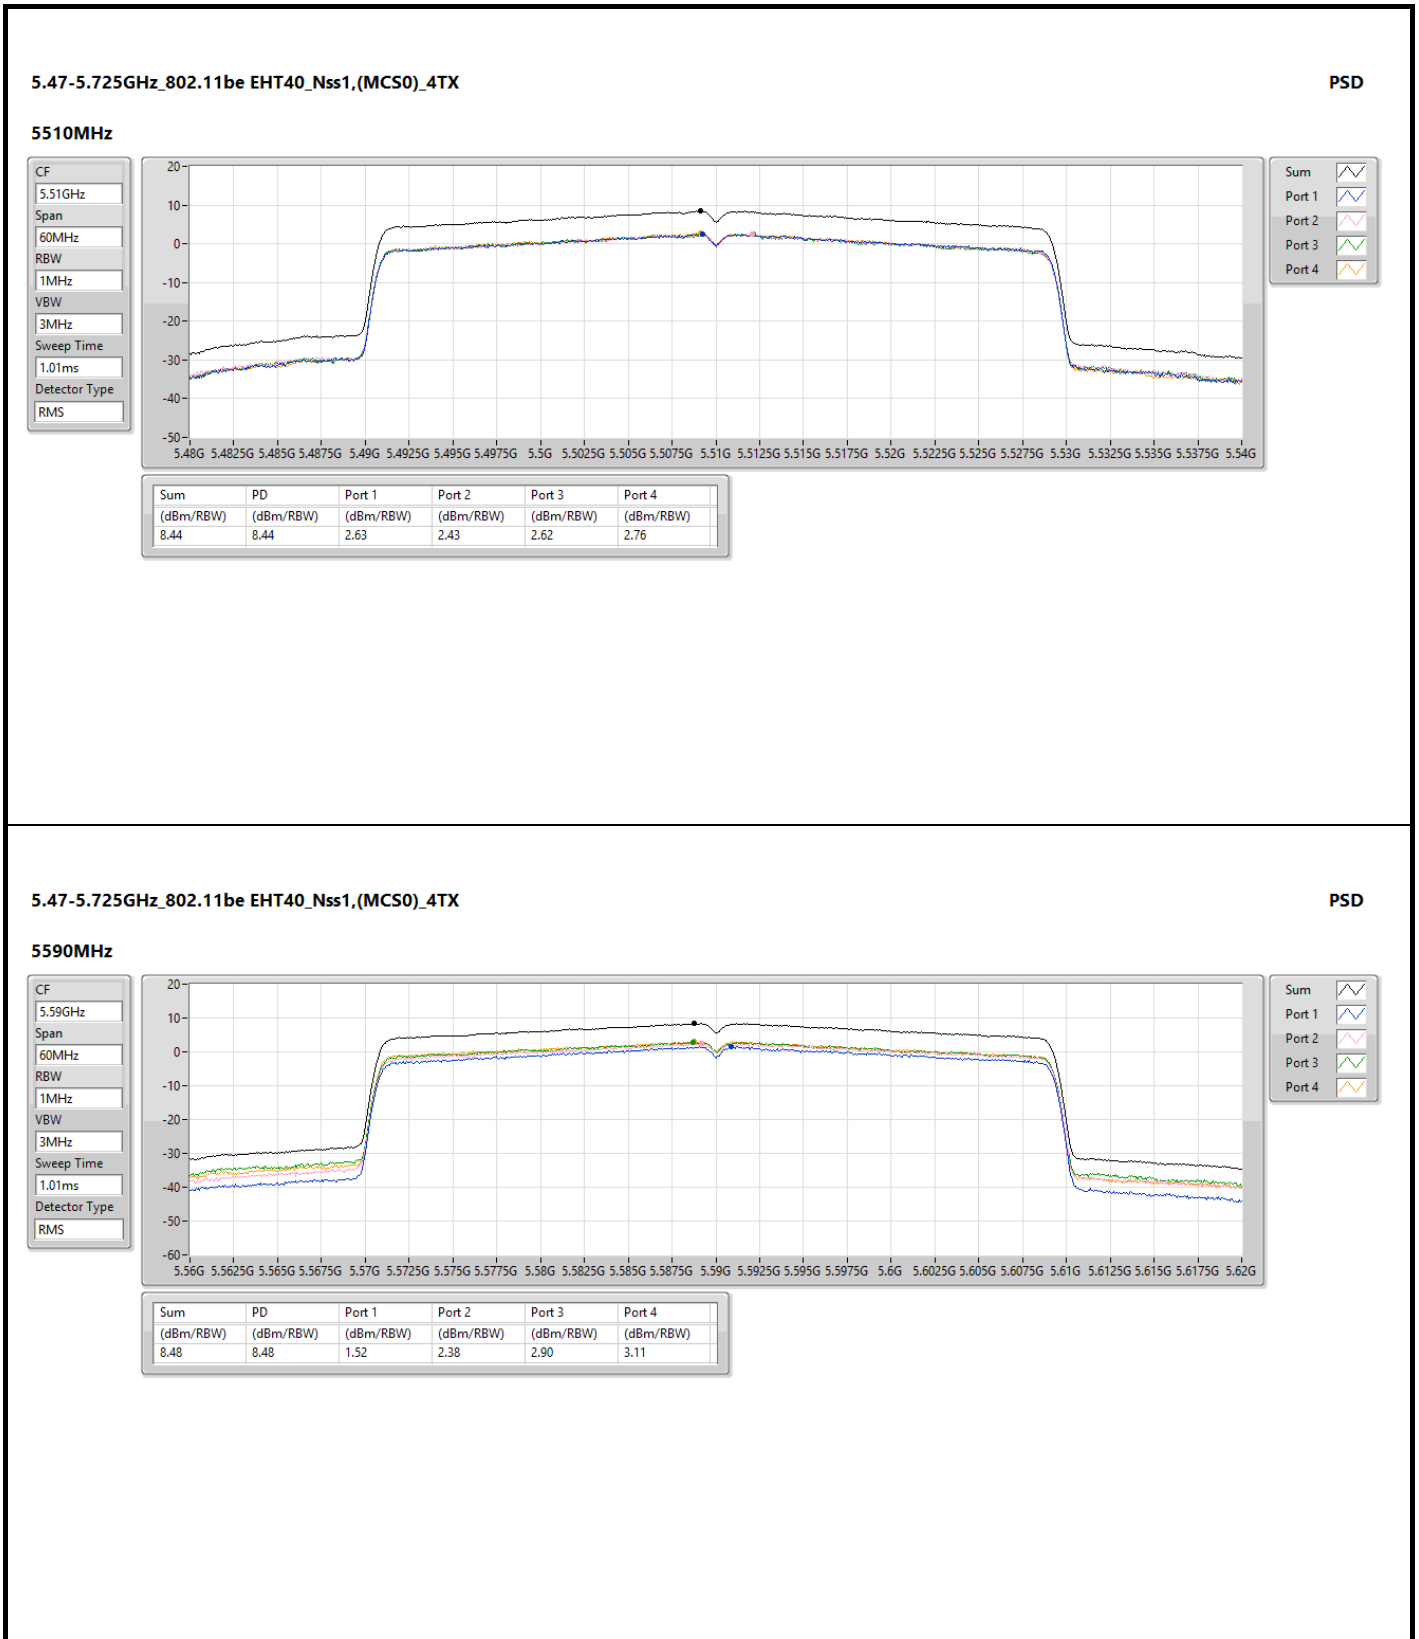

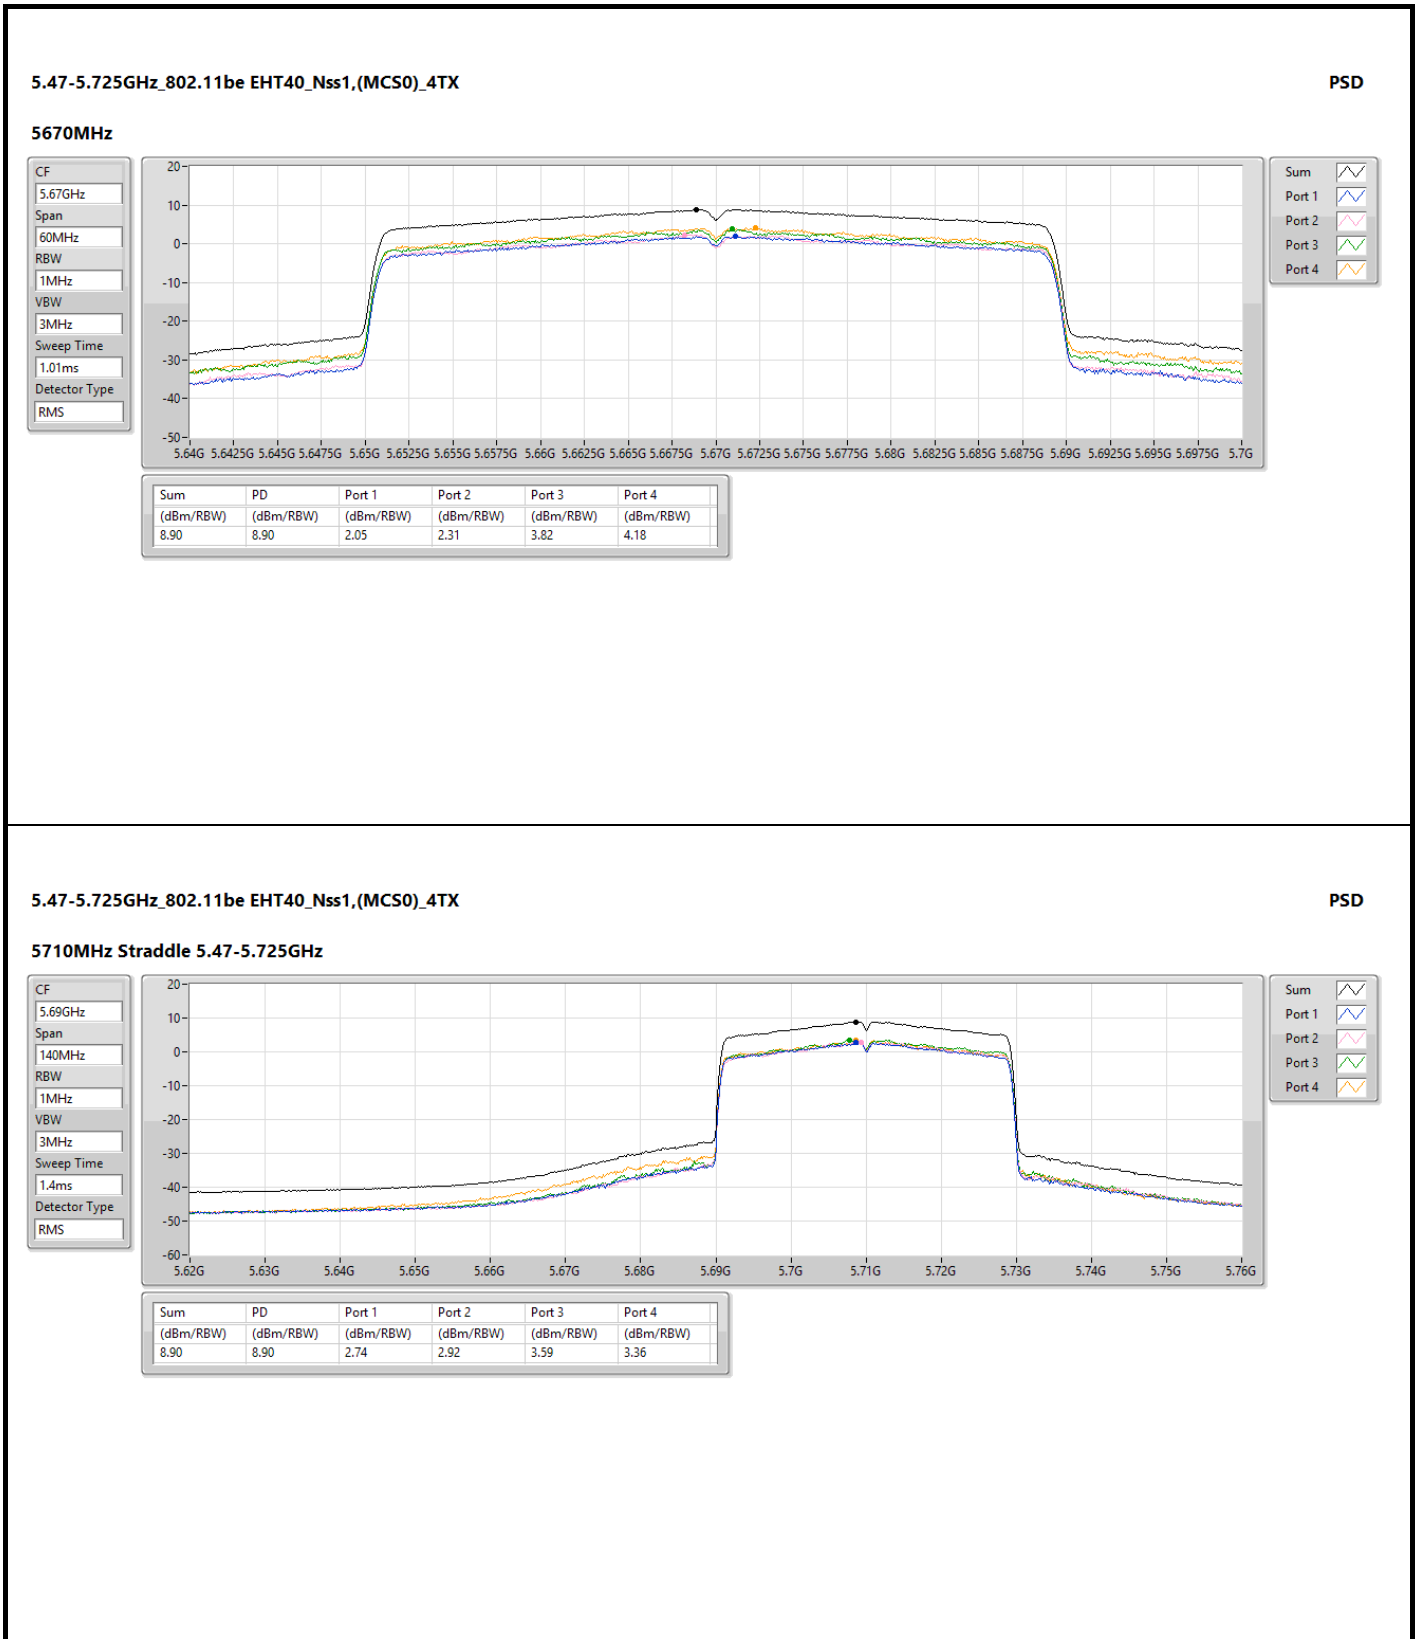


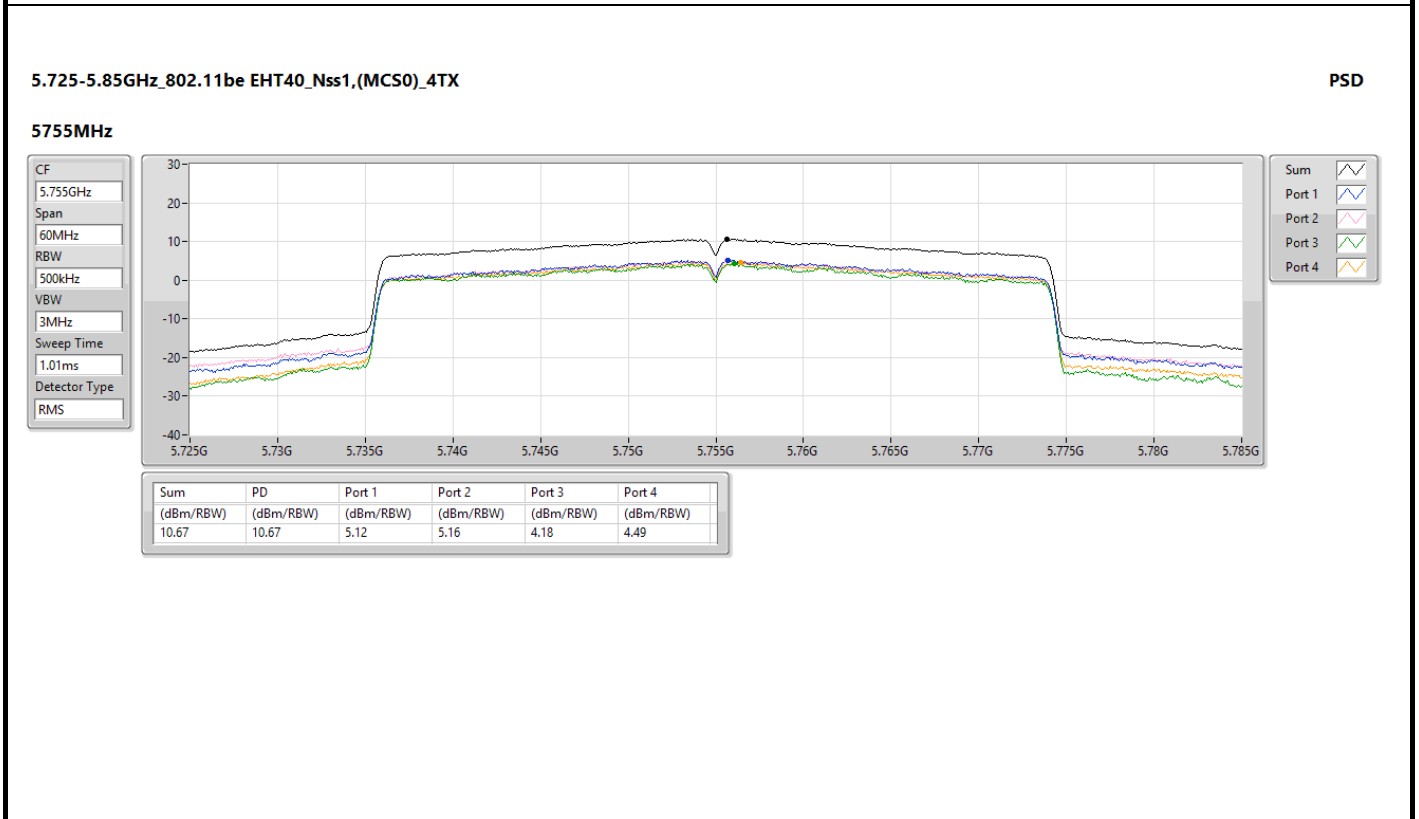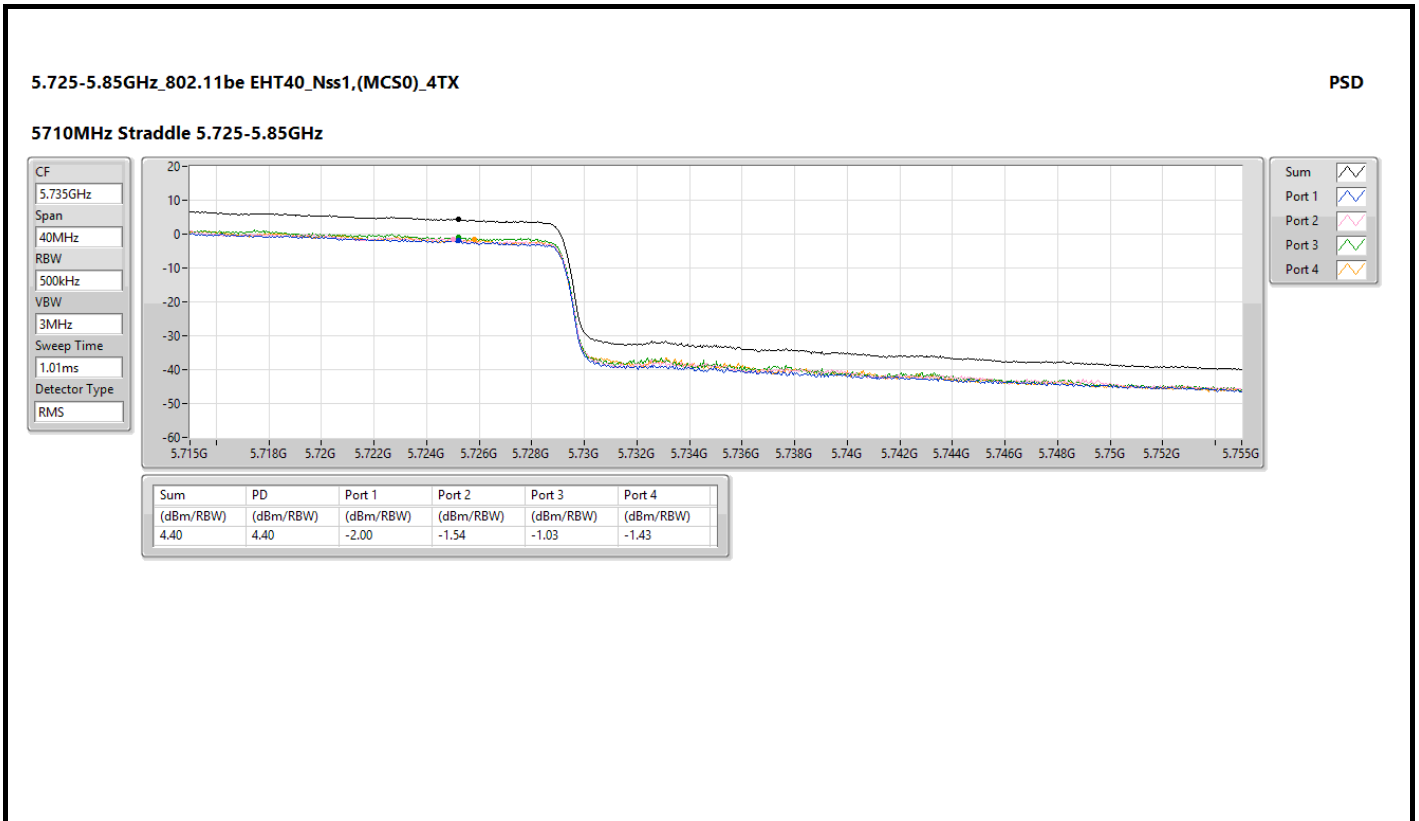

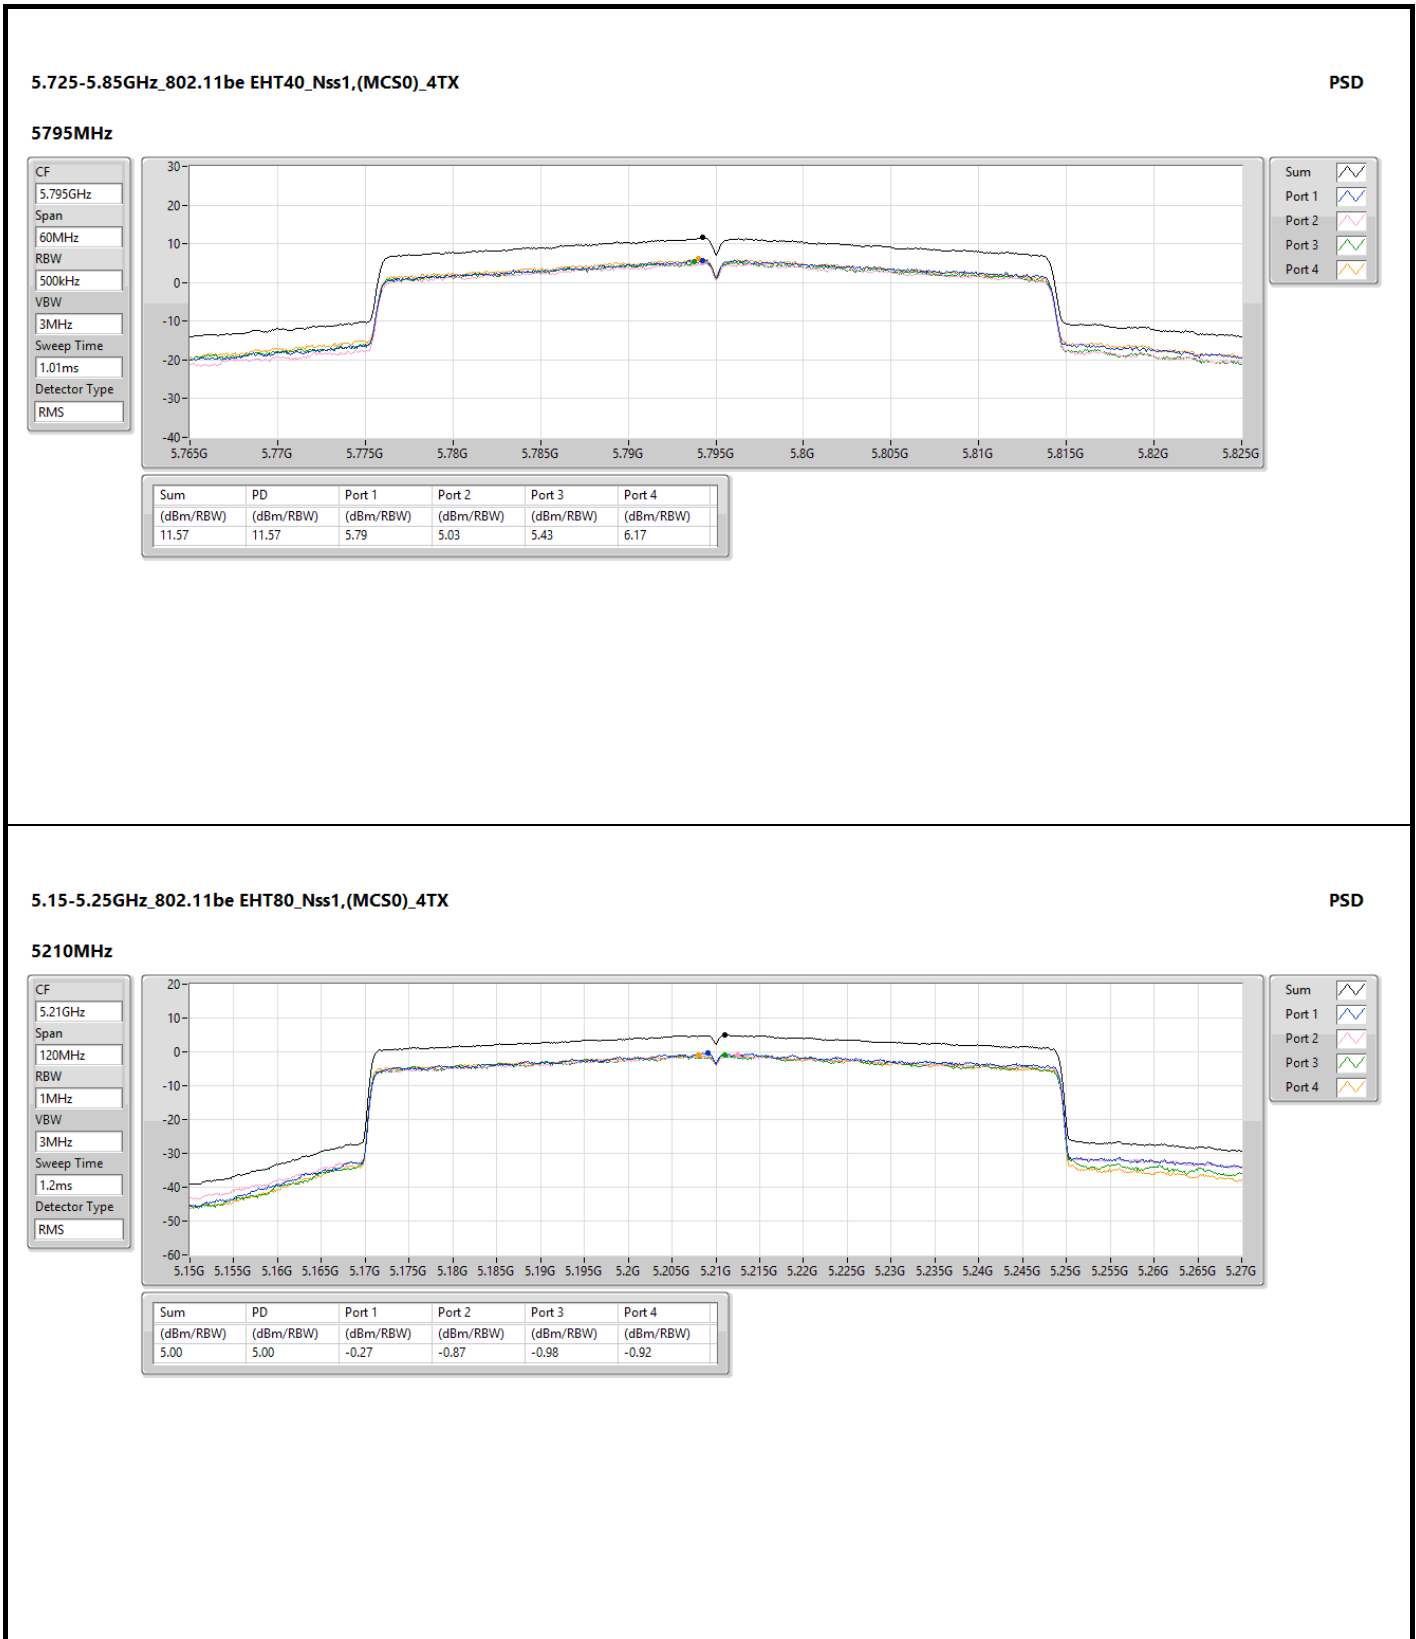

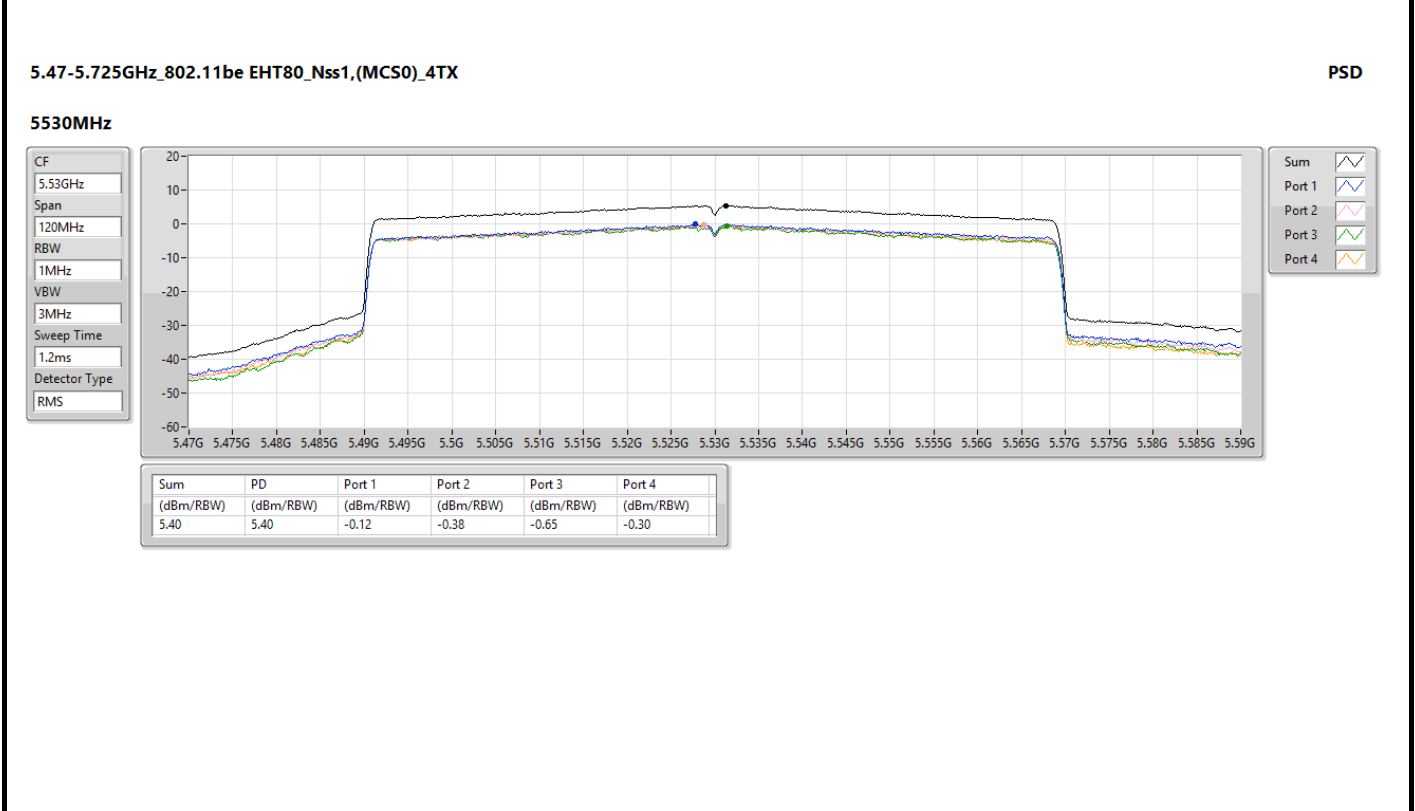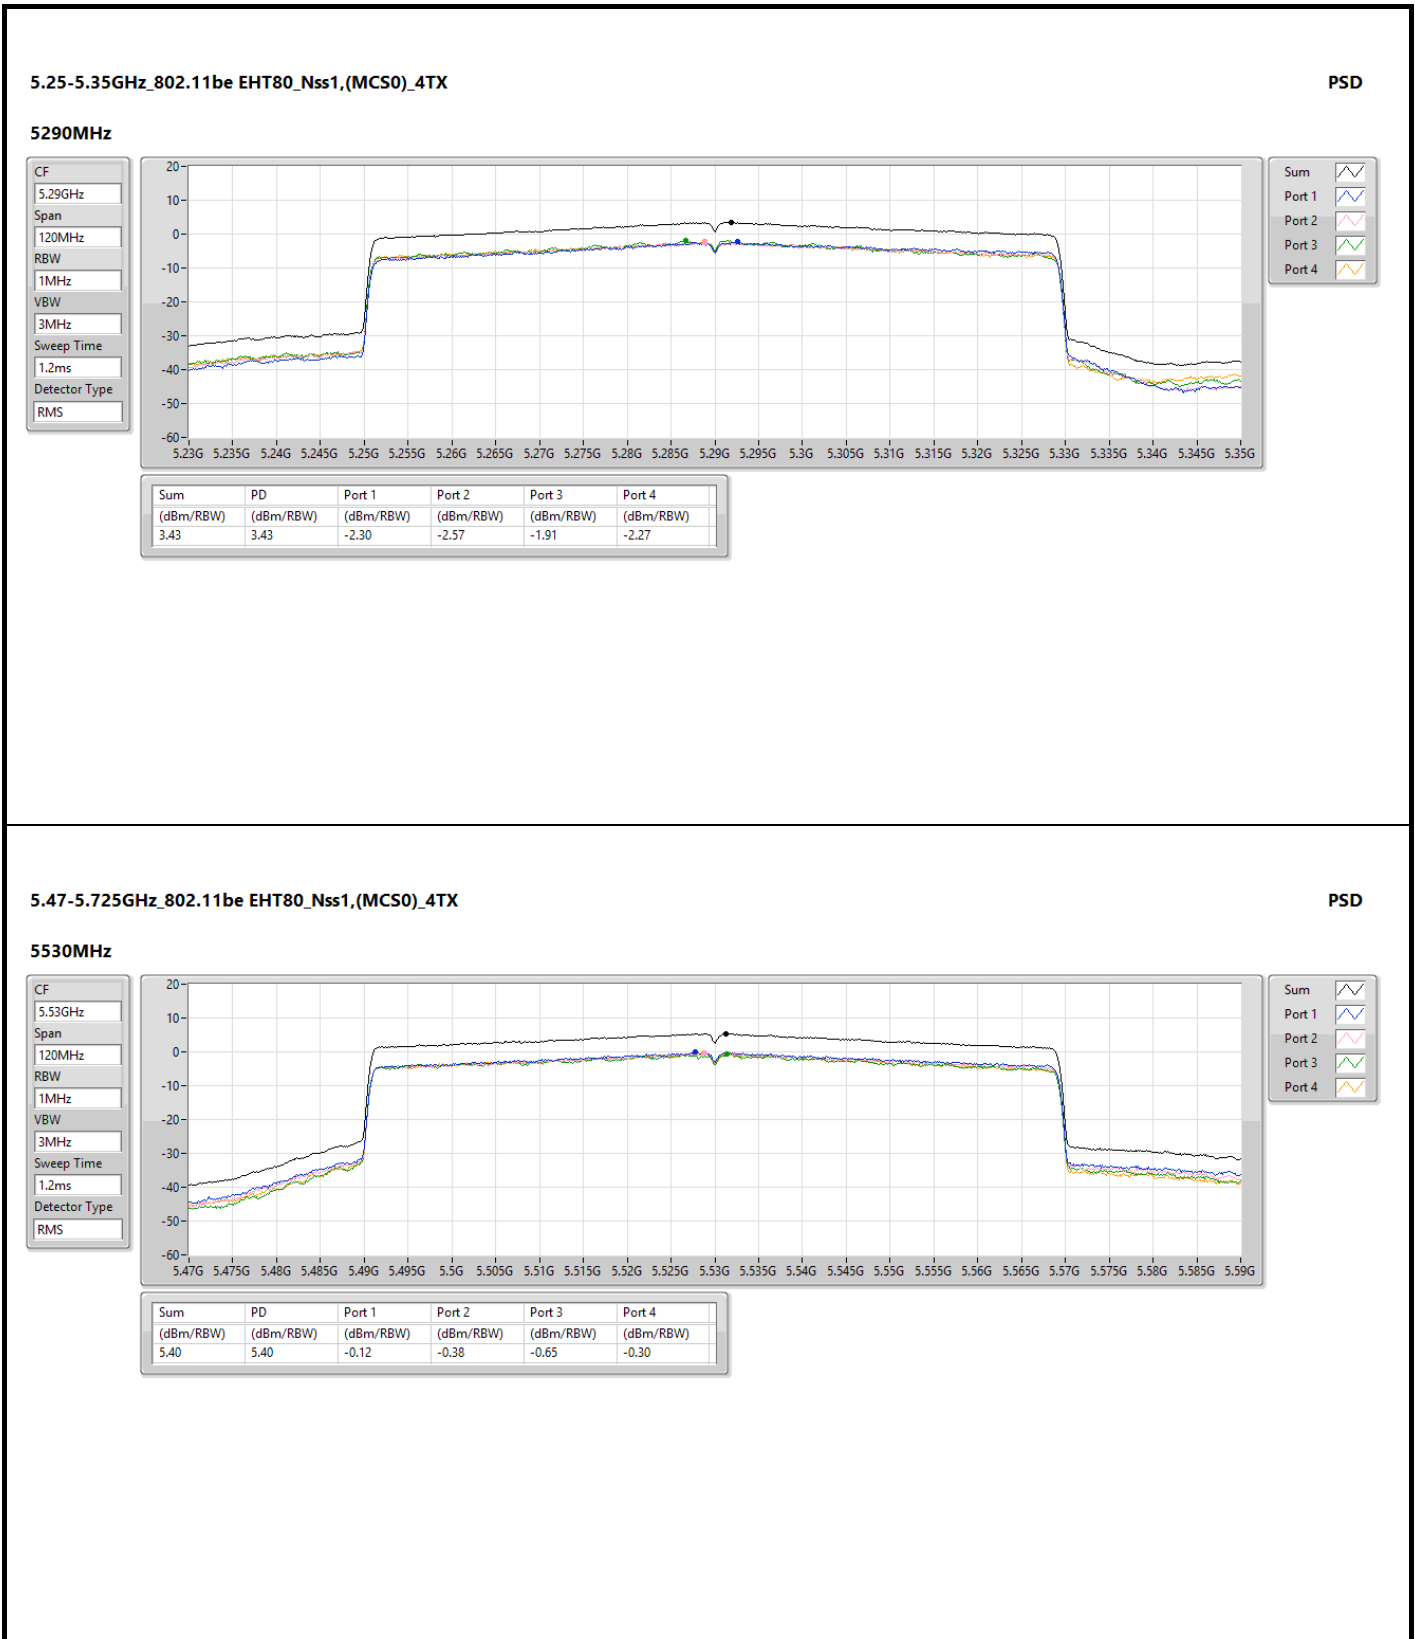



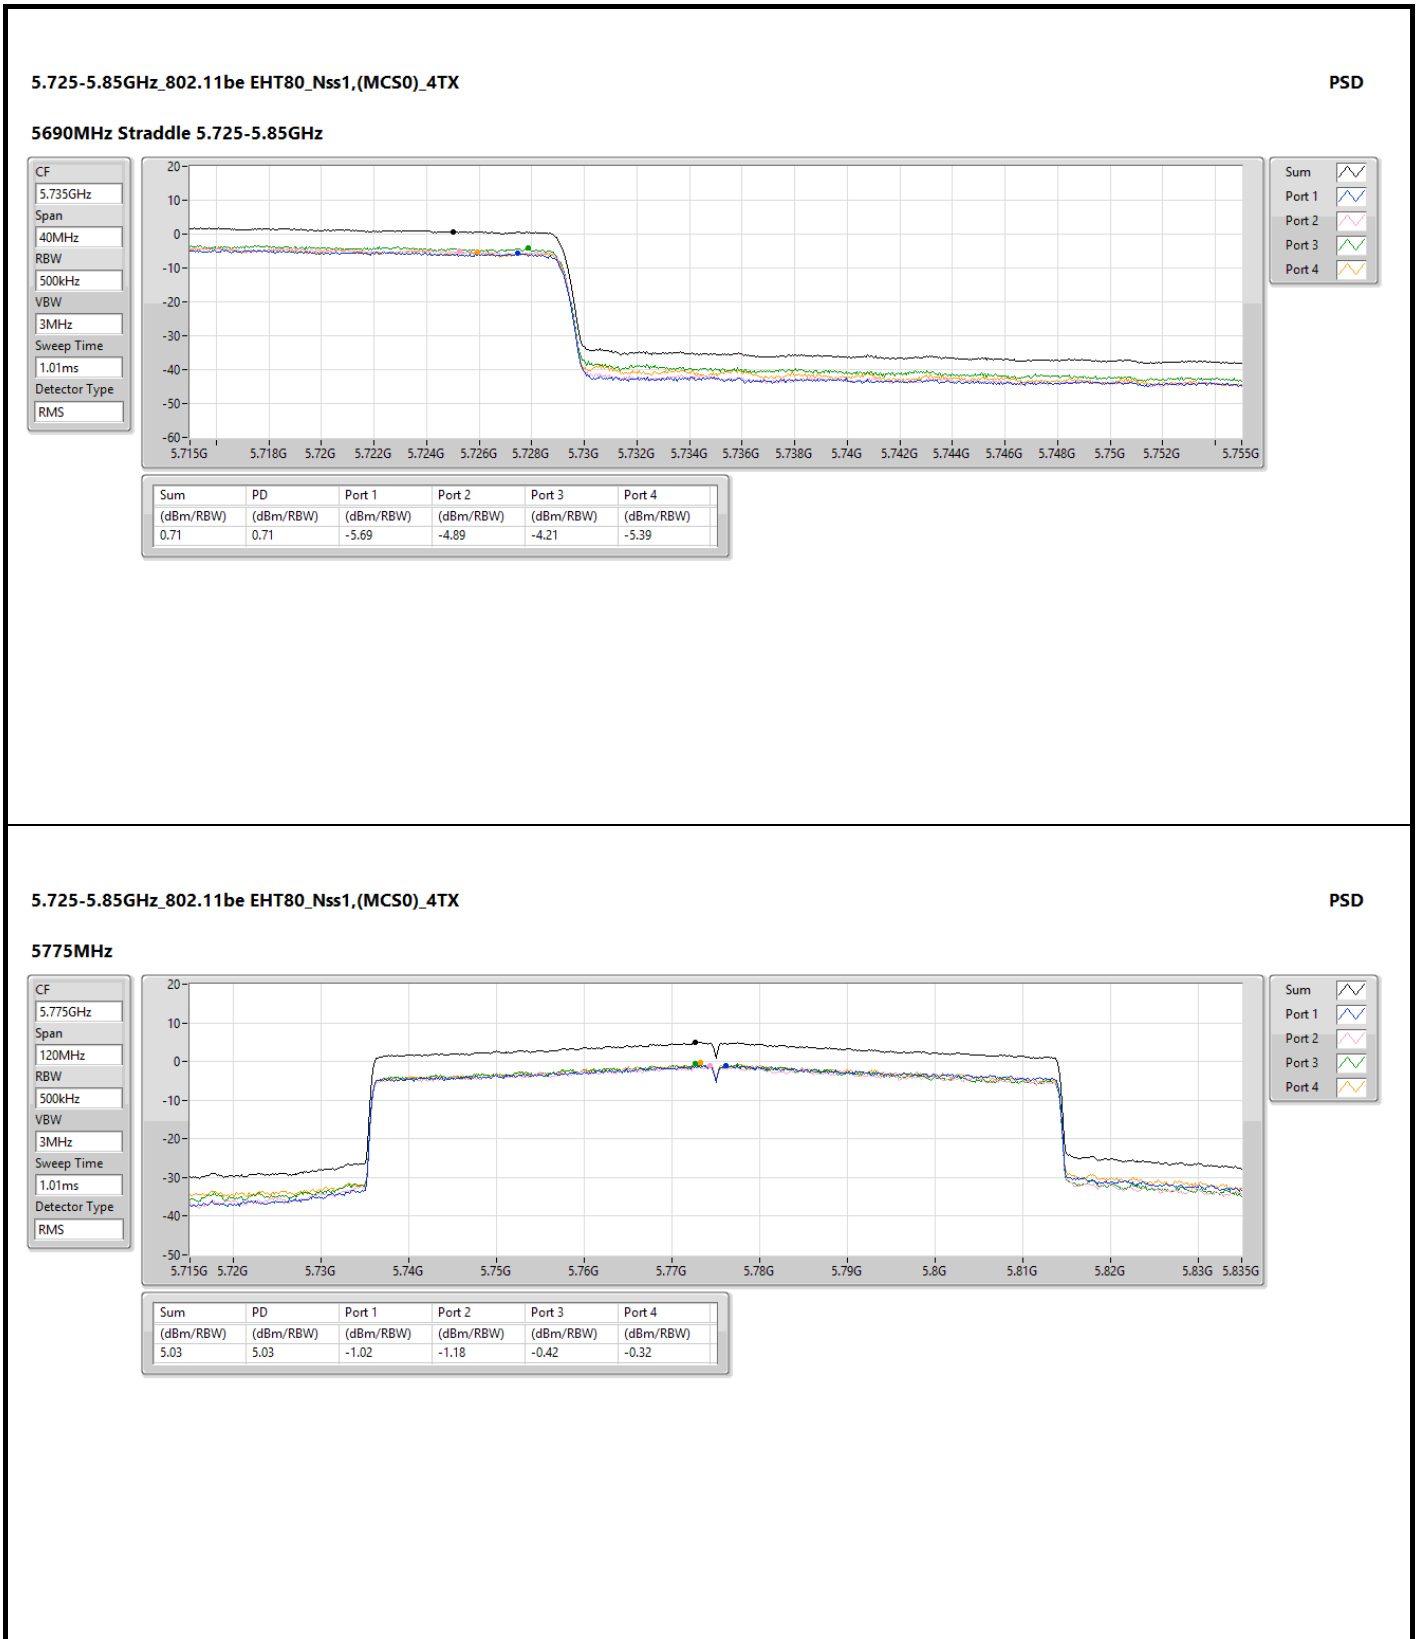

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX PSD

CF
5.775GHz

Span
120MHz

RBW
500kHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.03	5.03	-1.02	-1.18	-0.42	-0.32


Sum


Port 1

Port 2

Port 3

Port 4

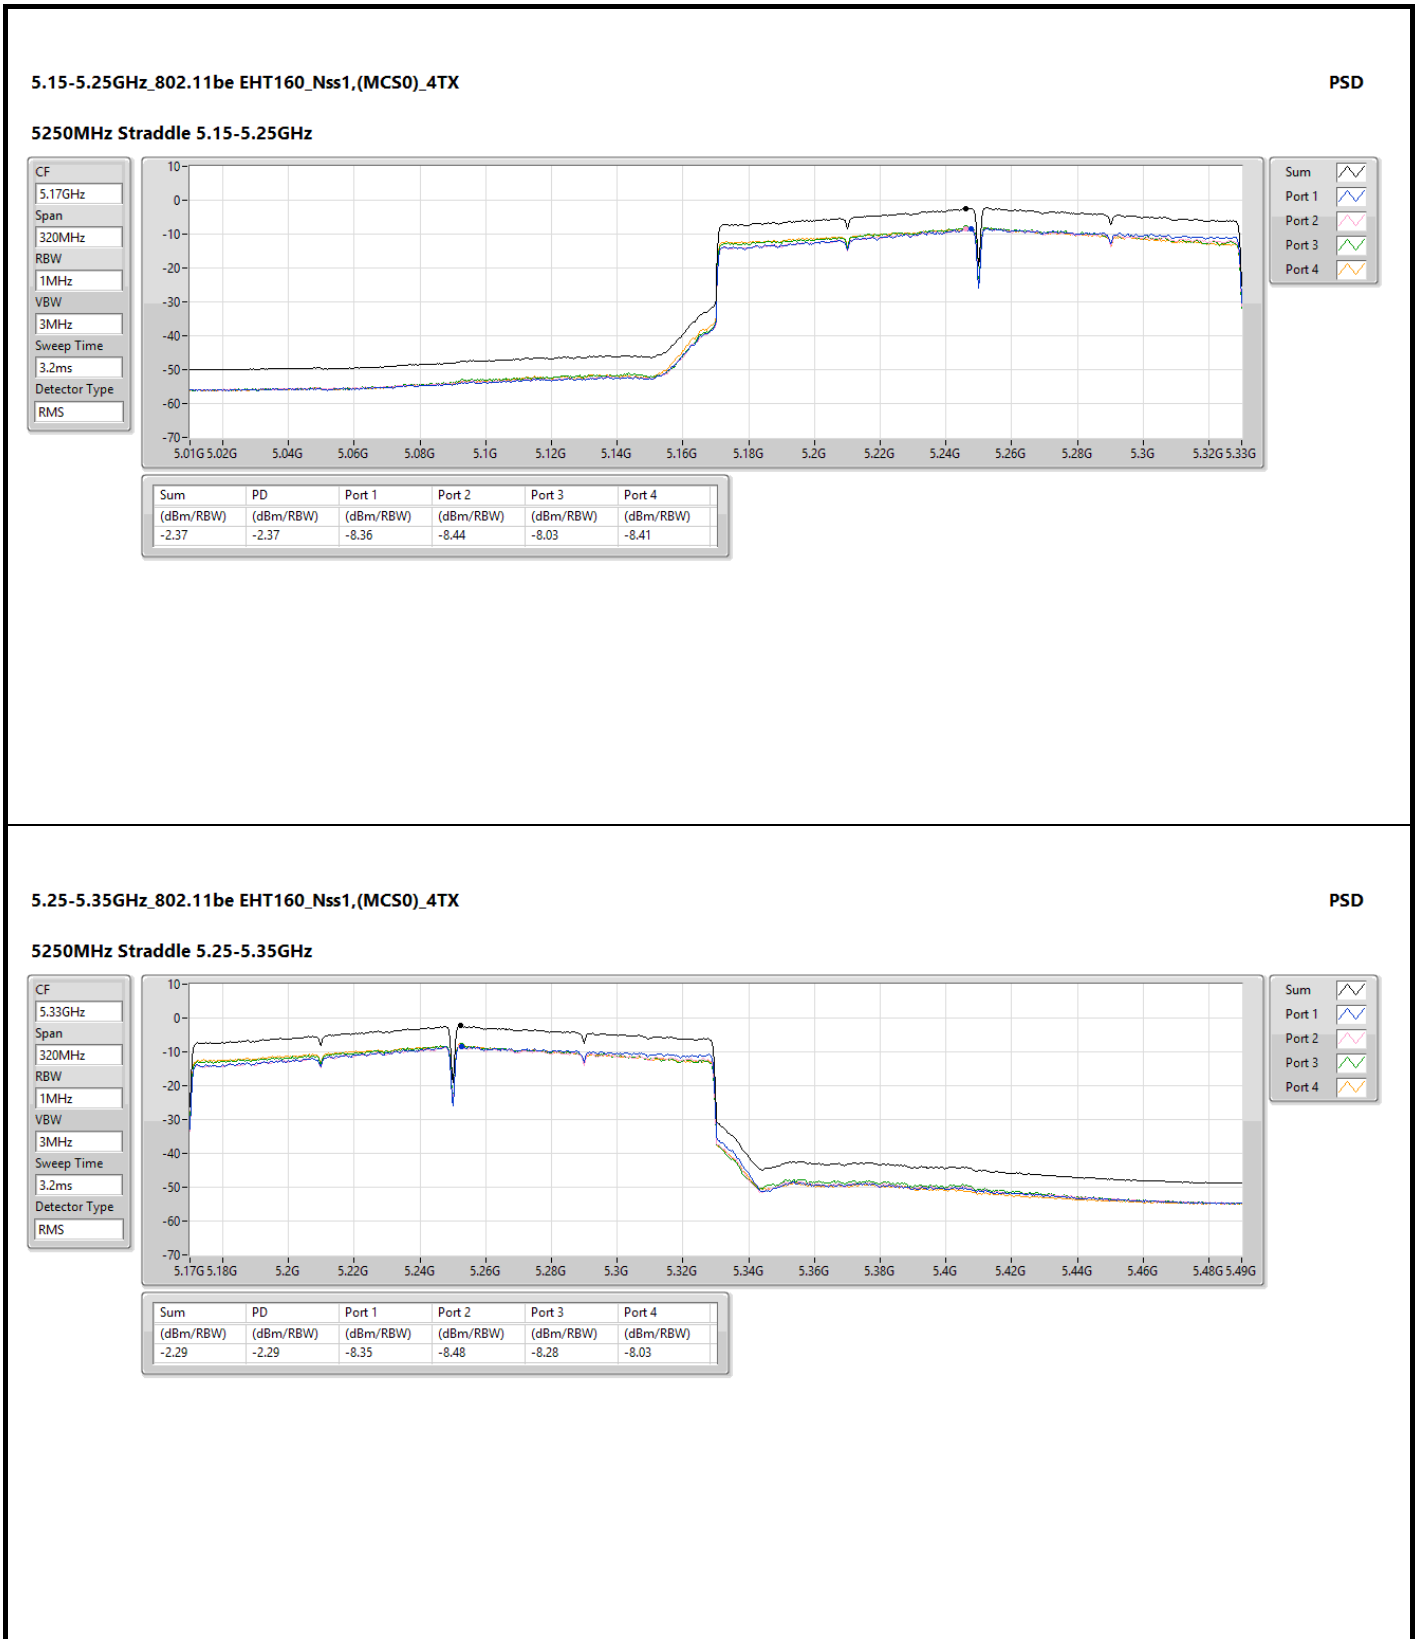

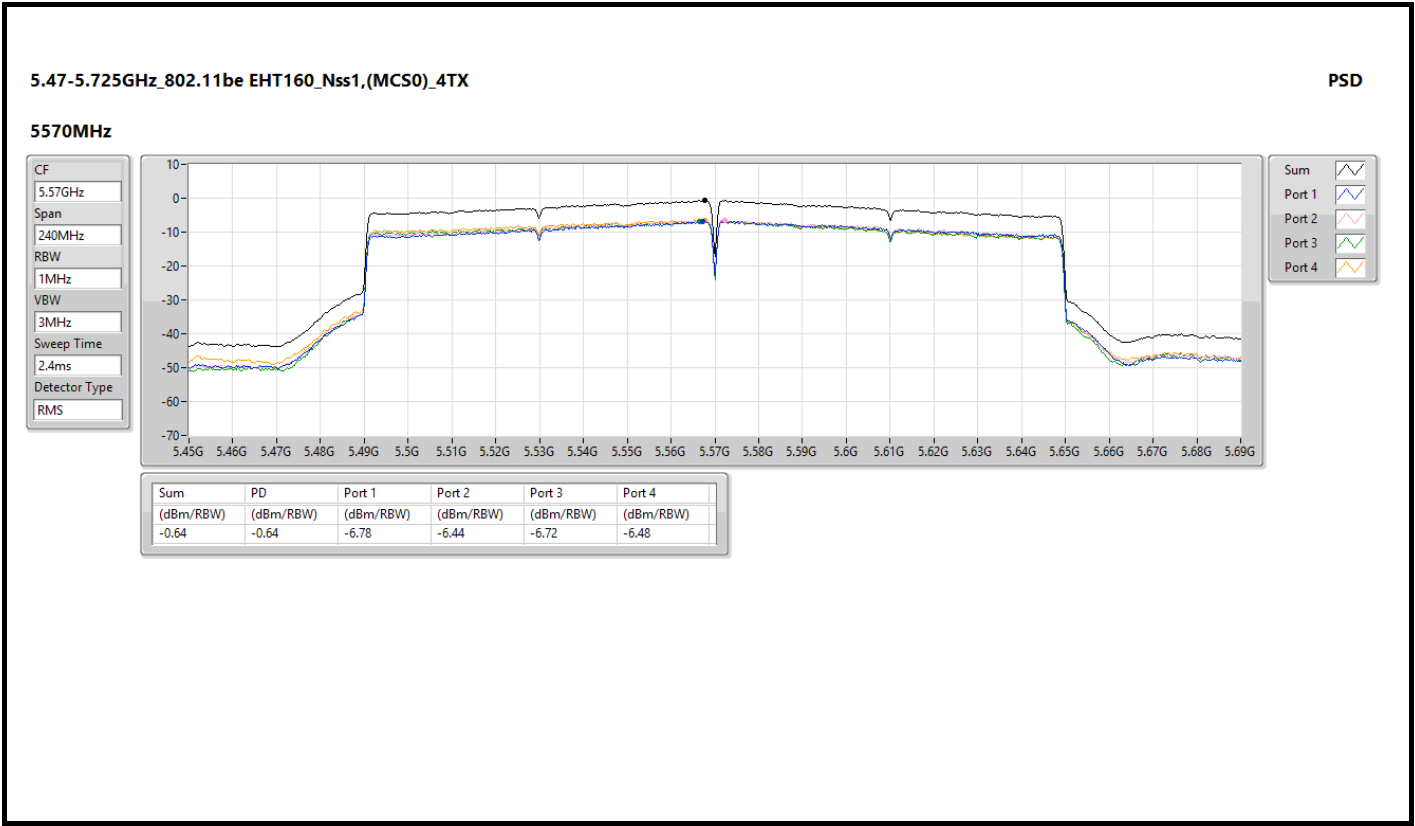



Beamforming mode

Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.15-5.25GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	14.18	20.06
802.11be EHT40-BF_Nss1,(MCS0)_4TX	12.21	18.09
802.11be EHT80-BF_Nss1,(MCS0)_4TX	4.26	10.14
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-2.14	3.74
5.25-5.35GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	10.49	15.93
802.11be EHT40-BF_Nss1,(MCS0)_4TX	9.03	14.47
802.11be EHT80-BF_Nss1,(MCS0)_4TX	2.77	8.21
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-2.25	3.19
5.47-5.725GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	10.50	15.96
802.11be EHT40-BF_Nss1,(MCS0)_4TX	9.10	14.56
802.11be EHT80-BF_Nss1,(MCS0)_4TX	5.68	11.14
802.11be EHT160-BF_Nss1,(MCS0)_4TX	1.01	6.47
5.725-5.85GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	14.31	19.26
802.11be EHT40-BF_Nss1,(MCS0)_4TX	11.29	16.24
802.11be EHT80-BF_Nss1,(MCS0)_4TX	3.97	8.92


RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;




Result


Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT20-BF_Nss1,(MCS0)_4TX										
5180MHz	Pass	5.88	6.42	6.58	6.54	6.94	12.45	17.00	18.33	23.00
5200MHz	Pass	5.88	8.50	8.04	7.99	8.40	13.96	17.00	19.84	23.00
5240MHz	Pass	5.88	9.00	8.52	7.63	7.96	14.18	17.00	20.06	23.00
5260MHz	Pass	5.44	4.54	4.11	4.33	4.71	10.22	11.00	15.66	17.00
5300MHz	Pass	5.44	4.79	4.51	4.76	4.67	10.34	11.00	15.78	17.00
5320MHz	Pass	5.44	4.91	4.83	4.70	4.84	10.49	11.00	15.93	17.00
5500MHz	Pass	5.46	4.15	4.21	4.85	4.81	10.28	11.00	15.74	17.00
5580MHz	Pass	5.46	4.87	4.38	4.82	4.51	10.46	11.00	15.92	17.00
5700MHz	Pass	5.46	4.86	3.95	4.96	4.82	10.50	11.00	15.96	17.00
5720MHz Straddle 5.47-5.725GHz	Pass	5.46	4.88	4.40	4.69	4.09	10.22	11.00	15.68	17.00
5720MHz Straddle 5.725-5.85GHz	Pass	4.95	2.47	1.86	2.28	1.73	8.00	30.00	12.95	36.00
5745MHz	Pass	4.95	8.32	8.30	8.55	8.59	14.31	30.00	19.26	36.00
5785MHz	Pass	4.95	8.43	7.82	7.76	8.79	13.92	30.00	18.87	36.00
5825MHz	Pass	4.95	7.54	7.48	7.83	7.60	13.38	30.00	18.33	36.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX										
5190MHz	Pass	5.88	3.18	3.49	3.04	3.39	9.14	17.00	15.02	23.00
5230MHz	Pass	5.88	6.84	6.52	6.65	6.58	12.21	17.00	18.09	23.00
5270MHz	Pass	5.44	3.20	3.16	3.35	3.39	9.03	11.00	14.47	17.00
5310MHz	Pass	5.44	2.85	2.86	3.02	2.94	8.79	11.00	14.23	17.00
5510MHz	Pass	5.46	2.62	3.12	3.67	3.51	9.10	11.00	14.56	17.00
5590MHz	Pass	5.46	3.18	2.79	2.92	2.65	8.71	11.00	14.17	17.00
5670MHz	Pass	5.46	3.05	2.12	3.01	3.87	8.95	11.00	14.41	17.00
5710MHz Straddle 5.47-5.725GHz	Pass	5.46	3.27	2.51	3.32	2.84	8.84	11.00	14.30	17.00
5710MHz Straddle 5.725-5.85GHz	Pass	4.95	-1.43	-1.48	-1.42	-1.87	4.30	30.00	9.25	36.00
5755MHz	Pass	4.95	4.56	4.33	5.15	5.34	10.63	30.00	15.58	36.00
5795MHz	Pass	4.95	5.45	4.66	5.51	6.20	11.29	30.00	16.24	36.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX										
5210MHz	Pass	5.88	-1.33	-1.21	-1.87	-1.78	4.26	17.00	10.14	23.00
5290MHz	Pass	5.44	-2.99	-3.22	-2.84	-3.02	2.77	11.00	8.21	17.00
5530MHz	Pass	5.46	-0.38	-0.41	-0.23	-0.15	5.58	11.00	11.04	17.00
5610MHz	Pass	5.46	0.10	-0.35	-0.07	-0.37	5.61	11.00	11.07	17.00
5690MHz Straddle 5.47-5.725GHz	Pass	5.46	-0.01	-0.86	0.11	-0.19	5.68	11.00	11.14	17.00
5690MHz Straddle 5.725-5.85GHz	Pass	4.95	-5.14	-5.16	-5.10	-5.31	0.68	30.00	5.63	36.00
5775MHz	Pass	4.95	-2.09	-2.50	-1.52	-1.30	3.97	30.00	8.92	36.00
802.11be EHT160-BF_Nss1,(MCS0)_4TX										
5250MHz Straddle 5.15-5.25GHz	Pass	5.88	-8.06	-8.48	-8.03	-7.89	-2.14	17.00	3.74	23.00
5250MHz Straddle 5.25-5.35GHz	Pass	5.44	-8.03	-8.38	-8.42	-7.90	-2.25	11.00	3.19	17.00
5570MHz	Pass	5.46	-4.85	-5.06	-4.93	-4.79	1.01	11.00	6.47	17.00


DG = Directional Gain; Directional Gain refers to antenna report. RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band; PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

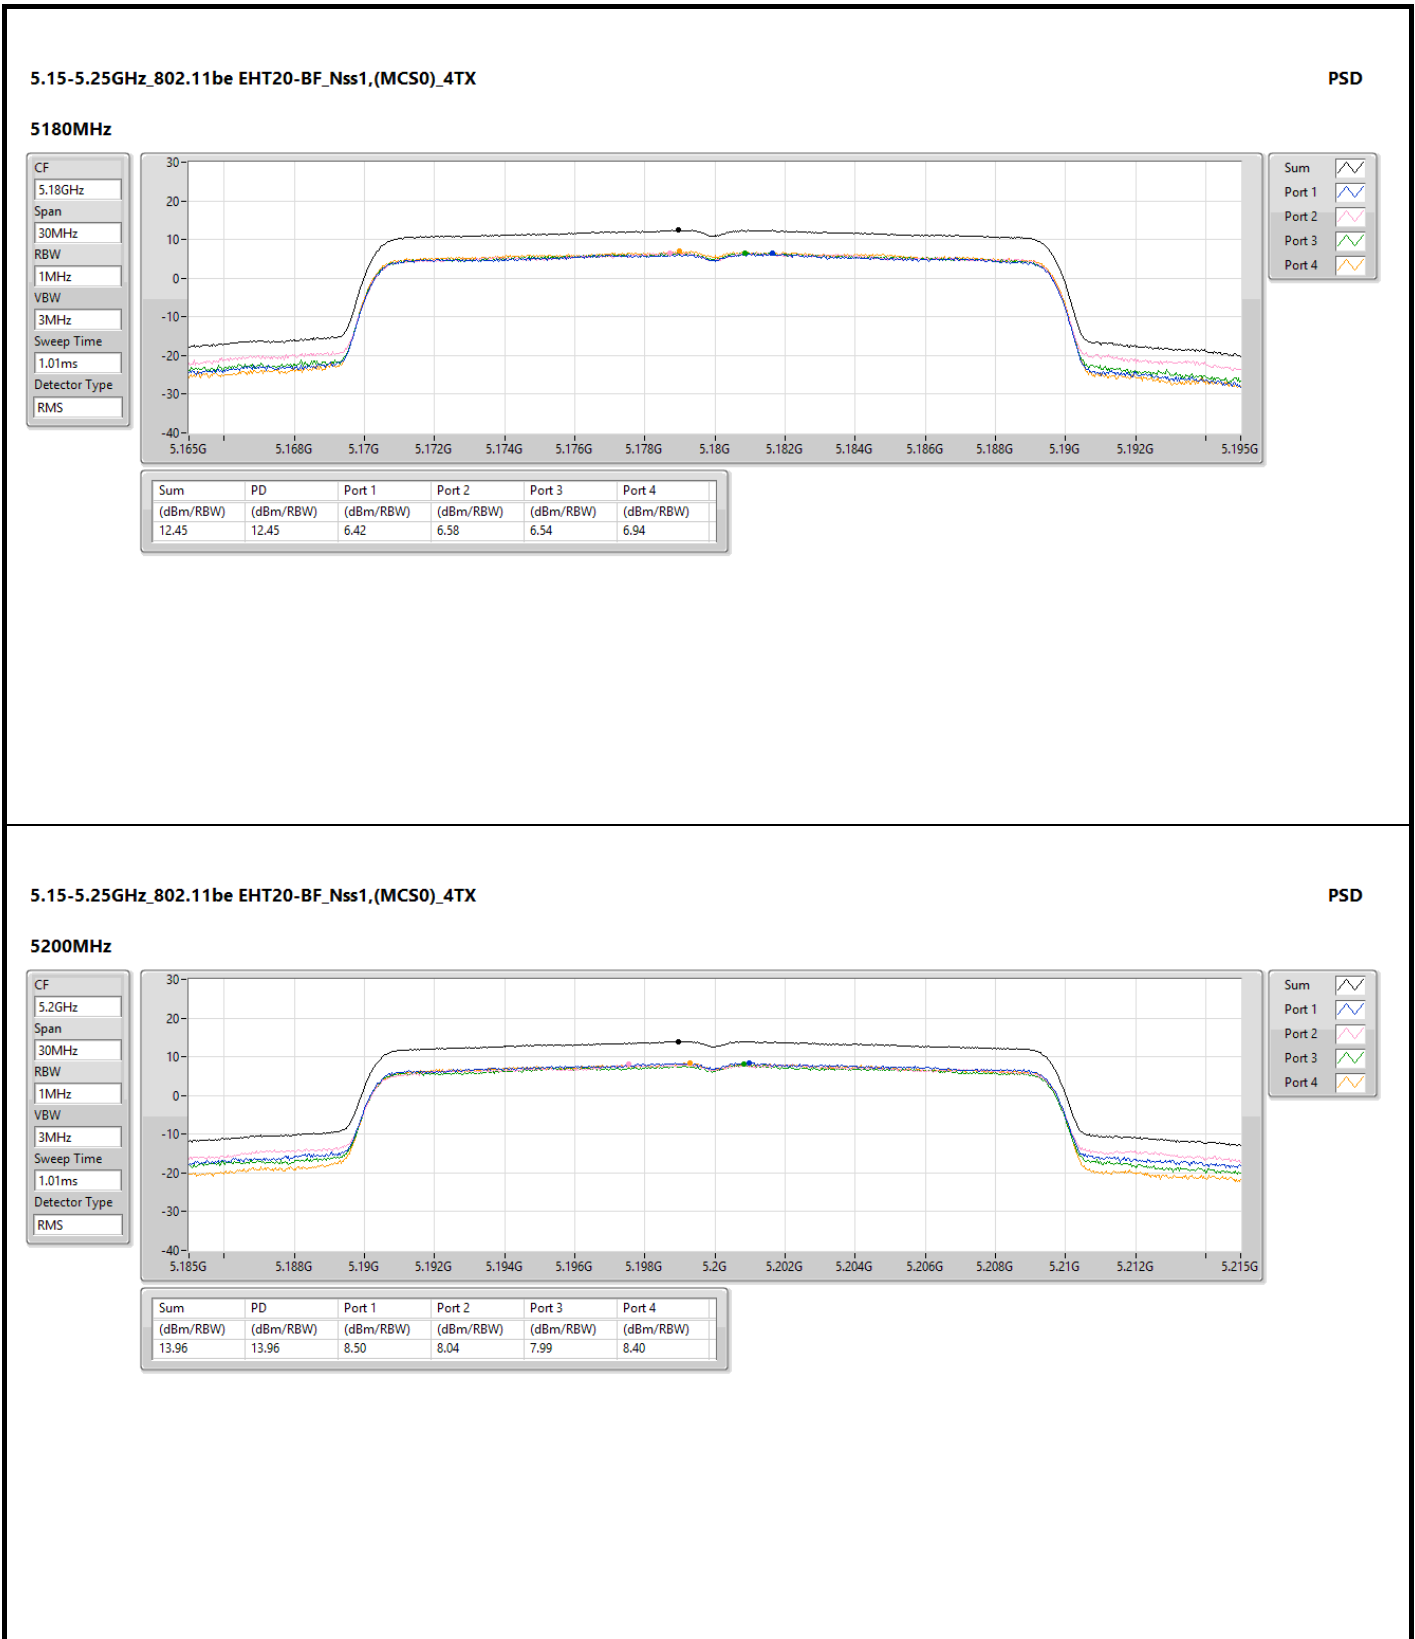


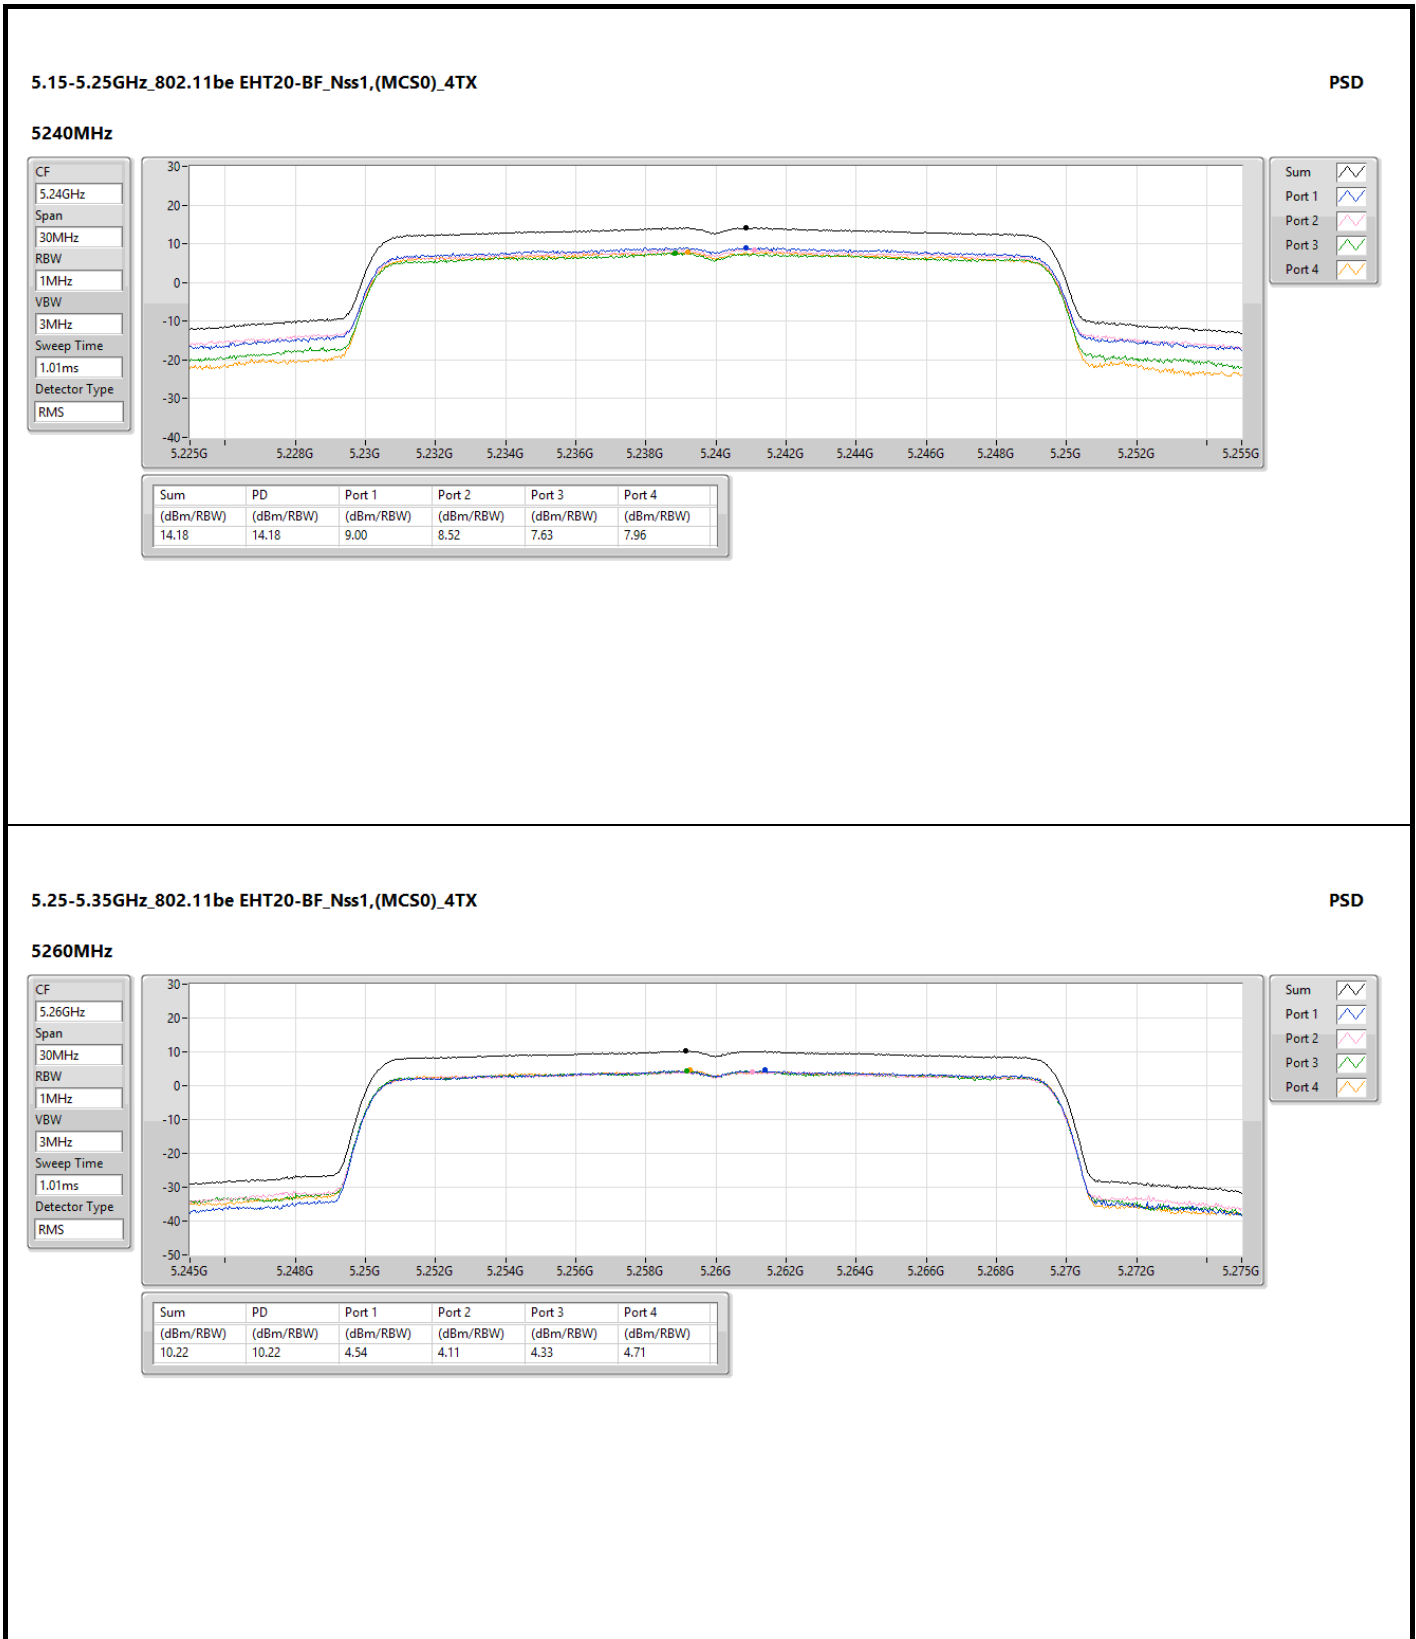





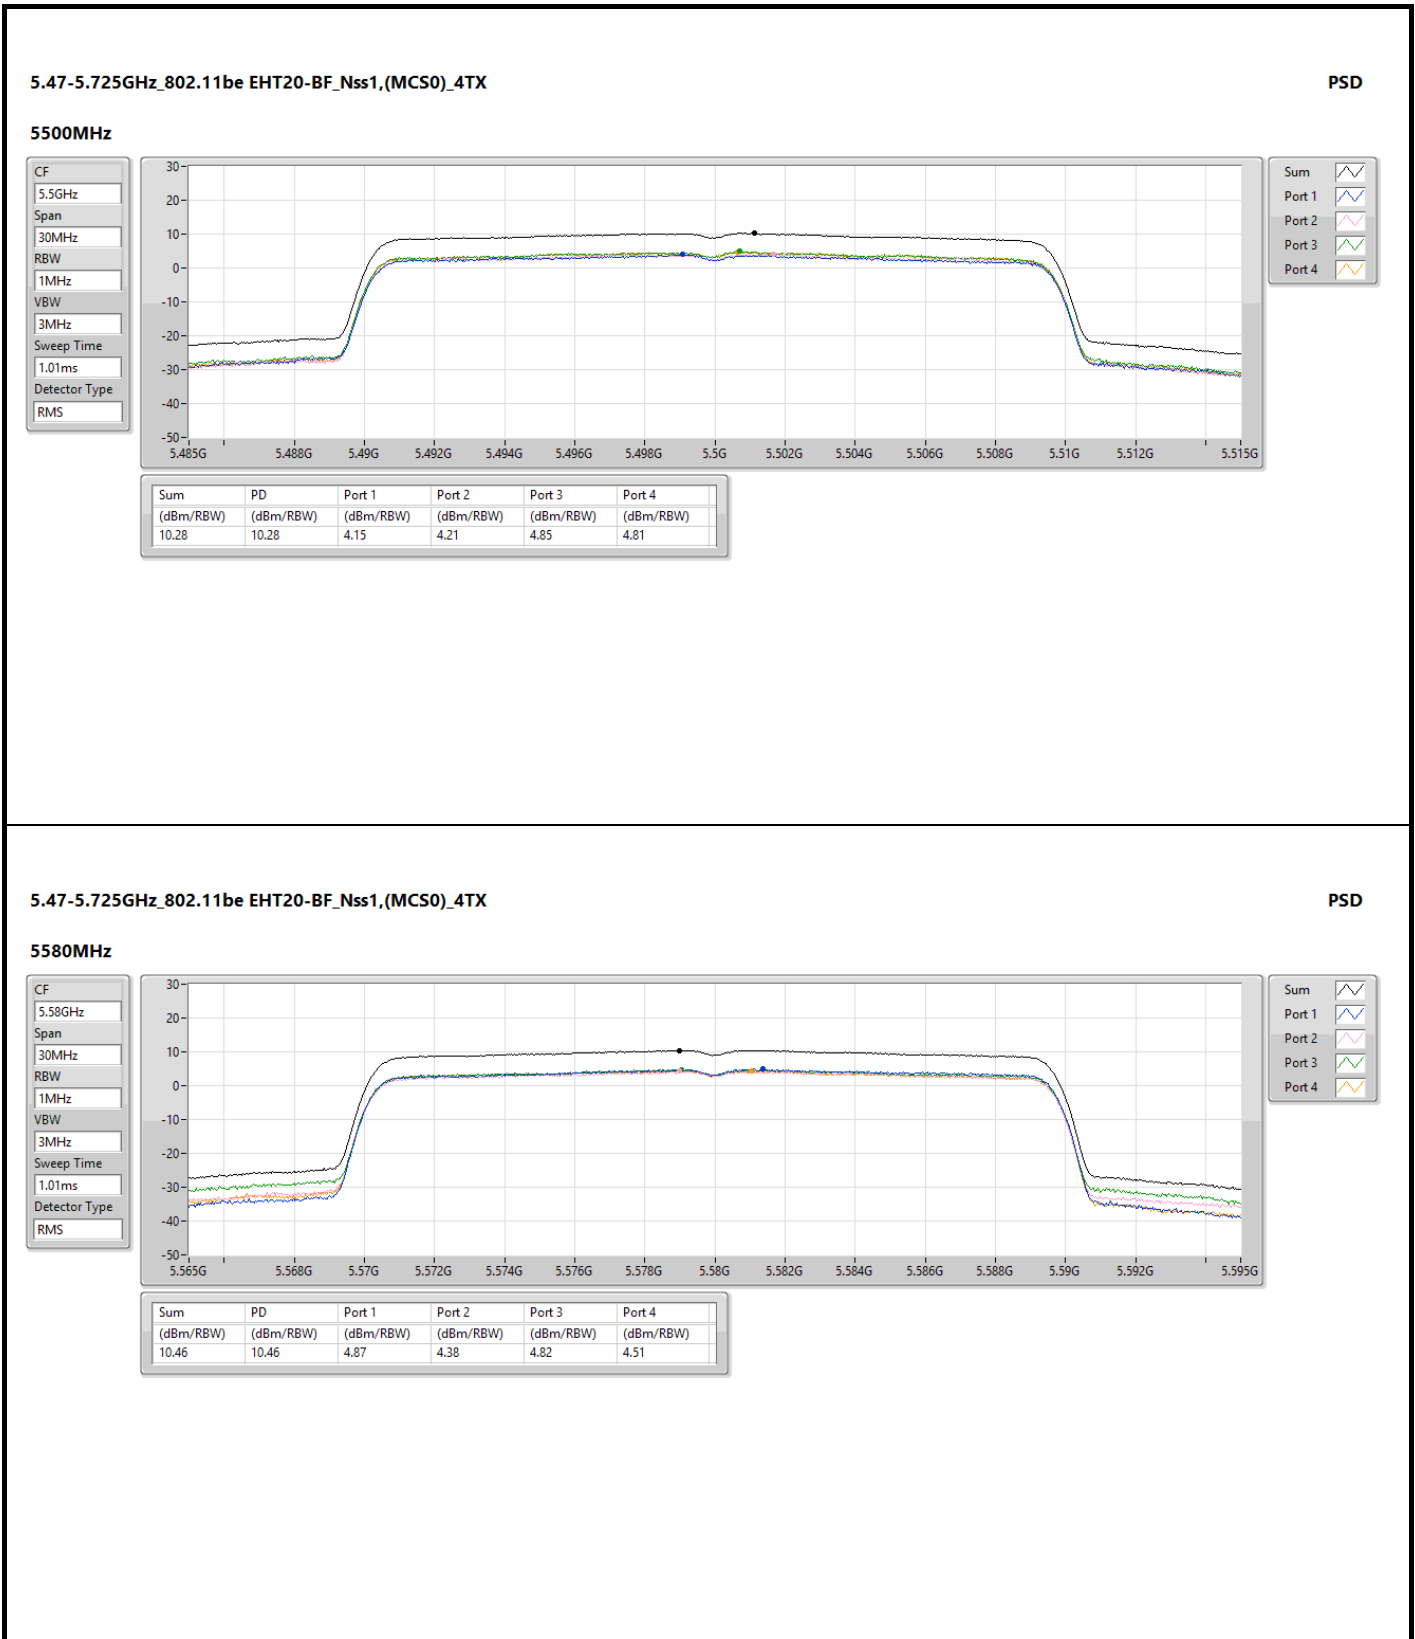


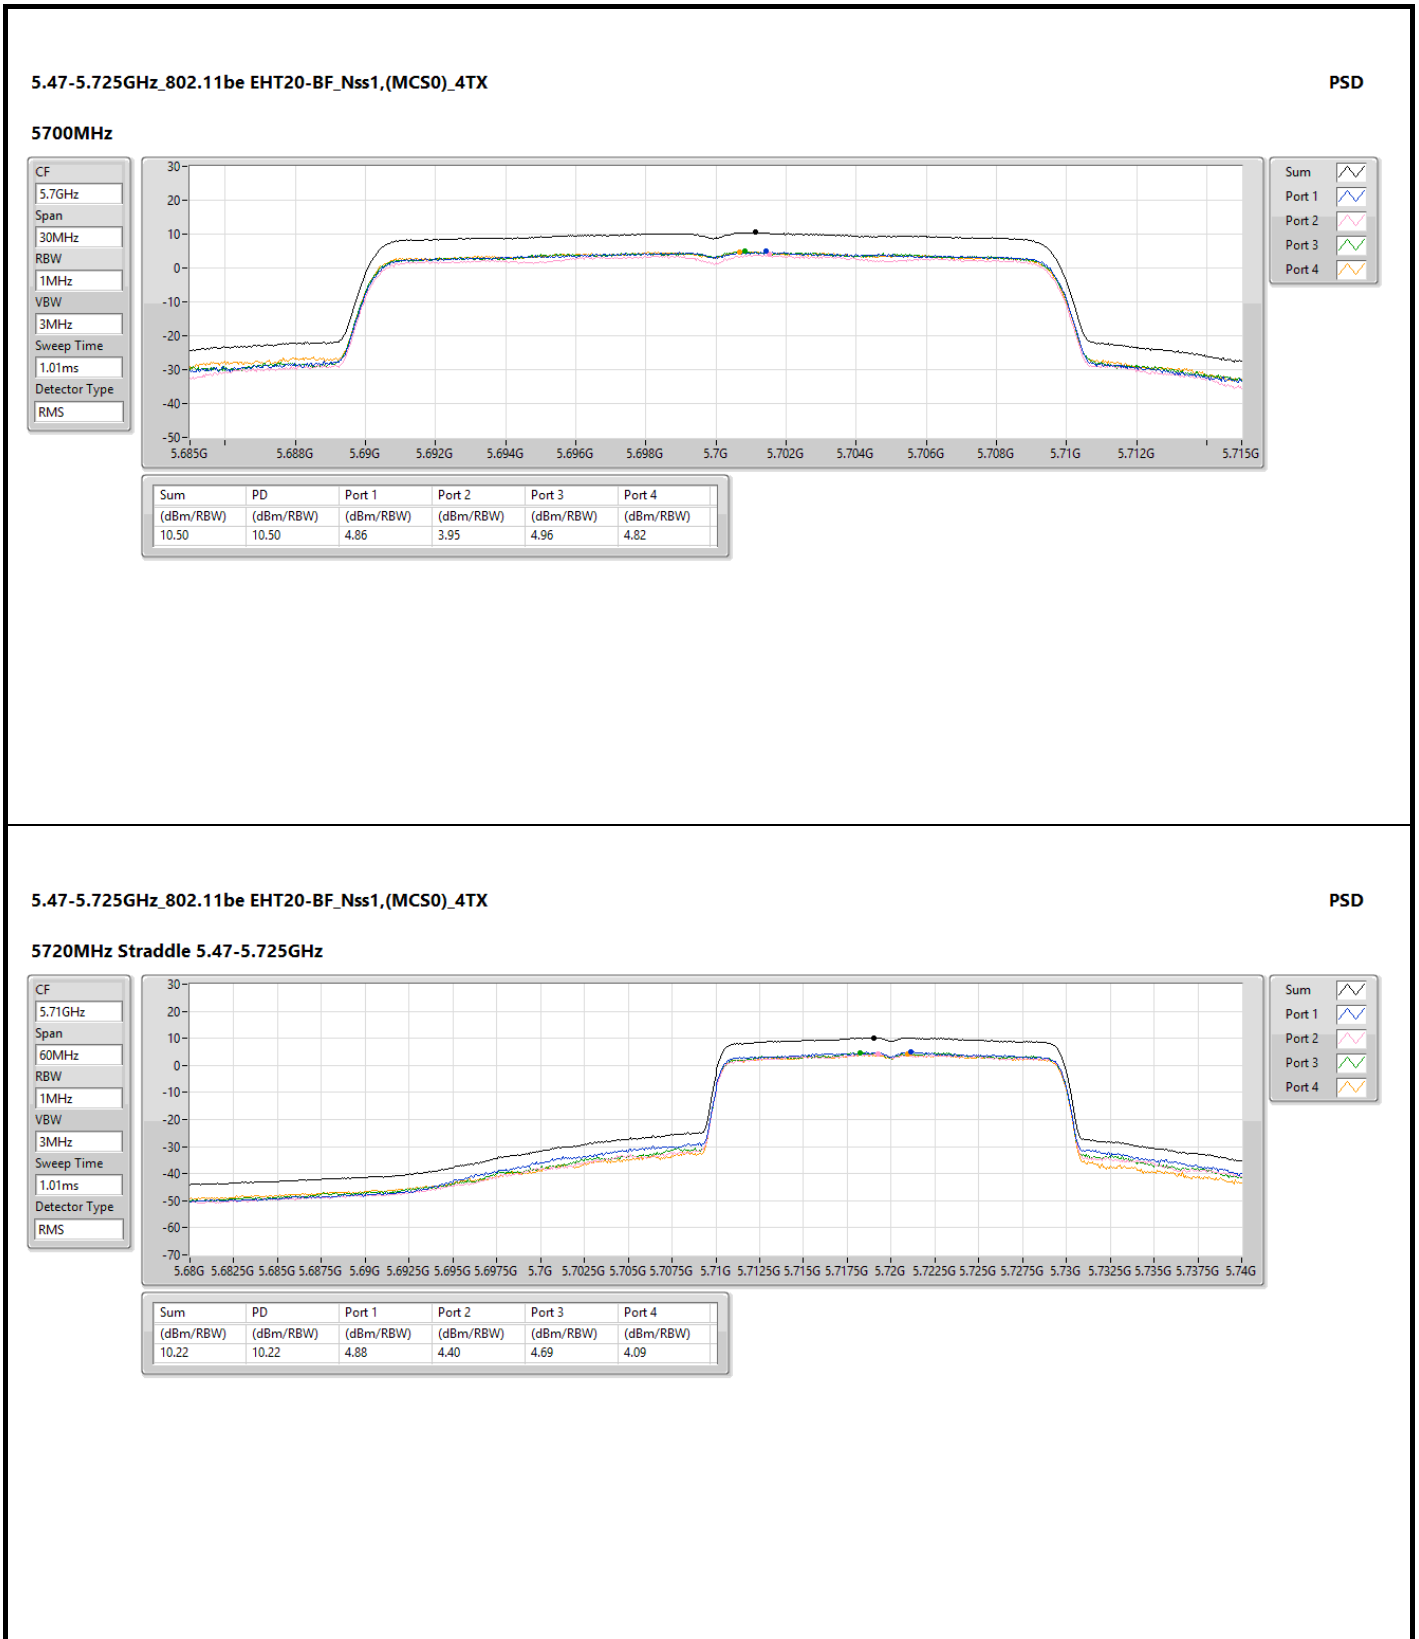


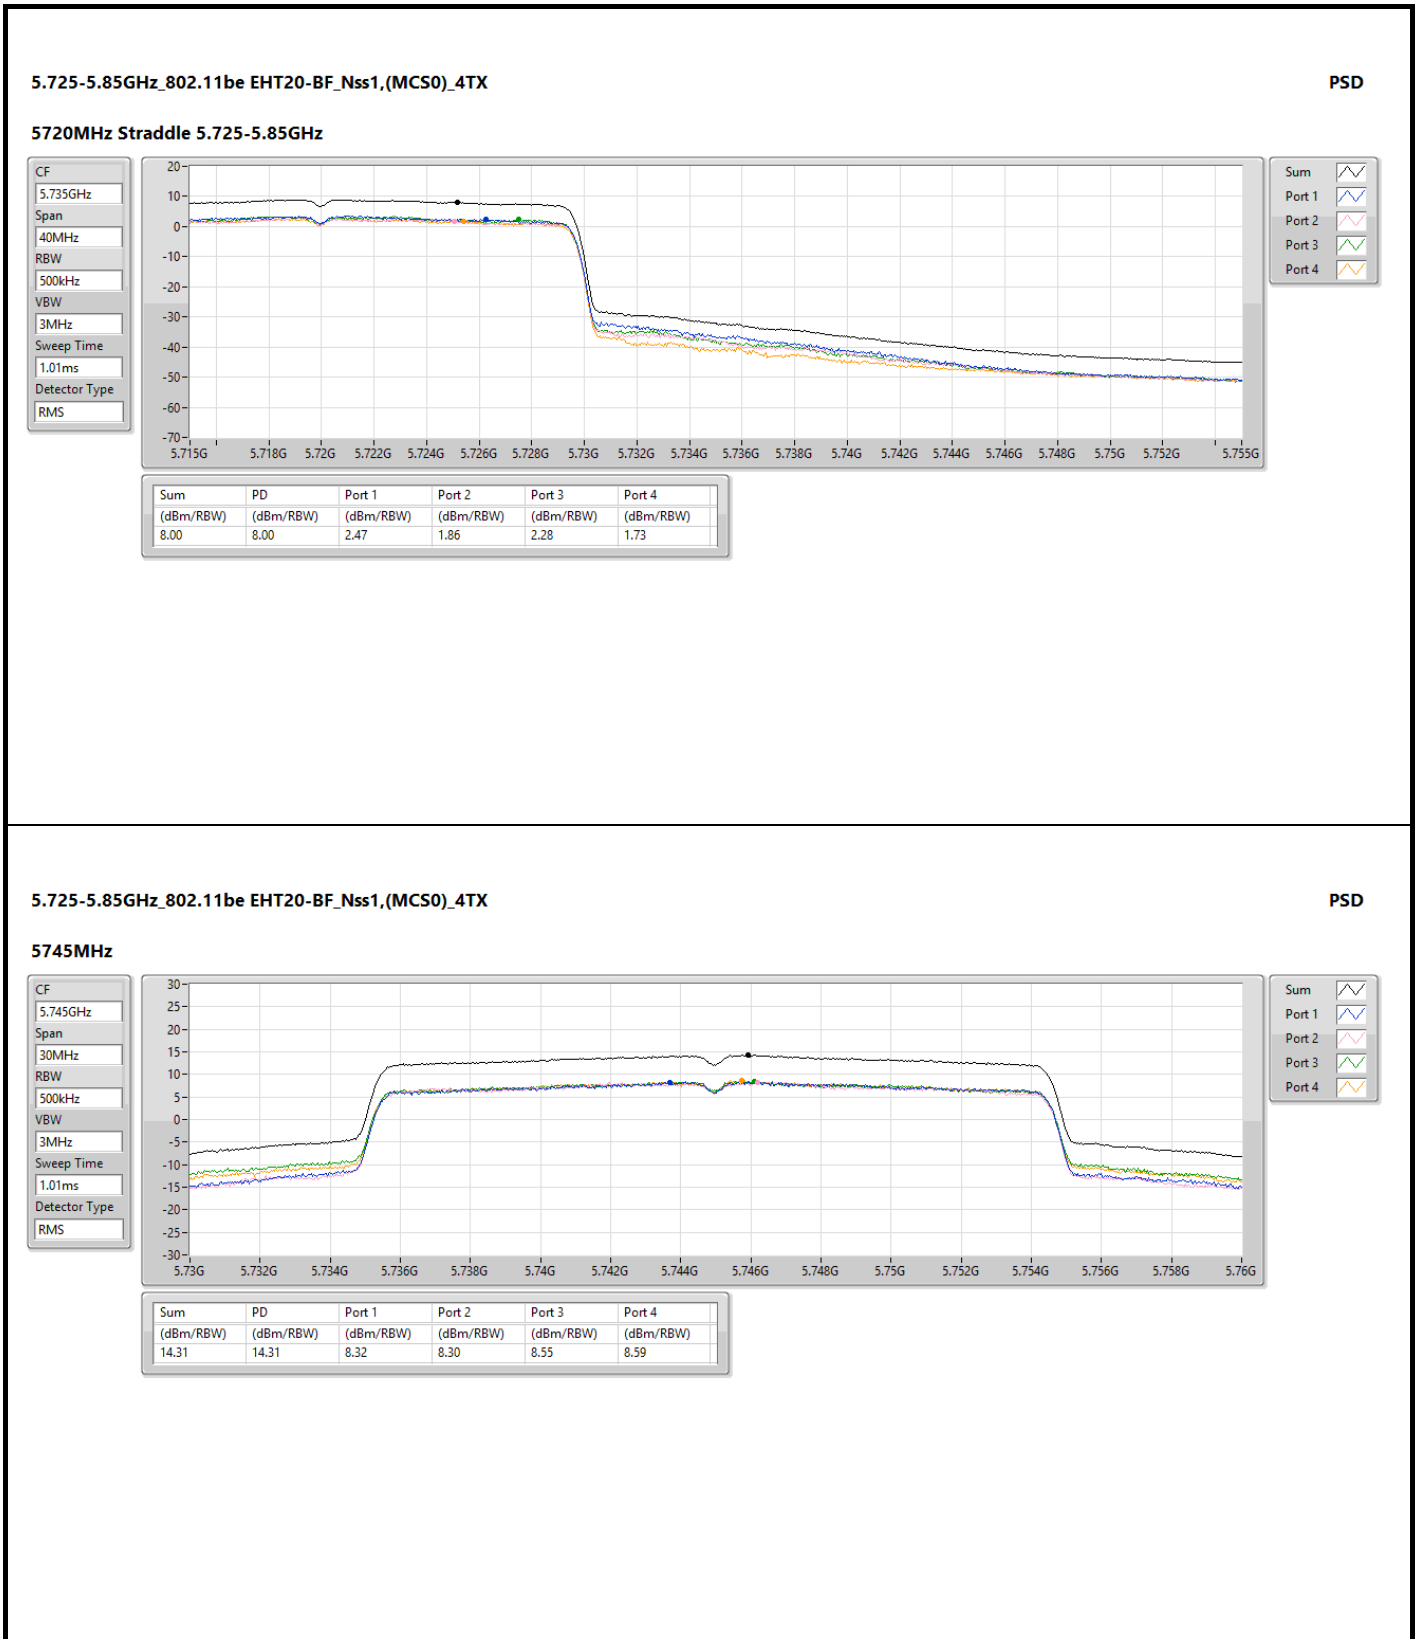


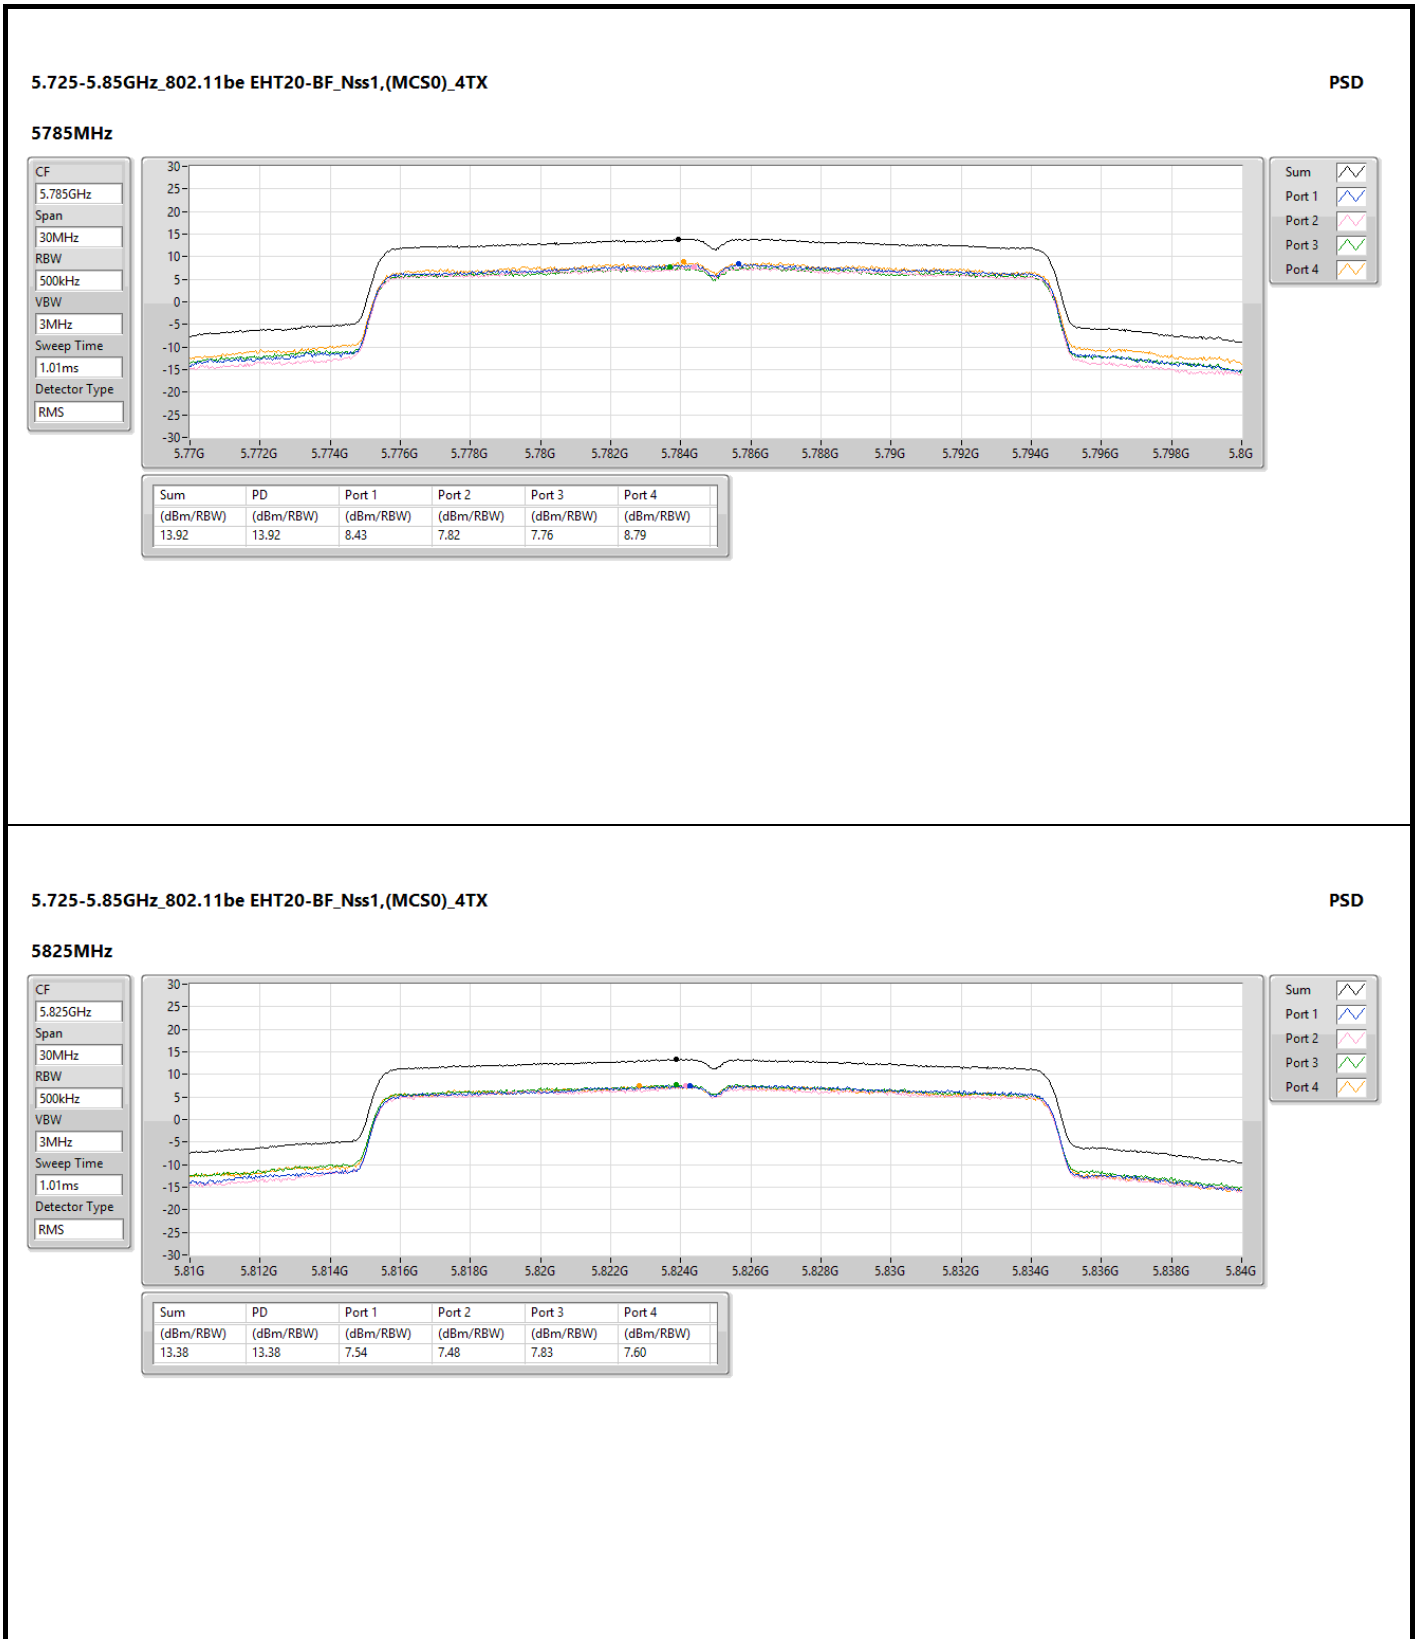


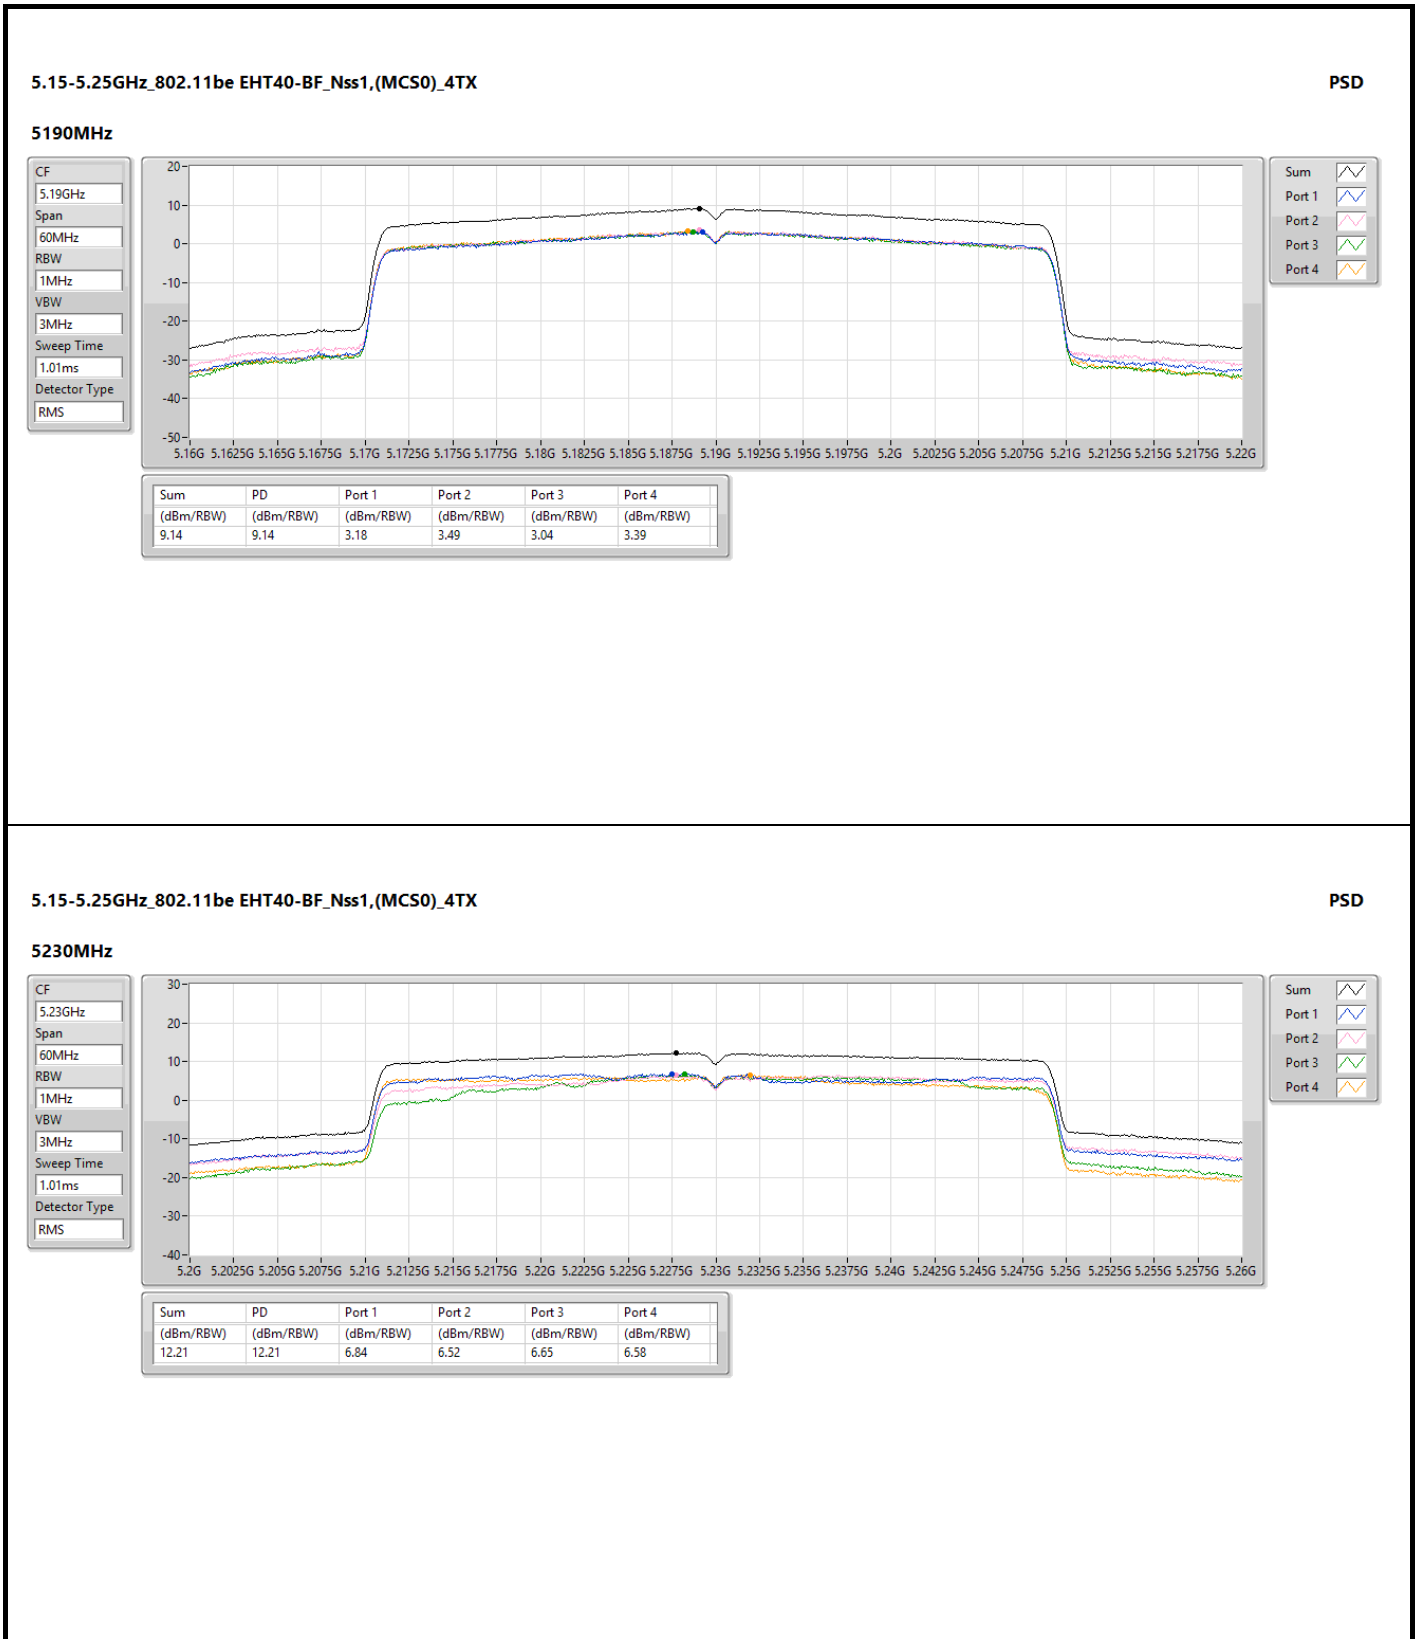


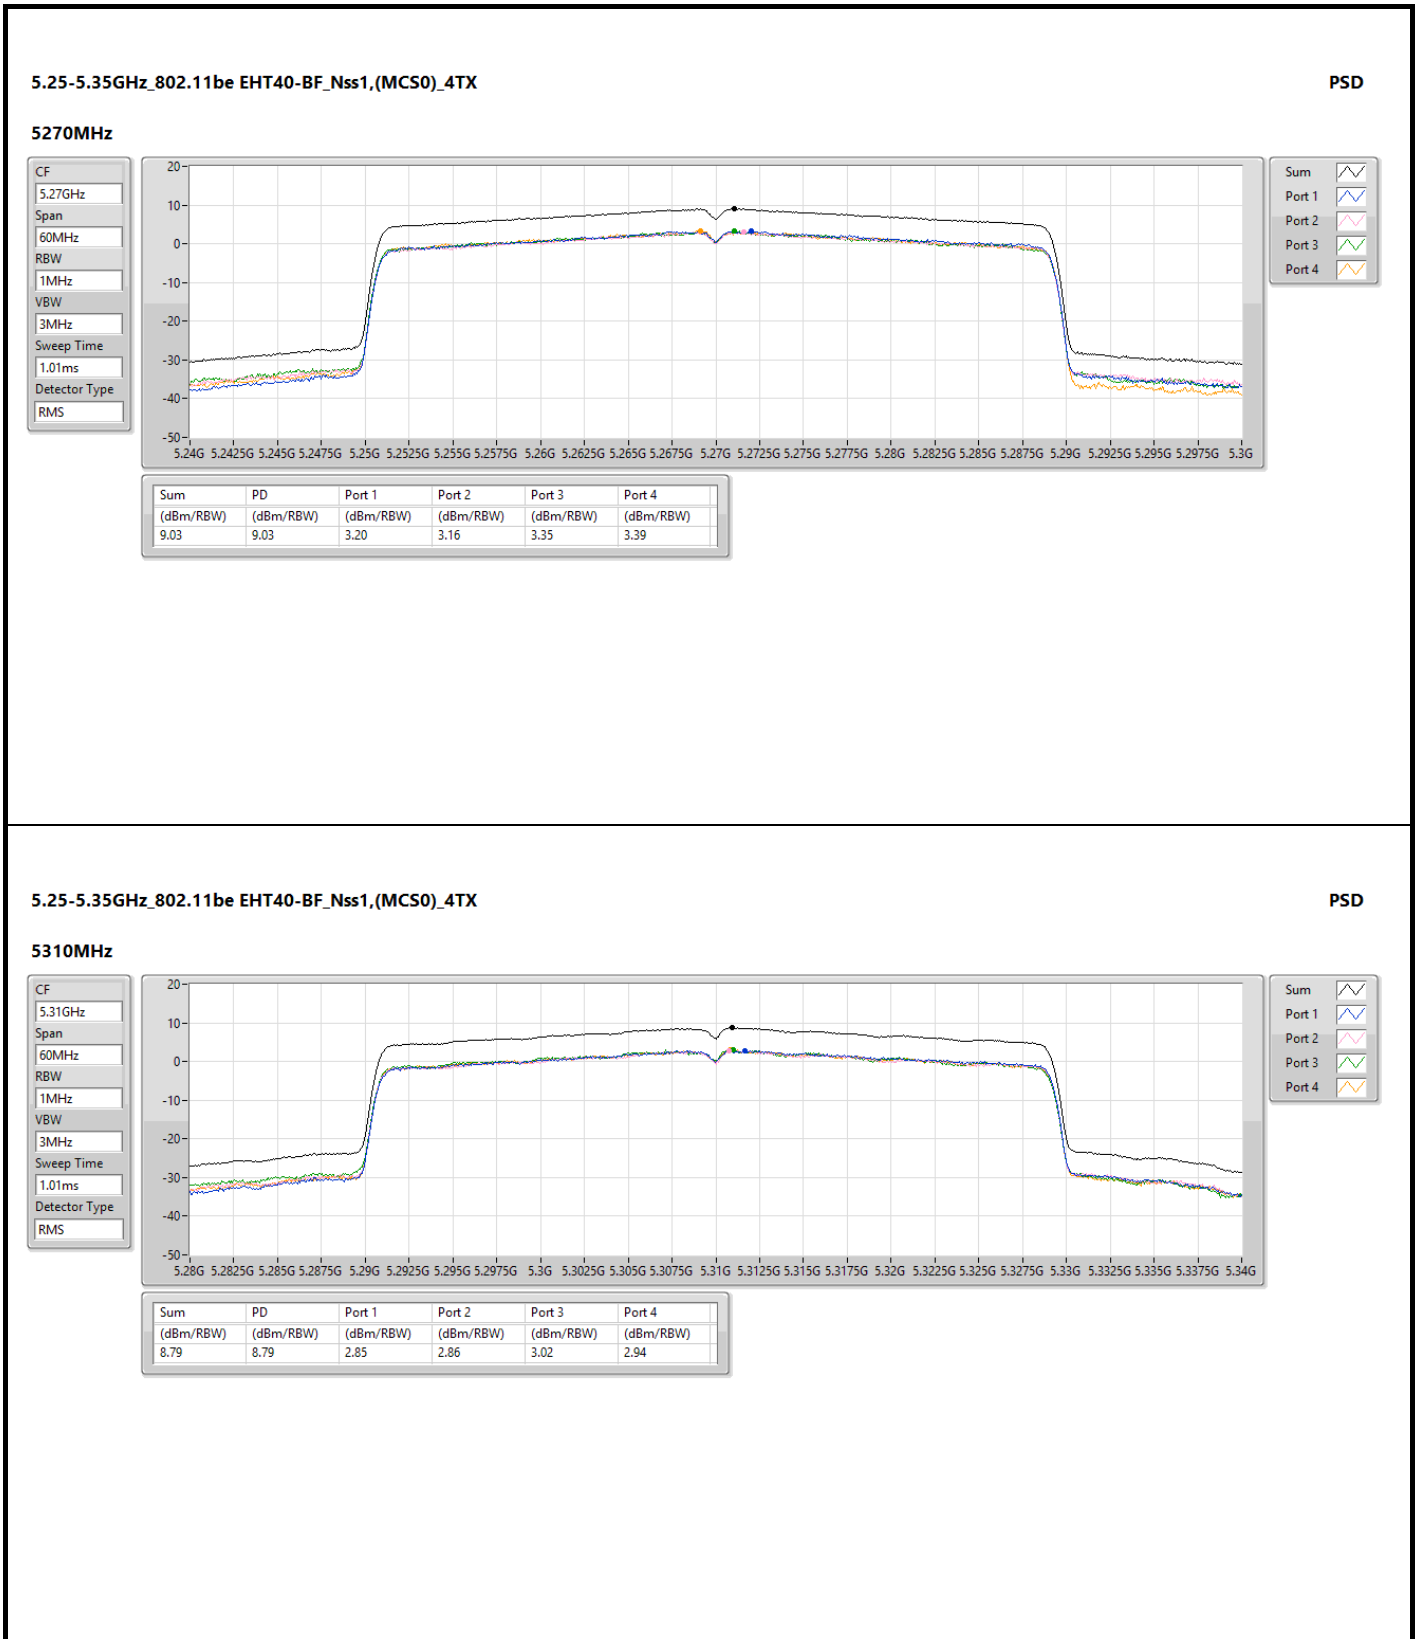


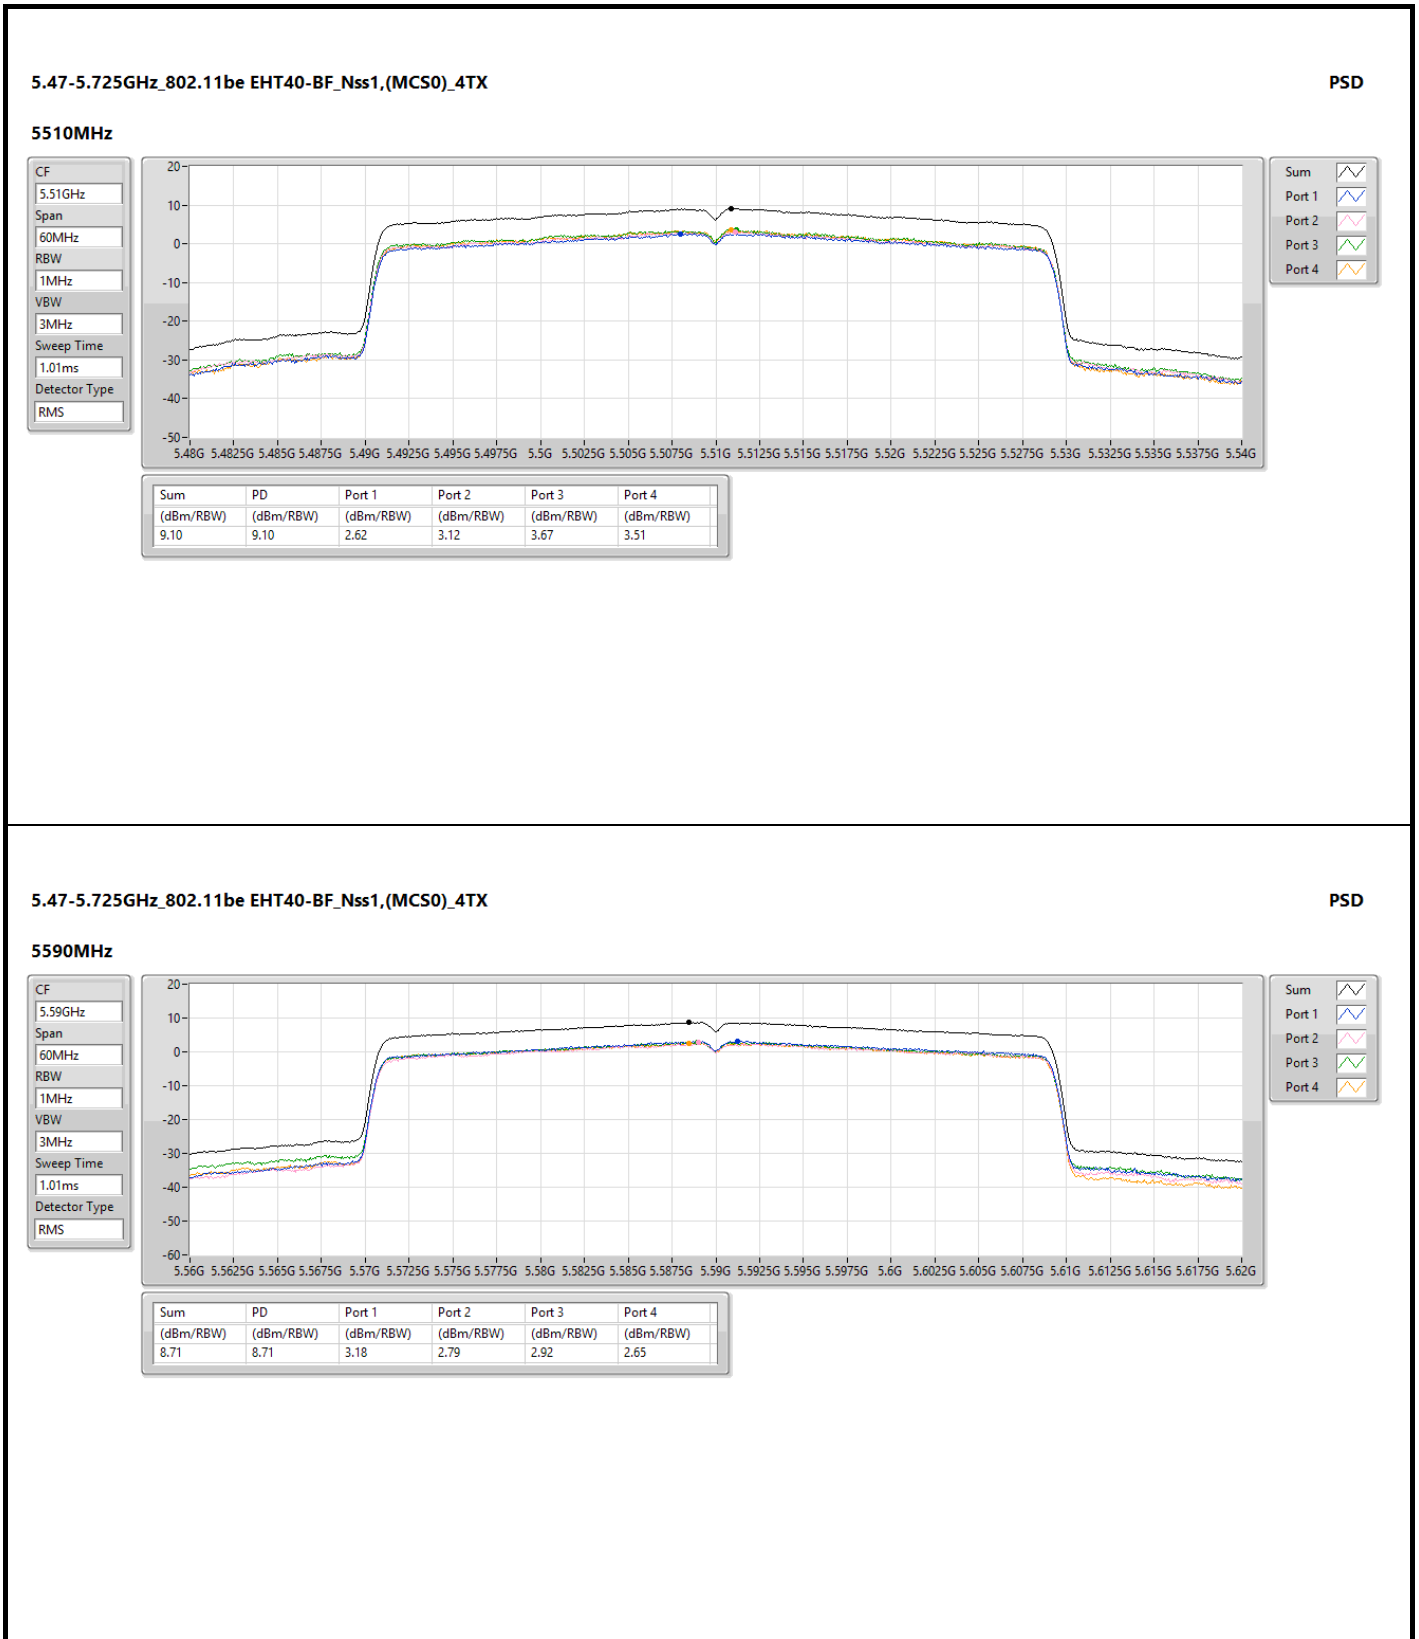


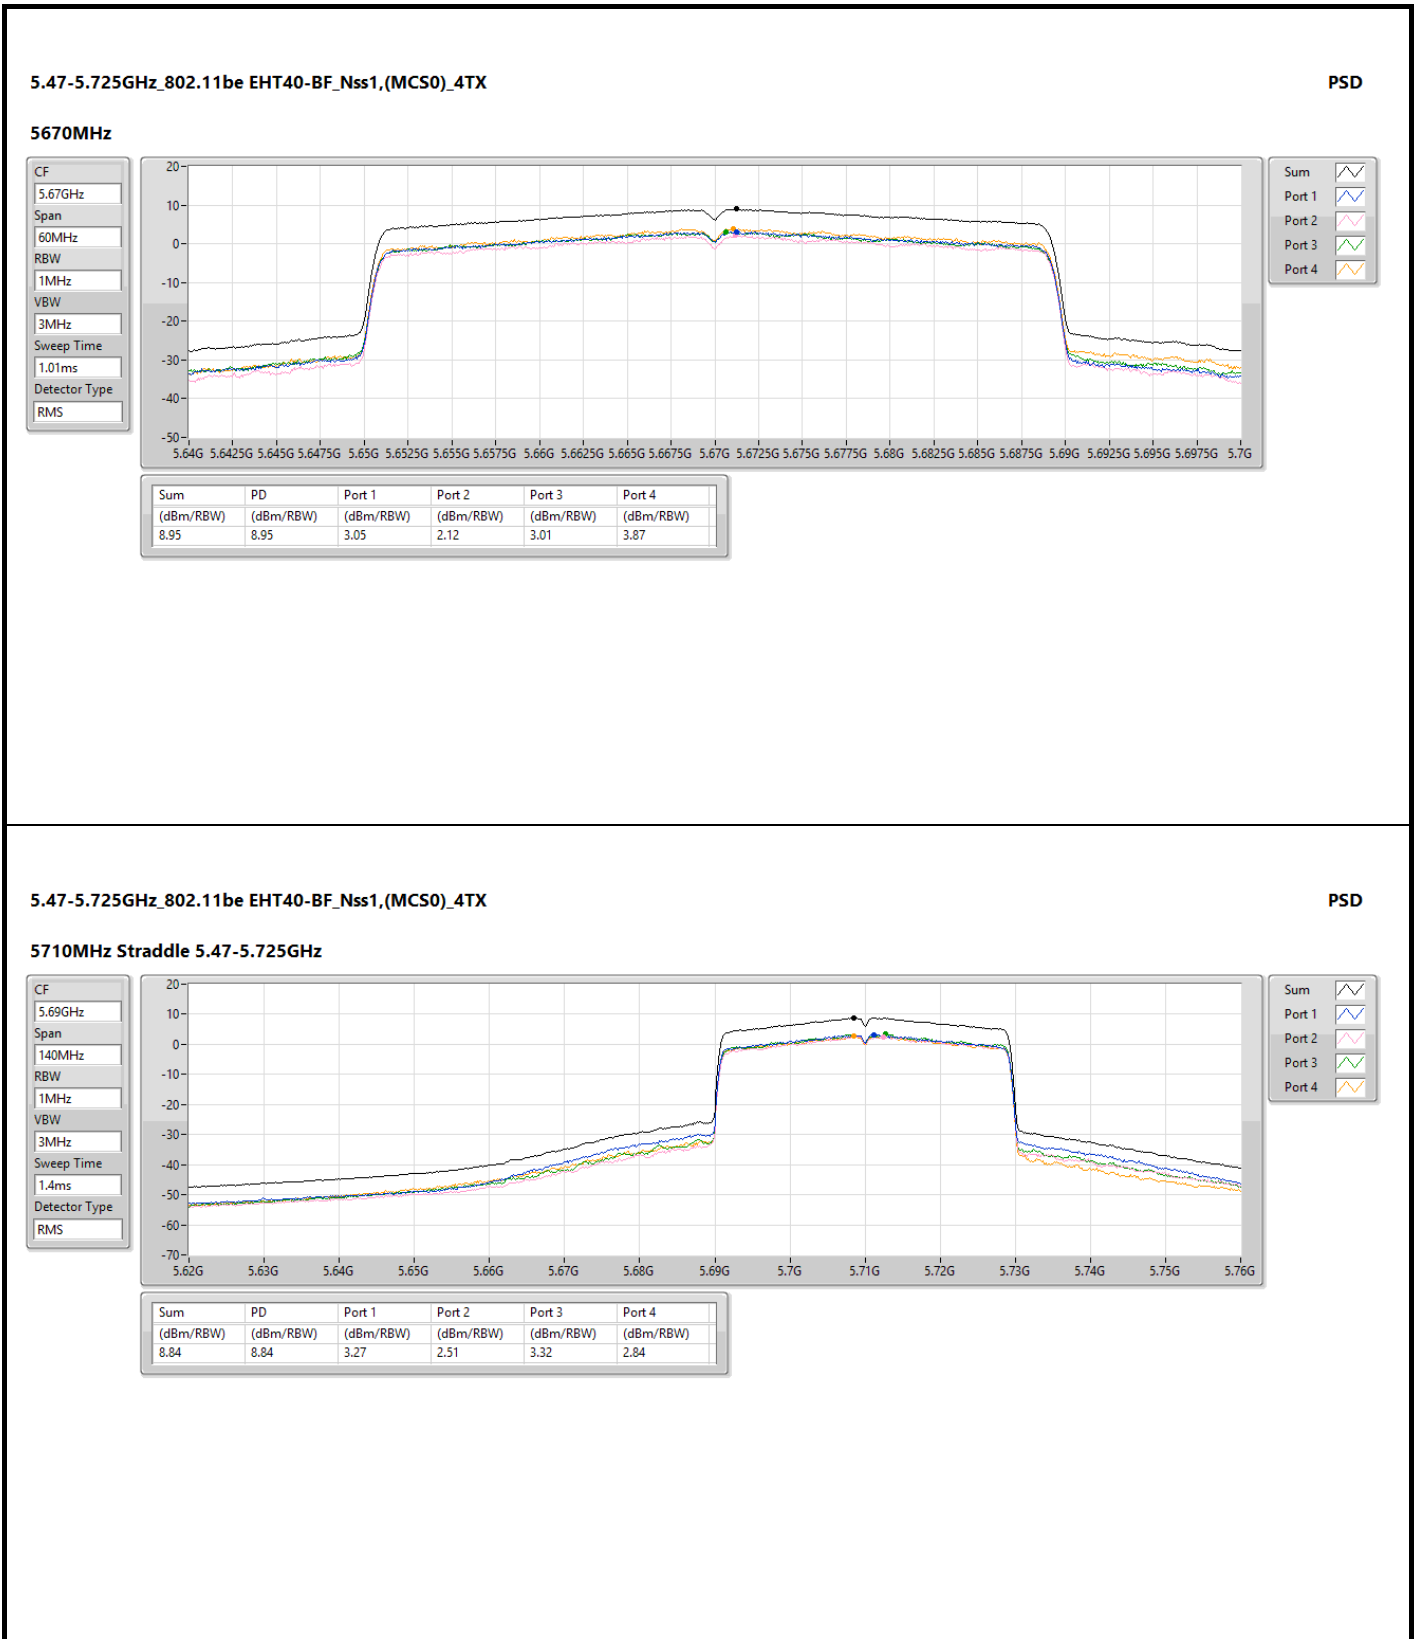

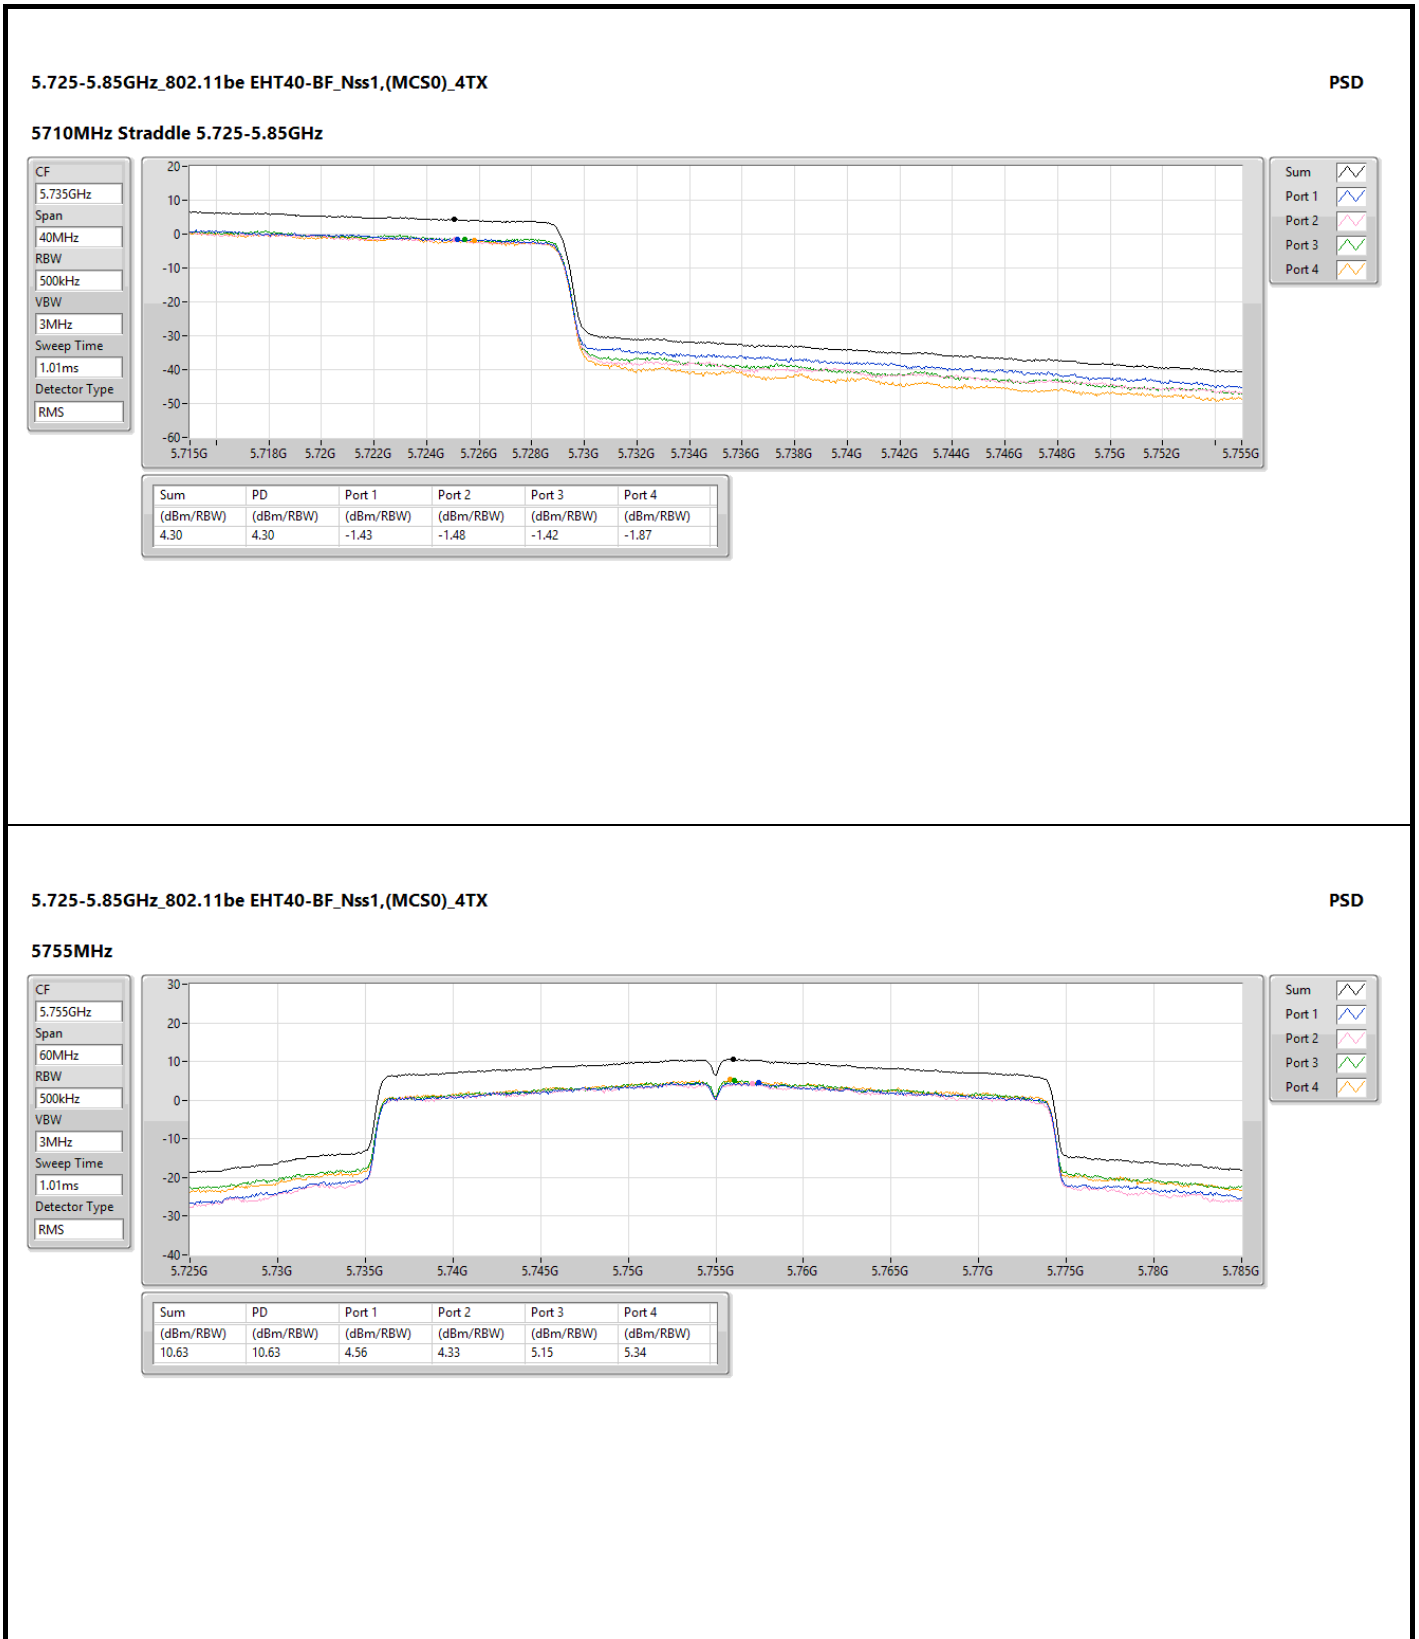


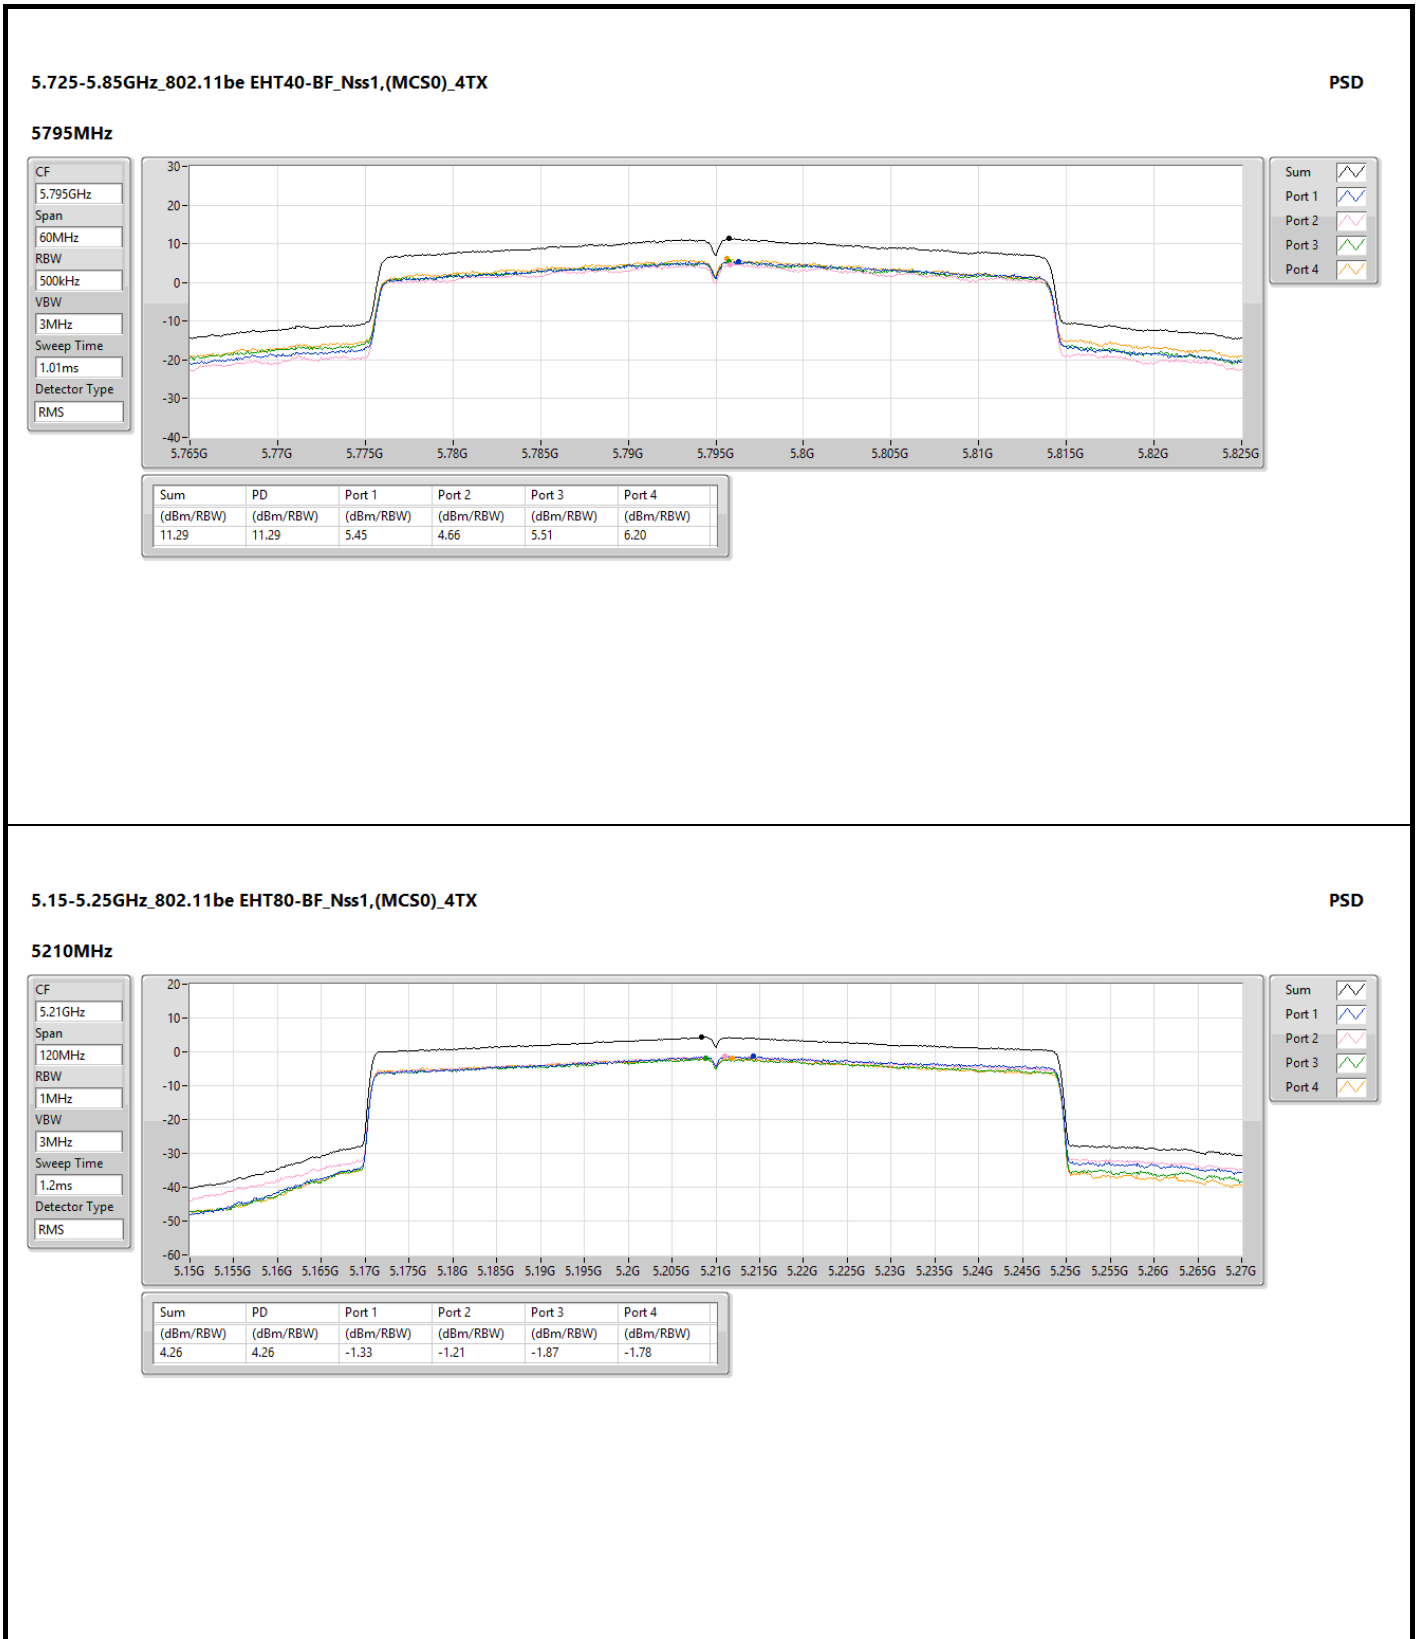


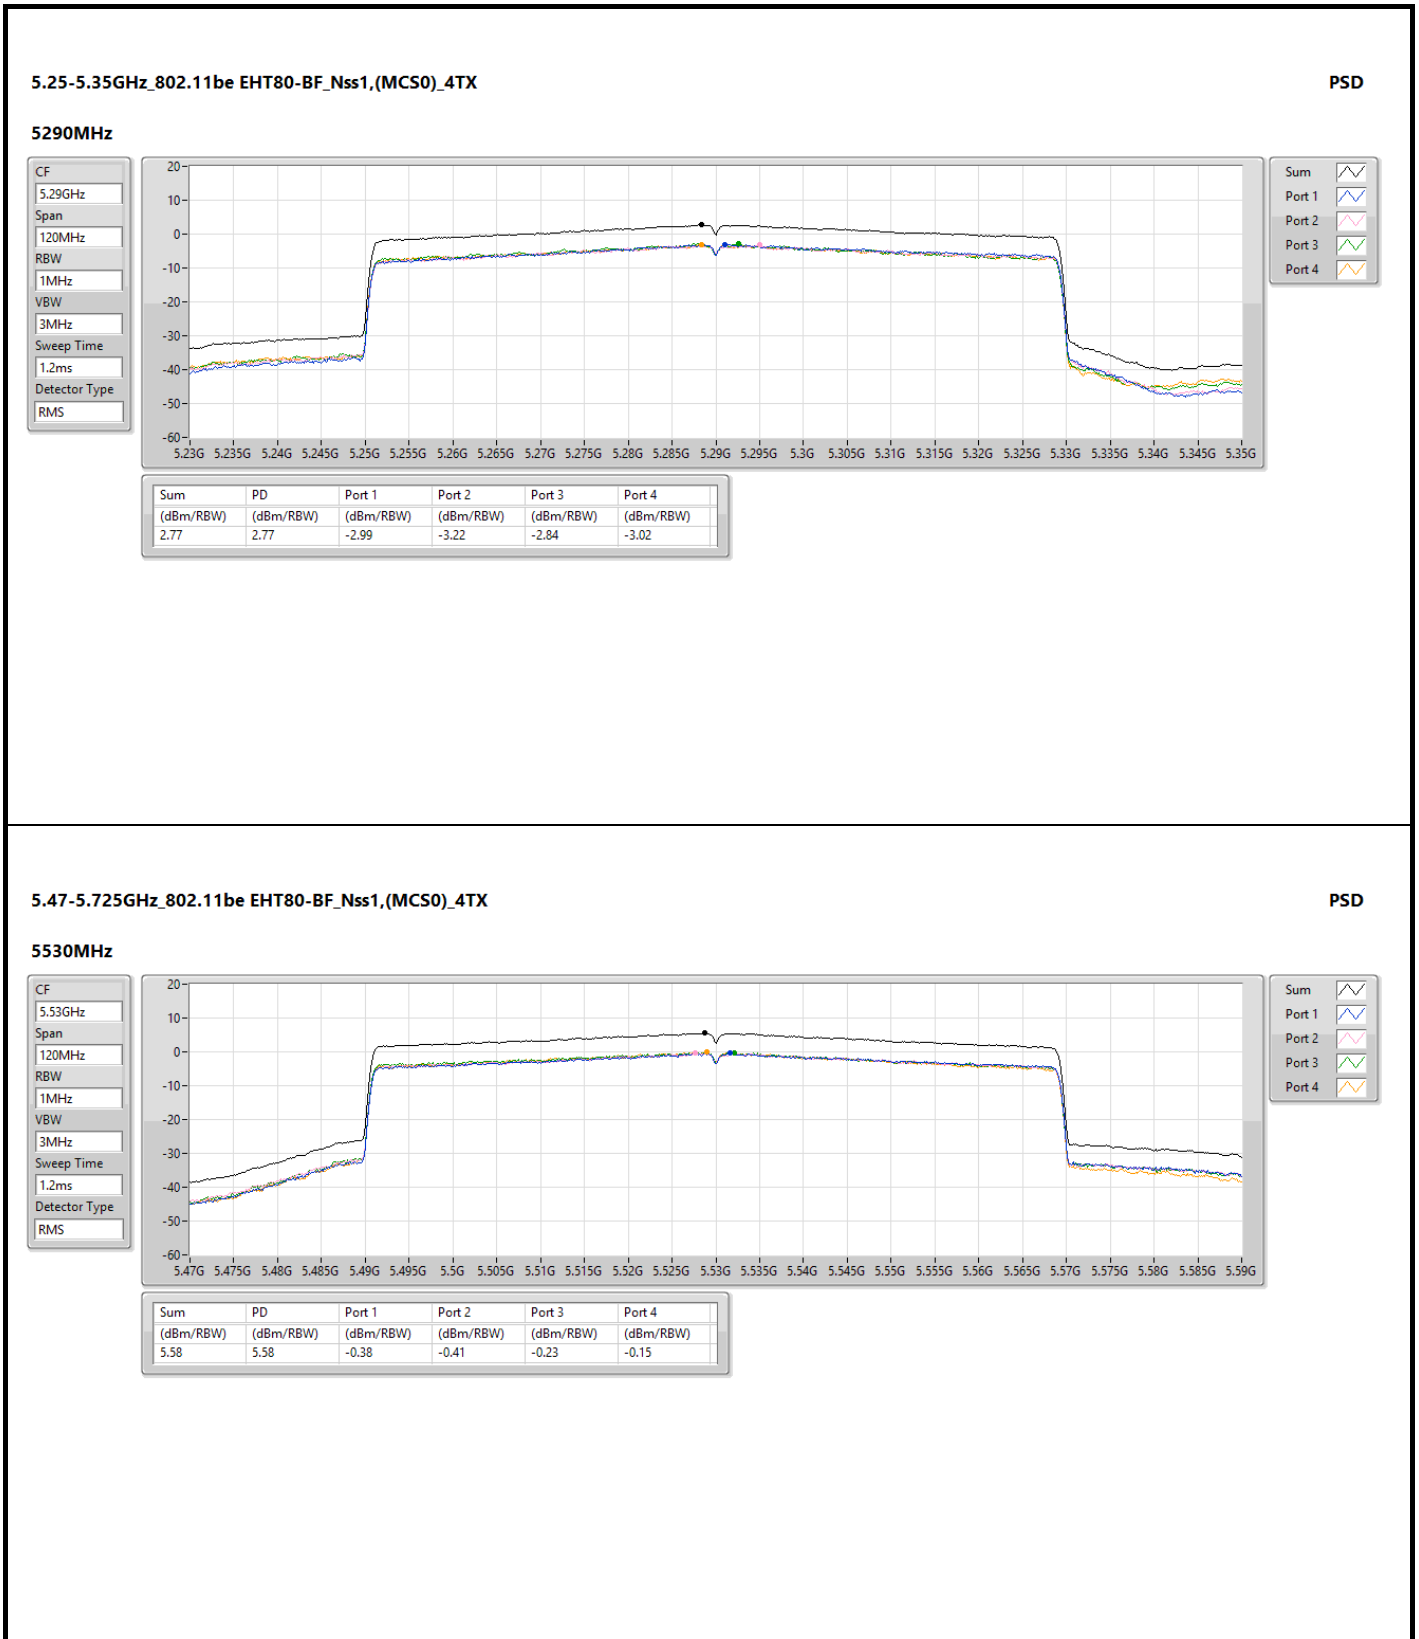

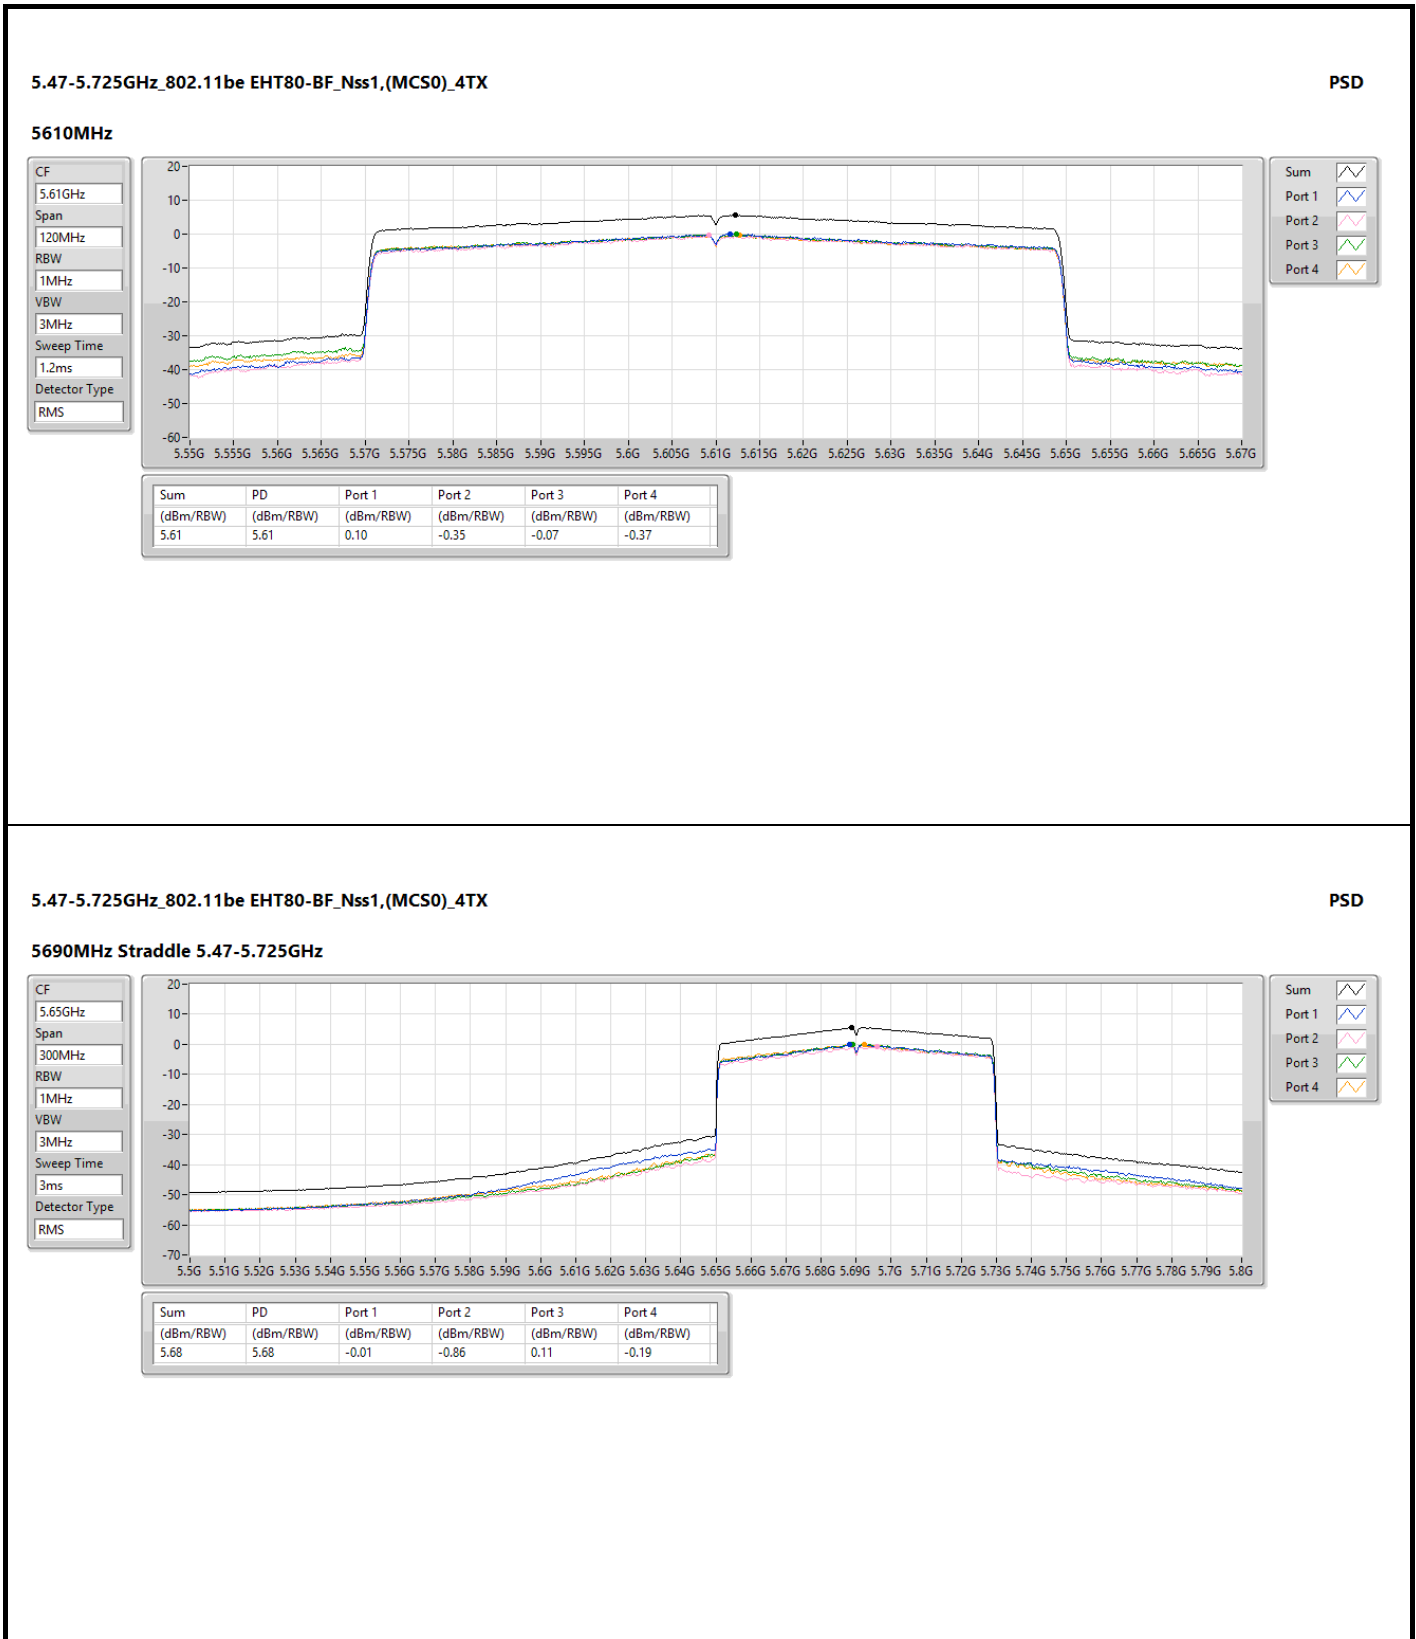



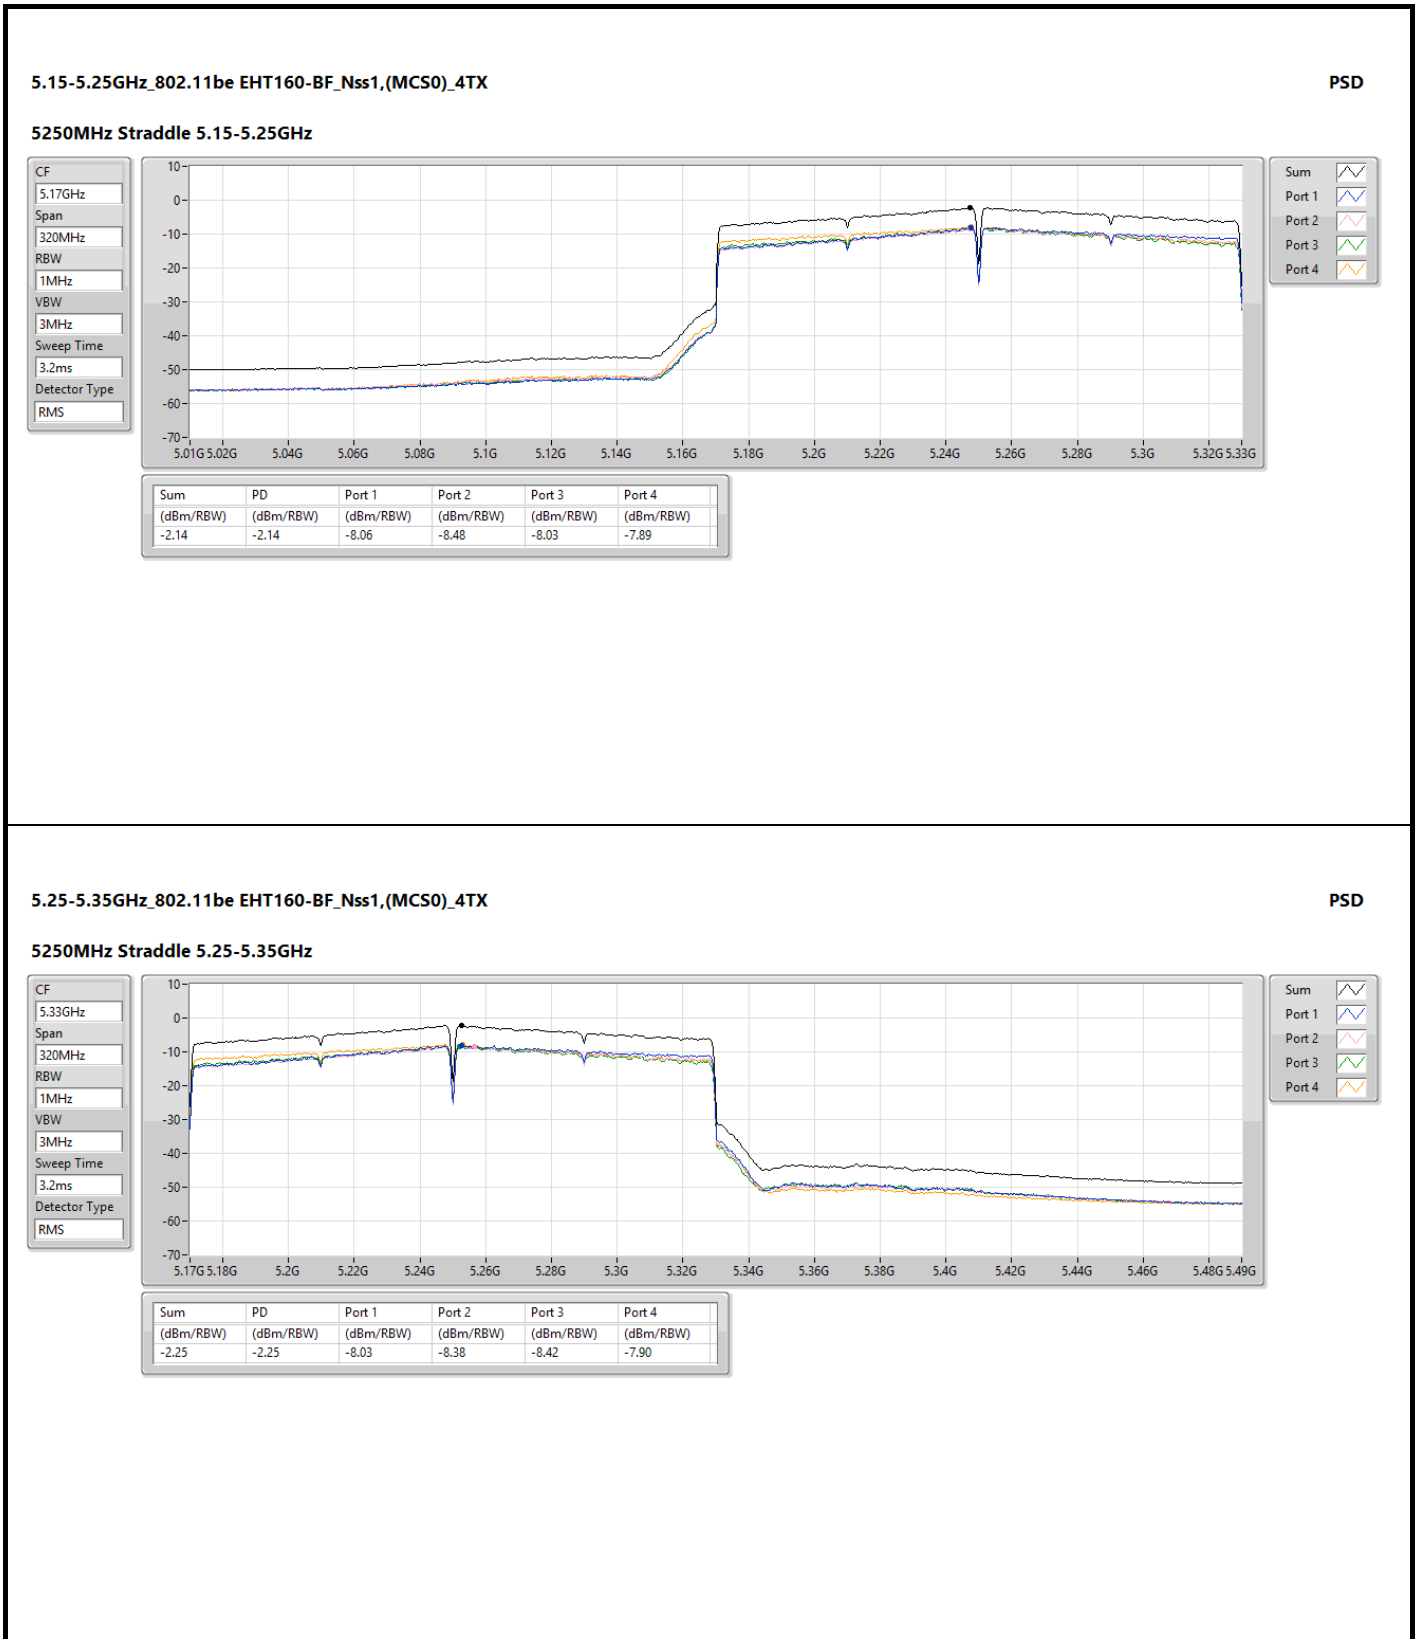

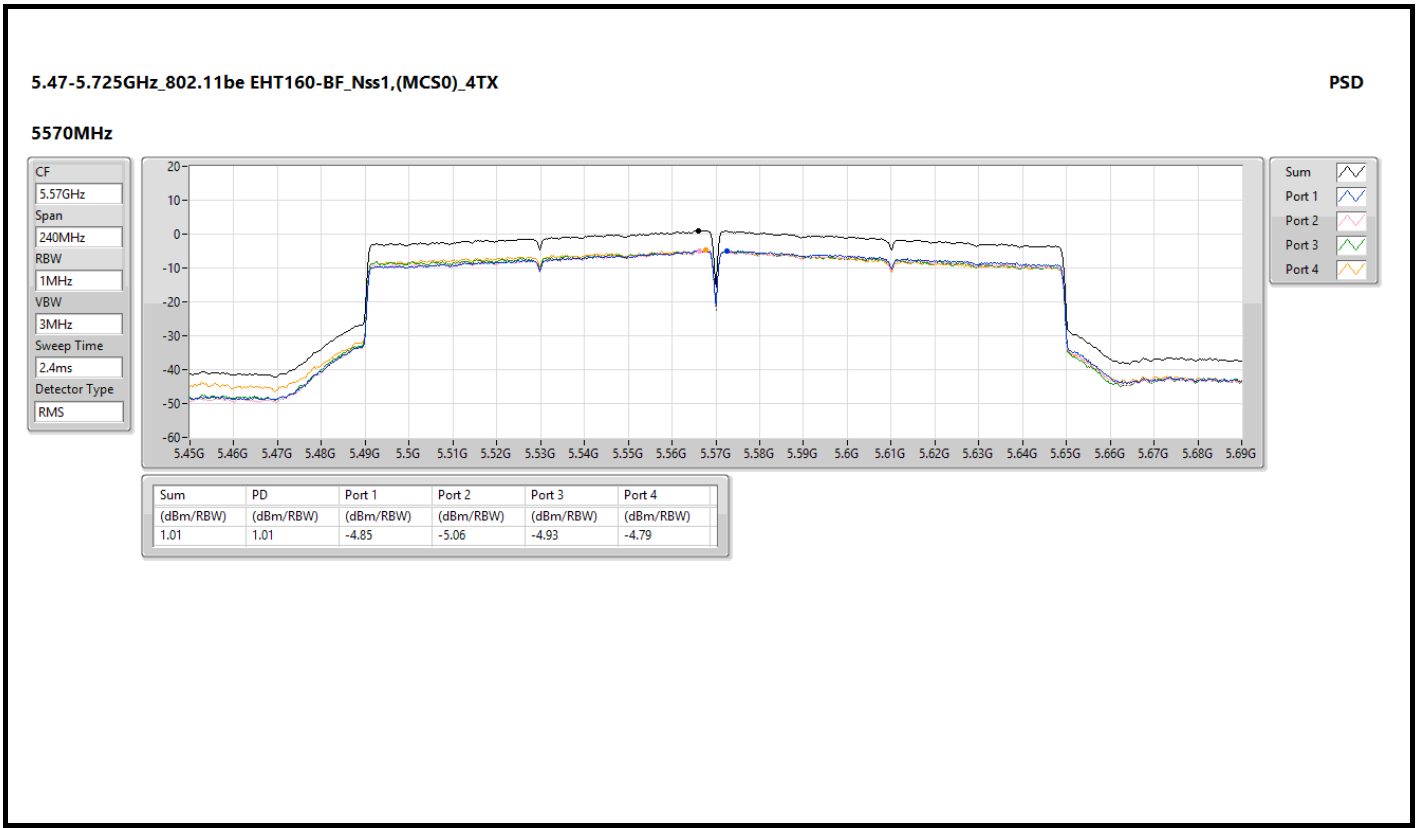




Non-beamforming mode

**Configuration 1: Model: SDG-8733
Unwanted Emissions (Below 1GHz)**

Modulation	be EHT40	Test Freq. (MHz)	5230
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 25 Humidity(%): 61

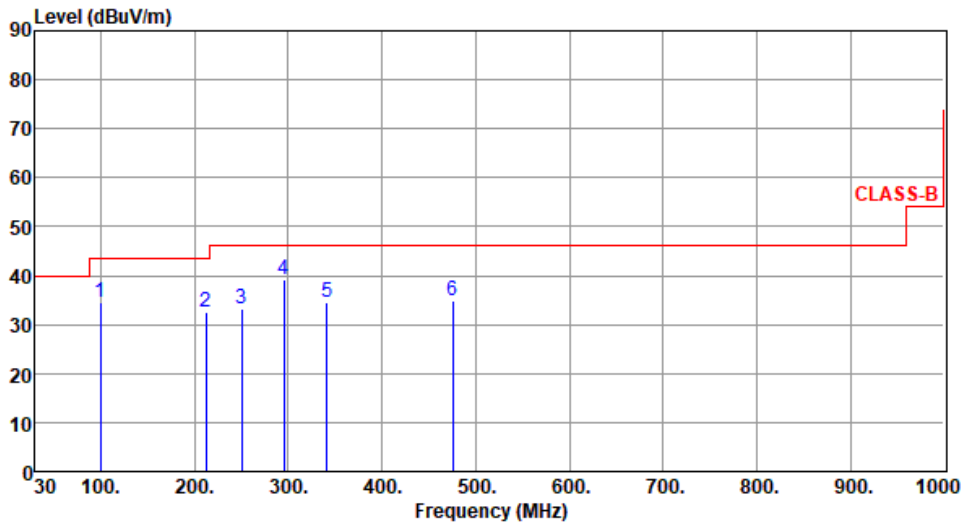

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	99.84	34.62	43.50	-8.88	47.88	-13.26	Peak	---	---
2	212.36	32.39	43.50	-11.11	44.36	-11.97	Peak	---	---
3	250.19	33.17	46.00	-12.83	43.12	-9.95	Peak	---	---
4	295.78	39.03	46.00	-6.97	47.28	-8.25	Peak	---	---
5	341.37	34.60	46.00	-11.40	41.65	-7.05	Peak	---	---
6	475.23	34.83	46.00	-11.17	38.41	-3.58	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Modulation	be EHT40	Test Freq. (MHz)	5230
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 25 Humidity(%): 61

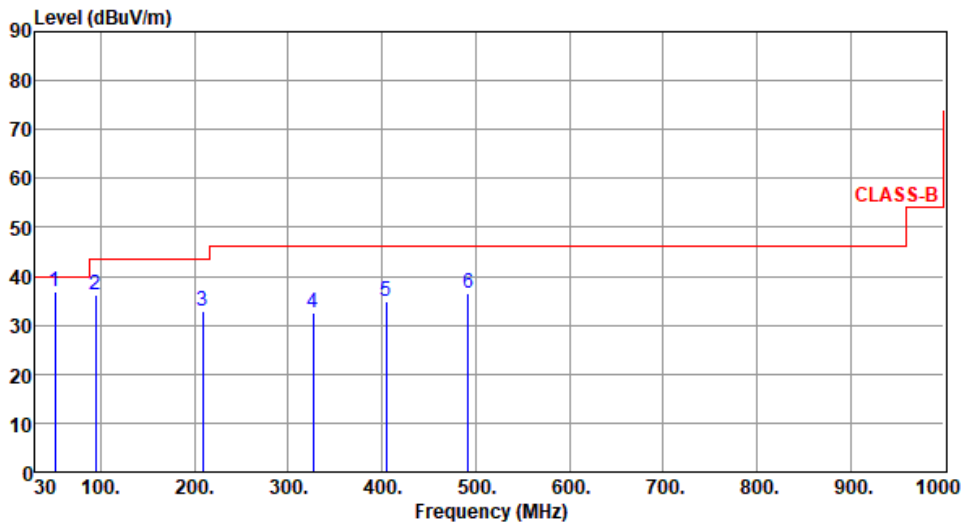

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	51.34	36.84	40.00	-3.16	44.71	-7.87	QP	100	60
2	94.02	36.24	43.50	-7.26	50.27	-14.03	Peak	---	---
3	208.48	32.90	43.50	-10.60	44.85	-11.95	Peak	---	---
4	326.82	32.68	46.00	-13.32	39.93	-7.25	Peak	---	---
5	404.42	34.85	46.00	-11.15	40.14	-5.29	Peak	---	---
6	491.72	36.57	46.00	-9.43	39.78	-3.21	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Modulation	11a	Test Freq. (MHz)	5745
Polarization	Horizontal		

Test By :Sean Yu Temperature(°C):25 Humidity(%):61

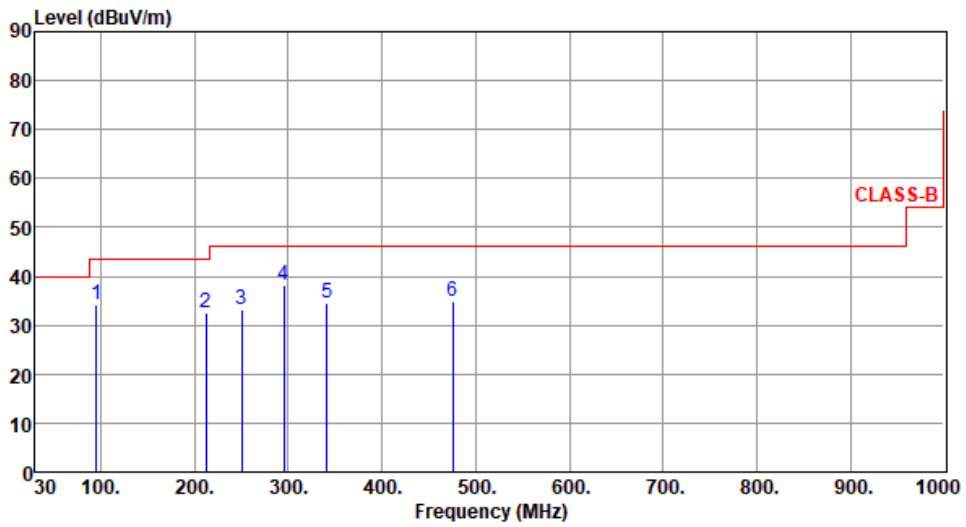

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	94.99	34.31	43.50	-9.19	48.25	-13.94	Peak	---	---
2	212.36	32.39	43.50	-11.11	44.36	-11.97	Peak	---	---
3	250.19	33.20	46.00	-12.80	43.15	-9.95	Peak	---	---
4	295.78	38.03	46.00	-7.97	46.28	-8.25	Peak	---	---
5	341.37	34.60	46.00	-11.40	41.65	-7.05	Peak	---	---
6	475.23	34.83	46.00	-11.17	38.41	-3.58	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Modulation	11a	Test Freq. (MHz)	5745
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 25 Humidity(%): 61

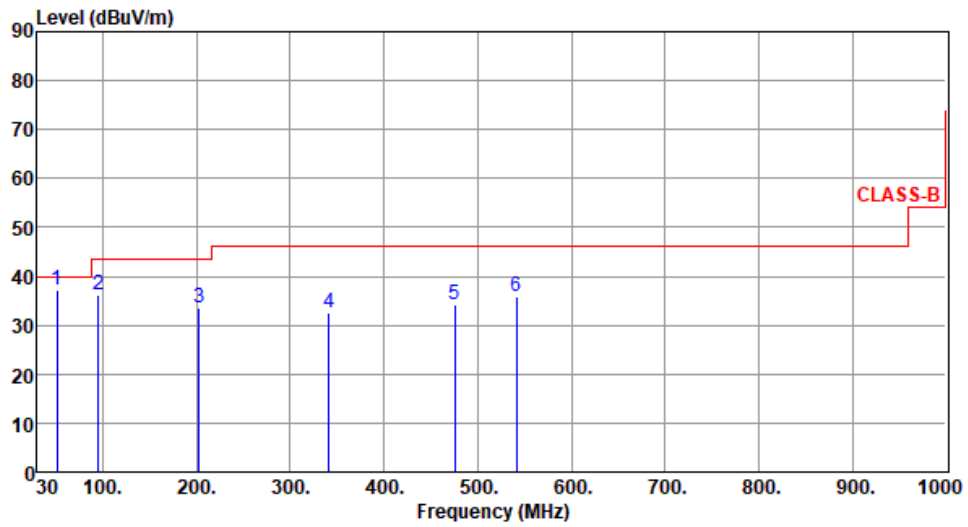

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	51.34	37.04	40.00	-2.96	44.91	-7.87	QP	100	60
2	94.99	36.11	43.50	-7.39	50.05	-13.94	Peak	---	---
3	202.66	33.62	43.50	-9.88	45.47	-11.85	Peak	---	---
4	341.37	32.67	46.00	-13.33	39.72	-7.05	Peak	---	---
5	475.23	34.25	46.00	-11.75	37.83	-3.58	Peak	---	---
6	541.19	35.79	46.00	-10.21	38.23	-2.44	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Unwanted Emissions (Above 1GHz) for 11a

Modulation	11a	Test Freq. (MHz)	5180
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):23 Humidity(%):62

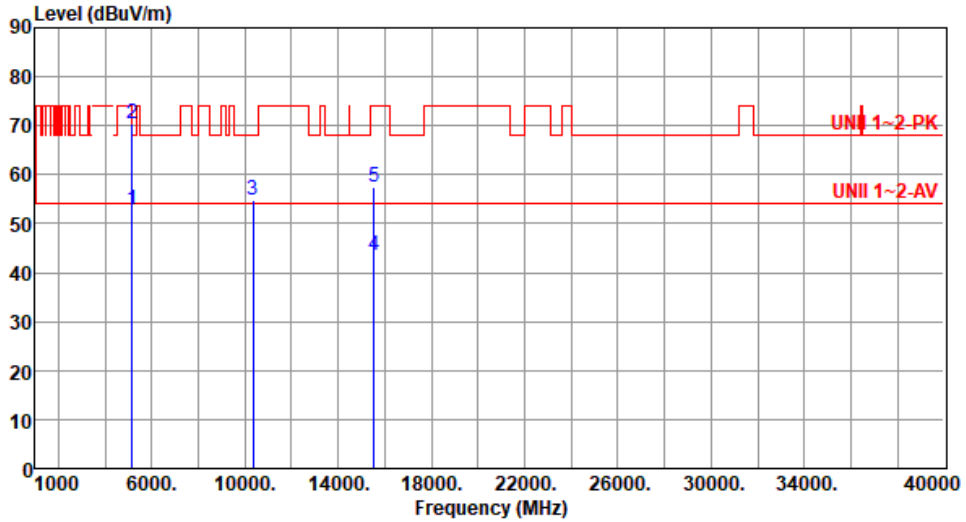

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	52.96	54.00	-1.04	52.63	0.33	Average	131	320
2	5150.00	70.27	74.00	-3.73	69.94	0.33	Peak	131	320
3	10360.00	54.89	68.20	-13.31	47.53	7.36	Peak	100	322
4	15540.00	43.60	54.00	-10.40	39.64	3.96	Average	117	180
5	15540.00	57.39	74.00	-16.61	53.43	3.96	Peak	117	180

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	5180
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):23 Humidity(%):62

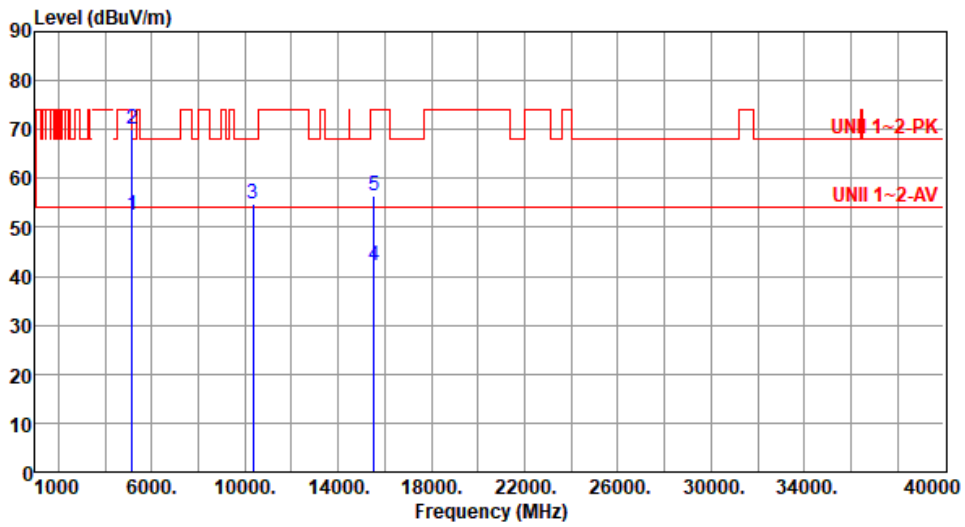

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	52.59	54.00	-1.41	52.26	0.33	Average	100	240
2	5150.00	69.93	74.00	-4.07	69.60	0.33	Peak	100	240
3	10360.00	54.89	68.20	-13.31	47.53	7.36	Peak	100	253
4	15540.00	42.18	54.00	-11.82	38.22	3.96	Average	100	216
5	15540.00	56.39	74.00	-17.61	52.43	3.96	Peak	100	216

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	5200
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 25 Humidity(%): 62

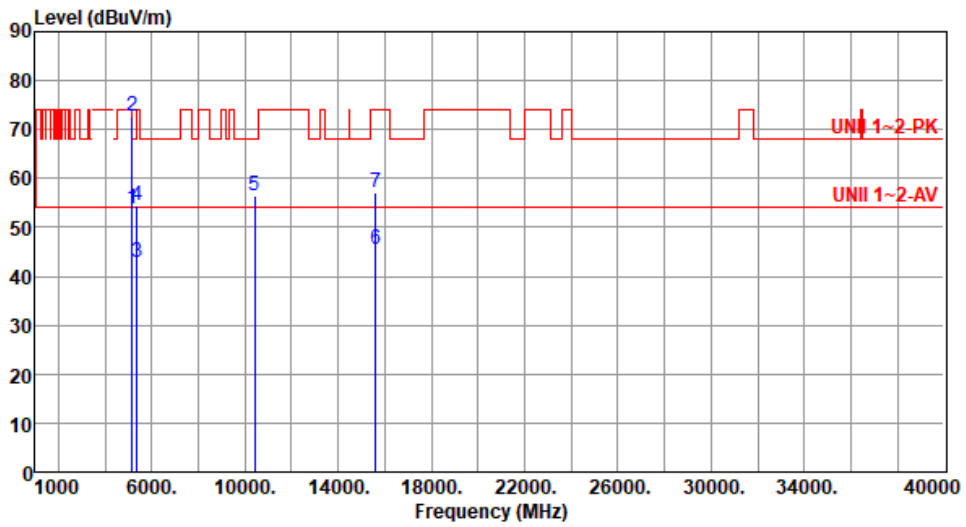

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	53.87	54.00	-0.13	53.54	0.33	Average	246	168
2	5150.00	72.74	74.00	-1.26	72.41	0.33	Peak	246	168
3	5350.00	42.99	54.00	-11.01	43.24	-0.25	Average	246	206
4	5350.00	54.60	74.00	-19.40	54.85	-0.25	Peak	246	206
5	10400.00	56.60	68.20	-11.60	49.26	7.34	Peak	100	228
6	15600.00	45.44	54.00	-8.56	41.44	4.00	Average	100	163
7	15600.00	57.07	74.00	-16.93	53.07	4.00	Peak	100	163

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	5200
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 25 Humidity(%): 62

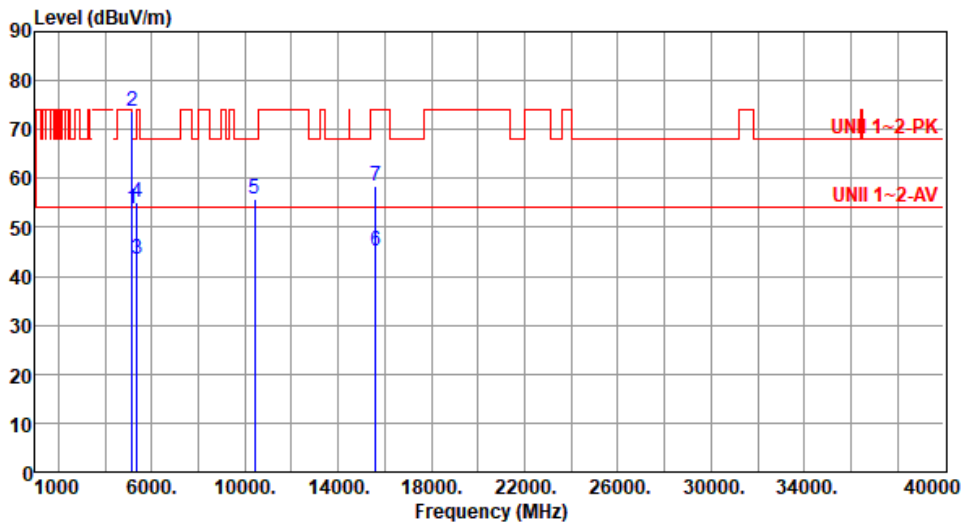

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	53.84	54.00	-0.16	53.51	0.33	Average	262	302
2	5150.00	73.65	74.00	-0.35	73.32	0.33	Peak	262	302
3	5350.00	43.36	54.00	-10.64	43.61	-0.25	Average	100	205
4	5350.00	55.20	74.00	-18.80	55.45	-0.25	Peak	100	205
5	10400.00	55.77	68.20	-12.43	48.43	7.34	Peak	100	157
6	15600.00	45.03	54.00	-8.97	41.03	4.00	Average	100	208
7	15600.00	58.33	74.00	-15.67	54.33	4.00	Peak	100	208

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	5240
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):23 Humidity(%):62

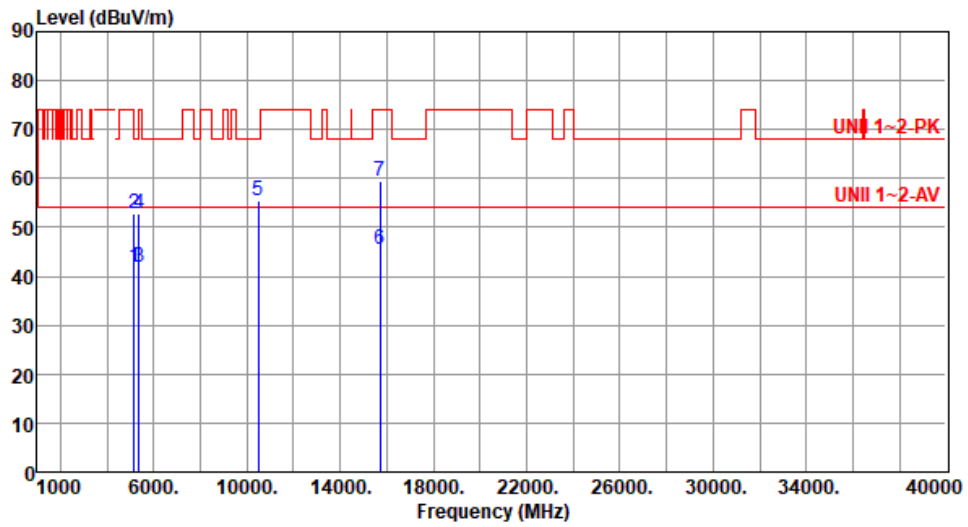

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	42.01	54.00	-11.99	41.68	0.33	Average	100	324
2	5150.00	52.73	74.00	-21.27	52.40	0.33	Peak	100	324
3	5350.00	41.96	54.00	-12.04	42.21	-0.25	Average	100	324
4	5350.00	52.76	74.00	-21.24	53.01	-0.25	Peak	100	324
5	10480.00	55.46	68.20	-12.74	48.22	7.24	Peak	100	321
6	15720.00	45.46	54.00	-8.54	41.23	4.23	Average	117	168
7	15720.00	59.50	74.00	-14.50	55.27	4.23	Peak	117	168

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	5240
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):23 Humidity(%):62

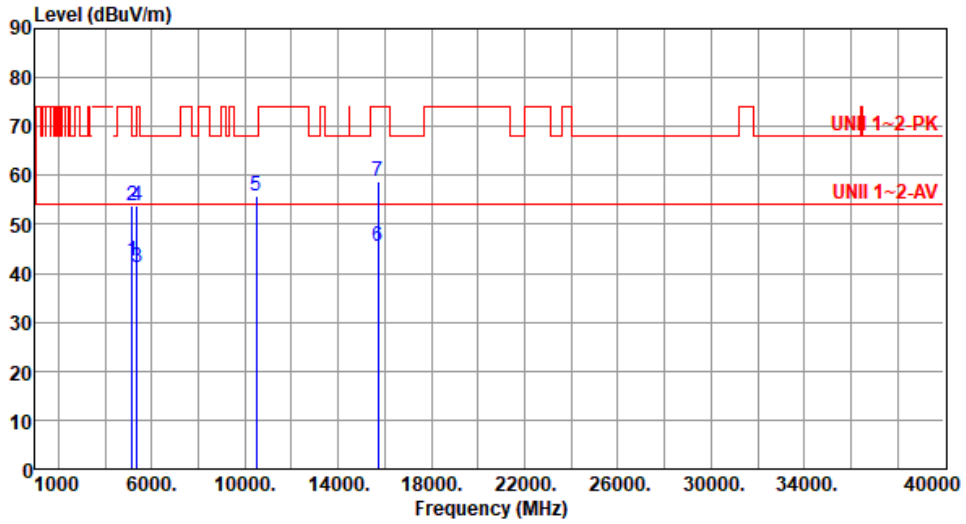

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	42.52	54.00	-11.48	42.19	0.33	Average	100	211
2	5150.00	53.89	74.00	-20.11	53.56	0.33	Peak	100	211
3	5350.00	41.24	54.00	-12.76	41.49	-0.25	Average	100	211
4	5350.00	53.88	74.00	-20.12	54.13	-0.25	Peak	100	211
5	10480.00	55.83	68.20	-12.37	48.59	7.24	Peak	100	248
6	15720.00	45.46	54.00	-8.54	41.23	4.23	Average	100	220
7	15720.00	58.67	74.00	-15.33	54.44	4.23	Peak	100	220

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	5260
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):23 Humidity(%):64

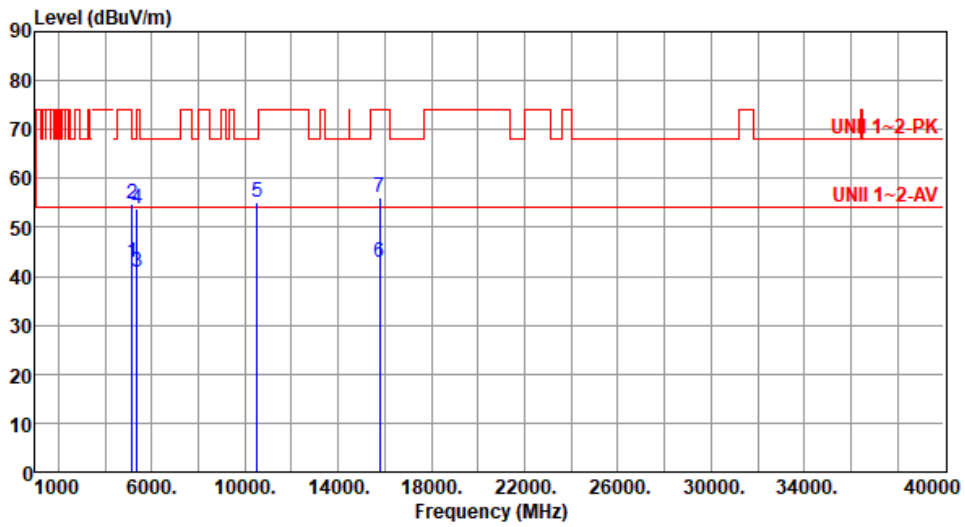

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	42.79	54.00	-11.21	42.46	0.33	Average	100	318
2	5150.00	54.83	74.00	-19.17	54.50	0.33	Peak	100	318
3	5350.00	41.00	54.00	-13.00	41.25	-0.25	Average	100	318
4	5350.00	53.90	74.00	-20.10	54.15	-0.25	Peak	100	318
5	10520.00	55.27	68.20	-12.93	48.13	7.14	Peak	100	38
6	15780.00	42.94	54.00	-11.06	38.98	3.96	Average	100	199
7	15780.00	56.07	74.00	-17.93	52.11	3.96	Peak	100	199

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	5260
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):23 Humidity(%):64

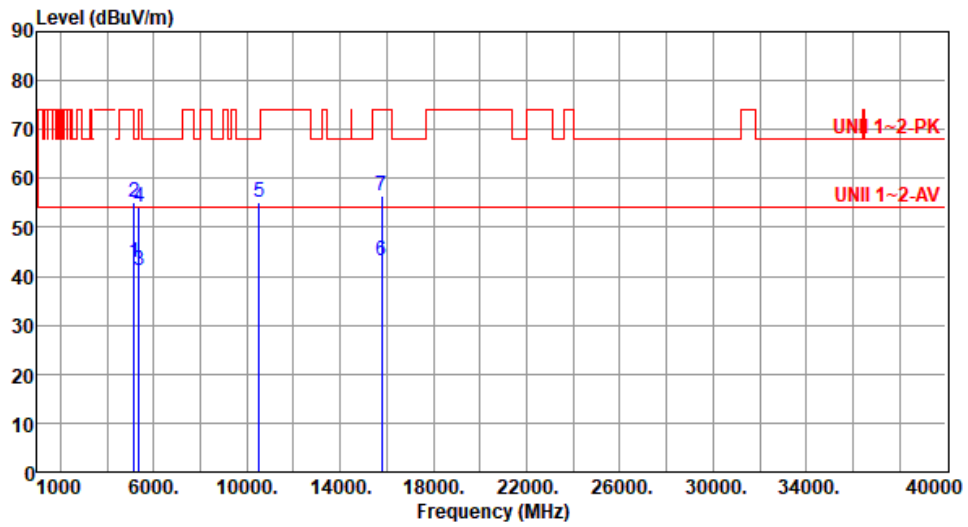

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	42.82	54.00	-11.18	42.49	0.33	Average	100	208
2	5150.00	55.21	74.00	-18.79	54.88	0.33	Peak	100	208
3	5350.00	41.05	54.00	-12.95	41.30	-0.25	Average	100	208
4	5350.00	54.02	74.00	-19.98	54.27	-0.25	Peak	100	208
5	10520.00	55.07	68.20	-13.13	47.93	7.14	Peak	100	228
6	15780.00	43.21	54.00	-10.79	39.25	3.96	Average	100	114
7	15780.00	56.61	74.00	-17.39	52.65	3.96	Peak	100	114

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	5300
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 61

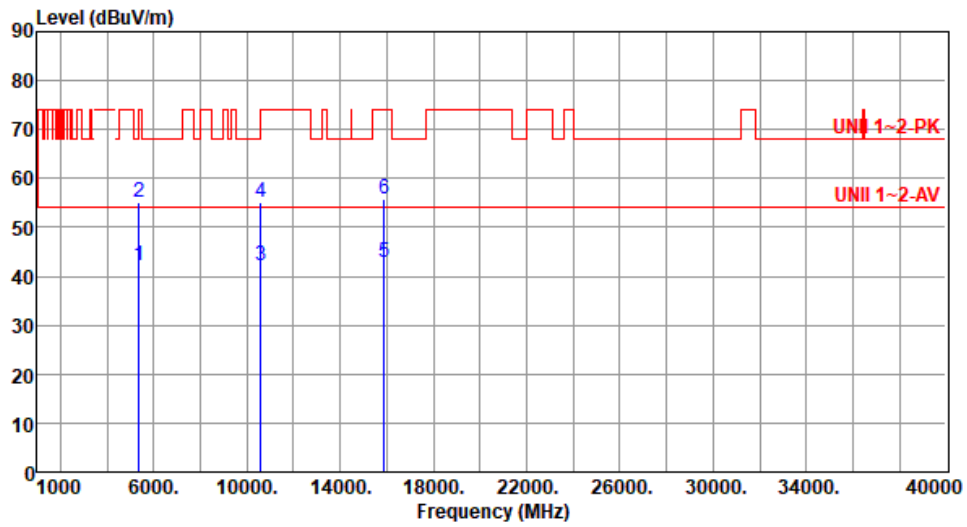

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5350.00	42.24	54.00	-11.76	42.49	-0.25	Average	238	146
2	5350.00	55.12	74.00	-18.88	55.37	-0.25	Peak	238	146
3	10600.00	42.01	54.00	-11.99	34.47	7.54	Average	100	215
4	10600.00	55.05	74.00	-18.95	47.51	7.54	Peak	100	215
5	15900.00	43.00	54.00	-11.00	38.67	4.33	Average	100	54
6	15900.00	55.95	74.00	-18.05	51.62	4.33	Peak	100	54

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	5300
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 61

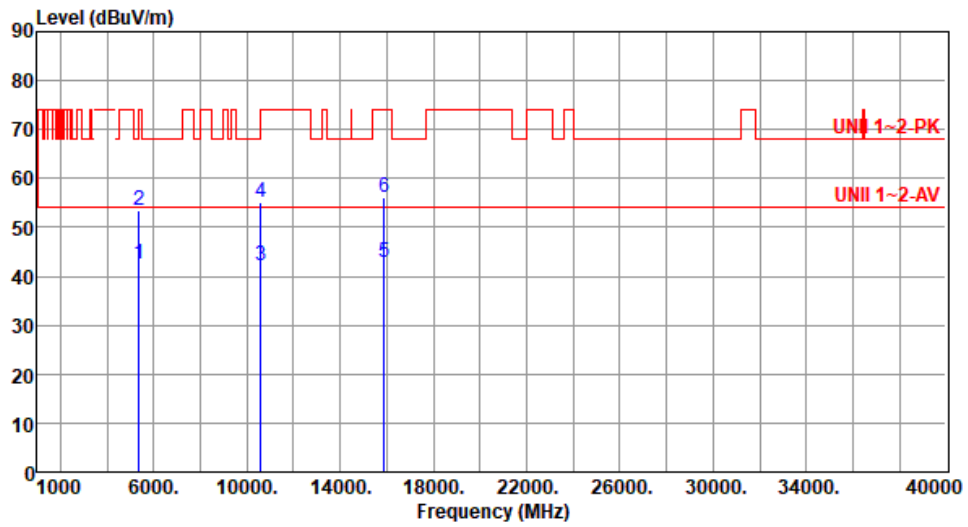

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5350.00	42.51	54.00	-11.49	42.76	-0.25	Average	100	232
2	5350.00	53.52	74.00	-20.48	53.77	-0.25	Peak	100	232
3	10600.00	42.05	54.00	-11.95	34.51	7.54	Average	100	177
4	10600.00	55.22	74.00	-18.78	47.68	7.54	Peak	100	177
5	15900.00	42.90	54.00	-11.10	38.57	4.33	Average	100	291
6	15900.00	55.99	74.00	-18.01	51.66	4.33	Peak	100	291

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	5320
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):23 Humidity(%):64

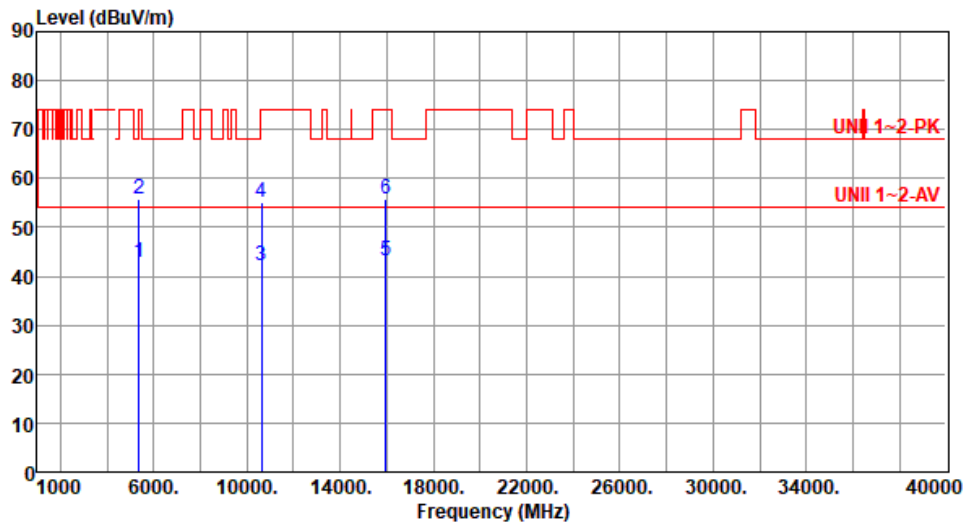

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5350.00	42.73	54.00	-11.27	42.98	-0.25	Average	220	331
2	5350.00	55.67	74.00	-18.33	55.92	-0.25	Peak	220	331
3	10640.00	42.17	54.00	-11.83	34.57	7.60	Average	100	166
4	10640.00	55.23	74.00	-18.77	47.63	7.60	Peak	100	166
5	15960.00	43.29	54.00	-10.71	38.98	4.31	Average	100	68
6	15960.00	55.83	74.00	-18.17	51.52	4.31	Peak	100	68

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	5320
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):23 Humidity(%):64

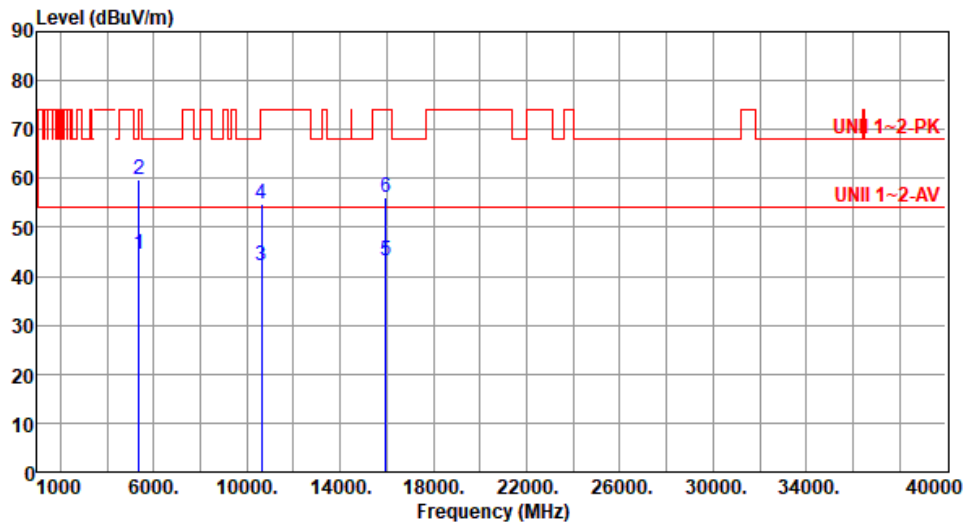

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5350.00	44.66	54.00	-9.34	44.91	-0.25	Average	100	201
2	5350.00	59.63	74.00	-14.37	59.88	-0.25	Peak	100	201
3	10640.00	42.19	54.00	-11.81	34.59	7.60	Average	100	349
4	10640.00	54.80	74.00	-19.20	47.20	7.60	Peak	100	349
5	15960.00	43.05	54.00	-10.95	38.74	4.31	Average	100	95
6	15960.00	56.02	74.00	-17.98	51.71	4.31	Peak	100	95

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	5500
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):23 Humidity(%):64

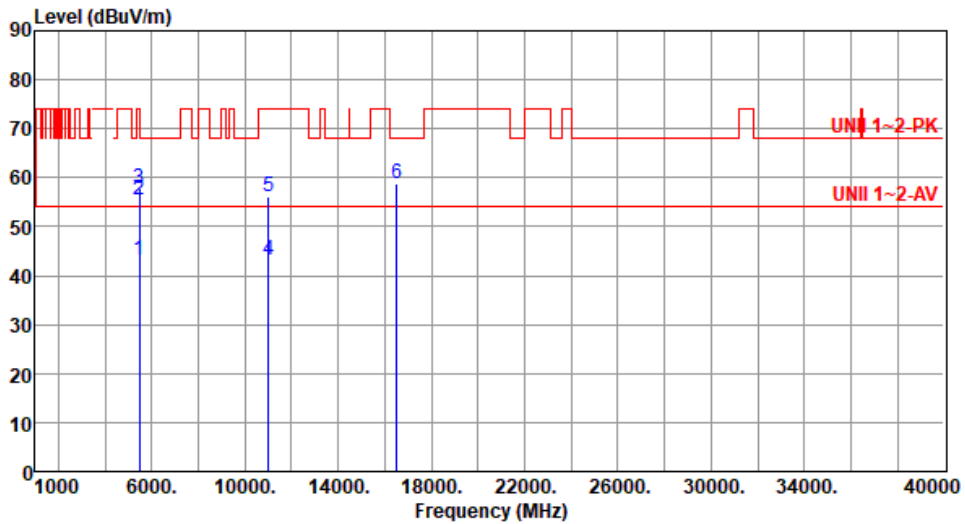

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	43.17	54.00	-10.83	42.78	0.39	Average	369	145
2	5460.00	55.33	74.00	-18.67	54.94	0.39	Peak	369	145
3	5470.00	57.71	68.20	-10.49	57.33	0.38	Peak	369	145
4	11000.00	43.04	54.00	-10.96	35.49	7.55	Average	100	167
5	11000.00	56.05	74.00	-17.95	48.50	7.55	Peak	100	167
6	16500.00	58.80	68.20	-9.40	52.35	6.45	Peak	100	294

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).



Modulation	11a	Test Freq. (MHz)	5500
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):23 Humidity(%):64

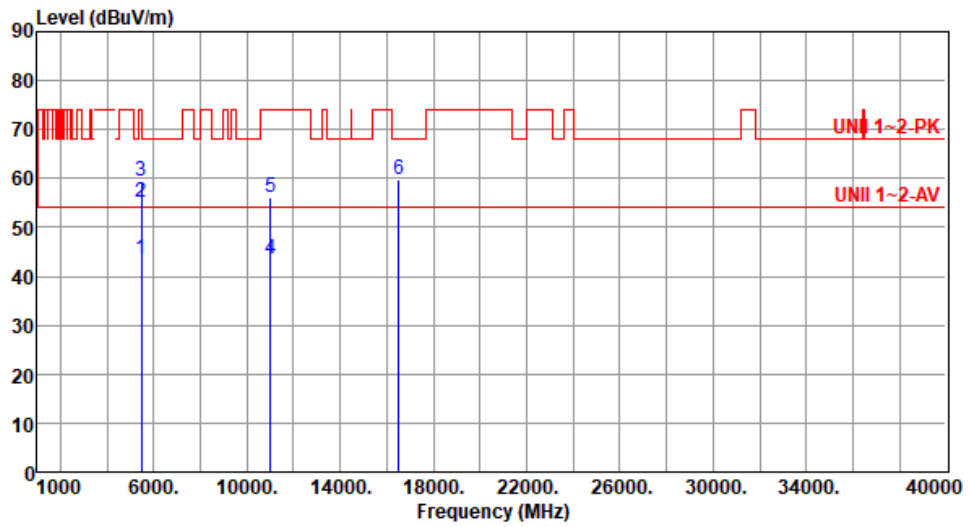

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	43.60	54.00	-10.40	43.21	0.39	Average	100	224
2	5460.00	55.25	74.00	-18.75	54.86	0.39	Peak	100	224
3	5470.00	59.33	68.20	-8.87	58.95	0.38	Peak	100	224
4	11000.00	43.57	54.00	-10.43	36.02	7.55	Average	100	338
5	11000.00	56.00	74.00	-18.00	48.45	7.55	Peak	100	338
6	16500.00	59.92	68.20	-8.28	53.47	6.45	Peak	100	182

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	5580
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 61

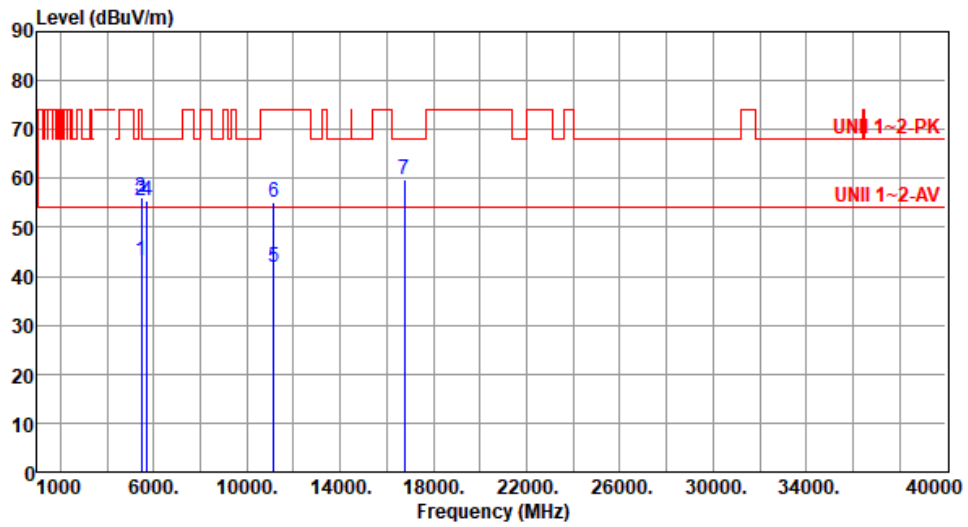

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	43.23	54.00	-10.77	42.84	0.39	Average	213	149
2	5460.00	55.54	74.00	-18.46	55.15	0.39	Peak	213	149
3	5470.00	56.00	68.20	-12.20	55.62	0.38	Peak	213	149
4	5725.00	55.37	68.20	-12.83	54.79	0.58	Peak	213	149
5	11160.00	41.75	54.00	-12.25	34.82	6.93	Average	100	271
6	11160.00	55.15	74.00	-18.85	48.22	6.93	Peak	100	271
7	16740.00	59.69	68.20	-8.51	52.33	7.36	Peak	100	331

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	5580
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 61

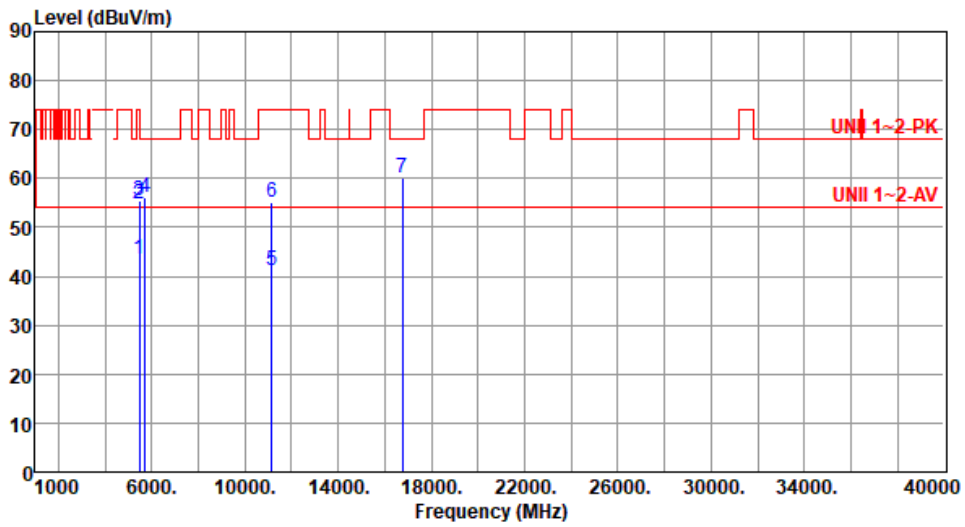

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	43.47	54.00	-10.53	43.08	0.39	Average	100	215
2	5460.00	54.70	74.00	-19.30	54.31	0.39	Peak	100	215
3	5470.00	55.50	68.20	-12.70	55.12	0.38	Peak	100	215
4	5725.00	56.18	68.20	-12.02	55.60	0.58	Peak	100	215
5	11160.00	41.15	54.00	-12.85	34.22	6.93	Average	100	155
6	11160.00	55.15	74.00	-18.85	48.22	6.93	Peak	100	155
7	16740.00	60.20	68.20	-8.00	52.84	7.36	Peak	100	271

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	5700
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):23 Humidity(%):64

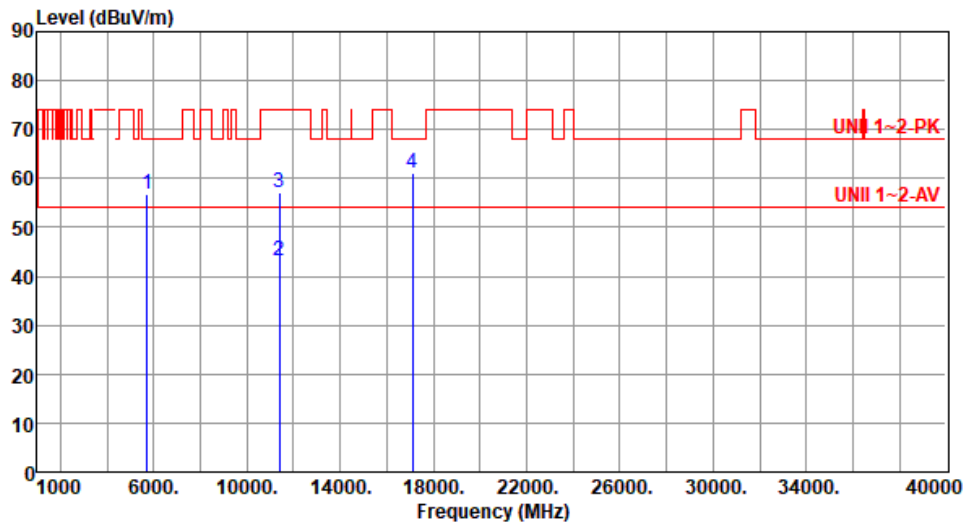

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5725.00	56.68	68.20	-11.52	56.10	0.58	Peak	183	144
2	11400.00	43.08	54.00	-10.92	35.89	7.19	Average	100	26
3	11400.00	56.96	74.00	-17.04	49.77	7.19	Peak	100	26
4	17100.00	61.09	68.20	-7.11	54.26	6.83	Peak	100	255

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	5700
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):23 Humidity(%):64

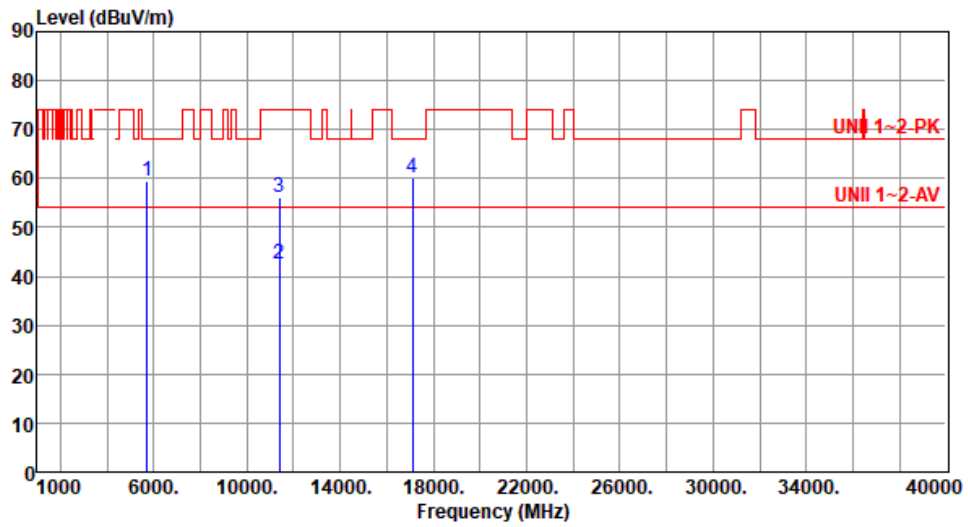

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5725.00	59.33	68.20	-8.87	58.75	0.58	Peak	100	252
2	11400.00	42.54	54.00	-11.46	35.35	7.19	Average	100	103
3	11400.00	56.16	74.00	-17.84	48.97	7.19	Peak	100	103
4	17100.00	60.21	68.20	-7.99	53.38	6.83	Peak	100	306

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	5720
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):23 Humidity(%):64

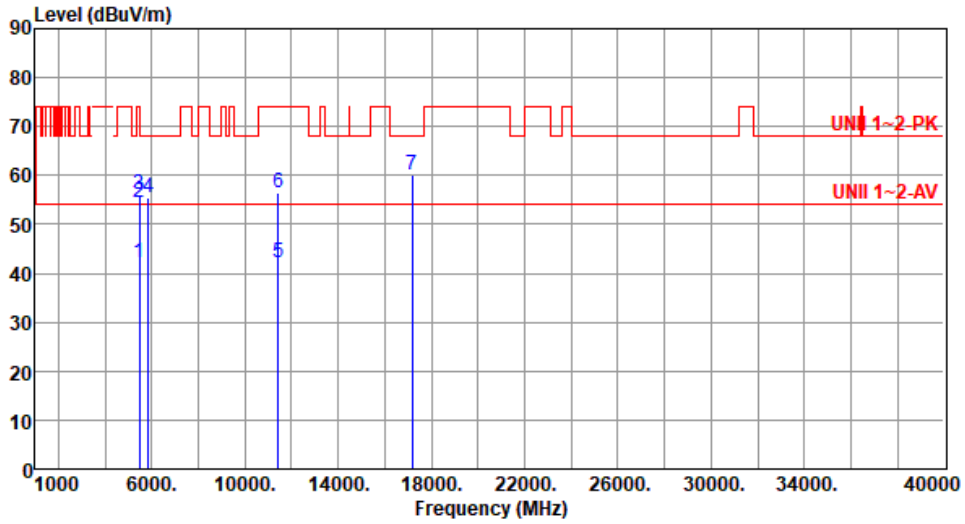

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	42.15	54.00	-11.85	41.76	0.39	Average	119	188
2	5460.00	54.56	74.00	-19.44	54.17	0.39	Peak	119	188
3	5470.00	55.96	68.20	-12.24	55.58	0.38	Peak	119	188
4	5850.00	55.58	68.20	-12.62	54.62	0.96	Peak	119	188
5	11440.00	42.29	54.00	-11.71	35.12	7.17	Average	100	144
6	11440.00	56.35	74.00	-17.65	49.18	7.17	Peak	100	144
7	17160.00	60.27	68.20	-7.93	53.79	6.48	Peak	100	144

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	5720
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):23 Humidity(%):64

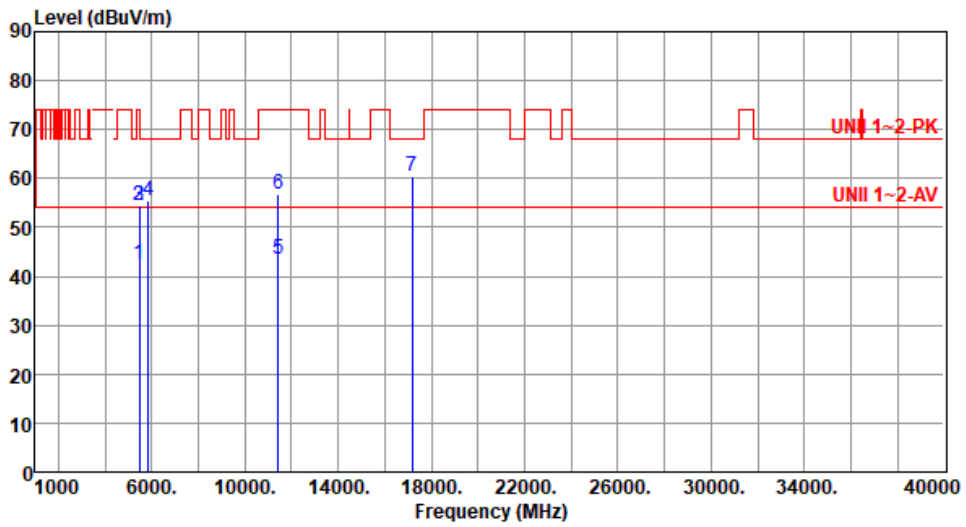

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	42.34	54.00	-11.66	41.95	0.39	Average	100	203
2	5460.00	54.47	74.00	-19.53	54.08	0.39	Peak	100	203
3	5470.00	54.51	68.20	-13.69	54.13	0.38	Peak	100	203
4	5850.00	55.49	68.20	-12.71	54.53	0.96	Peak	100	203
5	11440.00	43.47	54.00	-10.53	36.30	7.17	Average	100	278
6	11440.00	56.72	74.00	-17.28	49.55	7.17	Peak	100	278
7	17160.00	60.31	68.20	-7.89	53.83	6.48	Peak	100	15

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	5745
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 61

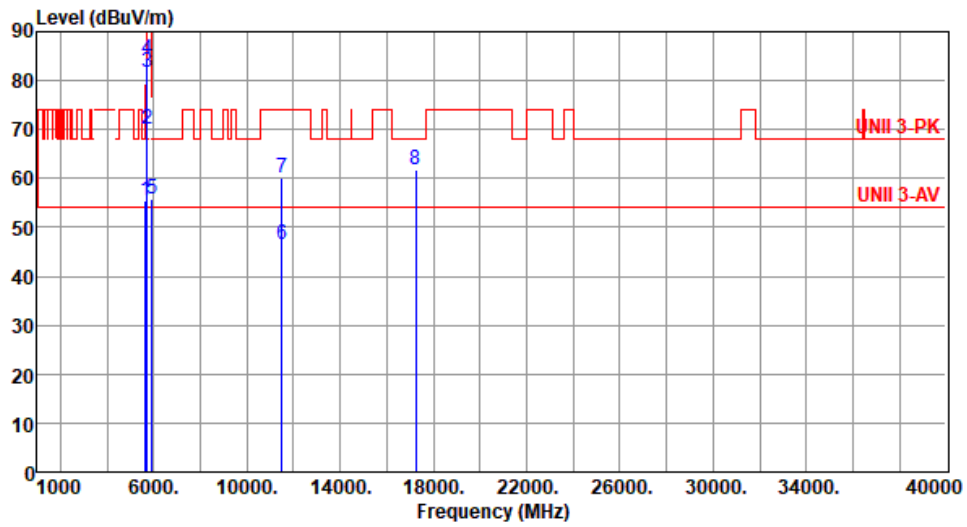

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	55.60	68.20	-12.60	55.39	0.21	Peak	194	138
2	5700.00	70.18	105.20	-35.02	69.65	0.53	Peak	194	138
3	5720.00	81.64	110.80	-29.16	81.07	0.57	Peak	194	138
4	5725.00	84.22	122.20	-37.98	83.64	0.58	Peak	194	138
5	5925.00	55.85	68.20	-12.35	54.72	1.13	Peak	194	138
6	11490.00	46.53	54.00	-7.47	39.22	7.31	Average	100	212
7	11490.00	60.18	74.00	-13.82	52.87	7.31	Peak	100	212
8	17235.00	61.62	68.20	-6.58	54.93	6.69	Peak	100	212

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	5745
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 61

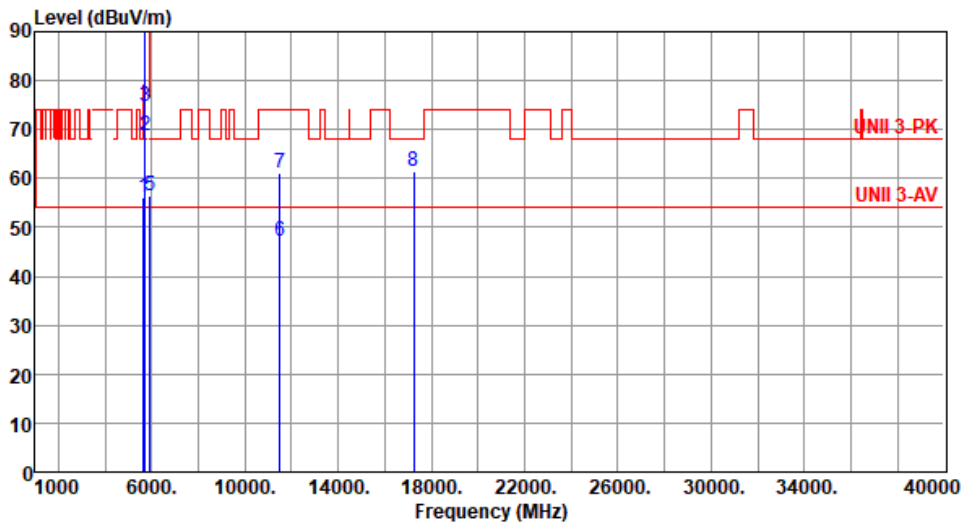

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	56.13	68.20	-12.07	55.92	0.21	Peak	100	246
2	5700.00	68.83	105.20	-36.37	68.30	0.53	Peak	100	246
3	5720.00	74.67	110.80	-36.13	74.10	0.57	Peak	100	246
4	5725.00	91.40	122.20	-30.80	90.82	0.58	Peak	100	246
5	5925.00	56.32	68.20	-11.88	55.19	1.13	Peak	100	246
6	11490.00	47.21	54.00	-6.79	39.90	7.31	Average	100	280
7	11490.00	61.23	74.00	-12.77	53.92	7.31	Peak	100	280
8	17235.00	61.38	68.20	-6.82	54.69	6.69	Peak	100	280

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	5785
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 61

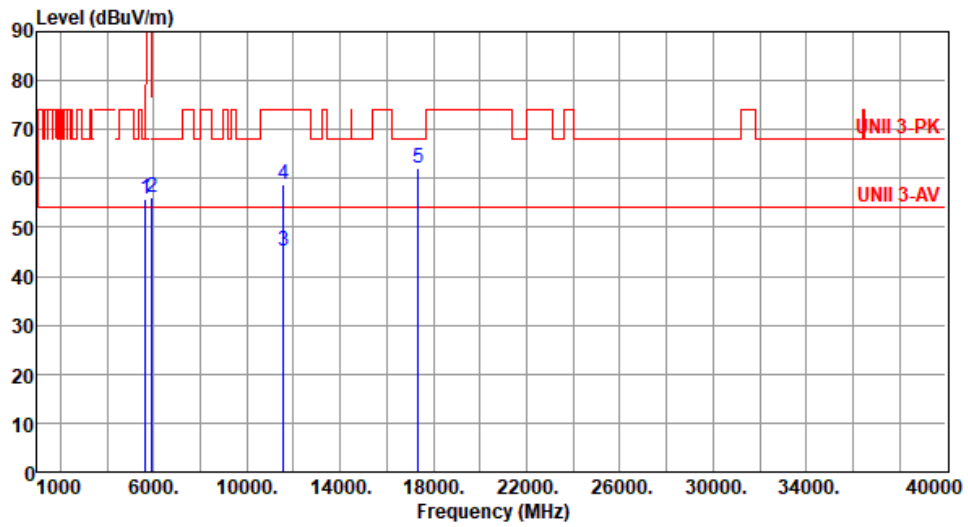

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	55.65	68.20	-12.55	55.44	0.21	Peak	211	146
2	5925.00	56.01	68.20	-12.19	54.88	1.13	Peak	211	146
3	11570.00	45.28	54.00	-8.72	38.06	7.22	Average	100	328
4	11570.00	58.90	74.00	-15.10	51.68	7.22	Peak	100	328
5	17355.00	62.11	68.20	-6.09	55.23	6.88	Peak	246	176

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	5785
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 61

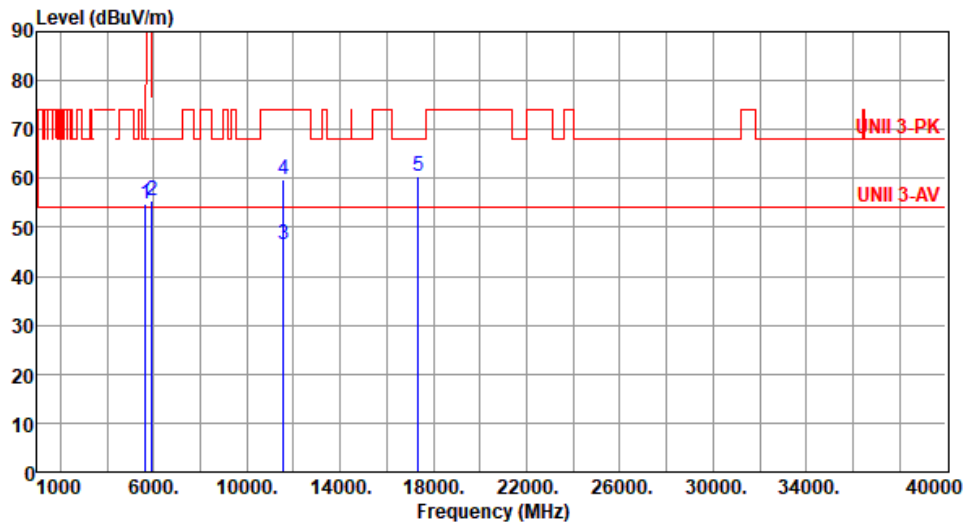

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	54.78	68.20	-13.42	54.57	0.21	Peak	100	326
2	5925.00	55.46	68.20	-12.74	54.33	1.13	Peak	100	326
3	11570.00	46.59	54.00	-7.41	39.37	7.22	Average	125	110
4	11570.00	59.73	74.00	-14.27	52.51	7.22	Peak	125	110
5	17355.00	60.50	68.20	-7.70	53.62	6.88	Peak	100	288

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	5825
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 61

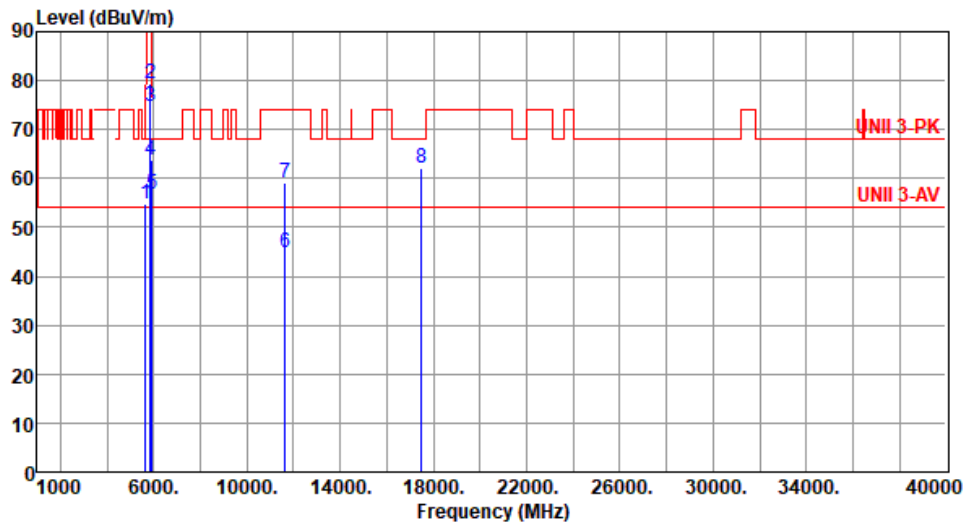

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	54.73	68.20	-13.47	54.52	0.21	Peak	224	150
2	5850.00	79.51	122.20	-42.69	78.55	0.96	Peak	224	150
3	5855.00	74.56	110.80	-36.24	73.58	0.98	Peak	224	150
4	5875.00	63.81	105.20	-41.39	62.79	1.02	Peak	224	150
5	5925.00	56.92	68.20	-11.28	55.79	1.13	Peak	224	150
6	11650.00	44.79	54.00	-9.21	38.16	6.63	Average	100	24
7	11650.00	59.07	74.00	-14.93	52.44	6.63	Peak	100	24
8	17475.00	62.03	68.20	-6.17	54.66	7.37	Peak	100	177

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	5825
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 61

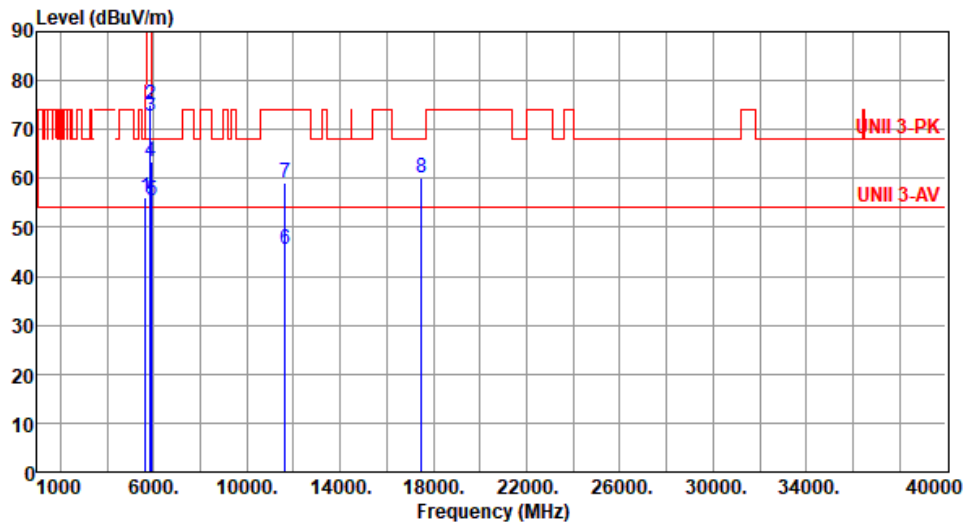

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	56.17	68.20	-12.03	55.96	0.21	Peak	121	249
2	5850.00	74.90	122.20	-47.30	73.94	0.96	Peak	121	249
3	5855.00	72.89	110.80	-37.91	71.91	0.98	Peak	121	249
4	5875.00	63.50	105.20	-41.70	62.48	1.02	Peak	121	249
5	5925.00	55.47	68.20	-12.73	54.34	1.13	Peak	121	249
6	11650.00	45.66	54.00	-8.34	39.03	6.63	Average	100	195
7	11650.00	59.04	74.00	-14.96	52.41	6.63	Peak	100	195
8	17475.00	60.03	68.20	-8.17	52.66	7.37	Peak	100	62

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Unwanted Emissions (Above 1GHz) for be EHT20

Modulation	be EHT20	Test Freq. (MHz)	5180
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):24 Humidity(%):61

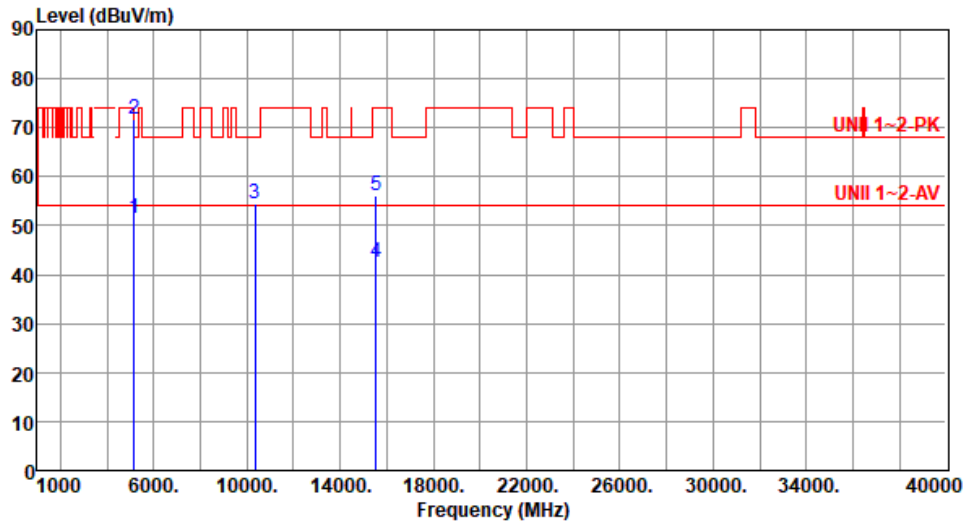

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	51.35	54.00	-2.65	51.02	0.33	Average	100	320
2	5150.00	71.65	74.00	-2.35	71.32	0.33	Peak	100	320
3	10360.00	54.59	68.20	-13.61	47.23	7.36	Peak	100	277
4	15540.00	42.60	54.00	-11.40	38.64	3.96	Average	100	181
5	15540.00	56.29	74.00	-17.71	52.33	3.96	Peak	100	181

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5180
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):24 Humidity(%):61

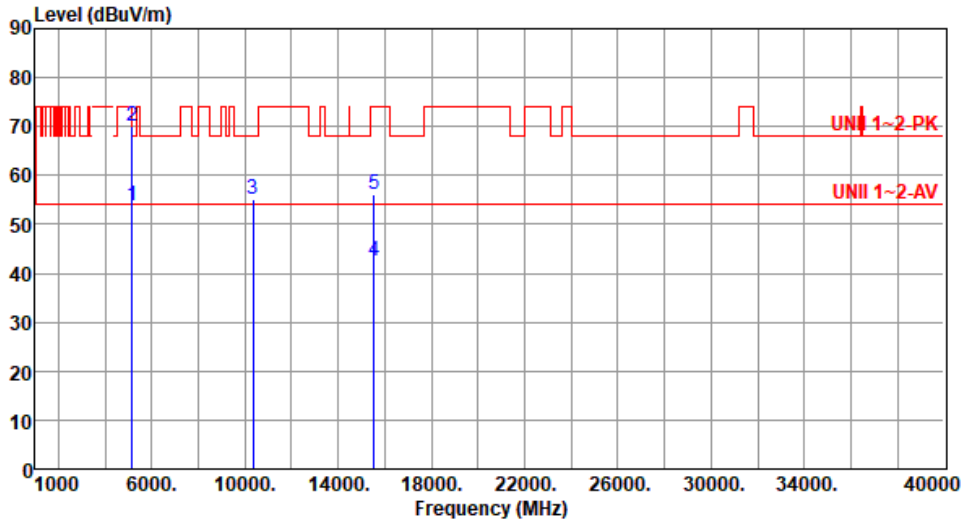

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	53.75	54.00	-0.25	53.42	0.33	Average	123	206
2	5150.00	70.18	74.00	-3.82	69.85	0.33	Peak	123	206
3	10360.00	54.99	68.20	-13.21	47.63	7.36	Peak	100	227
4	15540.00	42.52	54.00	-11.48	38.56	3.96	Average	100	310
5	15540.00	56.09	74.00	-17.91	52.13	3.96	Peak	100	310

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5200
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):24 Humidity(%):61

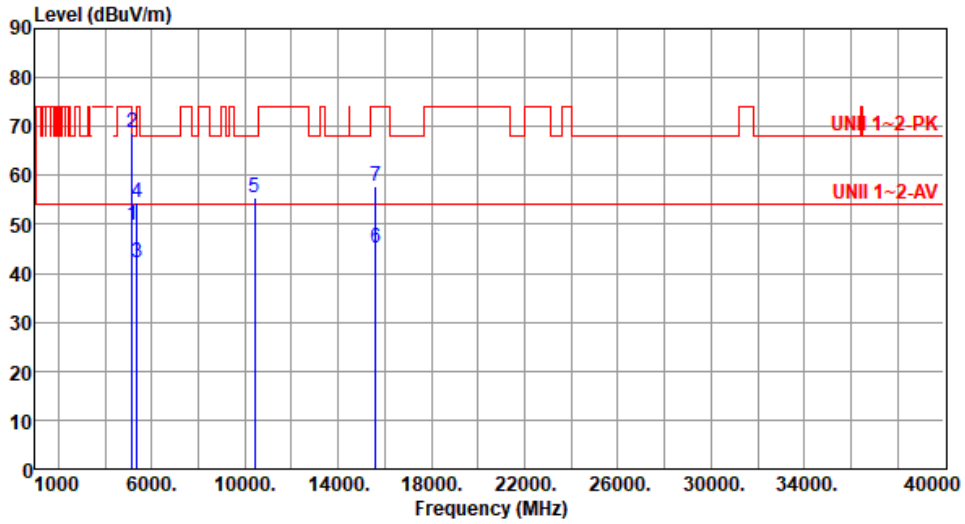

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	49.90	54.00	-4.10	49.57	0.33	Average	133	323
2	5150.00	68.60	74.00	-5.40	68.27	0.33	Peak	133	323
3	5350.00	42.09	54.00	-11.91	42.34	-0.25	Average	133	323
4	5350.00	54.56	74.00	-19.44	54.81	-0.25	Peak	133	323
5	10400.00	55.53	68.20	-12.67	48.19	7.34	Peak	100	270
6	15600.00	45.02	54.00	-8.98	41.02	4.00	Average	100	170
7	15600.00	57.80	74.00	-16.20	53.80	4.00	Peak	100	170

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5200
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):24 Humidity(%):61

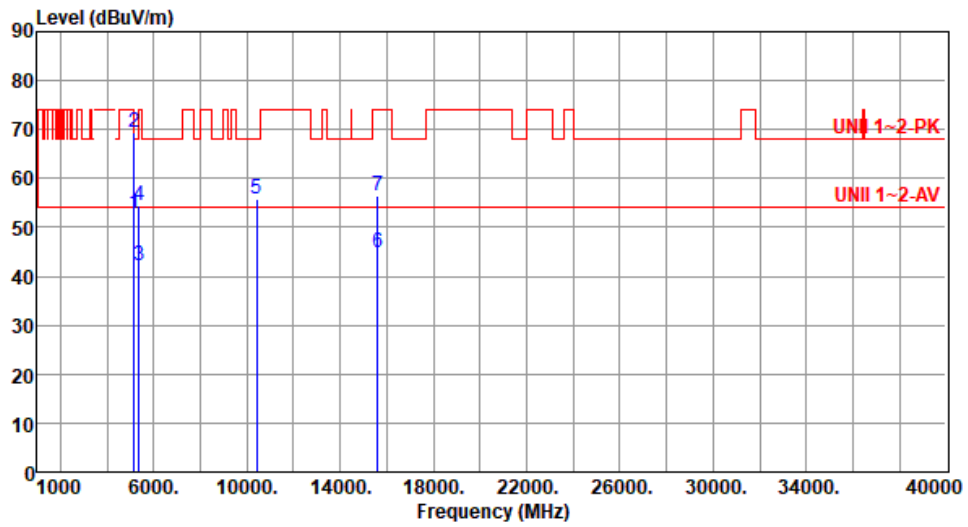

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	52.88	54.00	-1.12	52.55	0.33	Average	100	247
2	5150.00	69.30	74.00	-4.70	68.97	0.33	Peak	100	247
3	5350.00	42.30	54.00	-11.70	42.55	-0.25	Average	100	206
4	5350.00	54.48	74.00	-19.52	54.73	-0.25	Peak	100	206
5	10400.00	55.84	68.20	-12.36	48.50	7.34	Peak	100	226
6	15600.00	44.87	54.00	-9.13	40.87	4.00	Average	100	306
7	15600.00	56.29	74.00	-17.71	52.29	4.00	Peak	100	306

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5240
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):23 Humidity(%):62

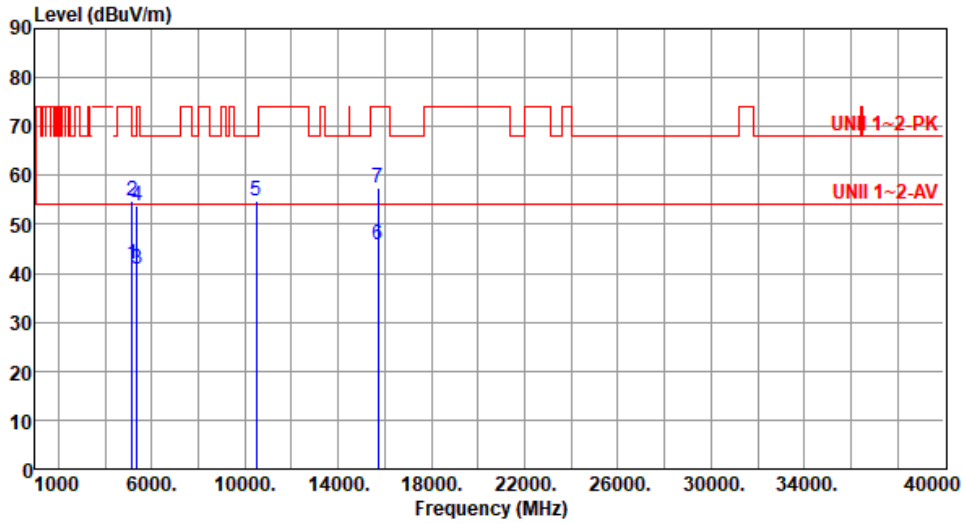

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	41.87	54.00	-12.13	41.54	0.33	Average	123	322
2	5150.00	54.95	74.00	-19.05	54.62	0.33	Peak	123	322
3	5350.00	40.86	54.00	-13.14	41.11	-0.25	Average	123	322
4	5350.00	53.83	74.00	-20.17	54.08	-0.25	Peak	123	322
5	10480.00	54.77	68.20	-13.43	47.53	7.24	Peak	100	273
6	15720.00	45.75	54.00	-8.25	41.52	4.23	Average	100	176
7	15720.00	57.57	74.00	-16.43	53.34	4.23	Peak	100	176

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5240
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):23 Humidity(%):62

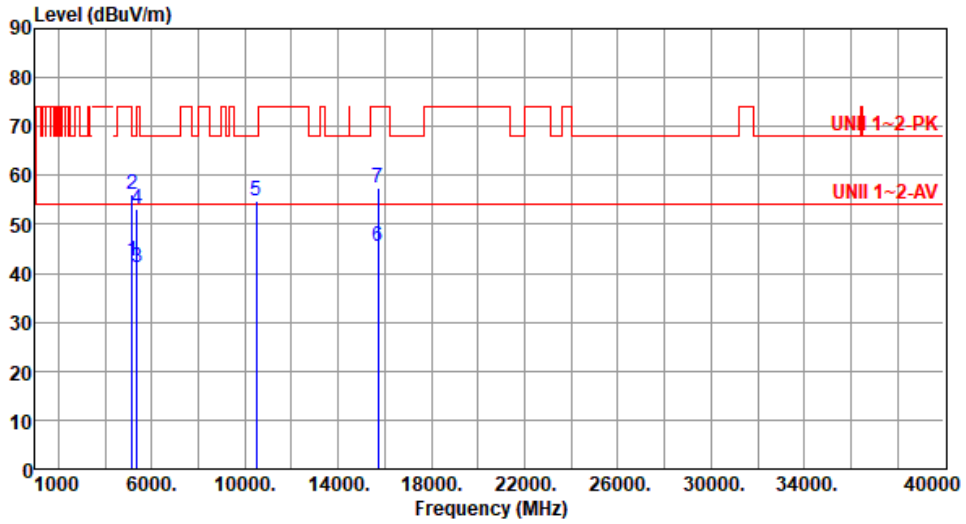

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	42.64	54.00	-11.36	42.31	0.33	Average	100	211
2	5150.00	56.17	74.00	-17.83	55.84	0.33	Peak	100	211
3	5350.00	41.34	54.00	-12.66	41.59	-0.25	Average	100	211
4	5350.00	52.99	74.00	-21.01	53.24	-0.25	Peak	100	211
5	10480.00	54.80	68.20	-13.40	47.56	7.24	Peak	100	227
6	15720.00	45.46	54.00	-8.54	41.23	4.23	Average	100	312
7	15720.00	57.42	74.00	-16.58	53.19	4.23	Peak	100	312

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5260
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):23 Humidity(%):64

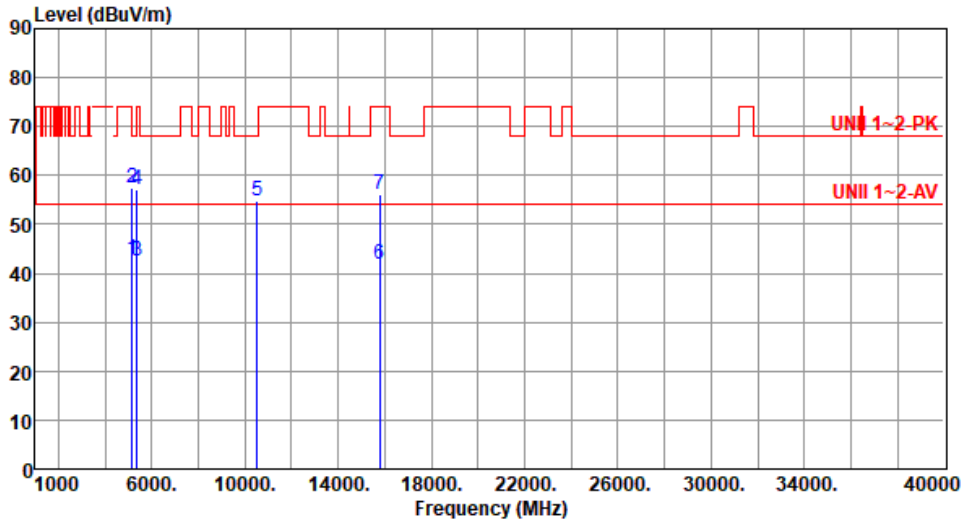

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	42.94	54.00	-11.06	42.61	0.33	Average	196	162
2	5150.00	57.51	74.00	-16.49	57.18	0.33	Peak	196	162
3	5350.00	42.36	54.00	-11.64	42.61	-0.25	Average	196	162
4	5350.00	57.24	74.00	-16.76	57.49	-0.25	Peak	196	162
5	10520.00	54.65	68.20	-13.55	47.51	7.14	Peak	100	243
6	15780.00	41.80	54.00	-12.20	37.84	3.96	Average	100	87
7	15780.00	55.99	74.00	-18.01	52.03	3.96	Peak	100	87

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5260
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):23 Humidity(%):64

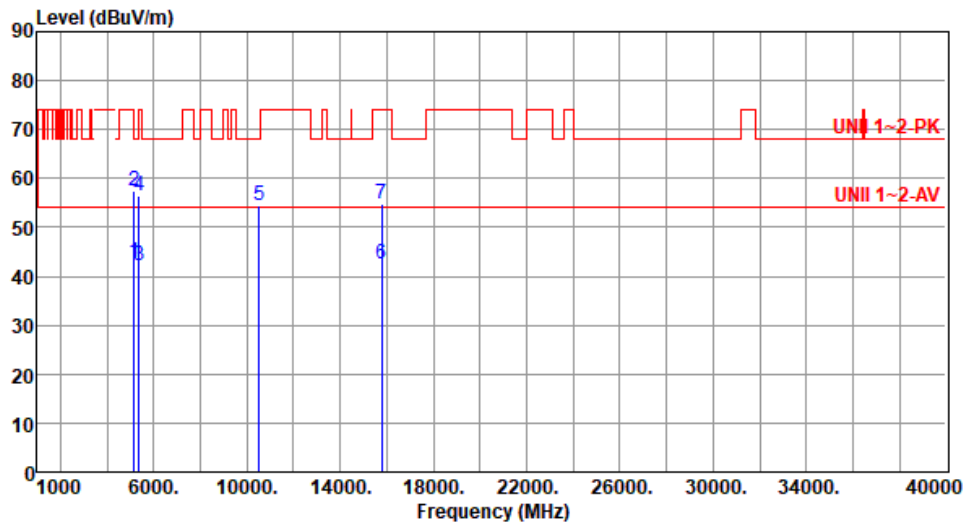

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	42.88	54.00	-11.12	42.55	0.33	Average	100	212
2	5150.00	57.30	74.00	-16.70	56.97	0.33	Peak	100	212
3	5350.00	42.33	54.00	-11.67	42.58	-0.25	Average	100	212
4	5350.00	56.51	74.00	-17.49	56.76	-0.25	Peak	100	212
5	10520.00	54.47	68.20	-13.73	47.33	7.14	Peak	100	240
6	15780.00	42.38	54.00	-11.62	38.42	3.96	Average	100	155
7	15780.00	54.82	74.00	-19.18	50.86	3.96	Peak	100	155

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5300
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):23 Humidity(%):64

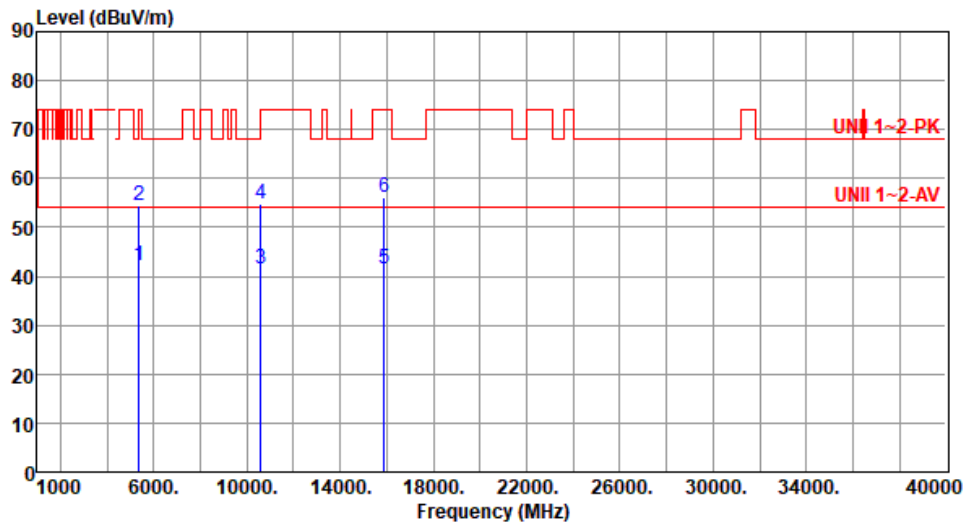

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5350.00	42.15	54.00	-11.85	42.40	-0.25	Average	250	331
2	5350.00	54.36	74.00	-19.64	54.61	-0.25	Peak	250	331
3	10600.00	41.64	54.00	-12.36	34.10	7.54	Average	100	72
4	10600.00	54.63	74.00	-19.37	47.09	7.54	Peak	100	72
5	15900.00	41.56	54.00	-12.44	37.23	4.33	Average	100	90
6	15900.00	56.08	74.00	-17.92	51.75	4.33	Peak	100	90

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5300
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):23 Humidity(%):64

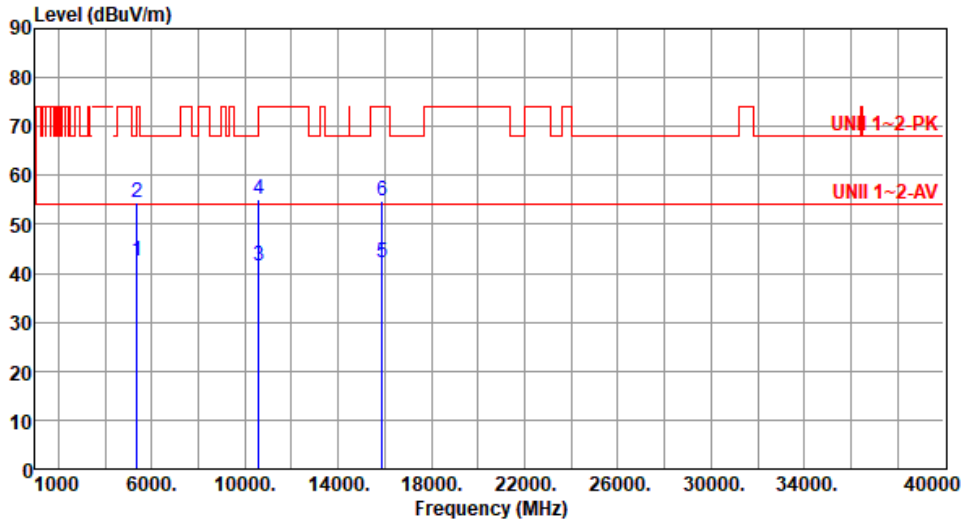

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5350.00	42.49	54.00	-11.51	42.74	-0.25	Average	100	217
2	5350.00	54.46	74.00	-19.54	54.71	-0.25	Peak	100	217
3	10600.00	41.53	54.00	-12.47	33.99	7.54	Average	100	226
4	10600.00	54.99	74.00	-19.01	47.45	7.54	Peak	100	226
5	15900.00	42.25	54.00	-11.75	37.92	4.33	Average	100	153
6	15900.00	54.94	74.00	-19.06	50.61	4.33	Peak	100	153

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5320
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):23 Humidity(%):64

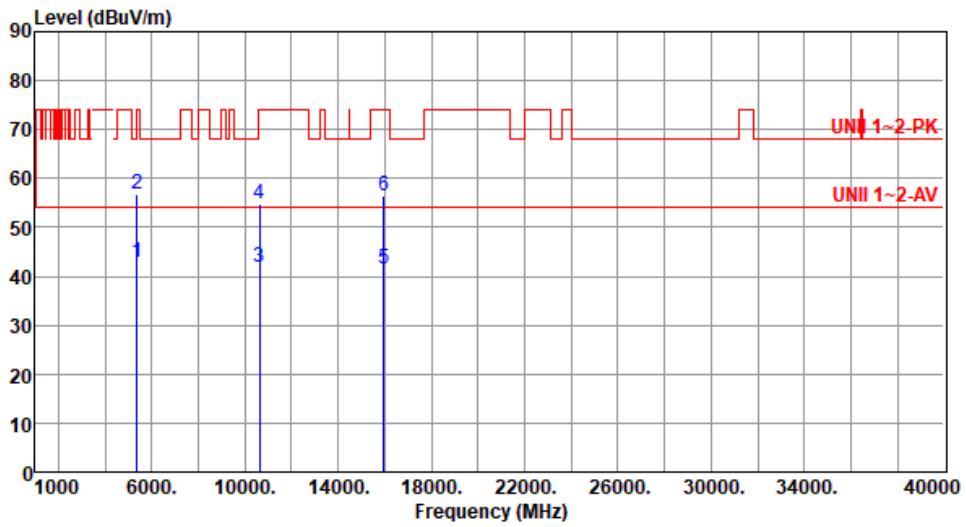

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5350.00	42.79	54.00	-11.21	43.04	-0.25	Average	263	132
2	5350.00	56.93	74.00	-17.07	57.18	-0.25	Peak	263	132
3	10640.00	41.82	54.00	-12.18	34.22	7.60	Average	100	84
4	10640.00	54.81	74.00	-19.19	47.21	7.60	Peak	100	84
5	15960.00	41.64	54.00	-12.36	37.33	4.31	Average	100	102
6	15960.00	56.44	74.00	-17.56	52.13	4.31	Peak	100	102

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5320
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):23 Humidity(%):64

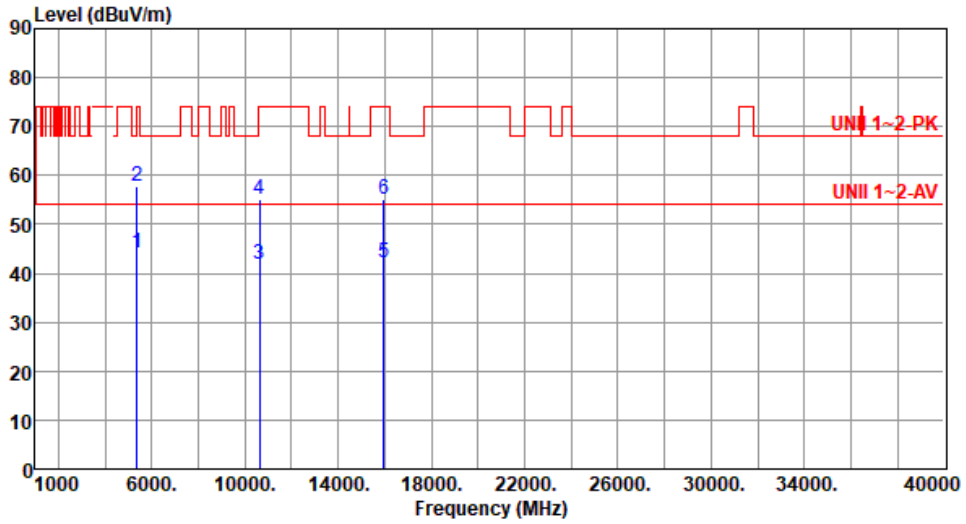

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5350.00	44.21	54.00	-9.79	44.46	-0.25	Average	105	215
2	5350.00	57.62	74.00	-16.38	57.87	-0.25	Peak	105	215
3	10640.00	41.81	54.00	-12.19	34.21	7.60	Average	100	249
4	10640.00	55.06	74.00	-18.94	47.46	7.60	Peak	100	249
5	15960.00	42.30	54.00	-11.70	37.99	4.31	Average	100	157
6	15960.00	55.23	74.00	-18.77	50.92	4.31	Peak	100	157

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5500
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):23 Humidity(%):64

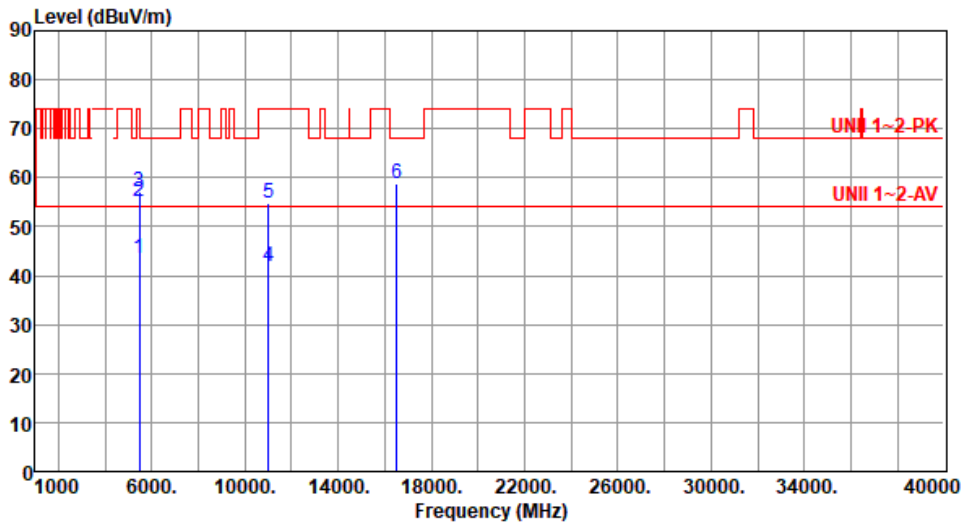

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	43.52	54.00	-10.48	43.13	0.39	Average	367	140
2	5460.00	55.02	74.00	-18.98	54.63	0.39	Peak	367	140
3	5470.00	57.28	68.20	-10.92	56.90	0.38	Peak	367	140
4	11000.00	41.92	54.00	-12.08	34.37	7.55	Average	100	330
5	11000.00	54.82	74.00	-19.18	47.27	7.55	Peak	100	330
6	16500.00	58.82	68.20	-9.38	52.37	6.45	Peak	100	176

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5500
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):23 Humidity(%):64

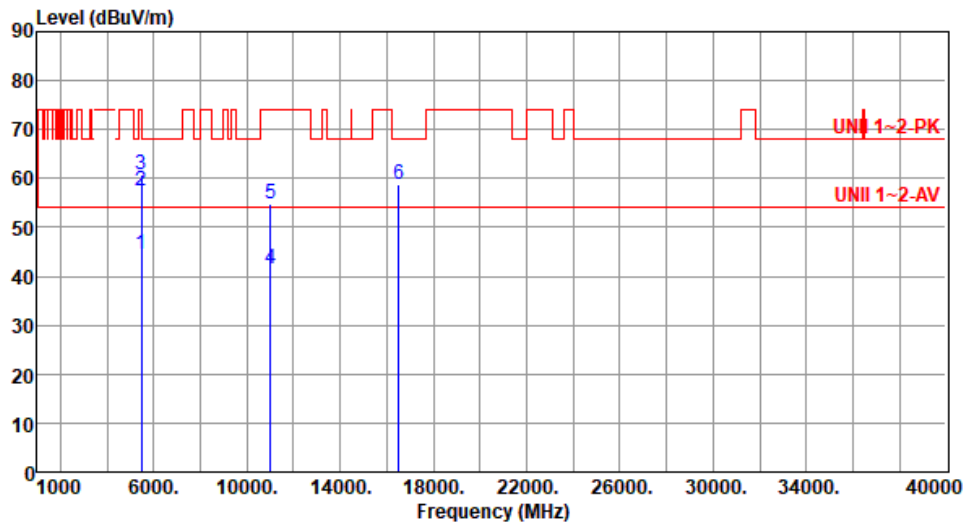

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	44.49	54.00	-9.51	44.10	0.39	Average	100	215
2	5460.00	57.51	74.00	-16.49	57.12	0.39	Peak	100	215
3	5470.00	60.64	68.20	-7.56	60.26	0.38	Peak	100	215
4	11000.00	41.63	54.00	-12.37	34.08	7.55	Average	100	133
5	11000.00	54.89	74.00	-19.11	47.34	7.55	Peak	100	133
6	16500.00	58.89	68.20	-9.31	52.44	6.45	Peak	100	330

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5580
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):23 Humidity(%):64

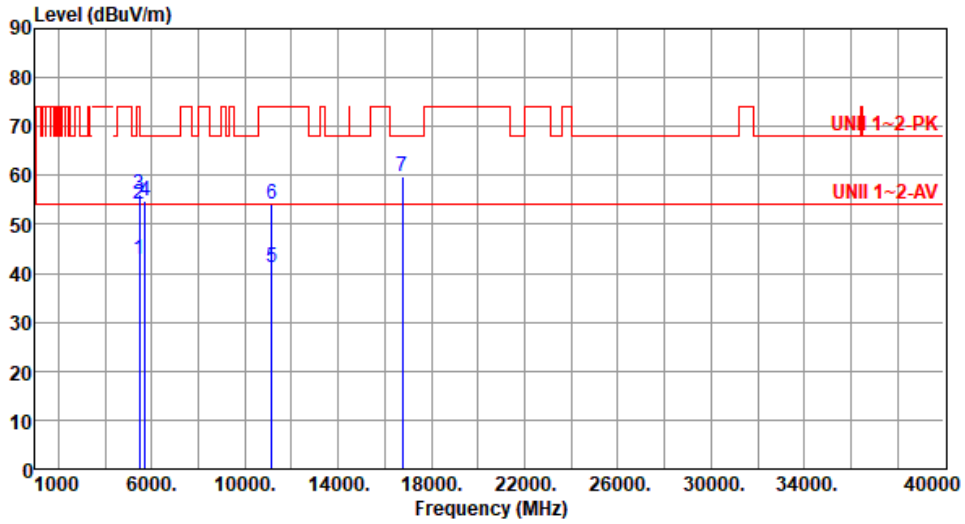

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	42.73	54.00	-11.27	42.34	0.39	Average	222	152
2	5460.00	54.29	74.00	-19.71	53.90	0.39	Peak	222	152
3	5470.00	56.19	68.20	-12.01	55.81	0.38	Peak	222	152
4	5725.00	54.89	68.20	-13.31	54.31	0.58	Peak	222	152
5	11160.00	41.15	54.00	-12.85	34.22	6.93	Average	100	325
6	11160.00	54.02	74.00	-19.98	47.09	6.93	Peak	100	325
7	16740.00	59.77	68.20	-8.43	52.41	7.36	Peak	100	23

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5580
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):23 Humidity(%):64

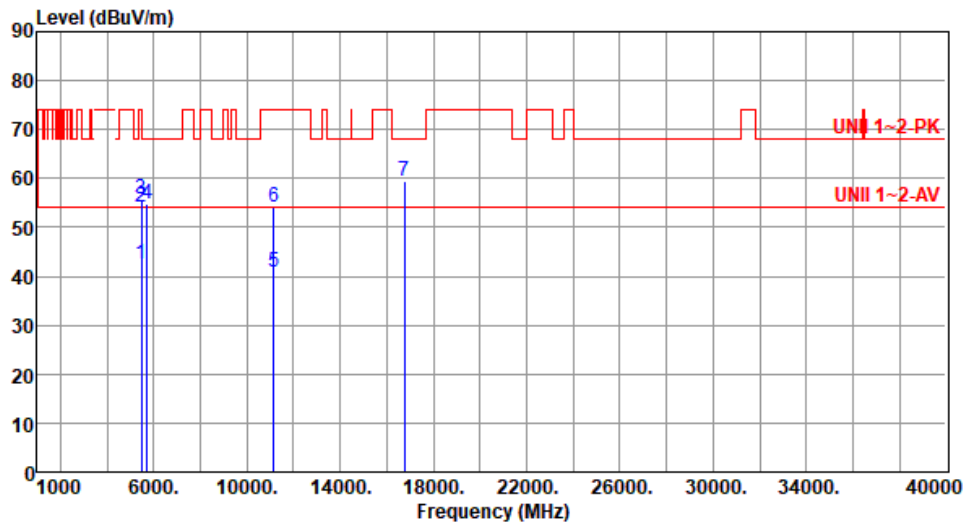

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	42.54	54.00	-11.46	42.15	0.39	Average	253	232
2	5460.00	54.03	74.00	-19.97	53.64	0.39	Peak	253	232
3	5470.00	55.86	68.20	-12.34	55.48	0.38	Peak	253	232
4	5725.00	54.83	68.20	-13.37	54.25	0.58	Peak	253	232
5	11160.00	40.96	54.00	-13.04	34.03	6.93	Average	100	129
6	11160.00	54.11	74.00	-19.89	47.18	6.93	Peak	100	129
7	16740.00	59.59	68.20	-8.61	52.23	7.36	Peak	100	331

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5700
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):23 Humidity(%):64

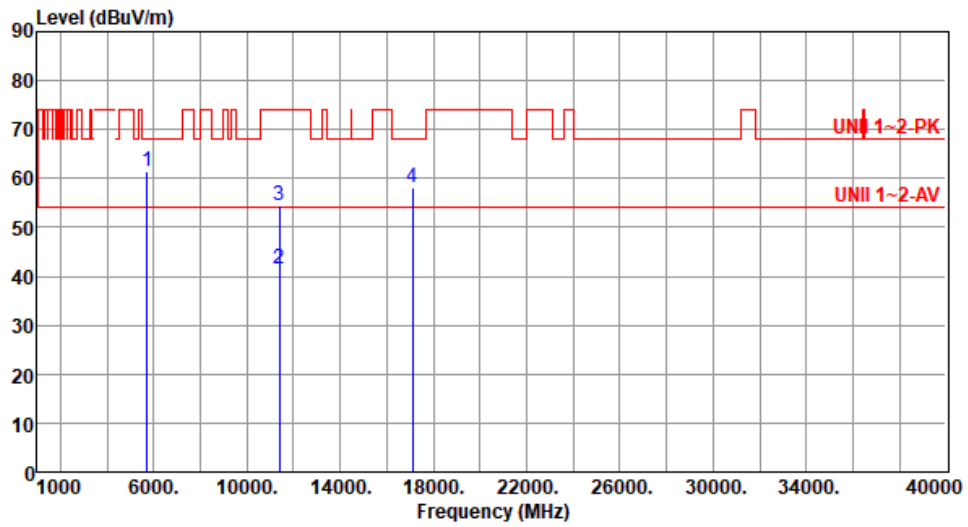

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5725.00	61.39	68.20	-6.81	60.81	0.58	Peak	295	190
2	11400.00	41.48	54.00	-12.52	34.29	7.19	Average	100	254
3	11400.00	54.62	74.00	-19.38	47.43	7.19	Peak	100	254
4	17100.00	58.21	68.20	-9.99	51.38	6.83	Peak	100	106

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5700
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):23 Humidity(%):64

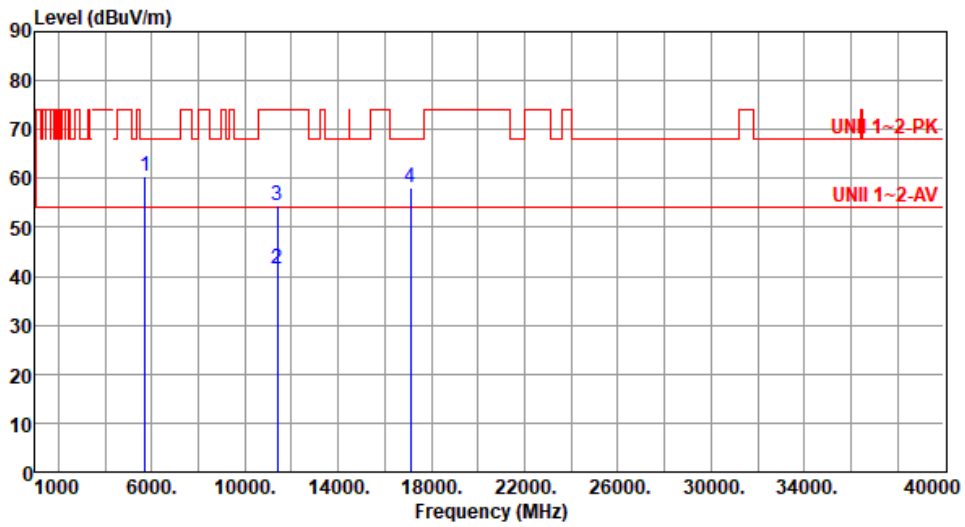

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5725.00	60.37	68.20	-7.83	59.79	0.58	Peak	100	245
2	11400.00	41.38	54.00	-12.62	34.19	7.19	Average	100	125
3	11400.00	54.49	74.00	-19.51	47.30	7.19	Peak	100	125
4	17100.00	58.01	68.20	-10.19	51.18	6.83	Peak	100	324

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5720
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):23 Humidity(%):64

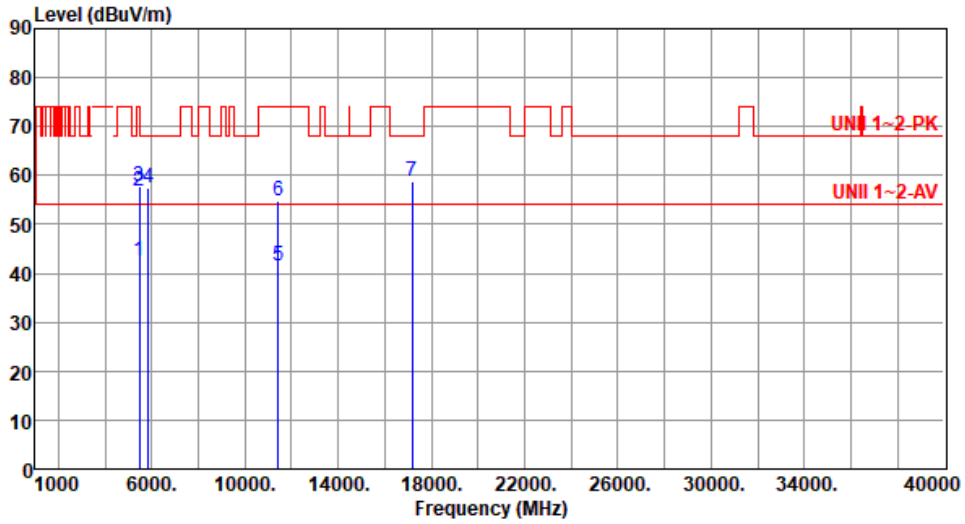

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	42.56	54.00	-11.44	42.17	0.39	Average	146	187
2	5460.00	56.86	74.00	-17.14	56.47	0.39	Peak	146	187
3	5470.00	57.88	68.20	-10.32	57.50	0.38	Peak	146	187
4	5850.00	57.30	68.20	-10.90	56.34	0.96	Peak	146	187
5	11440.00	41.45	54.00	-12.55	34.28	7.17	Average	100	185
6	11440.00	54.70	74.00	-19.30	47.53	7.17	Peak	100	185
7	17160.00	58.76	68.20	-9.44	52.28	6.48	Peak	100	206

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5720
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):23 Humidity(%):64

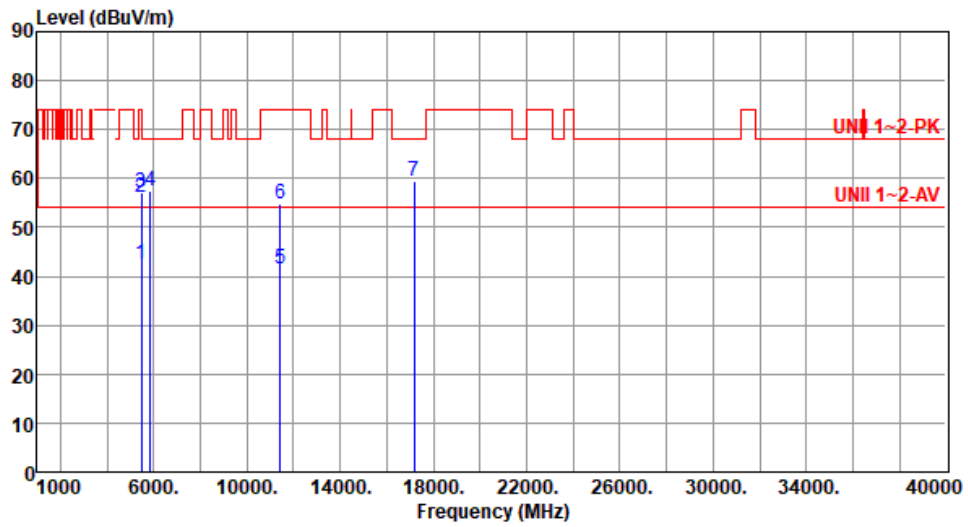

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	42.56	54.00	-11.44	42.17	0.39	Average	100	230
2	5460.00	56.16	74.00	-17.84	55.77	0.39	Peak	100	230
3	5470.00	57.00	68.20	-11.20	56.62	0.38	Peak	100	230
4	5850.00	57.47	68.20	-10.73	56.51	0.96	Peak	100	230
5	11440.00	41.46	54.00	-12.54	34.29	7.17	Average	100	108
6	11440.00	54.68	74.00	-19.32	47.51	7.17	Peak	100	108
7	17160.00	59.32	68.20	-8.88	52.84	6.48	Peak	100	246

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5745
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):24 Humidity(%):62

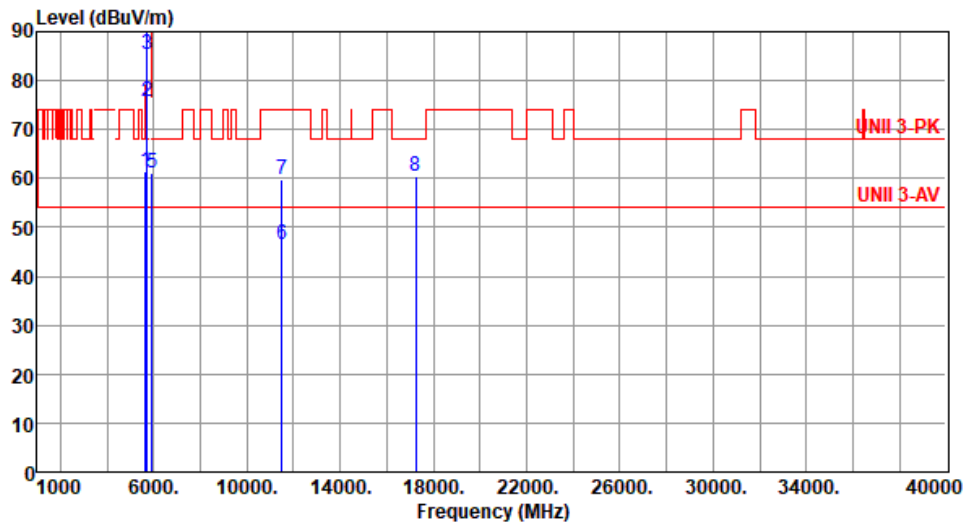

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	61.31	68.20	-6.89	61.10	0.21	Peak	290	186
2	5700.00	75.60	105.20	-29.60	75.07	0.53	Peak	290	186
3	5720.00	85.37	110.80	-25.43	84.80	0.57	Peak	290	186
4	5725.00	91.67	122.20	-30.53	91.09	0.58	Peak	290	186
5	5925.00	61.03	68.20	-7.17	59.90	1.13	Peak	290	186
6	11490.00	46.58	54.00	-7.42	39.27	7.31	Average	253	220
7	11490.00	59.64	74.00	-14.36	52.33	7.31	Peak	253	220
8	17235.00	60.53	68.20	-7.67	53.84	6.69	Peak	100	159

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5745
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):24 Humidity(%):62

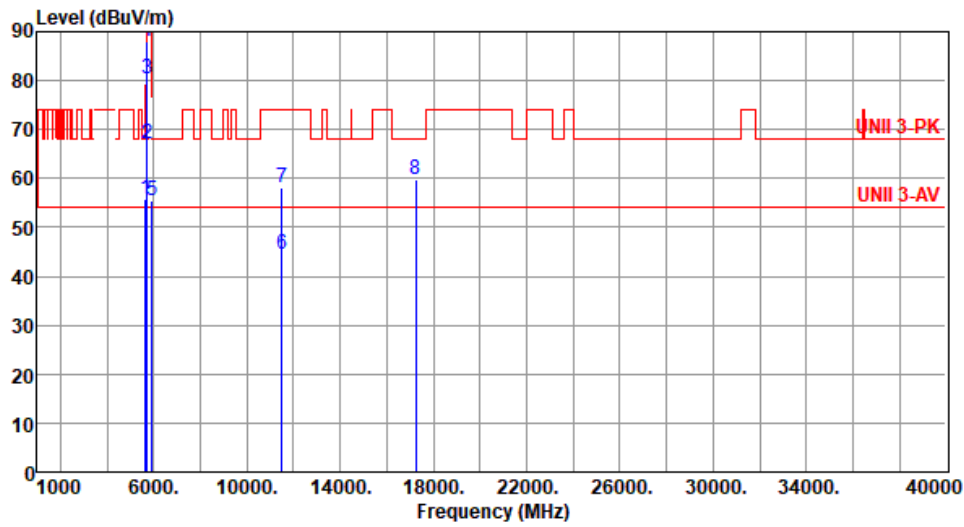

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	55.79	68.20	-12.41	55.58	0.21	Peak	100	192
2	5700.00	67.22	105.20	-37.98	66.69	0.53	Peak	100	192
3	5720.00	80.42	110.80	-30.38	79.85	0.57	Peak	100	192
4	5725.00	88.15	122.20	-34.05	87.57	0.58	Peak	100	192
5	5925.00	55.44	68.20	-12.76	54.31	1.13	Peak	100	192
6	11490.00	44.43	54.00	-9.57	37.12	7.31	Average	100	276
7	11490.00	58.23	74.00	-15.77	50.92	7.31	Peak	100	276
8	17235.00	59.88	68.20	-8.32	53.19	6.69	Peak	100	186

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5785
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):24 Humidity(%):62

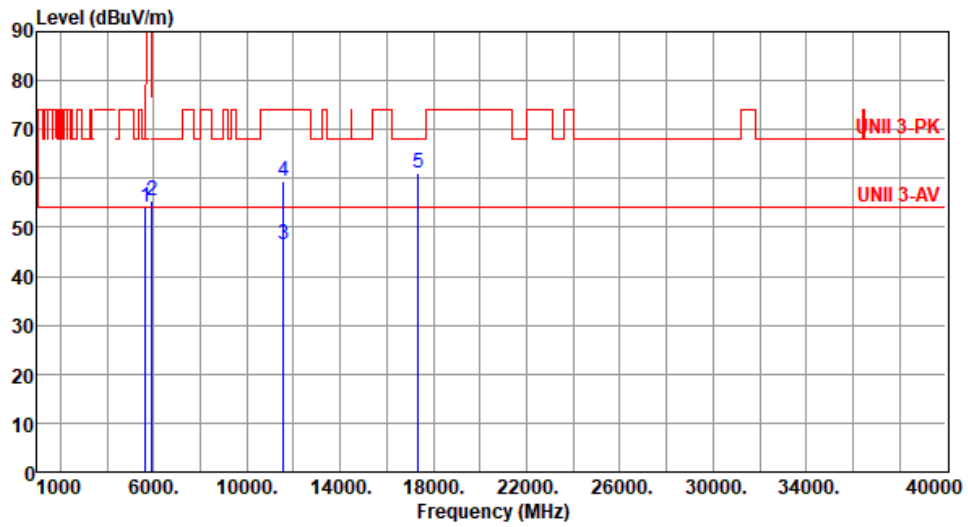

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	54.16	68.20	-14.04	53.95	0.21	Peak	210	141
2	5925.00	55.36	68.20	-12.84	54.23	1.13	Peak	210	141
3	11570.00	46.45	54.00	-7.55	39.23	7.22	Average	256	219
4	11570.00	59.49	74.00	-14.51	52.27	7.22	Peak	256	219
5	17355.00	61.02	68.20	-7.18	54.14	6.88	Peak	100	161

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5785
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):24 Humidity(%):62

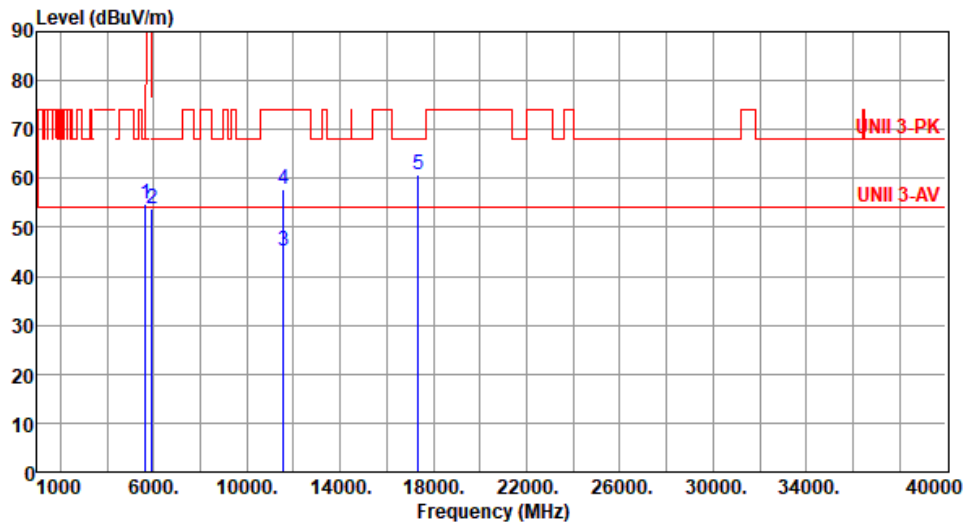

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	54.91	68.20	-13.29	54.70	0.21	Peak	243	329
2	5925.00	53.78	68.20	-14.42	52.65	1.13	Peak	243	329
3	11570.00	45.11	54.00	-8.89	37.89	7.22	Average	100	327
4	11570.00	57.69	74.00	-16.31	50.47	7.22	Peak	100	327
5	17355.00	60.68	68.20	-7.52	53.80	6.88	Peak	100	200

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5825
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 24 Humidity(%): 62

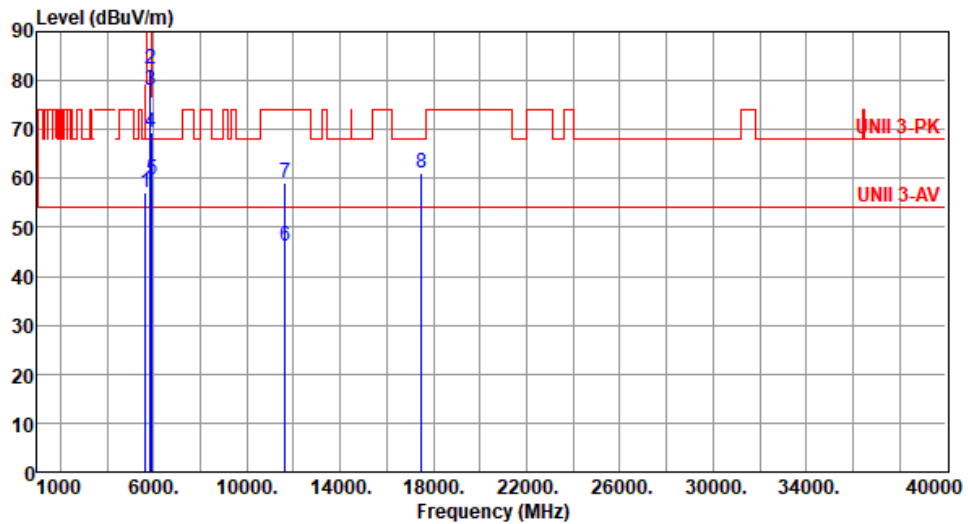

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	56.99	68.20	-11.21	56.78	0.21	Peak	167	136
2	5850.00	82.27	122.20	-39.93	81.31	0.96	Peak	167	136
3	5855.00	77.96	110.80	-32.84	76.98	0.98	Peak	167	136
4	5875.00	69.36	105.20	-35.84	68.34	1.02	Peak	167	136
5	5925.00	59.76	68.20	-8.44	58.63	1.13	Peak	167	136
6	11650.00	46.14	54.00	-7.86	39.51	6.63	Average	261	223
7	11650.00	59.06	74.00	-14.94	52.43	6.63	Peak	261	223
8	17475.00	61.04	68.20	-7.16	53.67	7.37	Peak	100	186

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5825
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 24 Humidity(%): 62

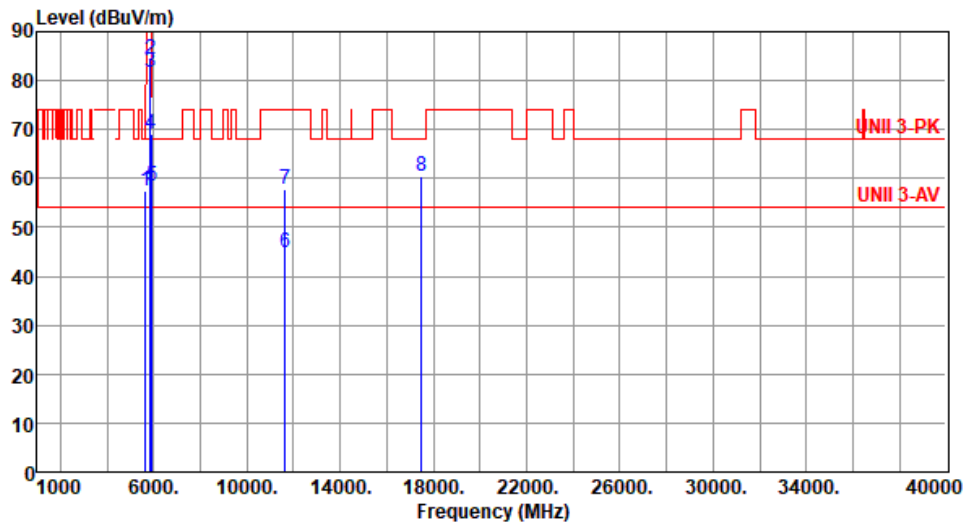

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	57.33	68.20	-10.87	57.12	0.21	Peak	100	226
2	5850.00	84.19	122.20	-38.01	83.23	0.96	Peak	100	226
3	5855.00	81.60	110.80	-29.20	80.62	0.98	Peak	100	226
4	5875.00	68.98	105.20	-36.22	67.96	1.02	Peak	100	226
5	5925.00	58.46	68.20	-9.74	57.33	1.13	Peak	100	226
6	11650.00	44.88	54.00	-9.12	38.25	6.63	Average	100	280
7	11650.00	57.76	74.00	-16.24	51.13	6.63	Peak	100	280
8	17475.00	60.59	68.20	-7.61	53.22	7.37	Peak	100	208

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Unwanted Emissions (Above 1GHz) for be EHT40

Modulation	be EHT40	Test Freq. (MHz)	5190
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 24 Humidity(%): 62

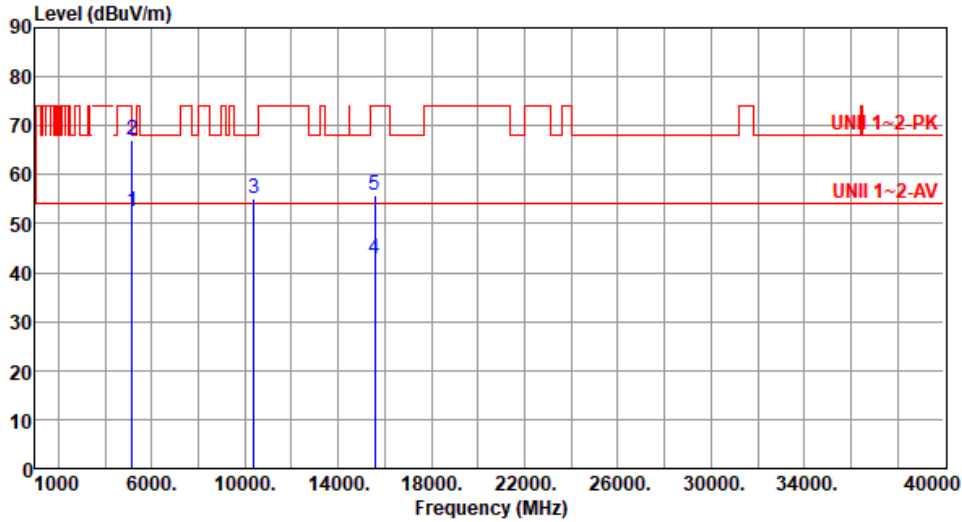

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	52.51	54.00	-1.49	52.18	0.33	Average	100	234
2	5150.00	67.24	74.00	-6.76	66.91	0.33	Peak	100	234
3	10380.00	55.21	68.20	-12.99	47.86	7.35	Peak	100	223
4	15570.00	42.85	54.00	-11.15	38.90	3.95	Average	100	186
5	15570.00	55.73	74.00	-18.27	51.78	3.95	Peak	100	186

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5190
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 24 Humidity(%): 62

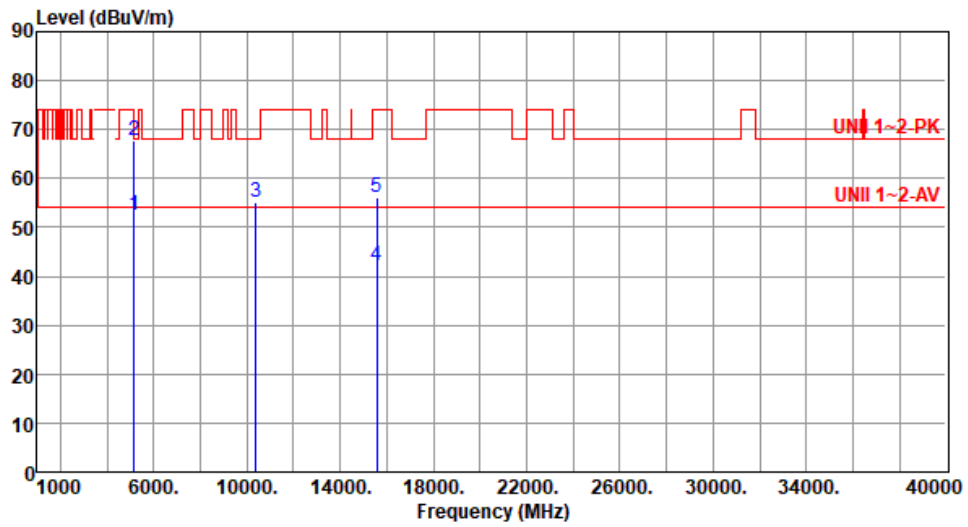

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	52.52	54.00	-1.48	52.19	0.33	Average	100	201
2	5150.00	67.81	74.00	-6.19	67.48	0.33	Peak	100	201
3	10380.00	55.21	68.20	-12.99	47.86	7.35	Peak	100	257
4	15570.00	42.17	54.00	-11.83	38.22	3.95	Average	100	225
5	15570.00	56.27	74.00	-17.73	52.32	3.95	Peak	100	225

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5230
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):23 Humidity(%):62

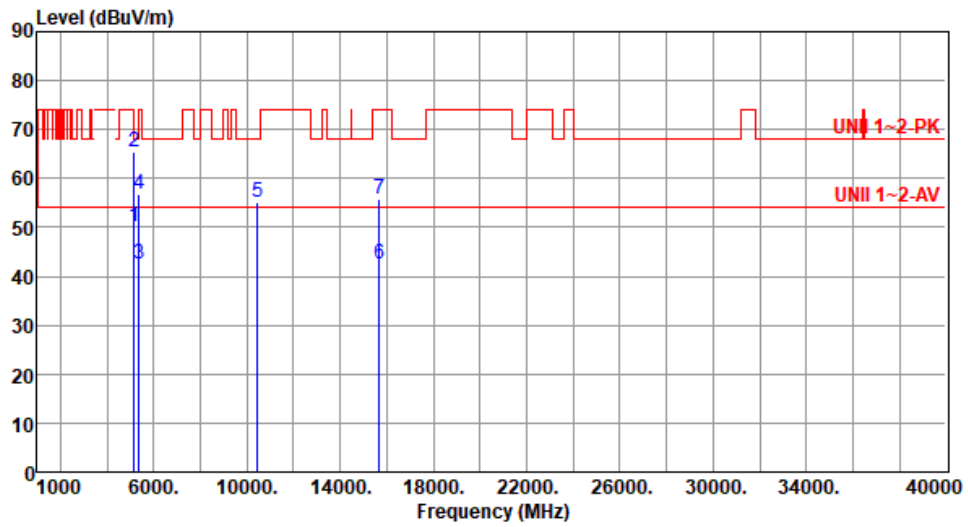

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	50.26	54.00	-3.74	49.93	0.33	Average	100	322
2	5150.00	65.51	74.00	-8.49	65.18	0.33	Peak	100	322
3	5350.00	42.59	54.00	-11.41	42.84	-0.25	Average	100	322
4	5350.00	56.63	74.00	-17.37	56.88	-0.25	Peak	100	322
5	10460.00	55.08	68.20	-13.12	47.79	7.29	Peak	100	226
6	15690.00	42.60	54.00	-11.40	38.43	4.17	Average	100	119
7	15690.00	55.93	74.00	-18.07	51.76	4.17	Peak	100	119

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5230
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):23 Humidity(%):62

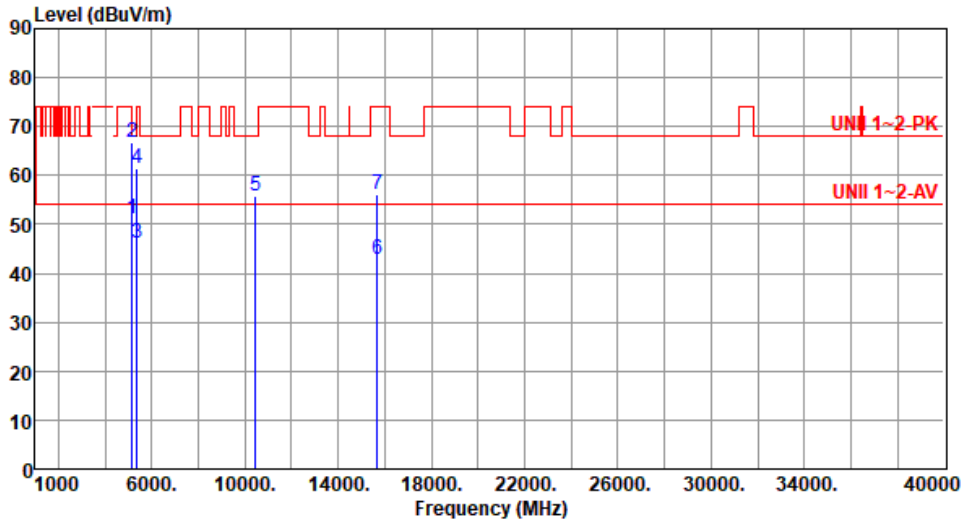

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	51.23	54.00	-2.77	50.90	0.33	Average	100	210
2	5150.00	66.83	74.00	-7.17	66.50	0.33	Peak	100	210
3	5350.00	46.05	54.00	-7.95	46.30	-0.25	Average	100	210
4	5350.00	61.30	74.00	-12.70	61.55	-0.25	Peak	100	210
5	10460.00	55.91	68.20	-12.29	48.62	7.29	Peak	100	142
6	15690.00	42.90	54.00	-11.10	38.73	4.17	Average	100	214
7	15690.00	56.01	74.00	-17.99	51.84	4.17	Peak	100	214

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5270
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):24 Humidity(%):62

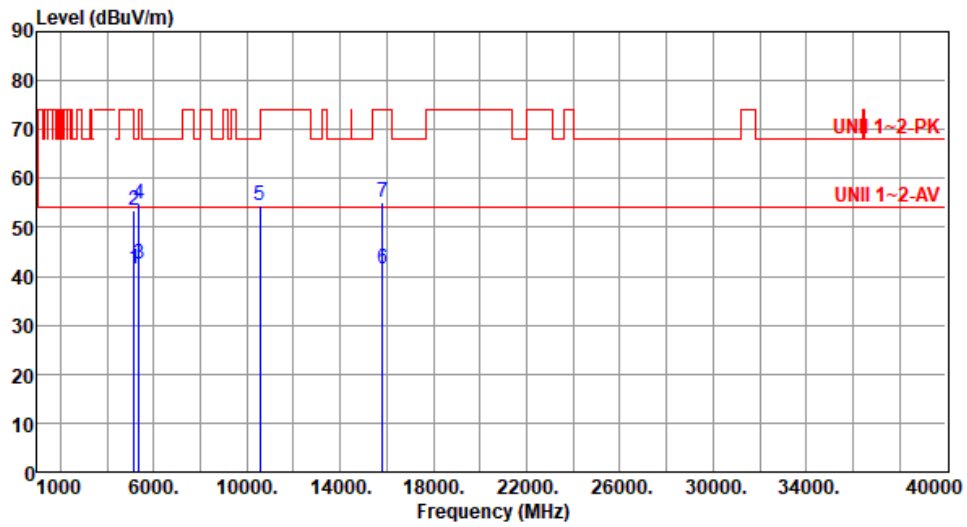

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	41.56	54.00	-12.44	41.23	0.33	Average	240	324
2	5150.00	53.55	74.00	-20.45	53.22	0.33	Peak	240	324
3	5350.00	42.47	54.00	-11.53	42.72	-0.25	Average	240	324
4	5350.00	54.75	74.00	-19.25	55.00	-0.25	Peak	240	324
5	10540.00	54.40	68.20	-13.80	47.31	7.09	Peak	100	23
6	15810.00	41.46	54.00	-12.54	37.66	3.80	Average	100	77
7	15810.00	55.06	74.00	-18.94	51.26	3.80	Peak	100	77

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5270
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):24 Humidity(%):62

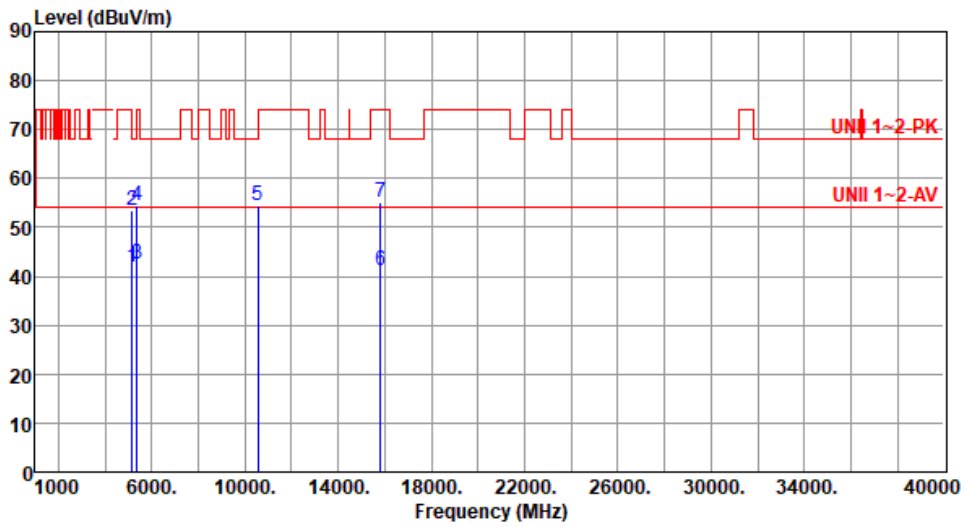

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	41.76	54.00	-12.24	41.43	0.33	Average	100	340
2	5150.00	53.33	74.00	-20.67	53.00	0.33	Peak	100	340
3	5350.00	42.59	54.00	-11.41	42.84	-0.25	Average	100	340
4	5350.00	54.54	74.00	-19.46	54.79	-0.25	Peak	100	340
5	10540.00	54.39	68.20	-13.81	47.30	7.09	Peak	100	119
6	15810.00	41.12	54.00	-12.88	37.32	3.80	Average	100	274
7	15810.00	55.22	74.00	-18.78	51.42	3.80	Peak	100	274

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5310
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):24 Humidity(%):62

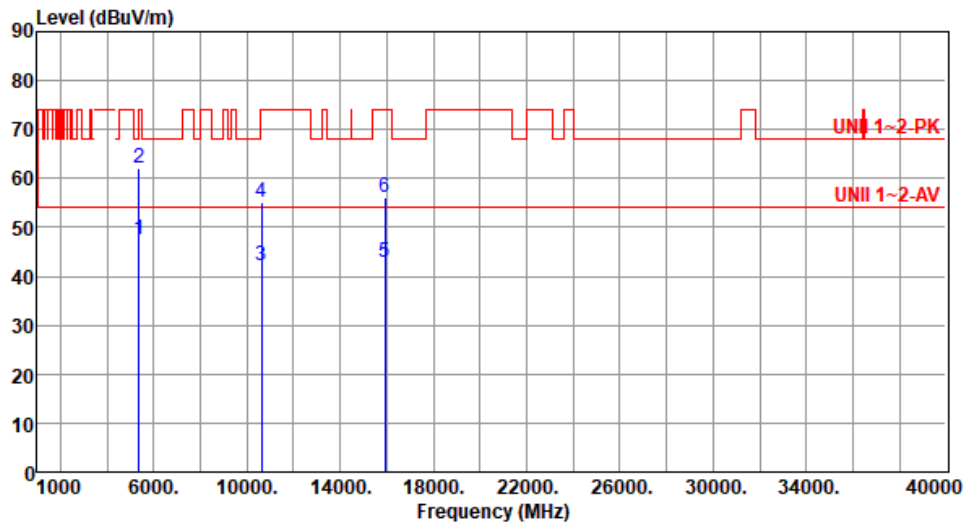

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5350.00	47.43	54.00	-6.57	47.68	-0.25	Average	199	313
2	5350.00	61.94	74.00	-12.06	62.19	-0.25	Peak	199	313
3	10620.00	42.18	54.00	-11.82	34.61	7.57	Average	100	176
4	10620.00	55.15	74.00	-18.85	47.58	7.57	Peak	100	176
5	15930.00	42.77	54.00	-11.23	38.46	4.31	Average	100	227
6	15930.00	56.07	74.00	-17.93	51.76	4.31	Peak	100	227

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5310
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):24 Humidity(%):62

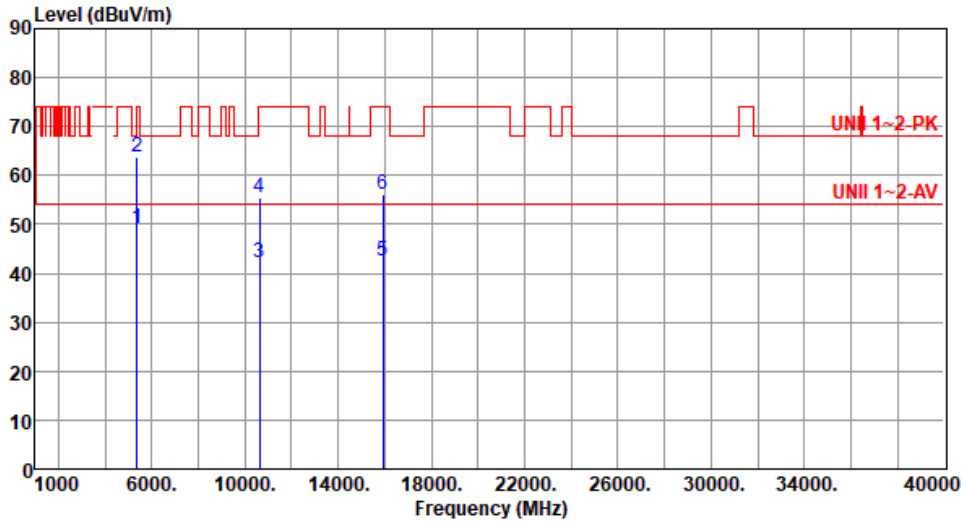

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5350.00	49.02	54.00	-4.98	49.27	-0.25	Average	343	247
2	5350.00	63.85	74.00	-10.15	64.10	-0.25	Peak	343	247
3	10620.00	42.15	54.00	-11.85	34.58	7.57	Average	100	177
4	10620.00	55.33	74.00	-18.67	47.76	7.57	Peak	100	177
5	15930.00	42.58	54.00	-11.42	38.27	4.31	Average	100	208
6	15930.00	55.99	74.00	-18.01	51.68	4.31	Peak	100	208

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5510
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):24 Humidity(%):62

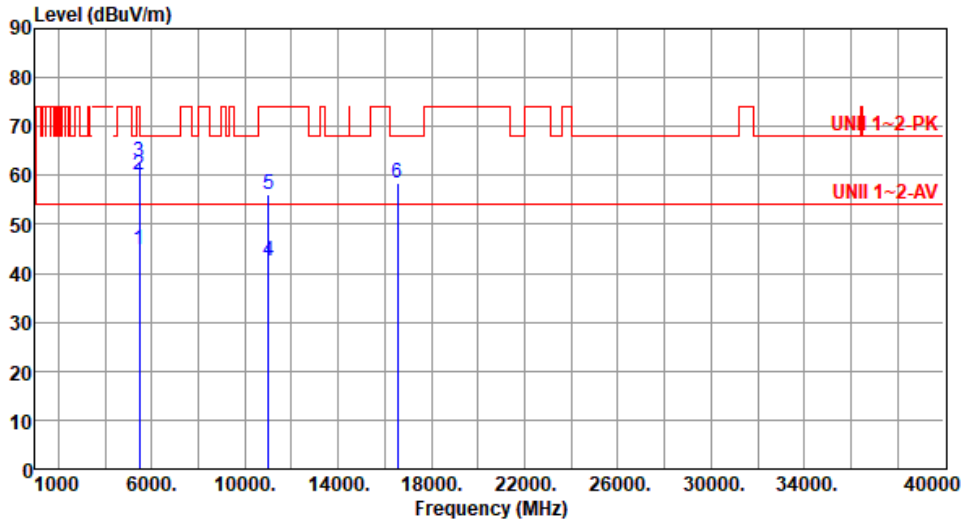

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	44.97	54.00	-9.03	44.58	0.39	Average	141	141
2	5460.00	59.95	74.00	-14.05	59.56	0.39	Peak	141	141
3	5470.00	62.91	68.20	-5.29	62.53	0.38	Peak	141	141
4	11020.00	42.66	54.00	-11.34	35.12	7.54	Average	100	176
5	11020.00	56.16	74.00	-17.84	48.62	7.54	Peak	100	176
6	16530.00	58.35	68.20	-9.85	52.13	6.22	Peak	100	227

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5510
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):24 Humidity(%):62

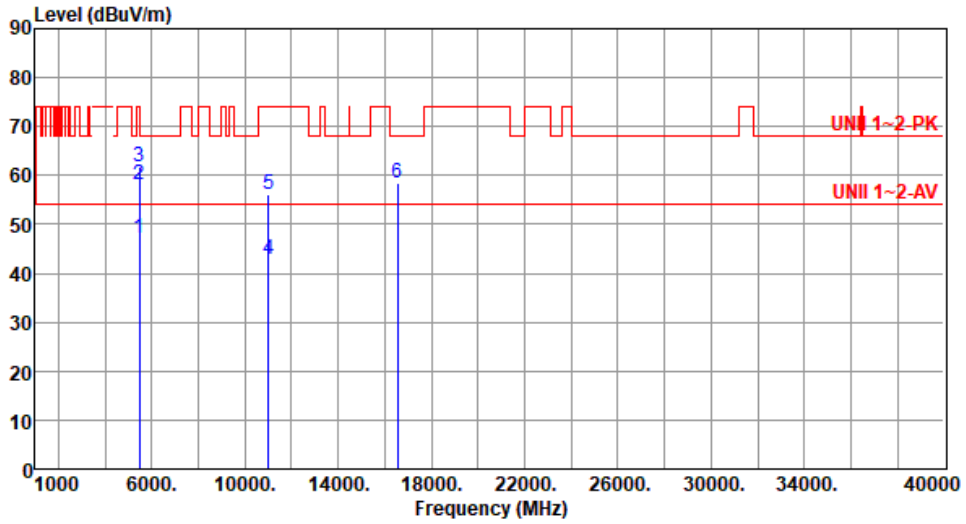

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	46.99	54.00	-7.01	46.60	0.39	Average	269	226
2	5460.00	58.07	74.00	-15.93	57.68	0.39	Peak	269	226
3	5470.00	61.81	68.20	-6.39	61.43	0.38	Peak	269	226
4	11020.00	42.81	54.00	-11.19	35.27	7.54	Average	100	106
5	11020.00	56.11	74.00	-17.89	48.57	7.54	Peak	100	106
6	16530.00	58.35	68.20	-9.85	52.13	6.22	Peak	100	194

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5590
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):24 Humidity(%):62

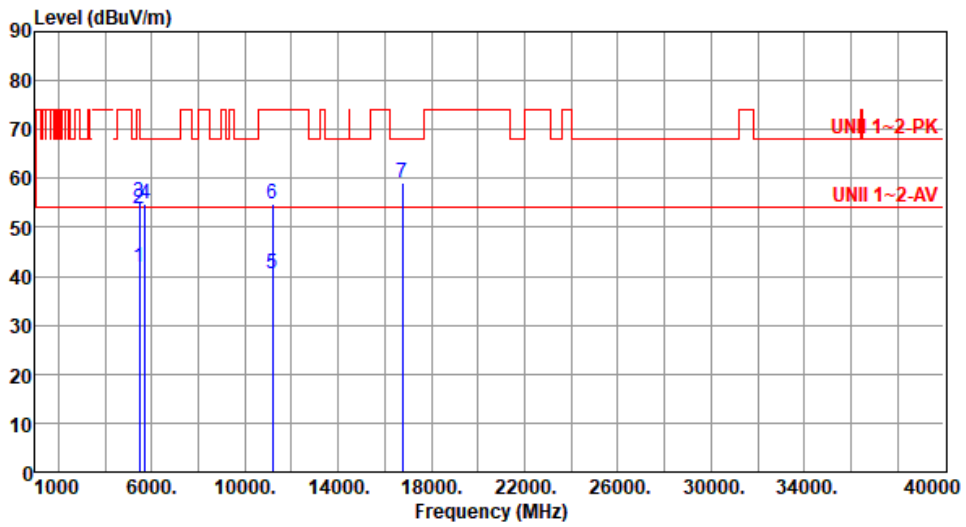

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	41.95	54.00	-12.05	41.56	0.39	Average	191	141
2	5460.00	53.77	74.00	-20.23	53.38	0.39	Peak	191	141
3	5470.00	55.22	68.20	-12.98	54.84	0.38	Peak	191	141
4	5725.00	54.86	68.20	-13.34	54.28	0.58	Peak	191	141
5	11180.00	40.50	54.00	-13.50	33.70	6.80	Average	100	60
6	11180.00	54.72	74.00	-19.28	47.92	6.80	Peak	100	60
7	16770.00	59.14	68.20	-9.06	51.83	7.31	Peak	100	269

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5590
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):24 Humidity(%):62

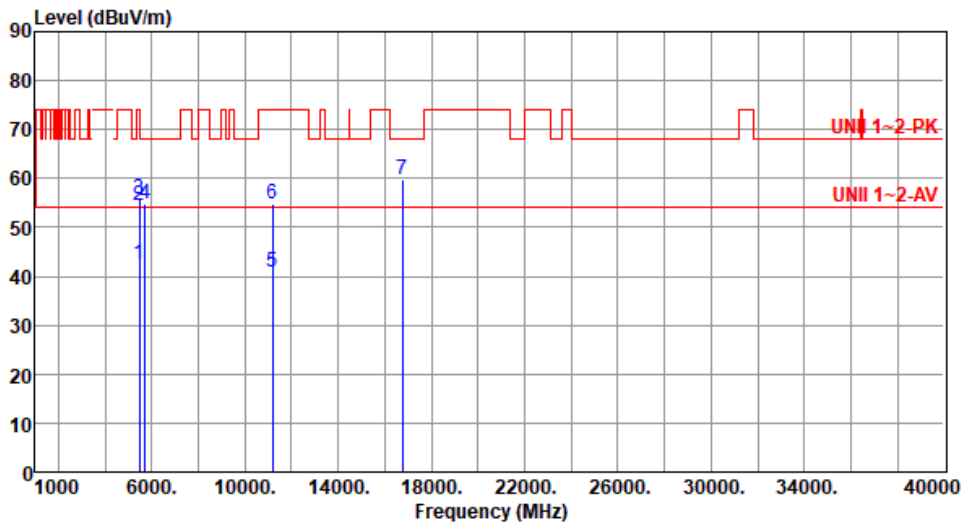

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	42.49	54.00	-11.51	42.10	0.39	Average	311	221
2	5460.00	54.47	74.00	-19.53	54.08	0.39	Peak	311	221
3	5470.00	55.77	68.20	-12.43	55.39	0.38	Peak	311	221
4	5725.00	54.79	68.20	-13.41	54.21	0.58	Peak	311	221
5	11180.00	40.70	54.00	-13.30	33.90	6.80	Average	100	32
6	11180.00	54.83	74.00	-19.17	48.03	6.80	Peak	100	32
7	16770.00	59.62	68.20	-8.58	52.31	7.31	Peak	100	107

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5670
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):24 Humidity(%):62

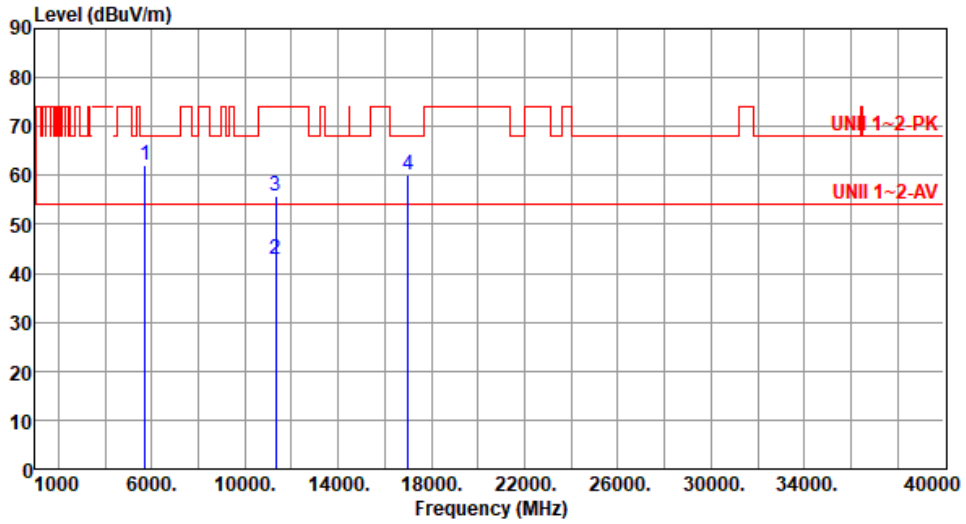

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5725.00	61.98	68.20	-6.22	61.40	0.58	Peak	159	141
2	11340.00	42.72	54.00	-11.28	35.67	7.05	Average	100	184
3	11340.00	55.77	74.00	-18.23	48.72	7.05	Peak	100	184
4	17010.00	60.01	68.20	-8.19	52.84	7.17	Peak	100	203

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5670
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):24 Humidity(%):62

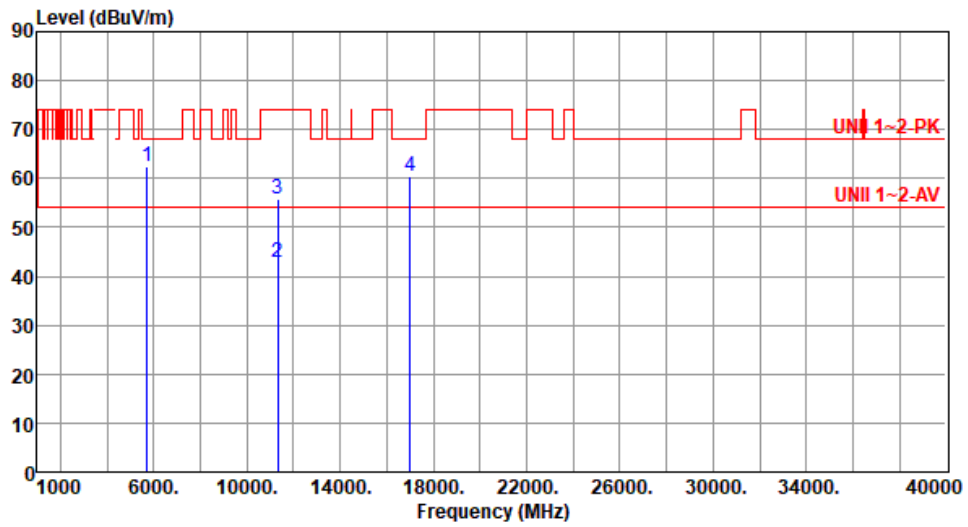

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5725.00	62.29	68.20	-5.91	61.71	0.58	Peak	100	194
2	11340.00	42.71	54.00	-11.29	35.66	7.05	Average	100	120
3	11340.00	55.82	74.00	-18.18	48.77	7.05	Peak	100	120
4	17010.00	60.38	68.20	-7.82	53.21	7.17	Peak	100	206

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5710
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):24 Humidity(%):62

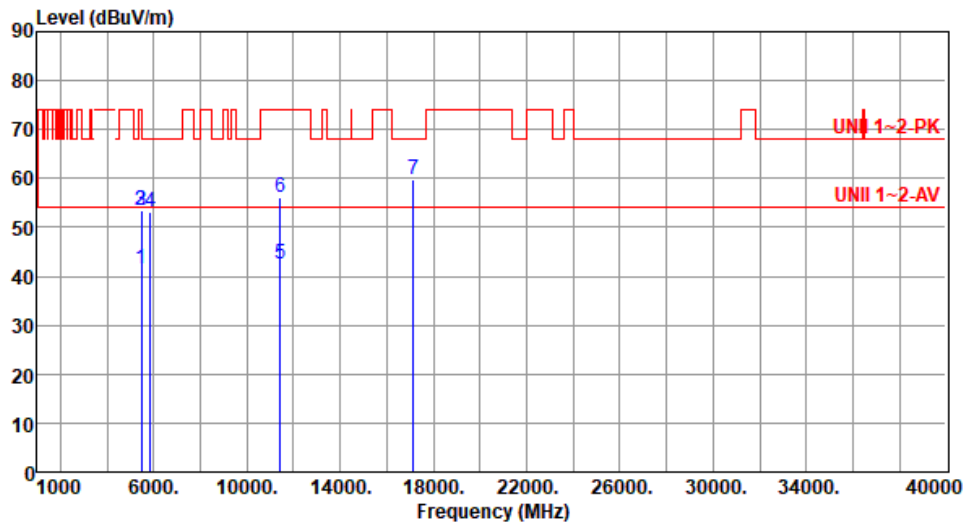

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	41.64	54.00	-12.36	41.25	0.39	Average	292	164
2	5470.00	53.36	74.00	-20.64	52.97	0.39	Peak	292	164
3	5470.00	53.44	68.20	-14.76	53.06	0.38	Peak	292	164
4	5850.00	53.19	68.20	-15.01	52.23	0.96	Peak	292	164
5	11420.00	42.60	54.00	-11.40	35.42	7.18	Average	100	178
6	11420.00	56.12	74.00	-17.88	48.94	7.18	Peak	100	178
7	17130.00	59.83	68.20	-8.37	53.21	6.62	Peak	100	227

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5710
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):24 Humidity(%):62

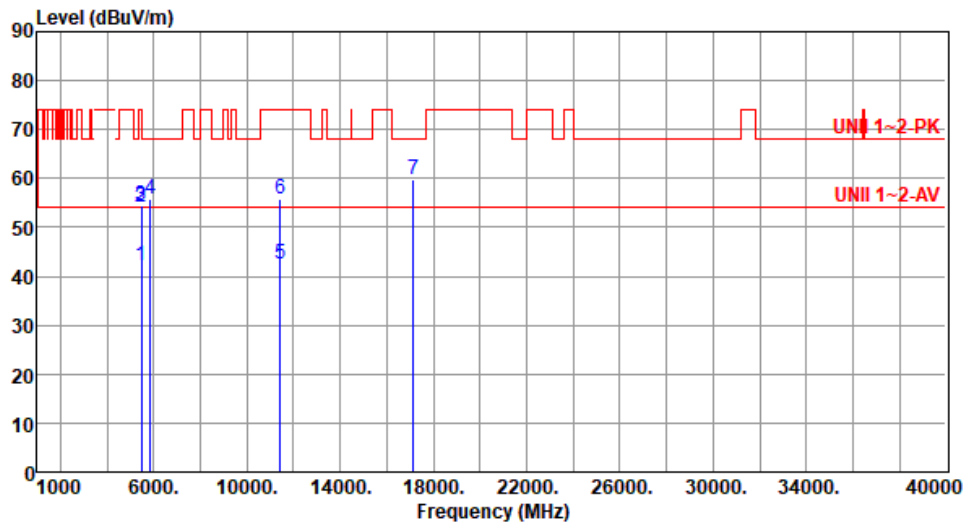

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	42.22	54.00	-11.78	41.83	0.39	Average	100	194
2	5460.00	54.26	74.00	-19.74	53.87	0.39	Peak	100	194
3	5470.00	54.47	68.20	-13.73	54.09	0.38	Peak	100	194
4	5850.00	55.77	68.20	-12.43	54.81	0.96	Peak	100	194
5	11420.00	42.56	54.00	-11.44	35.38	7.18	Average	100	261
6	11420.00	55.84	74.00	-18.16	48.66	7.18	Peak	100	261
7	17130.00	59.70	68.20	-8.50	53.08	6.62	Peak	100	214

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5755
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):24 Humidity(%):61

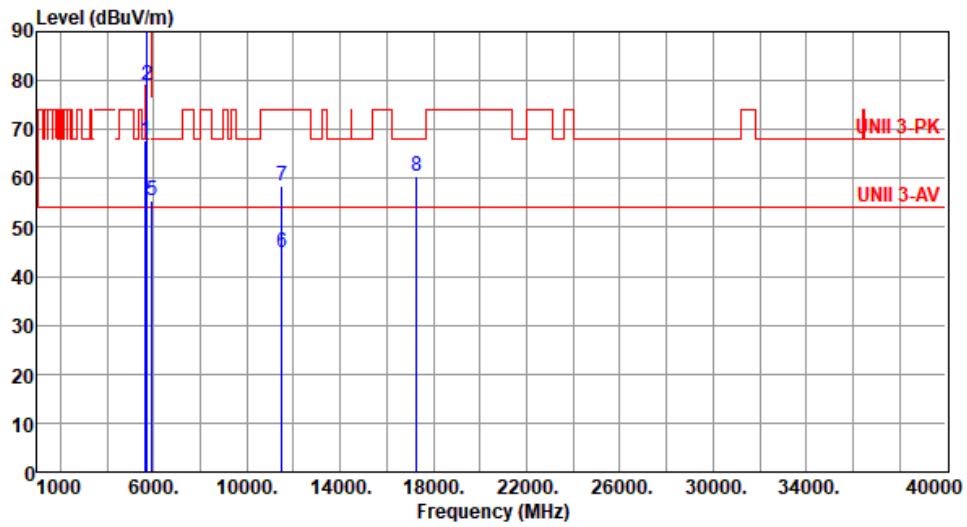

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	67.90	68.20	-0.30	67.69	0.21	Peak	304	162
2	5700.00	79.02	105.20	-26.18	78.49	0.53	Peak	304	162
3	5720.00	91.14	110.80	-19.66	90.57	0.57	Peak	304	162
4	5725.00	93.43	122.20	-28.77	92.85	0.58	Peak	304	162
5	5925.00	55.40	68.20	-12.80	54.27	1.13	Peak	304	162
6	11510.00	44.83	54.00	-9.17	37.48	7.35	Average	100	251
7	11510.00	58.58	74.00	-15.42	51.23	7.35	Peak	100	251
8	17265.00	60.59	68.20	-7.61	53.84	6.75	Peak	100	227

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5755
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):24 Humidity(%):61

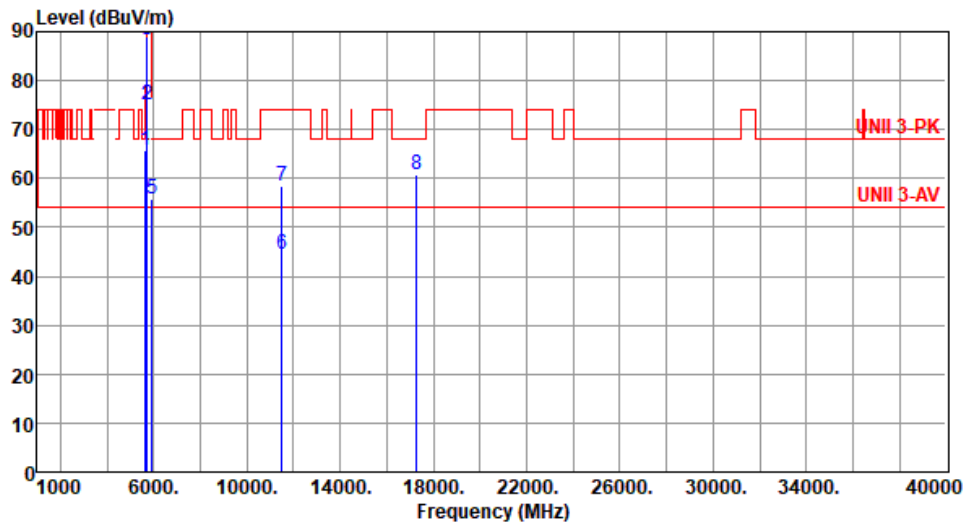

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	65.64	68.20	-2.56	65.43	0.21	Peak	100	222
2	5700.00	74.91	105.20	-30.29	74.38	0.53	Peak	100	222
3	5720.00	88.44	110.80	-22.36	87.87	0.57	Peak	100	222
4	5725.00	89.00	122.20	-33.20	88.42	0.58	Peak	100	222
5	5925.00	55.75	68.20	-12.45	54.62	1.13	Peak	100	222
6	11510.00	44.63	54.00	-9.37	37.28	7.35	Average	100	287
7	11510.00	58.58	74.00	-15.42	51.23	7.35	Peak	100	287
8	17265.00	60.69	68.20	-7.51	53.94	6.75	Peak	100	161

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5795
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):24 Humidity(%):61

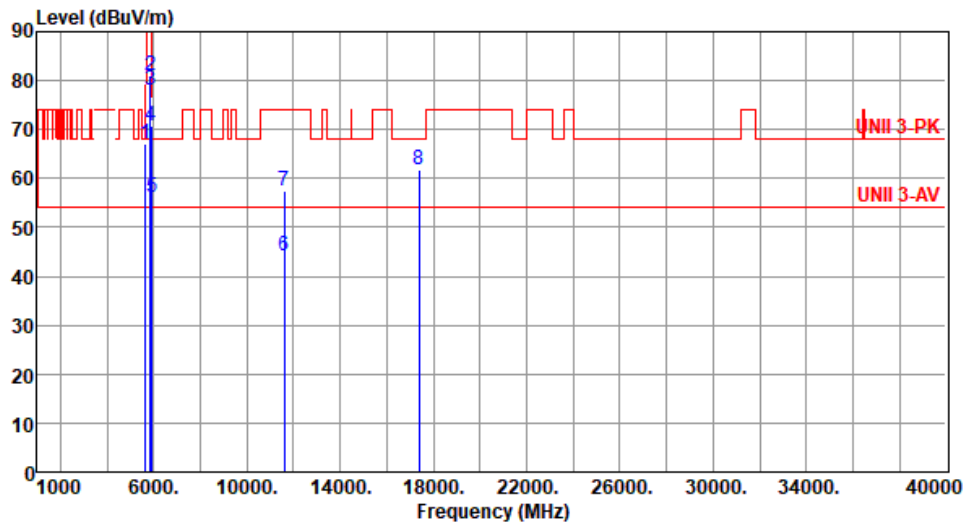

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	67.00	68.20	-1.20	66.79	0.21	Peak	313	169
2	5850.00	81.16	122.20	-41.04	80.20	0.96	Peak	313	169
3	5855.00	77.89	110.80	-32.91	76.91	0.98	Peak	313	169
4	5875.00	70.65	105.20	-34.55	69.63	1.02	Peak	313	169
5	5925.00	56.24	68.20	-11.96	55.11	1.13	Peak	313	169
6	11590.00	44.30	54.00	-9.70	37.20	7.10	Average	100	173
7	11590.00	57.33	74.00	-16.67	50.23	7.10	Peak	100	173
8	17385.00	61.64	68.20	-6.56	54.62	7.02	Peak	100	160

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5795
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):24 Humidity(%):61

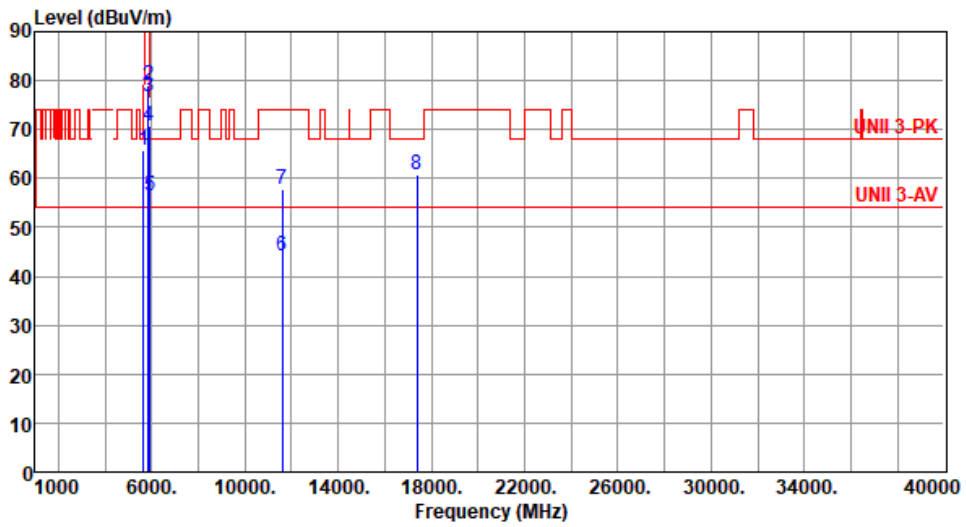

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	65.86	68.20	-2.34	65.65	0.21	Peak	100	192
2	5850.00	79.03	122.20	-43.17	78.07	0.96	Peak	100	192
3	5855.00	76.79	110.80	-34.01	75.81	0.98	Peak	100	192
4	5875.00	70.68	105.20	-34.52	69.66	1.02	Peak	100	192
5	5925.00	56.41	68.20	-11.79	55.28	1.13	Peak	100	192
6	11590.00	44.15	54.00	-9.85	37.05	7.10	Average	100	325
7	11590.00	57.90	74.00	-16.10	50.80	7.10	Peak	100	325
8	17385.00	60.94	68.20	-7.26	53.92	7.02	Peak	100	206

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Unwanted Emissions (Above 1GHz) for be EHT80

Modulation	be EHT80	Test Freq. (MHz)	5210
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 24 Humidity(%): 62

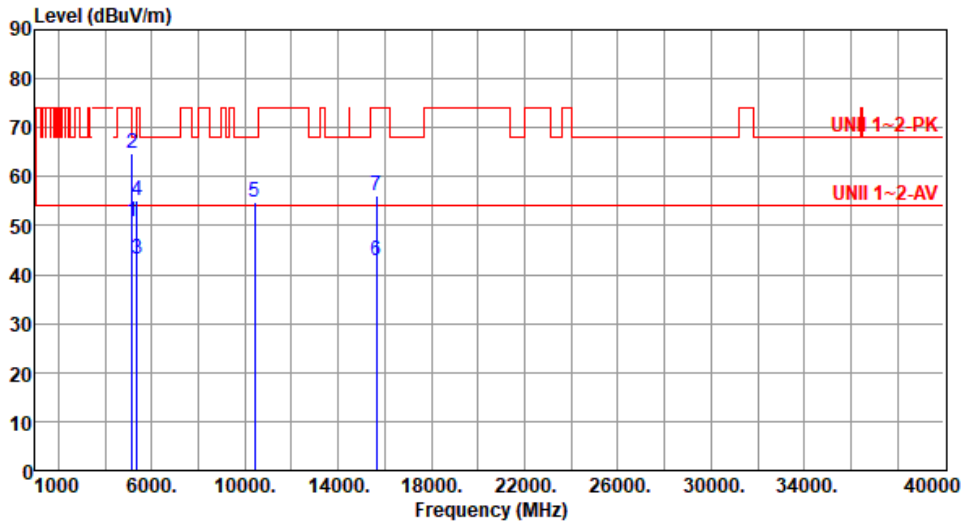

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	50.89	54.00	-3.11	50.56	0.33	Average	117	312
2	5150.00	64.66	74.00	-9.34	64.33	0.33	Peak	117	312
3	5350.00	43.02	54.00	-10.98	43.27	-0.25	Average	117	312
4	5350.00	54.98	74.00	-19.02	55.23	-0.25	Peak	117	312
5	10420.00	54.68	68.20	-13.52	47.35	7.33	Peak	100	254
6	15630.00	42.84	54.00	-11.16	38.92	3.92	Average	100	241
7	15630.00	56.08	74.00	-17.92	52.16	3.92	Peak	100	241

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).



Modulation	be EHT80	Test Freq. (MHz)	5210
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 24 Humidity(%): 62

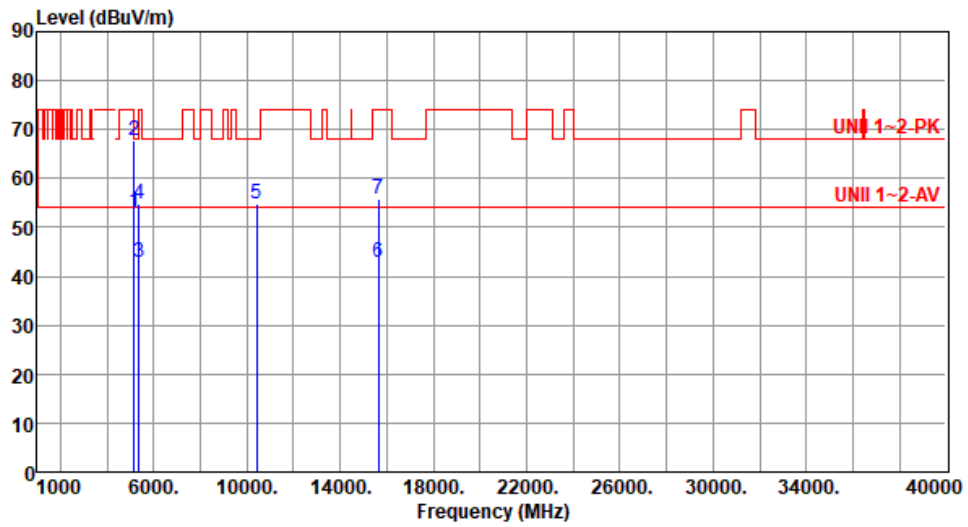

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	52.97	54.00	-1.03	52.64	0.33	Average	123	204
2	5150.00	67.78	74.00	-6.22	67.45	0.33	Peak	123	204
3	5350.00	42.95	54.00	-11.05	43.20	-0.25	Average	123	204
4	5350.00	54.85	74.00	-19.15	55.10	-0.25	Peak	123	204
5	10420.00	54.89	68.20	-13.31	47.56	7.33	Peak	100	158
6	15630.00	42.68	54.00	-11.32	38.76	3.92	Average	100	227
7	15630.00	55.74	74.00	-18.26	51.82	3.92	Peak	100	227

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	5290
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):24 Humidity(%):62

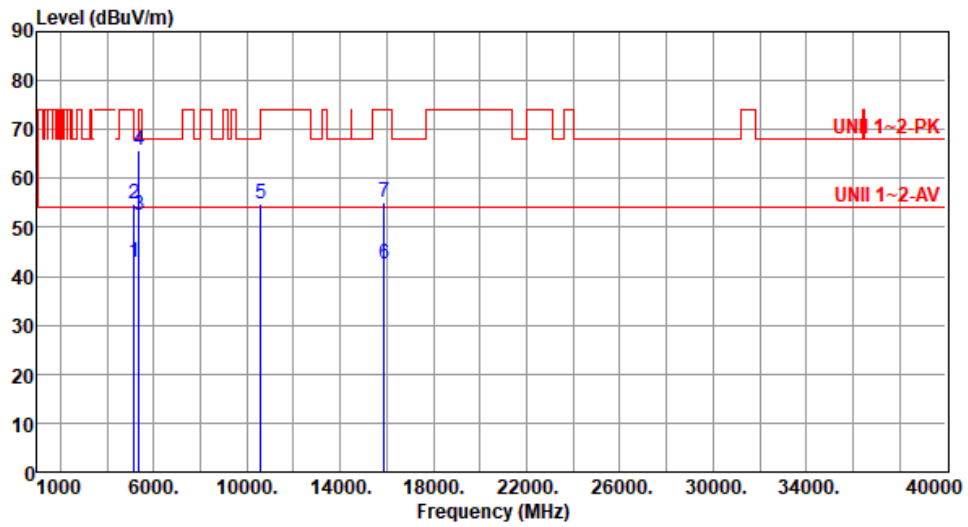

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	42.84	54.00	-11.16	42.51	0.33	Average	314	321
2	5150.00	54.87	74.00	-19.13	54.54	0.33	Peak	314	321
3	5350.00	52.50	54.00	-1.50	52.75	-0.25	Average	232	321
4	5350.00	65.86	74.00	-8.14	66.11	-0.25	Peak	232	332
5	10580.00	54.88	68.20	-13.32	47.53	7.35	Peak	100	188
6	15870.00	42.38	54.00	-11.62	38.33	4.05	Average	100	206
7	15870.00	55.28	74.00	-18.72	51.23	4.05	Peak	100	206

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	5290
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):24 Humidity(%):62

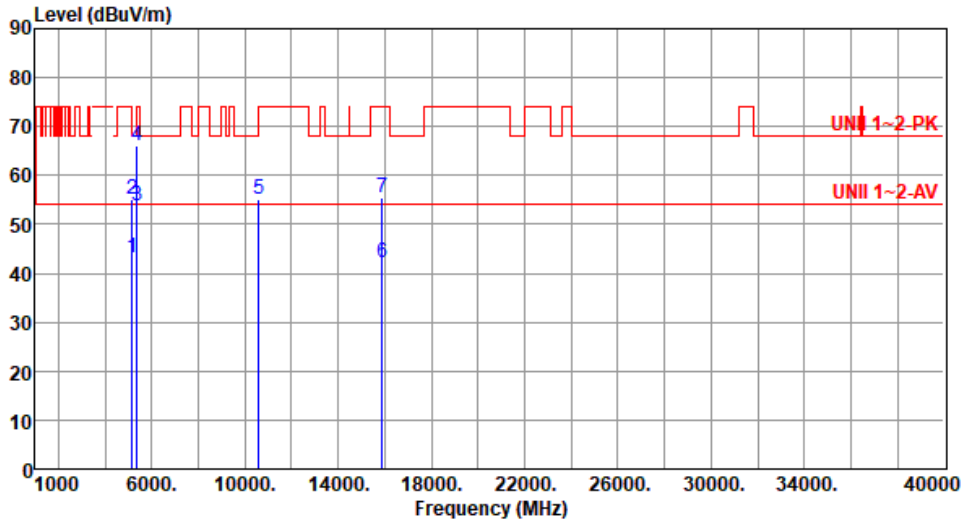

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	43.01	54.00	-10.99	42.68	0.33	Average	245	217
2	5150.00	54.99	74.00	-19.01	54.66	0.33	Peak	245	217
3	5350.00	53.74	54.00	-0.26	53.99	-0.25	Average	245	217
4	5350.00	66.02	74.00	-7.98	66.27	-0.25	Peak	245	217
5	10580.00	55.11	68.20	-13.09	47.76	7.35	Peak	100	156
6	15870.00	42.34	54.00	-11.66	38.29	4.05	Average	100	256
7	15870.00	55.48	74.00	-18.52	51.43	4.05	Peak	100	256

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	5530
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):24 Humidity(%):62

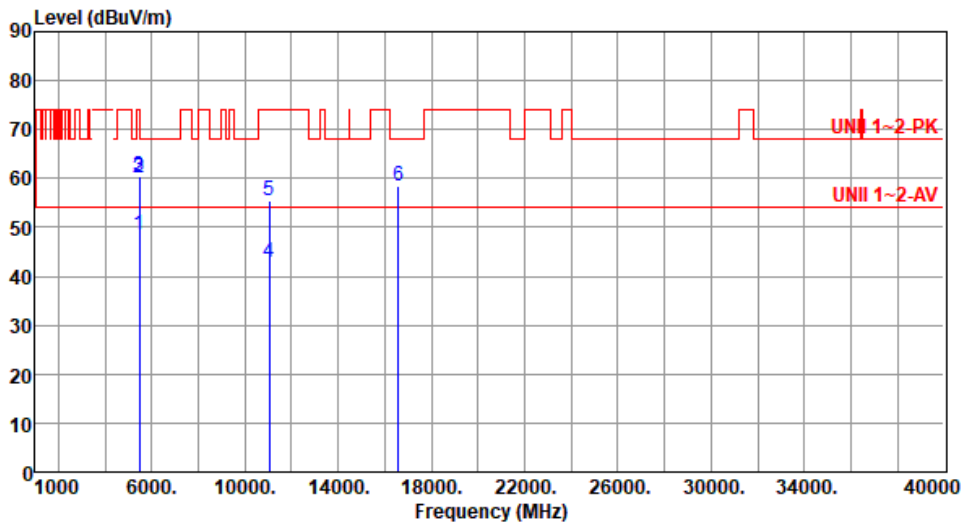

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	48.45	54.00	-5.55	48.06	0.39	Average	100	142
2	5460.00	59.97	74.00	-14.03	59.58	0.39	Peak	100	142
3	5470.00	60.51	68.20	-7.69	60.13	0.38	Peak	100	142
4	11060.00	42.70	54.00	-11.30	35.21	7.49	Average	100	251
5	11060.00	55.61	74.00	-18.39	48.12	7.49	Peak	100	251
6	16590.00	58.48	68.20	-9.72	52.16	6.32	Peak	100	228

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	5530
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):24 Humidity(%):62

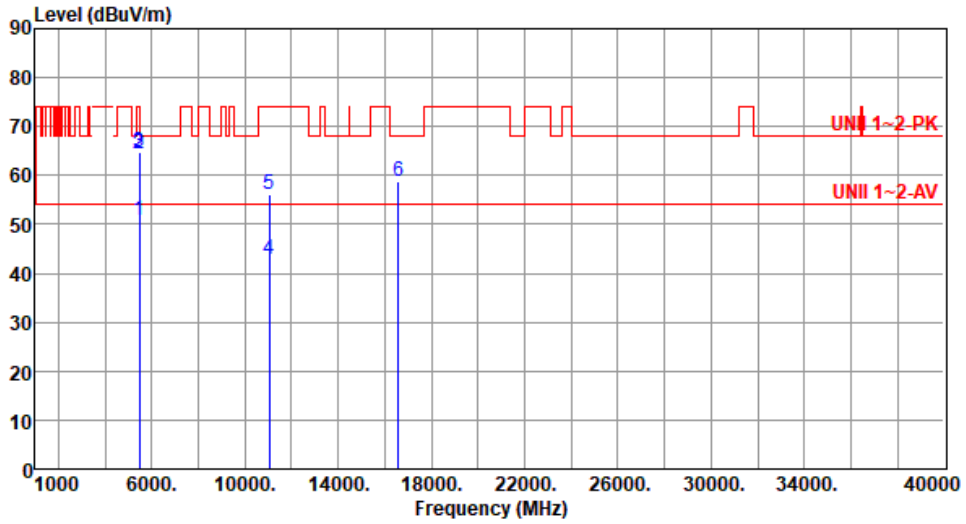

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	50.93	54.00	-3.07	50.54	0.39	Average	100	228
2	5460.00	64.33	74.00	-9.67	63.94	0.39	Peak	100	228
3	5470.00	64.61	68.20	-3.59	64.23	0.38	Peak	100	228
4	11060.00	42.76	54.00	-11.24	35.27	7.49	Average	100	147
5	11060.00	56.02	74.00	-17.98	48.53	7.49	Peak	100	147
6	16590.00	58.70	68.20	-9.50	52.38	6.32	Peak	100	108

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	5610
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):24 Humidity(%):62

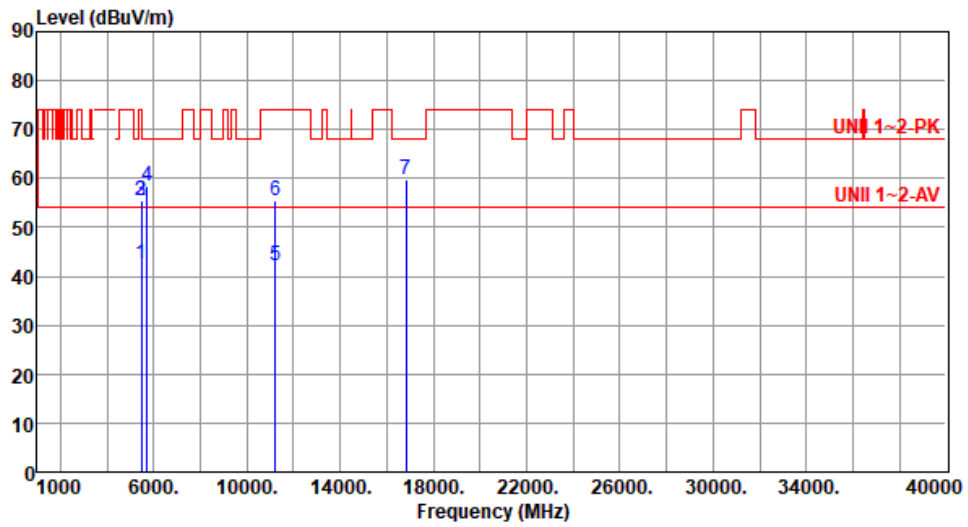

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	42.55	54.00	-11.45	42.16	0.39	Average	250	139
2	5460.00	55.36	74.00	-18.64	54.97	0.39	Peak	250	139
3	5470.00	55.40	68.20	-12.80	55.02	0.38	Peak	250	139
4	5725.00	58.39	68.20	-9.81	57.81	0.58	Peak	250	139
5	11220.00	42.30	54.00	-11.70	35.64	6.66	Average	100	251
6	11220.00	55.42	74.00	-18.58	48.76	6.66	Peak	100	251
7	16830.00	59.71	68.20	-8.49	52.50	7.21	Peak	100	116

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	5610
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):24 Humidity(%):62

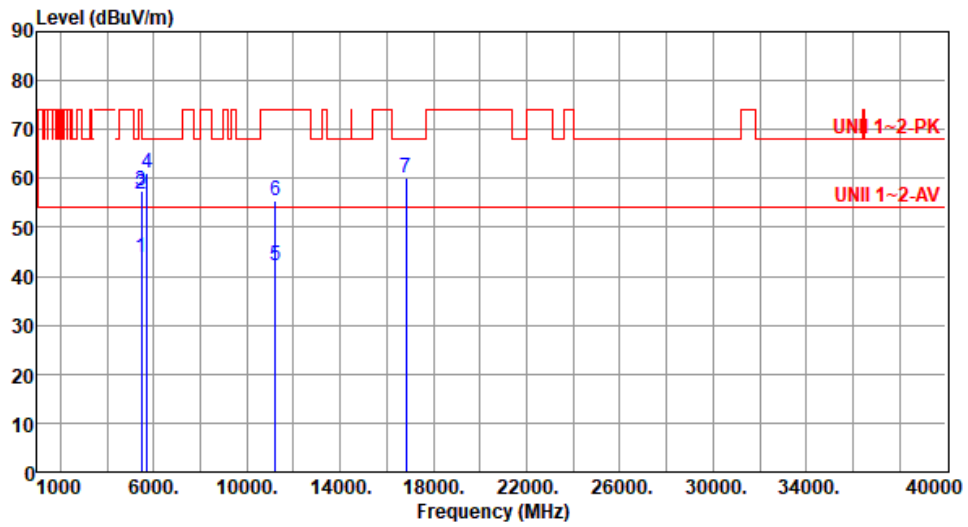

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	43.69	54.00	-10.31	43.30	0.39	Average	100	224
2	5460.00	56.83	74.00	-17.17	56.44	0.39	Peak	100	224
3	5470.00	57.55	68.20	-10.65	57.17	0.38	Peak	100	224
4	5725.00	61.19	68.20	-7.01	60.61	0.58	Peak	100	224
5	11220.00	42.32	54.00	-11.68	35.66	6.66	Average	100	107
6	11220.00	55.45	74.00	-18.55	48.79	6.66	Peak	100	107
7	16830.00	59.96	68.20	-8.24	52.75	7.21	Peak	100	165

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	5690
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):24 Humidity(%):62

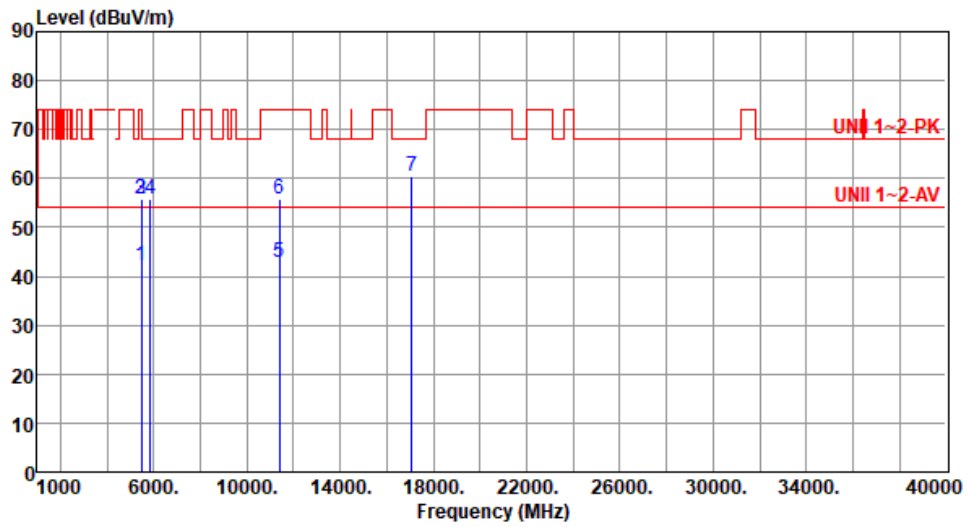

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	42.14	54.00	-11.86	41.75	0.39	Average	293	187
2	5460.00	55.69	74.00	-18.31	55.30	0.39	Peak	293	187
3	5470.00	55.80	68.20	-12.40	55.42	0.38	Peak	293	187
4	5850.00	55.78	68.20	-12.42	54.82	0.96	Peak	293	187
5	11380.00	42.84	54.00	-11.16	35.68	7.16	Average	100	251
6	11380.00	55.63	74.00	-18.37	48.47	7.16	Peak	100	251
7	17070.00	60.37	68.20	-7.83	53.27	7.10	Peak	100	110

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	5690
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):24 Humidity(%):62

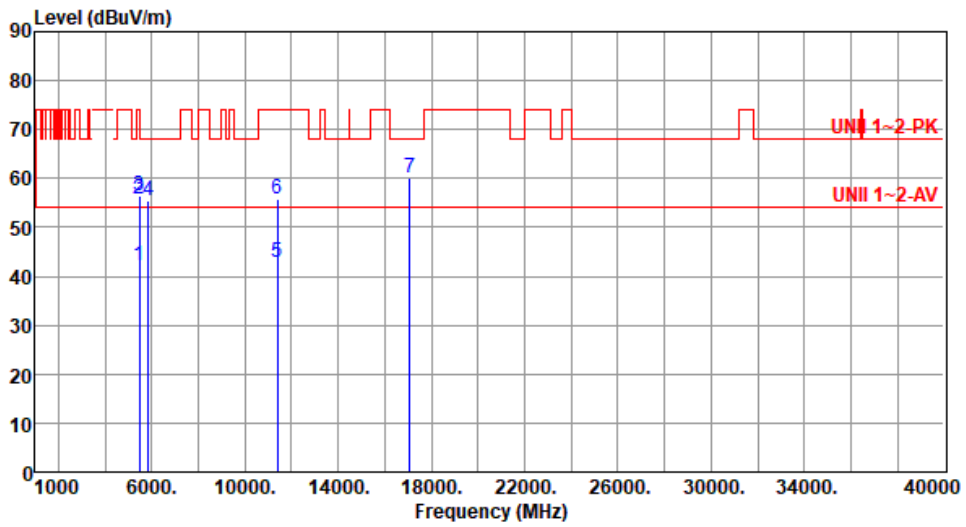

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	42.32	54.00	-11.68	41.93	0.39	Average	100	193
2	5460.00	55.81	74.00	-18.19	55.42	0.39	Peak	100	193
3	5470.00	56.36	68.20	-11.84	55.98	0.38	Peak	100	193
4	5850.00	55.49	68.20	-12.71	54.53	0.96	Peak	100	193
5	11380.00	42.88	54.00	-11.12	35.72	7.16	Average	100	157
6	11380.00	55.75	74.00	-18.25	48.59	7.16	Peak	100	157
7	17070.00	60.11	68.20	-8.09	53.01	7.10	Peak	100	204

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	5775
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 24 Humidity(%): 62

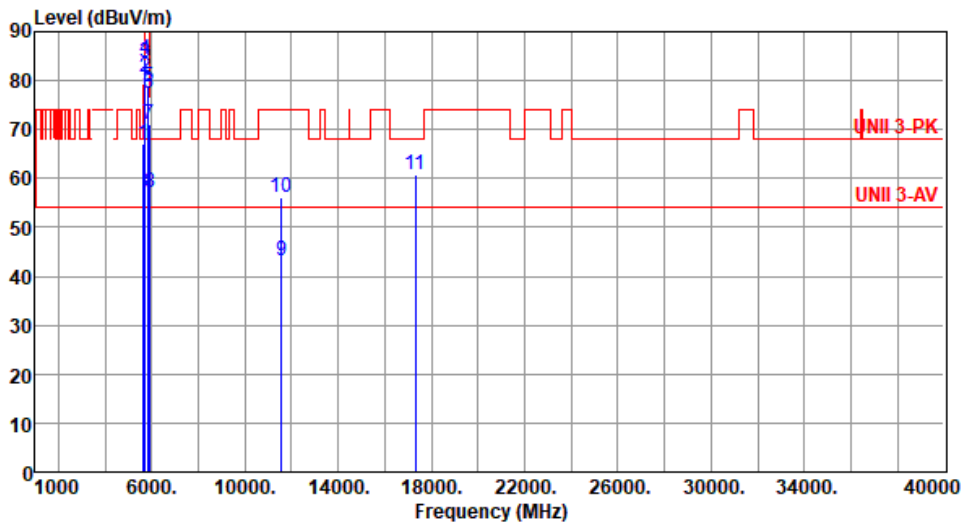

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	67.16	68.20	-1.04	66.95	0.21	Peak	199	137
2	5700.00	80.86	105.20	-24.34	80.33	0.53	Peak	199	137
3	5720.00	83.56	110.80	-27.24	82.99	0.57	Peak	199	137
4	5725.00	84.48	122.20	-37.72	83.90	0.58	Peak	199	137
5	5850.00	78.82	122.20	-43.38	77.86	0.96	Peak	199	137
6	5855.00	77.38	110.80	-33.42	76.40	0.98	Peak	199	137
7	5875.00	71.20	105.20	-34.00	70.18	1.02	Peak	199	137
8	5925.00	57.02	68.20	-11.18	55.89	1.13	Peak	199	137
9	11550.00	43.02	54.00	-10.98	35.68	7.34	Average	100	145
10	11550.00	56.24	74.00	-17.76	48.90	7.34	Peak	100	145
11	17325.00	60.64	68.20	-7.56	53.86	6.78	Peak	100	204

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	5775
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 24 Humidity(%): 62

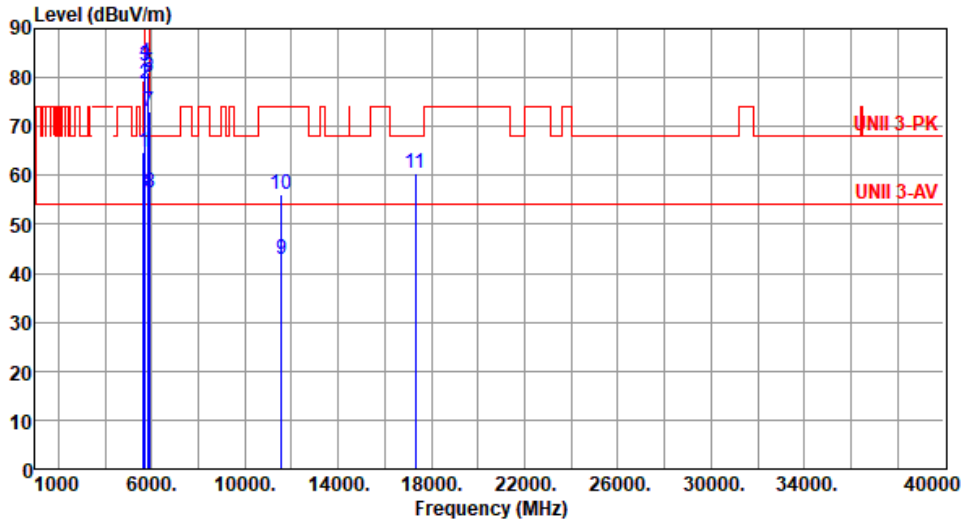

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	64.70	68.20	-3.50	64.49	0.21	Peak	100	318
2	5700.00	78.58	105.20	-26.62	78.05	0.53	Peak	100	318
3	5720.00	82.26	110.80	-28.54	81.69	0.57	Peak	100	318
4	5725.00	83.06	122.20	-39.14	82.48	0.58	Peak	100	318
5	5850.00	81.00	122.20	-41.20	80.04	0.96	Peak	100	318
6	5855.00	80.10	110.80	-30.70	79.12	0.98	Peak	100	318
7	5875.00	73.01	105.20	-32.19	71.99	1.02	Peak	100	318
8	5925.00	56.36	68.20	-11.84	55.23	1.13	Peak	100	318
9	11550.00	43.00	54.00	-11.00	35.66	7.34	Average	100	159
10	11550.00	56.16	74.00	-17.84	48.82	7.34	Peak	100	159
11	17325.00	60.52	68.20	-7.68	53.74	6.78	Peak	100	154

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Unwanted Emissions (Above 1GHz) for be EHT160

Modulation	be EHT160	Test Freq. (MHz)	5250						
Polarization	Horizontal								
<p>Test By :Allen Lee Temperature(°C):23 Humidity(%):64</p>									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	49.37	54.00	-4.63	49.04	0.33	Average	288	43
2	5150.00	61.70	74.00	-12.30	61.37	0.33	Peak	288	43
3	5350.00	51.04	54.00	-2.96	51.29	-0.25	Average	288	43
4	5350.00	63.09	74.00	-10.91	63.34	-0.25	Peak	288	43
5	10500.00	55.62	68.20	-12.58	48.43	7.19	Peak	100	176
6	15750.00	42.85	54.00	-11.15	38.64	4.21	Average	100	223
7	15750.00	55.47	74.00	-18.53	51.26	4.21	Peak	100	223

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160	Test Freq. (MHz)	5250
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):23 Humidity(%):64

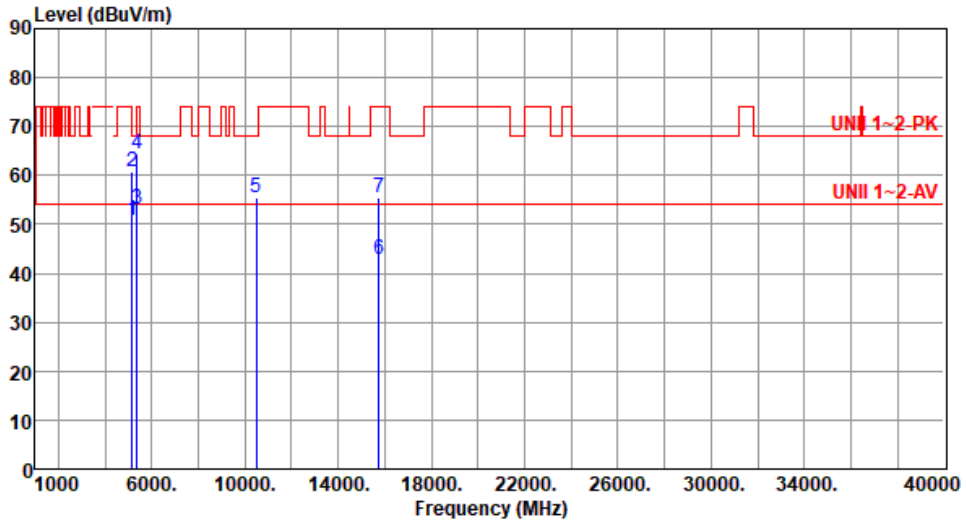

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	50.94	54.00	-3.06	50.61	0.33	Average	100	215
2	5150.00	60.88	74.00	-13.12	60.55	0.33	Peak	100	215
3	5350.00	53.20	54.00	-0.80	53.45	-0.25	Average	100	215
4	5350.00	64.56	74.00	-9.44	64.81	-0.25	Peak	100	215
5	10500.00	55.32	68.20	-12.88	48.13	7.19	Peak	100	226
6	15750.00	42.68	54.00	-11.32	38.47	4.21	Average	100	106
7	15750.00	55.43	74.00	-18.57	51.22	4.21	Peak	100	106

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160	Test Freq. (MHz)	5570
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):23 Humidity(%):64

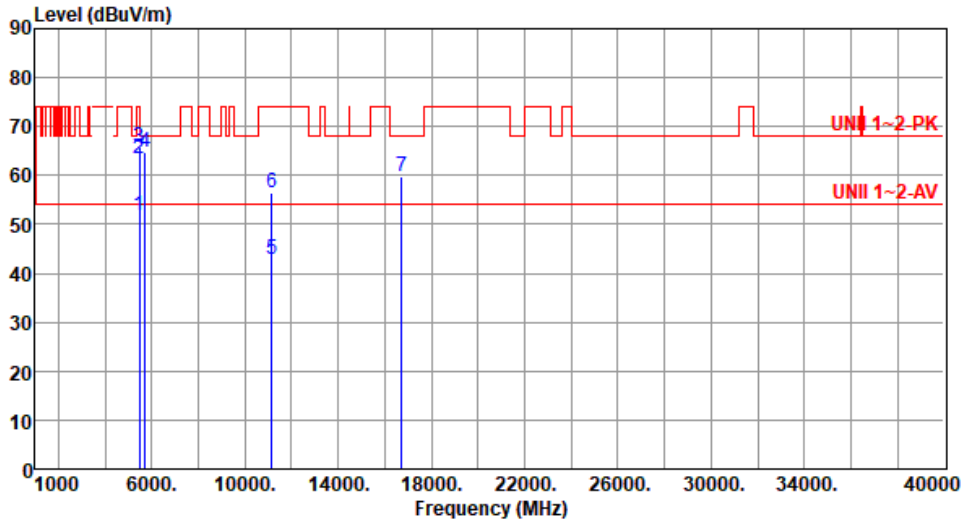

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	51.76	54.00	-2.24	51.37	0.39	Average	100	137
2	5460.00	63.48	74.00	-10.52	63.09	0.39	Peak	100	137
3	5470.00	65.66	68.20	-2.54	65.28	0.38	Peak	100	137
4	5725.00	64.65	68.20	-3.55	64.07	0.58	Peak	100	137
5	11140.00	42.69	54.00	-11.31	35.64	7.05	Average	100	223
6	11140.00	56.43	74.00	-17.57	49.38	7.05	Peak	100	223
7	16710.00	59.84	68.20	-8.36	52.43	7.41	Peak	100	105

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160	Test Freq. (MHz)	5570
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):23 Humidity(%):64

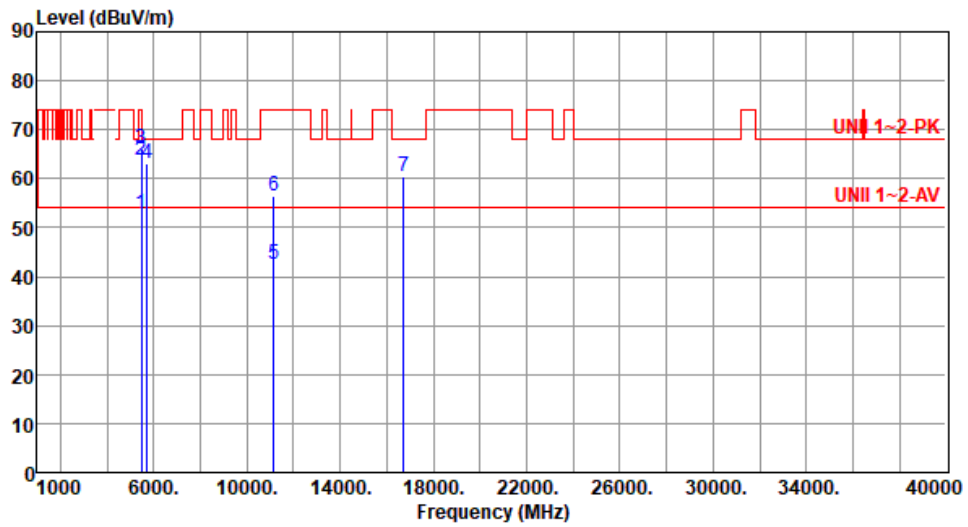

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	52.89	54.00	-1.11	52.50	0.39	Average	100	222
2	5460.00	63.83	74.00	-10.17	63.44	0.39	Peak	100	222
3	5470.00	66.10	68.20	-2.10	65.72	0.38	Peak	100	222
4	5725.00	63.04	68.20	-5.16	62.46	0.58	Peak	100	222
5	11140.00	42.47	54.00	-11.53	35.42	7.05	Average	100	158
6	11140.00	56.31	74.00	-17.69	49.26	7.05	Peak	100	158
7	16710.00	60.42	68.20	-7.78	53.01	7.41	Peak	100	102

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




Unwanted Emissions (Below 1GHz)

Configuration 2: Model: SDG-8734

Modulation	be EHT40	Test Freq. (MHz)	5230
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):24 Humidity(%):62

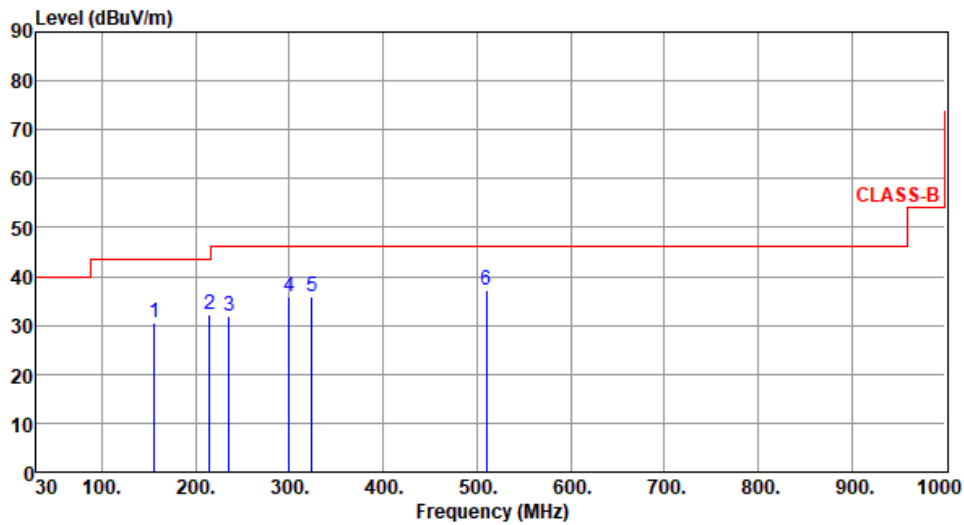

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	156.00	30.54	43.50	-12.96	39.18	-8.64	Peak	---	---
2	215.20	32.16	43.50	-11.34	44.12	-11.96	Peak	---	---
3	235.43	31.89	46.00	-14.11	42.64	-10.75	Peak	---	---
4	300.07	36.01	46.00	-9.99	44.07	-8.06	Peak	---	---
5	324.16	35.93	46.00	-10.07	43.25	-7.32	Peak	---	---
6	510.09	37.22	46.00	-8.78	39.96	-2.74	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Modulation	be EHT40	Test Freq. (MHz)	5230
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):24 Humidity(%):62

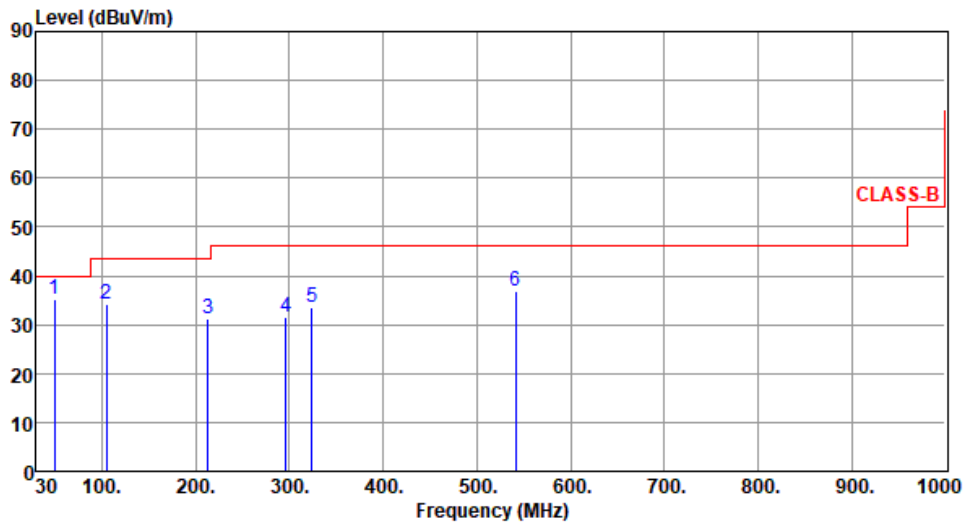

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	49.38	35.19	40.00	-4.81	43.07	-7.88	QP	100	82
2	104.52	34.12	43.50	-9.38	46.53	-12.41	Peak	---	---
3	213.08	31.23	43.50	-12.27	43.20	-11.97	Peak	---	---
4	296.55	31.45	46.00	-14.55	39.66	-8.21	Peak	---	---
5	324.21	33.46	46.00	-12.54	40.78	-7.32	Peak	---	---
6	541.06	37.02	46.00	-8.98	39.46	-2.44	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Modulation	11a	Test Freq. (MHz)	5745
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):24 Humidity(%):62

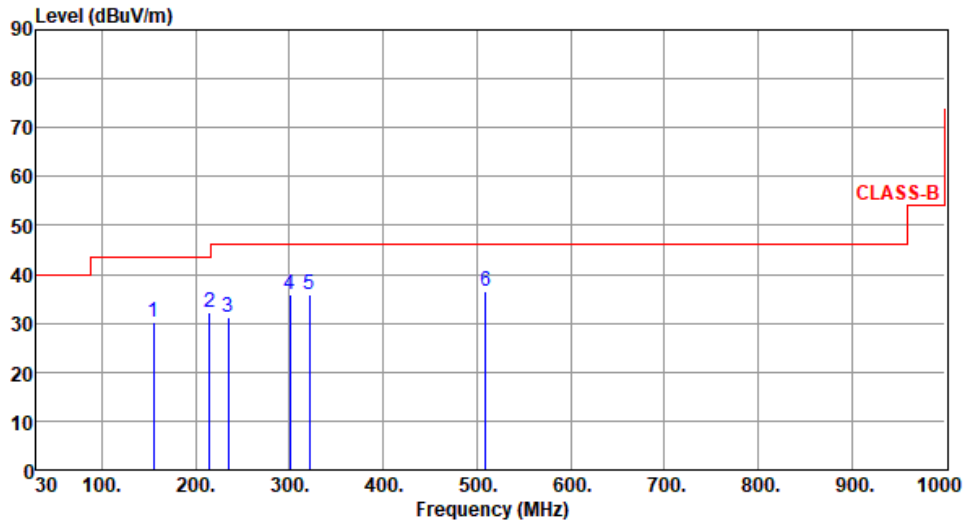

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	154.70	30.33	43.50	-13.17	38.91	-8.58	Peak	---	---
2	214.55	32.08	43.50	-11.42	44.05	-11.97	Peak	---	---
3	235.02	31.20	46.00	-14.80	41.99	-10.79	Peak	---	---
4	300.52	35.99	46.00	-10.01	44.04	-8.05	Peak	---	---
5	321.70	35.75	46.00	-10.25	43.12	-7.37	Peak	---	---
6	509.46	36.44	46.00	-9.56	39.20	-2.76	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Modulation	11a	Test Freq. (MHz)	5745
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):24 Humidity(%):62

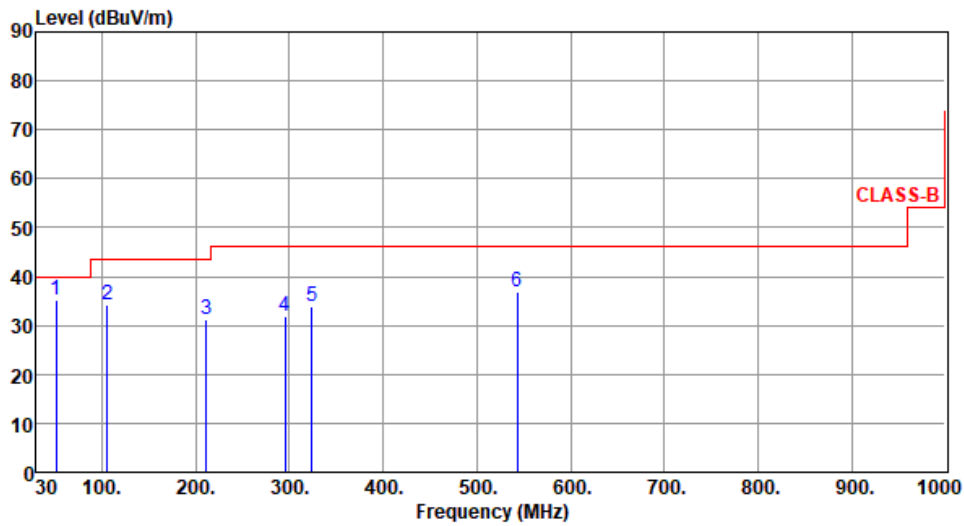

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	51.03	35.19	40.00	-4.81	43.04	-7.85	QP	100	80
2	105.52	34.22	43.50	-9.28	46.58	-12.36	Peak	---	---
3	211.58	31.08	43.50	-12.42	43.06	-11.98	Peak	---	---
4	295.40	31.86	46.00	-14.14	40.12	-8.26	Peak	---	---
5	324.00	33.72	46.00	-12.28	41.04	-7.32	Peak	---	---
6	543.21	36.76	46.00	-9.24	39.16	-2.40	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.




Beamforming mode

**Configuration 1: Model: SDG-8733
Unwanted Emissions (Below 1GHz)**

Modulation	be EHT20	Test Freq. (MHz)	5240
Polarization	Horizontal		

Test By :Sean Yu Temperature(°C):25 Humidity(%):61

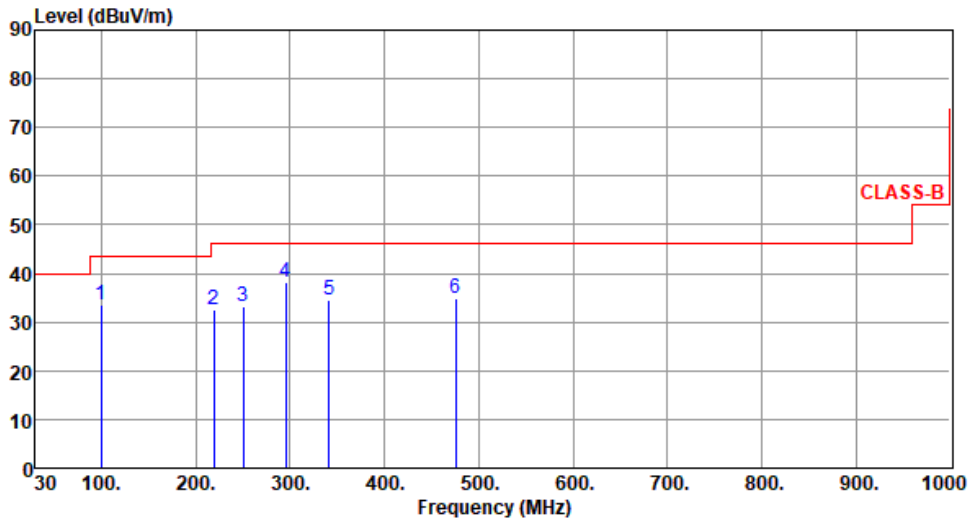

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	99.84	33.62	43.50	-9.88	46.88	-13.26	Peak	---	---
2	219.15	32.69	46.00	-13.31	44.56	-11.87	Peak	---	---
3	250.19	33.19	46.00	-12.81	43.14	-9.95	Peak	---	---
4	295.78	38.03	46.00	-7.97	46.28	-8.25	Peak	---	---
5	341.37	34.60	46.00	-11.40	41.65	-7.05	Peak	---	---
6	475.23	34.83	46.00	-11.17	38.41	-3.58	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Modulation	be EHT20	Test Freq. (MHz)	5240
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 25 Humidity(%): 61

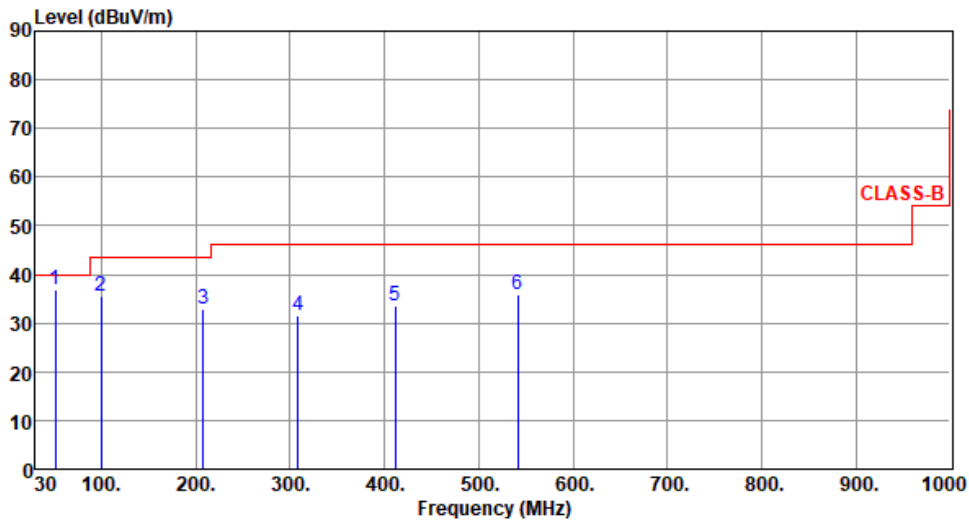

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	51.34	37.02	40.00	-2.98	44.89	-7.87	QP	100	62
2	99.84	35.38	43.50	-8.12	48.64	-13.26	Peak	---	---
3	207.51	32.78	43.50	-10.72	44.72	-11.94	Peak	---	---
4	308.39	31.46	46.00	-14.54	39.25	-7.79	Peak	---	---
5	411.21	33.66	46.00	-12.34	38.68	-5.02	Peak	---	---
6	541.19	35.79	46.00	-10.21	38.23	-2.44	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Modulation	be EHT20	Test Freq. (MHz)	5745
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 25 Humidity(%): 61

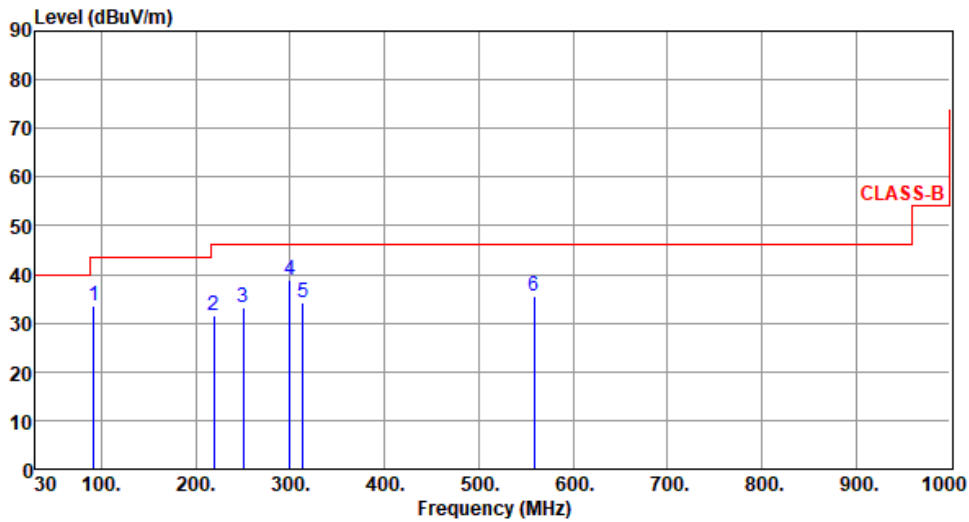

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	92.08	33.42	43.50	-10.08	47.73	-14.31	Peak	---	---
2	219.15	31.69	46.00	-14.31	43.56	-11.87	Peak	---	---
3	250.19	33.12	46.00	-12.88	43.07	-9.95	Peak	---	---
4	299.66	38.84	46.00	-7.16	46.91	-8.07	Peak	---	---
5	313.24	34.06	46.00	-11.94	41.66	-7.60	Peak	---	---
6	558.65	35.59	46.00	-10.41	37.46	-1.87	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Modulation	be EHT20	Test Freq. (MHz)	5745
Polarization	Vertical		

Test By :Sean Yu Temperature(°C):25 Humidity(%):61

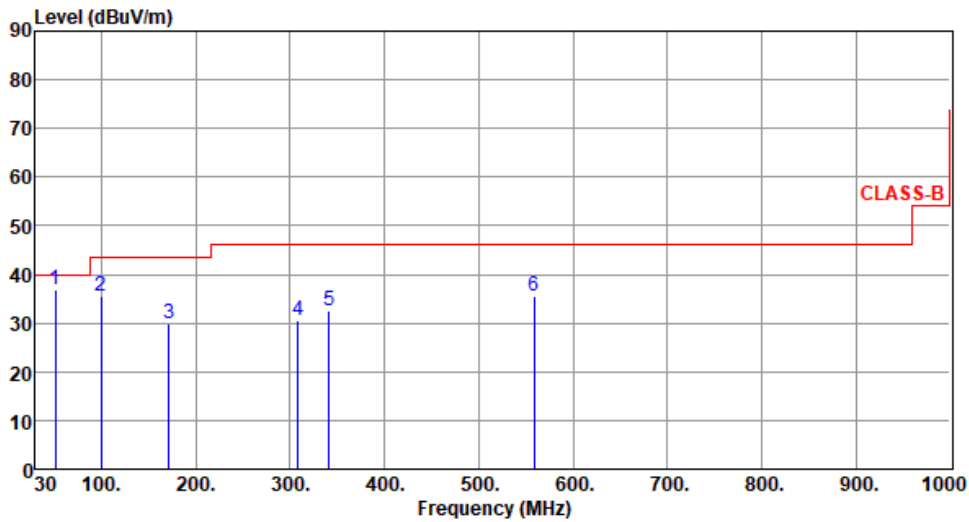

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	51.34	36.99	40.00	-3.01	44.86	-7.87	QP	100	61
2	99.84	35.38	43.50	-8.12	48.64	-13.26	Peak	---	---
3	171.62	29.92	43.50	-13.58	39.27	-9.35	Peak	---	---
4	308.39	30.46	46.00	-15.54	38.25	-7.79	Peak	---	---
5	341.37	32.67	46.00	-13.33	39.72	-7.05	Peak	---	---
6	558.65	35.52	46.00	-10.48	37.39	-1.87	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Unwanted Emissions (Above 1GHz) for be EHT20

Modulation	be EHT20	Test Freq. (MHz)	5180
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):25 Humidity(%):62

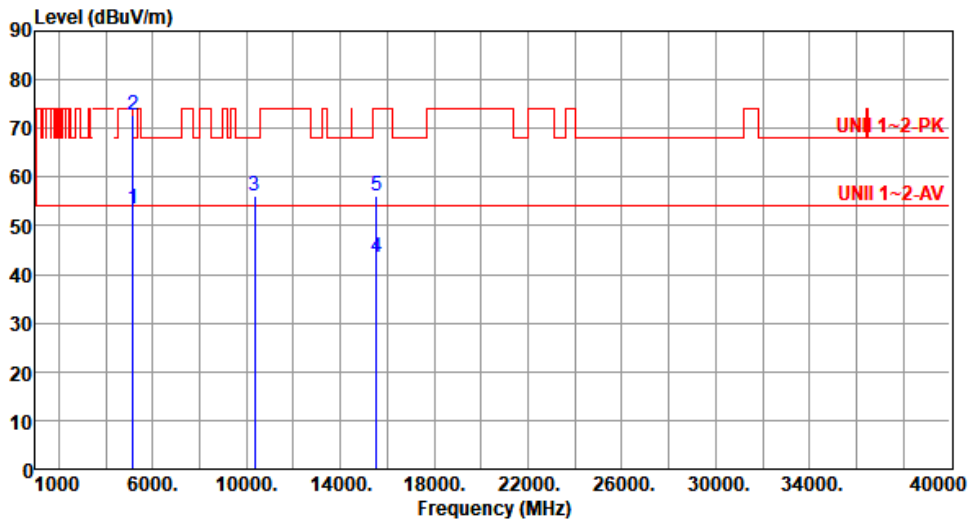


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	53.45	54.00	-0.55	53.12	0.33	Average	100	182
2	5150.00	72.78	74.00	-1.22	72.45	0.33	Peak	100	182
3	10360.00	56.22	68.20	-11.98	48.86	7.36	Peak	100	241
4	15540.00	43.44	54.00	-10.56	39.48	3.96	Average	100	117
5	15540.00	56.09	74.00	-17.91	52.13	3.96	Peak	100	117

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5180
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):25 Humidity(%):62

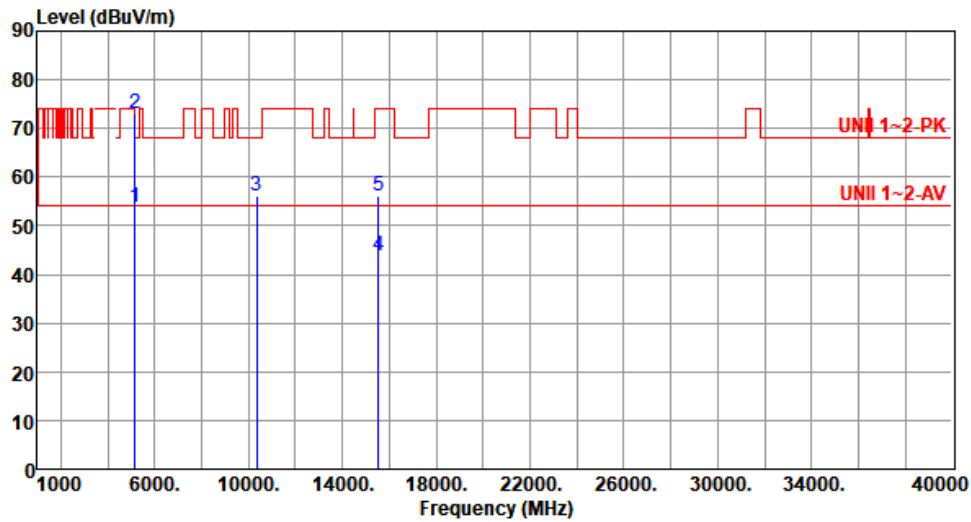

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	53.88	54.00	-0.12	53.55	0.33	Average	100	248
2	5150.00	73.20	74.00	-0.80	72.87	0.33	Peak	100	248
3	10360.00	56.15	68.20	-12.05	48.79	7.36	Peak	100	251
4	15540.00	43.71	54.00	-10.29	39.75	3.96	Average	100	185
5	15540.00	56.22	74.00	-17.78	52.26	3.96	Peak	100	185

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5200
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):25 Humidity(%):62

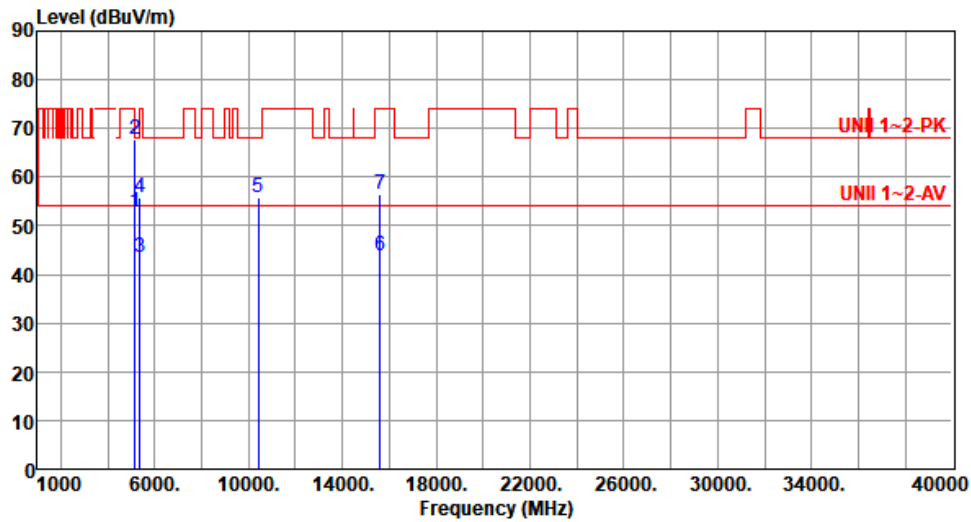

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	52.75	54.00	-1.25	52.42	0.33	Average	100	188
2	5150.00	67.89	74.00	-6.11	67.56	0.33	Peak	100	188
3	5350.00	43.38	54.00	-10.62	43.63	-0.25	Average	100	315
4	5350.00	55.87	74.00	-18.13	56.12	-0.25	Peak	100	315
5	10400.00	55.89	68.20	-12.31	48.55	7.34	Peak	100	168
6	15600.00	43.89	54.00	-10.11	39.89	4.00	Average	100	214
7	15600.00	56.36	74.00	-17.64	52.36	4.00	Peak	100	214

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5200
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):25 Humidity(%):62

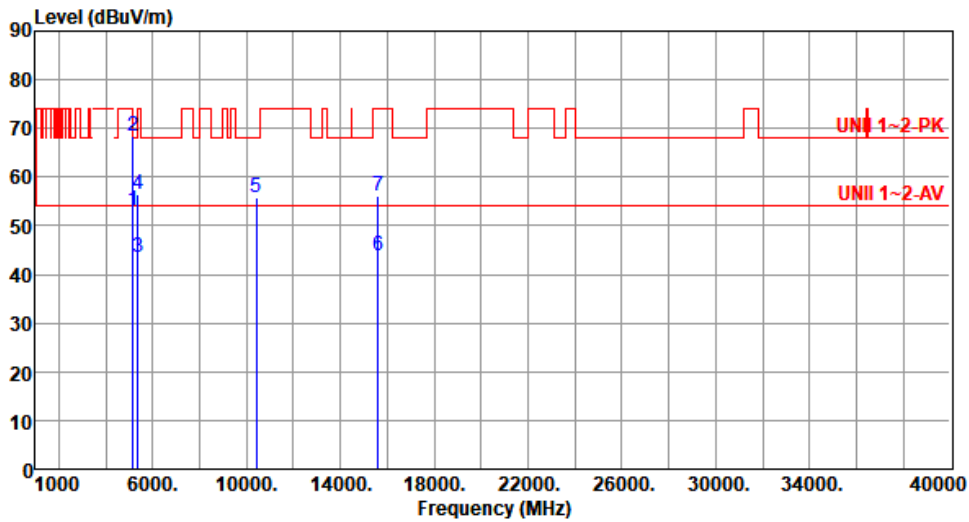

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	53.18	54.00	-0.82	52.85	0.33	Average	100	242
2	5150.00	68.55	74.00	-5.45	68.22	0.33	Peak	100	242
3	5350.00	43.36	54.00	-10.64	43.61	-0.25	Average	149	218
4	5350.00	56.31	74.00	-17.69	56.56	-0.25	Peak	149	218
5	10400.00	55.73	68.20	-12.47	48.39	7.34	Peak	100	125
6	15600.00	43.91	54.00	-10.09	39.91	4.00	Average	100	251
7	15600.00	56.20	74.00	-17.80	52.20	4.00	Peak	100	251

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5240
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 26 Humidity(%): 61

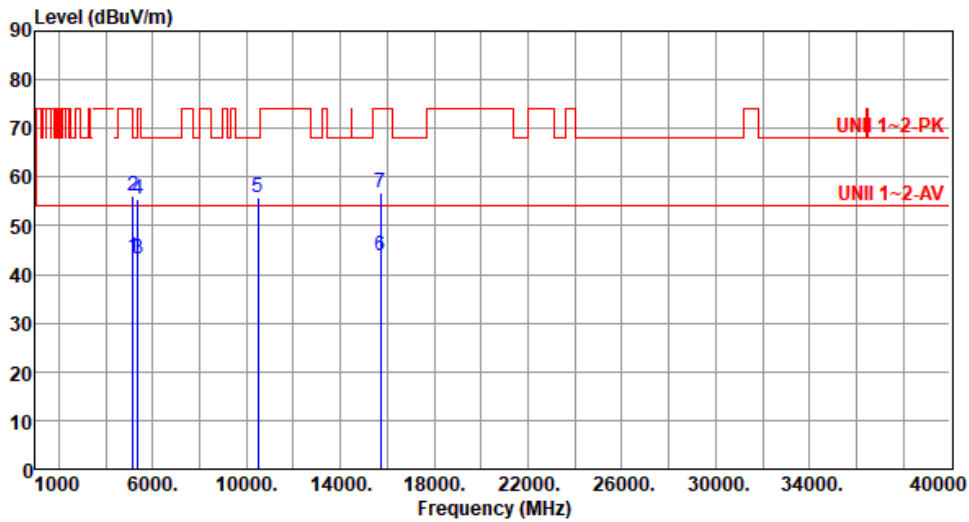

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	43.59	54.00	-10.41	43.26	0.33	Average	235	162
2	5150.00	56.13	74.00	-17.87	55.80	0.33	Peak	235	162
3	5350.00	43.05	54.00	-10.95	43.30	-0.25	Average	235	162
4	5350.00	55.34	74.00	-18.66	55.59	-0.25	Peak	235	162
5	10480.00	55.89	68.20	-12.31	48.65	7.24	Peak	100	156
6	15720.00	43.68	54.00	-10.32	39.45	4.23	Average	100	271
7	15720.00	56.89	74.00	-17.11	52.66	4.23	Peak	100	271

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5240
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 26 Humidity(%): 61

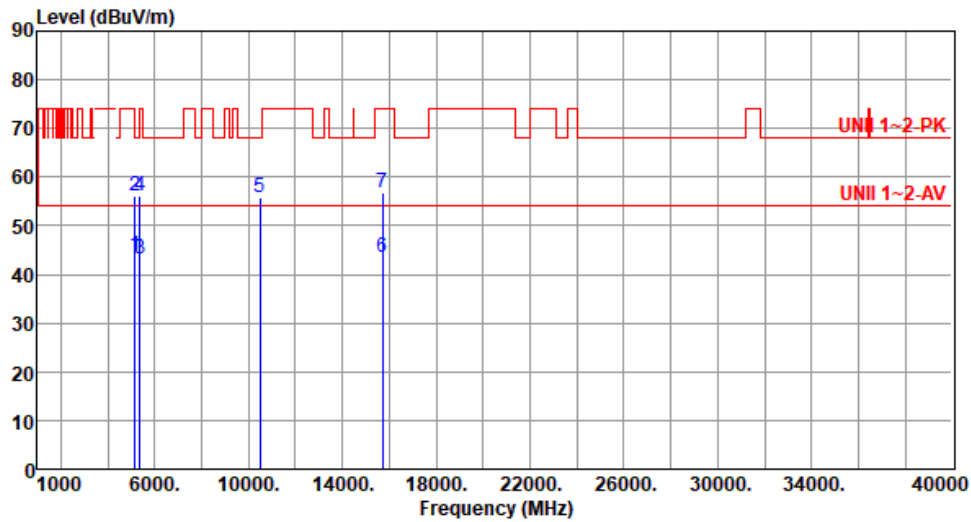

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	43.74	54.00	-10.26	43.41	0.33	Average	100	221
2	5150.00	56.17	74.00	-17.83	55.84	0.33	Peak	100	221
3	5350.00	43.25	54.00	-10.75	43.50	-0.25	Average	100	221
4	5350.00	55.98	74.00	-18.02	56.23	-0.25	Peak	100	221
5	10480.00	55.87	68.20	-12.33	48.63	7.24	Peak	100	174
6	15720.00	43.39	54.00	-10.61	39.16	4.23	Average	100	257
7	15720.00	56.92	74.00	-17.08	52.69	4.23	Peak	100	257

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5260
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 26 Humidity(%): 61

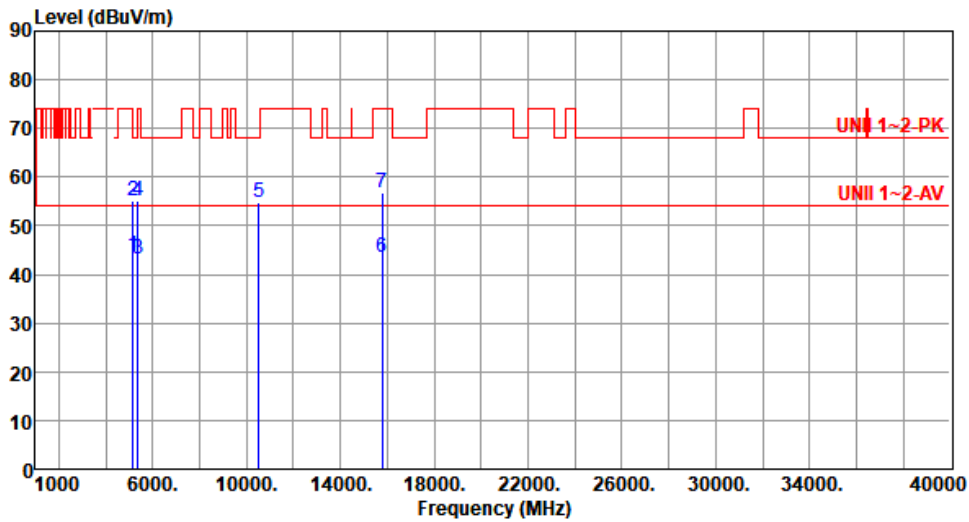

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	43.75	54.00	-10.25	43.42	0.33	Average	246	117
2	5150.00	55.00	74.00	-19.00	54.67	0.33	Peak	246	117
3	5350.00	43.20	54.00	-10.80	43.45	-0.25	Average	246	117
4	5350.00	55.07	74.00	-18.93	55.32	-0.25	Peak	246	117
5	10520.00	54.73	68.20	-13.47	47.59	7.14	Peak	100	248
6	15780.00	43.37	54.00	-10.63	39.41	3.96	Average	100	176
7	15780.00	56.64	74.00	-17.36	52.68	3.96	Peak	100	176

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5260
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 26 Humidity(%): 61

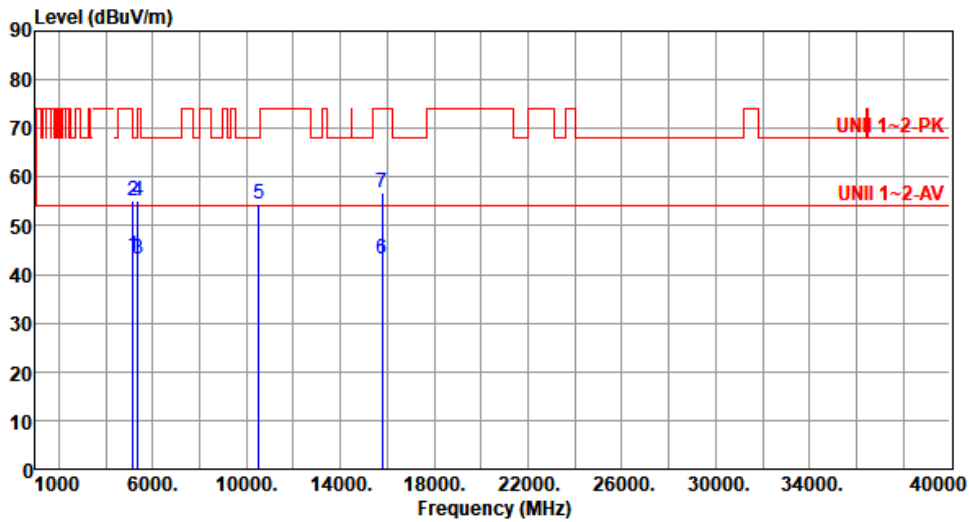

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	43.71	54.00	-10.29	43.38	0.33	Average	100	142
2	5150.00	55.27	74.00	-18.73	54.94	0.33	Peak	100	142
3	5350.00	43.21	54.00	-10.79	43.46	-0.25	Average	100	142
4	5350.00	55.25	74.00	-18.75	55.50	-0.25	Peak	100	142
5	10520.00	54.57	68.20	-13.63	47.43	7.14	Peak	100	250
6	15780.00	43.01	54.00	-10.99	39.05	3.96	Average	100	166
7	15780.00	56.64	74.00	-17.36	52.68	3.96	Peak	100	166

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5300
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 26 Humidity(%): 61

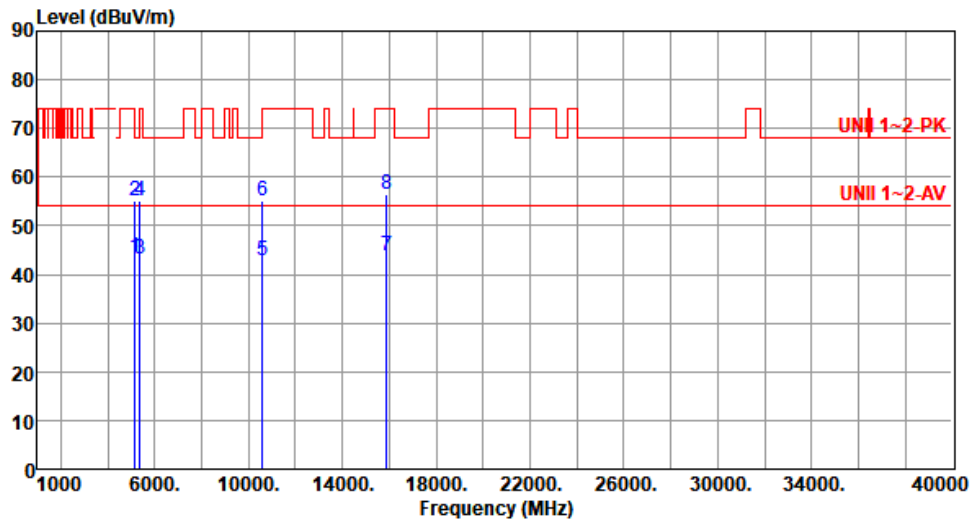

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	43.67	54.00	-10.33	43.34	0.33	Average	241	119
2	5150.00	55.17	74.00	-18.83	54.84	0.33	Peak	241	119
3	5350.00	43.25	54.00	-10.75	43.50	-0.25	Average	241	119
4	5350.00	55.00	74.00	-19.00	55.25	-0.25	Peak	241	119
5	10600.00	42.68	54.00	-11.32	35.14	7.54	Average	100	251
6	10600.00	55.18	74.00	-18.82	47.64	7.54	Peak	100	251
7	15900.00	43.79	54.00	-10.21	39.46	4.33	Average	100	186
8	15900.00	56.54	74.00	-17.46	52.21	4.33	Peak	100	186

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5300
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 26 Humidity(%): 61

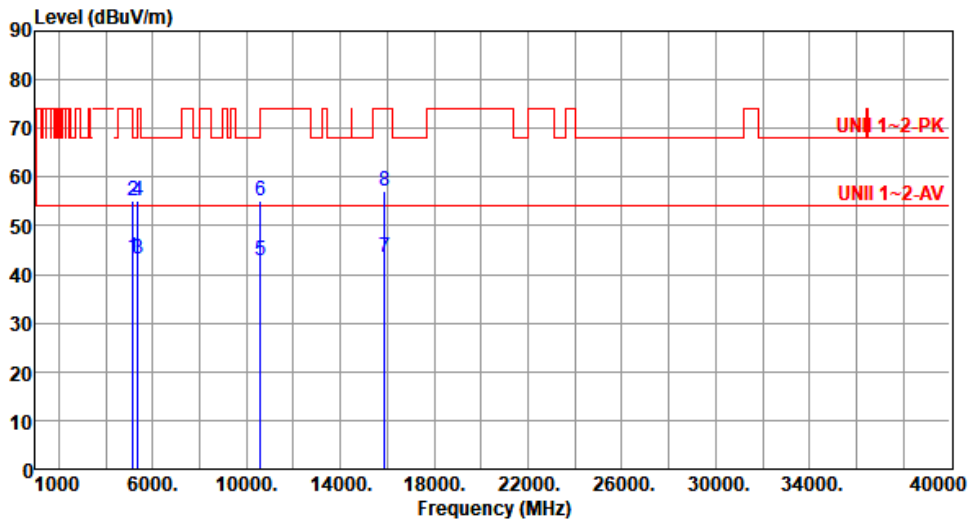

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	43.59	54.00	-10.41	43.26	0.33	Average	100	135
2	5150.00	55.19	74.00	-18.81	54.86	0.33	Peak	100	135
3	5350.00	43.12	54.00	-10.88	43.37	-0.25	Average	100	135
4	5350.00	55.11	74.00	-18.89	55.36	-0.25	Peak	100	135
5	10600.00	42.85	54.00	-11.15	35.31	7.54	Average	100	214
6	10600.00	55.05	74.00	-18.95	47.51	7.54	Peak	100	214
7	15900.00	43.46	54.00	-10.54	39.13	4.33	Average	100	158
8	15900.00	57.04	74.00	-16.96	52.71	4.33	Peak	100	158

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5320
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):25 Humidity(%):62

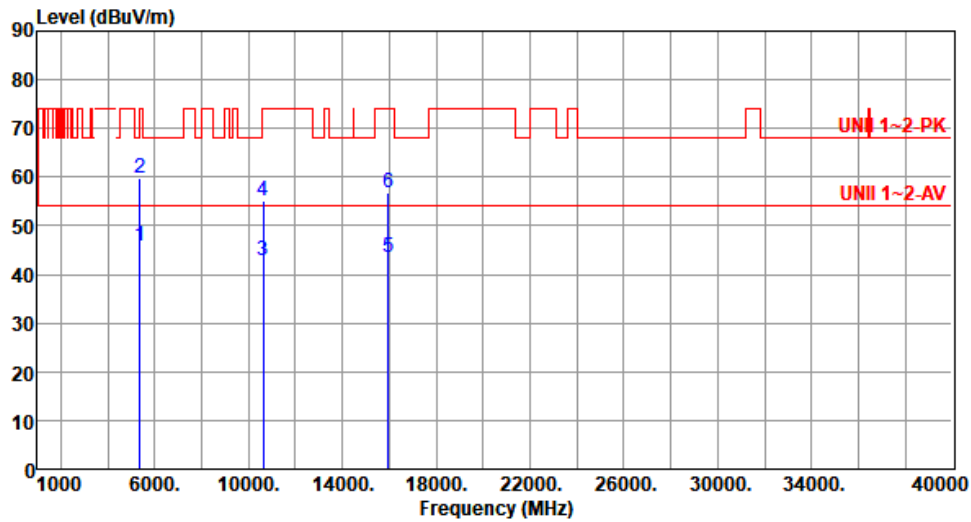

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5350.00	45.95	54.00	-8.05	46.20	-0.25	Average	100	221
2	5350.00	59.78	74.00	-14.22	60.03	-0.25	Peak	100	221
3	10640.00	42.97	54.00	-11.03	35.37	7.60	Average	100	247
4	10640.00	55.28	74.00	-18.72	47.68	7.60	Peak	100	247
5	15960.00	43.47	54.00	-10.53	39.16	4.31	Average	100	274
6	15960.00	56.74	74.00	-17.26	52.43	4.31	Peak	100	274

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5320
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):25 Humidity(%):62

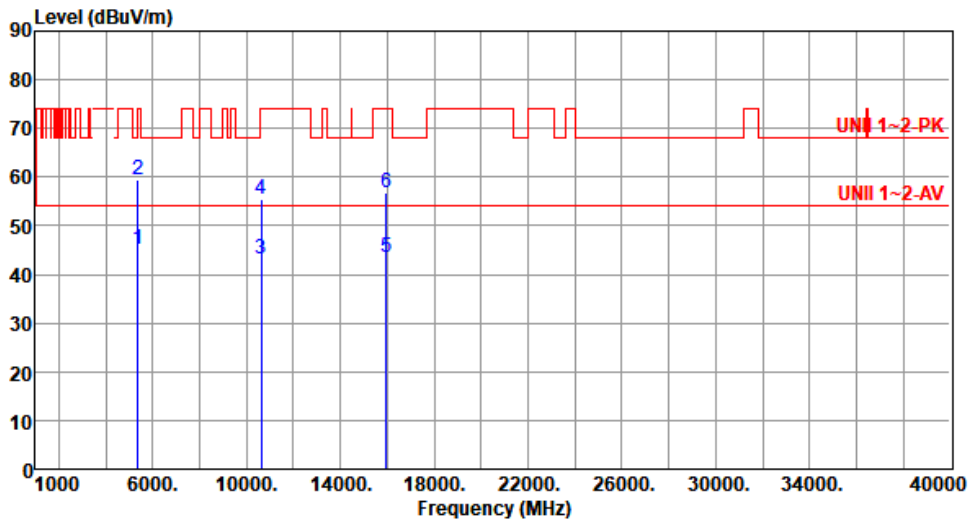

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5350.00	45.11	54.00	-8.89	45.36	-0.25	Average	243	123
2	5350.00	59.40	74.00	-14.60	59.65	-0.25	Peak	243	123
3	10640.00	43.02	54.00	-10.98	35.42	7.60	Average	100	176
4	10640.00	55.46	74.00	-18.54	47.86	7.60	Peak	100	176
5	15960.00	43.59	54.00	-10.41	39.28	4.31	Average	100	203
6	15960.00	56.88	74.00	-17.12	52.57	4.31	Peak	100	203

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5500
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):25 Humidity(%):62

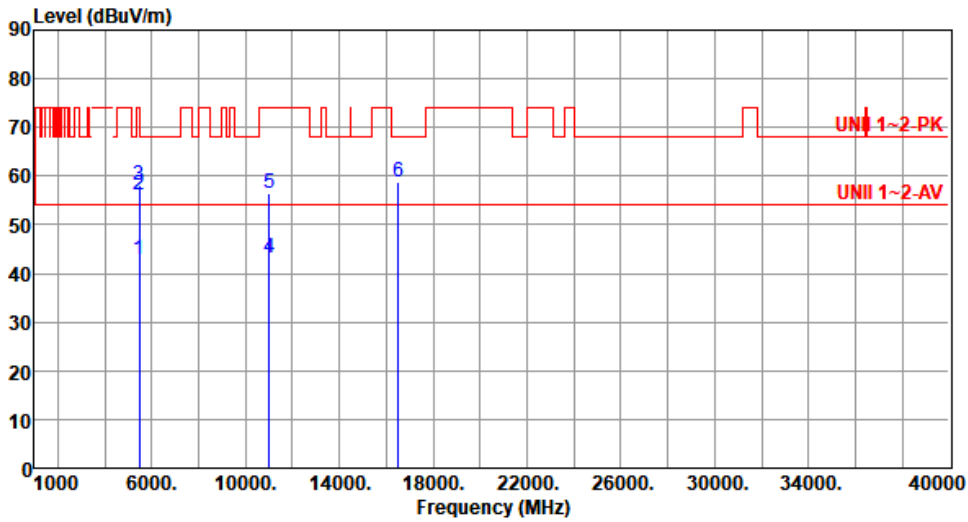

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	42.96	54.00	-11.04	42.57	0.39	Average	100	127
2	5460.00	56.24	74.00	-17.76	55.85	0.39	Peak	100	127
3	5470.00	58.04	68.20	-10.16	57.66	0.38	Peak	100	127
4	11000.00	43.20	54.00	-10.80	35.65	7.55	Average	100	251
5	11000.00	56.49	74.00	-17.51	48.94	7.55	Peak	100	251
6	16500.00	58.81	68.20	-9.39	52.36	6.45	Peak	100	174

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5500
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):25 Humidity(%):62

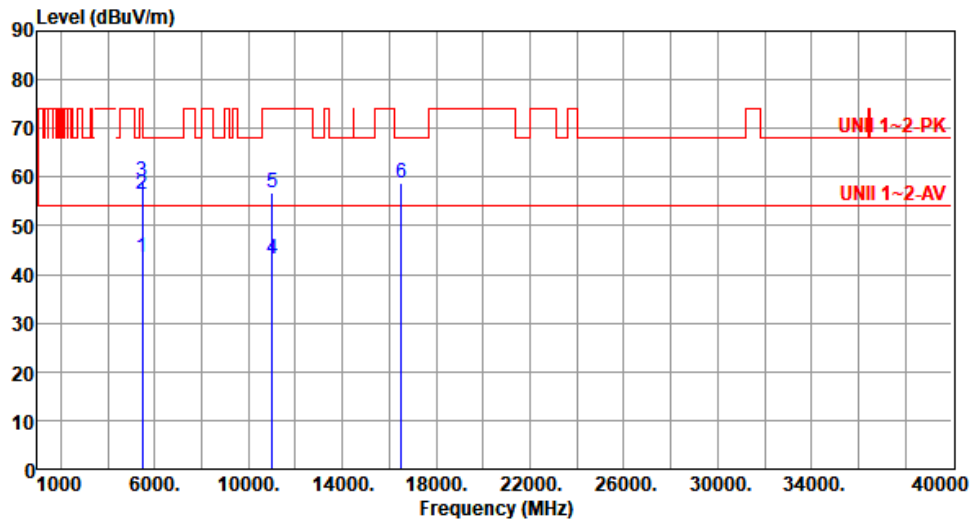

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	43.50	54.00	-10.50	43.11	0.39	Average	100	203
2	5460.00	56.53	74.00	-17.47	56.14	0.39	Peak	100	203
3	5470.00	59.12	68.20	-9.08	58.74	0.38	Peak	100	203
4	11000.00	43.20	54.00	-10.80	35.65	7.55	Average	100	175
5	11000.00	56.76	74.00	-17.24	49.21	7.55	Peak	100	175
6	16500.00	58.92	68.20	-9.28	52.47	6.45	Peak	100	206

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5580
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 26 Humidity(%): 61

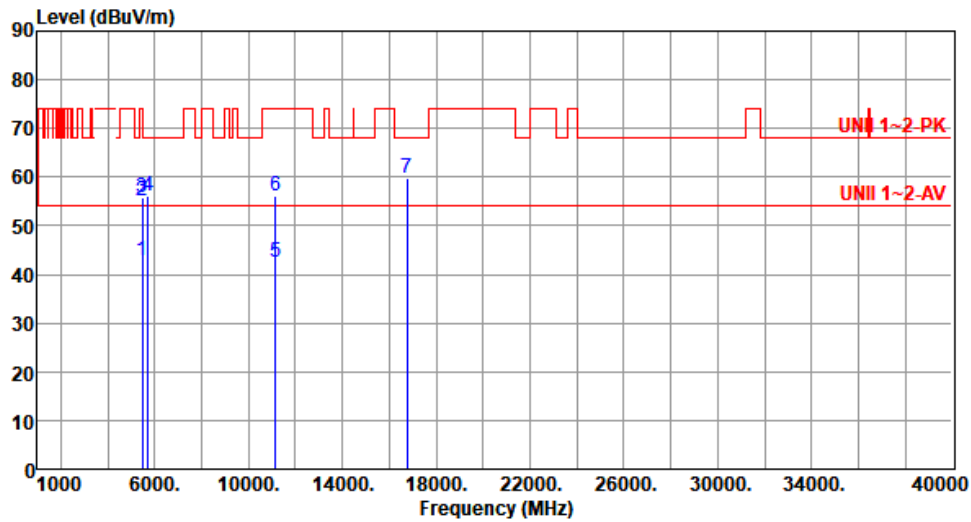

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	42.74	54.00	-11.26	42.35	0.39	Average	100	131
2	5460.00	55.13	74.00	-18.87	54.74	0.39	Peak	100	131
3	5470.00	55.81	68.20	-12.39	55.43	0.38	Peak	100	131
4	5725.00	56.09	68.20	-12.11	55.51	0.58	Peak	100	131
5	11160.00	42.61	54.00	-11.39	35.68	6.93	Average	100	251
6	11160.00	56.24	74.00	-17.76	49.31	6.93	Peak	100	251
7	16740.00	59.79	68.20	-8.41	52.43	7.36	Peak	100	117

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5580
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 26 Humidity(%): 61

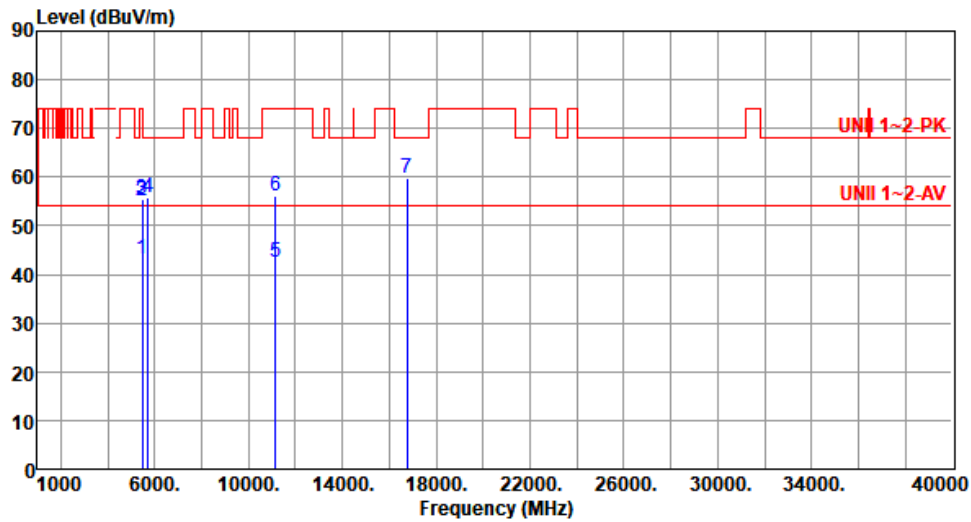

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	43.24	54.00	-10.76	42.85	0.39	Average	100	231
2	5460.00	55.06	74.00	-18.94	54.67	0.39	Peak	100	231
3	5470.00	55.51	68.20	-12.69	55.13	0.38	Peak	100	231
4	5725.00	55.84	68.20	-12.36	55.26	0.58	Peak	100	231
5	11160.00	42.41	54.00	-11.59	35.48	6.93	Average	100	247
6	11160.00	56.29	74.00	-17.71	49.36	6.93	Peak	100	247
7	16740.00	59.84	68.20	-8.36	52.48	7.36	Peak	100	115

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5700
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):25 Humidity(%):62

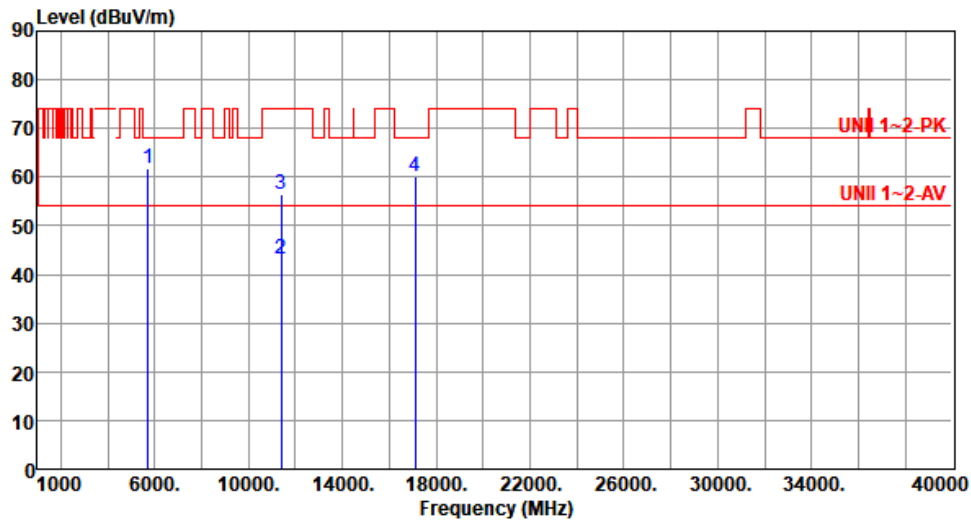

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5725.00	61.81	68.20	-6.39	61.23	0.58	Peak	100	126
2	11400.00	43.03	54.00	-10.97	35.84	7.19	Average	100	175
3	11400.00	56.62	74.00	-17.38	49.43	7.19	Peak	100	175
4	17100.00	59.96	68.20	-8.24	53.13	6.83	Peak	100	175

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5700
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):25 Humidity(%):62

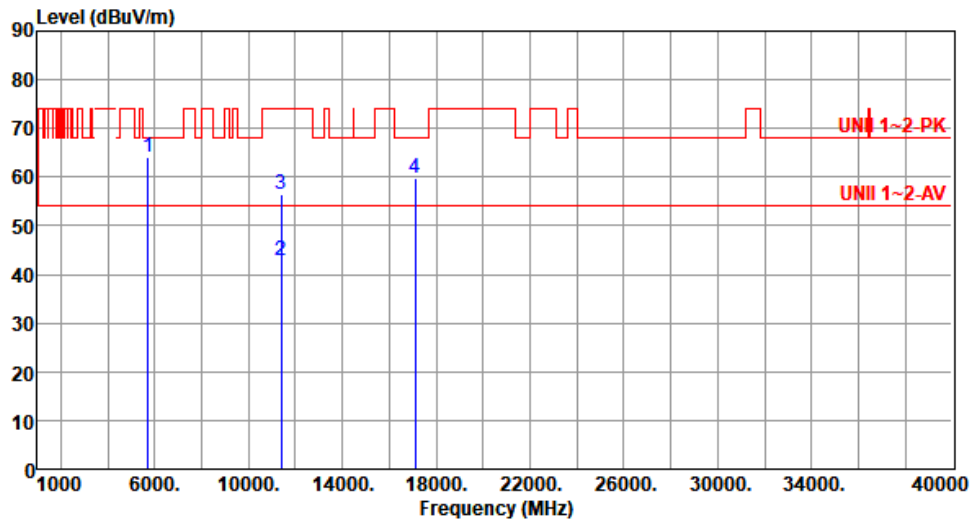

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5725.00	64.15	68.20	-4.05	63.57	0.58	Peak	112	193
2	11400.00	42.76	54.00	-11.24	35.57	7.19	Average	100	185
3	11400.00	56.47	74.00	-17.53	49.28	7.19	Peak	100	185
4	17100.00	59.65	68.20	-8.55	52.82	6.83	Peak	100	203

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5720
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):25 Humidity(%):62

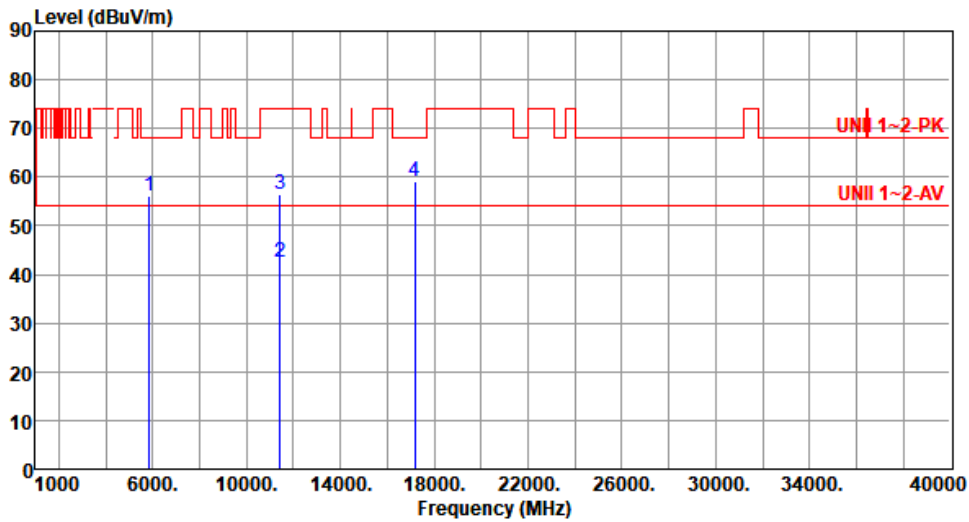

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5850.00	55.98	68.20	-12.22	55.02	0.96	Peak	100	131
2	11440.00	42.65	54.00	-11.35	35.48	7.17	Average	100	100
3	11440.00	56.32	74.00	-17.68	49.15	7.17	Peak	100	100
4	17160.00	58.96	68.20	-9.24	52.48	6.48	Peak	100	210

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5720
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):25 Humidity(%):62

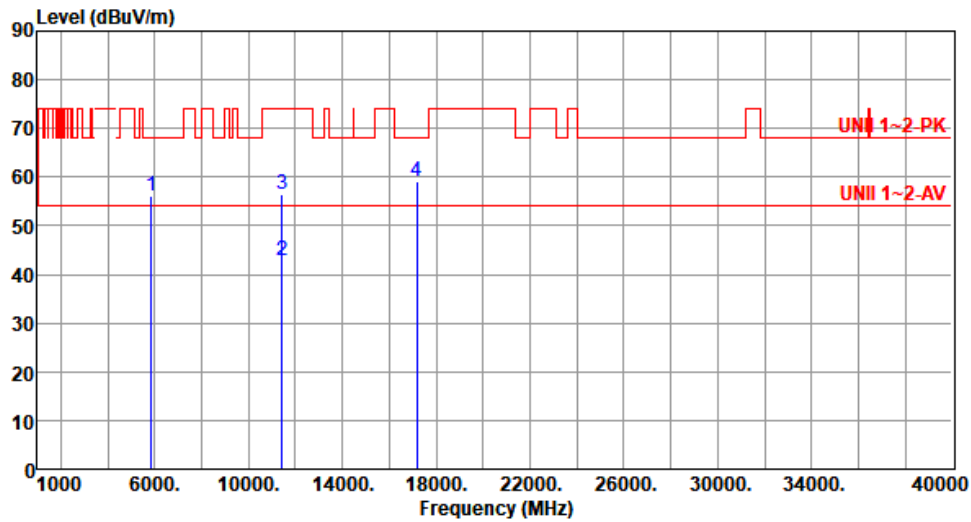

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5850.00	56.15	68.20	-12.05	55.19	0.96	Peak	115	195
2	11440.00	42.79	54.00	-11.21	35.62	7.17	Average	100	190
3	11440.00	56.48	74.00	-17.52	49.31	7.17	Peak	100	190
4	17160.00	59.14	68.20	-9.06	52.66	6.48	Peak	100	200

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5745
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 26 Humidity(%): 61

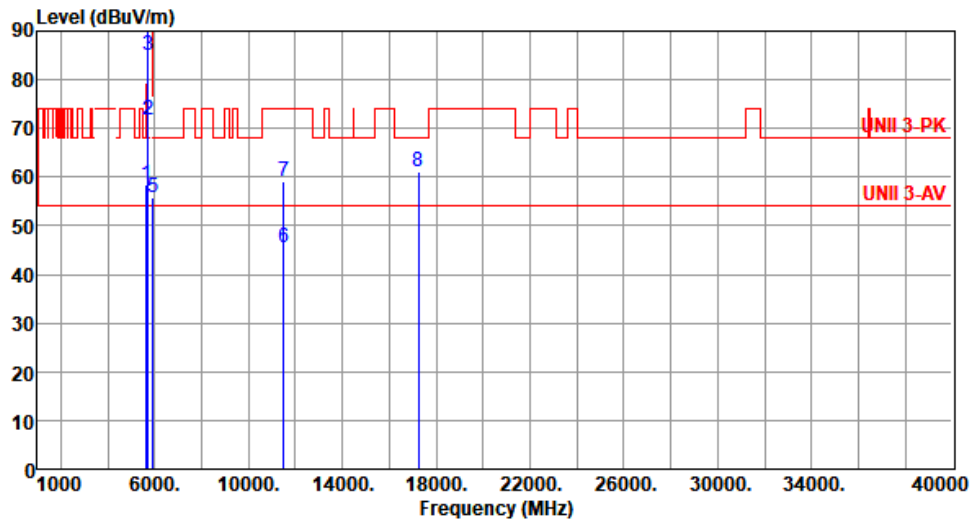

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	58.35	68.20	-9.85	58.14	0.21	Peak	234	334
2	5700.00	71.64	105.20	-33.56	71.11	0.53	Peak	234	334
3	5720.00	84.90	110.80	-25.90	84.33	0.57	Peak	234	334
4	5725.00	91.77	122.20	-30.43	91.19	0.58	Peak	234	334
5	5925.00	55.86	68.20	-12.34	54.73	1.13	Peak	234	334
6	11490.00	45.50	54.00	-8.50	38.19	7.31	Average	100	63
7	11490.00	59.09	74.00	-14.91	51.78	7.31	Peak	100	63
8	17235.00	60.94	68.20	-7.26	54.25	6.69	Peak	100	108

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5745
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 26 Humidity(%): 61

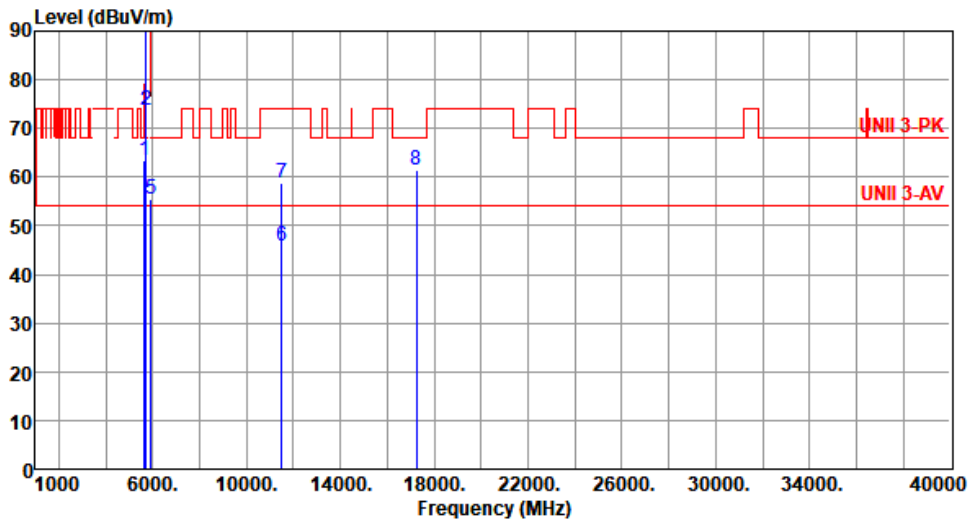

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	63.35	68.20	-4.85	63.14	0.21	Peak	100	237
2	5700.00	73.76	105.20	-31.44	73.23	0.53	Peak	100	237
3	5720.00	91.82	110.80	-18.98	91.25	0.57	Peak	100	237
4	5725.00	98.23	122.20	-23.97	97.65	0.58	Peak	100	237
5	5925.00	55.46	68.20	-12.74	54.33	1.13	Peak	100	237
6	11490.00	45.90	54.00	-8.10	38.59	7.31	Average	100	246
7	11490.00	58.91	74.00	-15.09	51.60	7.31	Peak	100	246
8	17235.00	61.48	68.20	-6.72	54.79	6.69	Peak	100	208

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5785
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 26 Humidity(%): 61

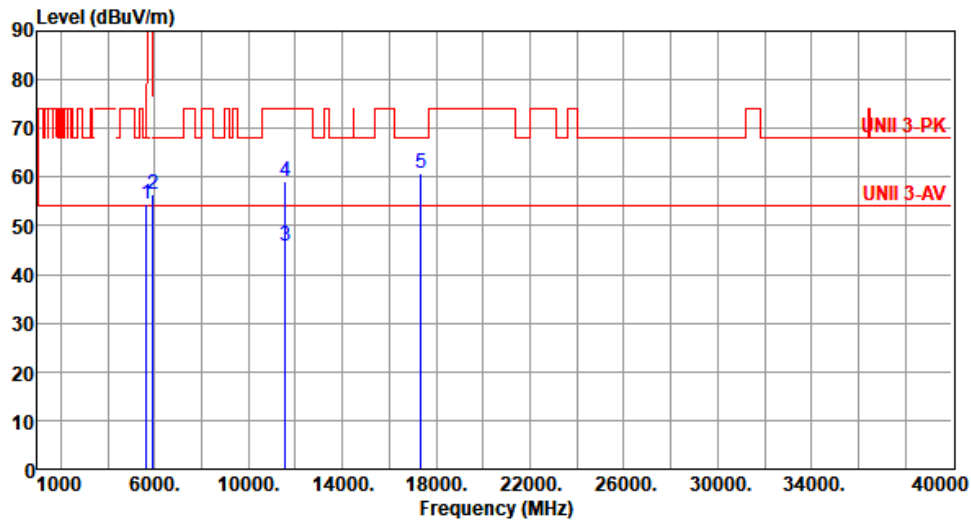

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	54.62	68.20	-13.58	54.41	0.21	Peak	100	141
2	5925.00	56.51	68.20	-11.69	55.38	1.13	Peak	100	141
3	11570.00	45.68	54.00	-8.32	38.46	7.22	Average	100	319
4	11570.00	59.02	74.00	-14.98	51.80	7.22	Peak	100	319
5	17355.00	60.90	68.20	-7.30	54.02	6.88	Peak	100	208

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5785
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 26 Humidity(%): 61

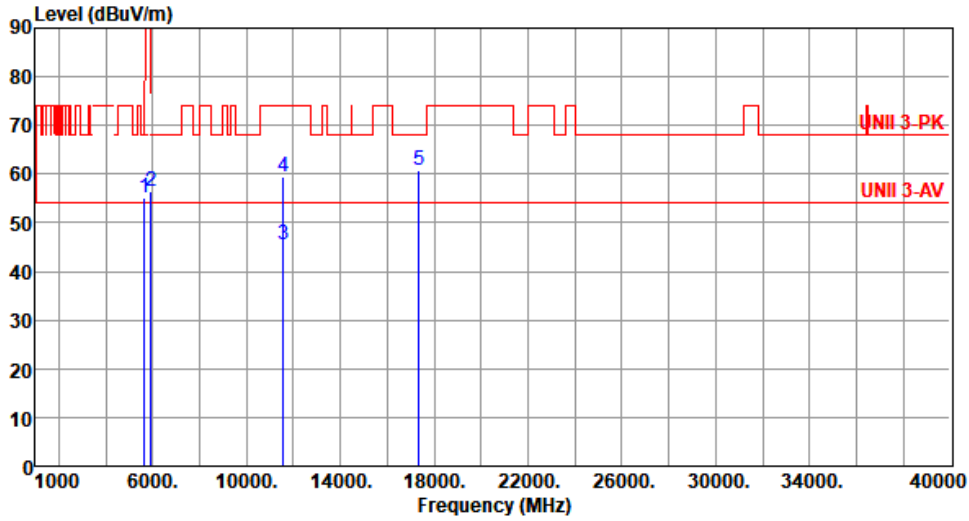

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	55.26	68.20	-12.94	55.05	0.21	Peak	100	229
2	5925.00	56.61	68.20	-11.59	55.48	1.13	Peak	100	229
3	11570.00	45.53	54.00	-8.47	38.31	7.22	Average	136	201
4	11570.00	59.57	74.00	-14.43	52.35	7.22	Peak	136	201
5	17355.00	60.74	68.20	-7.46	53.86	6.88	Peak	100	251

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).