




Modulation	be EHT20	Test Freq. (MHz)	5825
Polarization	Horizontal		

Test By : Sean Yu      Temperature(°C): 26      Humidity(%): 61

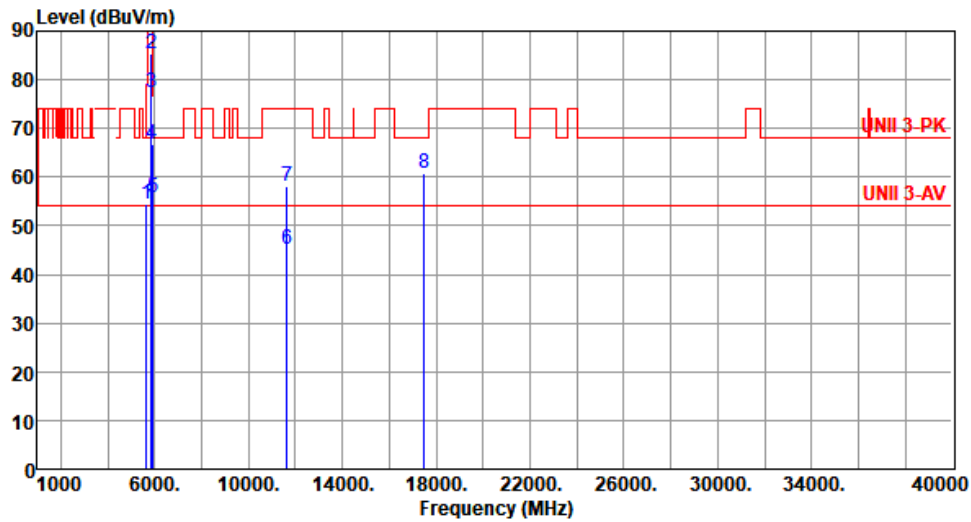

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	54.56	68.20	-13.64	54.35	0.21	Peak	105	156
2	5850.00	85.24	122.20	-36.96	84.28	0.96	Peak	105	156
3	5855.00	77.36	110.80	-33.44	76.38	0.98	Peak	105	156
4	5875.00	66.76	105.20	-38.44	65.74	1.02	Peak	105	156
5	5925.00	55.82	68.20	-12.38	54.69	1.13	Peak	105	156
6	11650.00	45.09	54.00	-8.91	38.46	6.63	Average	100	321
7	11650.00	58.25	74.00	-15.75	51.62	6.63	Peak	100	321
8	17475.00	60.63	68.20	-7.57	53.26	7.37	Peak	100	225

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5825
Polarization	Vertical		

Test By : Sean Yu      Temperature(°C): 26      Humidity(%): 61

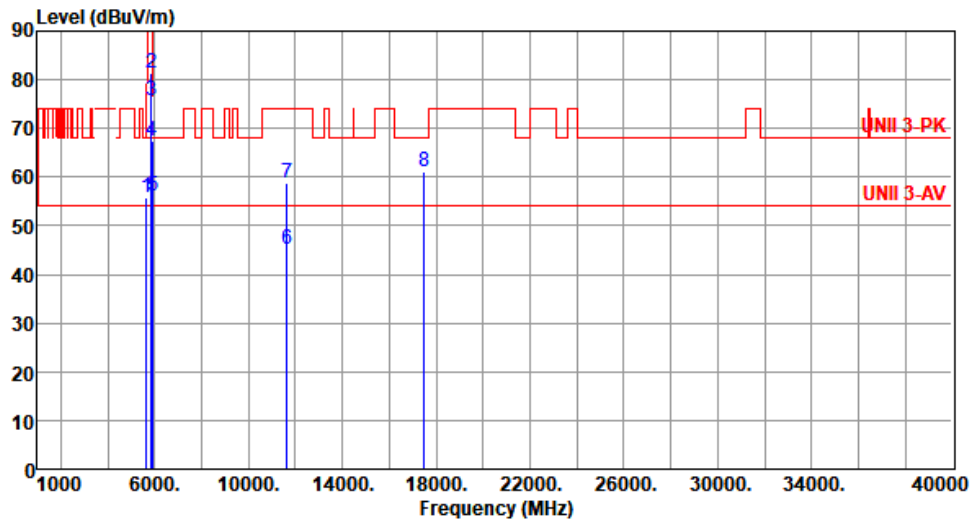

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	55.84	68.20	-12.36	55.63	0.21	Peak	100	237
2	5850.00	81.25	122.20	-40.95	80.29	0.96	Peak	100	237
3	5855.00	75.74	110.80	-35.06	74.76	0.98	Peak	100	237
4	5875.00	67.35	105.20	-37.85	66.33	1.02	Peak	100	237
5	5925.00	56.03	68.20	-12.17	54.90	1.13	Peak	100	237
6	11650.00	45.20	54.00	-8.80	38.57	6.63	Average	127	203
7	11650.00	58.74	74.00	-15.26	52.11	6.63	Peak	127	203
8	17475.00	61.05	68.20	-7.15	53.68	7.37	Peak	100	251

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).



Unwanted Emissions (Above 1GHz) for be EHT40

Modulation	be EHT40	Test Freq. (MHz)	5190
Polarization	Horizontal		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

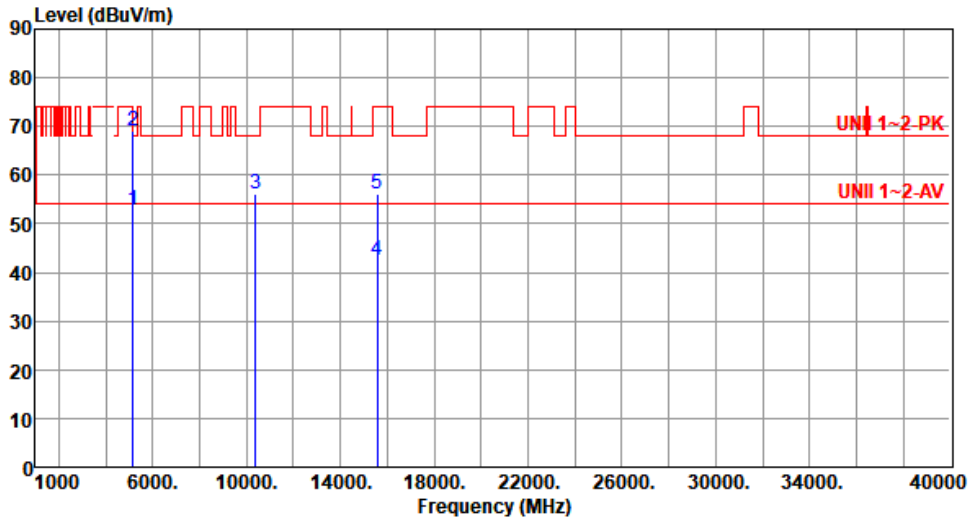

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	52.94	54.00	-1.06	52.61	0.33	Average	100	163
2	5150.00	69.22	74.00	-4.78	68.89	0.33	Peak	100	163
3	10380.00	55.97	68.20	-12.23	48.62	7.35	Peak	100	245
4	15570.00	42.42	54.00	-11.58	38.47	3.95	Average	100	120
5	15570.00	56.22	74.00	-17.78	52.27	3.95	Peak	100	120

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5190
Polarization	Vertical		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

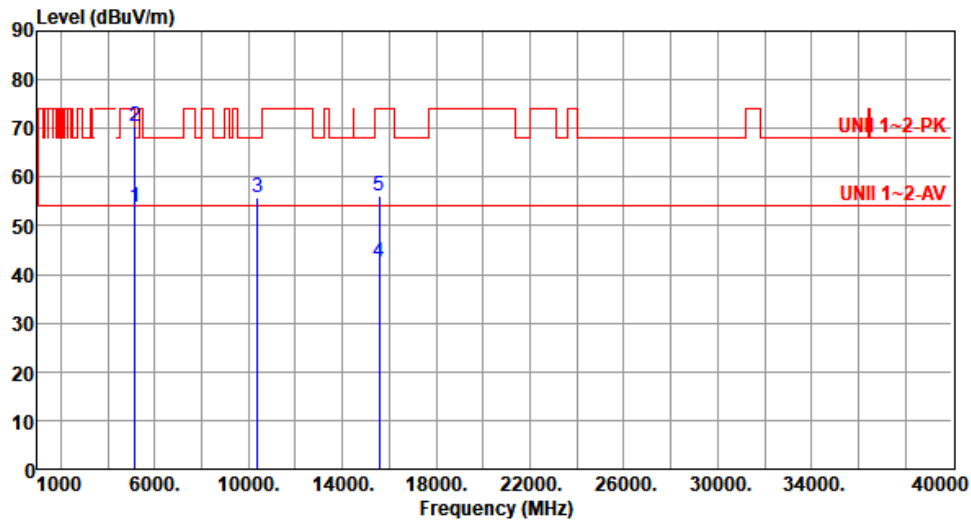

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	53.86	54.00	-0.14	53.53	0.33	Average	100	195
2	5150.00	70.39	74.00	-3.61	70.06	0.33	Peak	100	195
3	10380.00	55.80	68.20	-12.40	48.45	7.35	Peak	100	50
4	15570.00	42.51	54.00	-11.49	38.56	3.95	Average	100	30
5	15570.00	56.27	74.00	-17.73	52.32	3.95	Peak	100	30

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5230
Polarization	Horizontal		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

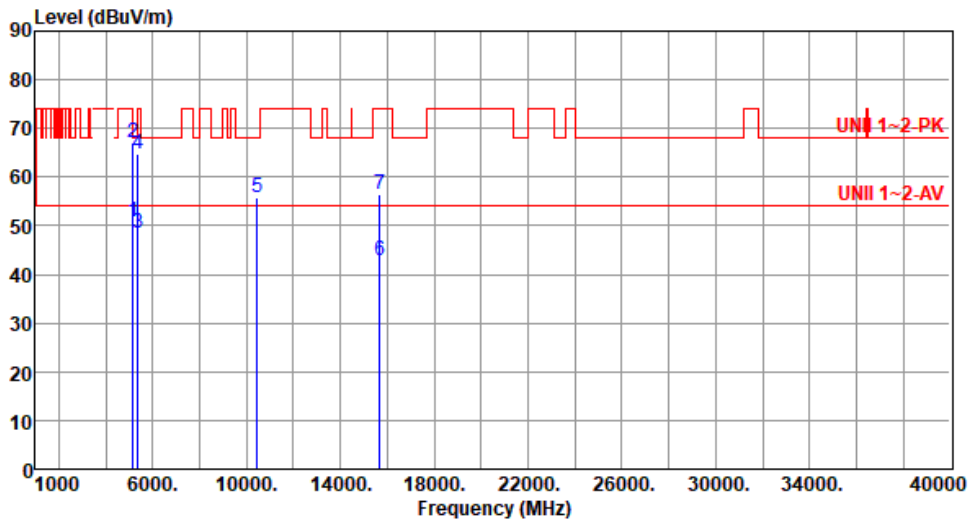

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	50.81	54.00	-3.19	50.48	0.33	Average	105	315
2	5150.00	66.92	74.00	-7.08	66.59	0.33	Peak	105	315
3	5350.00	48.39	54.00	-5.61	48.64	-0.25	Average	105	315
4	5350.00	64.61	74.00	-9.39	64.86	-0.25	Peak	105	315
5	10460.00	55.91	68.20	-12.29	48.62	7.29	Peak	100	165
6	15690.00	42.82	54.00	-11.18	38.65	4.17	Average	100	225
7	15690.00	56.32	74.00	-17.68	52.15	4.17	Peak	100	225

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5230
Polarization	Vertical		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

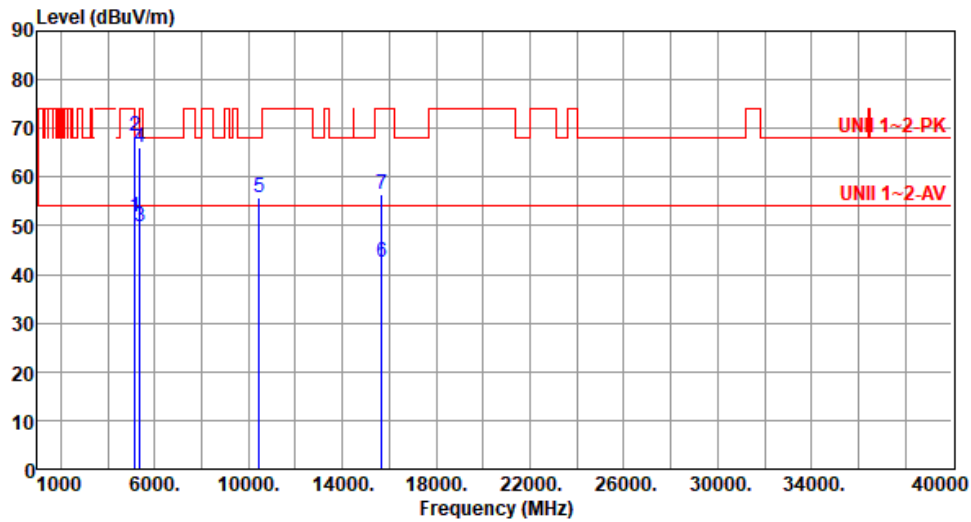

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	51.81	54.00	-2.19	51.48	0.33	Average	100	249
2	5150.00	68.45	74.00	-5.55	68.12	0.33	Peak	100	249
3	5350.00	49.68	54.00	-4.32	49.93	-0.25	Average	100	218
4	5350.00	66.02	74.00	-7.98	66.27	-0.25	Peak	100	218
5	10460.00	55.84	68.20	-12.36	48.55	7.29	Peak	100	150
6	15690.00	42.65	54.00	-11.35	38.48	4.17	Average	100	180
7	15690.00	56.43	74.00	-17.57	52.26	4.17	Peak	100	180

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5270
Polarization	Horizontal		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

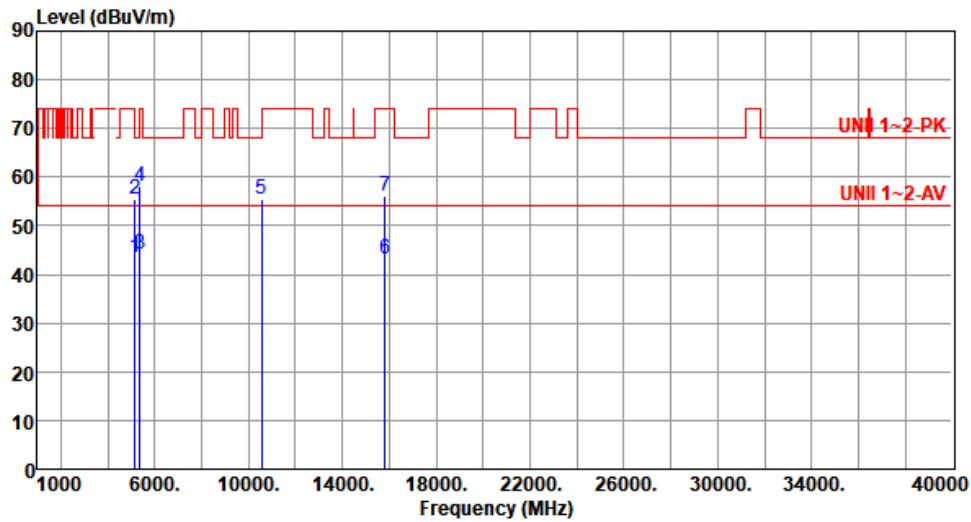

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	43.61	54.00	-10.39	43.28	0.33	Average	100	156
2	5150.00	55.36	74.00	-18.64	55.03	0.33	Peak	100	156
3	5350.00	44.03	54.00	-9.97	44.28	-0.25	Average	100	156
4	5350.00	58.05	74.00	-15.95	58.30	-0.25	Peak	100	156
5	10540.00	55.41	68.20	-12.79	48.32	7.09	Peak	100	220
6	15810.00	43.10	54.00	-10.90	39.30	3.80	Average	100	40
7	15810.00	56.23	74.00	-17.77	52.43	3.80	Peak	100	40

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).



Modulation	be EHT40	Test Freq. (MHz)	5270
Polarization	Vertical		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

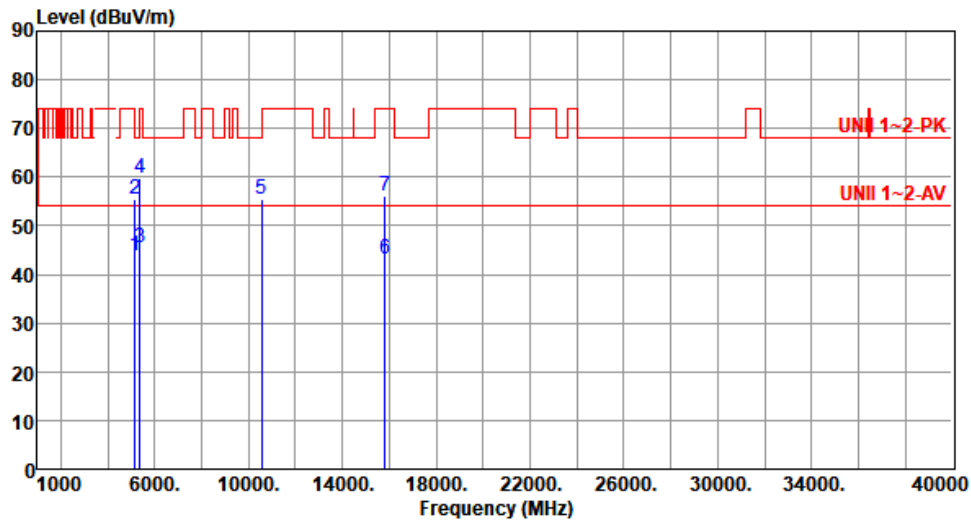

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	43.83	54.00	-10.17	43.50	0.33	Average	100	202
2	5150.00	55.51	74.00	-18.49	55.18	0.33	Peak	100	202
3	5350.00	45.48	54.00	-8.52	45.73	-0.25	Average	100	202
4	5350.00	59.94	74.00	-14.06	60.19	-0.25	Peak	100	202
5	10540.00	55.55	68.20	-12.65	48.46	7.09	Peak	100	190
6	15810.00	43.02	54.00	-10.98	39.22	3.80	Average	100	60
7	15810.00	56.11	74.00	-17.89	52.31	3.80	Peak	100	60

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).





Modulation	be EHT40	Test Freq. (MHz)	5310
Polarization	Horizontal		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

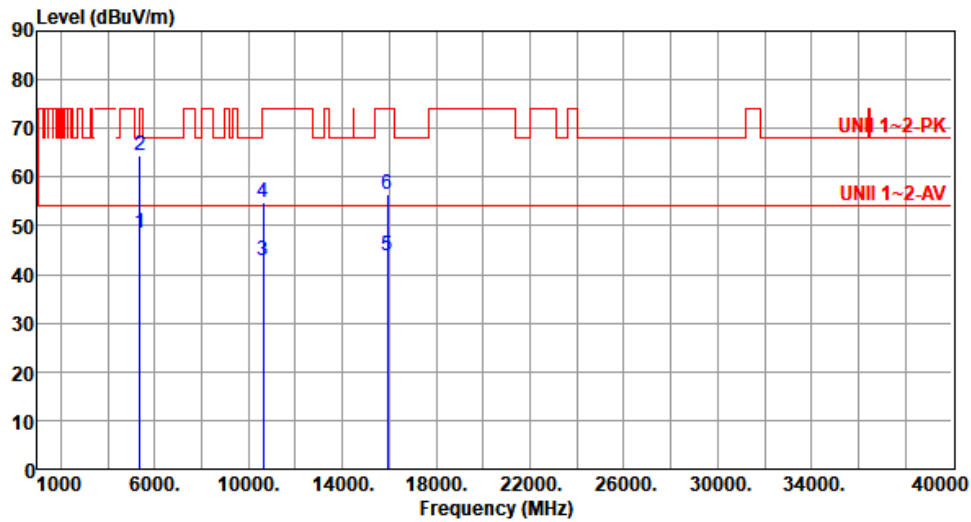

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5350.00	48.36	54.00	-5.64	48.61	-0.25	Average	166	155
2	5350.00	64.31	74.00	-9.69	64.56	-0.25	Peak	166	155
3	10620.00	42.86	54.00	-11.14	35.29	7.57	Average	100	60
4	10620.00	54.76	74.00	-19.24	47.19	7.57	Peak	100	60
5	15930.00	43.69	54.00	-10.31	39.38	4.31	Average	100	20
6	15930.00	56.53	74.00	-17.47	52.22	4.31	Peak	100	20

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5310
Polarization	Vertical		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

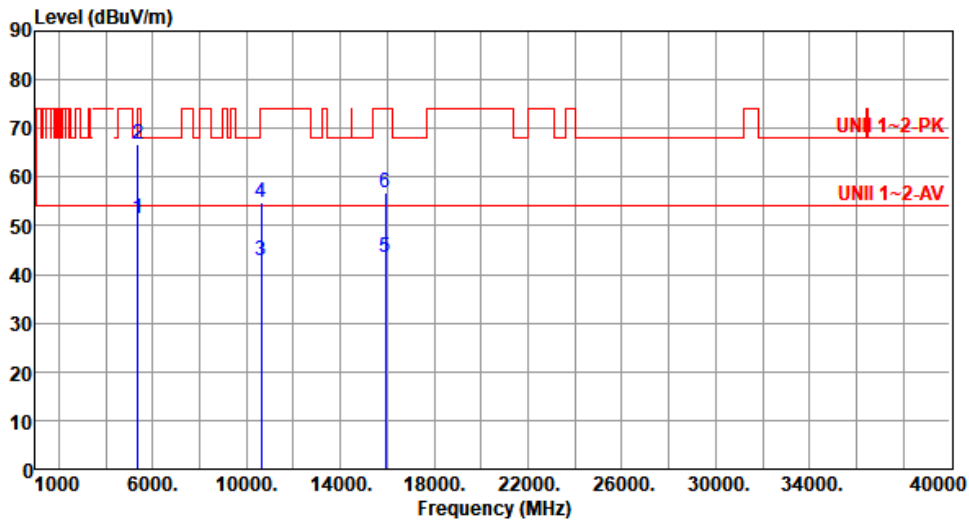

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5350.00	51.57	54.00	-2.43	51.82	-0.25	Average	100	215
2	5350.00	66.78	74.00	-7.22	67.03	-0.25	Peak	100	215
3	10620.00	42.93	54.00	-11.07	35.36	7.57	Average	100	50
4	10620.00	54.86	74.00	-19.14	47.29	7.57	Peak	100	50
5	15930.00	43.48	54.00	-10.52	39.17	4.31	Average	100	80
6	15930.00	56.67	74.00	-17.33	52.36	4.31	Peak	100	80

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5510
Polarization	Horizontal		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

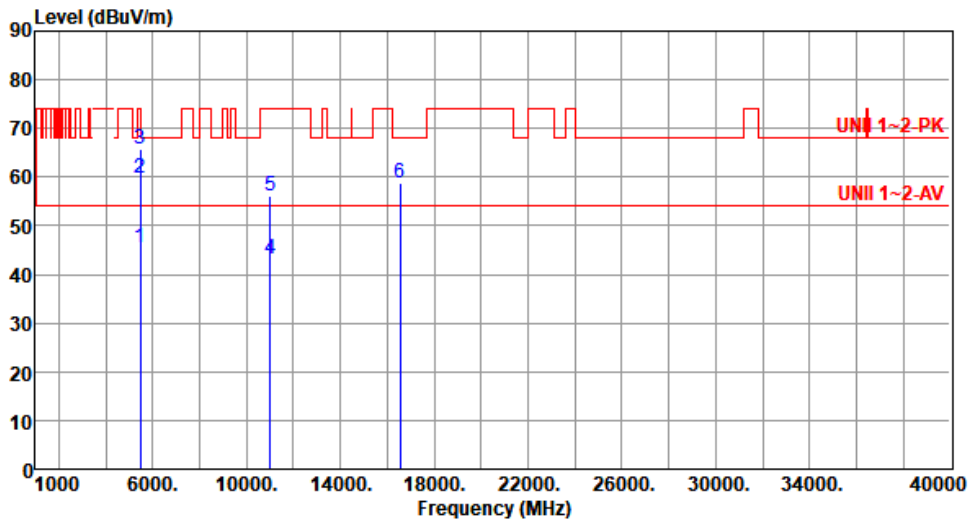

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	45.53	54.00	-8.47	45.14	0.39	Average	131	152
2	5460.00	59.83	74.00	-14.17	59.44	0.39	Peak	131	152
3	5470.00	65.63	68.20	-2.57	65.25	0.38	Peak	131	152
4	11020.00	43.02	54.00	-10.98	35.48	7.54	Average	100	240
5	11020.00	56.17	74.00	-17.83	48.63	7.54	Peak	100	240
6	16530.00	58.65	68.20	-9.55	52.43	6.22	Peak	100	180

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5510
Polarization	Vertical		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

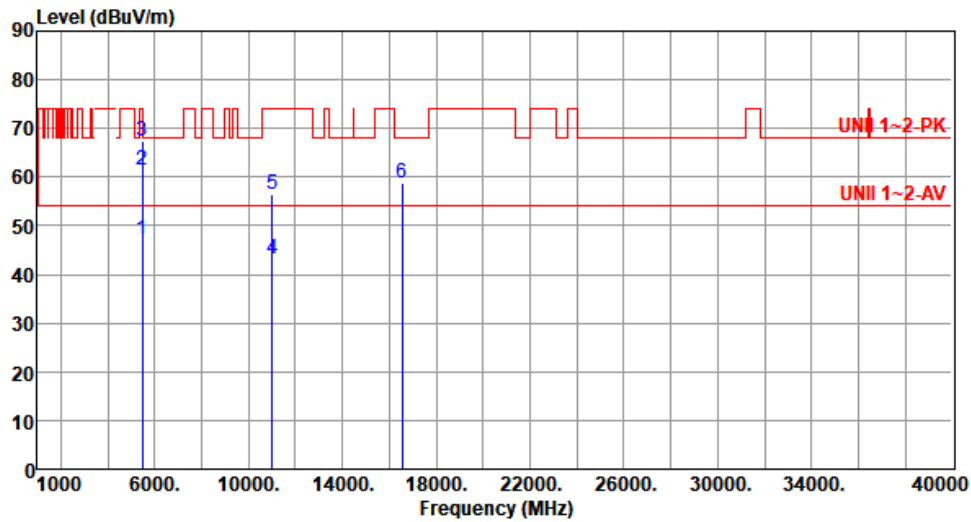

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	47.09	54.00	-6.91	46.70	0.39	Average	100	234
2	5460.00	61.27	74.00	-12.73	60.88	0.39	Peak	100	234
3	5470.00	67.48	68.20	-0.72	67.10	0.38	Peak	100	234
4	11020.00	43.16	54.00	-10.84	35.62	7.54	Average	100	220
5	11020.00	56.42	74.00	-17.58	48.88	7.54	Peak	100	220
6	16530.00	58.74	68.20	-9.46	52.52	6.22	Peak	100	60

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5590
Polarization	Horizontal		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

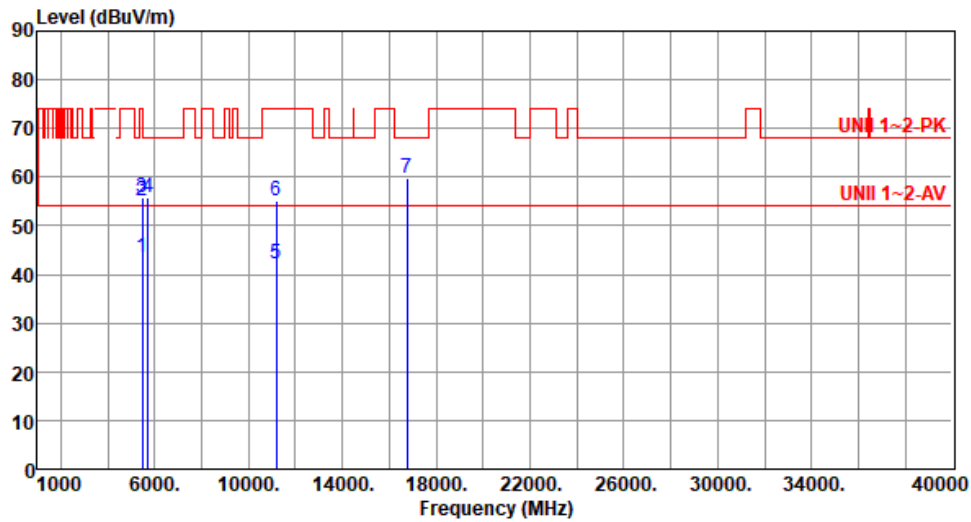

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	43.43	54.00	-10.57	43.04	0.39	Average	129	155
2	5460.00	55.27	74.00	-18.73	54.88	0.39	Peak	129	155
3	5470.00	55.76	68.20	-12.44	55.38	0.38	Peak	129	155
4	5725.00	55.87	68.20	-12.33	55.29	0.58	Peak	129	155
5	11180.00	42.22	54.00	-11.78	35.42	6.80	Average	100	80
6	11180.00	55.09	74.00	-18.91	48.29	6.80	Peak	100	80
7	16770.00	59.73	68.20	-8.47	52.42	7.31	Peak	100	90

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5590
Polarization	Vertical		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

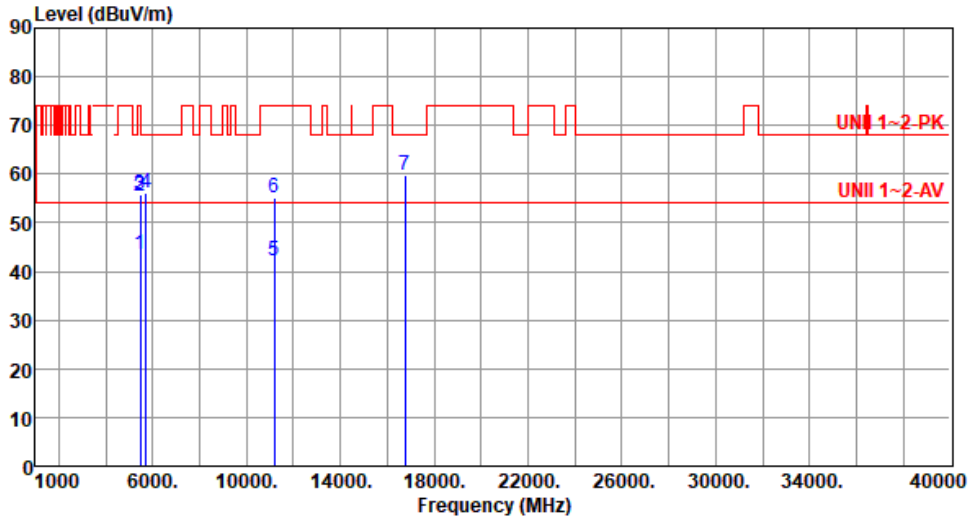

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	43.56	54.00	-10.44	43.17	0.39	Average	100	229
2	5460.00	55.50	74.00	-18.50	55.11	0.39	Peak	100	229
3	5470.00	55.94	68.20	-12.26	55.56	0.38	Peak	100	229
4	5725.00	56.14	68.20	-12.06	55.56	0.58	Peak	100	229
5	11180.00	42.32	54.00	-11.68	35.52	6.80	Average	100	230
6	11180.00	55.29	74.00	-18.71	48.49	6.80	Peak	100	230
7	16770.00	59.87	68.20	-8.33	52.56	7.31	Peak	100	100

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5670
Polarization	Horizontal		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

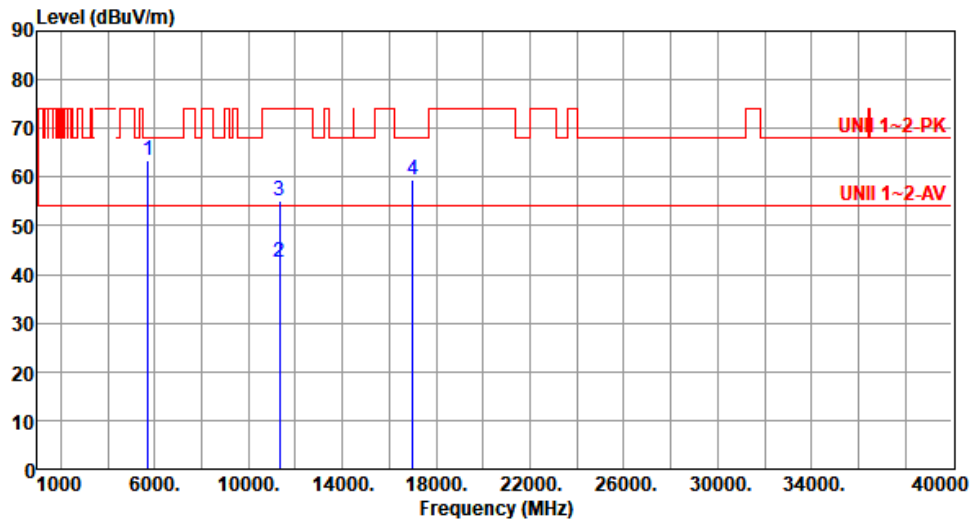

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5725.00	63.36	68.20	-4.84	62.78	0.58	Peak	125	144
2	11340.00	42.43	54.00	-11.57	35.38	7.05	Average	100	60
3	11340.00	55.16	74.00	-18.84	48.11	7.05	Peak	100	60
4	17010.00	59.50	68.20	-8.70	52.33	7.17	Peak	100	20

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5670
Polarization	Vertical		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

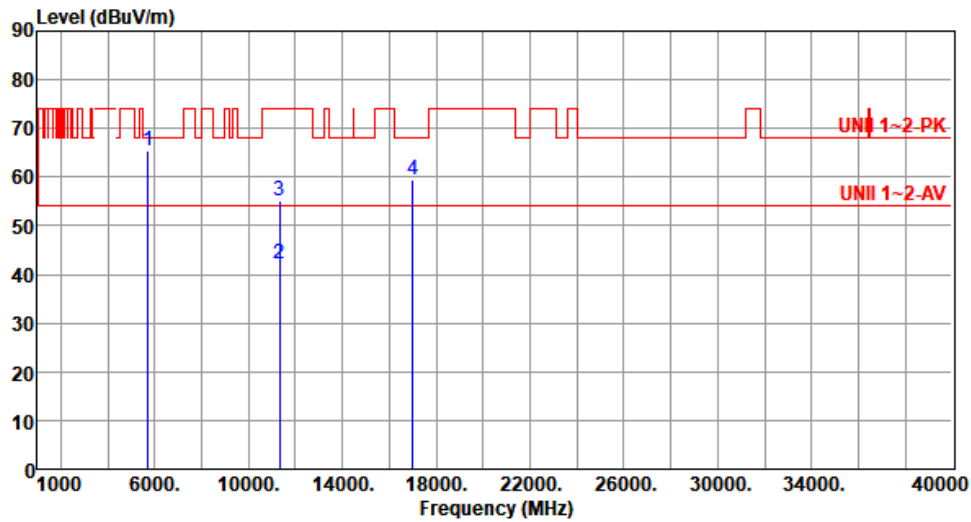

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5725.00	65.48	68.20	-2.72	64.90	0.58	Peak	100	248
2	11340.00	42.33	54.00	-11.67	35.28	7.05	Average	100	40
3	11340.00	55.08	74.00	-18.92	48.03	7.05	Peak	100	40
4	17010.00	59.38	68.20	-8.82	52.21	7.17	Peak	100	50

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).





Modulation	be EHT40	Test Freq. (MHz)	5710
Polarization	Horizontal		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

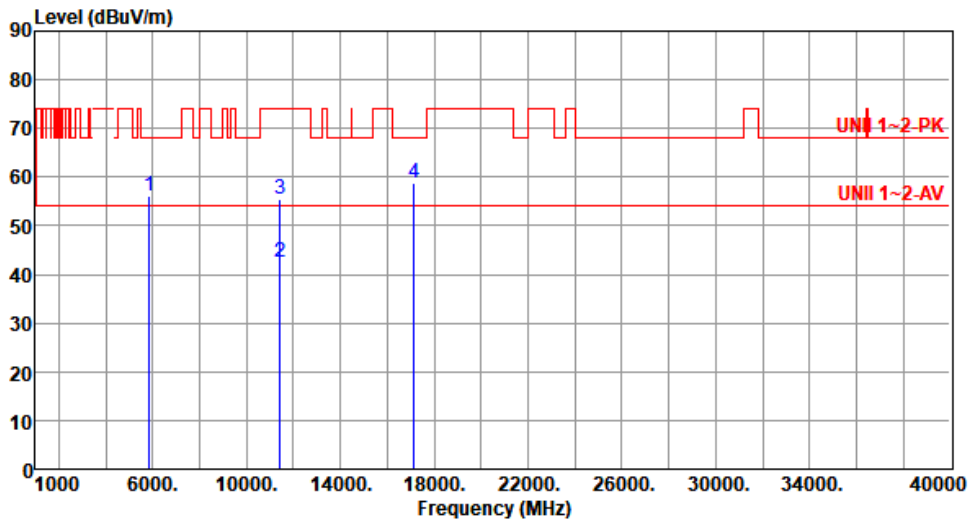

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5850.00	55.98	68.20	-12.22	55.02	0.96	Peak	126	143
2	11420.00	42.47	54.00	-11.53	35.29	7.18	Average	100	90
3	11420.00	55.33	74.00	-18.67	48.15	7.18	Peak	100	90
4	17130.00	58.93	68.20	-9.27	52.31	6.62	Peak	100	70

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5710
Polarization	Vertical		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

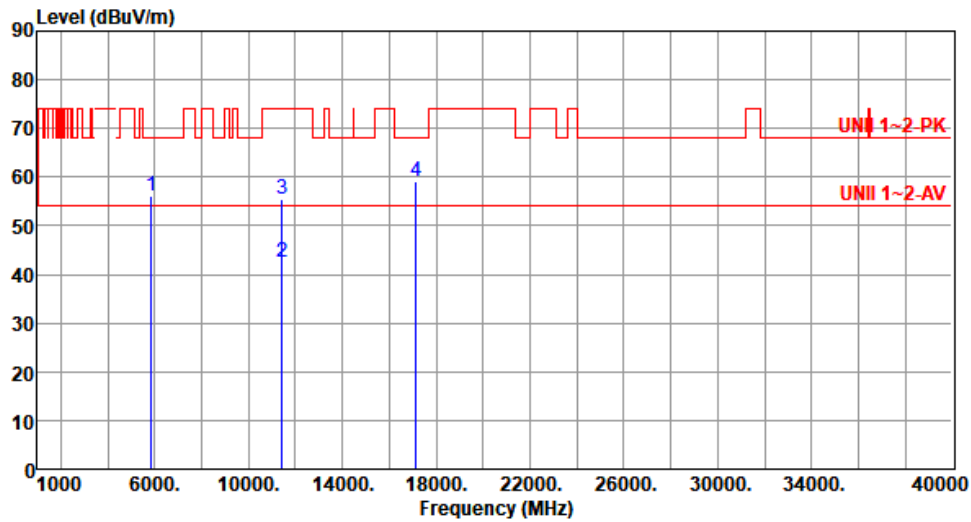

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5850.00	56.07	68.20	-12.13	55.11	0.96	Peak	100	225
2	11420.00	42.60	54.00	-11.40	35.42	7.18	Average	100	55
3	11420.00	55.51	74.00	-18.49	48.33	7.18	Peak	100	55
4	17130.00	59.08	68.20	-9.12	52.46	6.62	Peak	100	90

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5755
Polarization	Horizontal		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

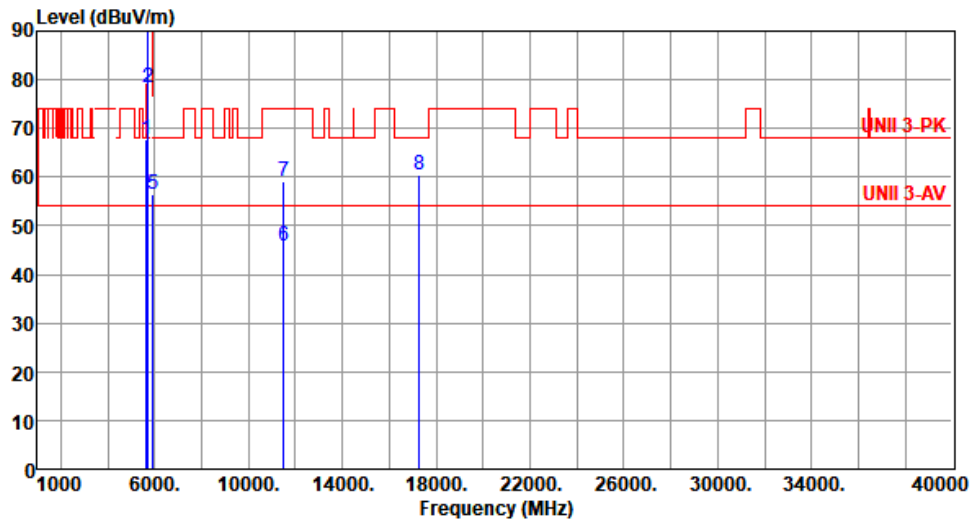

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	67.69	68.20	-0.51	67.48	0.21	Peak	230	137
2	5700.00	78.37	105.20	-26.83	77.84	0.53	Peak	230	137
3	5720.00	88.67	110.80	-22.13	88.10	0.57	Peak	230	137
4	5725.00	91.39	122.20	-30.81	90.81	0.58	Peak	230	137
5	5925.00	56.55	68.20	-11.65	55.42	1.13	Peak	230	137
6	11510.00	45.77	54.00	-8.23	38.42	7.35	Average	100	320
7	11510.00	59.00	74.00	-15.00	51.65	7.35	Peak	100	320
8	17265.00	60.34	68.20	-7.86	53.59	6.75	Peak	100	220

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5755
Polarization	Vertical		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

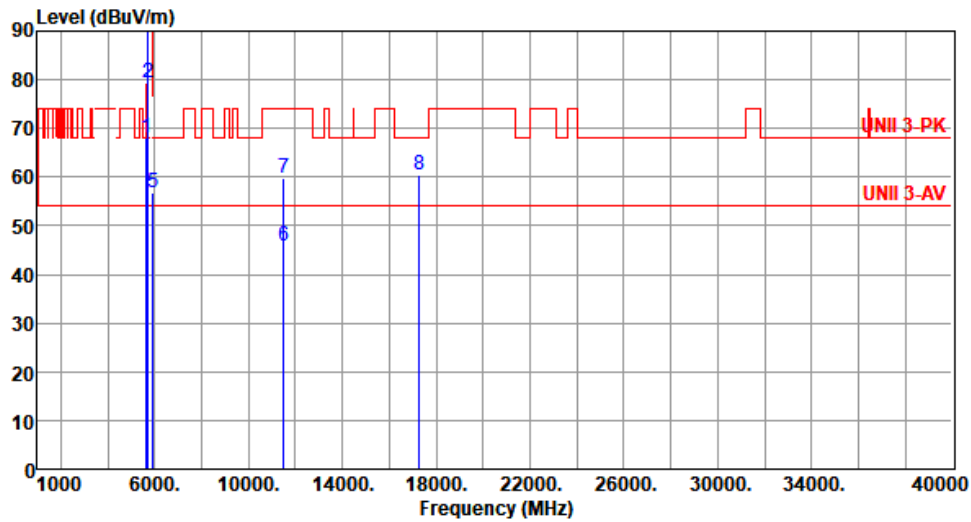

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	67.98	68.20	-0.22	67.77	0.21	Peak	100	194
2	5700.00	79.27	105.20	-25.93	78.74	0.53	Peak	100	194
3	5720.00	89.01	110.80	-21.79	88.44	0.57	Peak	100	194
4	5725.00	92.14	122.20	-30.06	91.56	0.58	Peak	100	194
5	5925.00	56.81	68.20	-11.39	55.68	1.13	Peak	100	194
6	11510.00	45.80	54.00	-8.20	38.45	7.35	Average	100	205
7	11510.00	59.81	74.00	-14.19	52.46	7.35	Peak	100	205
8	17265.00	60.39	68.20	-7.81	53.64	6.75	Peak	100	240

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5795
Polarization	Horizontal		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

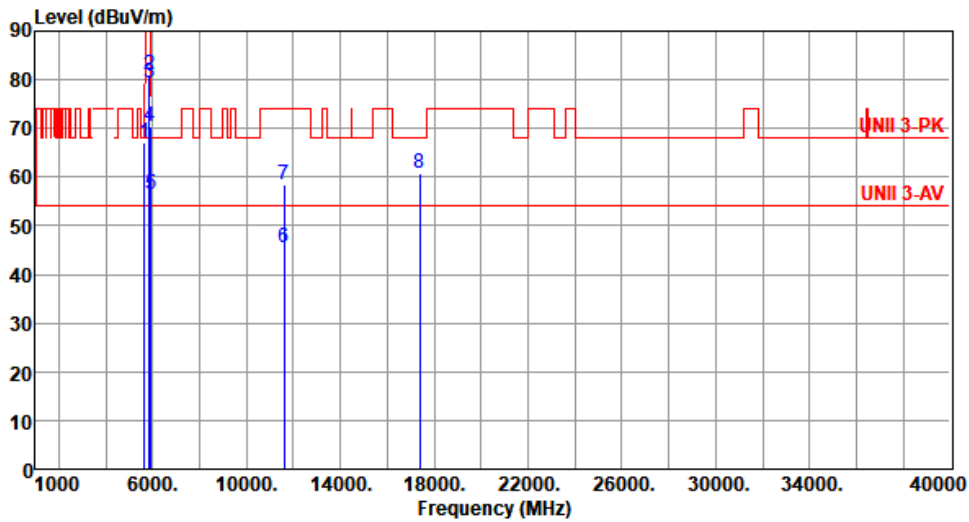

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	67.08	68.20	-1.12	66.87	0.21	Peak	229	132
2	5850.00	80.98	122.20	-41.22	80.02	0.96	Peak	229	132
3	5855.00	79.22	110.80	-31.58	78.24	0.98	Peak	229	132
4	5875.00	70.35	105.20	-34.85	69.33	1.02	Peak	229	132
5	5925.00	56.55	68.20	-11.65	55.42	1.13	Peak	229	132
6	11590.00	45.39	54.00	-8.61	38.29	7.10	Average	100	315
7	11590.00	58.59	74.00	-15.41	51.49	7.10	Peak	100	315
8	17385.00	60.71	68.20	-7.49	53.69	7.02	Peak	100	218

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5795
Polarization	Vertical		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

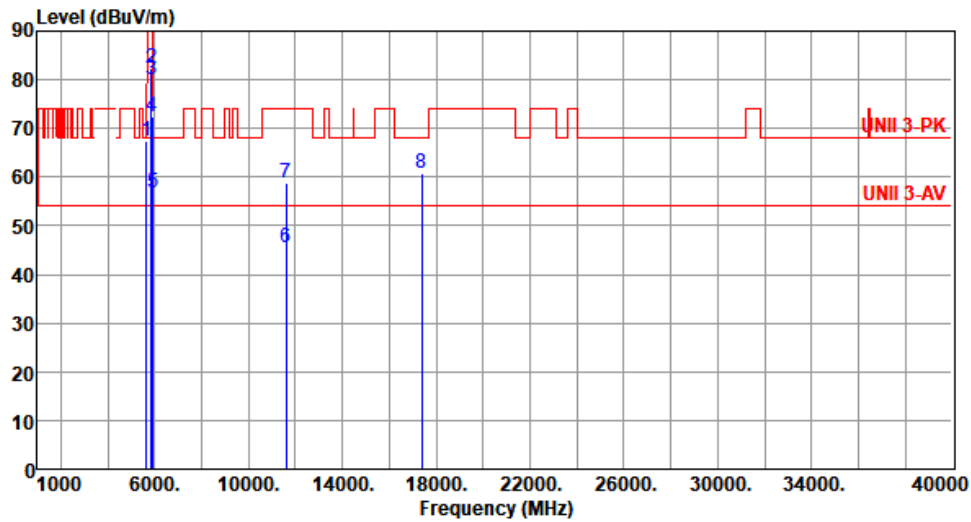

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	67.48	68.20	-0.72	67.27	0.21	Peak	100	199
2	5850.00	82.30	122.20	-39.90	81.34	0.96	Peak	100	199
3	5855.00	80.07	110.80	-30.73	79.09	0.98	Peak	100	199
4	5875.00	72.27	105.20	-32.93	71.25	1.02	Peak	100	199
5	5925.00	56.69	68.20	-11.51	55.56	1.13	Peak	100	199
6	11590.00	45.55	54.00	-8.45	38.45	7.10	Average	100	310
7	11590.00	58.69	74.00	-15.31	51.59	7.10	Peak	100	310
8	17385.00	60.82	68.20	-7.38	53.80	7.02	Peak	100	110

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Unwanted Emissions (Above 1GHz) for be EHT80

Modulation	be EHT80	Test Freq. (MHz)	5210
Polarization	Horizontal		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

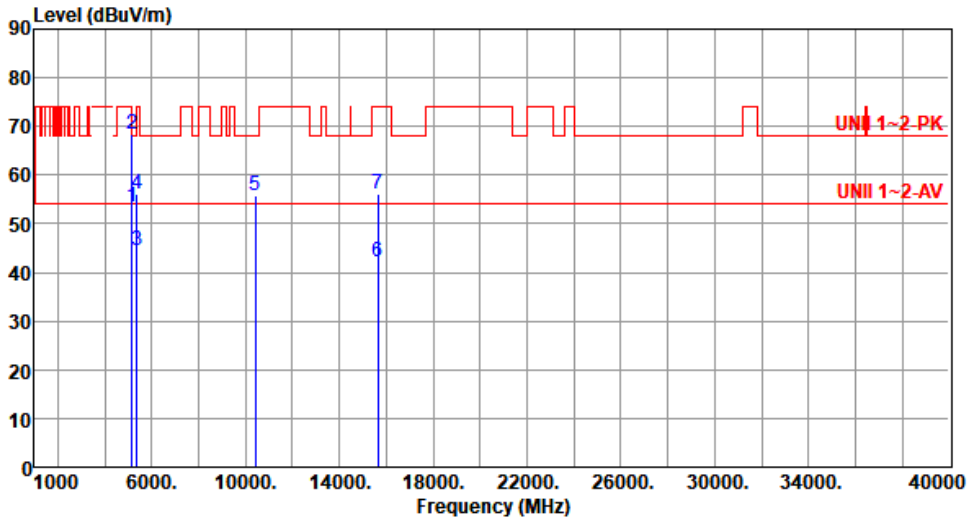


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	53.35	54.00	-0.65	53.02	0.33	Average	100	188
2	5150.00	68.36	74.00	-5.64	68.03	0.33	Peak	100	188
3	5350.00	44.36	54.00	-9.64	44.61	-0.25	Average	100	319
4	5350.00	56.20	74.00	-17.80	56.45	-0.25	Peak	100	319
5	10420.00	55.78	68.20	-12.42	48.45	7.33	Peak	100	250
6	15630.00	42.21	54.00	-11.79	38.29	3.92	Average	100	60
7	15630.00	56.08	74.00	-17.92	52.16	3.92	Peak	100	60

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)  
 \*Factor includes antenna factor , cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	5210
Polarization	Vertical		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

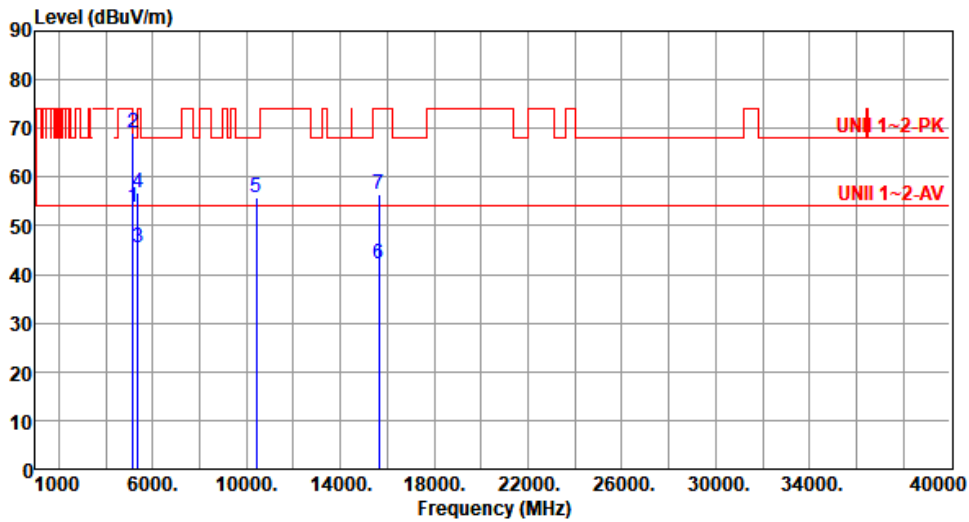

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	53.88	54.00	-0.12	53.55	0.33	Average	100	231
2	5150.00	69.19	74.00	-4.81	68.86	0.33	Peak	100	231
3	5350.00	45.34	54.00	-8.66	45.59	-0.25	Average	100	224
4	5350.00	56.93	74.00	-17.07	57.18	-0.25	Peak	100	224
5	10420.00	55.66	68.20	-12.54	48.33	7.33	Peak	100	100
6	15630.00	42.31	54.00	-11.69	38.39	3.92	Average	100	40
7	15630.00	56.31	74.00	-17.69	52.39	3.92	Peak	100	40

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).





Modulation	be EHT80	Test Freq. (MHz)	5290
Polarization	Horizontal		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

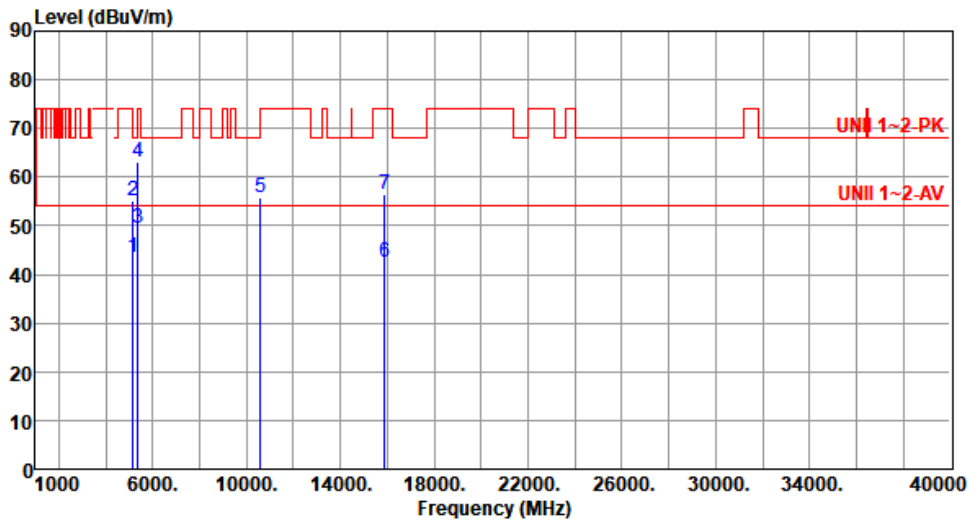

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	43.48	54.00	-10.52	43.15	0.33	Average	122	45
2	5150.00	55.22	74.00	-18.78	54.89	0.33	Peak	122	45
3	5350.00	49.34	54.00	-4.66	49.59	-0.25	Average	188	161
4	5350.00	63.15	74.00	-10.85	63.40	-0.25	Peak	188	161
5	10580.00	55.68	68.20	-12.52	48.33	7.35	Peak	100	240
6	15870.00	42.51	54.00	-11.49	38.46	4.05	Average	100	100
7	15870.00	56.41	74.00	-17.59	52.36	4.05	Peak	100	100

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	5290
Polarization	Vertical		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

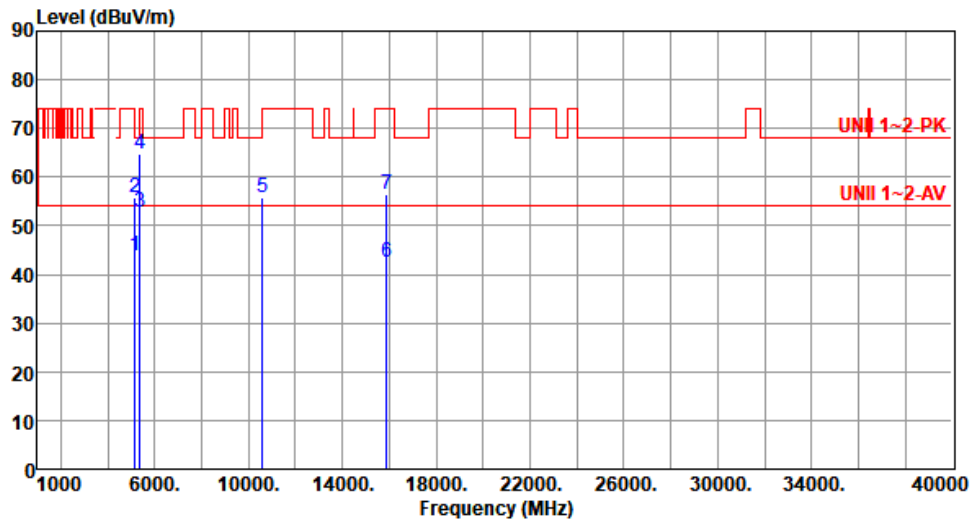

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	43.82	54.00	-10.18	43.49	0.33	Average	100	228
2	5150.00	55.79	74.00	-18.21	55.46	0.33	Peak	100	228
3	5350.00	52.86	54.00	-1.14	53.11	-0.25	Average	100	249
4	5350.00	64.76	74.00	-9.24	65.01	-0.25	Peak	100	249
5	10580.00	55.77	68.20	-12.43	48.42	7.35	Peak	100	220
6	15870.00	42.58	54.00	-11.42	38.53	4.05	Average	100	90
7	15870.00	56.54	74.00	-17.46	52.49	4.05	Peak	100	90

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).



Modulation	be EHT80	Test Freq. (MHz)	5530
Polarization	Horizontal		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

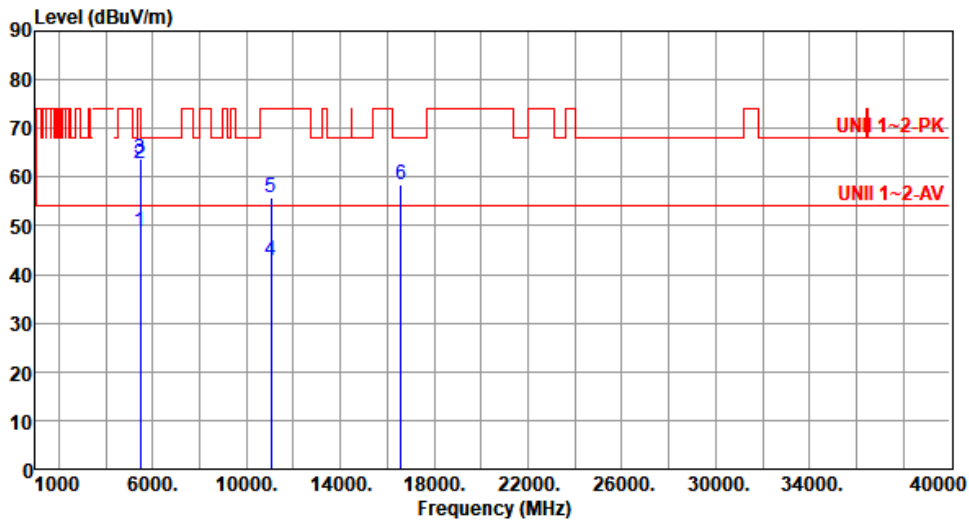

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	48.98	54.00	-5.02	48.59	0.39	Average	129	146
2	5460.00	62.69	74.00	-11.31	62.30	0.39	Peak	129	146
3	5470.00	63.87	68.20	-4.33	63.49	0.38	Peak	129	146
4	11060.00	42.78	54.00	-11.22	35.29	7.49	Average	100	200
5	11060.00	55.95	74.00	-18.05	48.46	7.49	Peak	100	200
6	16590.00	58.61	68.20	-9.59	52.29	6.32	Peak	100	100

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	5530
Polarization	Vertical		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

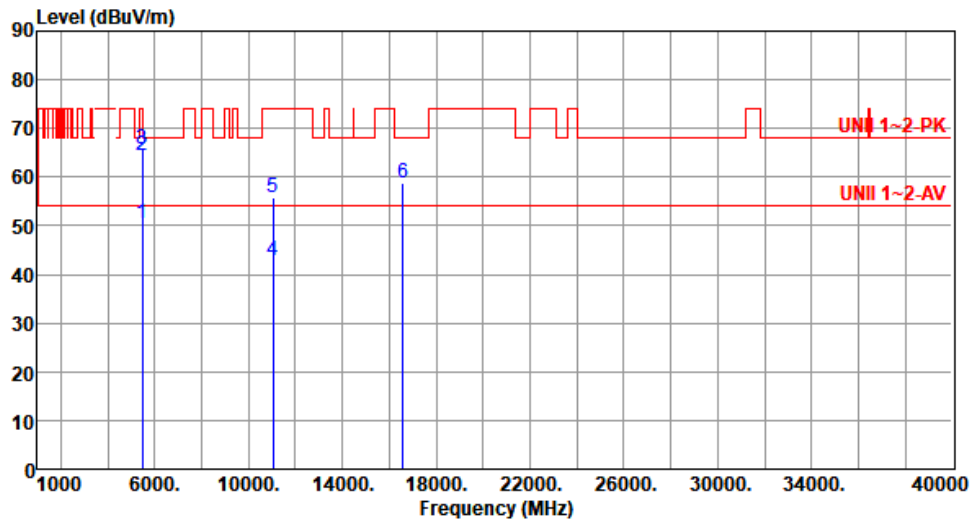

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	50.41	54.00	-3.59	50.02	0.39	Average	100	218
2	5460.00	64.47	74.00	-9.53	64.08	0.39	Peak	100	218
3	5470.00	65.78	68.20	-2.42	65.40	0.38	Peak	100	218
4	11060.00	42.84	54.00	-11.16	35.35	7.49	Average	100	180
5	11060.00	55.81	74.00	-18.19	48.32	7.49	Peak	100	180
6	16590.00	58.68	68.20	-9.52	52.36	6.32	Peak	100	120

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	5610
Polarization	Horizontal		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

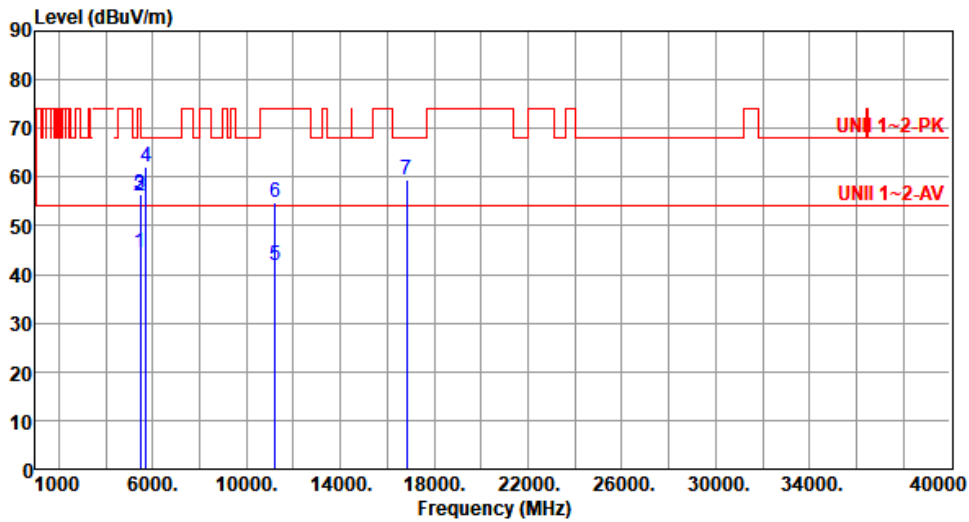

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	44.40	54.00	-9.60	44.01	0.39	Average	100	132
2	5460.00	56.26	74.00	-17.74	55.87	0.39	Peak	100	132
3	5470.00	56.29	68.20	-11.91	55.91	0.38	Peak	100	132
4	5725.00	62.14	68.20	-6.06	61.56	0.58	Peak	100	132
5	11220.00	41.92	54.00	-12.08	35.26	6.66	Average	100	40
6	11220.00	54.84	74.00	-19.16	48.18	6.66	Peak	100	40
7	16830.00	59.55	68.20	-8.65	52.34	7.21	Peak	100	110

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	5610
Polarization	Vertical		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

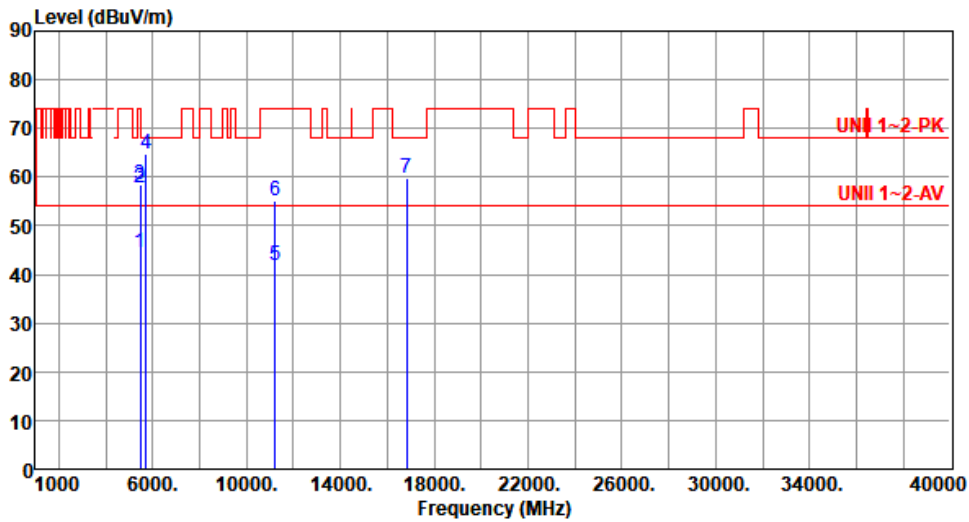

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	44.62	54.00	-9.38	44.23	0.39	Average	100	251
2	5460.00	57.92	74.00	-16.08	57.53	0.39	Peak	100	251
3	5470.00	58.29	68.20	-9.91	57.91	0.38	Peak	100	251
4	5725.00	64.76	68.20	-3.44	64.18	0.58	Peak	100	251
5	11220.00	41.85	54.00	-12.15	35.19	6.66	Average	100	120
6	11220.00	54.98	74.00	-19.02	48.32	6.66	Peak	100	120
7	16830.00	59.70	68.20	-8.50	52.49	7.21	Peak	100	160

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	5690
Polarization	Horizontal		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

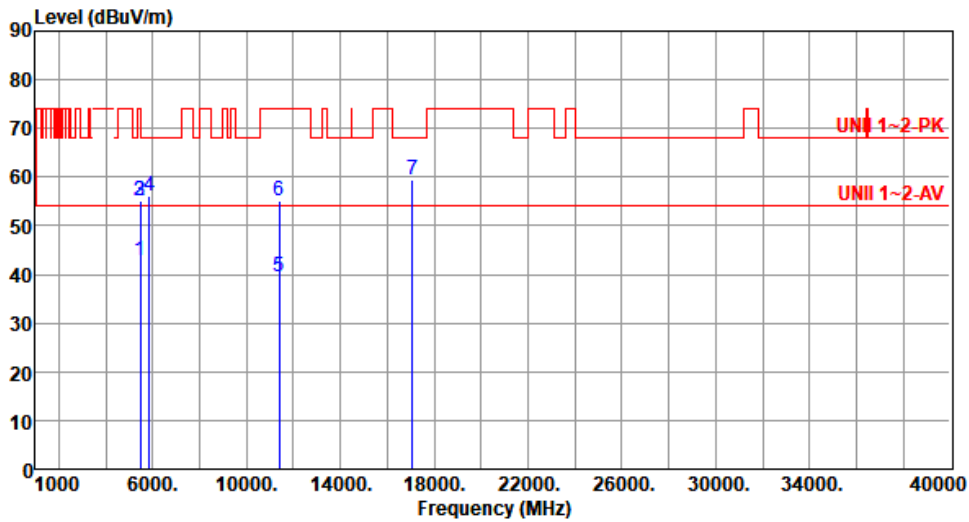

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	42.94	54.00	-11.06	42.55	0.39	Average	110	135
2	5460.00	55.07	74.00	-18.93	54.68	0.39	Peak	110	135
3	5470.00	55.24	68.20	-12.96	54.86	0.38	Peak	110	135
4	5850.00	56.07	68.20	-12.13	55.11	0.96	Peak	110	135
5	11380.00	39.41	54.00	-14.59	32.25	7.16	Average	100	60
6	11380.00	55.19	74.00	-18.81	48.03	7.16	Peak	100	60
7	17070.00	59.53	68.20	-8.67	52.43	7.10	Peak	100	50

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	5690
Polarization	Vertical		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

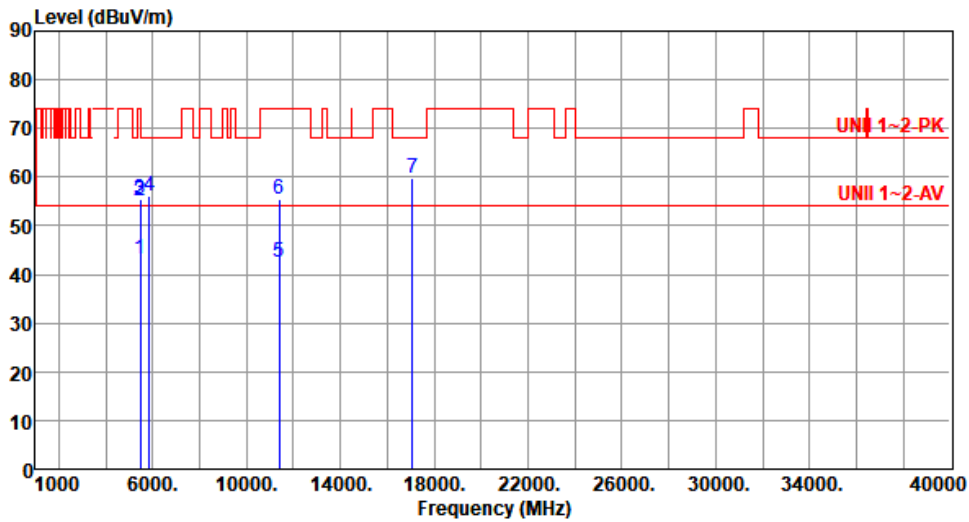

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	43.27	54.00	-10.73	42.88	0.39	Average	100	244
2	5460.00	55.27	74.00	-18.73	54.88	0.39	Peak	100	244
3	5470.00	55.53	68.20	-12.67	55.15	0.38	Peak	100	244
4	5850.00	56.25	68.20	-11.95	55.29	0.96	Peak	100	244
5	11380.00	42.48	54.00	-11.52	35.32	7.16	Average	100	110
6	11380.00	55.35	74.00	-18.65	48.19	7.16	Peak	100	110
7	17070.00	59.66	68.20	-8.54	52.56	7.10	Peak	100	80

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).





Modulation	be EHT80	Test Freq. (MHz)	5775
Polarization	Horizontal		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

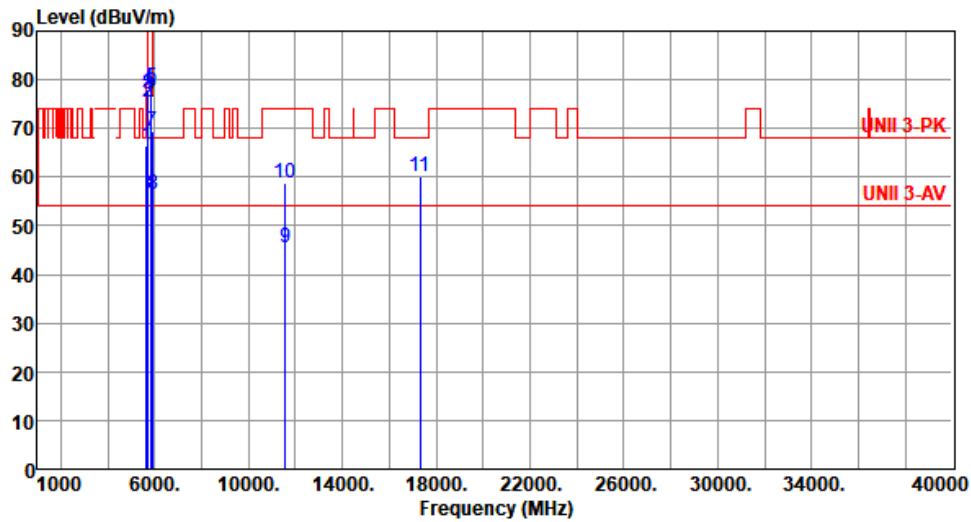

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	66.47	68.20	-1.73	66.26	0.21	Peak	225	135
2	5700.00	75.39	105.20	-29.81	74.86	0.53	Peak	225	135
3	5720.00	77.16	110.80	-33.64	76.59	0.57	Peak	225	135
4	5725.00	78.04	122.20	-44.16	77.46	0.58	Peak	225	135
5	5850.00	78.52	122.20	-43.68	77.56	0.96	Peak	225	135
6	5855.00	77.42	110.80	-33.38	76.44	0.98	Peak	225	135
7	5875.00	69.48	105.20	-35.72	68.46	1.02	Peak	225	135
8	5925.00	56.59	68.20	-11.61	55.46	1.13	Peak	225	135
9	11550.00	45.53	54.00	-8.47	38.19	7.34	Average	100	310
10	11550.00	58.73	74.00	-15.27	51.39	7.34	Peak	100	310
11	17325.00	60.26	68.20	-7.94	53.48	6.78	Peak	100	210

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	5775
Polarization	Vertical		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

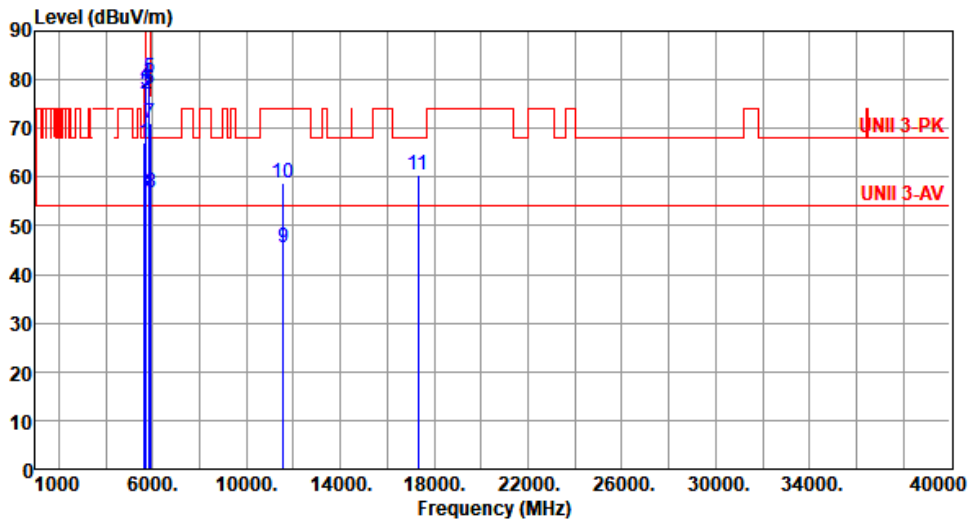

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	67.18	68.20	-1.02	66.97	0.21	Peak	100	191
2	5700.00	77.06	105.20	-28.14	76.53	0.53	Peak	100	191
3	5720.00	77.62	110.80	-33.18	77.05	0.57	Peak	100	191
4	5725.00	79.17	122.20	-43.03	78.59	0.58	Peak	100	191
5	5850.00	80.26	122.20	-41.94	79.30	0.96	Peak	100	191
6	5855.00	78.14	110.80	-32.66	77.16	0.98	Peak	100	191
7	5875.00	71.09	105.20	-34.11	70.07	1.02	Peak	100	191
8	5925.00	56.90	68.20	-11.30	55.77	1.13	Peak	100	191
9	11550.00	45.60	54.00	-8.40	38.26	7.34	Average	100	300
10	11550.00	58.63	74.00	-15.37	51.29	7.34	Peak	100	300
11	17325.00	60.34	68.20	-7.86	53.56	6.78	Peak	100	200

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Unwanted Emissions (Above 1GHz) for be EHT160

Modulation	be EHT160	Test Freq. (MHz)	5250
Polarization	Horizontal		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

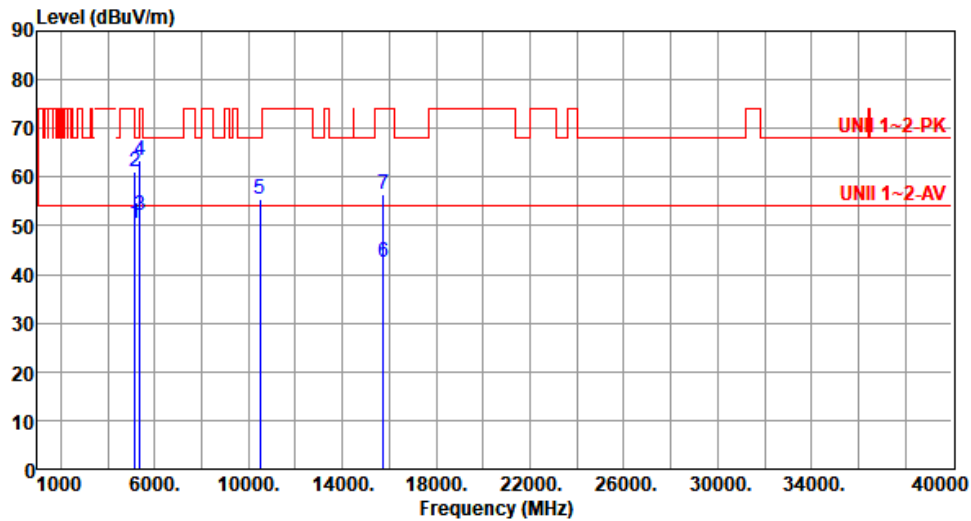

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	50.59	54.00	-3.41	50.26	0.33	Average	100	315
2	5150.00	61.22	74.00	-12.78	60.89	0.33	Peak	100	315
3	5350.00	52.00	54.00	-2.00	52.25	-0.25	Average	100	315
4	5350.00	63.40	74.00	-10.60	63.65	-0.25	Peak	100	315
5	10500.00	55.58	68.20	-12.62	48.39	7.19	Peak	100	200
6	15750.00	42.56	54.00	-11.44	38.35	4.21	Average	100	50
7	15750.00	56.57	74.00	-17.43	52.36	4.21	Peak	100	50

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160	Test Freq. (MHz)	5250
Polarization	Vertical		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

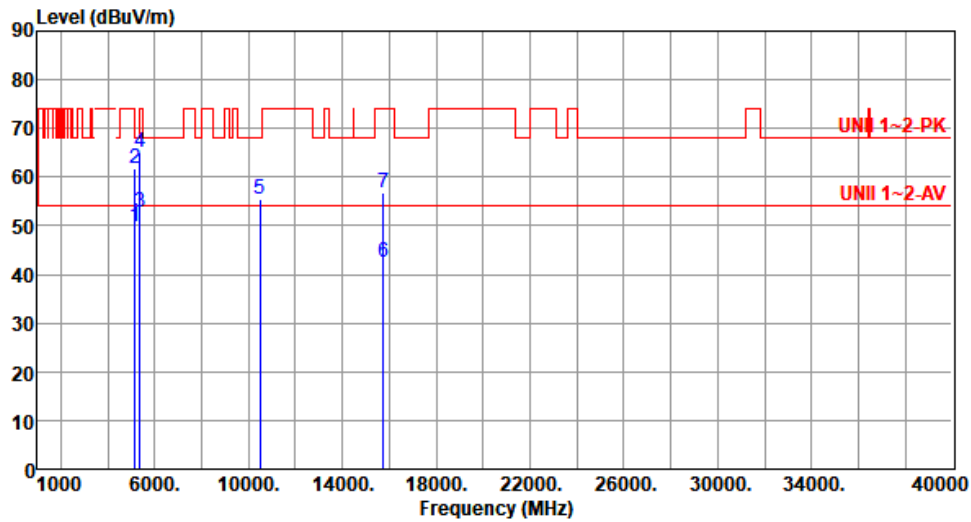

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	49.82	54.00	-4.18	49.49	0.33	Average	100	205
2	5150.00	61.89	74.00	-12.11	61.56	0.33	Peak	100	205
3	5350.00	52.83	54.00	-1.17	53.08	-0.25	Average	100	222
4	5350.00	65.23	74.00	-8.77	65.48	-0.25	Peak	100	222
5	10500.00	55.41	68.20	-12.79	48.22	7.19	Peak	100	100
6	15750.00	42.67	54.00	-11.33	38.46	4.21	Average	100	90
7	15750.00	56.69	74.00	-17.31	52.48	4.21	Peak	100	90

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).



Modulation	be EHT160	Test Freq. (MHz)	5570
Polarization	Horizontal		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

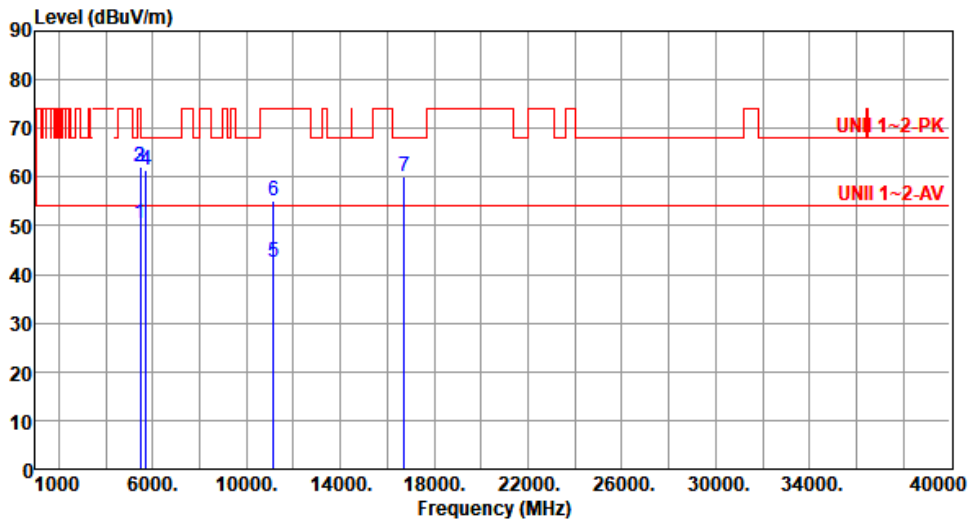

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	50.63	54.00	-3.37	50.24	0.39	Average	100	316
2	5460.00	61.94	74.00	-12.06	61.55	0.39	Peak	100	316
3	5470.00	62.07	68.20	-6.13	61.69	0.38	Peak	100	316
4	5725.00	61.47	68.20	-6.73	60.89	0.58	Peak	100	316
5	11140.00	42.34	54.00	-11.66	35.29	7.05	Average	100	60
6	11140.00	55.18	74.00	-18.82	48.13	7.05	Peak	100	60
7	16710.00	59.97	68.20	-8.23	52.56	7.41	Peak	100	40

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).



Modulation	be EHT160	Test Freq. (MHz)	5570
Polarization	Vertical		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

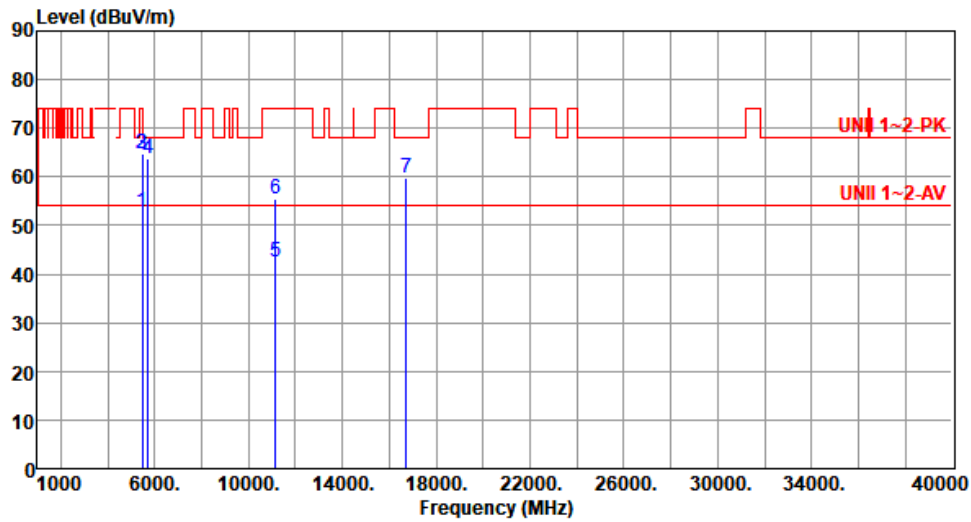

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	52.91	54.00	-1.09	52.52	0.39	Average	100	228
2	5460.00	64.60	74.00	-9.40	64.21	0.39	Peak	100	228
3	5470.00	64.86	68.20	-3.34	64.48	0.38	Peak	100	228
4	5725.00	63.92	68.20	-4.28	63.34	0.58	Peak	100	203
5	11140.00	42.44	54.00	-11.56	35.39	7.05	Average	100	20
6	11140.00	55.43	74.00	-18.57	48.38	7.05	Peak	100	20
7	16710.00	59.89	68.20	-8.31	52.48	7.41	Peak	100	90

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



**Configuration 2: Model: SDG-8734  
Unwanted Emissions (Below 1GHz)**

<b>Modulation</b>	be EHT20	<b>Test Freq. (MHz)</b>	5240
<b>Polarization</b>	Horizontal		

Test By :Allen Lee      Temperature(°C):24      Humidity(%):62

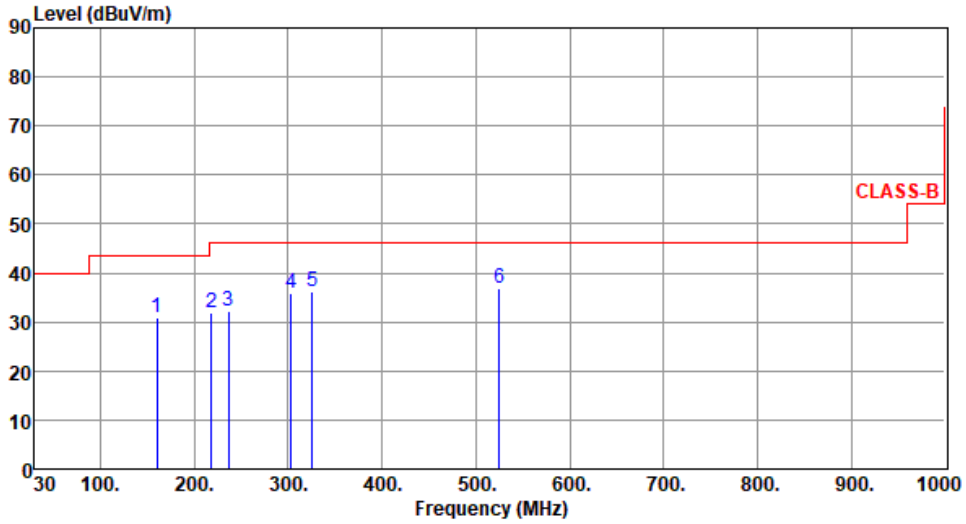

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	159.98	30.79	43.50	-12.71	39.53	-8.74	Peak	---	---
2	218.18	31.76	46.00	-14.24	43.66	-11.90	Peak	---	---
3	236.61	32.05	46.00	-13.95	42.68	-10.63	Peak	---	---
4	303.54	36.03	46.00	-9.97	44.01	-7.98	Peak	---	---
5	325.85	36.23	46.00	-9.77	43.50	-7.27	Peak	---	---
6	524.70	36.90	46.00	-9.10	39.51	-2.61	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



<b>Modulation</b>	be EHT20	<b>Test Freq. (MHz)</b>	5240
<b>Polarization</b>	Vertical		

Test By :Allen Lee      Temperature(°C):24      Humidity(%):62

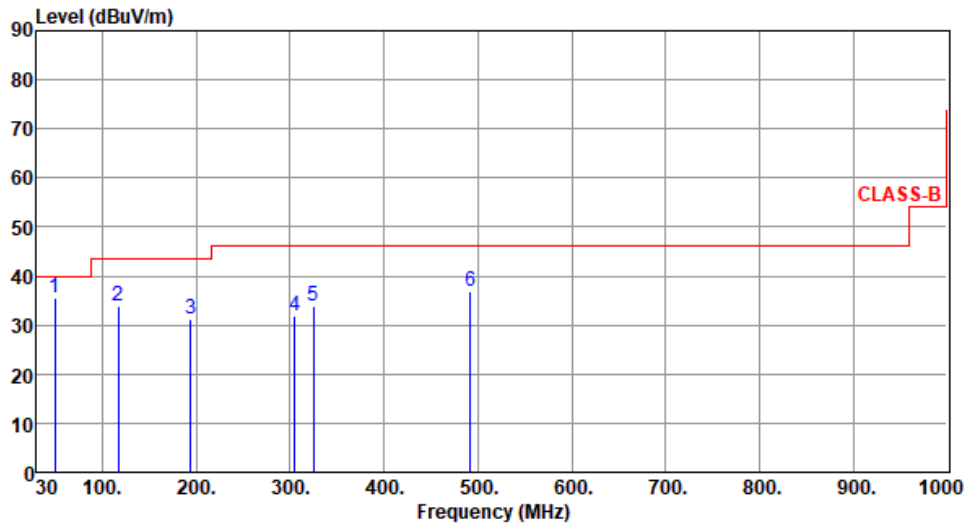

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	49.40	35.42	40.00	-4.58	43.30	-7.88	QP	100	89
2	117.30	34.00	43.50	-9.50	45.17	-11.17	Peak	---	---
3	193.93	31.12	43.50	-12.38	42.65	-11.53	Peak	---	---
4	304.51	32.04	46.00	-13.96	40.00	-7.96	Peak	---	---
5	324.88	33.84	46.00	-12.16	41.14	-7.30	Peak	---	---
6	491.72	36.72	46.00	-9.28	39.93	-3.21	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.





Modulation	be EHT20	Test Freq. (MHz)	5745
Polarization	Horizontal		

Test By :Allen Lee      Temperature(°C):24      Humidity(%):62

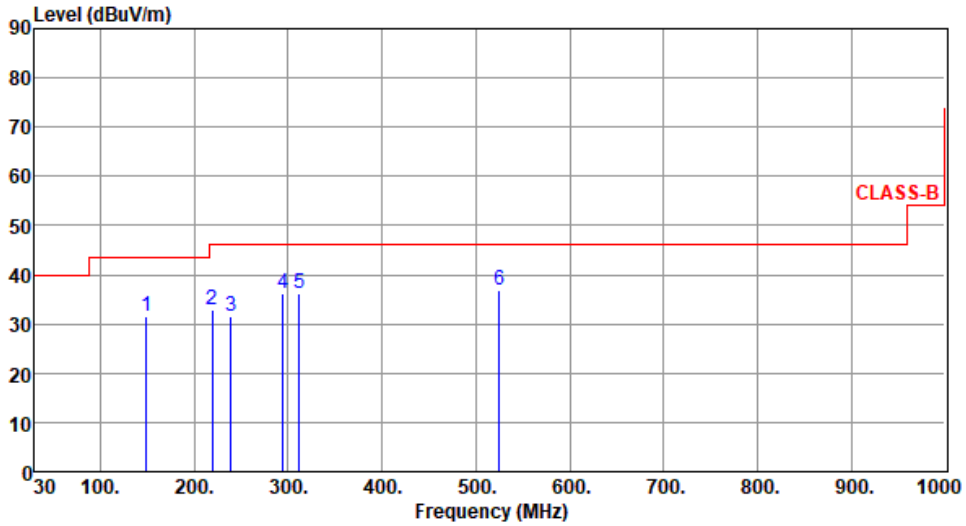

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	149.31	31.44	43.50	-12.06	40.25	-8.81	Peak	---	---
2	219.15	32.93	46.00	-13.07	44.80	-11.87	Peak	---	---
3	239.52	31.69	46.00	-14.31	42.02	-10.33	Peak	---	---
4	294.81	36.19	46.00	-9.81	44.47	-8.28	Peak	---	---
5	312.27	36.25	46.00	-9.75	43.89	-7.64	Peak	---	---
6	524.70	36.90	46.00	-9.10	39.51	-2.61	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Modulation	be EHT20	Test Freq. (MHz)	5745
Polarization	Vertical		

Test By :Allen Lee      Temperature(°C):24      Humidity(%):62

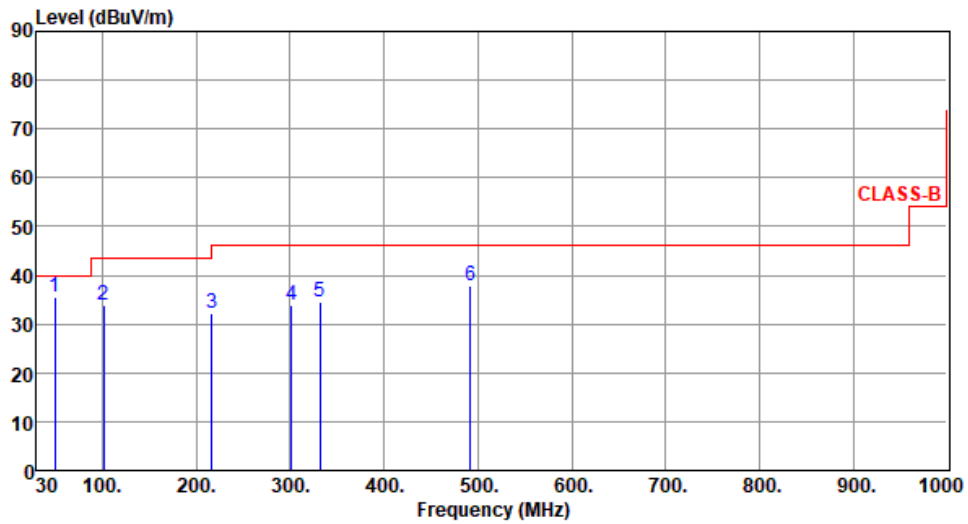

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	49.40	35.39	40.00	-4.61	43.27	-7.88	QP	100	90
2	101.78	34.02	43.50	-9.48	46.96	-12.94	Peak	---	---
3	216.24	32.20	46.00	-13.80	44.14	-11.94	Peak	---	---
4	301.60	33.95	46.00	-12.05	41.98	-8.03	Peak	---	---
5	331.67	34.56	46.00	-11.44	41.73	-7.17	Peak	---	---
6	491.72	37.72	46.00	-8.28	40.93	-3.21	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



<b>Frequency: 5300 MHz</b>	<b>Frequency Drift (ppm)</b>			
<b>Temperature (°C)</b>	<b>0 minute</b>	<b>2 minutes</b>	<b>5 minutes</b>	<b>10 minutes</b>
T20°CVmax	-11.94	-12.09	-11.56	-11.78
T20°CVmin	-10.58	-10.00	-10.30	-10.37
T40°CVnom	-12.01	-11.47	-12.02	-12.22
T30°CVnom	-12.30	-11.88	-11.78	-12.26
T20°CVnom	-11.67	-10.98	-11.44	-11.80
T10°CVnom	-10.97	-10.58	-10.51	-11.02
T0°CVnom	-11.37	-11.57	-10.54	-10.75
Vnom [V]: 120	Vmax [V]: 126.5		Vmin [V]: 93.5	
Tnom [°C]: 20	Tmax [°C]: 40		Tmin [°C]: 0	


<b>Frequency: 5785 MHz</b>	<b>Frequency Drift (ppm)</b>			
<b>Temperature (°C)</b>	<b>0 minute</b>	<b>2 minutes</b>	<b>5 minutes</b>	<b>10 minutes</b>
T20°CVmax	-11.05	-10.63	-10.29	-10.63
T20°CVmin	-10.06	-10.69	-10.81	-10.69
T40°CVnom	-11.38	-11.85	-11.09	-12.14
T30°CVnom	-11.59	-12.02	-11.50	-11.45
T20°CVnom	-10.92	-10.45	-11.13	-10.08
T10°CVnom	-10.51	-10.08	-10.53	-10.09
T0°CVnom	-10.69	-10.12	-10.08	-10.86
Vnom [V]: 120	Vmax [V]: 126.5		Vmin [V]: 93.5	
Tnom [°C]: 20	Tmax [°C]: 40		Tmin [°C]: 0	



**Non-beamforming mode**  
**Configuration 1: Model: SDG-8733**

Modulation Mode	be EHT40	Test Freq. (MHz)	5230
Power Phase	Line		

Test by : Joe Liao      Temperature: 23°C      Humidity: 63%

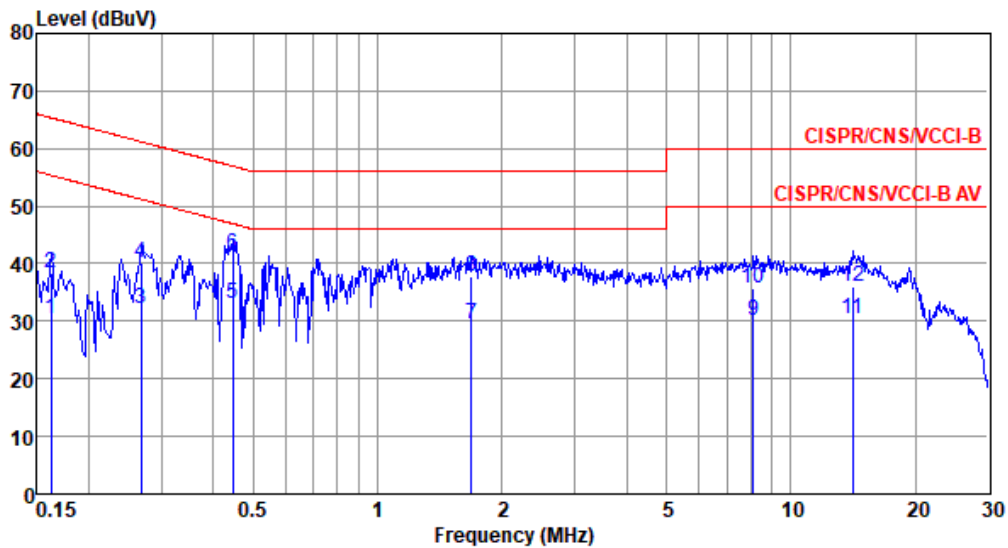


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.162	30.50	55.34	-24.84	20.59	9.63	0.07	0.21	Average
2	0.162	38.23	65.34	-27.11	28.32	9.63	0.07	0.21	QP
3	0.267	32.31	51.20	-18.89	22.34	9.62	0.07	0.28	Average
4	0.267	40.12	61.20	-21.08	30.15	9.62	0.07	0.28	QP
5*	0.447	33.03	46.93	-13.90	23.00	9.62	0.08	0.33	Average
6	0.447	41.51	56.93	-15.42	31.48	9.62	0.08	0.33	QP
7	1.689	29.52	46.00	-16.48	19.40	9.63	0.11	0.38	Average
8	1.689	37.67	56.00	-18.33	27.55	9.63	0.11	0.38	QP
9	8.105	30.05	50.00	-19.95	19.62	9.68	0.31	0.44	Average
10	8.105	35.77	60.00	-24.23	25.34	9.68	0.31	0.44	QP
11	14.138	30.43	50.00	-19.57	19.83	9.69	0.43	0.48	Average
12	14.138	36.06	60.00	-23.94	25.46	9.69	0.43	0.48	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).  
 Note 2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).



Modulation Mode	be EHT40	Test Freq. (MHz)	5230
Power Phase	Neutral		

Test by : Joe Liao      Temperature: 23°C      Humidity: 63%

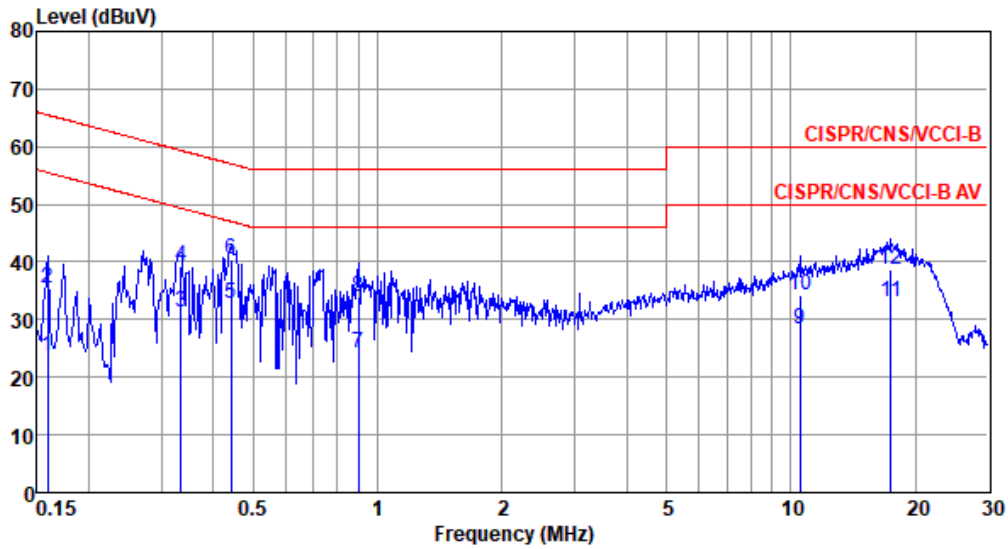


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.159	23.69	55.52	-31.83	13.85	9.63	0.08	0.13	Average
2	0.159	35.48	65.52	-30.04	25.64	9.63	0.08	0.13	QP
3	0.334	31.18	49.35	-18.17	21.26	9.62	0.07	0.23	Average
4	0.334	39.41	59.35	-19.94	29.49	9.62	0.07	0.23	QP
5*	0.442	32.72	47.02	-14.30	22.76	9.62	0.08	0.26	Average
6	0.442	40.55	57.02	-16.47	30.59	9.62	0.08	0.26	QP
7	0.899	24.29	46.00	-21.71	14.28	9.63	0.09	0.29	Average
8	0.899	33.93	56.00	-22.07	23.92	9.63	0.09	0.29	QP
9	10.508	28.39	50.00	-21.61	17.88	9.72	0.36	0.43	Average
10	10.508	34.19	60.00	-25.81	23.68	9.72	0.36	0.43	QP
11	17.475	32.94	50.00	-17.06	22.14	9.78	0.48	0.54	Average
12	17.475	38.61	60.00	-21.39	27.81	9.78	0.48	0.54	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).  
 Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).



Modulation Mode	11a	Test Freq. (MHz)	5745
Power Phase	Line		

Test by : Joe Liao      Temperature: 23°C      Humidity: 63%

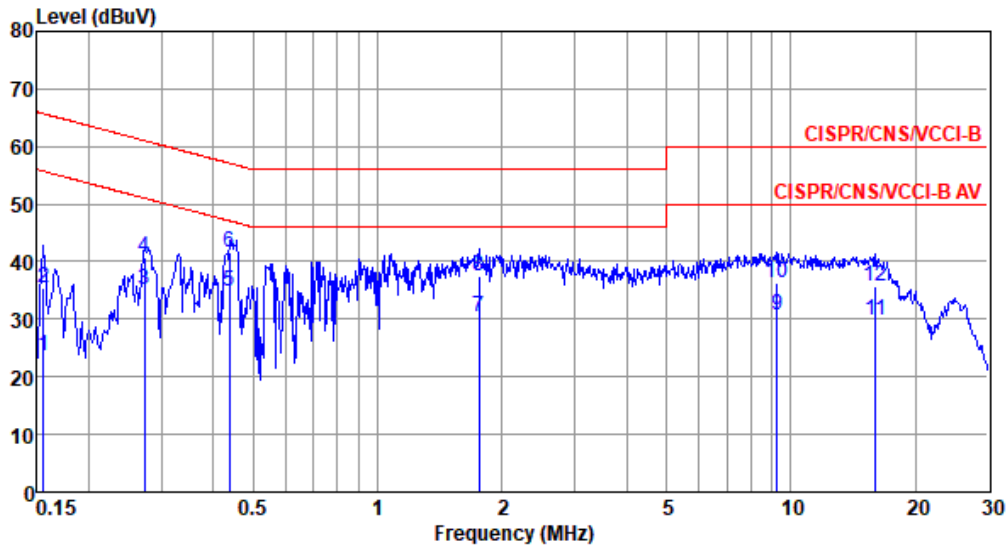


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.156	23.72	55.69	-31.97	13.80	9.63	0.08	0.21	Average
2	0.156	35.54	65.69	-30.15	25.62	9.63	0.08	0.21	QP
3	0.273	35.24	51.03	-15.79	25.26	9.62	0.07	0.29	Average
4	0.273	40.79	61.03	-20.24	30.81	9.62	0.07	0.29	QP
5*	0.437	34.93	47.11	-12.18	24.90	9.62	0.08	0.33	Average
6	0.437	41.65	57.11	-15.46	31.62	9.62	0.08	0.33	QP
7	1.762	30.30	46.00	-15.70	20.18	9.63	0.11	0.38	Average
8	1.762	37.49	56.00	-18.51	27.37	9.63	0.11	0.38	QP
9	9.253	30.56	50.00	-19.44	20.09	9.69	0.33	0.45	Average
10	9.253	36.30	60.00	-23.70	25.83	9.69	0.33	0.45	QP
11	16.055	29.85	50.00	-20.15	19.19	9.68	0.46	0.52	Average
12	16.055	35.69	60.00	-24.31	25.03	9.68	0.46	0.52	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).  
 Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).



Modulation Mode	11a	Test Freq. (MHz)	5745
Power Phase	Neutral		

Test by : Joe Liao      Temperature: 23°C      Humidity: 63%

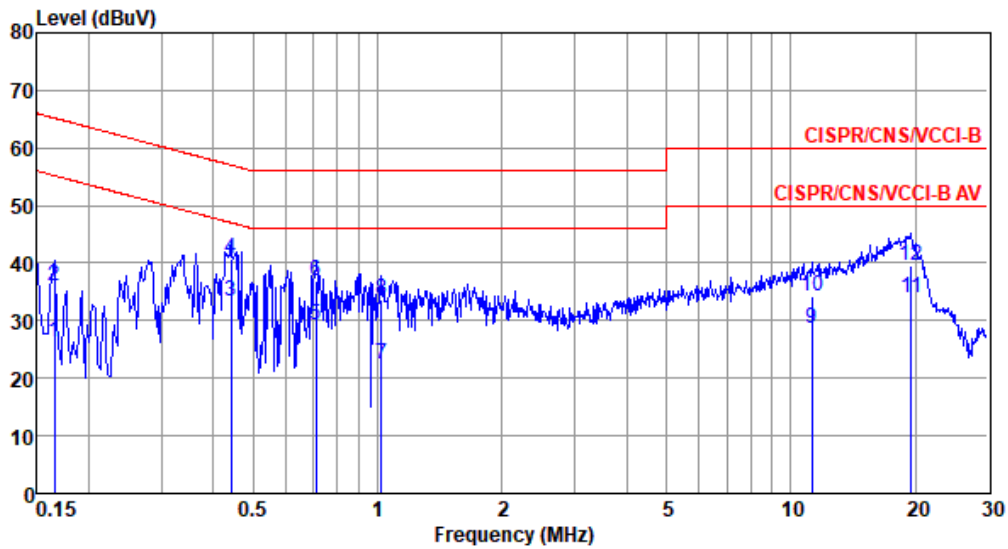

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.165	26.20	55.21	-29.01	16.36	9.63	0.07	0.14	Average
2	0.165	36.06	65.21	-29.15	26.22	9.63	0.07	0.14	QP
3*	0.442	33.30	47.02	-13.72	23.34	9.62	0.08	0.26	Average
4	0.442	40.86	57.02	-16.16	30.90	9.62	0.08	0.26	QP
5	0.708	29.29	46.00	-16.71	19.29	9.63	0.09	0.28	Average
6	0.708	36.94	56.00	-19.06	26.94	9.63	0.09	0.28	QP
7	1.021	22.34	46.00	-23.66	12.32	9.63	0.09	0.30	Average
8	1.021	33.70	56.00	-22.30	23.68	9.63	0.09	0.30	QP
9	11.257	28.56	50.00	-21.44	18.01	9.73	0.38	0.44	Average
10	11.257	34.38	60.00	-25.62	23.83	9.73	0.38	0.44	QP
11	19.532	33.97	50.00	-16.03	23.09	9.80	0.50	0.58	Average
12	19.532	39.49	60.00	-20.51	28.61	9.80	0.50	0.58	QP


Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).  
 Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).



Configuration 2: Model: SDG-8734

Modulation Mode	be EHT40	Test Freq. (MHz)	5230
Power Phase	Line		

Test by : Joe Liao      Temperature: 23°C      Humidity: 63%

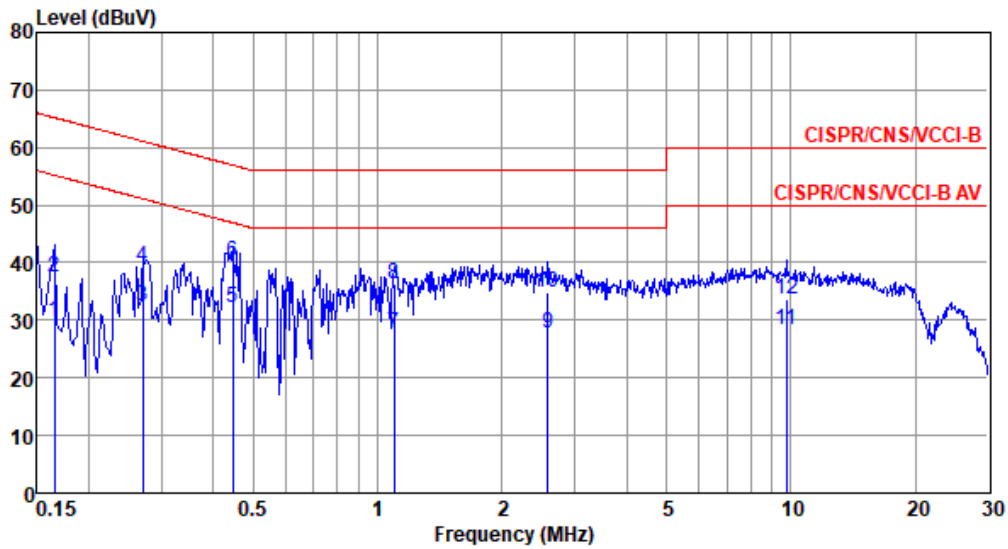

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.165	29.87	55.21	-25.34	19.95	9.63	0.07	0.22	Average
2	0.165	37.51	65.21	-27.70	27.59	9.63	0.07	0.22	QP
3	0.270	32.49	51.12	-18.63	22.52	9.62	0.07	0.28	Average
4	0.270	39.23	61.12	-21.89	29.26	9.62	0.07	0.28	QP
5*	0.447	32.04	46.93	-14.89	22.01	9.62	0.08	0.33	Average
6	0.447	40.01	56.93	-16.92	29.98	9.62	0.08	0.33	QP
7	1.094	27.62	46.00	-18.38	17.54	9.63	0.09	0.36	Average
8	1.094	36.41	56.00	-19.59	26.33	9.63	0.09	0.36	QP
9	2.581	27.83	46.00	-18.17	17.66	9.64	0.14	0.39	Average
10	2.581	34.91	56.00	-21.09	24.74	9.64	0.14	0.39	QP
11	9.757	28.28	50.00	-21.72	17.79	9.69	0.35	0.45	Average
12	9.757	33.79	60.00	-26.21	23.30	9.69	0.35	0.45	QP


Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).  
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).





Modulation Mode	be EHT40	Test Freq. (MHz)	5230
Power Phase	Neutral		

Test by : Joe Liao      Temperature: 23°C      Humidity: 63%

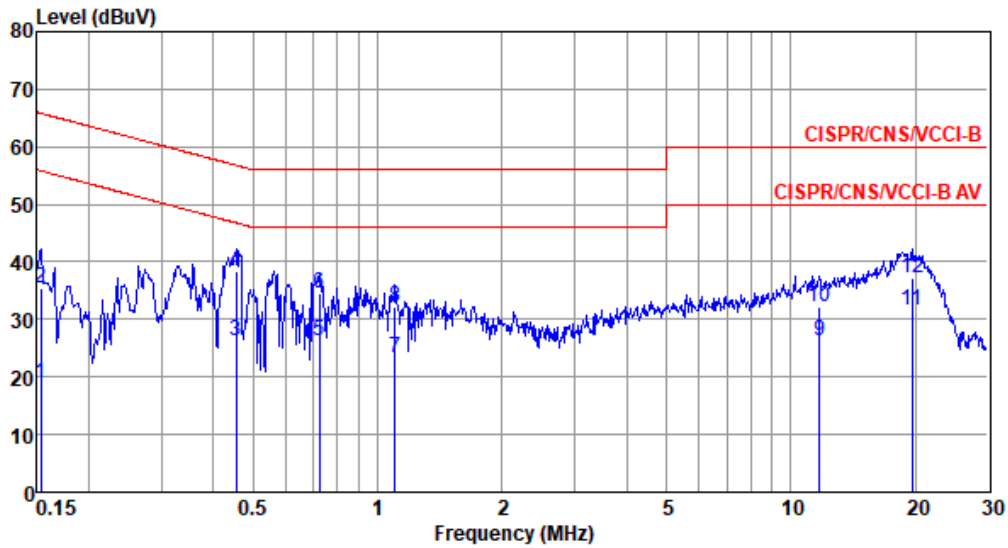


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.153	18.91	55.82	-36.91	9.08	9.63	0.08	0.12	Average
2	0.153	35.54	65.82	-30.28	25.71	9.63	0.08	0.12	QP
3	0.454	26.26	46.80	-20.54	16.30	9.62	0.08	0.26	Average
4*	0.454	38.45	56.80	-18.35	28.49	9.62	0.08	0.26	QP
5	0.724	26.22	46.00	-19.78	16.22	9.63	0.09	0.28	Average
6	0.724	34.40	56.00	-21.60	24.40	9.63	0.09	0.28	QP
7	1.100	23.39	46.00	-22.61	13.36	9.63	0.09	0.31	Average
8	1.100	32.06	56.00	-23.94	22.03	9.63	0.09	0.31	QP
9	11.745	26.28	50.00	-23.72	15.72	9.73	0.38	0.45	Average
10	11.745	32.08	60.00	-27.92	21.52	9.73	0.38	0.45	QP
11	19.635	31.56	50.00	-18.44	20.67	9.80	0.51	0.58	Average
12	19.635	37.05	60.00	-22.95	26.16	9.80	0.51	0.58	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).  
 Note 2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).



Modulation Mode	11a	Test Freq. (MHz)	5745
Power Phase	Line		

Test by : Joe Liao      Temperature: 23°C      Humidity: 63%

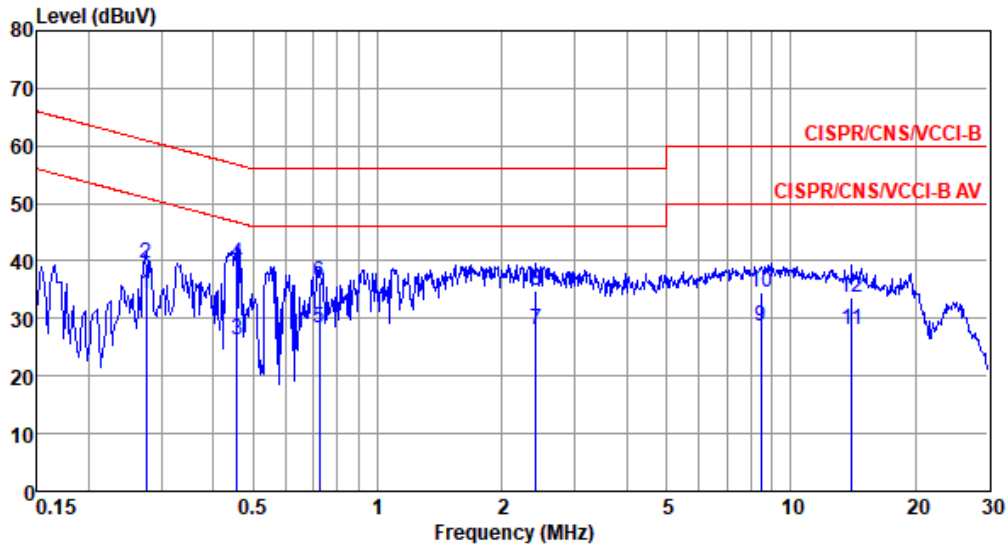


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1*	0.276	34.28	50.94	-16.66	24.30	9.62	0.07	0.29	Average
2	0.276	39.59	60.94	-21.35	29.61	9.62	0.07	0.29	QP
3	0.456	26.26	46.76	-20.50	16.23	9.62	0.08	0.33	Average
4	0.456	39.59	56.76	-17.17	29.56	9.62	0.08	0.33	QP
5	0.724	28.27	46.00	-17.73	18.20	9.63	0.09	0.35	Average
6	0.724	36.34	56.00	-19.66	26.27	9.63	0.09	0.35	QP
7	2.422	27.92	46.00	-18.08	17.76	9.64	0.13	0.39	Average
8	2.422	34.79	56.00	-21.21	24.63	9.64	0.13	0.39	QP
9	8.456	28.70	50.00	-21.30	18.26	9.68	0.32	0.44	Average
10	8.456	34.61	60.00	-25.39	24.17	9.68	0.32	0.44	QP
11	14.063	28.01	50.00	-21.99	17.41	9.69	0.43	0.48	Average
12	14.063	33.52	60.00	-26.48	22.92	9.69	0.43	0.48	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).  
 Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).



Modulation Mode	11a	Test Freq. (MHz)	5745
Power Phase	Neutral		

Test by : Joe Liao      Temperature: 23°C      Humidity: 63%

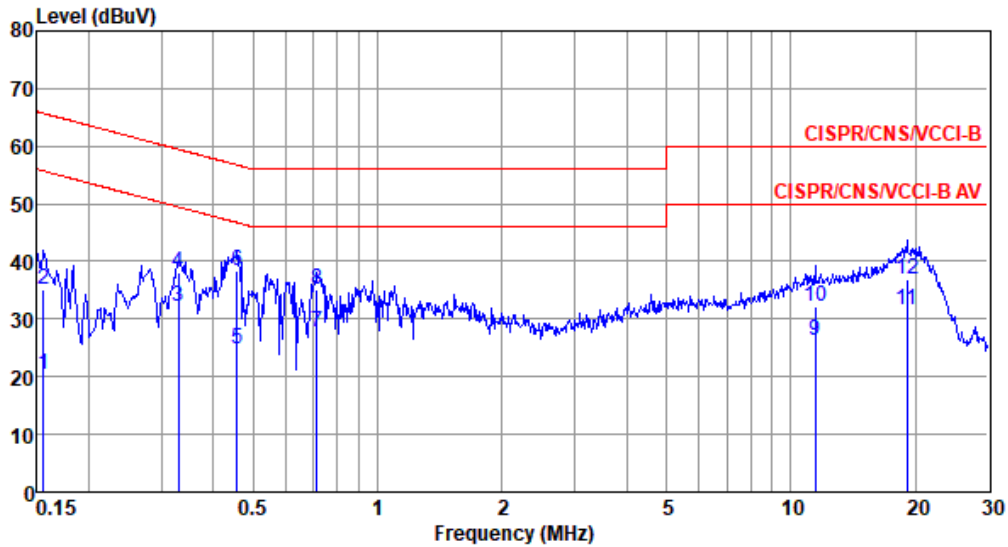

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.156	20.32	55.69	-35.37	10.48	9.63	0.08	0.13	Average
2	0.156	35.05	65.69	-30.64	25.21	9.63	0.08	0.13	QP
3*	0.330	32.17	49.44	-17.27	22.25	9.62	0.07	0.23	Average
4	0.330	37.96	59.44	-21.48	28.04	9.62	0.07	0.23	QP
5	0.456	24.65	46.76	-22.11	14.69	9.62	0.08	0.26	Average
6	0.456	38.33	56.76	-18.43	28.37	9.62	0.08	0.26	QP
7	0.712	27.83	46.00	-18.17	17.83	9.63	0.09	0.28	Average
8	0.712	35.02	56.00	-20.98	25.02	9.63	0.09	0.28	QP
9	11.438	26.35	50.00	-23.65	15.80	9.73	0.38	0.44	Average
10	11.438	32.07	60.00	-27.93	21.52	9.73	0.38	0.44	QP
11	19.122	31.46	50.00	-18.54	20.60	9.79	0.50	0.57	Average
12	19.122	37.05	60.00	-22.95	26.19	9.79	0.50	0.57	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).  
 Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).




Beamforming mode

Configuration 1: Model: SDG-8733

Modulation Mode	be EHT20	Test Freq. (MHz)	5240
Power Phase	Line		

Test by : Joe Liao      Temperature: 23°C      Humidity: 63%

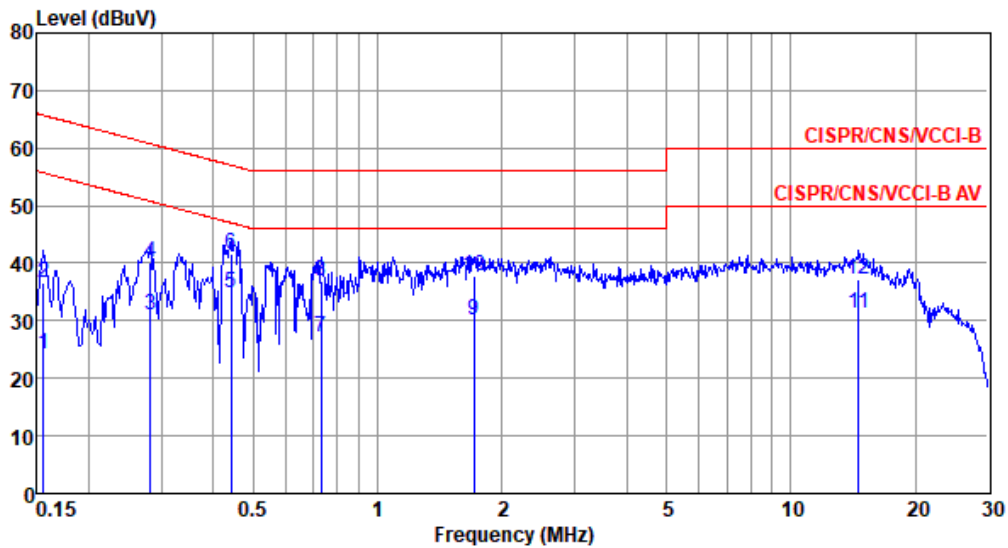


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.156	24.20	55.69	-31.49	14.28	9.63	0.08	0.21	Average
2	0.156	36.70	65.69	-28.99	26.78	9.63	0.08	0.21	QP
3	0.282	30.87	50.76	-19.89	20.89	9.62	0.07	0.29	Average
4	0.282	40.11	60.76	-20.65	30.13	9.62	0.07	0.29	QP
5*	0.442	34.79	47.02	-12.23	24.76	9.62	0.08	0.33	Average
6	0.442	41.65	57.02	-15.37	31.62	9.62	0.08	0.33	QP
7	0.731	27.11	46.00	-18.89	17.04	9.63	0.09	0.35	Average
8	0.731	36.96	56.00	-19.04	26.89	9.63	0.09	0.35	QP
9	1.707	30.09	46.00	-15.91	19.97	9.63	0.11	0.38	Average
10	1.707	37.66	56.00	-18.34	27.54	9.63	0.11	0.38	QP
11	14.594	31.35	50.00	-18.65	20.75	9.68	0.43	0.49	Average
12	14.594	37.05	60.00	-22.95	26.45	9.68	0.43	0.49	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).  
 Note 2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).



Modulation Mode	be EHT20	Test Freq. (MHz)	5240
Power Phase	Neutral		

Test by : Joe Liao      Temperature: 23°C      Humidity: 63%

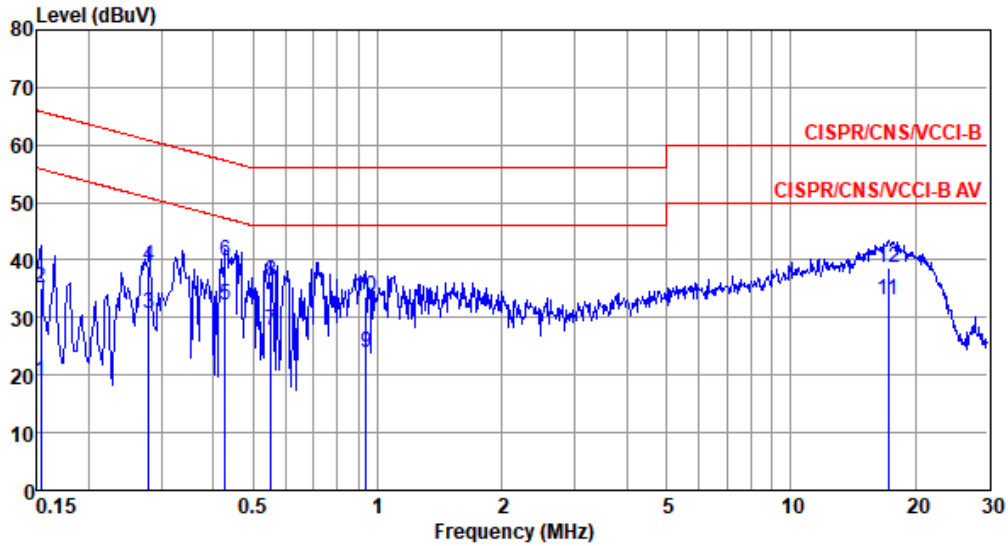


	Freq	Level	Limit	Over	Read	Factor	Cable	Aux	Remark
	MHz	dBuV	Line	Limit	Level	dB	loss	dB	
			dBuV	dB	dBuV		dB		
1	0.153	18.94	55.82	-36.88	9.11	9.63	0.08	0.12	Average
2	0.153	35.21	65.82	-30.61	25.38	9.63	0.08	0.12	QP
3	0.279	30.76	50.85	-20.09	20.85	9.63	0.07	0.21	Average
4	0.279	38.95	60.85	-21.90	29.04	9.63	0.07	0.21	QP
5*	0.428	32.29	47.29	-15.00	22.34	9.62	0.08	0.25	Average
6	0.428	39.95	57.29	-17.34	30.00	9.62	0.08	0.25	QP
7	0.552	27.88	46.00	-18.12	17.91	9.62	0.08	0.27	Average
8	0.552	36.23	56.00	-19.77	26.26	9.62	0.08	0.27	QP
9	0.938	24.03	46.00	-21.97	14.01	9.63	0.09	0.30	Average
10	0.938	33.55	56.00	-22.45	23.53	9.63	0.09	0.30	QP
11	17.199	33.10	50.00	-16.90	22.31	9.78	0.47	0.54	Average
12	17.199	38.66	60.00	-21.34	27.87	9.78	0.47	0.54	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).  
 Note 2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).



Modulation Mode	be EHT20	Test Freq. (MHz)	5745
Power Phase	Line		

Test by : Joe Liao      Temperature: 23°C      Humidity: 63%

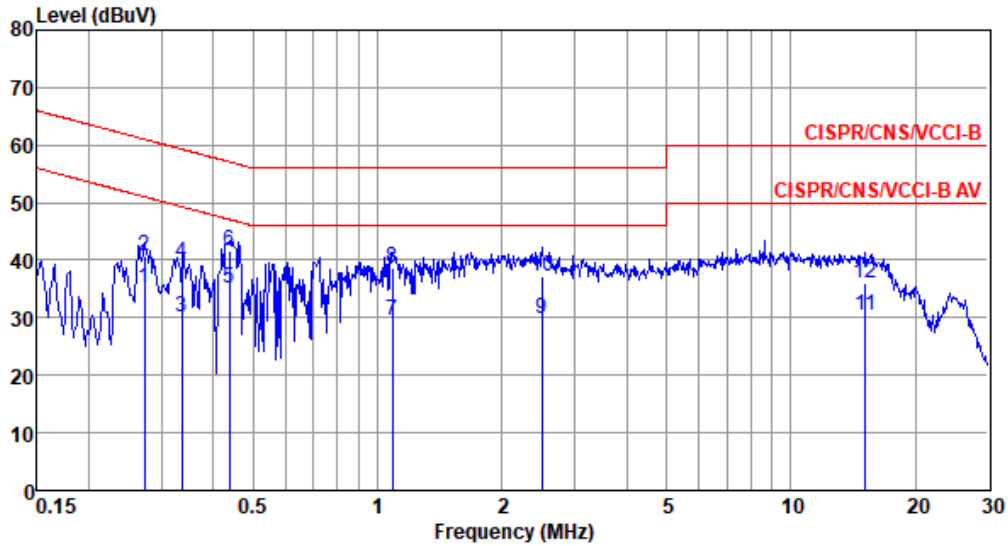


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.273	35.19	51.03	-15.84	25.21	9.62	0.07	0.29	Average
2	0.273	40.83	61.03	-20.20	30.85	9.62	0.07	0.29	QP
3	0.336	30.02	49.31	-19.29	20.02	9.62	0.07	0.31	Average
4	0.336	39.58	59.31	-19.73	29.58	9.62	0.07	0.31	QP
5*	0.437	34.99	47.11	-12.12	24.96	9.62	0.08	0.33	Average
6	0.437	41.73	57.11	-15.38	31.70	9.62	0.08	0.33	QP
7	1.088	29.59	46.00	-16.41	19.51	9.63	0.09	0.36	Average
8	1.088	38.70	56.00	-17.30	28.62	9.63	0.09	0.36	QP
9	2.500	29.68	46.00	-16.32	19.52	9.64	0.13	0.39	Average
10	2.500	37.09	56.00	-18.91	26.93	9.64	0.13	0.39	QP
11	15.146	30.42	50.00	-19.58	19.81	9.68	0.44	0.49	Average
12	15.146	36.03	60.00	-23.97	25.42	9.68	0.44	0.49	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).  
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).



Modulation Mode	be EHT20	Test Freq. (MHz)	5745
Power Phase	Neutral		

Test by : Joe Liao      Temperature: 23°C      Humidity: 63%

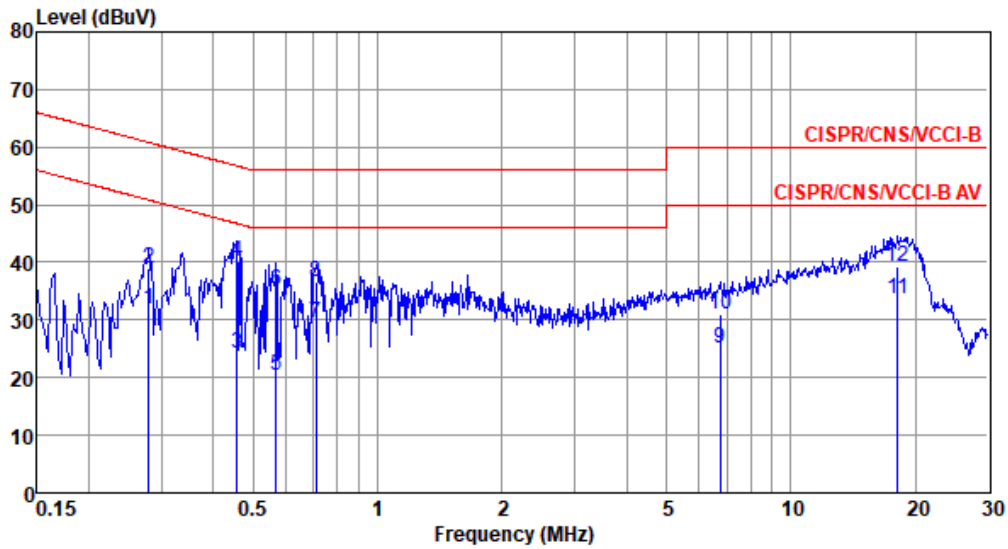

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.279	31.87	50.85	-18.98	21.96	9.63	0.07	0.21	Average
2	0.279	39.11	60.85	-21.74	29.20	9.63	0.07	0.21	QP
3	0.456	24.32	46.76	-22.44	14.36	9.62	0.08	0.26	Average
4	0.456	40.08	56.76	-16.68	30.12	9.62	0.08	0.26	QP
5	0.567	20.32	46.00	-25.68	10.35	9.62	0.08	0.27	Average
6	0.567	35.00	56.00	-21.00	25.03	9.62	0.08	0.27	QP
7	0.708	29.53	46.00	-16.47	19.53	9.63	0.09	0.28	Average
8	0.708	36.75	56.00	-19.25	26.75	9.63	0.09	0.28	QP
9	6.733	25.09	50.00	-24.91	14.72	9.68	0.28	0.41	Average
10	6.733	30.97	60.00	-29.03	20.60	9.68	0.28	0.41	QP
11*	18.135	33.74	50.00	-16.26	22.90	9.79	0.49	0.56	Average
12	18.135	39.39	60.00	-20.61	28.55	9.79	0.49	0.56	QP


Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).  
 Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).



Configuration 2: Model: SDG-8734

Modulation Mode	be EHT20	Test Freq. (MHz)	5240
Power Phase	Line		

Test by : Joe Liao      Temperature: 23°C      Humidity: 63%

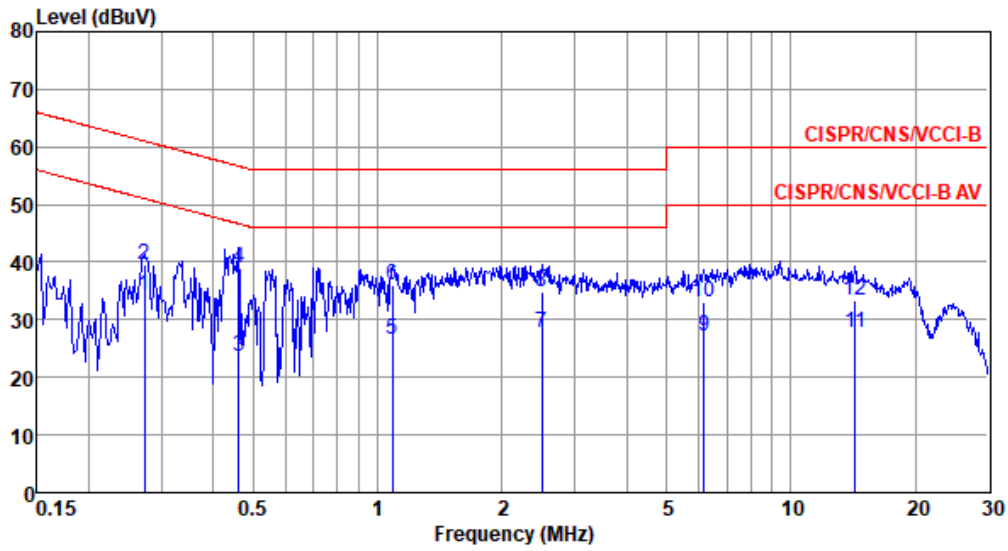

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1*	0.273	34.32	51.03	-16.71	24.34	9.62	0.07	0.29	Average
2	0.273	39.67	61.03	-21.36	29.69	9.62	0.07	0.29	QP
3	0.461	23.51	46.67	-23.16	13.48	9.62	0.08	0.33	Average
4	0.461	38.95	56.67	-17.72	28.92	9.62	0.08	0.33	QP
5	1.088	26.56	46.00	-19.44	16.48	9.63	0.09	0.36	Average
6	1.088	36.13	56.00	-19.87	26.05	9.63	0.09	0.36	QP
7	2.500	27.68	46.00	-18.32	17.52	9.64	0.13	0.39	Average
8	2.500	34.70	56.00	-21.30	24.54	9.64	0.13	0.39	QP
9	6.153	27.23	50.00	-22.77	16.87	9.67	0.26	0.43	Average
10	6.153	33.11	60.00	-26.89	22.75	9.67	0.26	0.43	QP
11	14.288	27.69	50.00	-22.31	17.09	9.68	0.43	0.49	Average
12	14.288	33.32	60.00	-26.68	22.72	9.68	0.43	0.49	QP


Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).  
 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).





Modulation Mode	be EHT20	Test Freq. (MHz)	5240
Power Phase	Neutral		

Test by : Joe Liao      Temperature: 23°C      Humidity: 63%

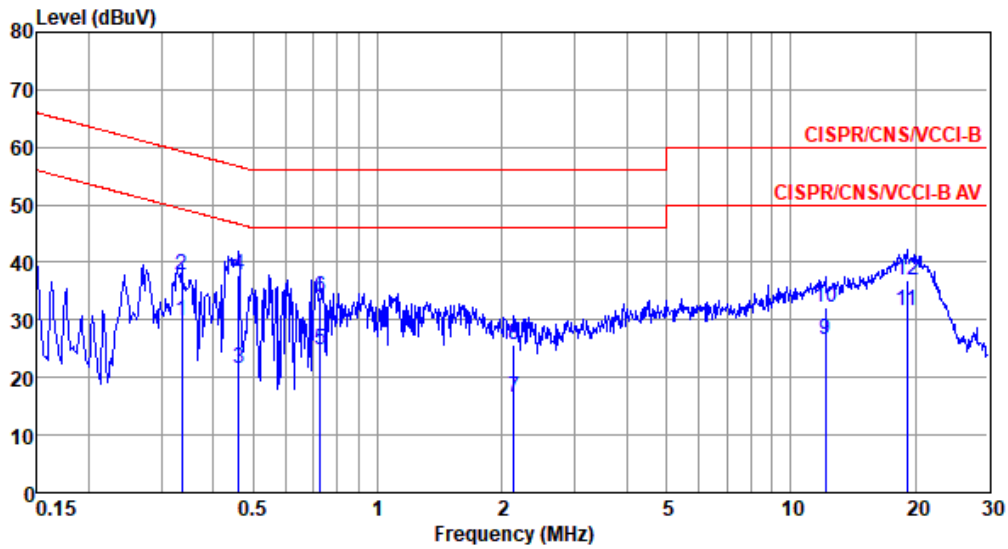


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.336	29.74	49.31	-19.57	19.82	9.62	0.07	0.23	Average
2	0.336	37.79	59.31	-21.52	27.87	9.62	0.07	0.23	QP
3	0.461	21.47	46.67	-25.20	11.51	9.62	0.08	0.26	Average
4	0.461	37.74	56.67	-18.93	27.78	9.62	0.08	0.26	QP
5	0.727	24.94	46.00	-21.06	14.94	9.63	0.09	0.28	Average
6	0.727	34.00	56.00	-22.00	24.00	9.63	0.09	0.28	QP
7	2.133	16.58	46.00	-29.42	6.47	9.64	0.12	0.35	Average
8	2.133	25.68	56.00	-30.32	15.57	9.64	0.12	0.35	QP
9	12.124	26.44	50.00	-23.56	15.86	9.74	0.39	0.45	Average
10	12.124	32.15	60.00	-27.85	21.57	9.74	0.39	0.45	QP
11*	19.122	31.45	50.00	-18.55	20.59	9.79	0.50	0.57	Average
12	19.122	37.00	60.00	-23.00	26.14	9.79	0.50	0.57	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).  
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).



Modulation Mode	be EHT20	Test Freq. (MHz)	5745
Power Phase	Line		

Test by : Joe Liao      Temperature: 23°C      Humidity: 63%

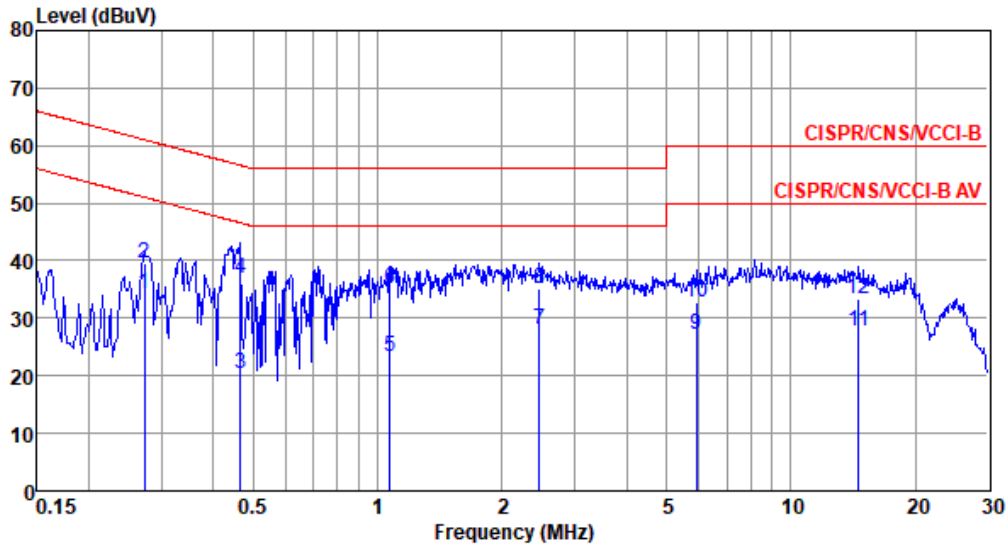


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1*	0.273	34.18	51.03	-16.85	24.20	9.62	0.07	0.29	Average
2	0.273	39.50	61.03	-21.53	29.52	9.62	0.07	0.29	QP
3	0.466	20.28	46.58	-26.30	10.24	9.62	0.08	0.34	Average
4	0.466	36.98	56.58	-19.60	26.94	9.62	0.08	0.34	QP
5	1.071	23.44	46.00	-22.56	13.36	9.63	0.09	0.36	Average
6	1.071	35.10	56.00	-20.90	25.02	9.63	0.09	0.36	QP
7	2.461	28.01	46.00	-17.99	17.85	9.64	0.13	0.39	Average
8	2.461	35.08	56.00	-20.92	24.92	9.64	0.13	0.39	QP
9	5.898	27.04	50.00	-22.96	16.69	9.67	0.25	0.43	Average
10	5.898	32.80	60.00	-27.20	22.45	9.67	0.25	0.43	QP
11	14.594	27.87	50.00	-22.13	17.27	9.68	0.43	0.49	Average
12	14.594	33.43	60.00	-26.57	22.83	9.68	0.43	0.49	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).  
 Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).



Modulation Mode	be EHT20	Test Freq. (MHz)	5745
Power Phase	Neutral		

Test by : Joe Liao      Temperature: 23°C      Humidity: 63%

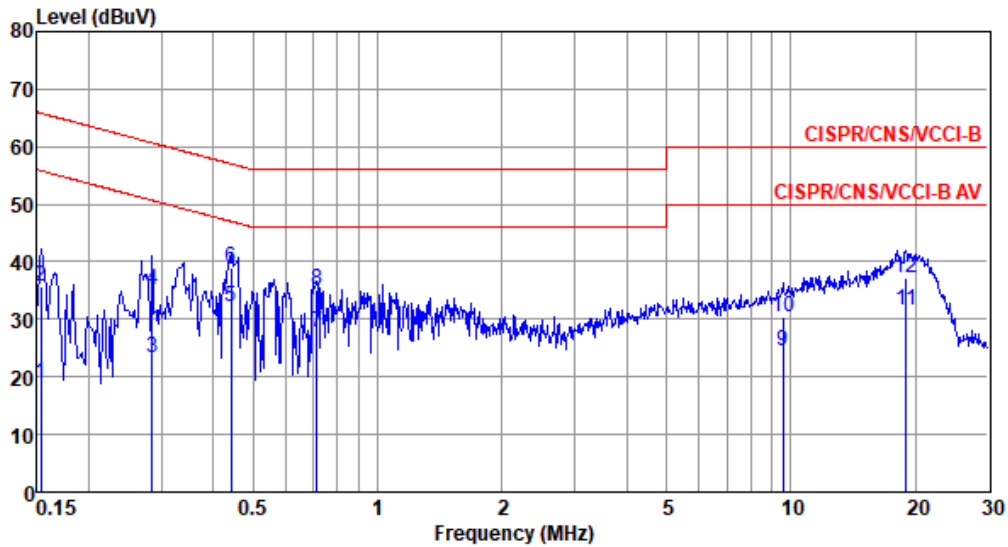

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.153	18.84	55.82	-36.98	9.01	9.63	0.08	0.12	Average
2	0.153	35.63	65.82	-30.19	25.80	9.63	0.08	0.12	QP
3	0.285	23.30	50.68	-27.38	13.40	9.62	0.07	0.21	Average
4	0.285	35.27	60.68	-25.41	25.37	9.62	0.07	0.21	QP
5*	0.442	32.16	47.02	-14.86	22.20	9.62	0.08	0.26	Average
6	0.442	39.07	57.02	-17.95	29.11	9.62	0.08	0.26	QP
7	0.712	27.86	46.00	-18.14	17.86	9.63	0.09	0.28	Average
8	0.712	34.99	56.00	-21.01	24.99	9.63	0.09	0.28	QP
9	9.552	24.62	50.00	-25.38	14.15	9.71	0.34	0.42	Average
10	9.552	30.39	60.00	-29.61	19.92	9.71	0.34	0.42	QP
11	19.021	31.55	50.00	-18.45	20.69	9.79	0.50	0.57	Average
12	19.021	37.15	60.00	-22.85	26.29	9.79	0.50	0.57	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).  
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).