







| Mode | UNII Band | Center Frequency (MHz) | Incumbent Frequency (MHz) | Injected (AWGN) Power (dBm) | Adjusted Power (dBm) | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | Detection Probability (%) | Limit (%) |
|----------|-----------|------------------------|---------------------------|-----------------------------|----------------------|---|---|---|---|---|---|---|---|---|----|---------------------------|-----------|
| be EHT20 | 5 | 6195 | 6194 | -65.04 | -67.785 | V | V | V | V | V | V | V | V | V | V | 100 | 90 |
| | 6 | 6475 | 6474 | -67.00 | -69.99 | V | V | V | V | V | V | V | V | V | V | 100 | 90 |
| | 7 | 6695 | 6694 | -66.11 | -68.551 | V | V | V | V | V | V | V | V | V | V | 100 | 90 |
| | 8 | 6995 | 6994 | -66.19 | -68.838 | V | V | V | V | V | V | V | V | V | V | 100 | 90 |



| Mode | UNII Band | Center Frequency (MHz) | Incumbent Frequency (MHz) | Injected (AWGN) Power (dBm) | Adjusted Power (dBm) | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | Detection Probability (%) | Limit (%) | |
|-----------|-----------|------------------------|---------------------------|-----------------------------|----------------------|---|---|---|---|---|---|---|---|---|----|---------------------------|-----------|----|
| be EHT320 | 5 | 6105 | 5950 | -66.26 | -69.005 | V | V | V | V | V | V | V | X | V | V | 90 | 90 | |
| | | | 6100 | -67.1 | -69.845 | V | V | V | V | V | V | V | V | V | V | V | 100 | 90 |
| | | | 6260 | -67.62 | -70.365 | V | V | V | V | V | V | V | V | V | V | V | 100 | 90 |
| | 6 / 7 | 6585 | 6430 | -69.01 | -71.451 | V | V | V | V | V | V | V | V | V | V | V | 100 | 90 |
| | | | 6580 | -68.65 | -71.091 | V | V | V | X | V | V | V | V | V | V | V | 90 | 90 |
| | | | 6740 | -67.96 | -70.401 | V | V | V | V | V | V | V | V | V | V | V | 100 | 90 |
| | 7 / 8 | 6905 | 6750 | -69.43 | -71.871 | V | V | V | V | V | V | V | V | V | V | V | 100 | 90 |
| | | | 6900 | -69.15 | -71.591 | V | V | V | V | V | V | V | V | V | V | V | 100 | 90 |
| | | | 7060 | -68.91 | -71.351 | V | V | V | V | V | V | V | V | V | V | V | 100 | 90 |







Test plot of Incumbent signal

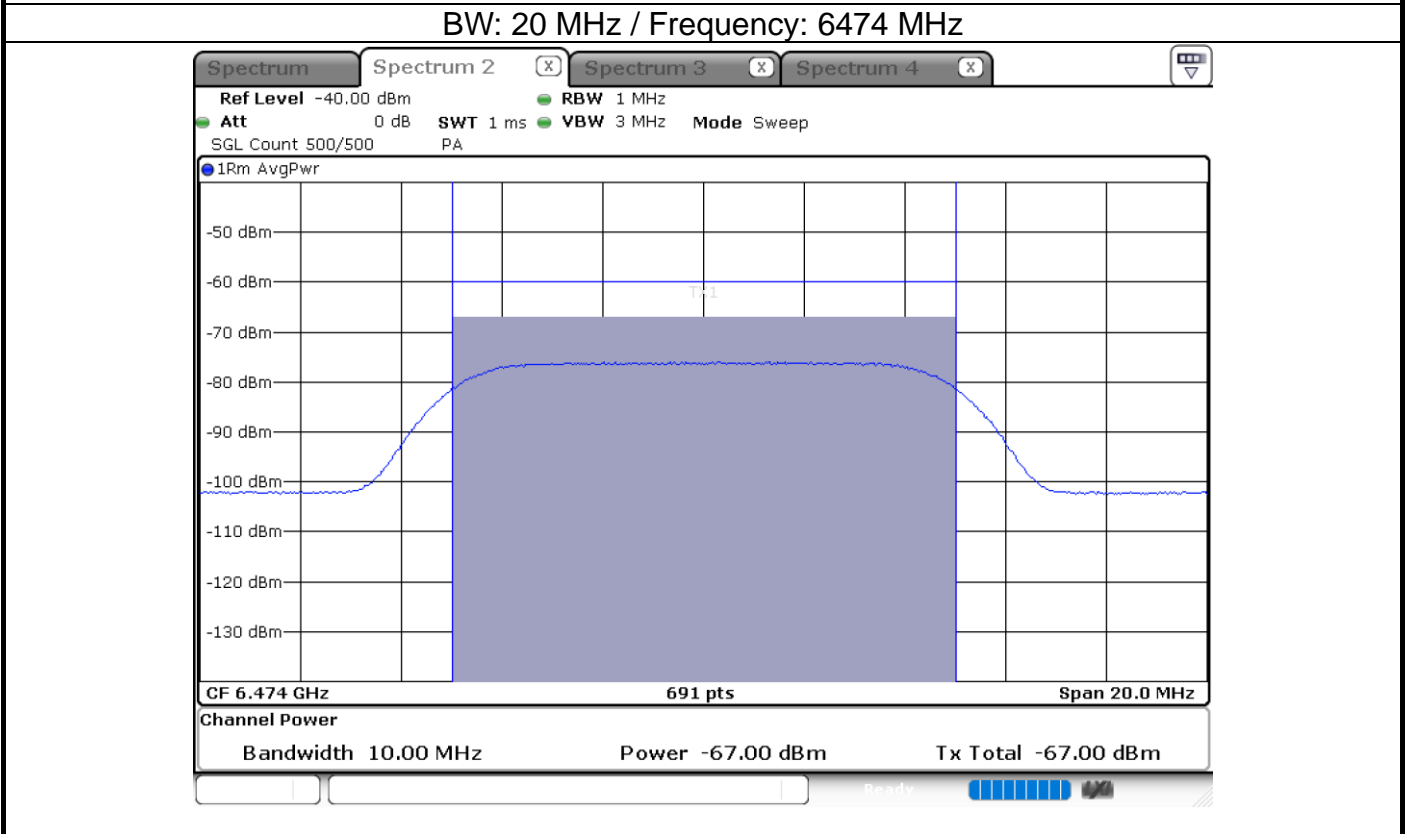
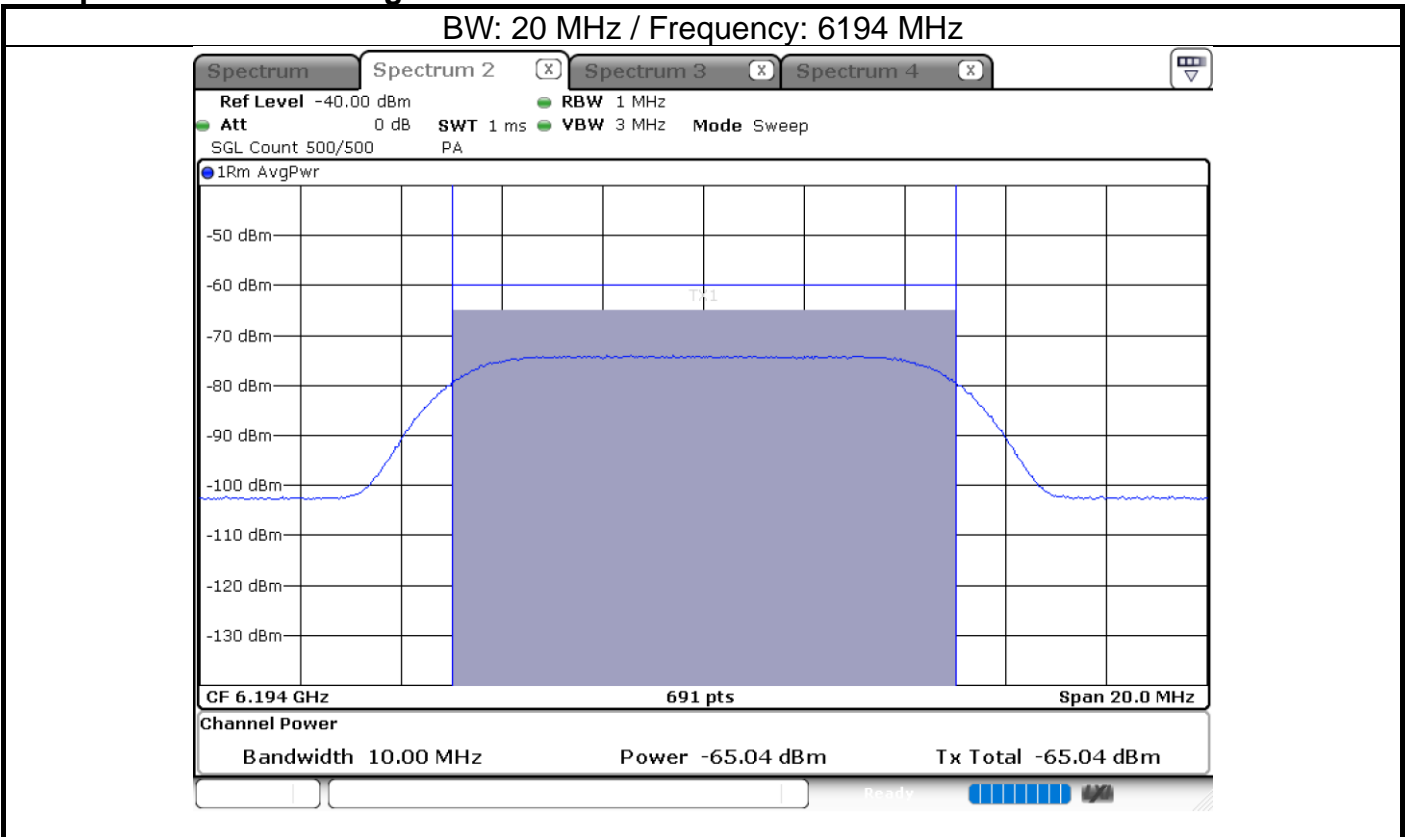


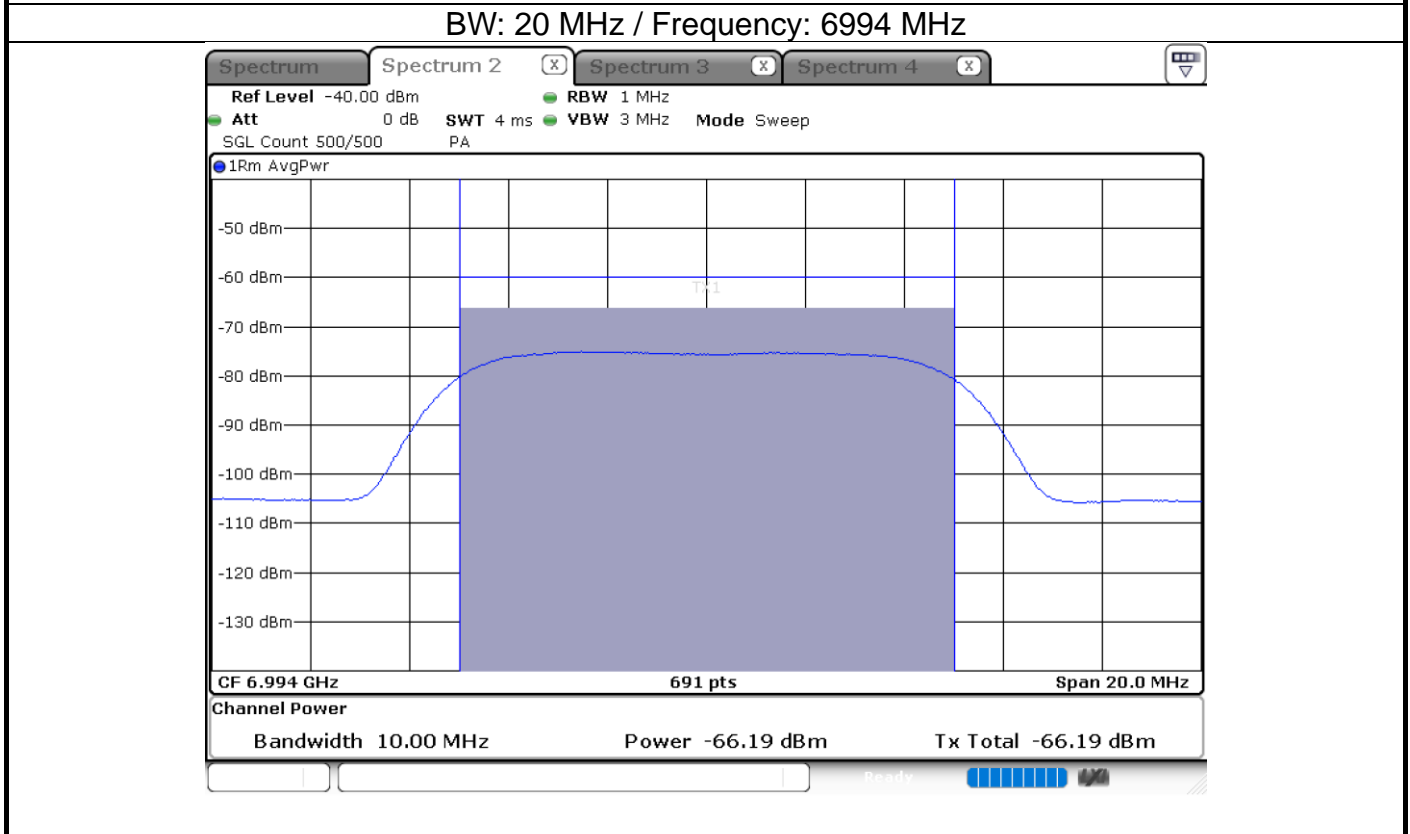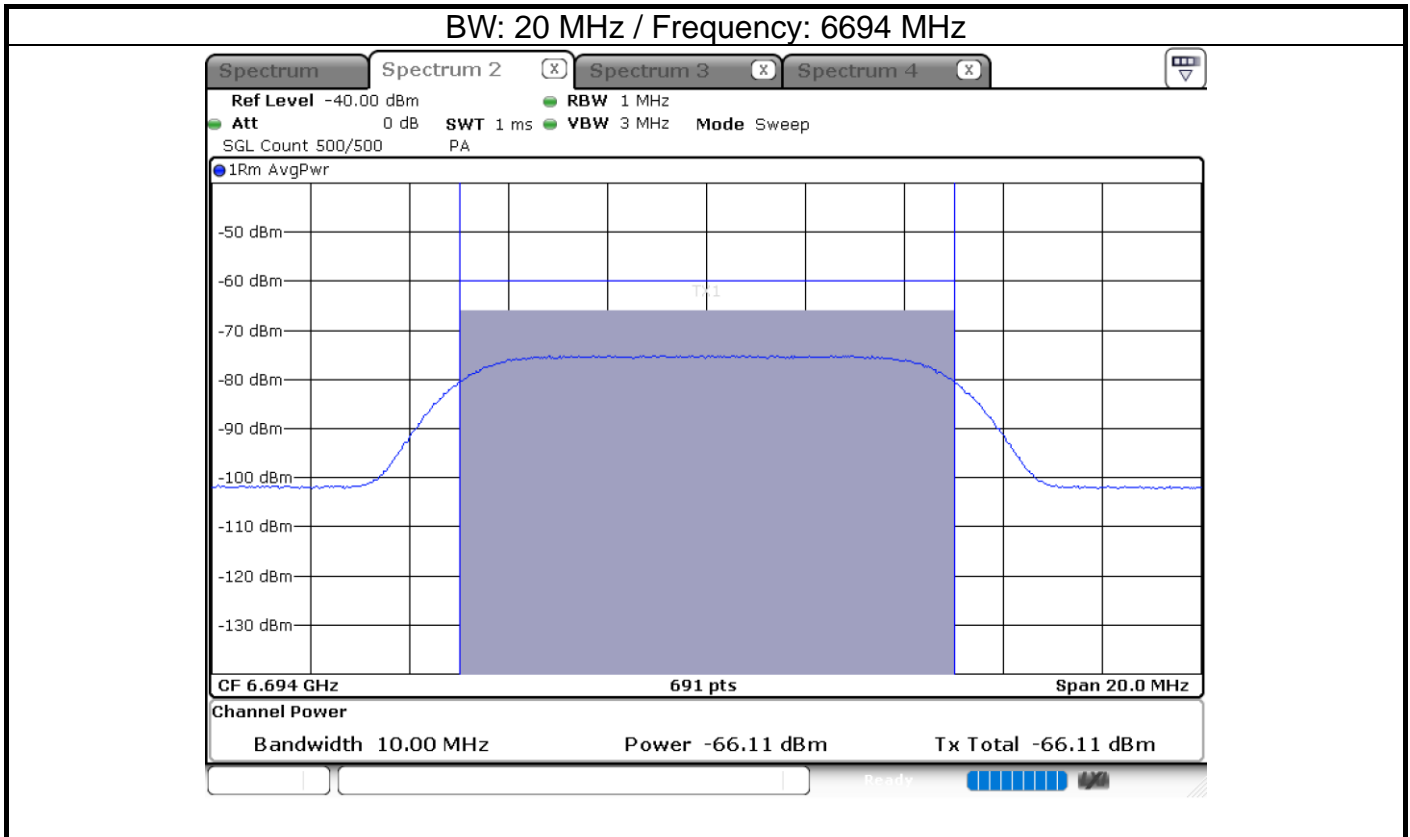


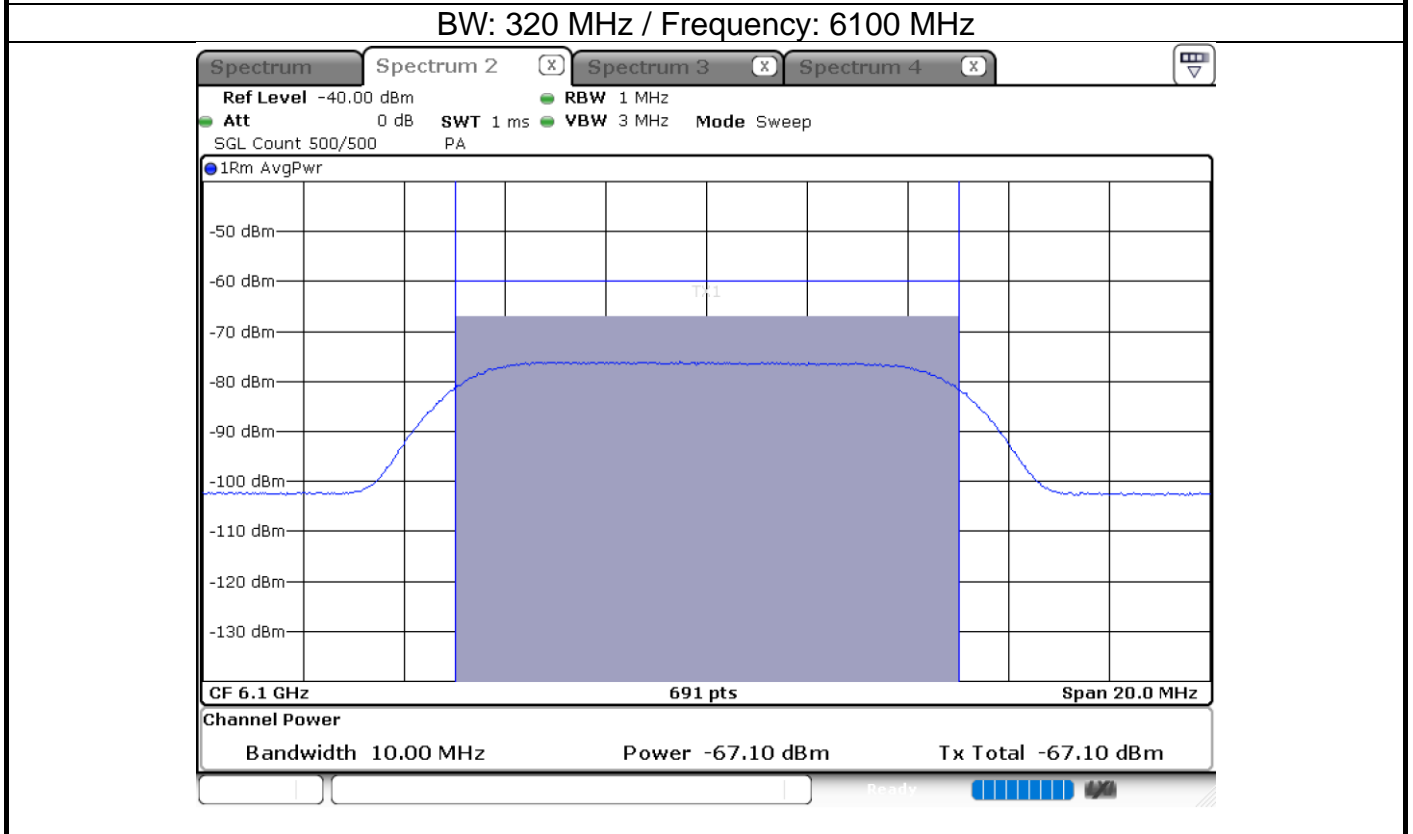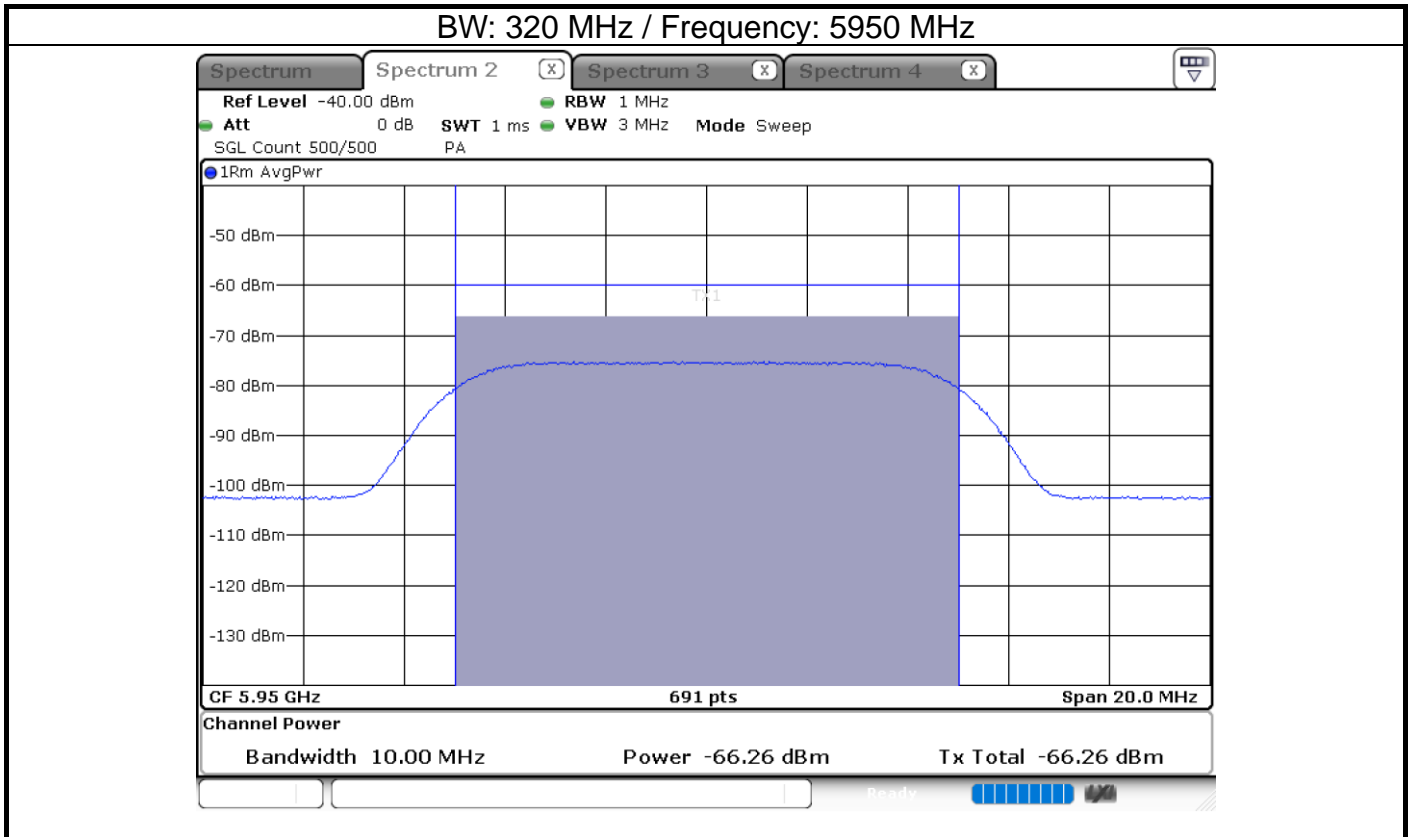

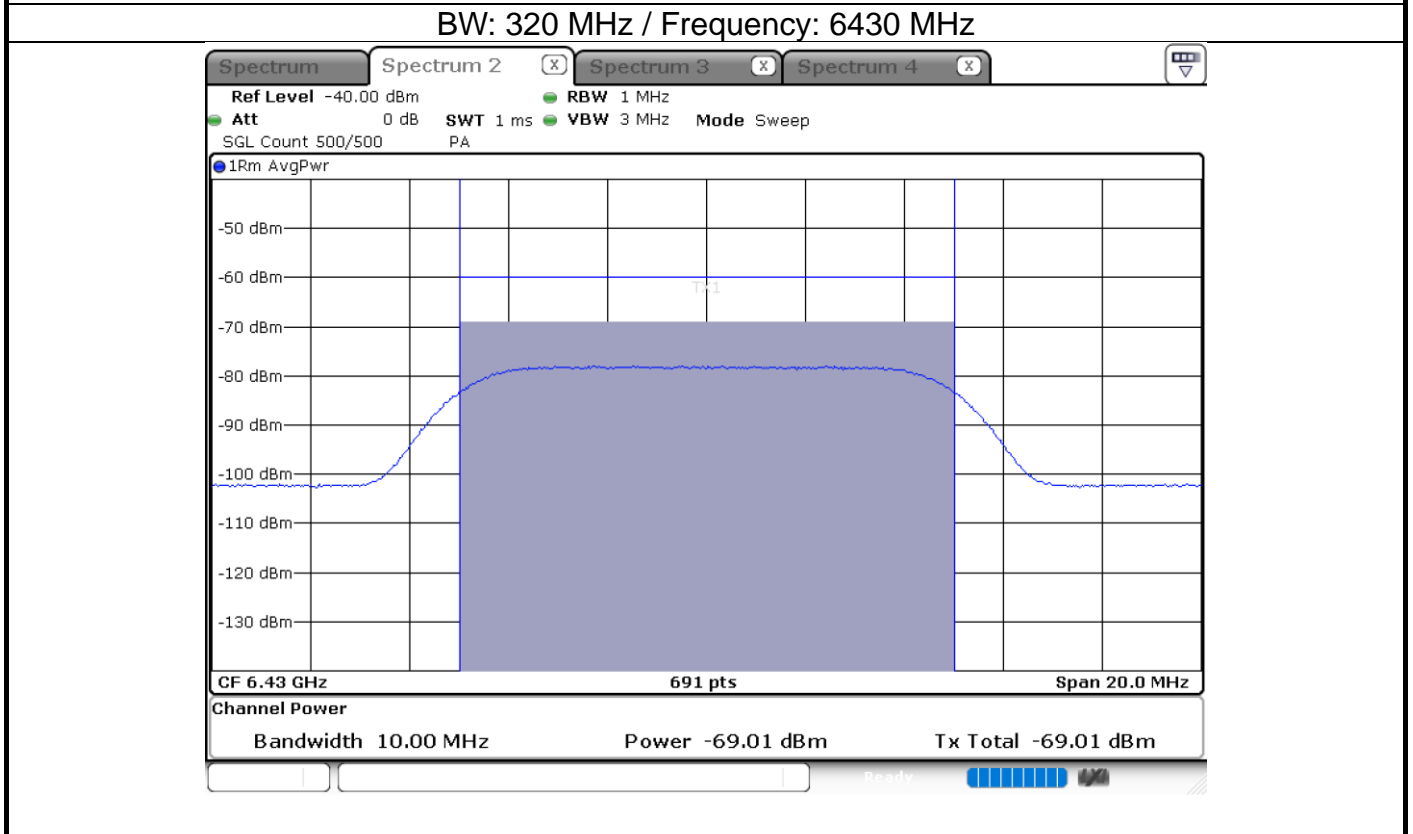
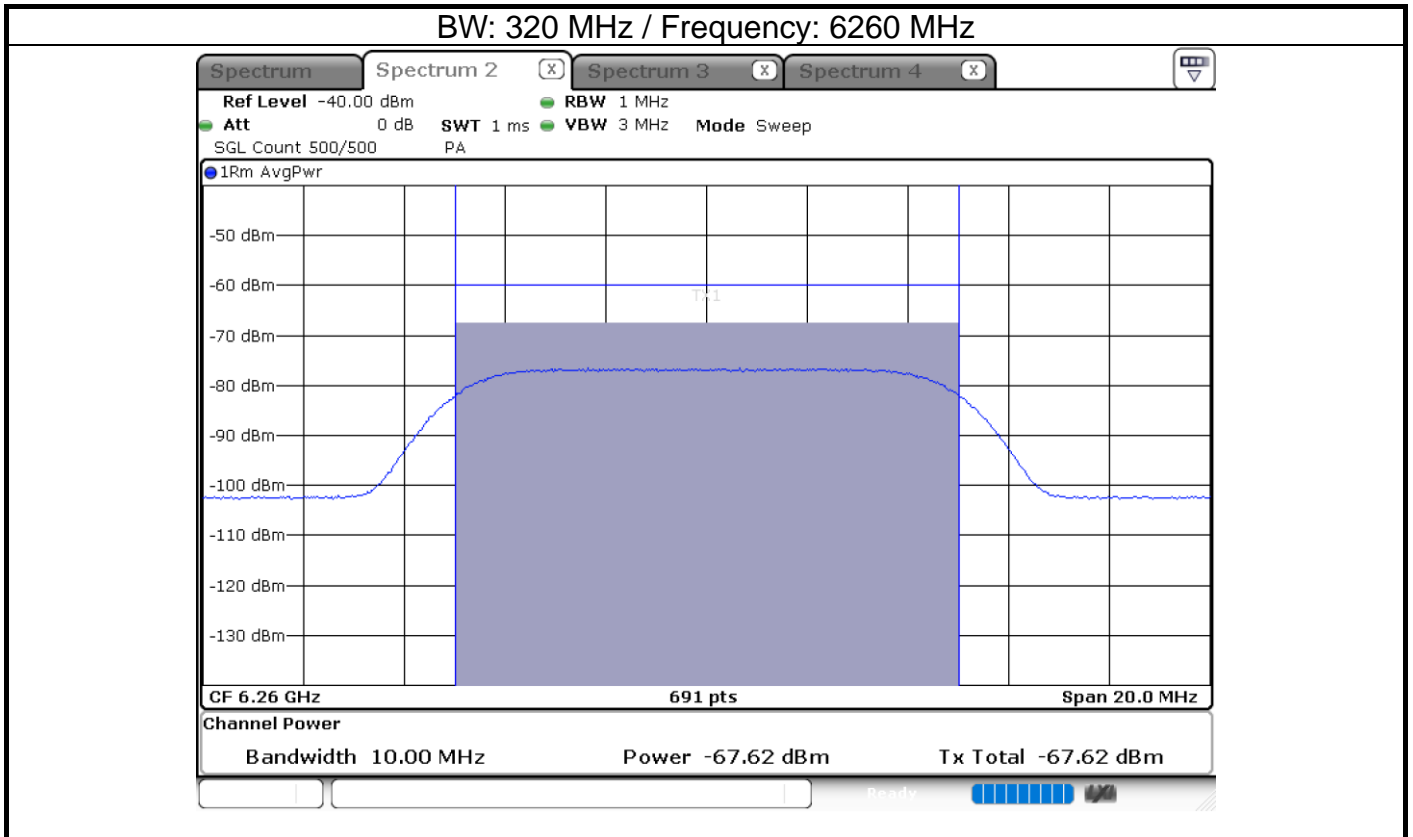


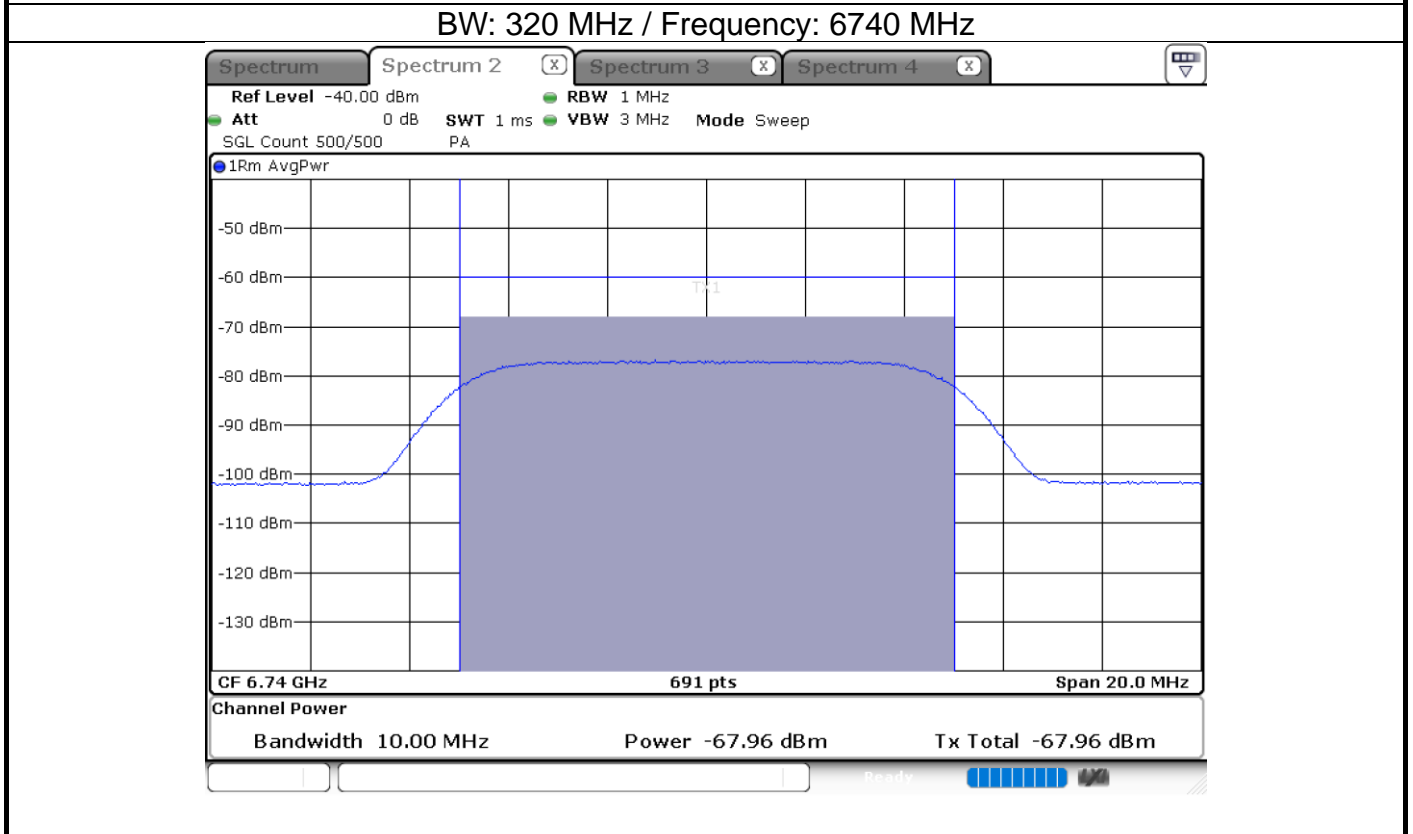
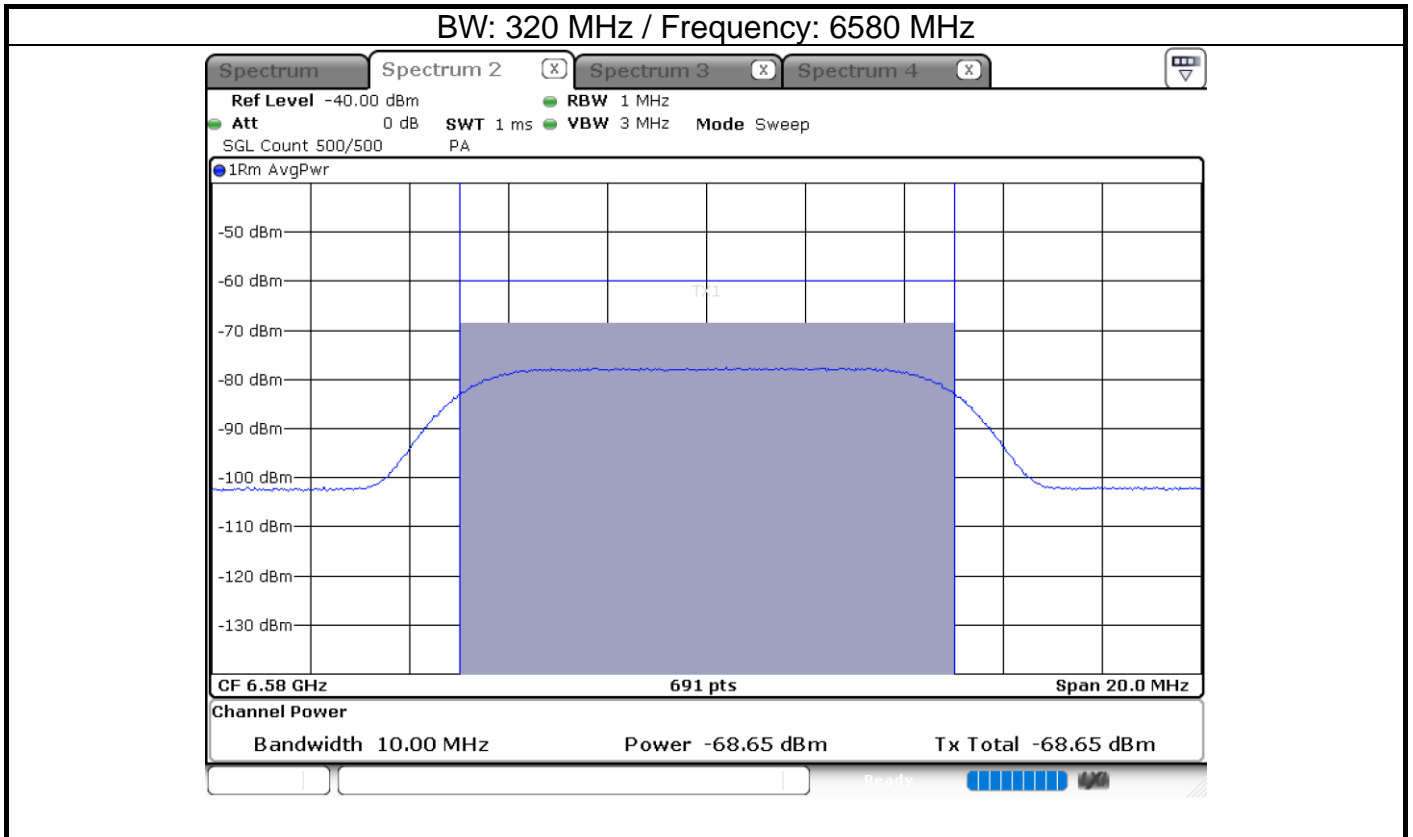


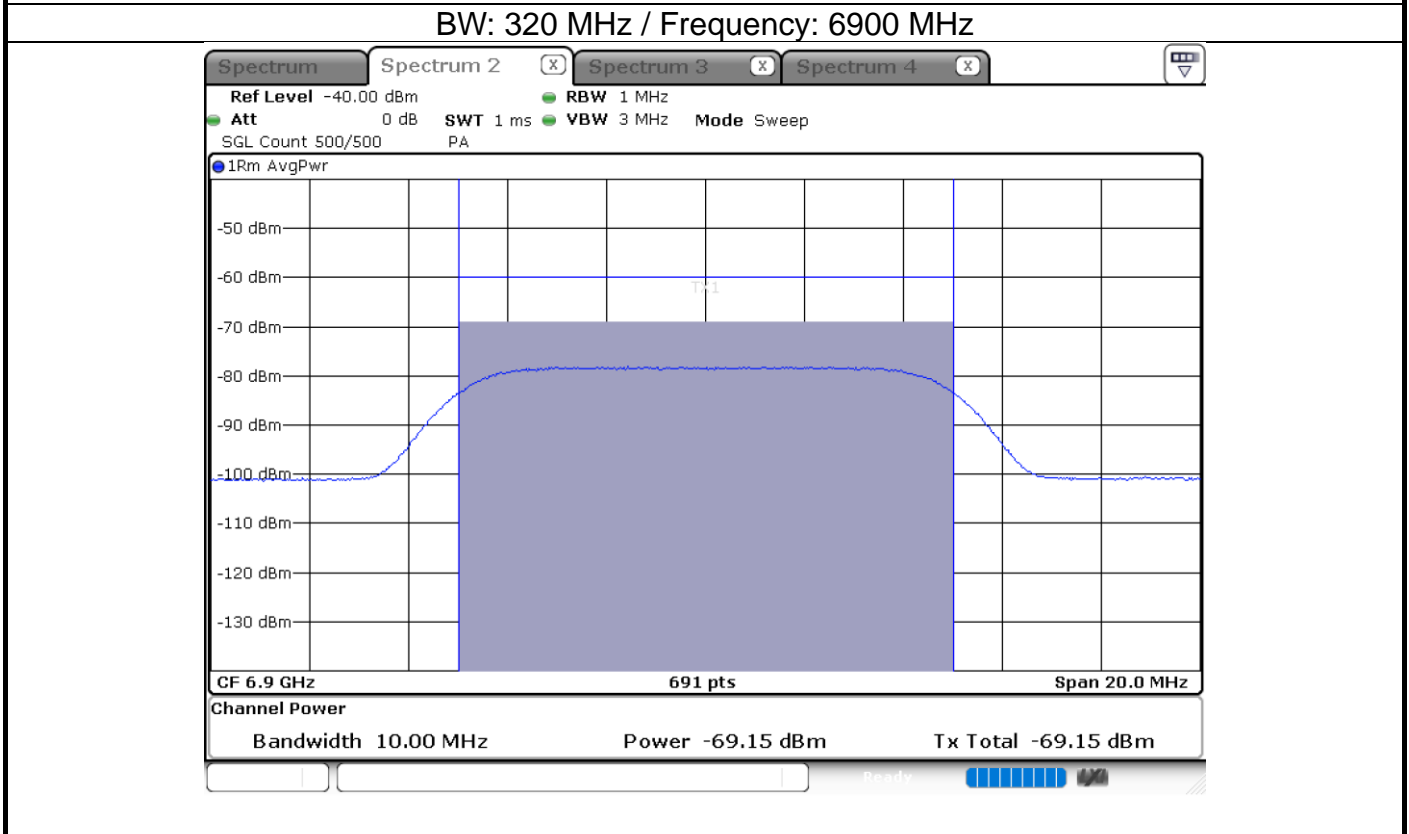
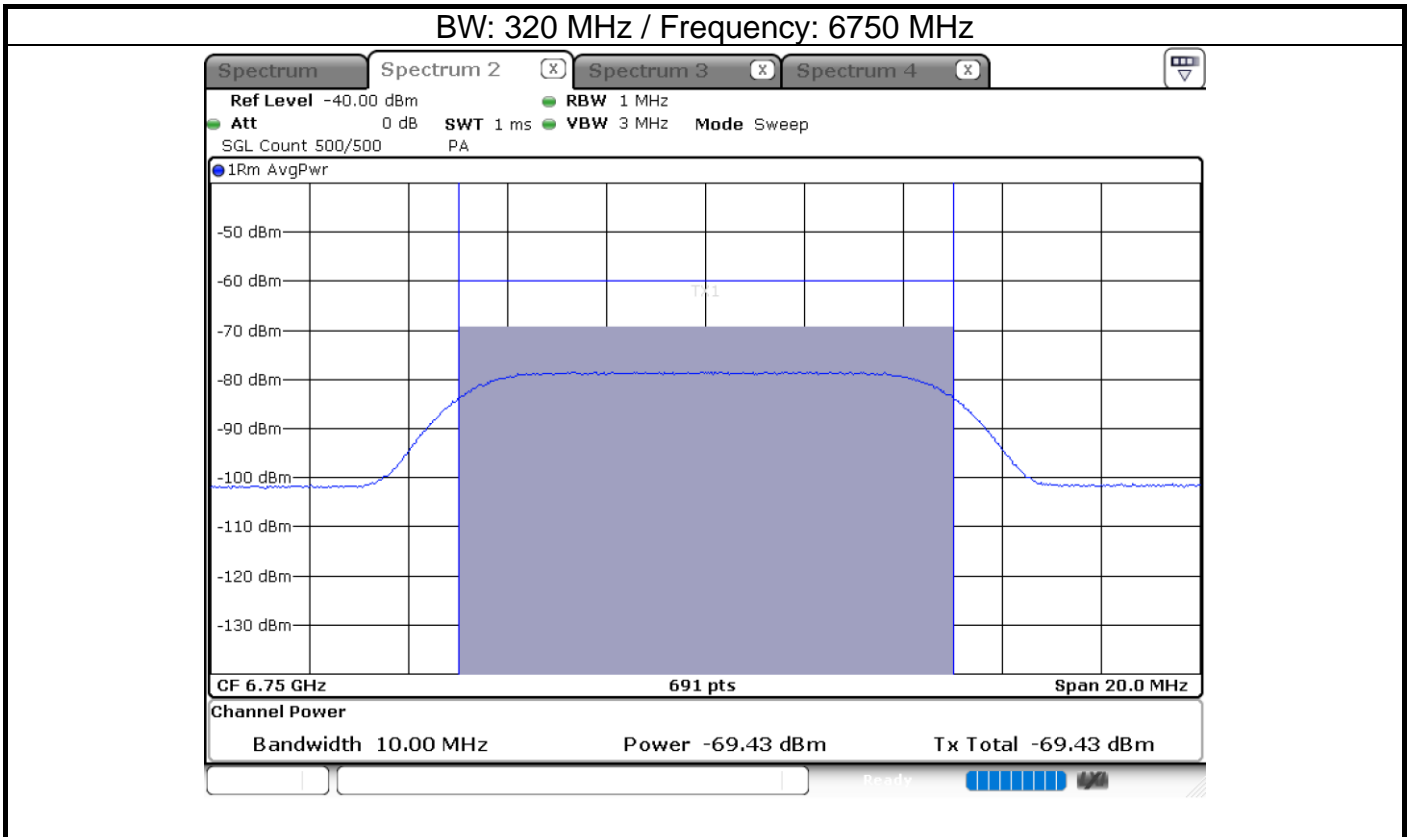


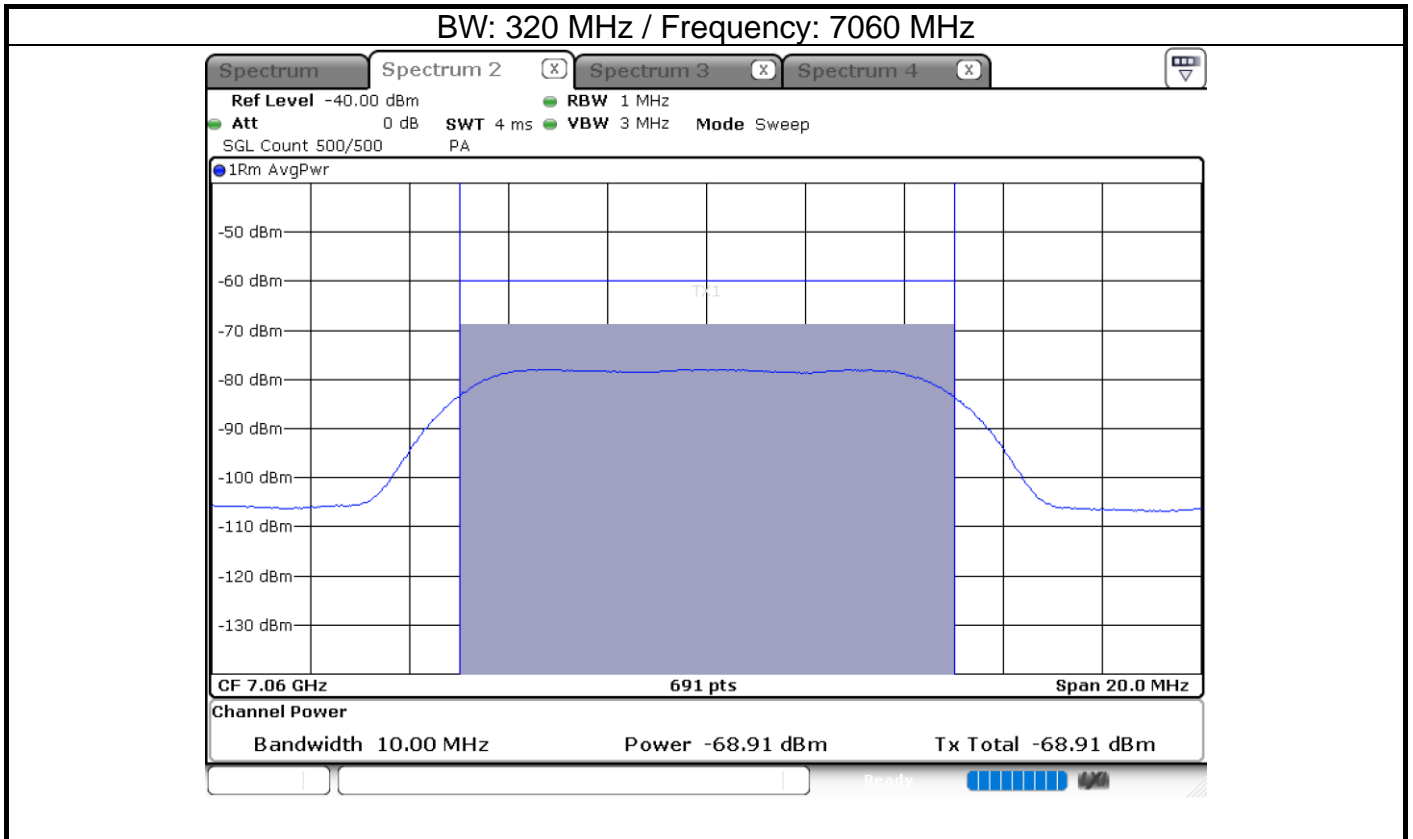


Test plot of Contention Based Protocol EUT Normal transmission

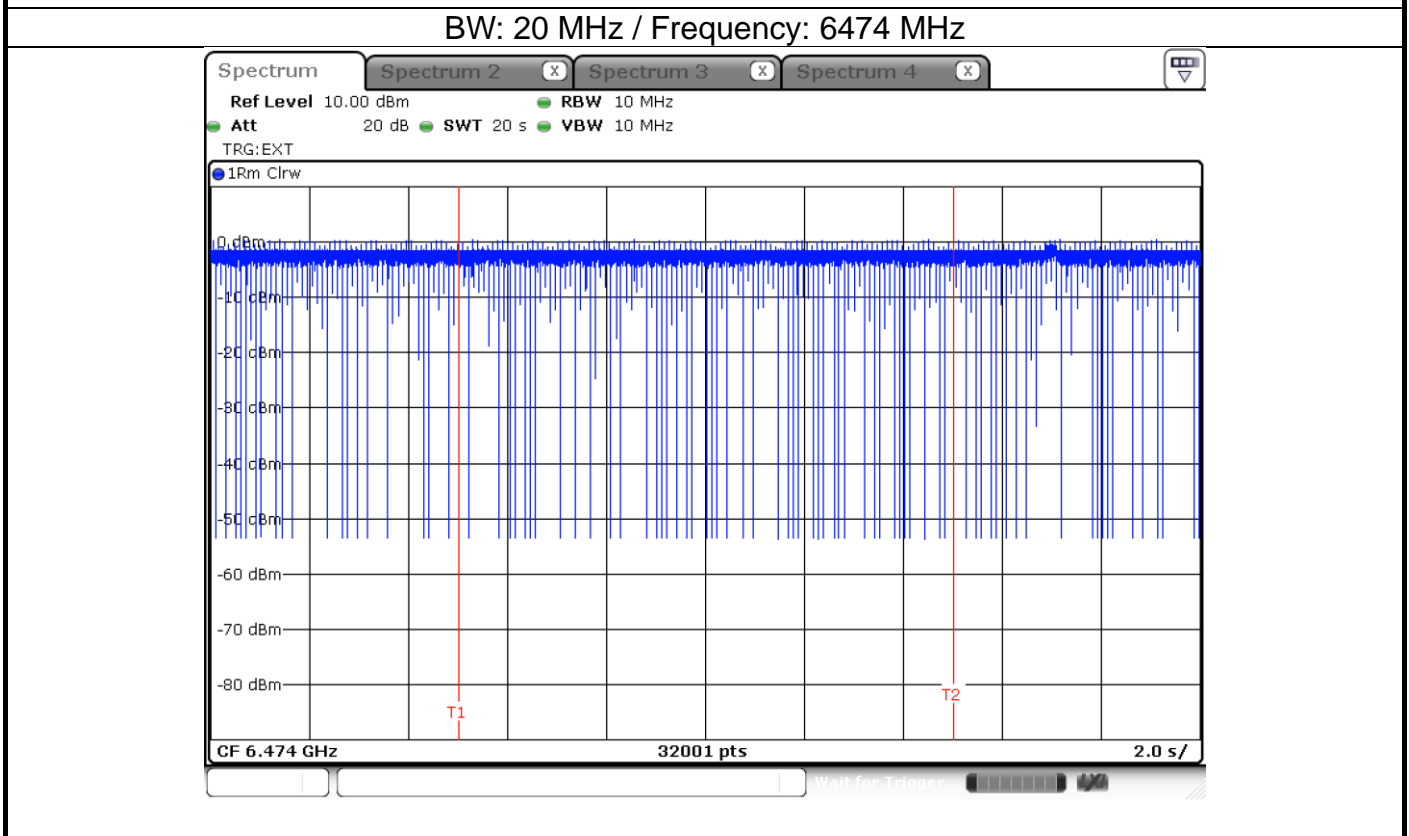
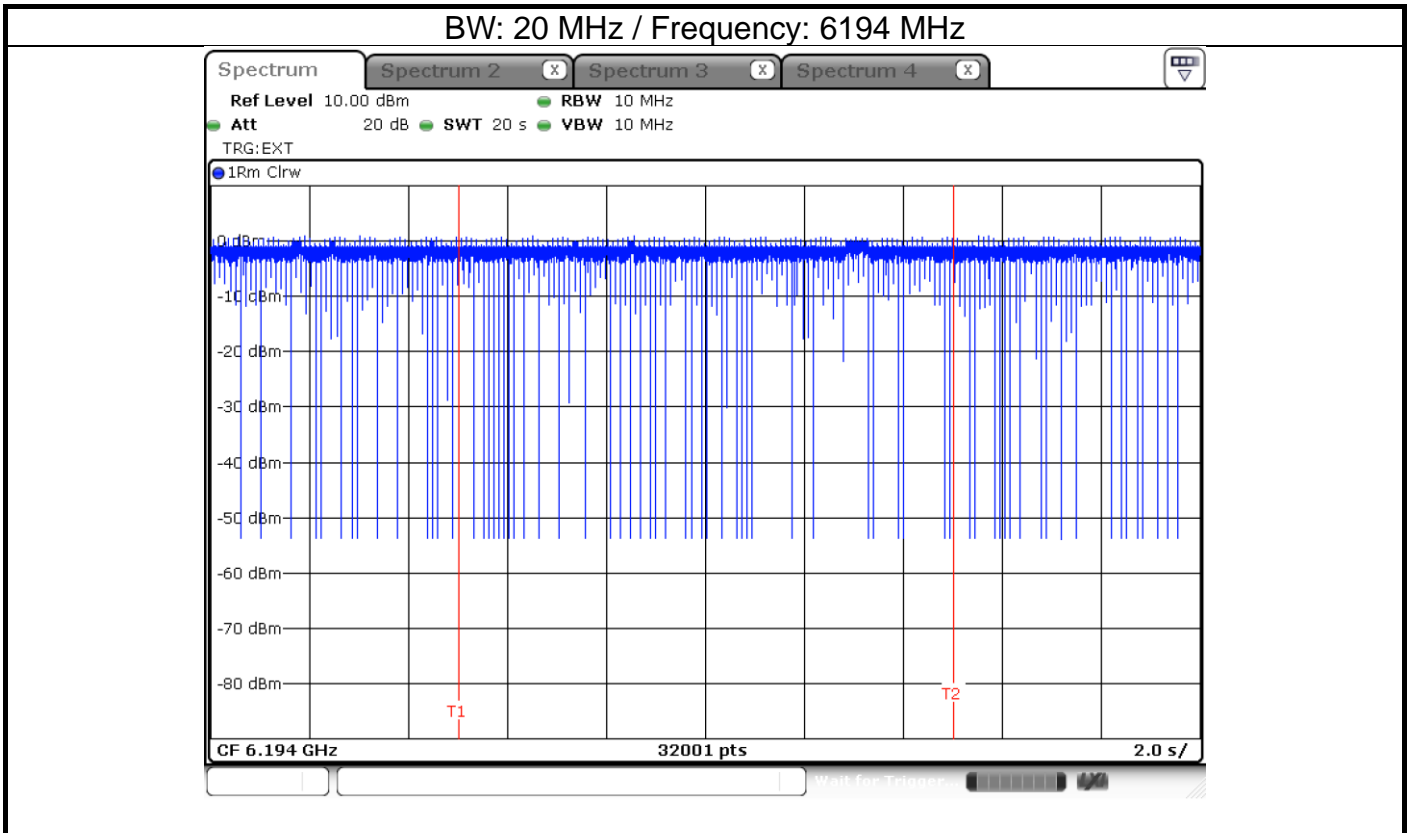


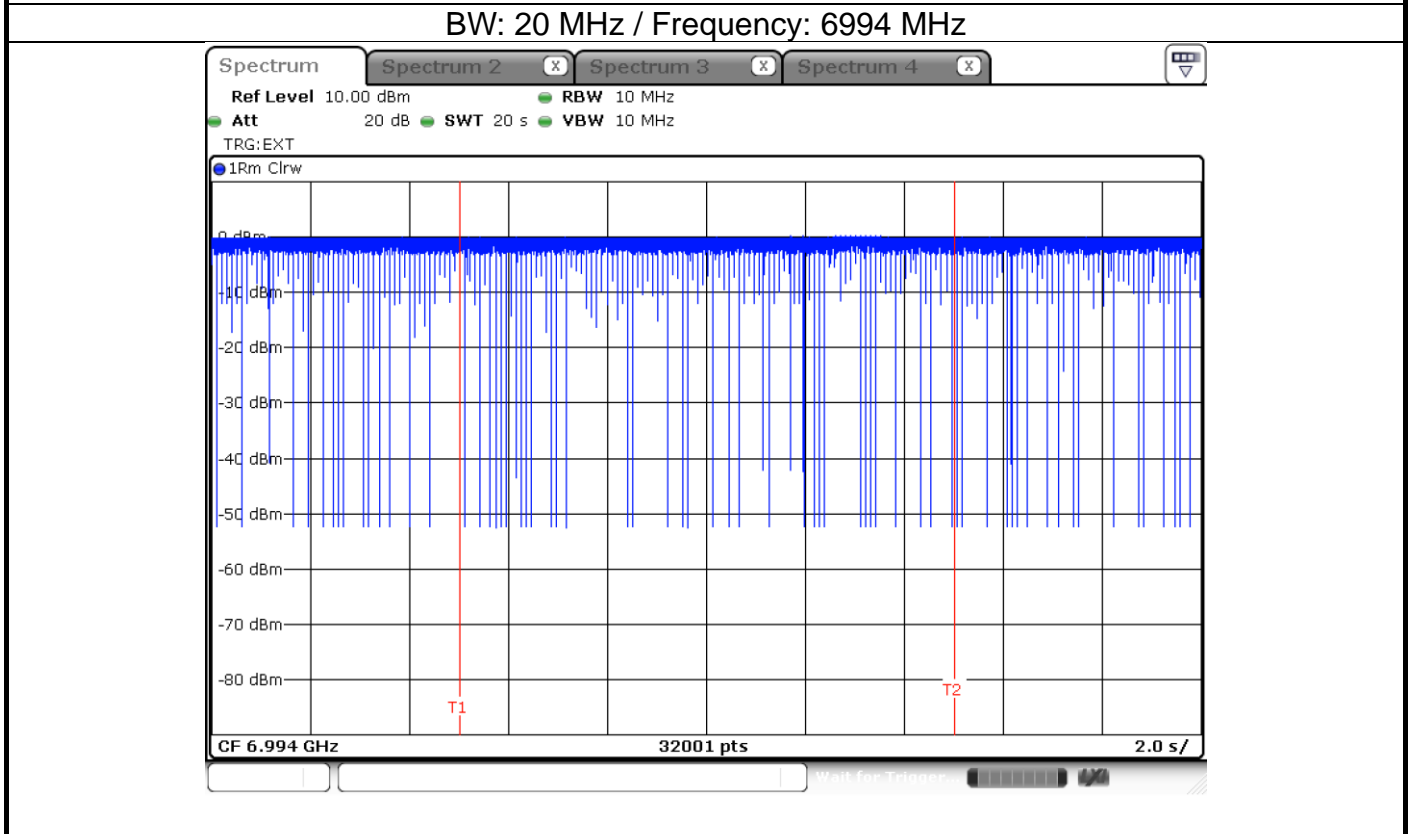
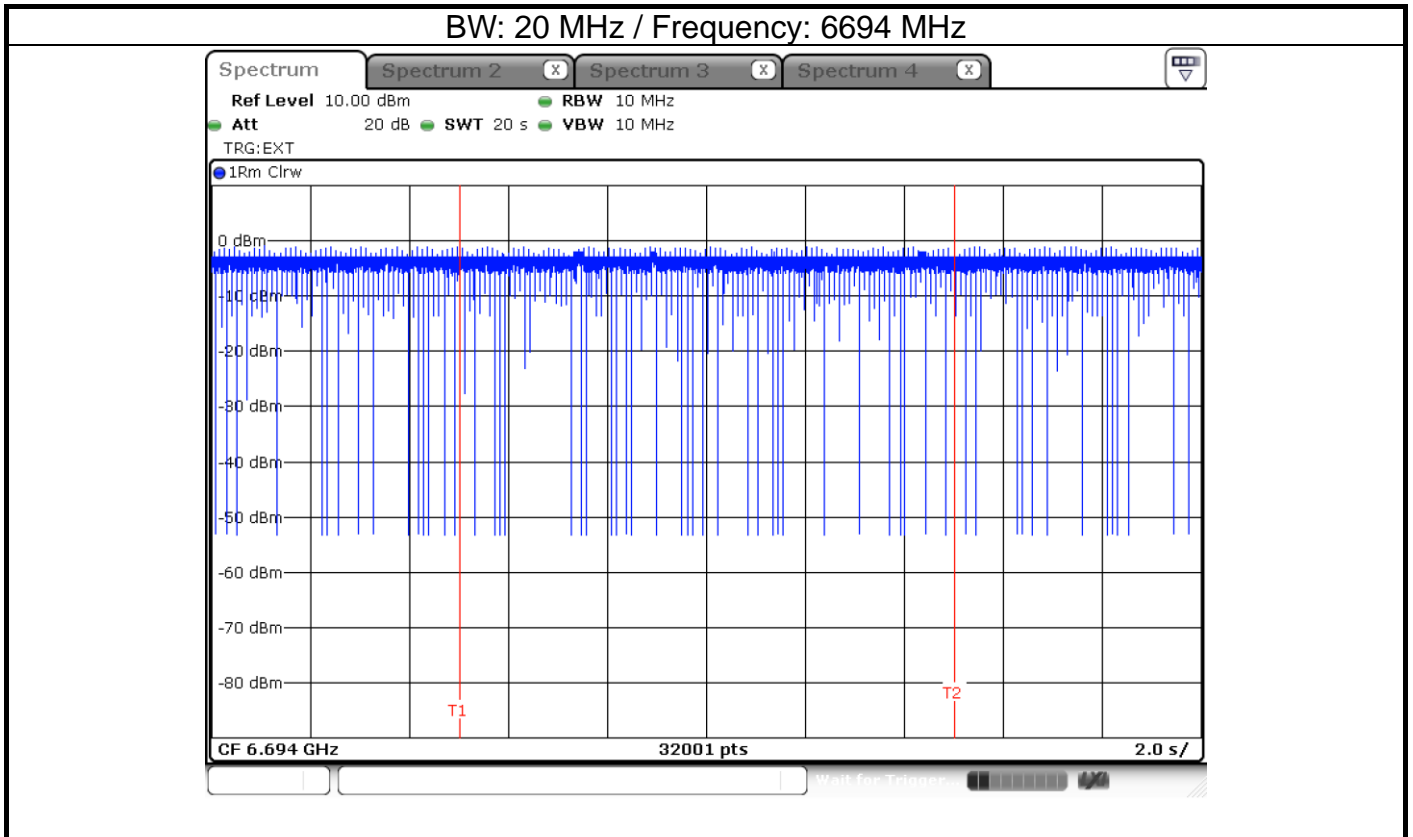


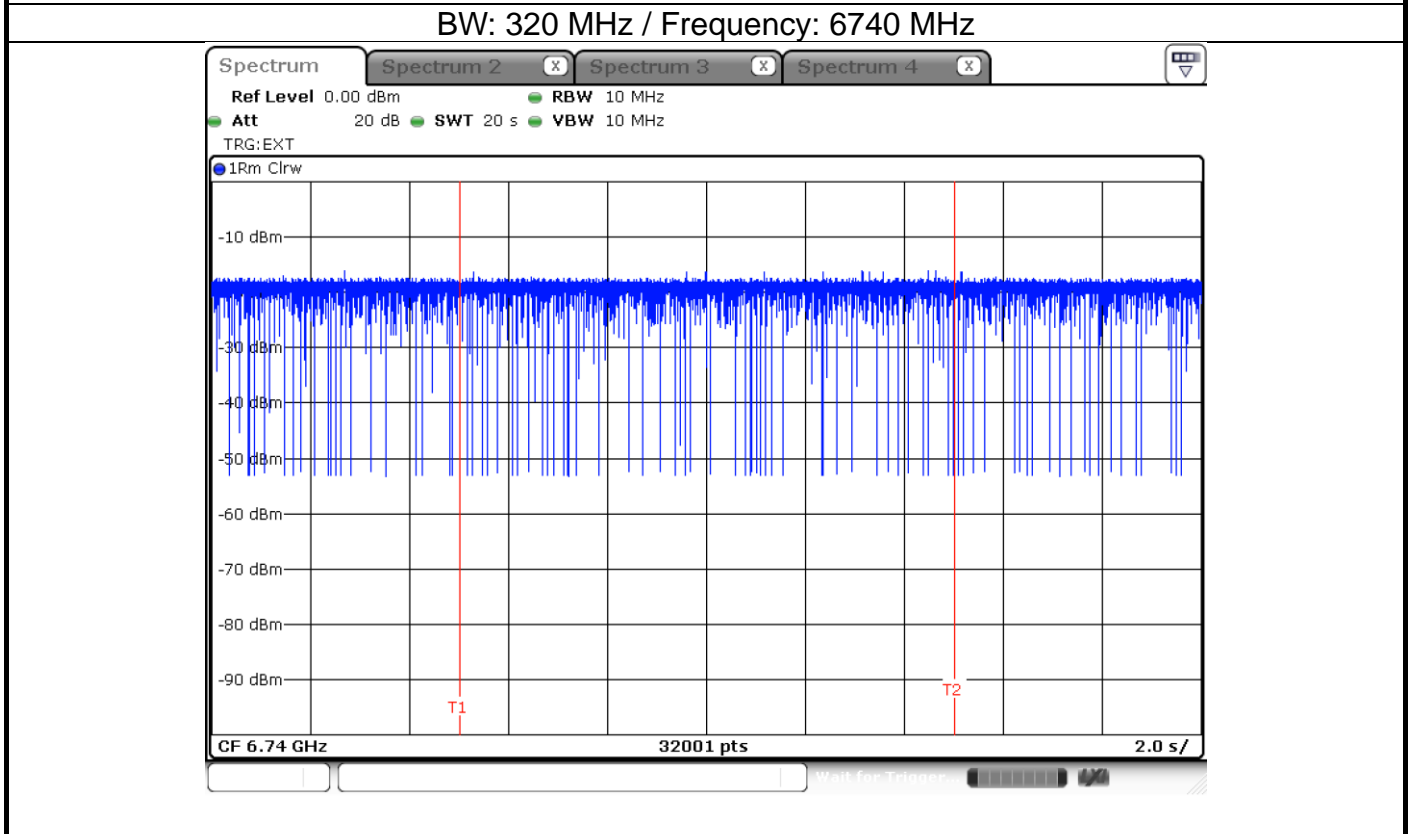
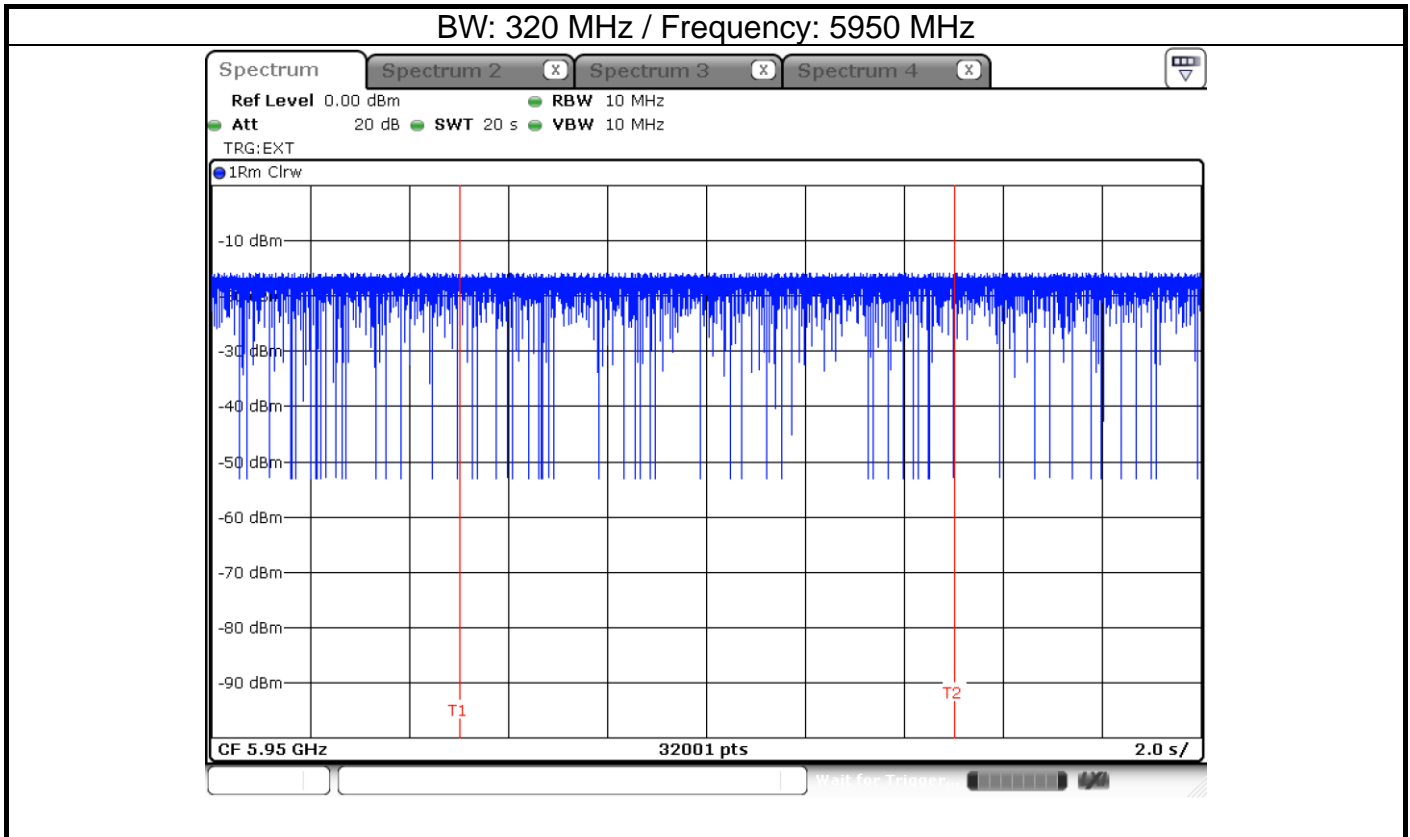


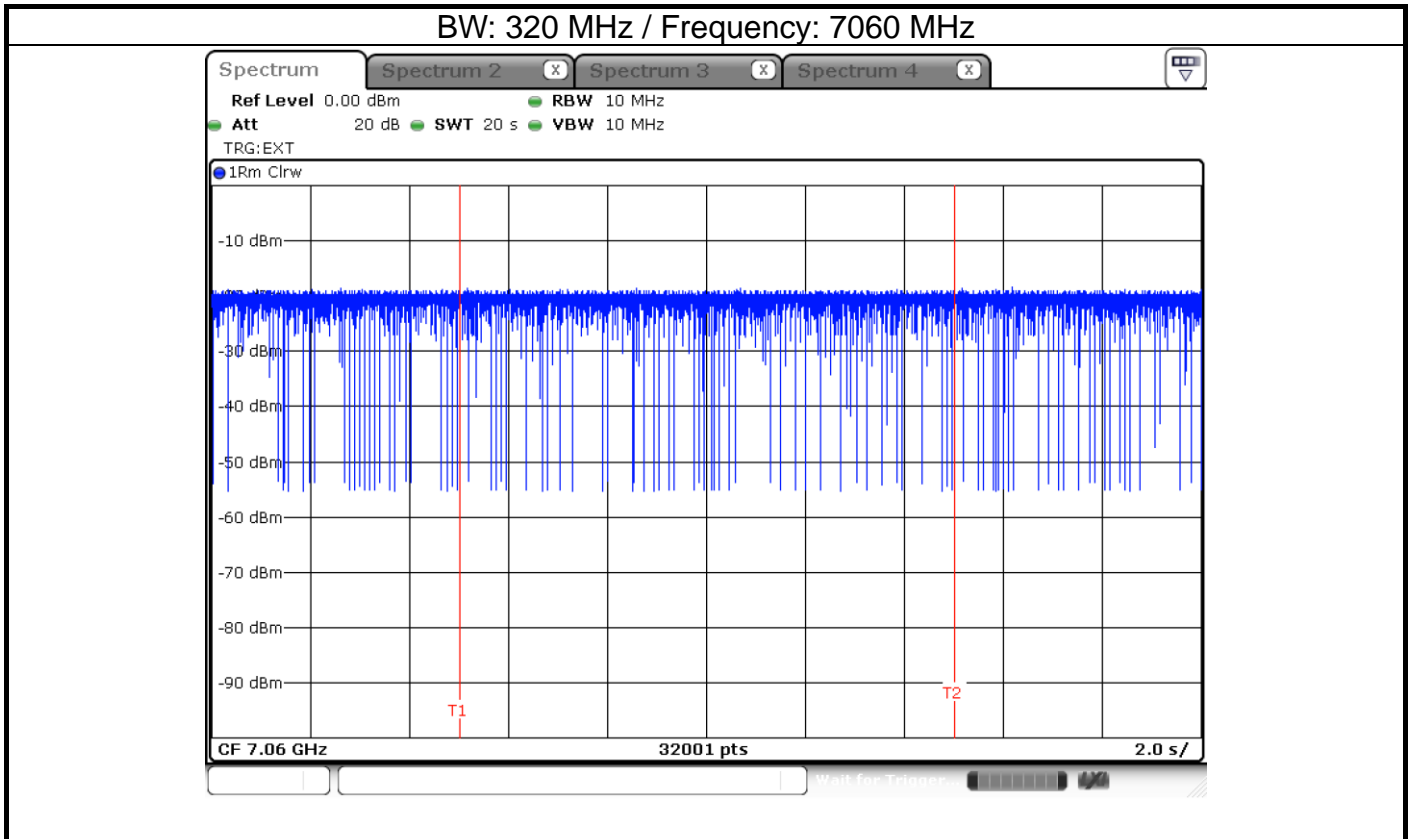


EUT Minimal transmission

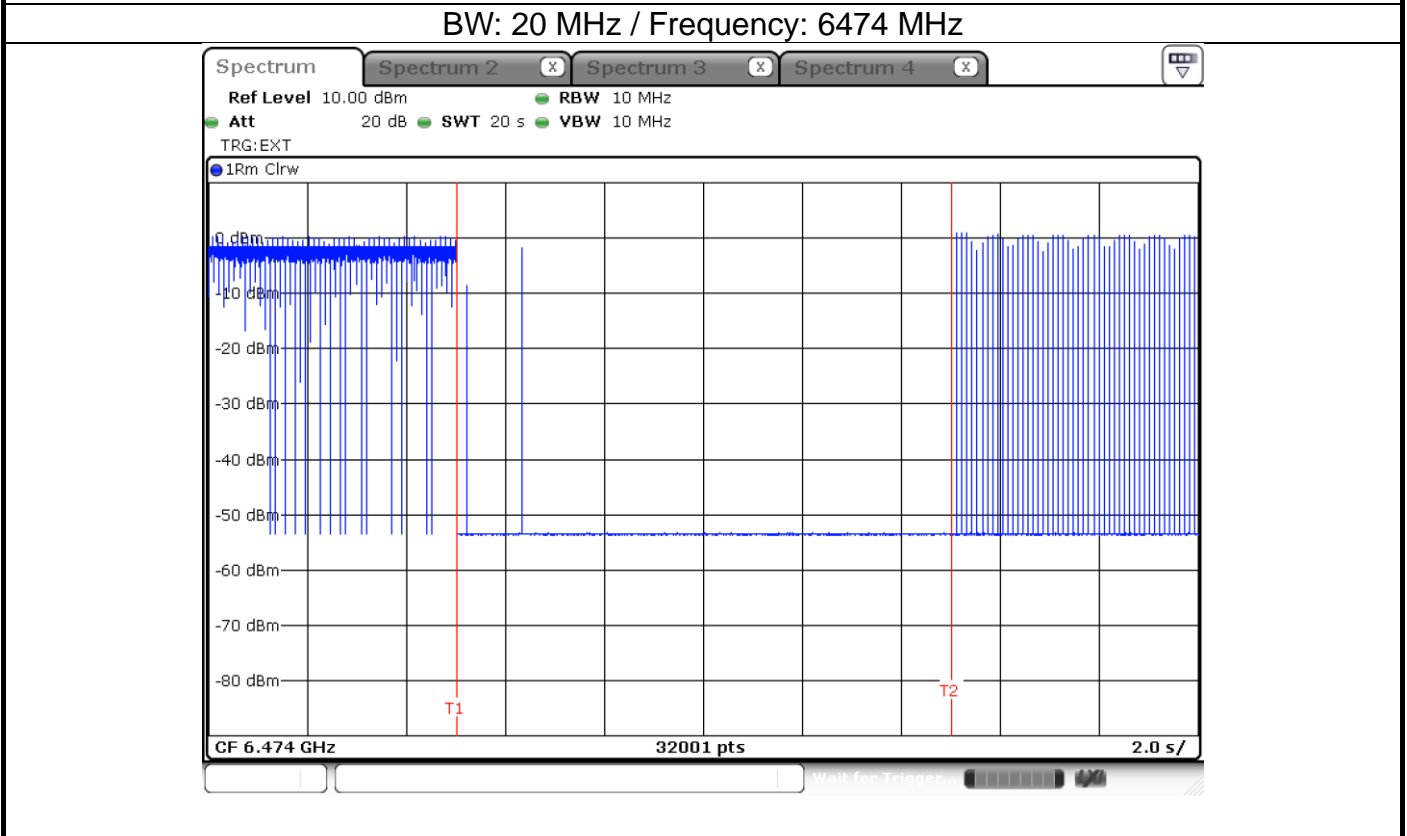
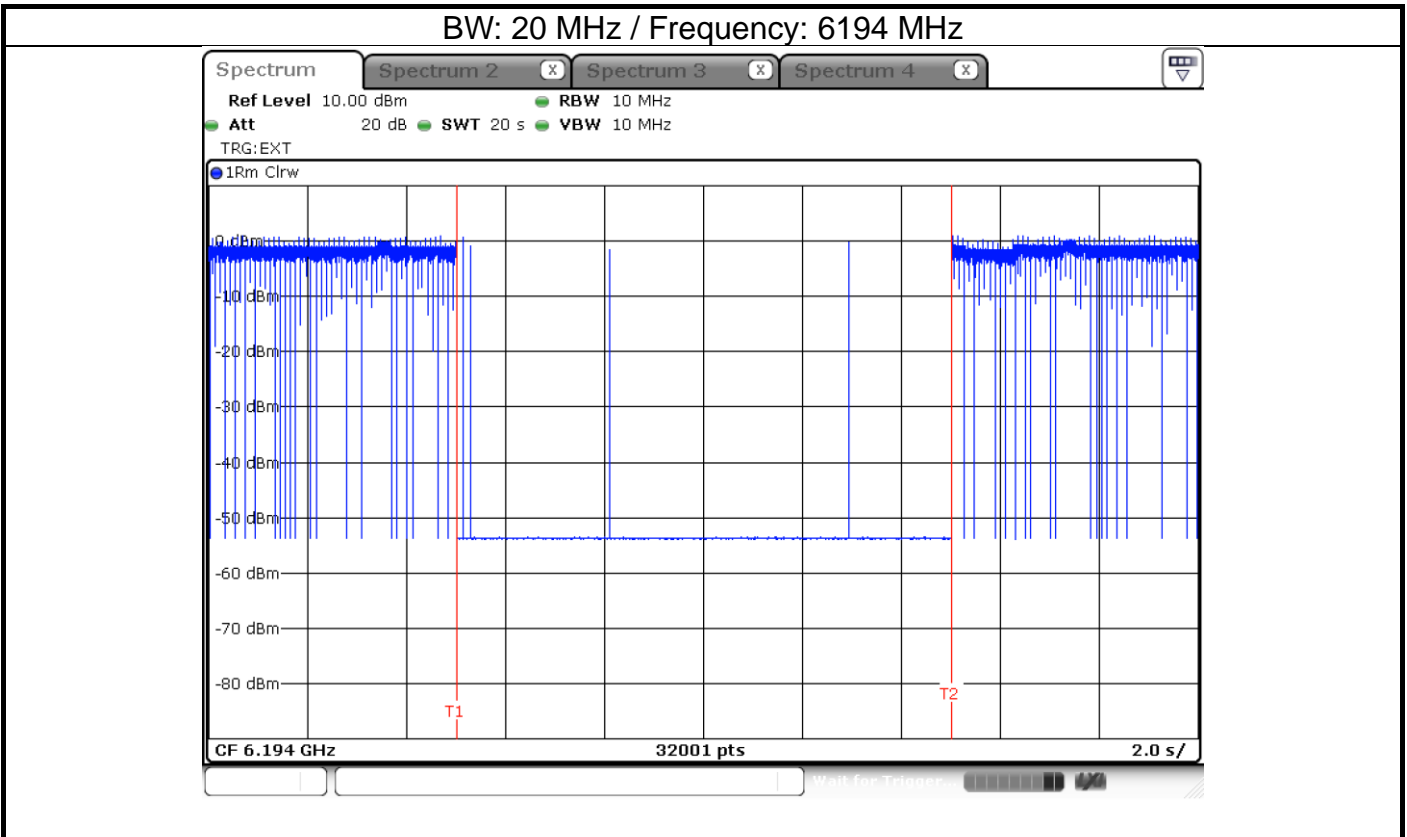


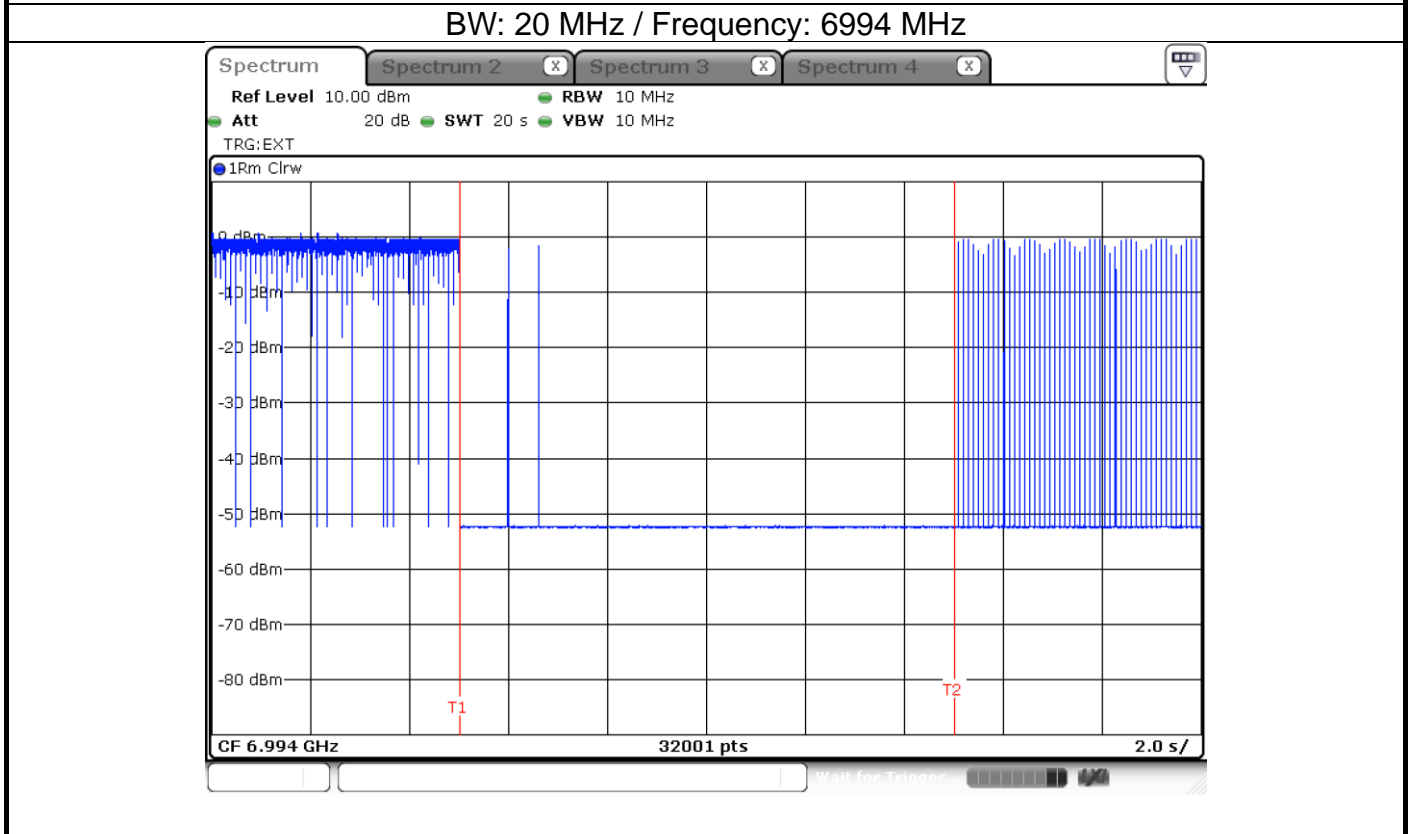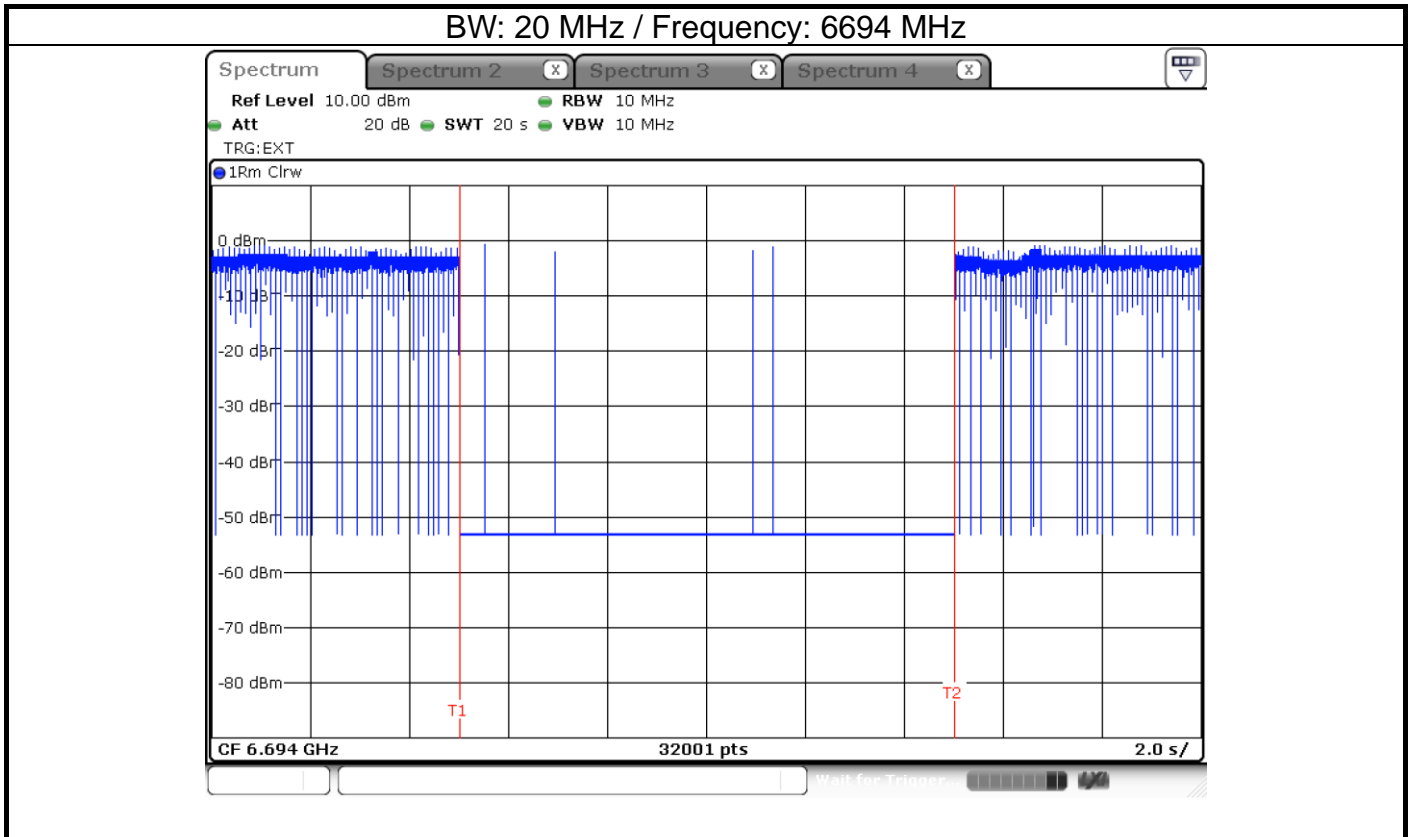

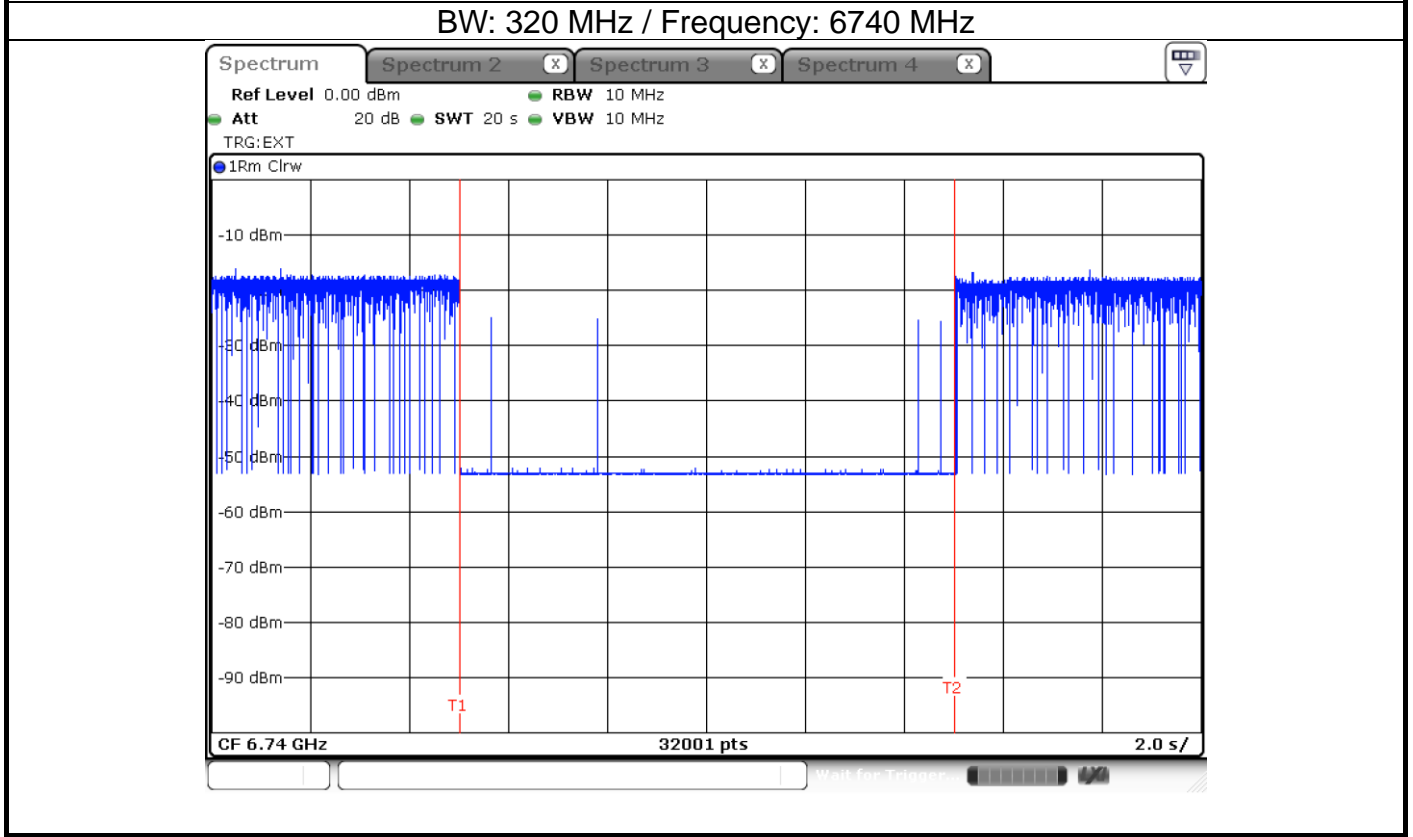
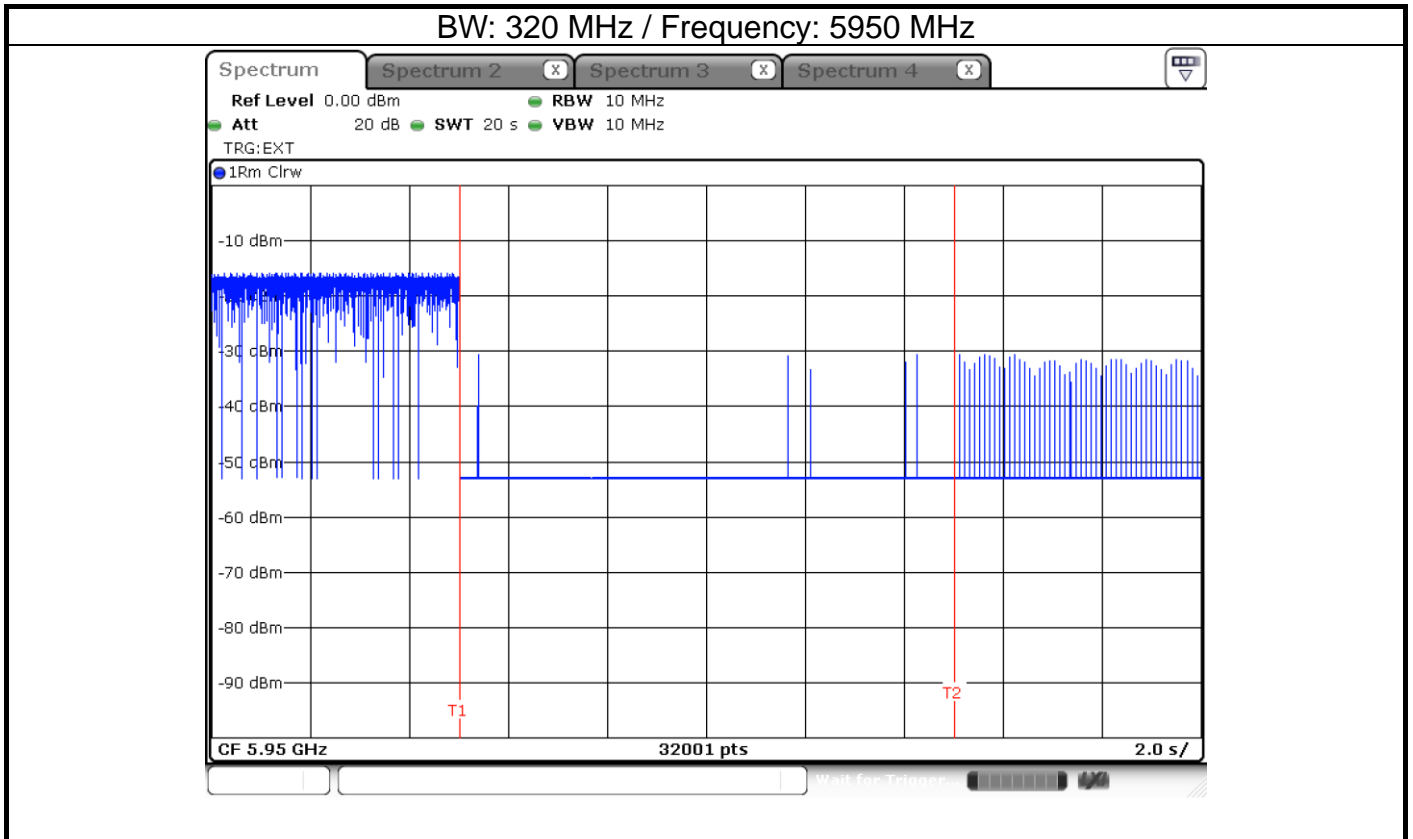


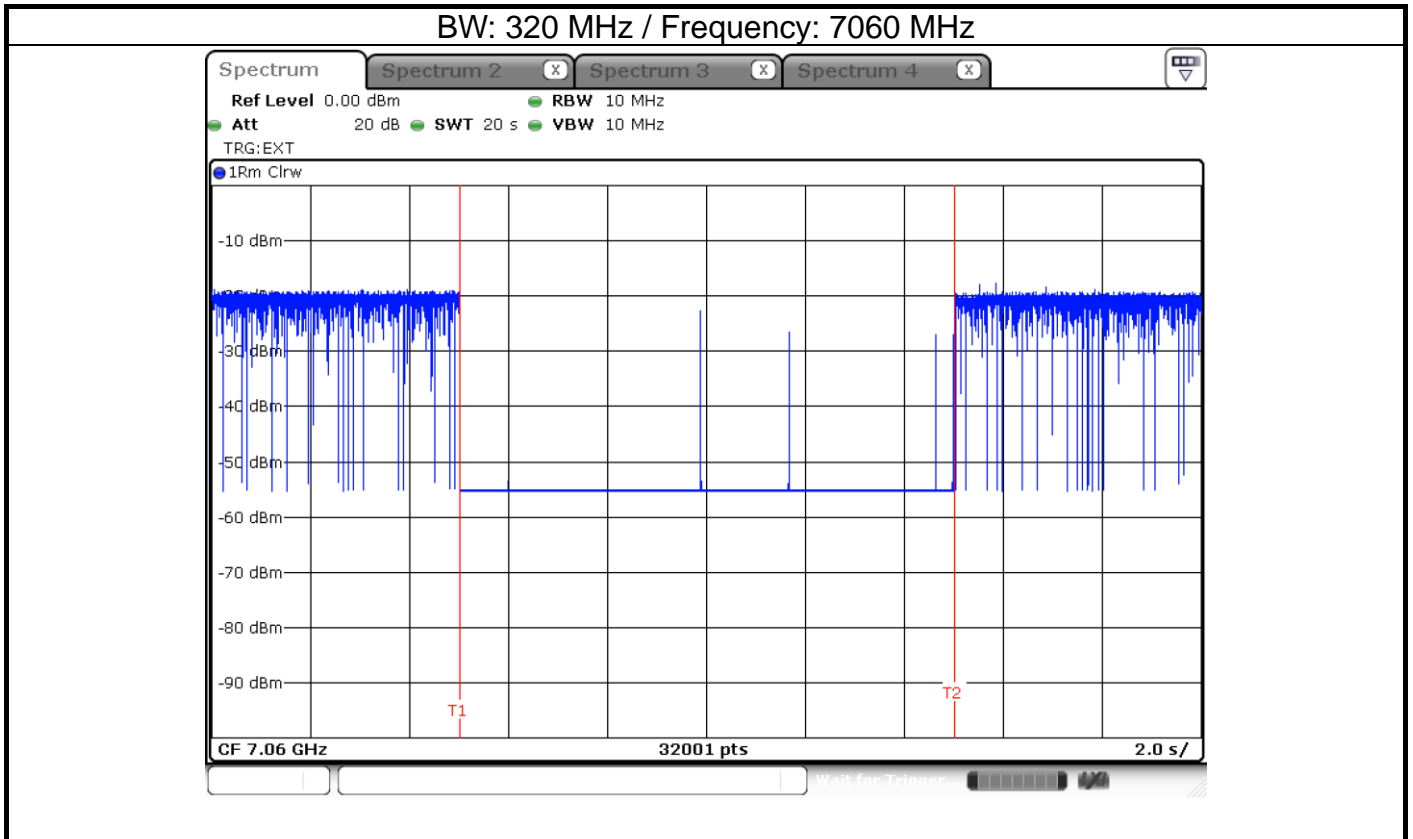



EUT ceased transmission

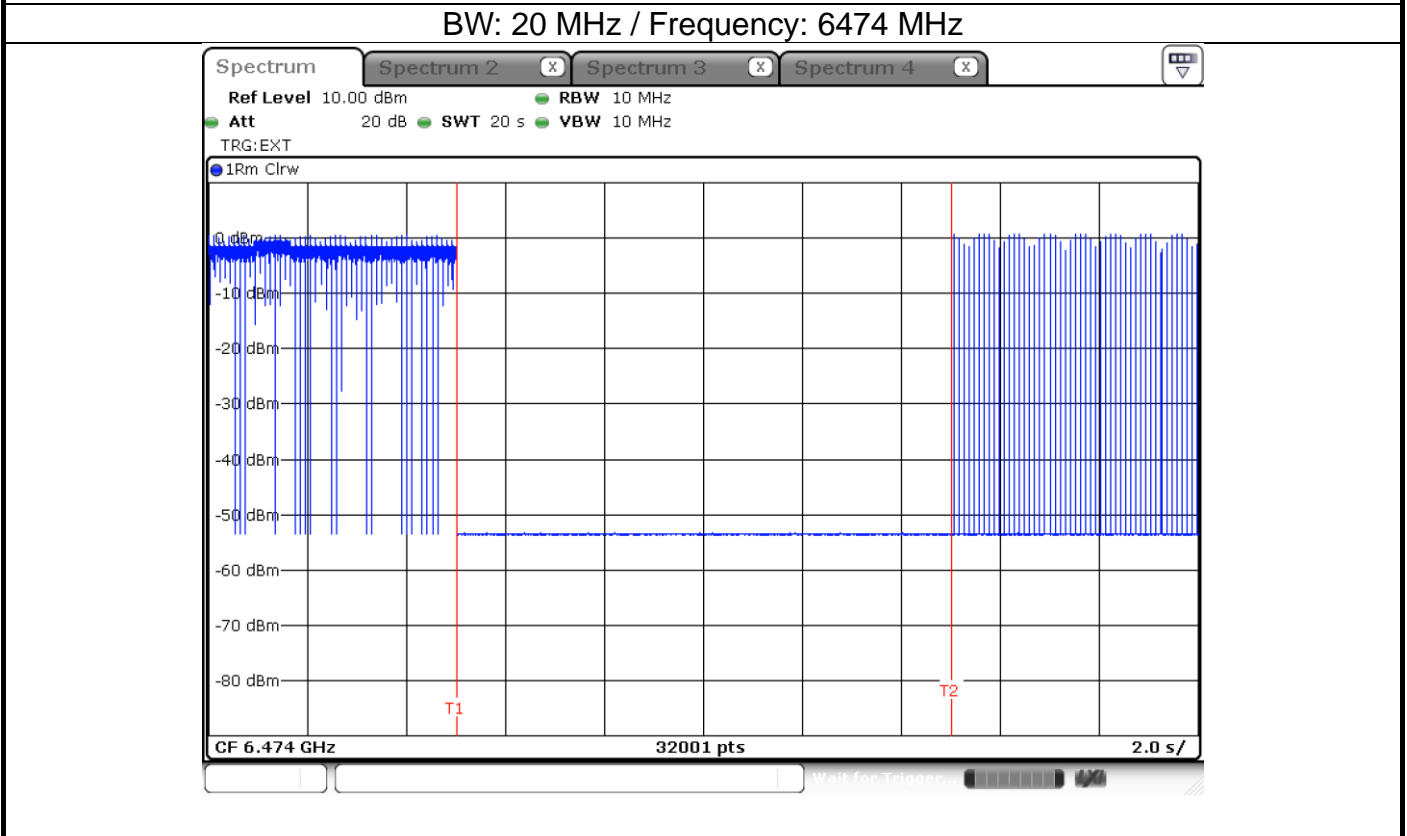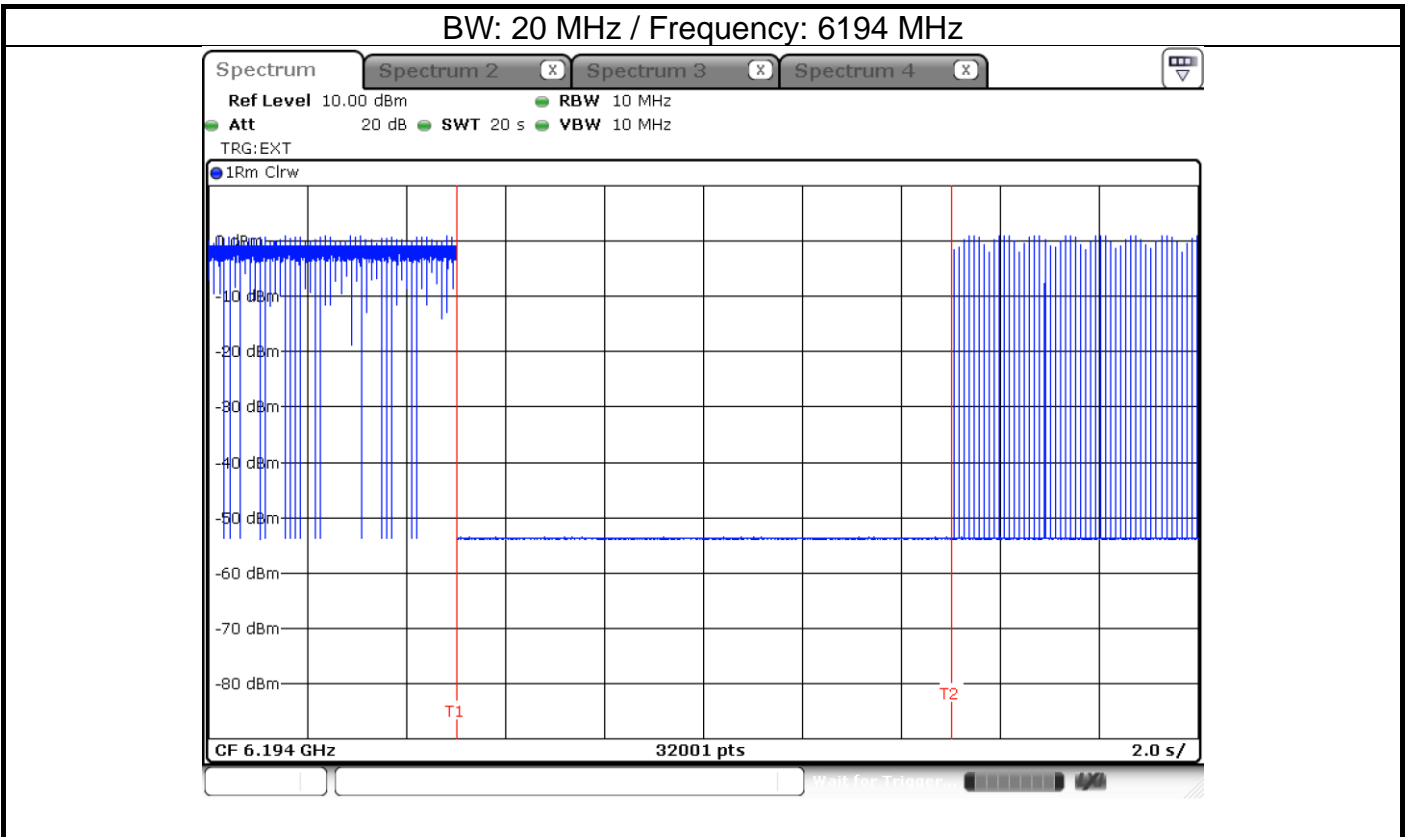



Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

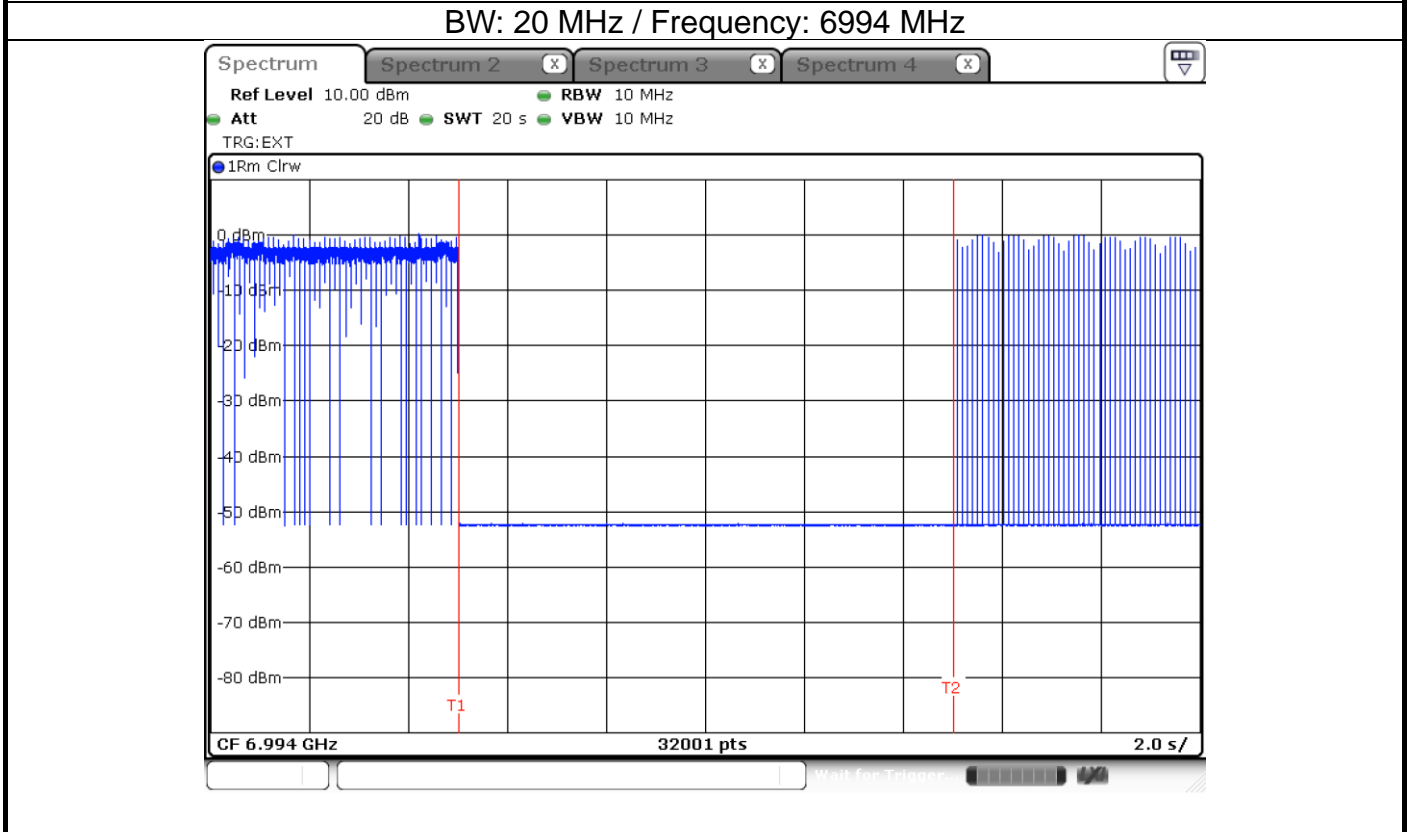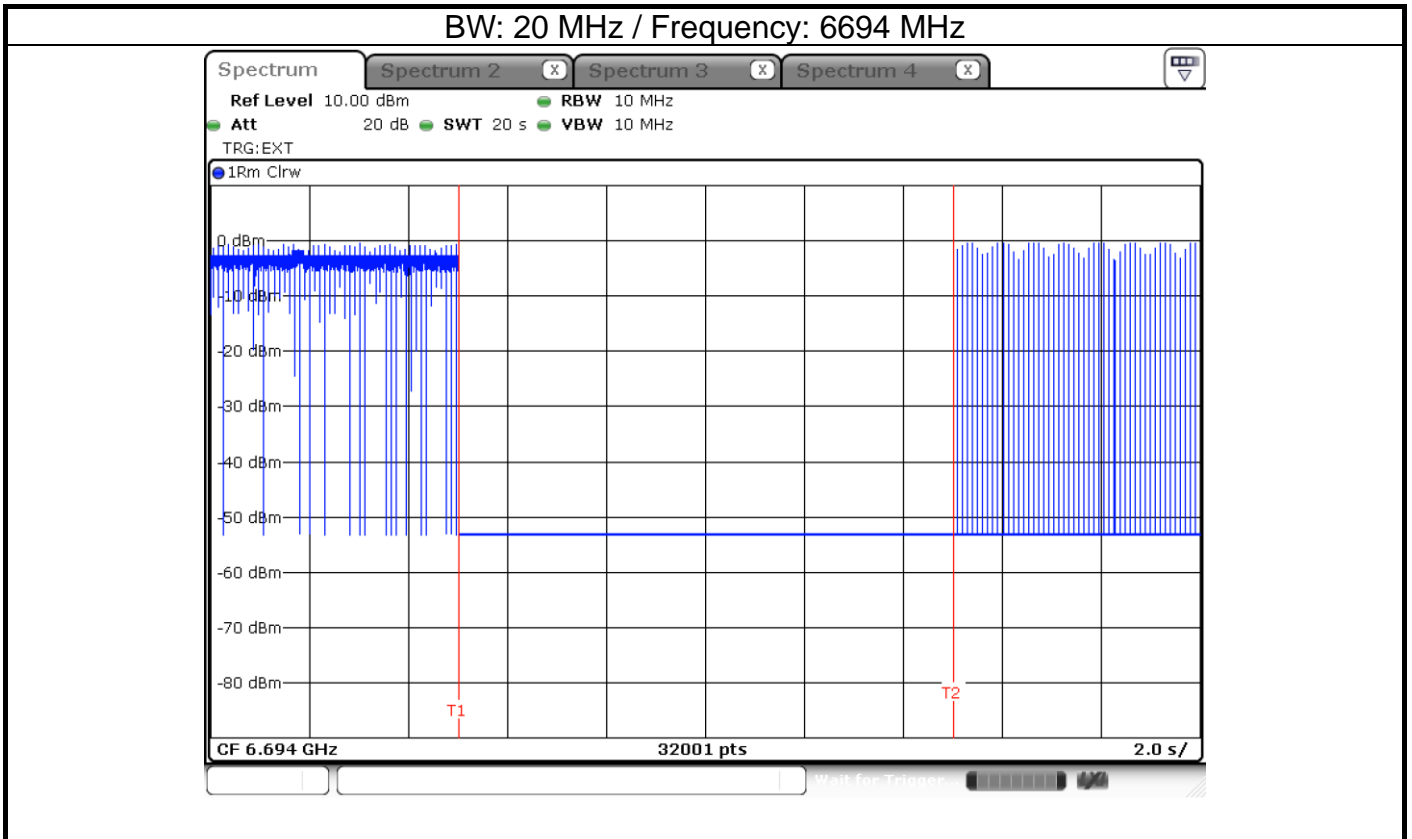



Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

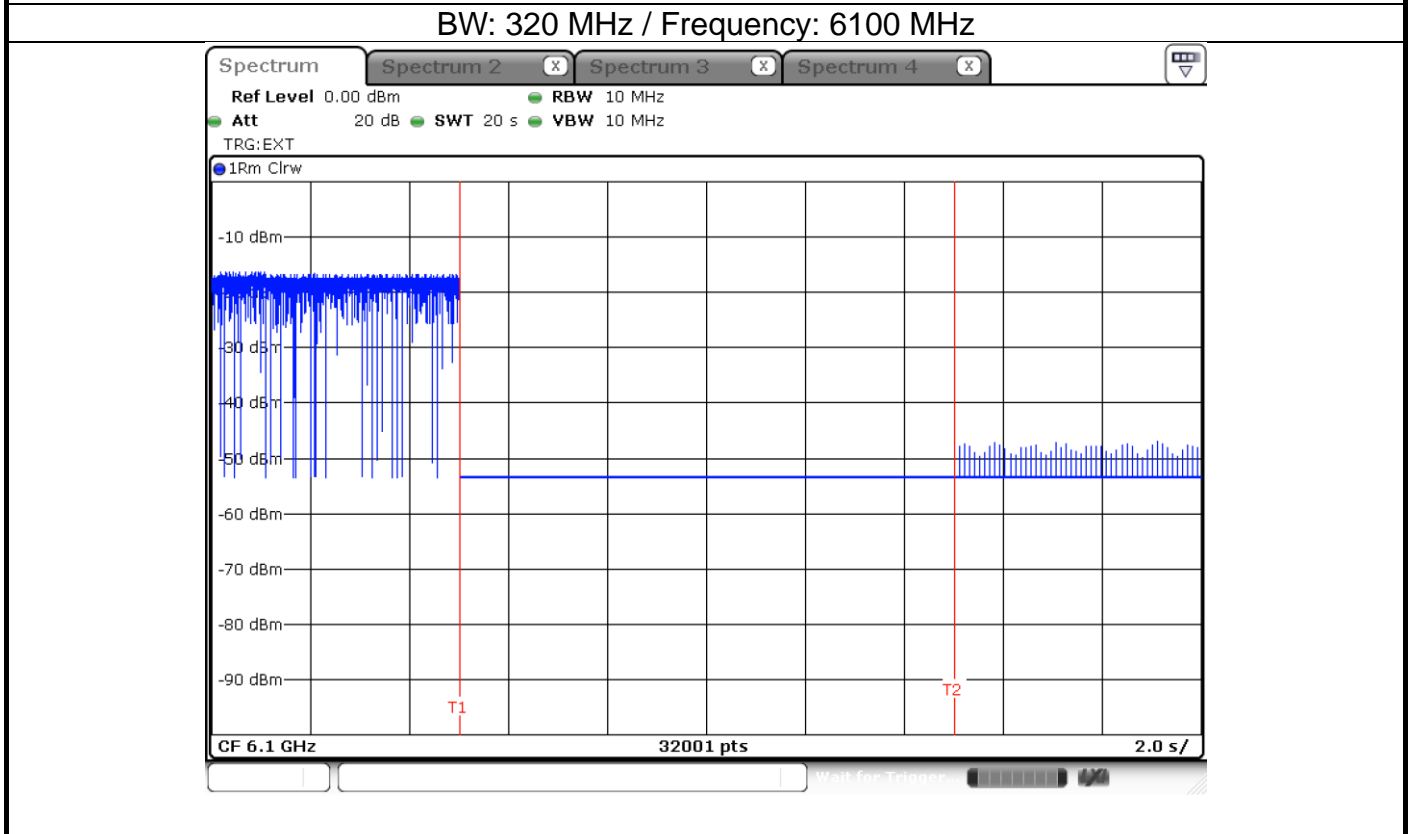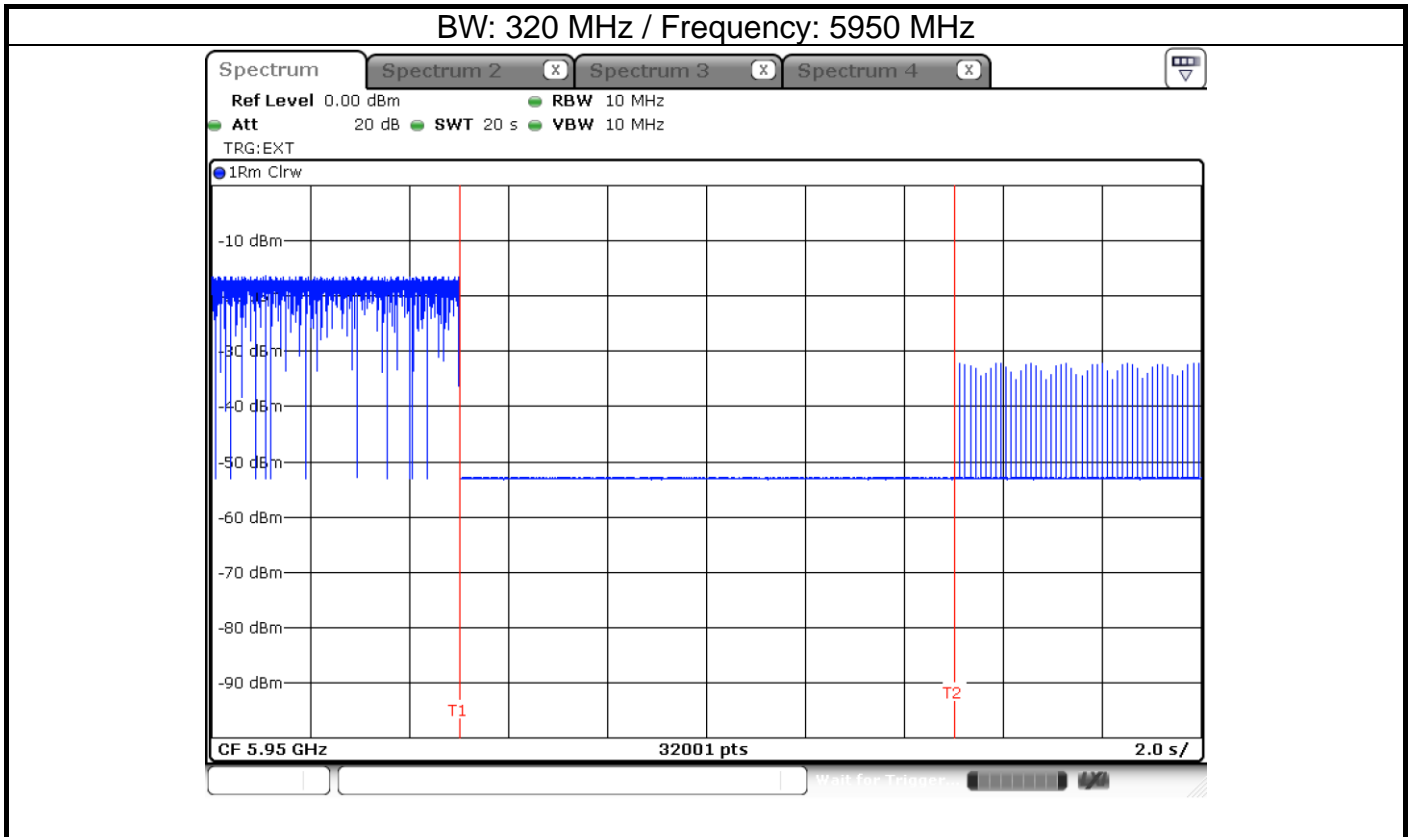



Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

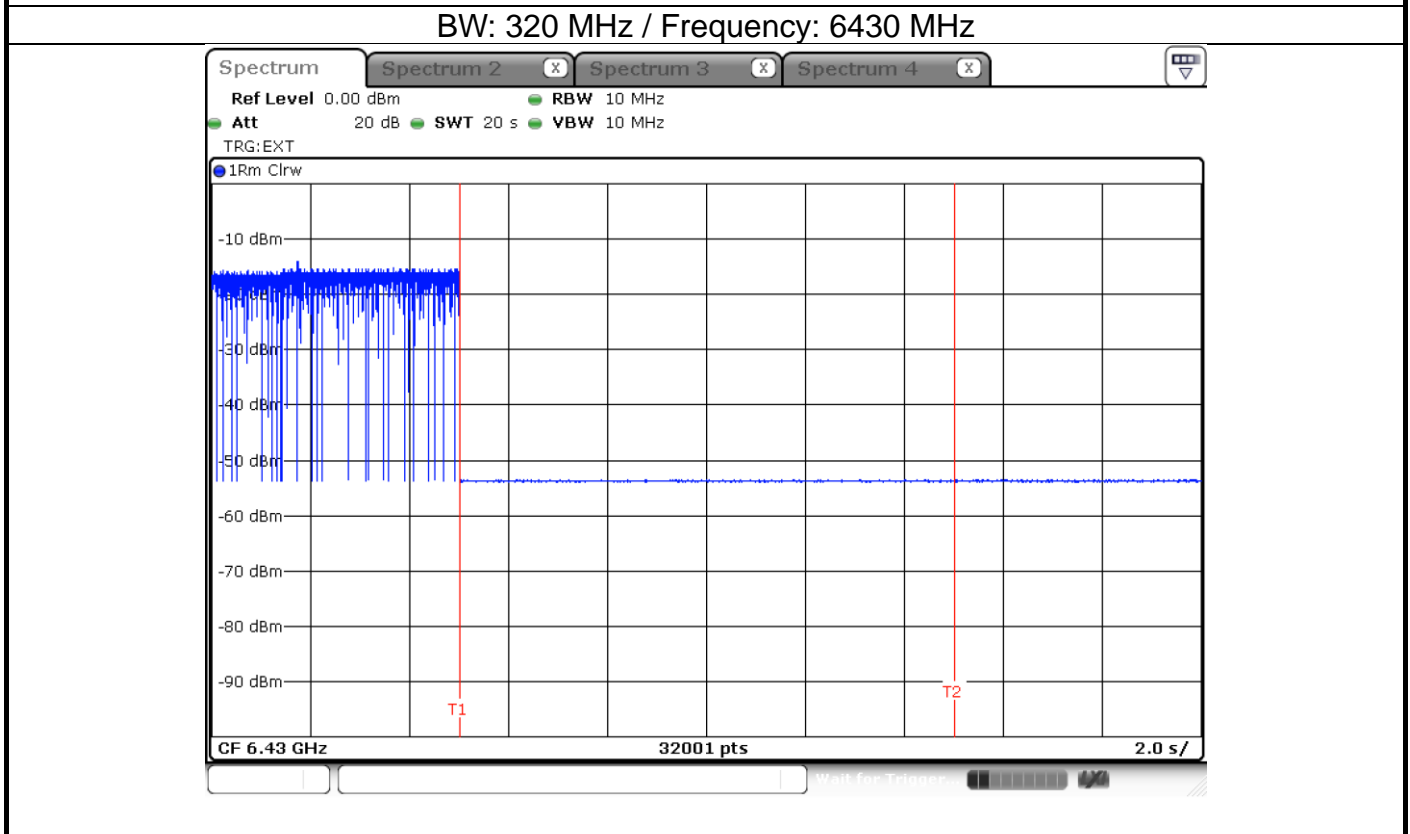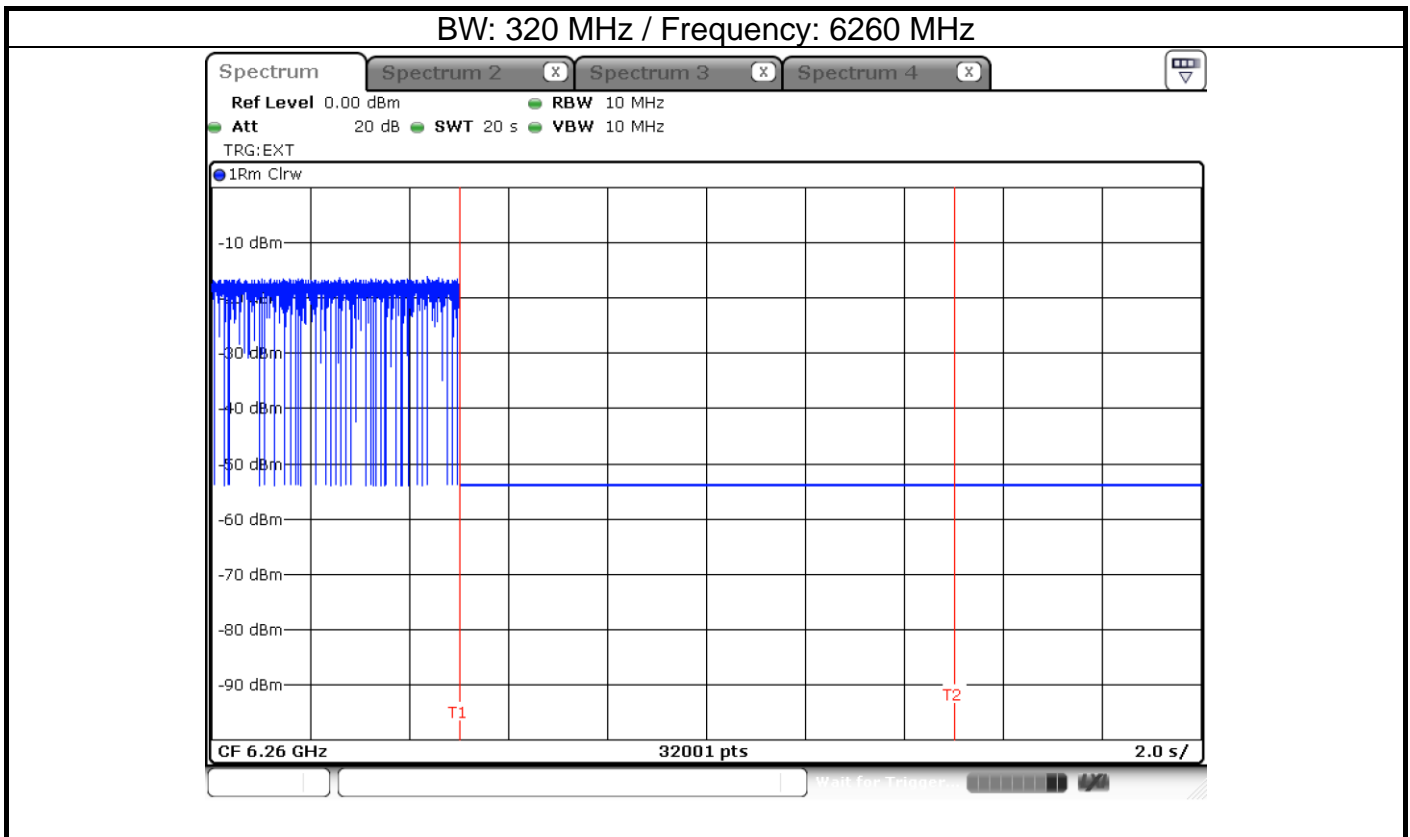


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

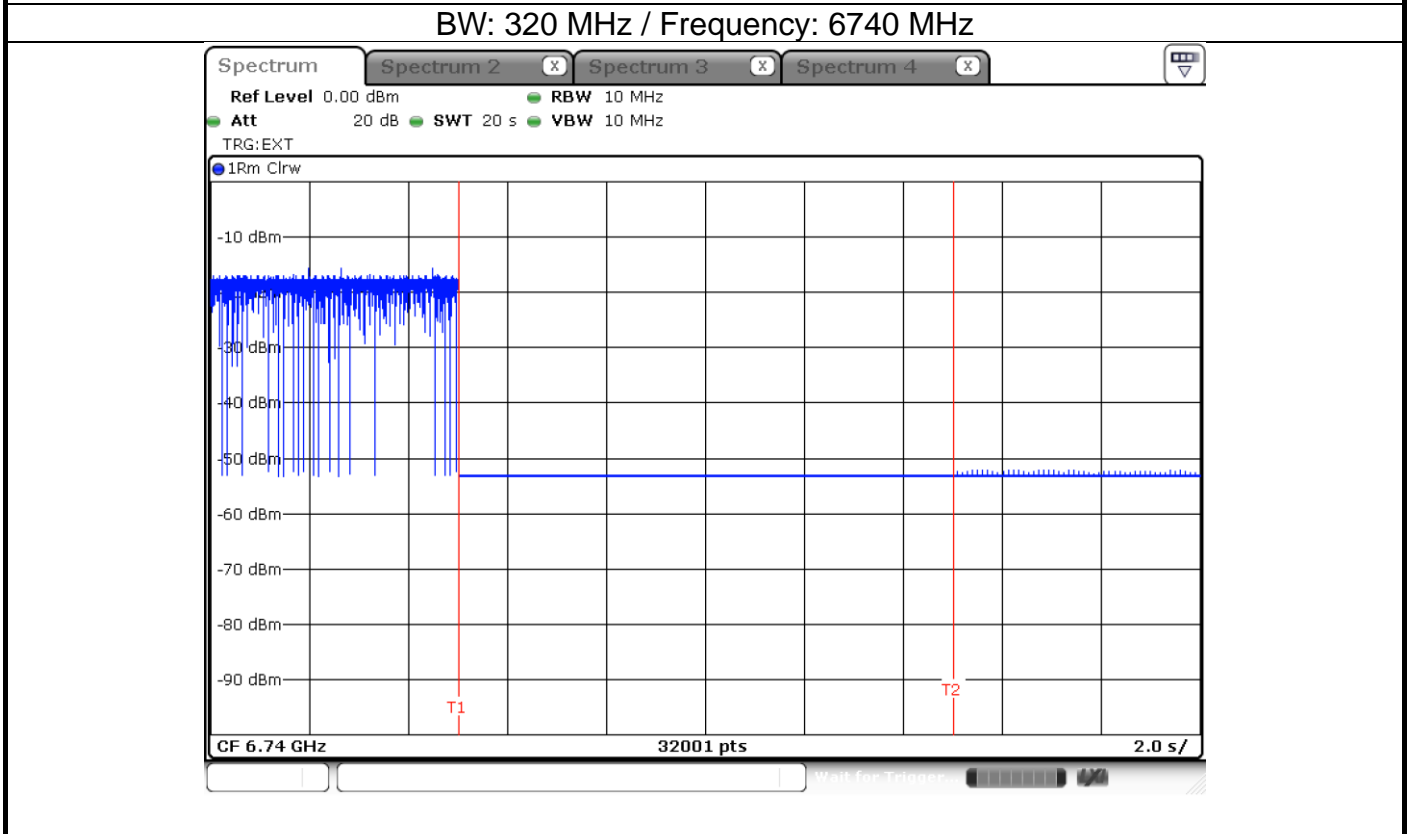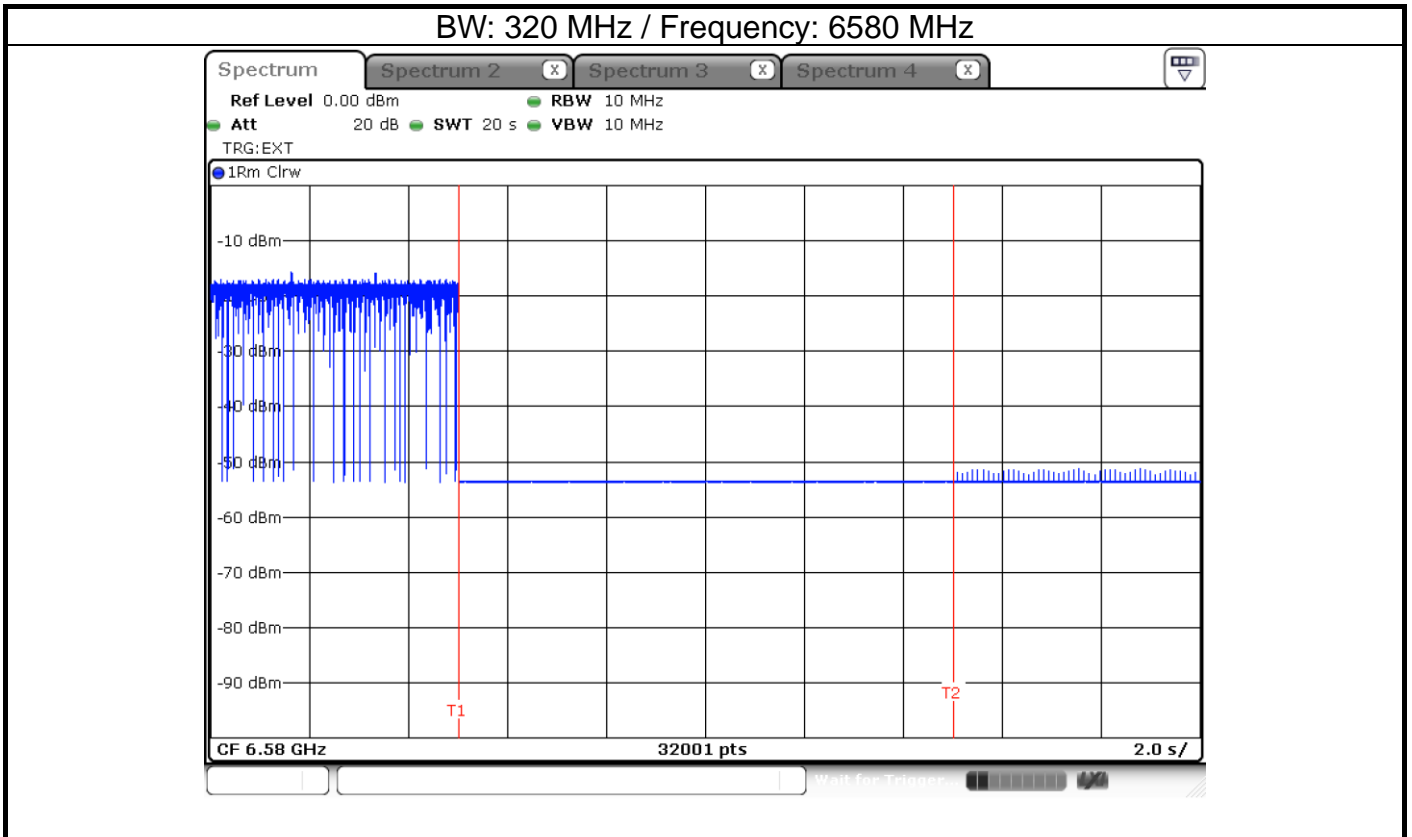

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

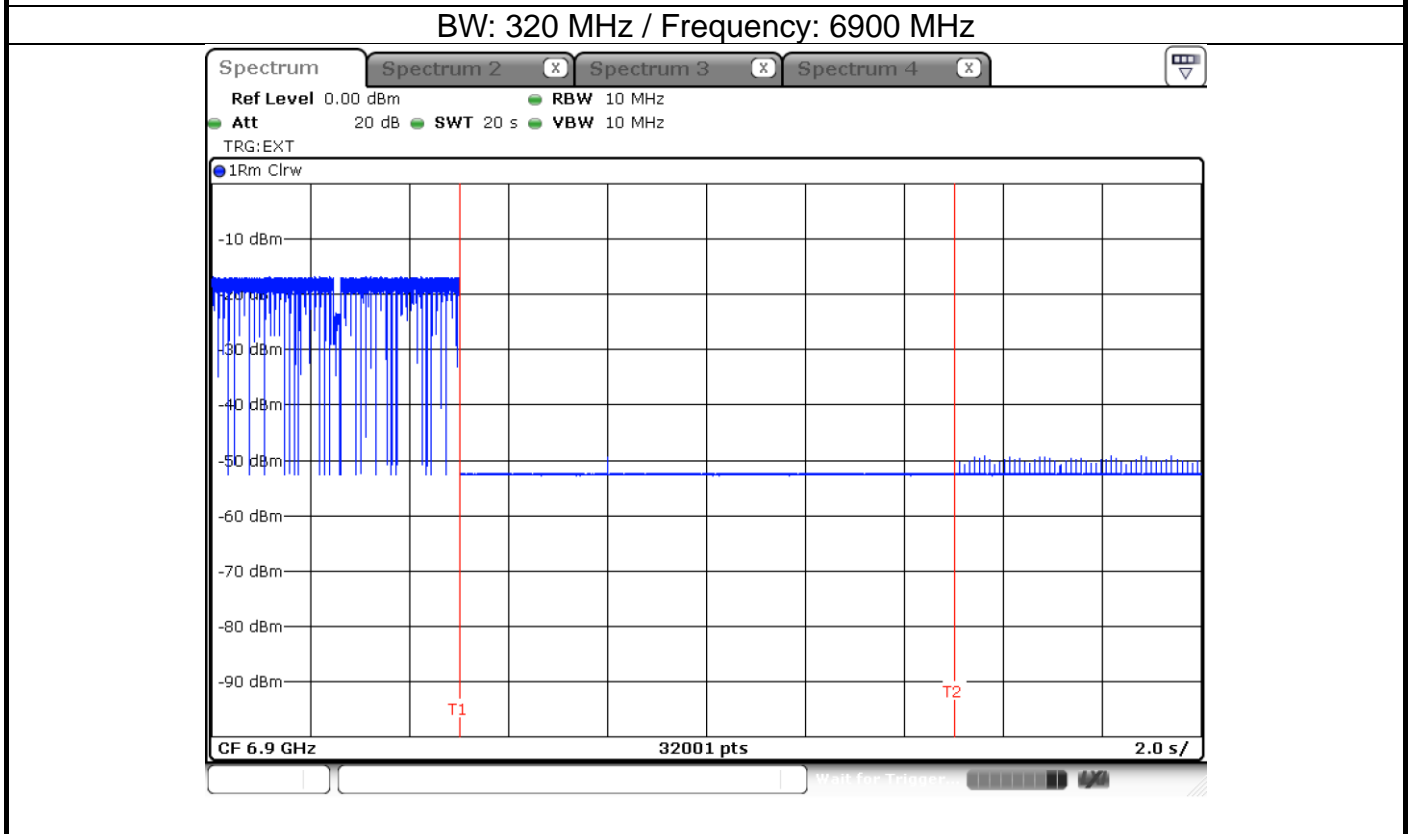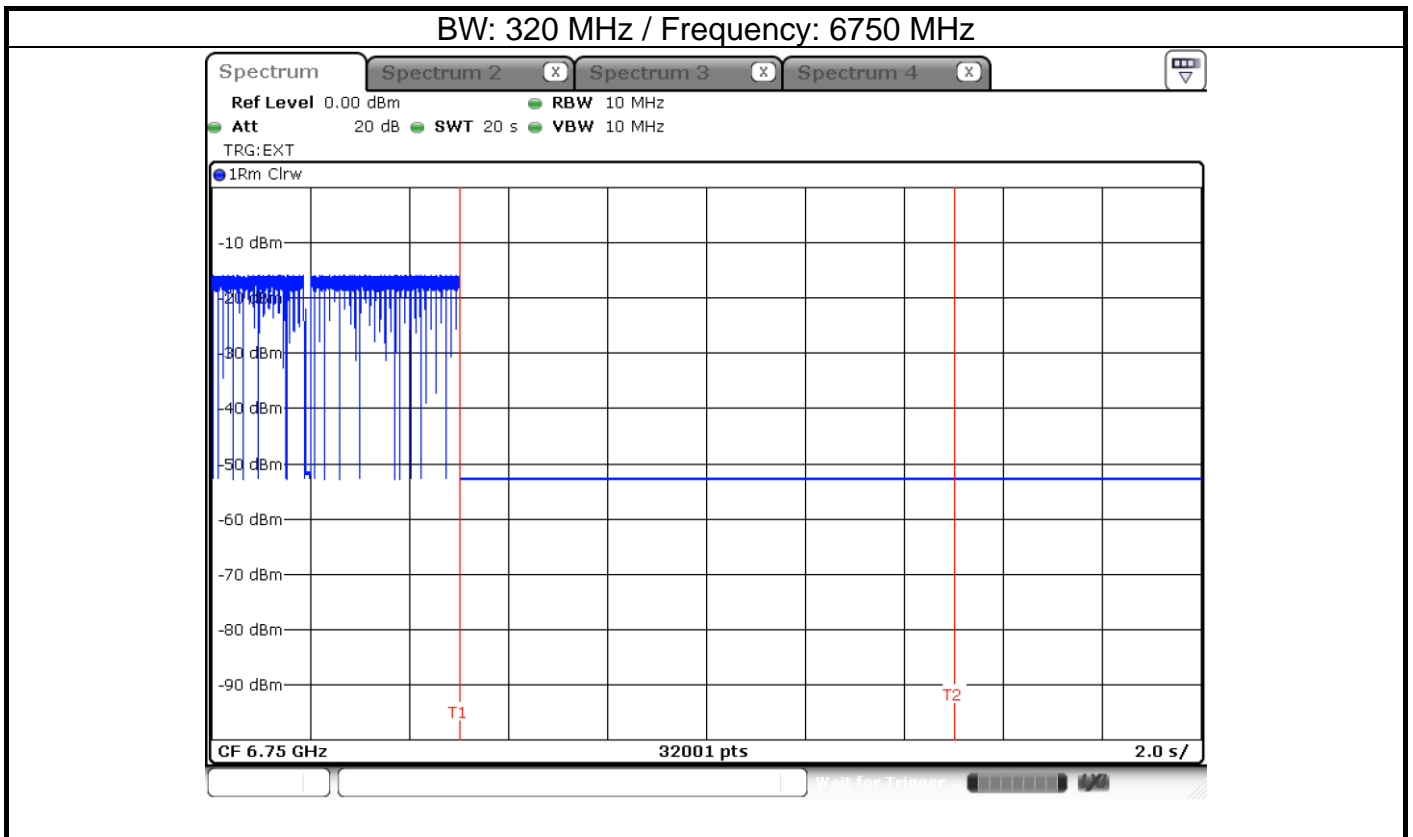

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

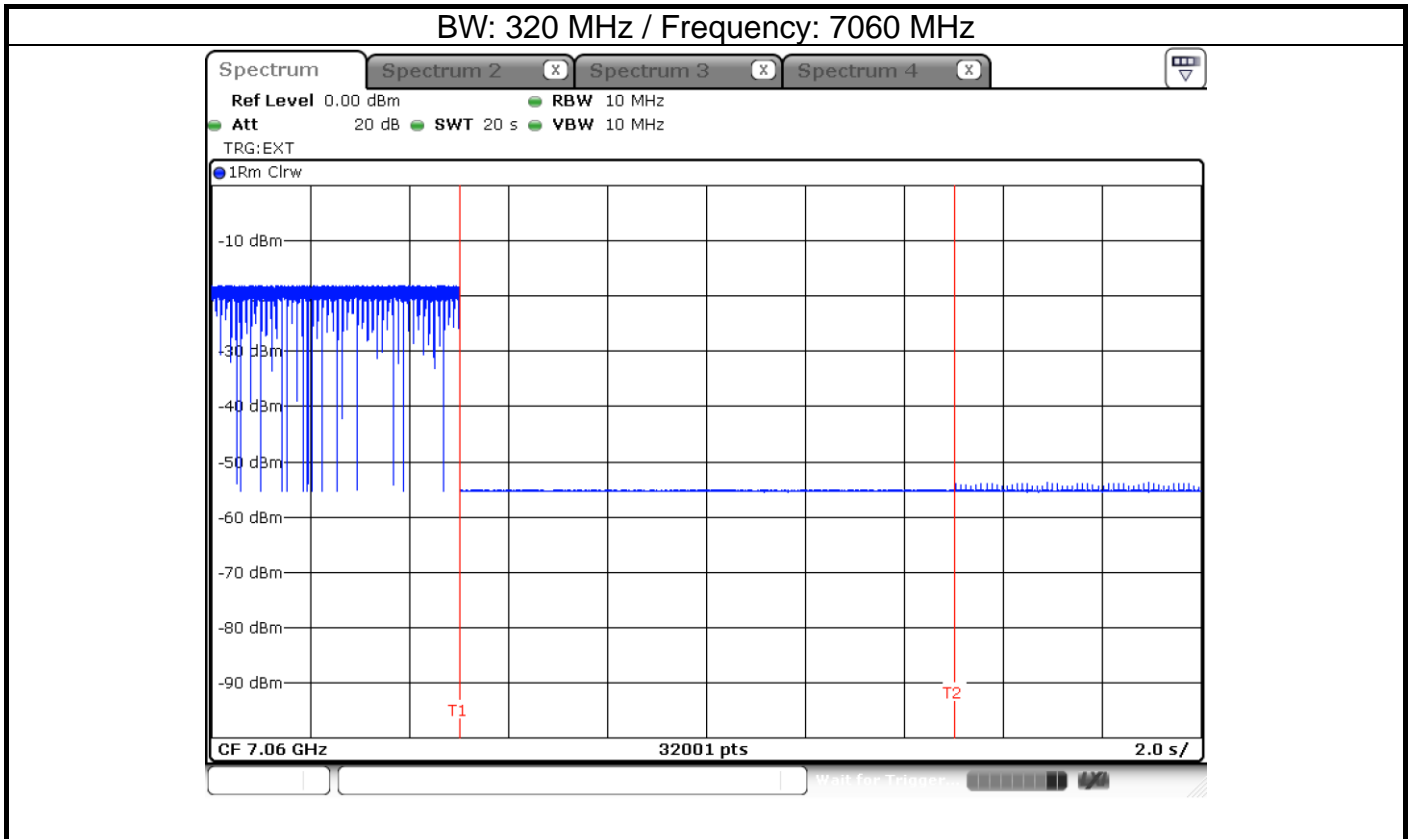

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.




Non-beamforming mode

Configuration 1: Model: SDG-8733

| | | | |
|-----------------|-----------|------------------|------|
| Modulation Mode | be EHT320 | Test Freq. (MHz) | 6425 |
| Power Phase | Line | | |

Test by : Joe Liao Temperature: 23°C Humidity: 63%

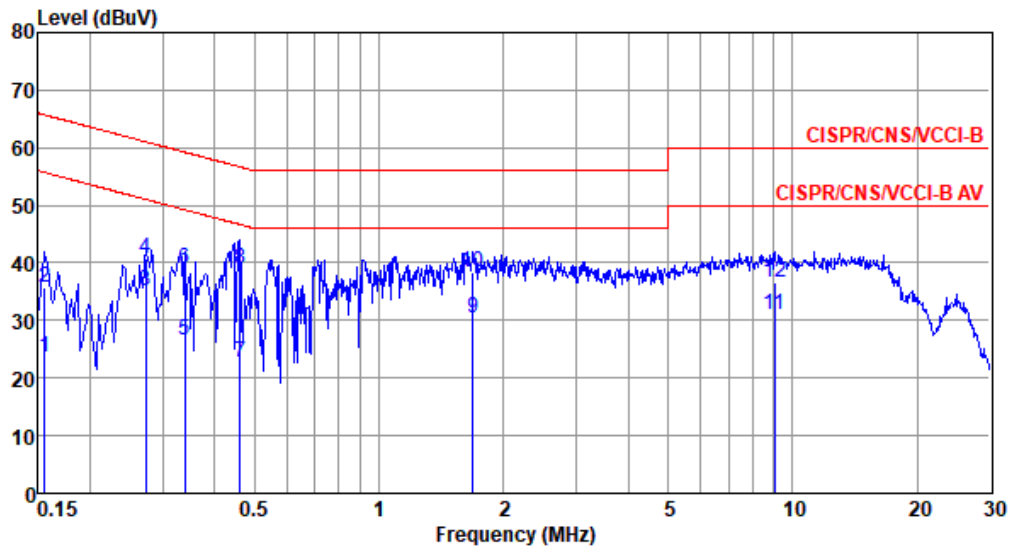


| | Freq MHz | Level dBuV | Limit Line dBuV | Over Limit dB | Read Level dBuV | Factor dB | Cable loss dB | Aux dB | Remark |
|----|-------------|---------------|-----------------------|---------------------|-----------------------|--------------|---------------------|-----------|---------|
| 1 | 0.156 | 23.59 | 55.69 | -32.10 | 13.67 | 9.63 | 0.08 | 0.21 | Average |
| 2 | 0.156 | 35.74 | 65.69 | -29.95 | 25.82 | 9.63 | 0.08 | 0.21 | QP |
| 3 | 0.273 | 35.24 | 51.03 | -15.79 | 25.26 | 9.62 | 0.07 | 0.29 | Average |
| 4 | 0.273 | 40.78 | 61.03 | -20.25 | 30.80 | 9.62 | 0.07 | 0.29 | QP |
| 5 | 0.339 | 26.63 | 49.22 | -22.59 | 16.62 | 9.62 | 0.08 | 0.31 | Average |
| 6 | 0.339 | 38.96 | 59.22 | -20.26 | 28.95 | 9.62 | 0.08 | 0.31 | QP |
| 7 | 0.461 | 22.62 | 46.67 | -24.05 | 12.59 | 9.62 | 0.08 | 0.33 | Average |
| 8 | 0.461 | 39.08 | 56.67 | -17.59 | 29.05 | 9.62 | 0.08 | 0.33 | QP |
| 9* | 1.689 | 30.29 | 46.00 | -15.71 | 20.17 | 9.63 | 0.11 | 0.38 | Average |
| 10 | 1.689 | 38.38 | 56.00 | -17.62 | 28.26 | 9.63 | 0.11 | 0.38 | QP |
| 11 | 9.059 | 30.87 | 50.00 | -19.13 | 20.40 | 9.69 | 0.33 | 0.45 | Average |
| 12 | 9.059 | 36.50 | 60.00 | -23.50 | 26.03 | 9.69 | 0.33 | 0.45 | QP |

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 Note 2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).



| | | | |
|-----------------|-----------|------------------|------|
| Modulation Mode | be EHT320 | Test Freq. (MHz) | 6425 |
| Power Phase | Neutral | | |

Test by : Joe Liao Temperature: 23°C Humidity: 63%

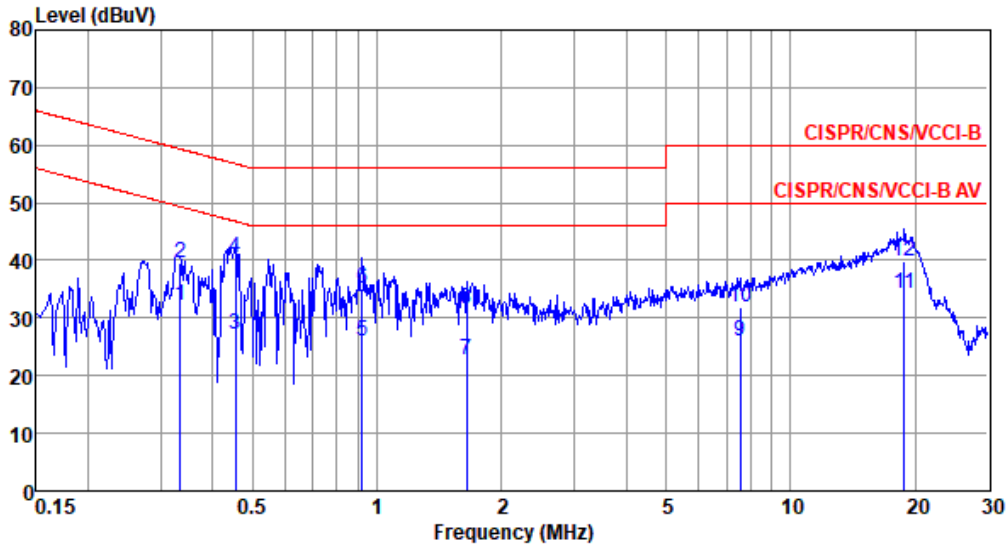

| | Freq MHz | Level dBuV | Limit Line dBuV | Over Limit dB | Read Level dBuV | Factor dB | Cable loss dB | Aux dB | Remark |
|-----|-------------|---------------|-----------------------|---------------------|-----------------------|--------------|---------------------|-----------|---------|
| 1 | 0.334 | 32.14 | 49.35 | -17.21 | 22.22 | 9.62 | 0.07 | 0.23 | Average |
| 2 | 0.334 | 39.62 | 59.35 | -19.73 | 29.70 | 9.62 | 0.07 | 0.23 | QP |
| 3 | 0.454 | 27.03 | 46.80 | -19.77 | 17.07 | 9.62 | 0.08 | 0.26 | Average |
| 4 | 0.454 | 40.33 | 56.80 | -16.47 | 30.37 | 9.62 | 0.08 | 0.26 | QP |
| 5 | 0.918 | 25.94 | 46.00 | -20.06 | 15.92 | 9.63 | 0.09 | 0.30 | Average |
| 6 | 0.918 | 35.11 | 56.00 | -20.89 | 25.09 | 9.63 | 0.09 | 0.30 | QP |
| 7 | 1.645 | 22.85 | 46.00 | -23.15 | 12.78 | 9.64 | 0.10 | 0.33 | Average |
| 8 | 1.645 | 31.70 | 56.00 | -24.30 | 21.63 | 9.64 | 0.10 | 0.33 | QP |
| 9 | 7.566 | 25.94 | 50.00 | -24.06 | 15.54 | 9.69 | 0.30 | 0.41 | Average |
| 10 | 7.566 | 31.81 | 60.00 | -28.19 | 21.41 | 9.69 | 0.30 | 0.41 | QP |
| 11* | 18.820 | 34.12 | 50.00 | -15.88 | 23.26 | 9.79 | 0.50 | 0.57 | Average |
| 12 | 18.820 | 39.87 | 60.00 | -20.13 | 29.01 | 9.79 | 0.50 | 0.57 | QP |


Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).



Configuration 2: Model: SDG-8734

| | | | |
|-----------------|-----------|------------------|------|
| Modulation Mode | be EHT320 | Test Freq. (MHz) | 6425 |
| Power Phase | Line | | |

Test by : Joe Liao Temperature: 23°C Humidity: 63%

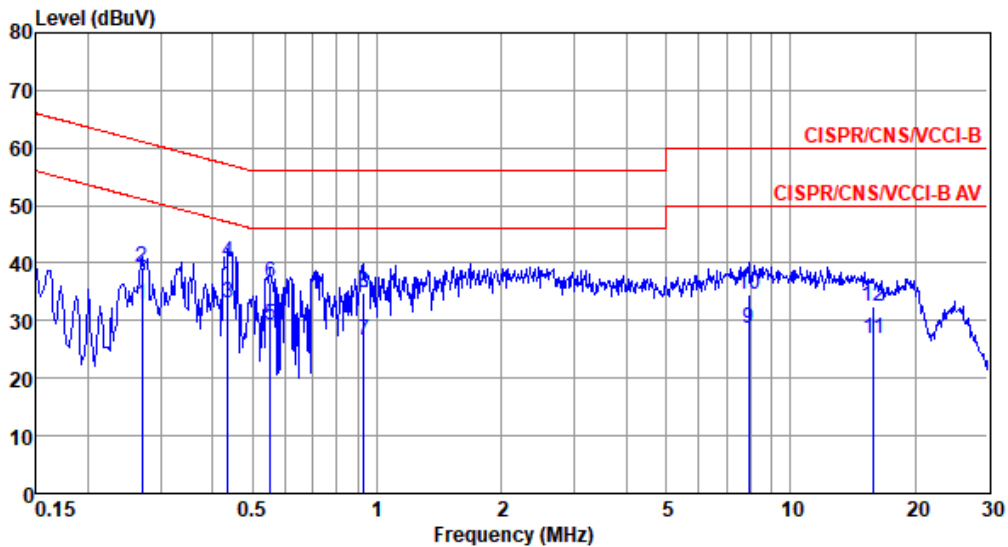


| | Freq MHz | Level dBUV | Limit Line dBUV | Over Limit dB | Read Level dBUV | Factor dB | Cable loss dB | Aux dB | Remark |
|----|-------------|---------------|-----------------------|---------------------|-----------------------|--------------|---------------------|-----------|---------|
| 1 | 0.270 | 32.70 | 51.12 | -18.42 | 22.73 | 9.62 | 0.07 | 0.28 | Average |
| 2 | 0.270 | 39.22 | 61.12 | -21.90 | 29.25 | 9.62 | 0.07 | 0.28 | QP |
| 3* | 0.435 | 33.14 | 47.15 | -14.01 | 23.11 | 9.62 | 0.08 | 0.33 | Average |
| 4 | 0.435 | 40.02 | 57.15 | -17.13 | 29.99 | 9.62 | 0.08 | 0.33 | QP |
| 5 | 0.552 | 29.31 | 46.00 | -16.69 | 19.27 | 9.62 | 0.08 | 0.34 | Average |
| 6 | 0.552 | 36.69 | 56.00 | -19.31 | 26.65 | 9.62 | 0.08 | 0.34 | QP |
| 7 | 0.928 | 26.67 | 46.00 | -19.33 | 16.59 | 9.63 | 0.09 | 0.36 | Average |
| 8 | 0.928 | 34.90 | 56.00 | -21.10 | 24.82 | 9.63 | 0.09 | 0.36 | QP |
| 9 | 7.935 | 28.78 | 50.00 | -21.22 | 18.35 | 9.68 | 0.31 | 0.44 | Average |
| 10 | 7.935 | 34.48 | 60.00 | -25.52 | 24.05 | 9.68 | 0.31 | 0.44 | QP |
| 11 | 15.885 | 26.84 | 50.00 | -23.16 | 16.20 | 9.68 | 0.45 | 0.51 | Average |
| 12 | 15.885 | 32.45 | 60.00 | -27.55 | 21.81 | 9.68 | 0.45 | 0.51 | QP |

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).



| | | | |
|-----------------|-----------|------------------|------|
| Modulation Mode | be EHT320 | Test Freq. (MHz) | 6425 |
| Power Phase | Neutral | | |

Test by : Joe Liao Temperature: 23°C Humidity: 63%

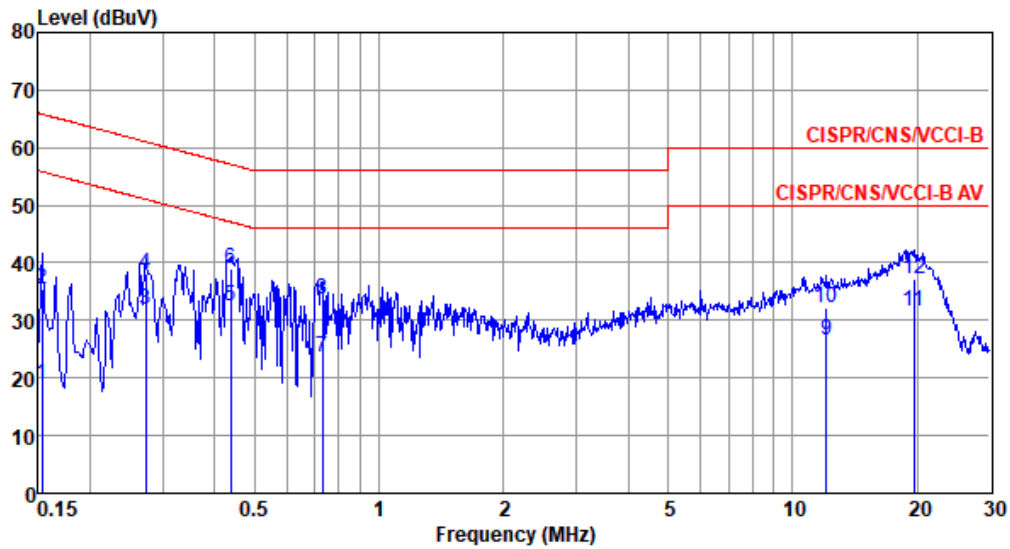

| | Freq MHz | Level dBuV | Limit Line dBuV | Over Limit dB | Read Level dBuV | Factor dB | Cable loss dB | Aux dB | Remark |
|----|-------------|---------------|-----------------------|---------------------|-----------------------|--------------|---------------------|-----------|---------|
| 1 | 0.153 | 18.83 | 55.82 | -36.99 | 9.00 | 9.63 | 0.08 | 0.12 | Average |
| 2 | 0.153 | 35.44 | 65.82 | -30.38 | 25.61 | 9.63 | 0.08 | 0.12 | QP |
| 3 | 0.273 | 32.02 | 51.03 | -19.01 | 22.11 | 9.63 | 0.07 | 0.21 | Average |
| 4 | 0.273 | 37.94 | 61.03 | -23.09 | 28.03 | 9.63 | 0.07 | 0.21 | QP |
| 5* | 0.437 | 32.33 | 47.11 | -14.78 | 22.38 | 9.62 | 0.08 | 0.25 | Average |
| 6 | 0.437 | 39.10 | 57.11 | -18.01 | 29.15 | 9.62 | 0.08 | 0.25 | QP |
| 7 | 0.731 | 23.61 | 46.00 | -22.39 | 13.61 | 9.63 | 0.09 | 0.28 | Average |
| 8 | 0.731 | 33.59 | 56.00 | -22.41 | 23.59 | 9.63 | 0.09 | 0.28 | QP |
| 9 | 12.060 | 26.49 | 50.00 | -23.51 | 15.92 | 9.73 | 0.39 | 0.45 | Average |
| 10 | 12.060 | 32.07 | 60.00 | -27.93 | 21.50 | 9.73 | 0.39 | 0.45 | QP |
| 11 | 19.635 | 31.68 | 50.00 | -18.32 | 20.79 | 9.80 | 0.51 | 0.58 | Average |
| 12 | 19.635 | 37.23 | 60.00 | -22.77 | 26.34 | 9.80 | 0.51 | 0.58 | QP |

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).




Beamforming mode

Configuration 1: Model: SDG-8733

| | | | |
|-----------------|-----------|------------------|------|
| Modulation Mode | be EHT320 | Test Freq. (MHz) | 6425 |
| Power Phase | Line | | |

Test by : Joe Liao Temperature: 23°C Humidity: 63%

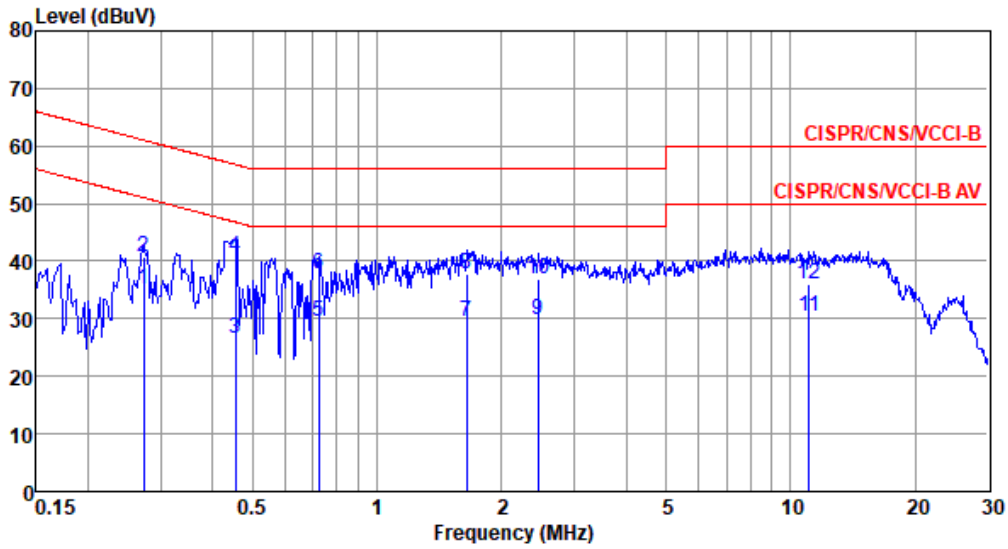


| | Freq MHz | Level dBUV | Limit Line dBUV | Over Limit dB | Read Level dBUV | Factor dB | Cable loss dB | Aux dB | Remark |
|----|-------------|---------------|-----------------------|---------------------|-----------------------|--------------|---------------------|-----------|---------|
| 1* | 0.273 | 35.18 | 51.03 | -15.85 | 25.20 | 9.62 | 0.07 | 0.29 | Average |
| 2 | 0.273 | 40.78 | 61.03 | -20.25 | 30.80 | 9.62 | 0.07 | 0.29 | QP |
| 3 | 0.454 | 26.56 | 46.80 | -20.24 | 16.53 | 9.62 | 0.08 | 0.33 | Average |
| 4 | 0.454 | 40.78 | 56.80 | -16.02 | 30.75 | 9.62 | 0.08 | 0.33 | QP |
| 5 | 0.724 | 29.59 | 46.00 | -16.41 | 19.52 | 9.63 | 0.09 | 0.35 | Average |
| 6 | 0.724 | 37.76 | 56.00 | -18.24 | 27.69 | 9.63 | 0.09 | 0.35 | QP |
| 7 | 1.645 | 29.61 | 46.00 | -16.39 | 19.51 | 9.63 | 0.10 | 0.37 | Average |
| 8 | 1.645 | 37.72 | 56.00 | -18.28 | 27.62 | 9.63 | 0.10 | 0.37 | QP |
| 9 | 2.448 | 29.85 | 46.00 | -16.15 | 19.69 | 9.64 | 0.13 | 0.39 | Average |
| 10 | 2.448 | 36.77 | 56.00 | -19.23 | 26.61 | 9.64 | 0.13 | 0.39 | QP |
| 11 | 11.080 | 30.29 | 50.00 | -19.71 | 19.77 | 9.69 | 0.37 | 0.46 | Average |
| 12 | 11.080 | 35.93 | 60.00 | -24.07 | 25.41 | 9.69 | 0.37 | 0.46 | QP |

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).



| | | | |
|-----------------|-----------|------------------|------|
| Modulation Mode | be EHT320 | Test Freq. (MHz) | 6425 |
| Power Phase | Neutral | | |

Test by : Joe Liao Temperature: 23°C Humidity: 63%

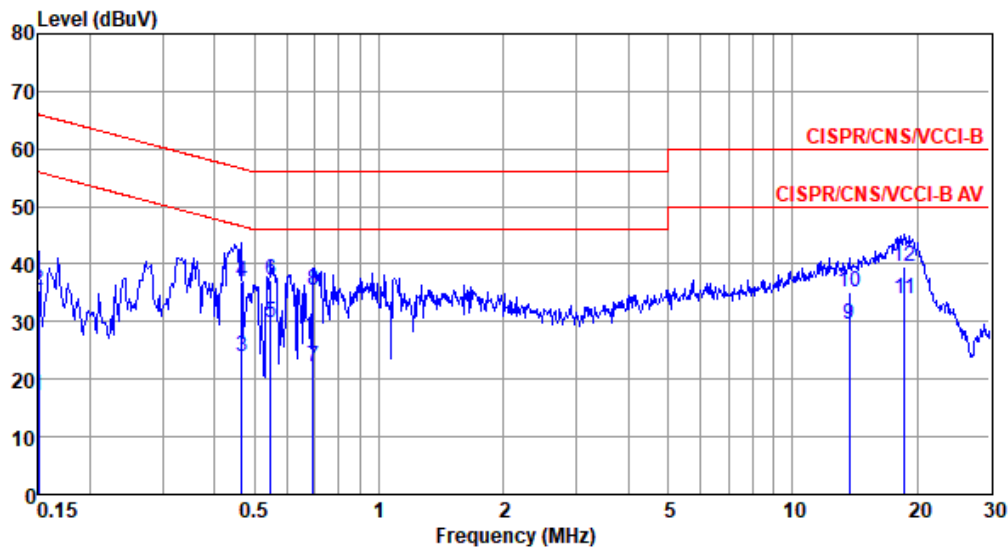

| | Freq MHz | Level dBuV | Limit Line dBuV | Over Limit dB | Read Level dBuV | Factor dB | Cable loss dB | Aux dB | Remark |
|-----|-------------|---------------|-----------------------|---------------------|-----------------------|--------------|---------------------|-----------|---------|
| 1 | 0.150 | 17.20 | 56.00 | -38.80 | 7.37 | 9.63 | 0.08 | 0.12 | Average |
| 2 | 0.150 | 35.46 | 66.00 | -30.54 | 25.63 | 9.63 | 0.08 | 0.12 | QP |
| 3 | 0.466 | 23.80 | 46.58 | -22.78 | 13.84 | 9.62 | 0.08 | 0.26 | Average |
| 4 | 0.466 | 36.87 | 56.58 | -19.71 | 26.91 | 9.62 | 0.08 | 0.26 | QP |
| 5 | 0.546 | 29.80 | 46.00 | -16.20 | 19.83 | 9.62 | 0.08 | 0.27 | Average |
| 6 | 0.546 | 37.10 | 56.00 | -18.90 | 27.13 | 9.62 | 0.08 | 0.27 | QP |
| 7 | 0.694 | 22.21 | 46.00 | -23.79 | 12.21 | 9.63 | 0.09 | 0.28 | Average |
| 8 | 0.694 | 35.43 | 56.00 | -20.57 | 25.43 | 9.63 | 0.09 | 0.28 | QP |
| 9 | 13.695 | 29.50 | 50.00 | -20.50 | 18.86 | 9.75 | 0.42 | 0.47 | Average |
| 10 | 13.695 | 35.25 | 60.00 | -24.75 | 24.61 | 9.75 | 0.42 | 0.47 | QP |
| 11* | 18.622 | 34.06 | 50.00 | -15.94 | 23.22 | 9.79 | 0.49 | 0.56 | Average |
| 12 | 18.622 | 39.63 | 60.00 | -20.37 | 28.79 | 9.79 | 0.49 | 0.56 | QP |


Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).



Configuration 2: Model: SDG-8734

| | | | |
|-----------------|-----------|------------------|------|
| Modulation Mode | be EHT320 | Test Freq. (MHz) | 6425 |
| Power Phase | Line | | |

Test by : Joe Liao Temperature: 23°C Humidity: 63%

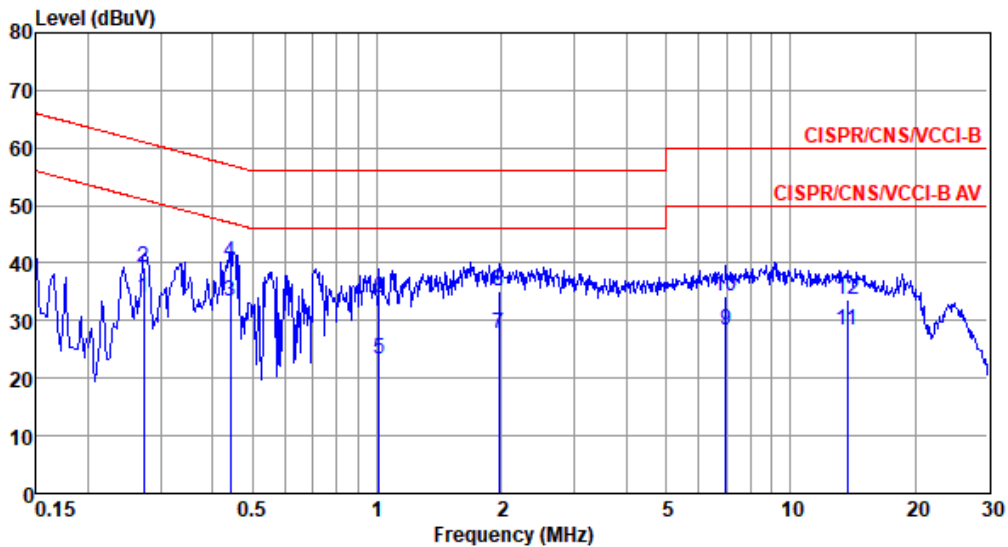


| | Freq MHz | Level dBuV | Limit Line dBuV | Over Limit dB | Read Level dBuV | Factor dB | Cable loss dB | Aux dB | Remark |
|----|-------------|---------------|-----------------------|---------------------|-----------------------|--------------|---------------------|-----------|---------|
| 1 | 0.273 | 34.07 | 51.03 | -16.96 | 24.09 | 9.62 | 0.07 | 0.29 | Average |
| 2 | 0.273 | 39.39 | 61.03 | -21.64 | 29.41 | 9.62 | 0.07 | 0.29 | QP |
| 3* | 0.442 | 33.32 | 47.02 | -13.70 | 23.29 | 9.62 | 0.08 | 0.33 | Average |
| 4 | 0.442 | 40.18 | 57.02 | -16.84 | 30.15 | 9.62 | 0.08 | 0.33 | QP |
| 5 | 1.010 | 23.21 | 46.00 | -22.79 | 13.13 | 9.63 | 0.09 | 0.36 | Average |
| 6 | 1.010 | 34.01 | 56.00 | -21.99 | 23.93 | 9.63 | 0.09 | 0.36 | QP |
| 7 | 1.970 | 27.61 | 46.00 | -18.39 | 17.49 | 9.63 | 0.11 | 0.38 | Average |
| 8 | 1.970 | 35.07 | 56.00 | -20.93 | 24.95 | 9.63 | 0.11 | 0.38 | QP |
| 9 | 6.988 | 28.29 | 50.00 | -21.71 | 17.91 | 9.67 | 0.28 | 0.43 | Average |
| 10 | 6.988 | 34.30 | 60.00 | -25.70 | 23.92 | 9.67 | 0.28 | 0.43 | QP |
| 11 | 13.695 | 28.22 | 50.00 | -21.78 | 17.63 | 9.69 | 0.42 | 0.48 | Average |
| 12 | 13.695 | 33.72 | 60.00 | -26.28 | 23.13 | 9.69 | 0.42 | 0.48 | QP |

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 Note 2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).



| | | | |
|-----------------|-----------|------------------|------|
| Modulation Mode | be EHT320 | Test Freq. (MHz) | 6425 |
| Power Phase | Neutral | | |

Test by : Joe Liao Temperature: 23°C Humidity: 63%

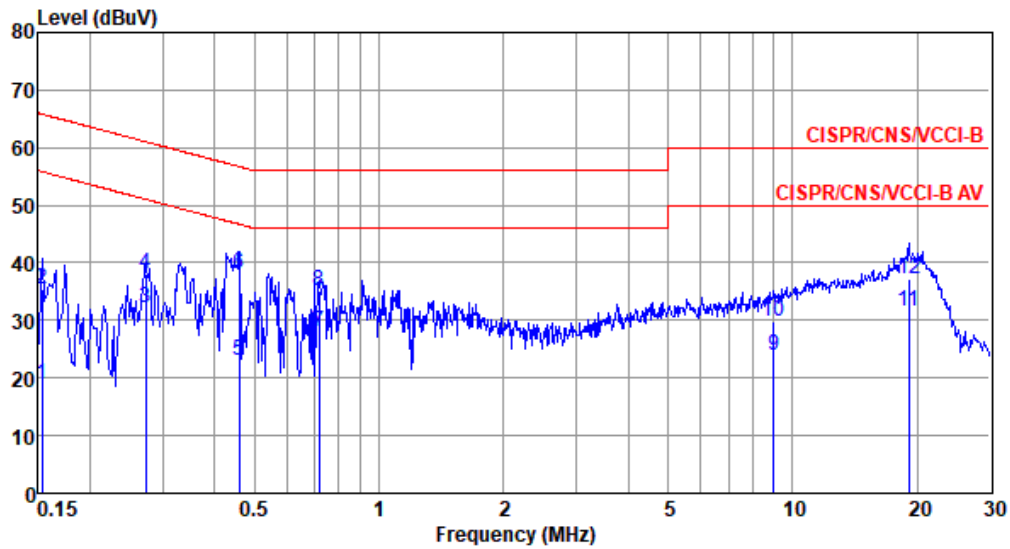

| | Freq MHz | Level dBuV | Limit Line dBuV | Over Limit dB | Read Level dBuV | Factor dB | Cable loss dB | Aux dB | Remark |
|----|-------------|---------------|-----------------------|---------------------|-----------------------|--------------|---------------------|-----------|---------|
| 1 | 0.153 | 18.82 | 55.82 | -37.00 | 8.99 | 9.63 | 0.08 | 0.12 | Average |
| 2 | 0.153 | 35.47 | 65.82 | -30.35 | 25.64 | 9.63 | 0.08 | 0.12 | QP |
| 3 | 0.273 | 32.04 | 51.03 | -18.99 | 22.13 | 9.63 | 0.07 | 0.21 | Average |
| 4 | 0.273 | 38.07 | 61.03 | -22.96 | 28.16 | 9.63 | 0.07 | 0.21 | QP |
| 5 | 0.459 | 23.02 | 46.71 | -23.69 | 13.06 | 9.62 | 0.08 | 0.26 | Average |
| 6 | 0.459 | 37.98 | 56.71 | -18.73 | 28.02 | 9.62 | 0.08 | 0.26 | QP |
| 7* | 0.716 | 27.90 | 46.00 | -18.10 | 17.90 | 9.63 | 0.09 | 0.28 | Average |
| 8 | 0.716 | 34.99 | 56.00 | -21.01 | 24.99 | 9.63 | 0.09 | 0.28 | QP |
| 9 | 9.011 | 23.78 | 50.00 | -26.22 | 13.33 | 9.70 | 0.33 | 0.42 | Average |
| 10 | 9.011 | 29.68 | 60.00 | -30.32 | 19.23 | 9.70 | 0.33 | 0.42 | QP |
| 11 | 19.122 | 31.60 | 50.00 | -18.40 | 20.74 | 9.79 | 0.50 | 0.57 | Average |
| 12 | 19.122 | 37.07 | 60.00 | -22.93 | 26.21 | 9.79 | 0.50 | 0.57 | QP |

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).