



FCC 47 CFR PART 15 SUBPART E

TEST REPORT

For

NetVanta 150

Trade Name: ADTRAN

Model: 1700412E1

Issued to

ADTRAN

901 Explorer Blvd. Huntsville Alabama 35806 U.S.A.

Issued by

Compliance Certification Services Inc.

**No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang,
Taoyuan Hsien, (338) Taiwan, R.O.C.**

<http://www.ccsemc.com.tw>

service@tw.ccsemc.com



***Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.*



TABLE OF CONTENTS

- 1. TEST RESULT CERTIFICATION..... 3**
- 2. EUT DESCRIPTION 4**
- 3. TEST METHODOLOGY 6**
 - 3.1 EUT CONFIGURATION 6
 - 3.2 EUT EXERCISE 6
 - 3.3 GENERAL TEST PROCEDURES..... 6
 - 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS..... 7
 - 3.5 DESCRIPTION OF TEST MODES..... 7
- 4 INSTRUMENT CALIBRATION..... 8**
 - 4.1 MEASURING INSTRUMENT CALIBRATION..... 8
 - 4.2 MEASUREMENT EQUIPMENT USED 8
- 5 FACILITIES AND ACCREDITATIONS 9**
 - 5.1 FACILITIES 9
 - 5.2 EQUIPMENT 9
 - 5.3 TABLE OF ACCREDITATIONS AND LISTINGS 10
- 6 SETUP OF EQUIPMENT UNDER TEST 11**
 - 6.1 SETUP CONFIGURATION OF EUT 11
 - 6.2 SUPPORT EQUIPMENT 11
- 7 FCC PART 15 REQUIREMENTS..... 12**
 - 7.1 26 DB EMISSION BANDWIDTH..... 12
 - 7.2 PEAK POWER 15
 - 7.3 BAND EDGES MEASUREMENT..... 19
 - 7.4 PEAK POWER SPECTRAL DENSITY 24
 - 7.5 PEAK EXCURSION 27
 - 7.6 RADIATED UNDESIRABLE EMISSION 30
 - 7.7 CONDUCTED UNDESIRABLE EMISSION 37
 - 7.8 POWERLINE CONDUCTED EMISSIONS 40
 - 7.9 TRANSMISSION IN ABSENCE OF DATA 43
 - 7.10 FREQUENCY STABILITY 43
- APPENDIX I RADIO FREQUENCY EXPOSURE 44**
- APPENDIX II PHOTOGRAPHS OF TEST SETUP..... 46**



1. TEST RESULT CERTIFICATION

Applicant: ADTRAN
 901 Explorer Blvd. Huntsville Alabama 35806 U.S.A.

Equipment Under Test: NetVanta 150

Trade Name: ADTRAN

Model: 1700412E1

Date of Test: August 10, 2006 ~ May 15, 2007

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart E	No non-compliance noted

We hereby certify that:

Compliance Certification Services Inc. tested the above equipment. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.407.

The test results of this report relate only to the tested sample identified in this report.

Approved by:

Reviewed by:

Johnny Liu
 Section Manager
 Compliance Certification Services Inc.

Amanda Wu
 Section Manager
 Compliance Certification Services Inc.



2. EUT DESCRIPTION

Product	NetVanta 150
Trade Name	ADTRAN
Model Number	1700412E1
Model Discrepancy	N/A
Power Supply	Model: LS-A8069-ADT1 I/P: 120V, 16W, 60Hz O/P: 12V, 800mA
Frequency Range	5.15 ~ 5.25 GHz
Transmit Power	13.91 dBm
Modulation Technique	OFDM (QPSK, BPSK, 16-QAM, 64-QAM)
Transmit Data Rate	54, 48, 36, 24, 18, 12, 9, 6 Mbps
Number of Channels	4 Channels
Antenna Specification	Gain: 3 dBi
Antenna Designation	Dipole-directional Antenna



Operation Frequency:

UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII)	
CHANNEL	MHz
36	5180
40	5200
44	5220
48	5240

Remark:

1. *The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.*
2. *This submittal(s) (test report) is intended for FCC ID: **HDC1700412E11** filing to comply with Section 15.407 of the FCC Part 15, Subpart E Rules.*



3. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4. Radiated testing was performed at an antenna to EUT distance 3 meters.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed for RF field strength measurement to meet the Commissions requirement, and is operated in a manner intended to generate the maximum emission in a continuous normal application.

3.2 EUT EXERCISE

The EUT is operated in the engineering mode to fix the Tx frequency for the purposes of measurement.

According to its specifications, the EUT must comply with the requirements of Section 15.407 under the FCC Rules Part 15 Subpart E.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is positioned at 0.8 m above the ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4, the conducted emission from the EUT is measured in the frequency range between 0.15 MHz and 30MHz, using the CISPR Quasi-Peak detector mode.

Radiated Emissions

The EUT is placed on the turntable, which is 0.8 m above the ground plane. The turntable is then rotated for 360 degrees to determine the proper orientation for the maximum emission level. The EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission level. And, each emission is to be maximized by changing the horizontal and vertical polarization of the receiving antenna. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.5 DESCRIPTION OF TEST MODES

The EUT (model: 1700412E1) had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

Channel Low (5180MHz), Channel Mid (5200MHz) and Channel High (5240MHz) with 6Mbps data rate were chosen for full testing.



4 INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	01/30/2008

3M Semi Anechoic Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	08/02/2007
Test Receiver	Rohde&Schwarz	ESCI	100064	11/13/2007
Switch Controller	TRC	Switch Controller	SC94050010	05/04/2008
4 Port Switch	TRC	4 Port Switch	SC94050020	05/04/2008
Horn-Antenna	TRC	HA-0502	06	06/06/2007
Horn-Antenna	TRC	HA-0801	04	05/15/2007
Horn-Antenna	TRC	HA-1201A	01	07/10/2007
Horn-Antenna	TRC	HA-1301A	01	07/18/2007
Bilog- Antenna	Sunol Sciences	JB3	A030205	03/09/2008
Turn Table	Max-Full	MFT-120S	T120S940302	N.C.R.
Antenna Tower	Max-Full	MFA-430	A440940302	N.C.R.
Controller	Max-Full	MF-CM886	CC-C-1F-13	N.C.R.
Site NSA	CCS	N/A	FCC: 965860 IC: IC 6106	09/25/2008
Test S/W	LABVIEW (V 6.1)			

Remark: The measurement uncertainty is less than +/-2.0065dB (30MHz ~ 1GHz), +/-3.0958dB (Above 1GHz) which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

Powerline Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI TEST RECEIVER 9kHz-30MHz	ROHDE & SCHWARZ	ESHS30	828144/003	10/31/2007
TWO-LINE V-NETWORK 9kHz-30MHz	SCHAFFNER	NNB41	03/10013	06/14/2007
LISN 10kHz-100MHz	EMCO	3825/2	9106-1809	03/19/2008
Test S/W	LABVIEW (V 6.1)			

Remark: The measurement uncertainty is less than +/- 2.81dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.



5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No. 199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

No. 11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT








Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	EN 55011, EN 55014-1/2, CISPR 11, CISPR 14-1/2, EN 55022, EN 55015, CISPR 22, CISPR 15, AS/NZS 3548, VCCI V3 (2001), CFR 47, FCC Part 15/18, CNS 13783-1, CNS 13439, CNS 13438, CNS 13803, CNS 14115, EN 55024, IEC 801-2, IEC 801-3, IEC 801-4, IEC/EN 61000-3-2, EIC/EN 61000-3-3, IEC/EN 61000-4-2/3/4/5/6/8/11, EN 50081-1/ EN 61000-6-3, EN 50081-2/EN 61000-6-4, EN 50081-2/EN 61000-6-1: 2001	 0824-01
USA	FCC	3/10 meter Open Area Test Sites (93105, 90471) / 3M Semi Anechoic Chamber (965860) to perform FCC Part 15/18 measurements	 93105, 90471 965860
Japan	VCCI	3/10 meter Open Area Test Sites to perform conducted/radiated measurements	 R-393/1066/725/879 C-402/747/912
Norway	NEMKO	EN 50081-1/2, EN 50082-1/2, IEC 61000-6-1/2, EN 50091-2, EN 50130-4, EN 55011, EN 55013, EN 55014-1/2, EN 55015, EN 55022, EN 55024, EN 61000-3-2/3, EN 61326-1, IEC 61000-4-2/3/4/5/6/8/11, EN 60601-1-2, EN 300 328, EN 300 422-2, EN 301 419-1, EN 301 489-01/03/07/08/09/17, EN 301 419-2/3, EN 300 454-2, EN 301 357-2	 ELA 124a ELA 124b ELA 124c
Taiwan	TAF	EN 300 328, EN 300 220-1, EN 300 220-2, EN 300 220-3, 47 CFR FCC Part 15 Subpart C, EN 61000-3-2, EN 61000-3-3, CNS 13439, CNS 13783-1, CNS 14115, CNS 13438, AS/NZS CISPR 22, CNS 13022-1, IEC 61000-4-2/3/4/5/6/8/11, CNS 13022-2/3	 Testing Laboratory 0363
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS 13439, CNS 14115	 SL2-IS-E-0014 SL2-IN-E-0014 SL2-A1-E-0014 SL2-R1-E-0014 SL2-R2-E-0014 SL2-L1-E-0014
Canada	Industry Canada	3/10 meter Open Area Test Sites (IC 2324C-3, IC 2324C-5) / 3M Semi Anechoic Chamber (IC 6106) to perform RSS 212 Issue 1	 IC 2324C-3 IC 2324C-5 IC 6106

No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



6 SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	Notebook PC (Remote)	IBM	2672 (X31)	9985H9M	WLAN: ANO20030400LEG Bluetooth: ANO20020100MTN	Line Cable: Unshielded, 10m	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core

Remark:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*




7 FCC PART 15 REQUIREMENTS

7.1 26 DB EMISSION BANDWIDTH

LIMIT

According to §15.403(i), Emission bandwidth. For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low-loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 1%EBW, VBW = RBW, Span = 50MHz / 100MHz (Turbo Mode), and Sweep = auto.
Or Set the spectrum analyzer as RBW > 1%EBW, VBW > RBW, Span >26dB bandwidth (Base Mode) / >26dB bandwidth (Turbo Mode), and Sweep = auto.
4. Mark the peak frequency and -26dB (upper and lower) frequency.
5. Repeat until all the rest channels were investigated.

TEST RESULTS

No non-compliance noted

Test Data

Channel	Frequency (MHz)	Bandwidth (B) (MHz)
Low	5180	24.431
Mid	5200	24.164
High	5240	24.213



Test Plot

IEEE 802.11a

CH Low


Agilent 17:43:08 May 4, 2007

R T

26 dB BW, a Mode Low Ch.

Ref 20 dBm

Atten 20 dB

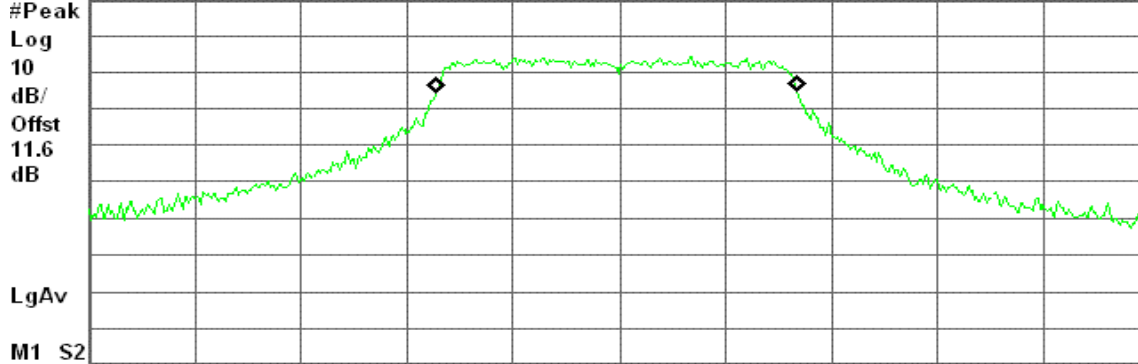

Center 5.180 00 GHz

Span 50 MHz

#Res BW 270 kHz

#VBW 750 kHz

Sweep 1 ms (601 pts)

Occupied Bandwidth
16.9006 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -97.279 kHz
x dB Bandwidth 24.431 MHz

CH Mid


Agilent 17:29:04 May 4, 2007

R T

26 dB BW, a Mode Mid Ch.

Ref 20 dBm

Atten 20 dB

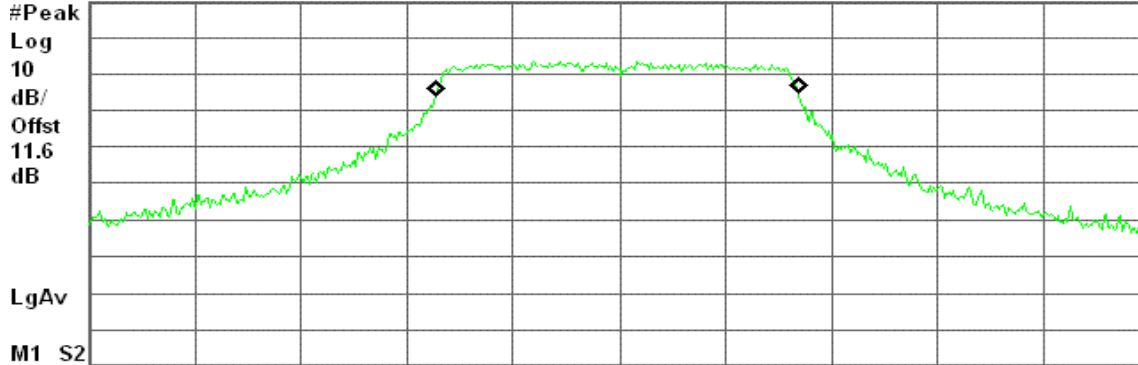

Center 5.200 00 GHz

Span 50 MHz

#Res BW 270 kHz

#VBW 750 kHz

Sweep 1 ms (601 pts)

Occupied Bandwidth
17.0083 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -96.778 kHz
x dB Bandwidth 24.164 MHz



CH High


Agilent 11:13:00 May 15, 2007

R T

26 dB BW, a Mode High Ch.

Ref 20 dBm

Atten 20 dB

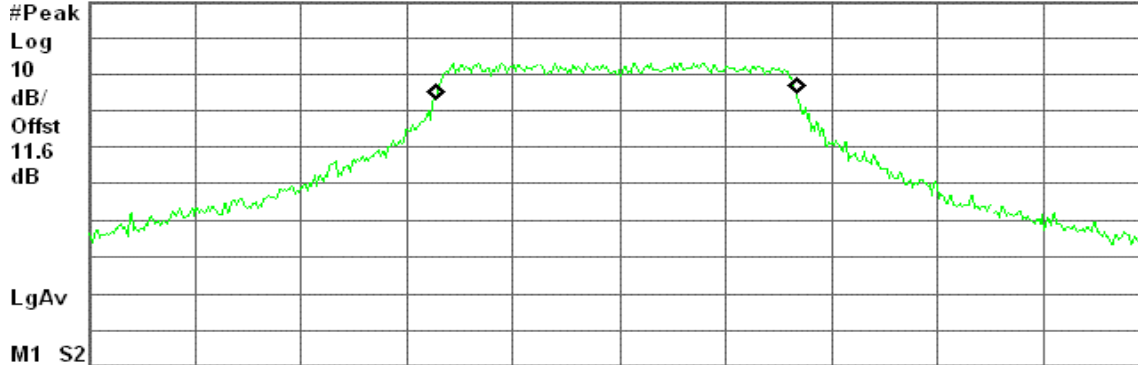

Center 5.240 00 GHz

Span 50 MHz

#Res BW 270 kHz

#VBW 750 kHz

Sweep 1 ms (601 pts)

Occupied Bandwidth
16.9145 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -126.508 kHz
x dB Bandwidth 24.213 MHz



7.2 PEAK POWER

LIMIT

According to §15.407(a),

- (1) For the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz.
- (2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz.

If transmitting antennas of directional gain greater than 6dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


The peak power shall not exceed the limit as follow:

Frequency (MHz)	26 dB Bandwidth (B) (MHz)	10 Log B (dB)	Limit 4 + 10 Log B or 11 + 10 Log B (dBm)	Power Limit (dBm)
5180	24.431	13.88	17.87	17.00
5200	24.164	13.83	24.83	24.00
5240	24.213	13.84	24.84	24.00



Test Configuration

The EUT was connected to a spectrum analyzer through a 50 Ω RF cable.



TEST PROCEDURE

Set span to encompass the entire emission bandwidth (EBW) of the signal.

Set RBW = 1 MHz / Set VBW = 3 MHz.

Use sample detector mode if bin width (i.e., span/number of points in spectrum display) < 0.5 RBW. Otherwise use peak detector mode. Use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at full control power for entire sweep of every sweep. If the device transmits continuously, with no off intervals or reduced power intervals, the trigger may be set to “free run”. Trace average 100 traces in power averaging mode. Compute power by integrating the spectrum across the 26 dB EBW of the signal. The integration can be performed using the spectrum analyzer’s band power measurement function with band limits set equal to the EBW band edges or by summing power levels in each 1 MHz band in linear power terms. The 1 MHz band power levels to be summed can be obtained by averaging, in linear power terms, power levels in each frequency bin across the 1 MHz.

TEST RESULTS

No non-compliance noted

Test Data

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)
Low	5180	13.91	17.00
Mid	5200	13.40	24.00
High	5240	13.15	24.00



Test Plot

IEEE 802.11a

CH Low


Agilent 17:43:58 May 4, 2007

R T

Peak Transmit Power, a Mode Low Ch.

Ref 30 dBm

Atten 30 dB

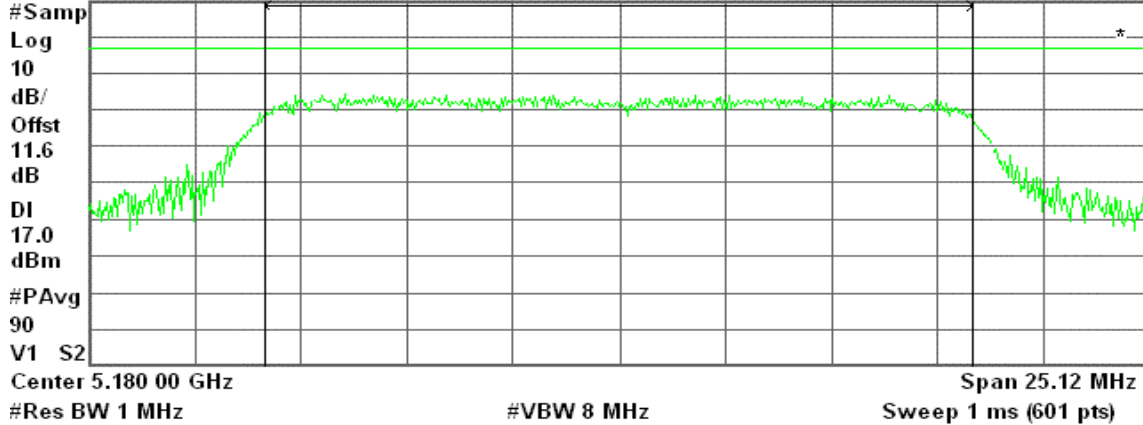

Channel Power

13.91 dBm / 16.7474 MHz

Power Spectral Density

-58.33 dBm/Hz

CH Mid


Agilent 17:31:41 May 4, 2007

R T

Peak Transmit Power, a Mode Mid Ch.

Ref 30 dBm

Atten 30 dB

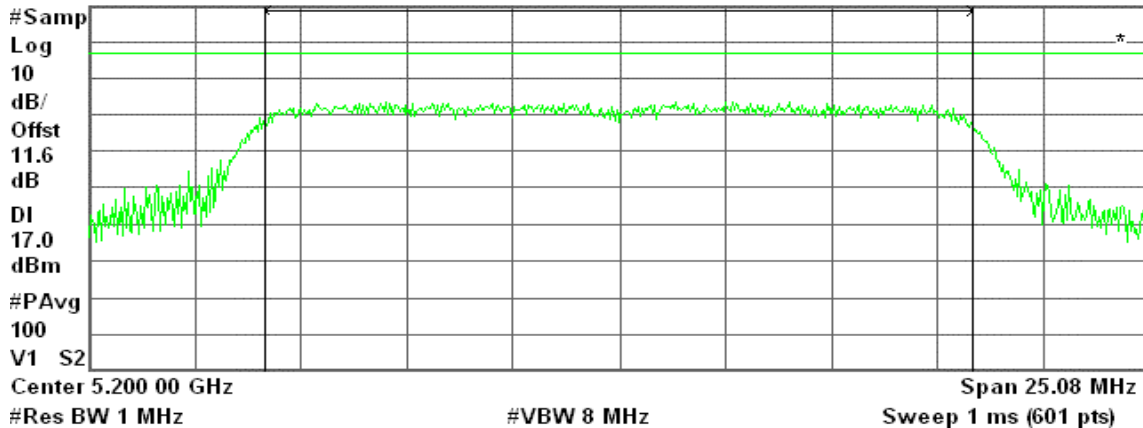

Channel Power

13.40 dBm / 16.7230 MHz

Power Spectral Density

-58.84 dBm/Hz



CH High


Agilent 11:13:44 May 15, 2007

R T

Peak Transmit Power, a Mode High Ch.

Ref 30 dBm

Atten 30 dB

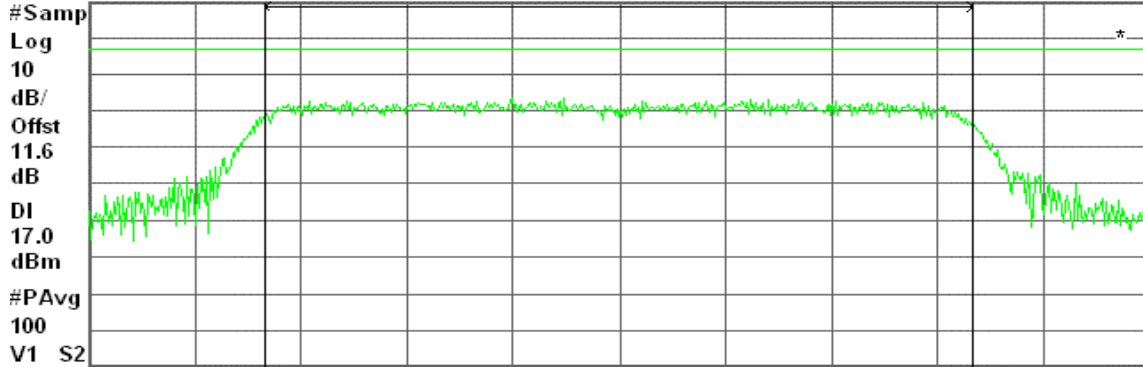

Channel Power

13.15 dBm / 16.7365 MHz

Power Spectral Density

-59.08 dBm/Hz


7.3 BAND EDGES MEASUREMENT

LIMIT

According to §15.407(b),

1. The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.
2. When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency block edges as the design of the equipment permits.

Test Configuration

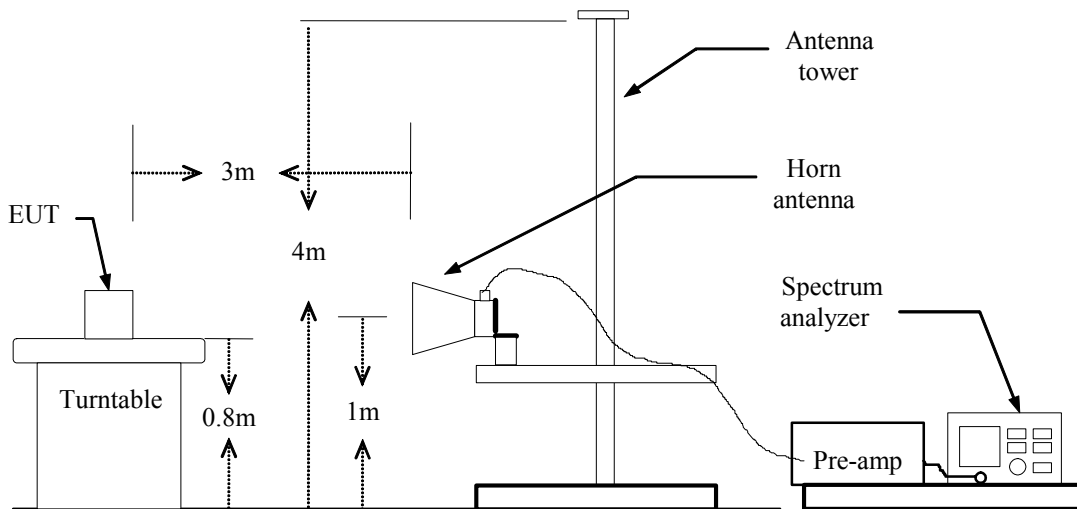

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.



Test Plot

IEEE 802.11a / CH Low


Detector mode: Peak

Polarity: Vertical

Agilent 19:34:08 May 8, 2007

R T

Mkr1 5.150 0 GHz
67.39 dBμV

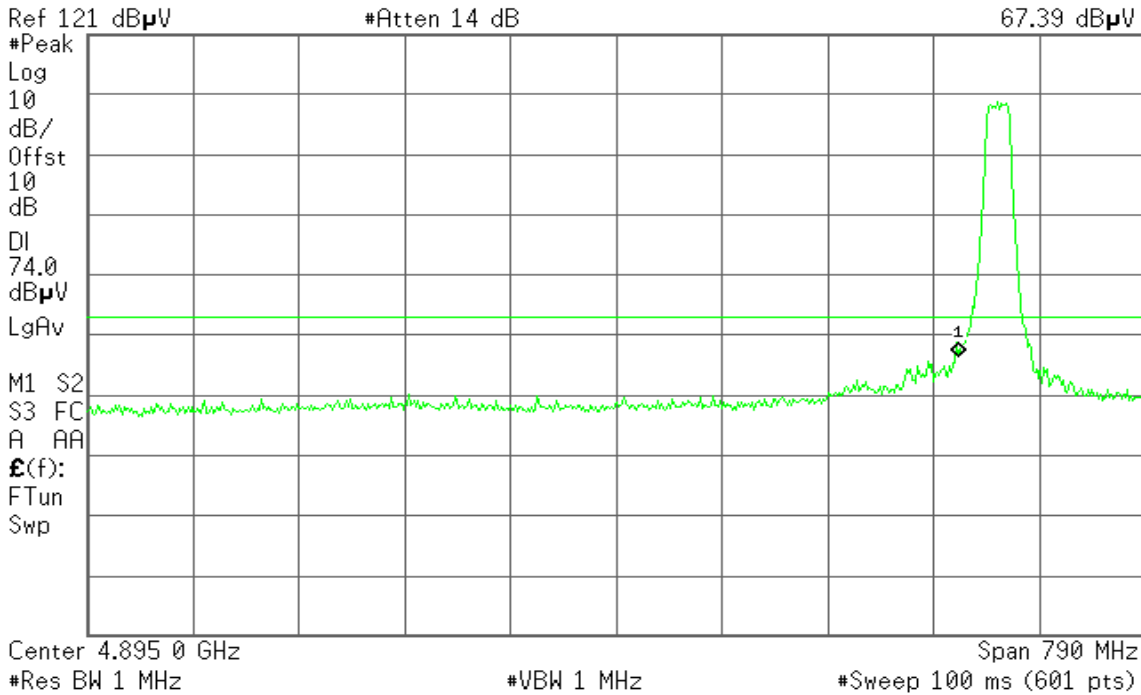


Detector mode: Average

Polarity: Vertical

Agilent 19:33:01 May 8, 2007

R T

Mkr1 5.150 0 GHz
53.17 dBμV

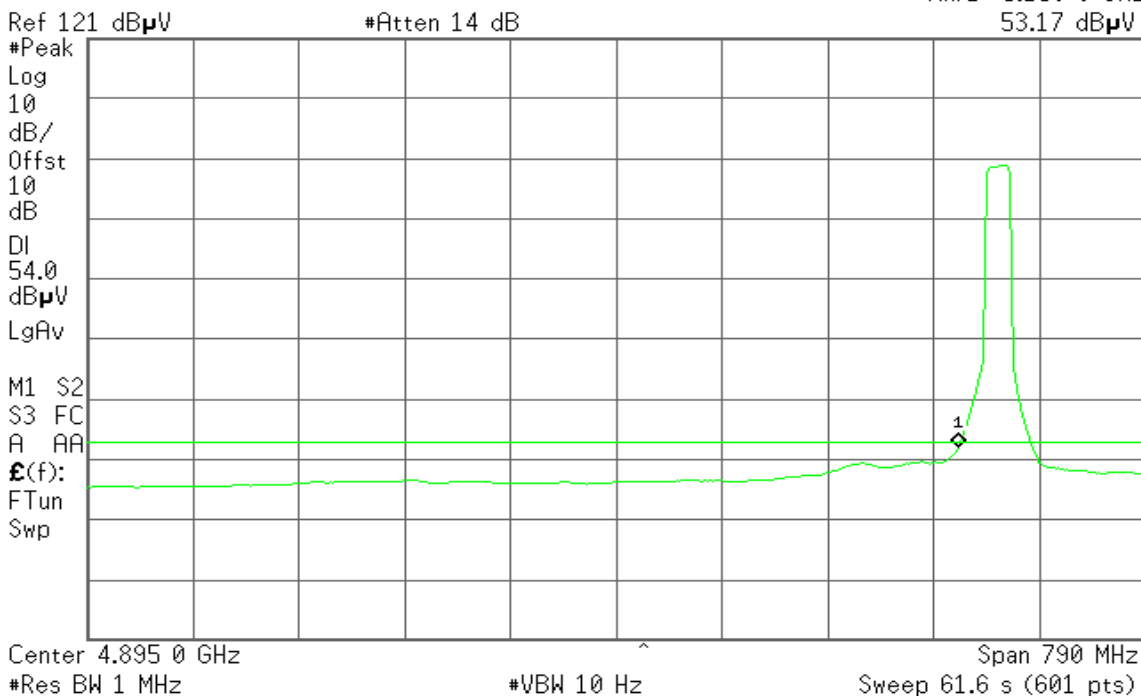




Detector mode: Peak

Polarity: Horizontal

Agilent 19:42:09 May 8, 2007

R T

Mkr1 5.150 0 GHz
63.30 dBµV

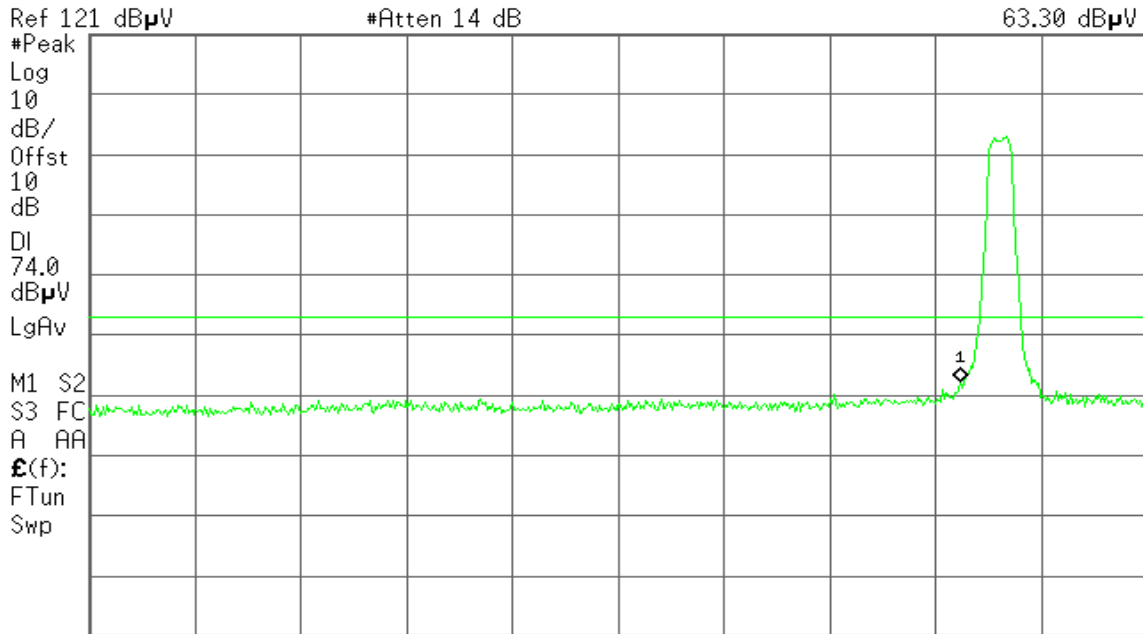

Center 4.895 0 GHz

#Res BW 1 MHz

#VBW 1 MHz

Span 790 MHz

#Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Horizontal

Agilent 19:41:07 May 8, 2007

R T

Mkr1 5.150 0 GHz
49.47 dBµV

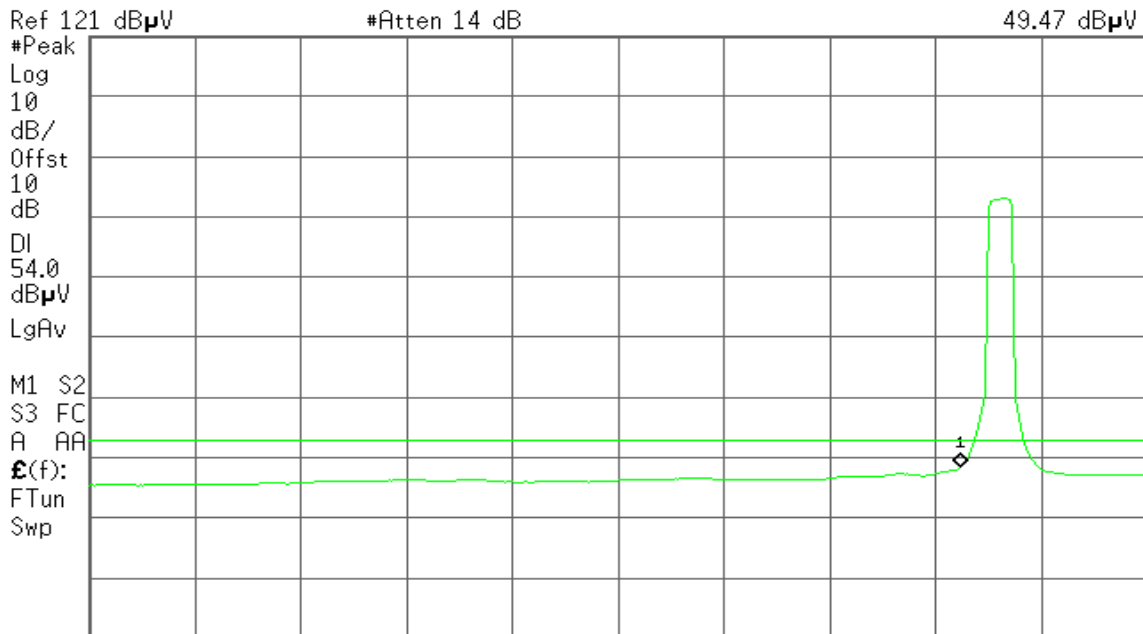

Center 4.895 0 GHz

#Res BW 1 MHz

#VBW 10 Hz

Span 790 MHz

Sweep 61.6 s (601 pts)



IEEE 802.11a / CH High

Detector mode: Peak

Polarity: Vertical

Agilent 13:35:49 May 15, 2007


R T

Mkr1 5.350 0 GHz

60.92 dB μ V

Ref 121 dB μ V

#Atten 14 dB

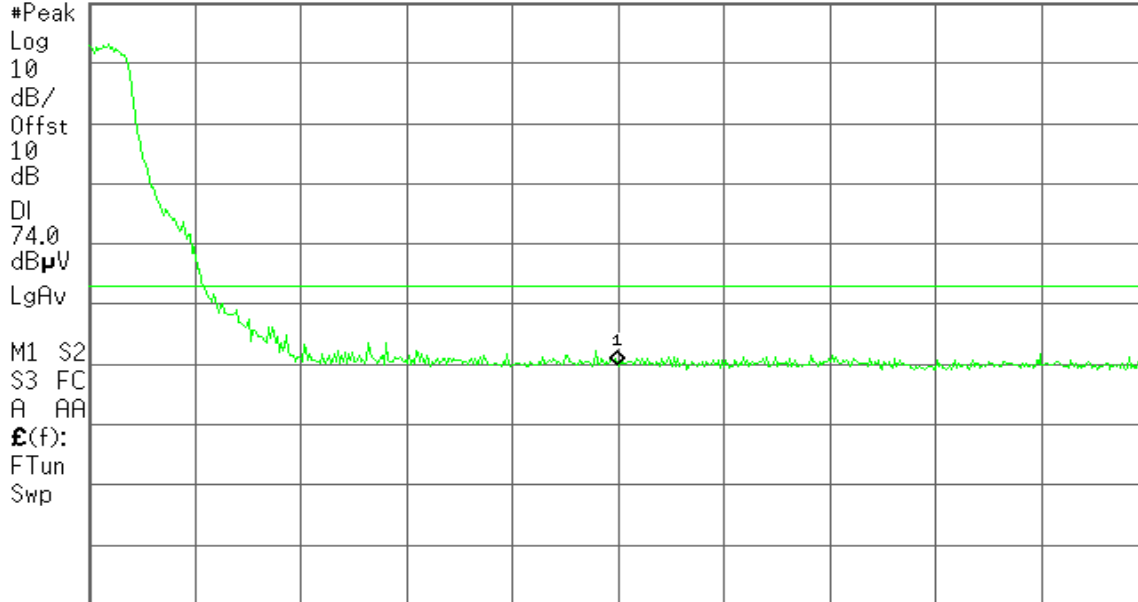

Start 5.240 0 GHz

Stop 5.460 0 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Vertical

Agilent 13:37:00 May 15, 2007


R T

Mkr1 5.350 0 GHz

49.06 dB μ V

Ref 121 dB μ V

#Atten 14 dB

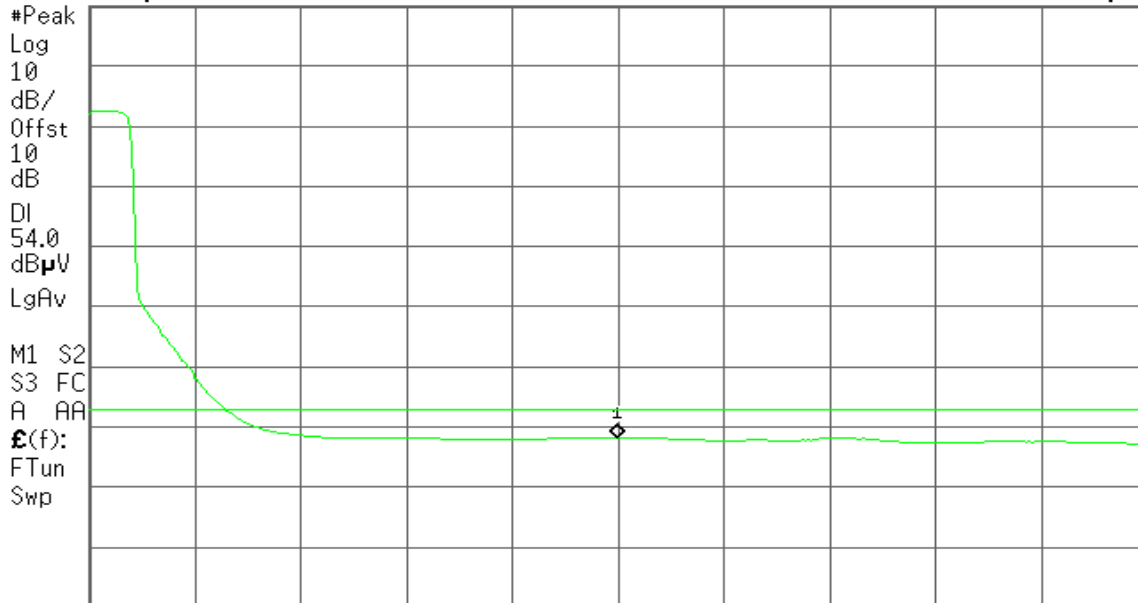

Start 5.240 0 GHz

Stop 5.460 0 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 17.15 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 13:27:02 May 15, 2007

R L

Mkr1 5.350 0 GHz
59.43 dBµV

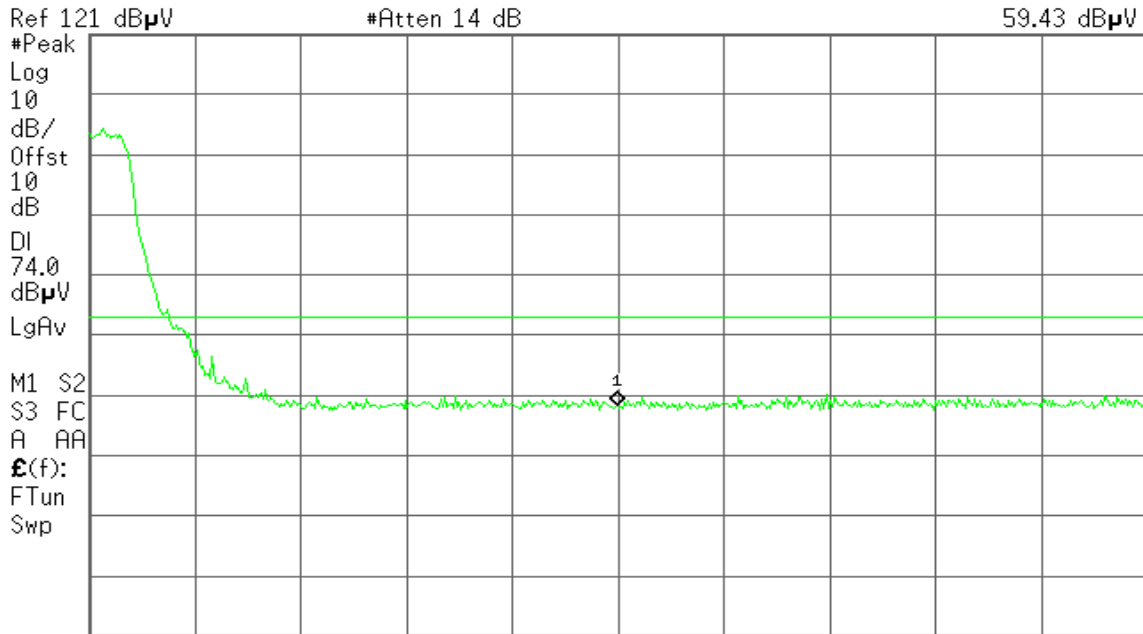

Start 5.240 0 GHz #Res BW 1 MHz #VBW 1 MHz #Sweep 100 ms (601 pts) Stop 5.460 0 GHz


Detector mode: Average

Polarity: Horizontal

Agilent 13:29:43 May 15, 2007

R T

Mkr1 5.350 0 GHz
47.12 dBµV

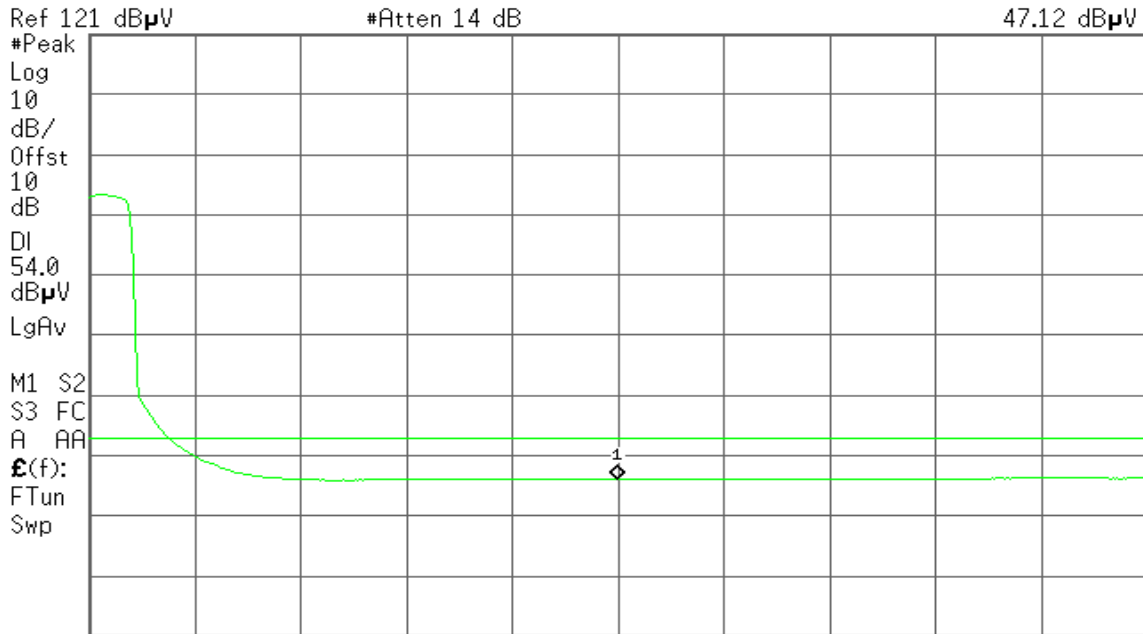

Start 5.240 0 GHz #Res BW 1 MHz #VBW 10 Hz Sweep 17.15 s (601 pts) Stop 5.460 0 GHz

7.4 PEAK POWER SPECTRAL DENSITY


LIMIT

According to §15.407(a),

- (1) For the band 5.15-5.25 GHz, the peak power spectral density shall not exceed 4dBm in any 1MHz band.
- (2) For the band 5.25-5.35 GHz, the peak power spectral density shall not exceed 11dBm in any 1MHz band.

If transmitting antennas of directional gain greater than 6dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 1MHz, VBW = 3MHz, Span = Base mode: 25MHz / Turbo mode: 50MHz, Sweep=Auto.
4. Record the max. reading.

Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted

Test Data

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)	Result
Low	5180	3.837	4.00	-0.163	PASS
Mid	5200	3.748	11.00	-7.252	PASS
High	5240	3.473	11.00	-7.527	PASS



Test Plot

IEEE 802.11a

CH Low

Agilent 17:44:12 May 4, 2007

R T


Peak Power Spectral Density, a Mode Low Ch.

Mkr1 5.173 51 GHz

Ref 30 dBm

Atten 30 dB

3.837 dBm

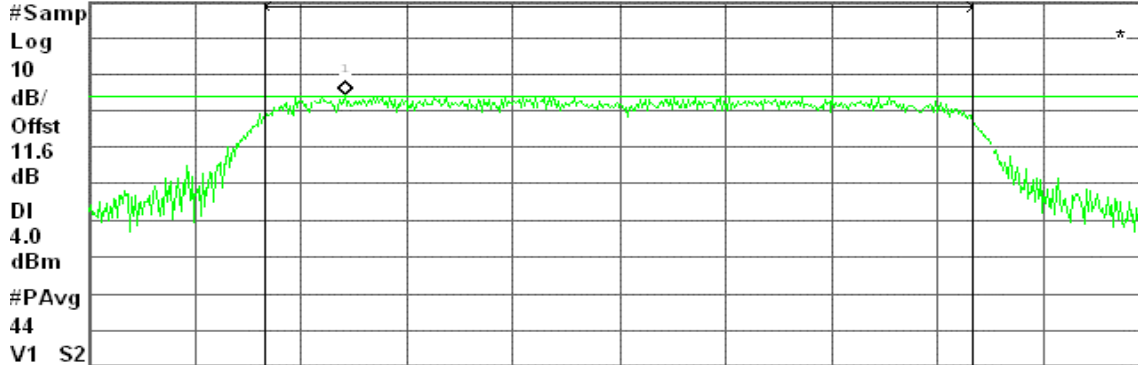

Center 5.180 00 GHz

Span 25.12 MHz

#Res BW 1 MHz

#VBW 8 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

14.15 dBm / 16.7474 MHz

-58.09 dBm/Hz

CH Mid

Agilent 17:32:25 May 4, 2007

R T


Peak Power Spectral Density, a Mode Mid Ch.

Mkr1 5.194 48 GHz

Ref 30 dBm

Atten 30 dB

3.748 dBm

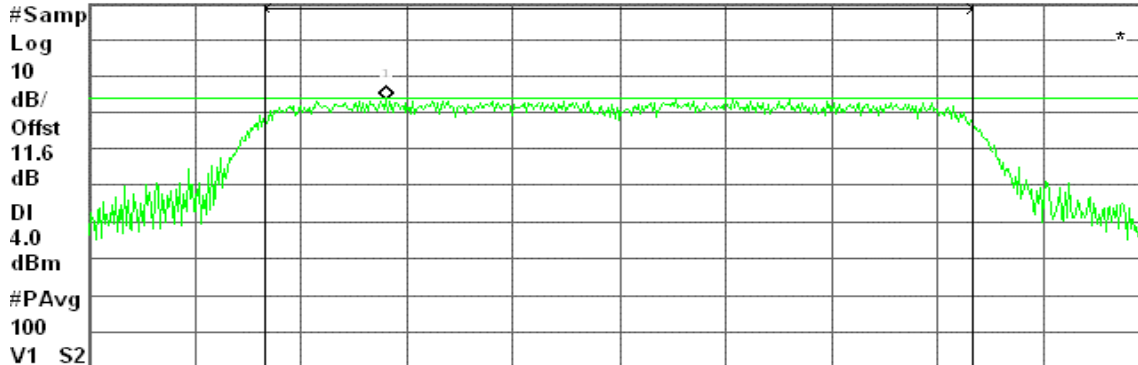

Center 5.200 00 GHz

Span 25.08 MHz

#Res BW 1 MHz

#VBW 8 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

13.39 dBm / 16.7230 MHz

-58.84 dBm/Hz



CH High

Agilent 11:14:44 May 15, 2007

R T


Peak Power Spectral Density, a Mode High Ch.

Mkr1 5.238 70 GHz

Ref 30 dBm

Atten 30 dB

3.473 dBm

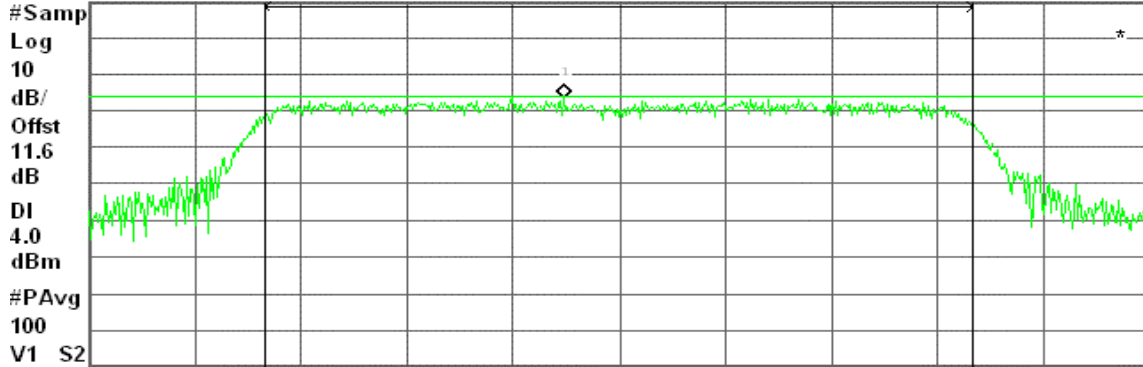

Center 5.240 00 GHz

Span 25.1 MHz

#Res BW 1 MHz

#VBW 8 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

12.71 dBm / 16.7365 MHz

-59.52 dBm/Hz




7.5 PEAK EXCURSION

LIMIT

According to §15.407(a)(6), the ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

Test Configuration



TEST PROCEDURE

The test is performed in accordance with <FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices> – Part 15, Subpart E, August 2002.

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to spectrum.
3. Trace A, Set RBW =1MHz, VBW = 3MHz, Span >26dB bandwidth (Base Mode) / >26dB bandwidth (Turbo Mode), Max. hold.
4. Trace B, Set RBW = 1MHz, VBW = 30kHz, Span >26dB bandwidth (Base Mode) / >26dB bandwidth (Turbo Mode), Max. hold.
5. Delta Mark trace A Maximum frequency and trace B same frequency.
6. Repeat the above procedure until measurements for all frequencies were complete.

TEST RESULTS

No non-compliance noted

Test Data

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)	Result
Low	5180	9.00	13.00	-4.00	PASS
Mid	5200	9.67	13.00	-3.33	PASS
High	5240	8.27	13.00	-4.73	PASS



Test Plot

IEEE 802.11a

CH Low

Agilent 17:44:40 May 4, 2007


R T

Peak Excursion, a Mode Low Ch.

Δ Mkr1 0 Hz
9.00 dB

Ref 30 dBm

Atten 30 dB

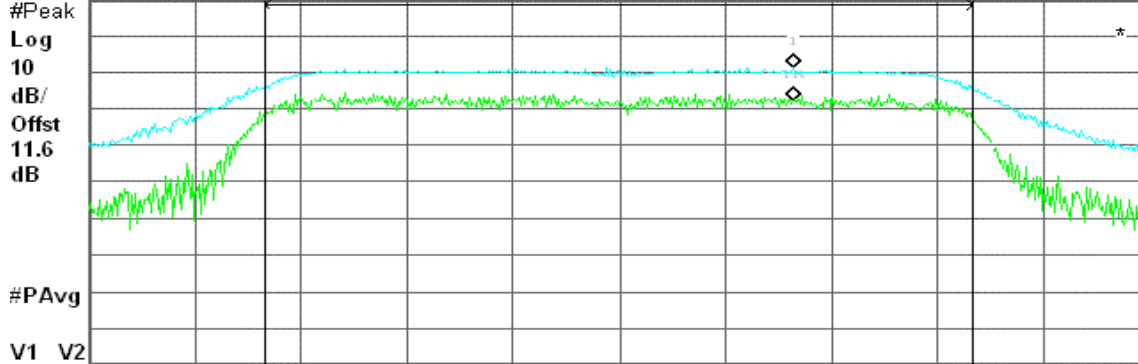

Center 5.180 00 GHz

Span 25.12 MHz

#Res BW 1 MHz

#VBW 8 MHz

Sweep 20 ms (601 pts)

Channel Power

Power Spectral Density

20.23 dBm / 16.7474 MHz

-52.01 dBm/Hz

CH Mid

Agilent 17:33:56 May 4, 2007


R T

Peak Excursion, a Mode Mid Ch.

Δ Mkr1 0 Hz
9.67 dB

Ref 30 dBm

Atten 30 dB

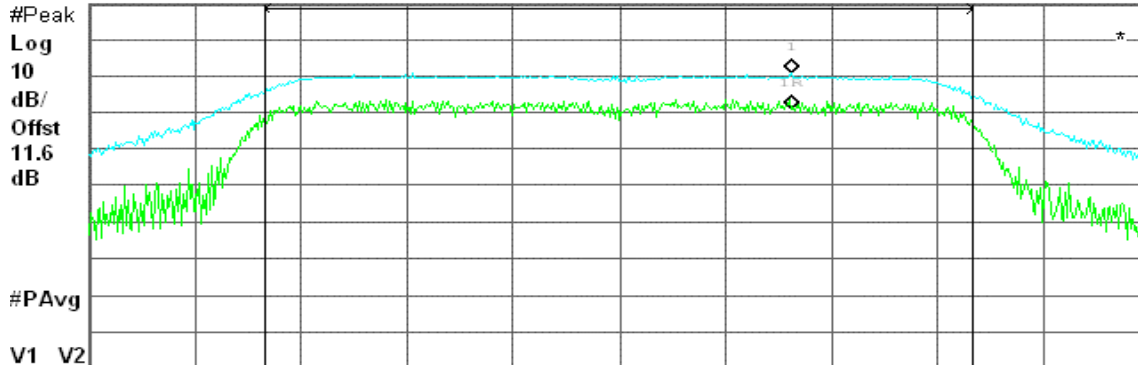

Center 5.200 00 GHz

Span 25.08 MHz

#Res BW 1 MHz

#VBW 8 MHz

Sweep 20 ms (601 pts)

Channel Power

Power Spectral Density

19.76 dBm / 16.7230 MHz

-52.47 dBm/Hz



CH High

Agilent 11:15:15 May 15, 2007

R T

Peak Excursion, a Mode High Ch.

Δ Mkr1 0 Hz

Ref 30 dBm

Atten 30 dB

8.27 dB

#Peak

Log

10

dB/

Offst

11.6

dB

#PAvg

V1 V2

Center 5.240 00 GHz

Span 25.1 MHz

#Res BW 1 MHz

#VBW 8 MHz


Sweep 20 ms (601 pts)

Channel Power

Power Spectral Density

19.27 dBm / 16.7365 MHz

-52.97 dBm/Hz

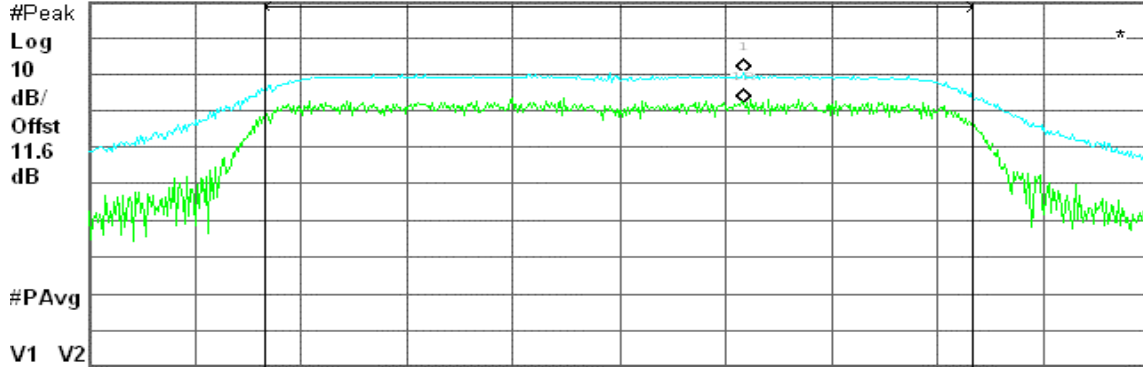



7.6 RADIATED UNDESIRABLE EMISSION

LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.


Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$ at 3-meter)	Field Strength (dB $\mu\text{V}/\text{m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Configuration

Below 1 GHz

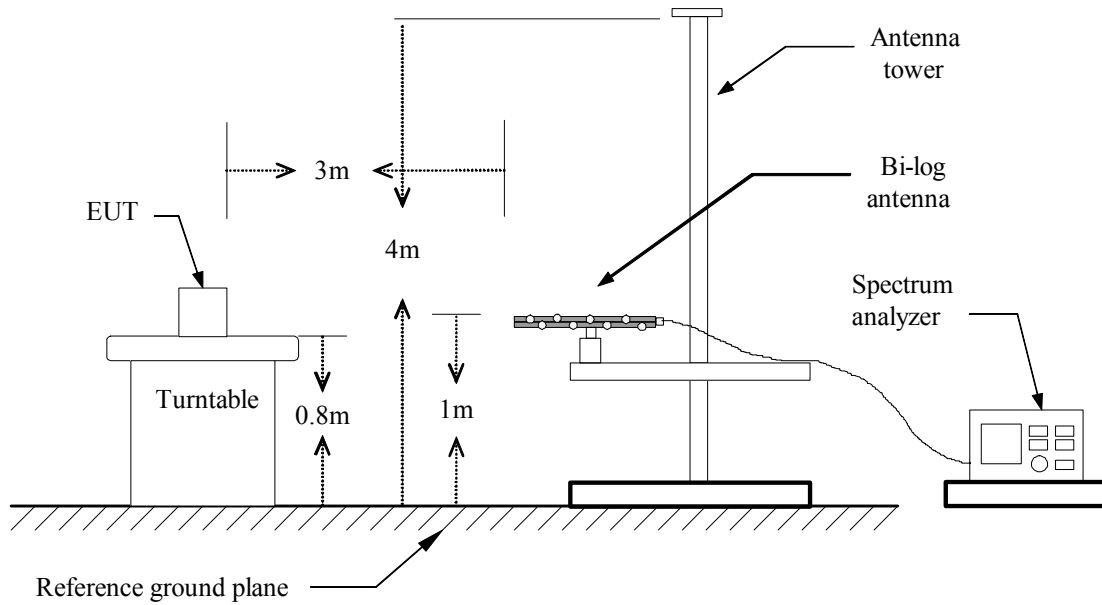

Above 1 GHz

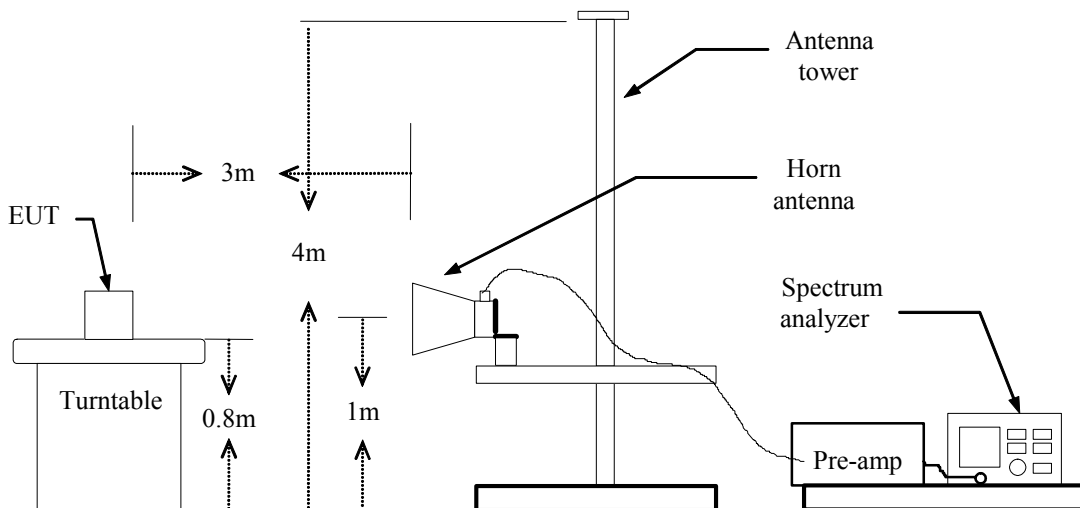



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.



TEST RESULTS

Below 1 GHz

Operation Mode: Normal Link

Test Date: August 10, 2006

Temperature: 22°C

Tested by: Rex Lai

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
38.08	V	44.20	-11.60	32.60	40.00	-7.40	QP
249.87	V	53.51	-14.56	38.95	46.00	-7.05	Peak
400.22	V	45.78	-10.00	35.78	46.00	-10.22	Peak
450.33	V	45.04	-8.73	36.31	46.00	-9.69	Peak
629.78	V	43.86	-5.34	38.51	46.00	-7.49	Peak
809.23	V	39.19	-2.93	36.25	46.00	-9.75	Peak
249.87	H	52.10	-14.56	37.53	46.00	-8.47	Peak
359.80	H	42.61	-10.42	32.19	46.00	-13.81	Peak
400.22	H	48.32	-10.00	38.32	46.00	-7.68	Peak
629.78	H	38.40	-5.34	33.05	46.00	-12.95	Peak
720.32	H	37.72	-4.30	33.42	46.00	-12.58	Peak
809.23	H	37.04	-2.93	34.10	46.00	-11.90	Peak

Remark:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).



Above 1 GHz

Operation Mode: Tx / IEEE 802.11a / CH Low

Test Date: May 8, 2007

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1105.00	V	53.37	---	-10.62	42.75	---	74.00	54.00	-11.25	Peak
1595.00	V	58.23	---	-9.03	49.20	---	74.00	54.00	-4.80	Peak
5013.33	V	59.44	46.17	0.74	60.18	46.91	74.00	54.00	-7.09	AVG
5176.67	V	52.68	---	0.97	53.64	---	74.00	54.00	-0.36	Peak
5503.33	V	50.87	---	1.41	52.29	---	74.00	54.00	-1.71	Peak
10366.67	V	51.42	36.56	14.07	65.49	50.63	74.00	54.00	-3.37	AVG
1000.00	H	56.83	---	-10.79	46.04	---	74.00	54.00	-7.96	Peak
1595.00	H	49.61	---	-9.03	40.58	---	74.00	54.00	-13.42	Peak
4383.33	H	44.88	---	0.04	44.92	---	74.00	54.00	-9.08	Peak
5176.67	H	51.94	---	0.97	52.91	---	74.00	54.00	-1.09	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11a / CH Mid

Test Date: May 8, 2007

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1595.00	V	52.86	---	-9.03	43.83	---	74.00	54.00	-10.17	Peak
3461.67	V	44.51	---	-1.87	42.65	---	74.00	54.00	-11.35	Peak
5001.67	V	60.67	48.28	0.73	61.40	49.01	74.00	54.00	-4.99	AVG
5188.33	V	59.40	48.90	0.98	60.38	49.88	74.00	54.00	-4.12	AVG
5515.00	V	51.76	---	1.43	53.19	---	74.00	54.00	-0.81	Peak
10400.00	V	51.55	37.47	14.23	65.78	51.70	74.00	54.00	-2.30	AVG
4990.00	H	45.96	---	0.71	46.68	---	74.00	54.00	-7.32	Peak
5200.00	H	52.15	---	1.00	53.15	---	74.00	54.00	-0.85	Peak
10400.00	H	38.32	---	14.23	52.55	---	74.00	54.00	-1.45	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11a / CH High

Test Date: May 15, 2007

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 30% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1595.00	V	52.45	---	-9.03	43.42	---	74.00	54.00	-10.58	Peak
1863.33	V	48.72	---	-6.36	42.36	---	74.00	54.00	-11.64	Peak
5001.67	V	52.64	---	0.73	53.36	---	74.00	54.00	-0.64	Peak
5235.00	V	51.56	---	1.05	52.60	---	74.00	54.00	-1.40	Peak
5526.67	V	49.38	---	1.44	50.82	---	74.00	54.00	-3.18	Peak
10483.33	V	48.30	35.69	14.63	62.93	50.32	74.00	54.00	-3.68	AVG
1000.00	H	56.87	---	-10.79	46.08	---	74.00	54.00	-7.92	Peak
1595.00	H	48.13	---	-9.03	39.10	---	74.00	54.00	-14.90	Peak
5001.67	H	47.91	---	0.73	48.63	---	74.00	54.00	-5.37	Peak
5235.00	H	50.67	---	1.05	51.71	---	74.00	54.00	-2.29	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).




7.7 CONDUCTED UNDESIRABLE EMISSION

LIMIT

According to 15.407(b),

- (1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band.

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 1 MHz. The video bandwidth is set to 1 MHz. Peak detector measurements are compared to the average EIRP limit, adjusted for the maximum antenna gain. If necessary, additional average detection measurements are made.

Measurements are made over the 30 MHz to 40 GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

No non-compliance noted



Test Plot


IEEE 802.11a

CH Low

30MHz ~ 40GHz

Agilent 17:58:24 May 4, 2007

R T

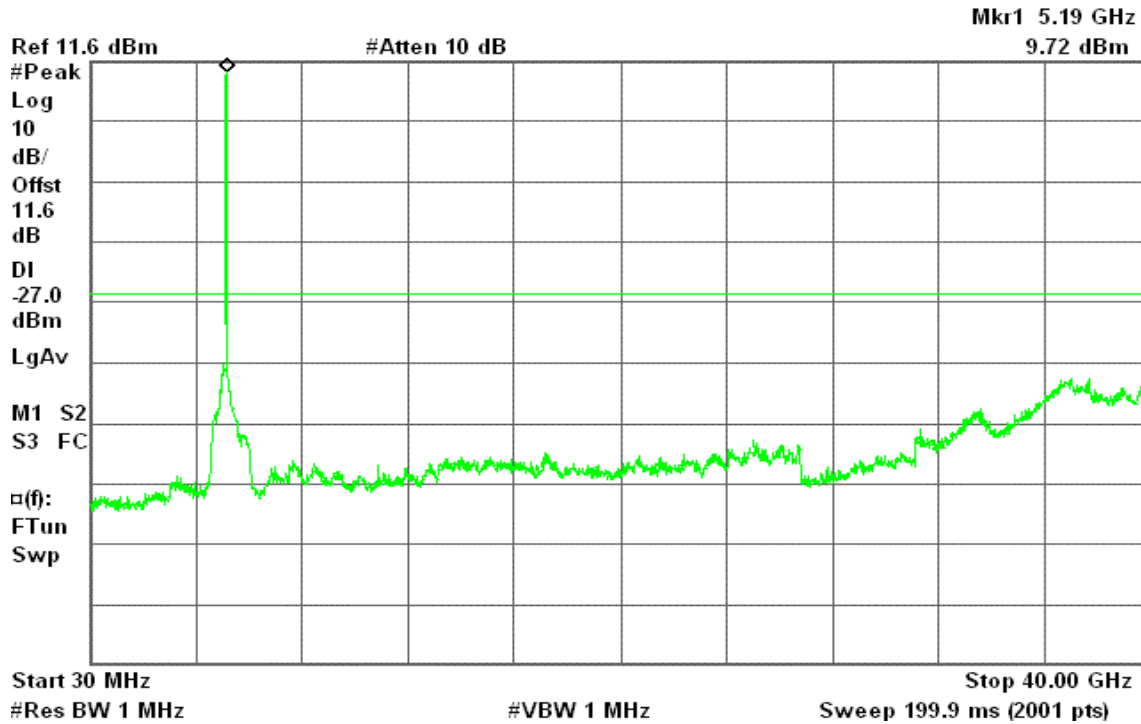


CH Mid

30MHz ~ 40GHz

Agilent 17:37:56 May 4, 2007

R T

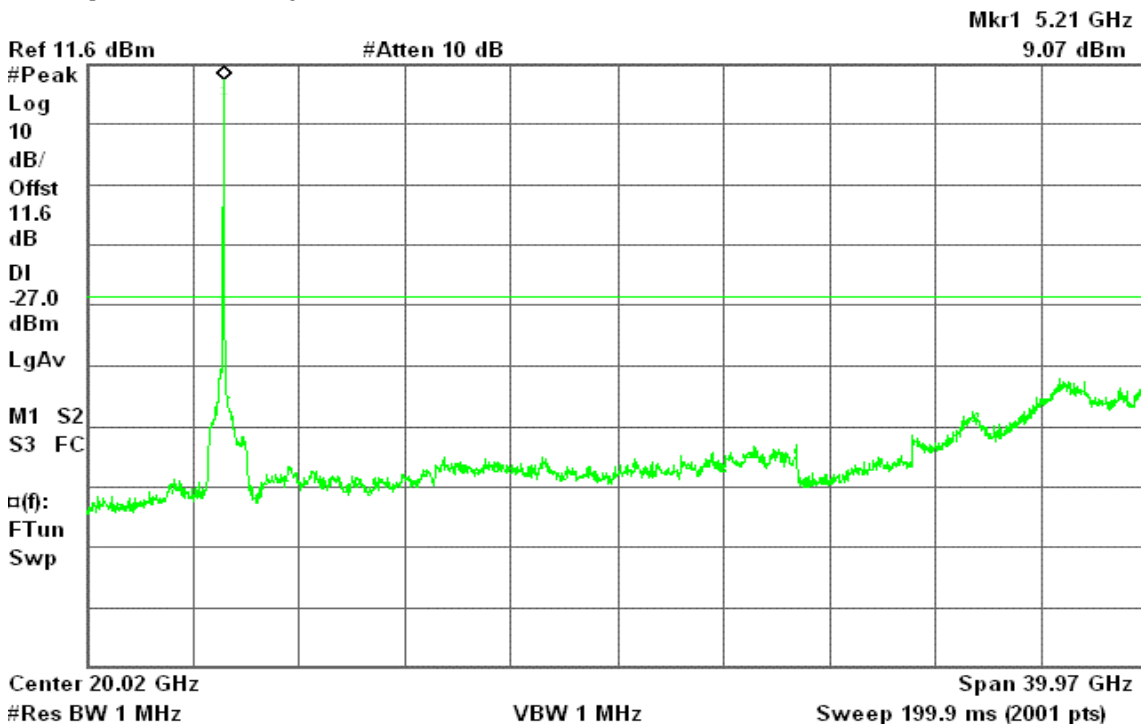




CH High

30MHz ~ 40GHz

Agilent 11:18:35 May 15, 2007

R T

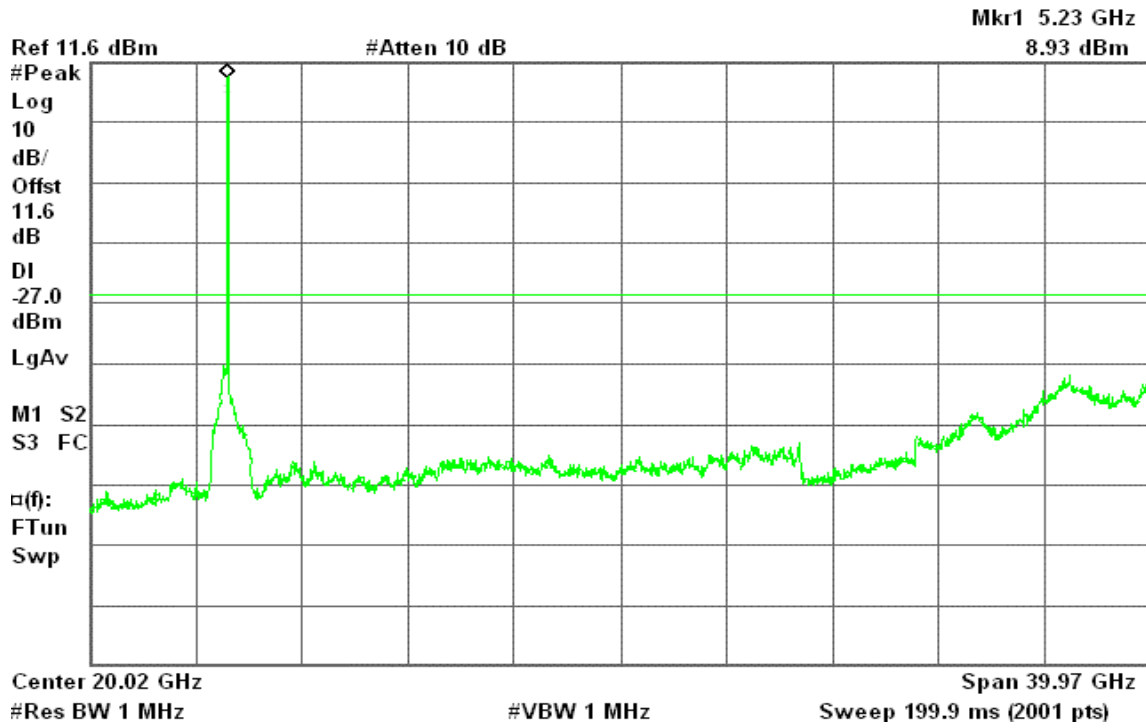



7.8 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data

Operation Mode: Normal Link **Test Date:** February 13, 2007
Temperature: 25°C **Tested by:** Ming Chen
Humidity: 55% RH

Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB)	QP Result (dBuV)	AV Result (dBuV)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.260	31.430	31.020	0.100	31.530	31.120	61.431	51.431	-29.901	-20.311	L1
3.604	30.910	28.390	0.100	31.010	28.490	56.000	46.000	-24.990	-17.510	L1
4.095	27.950	25.520	0.109	28.059	25.629	56.000	46.000	-27.941	-20.371	L1
4.295	27.860	25.330	0.130	27.990	25.460	56.000	46.000	-28.010	-20.540	L1
13.422	22.790	21.060	0.768	23.558	21.828	60.000	50.000	-36.442	-28.172	L1
20.805	26.400	25.540	1.200	27.600	26.740	60.000	50.000	-32.400	-23.260	L1
0.260	33.410	30.950	0.100	33.510	31.050	61.431	51.431	-27.921	-20.381	L2
3.633	31.470	28.910	0.100	31.570	29.010	56.000	46.000	-24.430	-16.990	L2
4.095	29.320	26.420	0.109	29.429	26.529	56.000	46.000	-26.571	-19.471	L2
4.329	28.950	26.530	0.133	29.083	26.663	56.000	46.000	-26.917	-19.337	L2
12.198	22.720	20.980	0.744	23.464	21.724	60.000	50.000	-36.536	-28.276	L2
21.478	24.570	21.840	1.200	25.770	23.040	60.000	50.000	-34.230	-26.960	L2


Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)




Test Plots

Conducted emissions (Line 1)

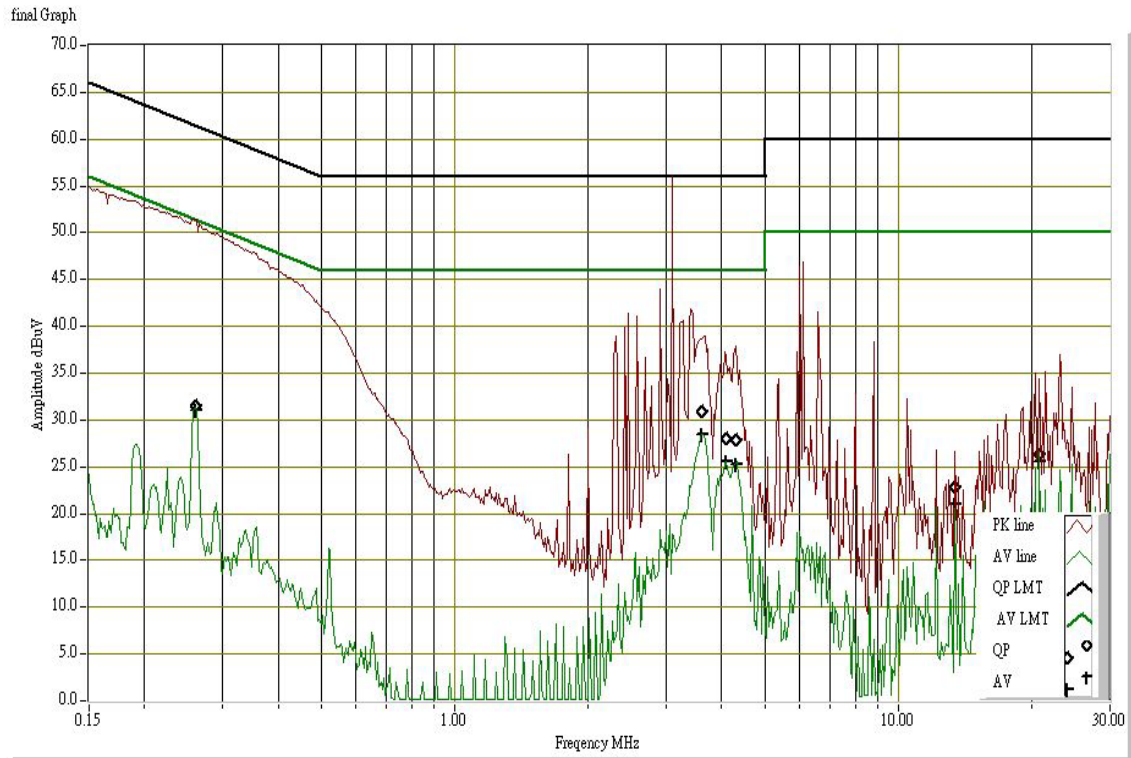

Conducted emissions (Line 2)

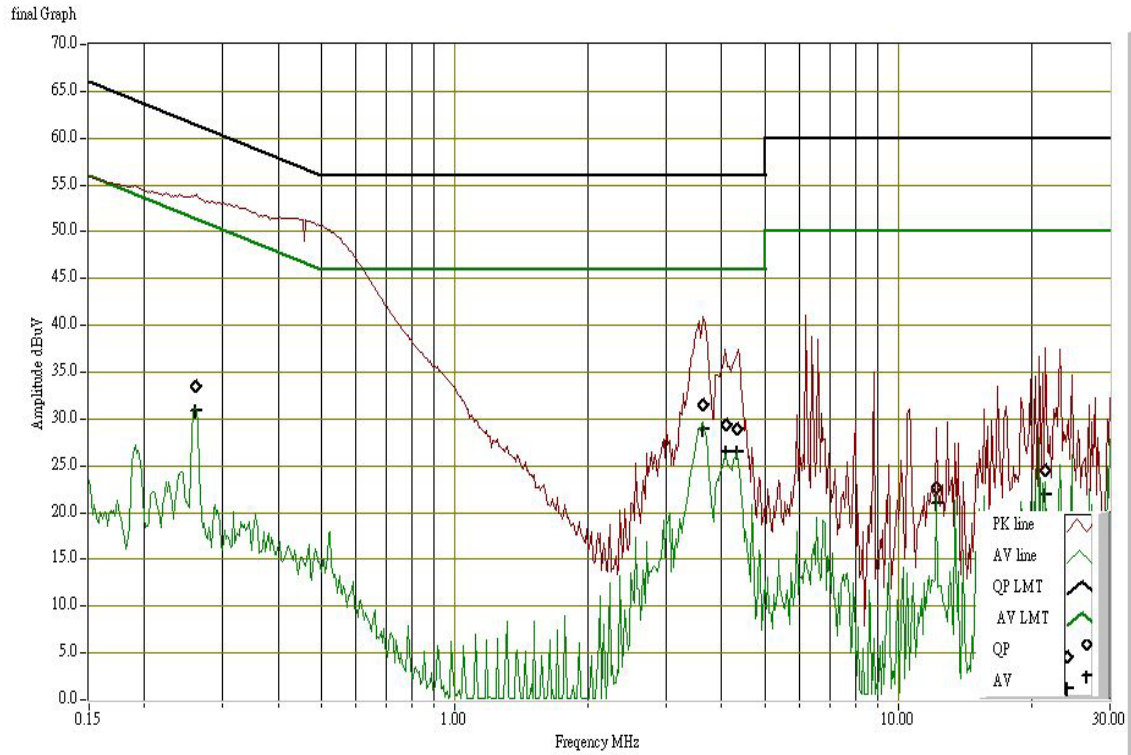



7.9 TRANSMISSION IN ABSENCE OF DATA

LIMIT

According to §15.319(f), the device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude transmission of control and signaling information or use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

Applicants shall include in their application for equipment authorization a description of how this requirement is met.

TEST RESULTS

No non-compliance noted

Remark: *For the details, please refer to the user's manual.*

7.10 FREQUENCY STABILITY

LIMIT

According to §15.407(g), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

TEST RESULTS

Please refer to the user's manual for further details.

Remark: *An examination of the band-edge plots shows that the emission will stay within the authorized band over the entire temperature range.*



APPENDIX I RADIO FREQUENCY EXPOSURE

LIMIT

According to §15.407(f), U-NII devices are subject to the radio frequency radiation exposure requirements specified in §§ 1.1307(b), 2.1091 and 2.1093 of this chapter, as appropriate. All equipment shall be considered to operate in a "general population/uncontrolled" environment. Applications for equipment authorization of devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. Technical information showing the basis for this statement must be submitted to the Commission upon request.

EUT Specification

EUT	NetVanta 150
Frequency band (Operating)	<input type="checkbox"/> WLAN: 2.412GHz ~ 2.462GHz <input checked="" type="checkbox"/> WLAN: 5.15GHz ~ 5.25GHz <input type="checkbox"/> WLAN: 5.725GHz ~ 5.850GHz <input type="checkbox"/> Bluetooth: 2.402 GHz ~ 2.482 GHz <input type="checkbox"/> Others: _____
Device category	<input type="checkbox"/> Portable (<20cm separation) <input checked="" type="checkbox"/> Mobile (>20cm separation) <input type="checkbox"/> Others: _____
Exposure classification	General Population/Uncontrolled exposure ($S=1mW/cm^2$)
Antenna diversity	<input type="checkbox"/> Single antenna <input checked="" type="checkbox"/> Multiple antennas <input type="checkbox"/> Tx diversity <input type="checkbox"/> Rx diversity <input checked="" type="checkbox"/> Tx/Rx diversity
Max. output power	13.91 dBm (24.60mW)
Antenna gain (Max)	3 dBi (Numeric gain: 2.00)
Evaluation applied	<input checked="" type="checkbox"/> MPE Evaluation* <input type="checkbox"/> SAR Evaluation <input type="checkbox"/> N/A
Remark: 1. The maximum output power is <u>13.91 dBm (24.60mW)</u> at <u>5180MHz</u> (with <u>2.00numeric antenna gain.</u>) 2. For mobile or fixed location transmitters, no SAR consideration applied. The maximum power density is $1.0 mW/cm^2$ even if the calculation indicates that the power density would be larger.	

TEST RESULTS

No non-compliance noted.



Calculation

Given $E = \frac{\sqrt{30 \times P \times G}}{d}$ & $S = \frac{E^2}{3770}$

Where $E =$ Field strength in Volts / meter

$P =$ Power in Watts

$G =$ Numeric antenna gain

$d =$ Distance in meters

$S =$ Power density in milliwatts / square centimeter

Combining equations and re-arranging the terms to express the distance as a function of the remaining variables yields:

$$S = \frac{30 \times P \times G}{3770d^2}$$

Changing to units of mW and cm, using:

$P (mW) = P (W) / 1000$ and

$d (cm) = d(m) / 100$

Yields

$$S = \frac{30 \times (P/1000) \times G}{3770 \times (d/100)^2} = 0.0796 \times \frac{P \times G}{d^2} \quad \text{Equation 1}$$

Where $d =$ Distance in cm

$P =$ Power in mW

$G =$ Numeric antenna gain

$S =$ Power density in mW / cm²

Maximum Permissible Exposure

EUT output power = 24.60mW

Numeric Antenna gain = 2.00

Substituting the MPE safe distance using d = 20 cm into Equation 1:

Yields

$$S = 0.000199 \times P \times G$$

Where $P =$ Power in mW

$G =$ Numeric antenna gain

$S =$ Power density in mW / cm²

→ Power density = 0.00979 mW / cm²

(For mobile or fixed location transmitters, the maximum power density is 1.0 mW/cm² even if the calculation indicates that the power density would be larger.)