




Transmitter Radiated Unwanted Emissions (Below 1GHz)

Transmitter Radiated Unwanted Emissions (Below 1GHz)			
Operating Mode	2	Polarization	V
Operating Function	UPS mode		

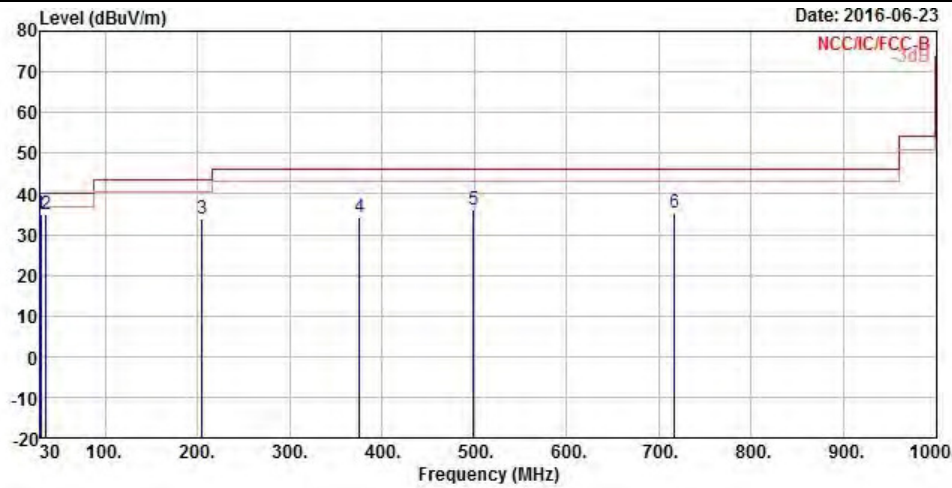


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	30.000	34.84	-5.16	40.00	35.99	25.62	0.78	27.55	QP
2	35.820	34.90	-5.10	40.00	39.58	22.01	0.85	27.54	QP
3	204.600	33.86	-9.64	43.50	42.13	16.34	2.30	26.91	Peak
4	375.320	34.35	-11.65	46.00	36.07	21.82	3.16	26.70	Peak
5	499.480	36.21	-9.79	46.00	36.64	23.80	3.56	27.79	Peak
6	716.760	35.27	-10.73	46.00	33.00	25.73	4.44	27.90	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Below 1GHz)			
Operating Mode	2	Polarization	H
Operating Function	UPS mode		

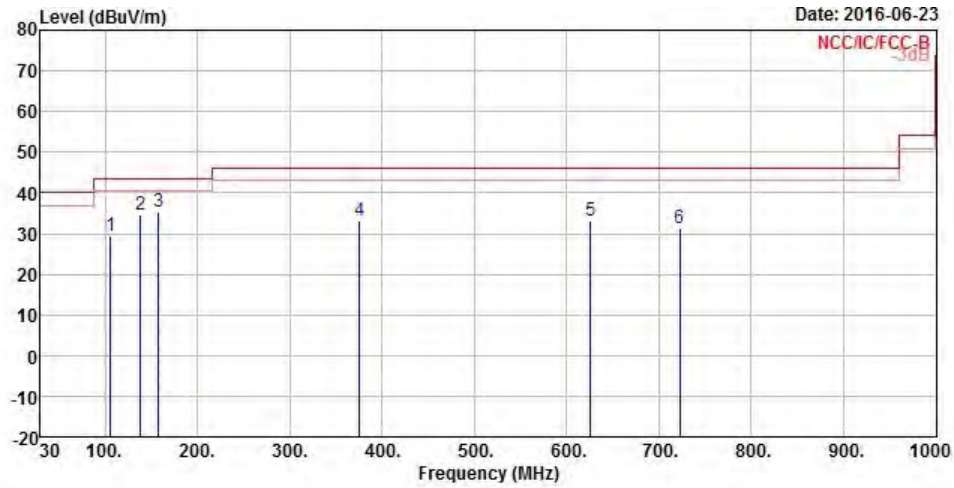


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	105.660	29.43	-14.07	43.50	37.25	17.95	1.59	27.36	Peak
2	138.640	34.76	-8.74	43.50	42.21	17.93	1.83	27.21	Peak
3	158.040	35.31	-8.19	43.50	43.93	16.53	1.97	27.12	Peak
4	375.320	33.19	-12.81	46.00	34.91	21.82	3.16	26.70	Peak
5	625.580	33.02	-12.98	46.00	31.76	25.10	4.16	28.00	Peak
6	722.580	31.39	-14.61	46.00	29.00	25.83	4.46	27.90	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.




Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5150-5250MHz


Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11a (Ant. A)	Test Freq. (MHz)	5180
N _{TX}	1	Polarization	V

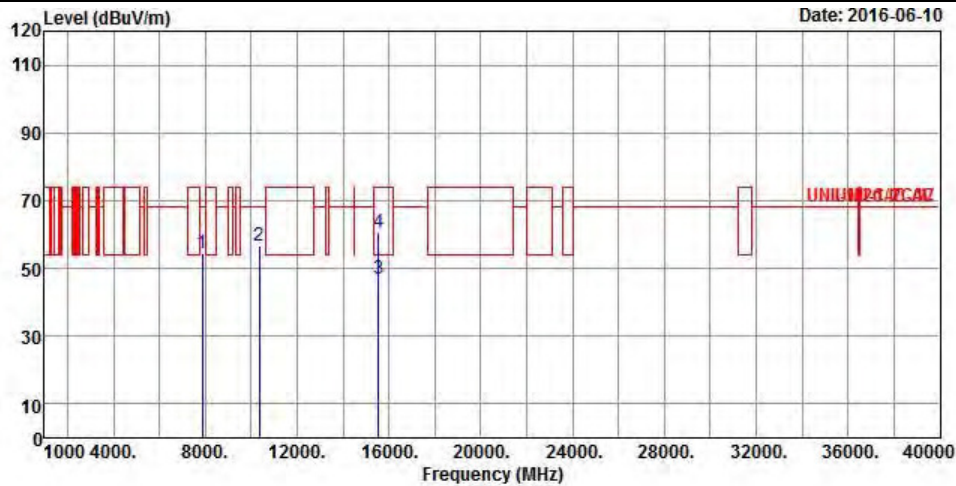



	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7869.400	54.27	-13.93	68.20	43.10	36.89	7.20	32.92	Peak
2	10360.000	56.58	-11.62	68.20	41.77	39.23	8.47	32.89	Peak
3	15540.000	46.92	-7.08	54.00	30.55	38.30	10.41	32.34	Average
4	15540.000	60.87	-13.13	74.00	44.50	38.30	10.41	32.34	Peak


- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

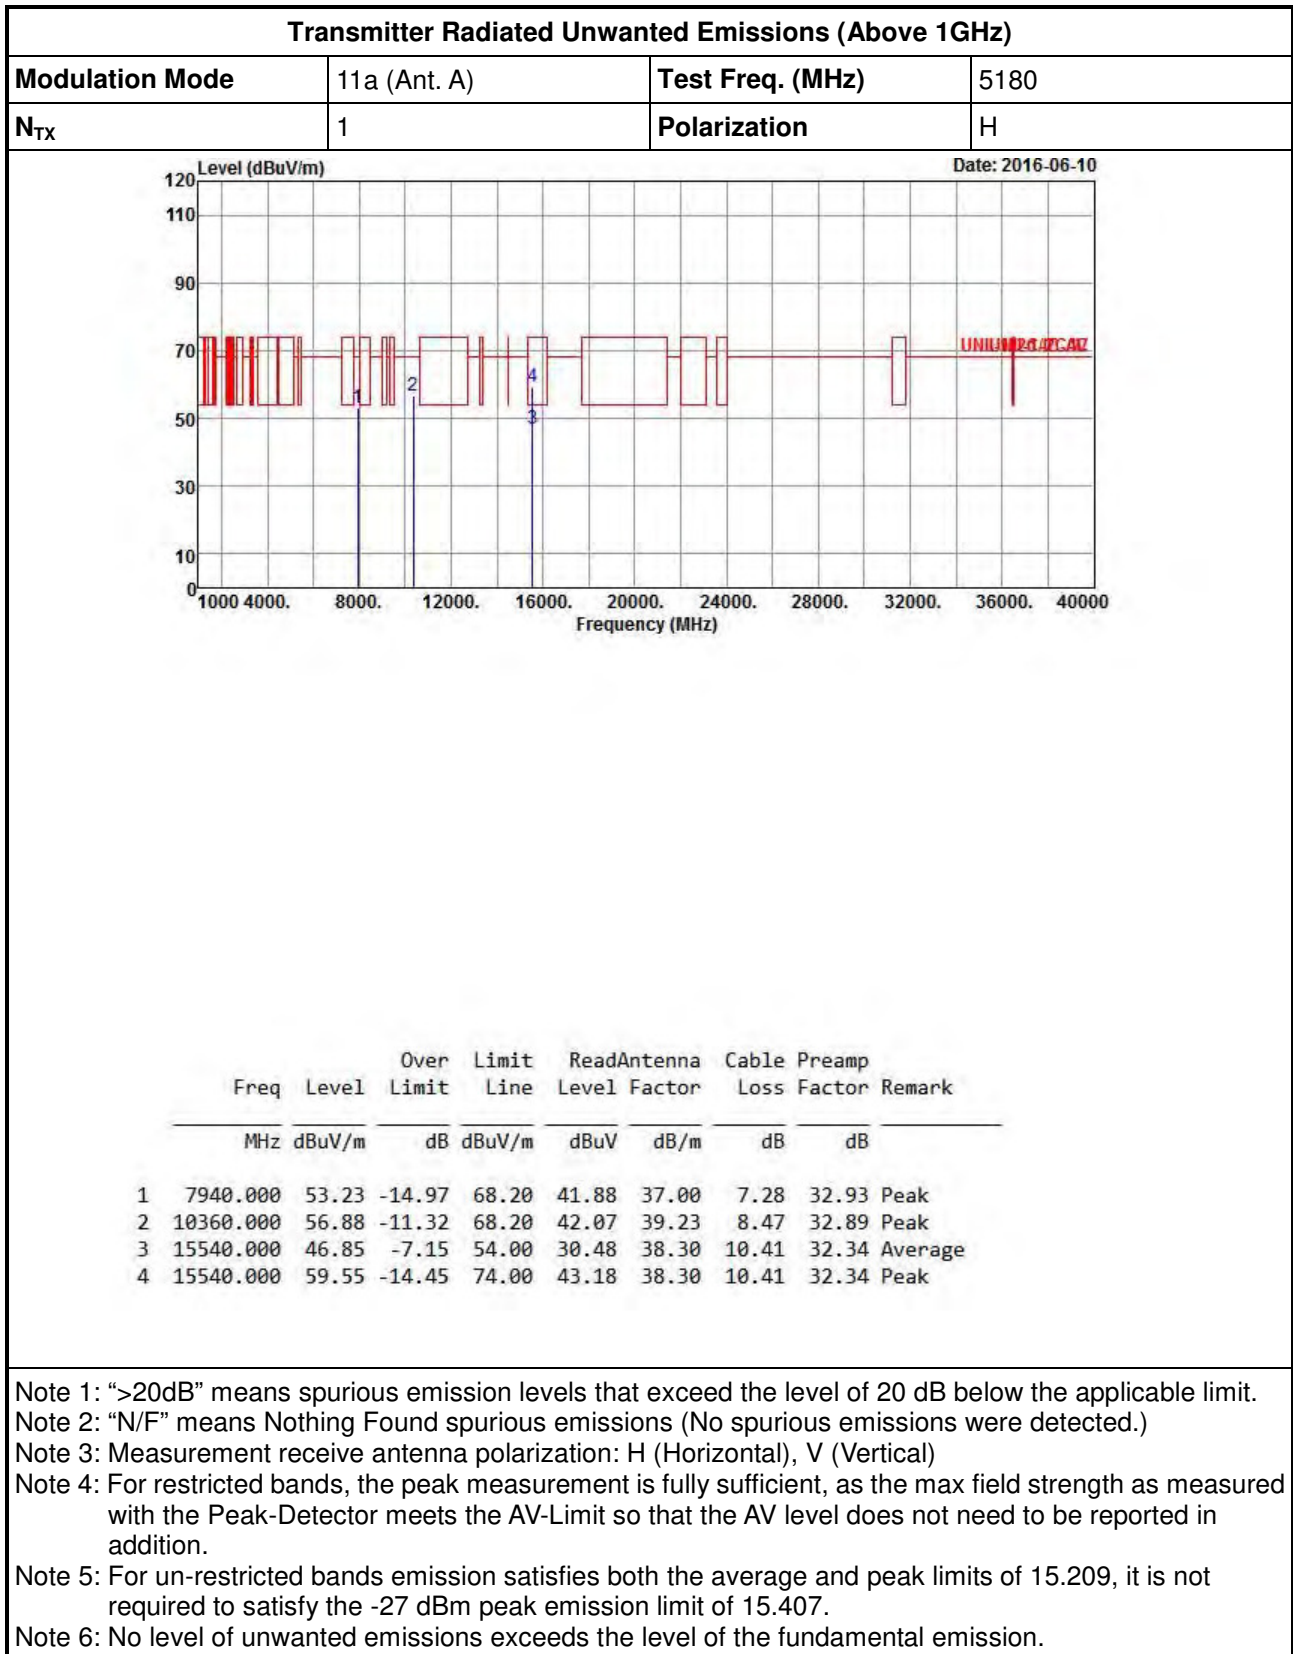


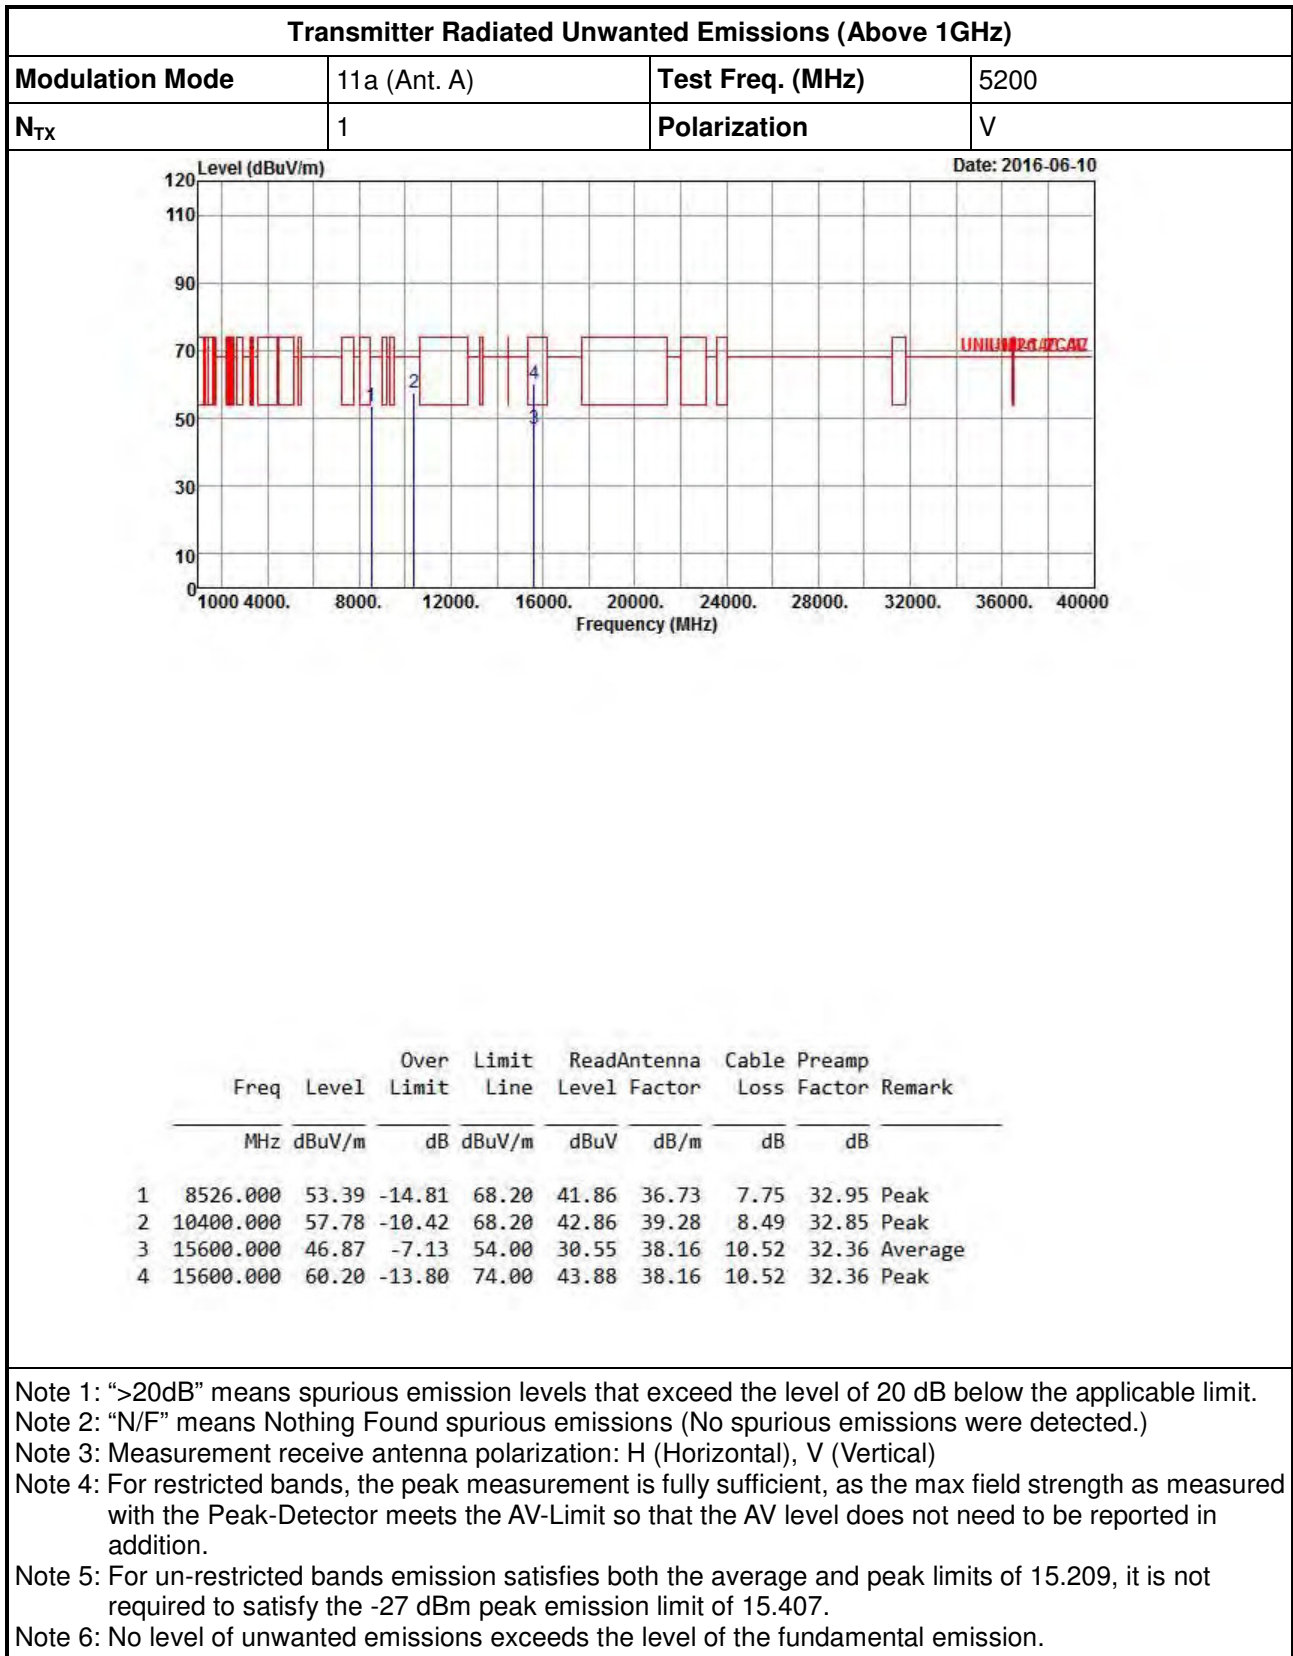


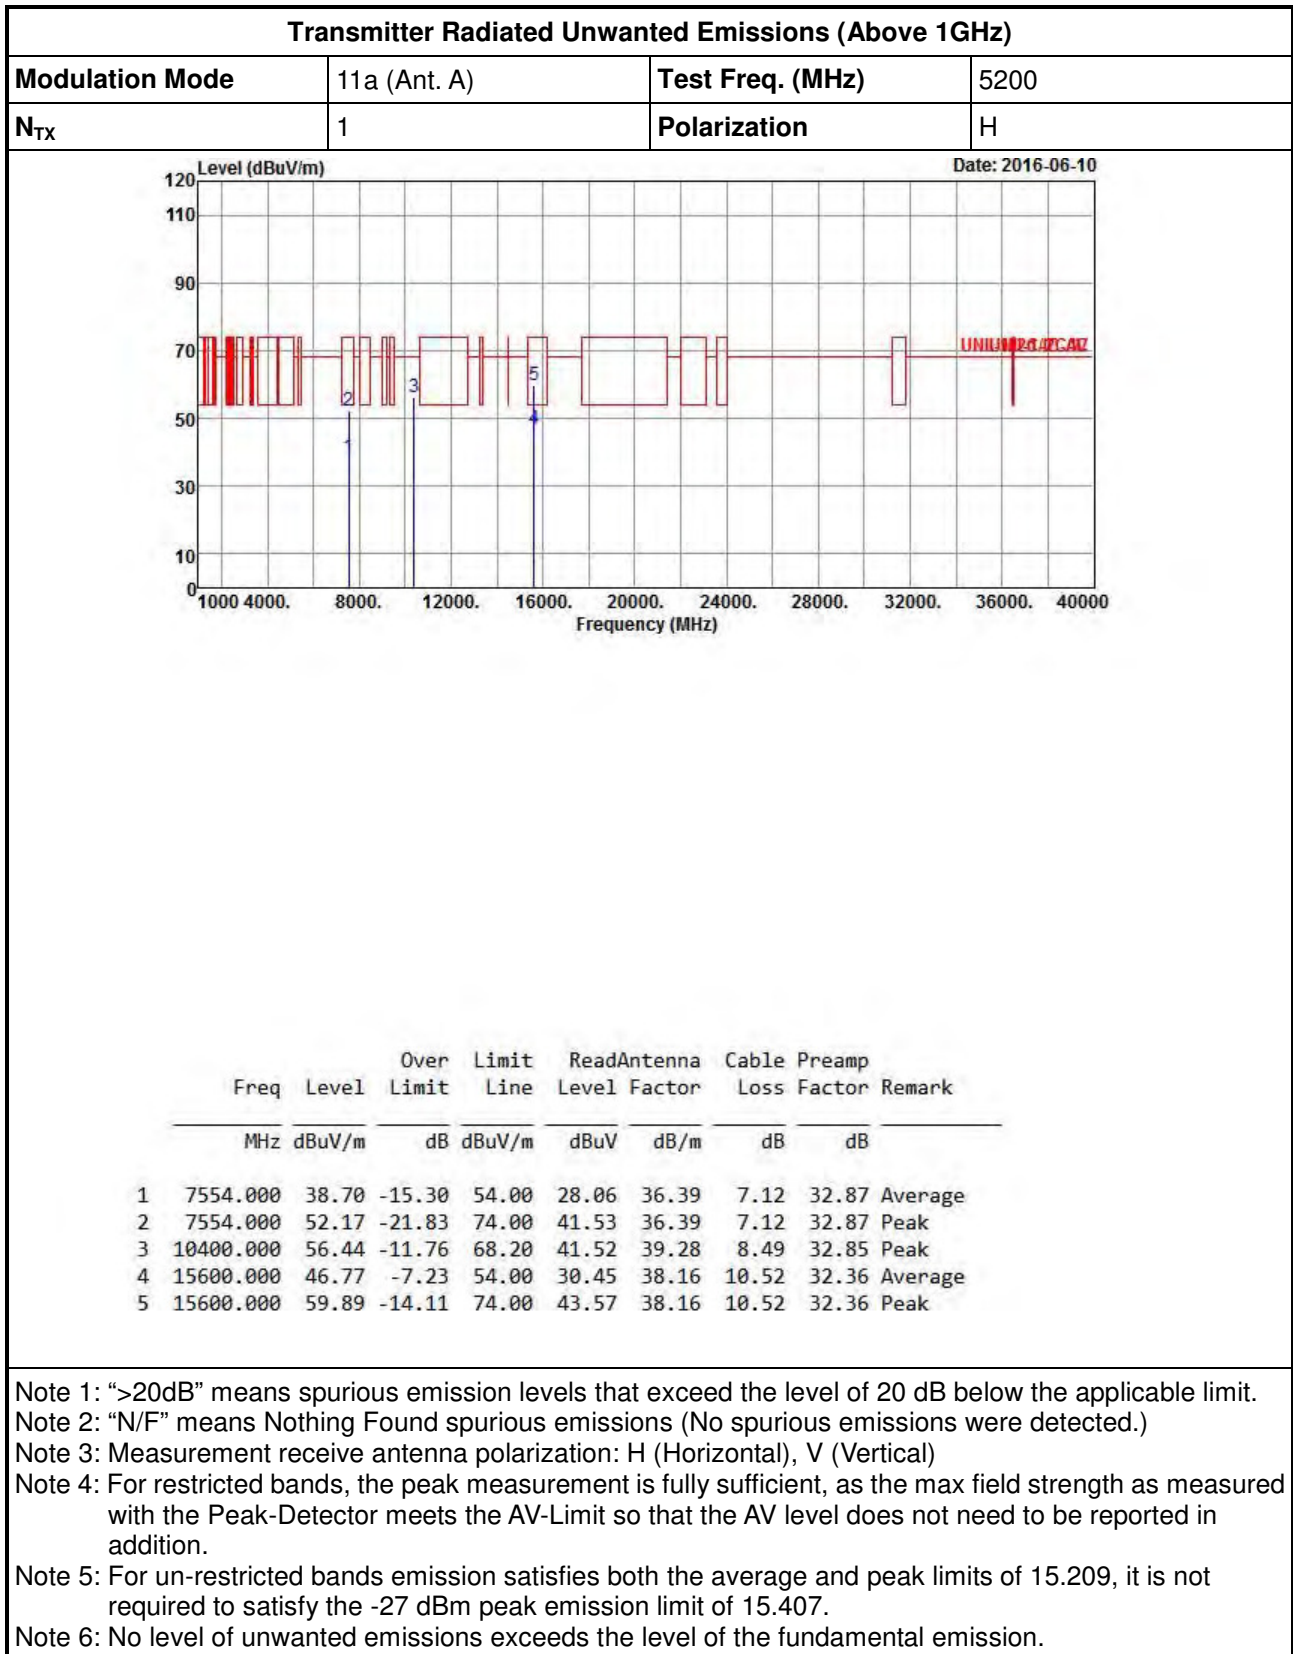


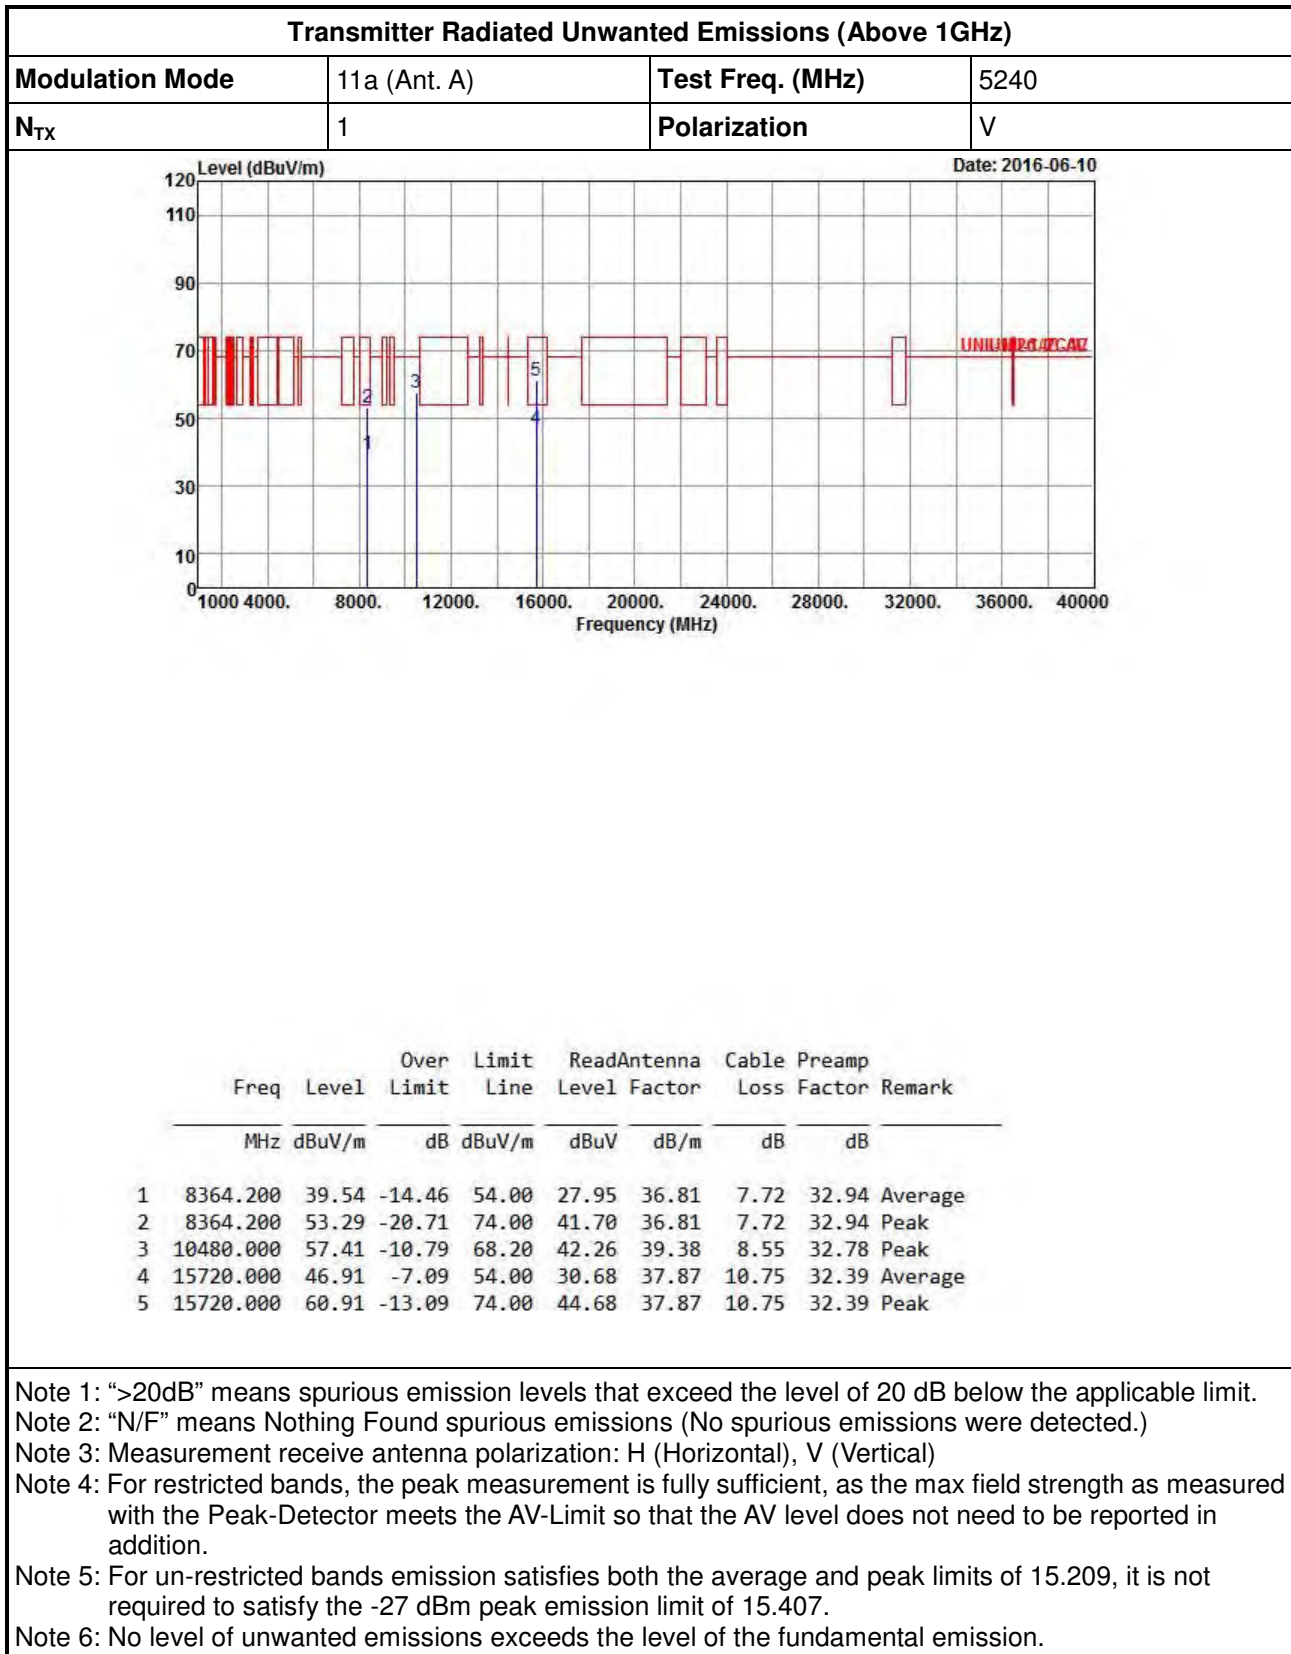


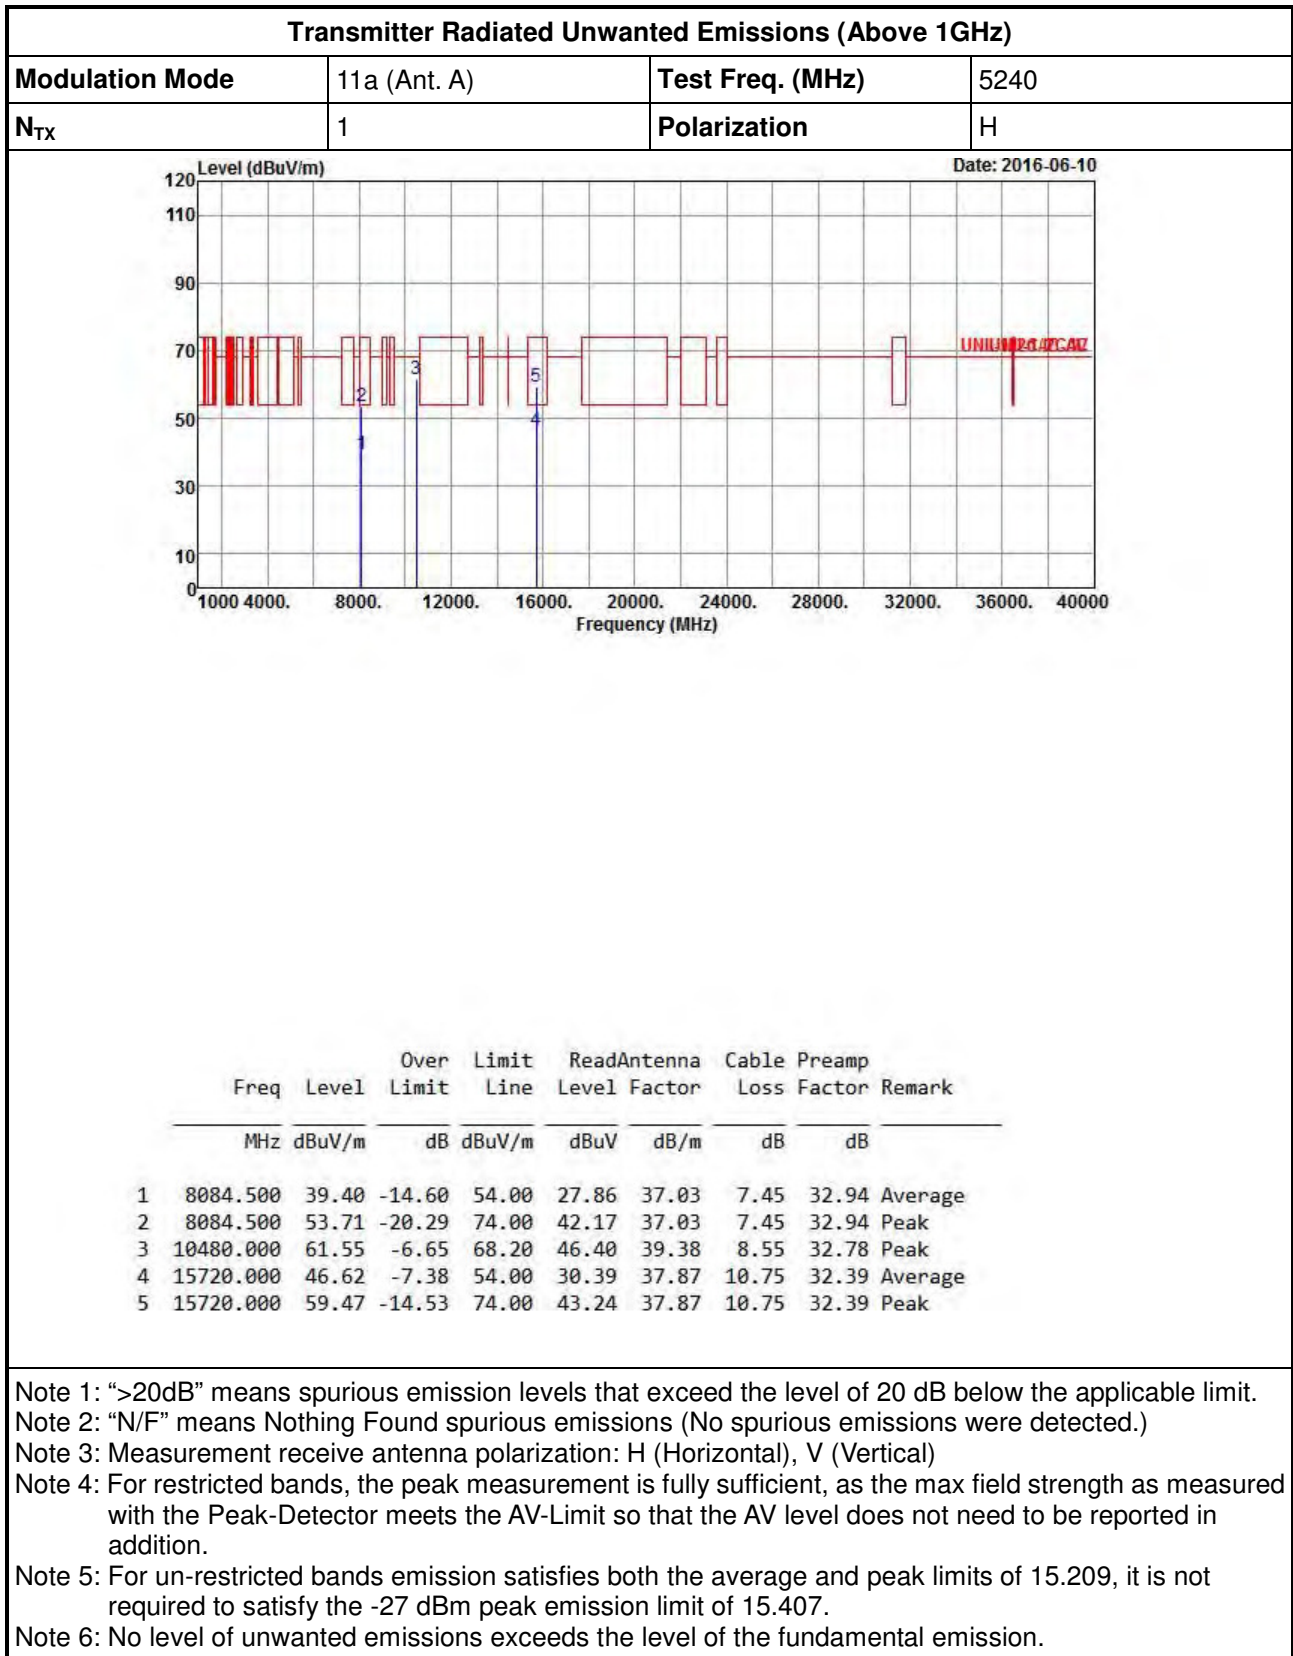


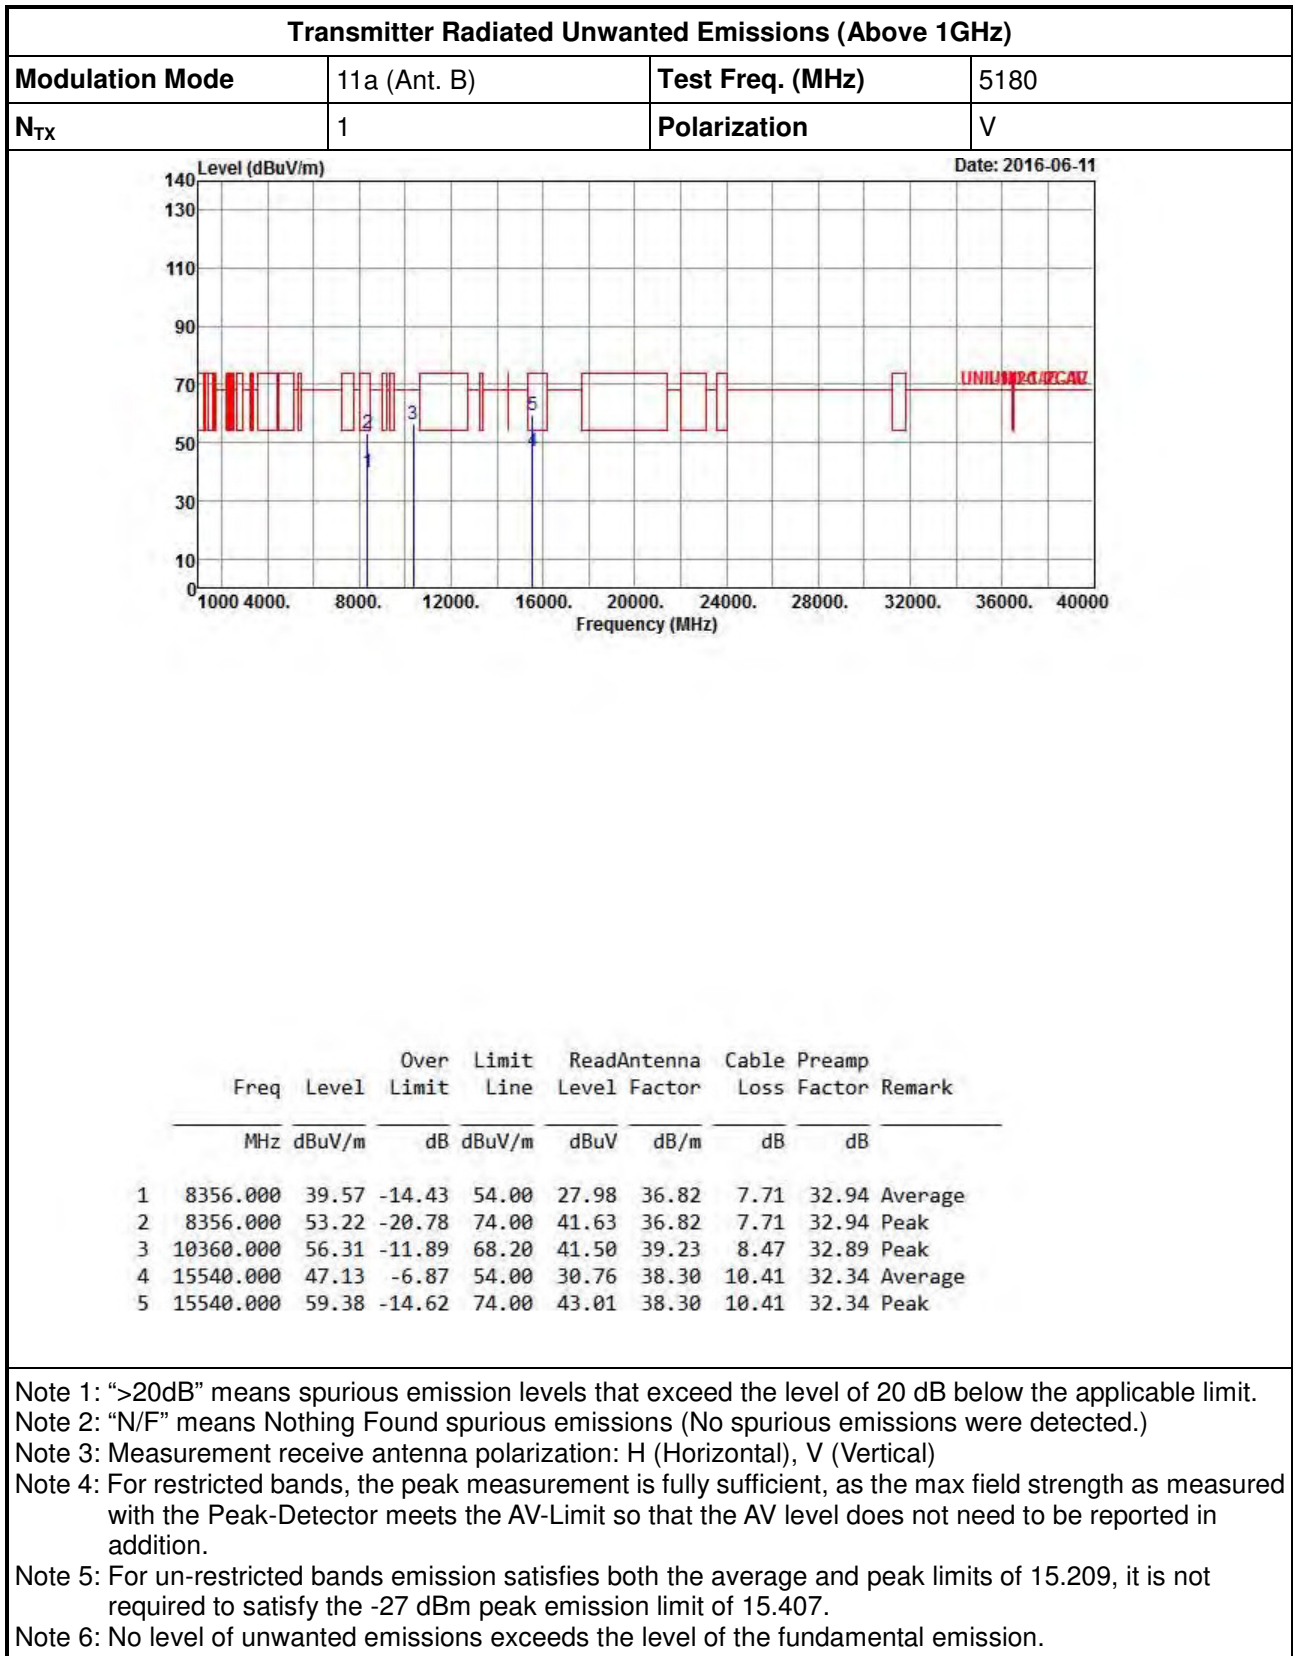


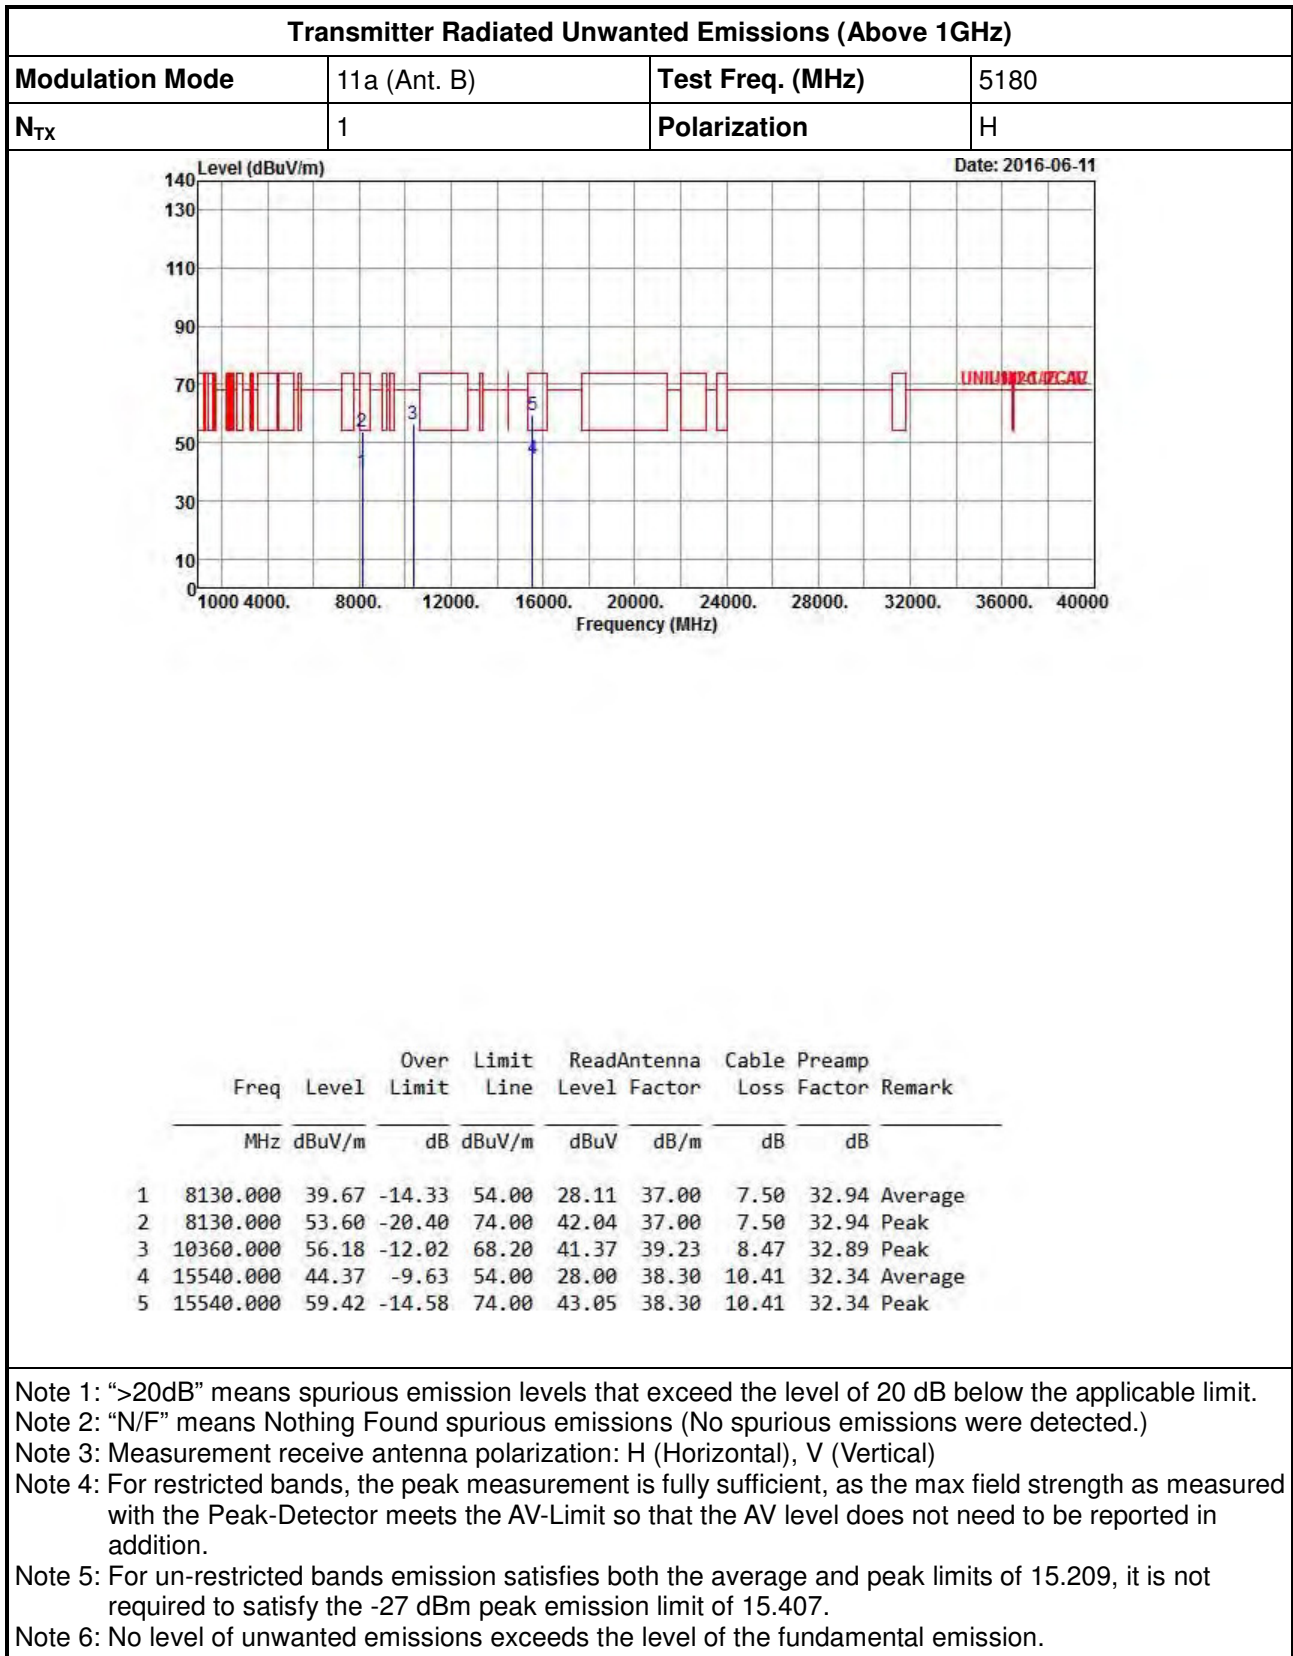


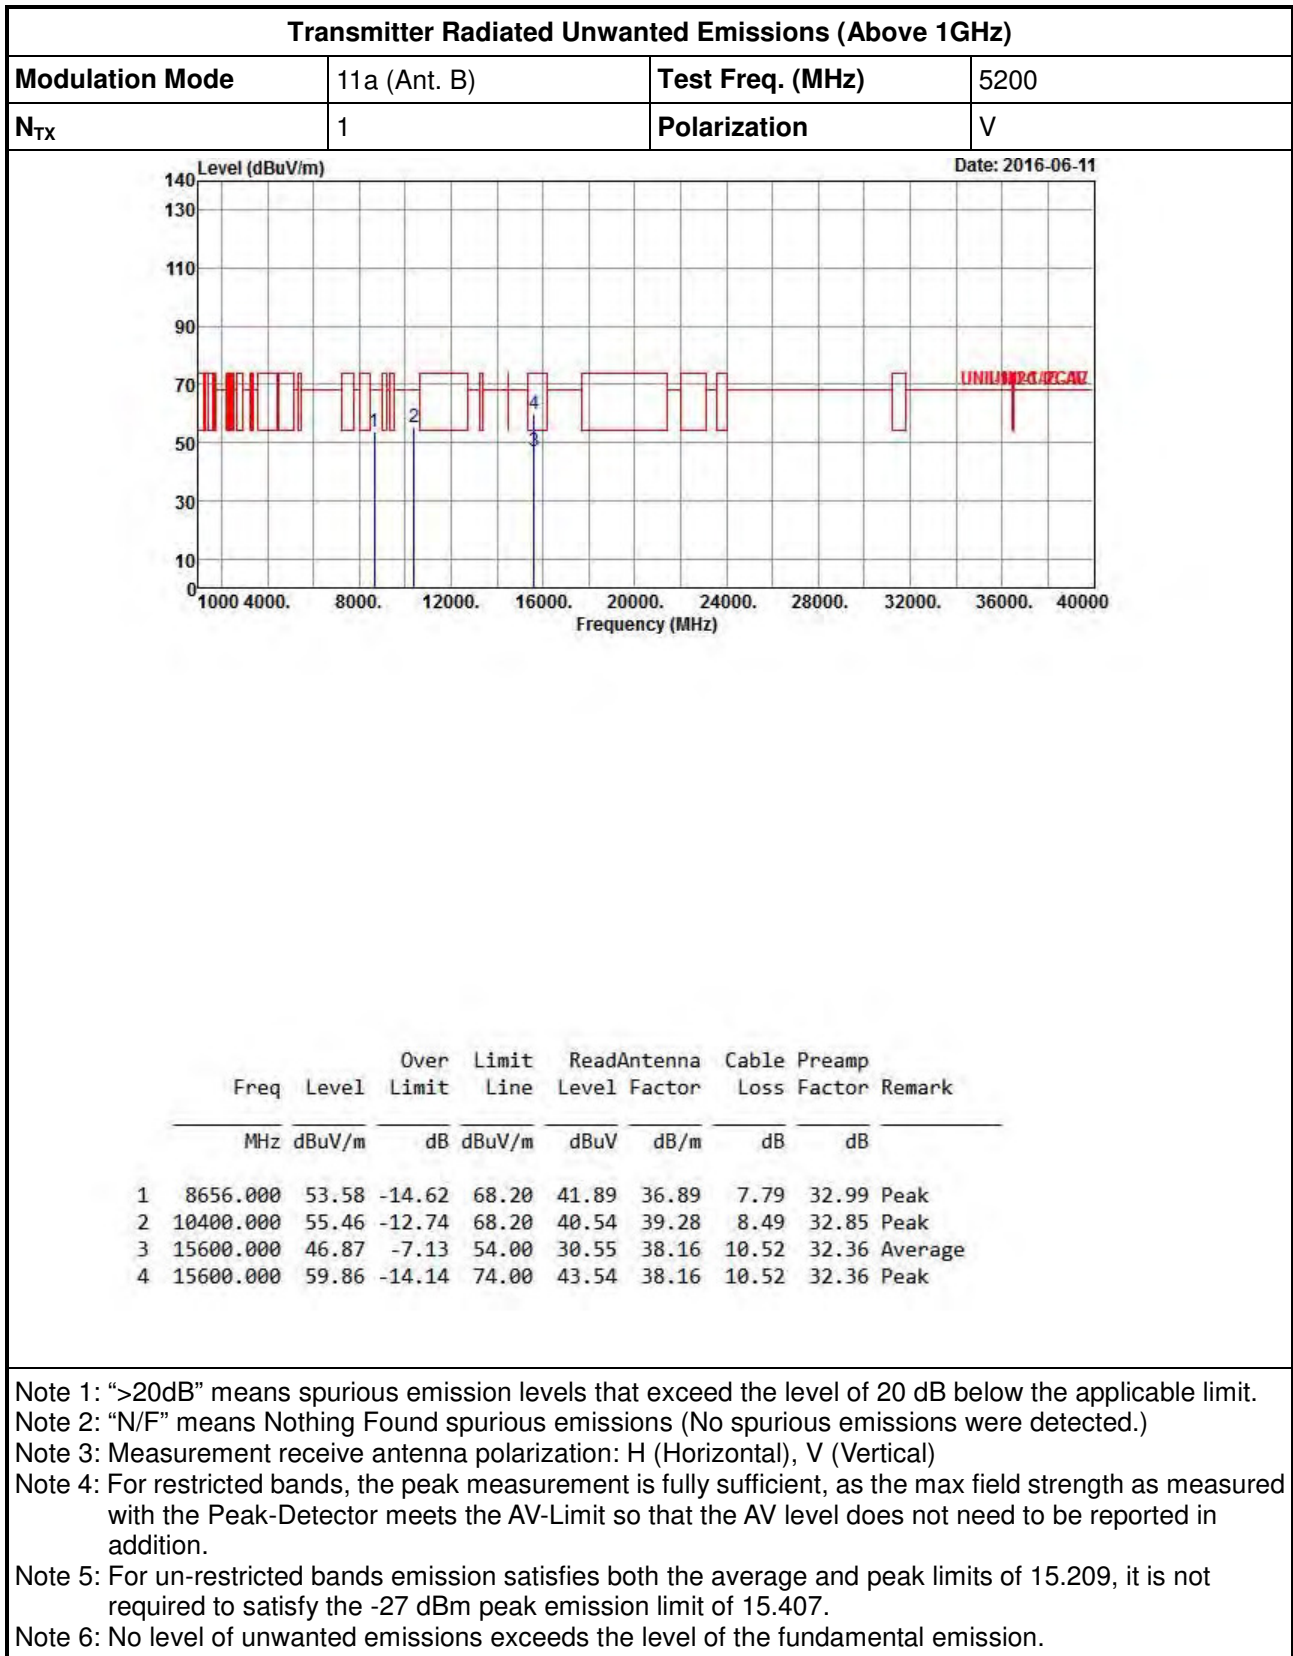

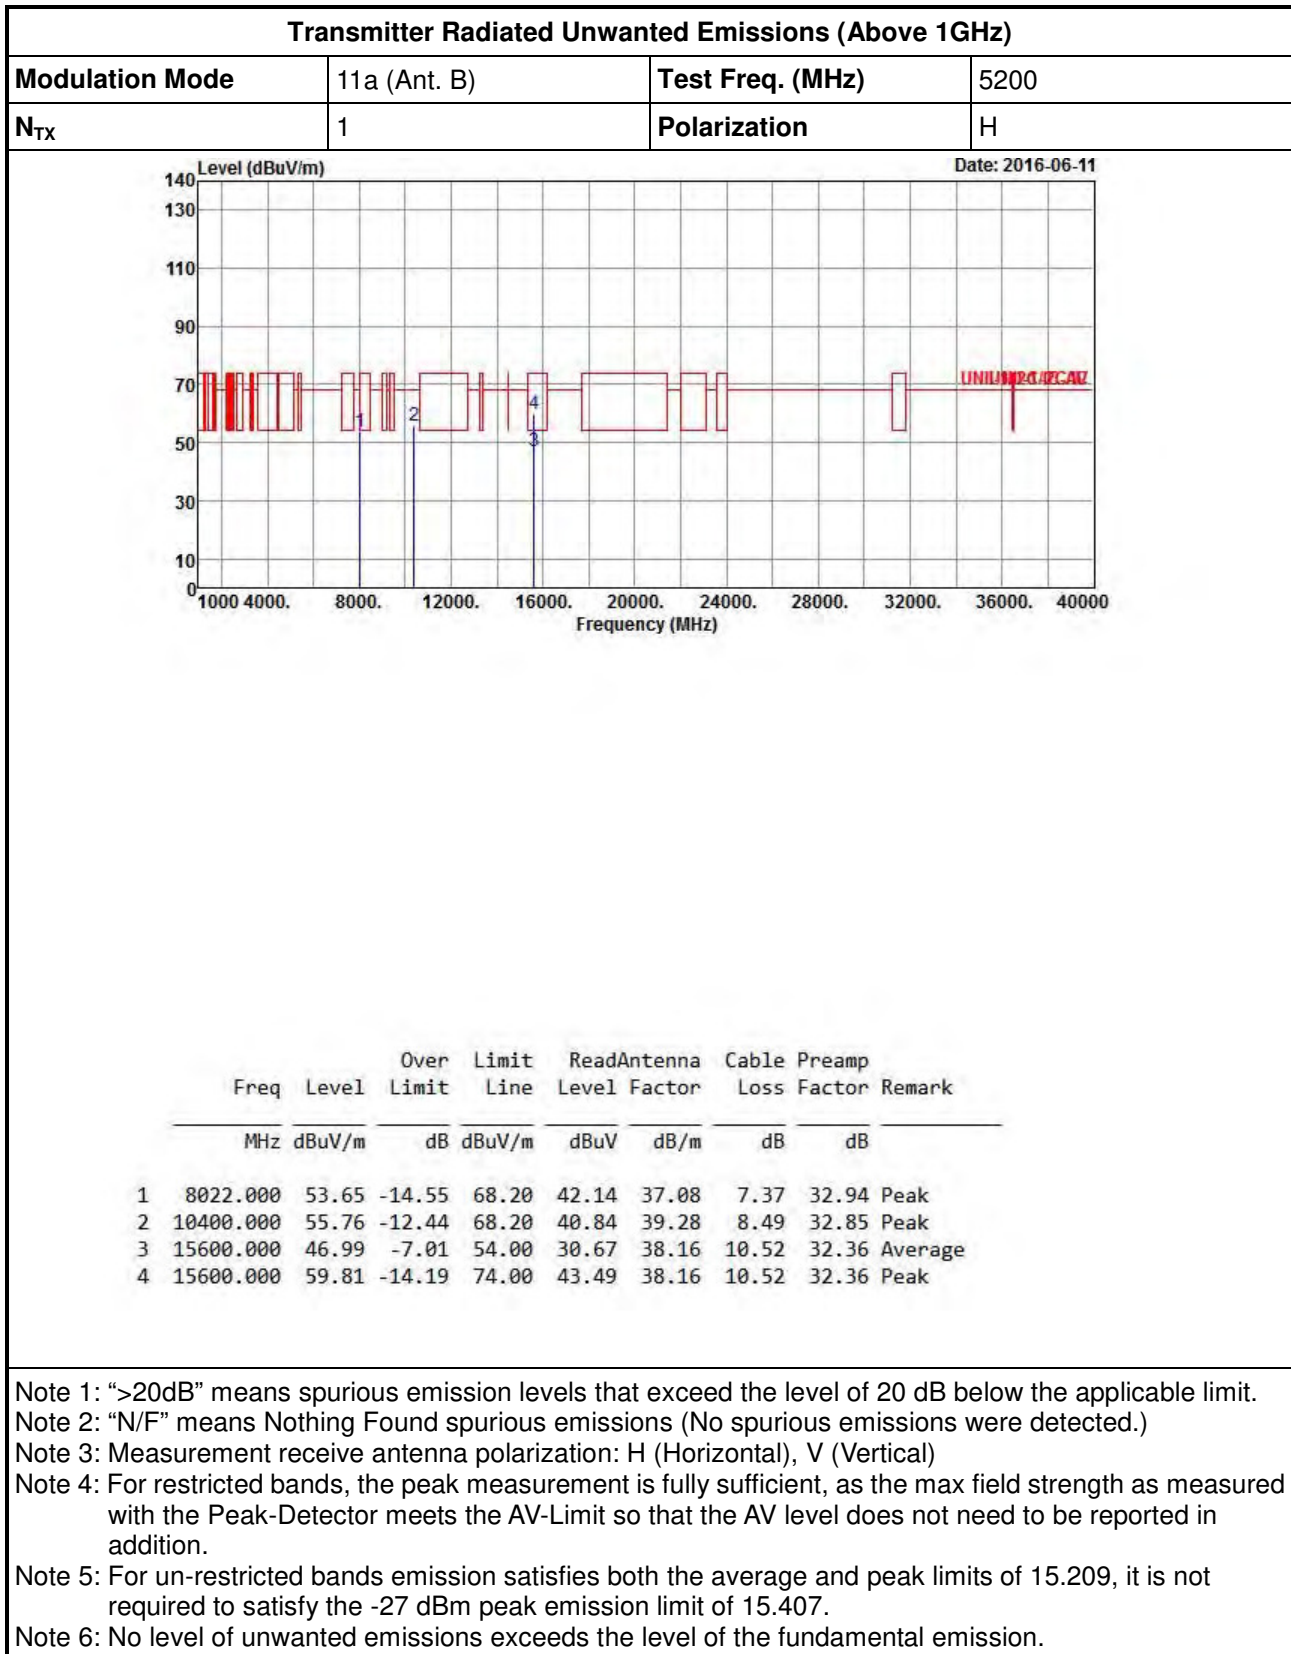

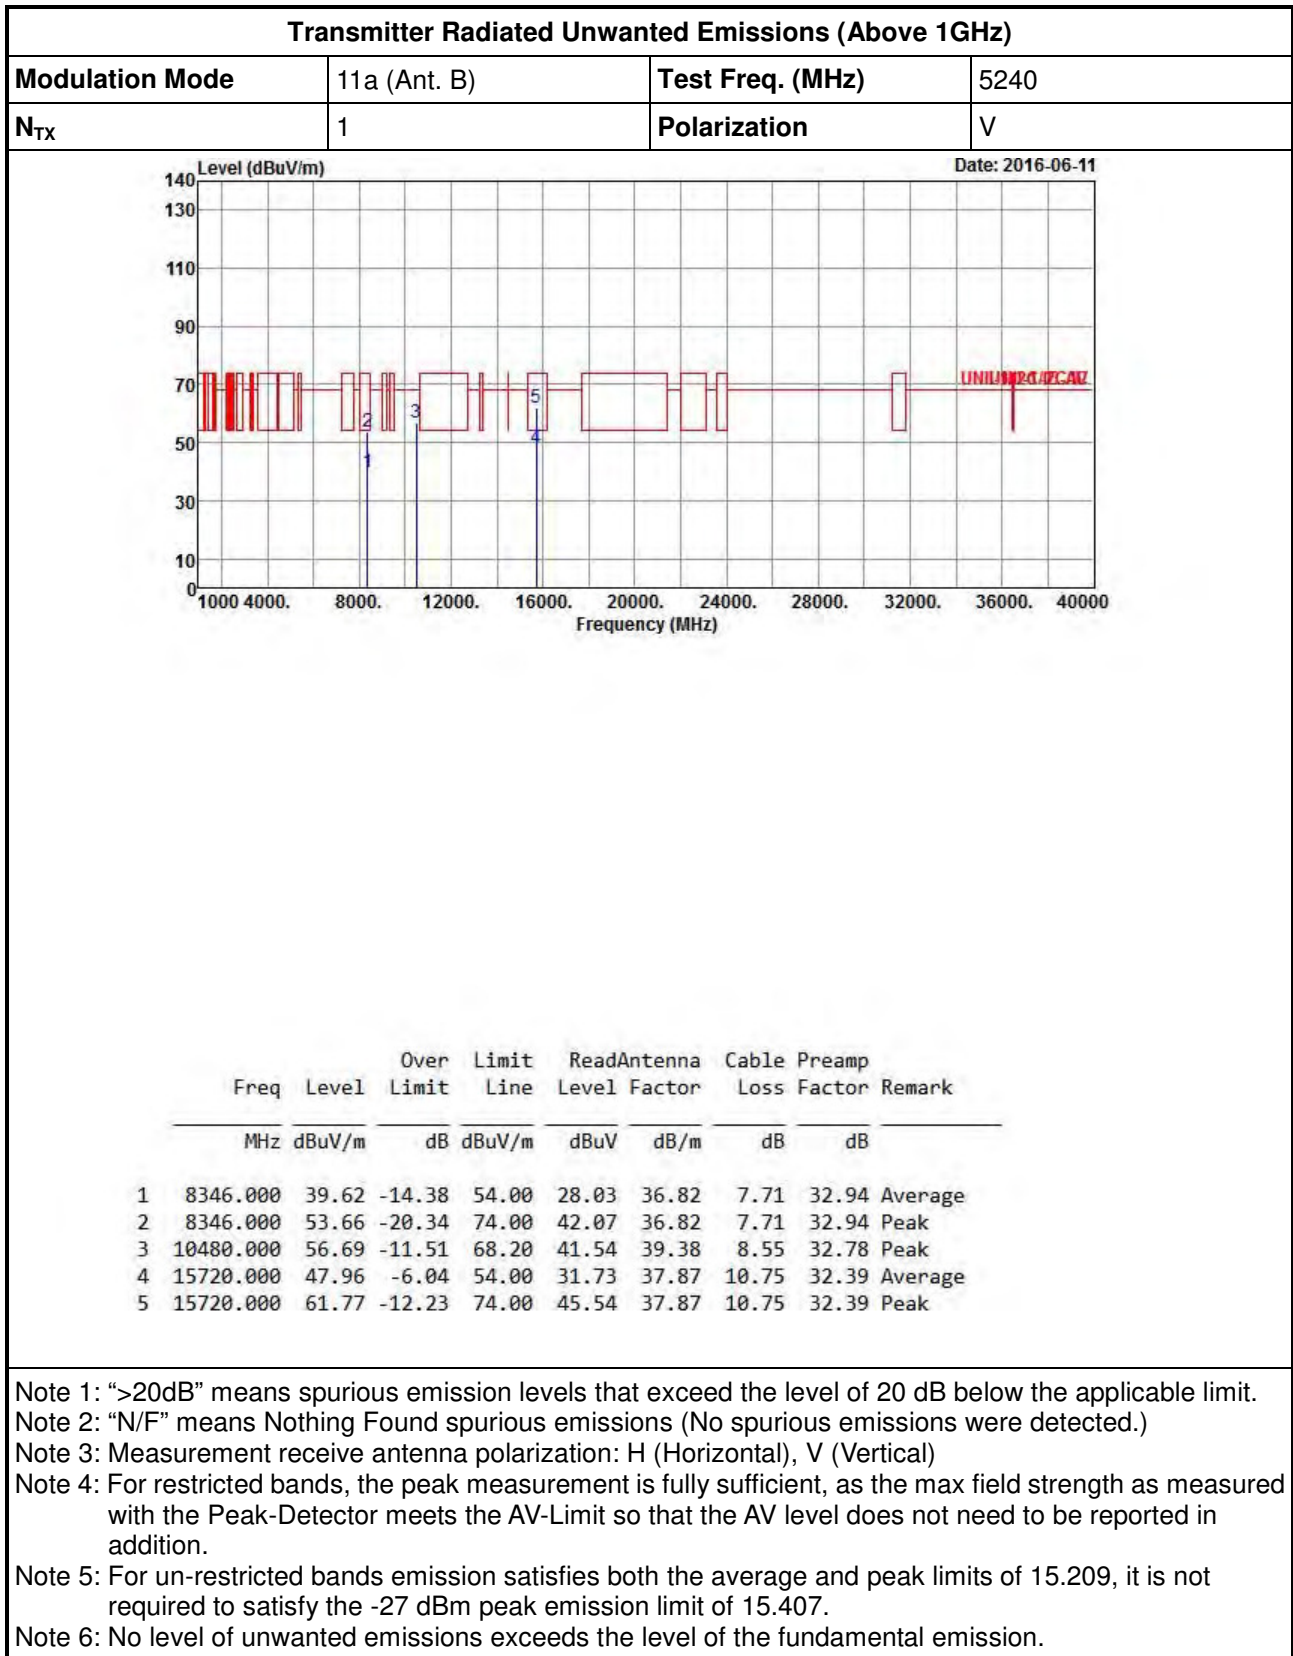


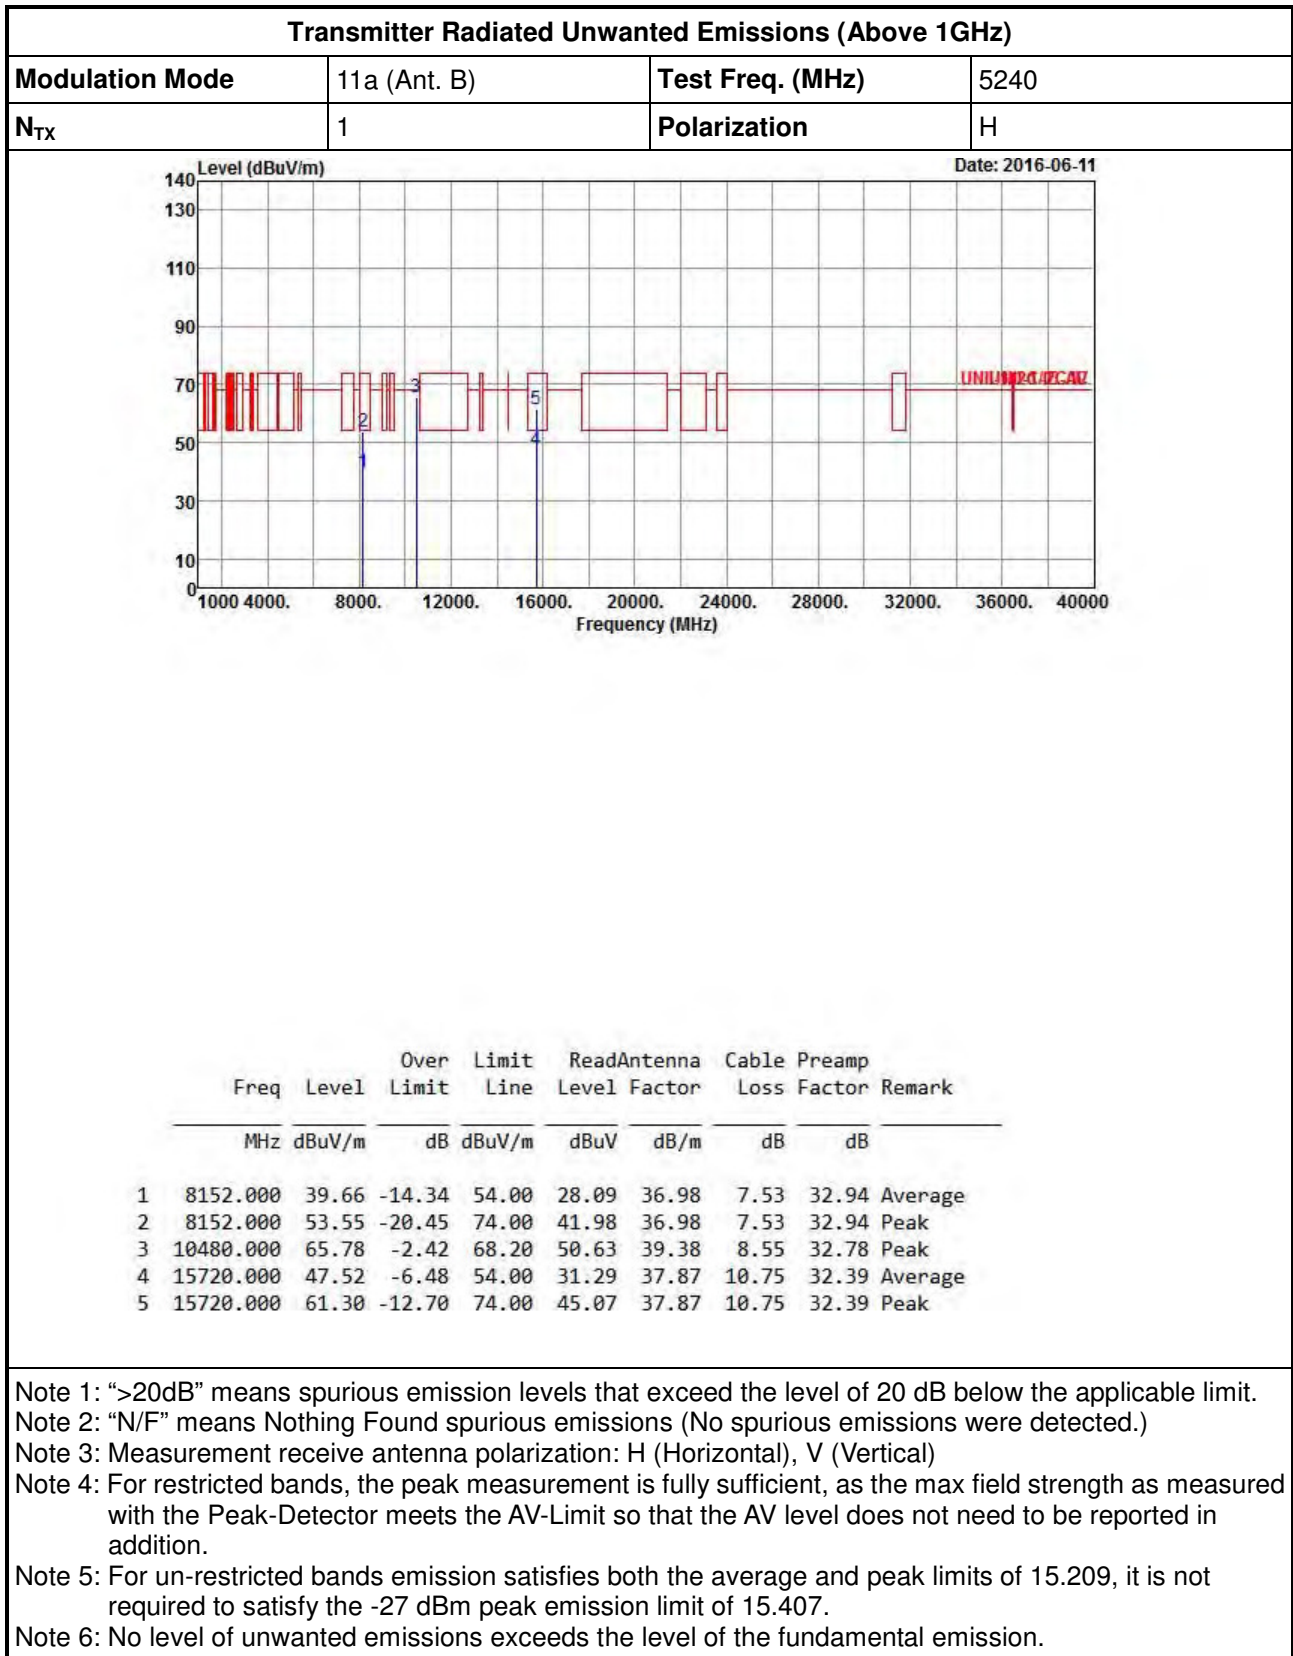


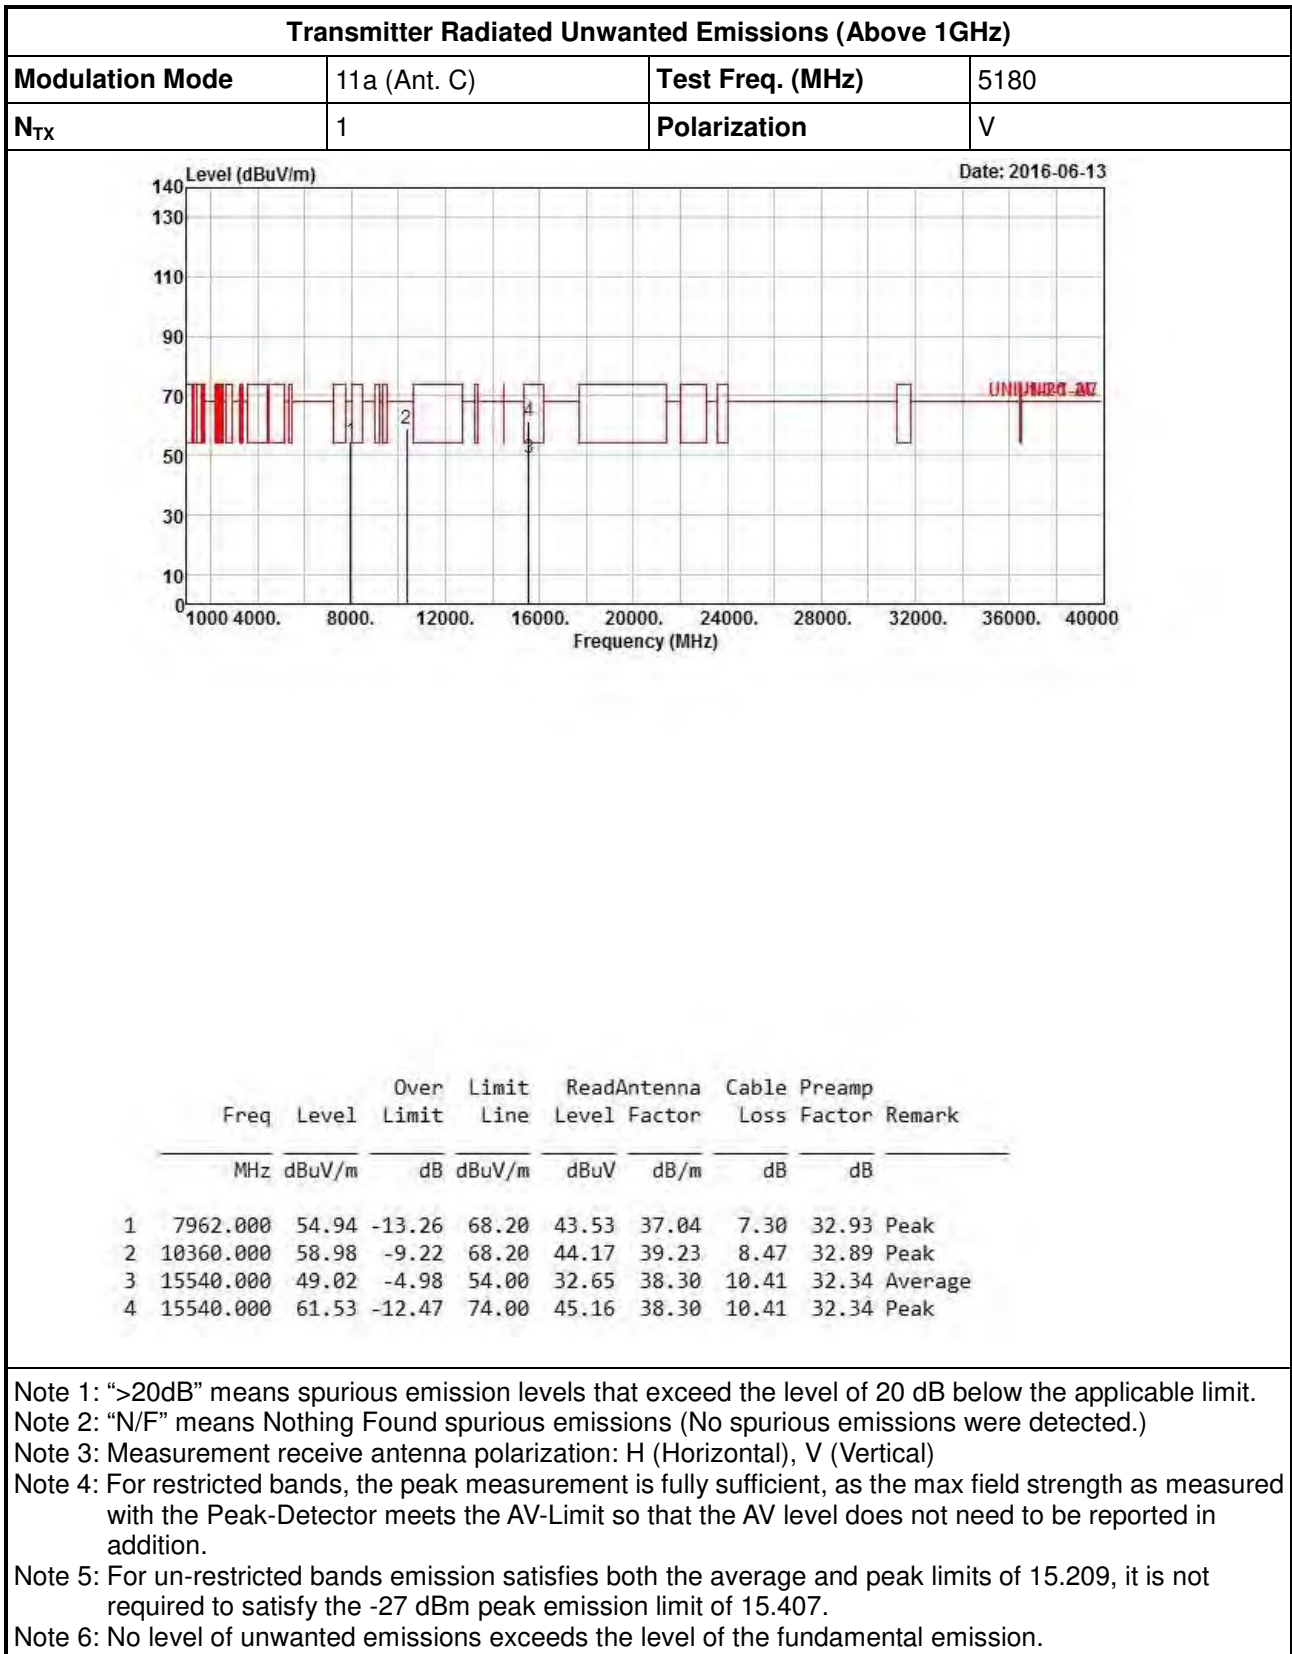






Transmitter Radiated Unwanted Emissions (Above 1GHz)																																																															
Modulation Mode	11a (Ant. C)	Test Freq. (MHz)	5180																																																												
N _{TX}	1	Polarization	H																																																												
<div style="text-align: right;">Date: 2016-06-13</div>																																																															
<table border="1"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>ReadAntenna Level</th> <th>Antenna Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7794.000</td> <td>54.57</td> <td>-13.63</td> <td>68.20</td> <td>43.57</td> <td>36.77</td> <td>7.13</td> <td>32.90</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10360.000</td> <td>62.54</td> <td>-5.66</td> <td>68.20</td> <td>47.73</td> <td>39.23</td> <td>8.47</td> <td>32.89</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>15540.000</td> <td>47.99</td> <td>-6.01</td> <td>54.00</td> <td>31.62</td> <td>38.30</td> <td>10.41</td> <td>32.34</td> <td>Average</td> </tr> <tr> <td>4</td> <td>15540.000</td> <td>61.45</td> <td>-12.55</td> <td>74.00</td> <td>45.08</td> <td>38.30</td> <td>10.41</td> <td>32.34</td> <td>Peak</td> </tr> </tbody> </table>					Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		1	7794.000	54.57	-13.63	68.20	43.57	36.77	7.13	32.90	Peak	2	10360.000	62.54	-5.66	68.20	47.73	39.23	8.47	32.89	Peak	3	15540.000	47.99	-6.01	54.00	31.62	38.30	10.41	32.34	Average	4	15540.000	61.45	-12.55	74.00	45.08	38.30	10.41	32.34	Peak
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark																																																						
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																							
1	7794.000	54.57	-13.63	68.20	43.57	36.77	7.13	32.90	Peak																																																						
2	10360.000	62.54	-5.66	68.20	47.73	39.23	8.47	32.89	Peak																																																						
3	15540.000	47.99	-6.01	54.00	31.62	38.30	10.41	32.34	Average																																																						
4	15540.000	61.45	-12.55	74.00	45.08	38.30	10.41	32.34	Peak																																																						
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical) Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition. Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407. Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.</p>																																																															

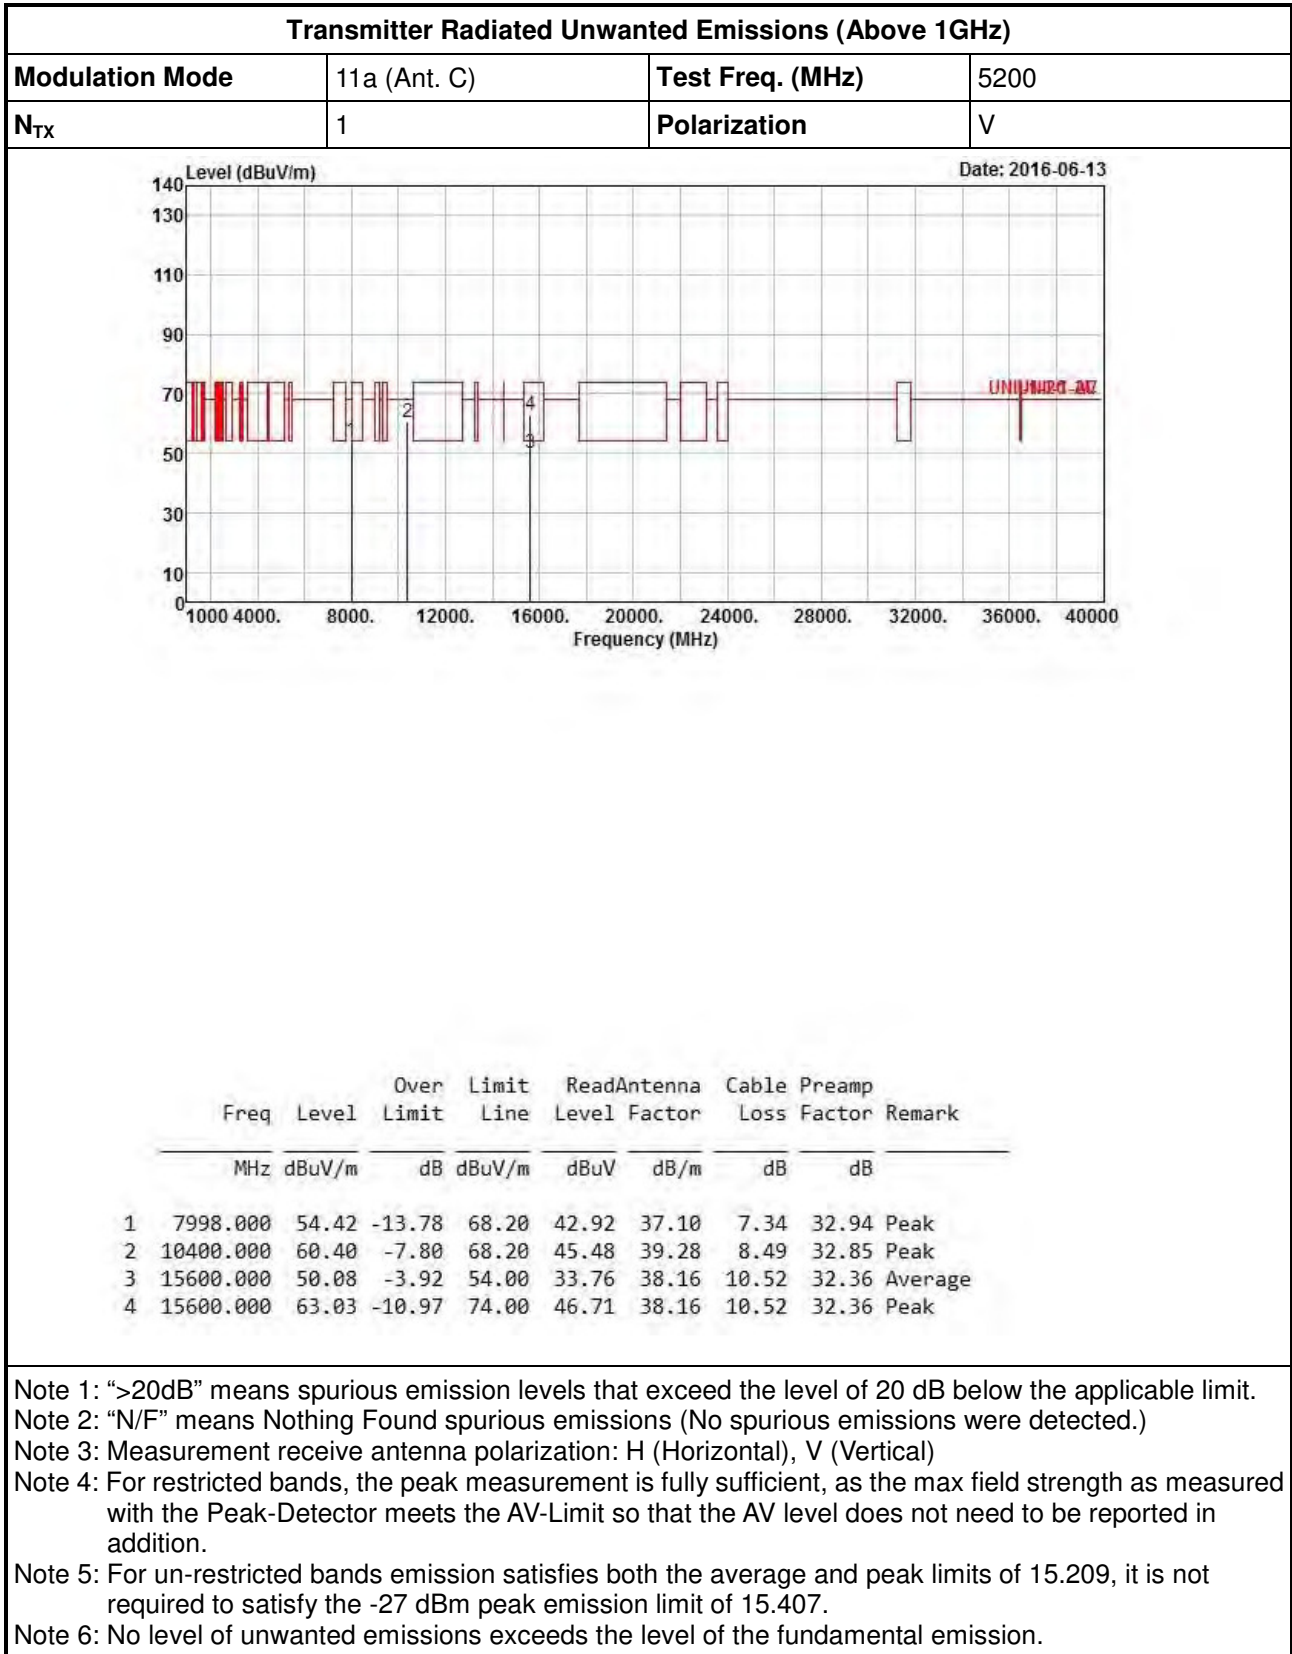


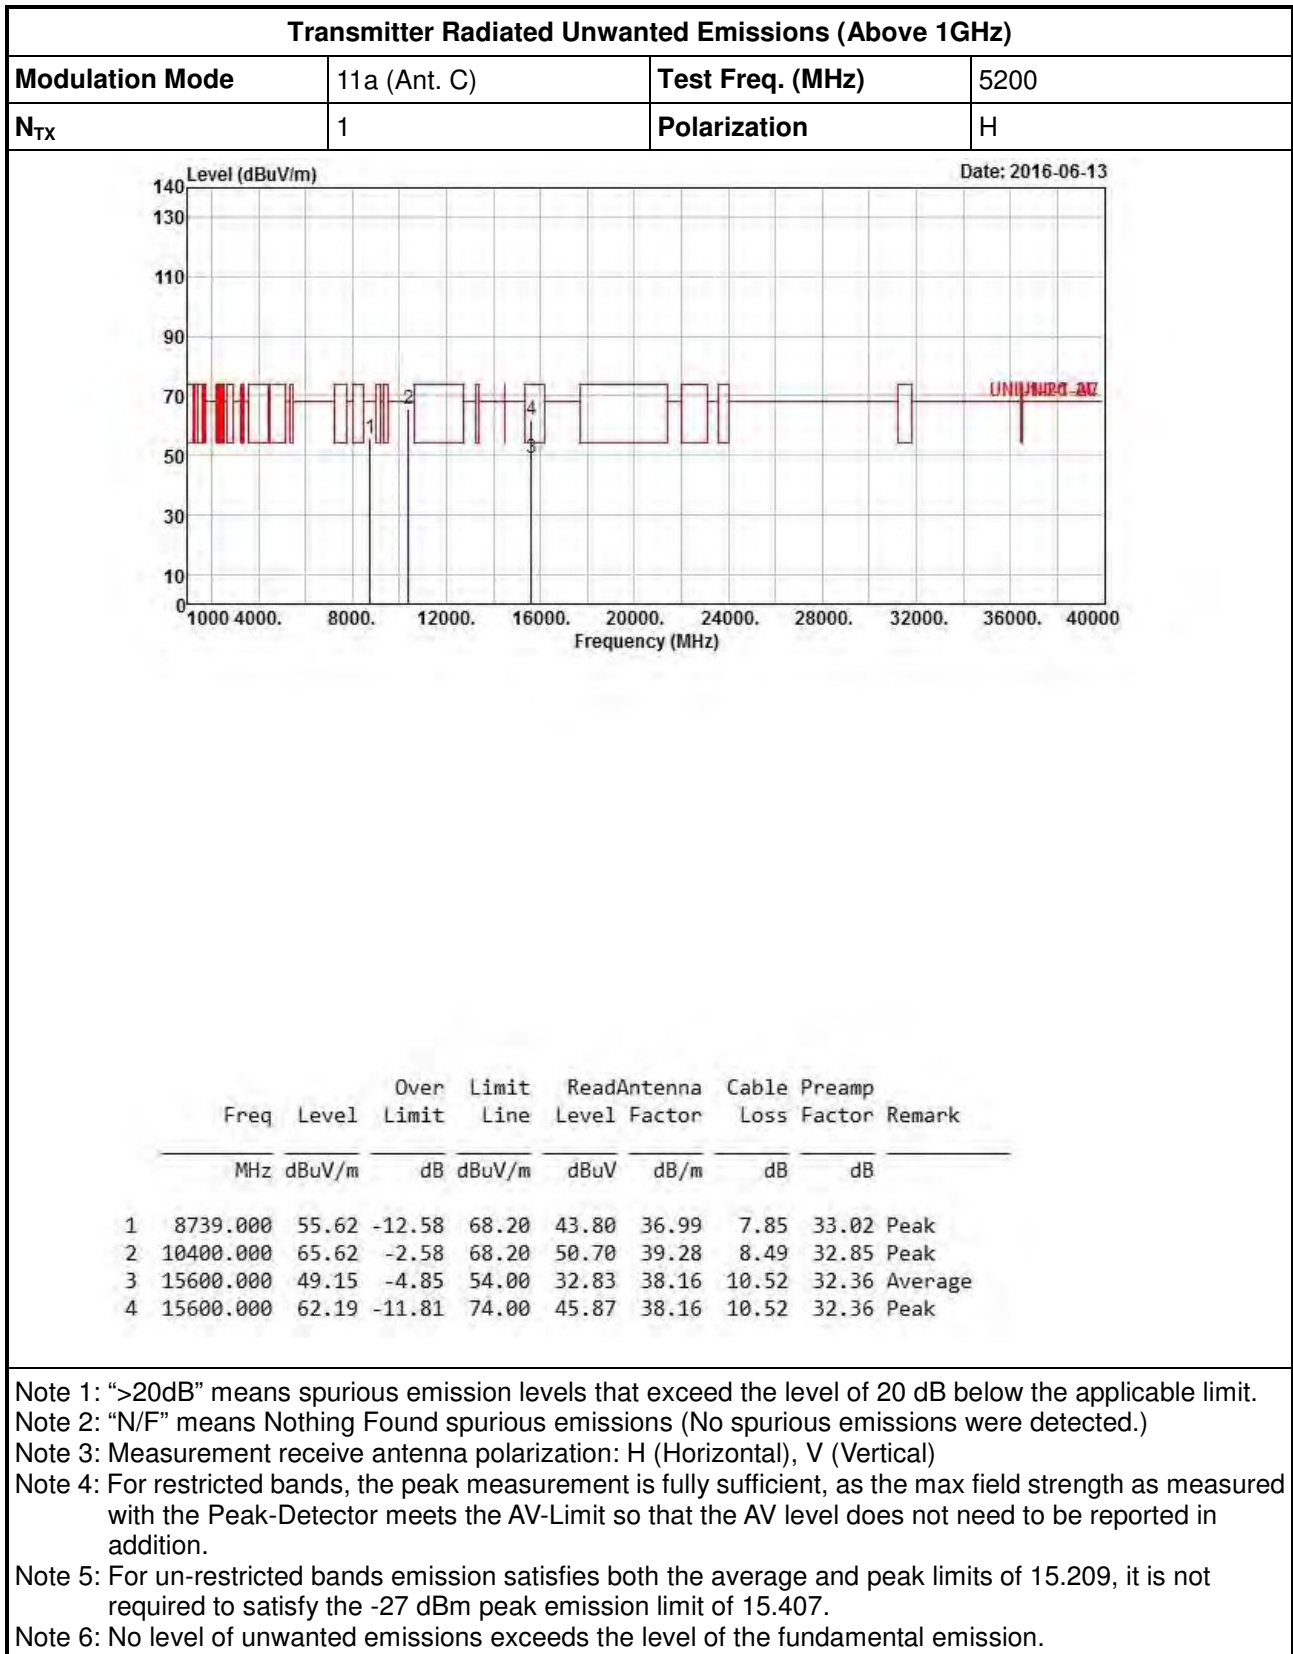


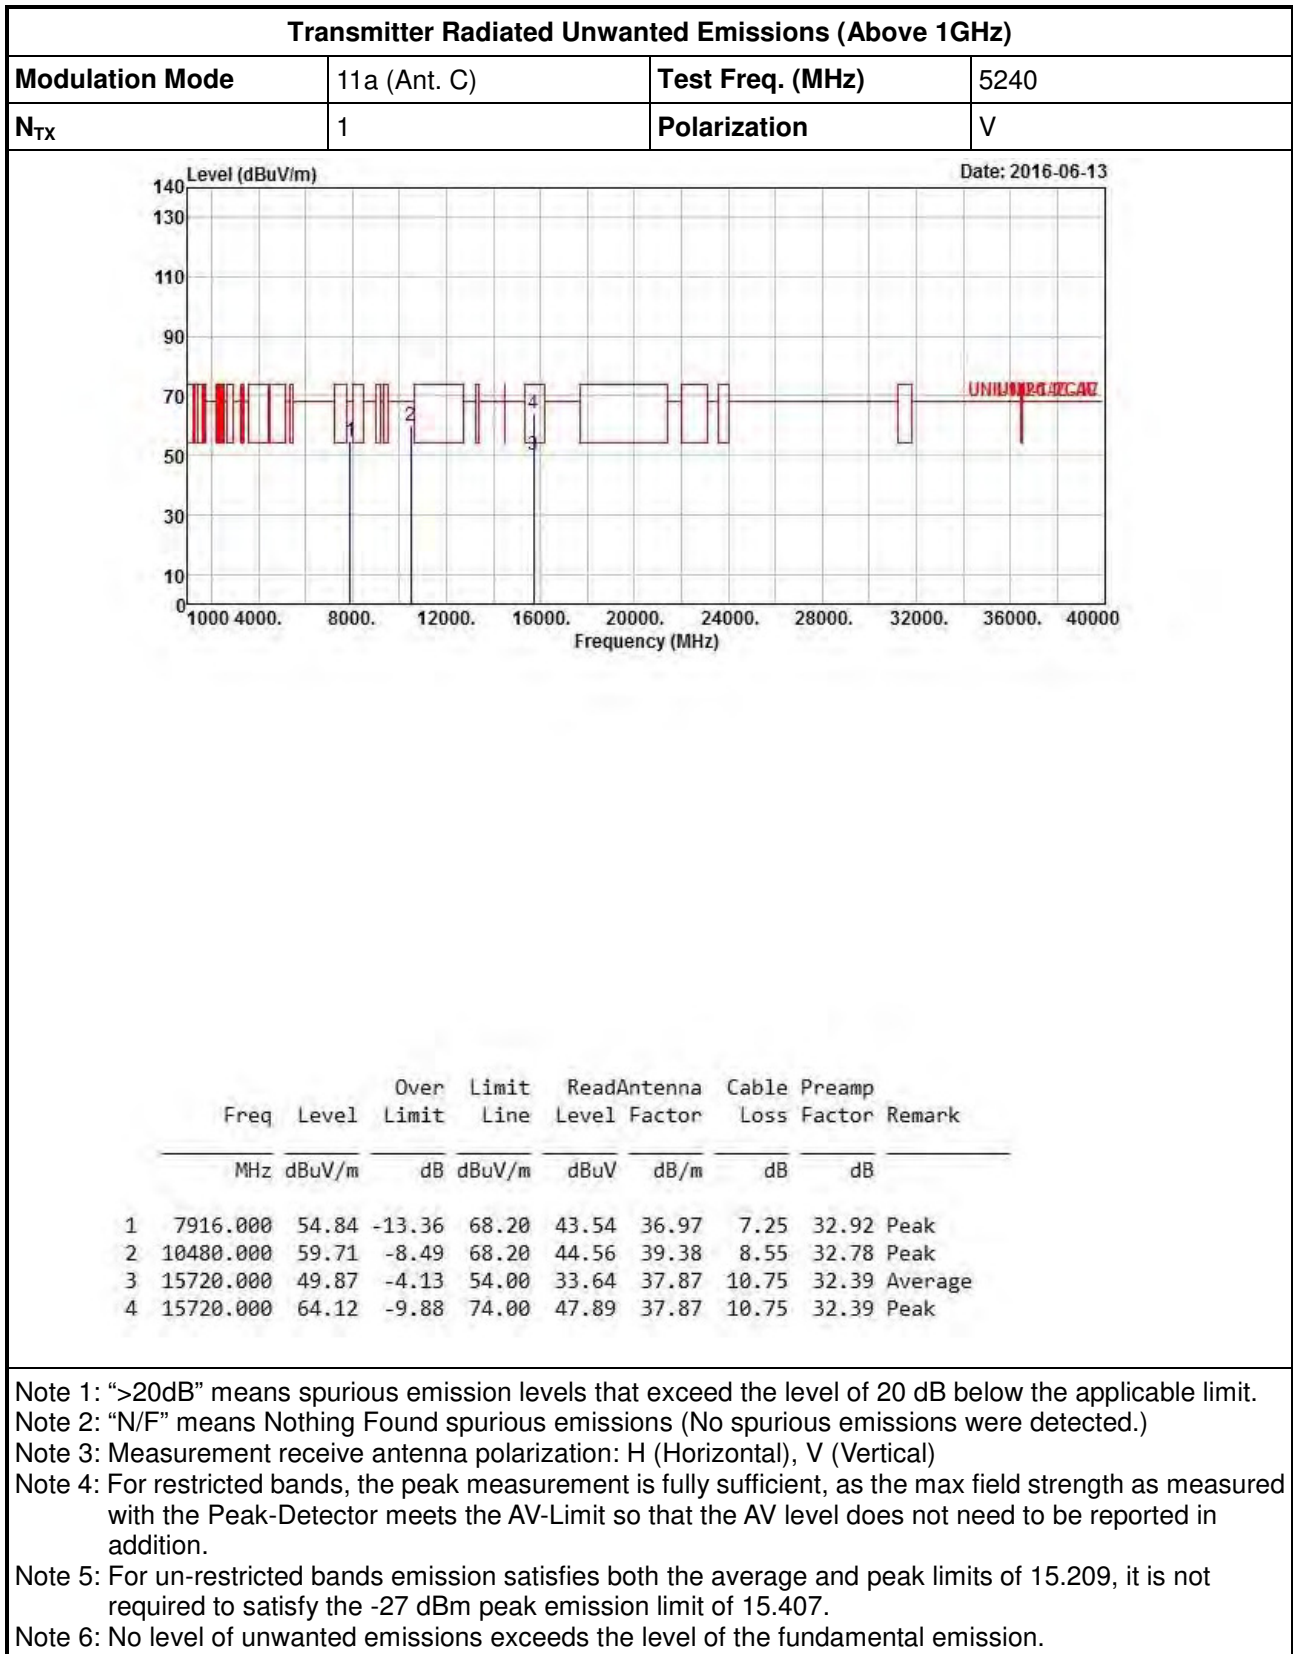


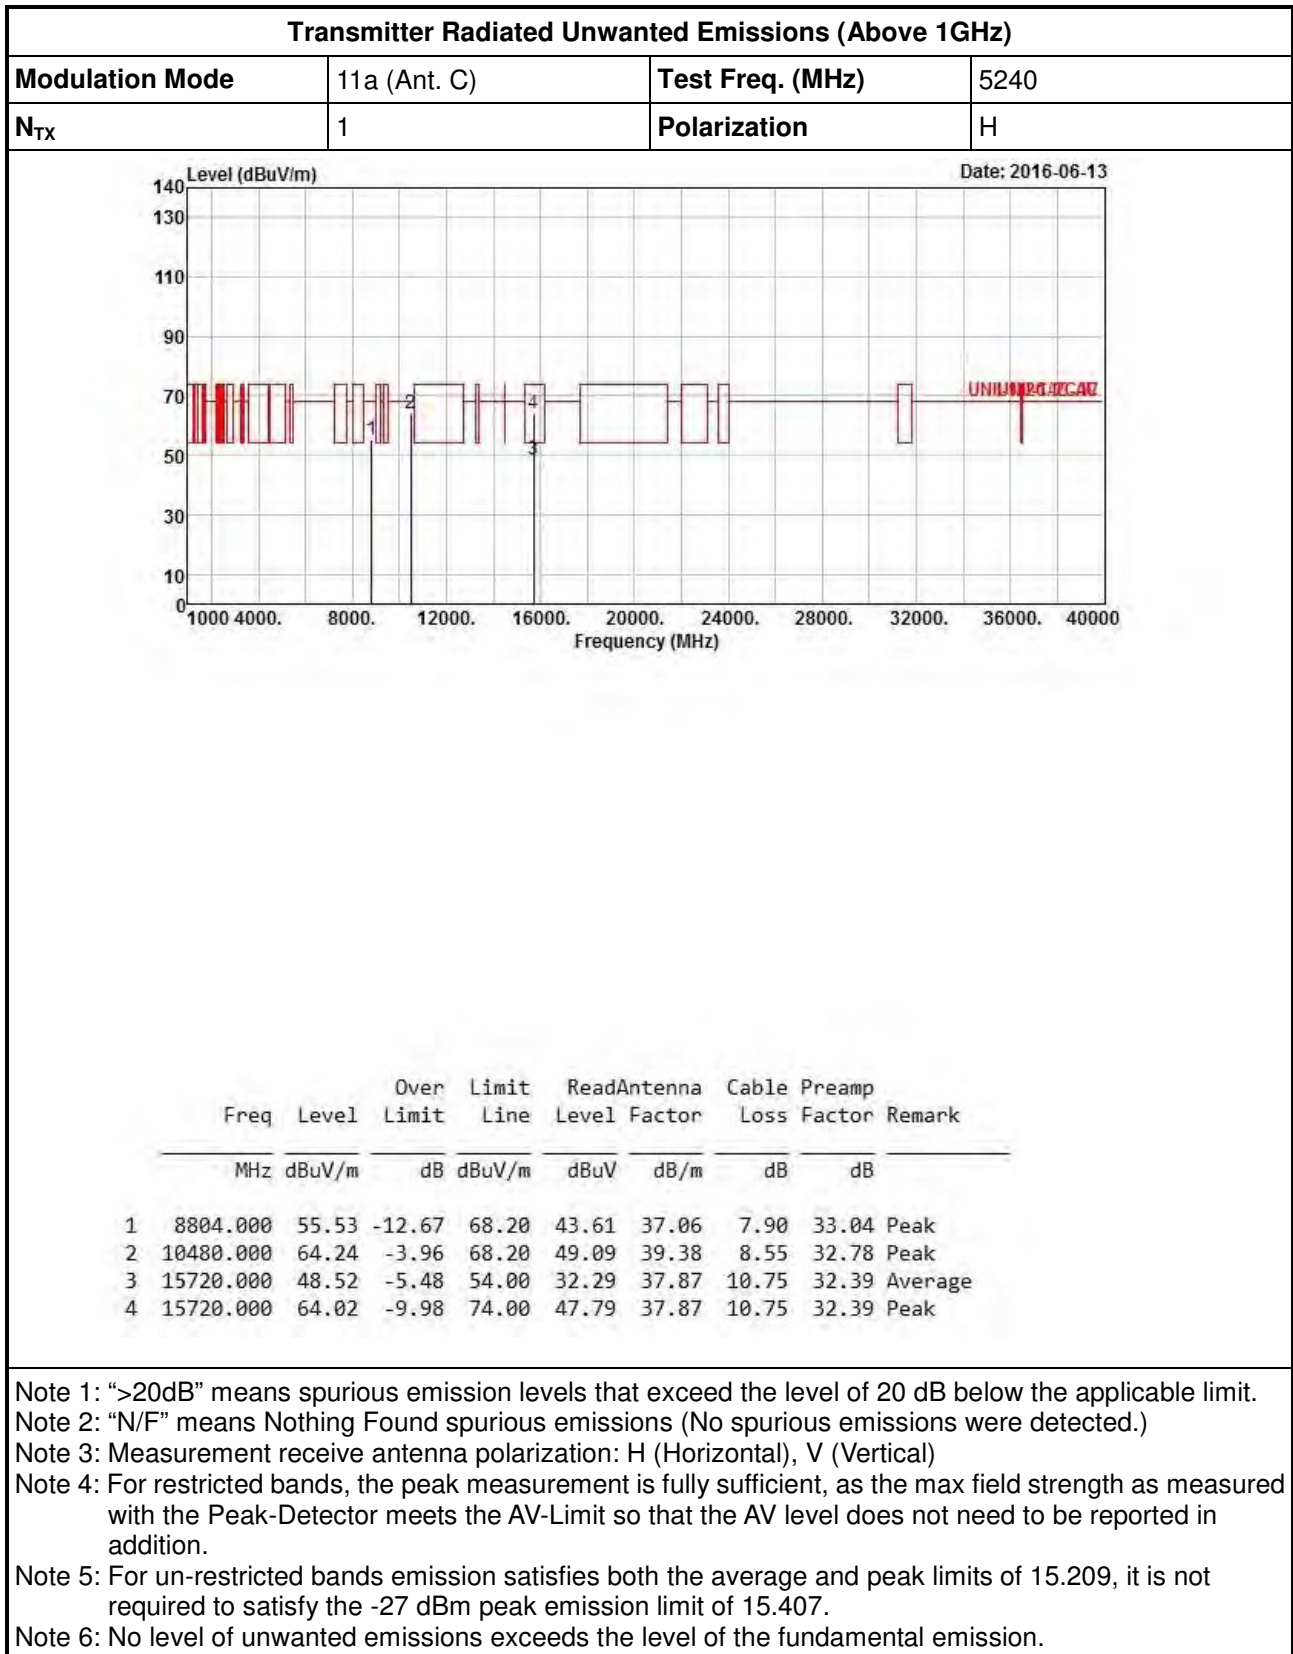


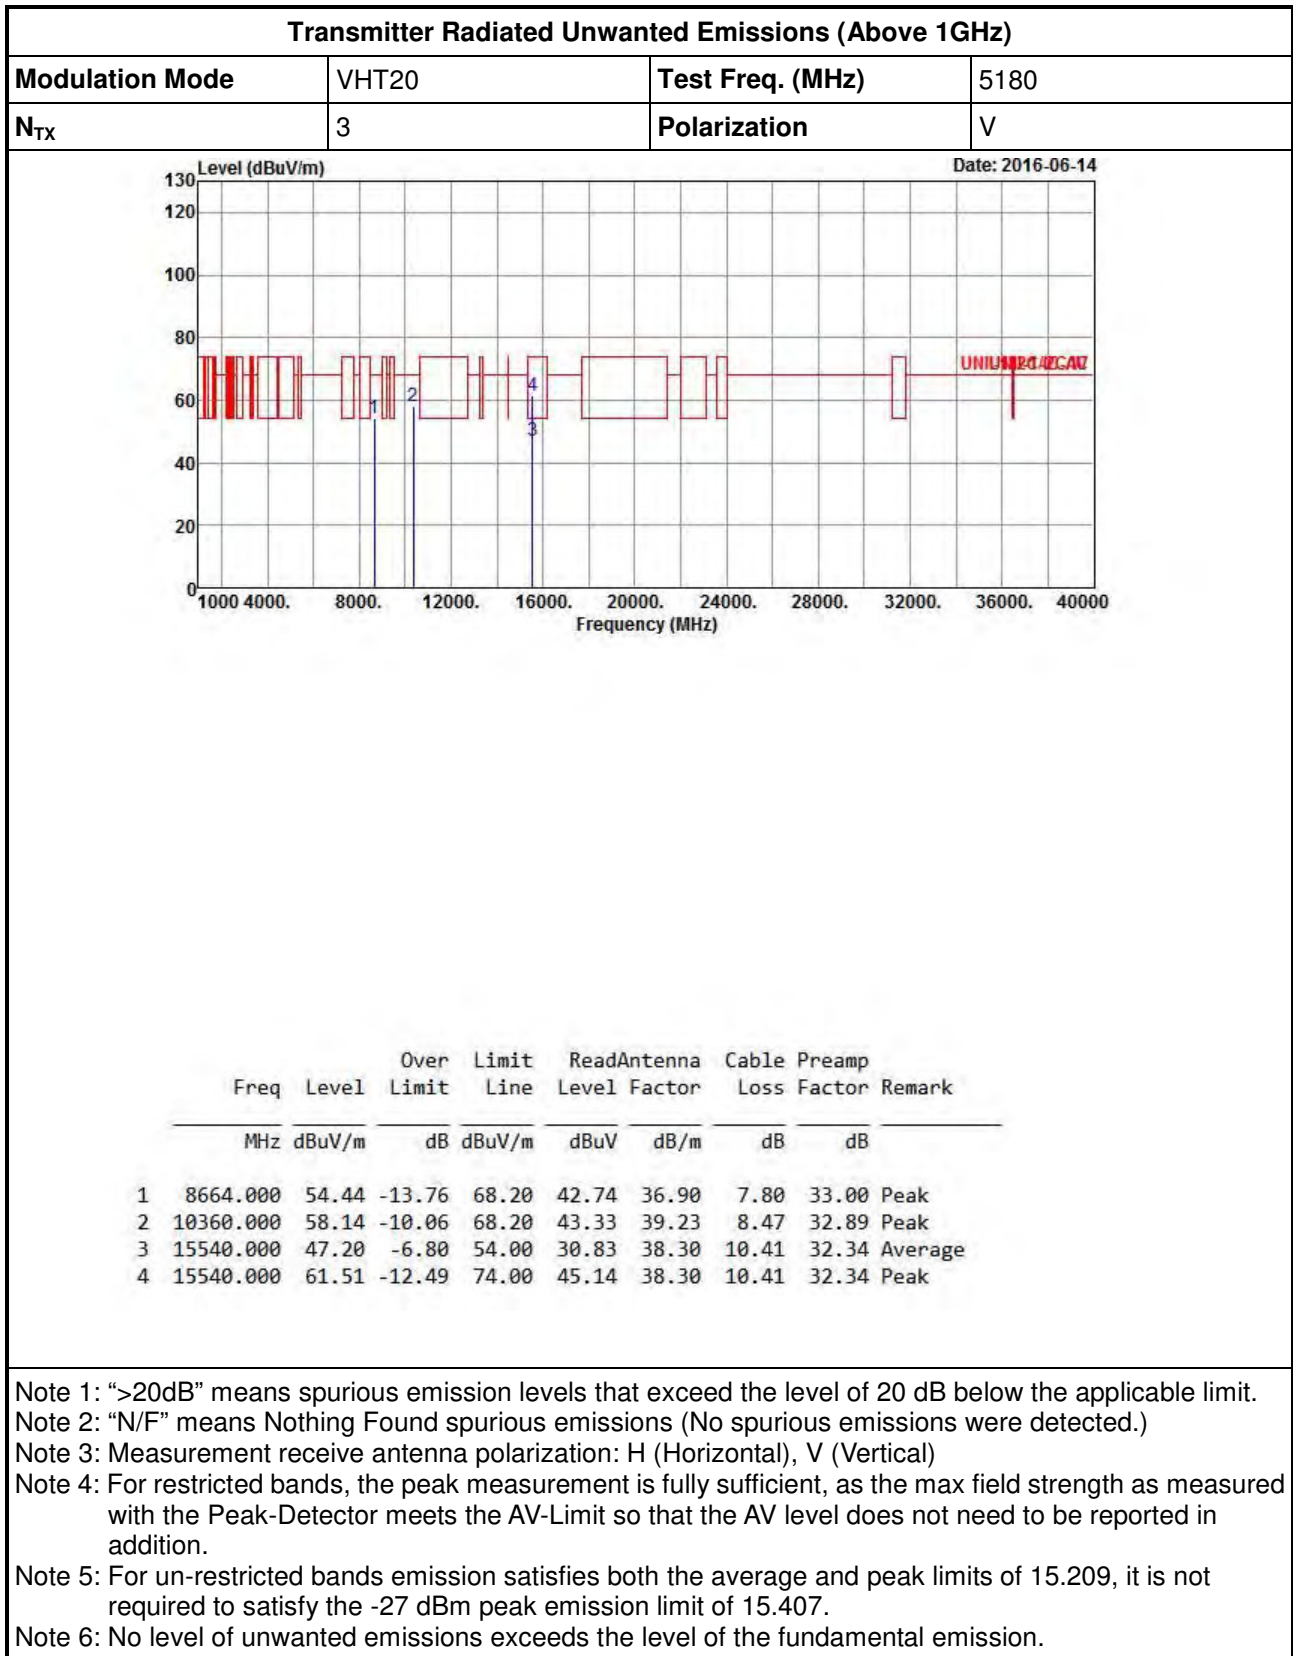


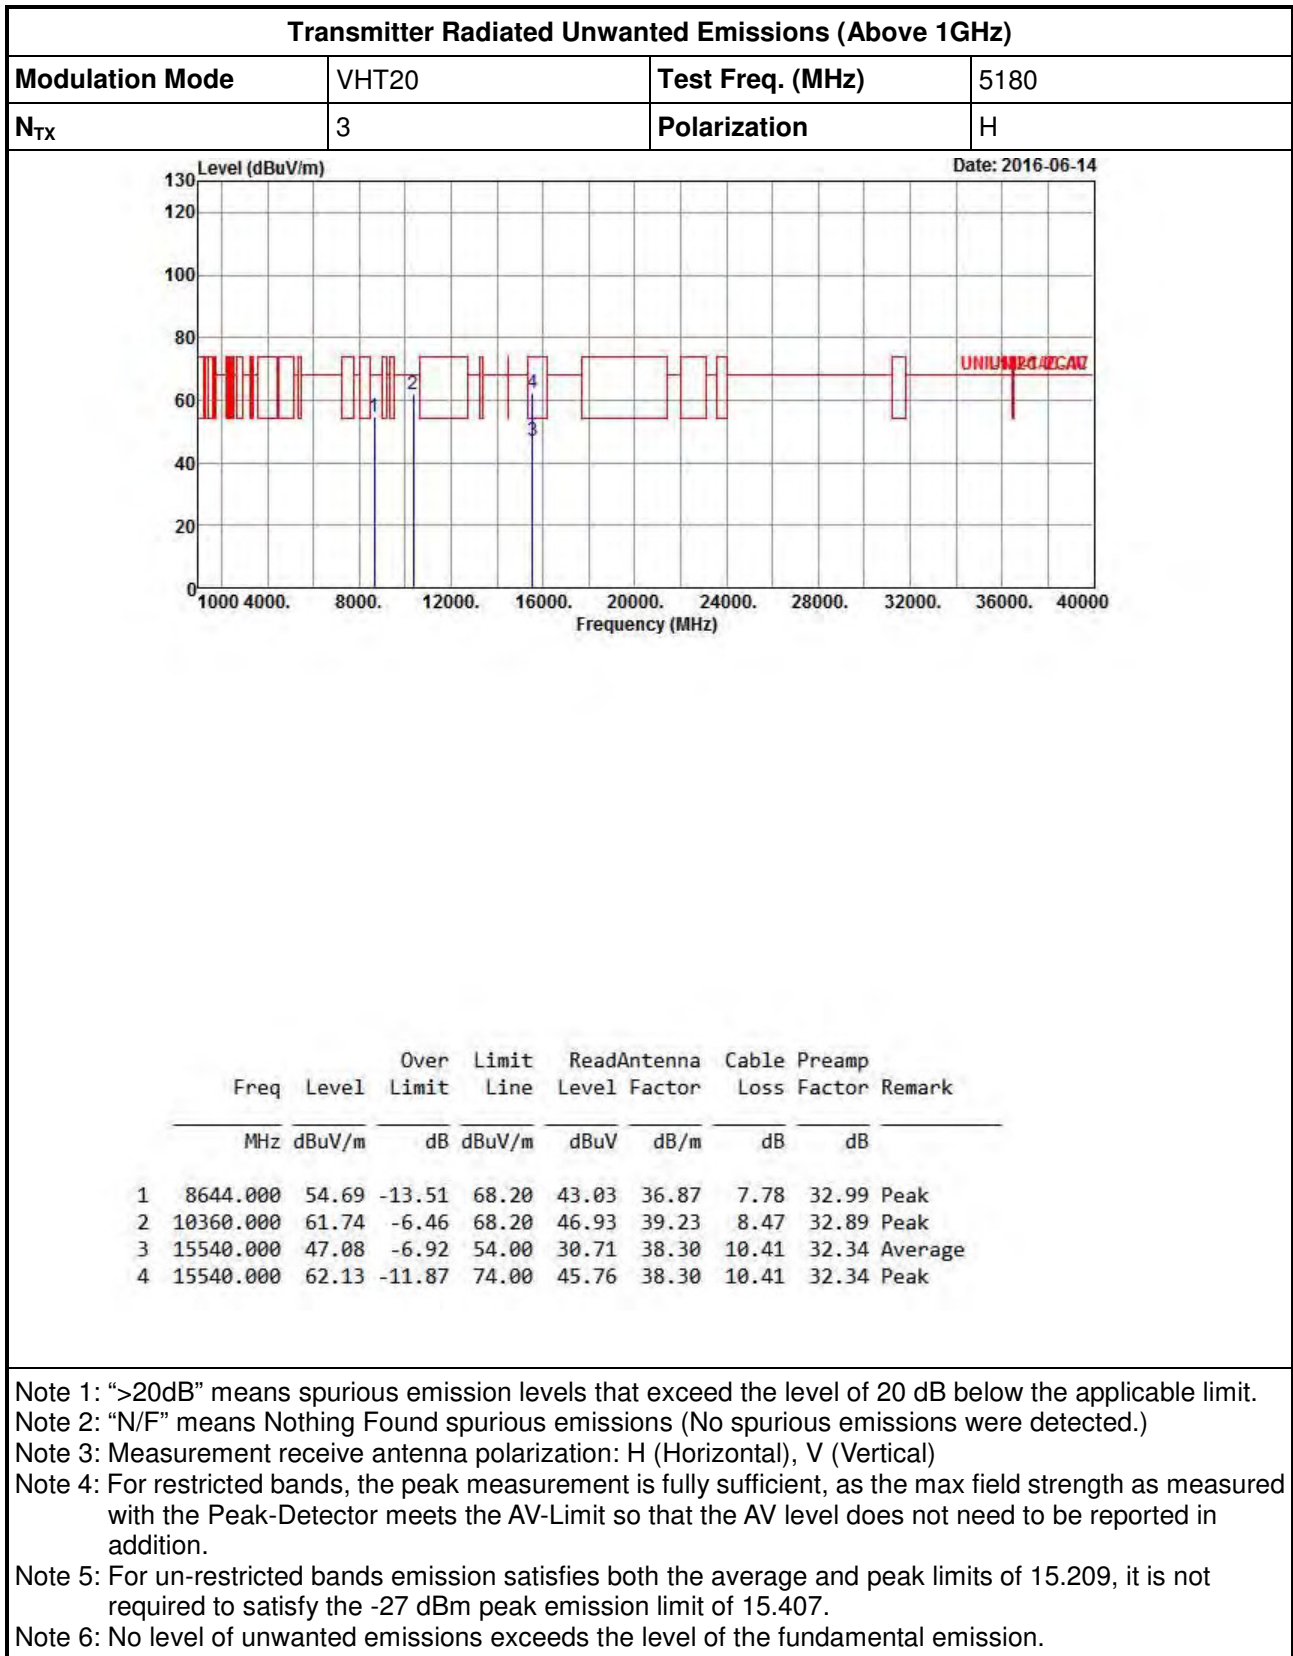


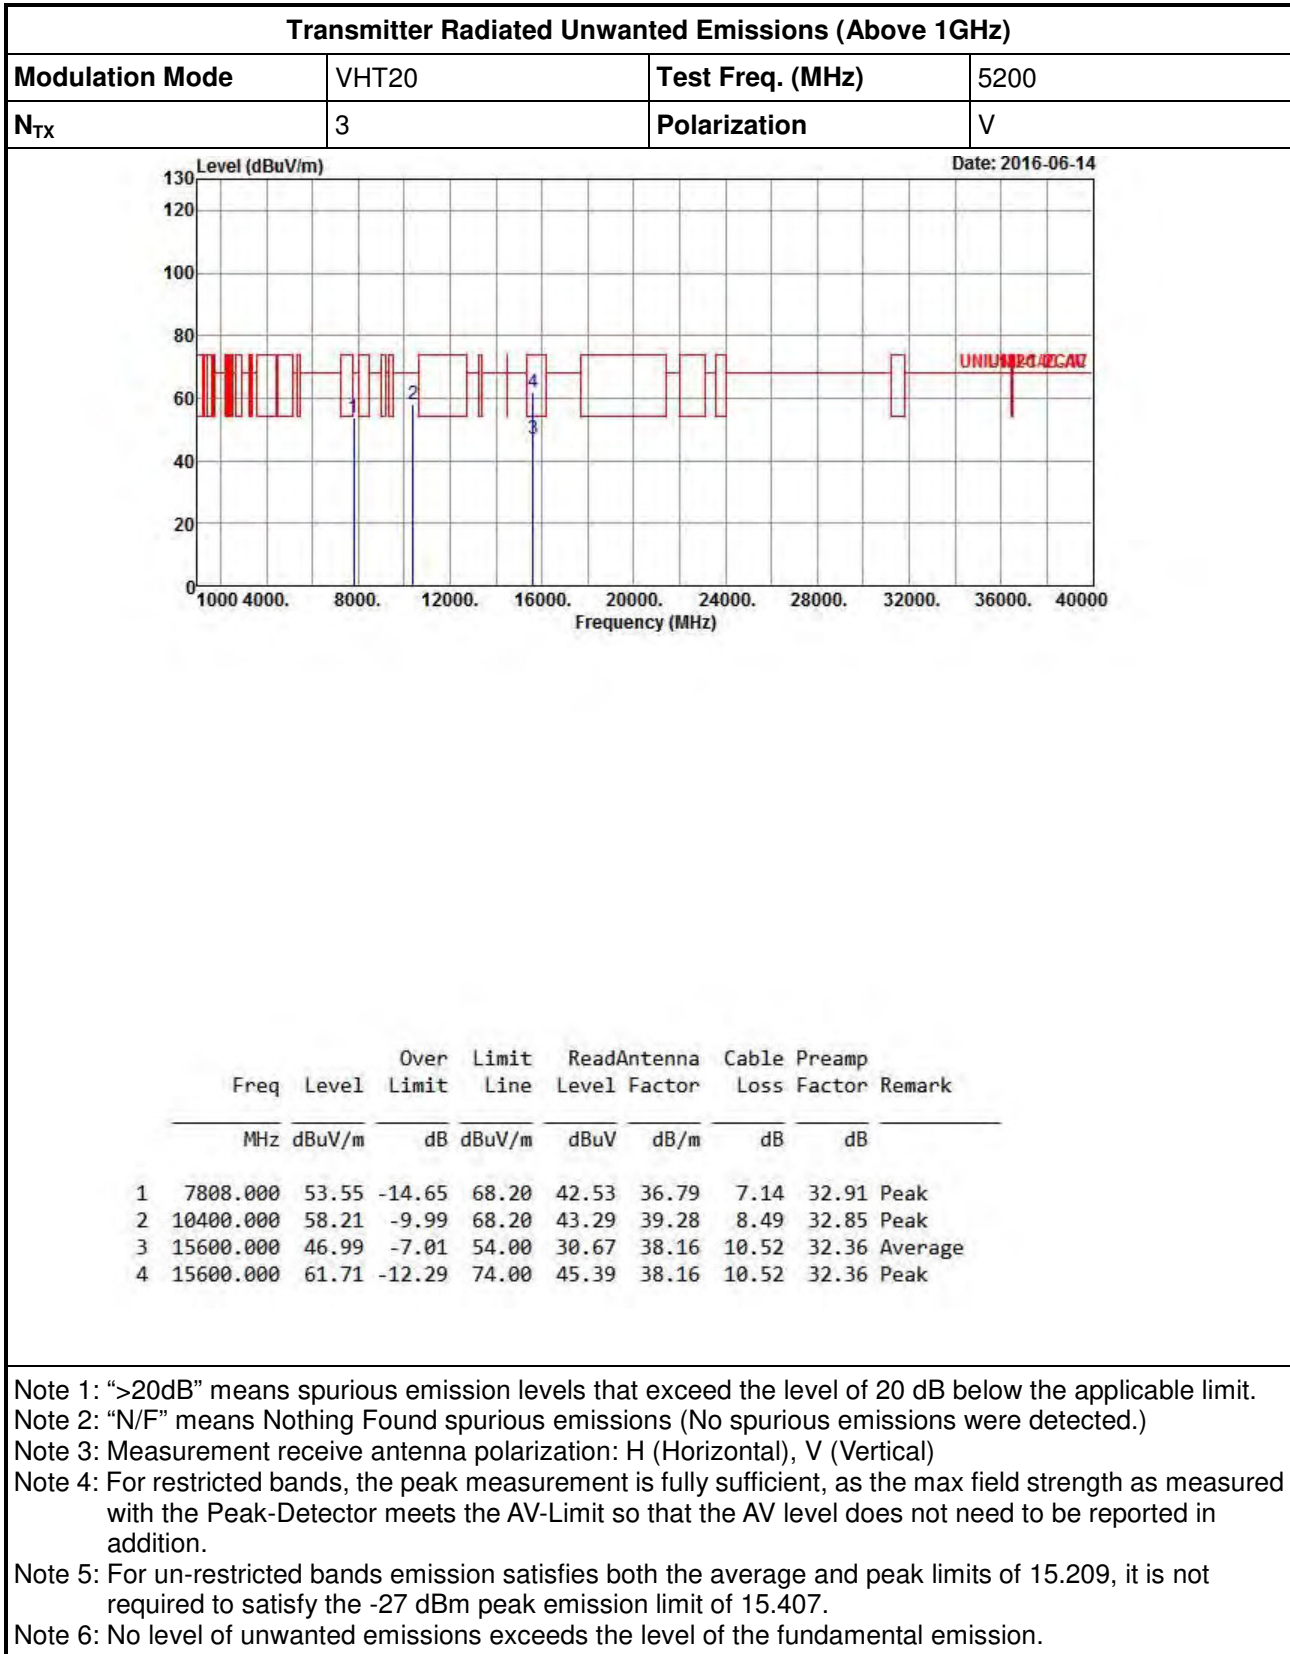


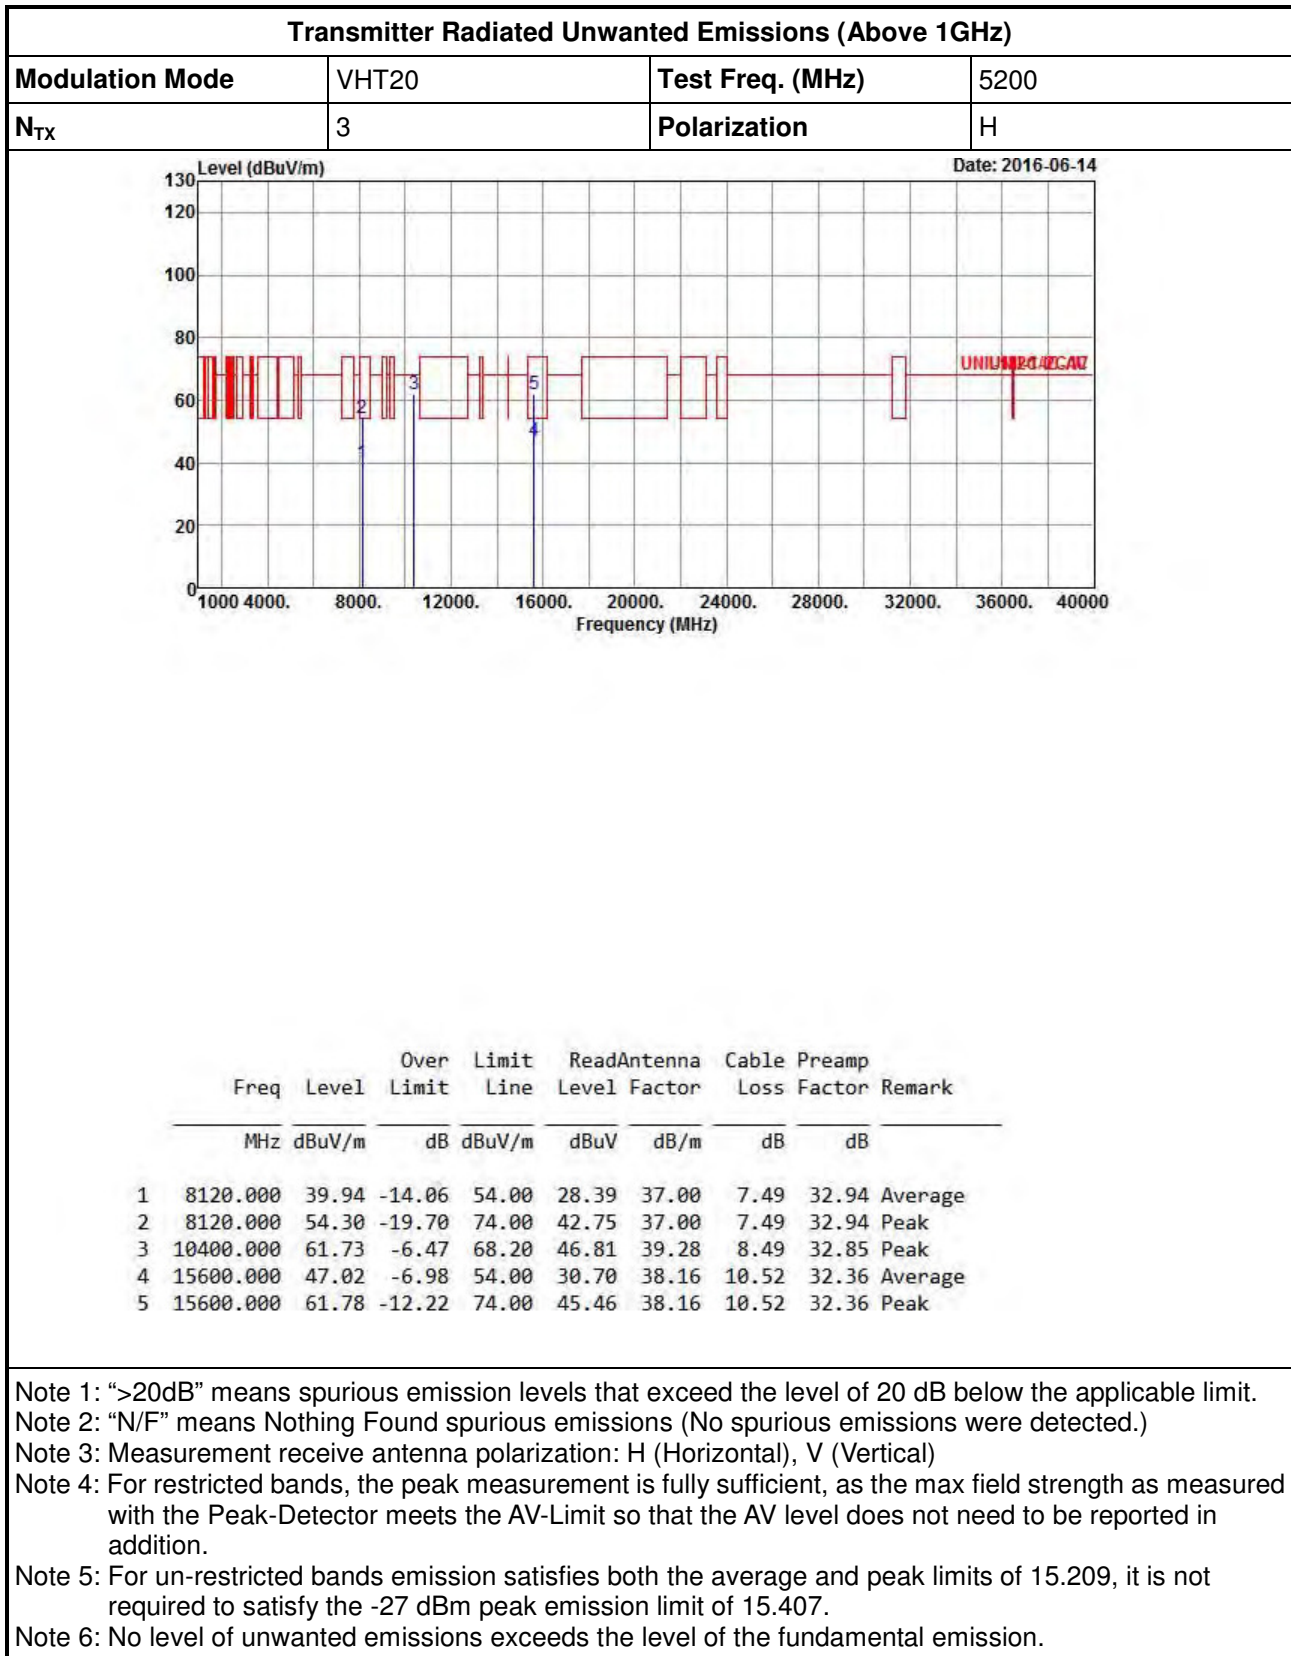


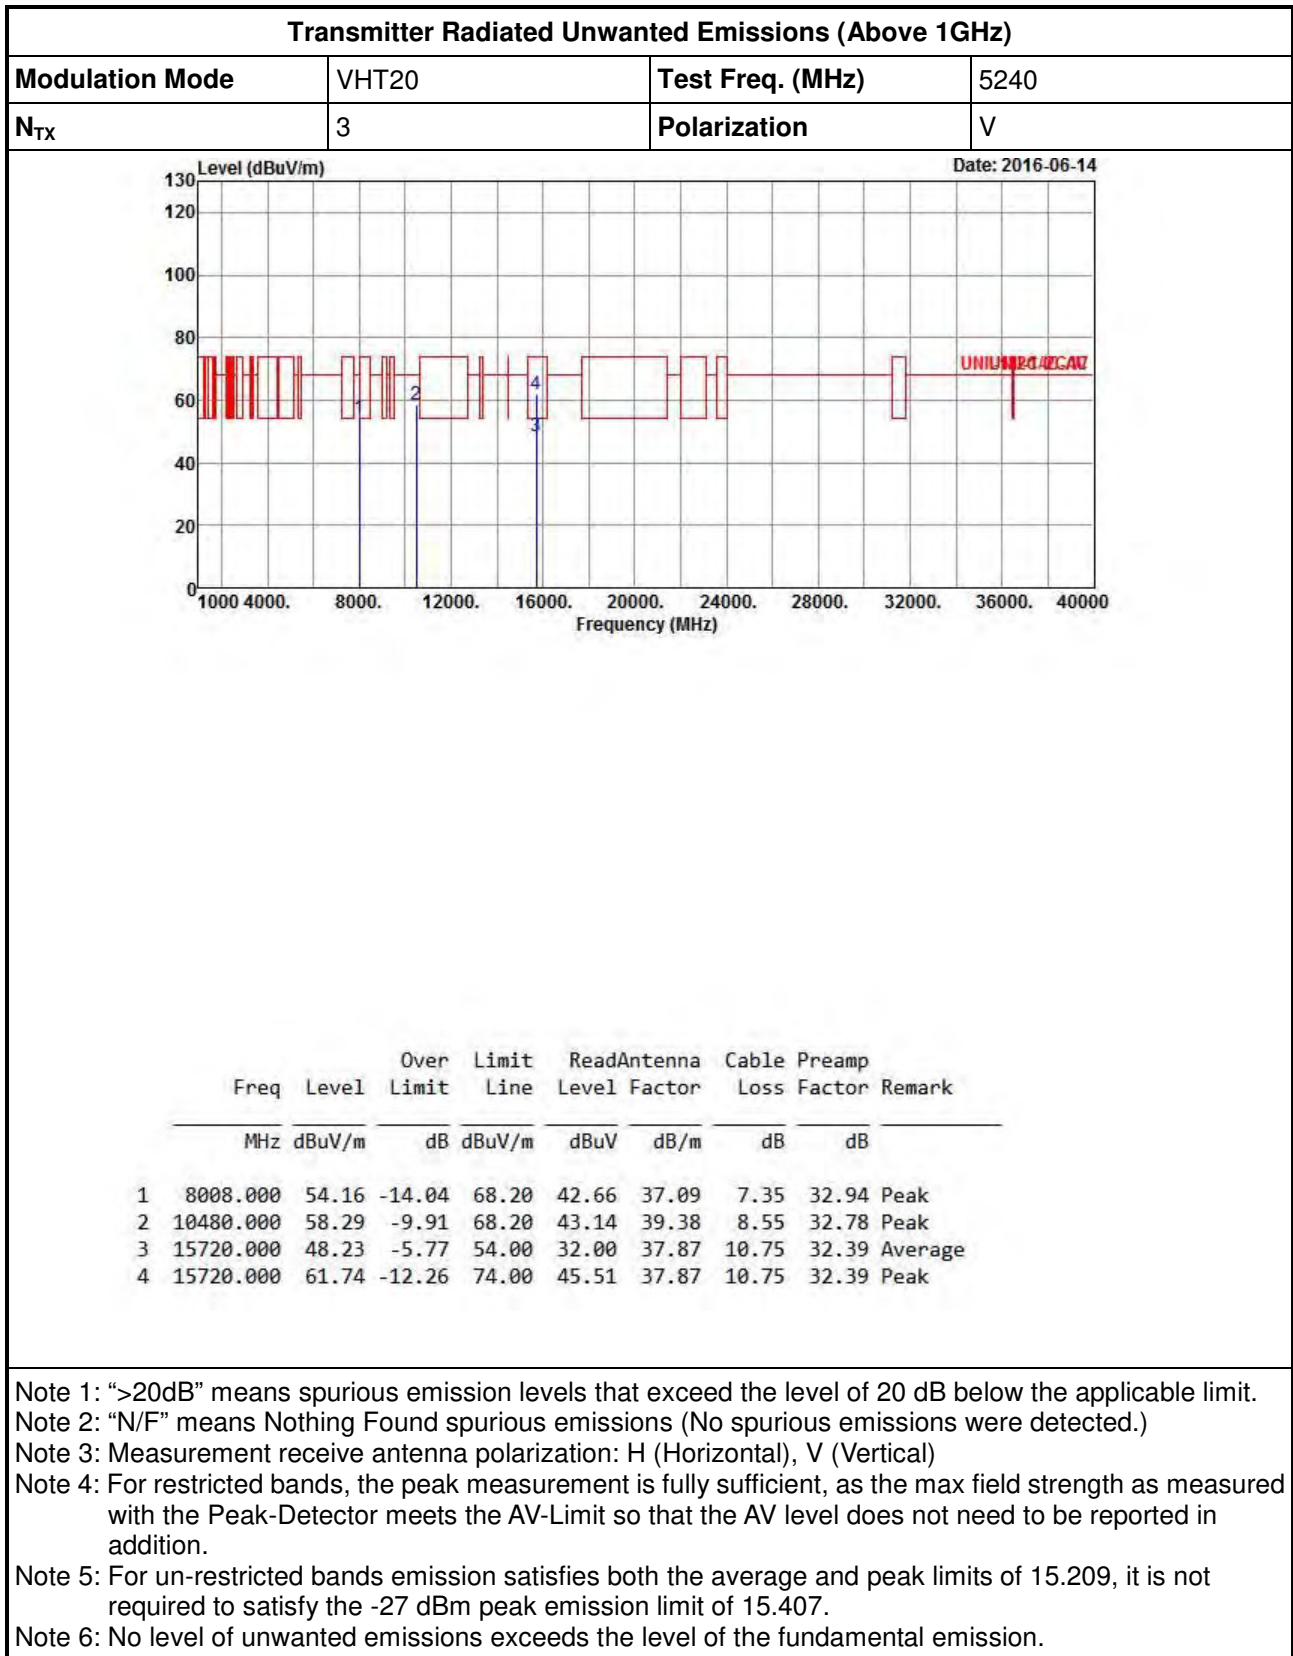


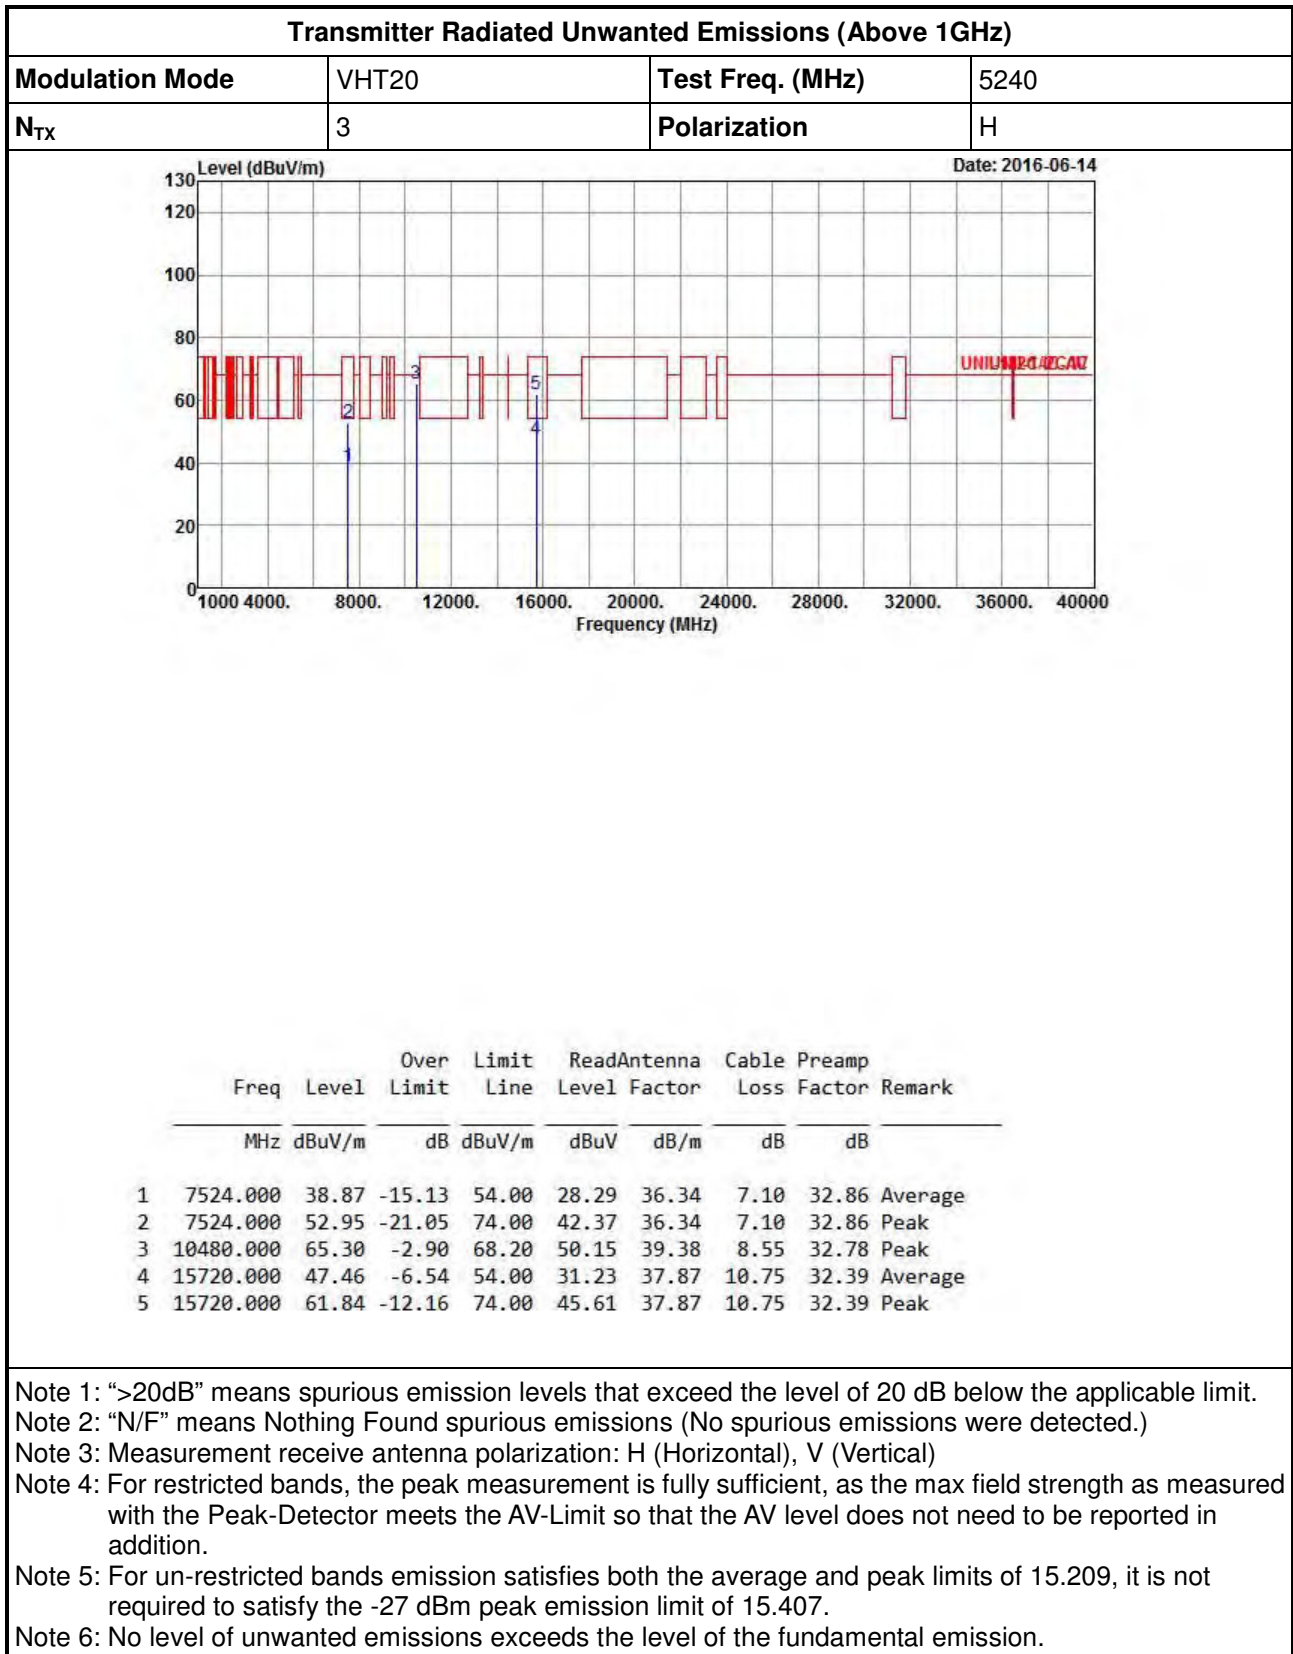


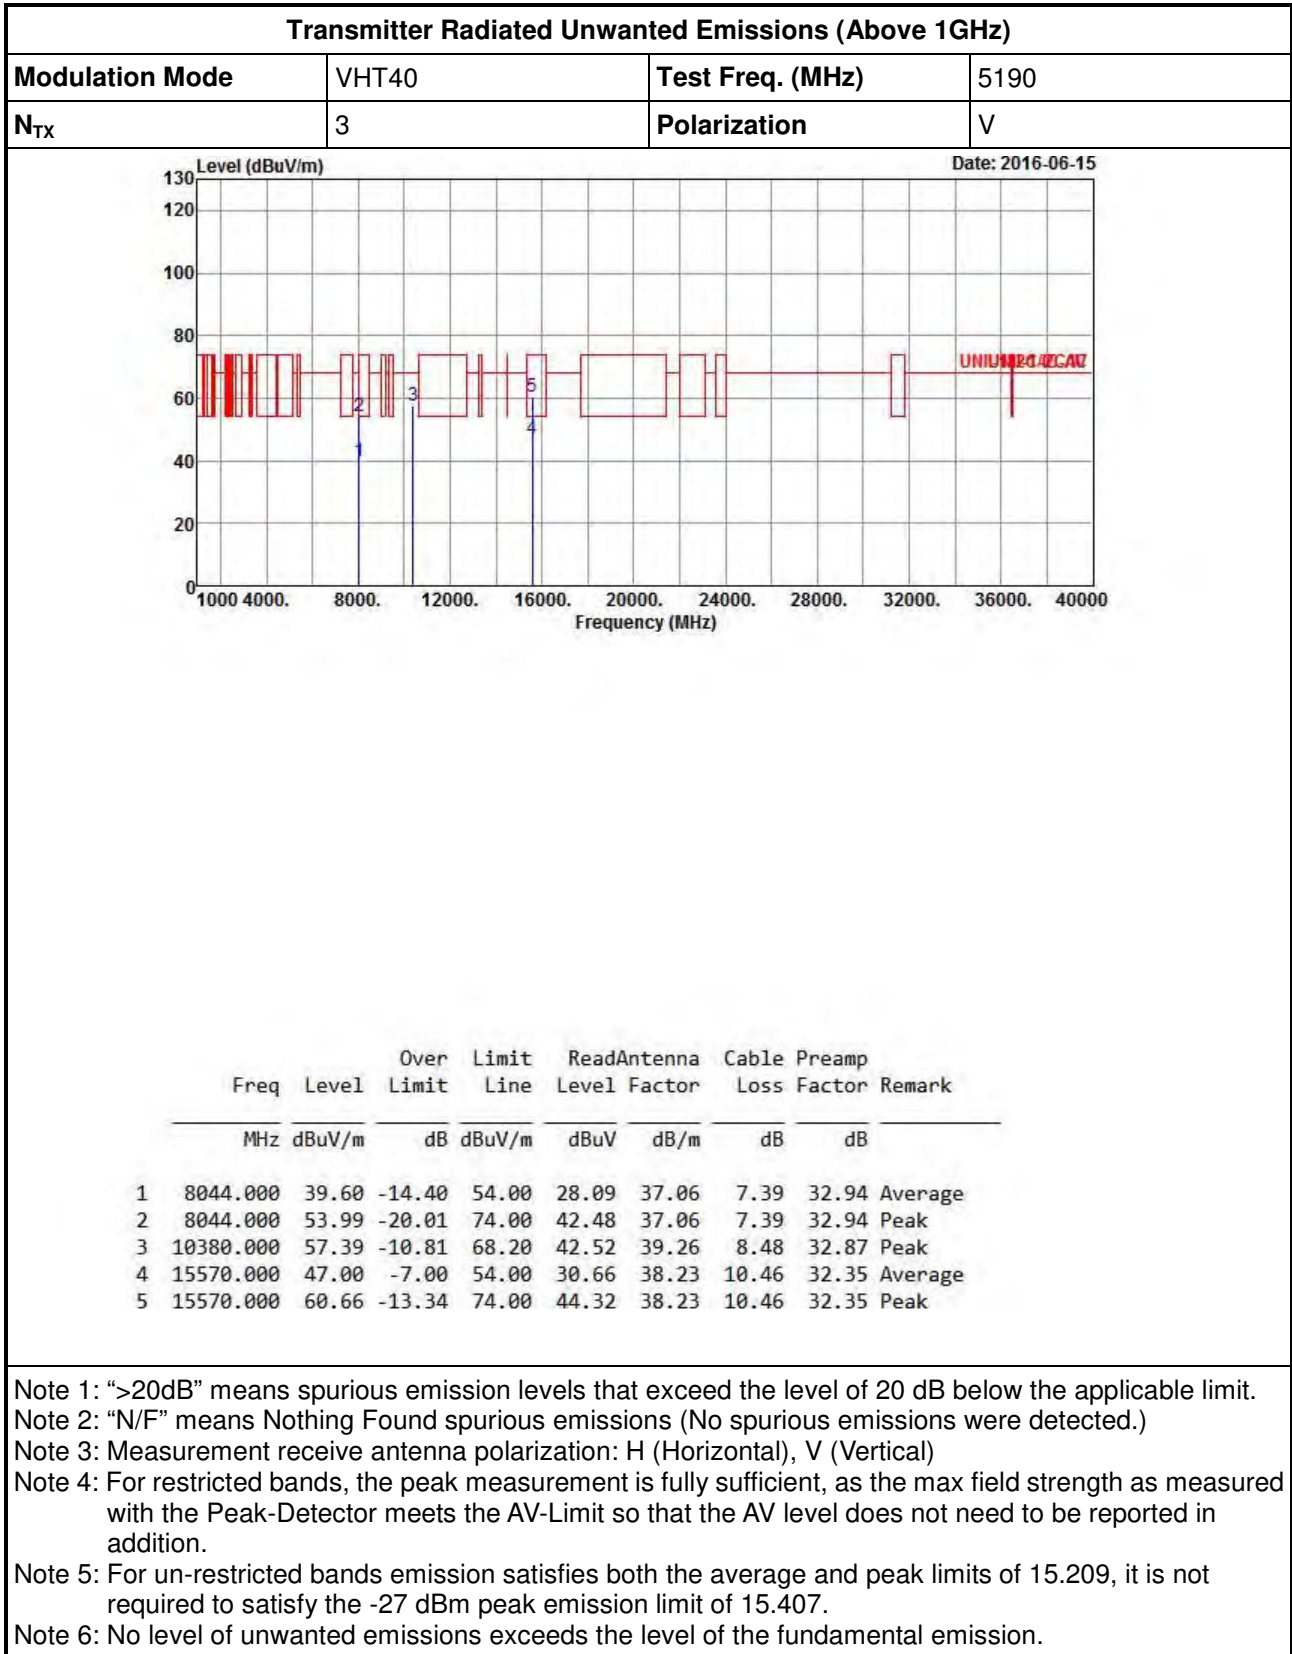


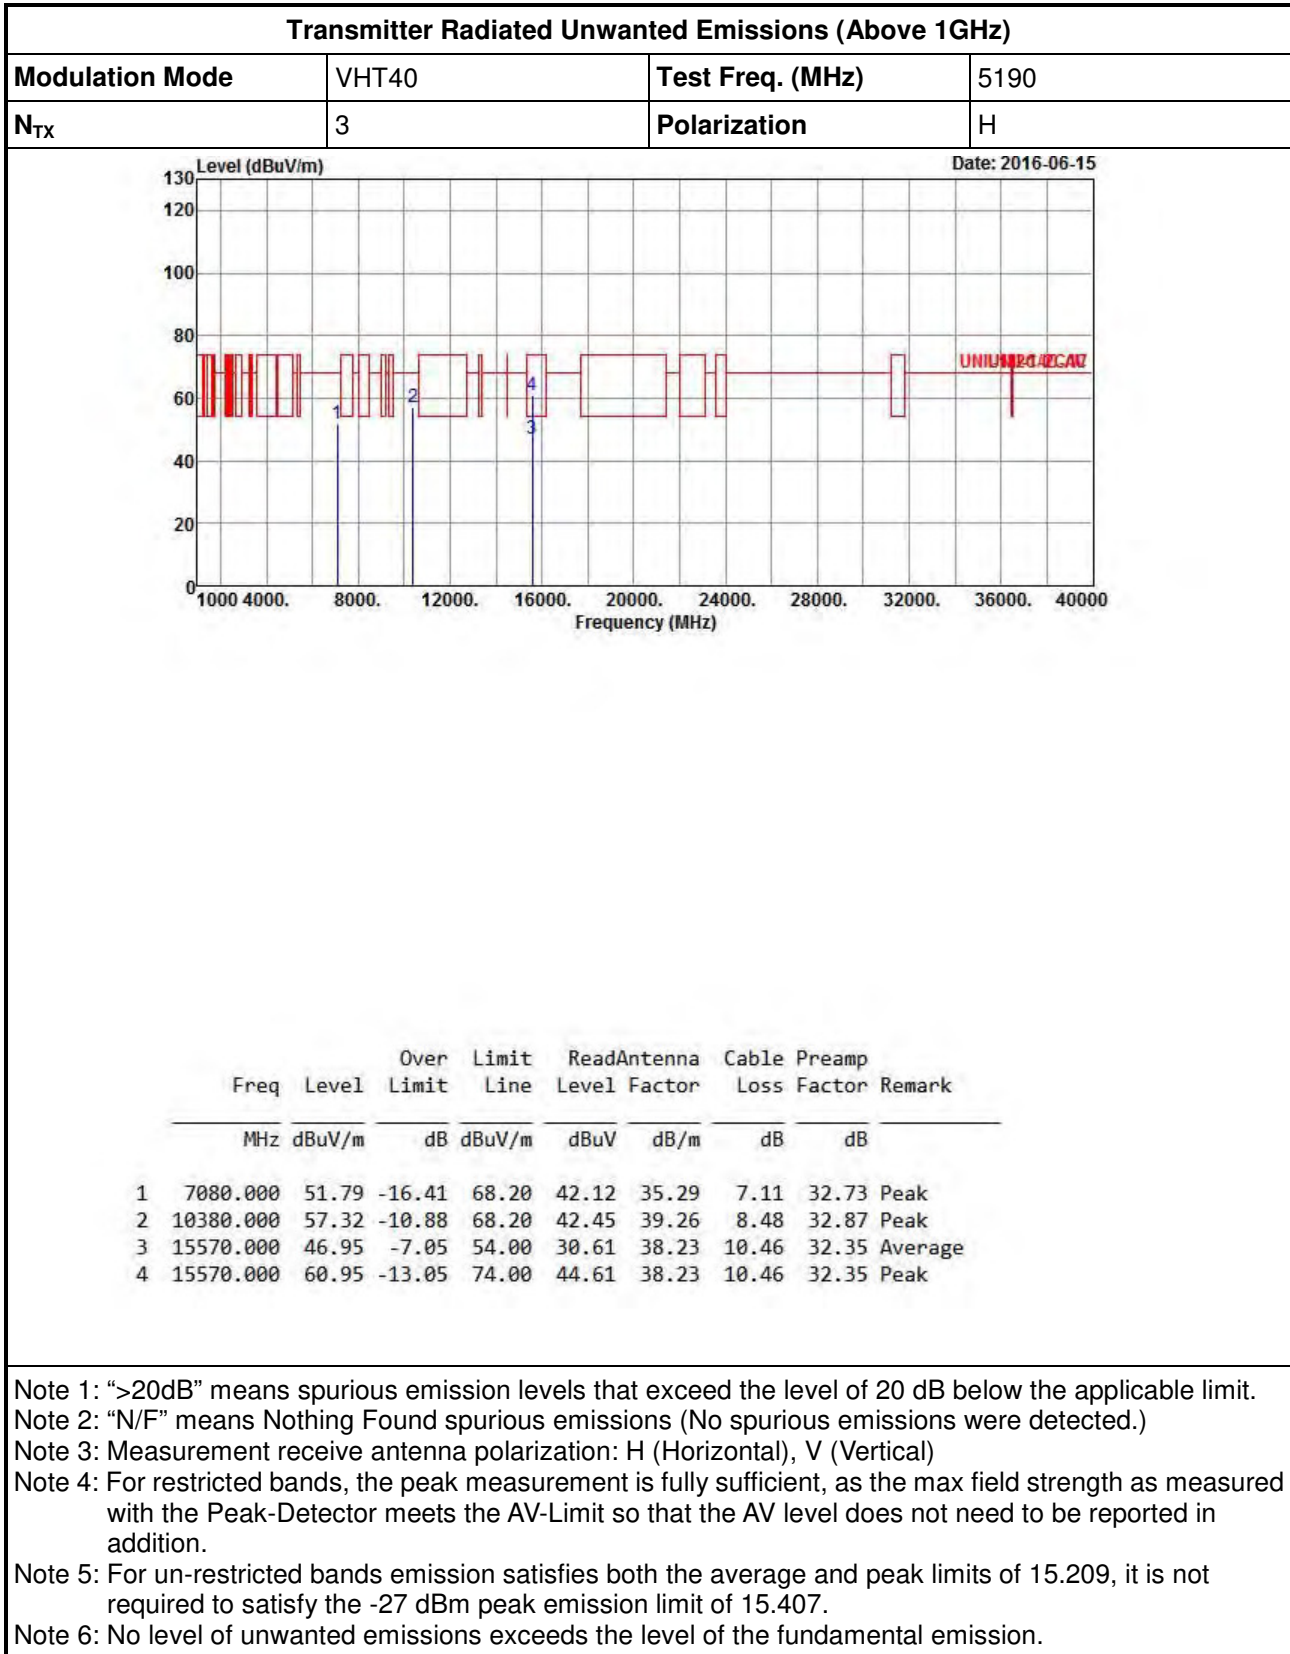

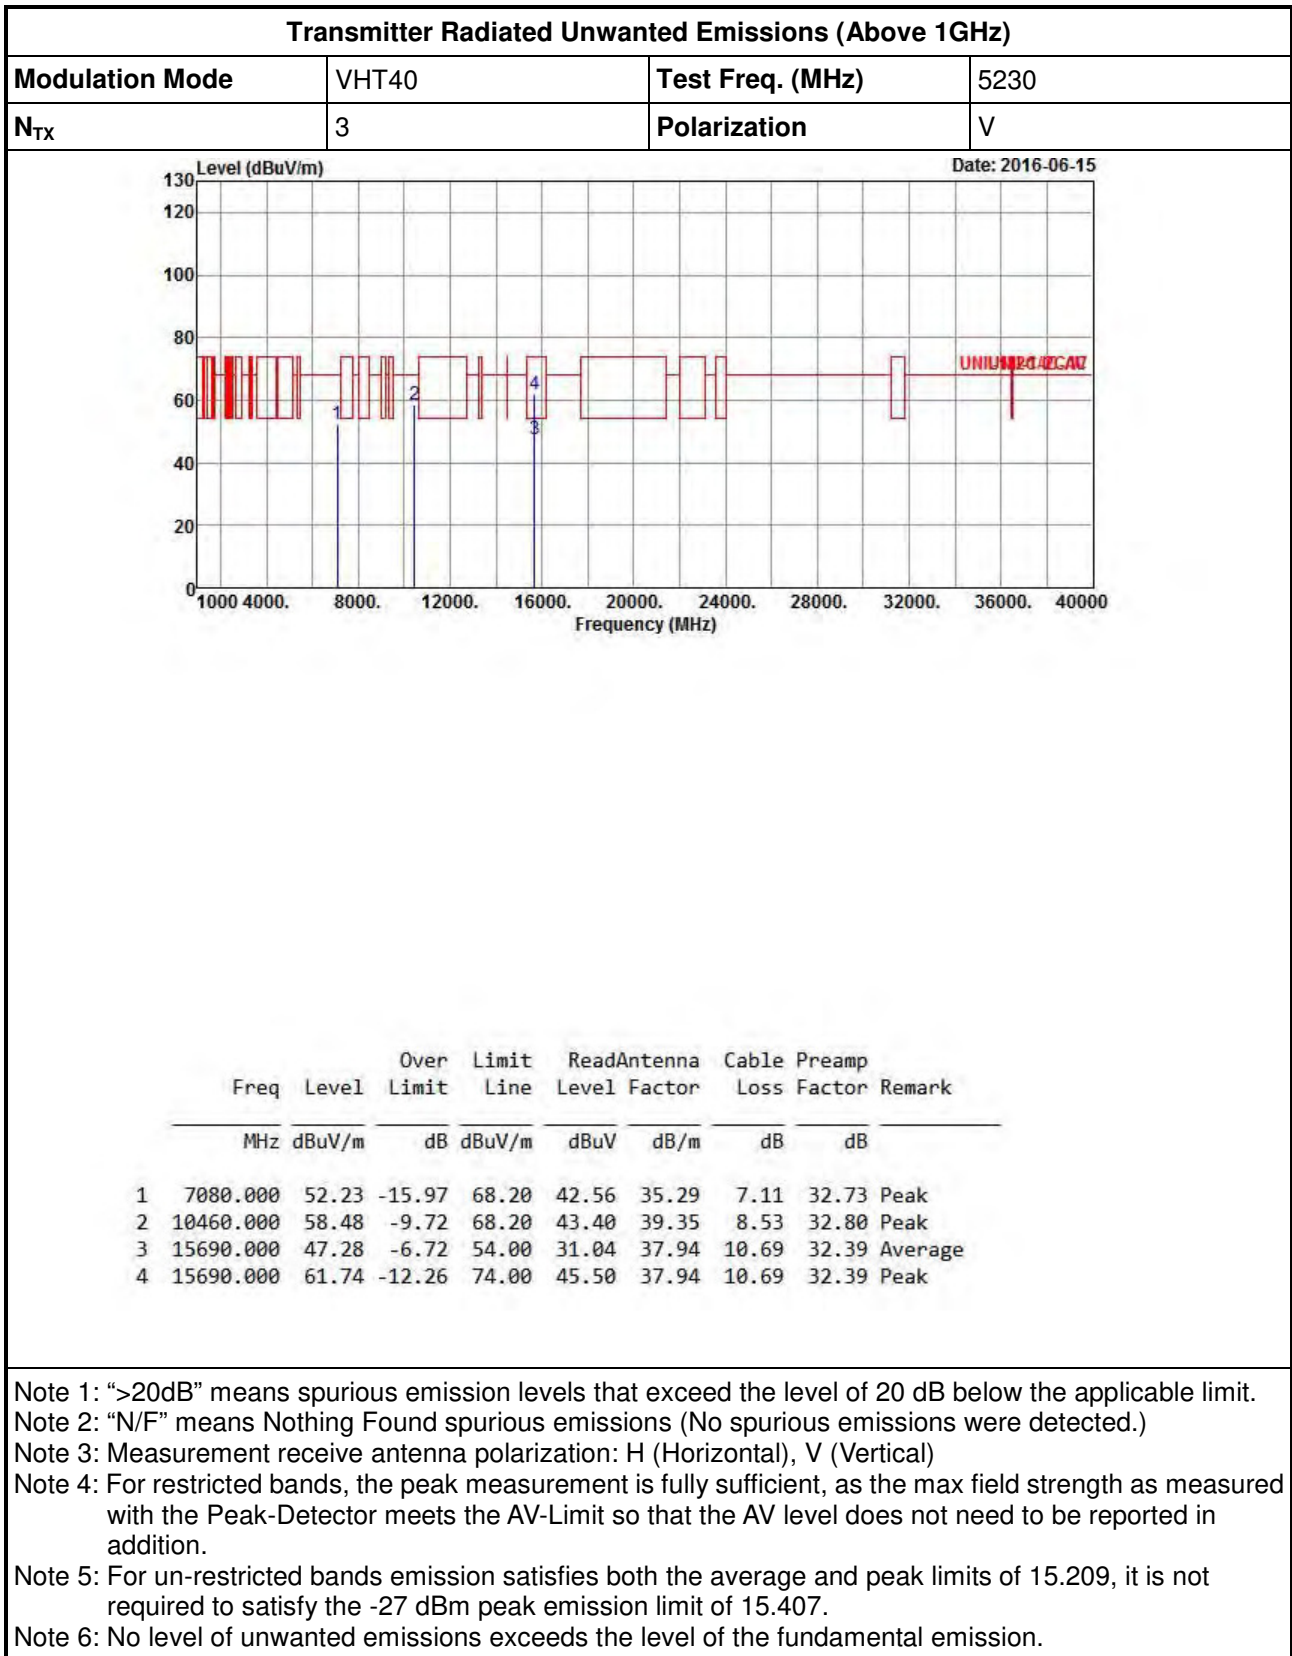

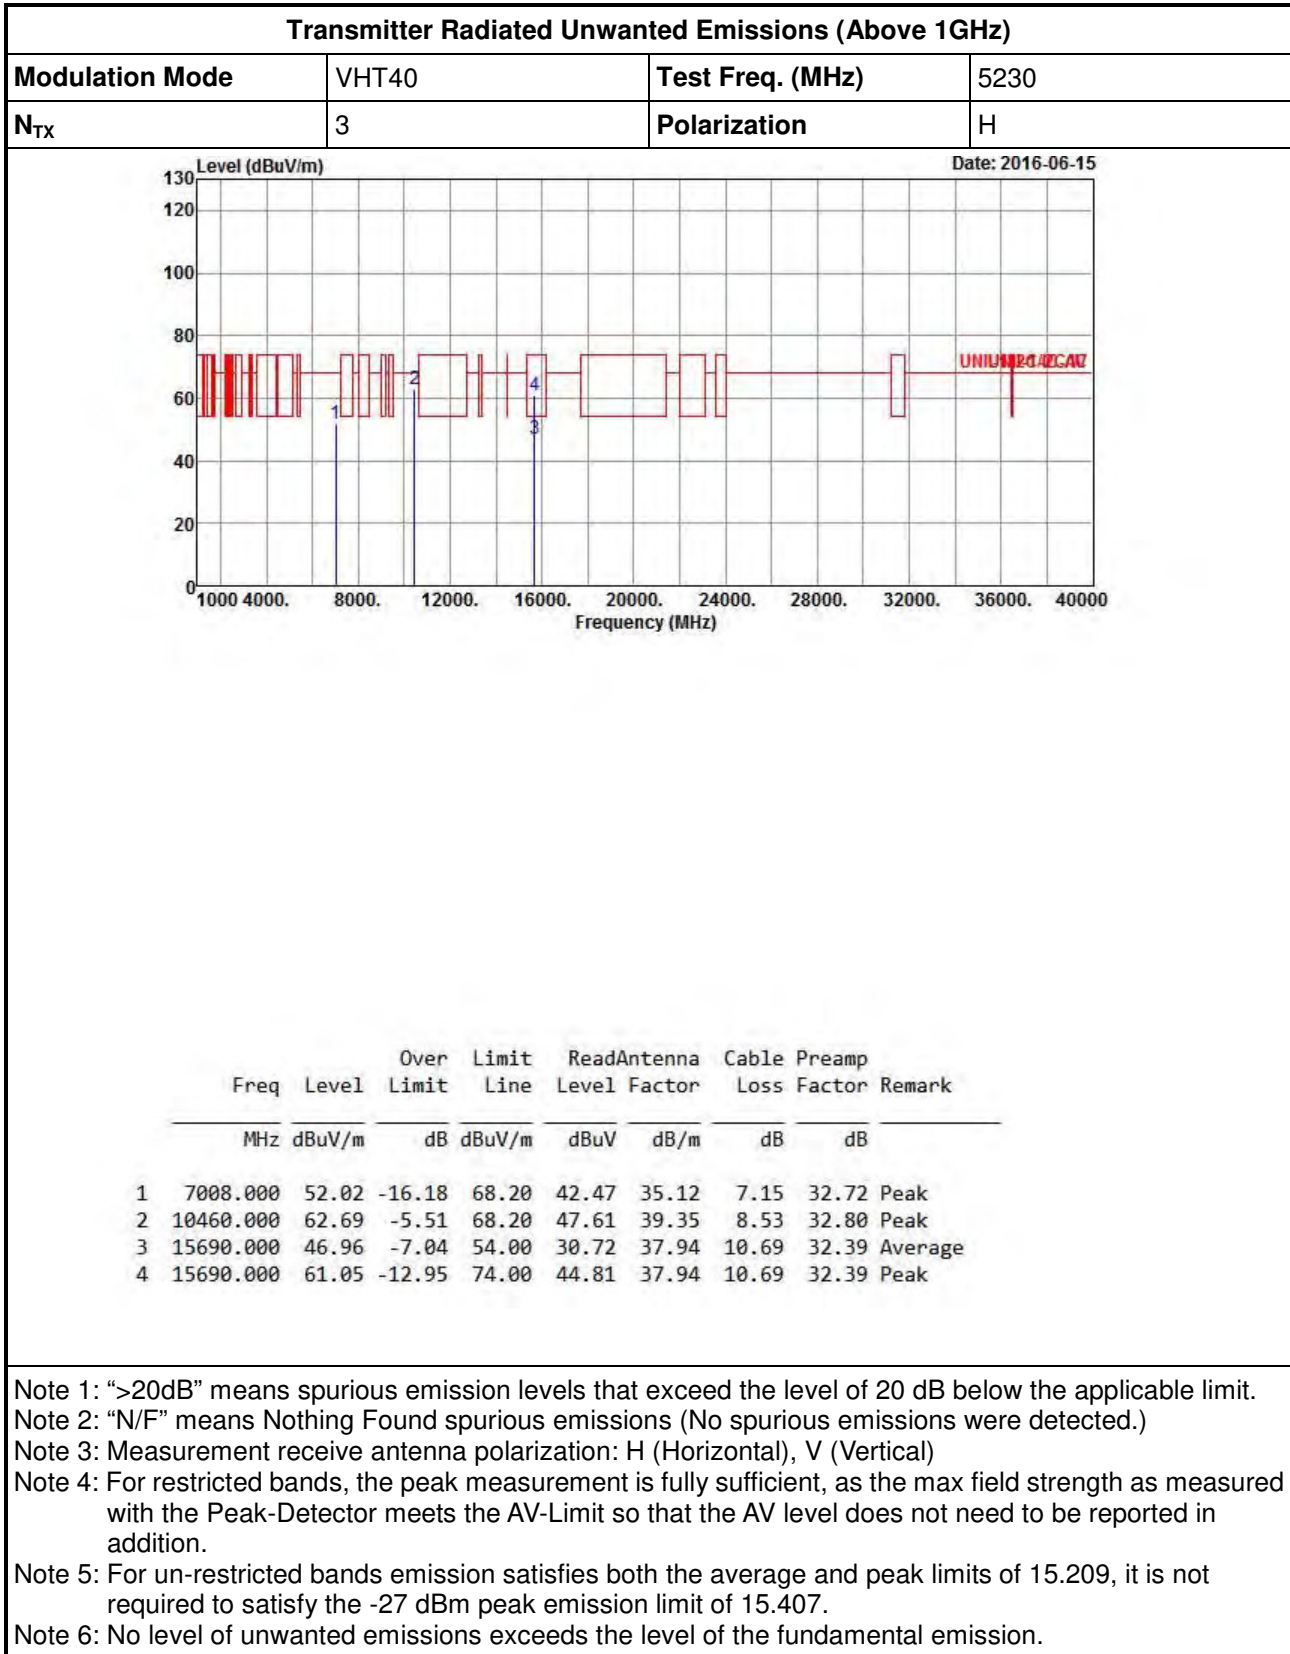


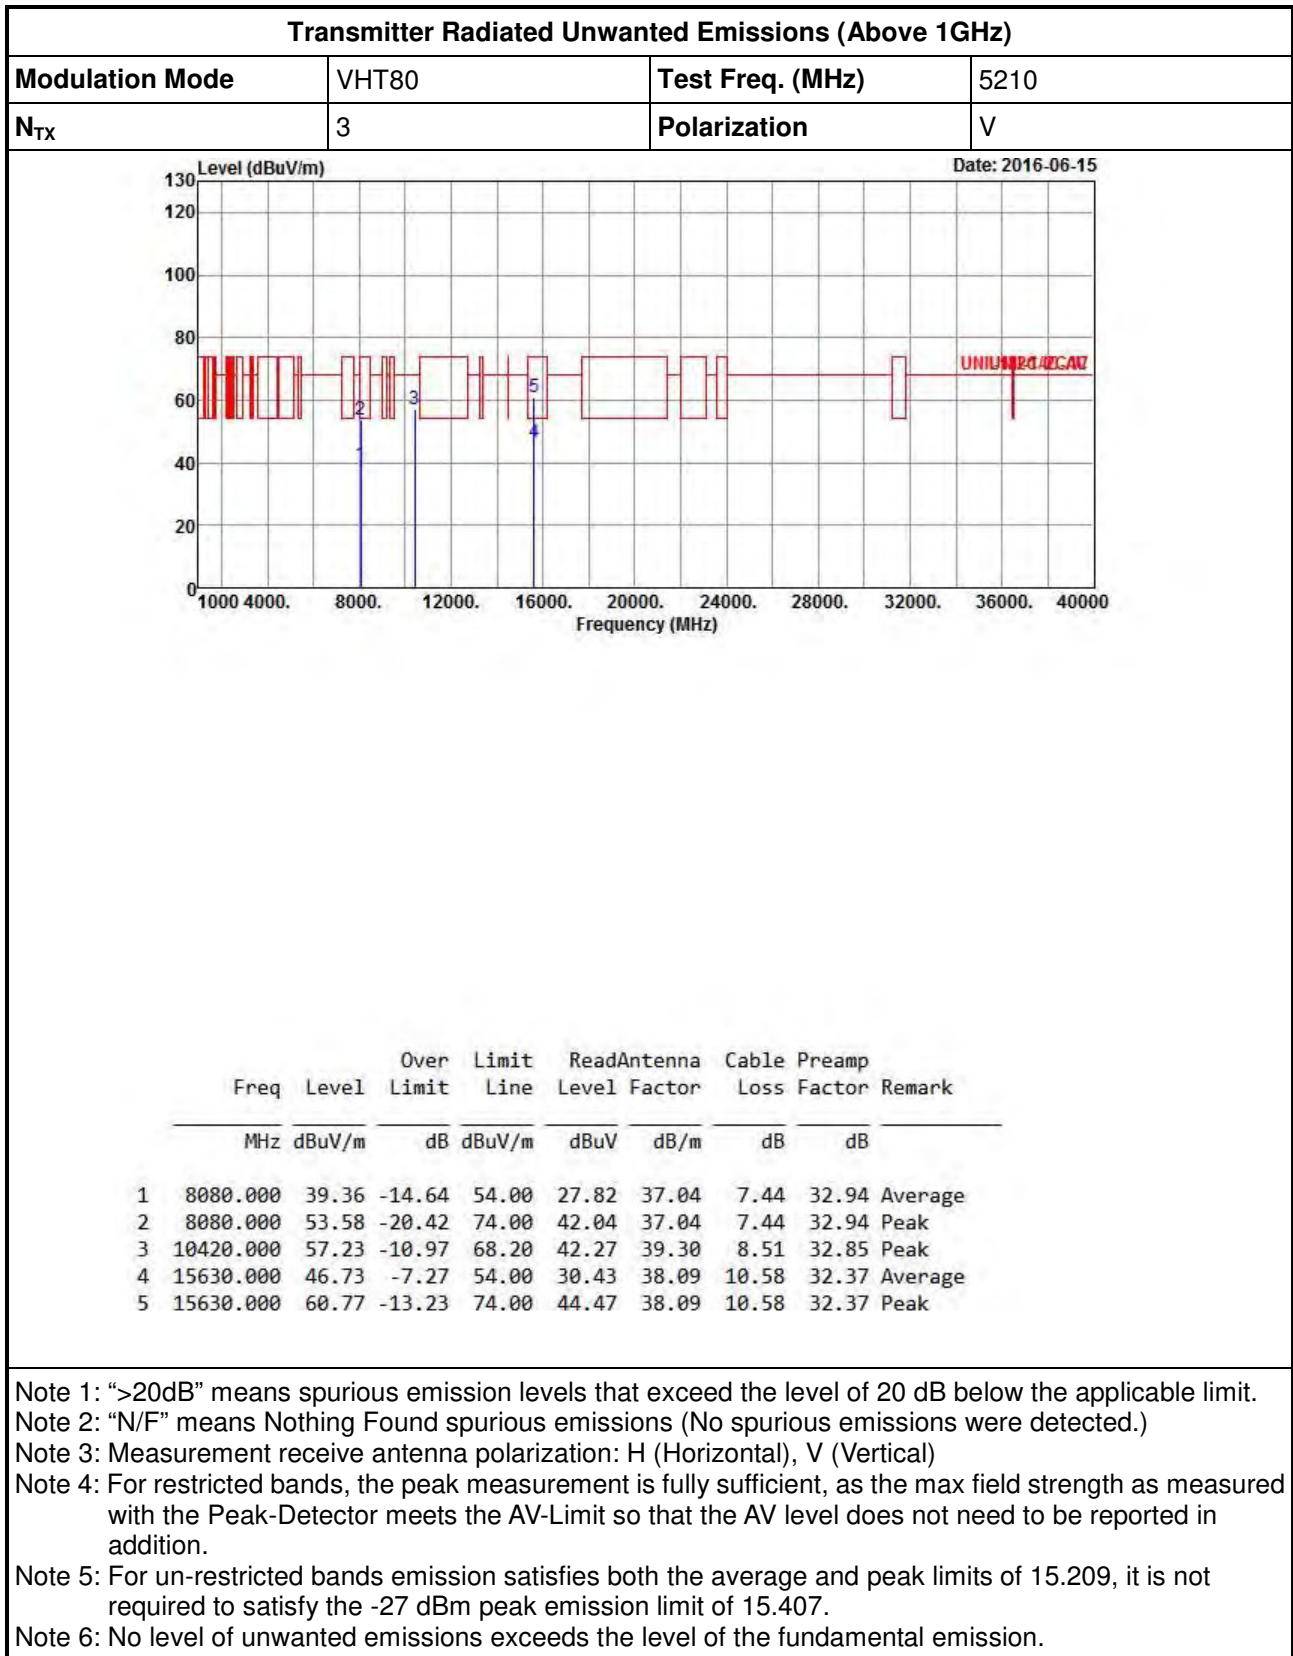

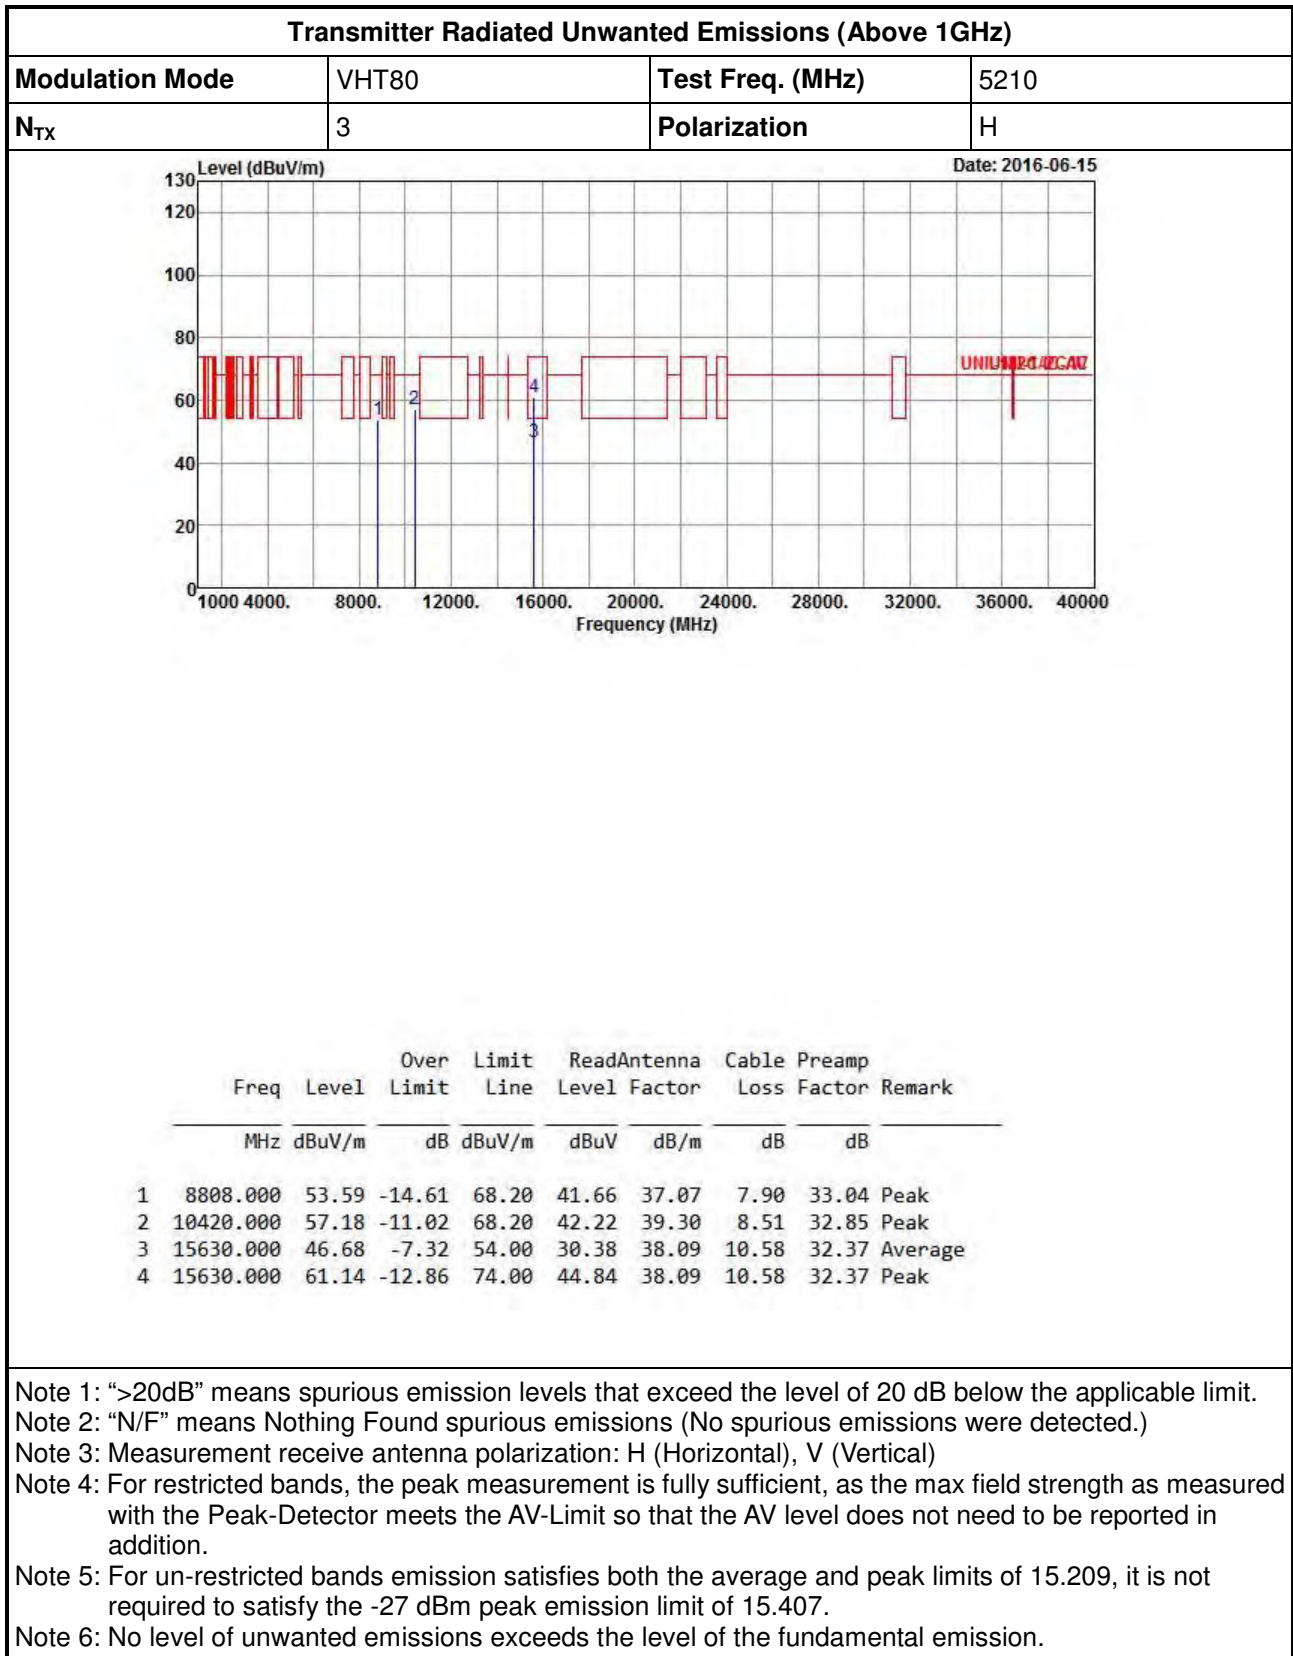




Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5725-5850MHz

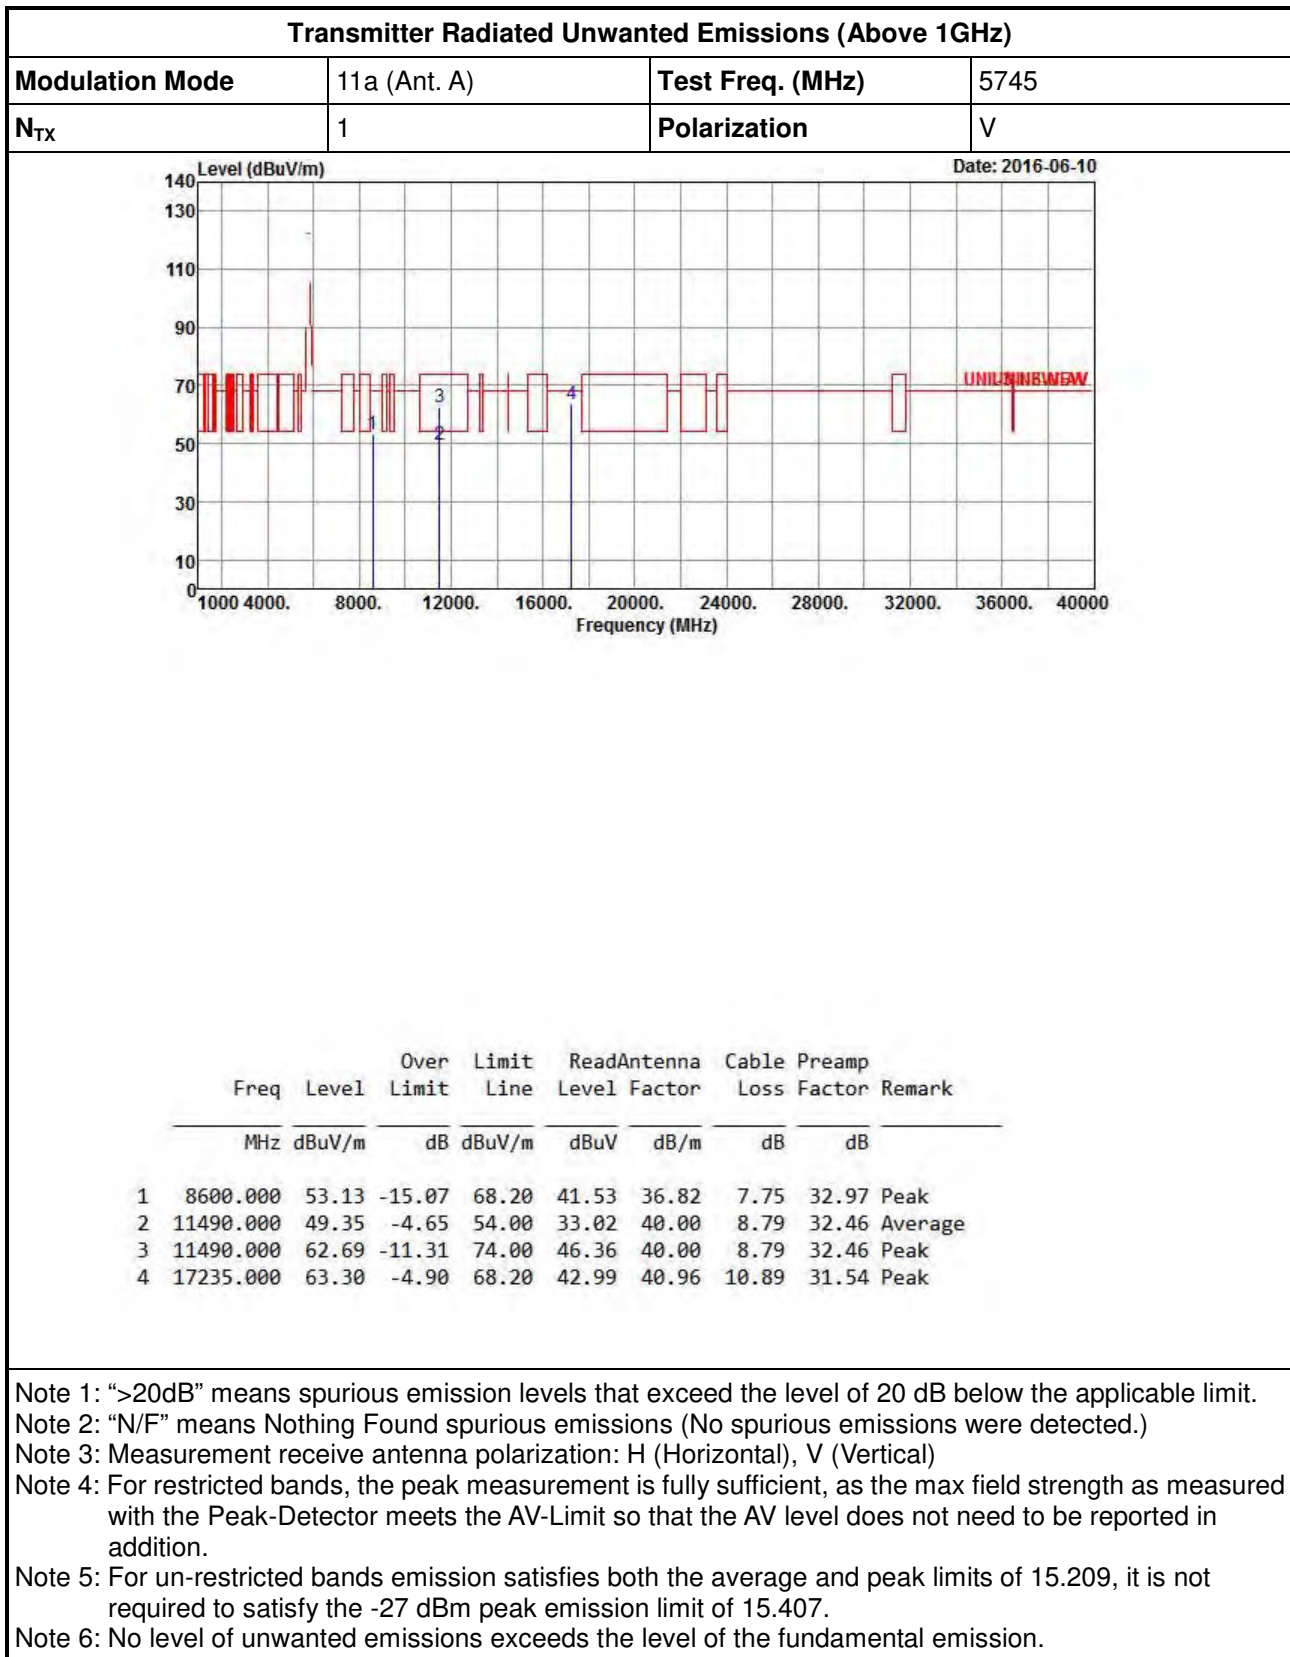




Transmitter Radiated Unwanted Emissions (Above 1GHz)


Modulation Mode	11a (Ant. A)	Test Freq. (MHz)	5745
N _{TX}	1	Polarization	H

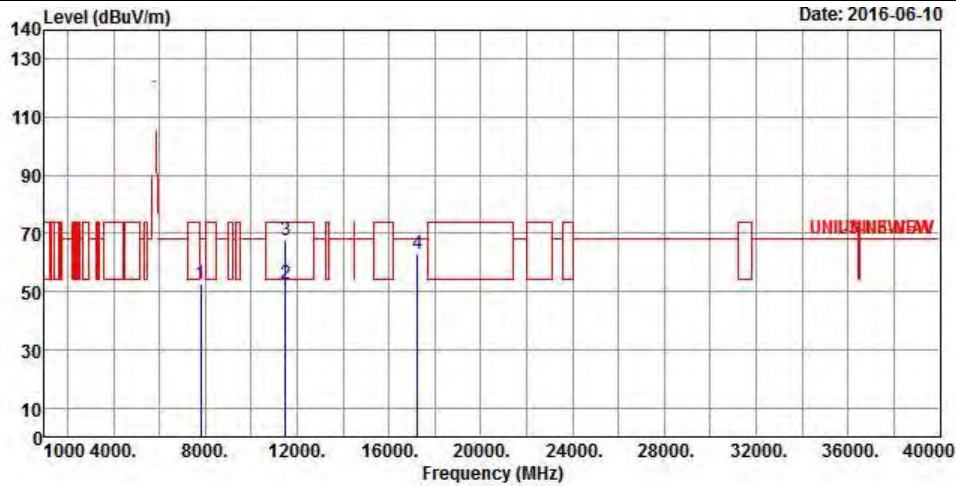



	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	
1	7818.000	52.44	-15.76	68.20	41.39	36.81	7.15	32.91 Peak
2	11490.000	52.83	-1.17	54.00	36.50	40.00	8.79	32.46 Average
3	11490.000	67.56	-6.44	74.00	51.23	40.00	8.79	32.46 Peak
4	17235.000	62.81	-5.39	68.20	42.50	40.96	10.89	31.54 Peak


- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

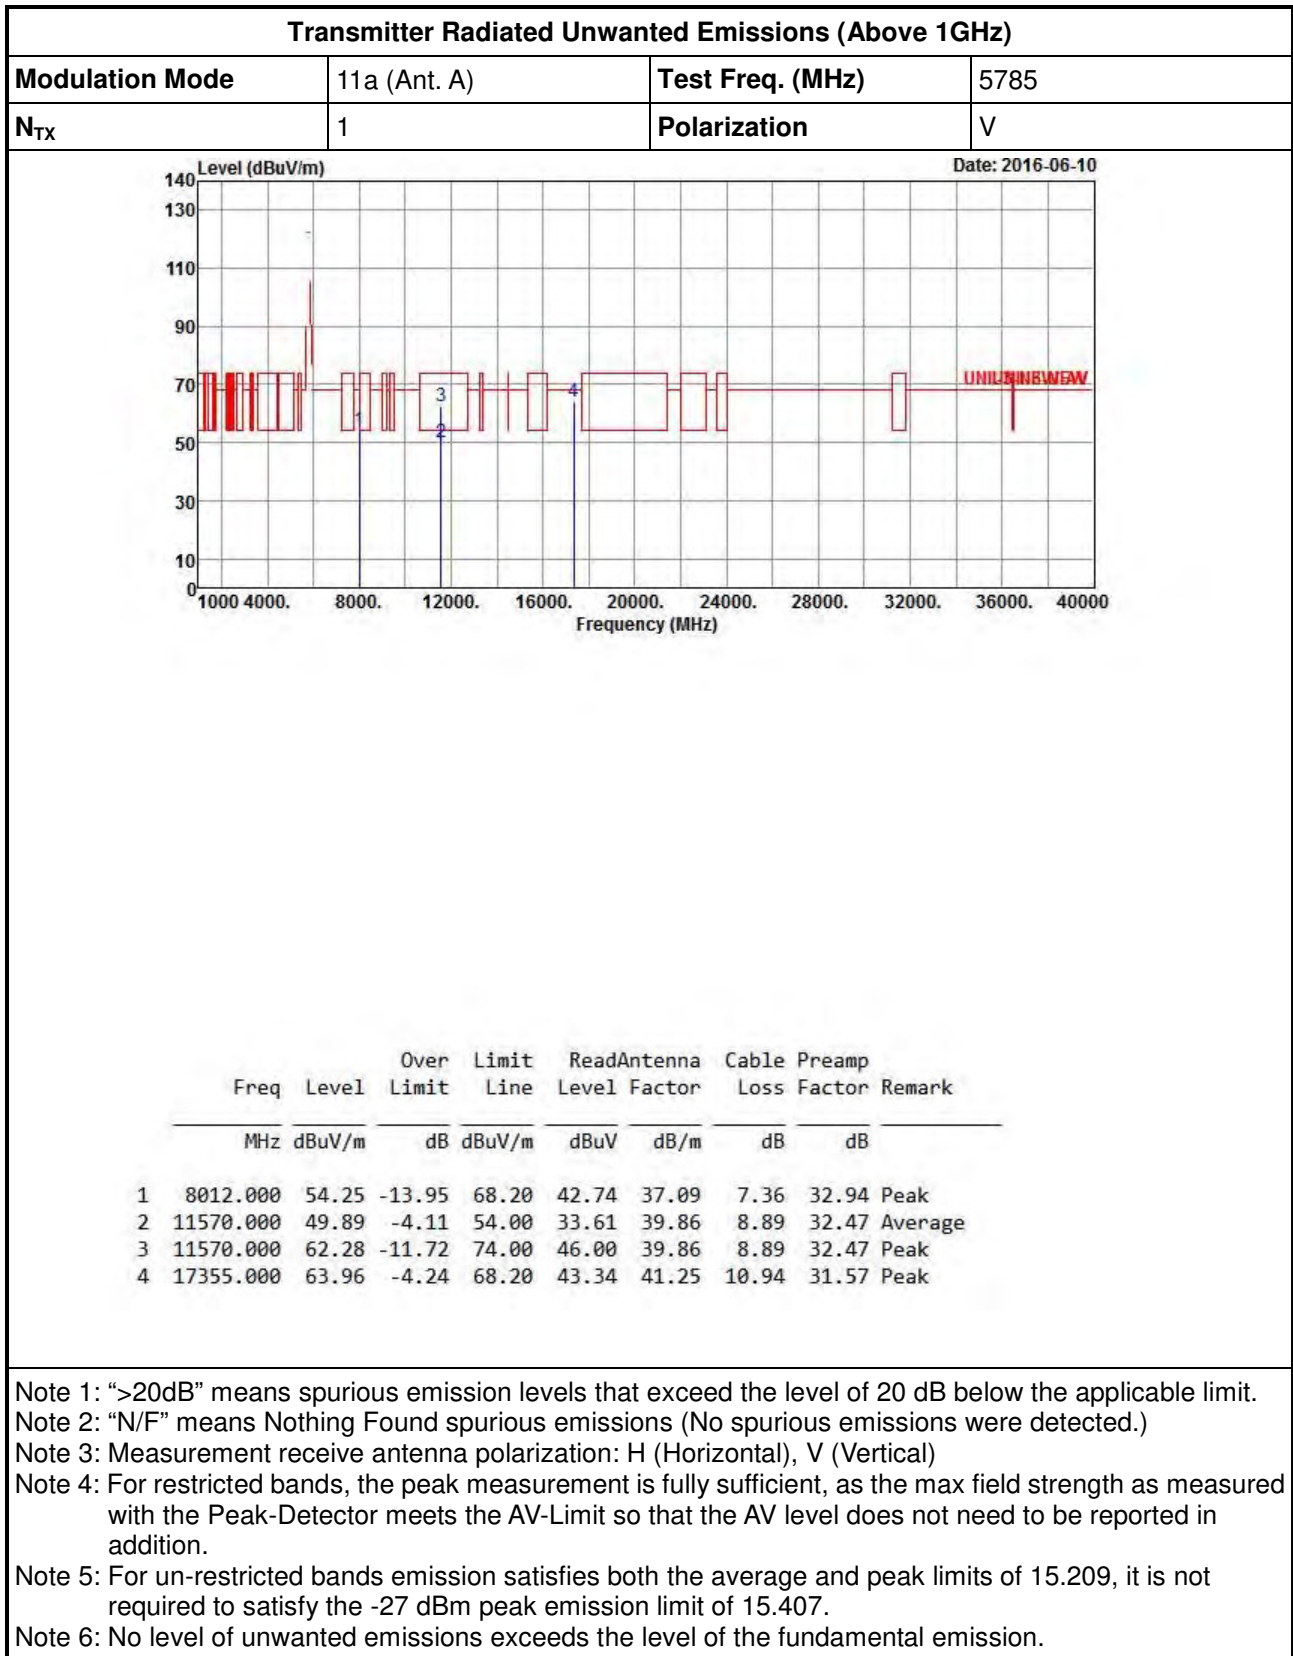

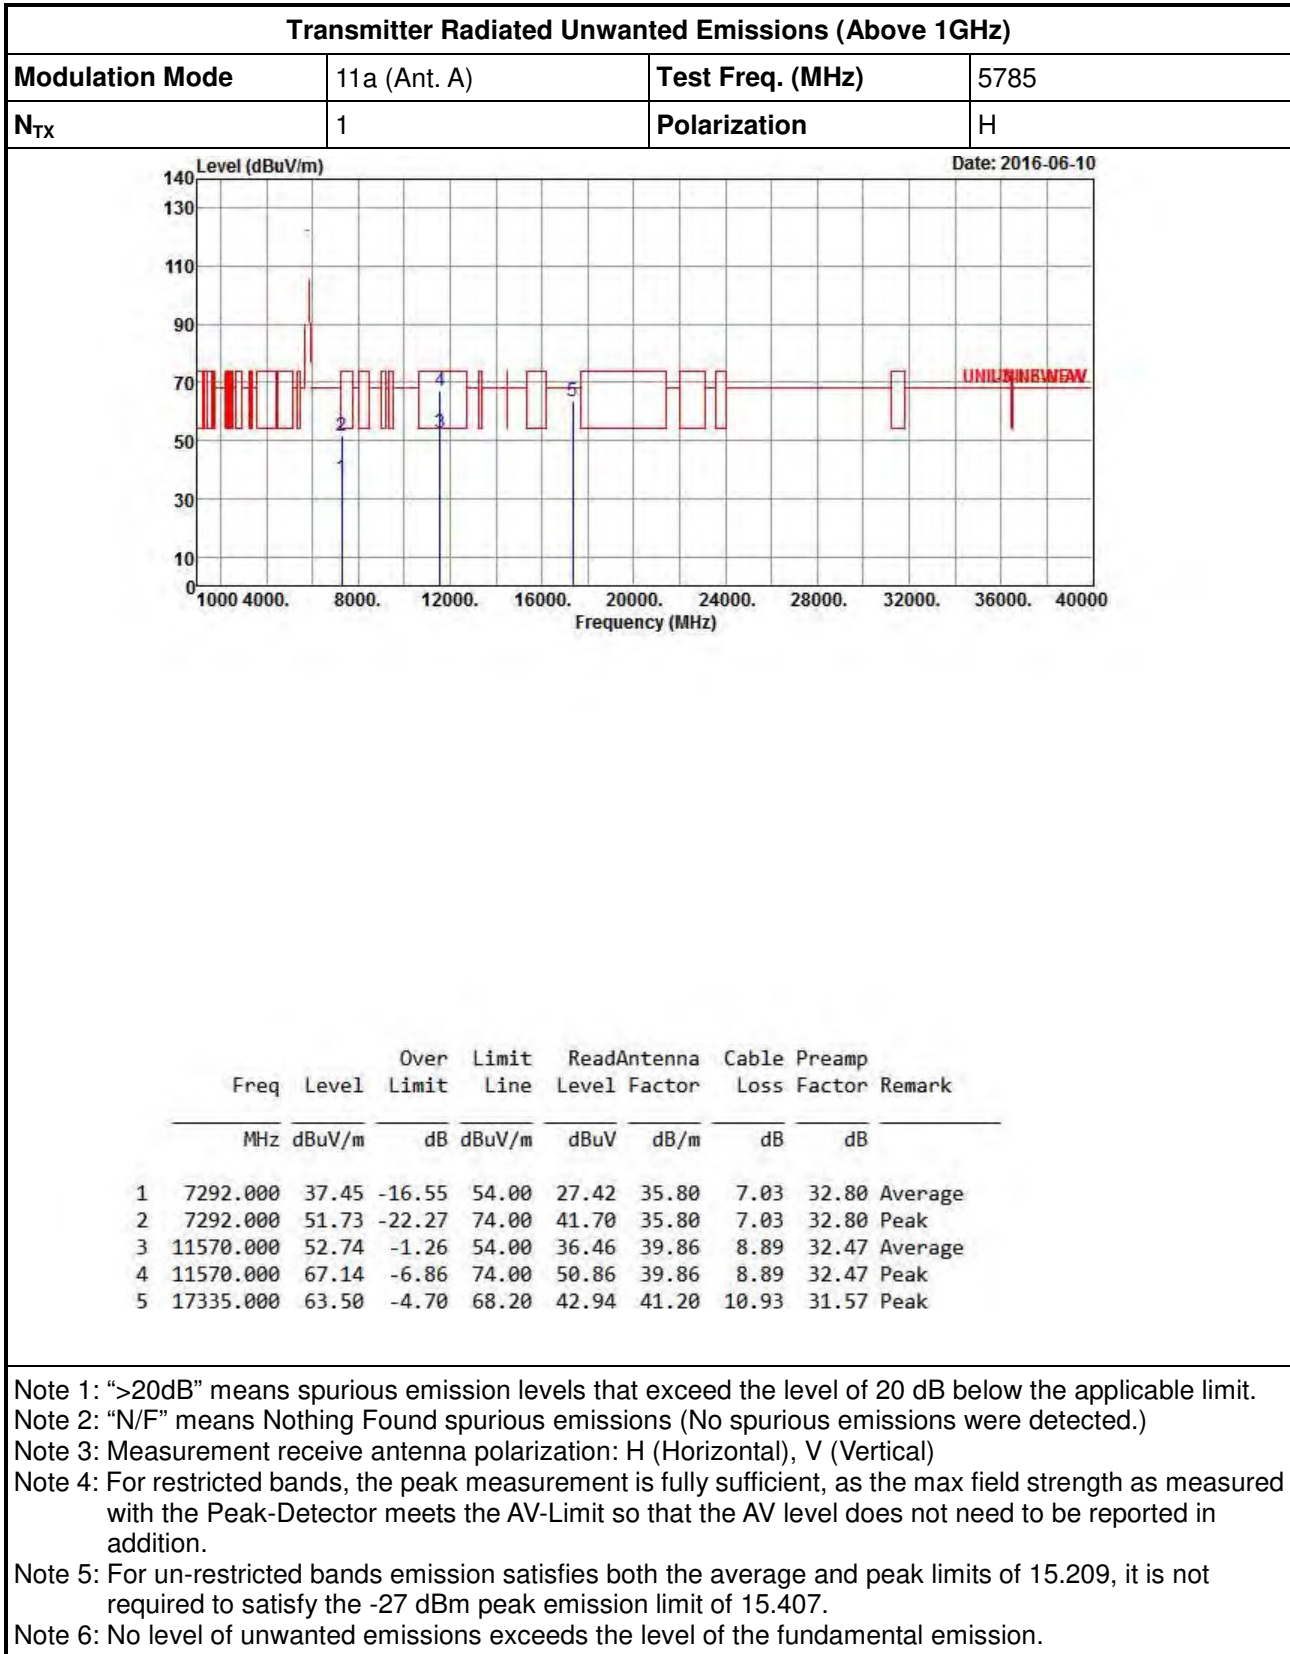

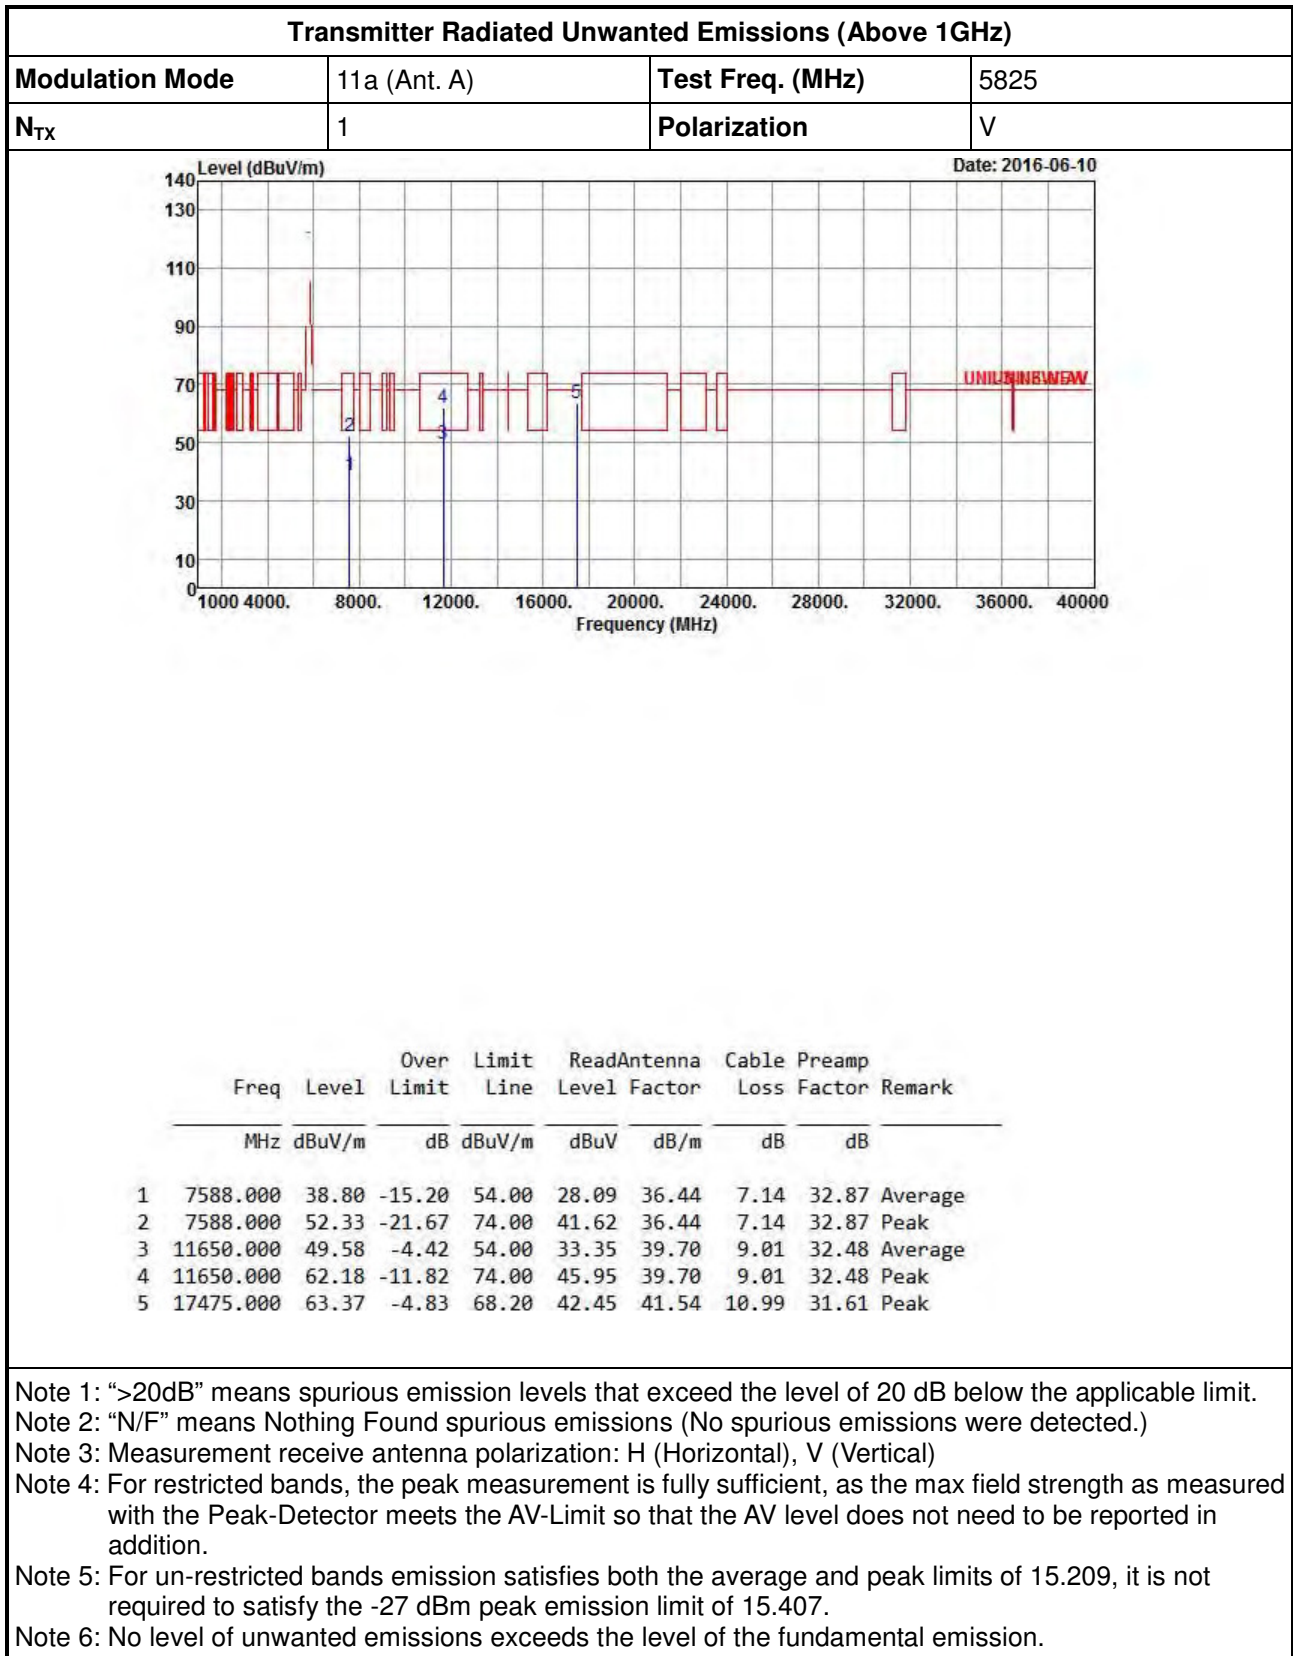

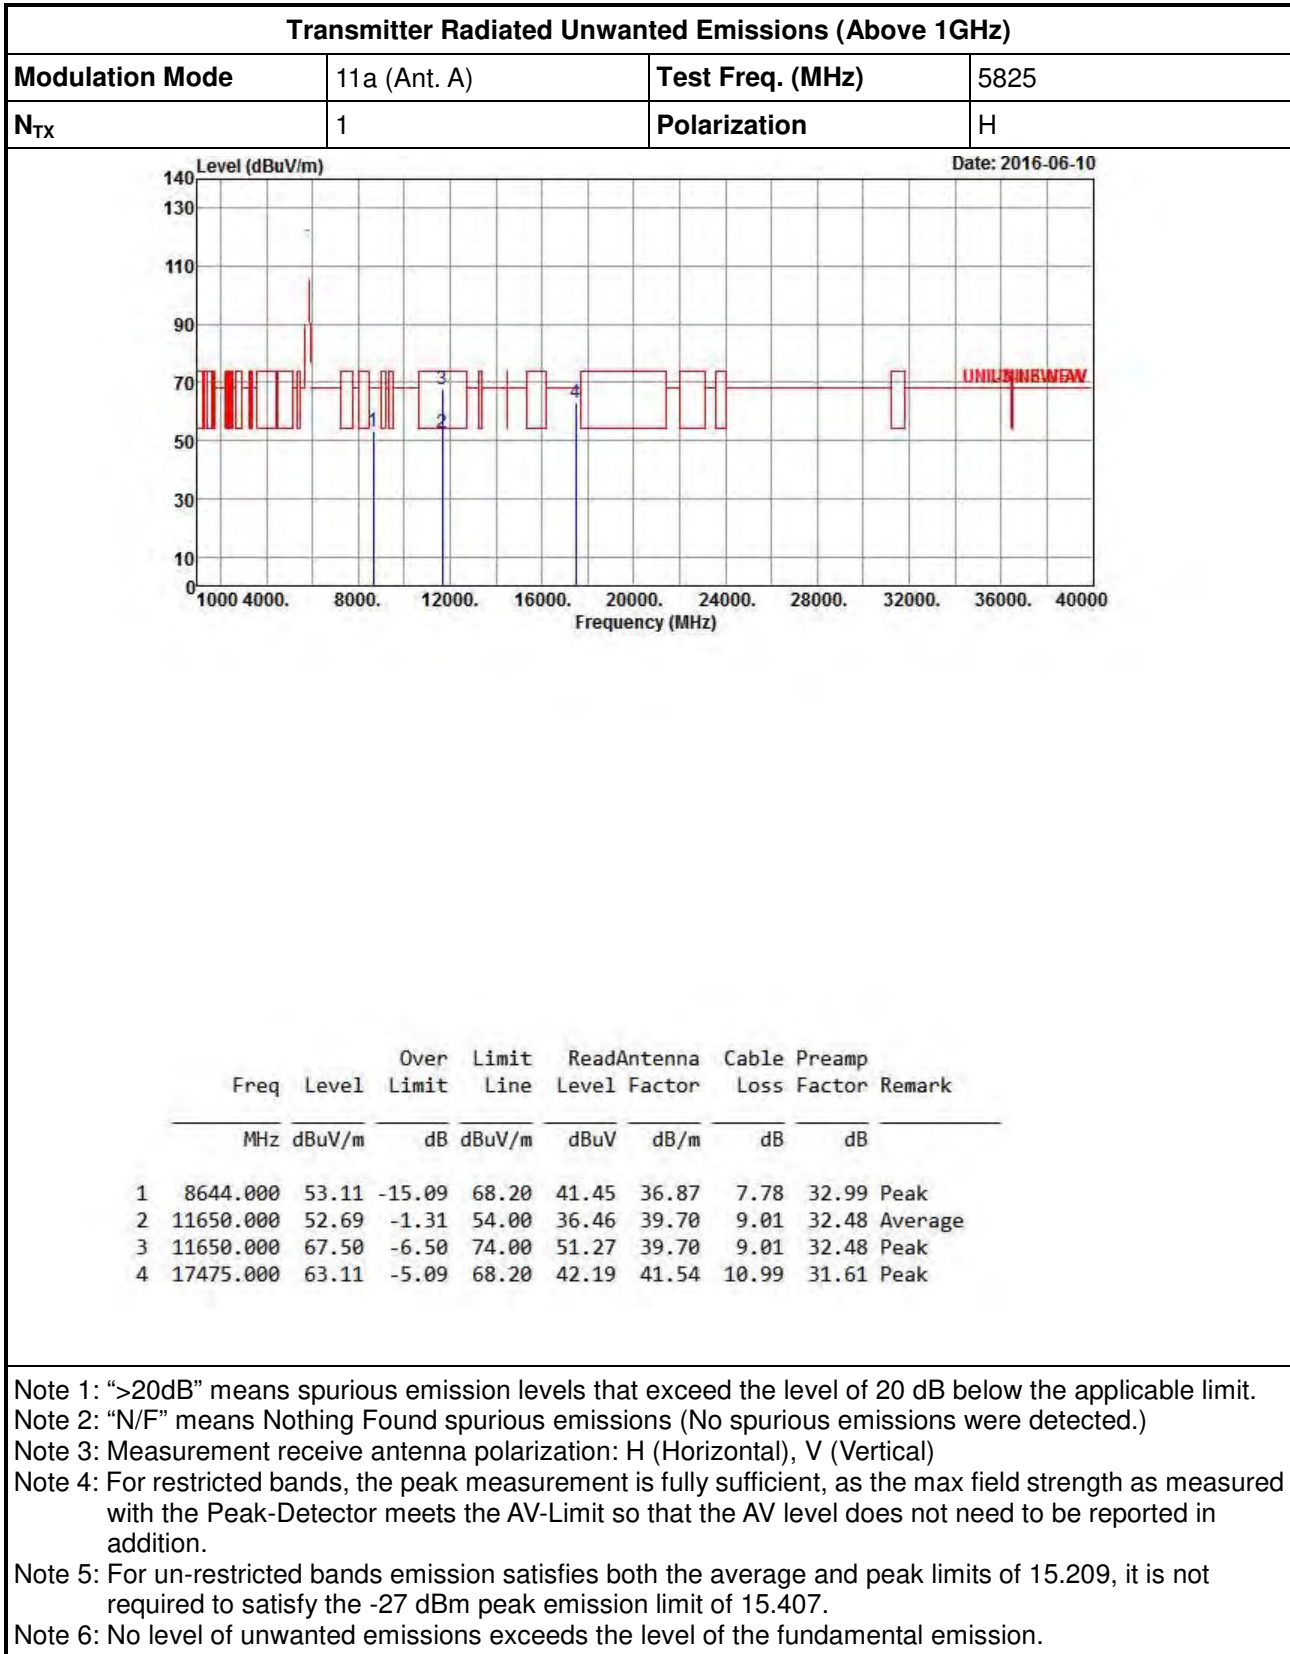


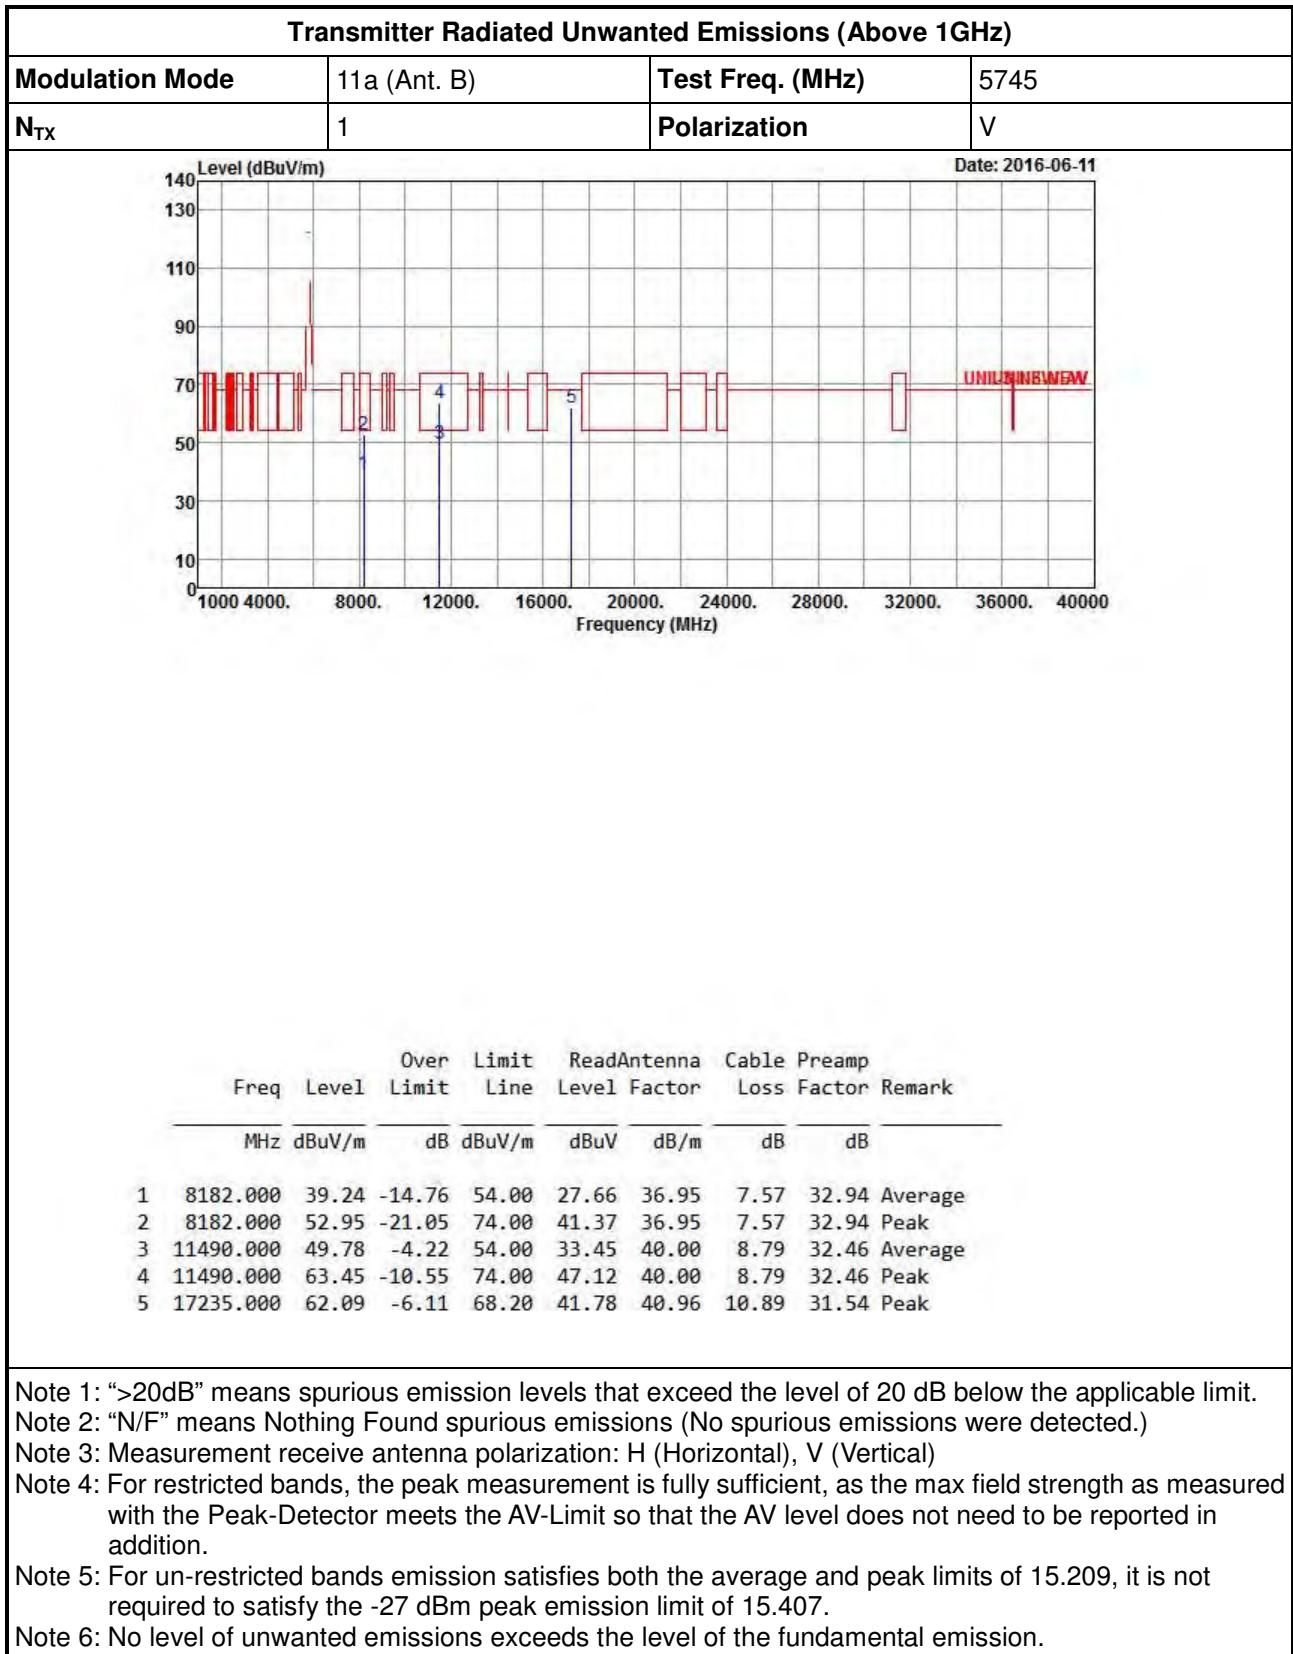




Transmitter Radiated Unwanted Emissions (Above 1GHz)


Modulation Mode	11a (Ant. B)	Test Freq. (MHz)	5745
N _{TX}	1	Polarization	H

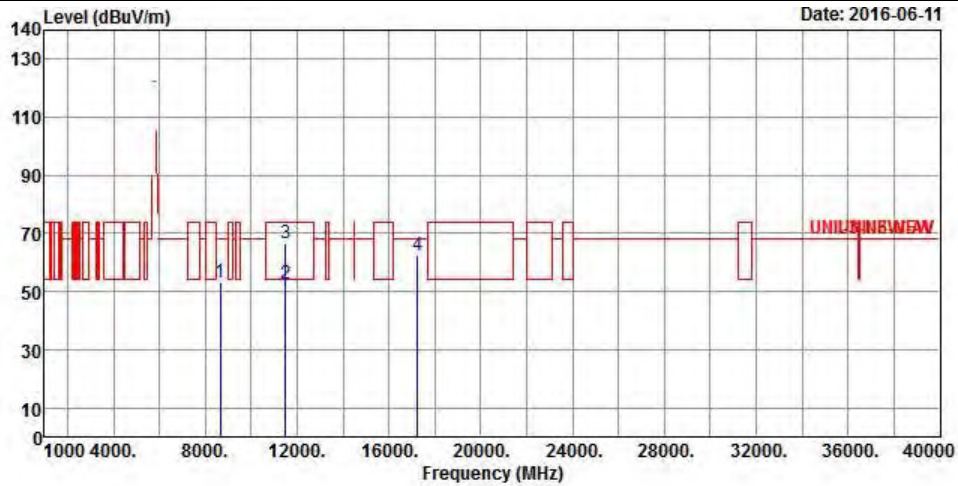



	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	
1	8666.000	53.03	-15.17	68.20	41.33	36.90	7.80	33.00 Peak
2	11490.000	52.73	-1.27	54.00	36.40	40.00	8.79	32.46 Average
3	11490.000	66.50	-7.50	74.00	50.17	40.00	8.79	32.46 Peak
4	17235.000	62.36	-5.84	68.20	42.05	40.96	10.89	31.54 Peak


- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

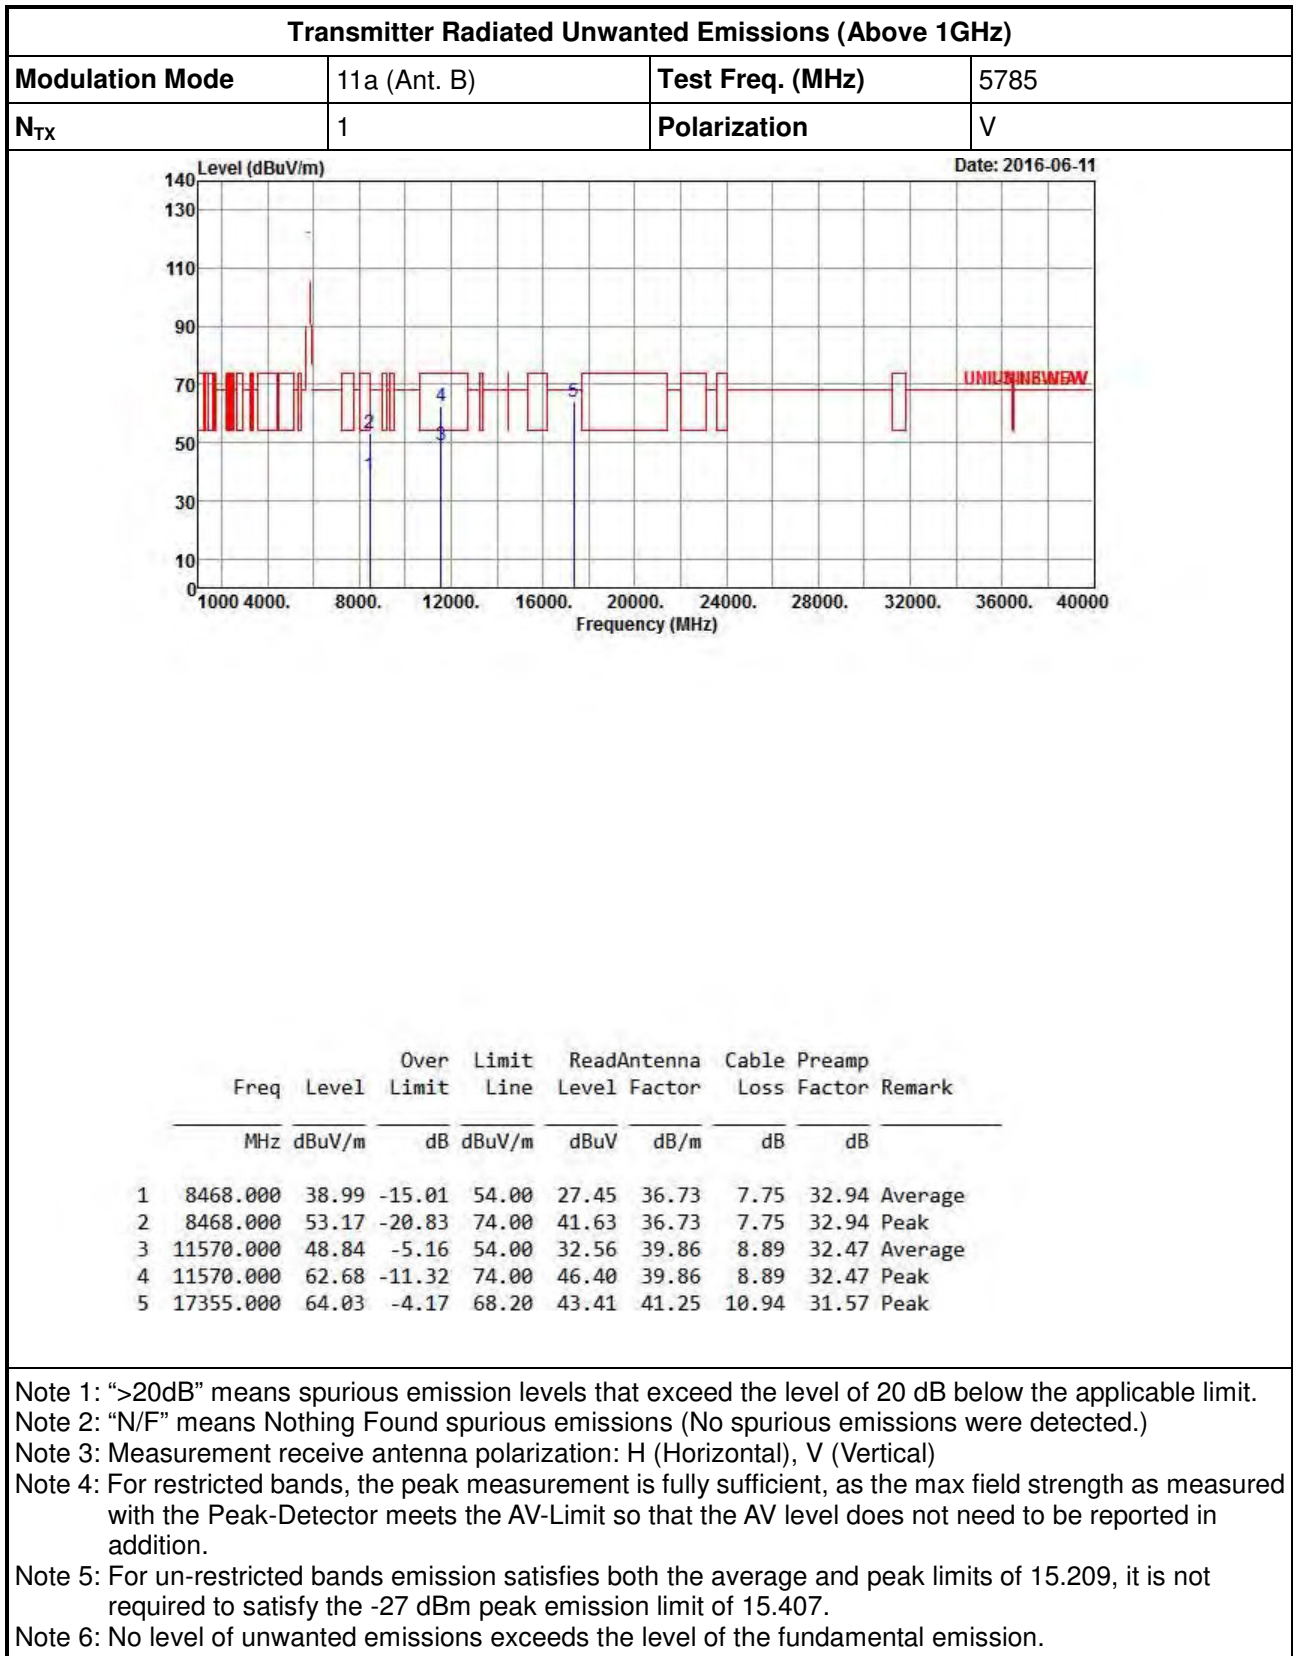

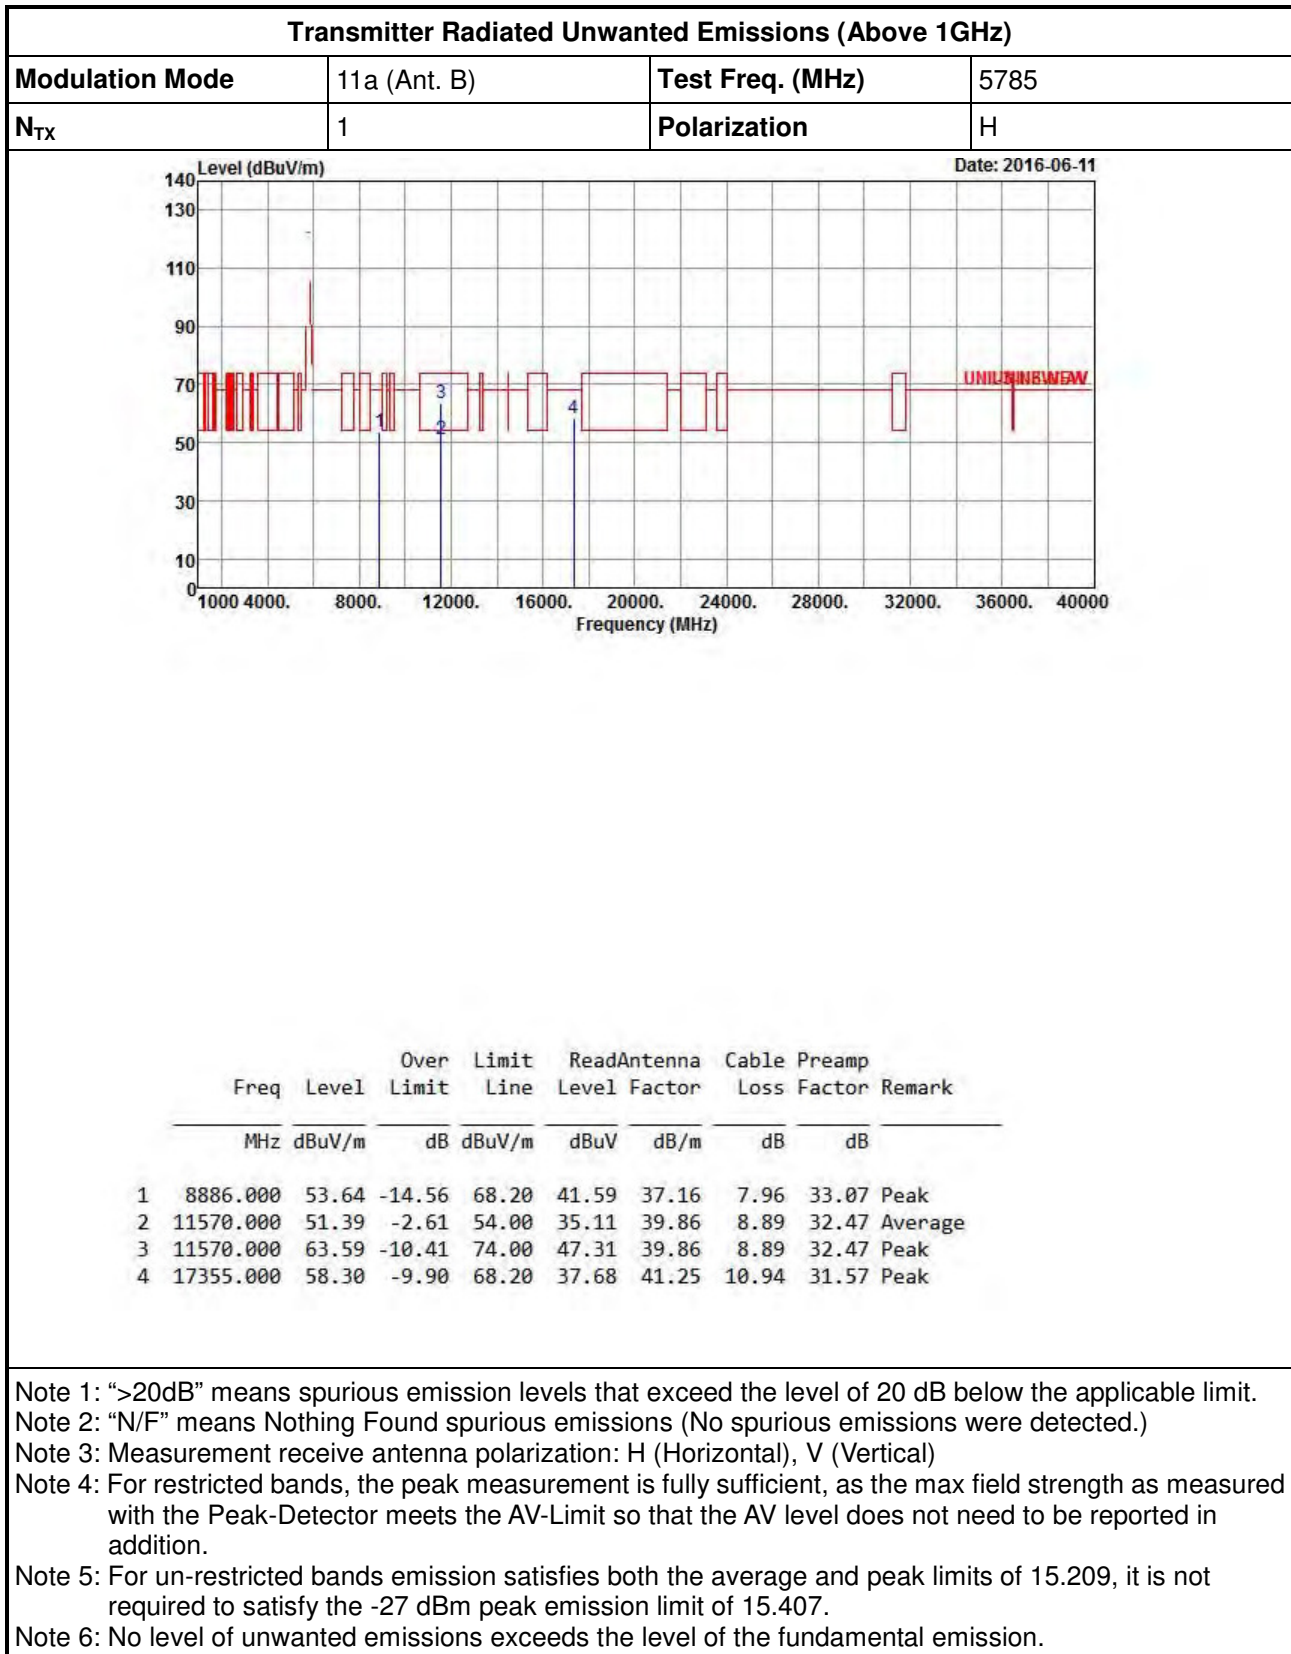

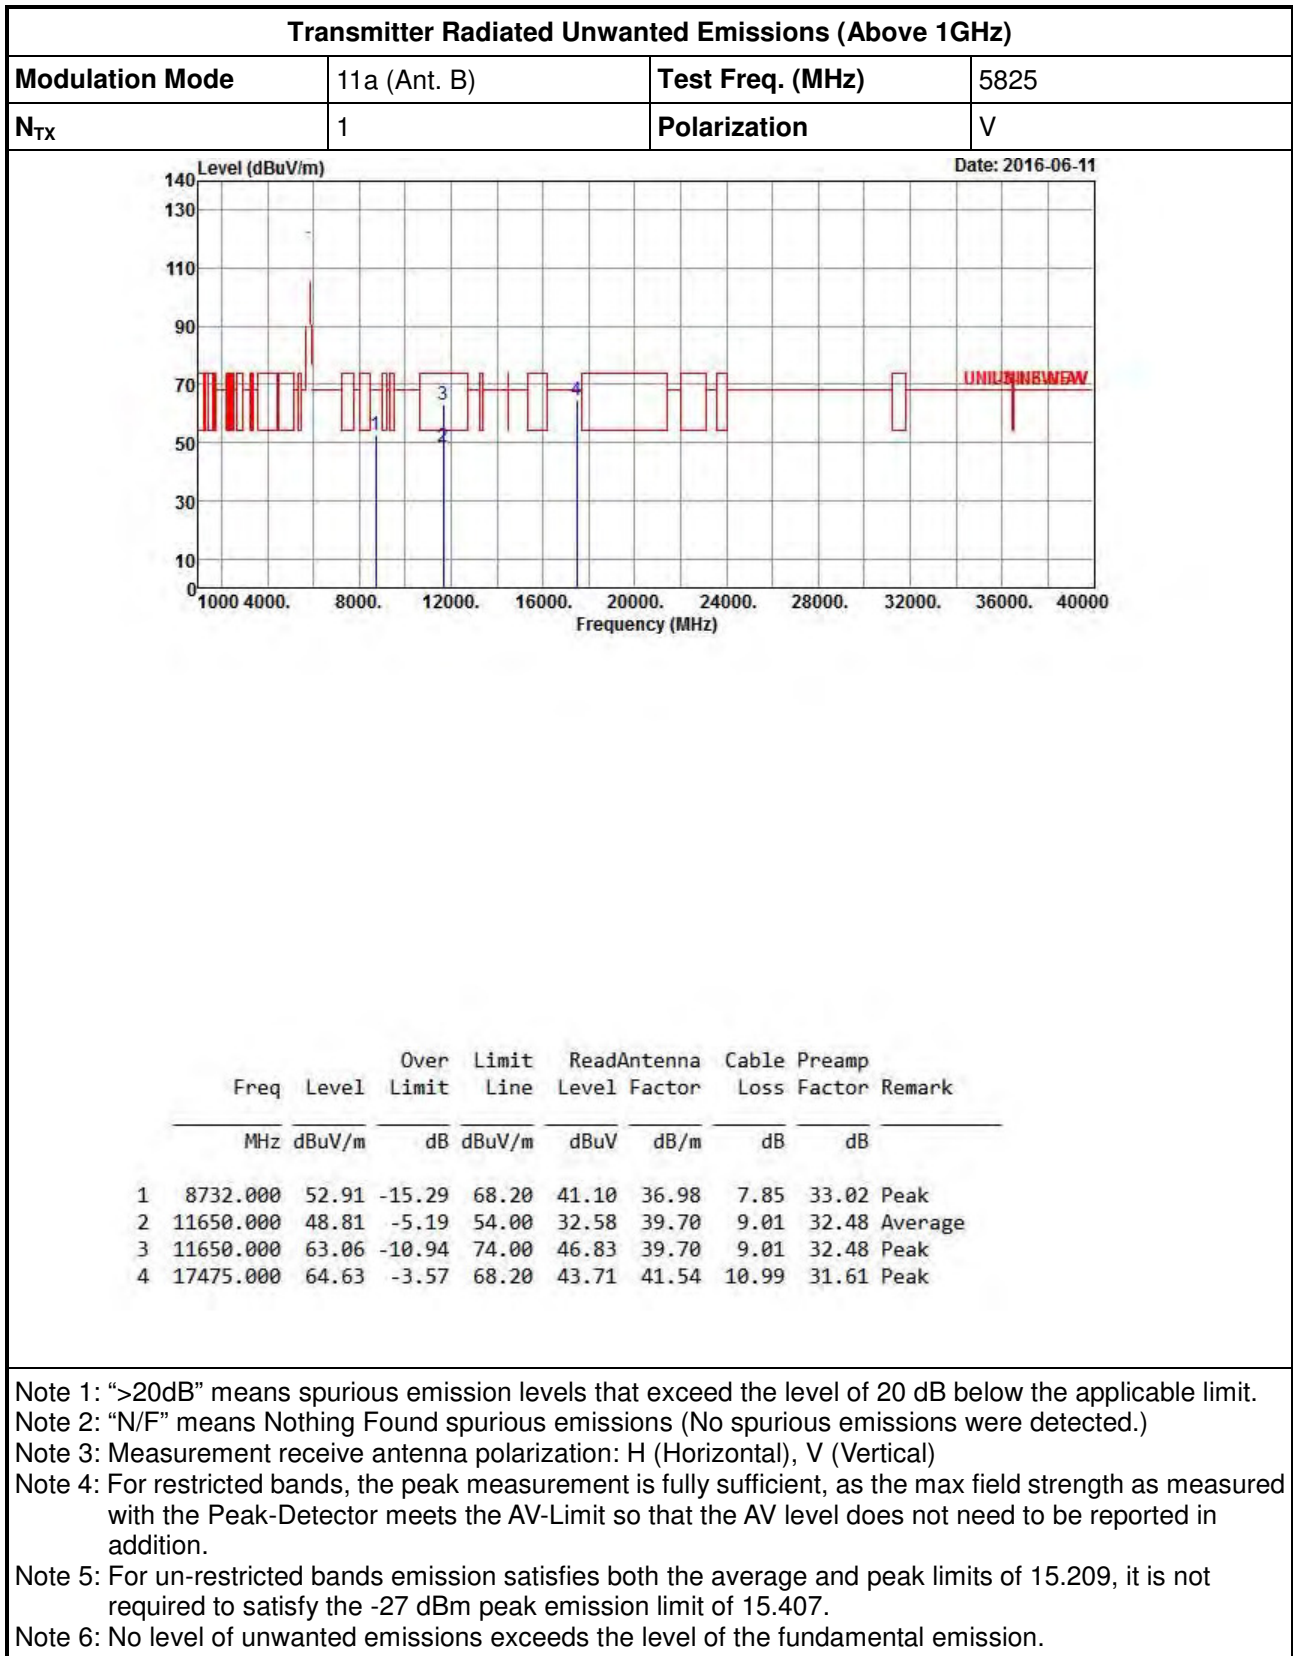


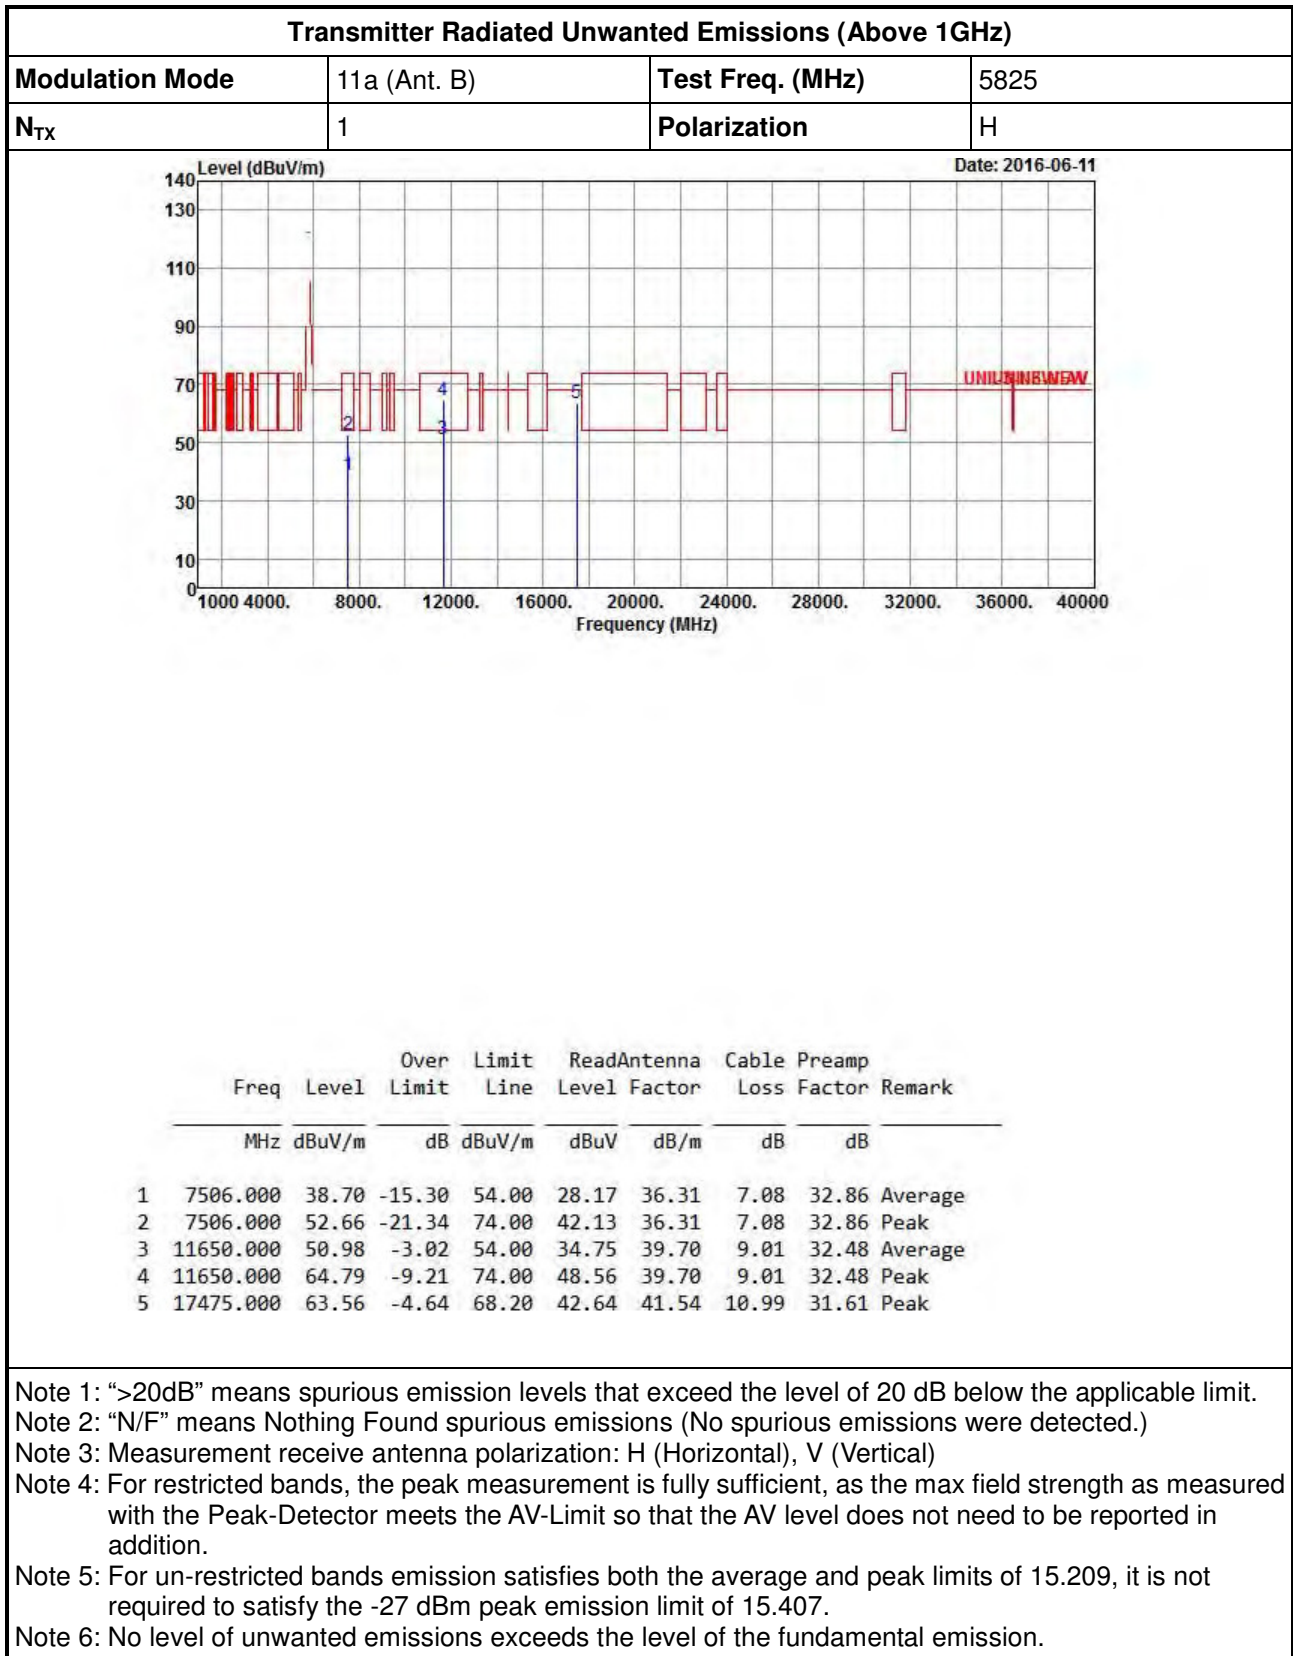

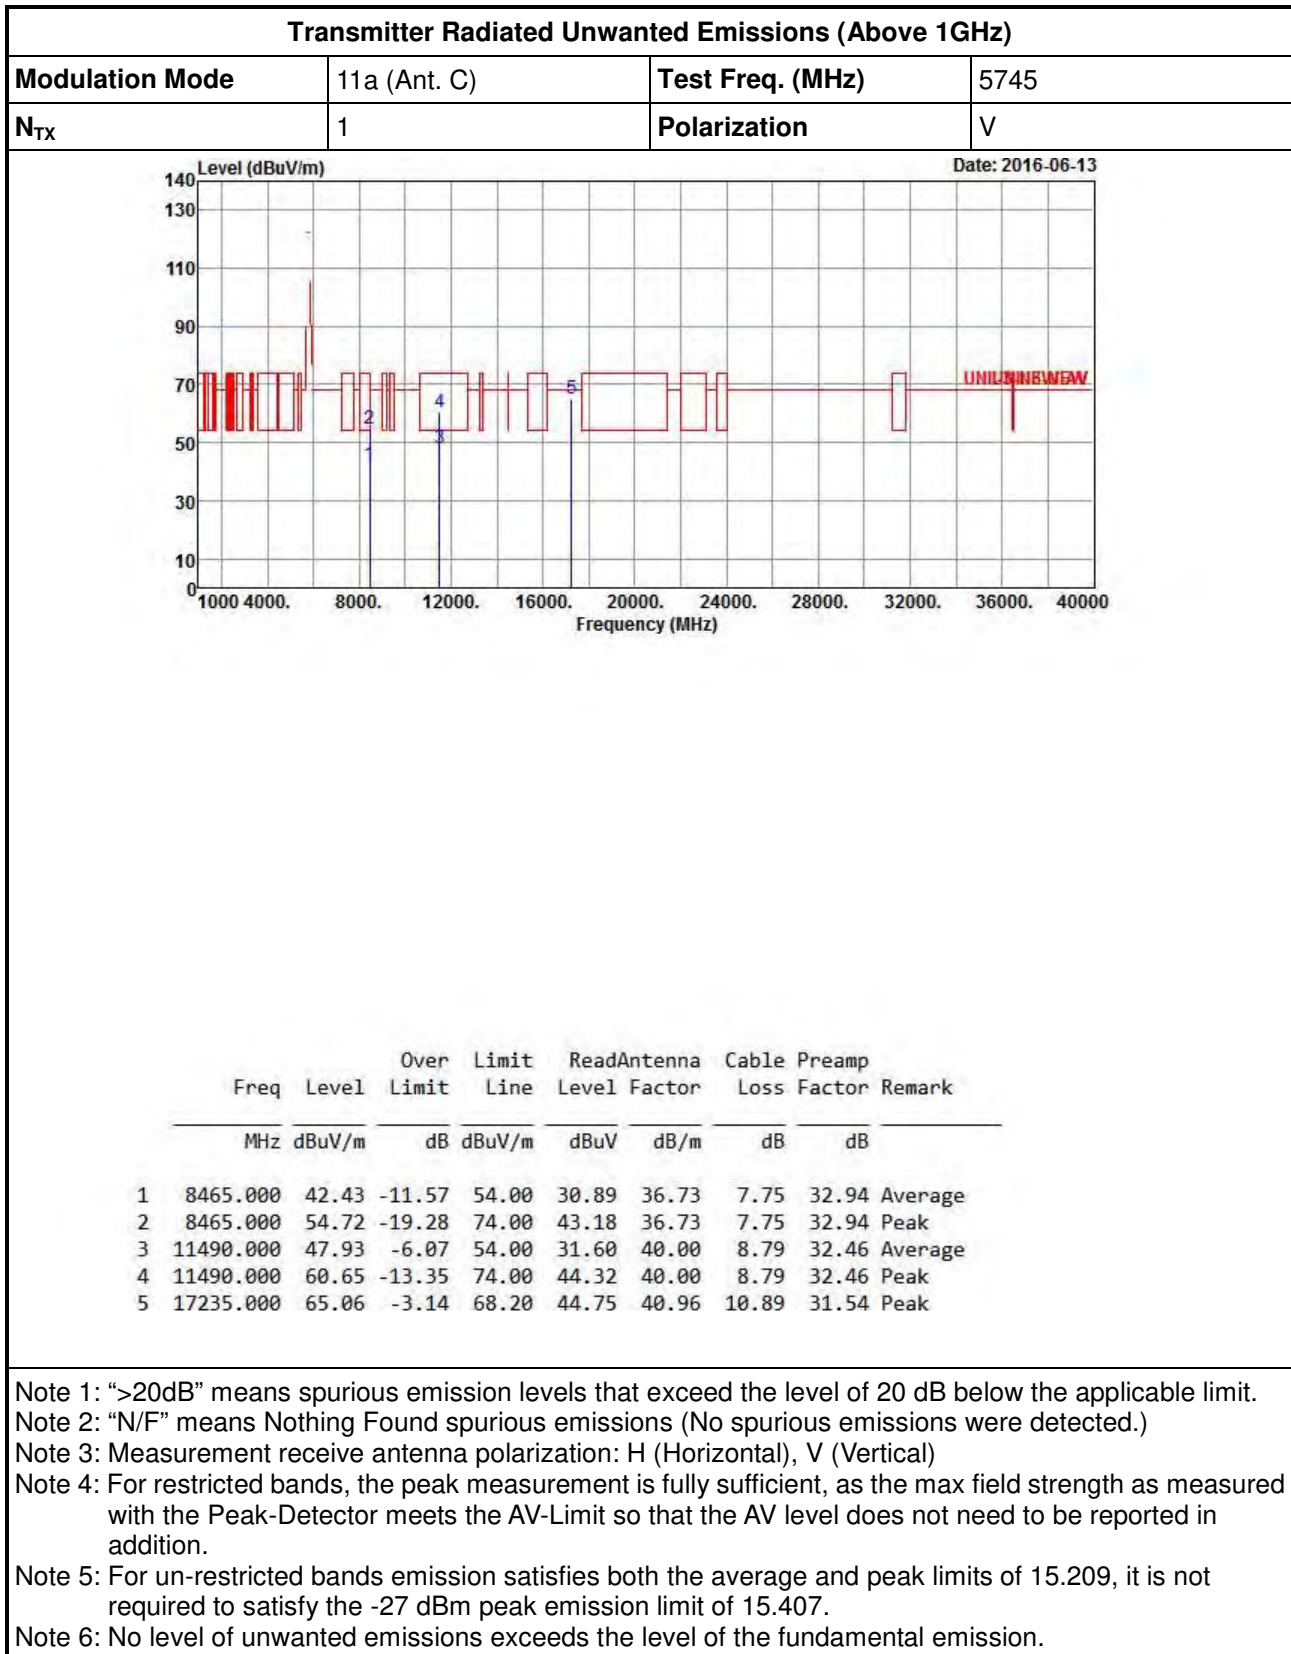





Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11a (Ant. C)	Test Freq. (MHz)	5745
N _{TX}	1	Polarization	H

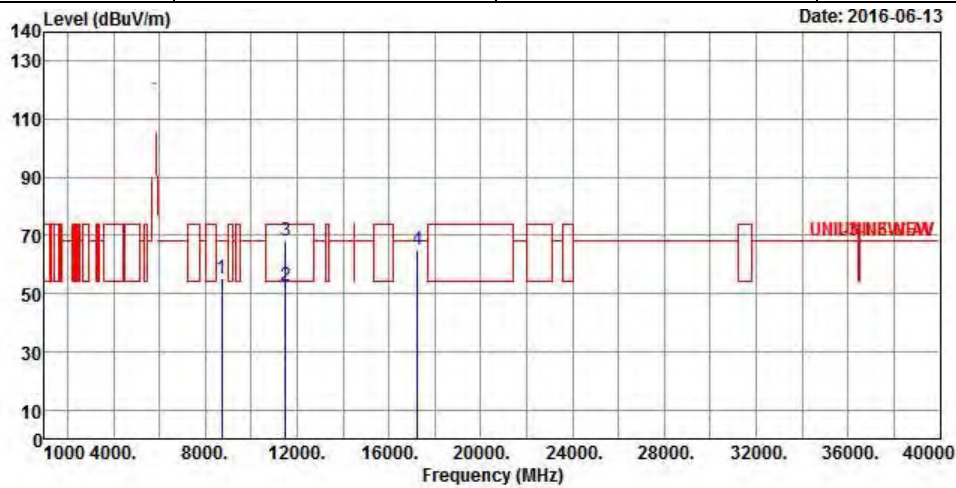



	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8719.000	55.18	-13.02	68.20	43.40	36.96	7.84	33.02 Peak
2	11490.000	52.50	-1.50	54.00	36.17	40.00	8.79	32.46 Average
3	11490.000	68.30	-5.70	74.00	51.97	40.00	8.79	32.46 Peak
4	17235.000	65.04	-3.16	68.20	44.73	40.96	10.89	31.54 Peak


- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

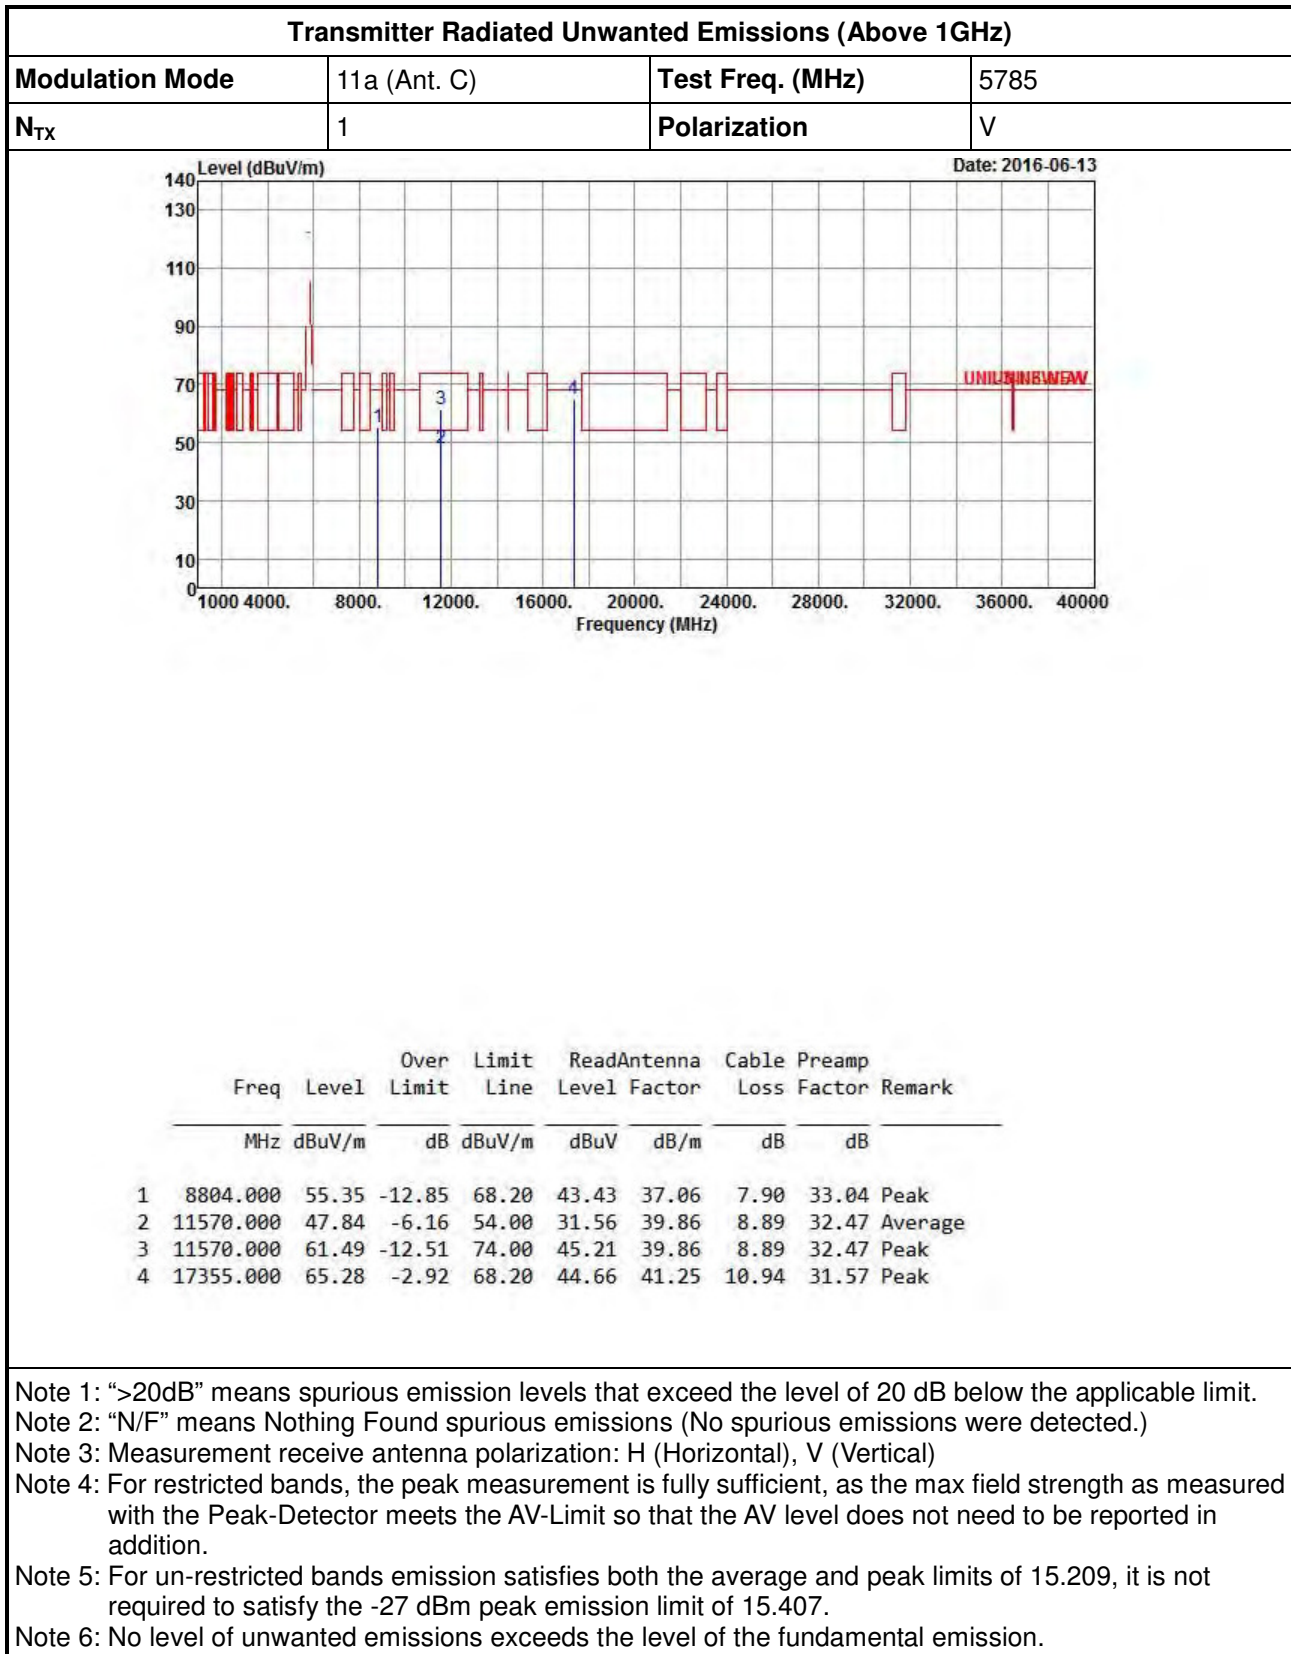


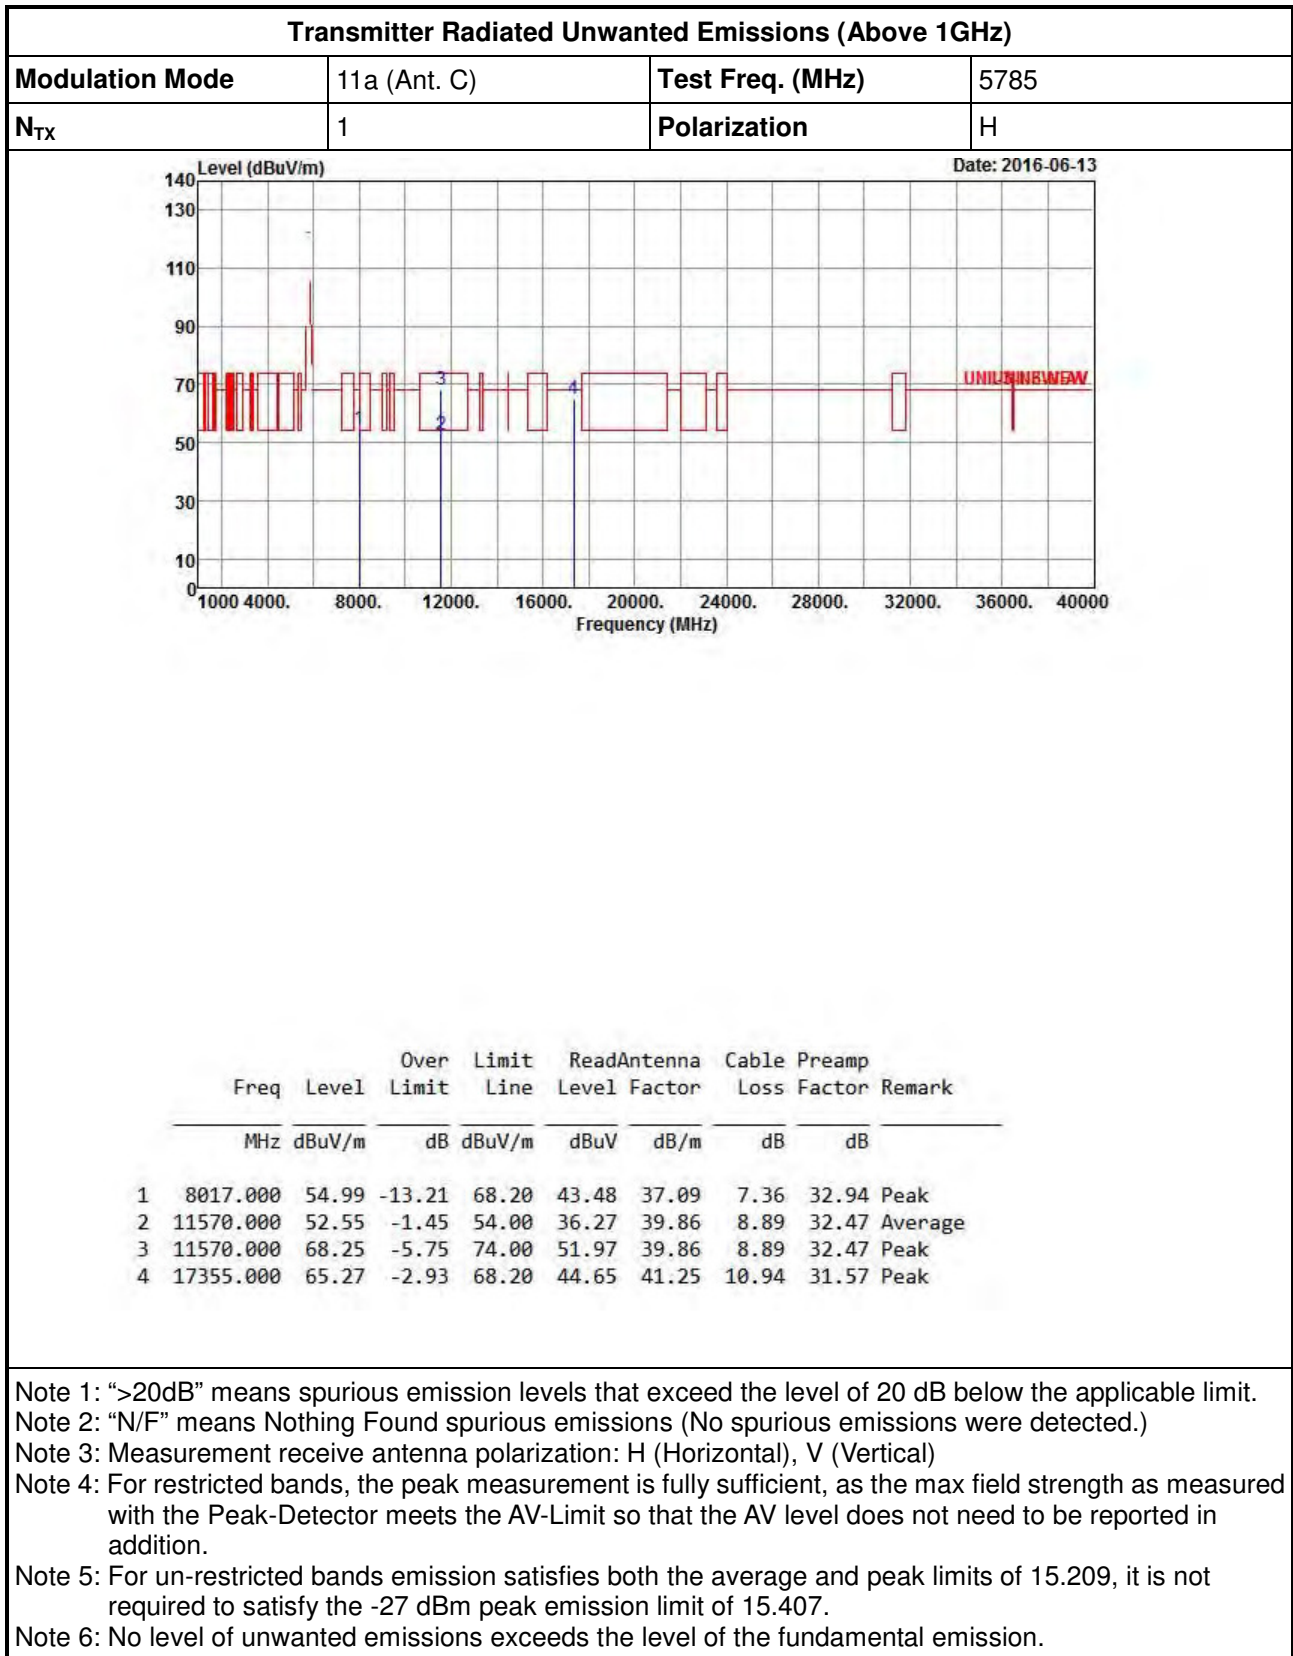


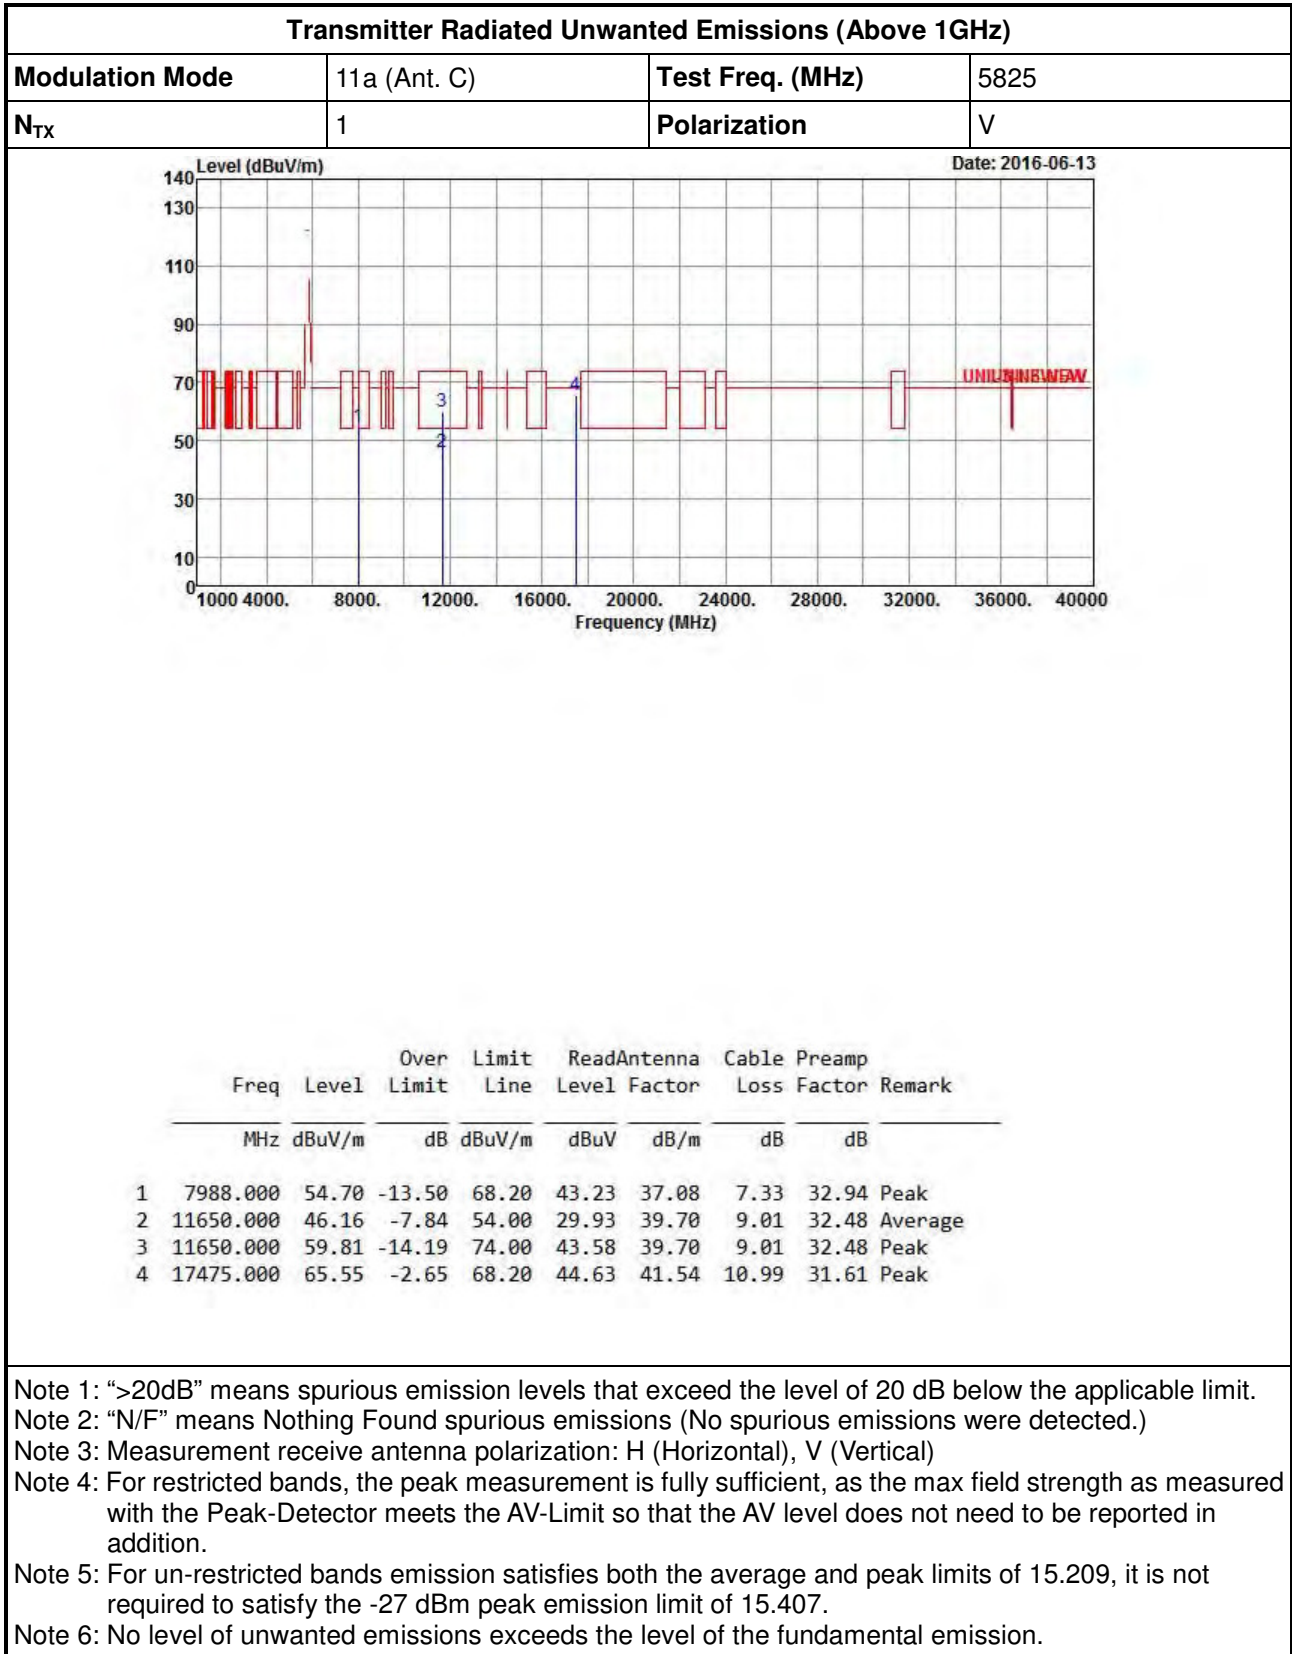


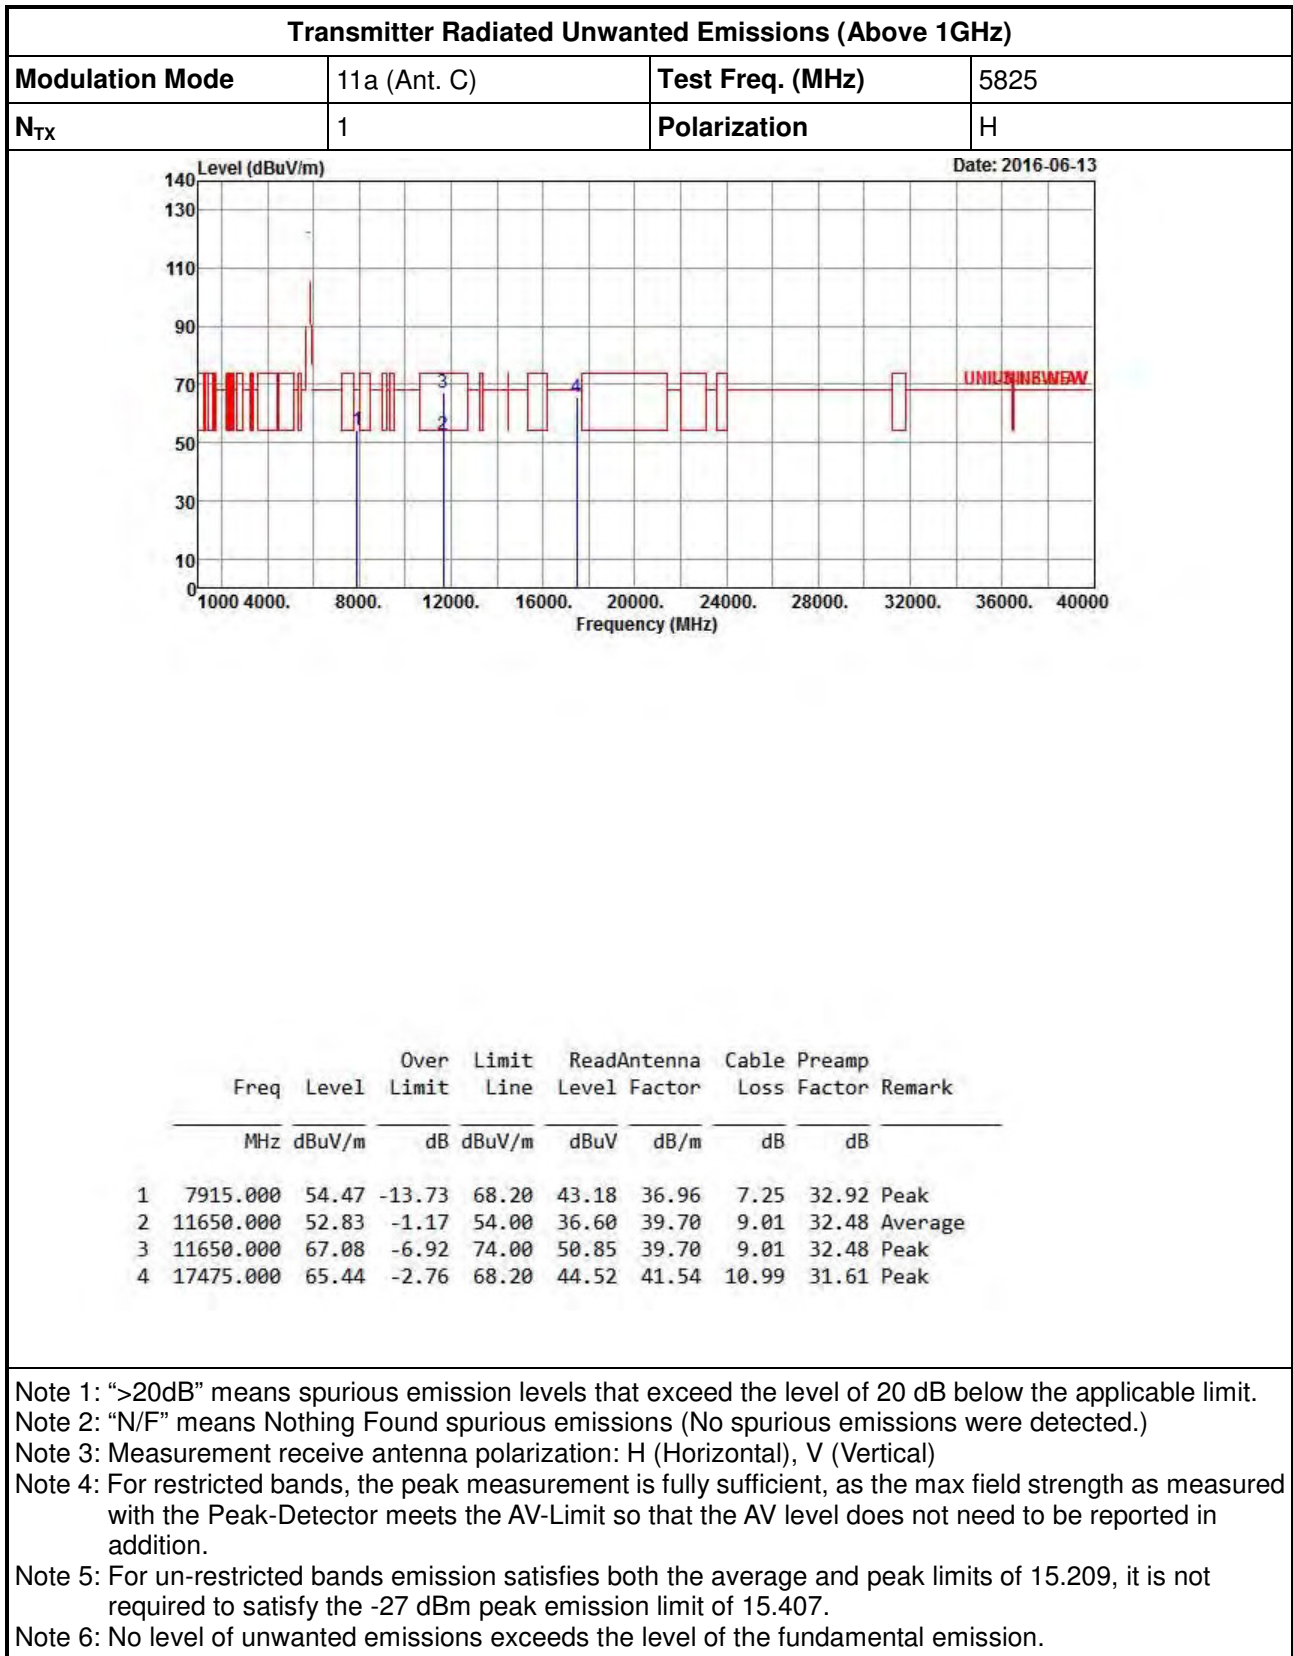


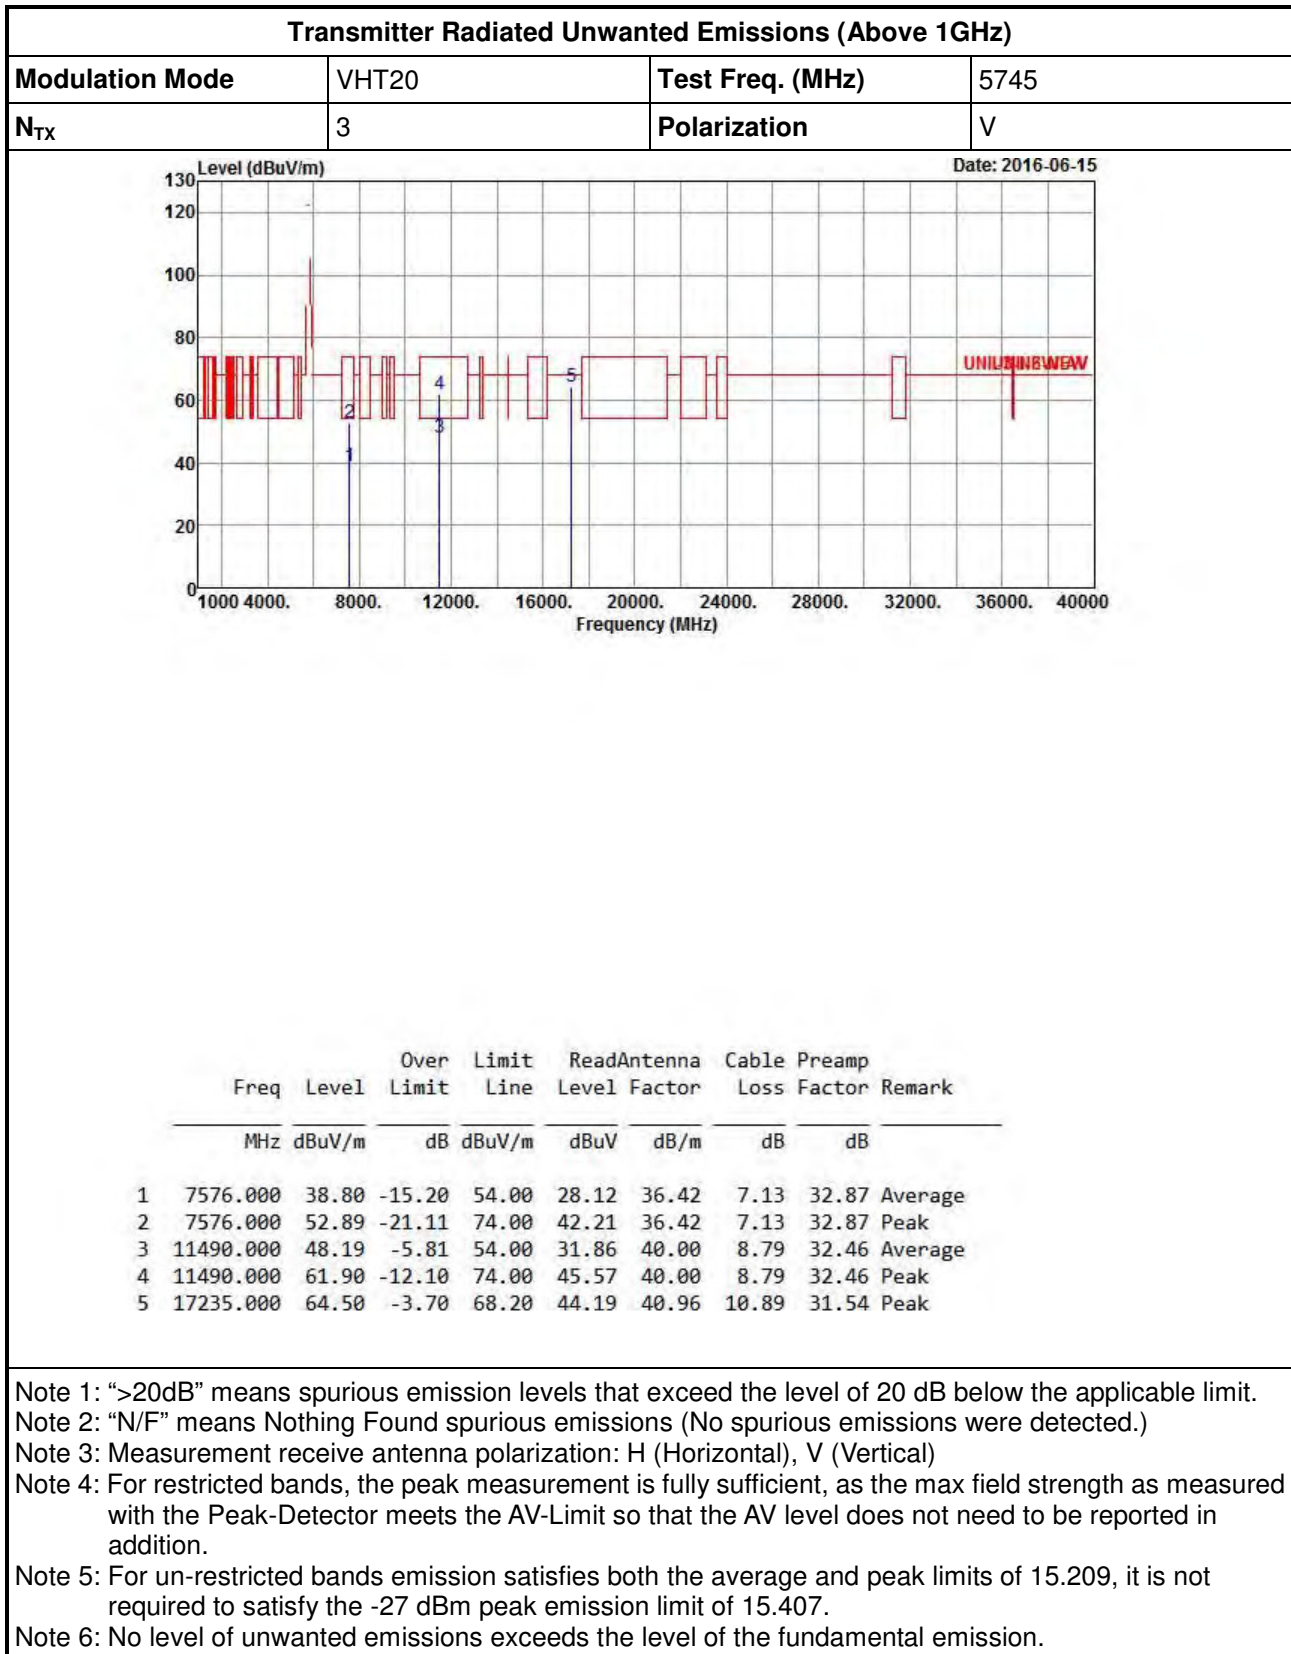


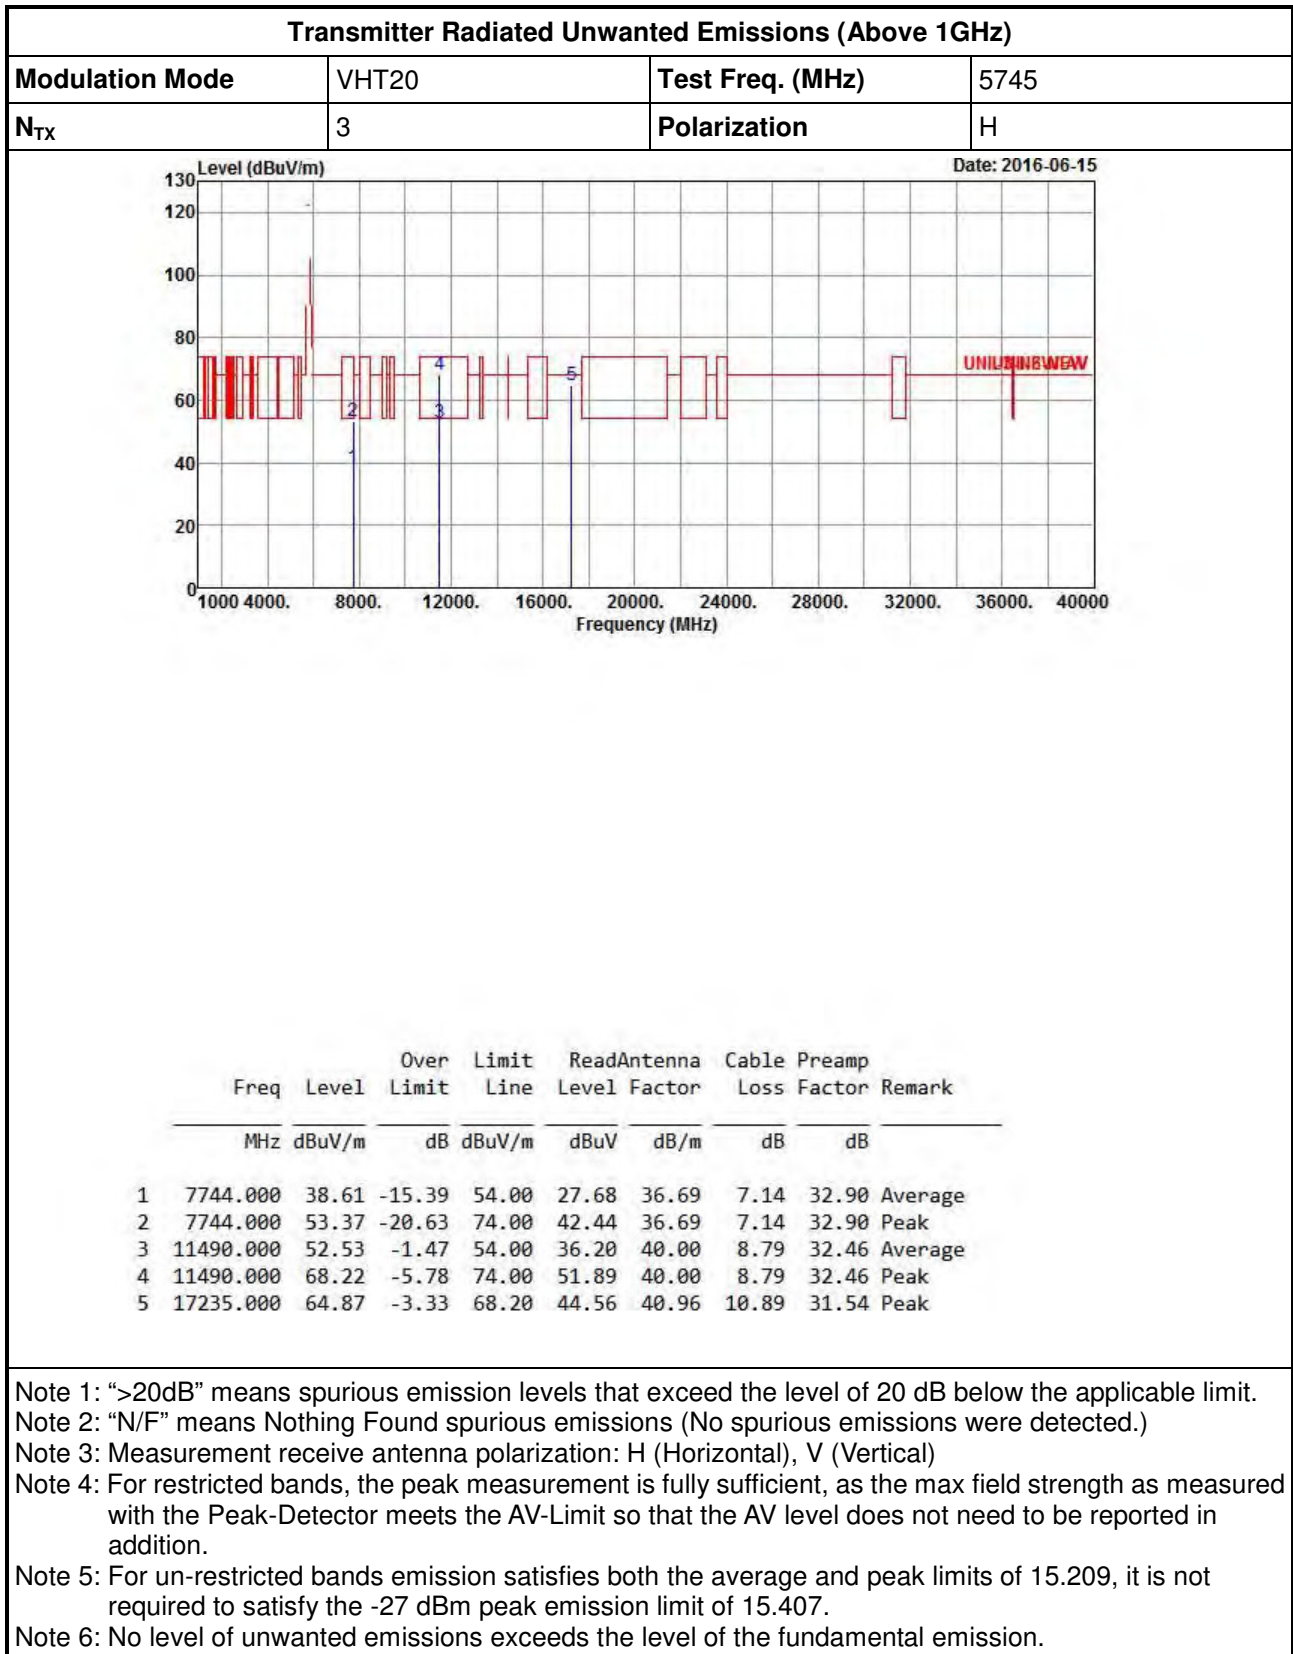


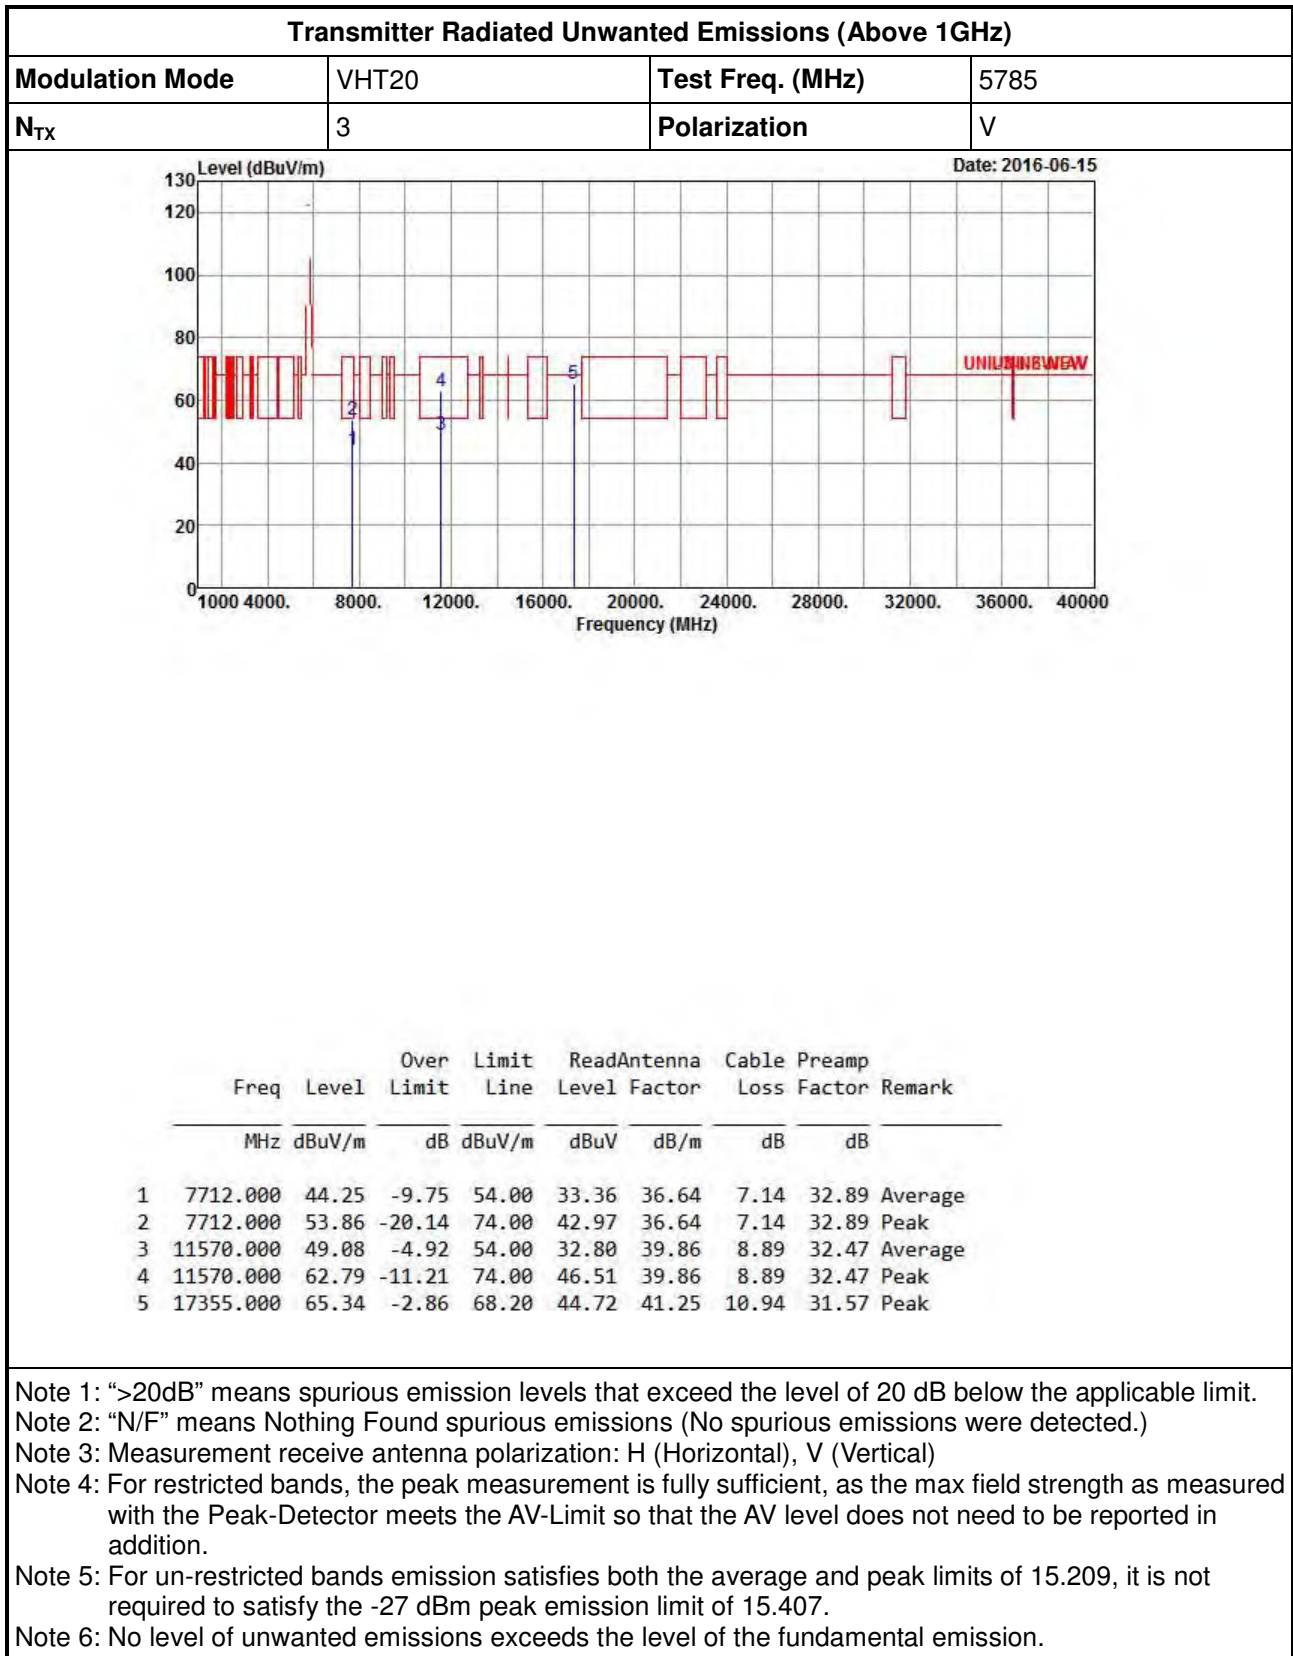


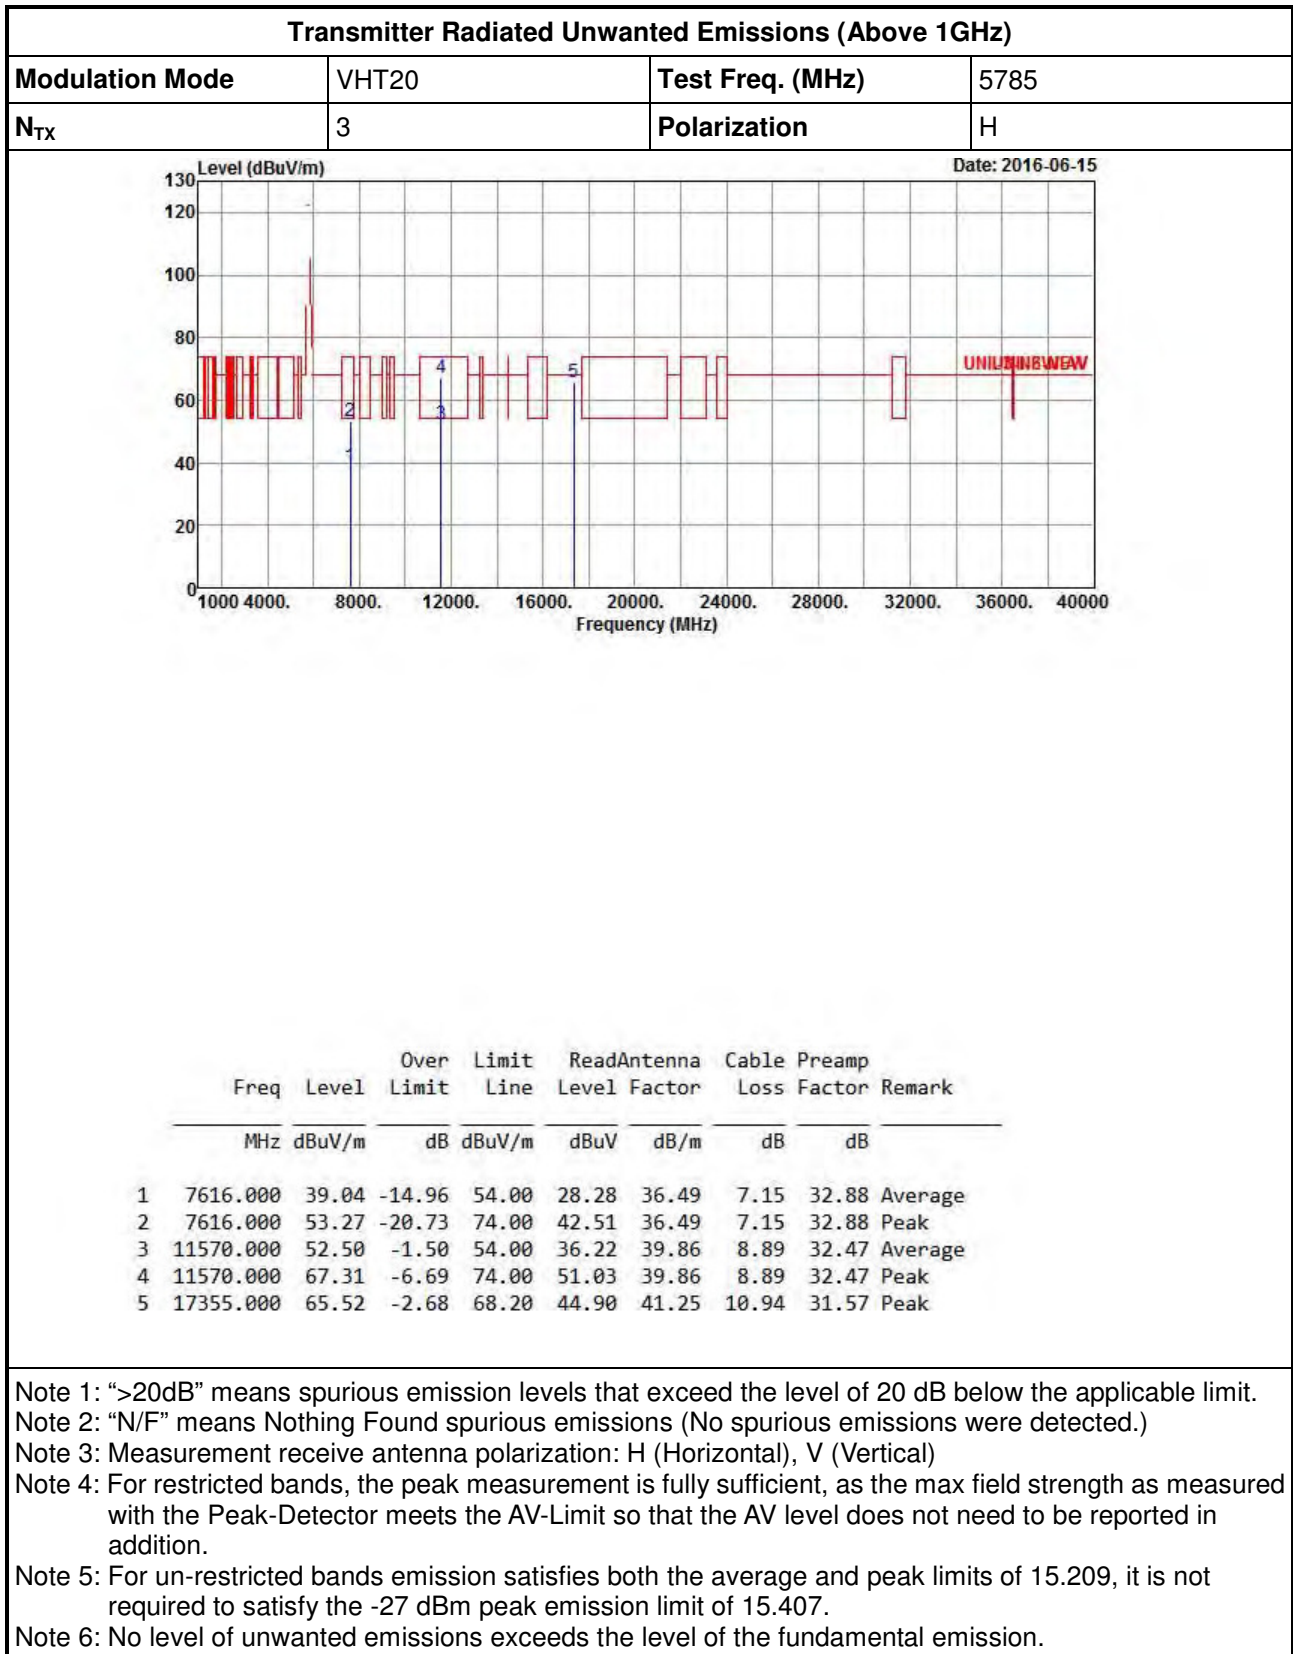


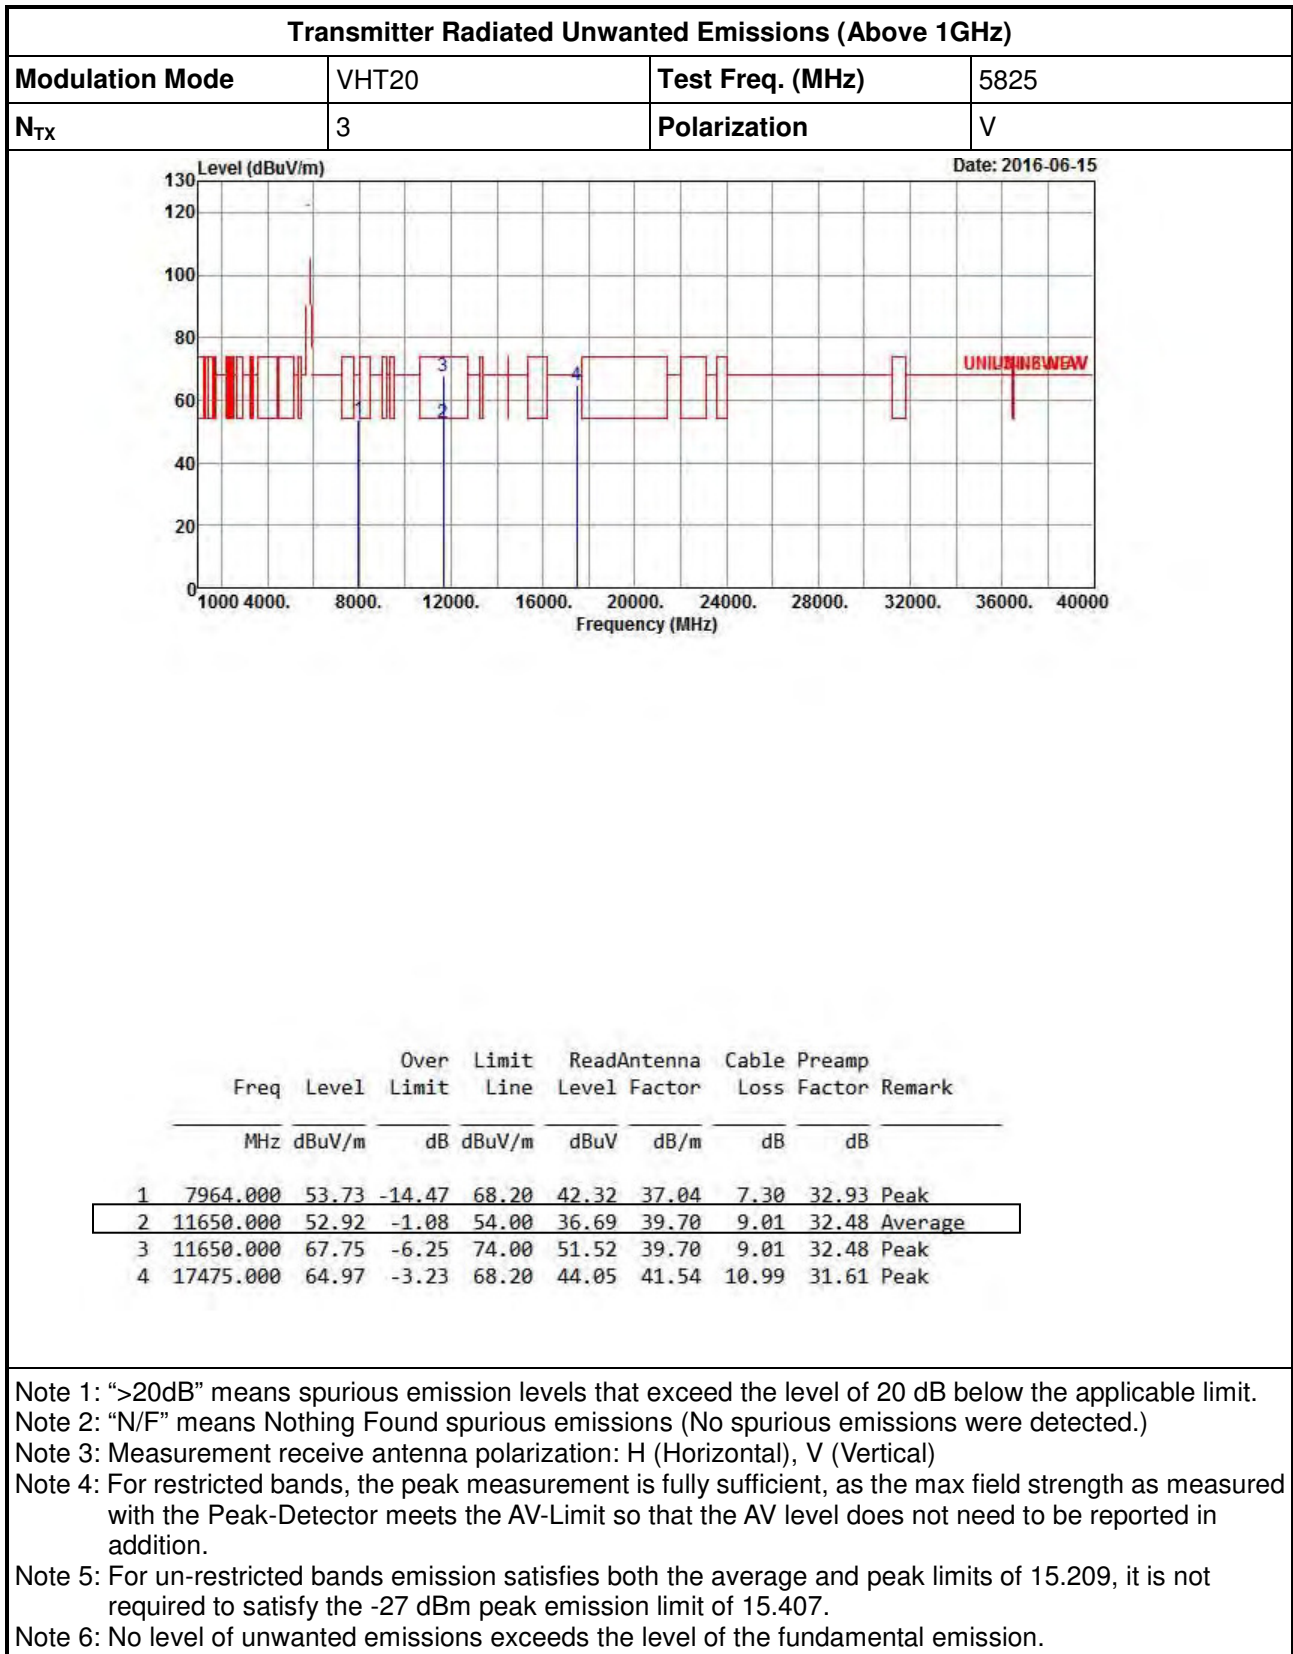


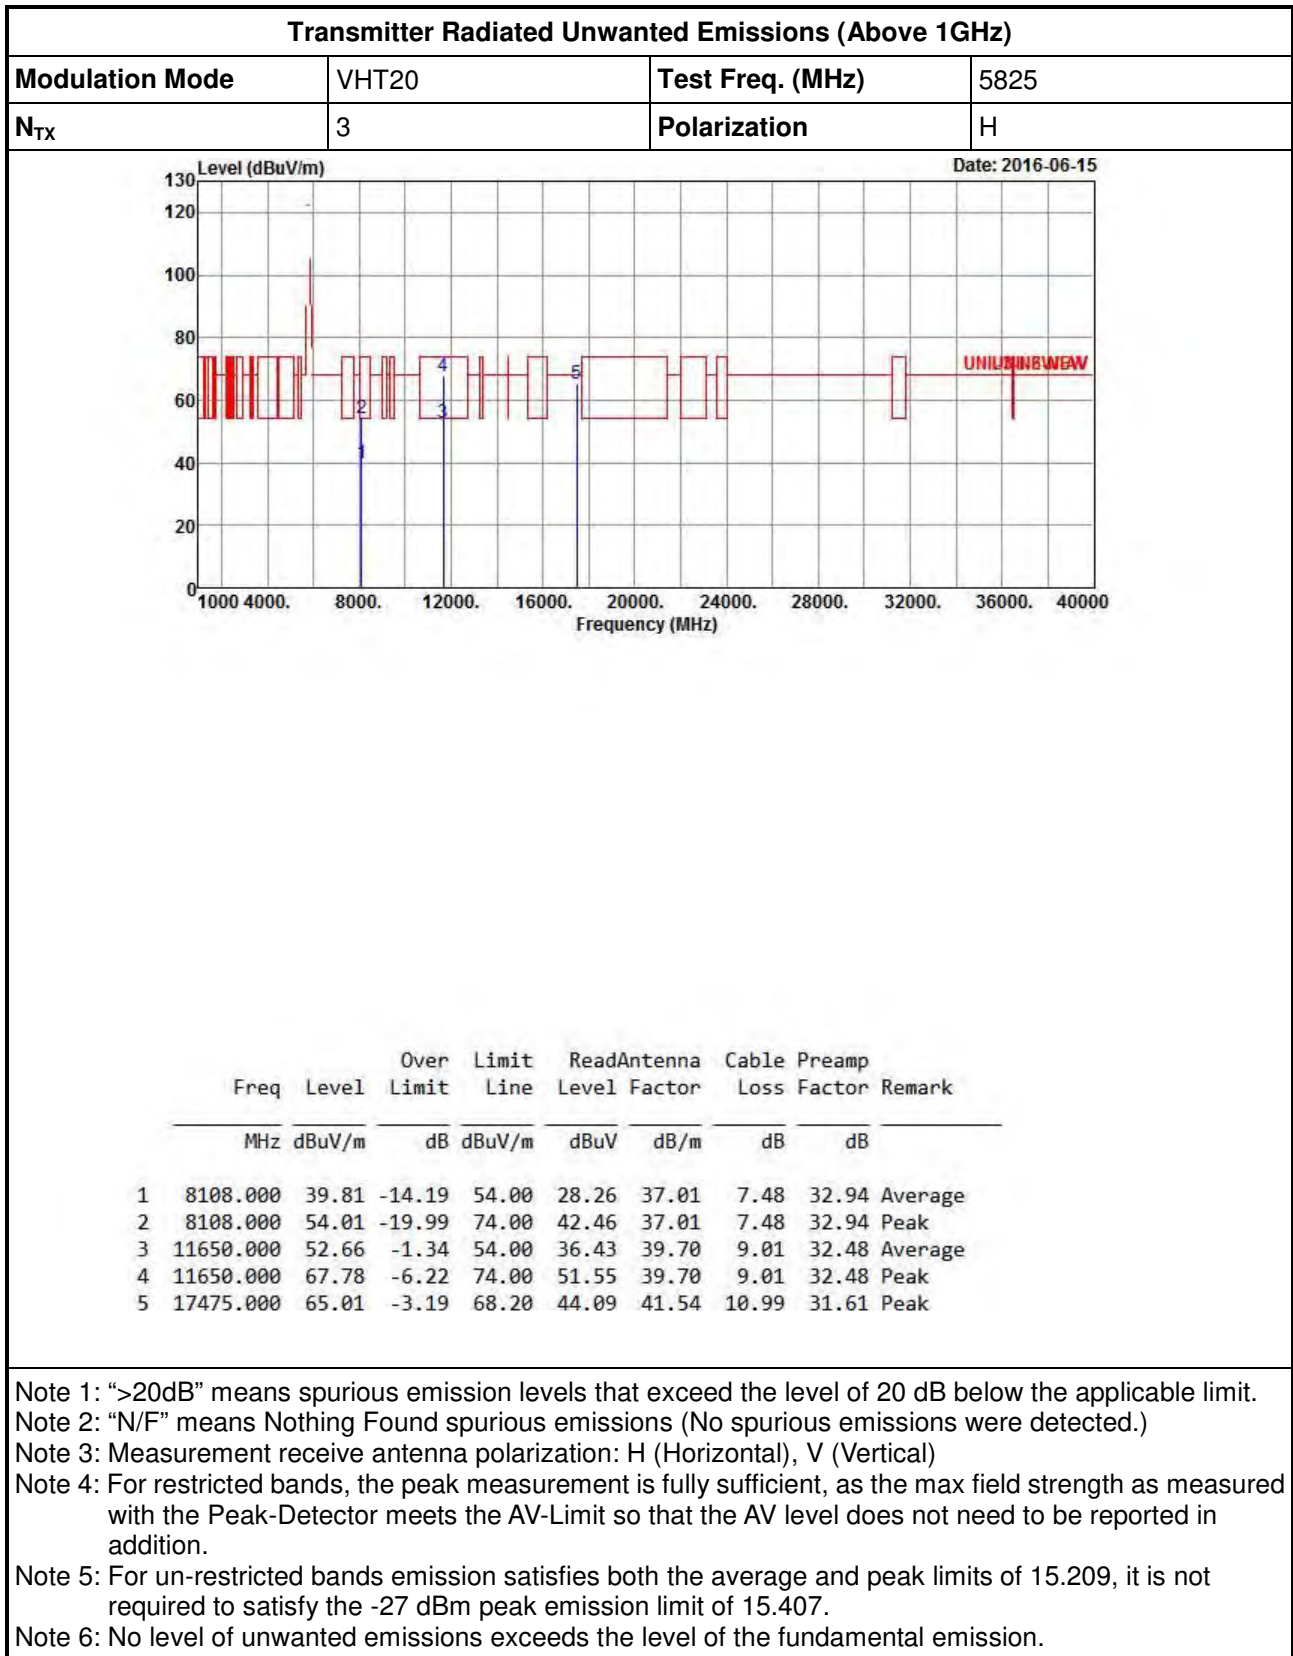


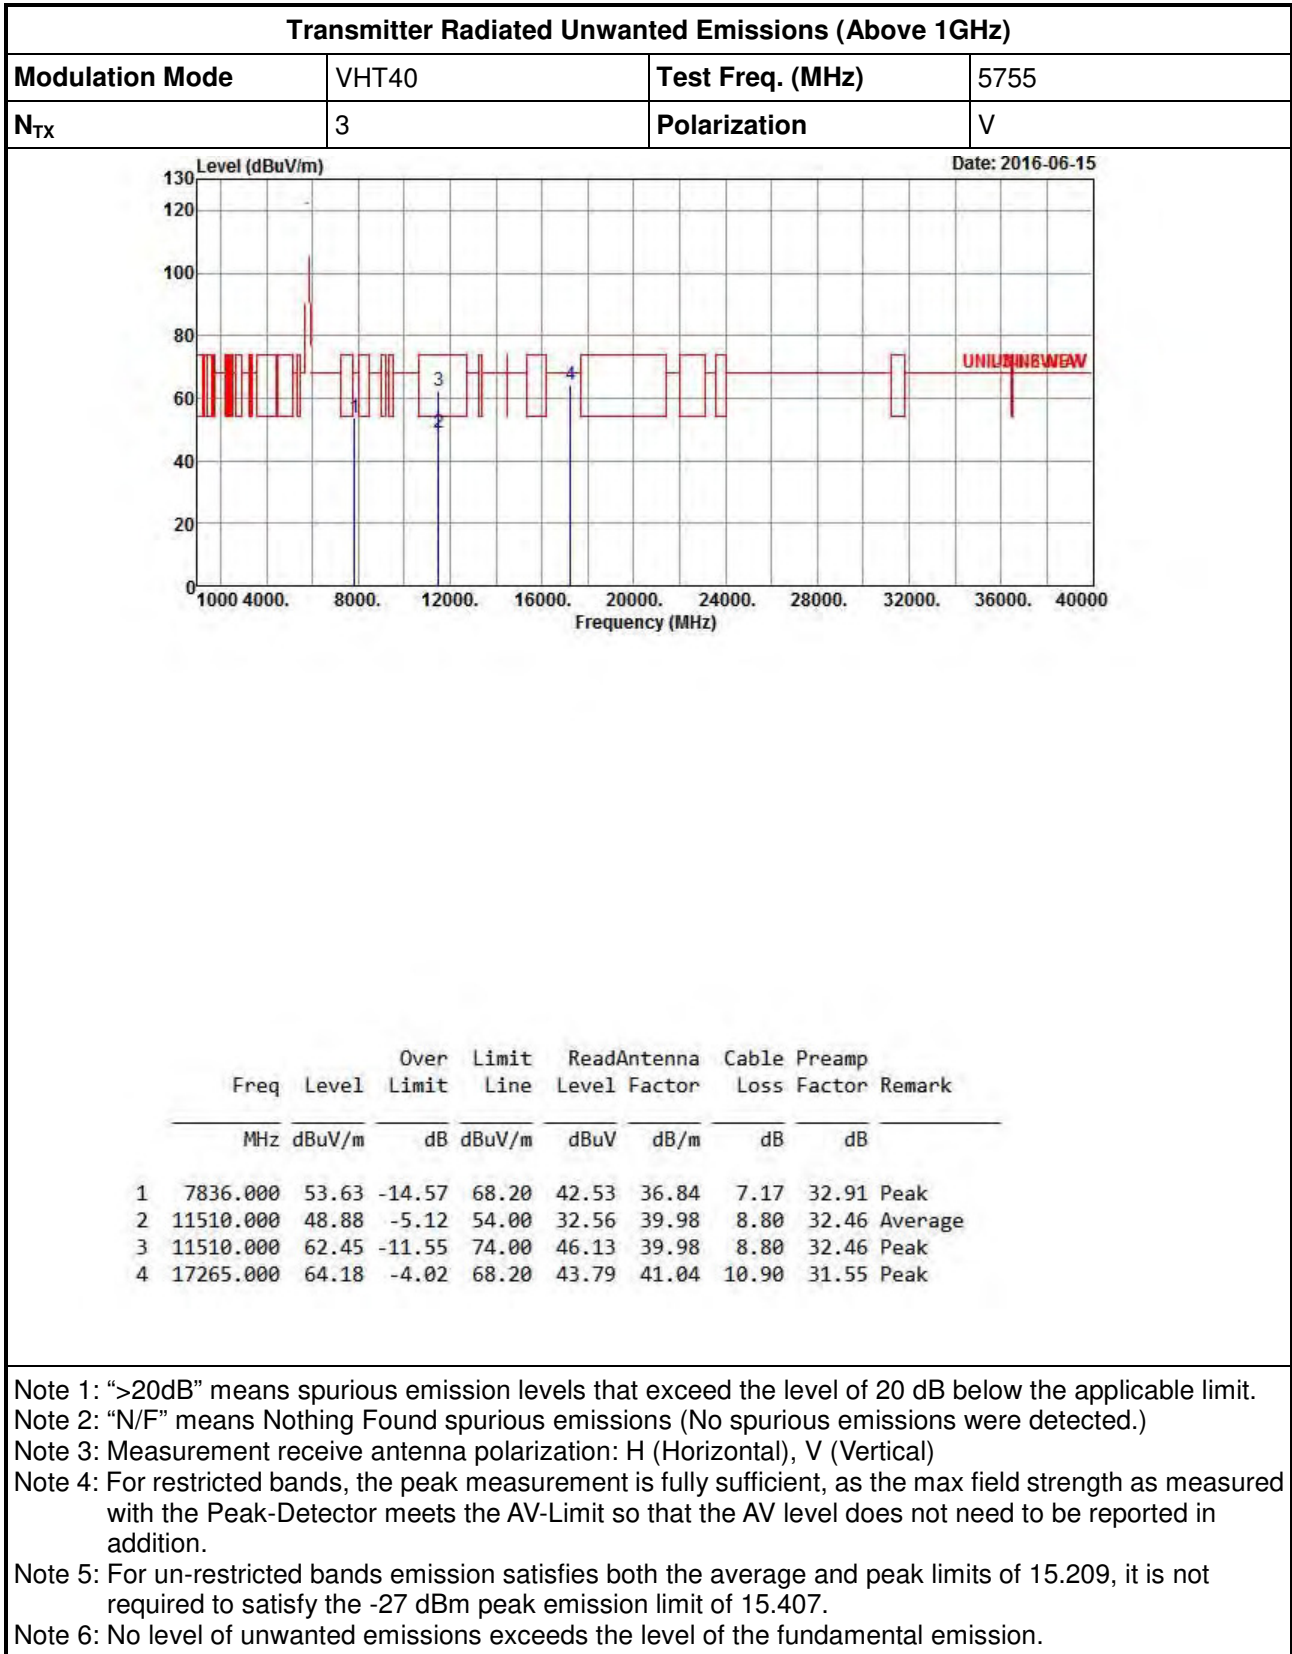


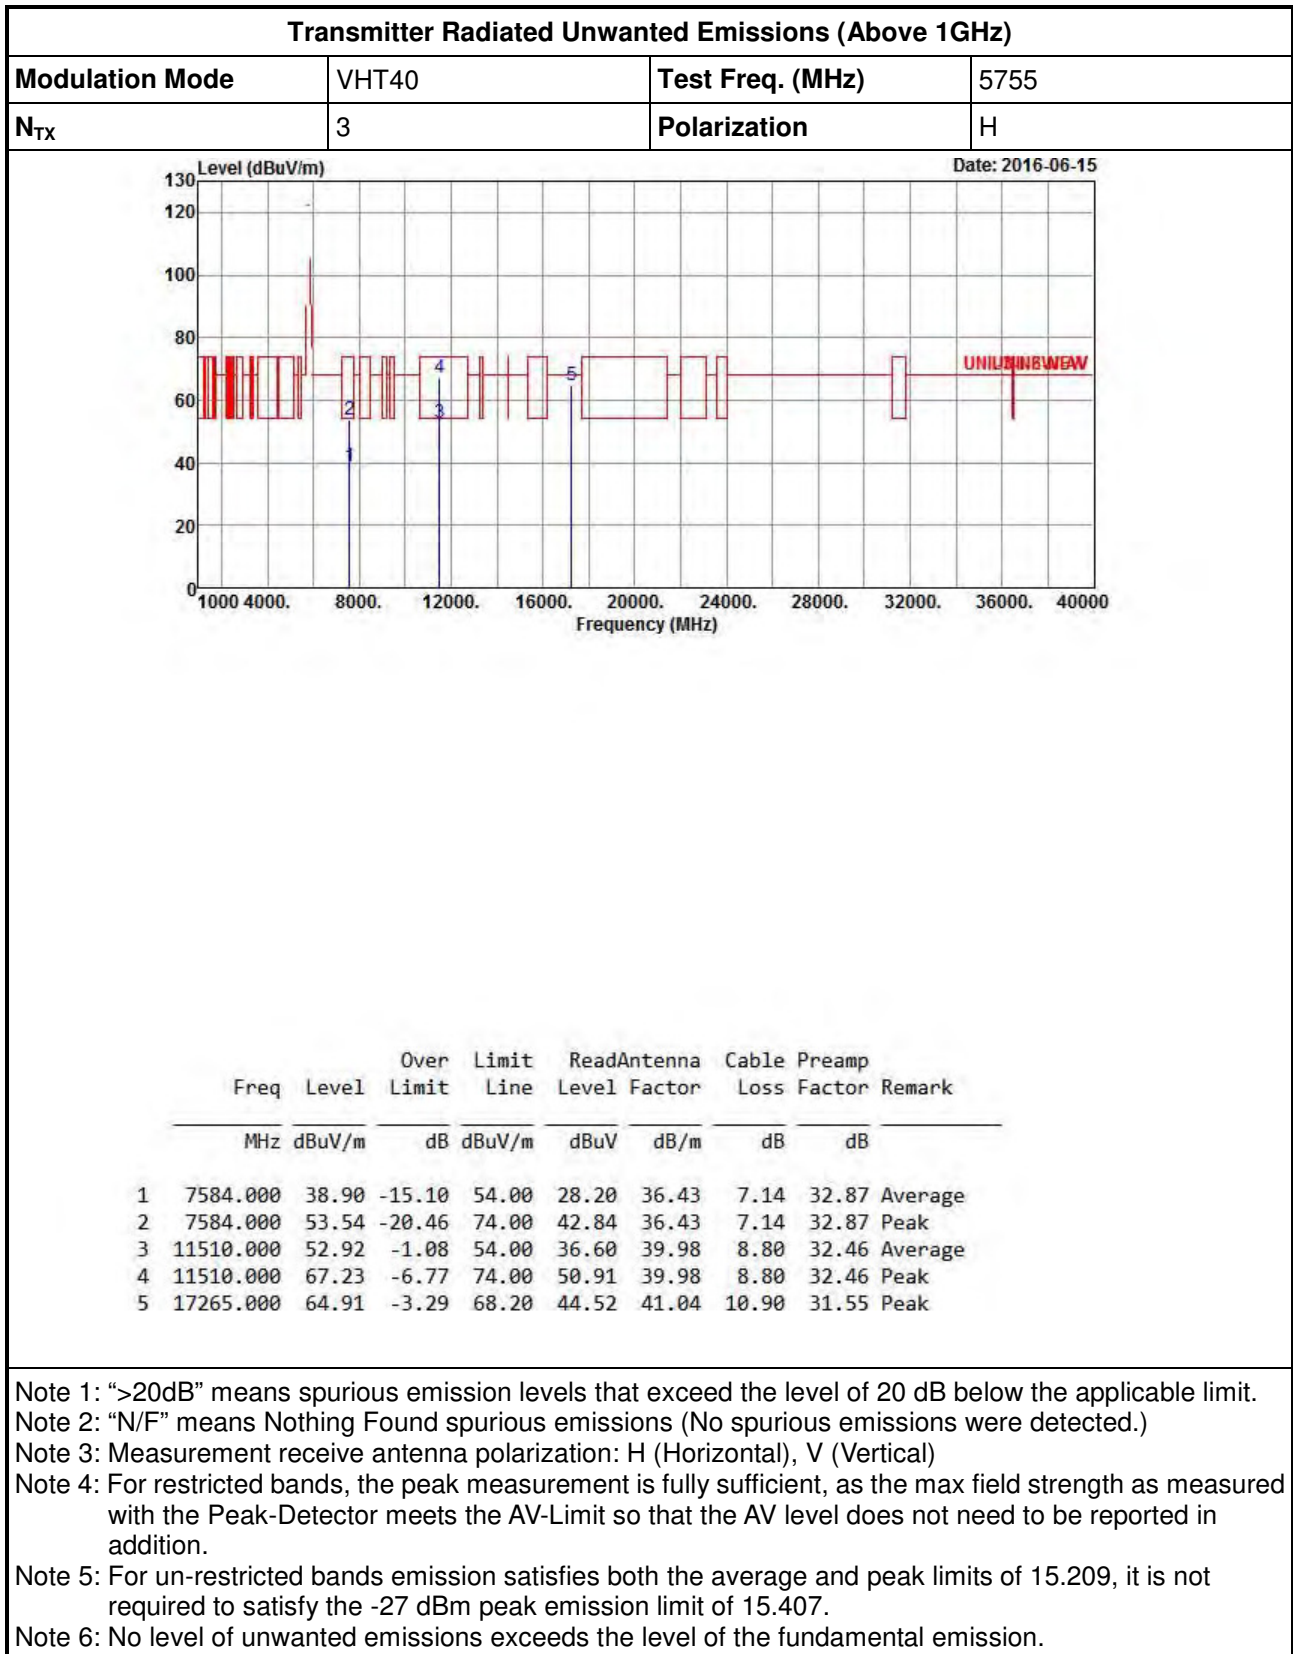

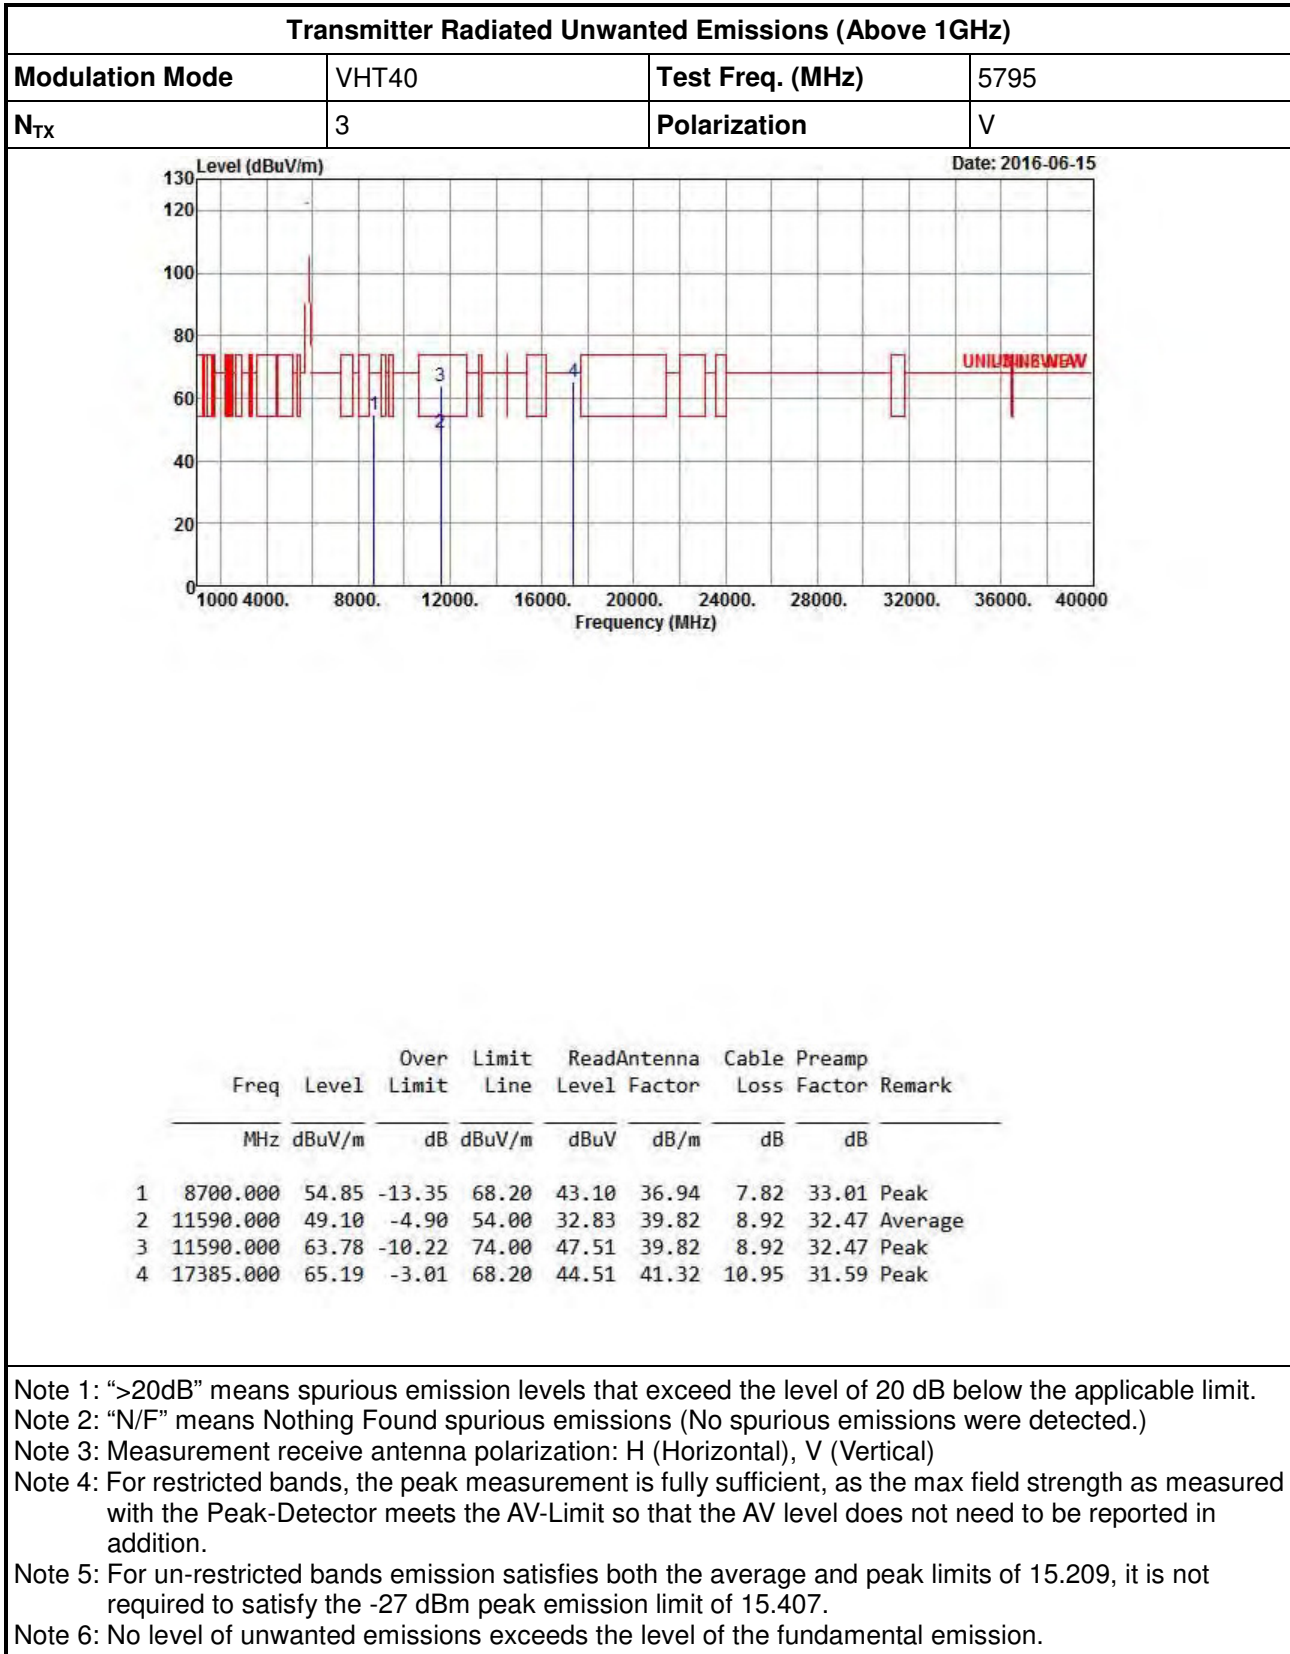

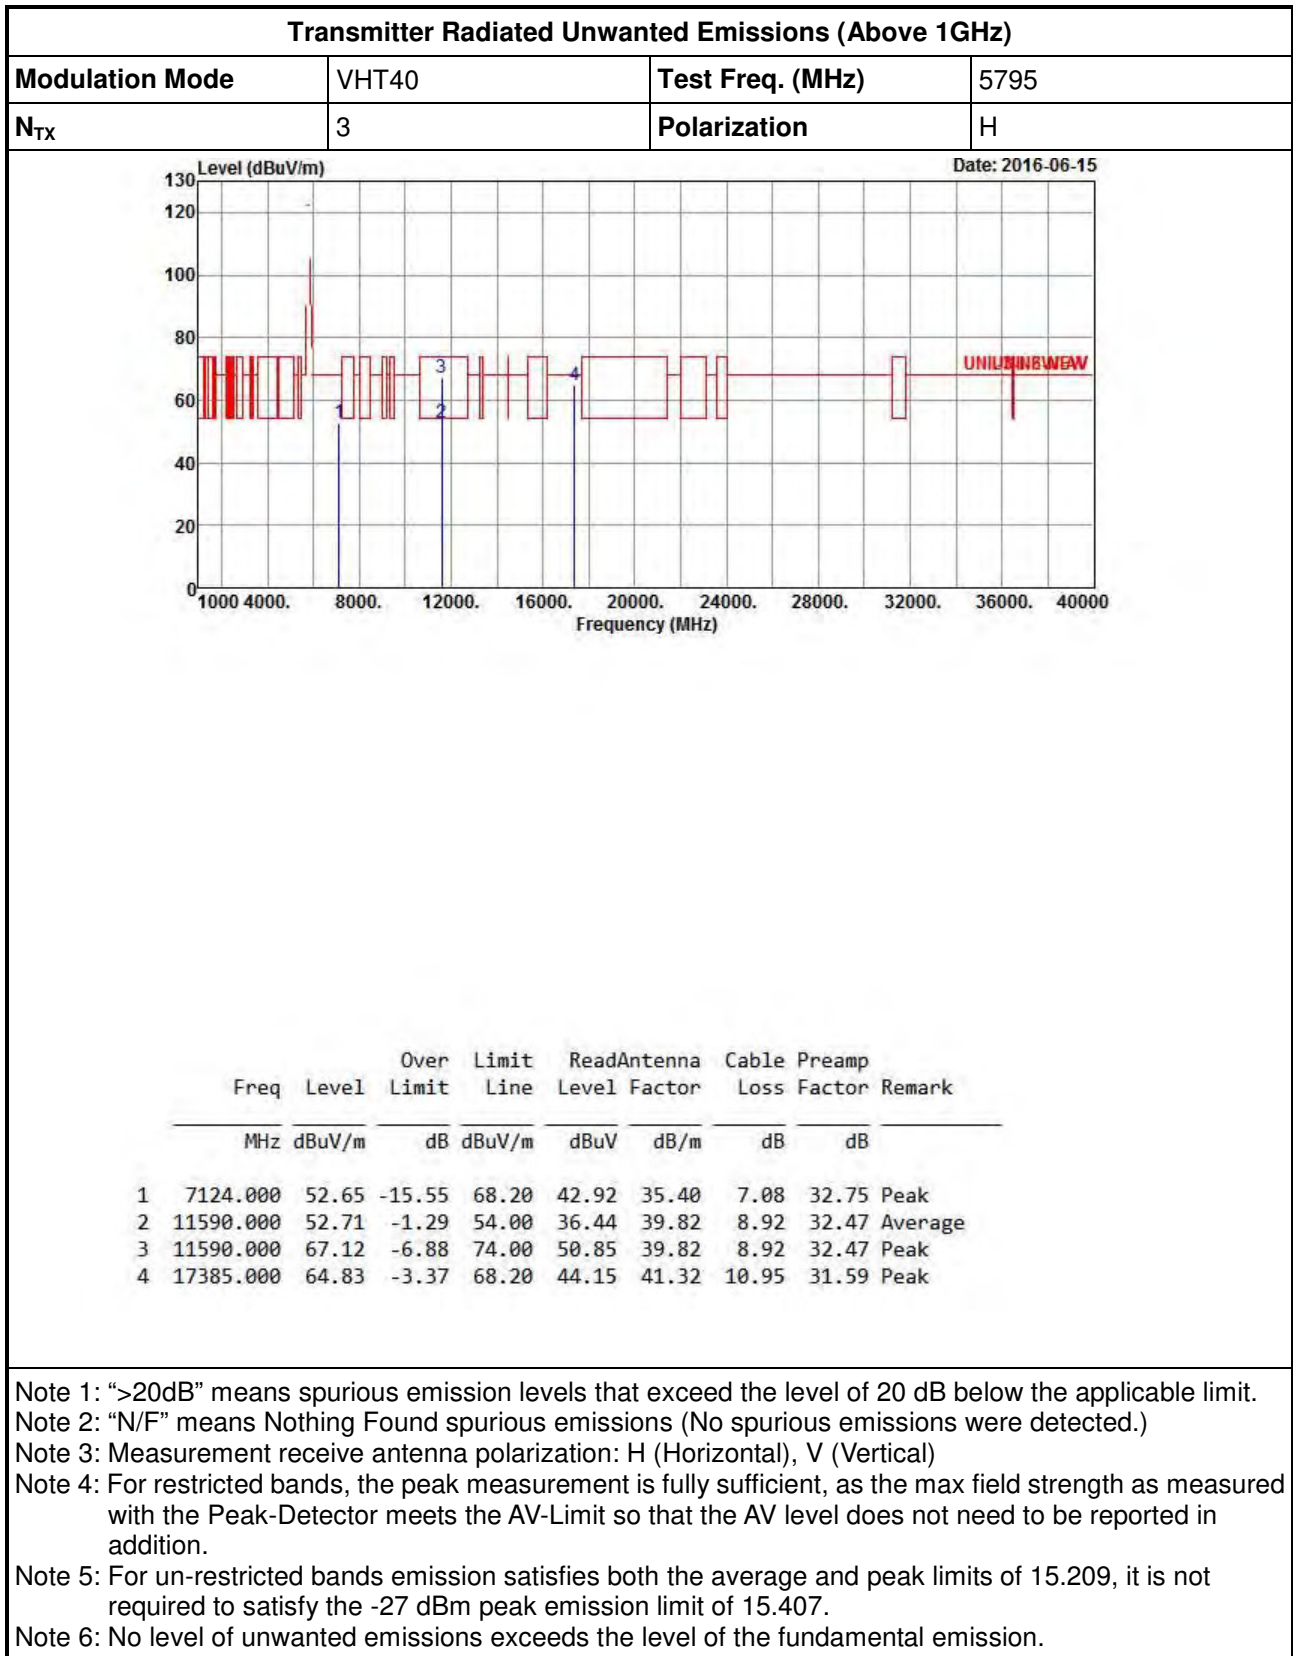

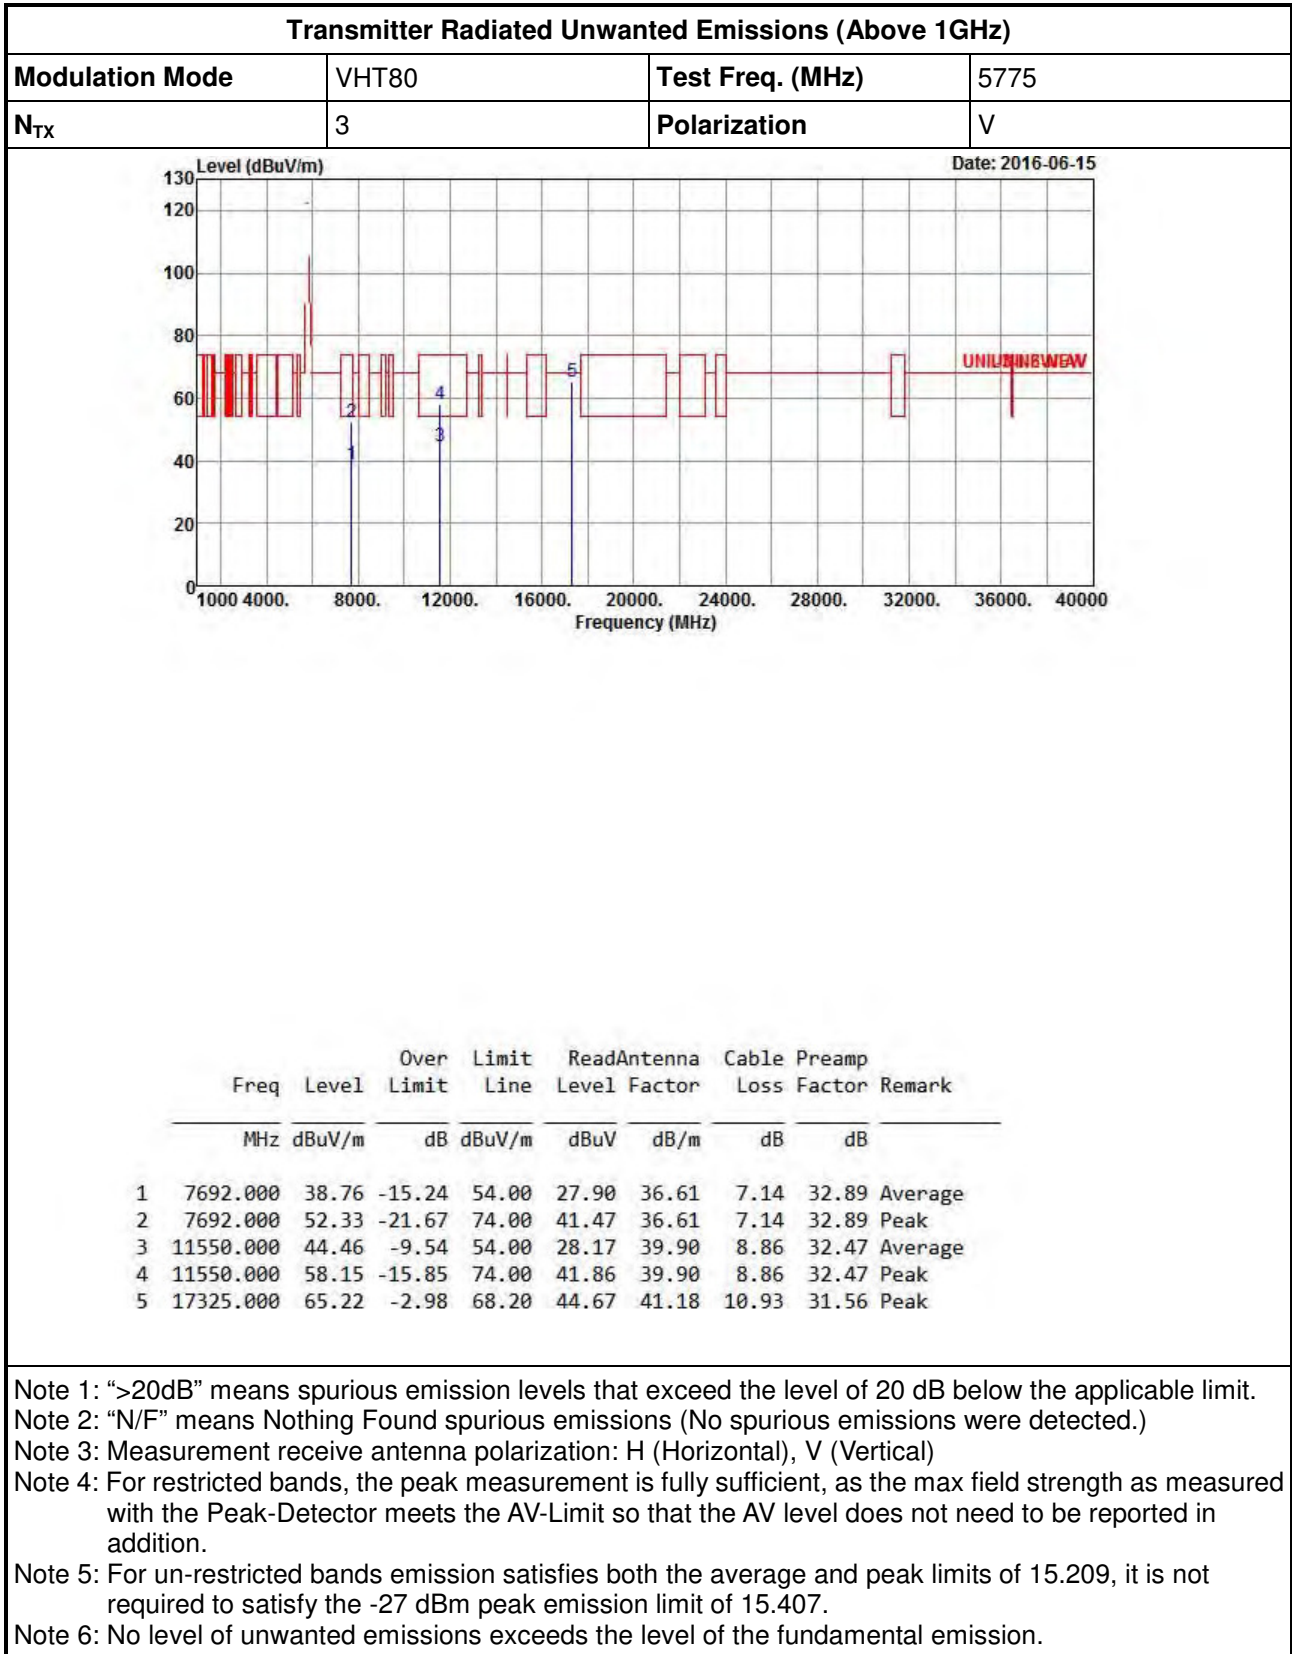


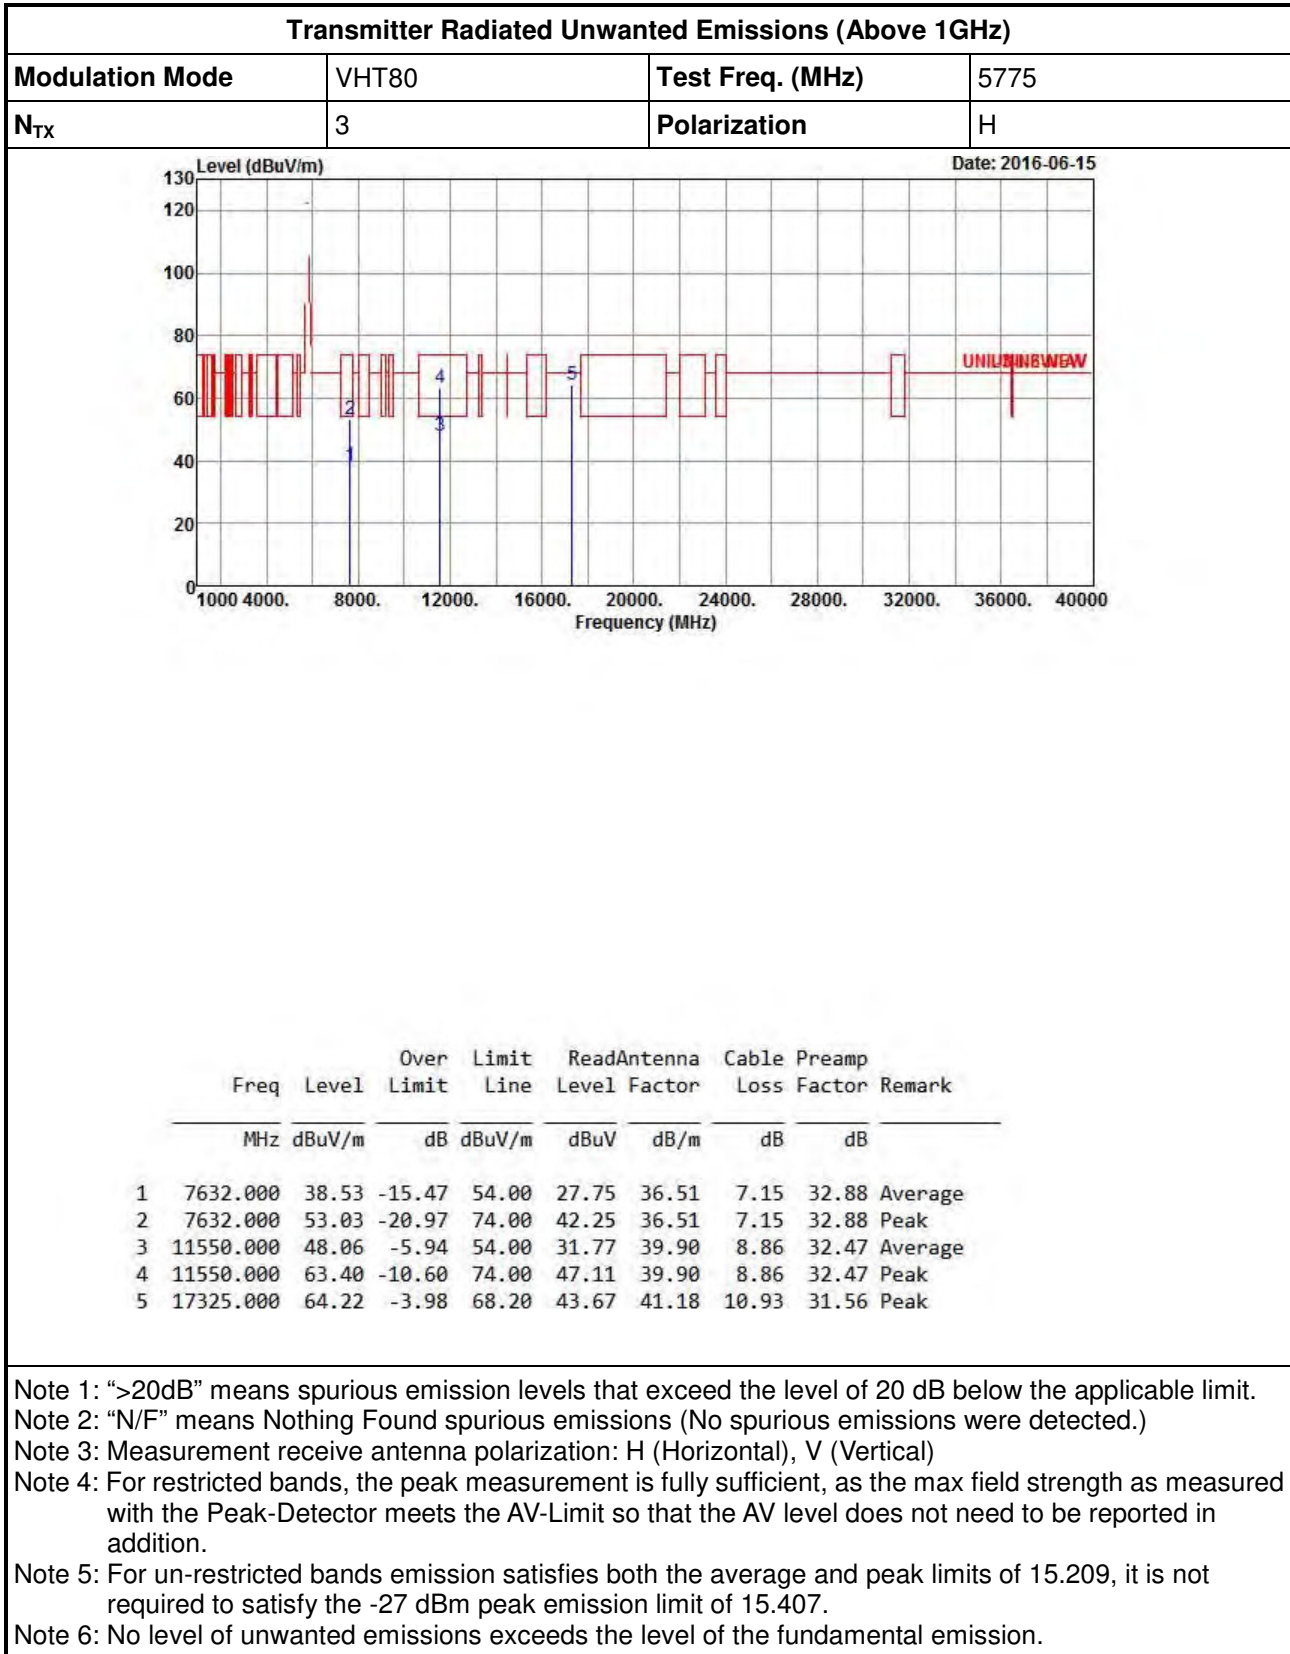



Transmitter Radiated Unwanted Emissions (Below 1GHz) for TxBF

Transmitter Radiated Unwanted Emissions (Below 1GHz)			
Operating Mode	2	Polarization	V
Operating Function	UPS mode		

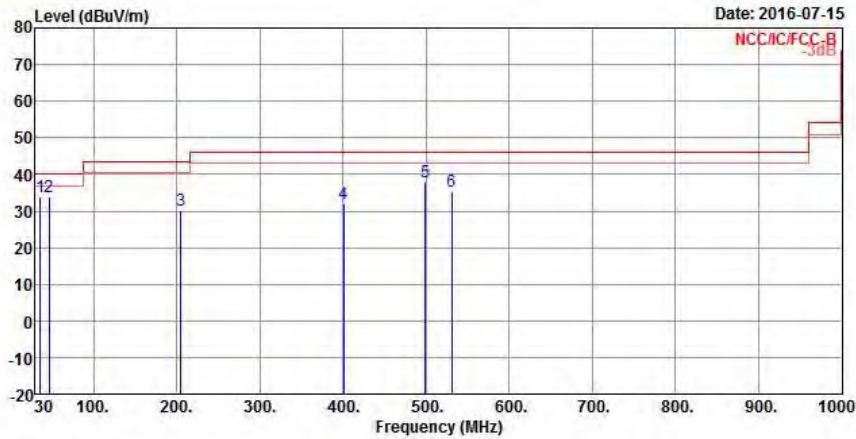


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	35.820	33.89	-6.11	40.00	38.57	22.01	0.85	27.54	QP
2	46.490	34.05	-5.95	40.00	44.43	16.14	0.99	27.51	Peak
3	204.600	30.30	-13.20	43.50	38.57	16.34	2.30	26.91	Peak
4	400.540	32.18	-13.82	46.00	33.28	22.37	3.24	26.71	Peak
5	499.480	37.78	-8.22	46.00	38.21	23.80	3.56	27.79	Peak
6	530.520	35.29	-10.71	46.00	35.22	24.33	3.61	27.87	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode	2	Polarization	H
Operating Function	UPS mode		

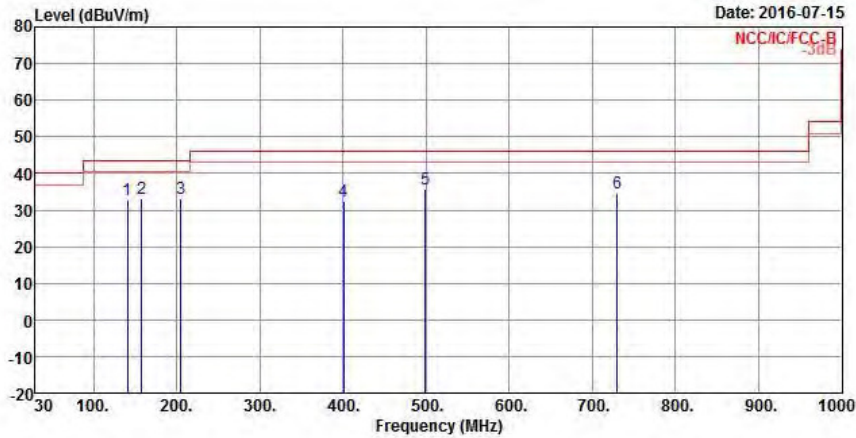


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	140.580	32.85	-10.65	43.50	40.44	17.77	1.84	27.20	Peak
2	158.040	33.03	-10.47	43.50	41.65	16.53	1.97	27.12	Peak
3	204.600	33.25	-10.25	43.50	41.52	16.34	2.30	26.91	Peak
4	400.540	32.38	-13.62	46.00	33.48	22.37	3.24	26.71	Peak
5	499.480	35.86	-10.14	46.00	36.29	23.80	3.56	27.79	Peak
6	730.340	34.60	-11.40	46.00	32.04	25.96	4.48	27.88	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.




Transmitter Radiated Unwanted Emissions (Above 1GHz) for TxBF 5150-5250MHz


Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	VHT20	Test Freq. (MHz)	5180
N _{TX}	3	Polarization	V

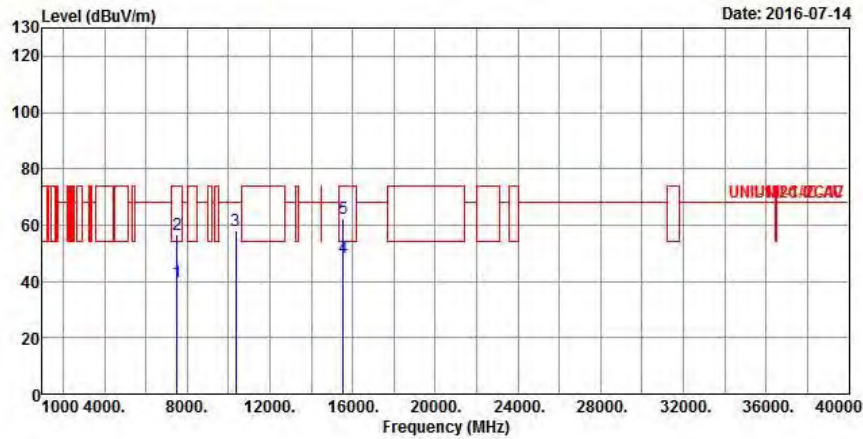



	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7500.000	39.86	-14.14	54.00	29.34	36.30	7.08	32.86	Average
2	7500.000	56.63	-17.37	74.00	46.11	36.30	7.08	32.86	Peak
3	10360.000	58.25	-9.95	68.20	43.44	39.23	8.47	32.89	Peak
4	15540.000	48.43	-5.57	54.00	32.06	38.30	10.41	32.34	Average
5	15540.000	62.17	-11.83	74.00	45.80	38.30	10.41	32.34	Peak


- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

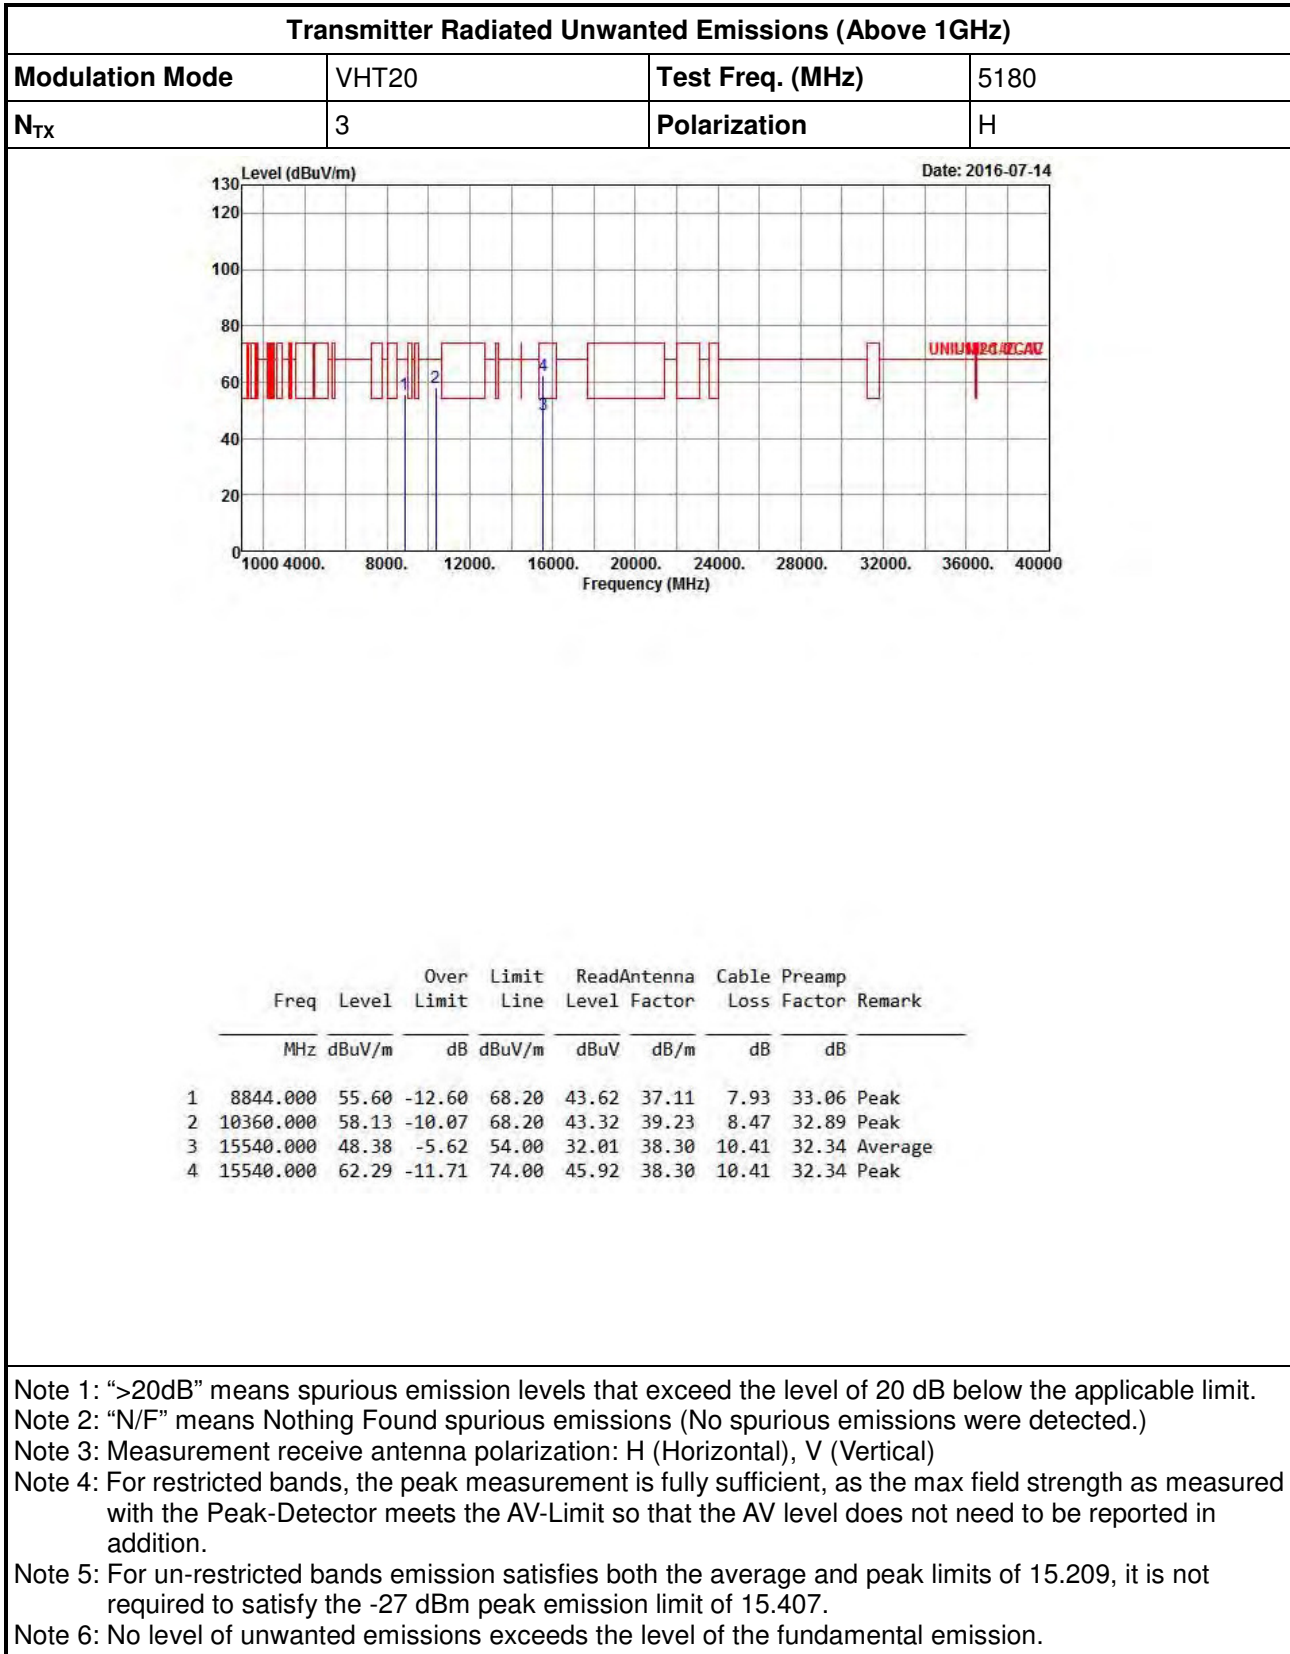


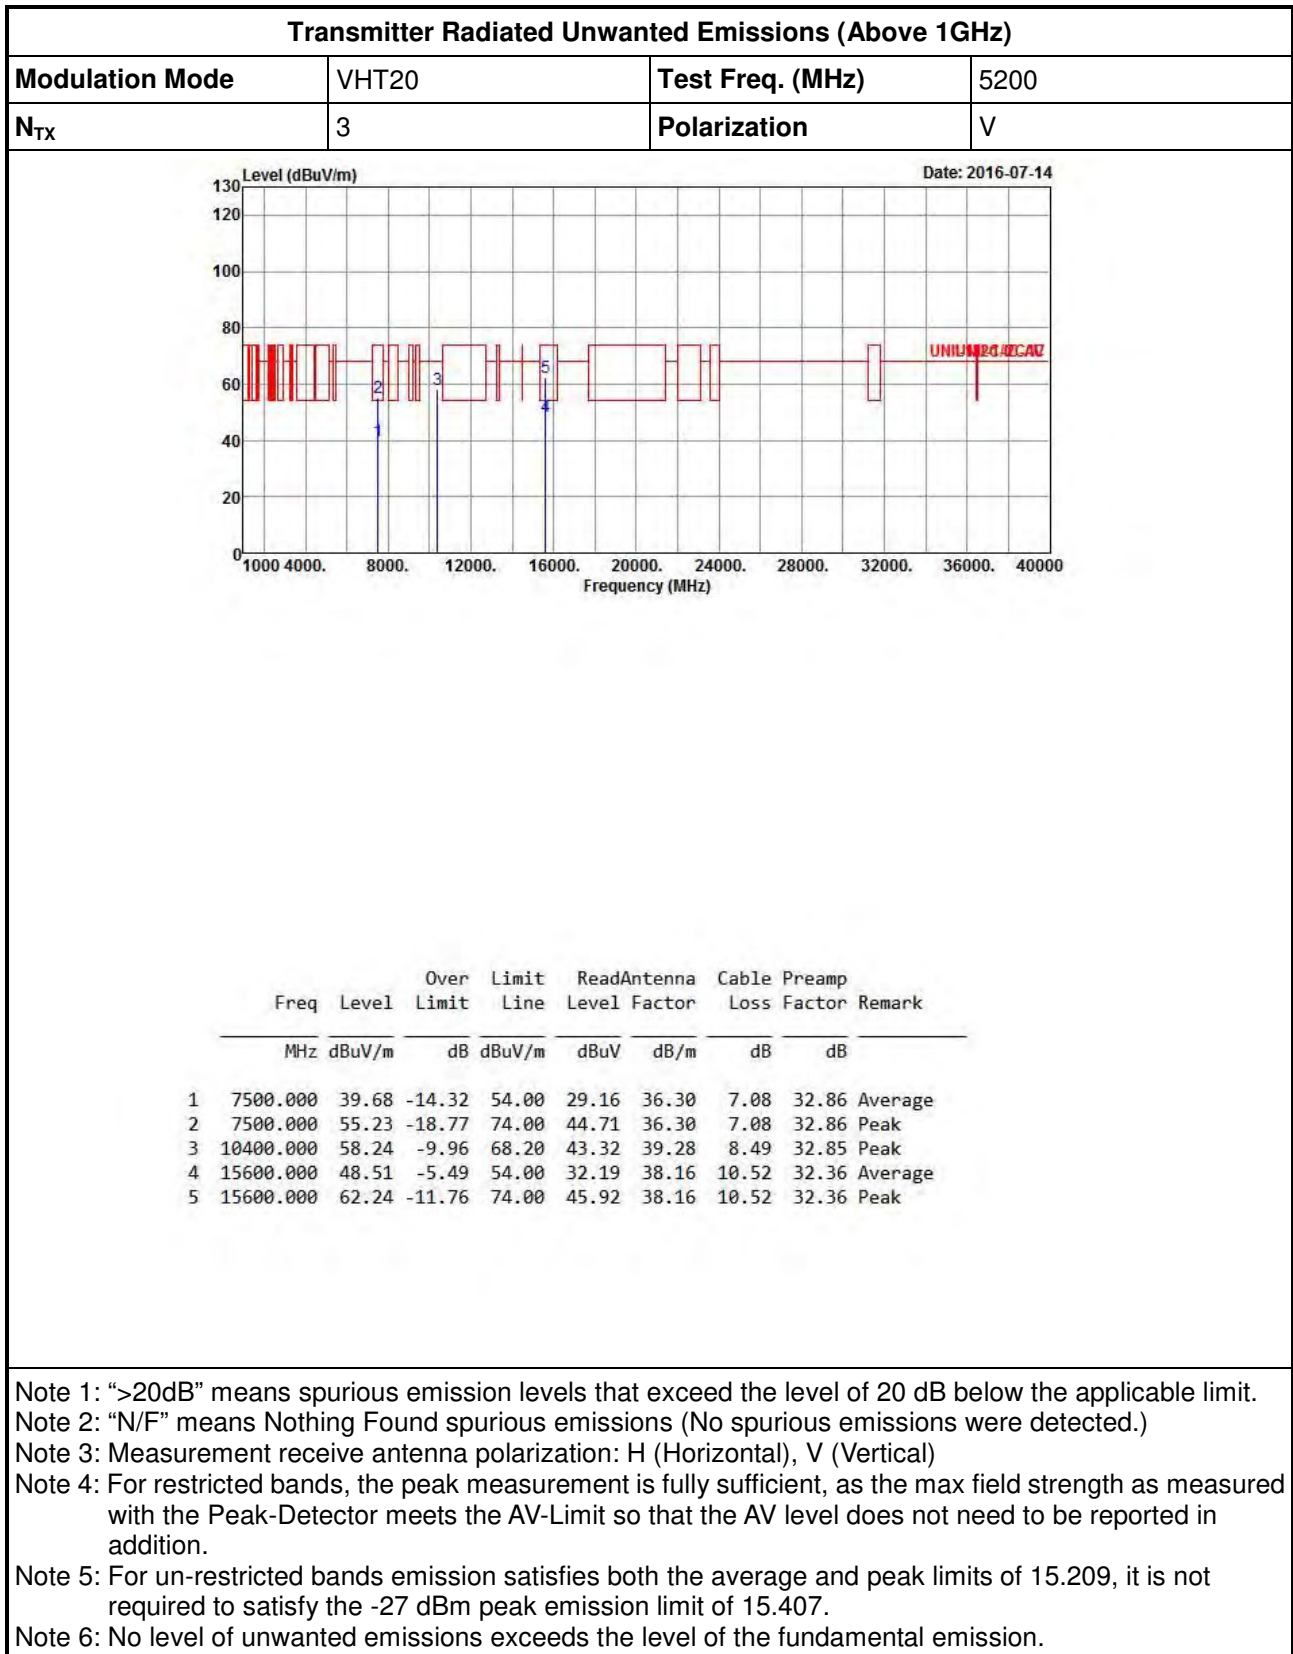


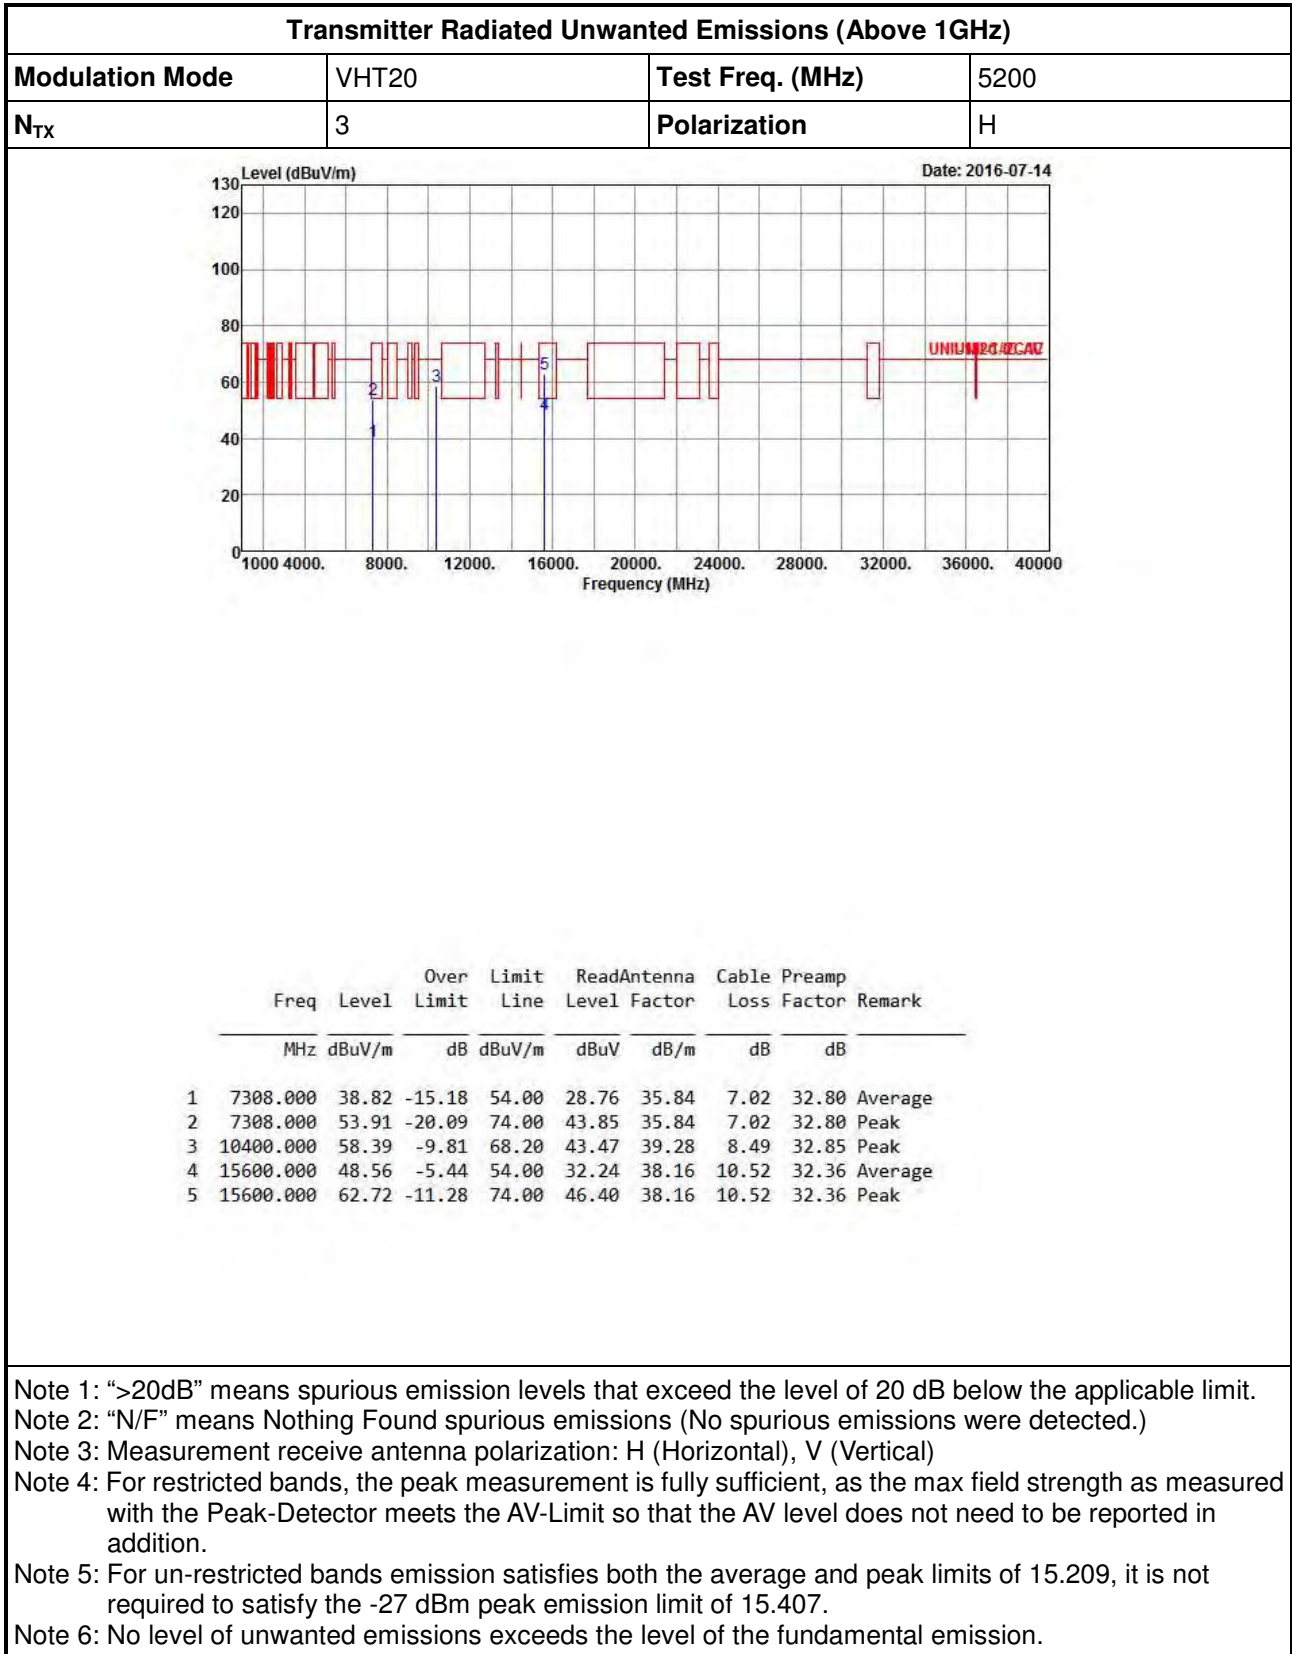


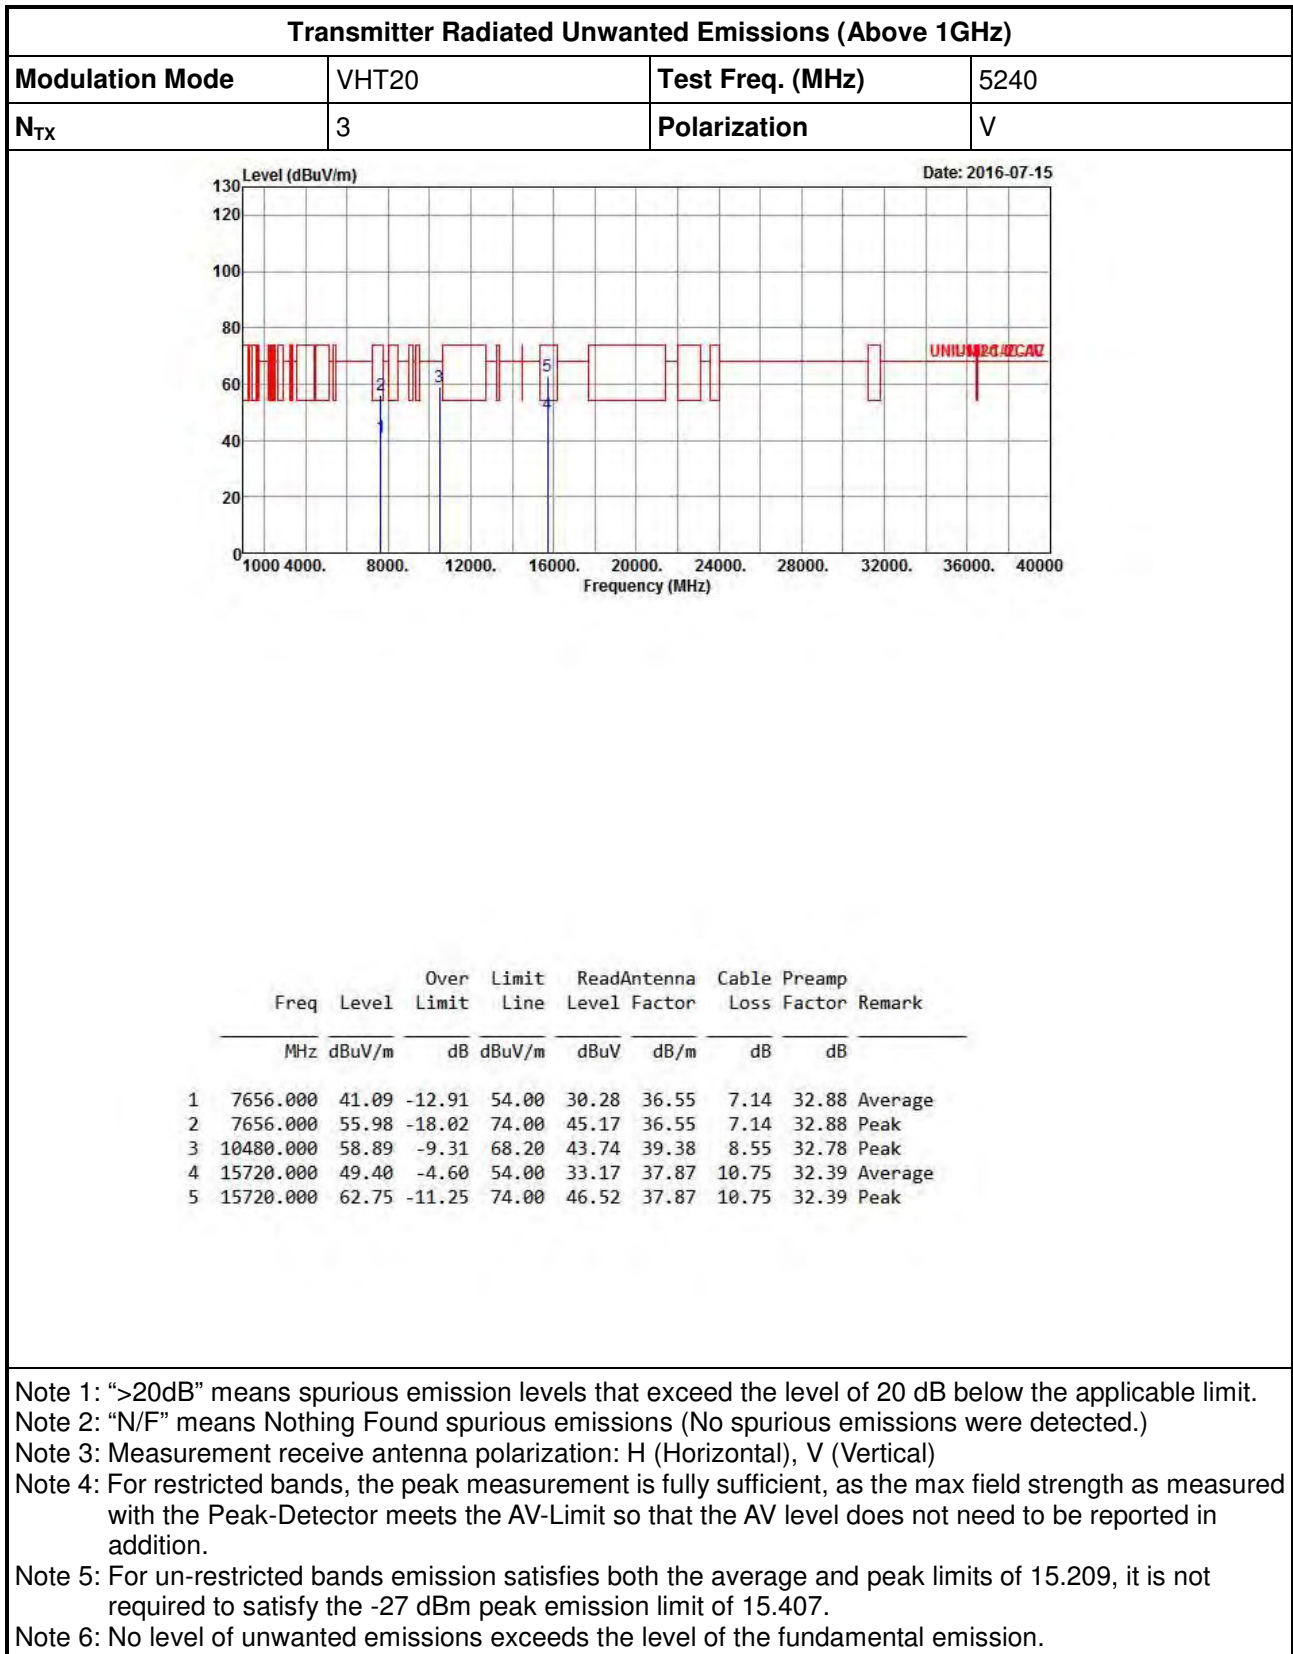


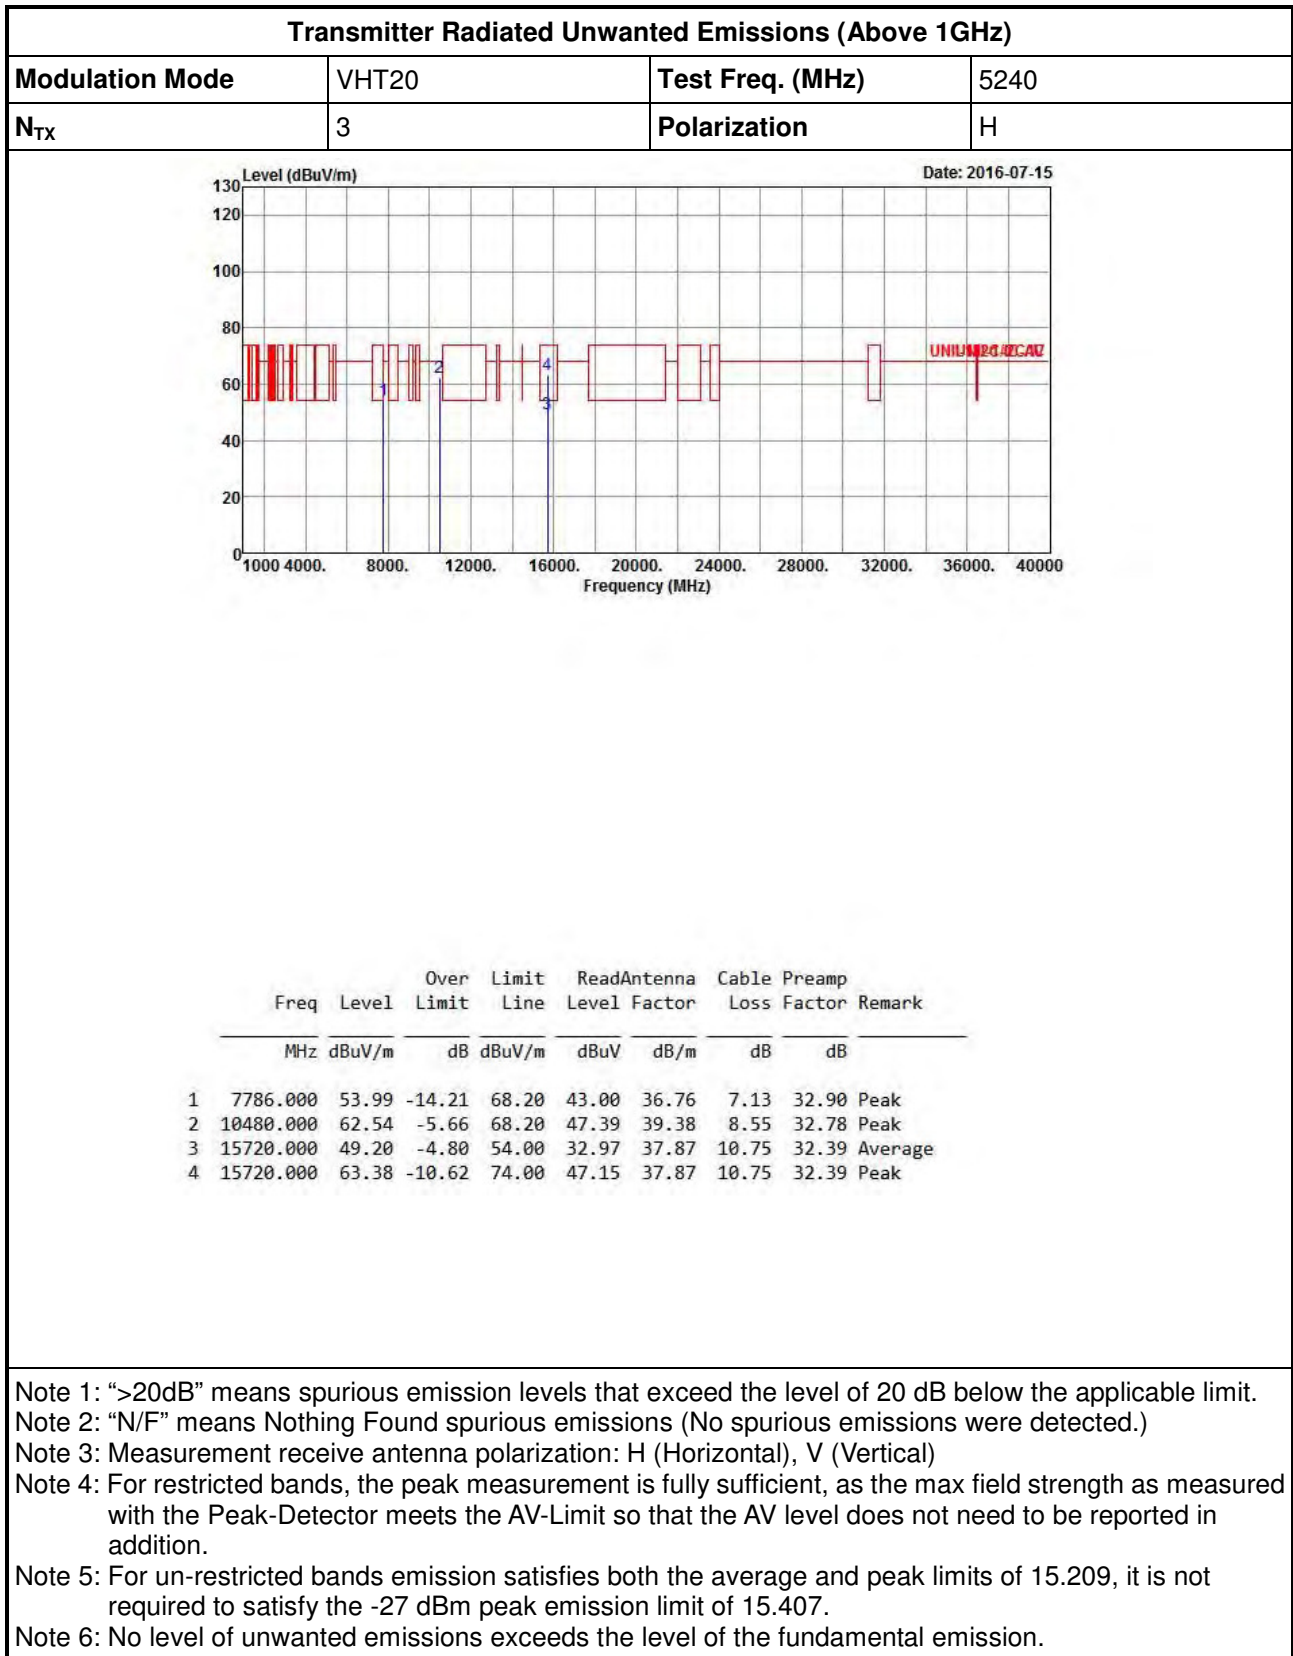


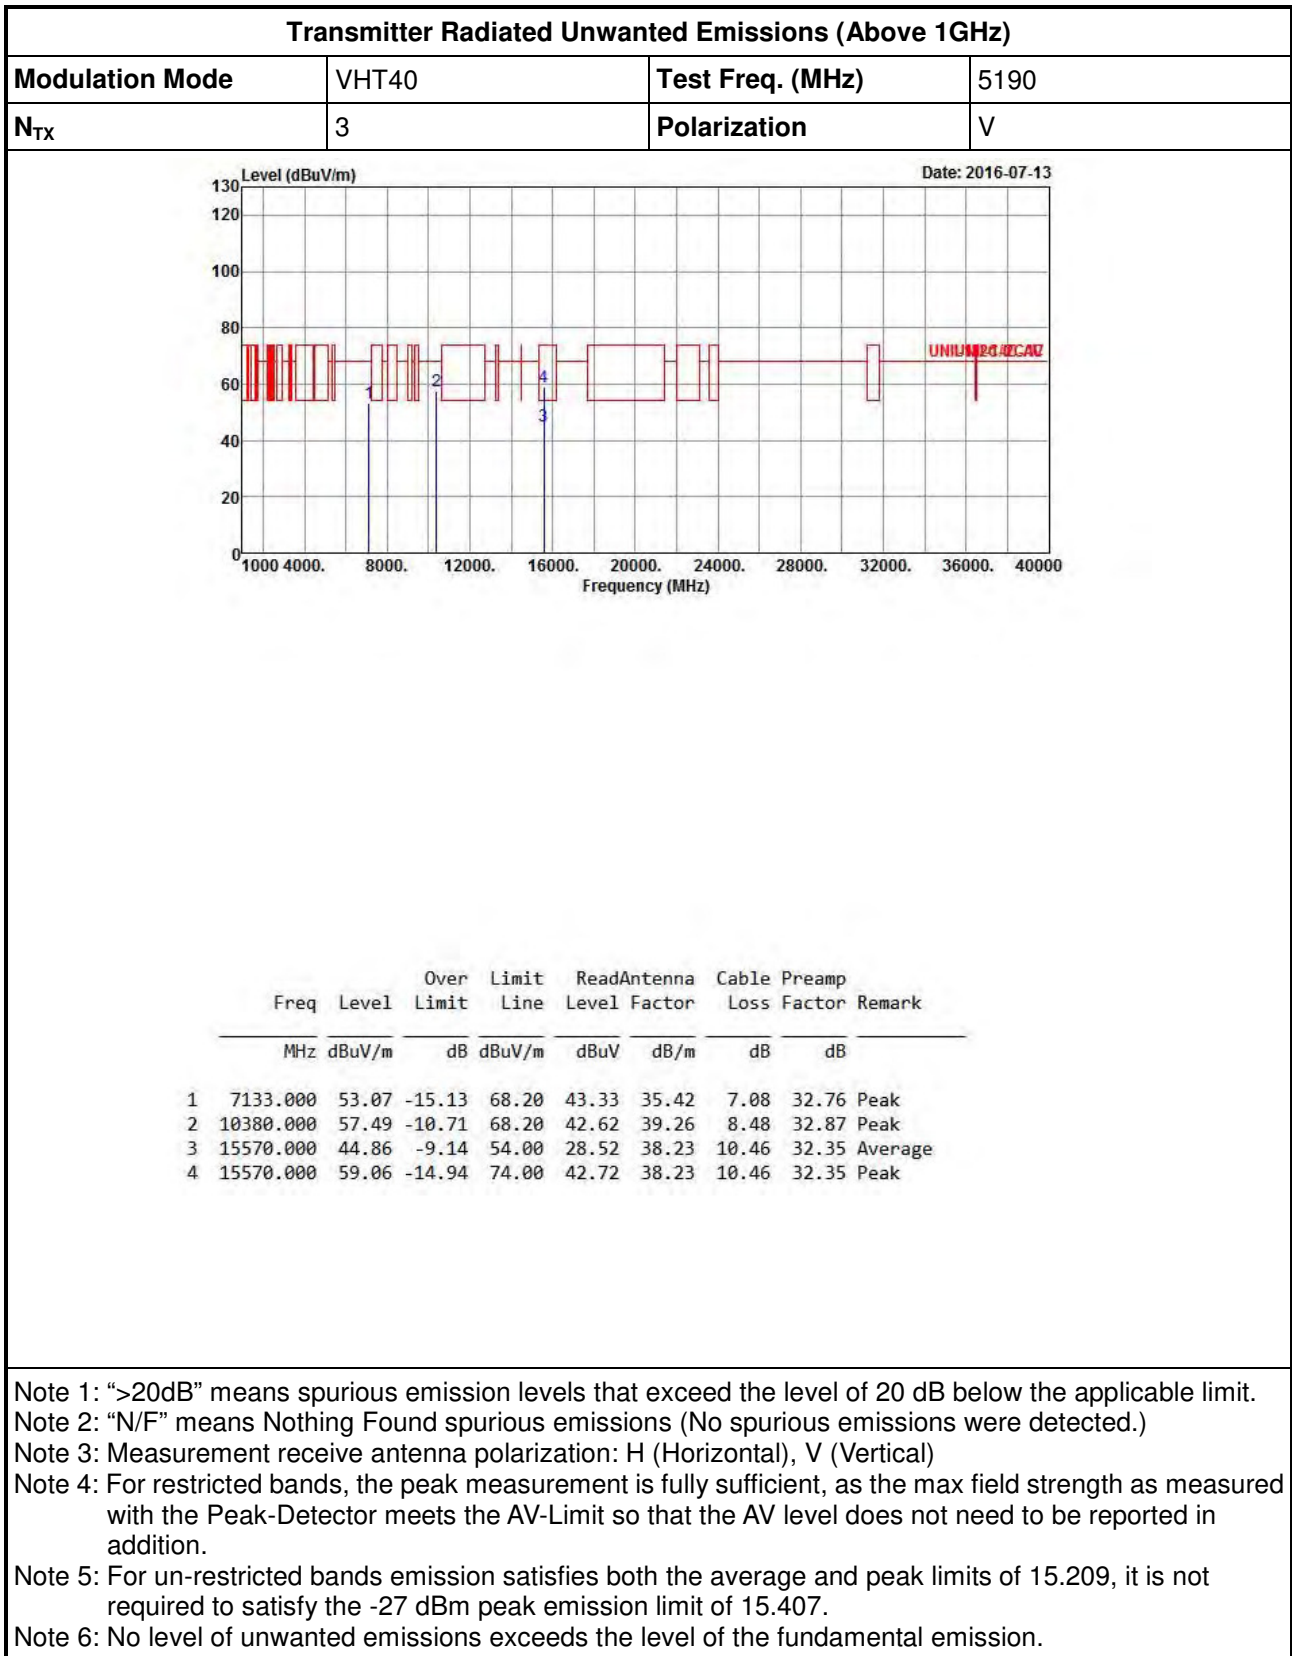


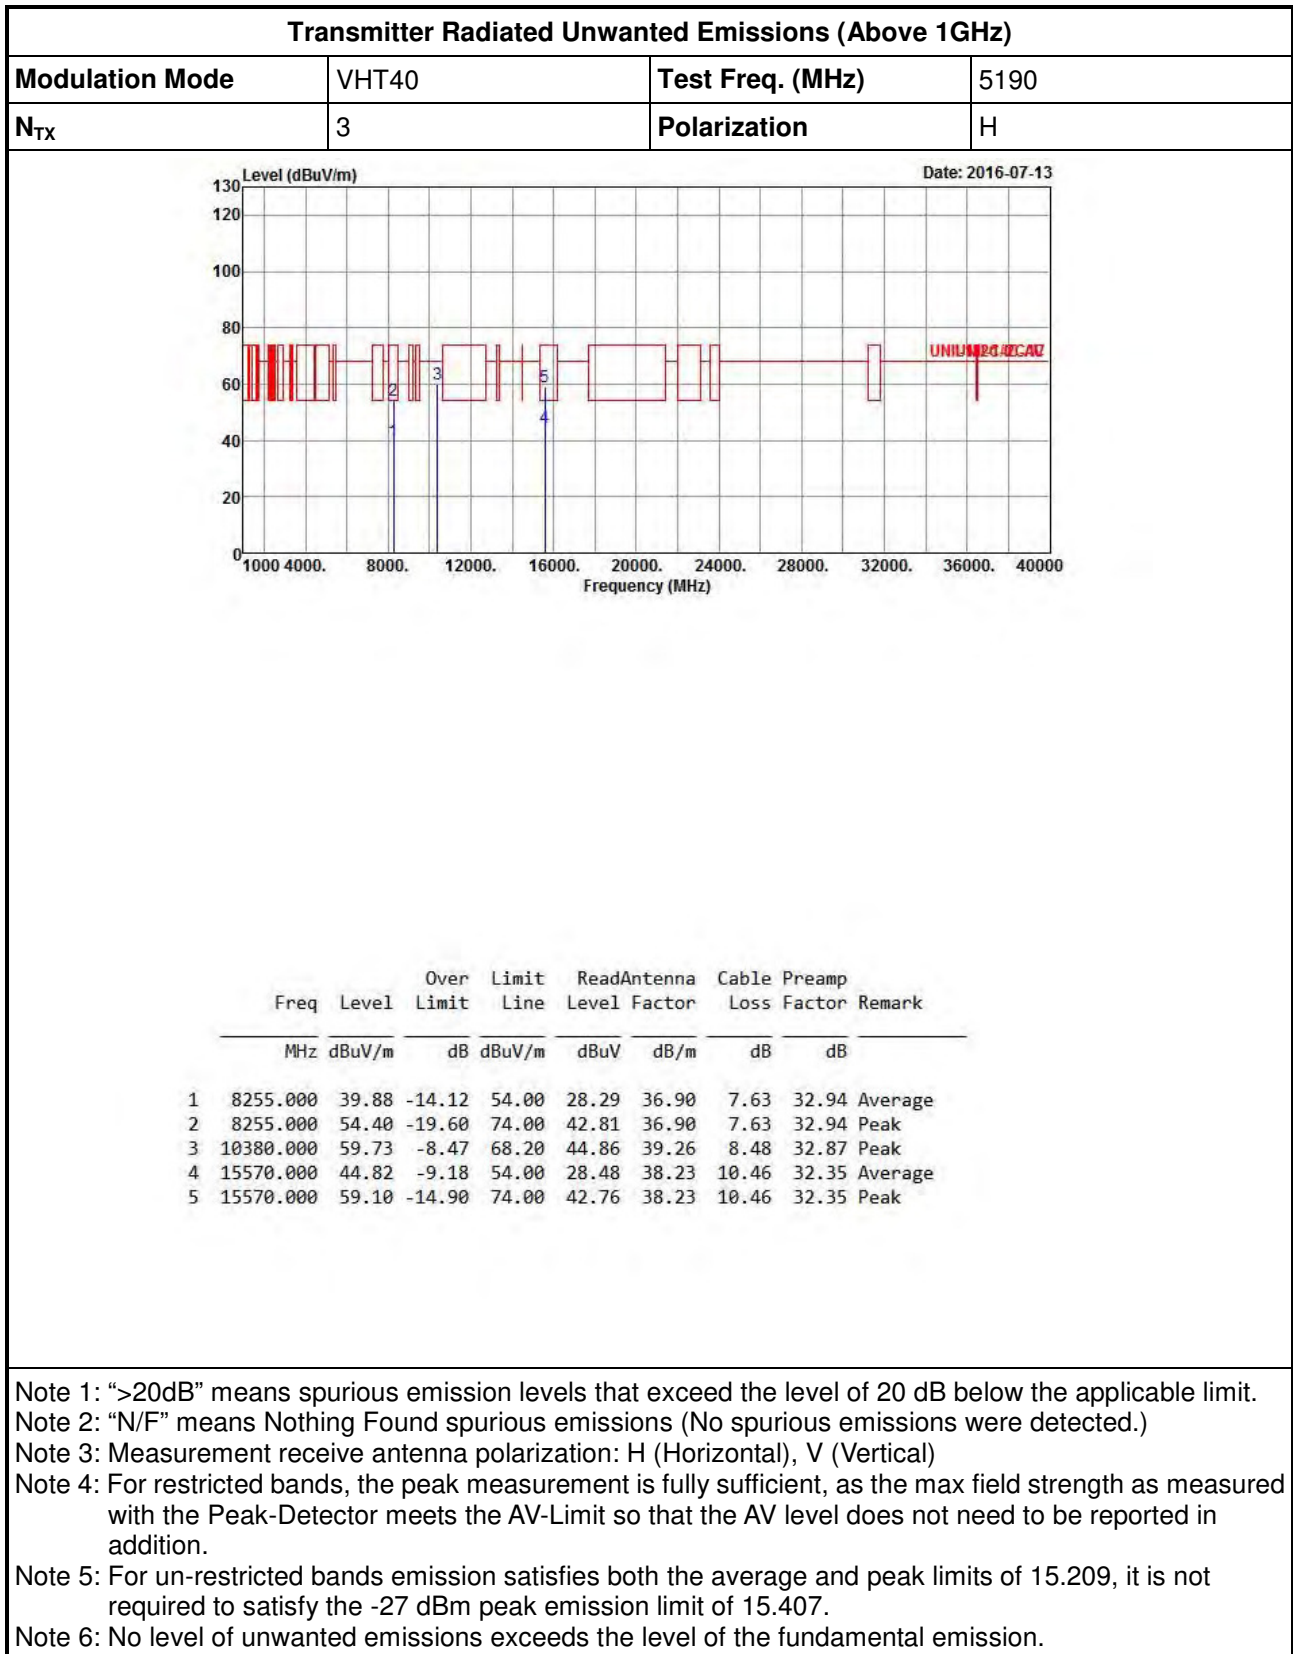

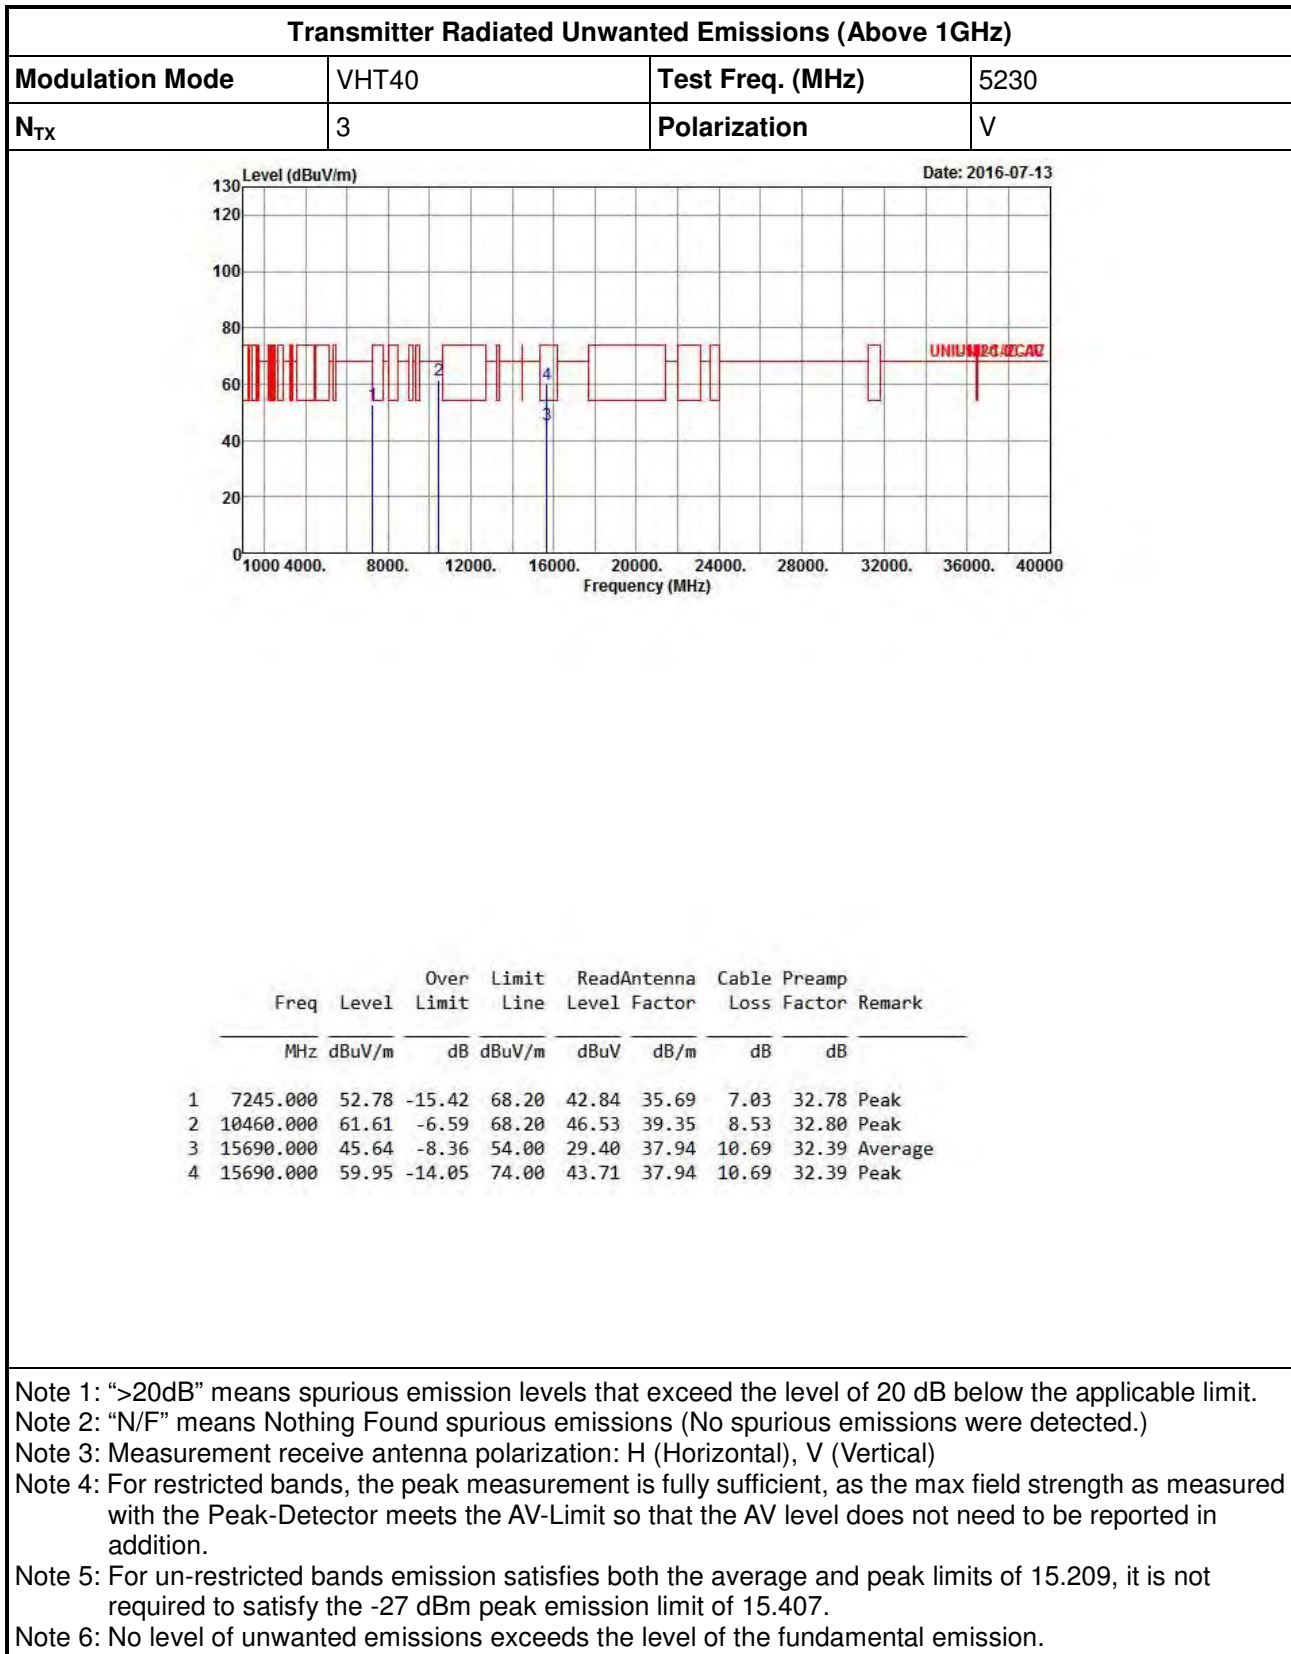

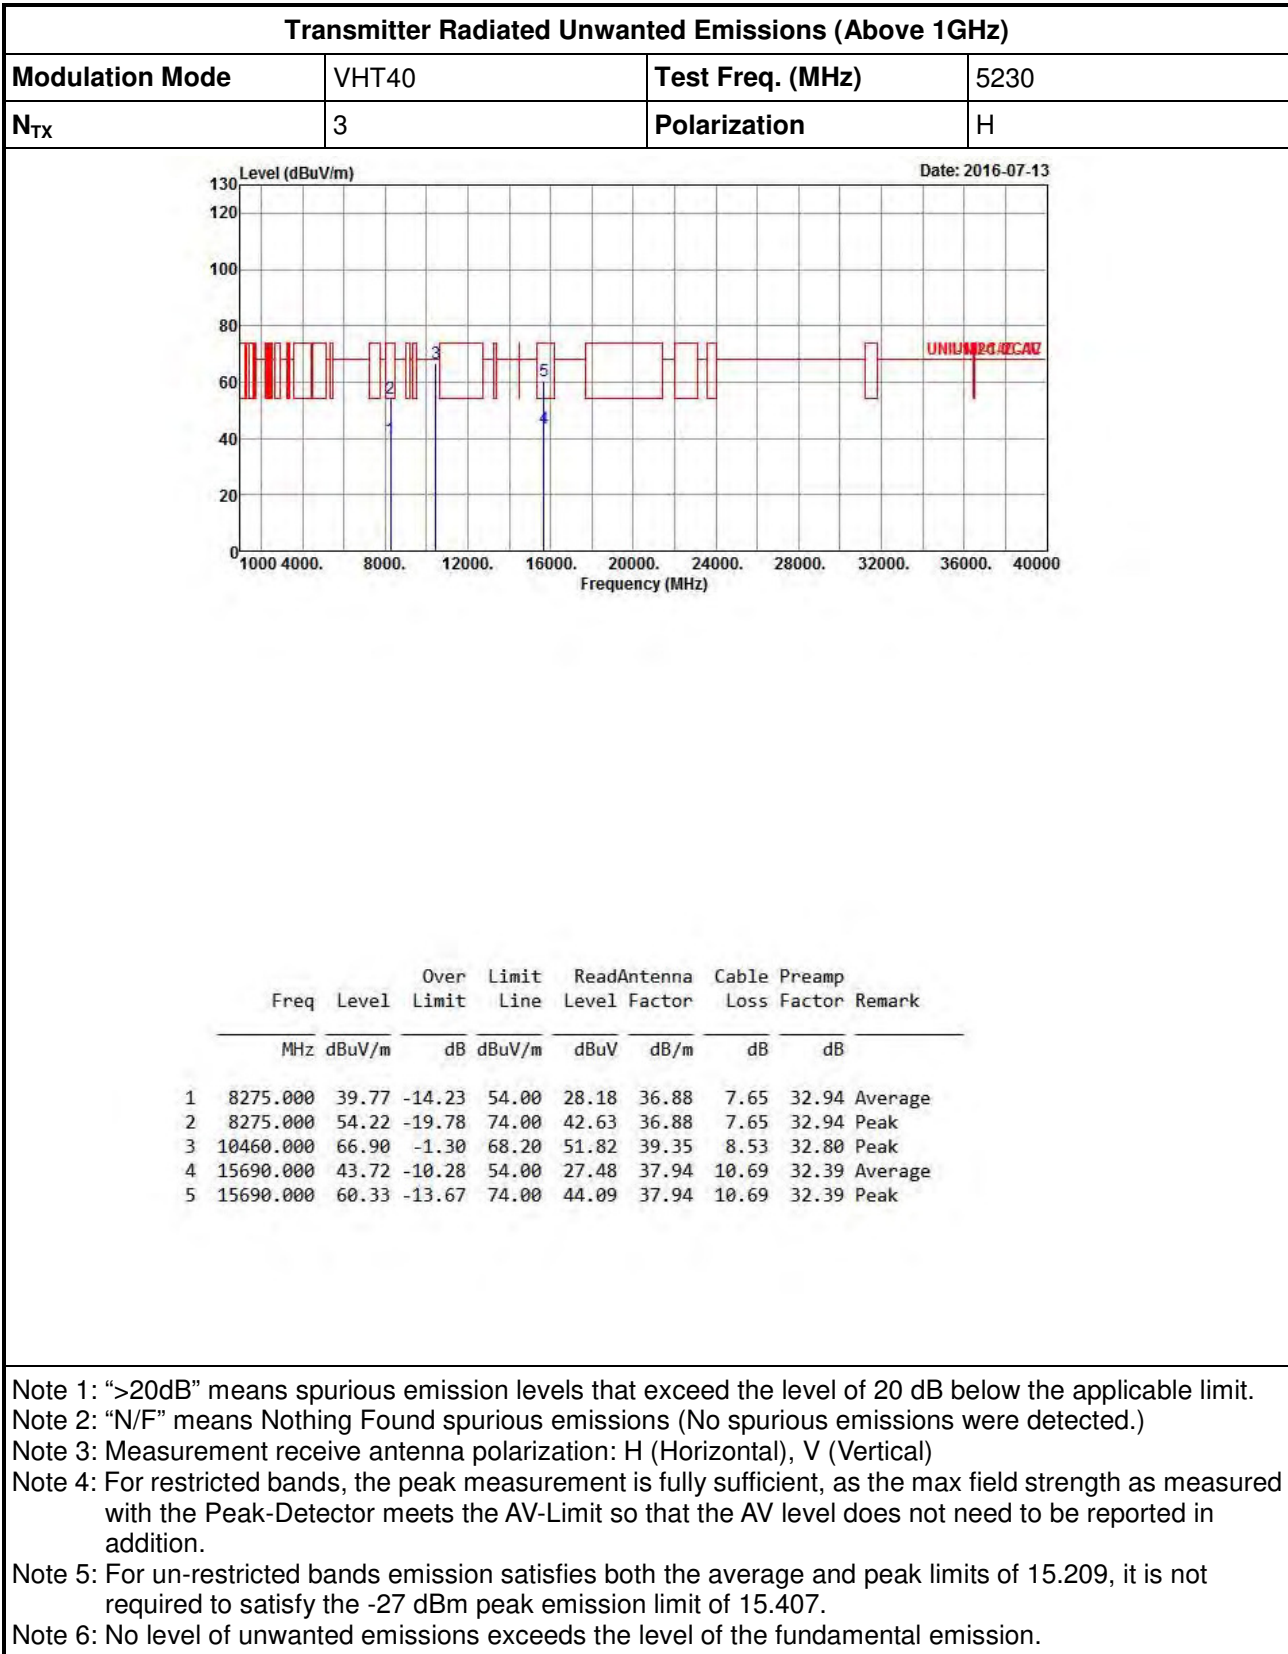

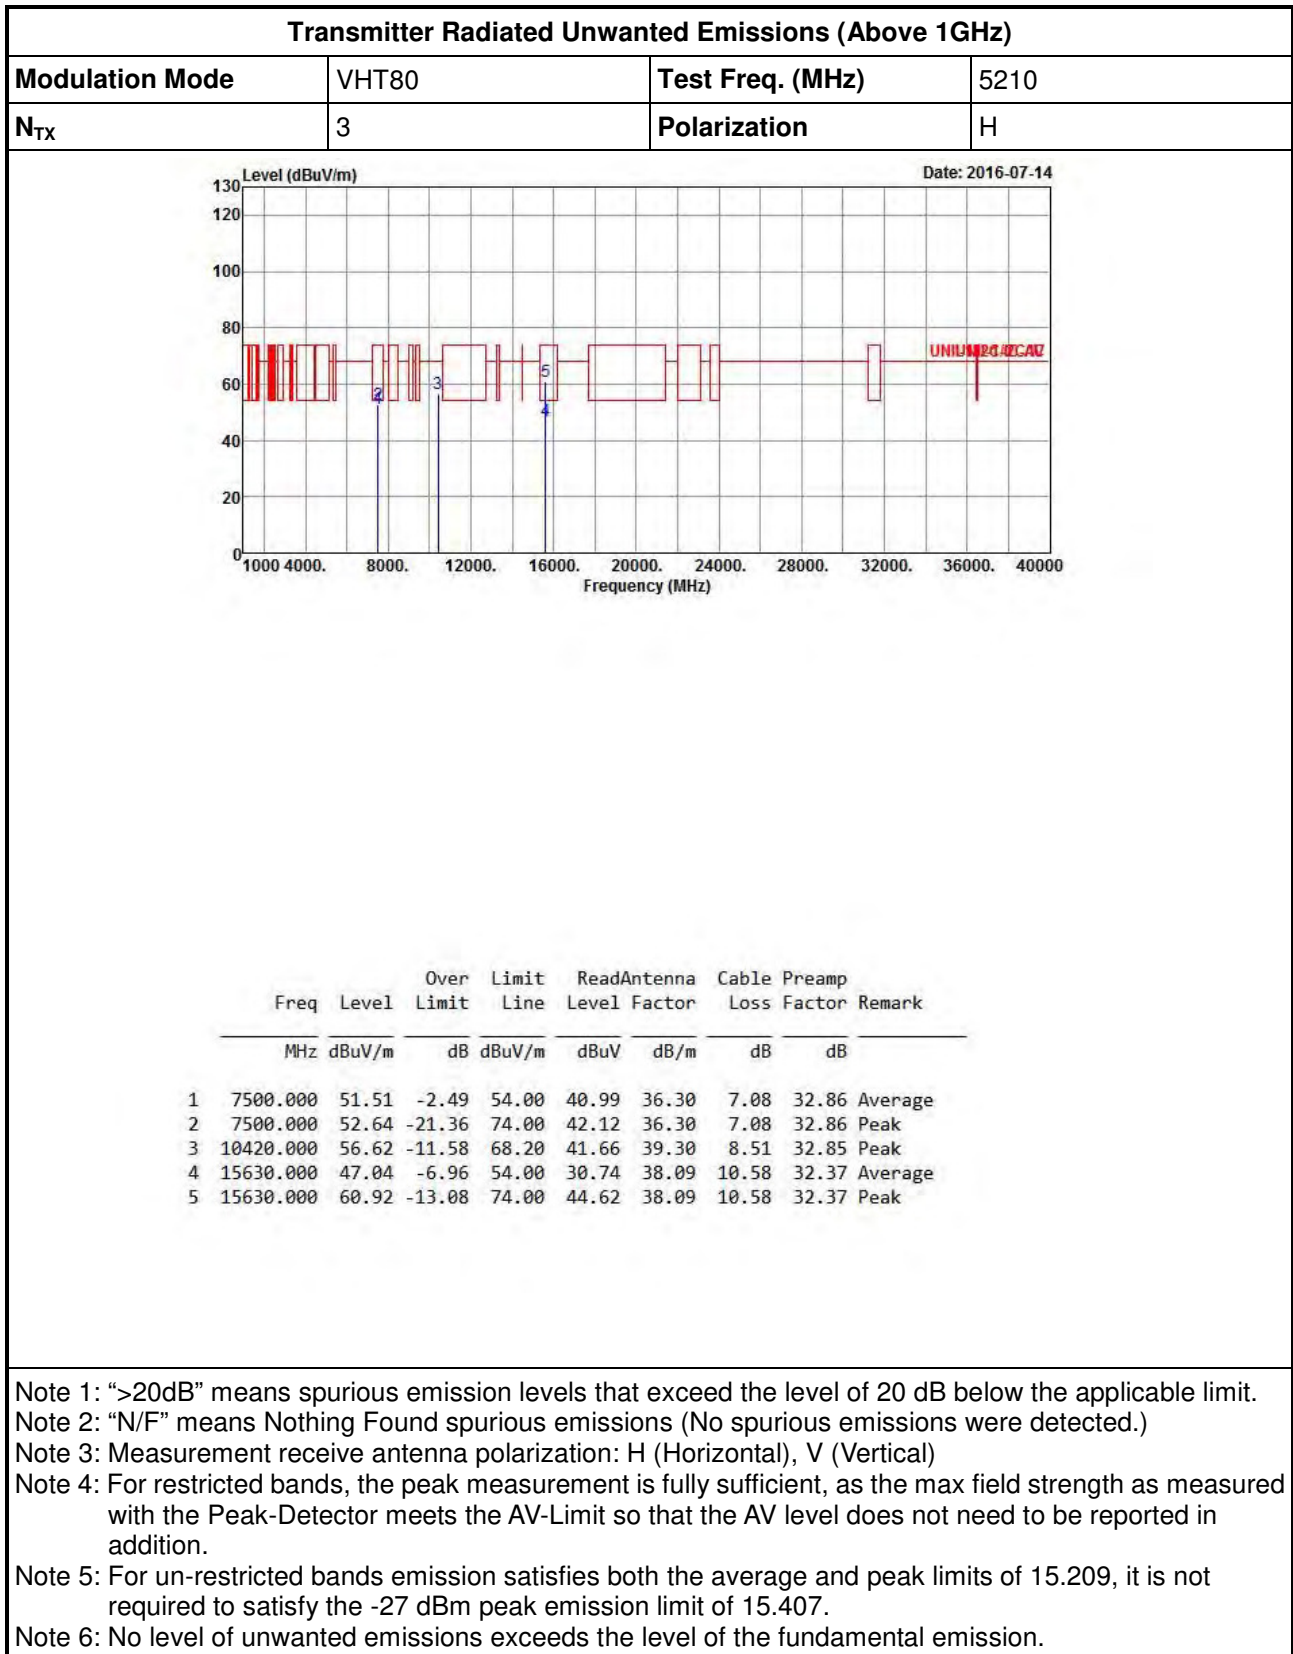


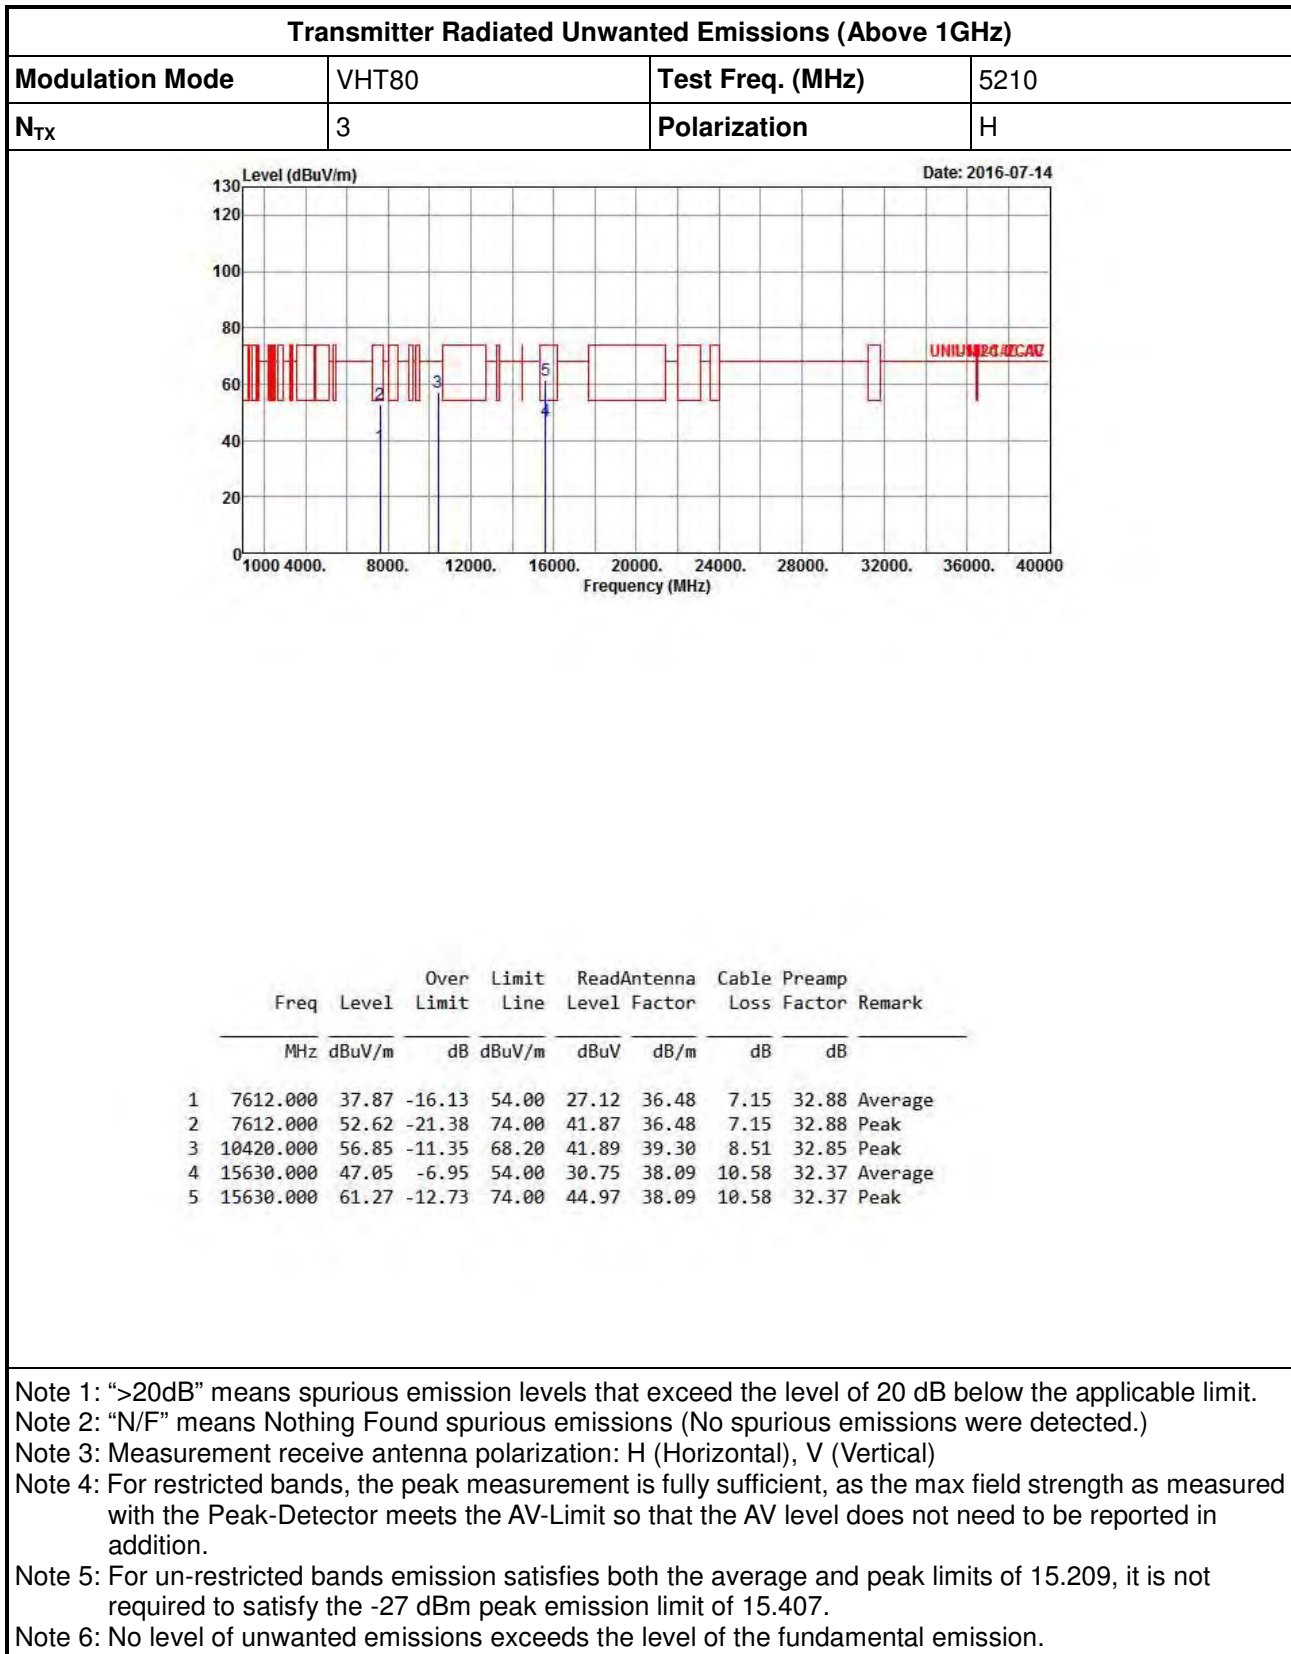



Transmitter Radiated Unwanted Emissions (Above 1GHz) for TxBF 5725-5850MHz

Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	VHT20	Test Freq. (MHz)	5745
N _{TX}	3	Polarization	V

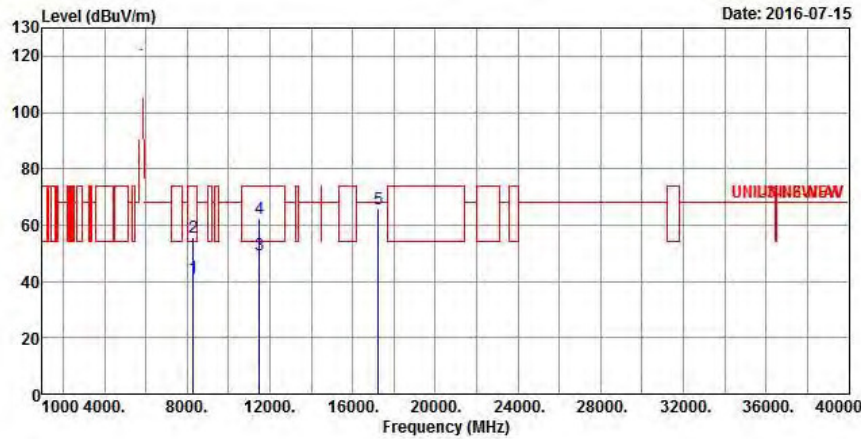


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8304.000	41.27	-12.73	54.00	29.68	36.86	7.67	32.94	Average
2	8304.000	55.42	-18.58	74.00	43.83	36.86	7.67	32.94	Peak
3	11490.000	49.35	-4.65	54.00	33.02	40.00	8.79	32.46	Average
4	11490.000	62.32	-11.68	74.00	45.99	40.00	8.79	32.46	Peak
5	17235.000	65.73	-2.47	68.20	45.42	40.96	10.89	31.54	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
 Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.




Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5745
N _{TX}	3	Polarization	H

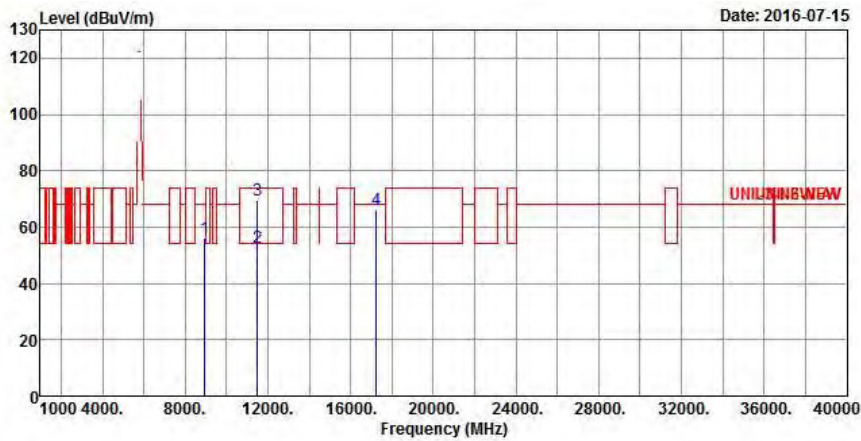

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Gain	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8936.000	56.32	-11.88	68.20	44.19	37.22	7.99	33.08	Peak
2	11490.000	52.73	-1.27	54.00	36.40	40.00	8.79	32.46	Average
3	11490.000	69.52	-4.48	74.00	53.19	40.00	8.79	32.46	Peak
4	17235.000	66.22	-1.98	68.20	45.91	40.96	10.89	31.54	Peak


- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

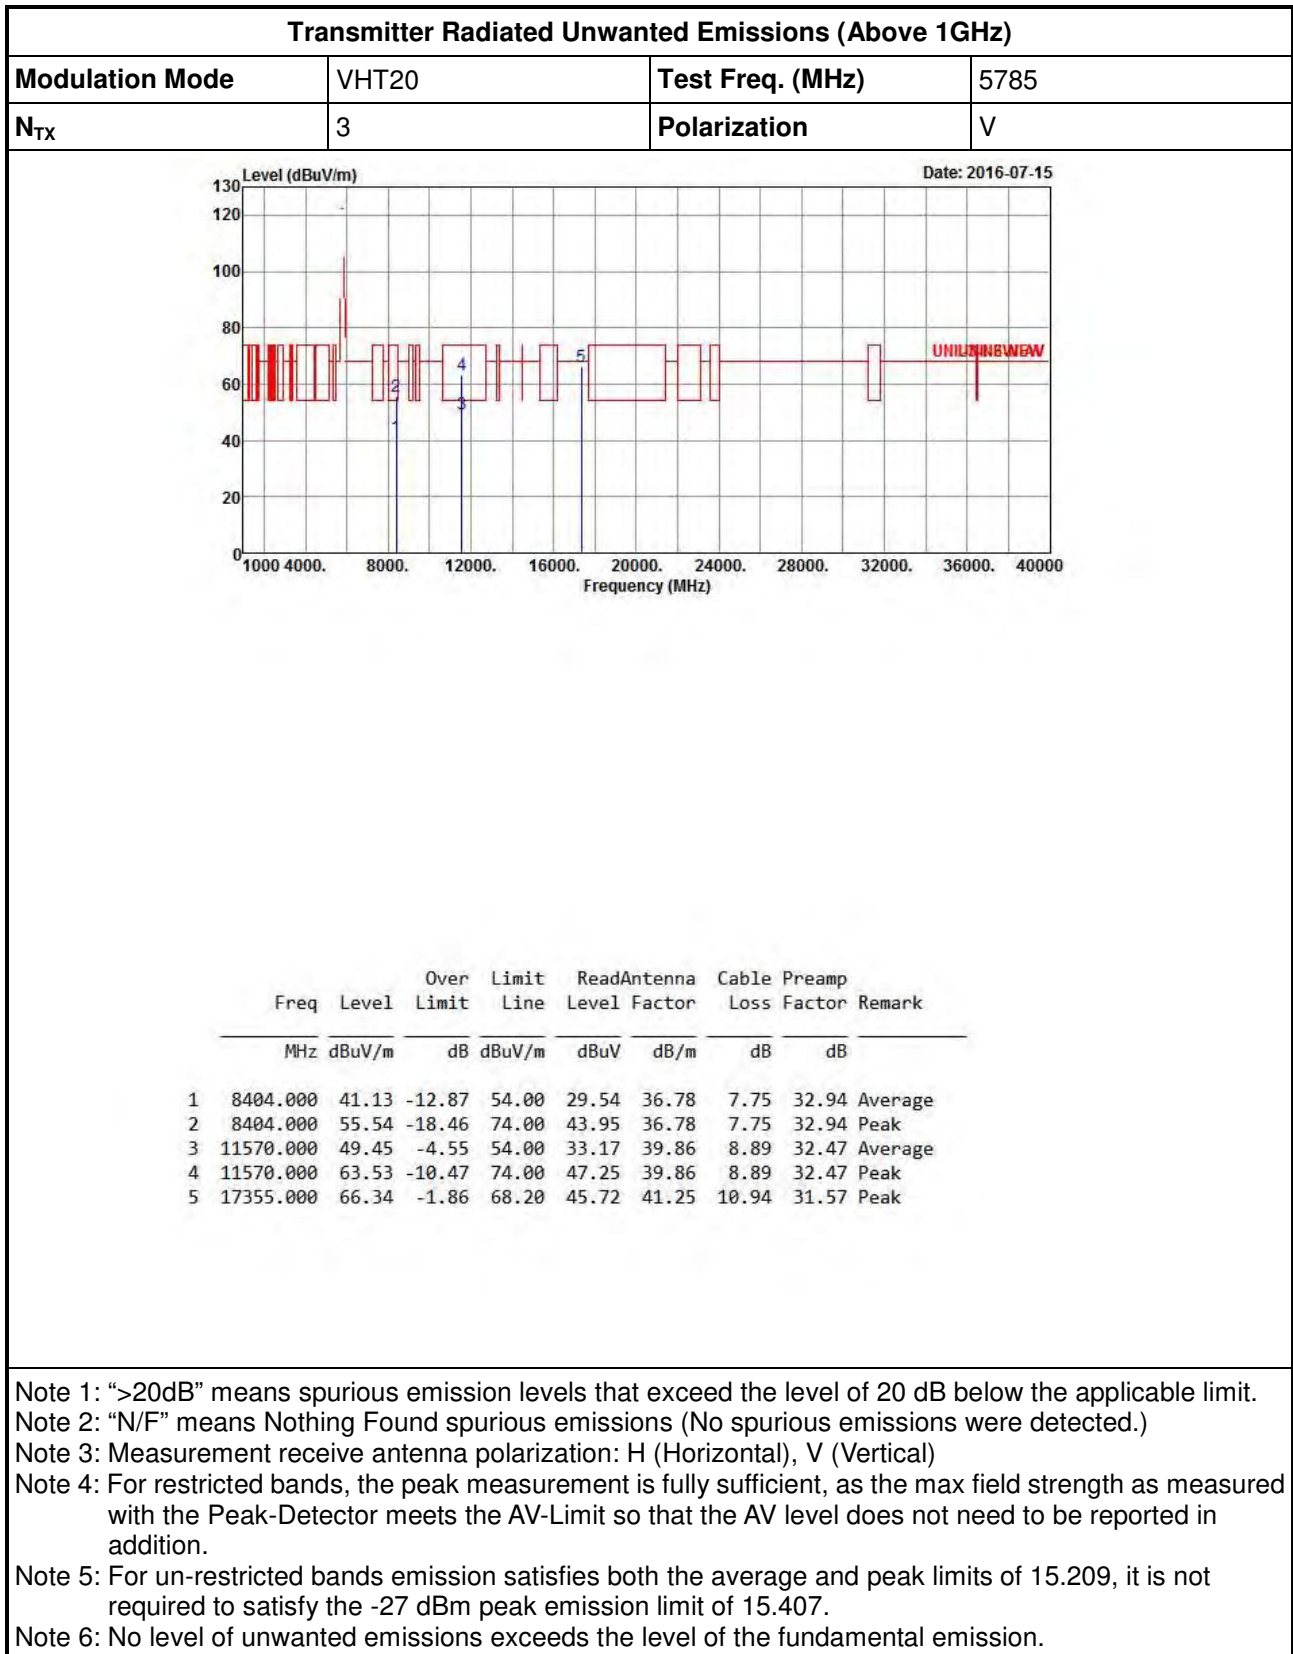



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5785
N _{TX}	3	Polarization	H

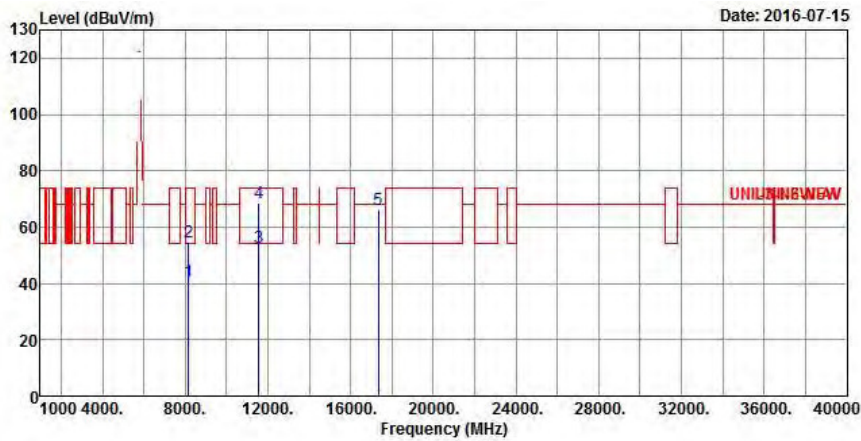


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Gain	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8176.000	40.74	-13.26	54.00	29.16	36.96	7.56	32.94	Average
2	8176.000	54.83	-19.17	74.00	43.25	36.96	7.56	32.94	Peak
3	11570.000	52.96	-1.04	54.00	36.68	39.86	8.89	32.47	Average
4	11570.000	68.59	-5.41	74.00	52.31	39.86	8.89	32.47	Peak
5	17355.000	66.35	-1.85	68.20	45.73	41.25	10.94	31.57	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5825
N _{TX}	3	Polarization	V

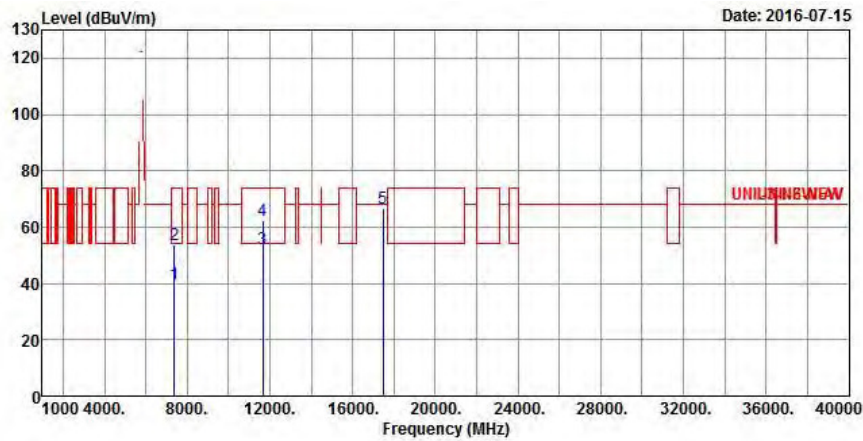


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Gain	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7384.000	39.89	-14.11	54.00	29.68	36.02	7.01	32.82	Average
2	7384.000	53.69	-20.31	74.00	43.48	36.02	7.01	32.82	Peak
3	11650.000	52.50	-1.50	54.00	36.27	39.70	9.01	32.48	Average
4	11650.000	62.25	-11.75	74.00	46.02	39.70	9.01	32.48	Peak
5	17475.000	66.75	-1.45	68.20	45.83	41.54	10.99	31.61	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5825
N _{TX}	3	Polarization	H

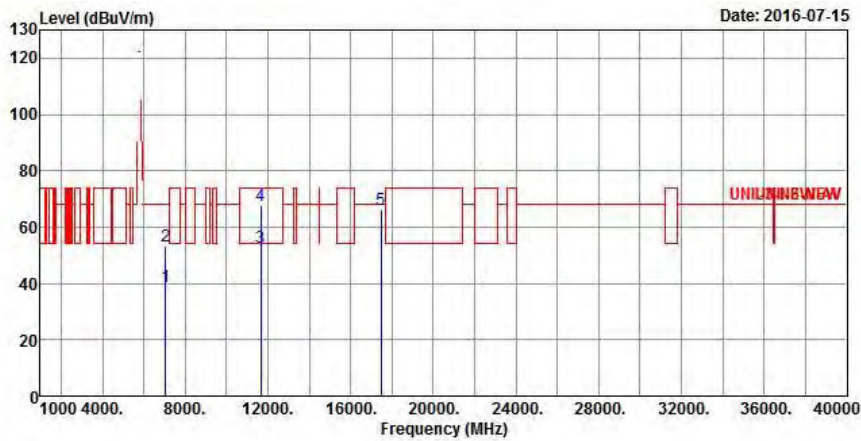


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Gain	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7046.000	38.73	-29.47	68.20	29.12	35.21	7.12	32.72	Average
2	7046.000	53.13	-15.07	68.20	43.52	35.21	7.12	32.72	Peak
3	11650.000	52.75	-1.25	54.00	36.52	39.70	9.01	32.48	Average
4	11650.000	67.81	-6.19	74.00	51.58	39.70	9.01	32.48	Peak
5	17475.000	66.18	-2.02	68.20	45.26	41.54	10.99	31.61	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	VHT40	Test Freq. (MHz)	5755
N _{TX}	3	Polarization	V

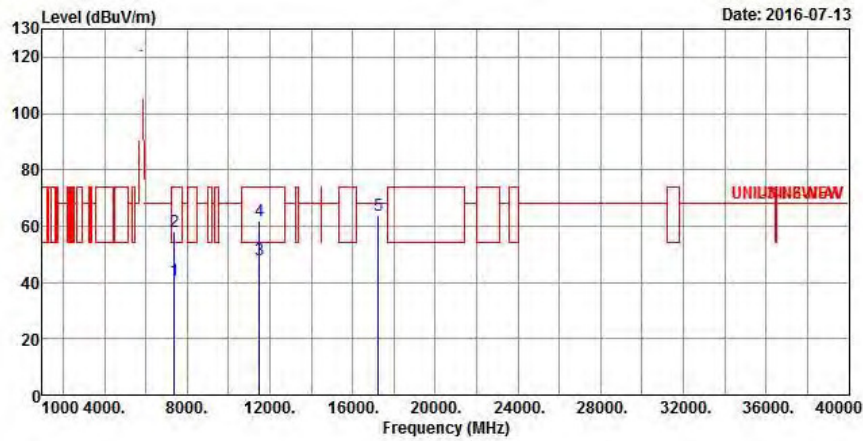


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7384.000	40.55	-13.45	54.00	30.34	36.02	7.01	32.82	Average
2	7384.000	58.11	-15.89	74.00	47.90	36.02	7.01	32.82	Peak
3	11510.000	48.16	-5.84	54.00	31.84	39.98	8.80	32.46	Average
4	11510.000	61.99	-12.01	74.00	45.67	39.98	8.80	32.46	Peak
5	17265.000	63.97	-4.23	68.20	43.58	41.04	10.90	31.55	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.





Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	VHT40	Test Freq. (MHz)	5755
N _{TX}	3	Polarization	H

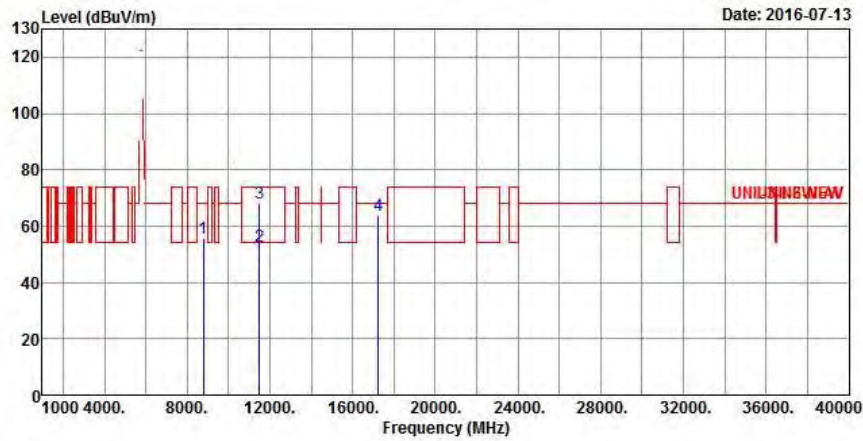



	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8800.000	55.61	-12.59	68.20	43.70	37.06	7.89	33.04	Peak
2	11510.000	52.59	-1.41	54.00	36.27	39.98	8.80	32.46	Average
3	11510.000	68.21	-5.79	74.00	51.89	39.98	8.80	32.46	Peak
4	17265.000	63.91	-4.29	68.20	43.52	41.04	10.90	31.55	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

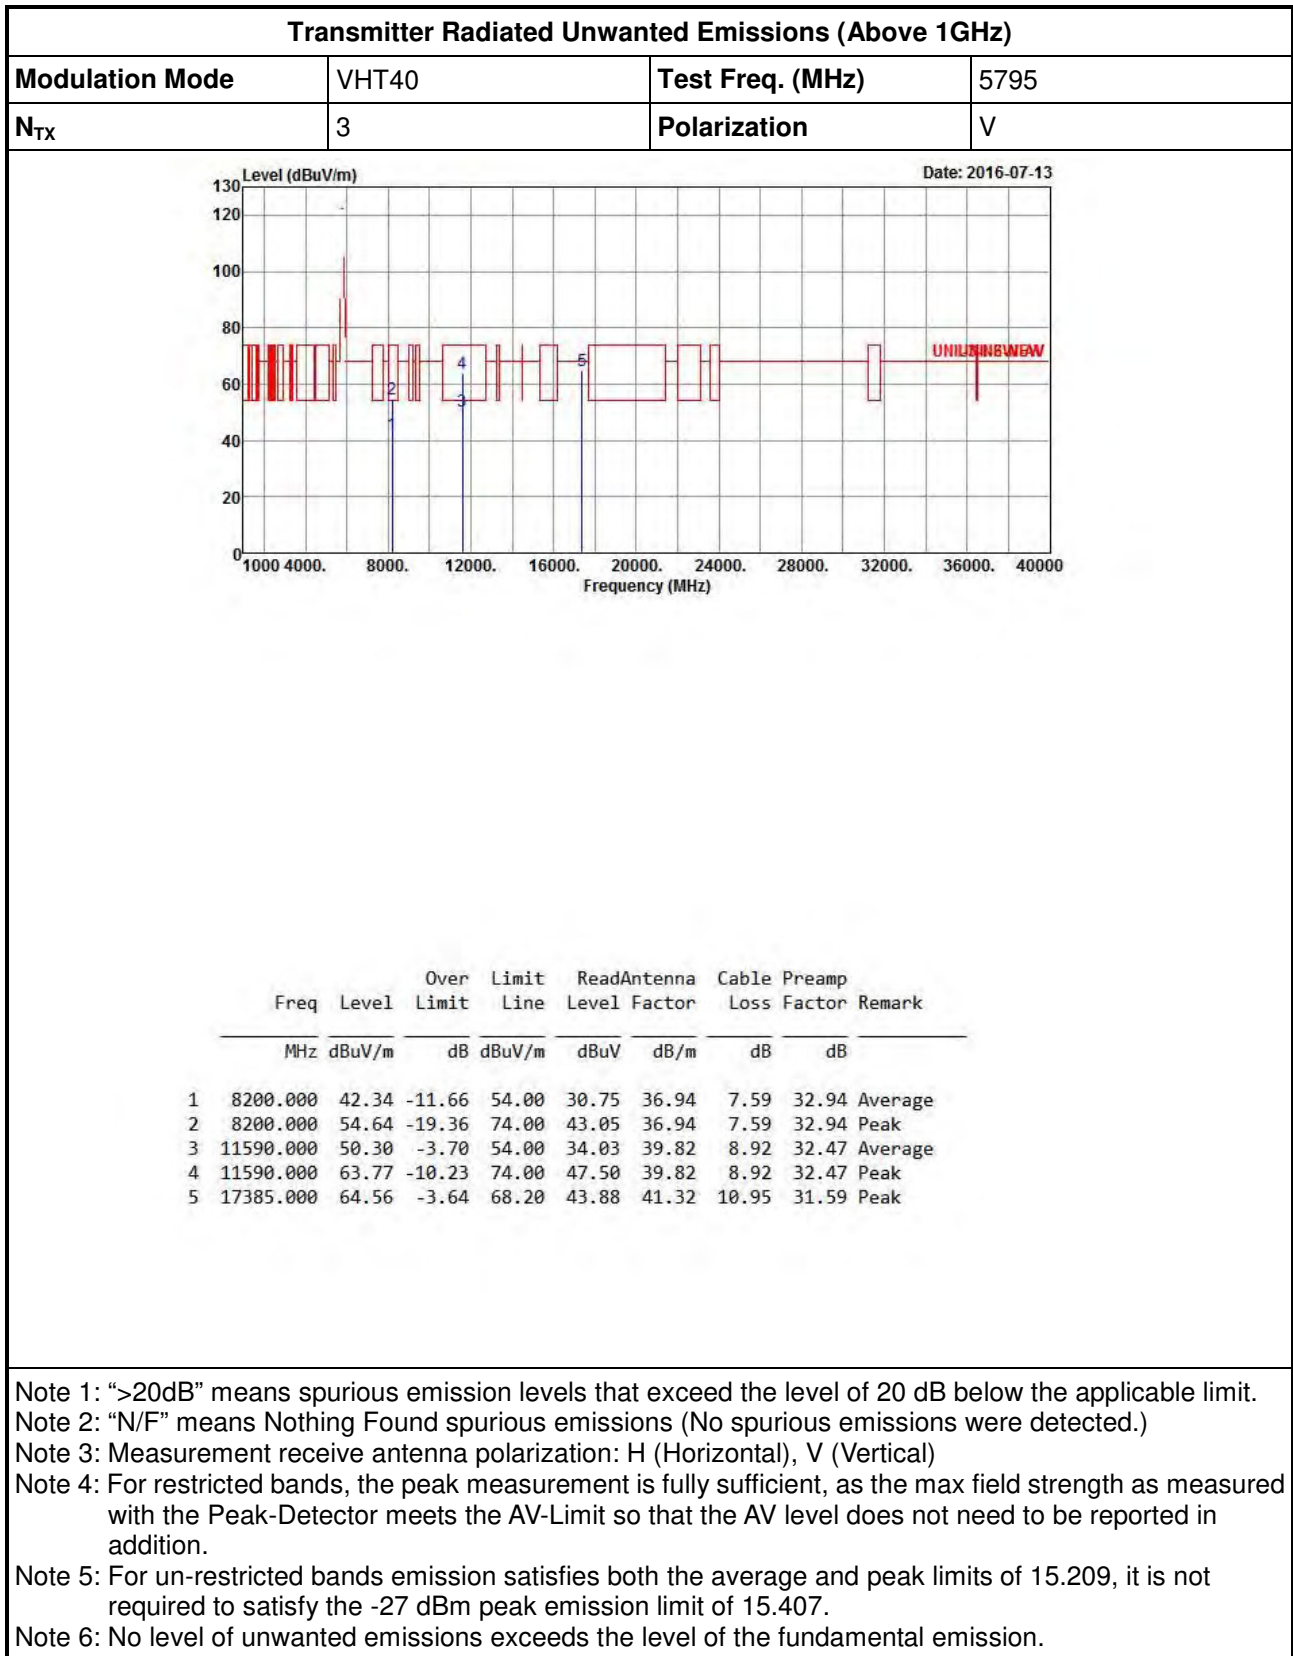

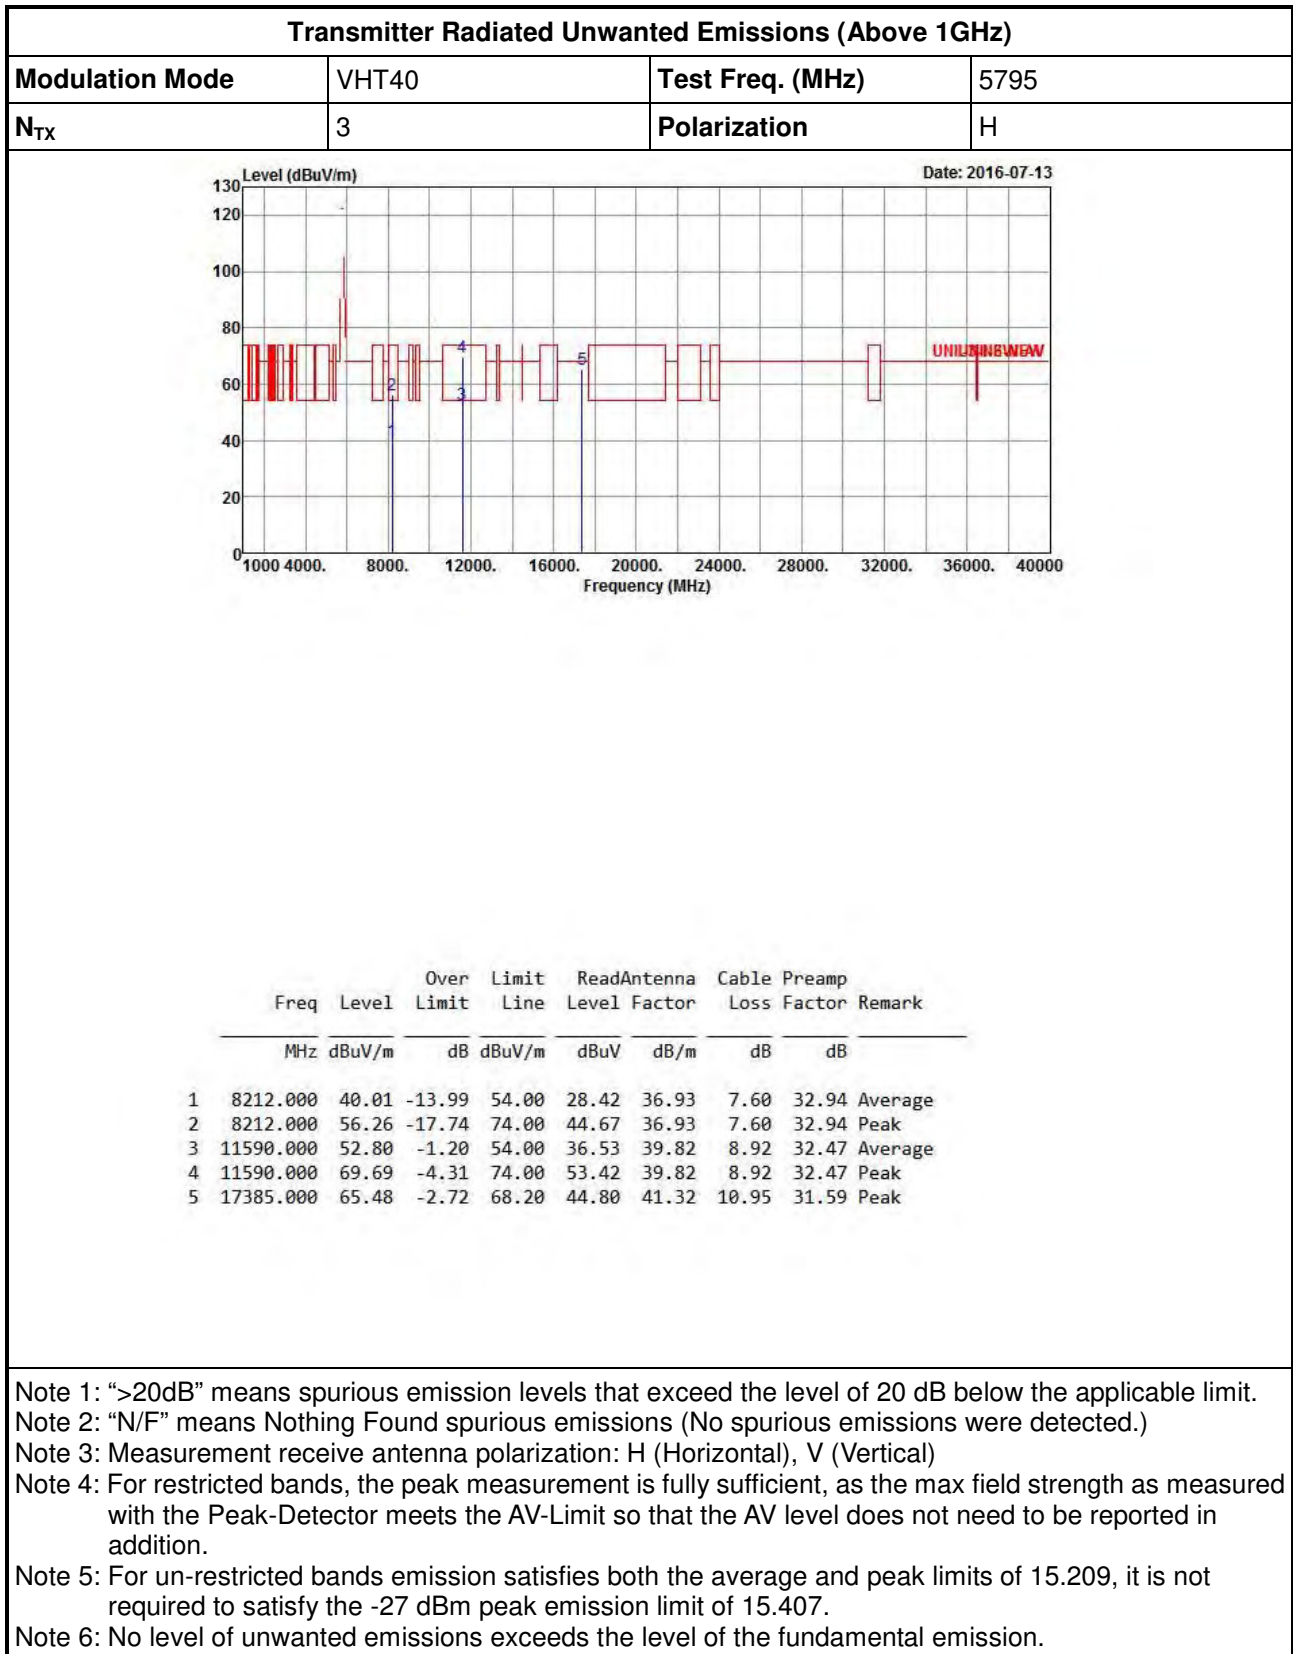

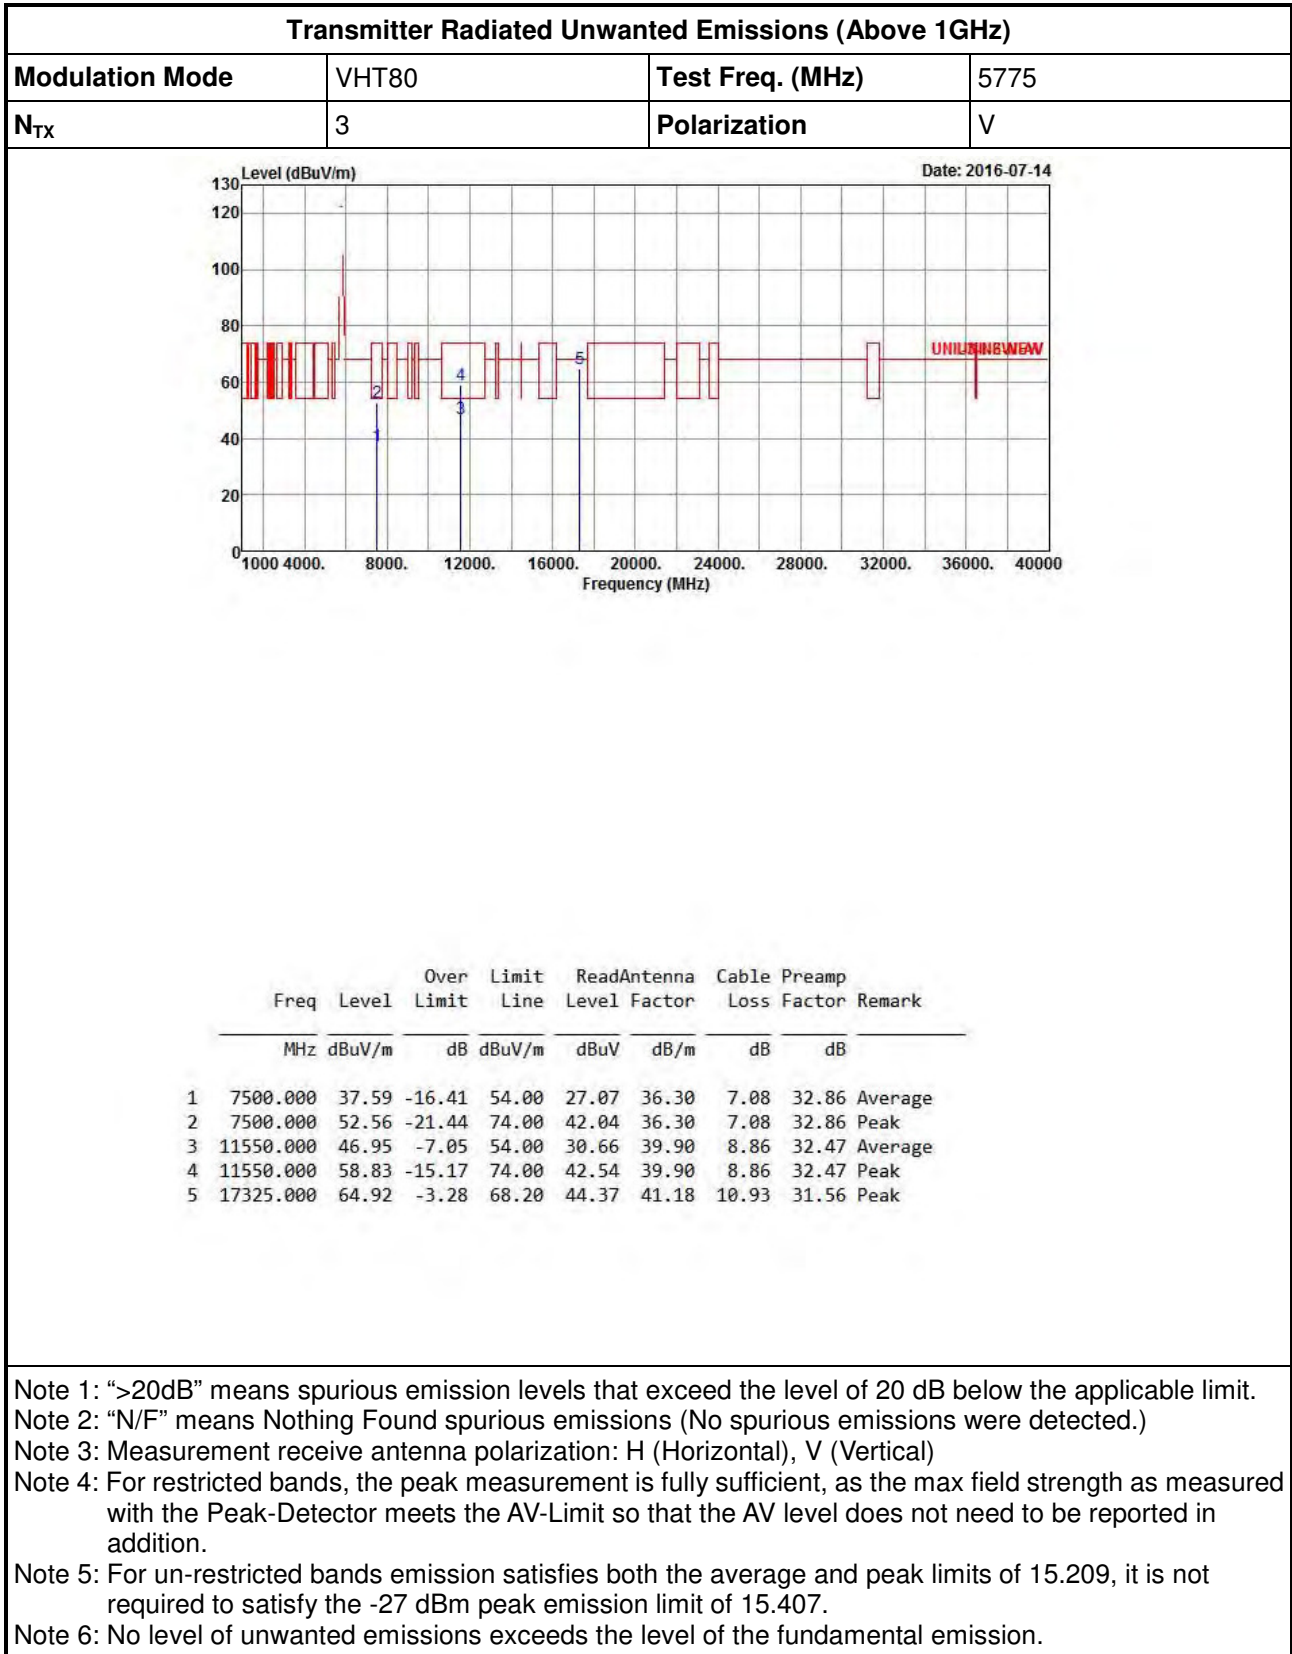

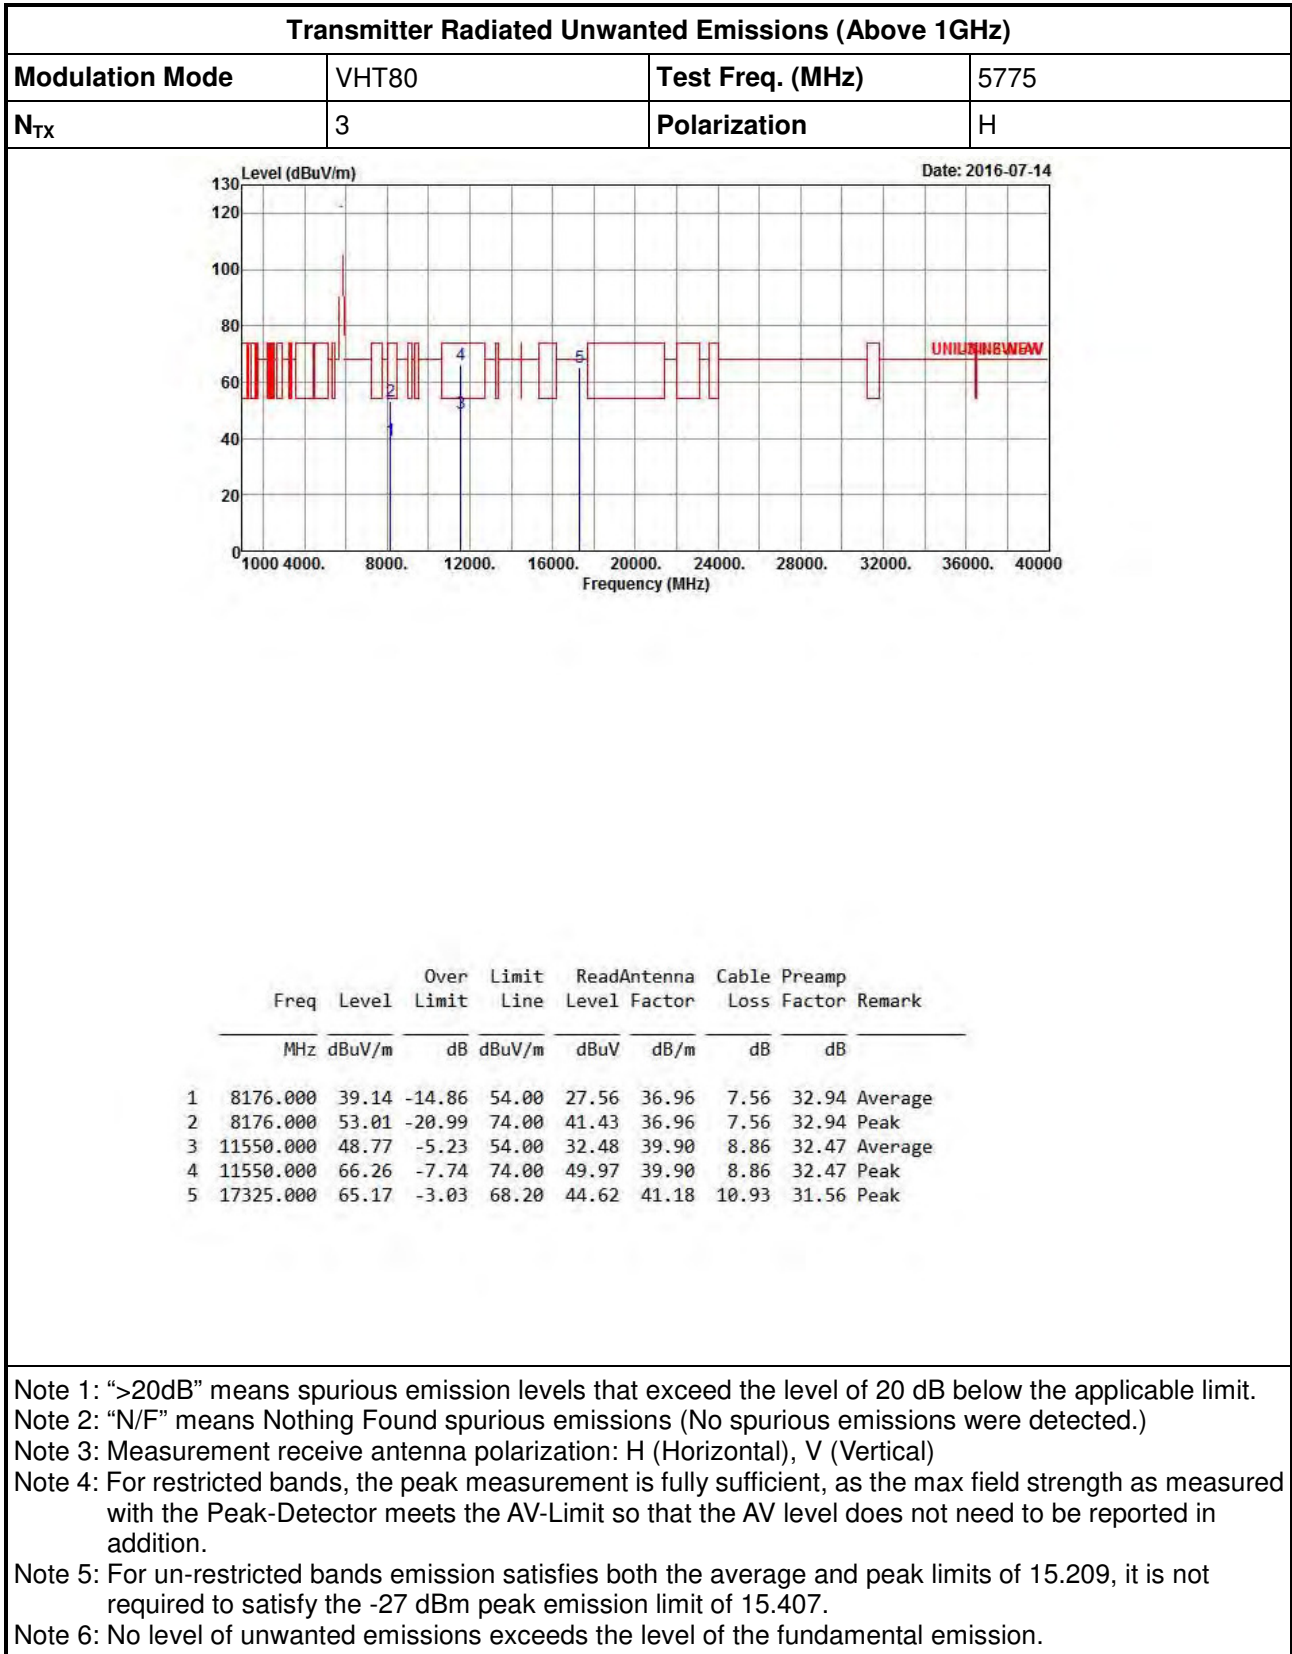



Summary

Mode	Result	Ch (Hz)	Center (Hz)	F1 (Hz)	Fh (Hz)	ppm	Limit (ppm)	Port	Remark
5.2G;11a;20;1;1(1);5200;M;T50,VN	Pass	5.2G	5.20009561G	NaN	NaN	18.386	20	1	2 min



Result

Mode	Result	Ch (Hz)	Center (Hz)	Fl (Hz)	Fh (Hz)	ppm	Limit (ppm)	Port	Remark
5.2G;11a;20;1;1(1);5200;M;TN,VL	Pass	5.2G	5.19996945G	NaN	NaN	5.875	20	1	0 min
5.2G;11a;20;1;1(1);5200;M;TN,VL	Pass	5.2G	5.19996944G	NaN	NaN	5.876	20	1	2 min
5.2G;11a;20;1;1(1);5200;M;TN,VL	Pass	5.2G	5.19996949G	NaN	NaN	5.868	20	1	5 min
5.2G;11a;20;1;1(1);5200;M;TN,VL	Pass	5.2G	5.19996951G	NaN	NaN	5.863	20	1	10 min
5.2G;11a;20;1;1(1);5200;M;TN,VH	Pass	5.2G	5.19997459G	NaN	NaN	4.886	20	1	0 min
5.2G;11a;20;1;1(1);5200;M;TN,VH	Pass	5.2G	5.19997464G	NaN	NaN	4.878	20	1	2 min
5.2G;11a;20;1;1(1);5200;M;TN,VH	Pass	5.2G	5.19997465G	NaN	NaN	4.875	20	1	5 min
5.2G;11a;20;1;1(1);5200;M;TN,VH	Pass	5.2G	5.19997472G	NaN	NaN	4.861	20	1	10 min
5.2G;11a;20;1;1(1);5200;M;T50,VN	Pass	5.2G	5.20009556G	NaN	NaN	18.377	20	1	0 min
5.2G;11a;20;1;1(1);5200;M;T50,VN	Pass	5.2G	5.20009561G	NaN	NaN	18.386	20	1	2 min
5.2G;11a;20;1;1(1);5200;M;T50,VN	Pass	5.2G	5.2000955G	NaN	NaN	18.365	20	1	5 min
5.2G;11a;20;1;1(1);5200;M;T50,VN	Pass	5.2G	5.20009546G	NaN	NaN	18.359	20	1	10 min
5.2G;11a;20;1;1(1);5200;M;T40,VN	Pass	5.2G	5.20003187G	NaN	NaN	6.129	20	1	0 min
5.2G;11a;20;1;1(1);5200;M;T40,VN	Pass	5.2G	5.20003191G	NaN	NaN	6.136	20	1	2 min
5.2G;11a;20;1;1(1);5200;M;T40,VN	Pass	5.2G	5.2000319G	NaN	NaN	6.135	20	1	5 min
5.2G;11a;20;1;1(1);5200;M;T40,VN	Pass	5.2G	5.20003198G	NaN	NaN	6.151	20	1	10 min
5.2G;11a;20;1;1(1);5200;M;T30,VN	Pass	5.2G	5.19998358G	NaN	NaN	3.158	20	1	0 min
5.2G;11a;20;1;1(1);5200;M;T30,VN	Pass	5.2G	5.19998364G	NaN	NaN	3.147	20	1	2 min
5.2G;11a;20;1;1(1);5200;M;T30,VN	Pass	5.2G	5.19998371G	NaN	NaN	3.133	20	1	5 min
5.2G;11a;20;1;1(1);5200;M;T30,VN	Pass	5.2G	5.19998379G	NaN	NaN	3.116	20	1	10 min
5.2G;11a;20;1;1(1);5200;M;T20,VN	Pass	5.2G	5.19997101G	NaN	NaN	5.575	20	1	0 min
5.2G;11a;20;1;1(1);5200;M;T20,VN	Pass	5.2G	5.19997101G	NaN	NaN	5.576	20	1	2 min
5.2G;11a;20;1;1(1);5200;M;T20,VN	Pass	5.2G	5.19997103G	NaN	NaN	5.57	20	1	5 min
5.2G;11a;20;1;1(1);5200;M;T20,VN	Pass	5.2G	5.199971G	NaN	NaN	5.578	20	1	10 min
5.2G;11a;20;1;1(1);5200;M;T10,VN	Pass	5.2G	5.19996467G	NaN	NaN	6.794	20	1	0 min
5.2G;11a;20;1;1(1);5200;M;T10,VN	Pass	5.2G	5.1999647G	NaN	NaN	6.789	20	1	2 min
5.2G;11a;20;1;1(1);5200;M;T10,VN	Pass	5.2G	5.19996468G	NaN	NaN	6.792	20	1	5 min
5.2G;11a;20;1;1(1);5200;M;T10,VN	Pass	5.2G	5.19996467G	NaN	NaN	6.795	20	1	10 min
5.2G;11a;20;1;1(1);5200;M;T0,VN	Pass	5.2G	5.19996639G	NaN	NaN	6.463	20	1	0 min
5.2G;11a;20;1;1(1);5200;M;T0,VN	Pass	5.2G	5.19996635G	NaN	NaN	6.472	20	1	2 min
5.2G;11a;20;1;1(1);5200;M;T0,VN	Pass	5.2G	5.19996643G	NaN	NaN	6.456	20	1	5 min
5.2G;11a;20;1;1(1);5200;M;T0,VN	Pass	5.2G	5.19996644G	NaN	NaN	6.454	20	1	10 min
5.2G;11a;20;1;1(1);5200;M;T-10,VN	Pass	5.2G	5.19996756G	NaN	NaN	6.238	20	1	0 min
5.2G;11a;20;1;1(1);5200;M;T-10,VN	Pass	5.2G	5.19996759G	NaN	NaN	6.233	20	1	2 min
5.2G;11a;20;1;1(1);5200;M;T-10,VN	Pass	5.2G	5.19996758G	NaN	NaN	6.235	20	1	5 min
5.2G;11a;20;1;1(1);5200;M;T-10,VN	Pass	5.2G	5.19996759G	NaN	NaN	6.232	20	1	10 min