



中国认可
国际互认
检测
TESTING
CNAS L2264

EMC TEST REPORT

Applicant ADTRAN, Inc.
FCC ID HDC6304W
Product EPON RG ONU
Model 6304W
Report No. RXA1704-0118EMC
Issue Date June 20, 2017

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC Code CFR47 Part15B (2016)/ ANSI C63.4 (2014)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Wei Liu

Guangchang Fan

Performed by: Wei Liu/ Manager

Approved by: Guangchang Fan/ Director

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



Table of Contents

1	Test Laboratory.....	4
1.1	Notes of the Test Report.....	4
1.2	Test facility.....	4
1.3	Testing Location.....	5
2	General Description of Equipment under Test.....	6
2.1	Client Information.....	6
2.2	General information.....	6
2.3	Applied Standards.....	7
2.4	Test Configuration.....	8
3	Test Case Results.....	9
3.1	Radiated Emission.....	9
3.2	Conducted Emission.....	16
4	Main Test Instrument.....	18
	ANNEX A: The EUT Appearance and Test Configuration.....	19
	A.1 EUT Appearance.....	19
	A.2 Test Setup.....	21
	A.3 Host Product.....	23



Summary of measurement results

Number	Test Case	Clause in FCC Rules	Conclusion
1	Radiated Emission	15.109, ANSI C63.4-2014	PASS
2	Conducted Emission	15.107, ANSI C63.4-2014	PASS
Date of Testing: May 16, 2017~ June 8, 2017			

1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above. This report must not be used by the client to claim product certification, approval, or endorsement any government agencies.

1.2 Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (recognition number is 428261)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2 General Description of Equipment under Test

2.1 Client Information

Applicant	ADTRAN, Inc.
Applicant address	901 Explorer Blvd, Huntsville AL 35806
Agent	ubiQuoss, Inc.
Agent Address	83,Saneop-ro 155beon-gil, Gwonseon-gu, Suwon-si, Gyeonggi-do, Korea,16648
Manufacturer	Shenzhen Gongjin Electronics Co.,Ltd.
Manufacturer address	B116,B118,A211-A213,B201-B213,A311-A313,B411-413,BF08-09 Nanshan Medical Instrument Industry Park,1019# Nanhai Road, Nanshan District, Shenzhen, Guangdong, 518067, P.R.China

2.2 General information

EUT Description	
Device Type:	Portable Device
Product Name:	EPON RG ONU
Model Number:	6304W
HW Version:	V01
SW Version:	V1.4
Tested Device Code:	0118S01
Antenna Type:	Internal Antenna
Used Host Product:	PC Manufacturer: lenovo Model: Thinkpad T540p (SN : SL10E37685)
Telephone	Manufacturer :TCL Model:HCD868(79)TSD
Test Mode:	Transfer Data Mode
EUT Accessory	
Charger	Manufacturer: Shenzhen Gongjin Electronics Co.,Ltd. Model: S24B72-120A200-C4
Remark: The information of the EUT is declared by the manufacturer. Please refer to the specifications or user manual for details.	



2.3 Applied Standards


According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

FCC Code CFR47 Part15B (2016)

ANSI C63.4 (2014)

2.4 Test Configuration

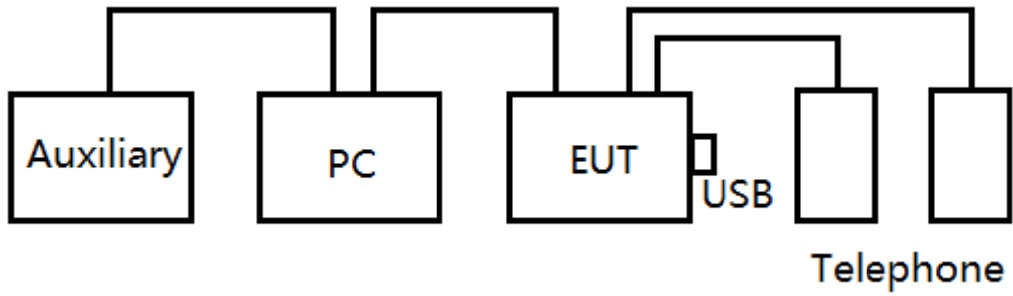

3 Test Case Results

3.1 Radiated Emission

Ambient condition

Temperature	Relative humidity	Pressure
24°C~26°C	45%~50%	102.5kPa

Methods of Measurement

The EUT is placed on a non-metallic table 0.8m above the horizontal metal reference ground plane. The distance between EUT and receive antenna should be 3 meters. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated signal level.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. During the test, the EUT is worked at maximum output power.

Set the spectrum analyzer in the following:

Below 1GHz:

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO


(b) AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.


During the test, EUT is connected to a laptop via a USB cable in the case of Transfer Data mode. The EUT is used as the peripheral equipment of the PC and telephone. The data is transferred from EUT to PC; PC is connected to server via a long LAN cable.

Test Setup

Below 1GHz

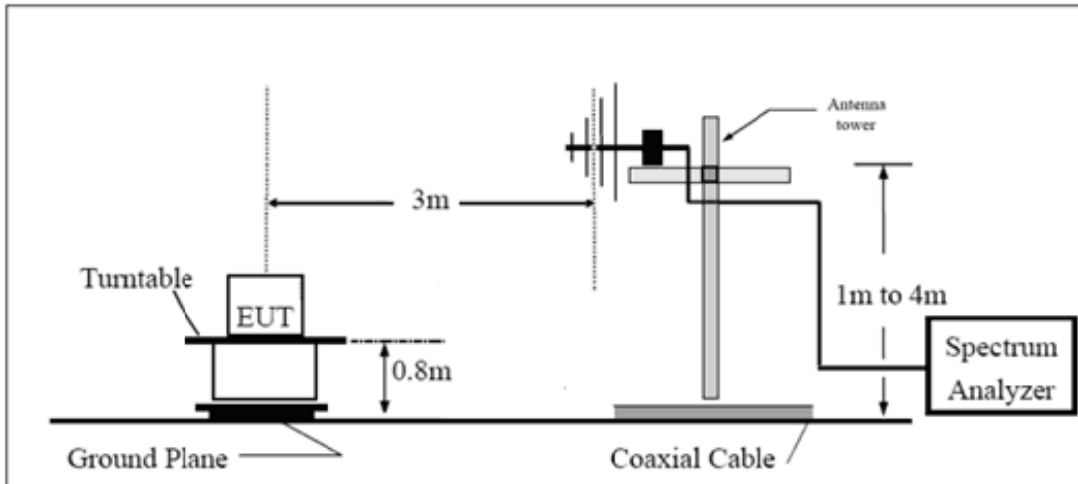

Above 1GHz

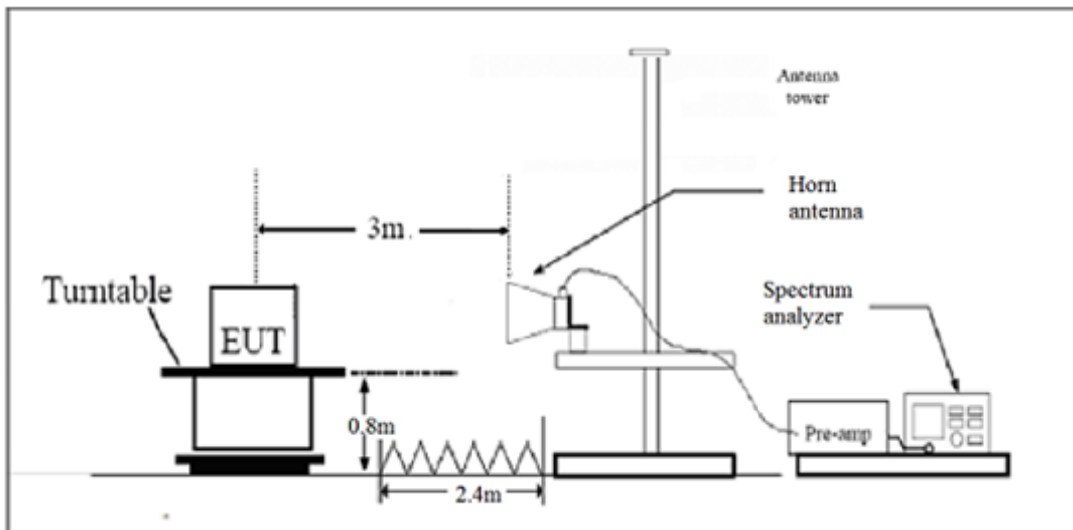

Note: Area side:2.4mX3.6m

Antenna Tower meets ANSI C63.4 requirements for measurements above 1 GHz by keeping the antenna aimed at the EUT during the antenna's ascent/ descent along the antenna mast.

**Limits**


Frequency (MHz)	Field Strength (dB μ V/m)	Detector
30 -88	40.0	Quasi-peak
88-216	43.5	Quasi-peak
216 – 960	46.0	Quasi-peak
960-1000	54.0	Quasi-peak
1000-5 th harmonic of the highest frequency or 40GHz, which is lower	54 74	Average Peak

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$. $U = 3.92$ dB.

Test Results

The following graphs display the maximum values of horizontal and vertical by software.
 For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

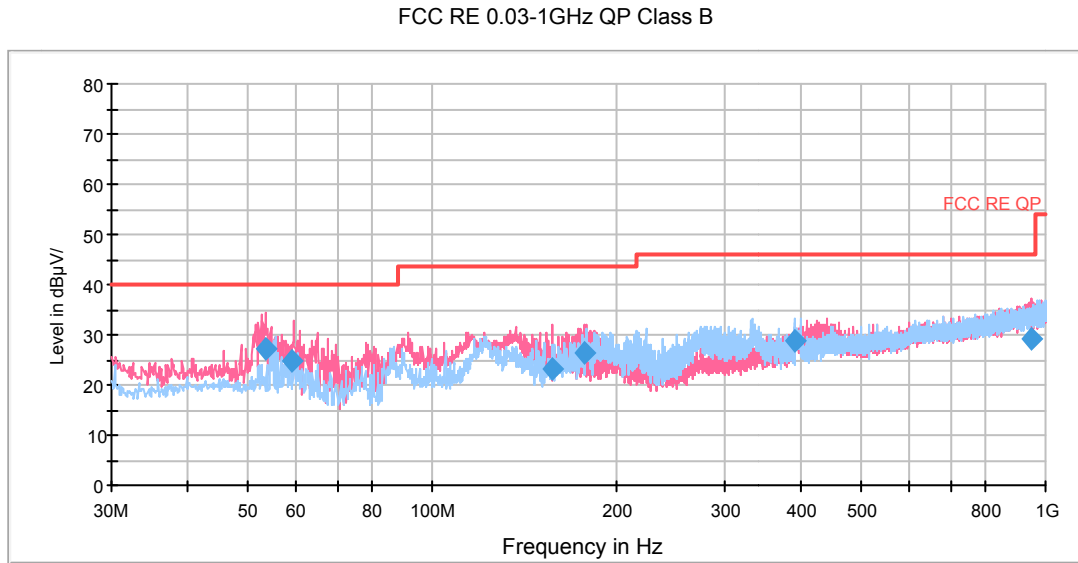


Radiated Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Reading value (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
53.522500	27.1	42.9	100.0	V	276.0	15.8	12.9	40.0
58.863750	24.7	40.4	125.0	V	290.0	15.7	15.3	40.0
157.151250	23.0	35.7	100.0	V	353.0	12.7	20.5	43.5
177.641250	26.4	40.3	100.0	V	187.0	13.9	17.1	43.5
390.637500	28.7	49.7	217.0	H	0.0	21.0	17.3	46.0
951.055000	29.0	59.3	113.0	V	175.0	30.3	17.0	46.0

- Remark:**
1. Quasi-Peak = Reading value + Correction factor
 2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)
 3. Margin = Limit – Quasi-Peak

RE 1G-3GHz PK+AV

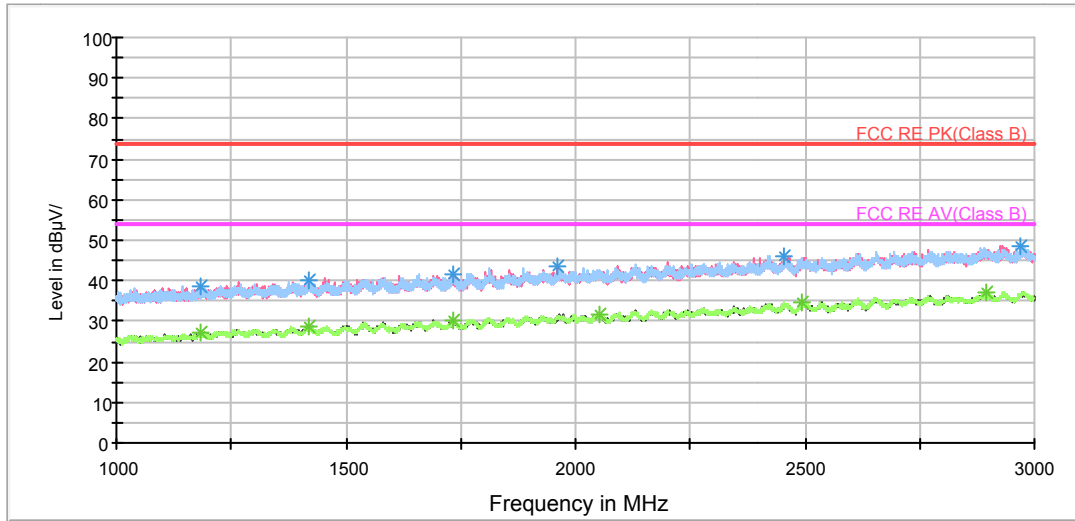


Radiated Emission from 1GHz to 3GHz

Frequency (MHz)	Peak (dBuV/m)	Reading value (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1182.750000	38.8	46.8	210.0	V	0.0	-8.0	35.2	74
1419.000000	39.9	46.8	210.0	V	249.0	-6.9	34.1	74
1731.500000	41.6	46.4	110.0	H	122.0	-4.8	32.4	74
1961.750000	43.3	46.5	110.0	V	106.0	-3.2	30.7	74
2455.500000	46.0	46.5	210.0	H	334.0	-0.5	28.0	74
2970.000000	48.5	46.3	110.0	H	142.0	2.2	25.5	74

Frequency (MHz)	Average (dBuV/m)	Reading value (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1184.750000	27.2	35.3	110.0	V	342.0	-8.1	26.8	54
1420.000000	28.8	35.7	110.0	V	204.0	-6.9	25.2	54
1731.500000	30.4	35.2	110.0	H	122.0	-4.8	23.6	54
2052.000000	31.8	35.0	210.0	H	334.0	-3.2	22.2	54
2495.000000	34.5	34.4	210.0	H	0.0	0.1	19.5	54
2894.750000	37.1	35.0	110.0	V	277.0	2.1	16.9	54

RE 3-18GHz PK+AV

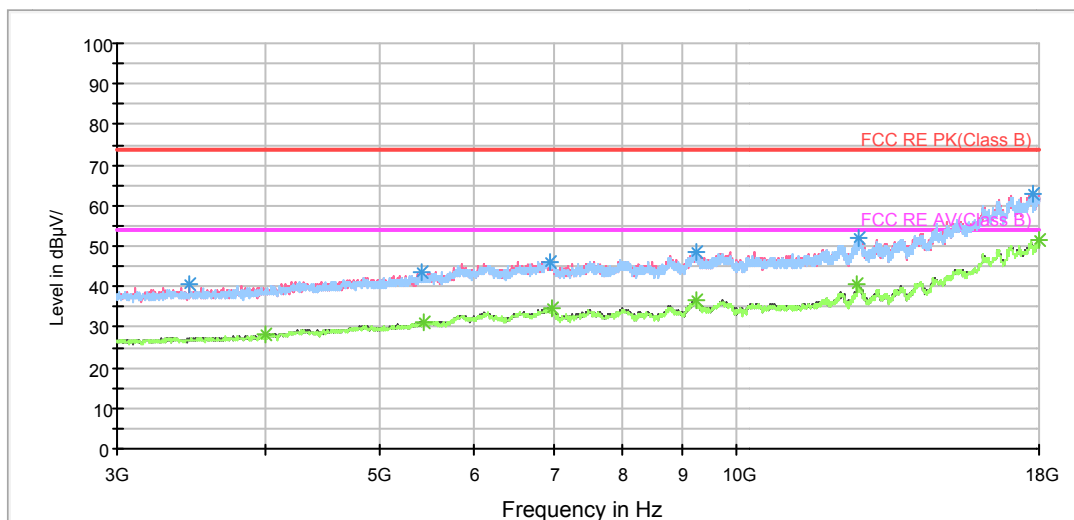


Radiated Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Reading value (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3453.750000	40.4	42.6	210.0	V	109.0	-2.2	33.6	74
5416.875000	43.4	40.7	210.0	V	19.0	2.7	30.6	74
6956.250000	46.2	40.0	110.0	V	184.0	6.2	27.8	74
9240.000000	48.7	38.8	210.0	H	251.0	9.9	25.3	74
12676.875000	52.0	37.8	110.0	H	240.0	14.2	22.0	74
17761.875000	62.9	38.6	110.0	H	0.0	24.3	11.1	74

Frequency (MHz)	Average (dBuV/m)	Reading value (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3997.500000	28.0	29.1	210.0	H	251.0	-1.1	26.0	54
5433.750000	31.2	28.4	110.0	V	0.0	2.8	22.8	54
6993.750000	34.6	28.1	210.0	H	251.0	6.5	19.4	54
9238.125000	36.5	26.6	110.0	V	138.0	9.9	17.5	54
12641.250000	40.6	26.1	210.0	V	0.0	14.5	13.4	54
18000.000000	51.3	25.8	210.0	V	156.0	25.5	2.7	54

BELL_RE 18-26.5GHz PK+AV

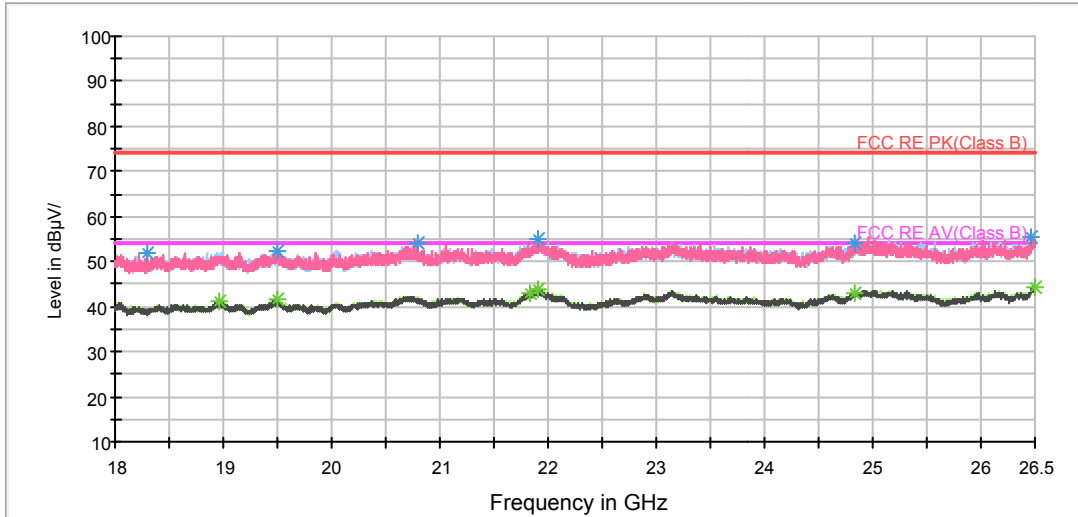

Radiated Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Reading value (dBuV/m)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18297.500000	52.1	51.2	V	87.0	0.9	21.9	74
19496.000000	52.5	52.4	V	106.0	0.1	21.5	74
20799.687500	54.3	56.2	V	46.0	-1.9	19.7	74
21907.875000	55.1	56.6	H	174.0	-1.5	18.9	74
24825.500000	54.0	53.8	V	115.0	0.2	20.0	74
26463.875000	55.6	54.5	H	225.0	1.1	18.4	74

Frequency (MHz)	Average (dBuV/m)	Reading value (dBuV/m)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18965.812500	41.0	41.1	V	87.0	-0.1	13.0	54
19500.250000	41.8	41.7	V	96.0	0.1	12.2	54
21837.750000	42.8	44.7	H	217.0	-1.9	11.2	54
21900.437500	43.9	45.5	H	225.0	-1.6	10.1	54
24837.187500	43.0	42.7	H	225.0	0.3	11.0	54
26492.562500	44.5	43.4	V	149.0	1.1	9.5	54

3.2 Conducted Emission

Ambient condition


Temperature	Relative humidity	Pressure
24°C ~26°C	50%~55%	102.5kPa

Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

During the test, EUT is connected to a laptop via a USB cable in the case of Transfer Data mode. The EUT is used as the peripheral equipment of the PC and telephone. The data is transferred from EUT to PC; PC is connected to server via a long LAN cable.

Test Setup

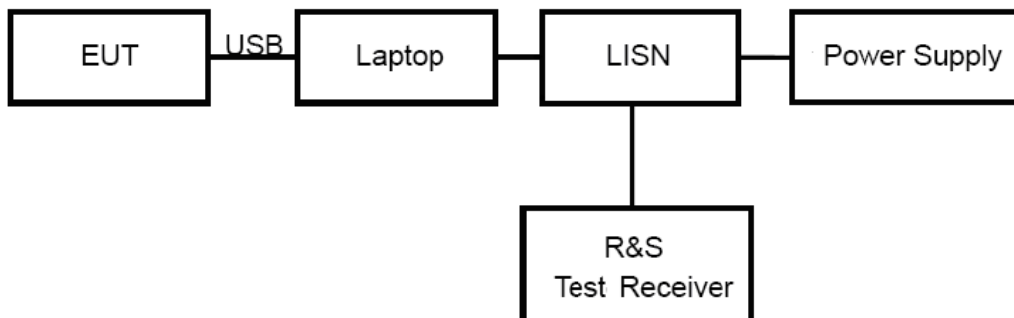

Note: Power Supply is AC Power source and it is used to change the voltage 120V/60Hz.

Limits

Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50


*: Decreases with the logarithm of the frequency.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$. $U = 2.69$ dB.

Test Results

Following plots, Blue trace uses the peak detection; Green trace uses the average detection.

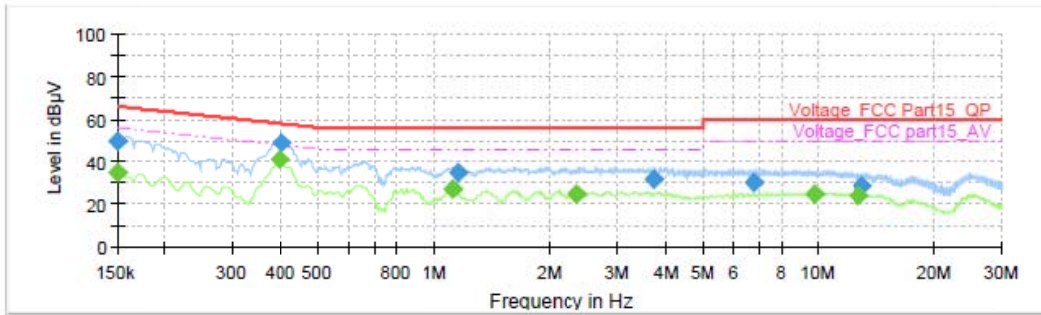


Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.150000	---	35.25	56.00	20.75	1000.0	9.000	L1	ON	19.1
0.150000	49.74	---	66.00	16.26	1000.0	9.000	L1	ON	19.1
0.395250	---	40.80	47.95	7.16	1000.0	9.000	L1	ON	19.2
0.399750	48.94	---	57.86	8.92	1000.0	9.000	L1	ON	19.2
1.119750	---	26.82	46.00	19.18	1000.0	9.000	L1	ON	19.2
1.153500	34.76	---	56.00	21.24	1000.0	9.000	L1	ON	19.2
2.361750	---	24.89	46.00	21.11	1000.0	9.000	L1	ON	19.0
3.738750	31.71	---	56.00	24.29	1000.0	9.000	L1	ON	19.1
6.780750	30.05	---	60.00	29.95	1000.0	9.000	L1	ON	19.1
9.730500	---	24.94	50.00	25.06	1000.0	9.000	L1	ON	19.4
12.696000	---	24.28	50.00	25.72	1000.0	9.000	L1	ON	19.5
12.943500	28.72	---	60.00	31.28	1000.0	9.000	L1	ON	19.5

L line

Conducted Emission from 150 KHz to 30 MHz

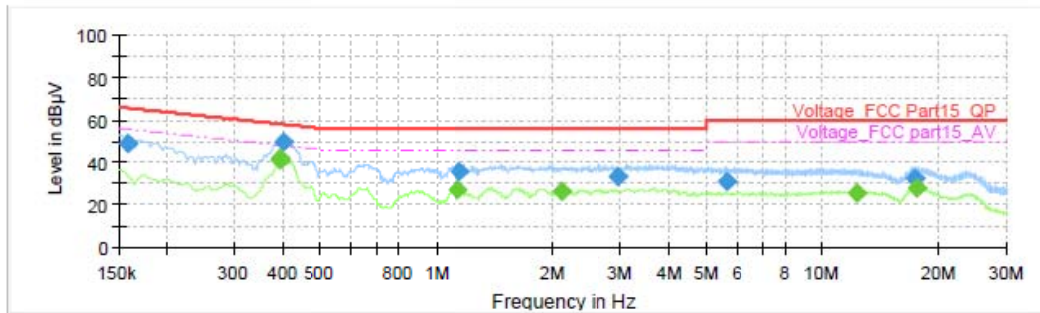

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.159000	49.07	---	65.52	16.45	1000.0	9.000	N	ON	19.1
0.390750	---	41.19	48.05	6.86	1000.0	9.000	N	ON	19.2
0.393000	---	41.65	48.00	6.35	1000.0	9.000	N	ON	19.2
0.399750	49.81	---	57.86	8.05	1000.0	9.000	N	ON	19.2
1.137750	---	27.51	46.00	18.49	1000.0	9.000	N	ON	19.2
1.149000	35.47	---	56.00	20.53	1000.0	9.000	N	ON	19.2
2.118750	---	26.50	46.00	19.50	1000.0	9.000	N	ON	19.1
2.944500	33.18	---	56.00	22.82	1000.0	9.000	N	ON	19.1
5.649000	31.24	---	60.00	28.76	1000.0	9.000	N	ON	19.1
12.230250	---	25.87	50.00	24.13	1000.0	9.000	N	ON	19.4
17.396250	32.55	---	60.00	27.45	1000.0	9.000	N	ON	19.5
17.497500	---	27.76	50.00	22.24	1000.0	9.000	N	ON	19.5

N line


Conducted Emission from 150 KHz to 30 MHz

4 Main Test Instrument

Name	Type	Manufacturer	Serial Number	Last Cal.	Cal. Due Date
Signal Analyzer	FSV30	R&S	100815	2016-12-16	2017-12-15
EMI Test Receiver	ESCI	R&S	100948	2017-05-20	2018-05-19
Loop Antenna	FMZB1519	SCHWARZBECK	1519-047	2017-02-18	2019-02-17
Trilog Antenna	VULB 9163	SCHWARZBECK	9163-201	2014-12-06	2017-12-05
Horn Antenna	HF907	R&S	100126	2014-12-06	2017-12-05
Horn Antenna	3160-09	ETS-Lindgren	00102643	2015-01-30	2018-01-29
EMI Test Receiver	ESCS30	R&S	100138	2016-12-16	2017-12-15
LISN	ENV216	R&S	101171	2016-12-16	2019-12-15
Bore Sight Antenna mast	2171B	ETS	00058752	NA	NA

ANNEX A: The EUT Appearance and Test Configuration

A.1 EUT Appearance

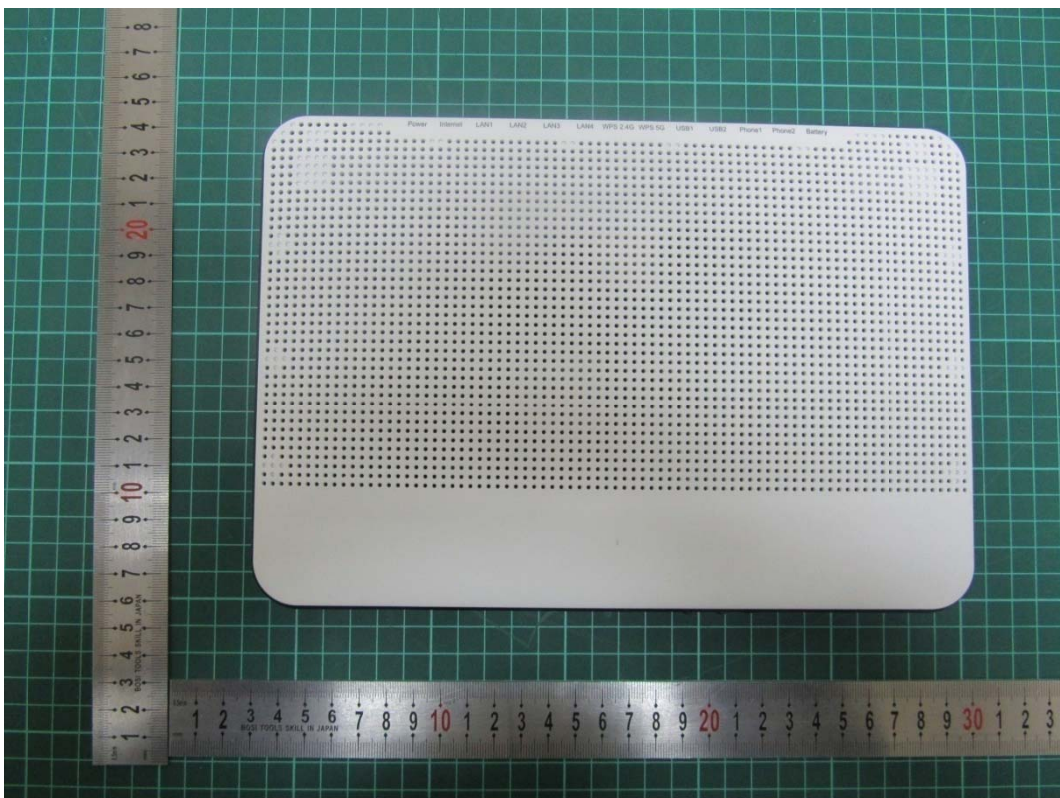


a: EUT



b: Adapter
Picture 1 EUT

A.2 Test Setup

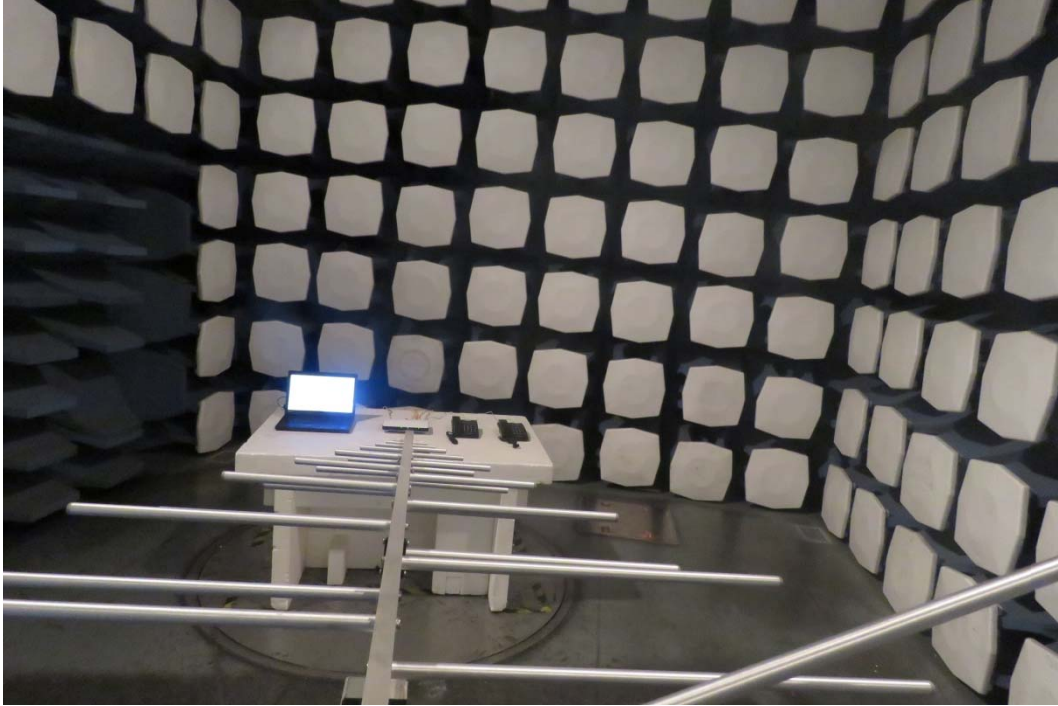

a: Below 1GHz



b: Above 1GHz

Picture 2 Radiated Emission Test Setup



Picture 3 Conducted Emission Test Setup

A.3 Host Product

