



Washington Laboratories, Ltd.

FCC & Industry Canada Certification Test Report
For the
Adtran, Inc.
Tracer 6420L2X

FCC ID: HDCTRC6420L2X
2250A-TRC64202

WLL JOB# 9071
June 27, 2006

Prepared for:

Adtran, Inc.
901 Explorer Boulevard
Huntsville, AL 35806

Prepared By:

Washington Laboratories, Ltd.
7560 Lindbergh Drive
Gaithersburg, Maryland 20879

FCC & Industry Canada Certification Test Report
for the
Adtran, Inc.
Tracer 6420L2X
FCC ID: HDCTRC6420L2X
IC ID: 2250A-TRC64202

June 27, 2006

WLL JOB# 9071

Prepared by: Brian J. Dettling
Documentation Specialist

Reviewed by: Gregory M. Snyder
Chief EMC Engineer

Abstract

This report has been prepared on behalf of Adtran, Inc. to support the attached Application for Equipment Authorization. The test report and application are submitted for a digitally modulated transmitter under Part 15.247 of the FCC Rules and Regulations and Spectrum Management and Telecommunications Policy RSS-210 of Industry Canada. This Certification Test Report documents the test configuration and test results for an Adtran, Inc. Tracer 6420L2X.

Testing was performed on an Open Area Test Site (OATS) of Washington Laboratories, Ltd, 7560 Lindbergh Drive, Gaithersburg, MD 20879. Site description and site attenuation data have been placed on file with the FCC's Sampling and Measurements Branch at the FCC laboratory in Columbia, MD. The Industry Canada OATS numbers are 3035A-1 and 3035A-2 for Washington Laboratories, Ltd. Site 1 and Site 2, respectively. Washington Laboratories, Ltd. has been accepted by the FCC and approved by NIST NVLAP (NVLAP Lab Code: 200066-0) as an independent FCC test laboratory.

The Adtran, Inc. Tracer 6420L2X complies with the limits for a Digitally Modulated Transceiver device under FCC Part 15.247 and Industry Canada RSS-210.

Table of Contents

Abstract	ii
1 Introduction	1
1.1 Compliance Statement	1
1.2 Test Scope	1
1.3 Contract Information	1
1.4 Test Dates	1
1.5 Test and Support Personnel	1
2 Equipment Under Test	2
2.1 EUT Identification & Description	2
2.2 Test Configuration	3
2.3 Testing Algorithm	4
2.4 Test Location	4
2.5 Measurements	4
2.5.1 References	4
2.6 Measurement Uncertainty	4
3 Test Equipment	5
4 Test Results	6
4.1 RF Power Output: (§15.247(b) and RSS-210, A8.4)	6
4.2 Occupied Bandwidth: (§15.247(a)(2) and RSS-210 Section A8.2)	7
4.3 RF Peak Power Spectral Density (§15.247(e) and RSS-210, Annex 8.2)	12
4.4 Conducted Spurious Emissions at Antenna Terminals (FCC Part §15.247(d) and RSS-210, A8)	17
4.5 Radiated Spurious Emissions: (FCC Part §15.247(c) and RSS-210 A8.5)	66
4.5.1 Test Procedure	66
4.5.2 Test Procedure for 10' Dish Antenna	72
4.5.3 Test results	72
4.6 AC Powerline Conducted Emissions: (FCC Part §15.207 and RSS-GEN)	76

List of Tables

Table 1. Device Summary	2
Table 2: Test Equipment List	5
Table 3. RF Power Output	6
Table 4. Occupied Bandwidth Results	12
Table 5. RF Power Spectral Density	17
Table 6: Radiated Emission Test Data, Low Frequency Data (<1GHz)	67
Table 7: Radiated Emission Test Data, High Frequency Data: Plan A, Band 1 (5744MHz)	69
Table 8: Radiated Emission Test Data, High Frequency Data: Plan B, Band 1 (5824MHz)	70
Table 10: Radiated Emission Test Data, High Frequency Data: Plan B, Band 3 (5831MHz)	71
Table 11: Radiated Emissions; 10ft Dish Antenna – Plan A Band 1	73
Table 12: Radiated Emissions; 10ft Dish Antenna – Plan B Band 1	74
Table 13: Radiated Emissions; 10ft Dish Antenna – Plan B Band 3	75
Table 14: Conducted Emissions Test Data; §15.207	76

List of Figures

Figure 1. Power Measurement Setup	7
Figure 2. Occupied Bandwidth - Plan A, Band 1	8
Figure 3. Occupied Bandwidth - Plan A, Band 3	9
Figure 4. Occupied Bandwidth - Plan B, Band 1.....	10
Figure 5. Occupied Bandwidth - Plan B, Band 3.....	11
Figure 6. Power Spectral Density Plan A, Band 1	13
Figure 7. Power Spectral Density Plan A, Band 3.....	14
Figure 8. Power Spectral Density Plan B, Band 1	15
Figure 9. Power Spectral Density Plan B, Band 3	16
Figure 10. Conducted Spurious Emissions, Plan A Band 1, Inband	18
Figure 11. Conducted Spurious Emissions, Plan A Band 1, Lower Band Edge	19
Figure 12. Conducted Spurious Emissions, Plan A Band 1, Upper Band Edge	20
Figure 13. Conducted Spurious Emissions, Plan A Band 1, 30MHz - 1GHz	21
Figure 14. Conducted Spurious Emissions, Plan A Band 1, 1GHz – 5.675GHz.....	22
Figure 15. Conducted Spurious Emissions, Plan A Band 1, 5.9 – 10GHz	23
Figure 16. Conducted Spurious Emissions, Plan A Band 1, 10 – 15GHz	24
Figure 17. Conducted Spurious Emissions, Plan A Band 1, 15 – 20GHz	25
Figure 18. Conducted Spurious Emissions, Plan A Band 1, 20 – 25GHz	26
Figure 19. Conducted Spurious Emissions, Plan A Band 1, 25 – 30GHz	27
Figure 20. Conducted Spurious Emissions, Plan A Band 1, 30 – 35GHz	28
Figure 21. Conducted Spurious Emissions, Plan A Band 1, 35 – 40GHz	29
Figure 22. Conducted Spurious Emissions, Plan A Band 3, Inband	30
Figure 23. Conducted Spurious Emissions, Plan A Band 3, Lower Band Edge	31
Figure 24. Conducted Spurious Emissions, Plan A Band 3, Upper Band Edge	32
Figure 25. Conducted Spurious Emissions, Plan A Band 3, 30MHz - 1GHz	33
Figure 26. Conducted Spurious Emissions, Plan A Band 3, 1GHz – 5.675GHz.....	34
Figure 27. Conducted Spurious Emissions, Plan A Band 3, 5.9GHz – 10GHz.....	35
Figure 28. Conducted Spurious Emissions, Plan A Band 3, 10GHz – 15GHz.....	36
Figure 29. Conducted Spurious Emissions, Plan A Band 3, 15GHz – 20GHz.....	37
Figure 30. Conducted Spurious Emissions, Plan A Band 3, 20GHz – 25GHz.....	38
Figure 31. Conducted Spurious Emissions, Plan A Band 3, 25GHz – 30GHz.....	39
Figure 32. Conducted Spurious Emissions, Plan A Band 3, 30GHz – 35GHz.....	40
Figure 33. Conducted Spurious Emissions, Plan A Band 3, 35GHz – 40GHz.....	41
Figure 34. Conducted Spurious Emissions, Plan B Band 1, Inband.....	42
Figure 35. Conducted Spurious Emissions, Plan B Band 1, Lower Band Edge.....	43
Figure 36. Conducted Spurious Emissions, Plan B Band 1, Upper Band Edge	44
Figure 37. Conducted Spurious Emissions, Plan B Band 1, 30MHz - 1GHz.....	45
Figure 38. Conducted Spurious Emissions, Plan B Band 1, 1GHz – 5.67GHz.....	46
Figure 39. Conducted Spurious Emissions, Plan B Band 1, 5.9 – 10GHz	47
Figure 40. Conducted Spurious Emissions, Plan B Band 1, 10 – 15GHz	48
Figure 41. Conducted Spurious Emissions, Plan B Band 1, 15 – 20GHz	49
Figure 42. Conducted Spurious Emissions, Plan B Band 1, 20 – 25GHz	50
Figure 43. Conducted Spurious Emissions, Plan B Band 1, 25 – 30GHz	51
Figure 44. Conducted Spurious Emissions, Plan B Band 1, 30 – 35GHz	52

Figure 45. Conducted Spurious Emissions, Plan B Band 1, 35 – 40GHz	53
Figure 46. Conducted Spurious Emissions, Plan B Band 3, Inband.....	54
Figure 47. Conducted Spurious Emissions, Plan B Band 3, Lower Band Edge.....	55
Figure 48. Conducted Spurious Emissions, Plan B Band 3, Upper Band Edge	56
Figure 49. Conducted Spurious Emissions, Plan B Band 3, 30MHz - 1GHz.....	57
Figure 50. Conducted Spurious Emissions, Plan B Band 3, 1GHz – 5.66GHz.....	58
Figure 51. Conducted Spurious Emissions, Plan B Band 3, 5.9 – 10GHz	59
Figure 52. Conducted Spurious Emissions, Plan B Band 3, 10 – 15GHz	60
Figure 53. Conducted Spurious Emissions, Plan B Band 3, 15 – 20GHz	61
Figure 54. Conducted Spurious Emissions, Plan B Band 3, 20 – 25GHz	62
Figure 55. Conducted Spurious Emissions, Plan B Band 3, 25 – 30GHz	63
Figure 56. Conducted Spurious Emissions, Plan B Band 3, 30 – 35GHz	64
Figure 57. Conducted Spurious Emissions, Plan B Band 3, 35 – 40GHz	65

1 Introduction

1.1 Compliance Statement

The Adtran, Inc. Tracer 6420L2X complies with the limits for a Digitally Modulated Transmitter device under FCC Part 15.247 and Industry Canada RSS-210, Issue 6.

1.2 Test Scope

Tests for radiated and conducted (at antenna terminal) emissions were performed. All measurements were performed in accordance with the 2003 version of ANSI C63.4. The measurement equipment conforms to ANSI C63.2 Specifications for Electromagnetic Noise and Field Strength Instrumentation.

1.3 Contract Information

Customer:	Adtran, Inc. 901 Explorer Boulevard Huntsville, AL 35806
-----------	--

Quotation Number:	62681
-------------------	-------

1.4 Test Dates

Testing was performed on the following date(s):	February 1 to February 3, 2006
---	--------------------------------

1.5 Test and Support Personnel

Washington Laboratories, LTD	James Ritter
Client Representative	Derek Foster

2 Equipment Under Test

2.1 EUT Identification & Description

ADTRAN Part #	Product Name/Description
12806420L2A	Tracer 6420L2 Plan A
12806420L2B	Tracer 6420L2 Plan B

Top Assembly #: 12806420L2X A / B

Sub Assembly #(s): 22806410-1, 2280018-18

Circuit Board #(s): 52806410-1, 5280018-18

The Adtran, Inc. Tracer 6420L2X operates in the 5725 to 5850 MHz unlicensed industrial, scientific, and medical (ISM) band, and serves as a radio frequency converter for 8xT1, 8xE1, and 10/100 Base-T Ethernet digital signals. The aggregate single-sided baseband bandwidth of the product is a maximum of 16.7 MHz, which accounts for 8xT1 plus framing overhead. Three frequency band plans are available: A1/B1, A2/B2, and A3/B3. Frequency plan A radios transmit (receive) in the lower (upper) band, while plan B radios transmit (receive) in the upper (lower) band.

The Tracer 6420L2X is identical to the previously approved Tracer 6420L2 (FCC ID: HDCTRC6420L2) except for the following changes. This new version of the 2280018-17D has an improved match at the PA (U39) and a crystal oscillator module (U23) at 280 MHz replacing a 280 MHz PLL discrete oscillator circuit. No changes to the specifications of the radio have changed

Table 1. Device Summary

ITEM	DESCRIPTION
Manufacturer:	Adtran, Inc.
FCC ID:	HDCTRC6420L2X
IC:	2250A-TRC64202
Model:	Tracer 6420L2X
FCC Rule Parts:	§15.247
Industry Canada:	RSS-210, RSS-GEN
Frequency Range:	5744 - 5831 MHz
Maximum Output Power:	243mW
Modulation:	Digital (QPSK)
Occupied Bandwidth:	16.585MHz
Keying:	Automatic
Type of Information:	Data
Number of Channels:	2 plans (A and B), 3 channels/plan
Power Output Level	Fixed
Antenna Type	Parabolic Dish Radio Waves, Inc. SP2-2.4; 21.1 dBi 10ft Dish Antenna; 41dBi (Fixed Point-to-Point Installations)
Power Source & Voltage:	48Vdc

As this device is being sought for certification under §15.247 and operates as a fixed installation point-to-point system at 5.8GHz, the antenna gain can exceed 6dBi without any reduction in output power. The user manual specifies antennas up to 12' in diameter with gains up to 44.2dBi.

Antenna Description of Tested Models:

Manufacturer	Model	Description	Gain
Andrew	PL10F-23-N7A	10' Dish Antenna with 5.8GHz Feed Horn	42.5dBi
Radio Waves, Inc.	SP2-5.8	2' Dish Antenna with 5.8GHz Feed Horn	28.5dBi

2.2 Test Configuration

The Tracer 6420L2X was configured with an external power adapter to provide 48Vdc. Cables with loopback connections were connected to Channels A and B, unshielded wires were connected to the alarm I/O and a 50 Ohm coaxial cable was connected to the antenna port.

The EUT firmware was set up to provide continuous random data for Direct Sequence modulation to the output connector.

Two plans are available: "A" and "B". Changing between the plans is accomplished by switching the internal diplexer cables. The channels are then programmed within the plan.

A laptop PC was used to set up the EUT via Hyperterminal. The PC is only used for configuration and was removed during testing.

I/O ports available on the Tracer 6420L2X:

Port ID	Connector Type	Cable Length (m)	Shielded (Y/N)	Connected To/From
RF Port	N	2m	Shielded	Connected to antenna
T1 (8)	RJ-45	1m	N	Un-terminated
Network	RJ-45	1m	N	Un-terminated
Craft Port	DB-9	1m	Y	Un-terminated
Alarm	3-Pin Header	1m	N	Discrete/un-terminated wires
Power	2-Pin Header	1m	N	To AC/DC Power supply

This test report presents emissions data for the 2' (28.5dBi) dish antenna and 10' dish antenna (42.5dBi). It can be seen from the spurious emission data collected at the antenna terminal and the comparison of the radiated emissions data from the 2' to 10' dish antenna that the spurious emissions are not increased by the use of the high gain antenna.

All testing was first performed with the 2' dish antenna. The 10' dish antenna was evaluated at the lowest and highest frequency of operation.

2.3 Testing Algorithm

The Tracer 6420L2X was operated continuously by a firmware test sequence that provided a continuous modulated RF data stream to the output port.

Worst case emission levels are provided in the test results data.

2.4 Test Location

All measurements herein were performed at Washington Laboratories, Ltd. test center in Gaithersburg, MD. Site description and site attenuation data have been placed on file with the FCC's Sampling and Measurements Branch at the FCC laboratory in Columbia, MD. The Industry Canada OATS numbers are 3035A-1 and 3035A-2 for Washington Laboratories, Ltd. Site 1 and Site 2, respectively. Washington Laboratories, Ltd. has been accepted by the FCC and approved by NIST NVLAP (NVLAP Lab Code: 200066-0) as an independent FCC test laboratory.

2.5 Measurements

2.5.1 References

ANSI C63.2 Specifications for Electromagnetic Noise and Field Strength Instrumentation

ANSI C63.4 American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

2.6 Measurement Uncertainty

All results reported herein relate only to the equipment tested. For the purposes of the measurements performed by Washington Laboratories, the measurement uncertainty is ± 2.3 dB. This has been calculated for a *worst-case situation* (radiated emissions measurements performed on an open area test site).

The following measurement uncertainty calculation is provided:

$$\text{Total Uncertainty} = (A^2 + B^2 + C^2)^{1/2}/(n-1)$$

where:

A = Antenna calibration uncertainty, in dB = 2 dB

B = Spectrum Analyzer uncertainty, in dB = 1 dB

C = Site uncertainty, in dB = 4 dB

n = number of factors in uncertainty calculation = 3

Thus, Total Uncertainty = $0.5 (2^2 + 1^2 + 4^2)^{1/2} = \pm 2.3$ dB.

3 Test Equipment

Table 2 shows a list of the test equipment used for measurements along with the calibration information.

Table 2: Test Equipment List

WLL Asset #	Manufacturer Model/Type	Function	Cal. Due
0073	HP 8568B	SPECTRUM ANALYZER	6/30/2006
0007	ARA LPB-2520	BICONILOG ANTENNA	12/20/2006
0522	HEWLETT-PACKARD 8449B	MICROWAVE PREAMP	4/11/2006
0425	ARA DRG118/A	MICROWAVE HORN ANTENNA	1/17/2007
0125	SOLAR 8012-50-R-24-BNC	LISN	1/31/2007
0126	SOLAR 8012-50-R-24-BNC	LISN	1/31/2007
0210	NARDA V638	HORN ANTENNA	12/25/2008
0476	TEKTRONIX TDS 220	OSCILLOSCOPE	8/2/2006
0475	WILTRON 75N50	DIODE DETECTOR	2/28/2006
0394	HEWLETT-PACKARD 438A	POWER METER	3/21/2006
0390	HEWLETT-PACKARD 8481B	POWER HEAD	3/21/2006
0071	HP 85685A	RF PRESELECTOR	6/30/2006
0478	ROHDE & SCHWARZ SMT06	SIGNAL GENERATOR	11/30/2006
0069	HP 85650A	QUASI-PEAK ADAPTER	6/30/2006
0067	HEWLETT-PACKARD 8564E	SPECTRUM ANALYZER	7/16/2006
0528	AGILENT E4446A	SPECTRUM ANALYZER	6/27/2006

4 Test Results

4.1 RF Power Output: (§15.247(b) and RSS-210, A8.4)

For devices within the scope of FCC §15.247 and RSS-210 Annex A, the peak power conducted from the intentional radiator to the antenna shall not be greater than one watt (30 dBm).

The output from the transmitter was connected to a diode detector and oscilloscope. The peak deflection was measured on the oscilloscope and recorded. A signal generator was then substituted in place of EUT and set to the same frequency as the transmitter. The CW output of the signal generator was increased until the same deflection was noted on the oscilloscope. A power meter was then connected to the output of the signal generator to determine the output power of the signal generator. This level is then recorded as the output power of the EUT at the specified frequency.

The EUT carrier was modulated during this test.

Table 3. RF Power Output

Channel and/or Frequency	Measured Level (dBm)	Measured Level (mWatts)	Rated (mWatts)	Limit (mWatts)
Plan A Chan 1 / 5744MHz	23.48	223	250	1000
Plan A Chan 2 / 5747 MHz	23.7	235	250	1000
Plan A Chan 3 / 5751 MHz	23.84	242	250	1000
Plan B Chan 1 / 5824 MHz	23.56	231	250	1000
Plan B Chan 2 / 5827 MHz	23.76	237	250	1000
Plan B Chan 3 / 5831 MHz	23.85	243	250	1000

**RF Output Power Measurement
Diode Detector Method Test Setup Diagram**

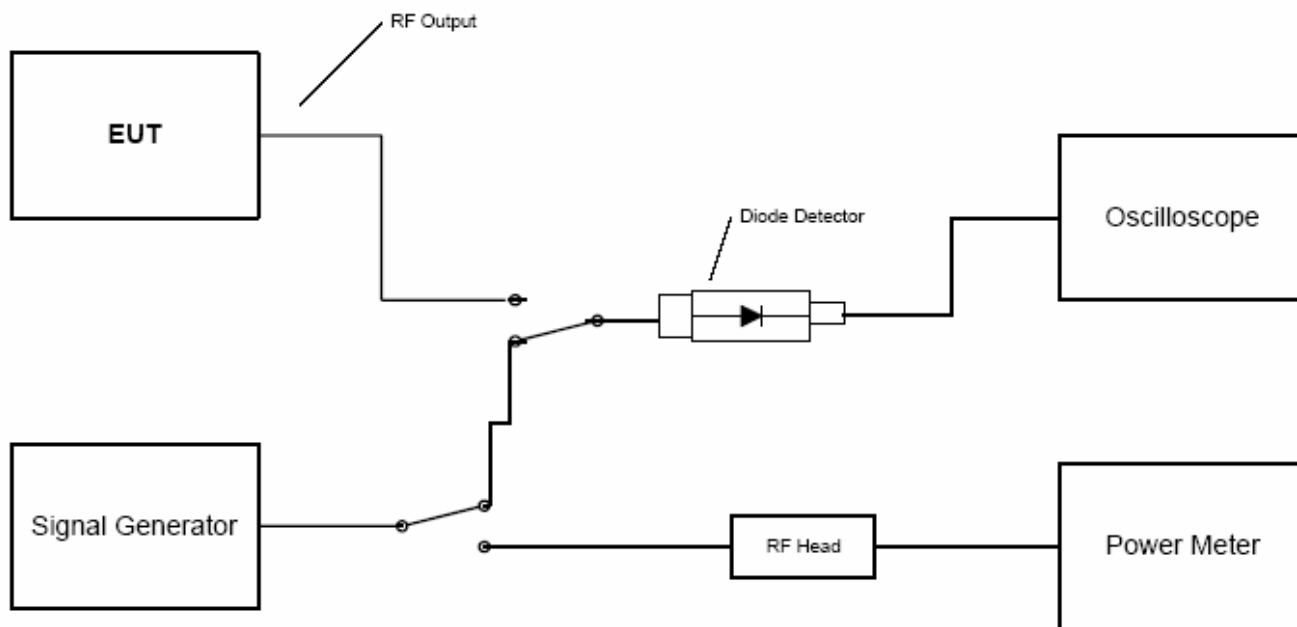


Figure 1. Power Measurement Setup

4.2 Occupied Bandwidth: (§15.247(a)(2) and RSS-210 Section A8.2)

For systems using digital modulation techniques, FCC Part 15.247 and Annex A of RSS-210 requires that the minimum 6dB bandwidth be at least 500 kHz.

Occupied bandwidth was performed by connecting the RF output of the EUT to the input of a spectrum analyzer. The following plots depict the bandwidth measurements. Table 4 lists the measured bandwidths.

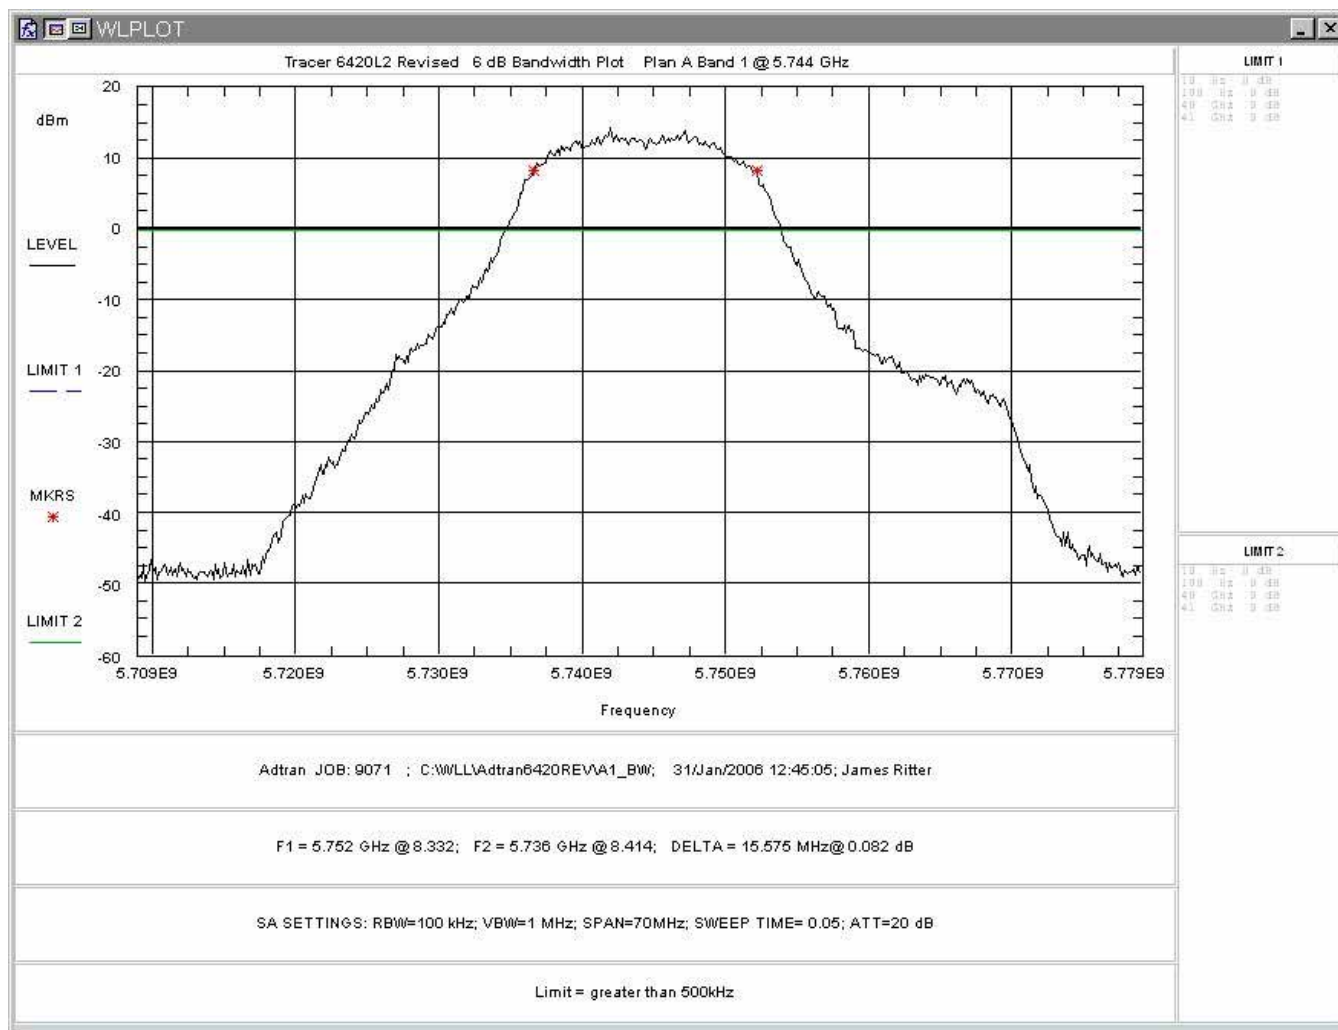


Figure 2. Occupied Bandwidth - Plan A, Band 1

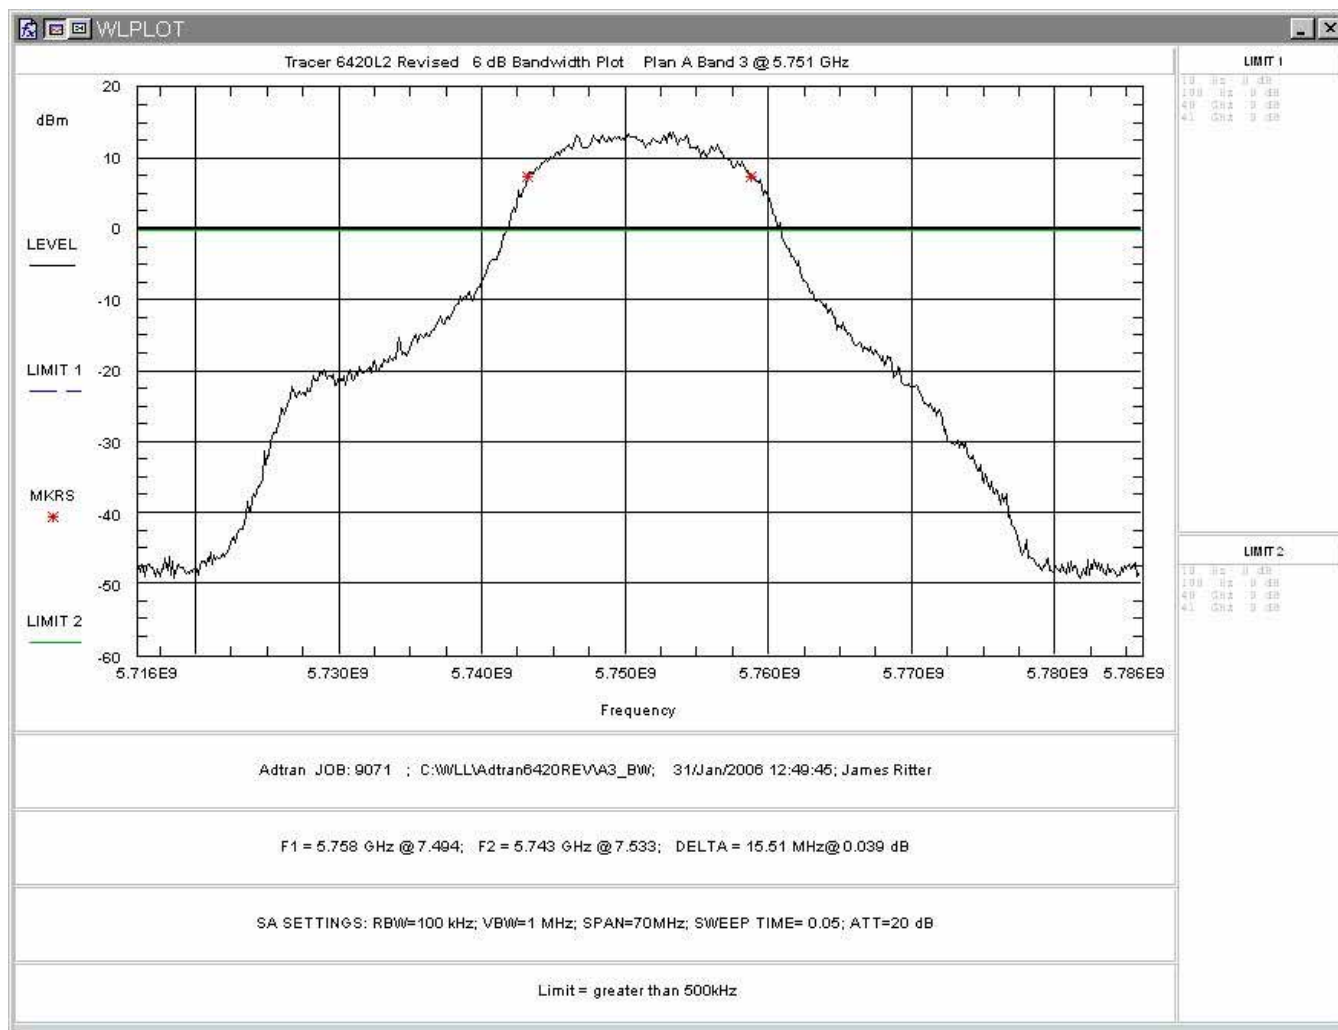


Figure 3. Occupied Bandwidth - Plan A, Band 3

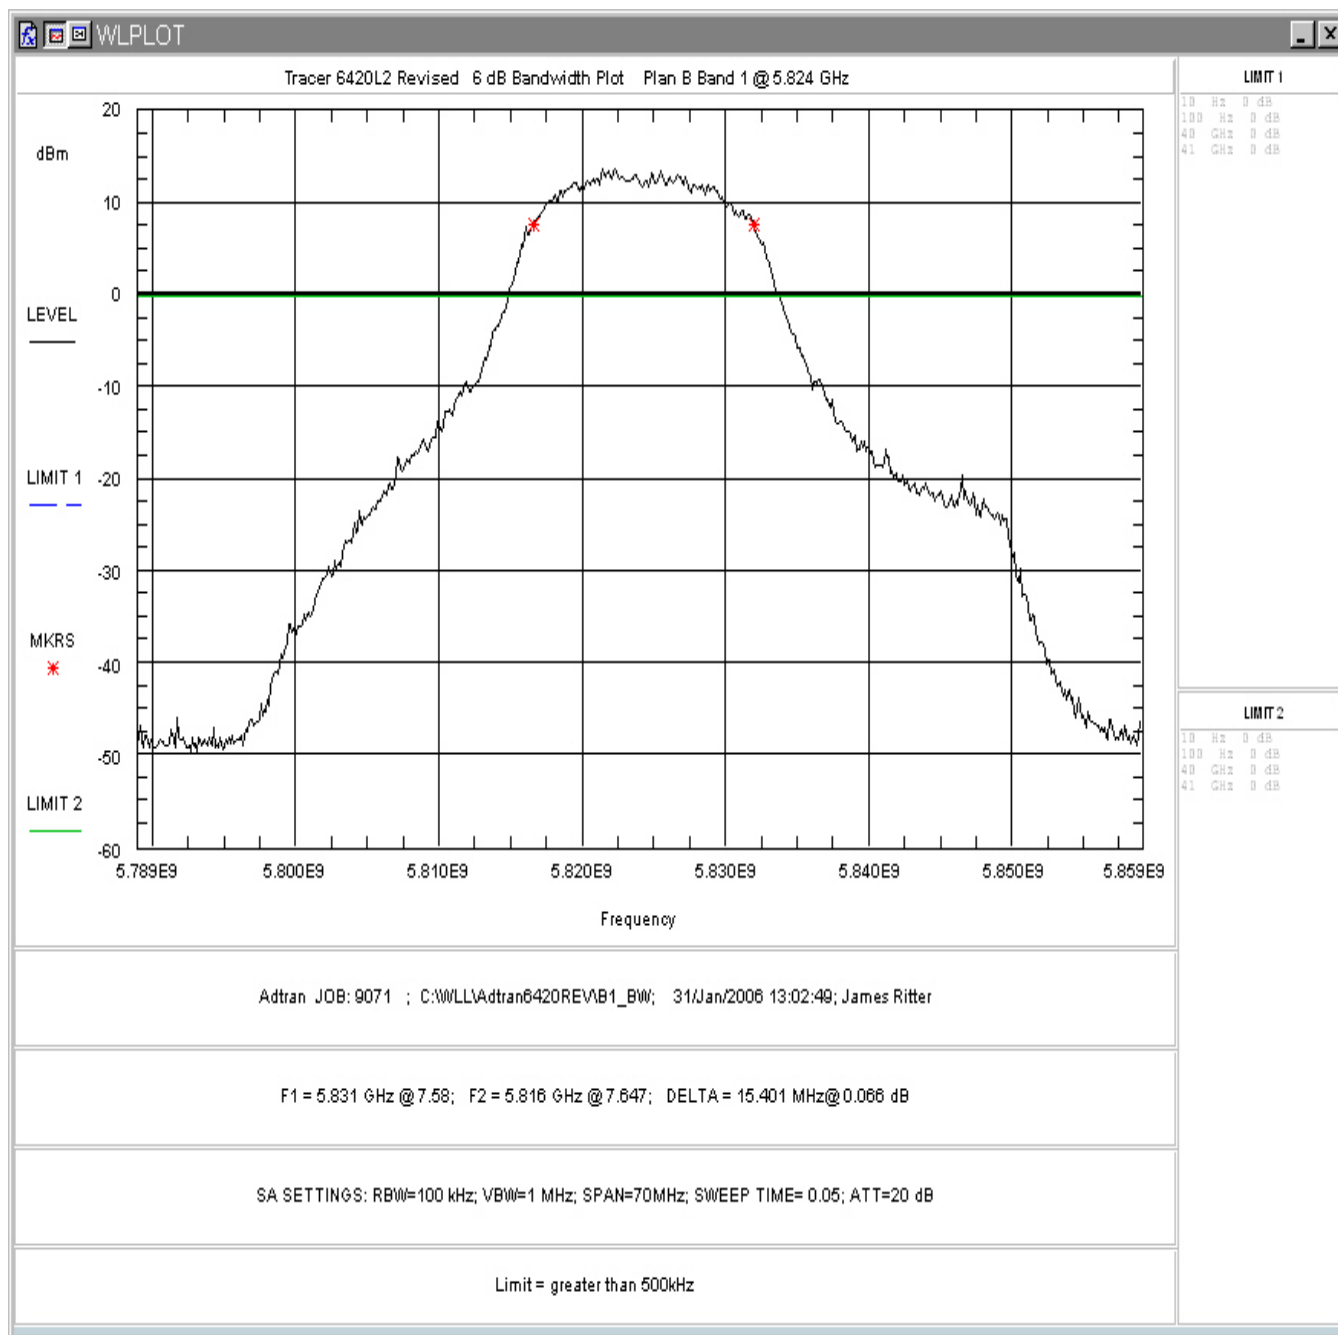


Figure 4. Occupied Bandwidth - Plan B, Band 1

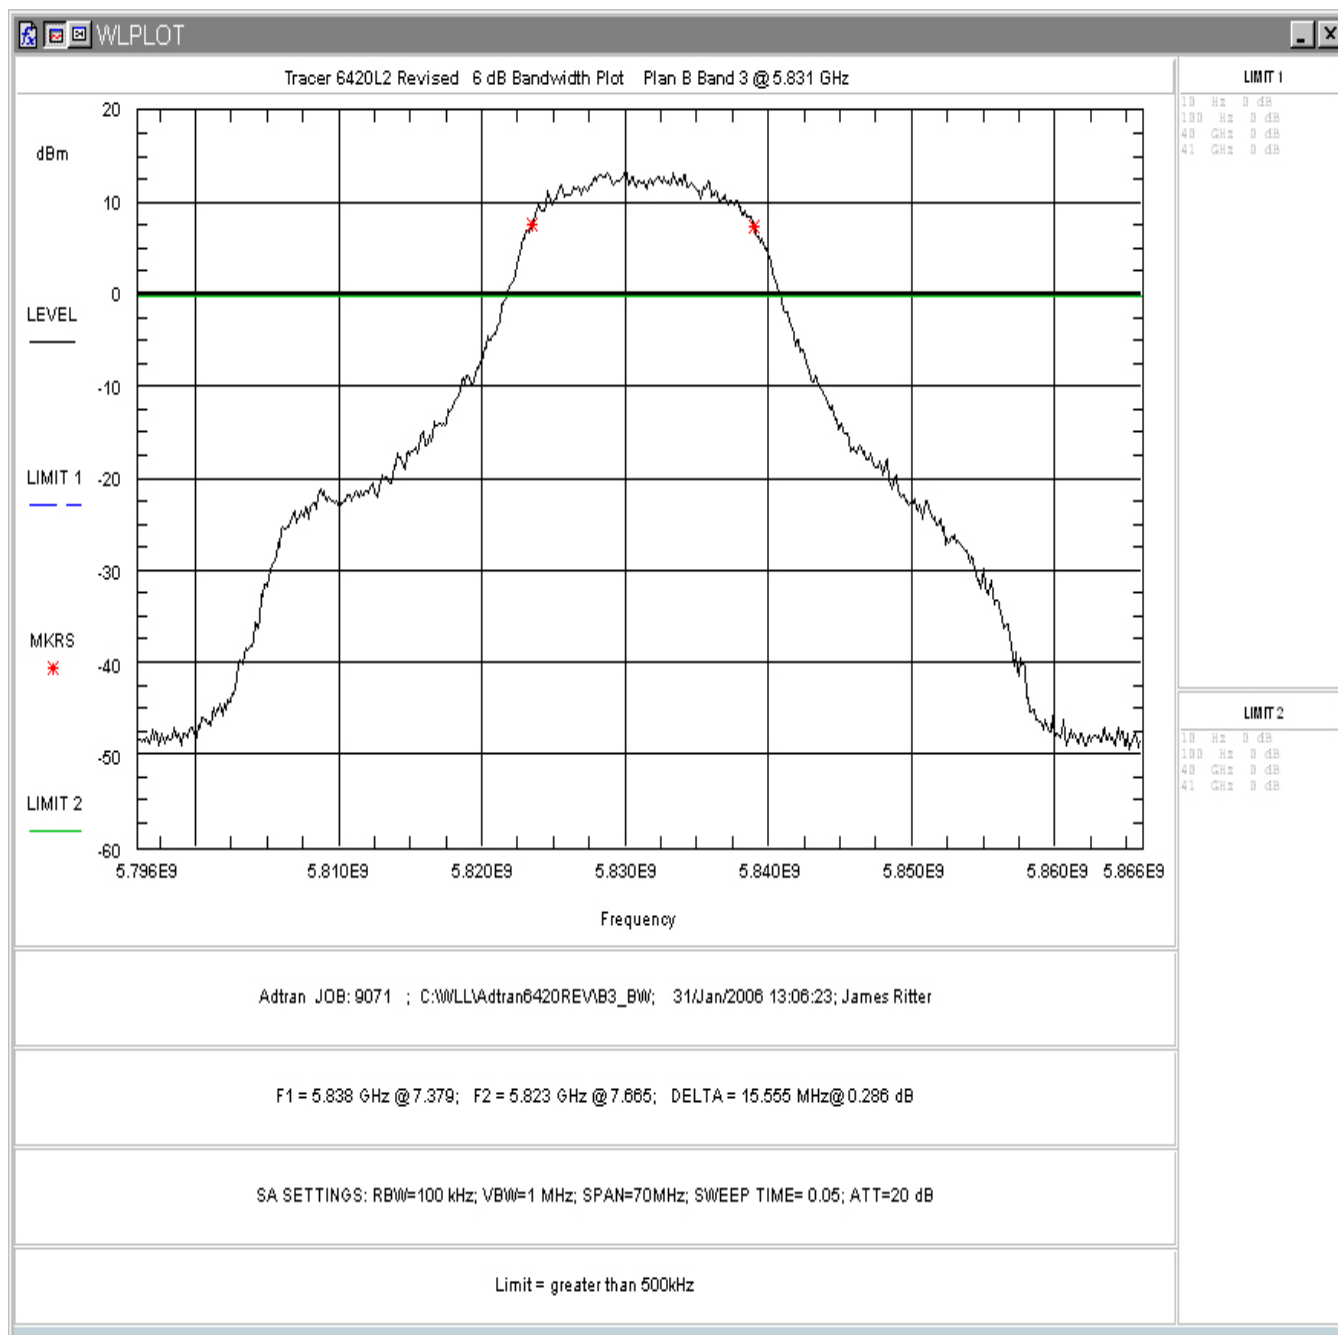


Figure 5. Occupied Bandwidth - Plan B, Band 3

Table 4 provides a summary of the Occupied Bandwidth Results.

Table 4. Occupied Bandwidth Results

Frequency	Bandwidth	Limit	Pass/Fail
Plan A (1)	15.57	> 500 kHz	Pass
Plan A (3)	15.51	> 500 kHz	Pass
Plan B (1)	15.40	> 500 kHz	Pass
Plan B (3)	15.55	> 500 kHz	Pass

4.3 RF Peak Power Spectral Density (§15.247(e) and RSS-210, Annex 8.2)

For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

The output from the transmitter was connected to an attenuator and then to the input of the RF Spectrum Analyzer. The analyzer offset was adjusted to compensate for the attenuator and other losses in the system.

The highest peak within the transmission was located and measured for the upper and lower channels of Plan A and Plan B. Plots of the PSD were taken as shown in Figure 6 through Figure 9 below. Table 5 provides a summary of the data.

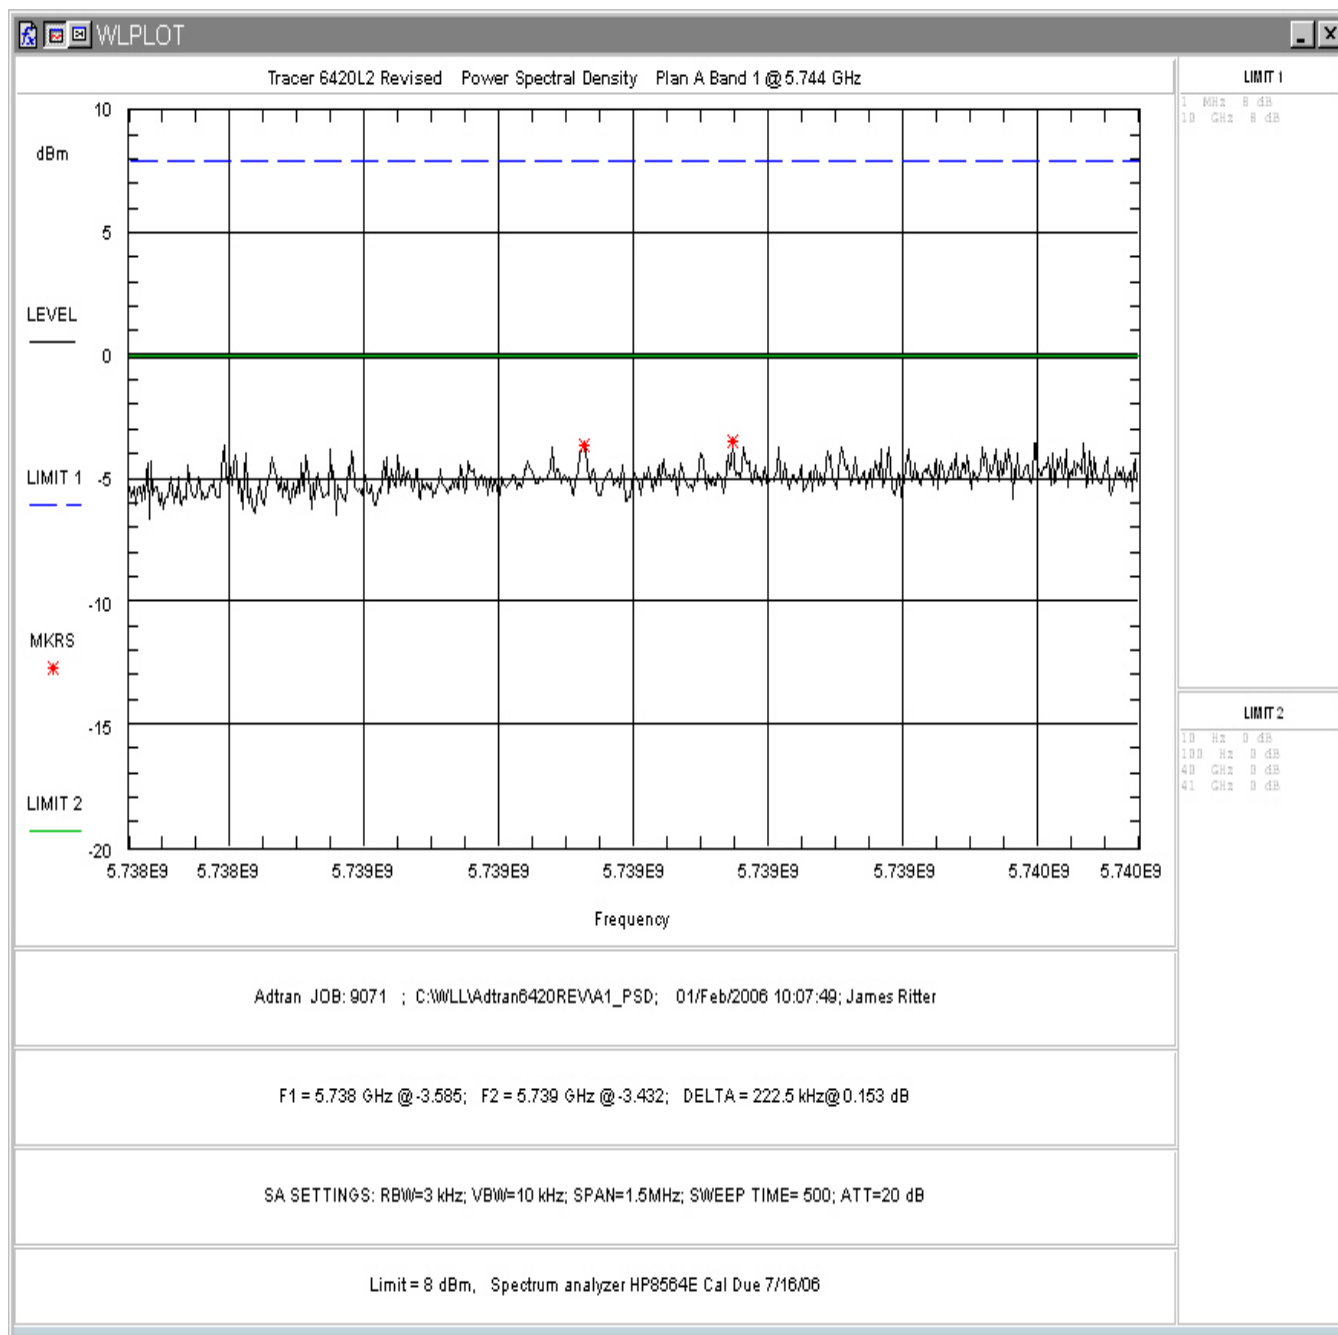


Figure 6. Power Spectral Density Plan A, Band 1

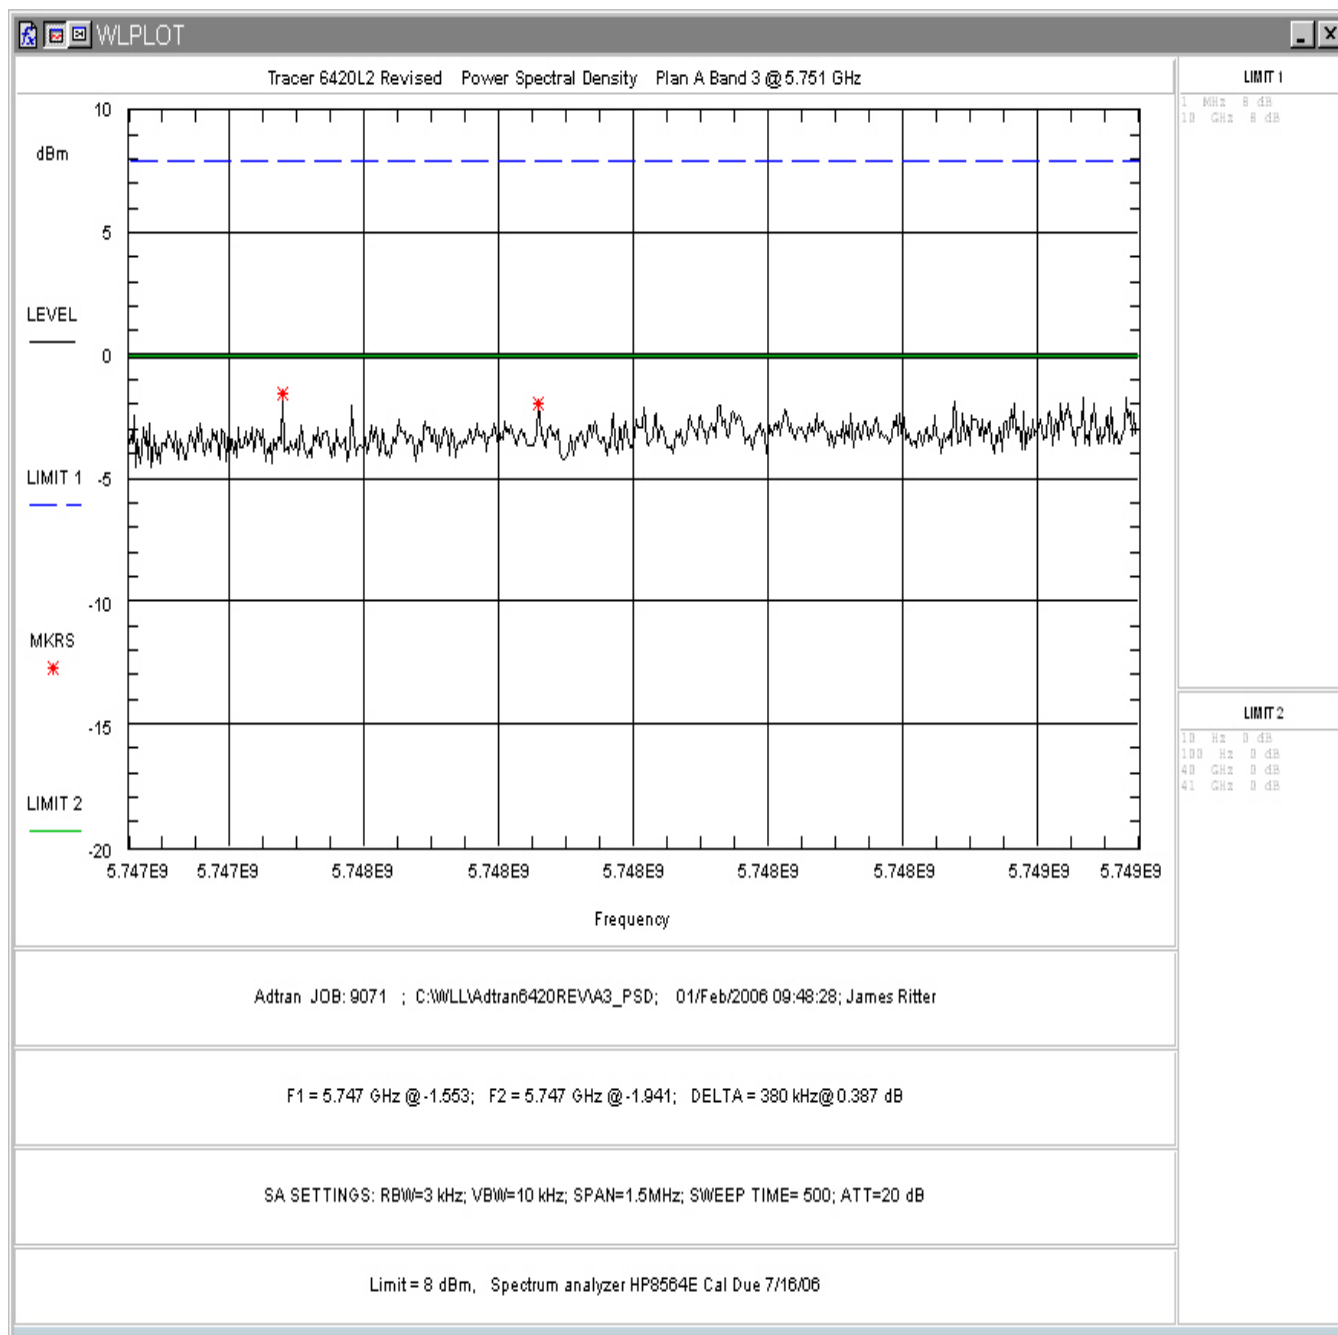


Figure 7. Power Spectral Density Plan A, Band 3

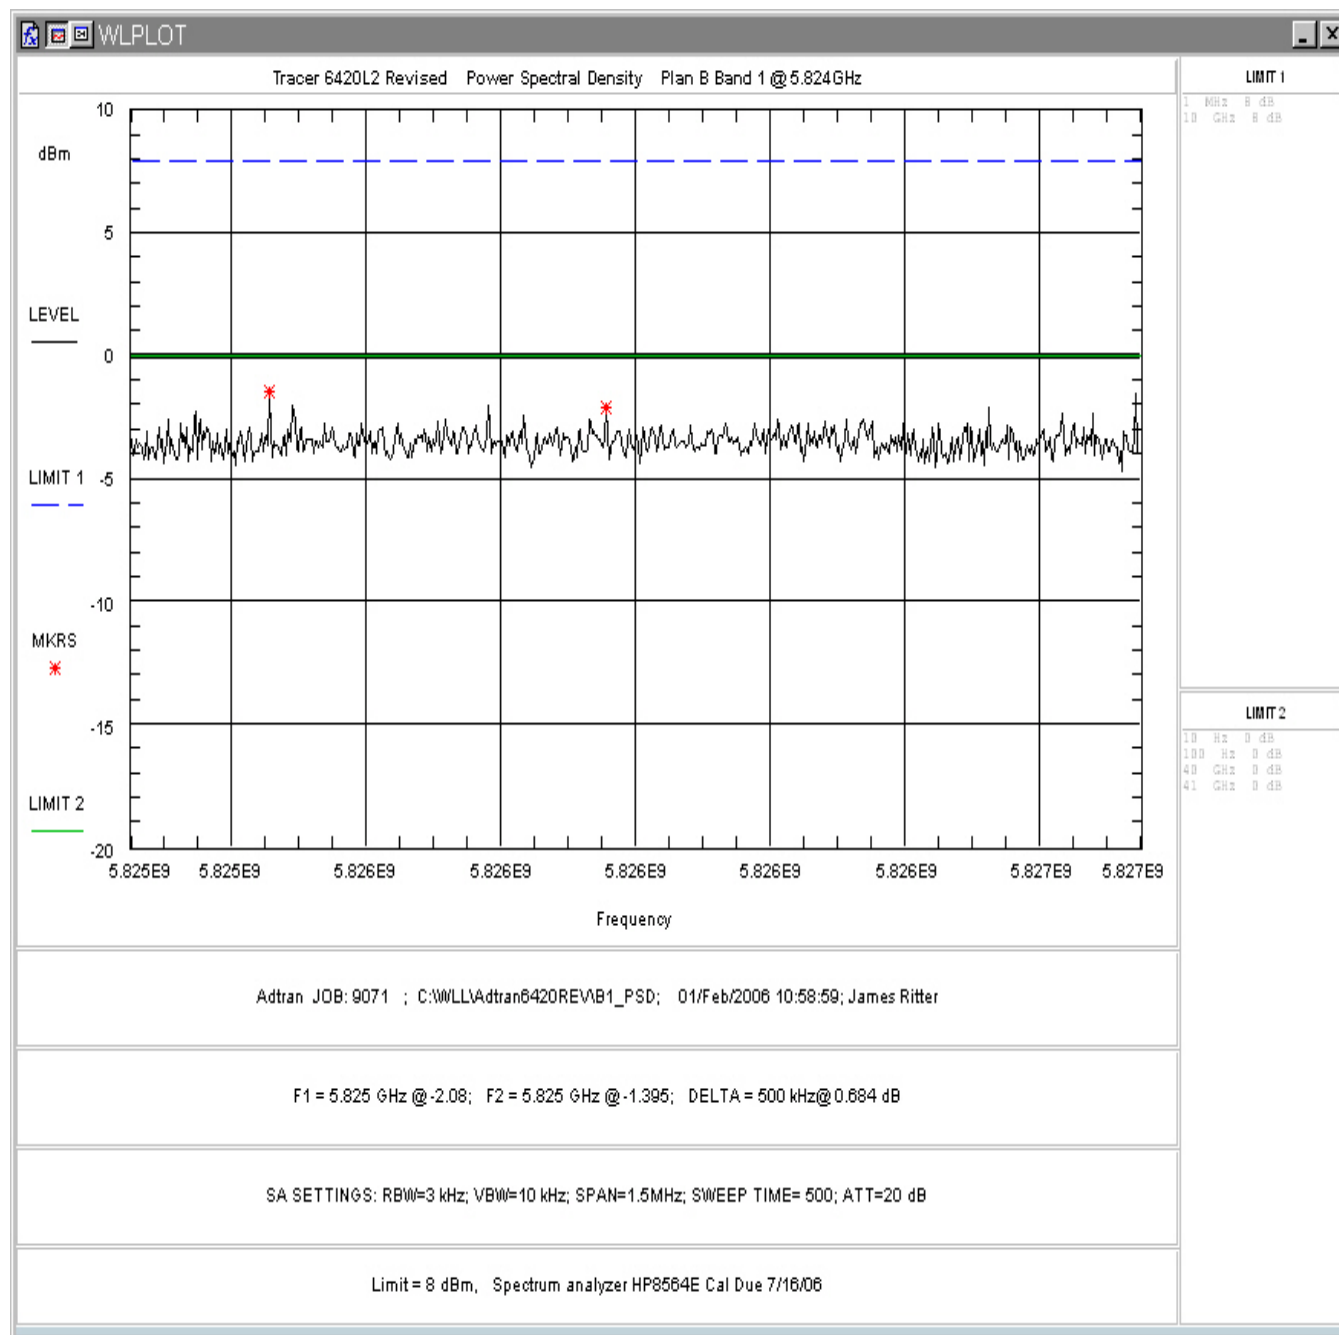


Figure 8. Power Spectral Density Plan B, Band 1

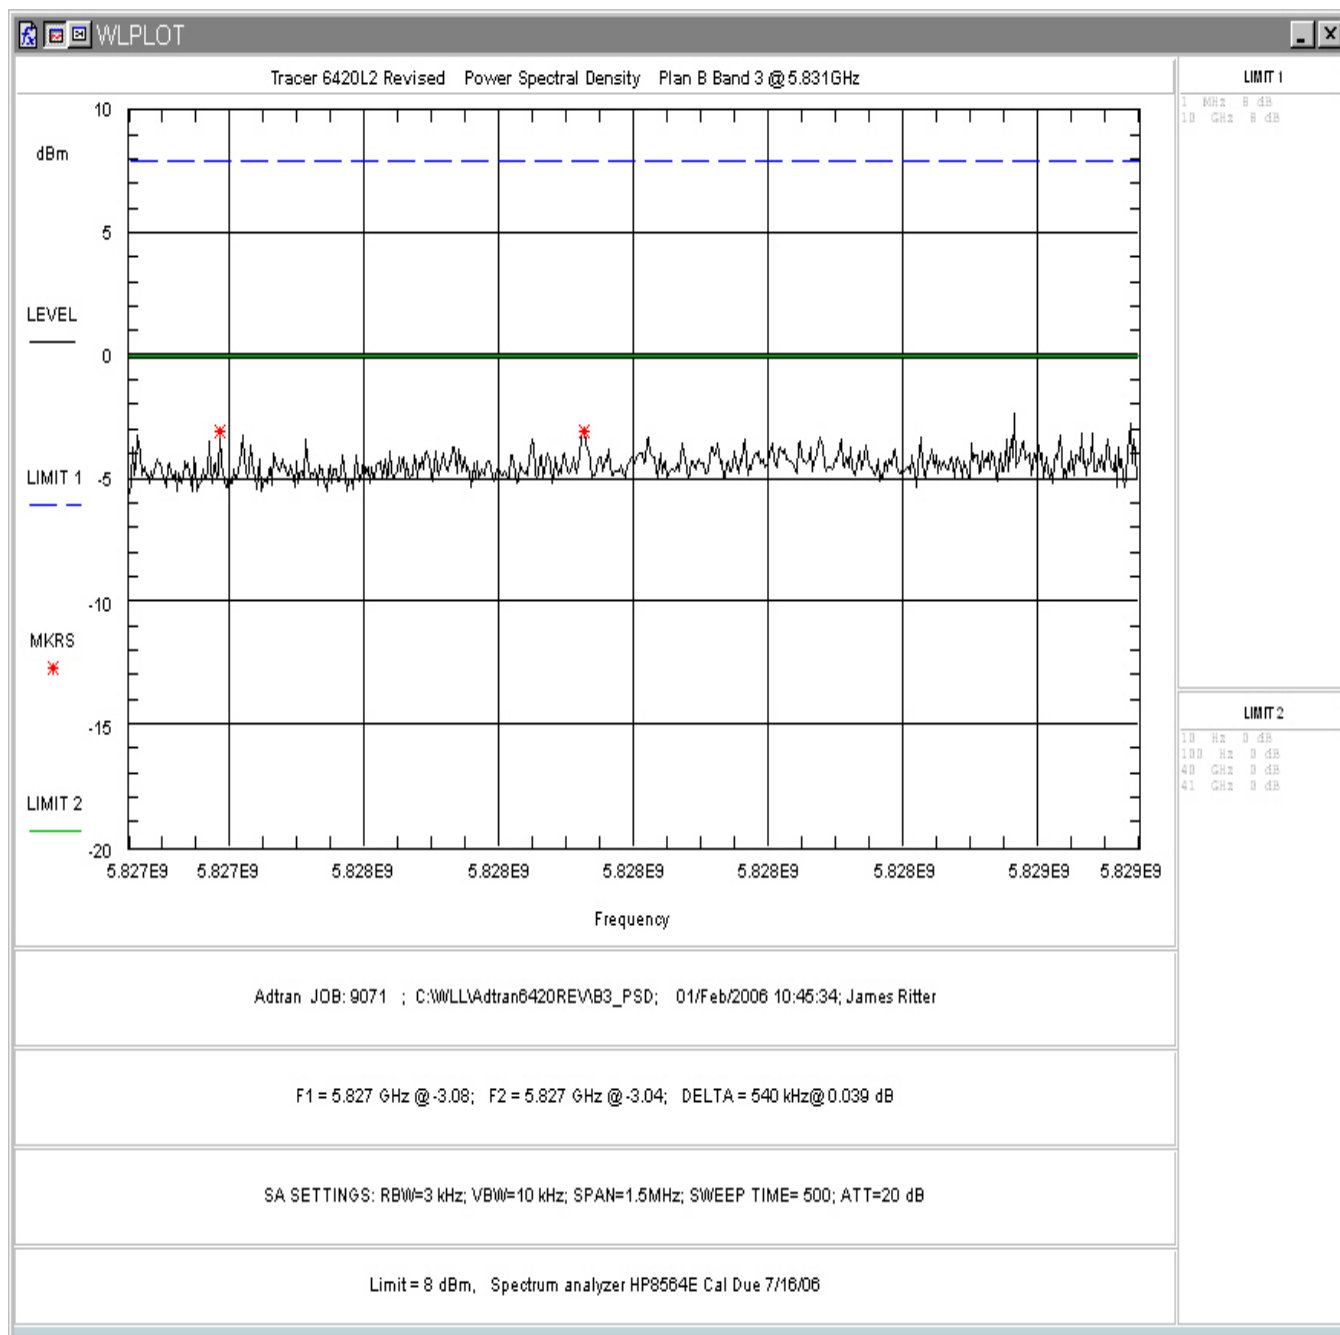


Figure 9. Power Spectral Density Plan B, Band 3

Table 5. RF Power Spectral Density

Frequency	Level (dBm)	Limit (dBm)	Pass/Fail
Plan A (1)	-3.43	8	Pass
Plan A (3)	-1.94	8	Pass
Plan B (1)	-1.4	8	Pass
Plan B (3)	-3.04	8	Pass

4.4 Conducted Spurious Emissions at Antenna Terminals (FCC Part §15.247(d) and RSS-210, A8)

In any 100 kHz band outside the frequency band in which the system is operating, the RF power shall be at least 20dB below that in the 100 kHz bandwidth that contain the highest level of the desired power.

All measurements were performed with a measurement bandwidth of 100kHz. The video bandwidth was set to 3MHz during the testing.

See the plots of conducted emissions plots below.

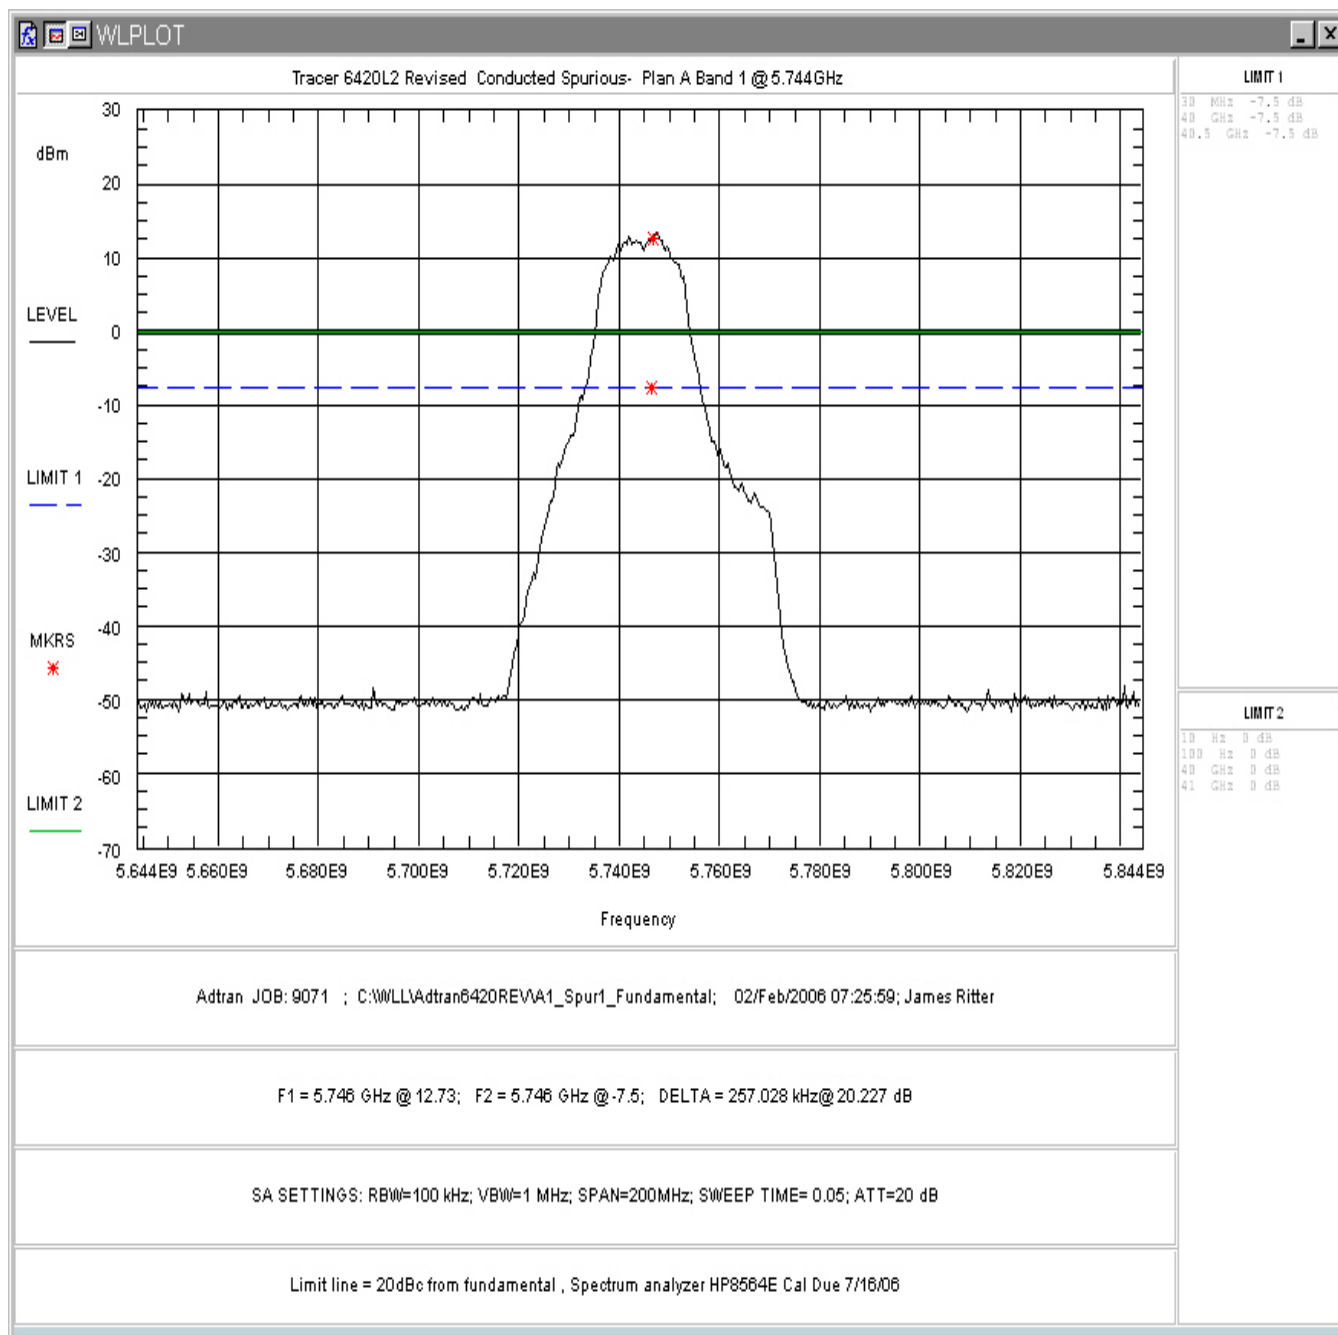


Figure 10. Conducted Spurious Emissions, Plan A Band 1, Inband

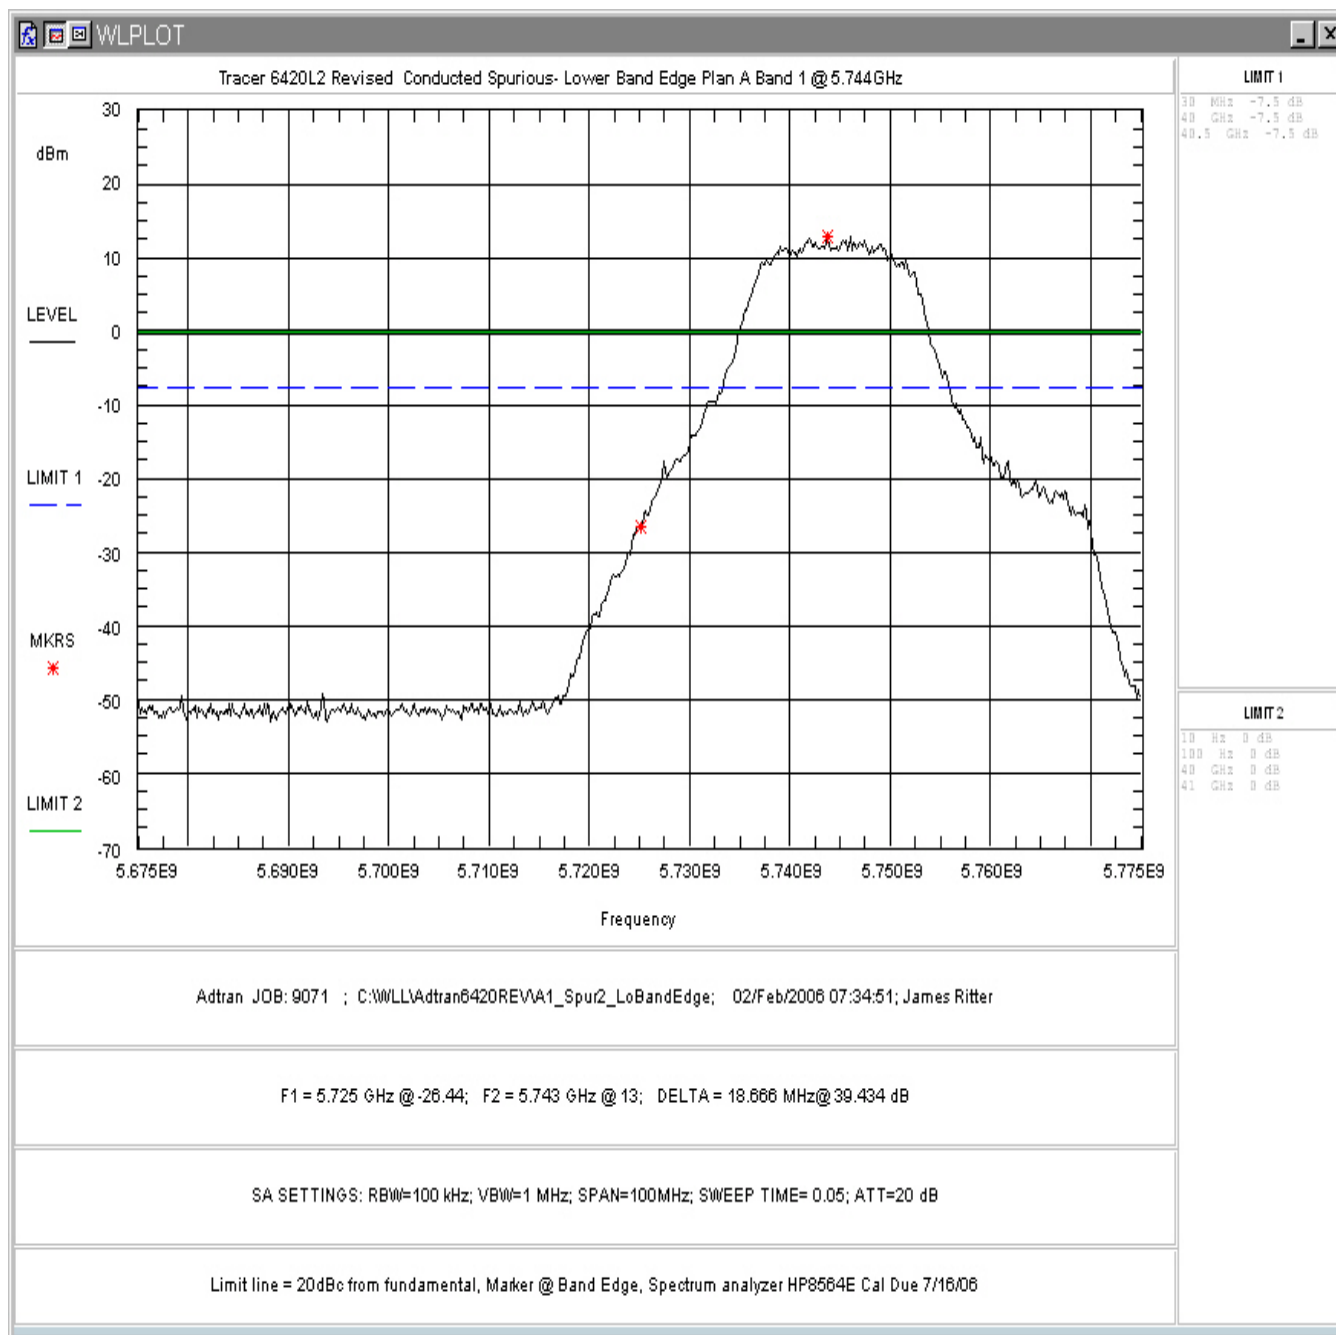


Figure 11. Conducted Spurious Emissions, Plan A Band 1, Lower Band Edge

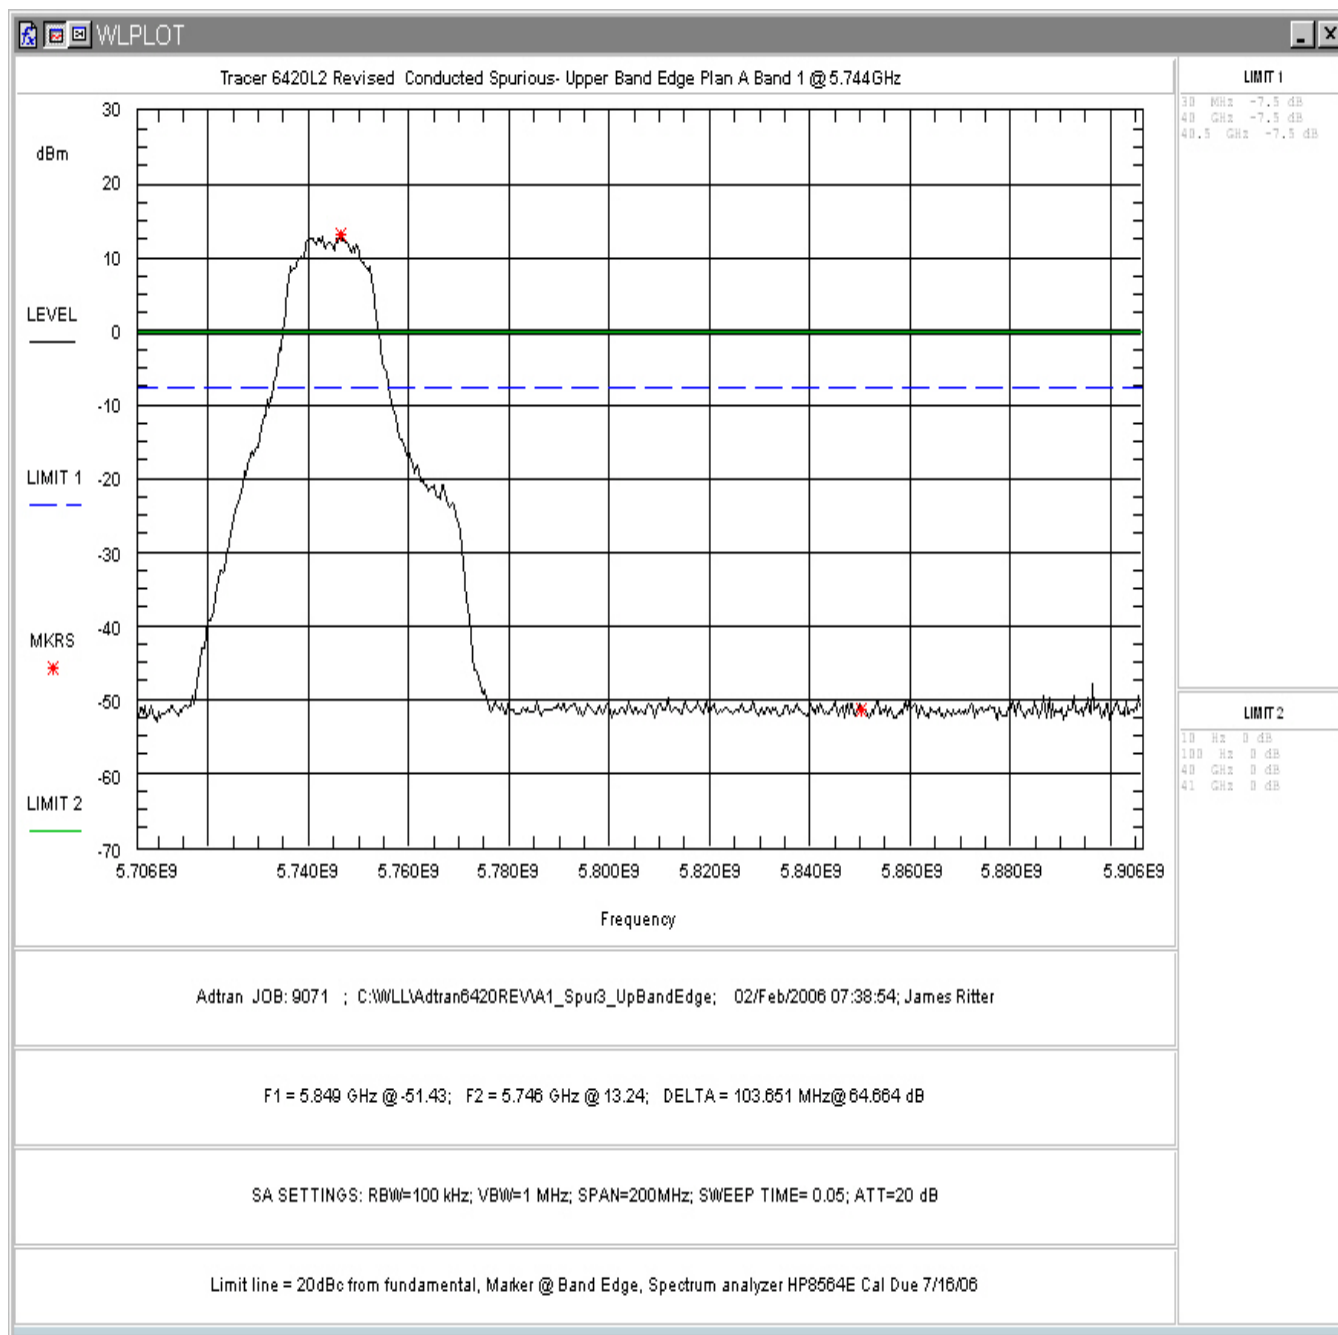


Figure 12. Conducted Spurious Emissions, Plan A Band 1, Upper Band Edge

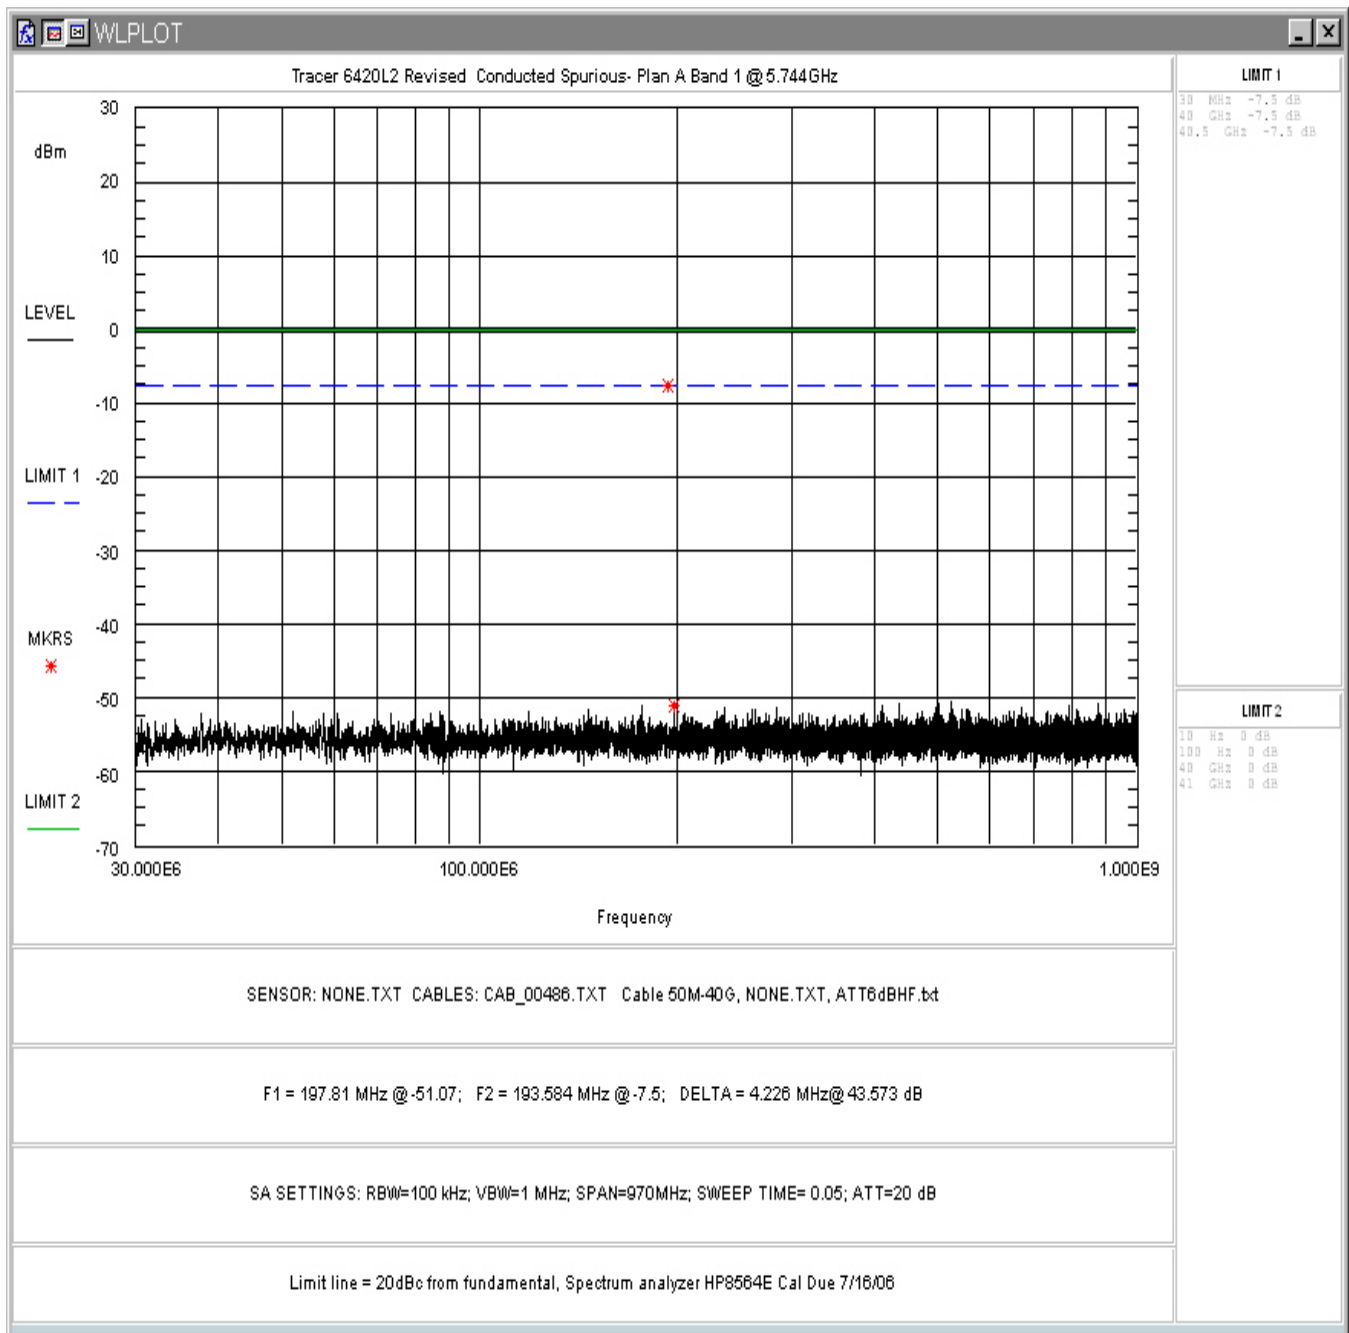


Figure 13. Conducted Spurious Emissions, Plan A Band 1, 30MHz - 1GHz

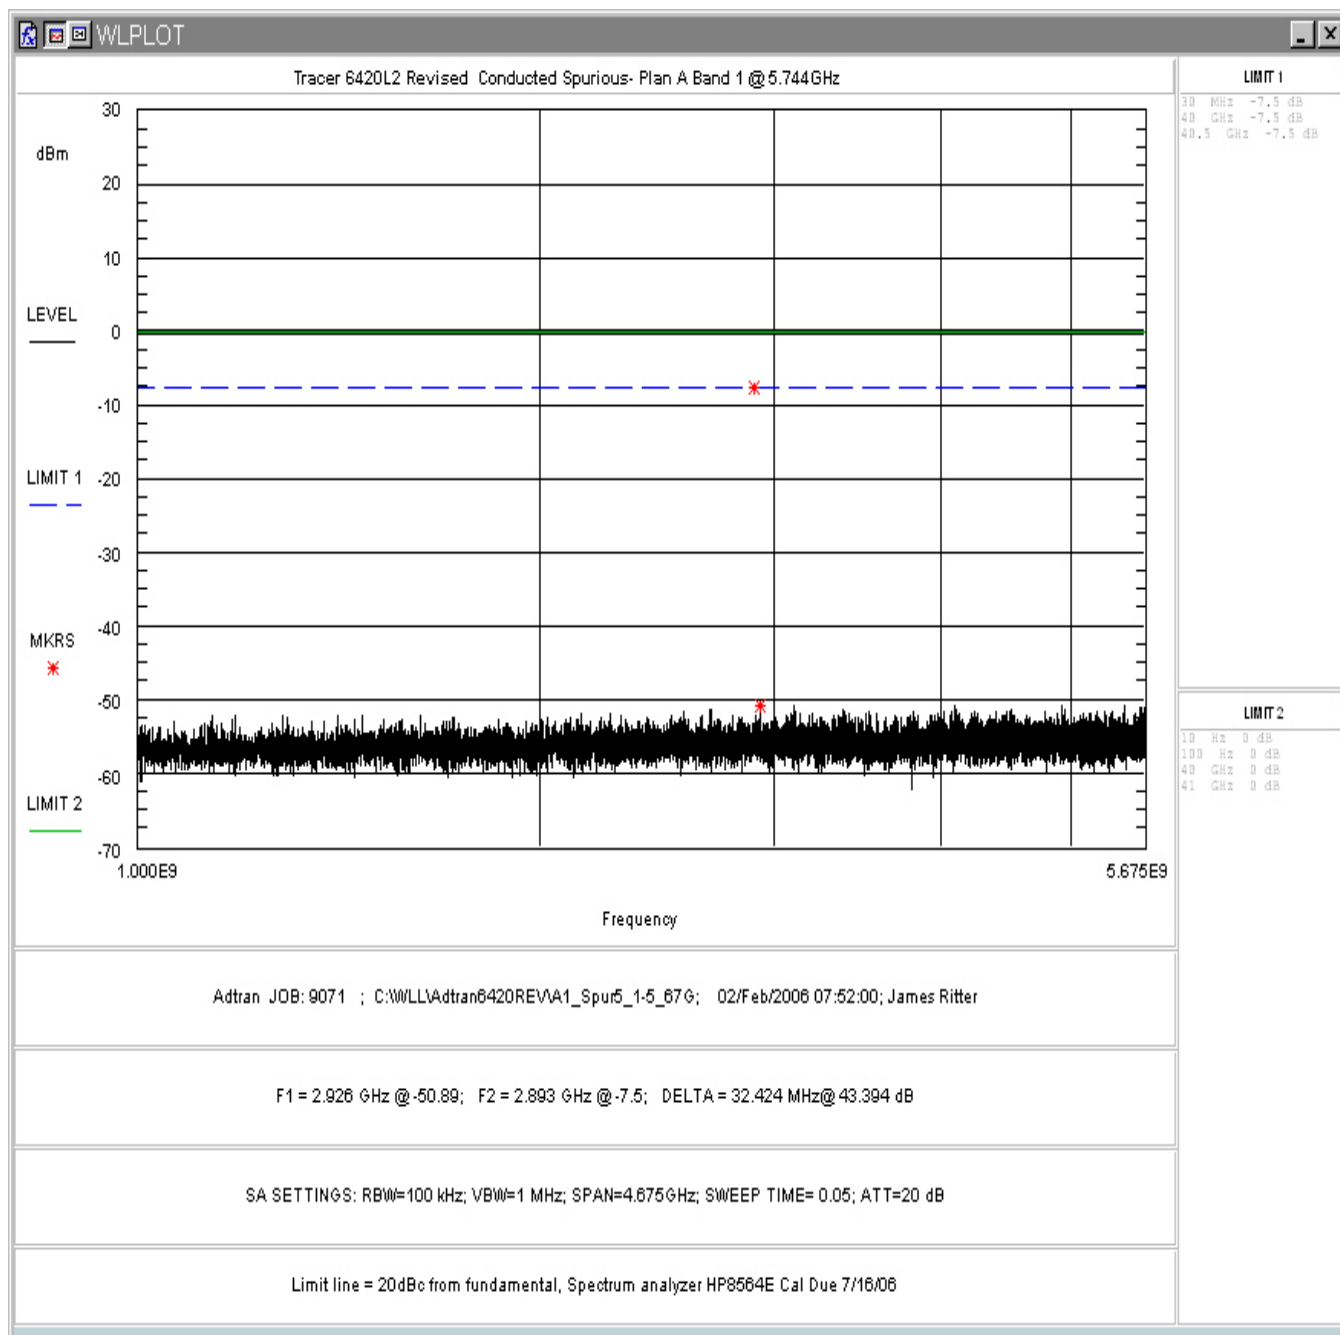


Figure 14. Conducted Spurious Emissions, Plan A Band 1, 1GHz – 5.675GHz

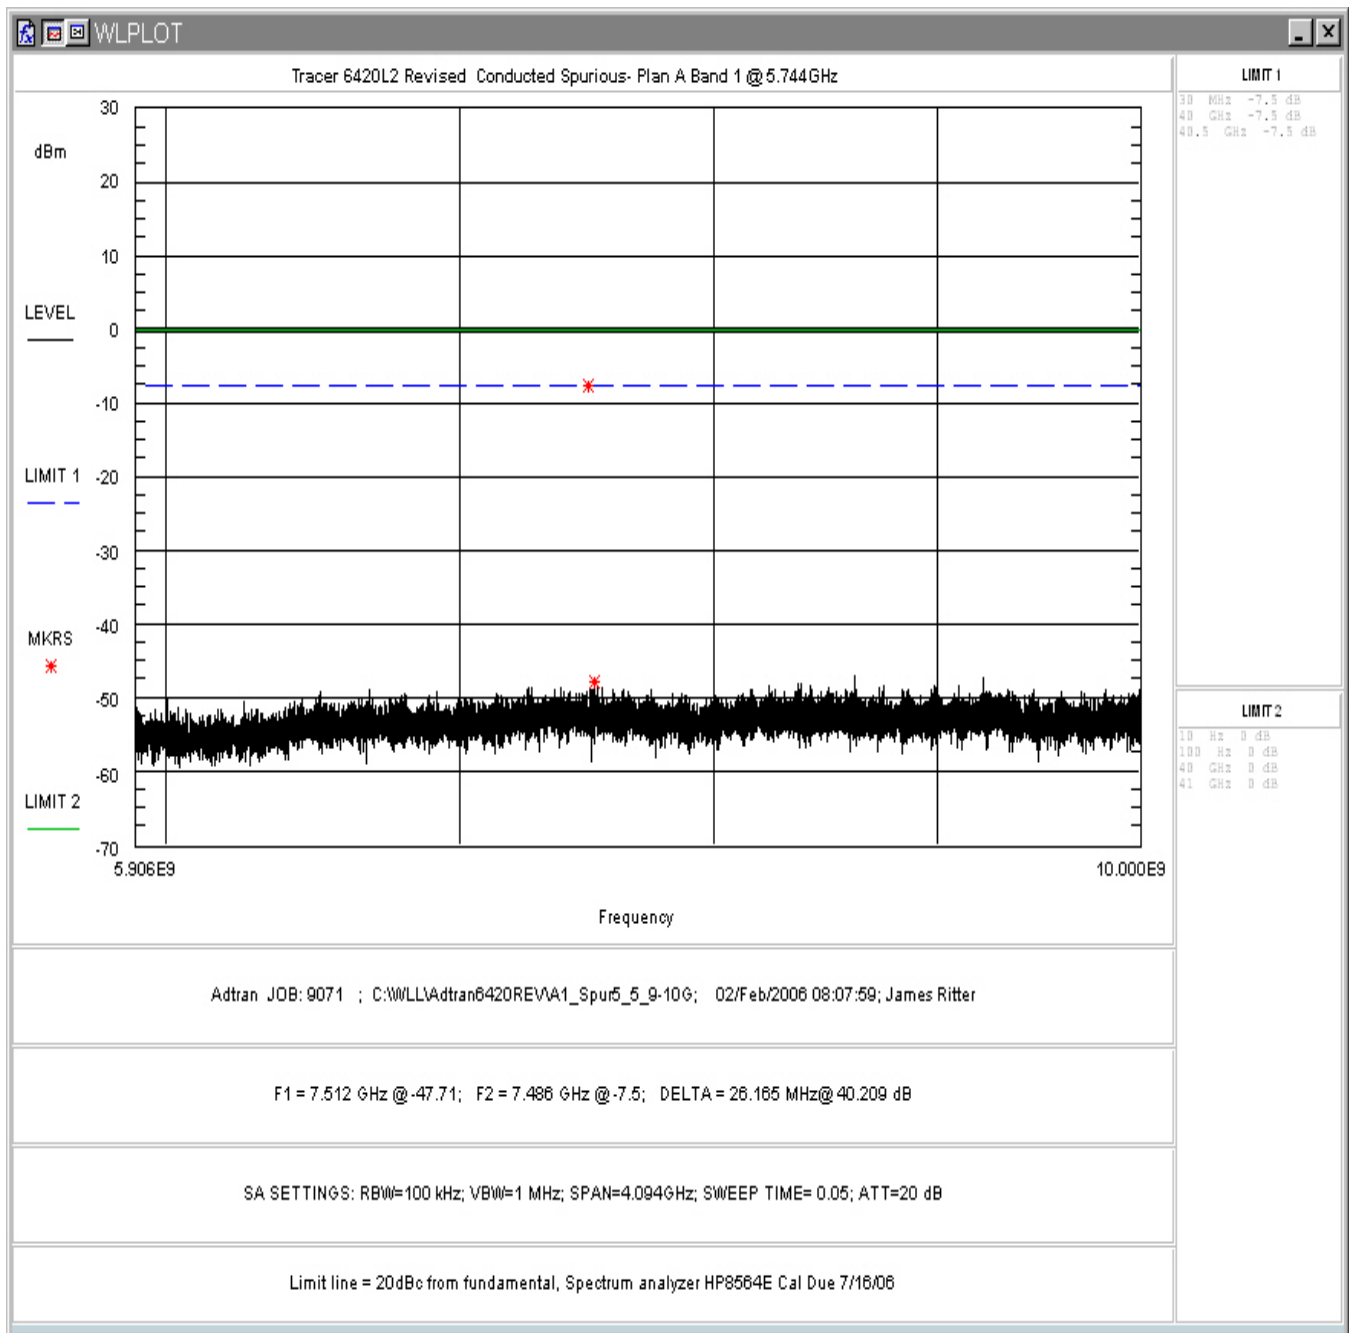


Figure 15. Conducted Spurious Emissions, Plan A Band 1, 5.9 – 10GHz

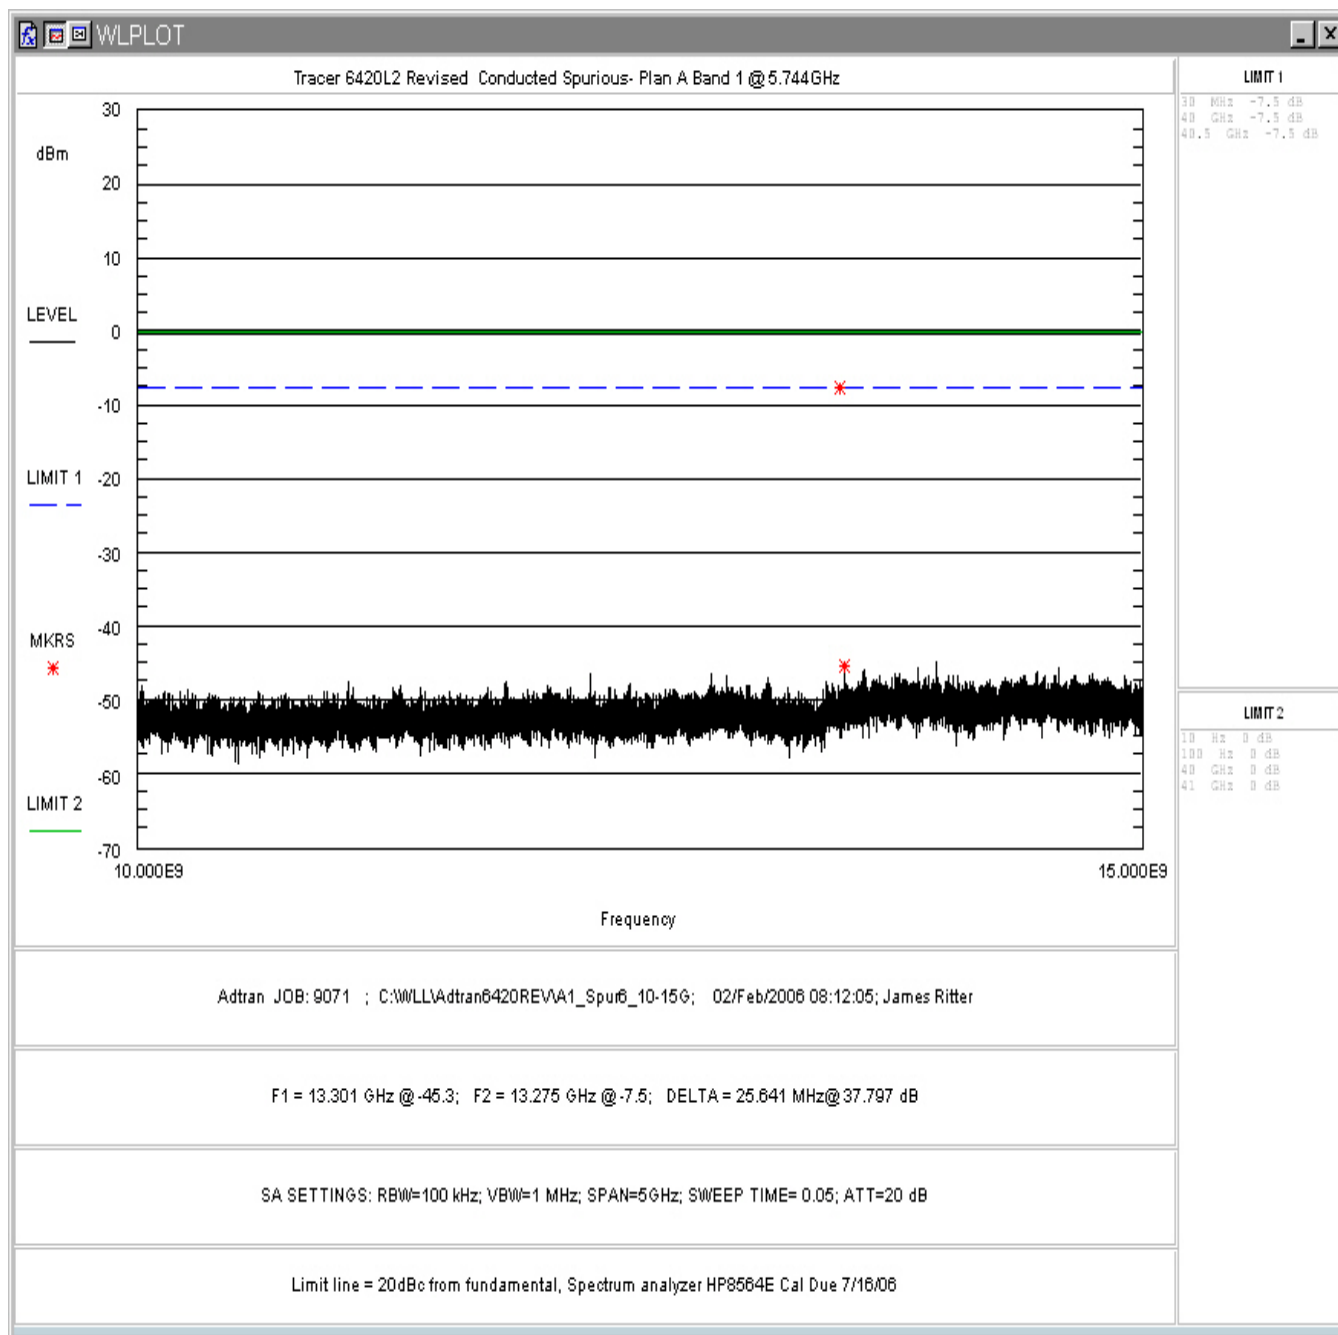


Figure 16. Conducted Spurious Emissions, Plan A Band 1, 10 – 15GHz

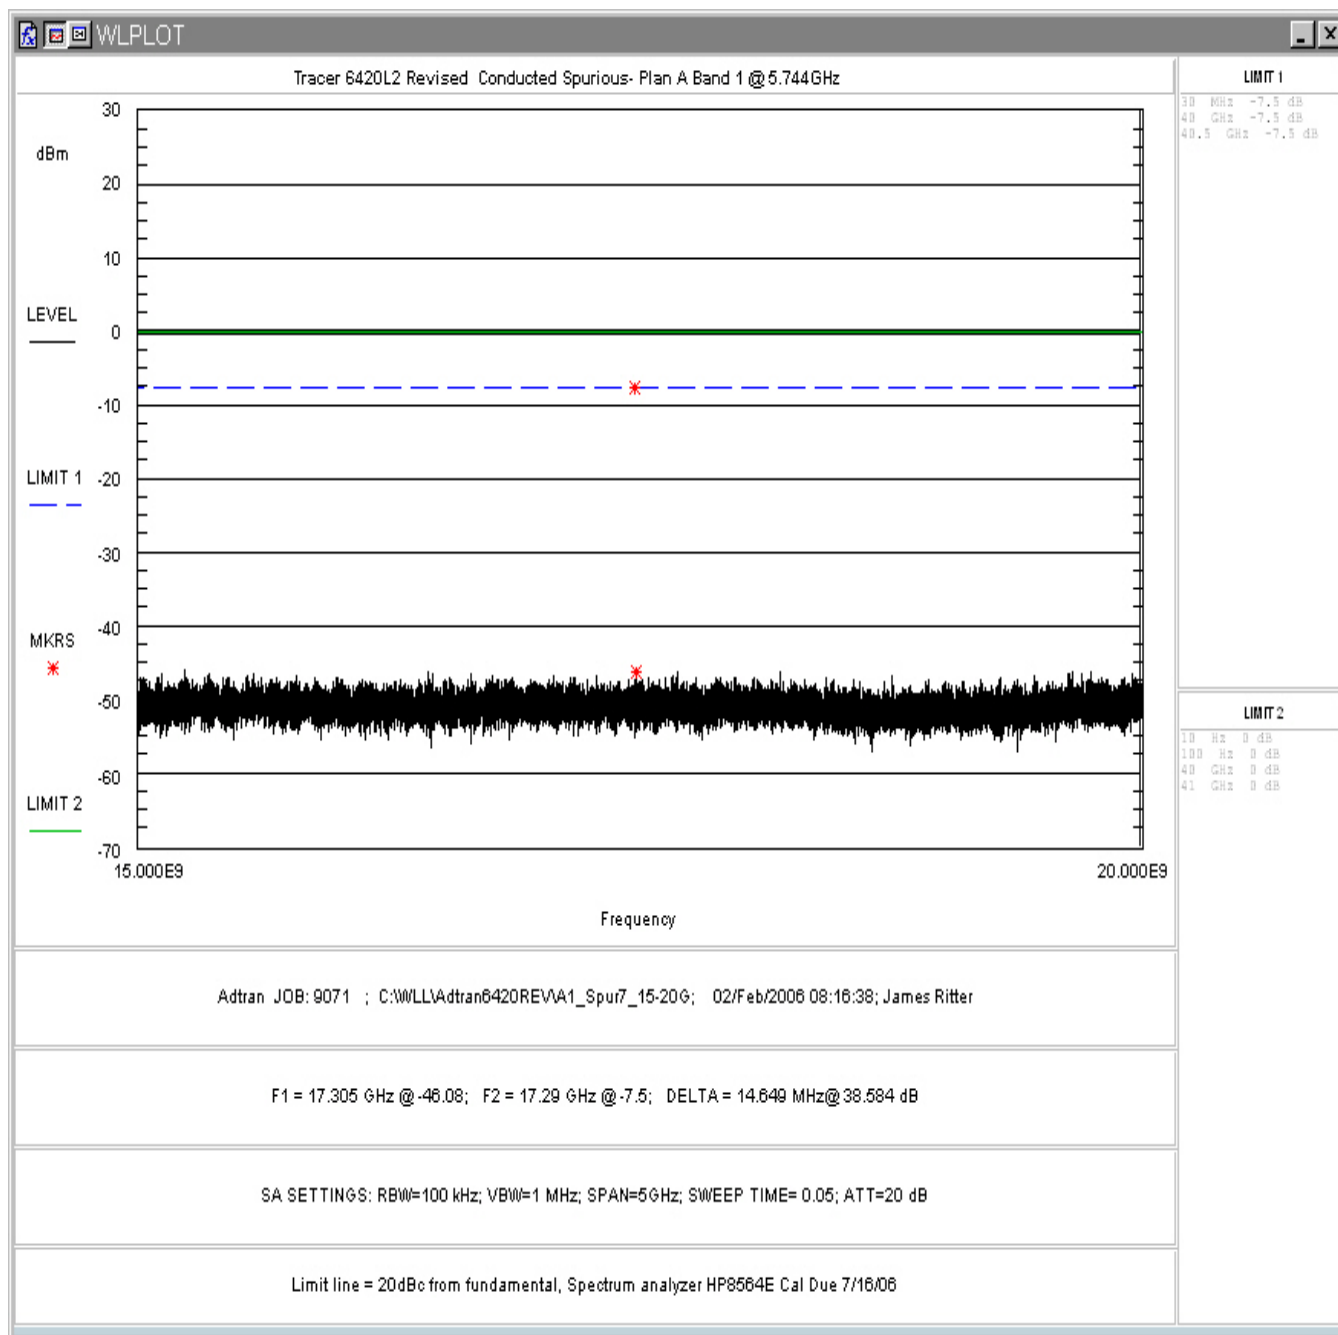


Figure 17. Conducted Spurious Emissions, Plan A Band 1, 15 – 20GHz

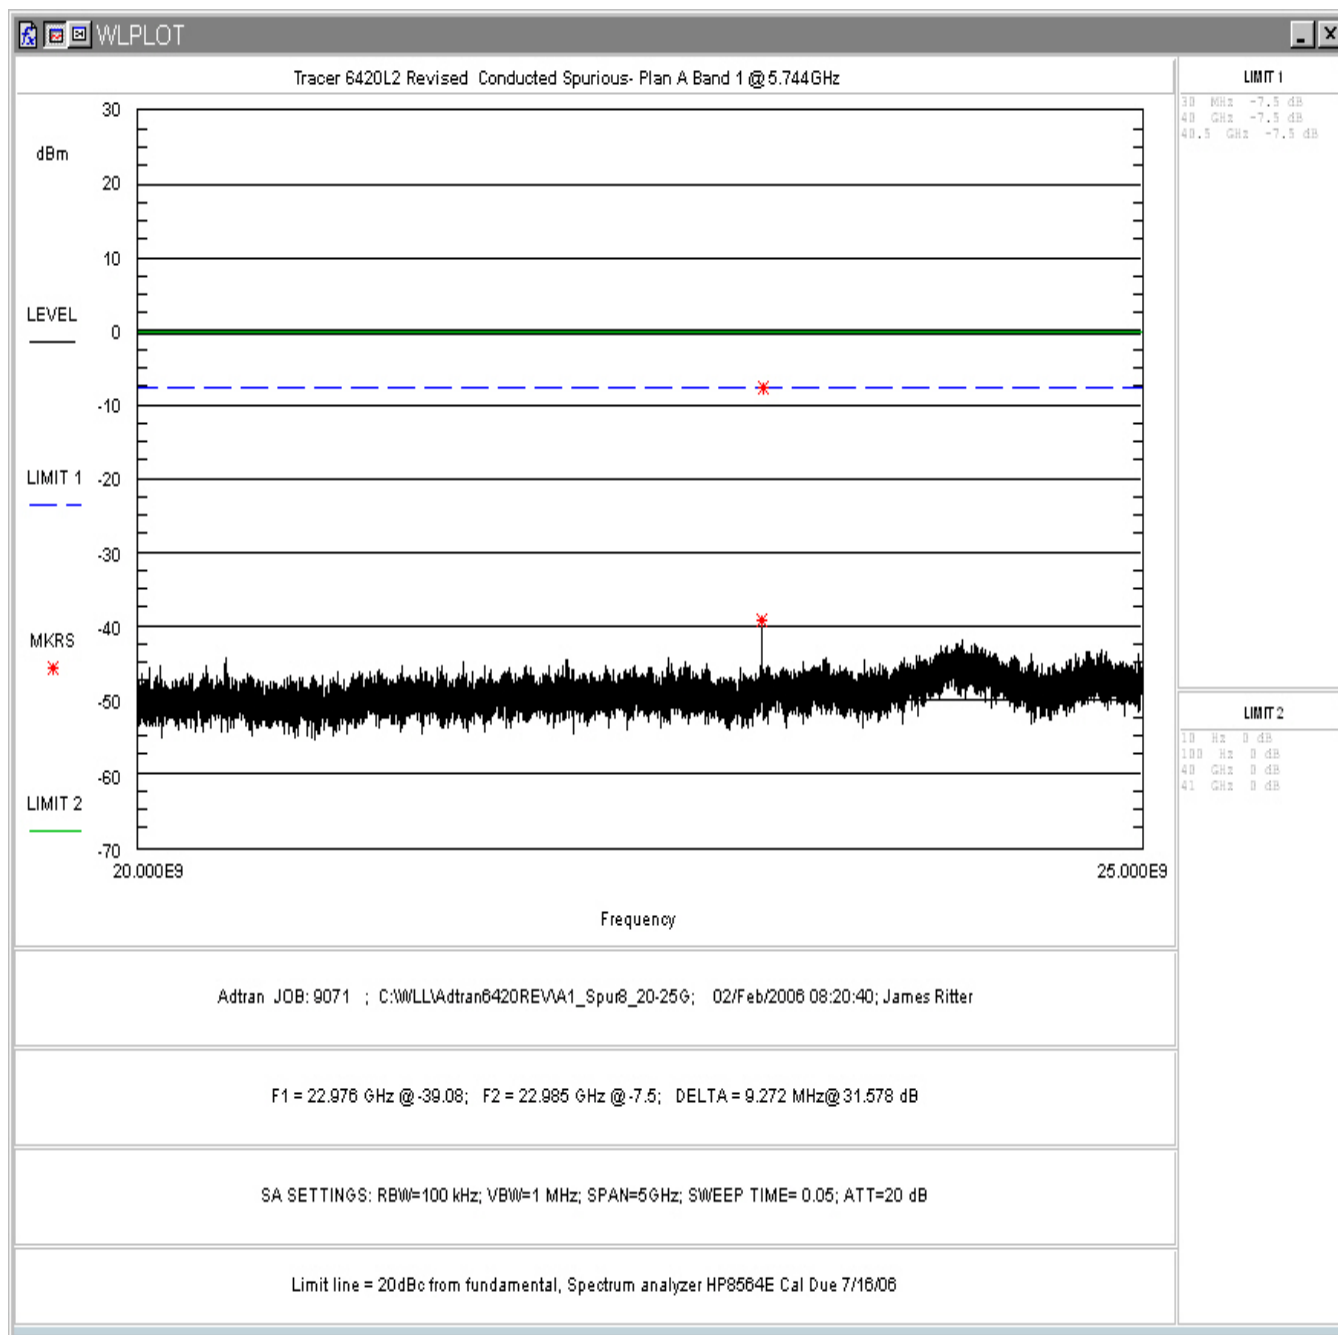


Figure 18. Conducted Spurious Emissions, Plan A Band 1, 20 – 25GHz

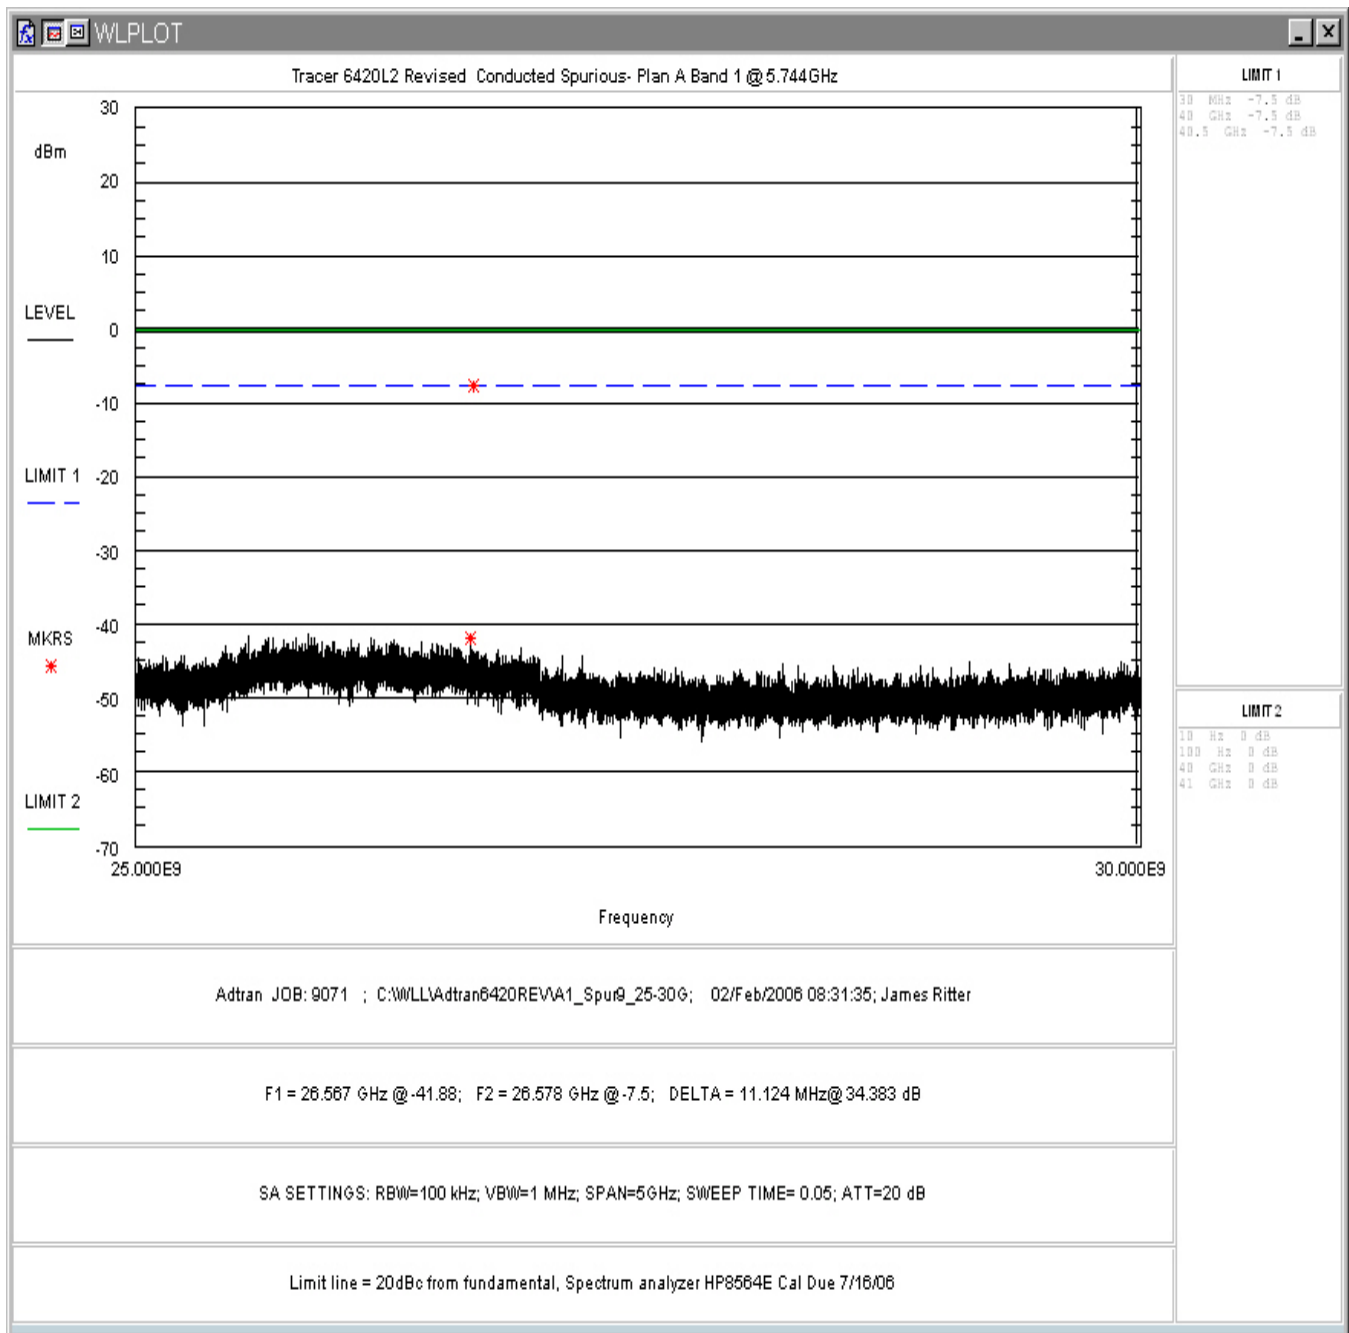


Figure 19. Conducted Spurious Emissions, Plan A Band 1, 25 – 30GHz

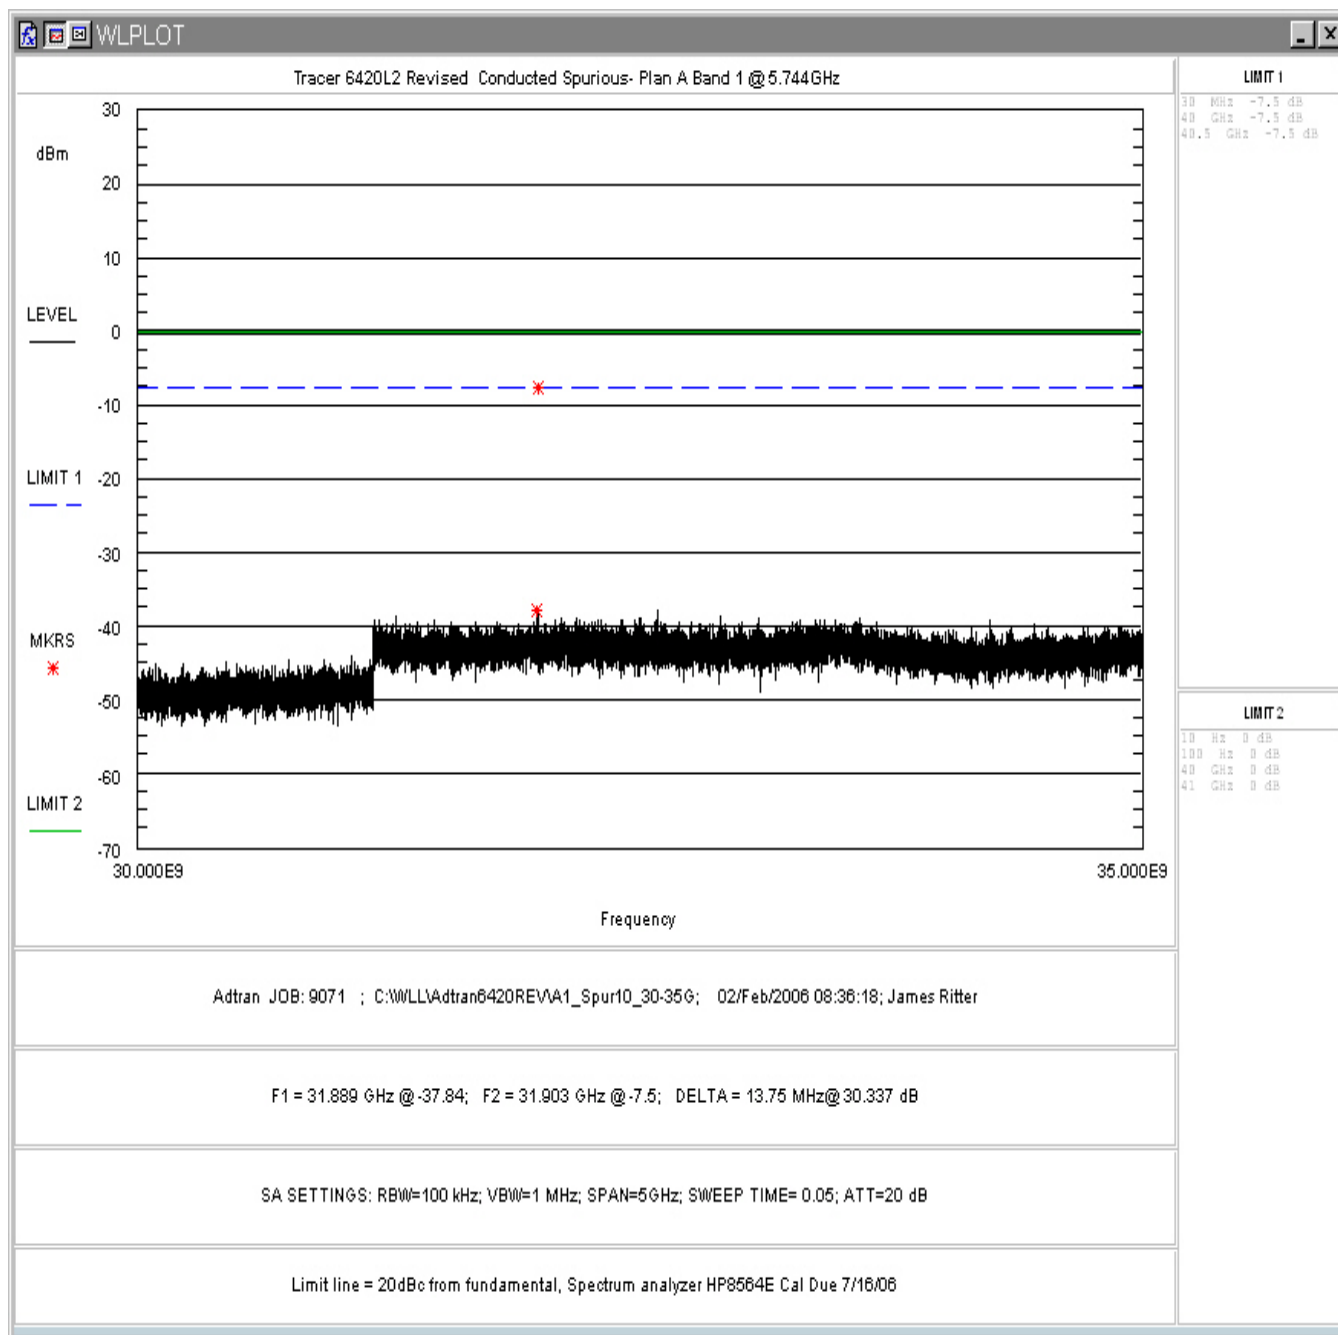


Figure 20. Conducted Spurious Emissions, Plan A Band 1, 30 – 35GHz

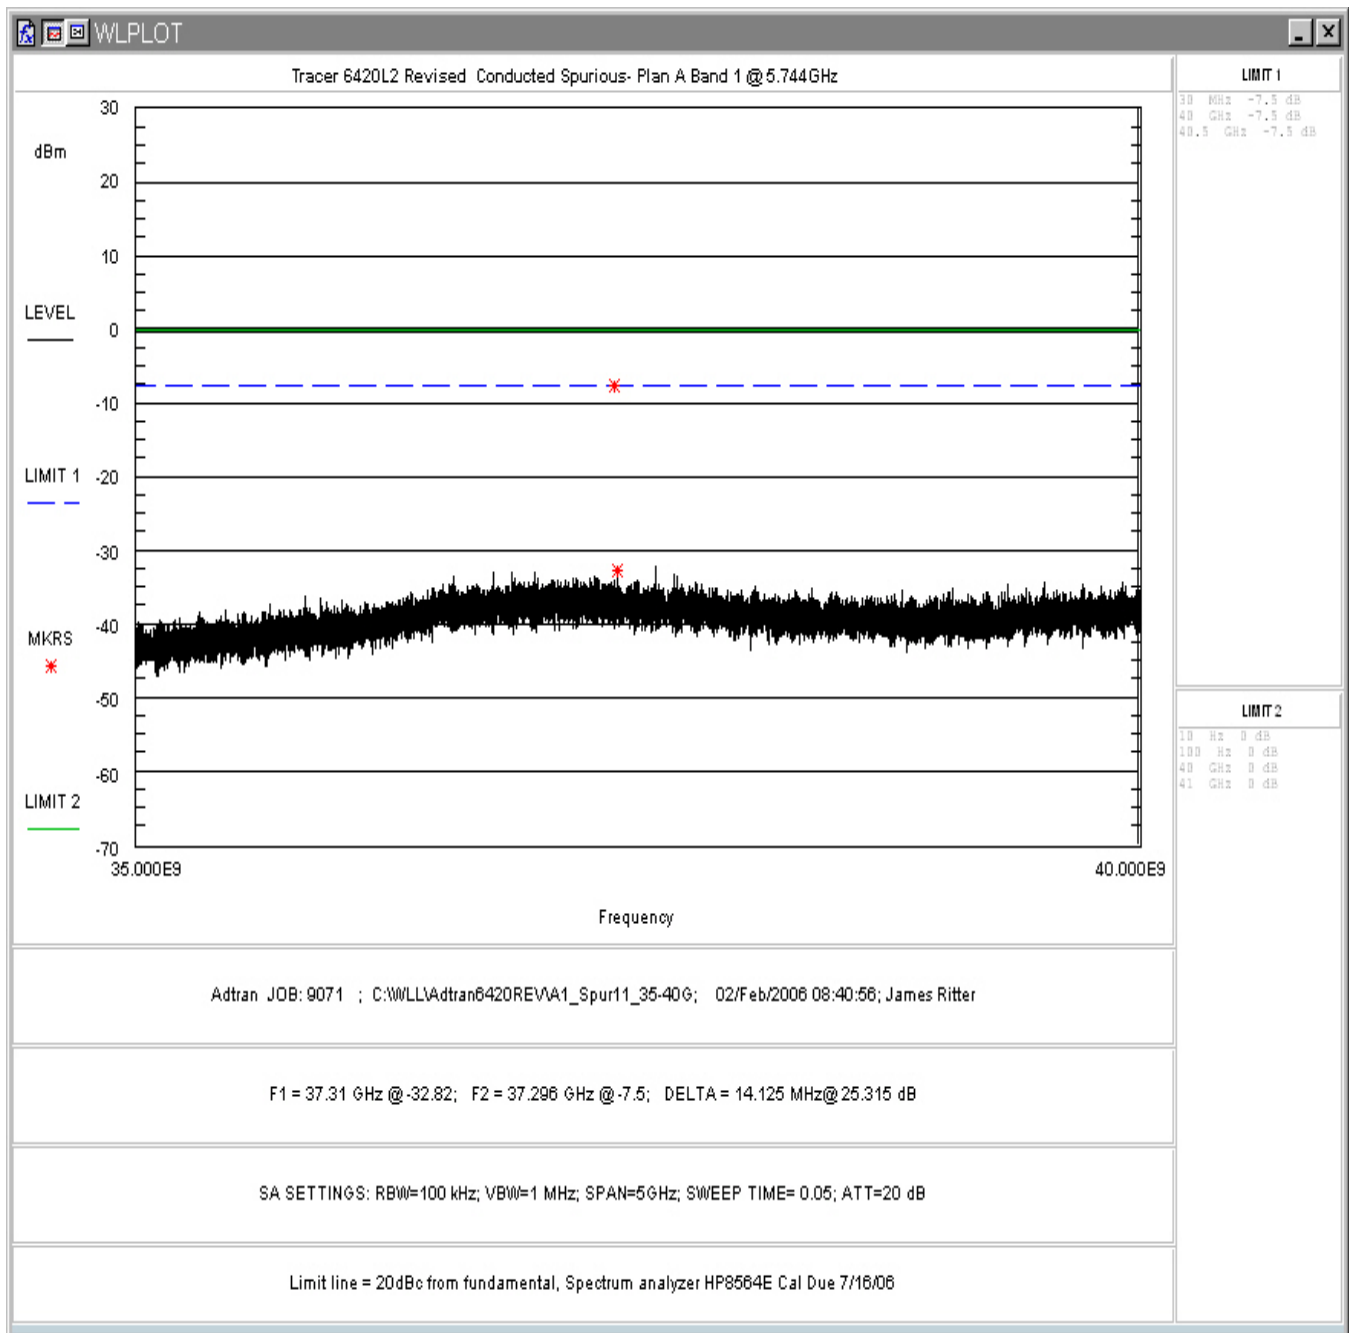


Figure 21. Conducted Spurious Emissions, Plan A Band 1, 35 – 40GHz

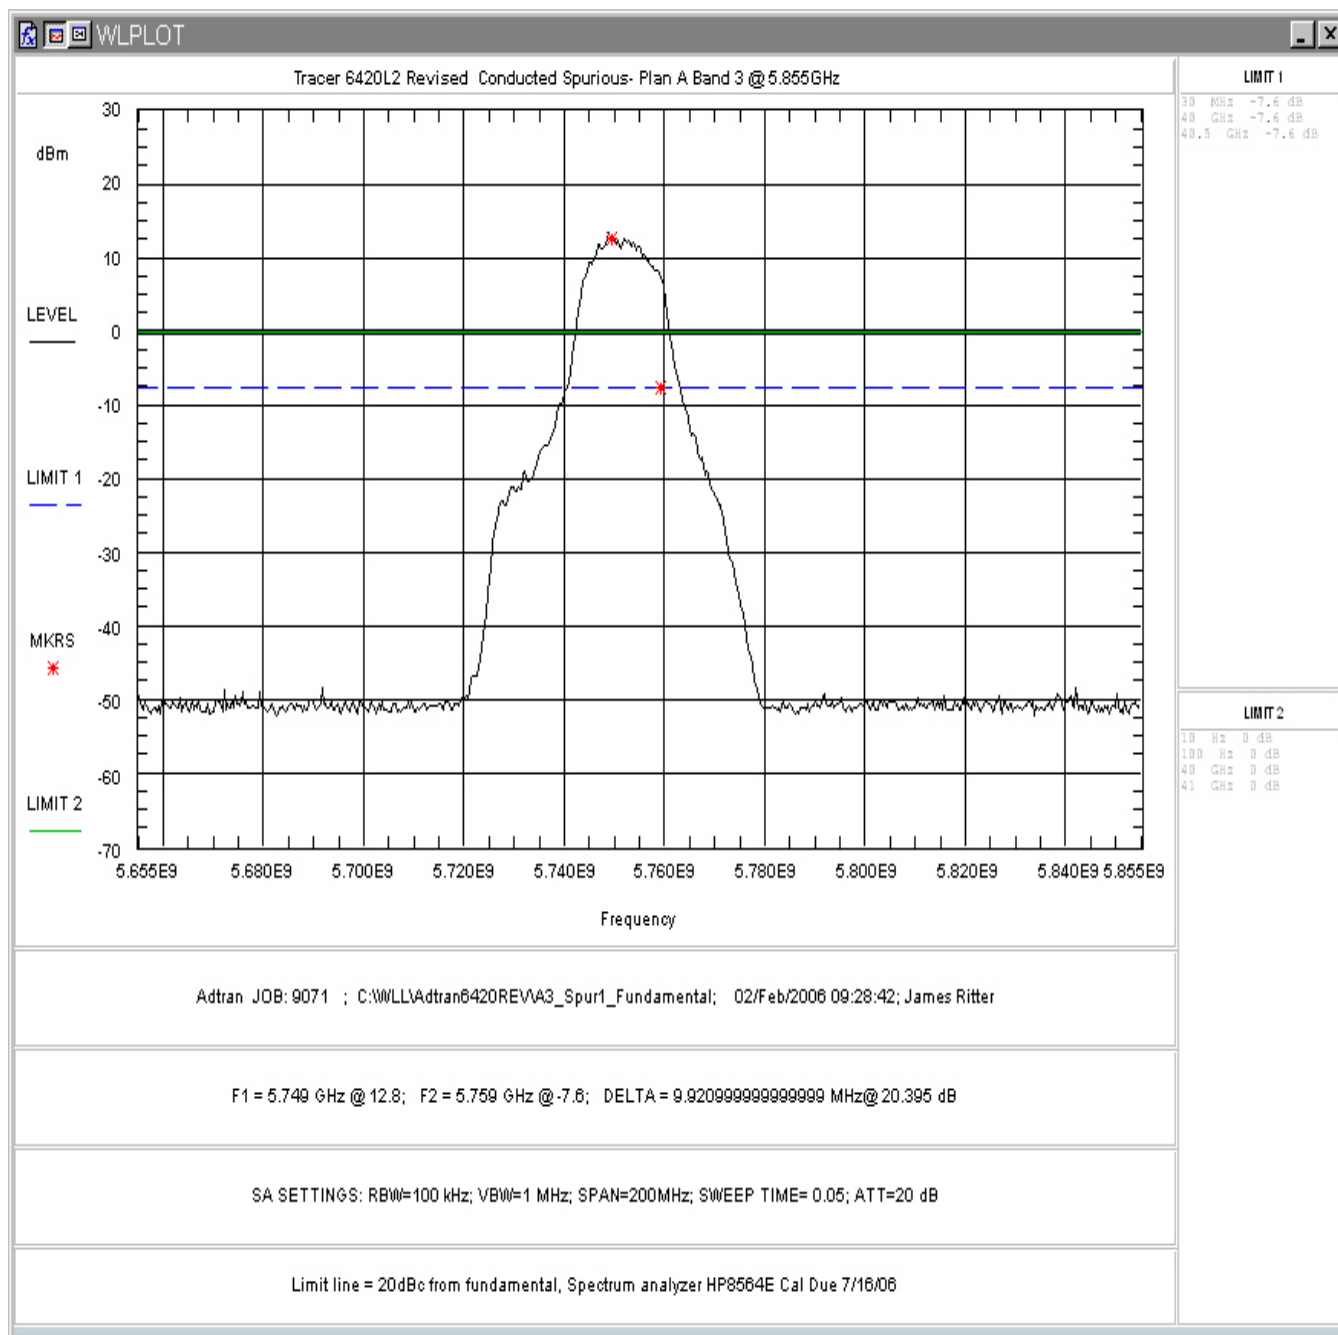


Figure 22. Conducted Spurious Emissions, Plan A Band 3, Inband

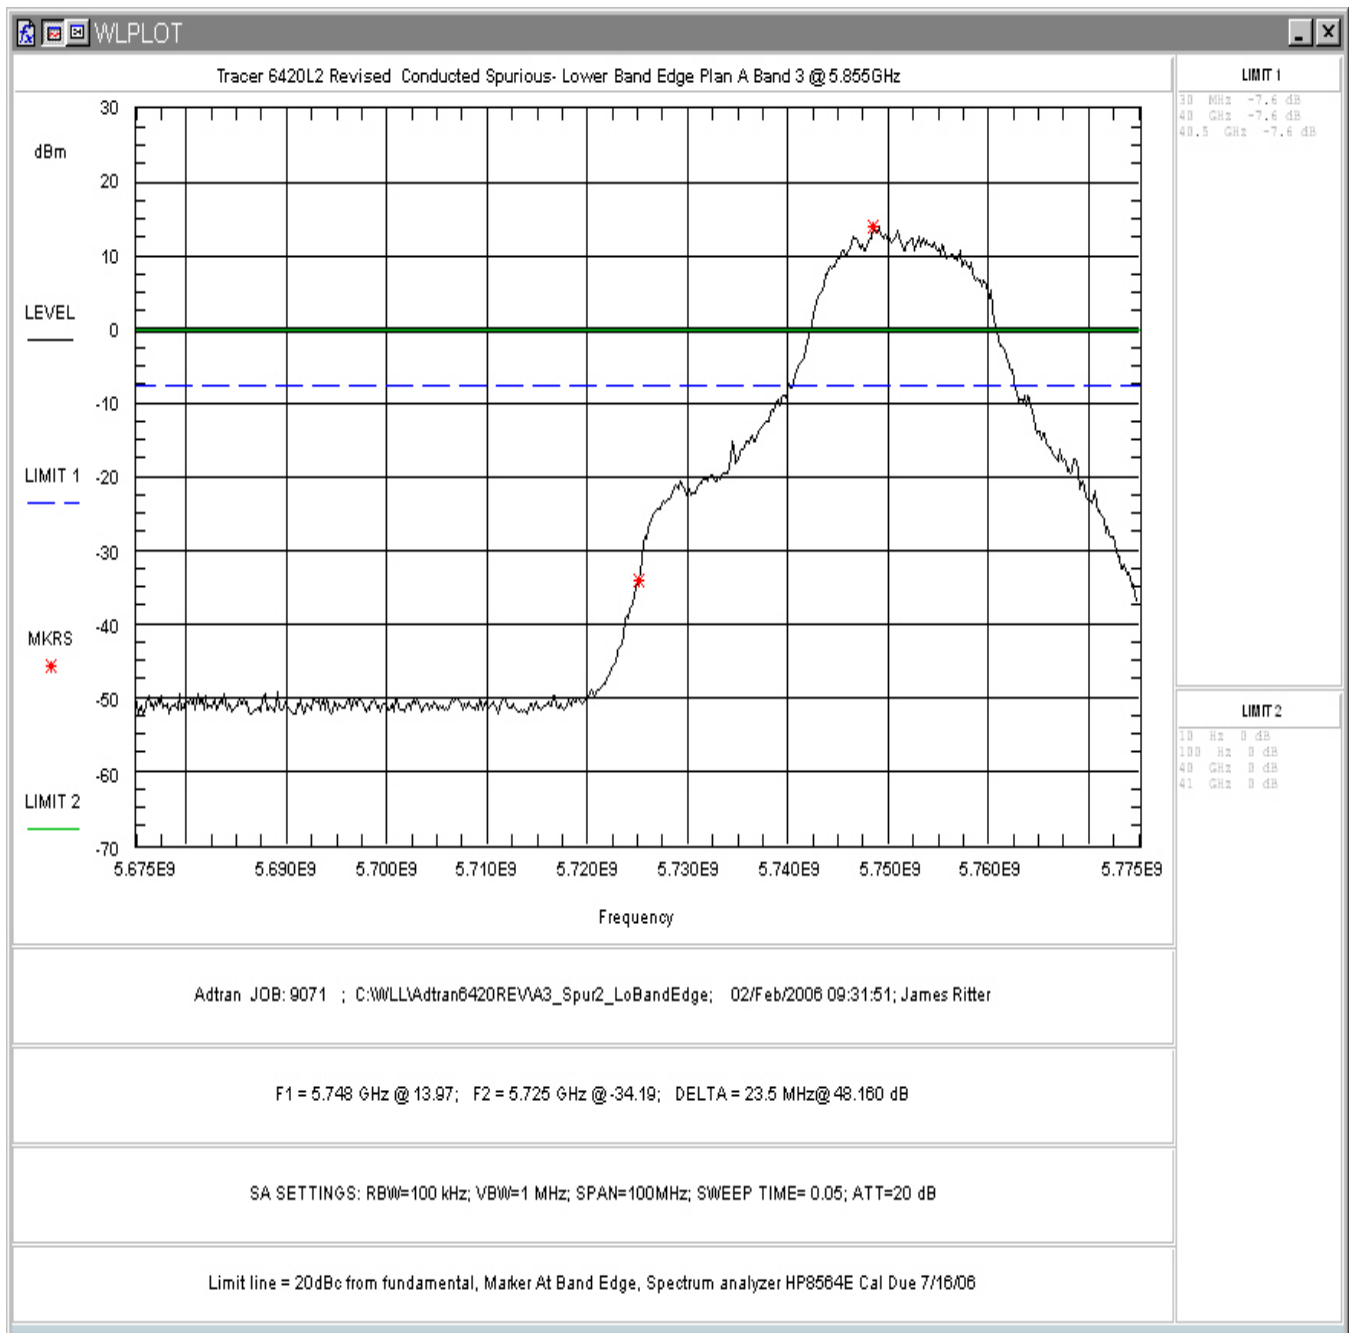


Figure 23. Conducted Spurious Emissions, Plan A Band 3, Lower Band Edge

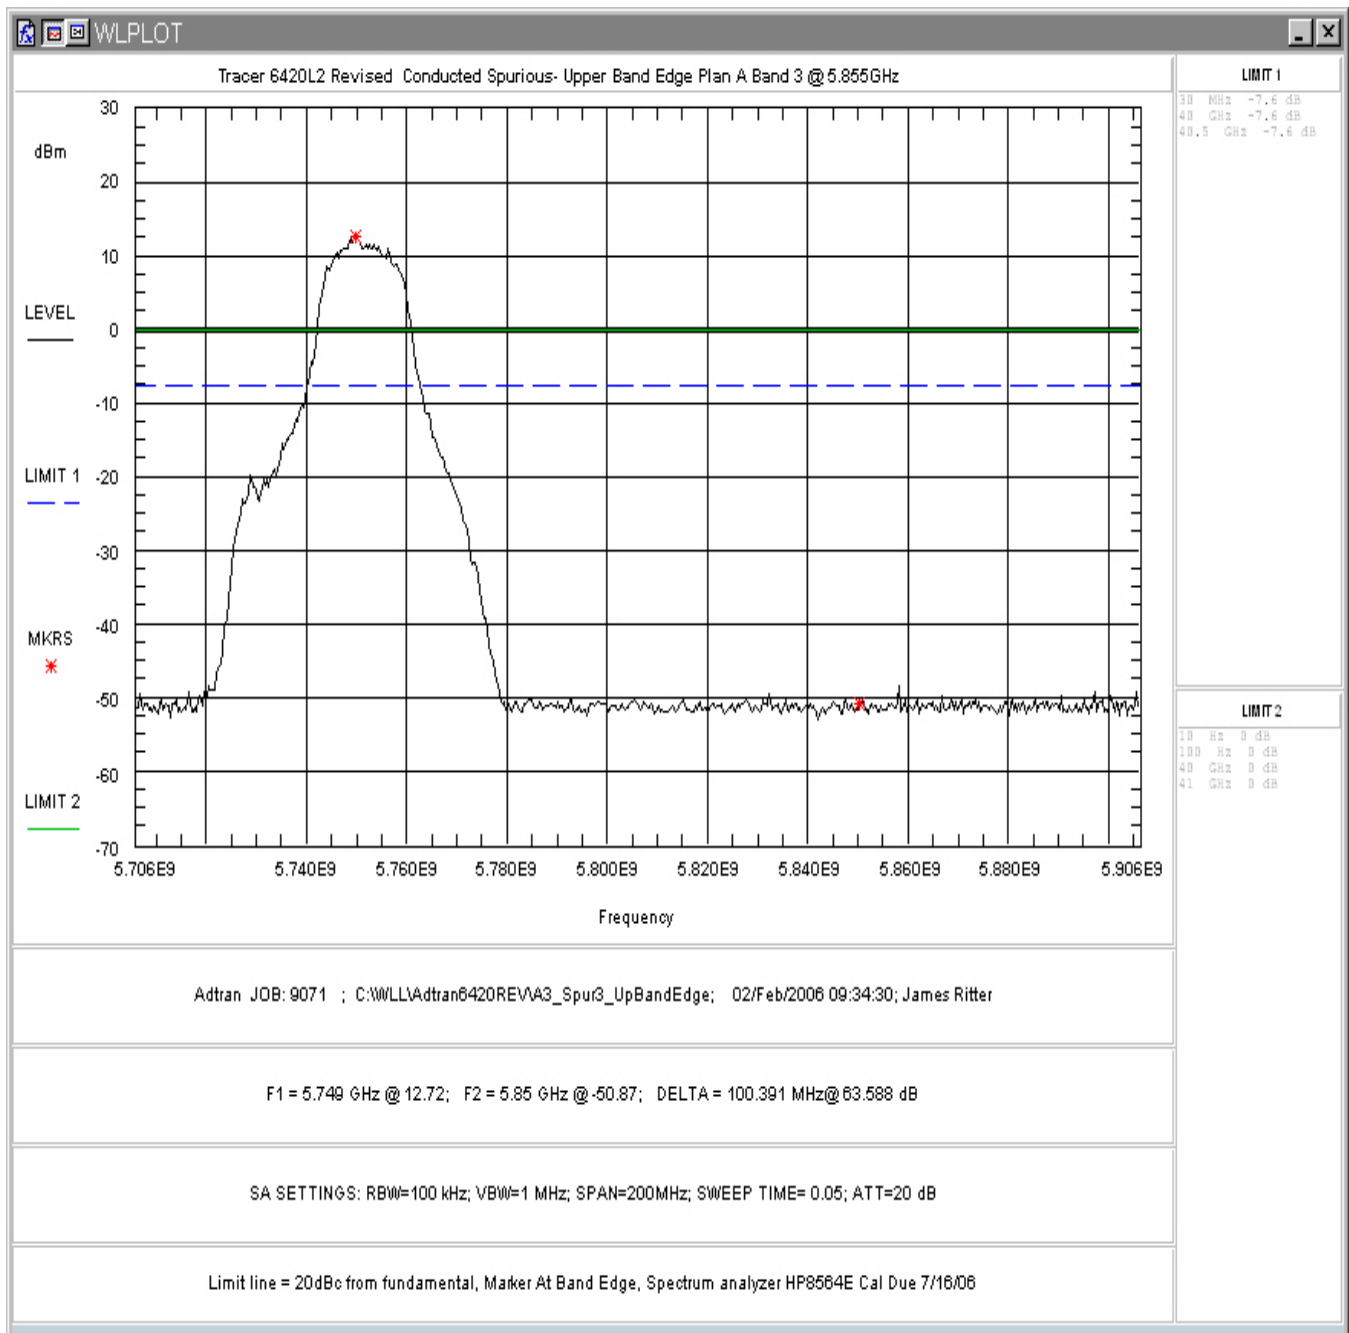


Figure 24. Conducted Spurious Emissions, Plan A Band 3, Upper Band Edge

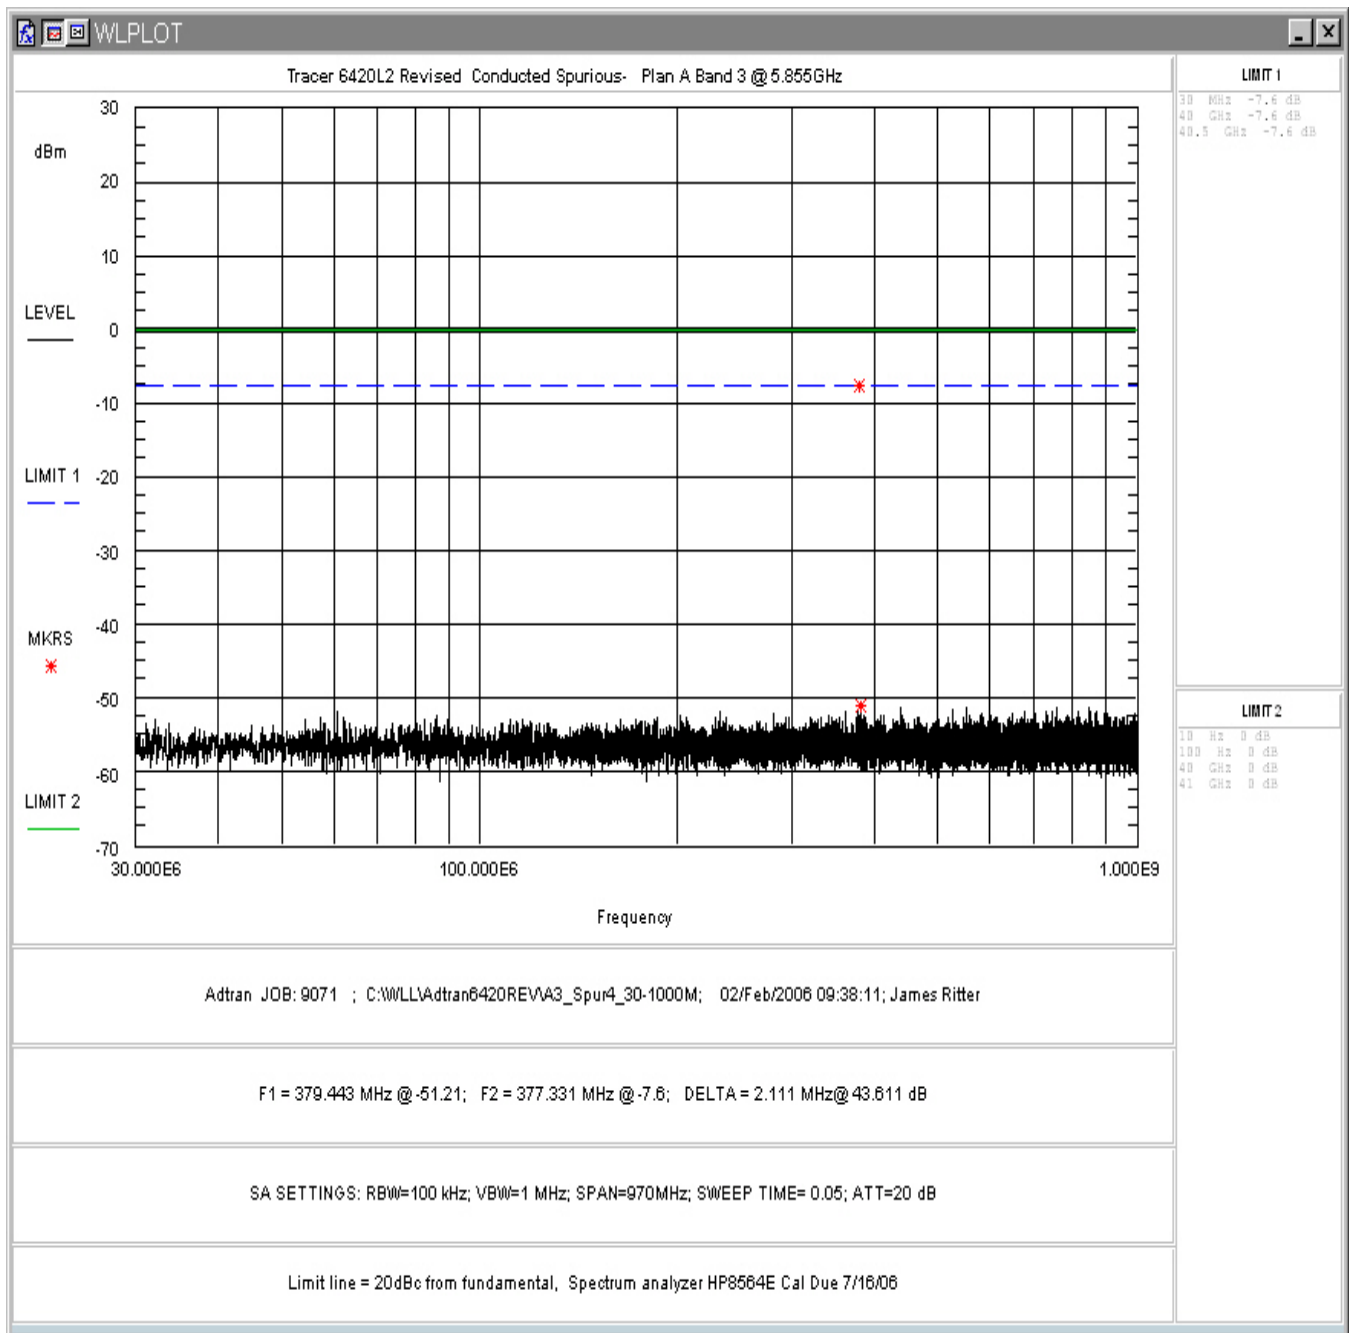


Figure 25. Conducted Spurious Emissions, Plan A Band 3, 30MHz - 1GHz

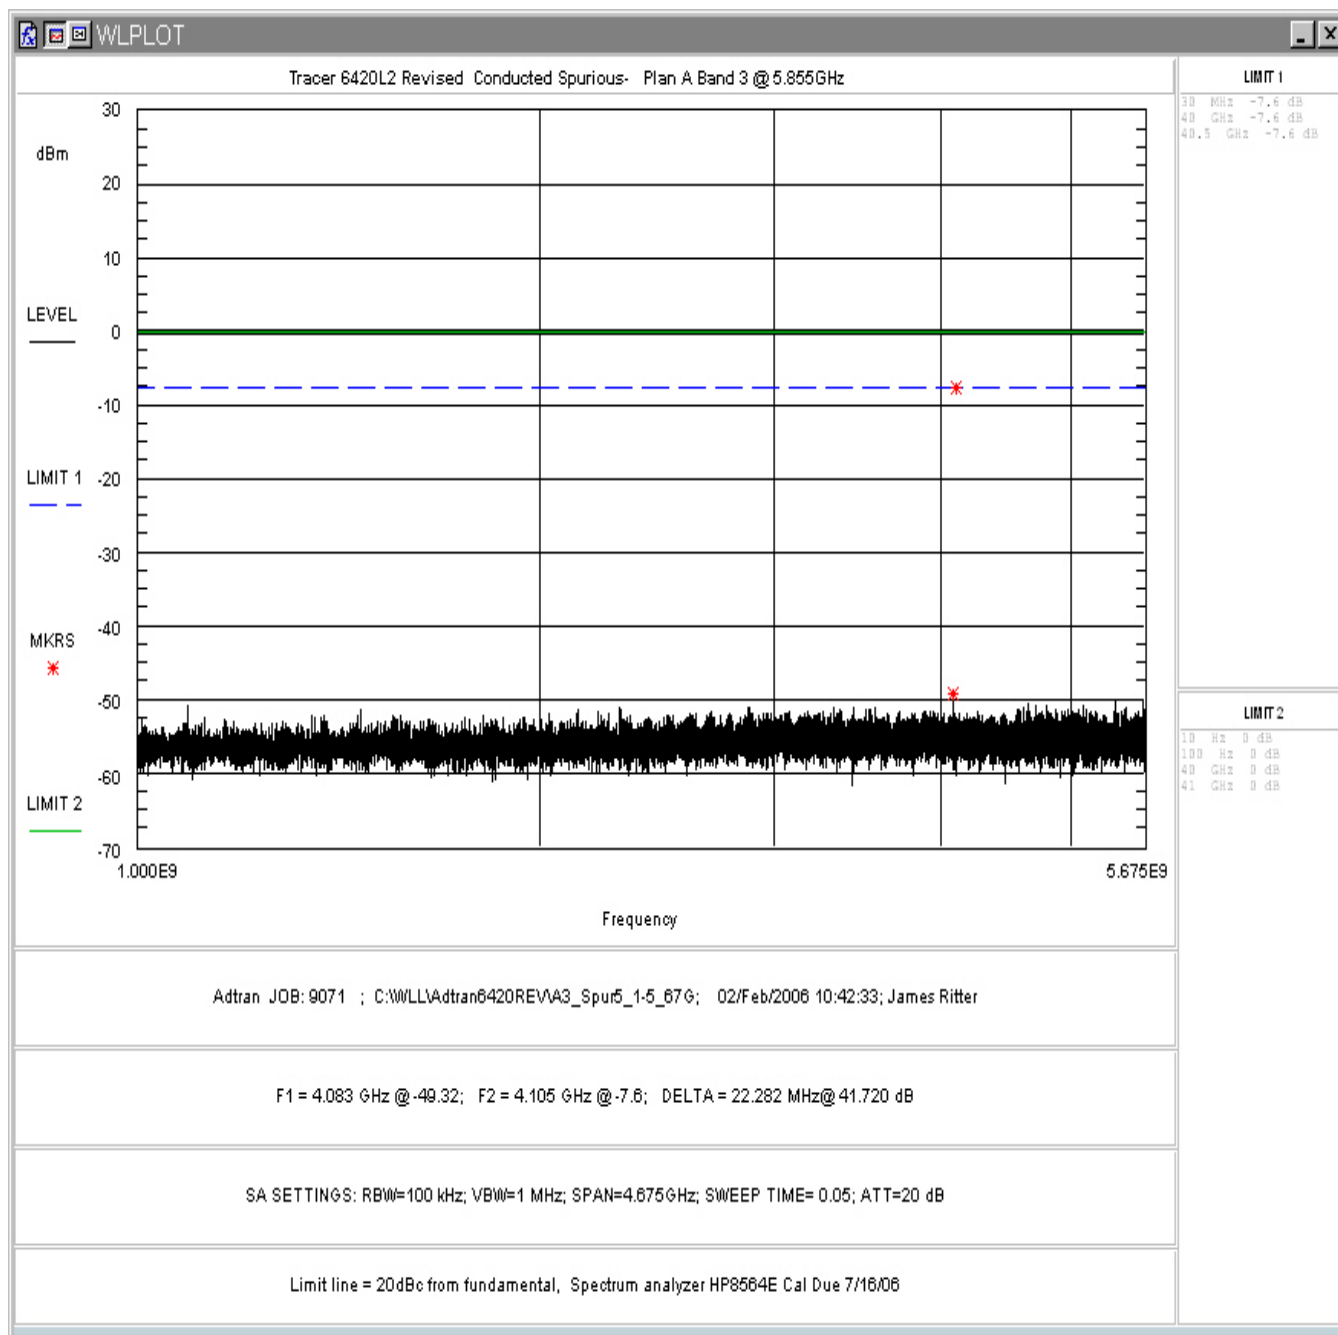


Figure 26. Conducted Spurious Emissions, Plan A Band 3, 1GHz – 5.675GHz

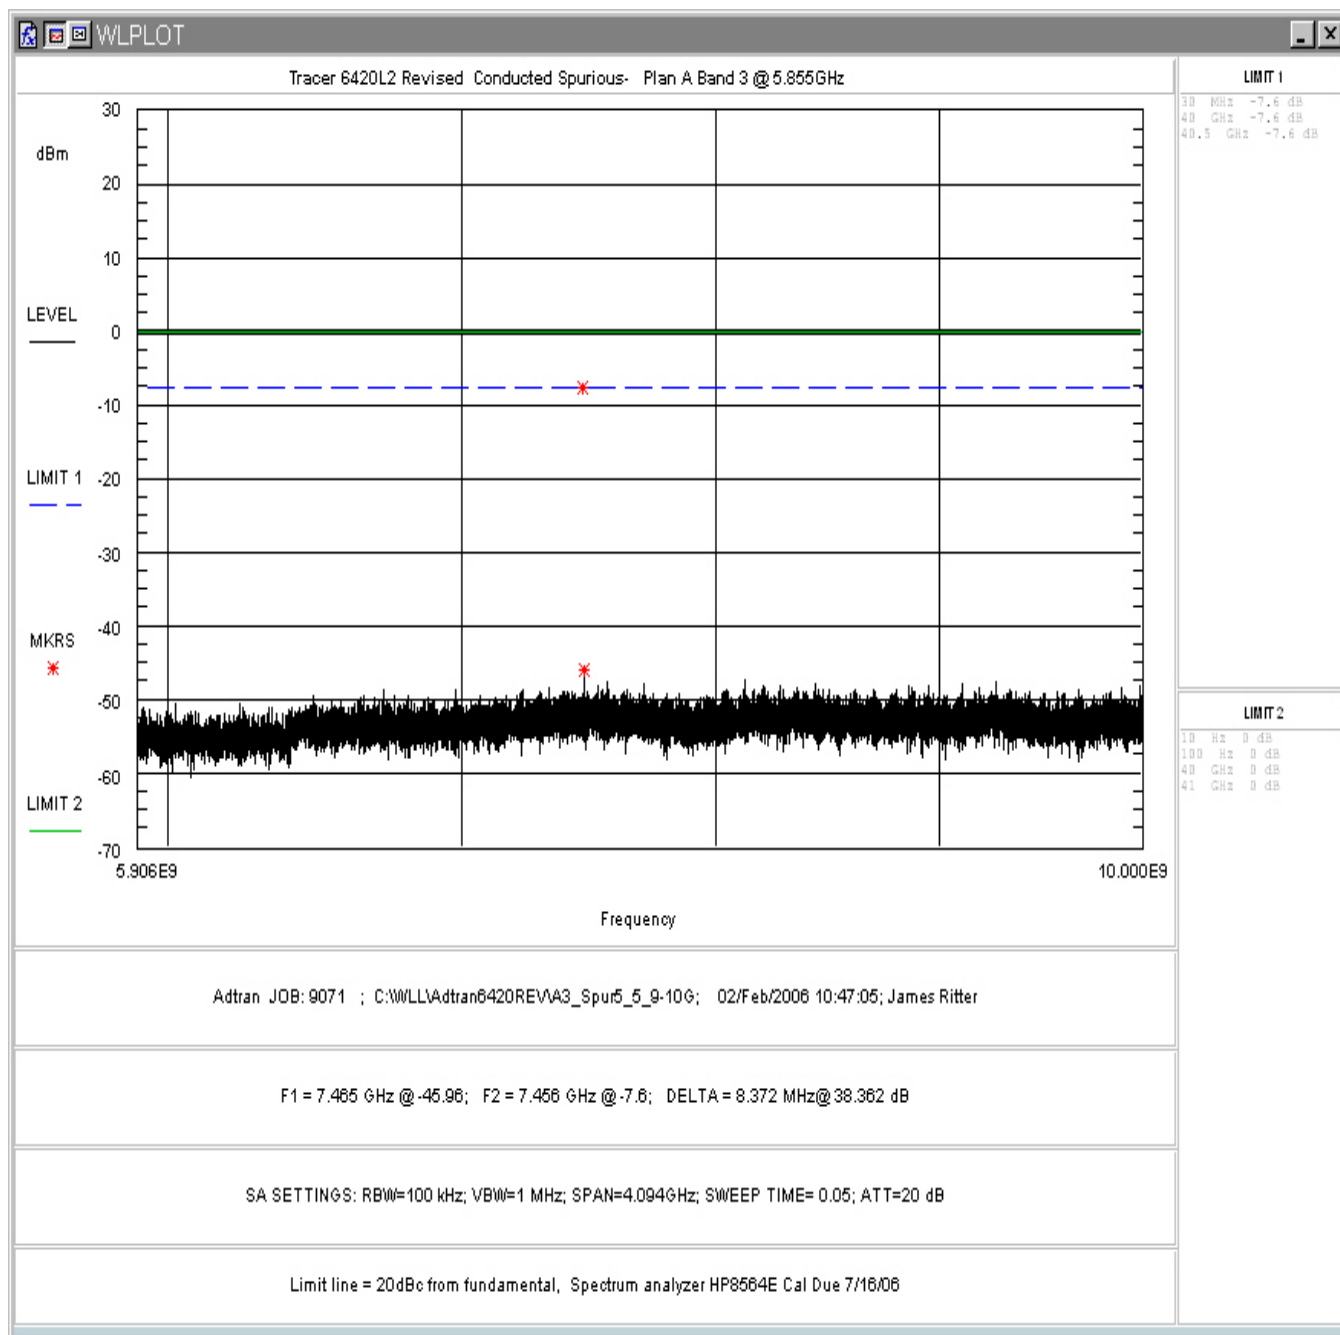


Figure 27. Conducted Spurious Emissions, Plan A Band 3, 5.9GHz – 10GHz

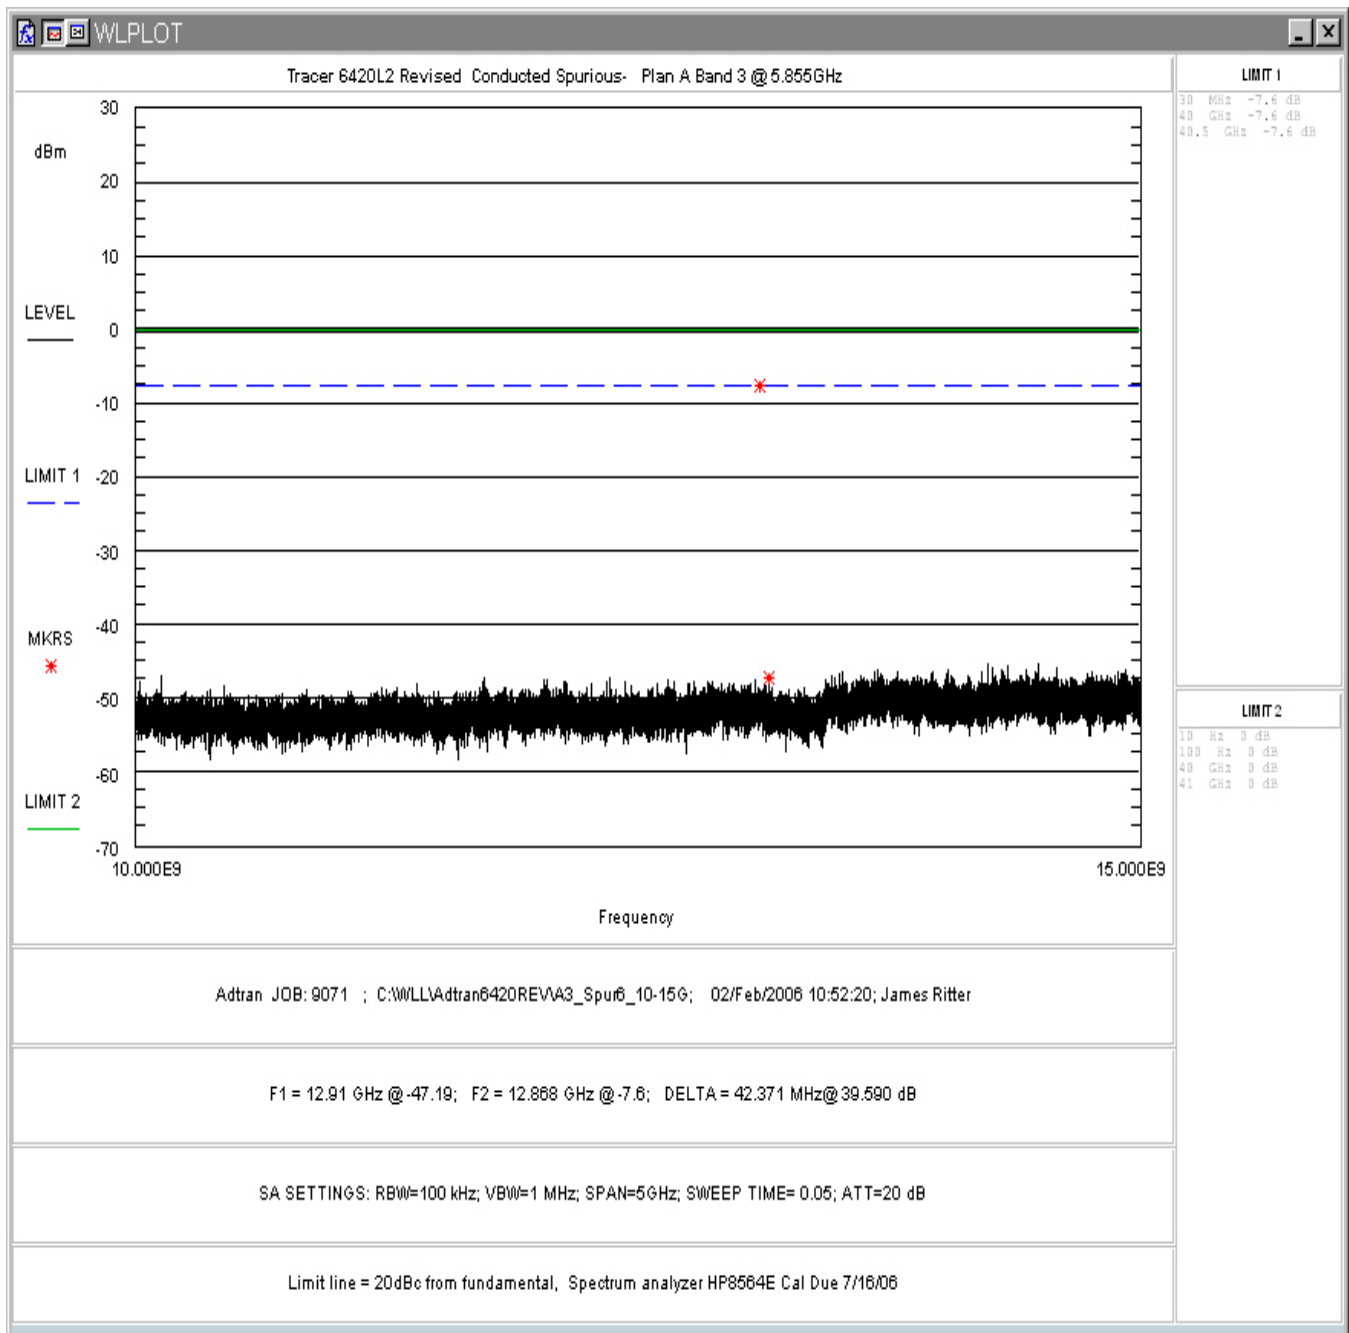


Figure 28. Conducted Spurious Emissions, Plan A Band 3, 10GHz – 15GHz

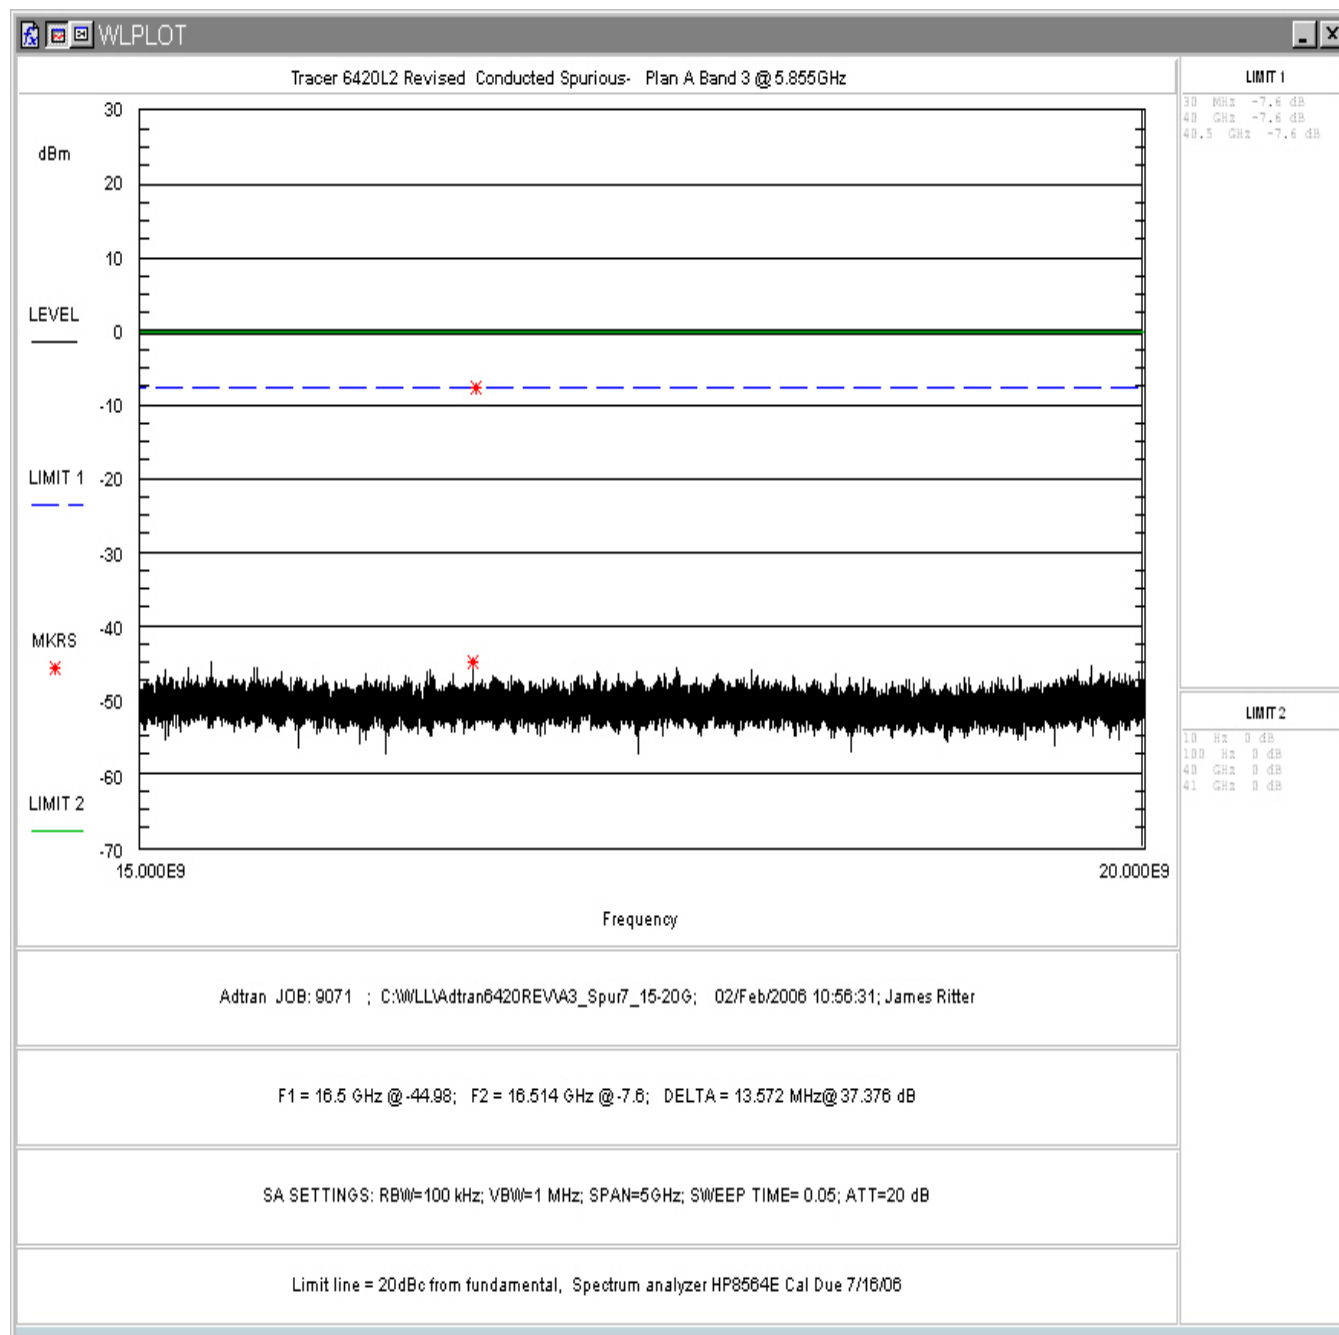


Figure 29. Conducted Spurious Emissions, Plan A Band 3, 15GHz – 20GHz

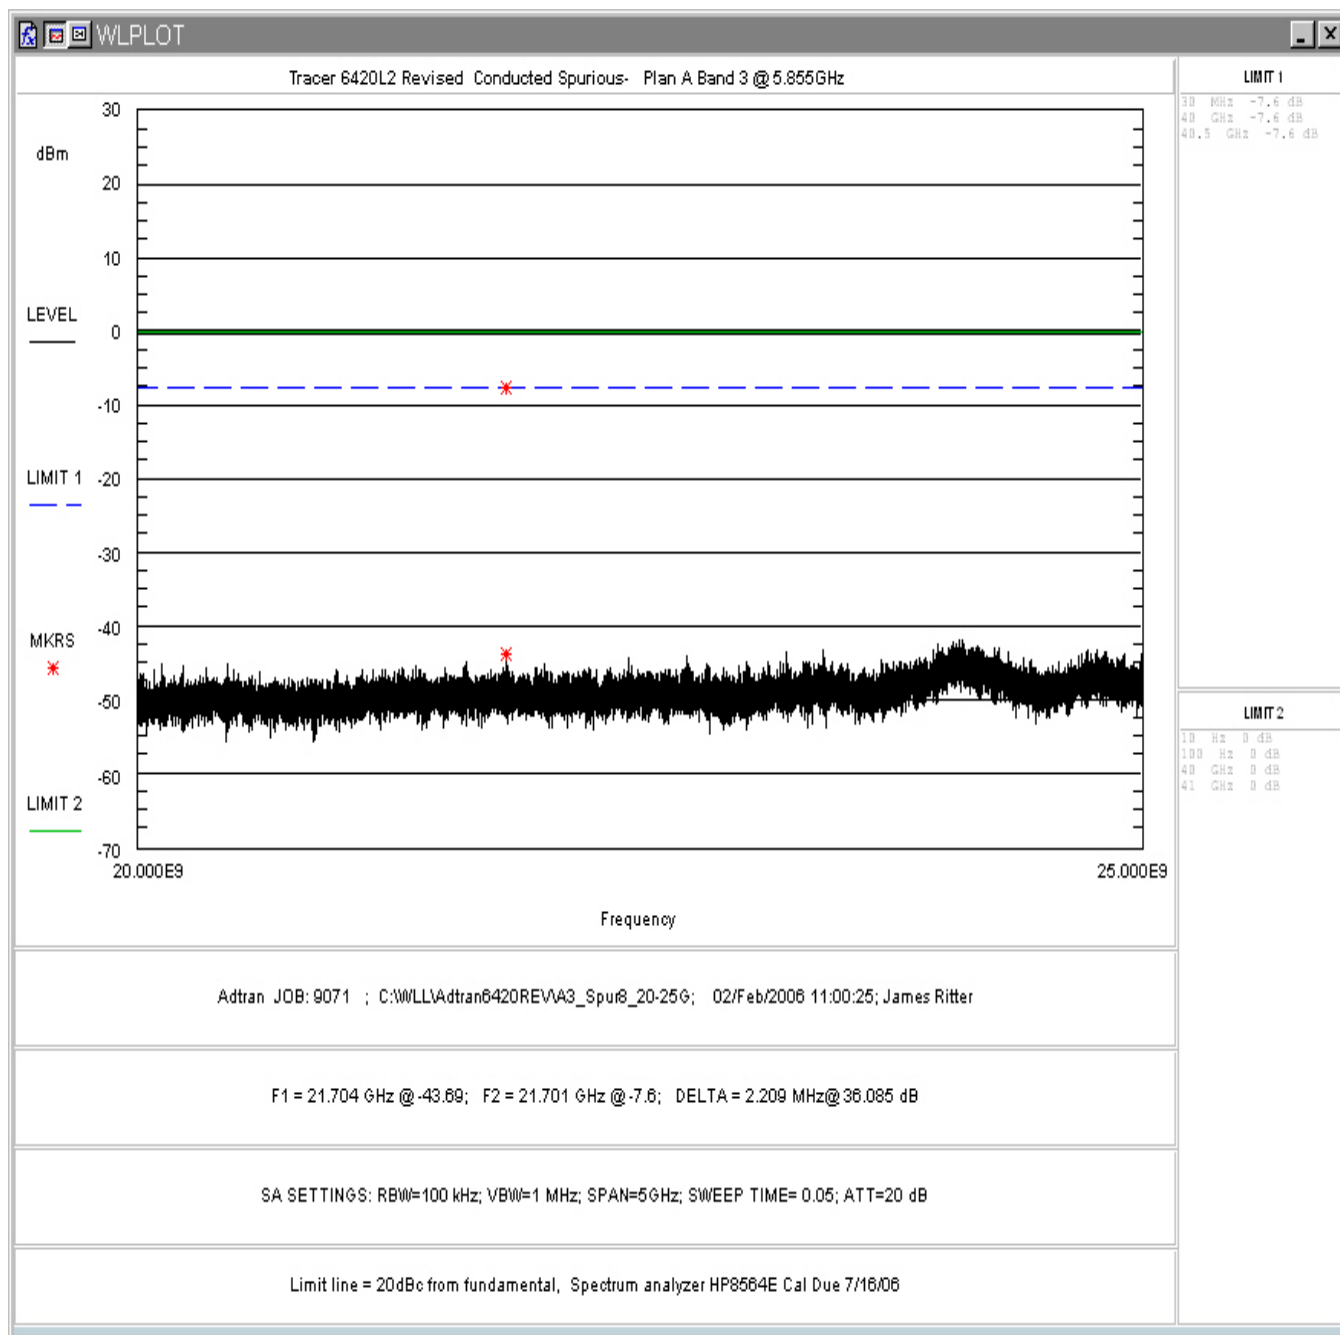


Figure 30. Conducted Spurious Emissions, Plan A Band 3, 20GHz – 25GHz

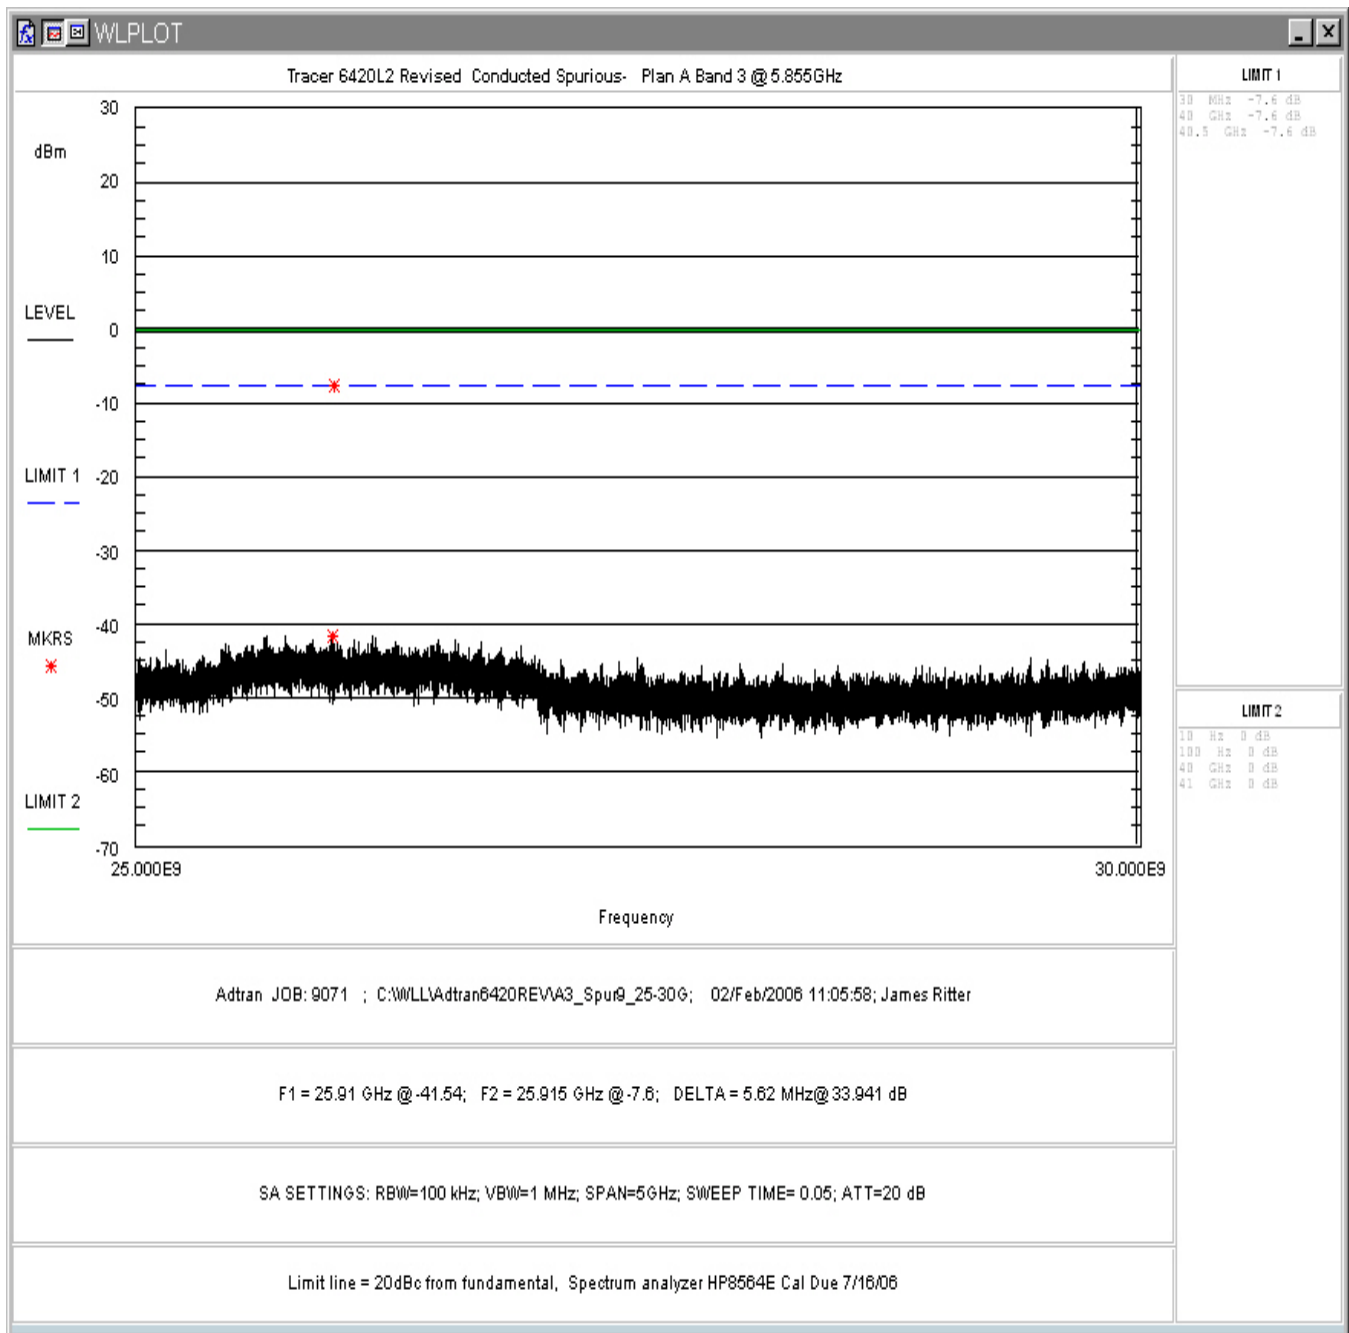


Figure 31. Conducted Spurious Emissions, Plan A Band 3, 25GHz – 30GHz

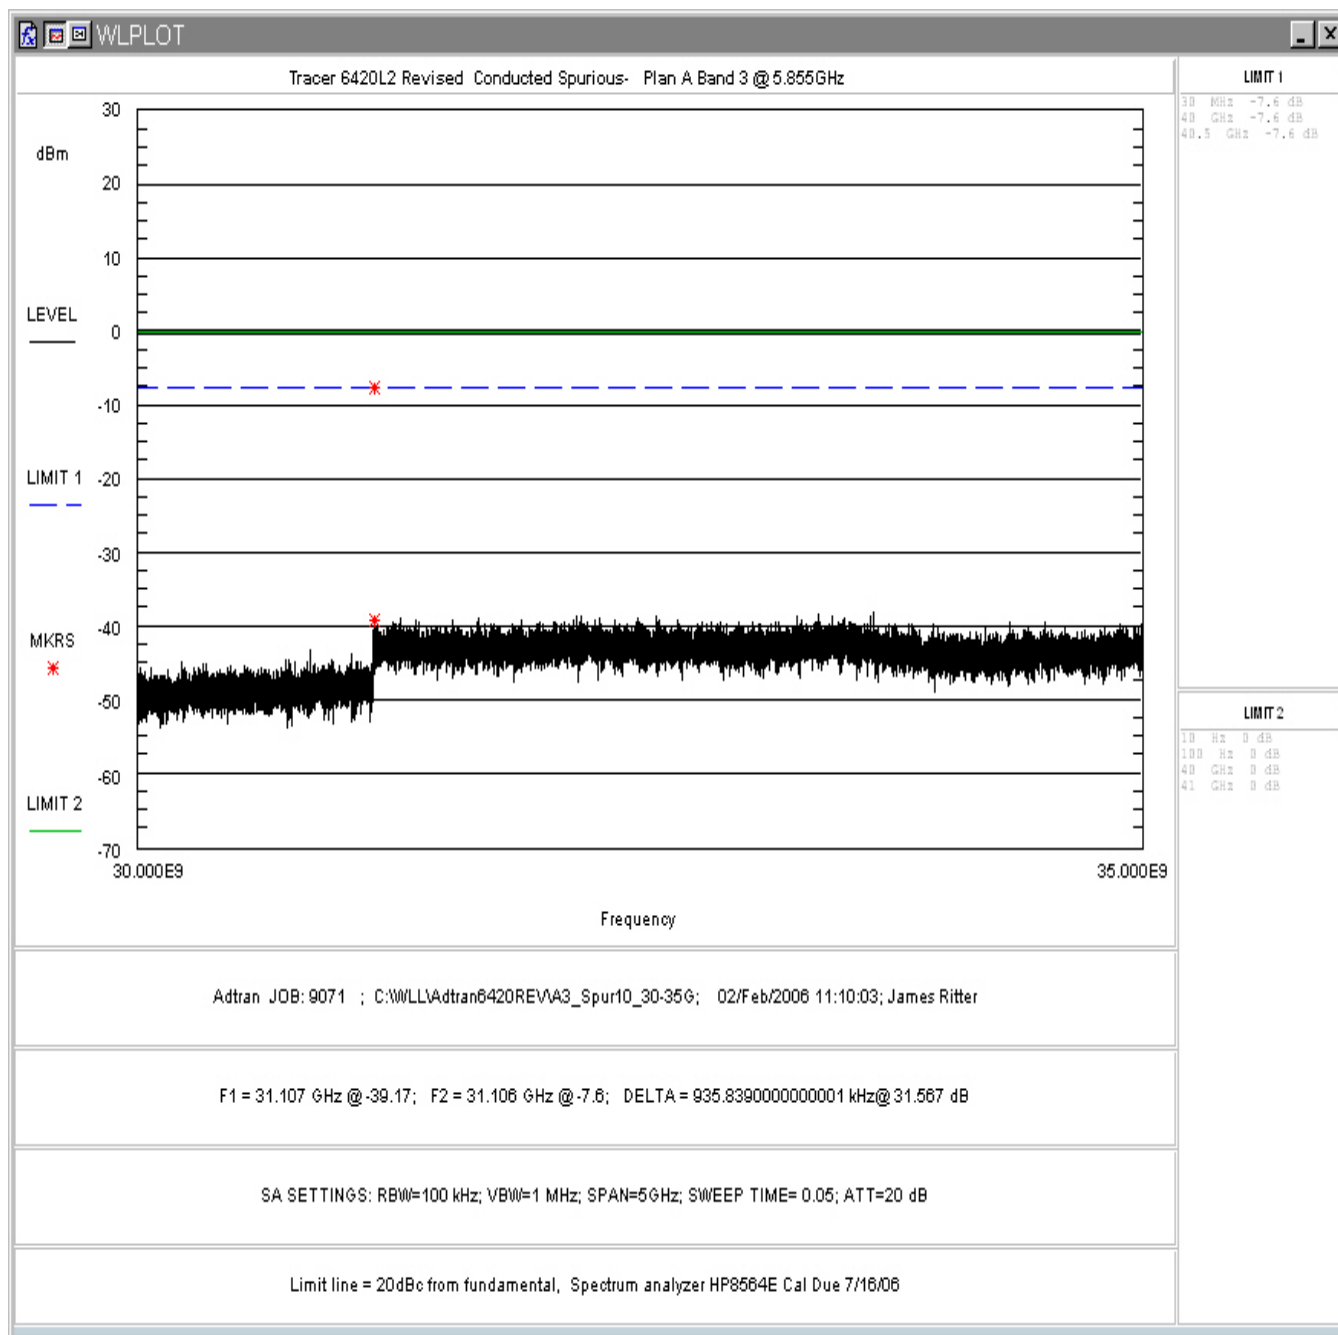


Figure 32. Conducted Spurious Emissions, Plan A Band 3, 30GHz – 35GHz

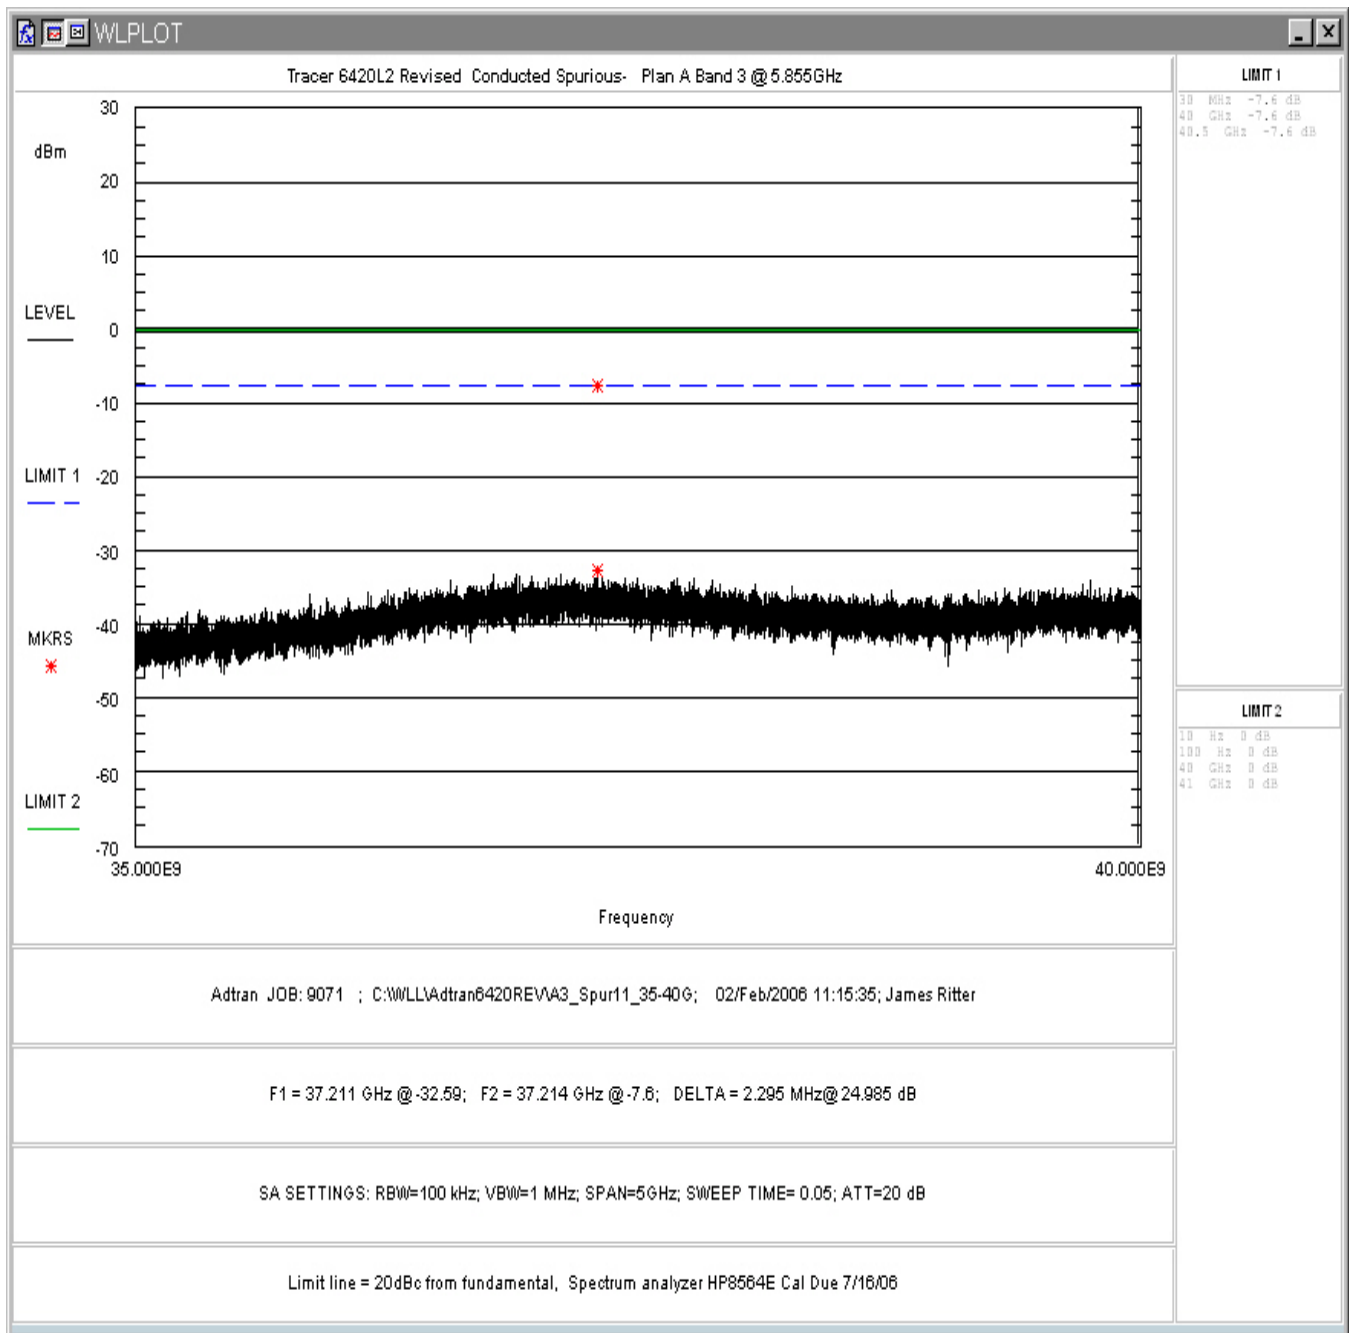


Figure 33. Conducted Spurious Emissions, Plan A Band 3, 35GHz – 40GHz

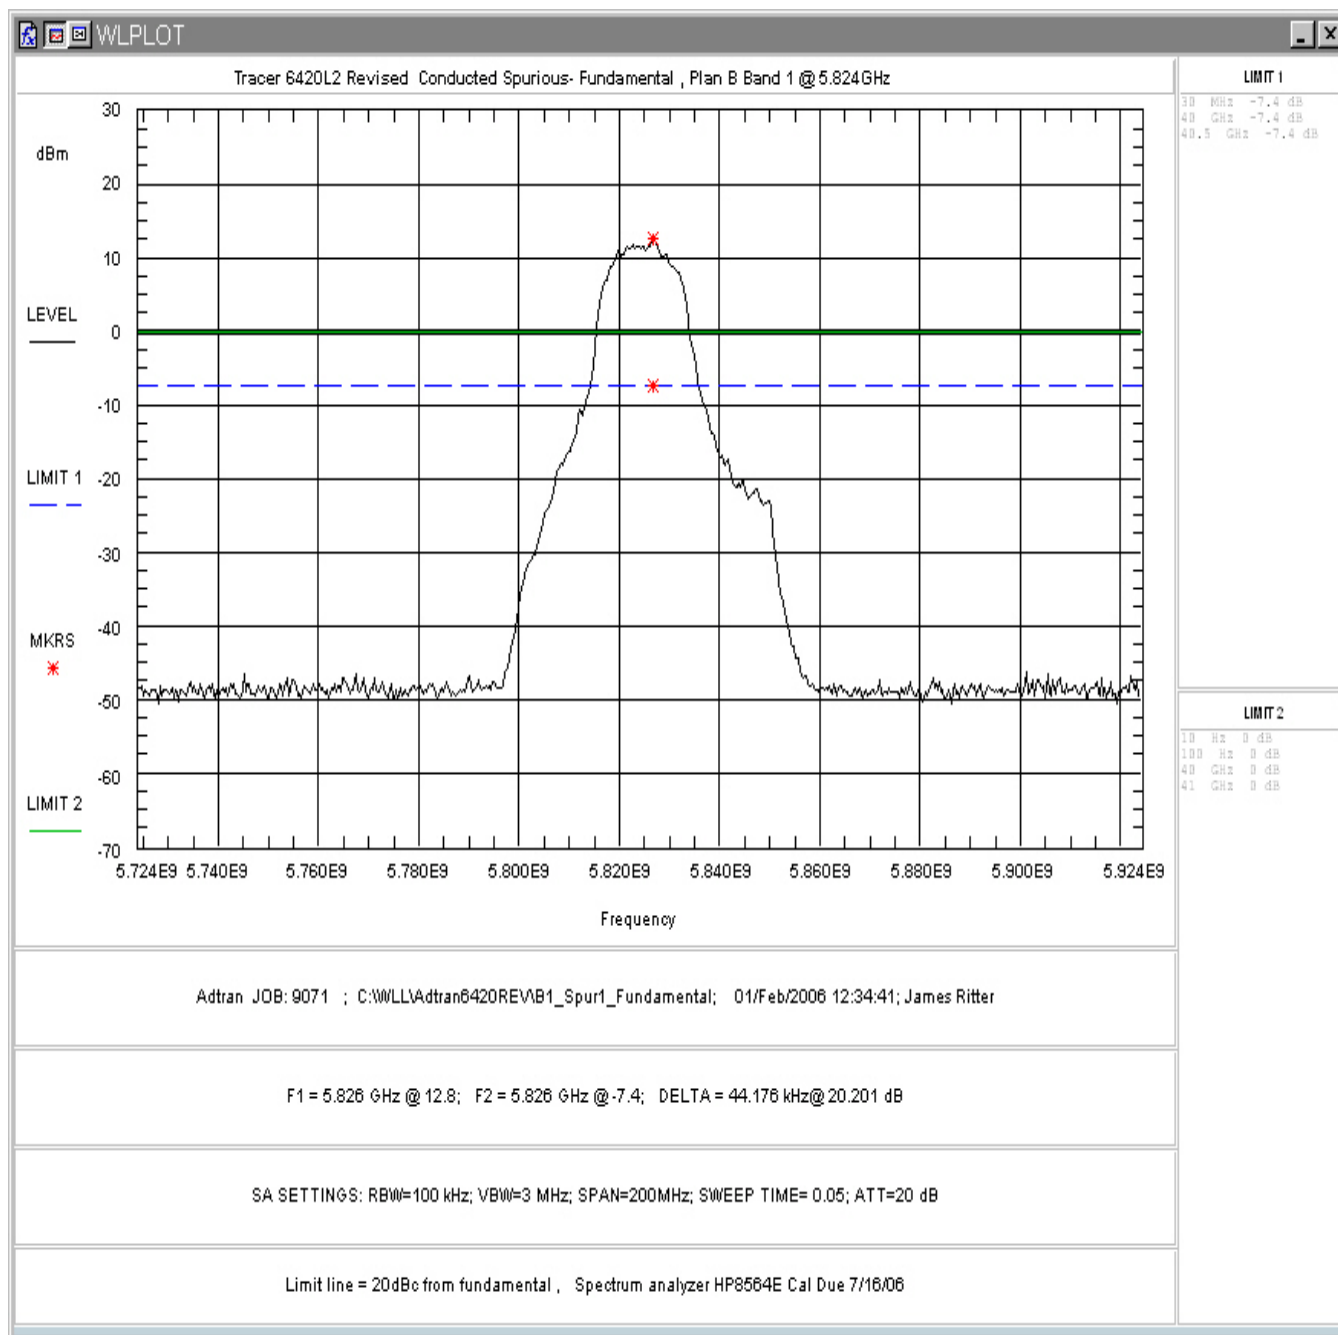


Figure 34. Conducted Spurious Emissions, Plan B Band 1, Inband

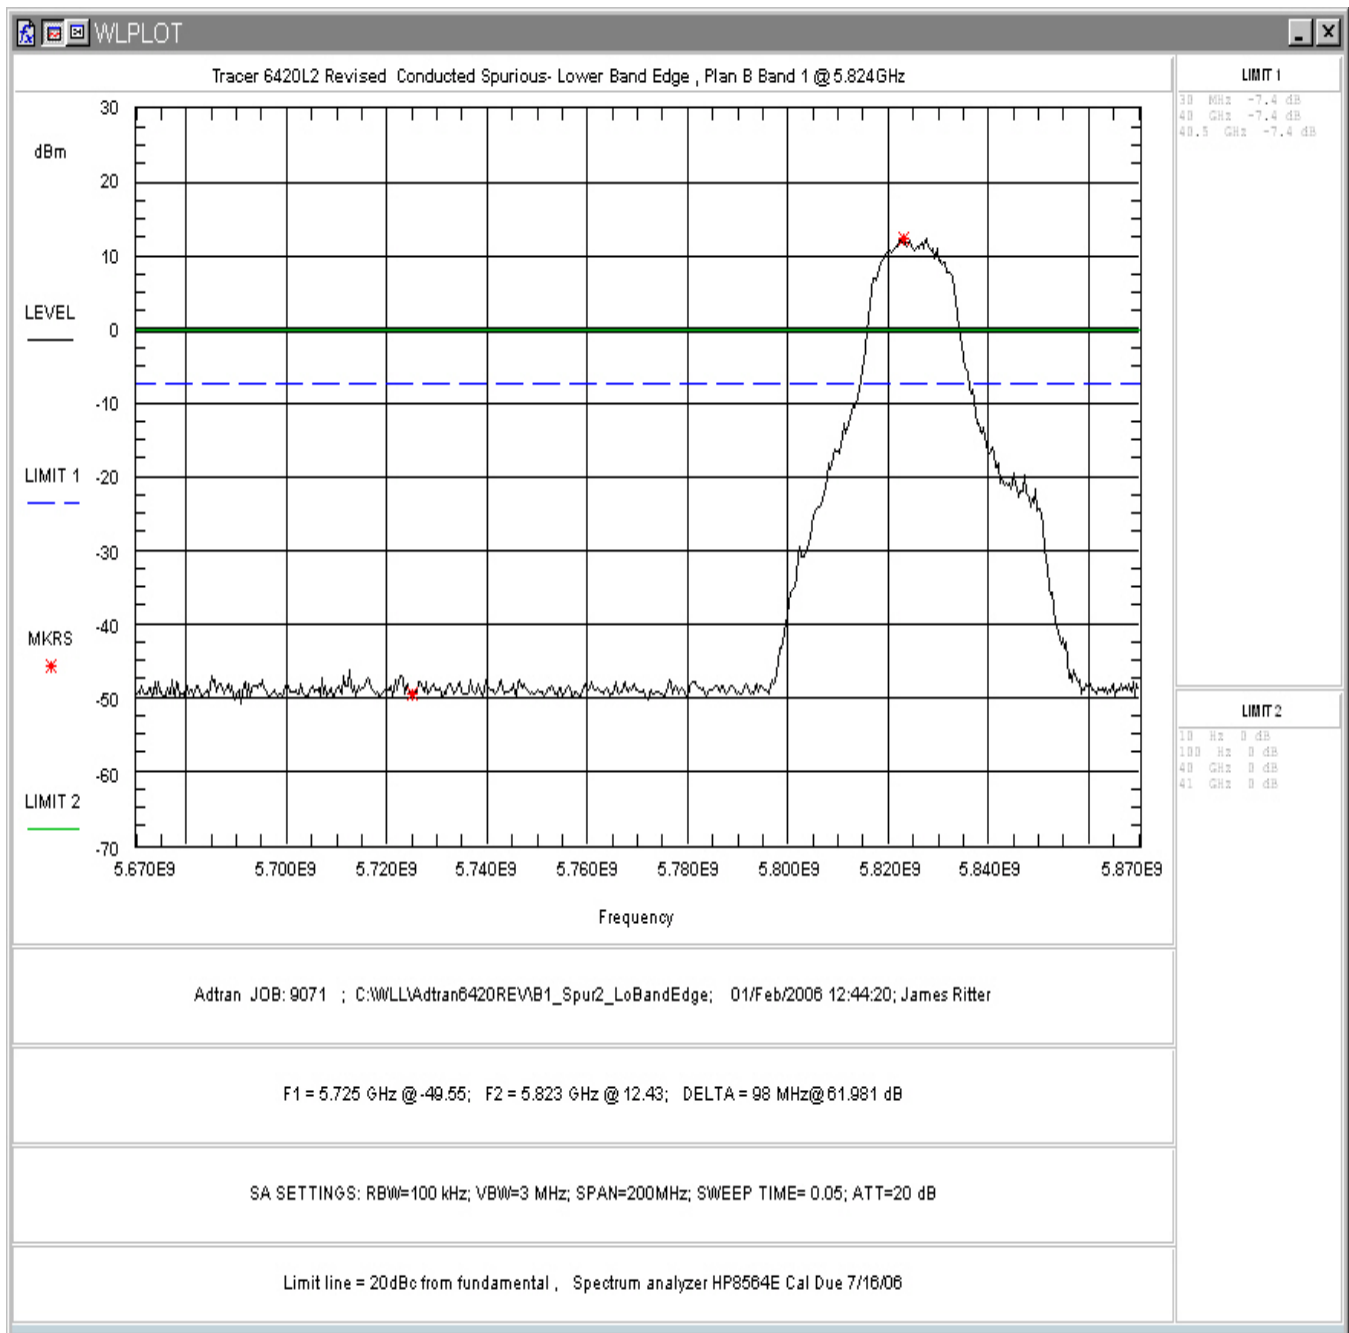


Figure 35. Conducted Spurious Emissions, Plan B Band 1, Lower Band Edge

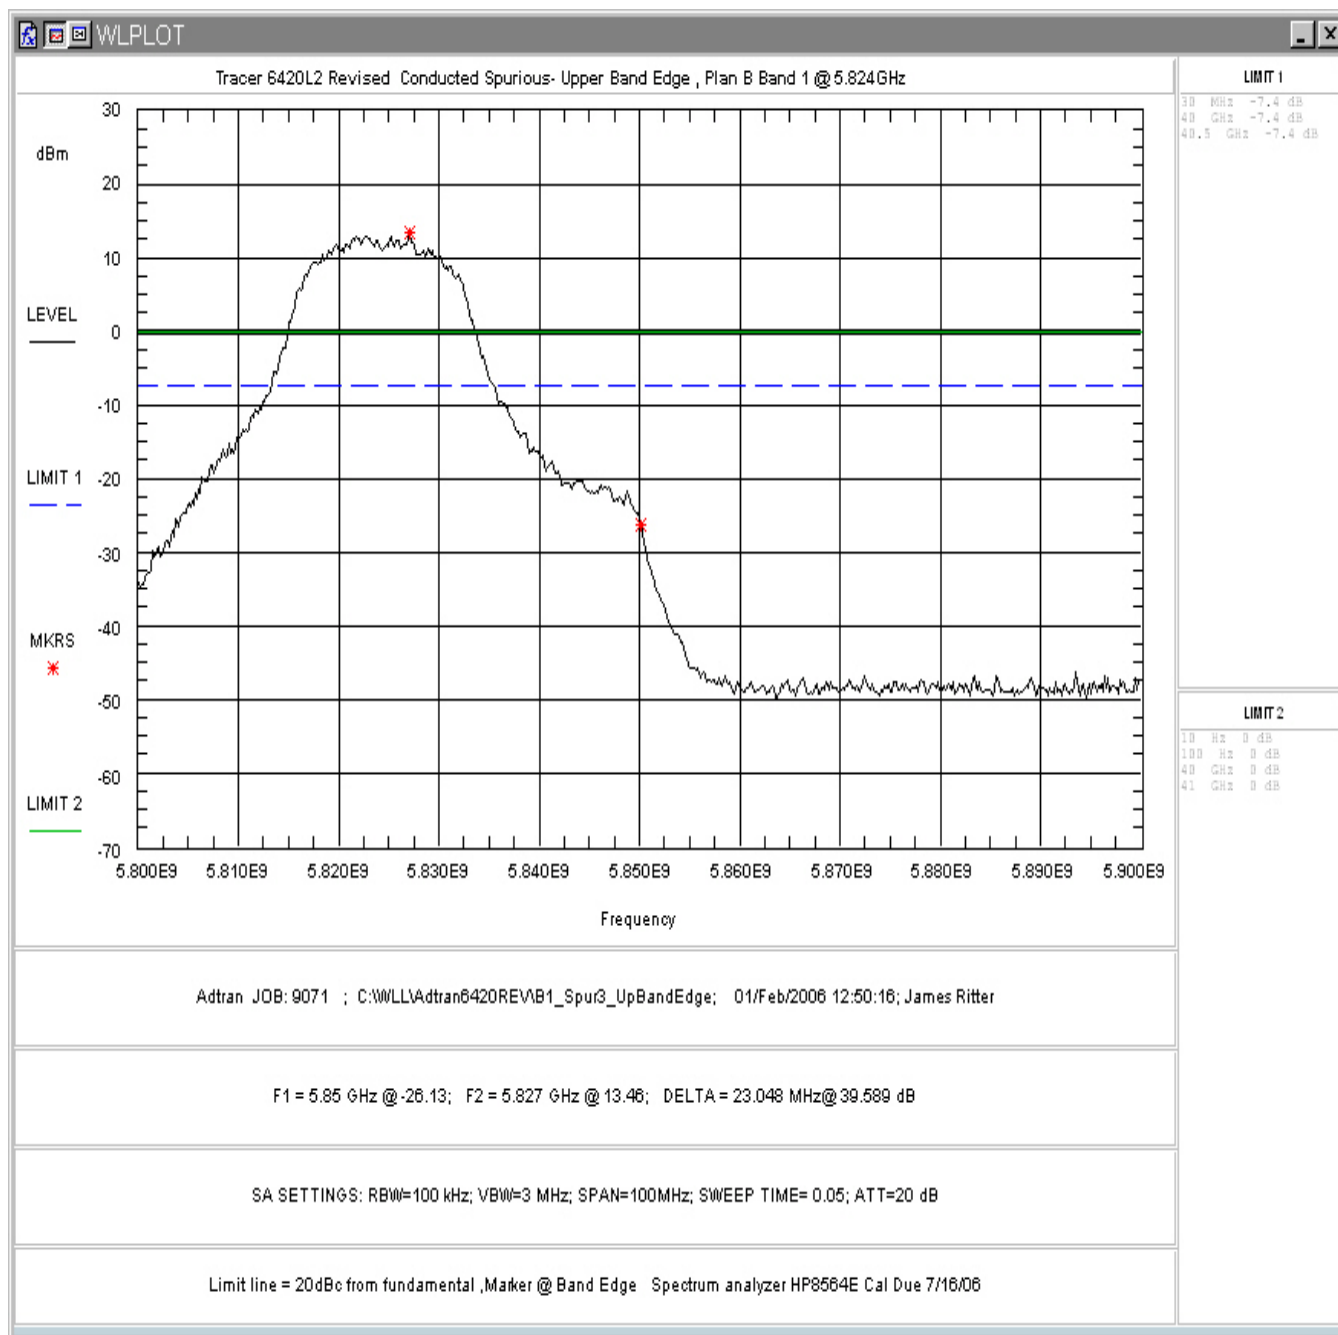


Figure 36. Conducted Spurious Emissions, Plan B Band 1, Upper Band Edge

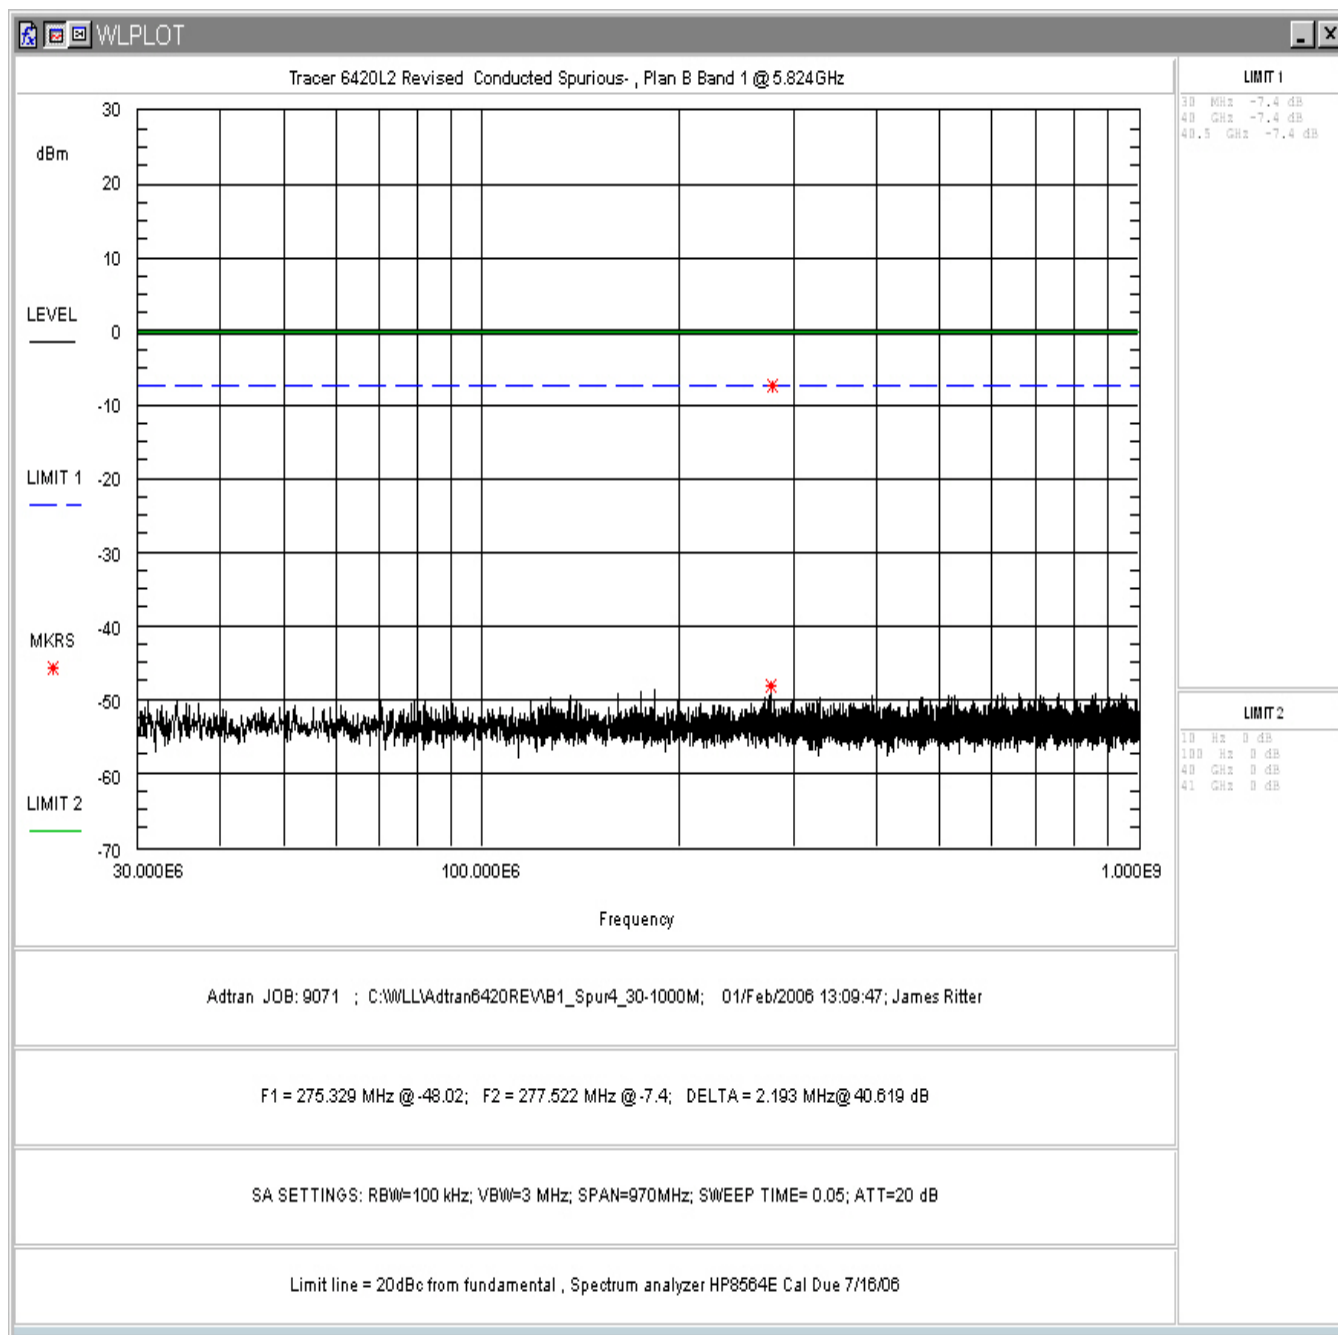


Figure 37. Conducted Spurious Emissions, Plan B Band 1, 30MHz - 1GHz

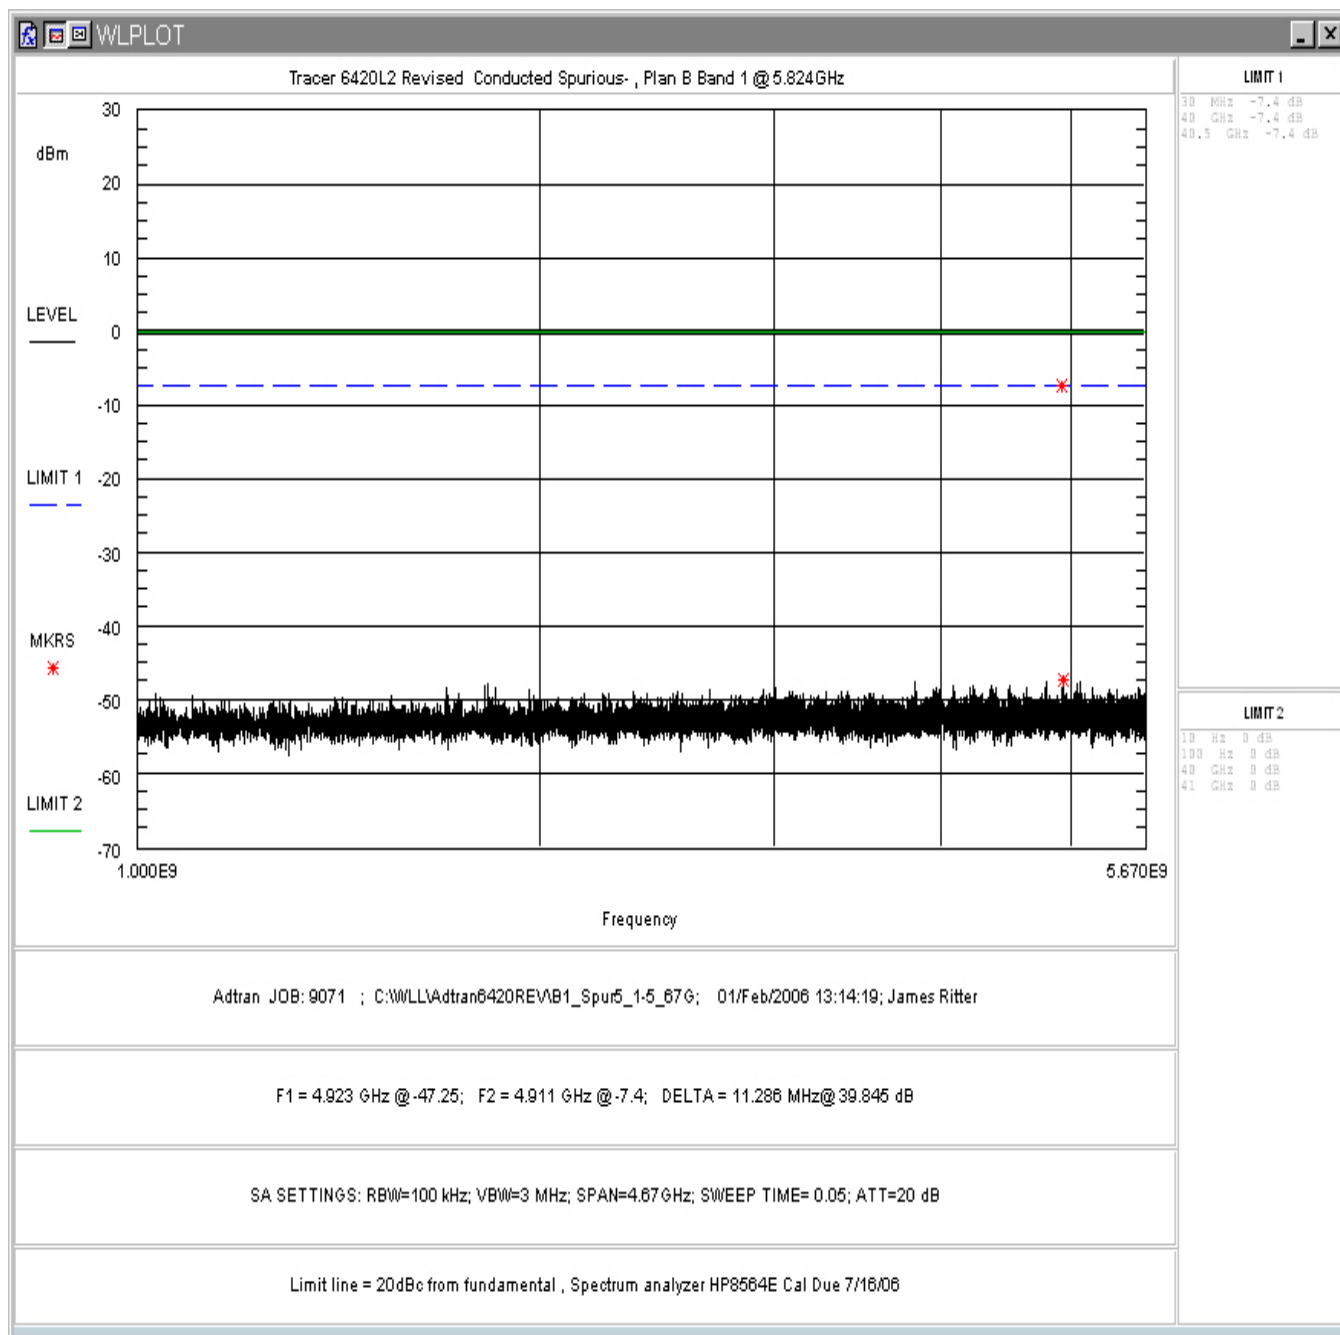


Figure 38. Conducted Spurious Emissions, Plan B Band 1, 1GHz – 5.67GHz

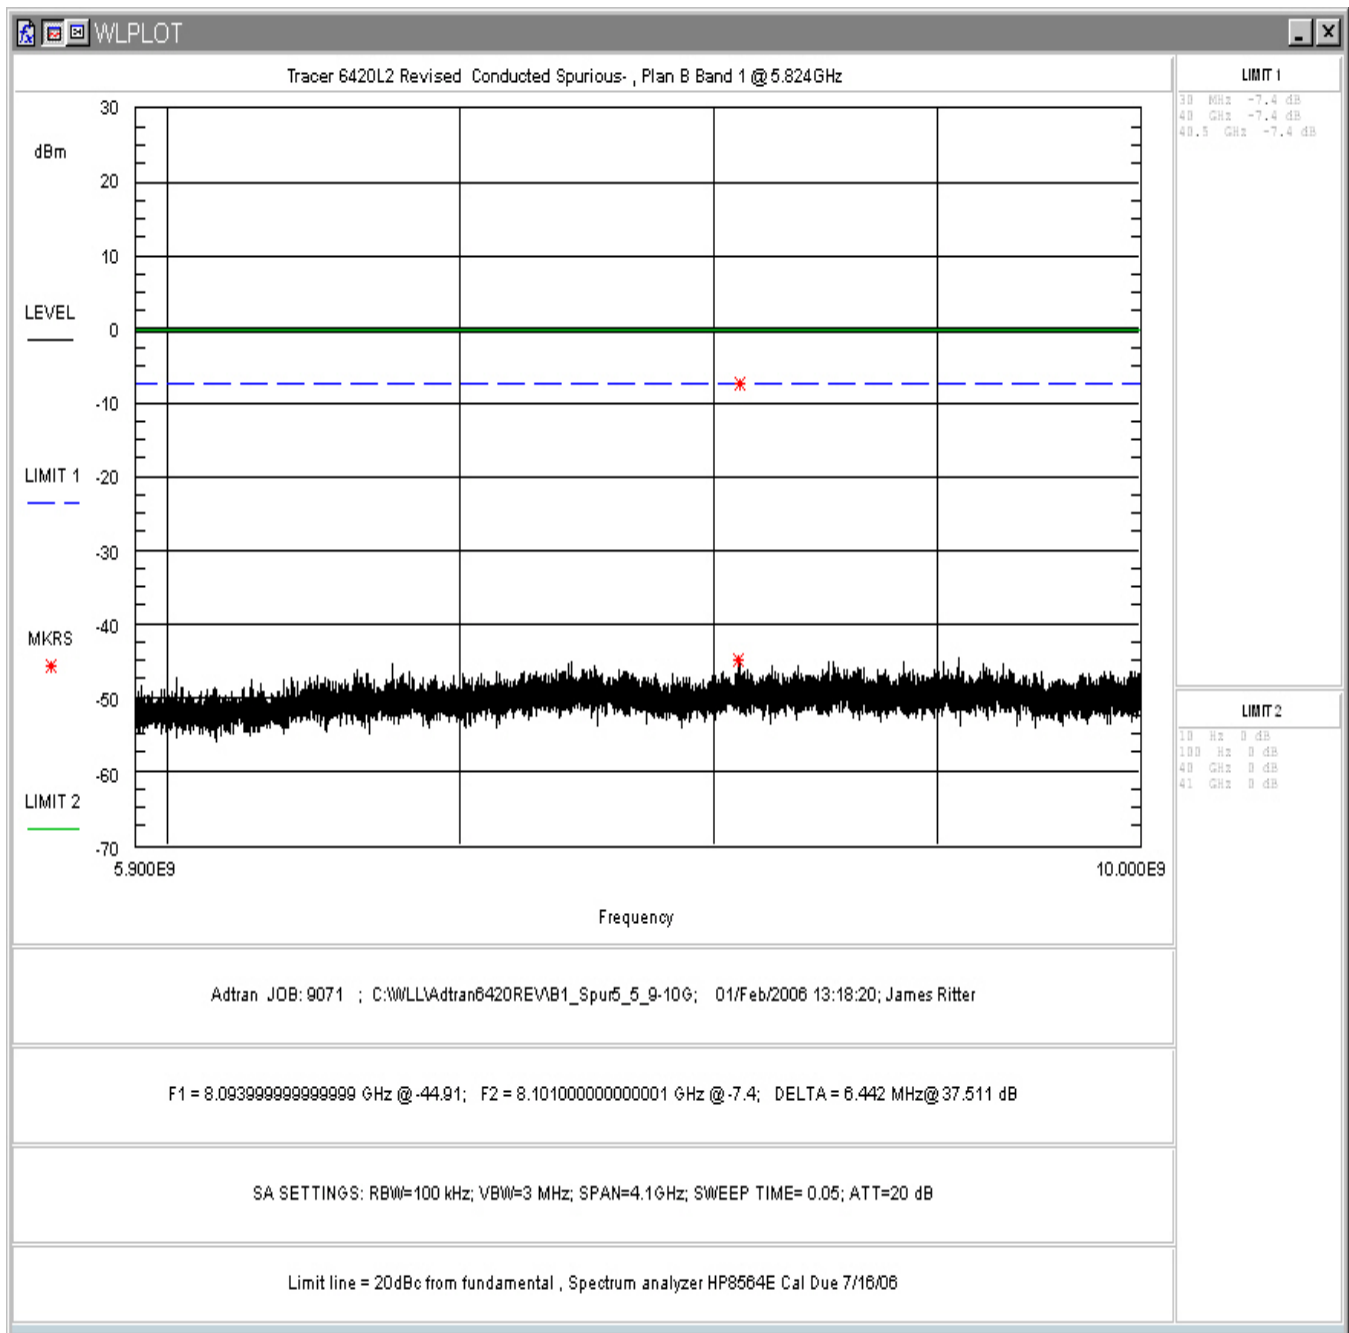


Figure 39. Conducted Spurious Emissions, Plan B Band 1, 5.9 – 10GHz

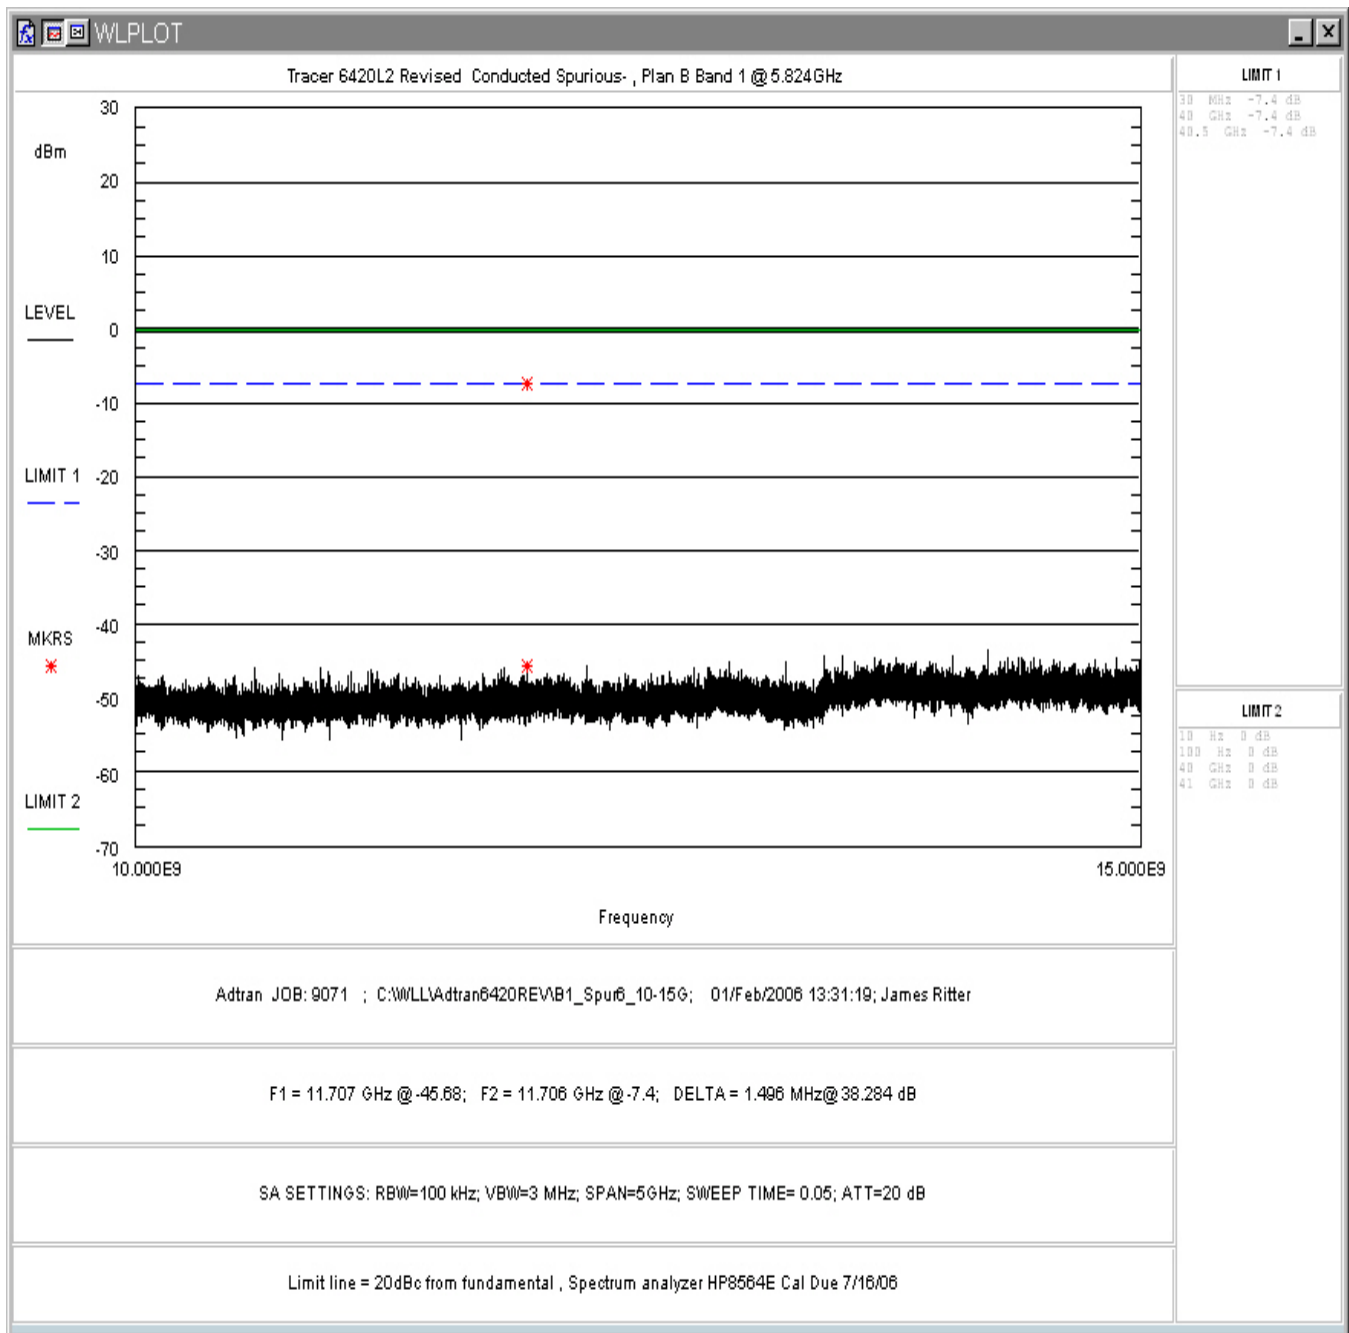


Figure 40. Conducted Spurious Emissions, Plan B Band 1, 10 – 15GHz

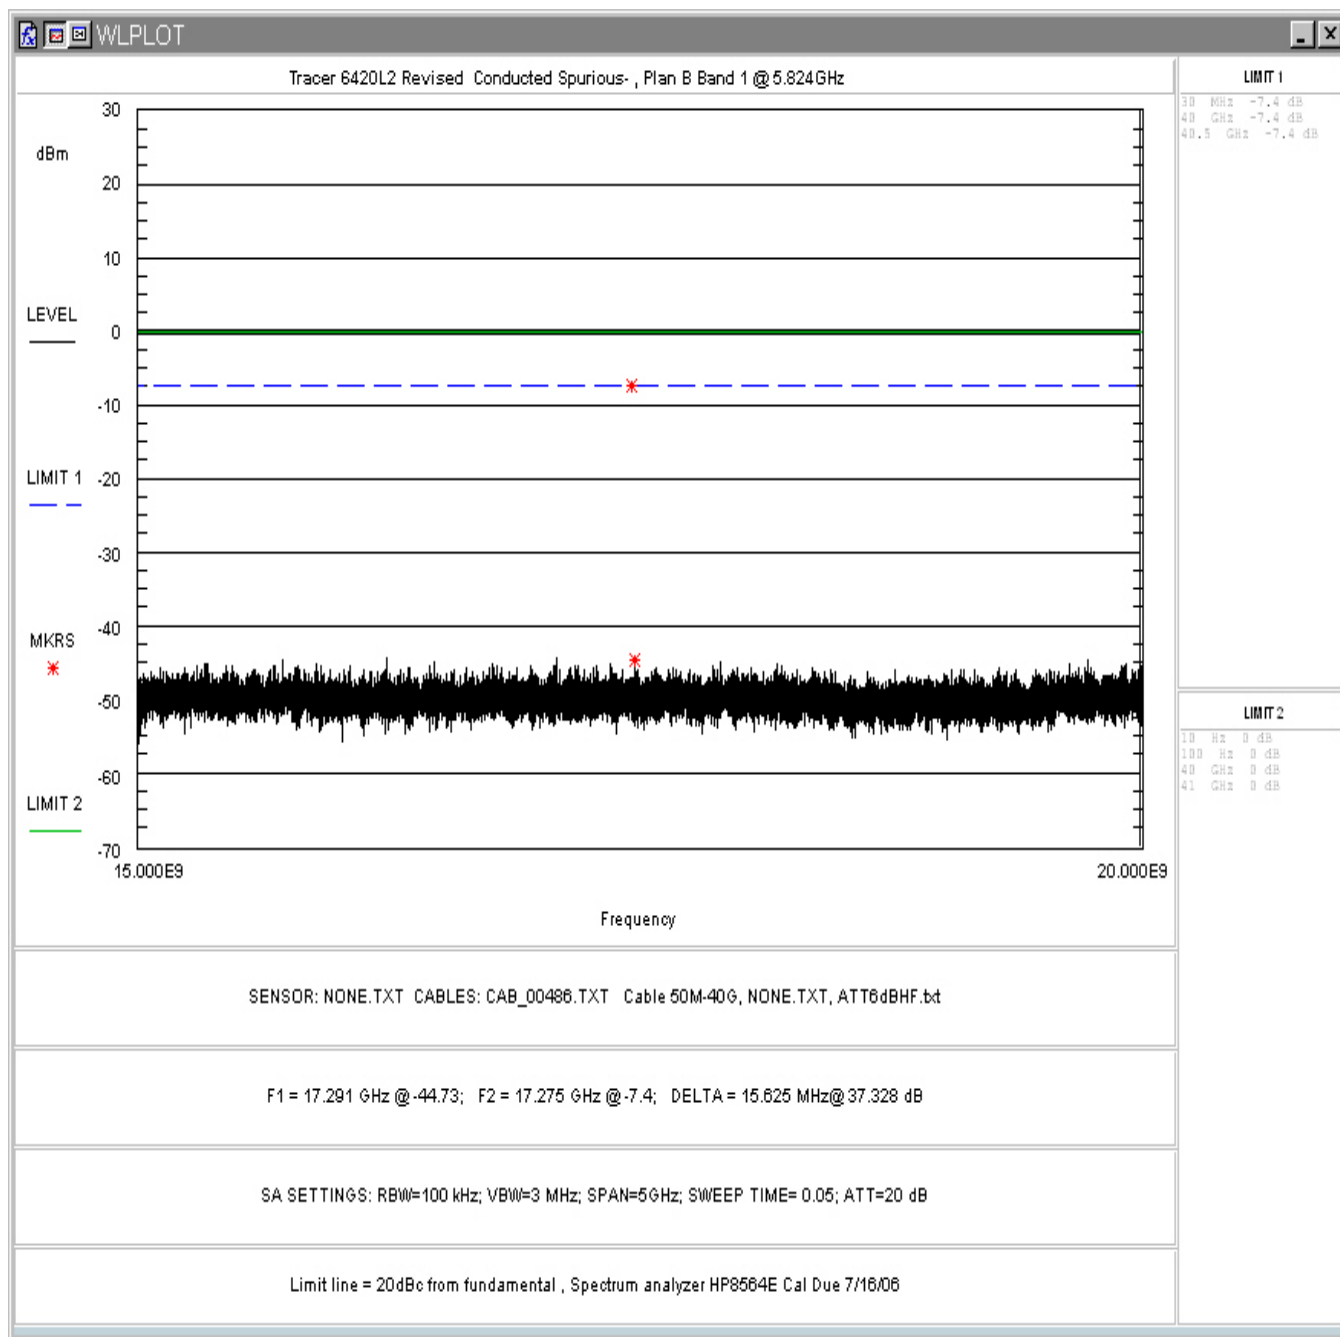


Figure 41. Conducted Spurious Emissions, Plan B Band 1, 15 – 20GHz

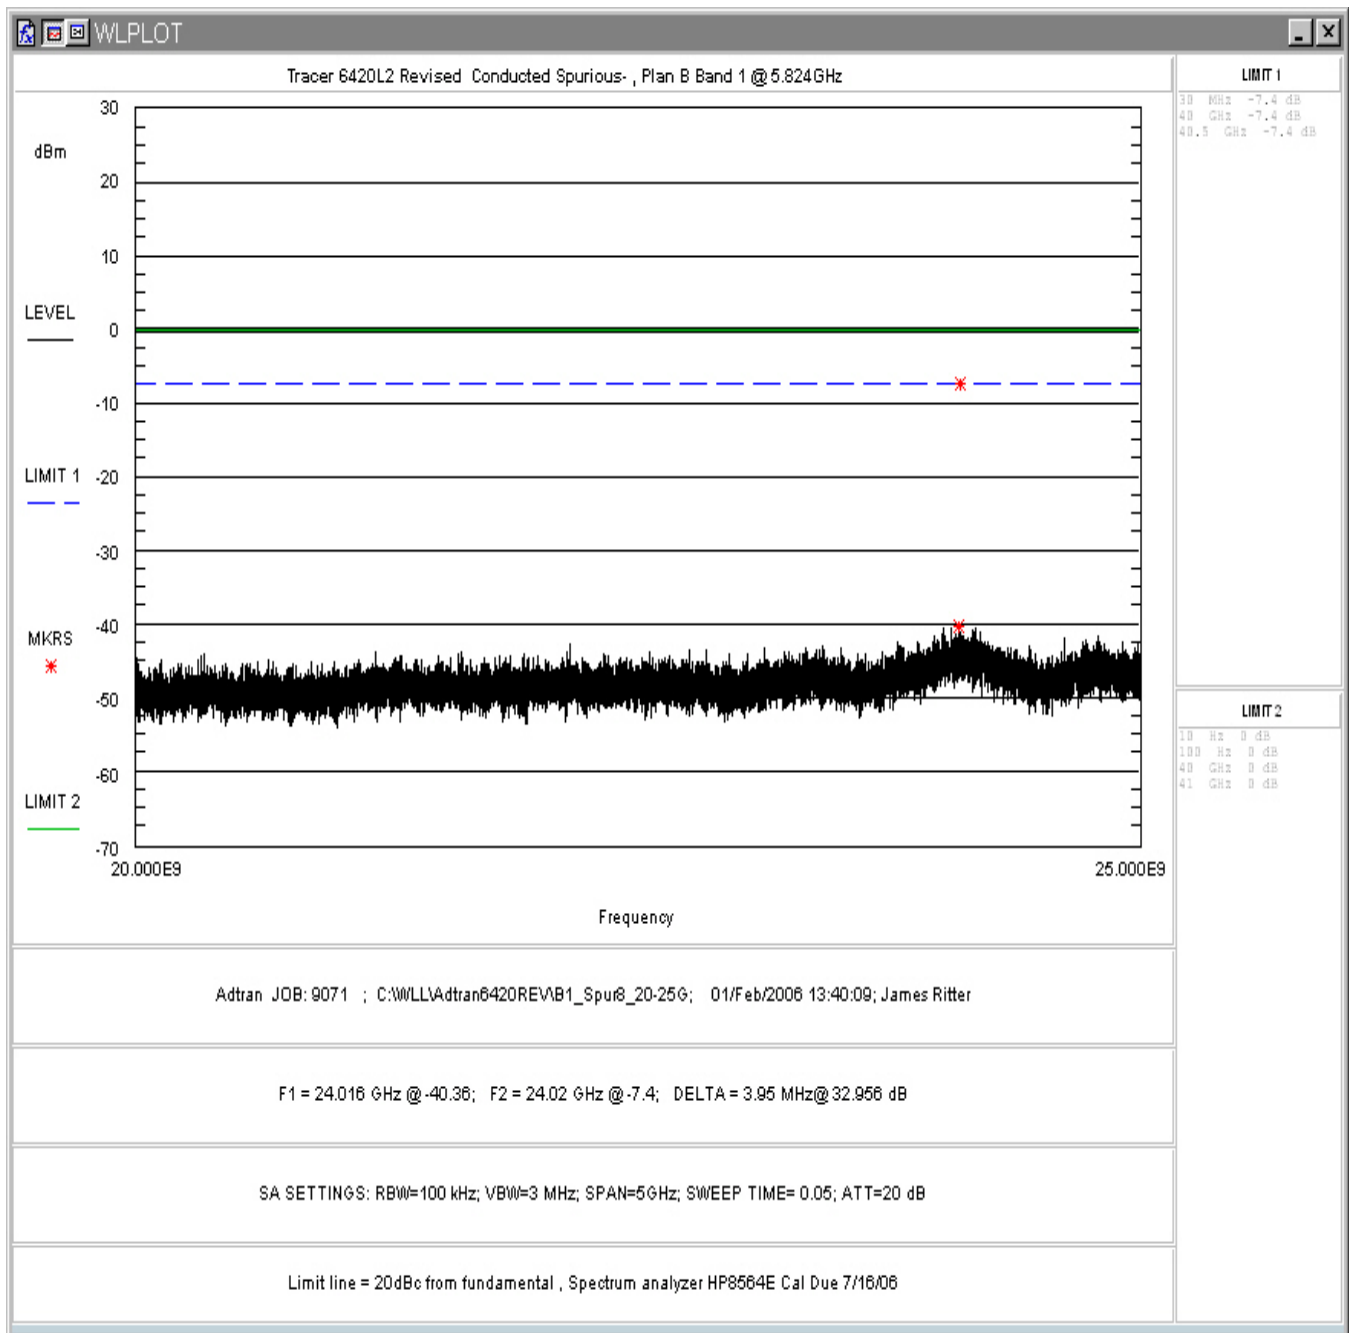


Figure 42. Conducted Spurious Emissions, Plan B Band 1, 20 – 25GHz

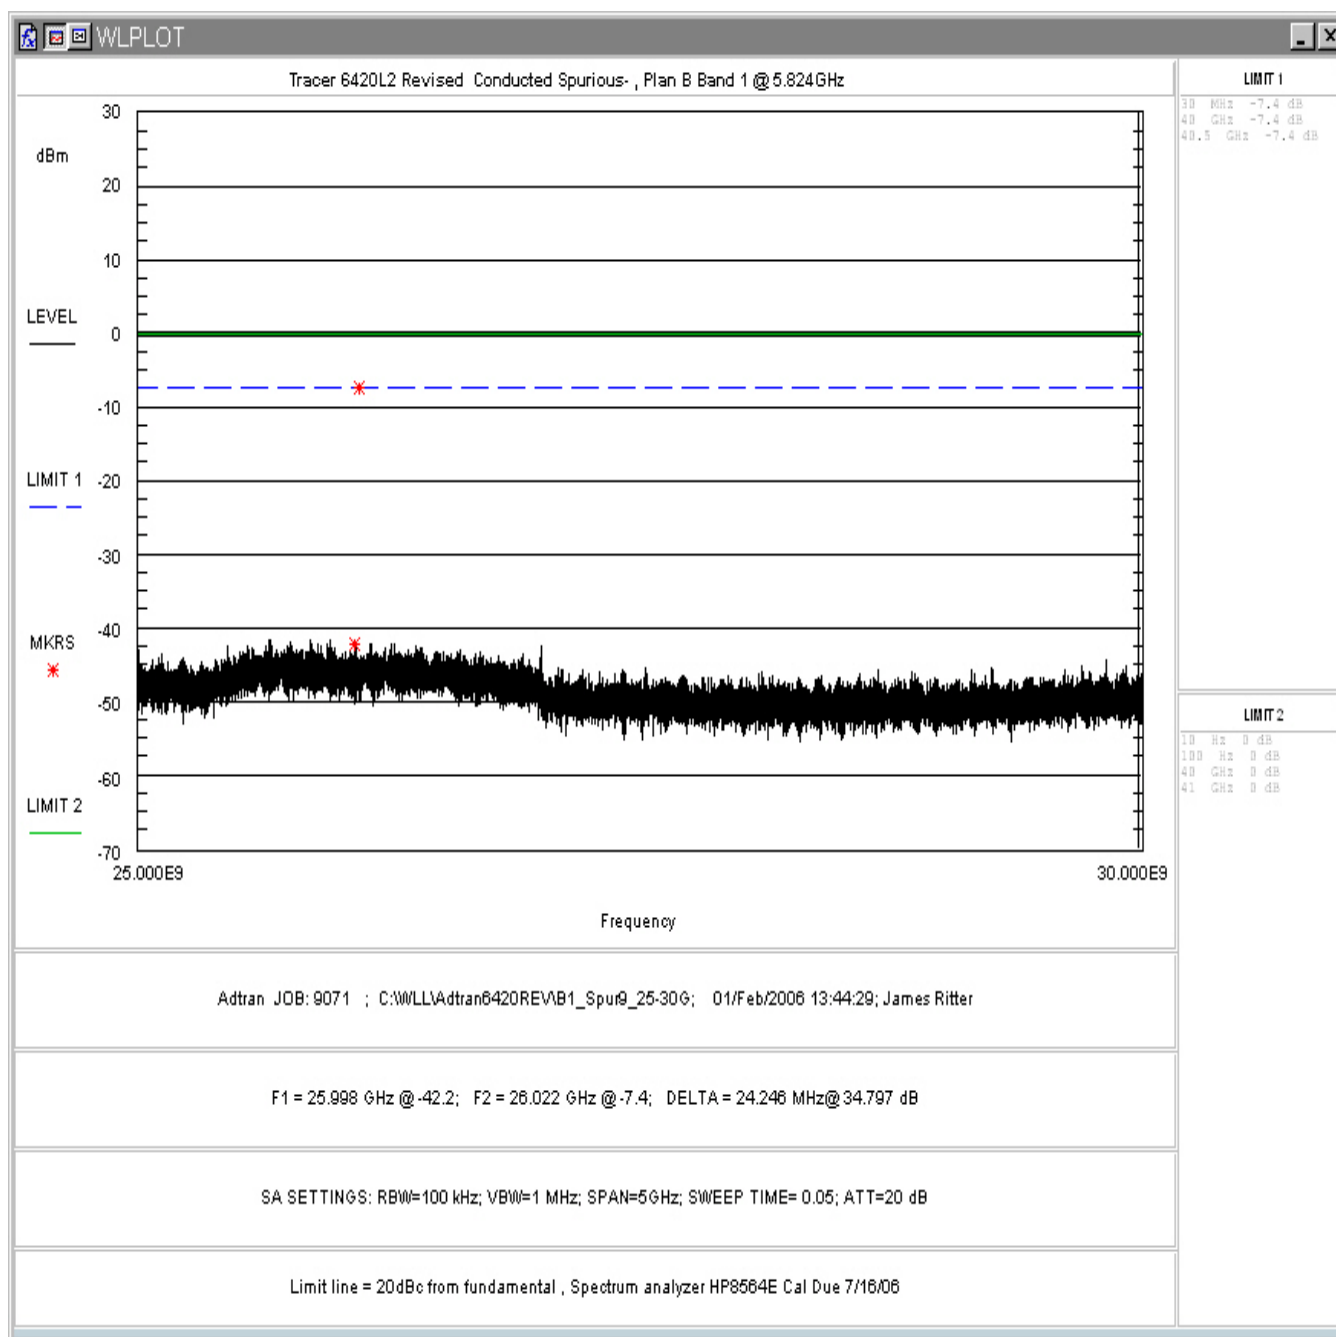


Figure 43. Conducted Spurious Emissions, Plan B Band 1, 25 – 30GHz

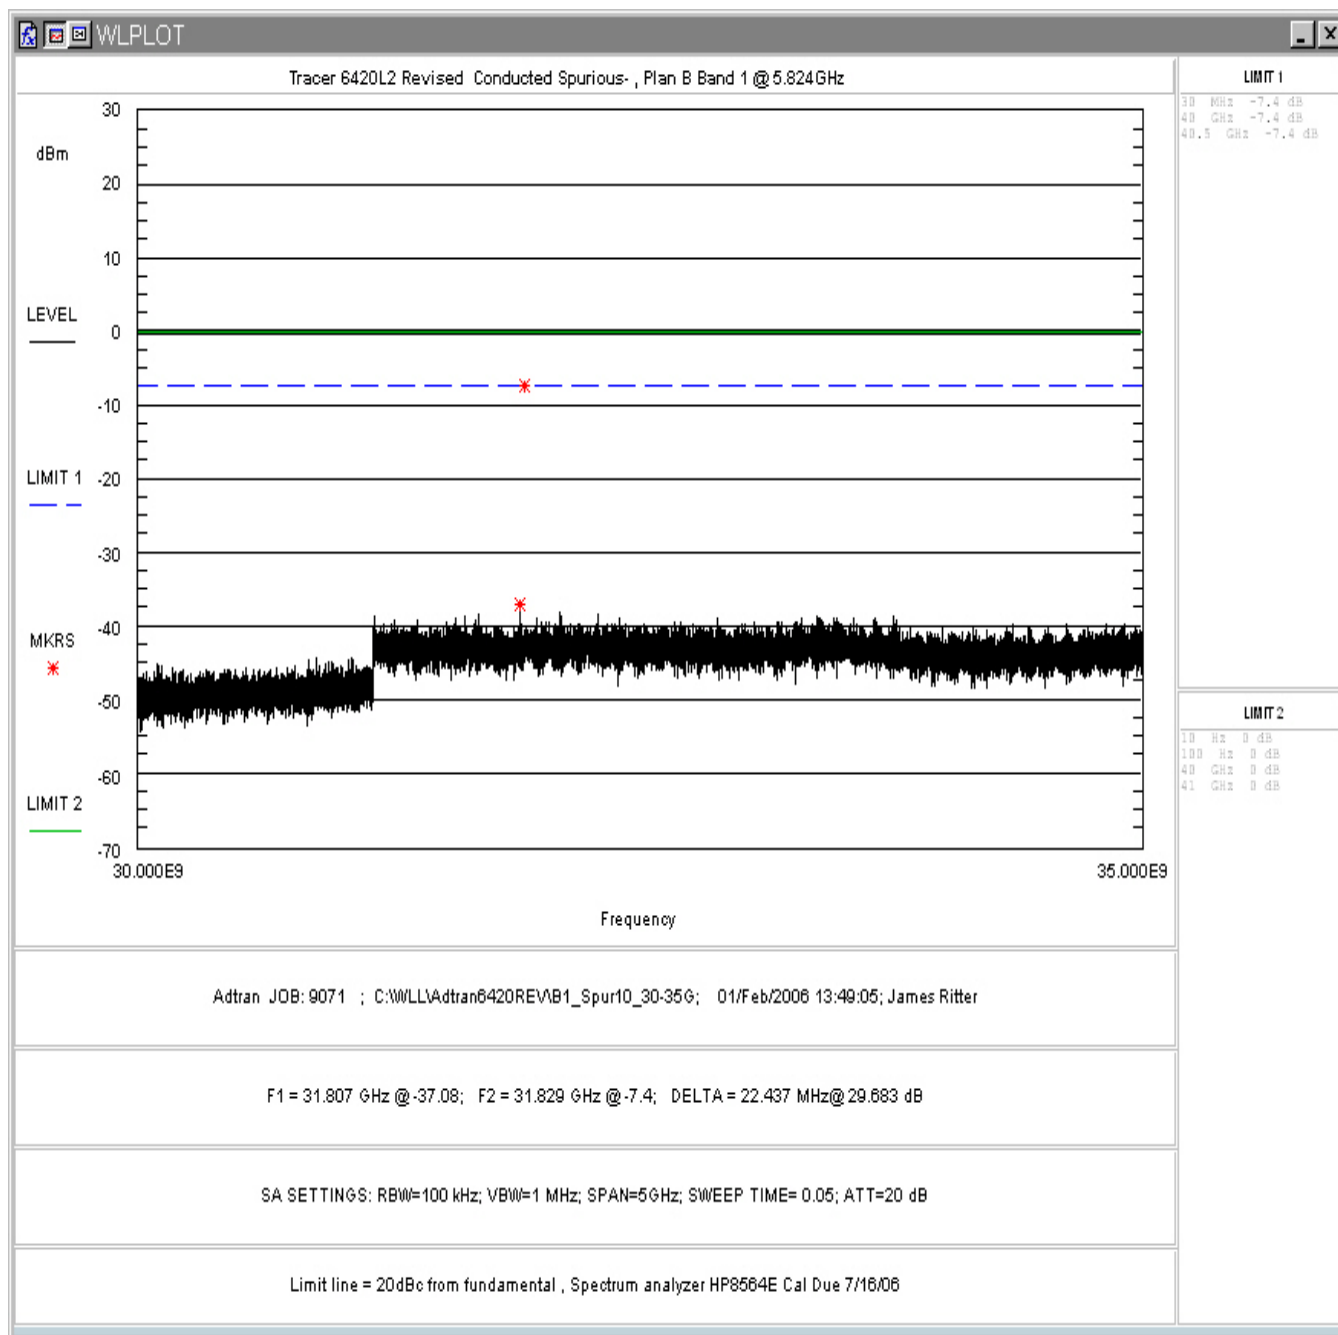


Figure 44. Conducted Spurious Emissions, Plan B Band 1, 30 – 35GHz

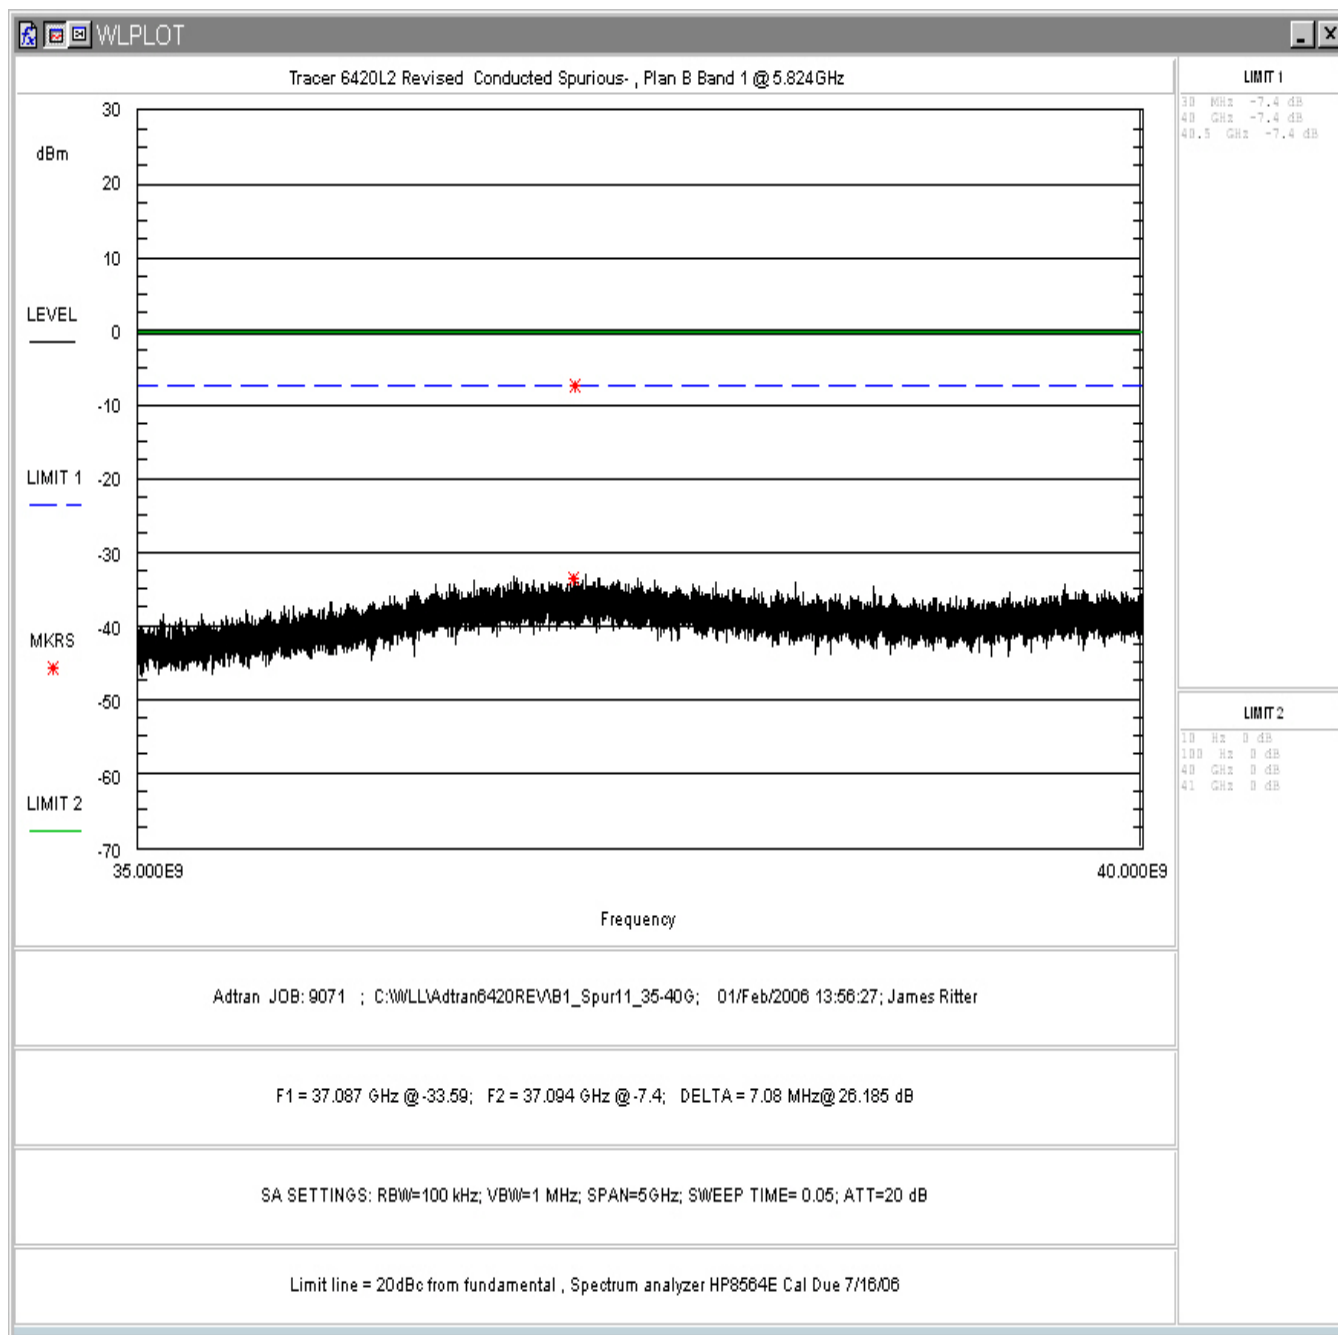


Figure 45. Conducted Spurious Emissions, Plan B Band 1, 35 – 40GHz

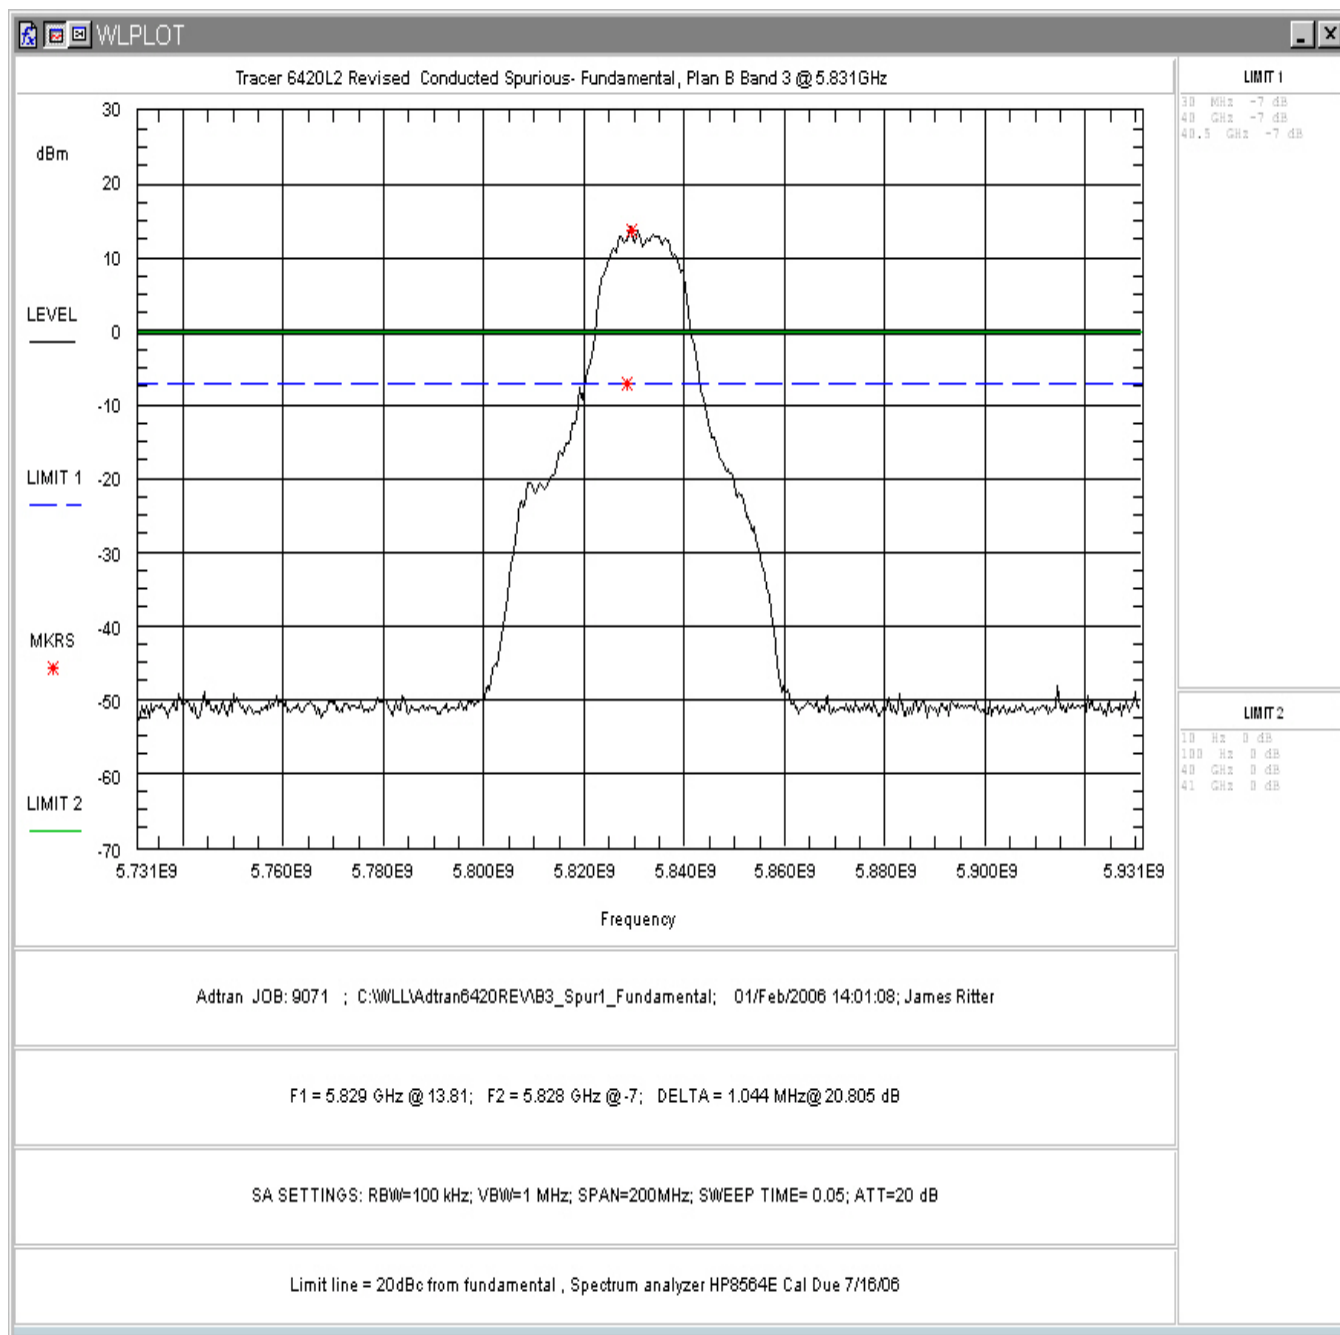


Figure 46. Conducted Spurious Emissions, Plan B Band 3, Inband

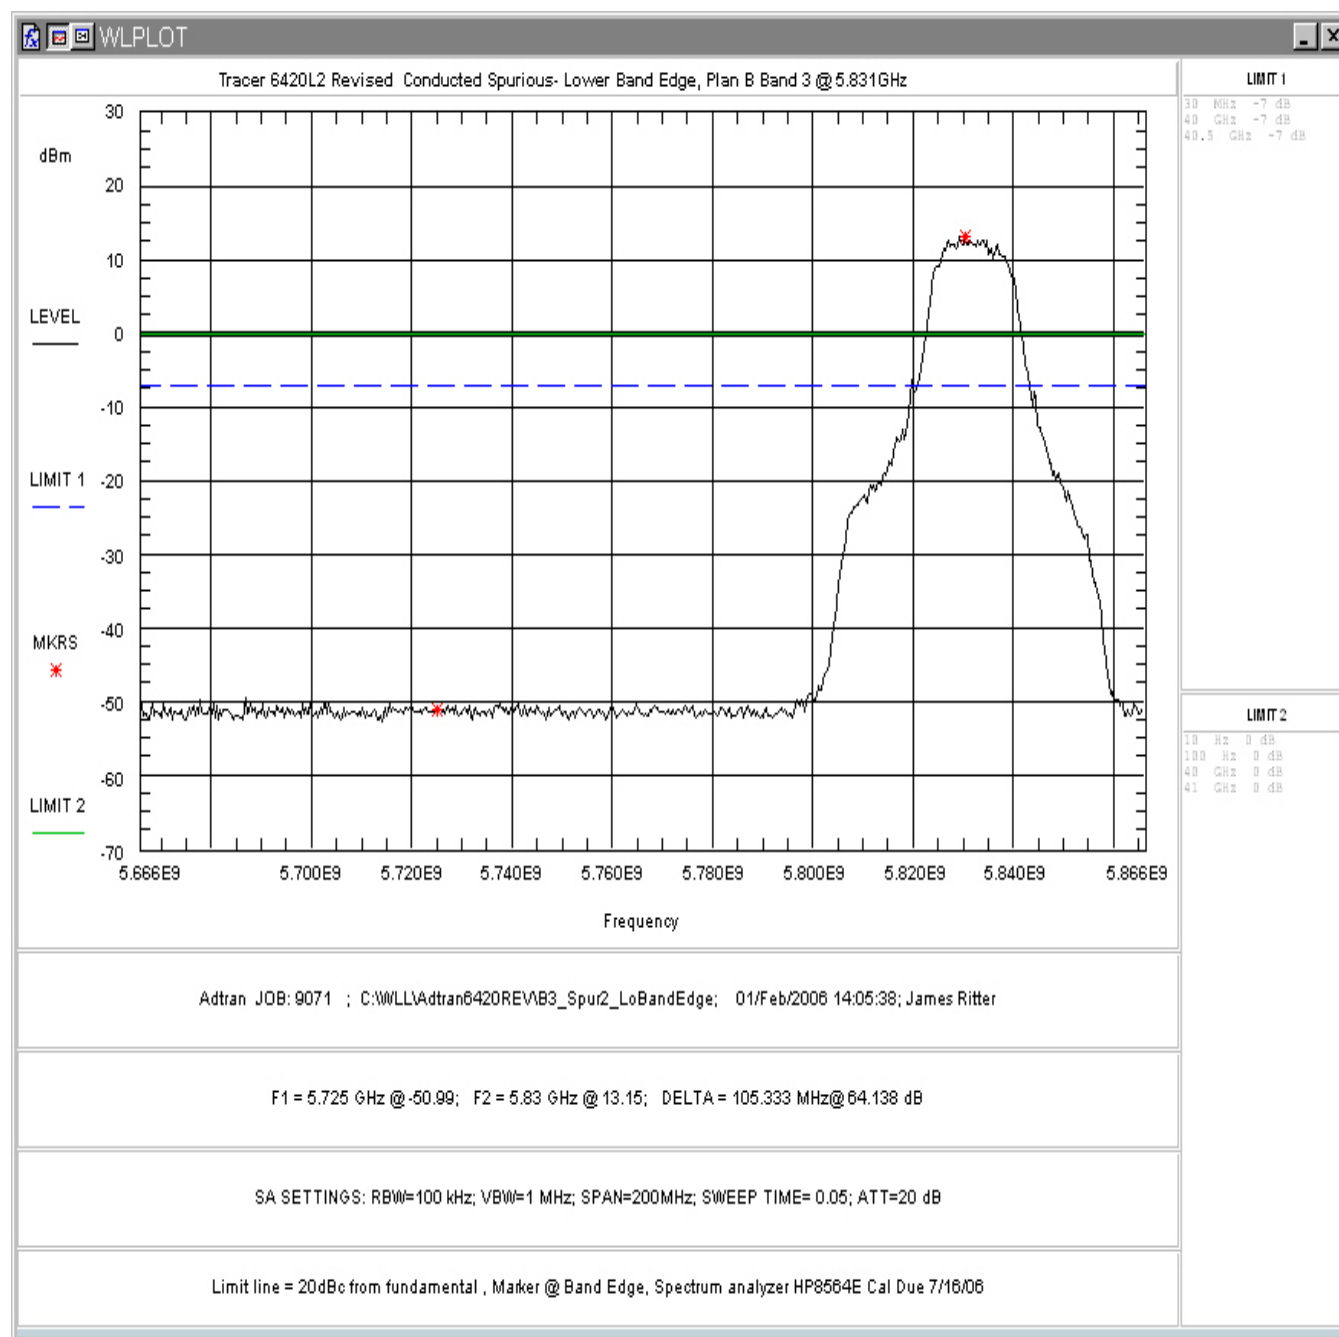


Figure 47. Conducted Spurious Emissions, Plan B Band 3, Lower Band Edge

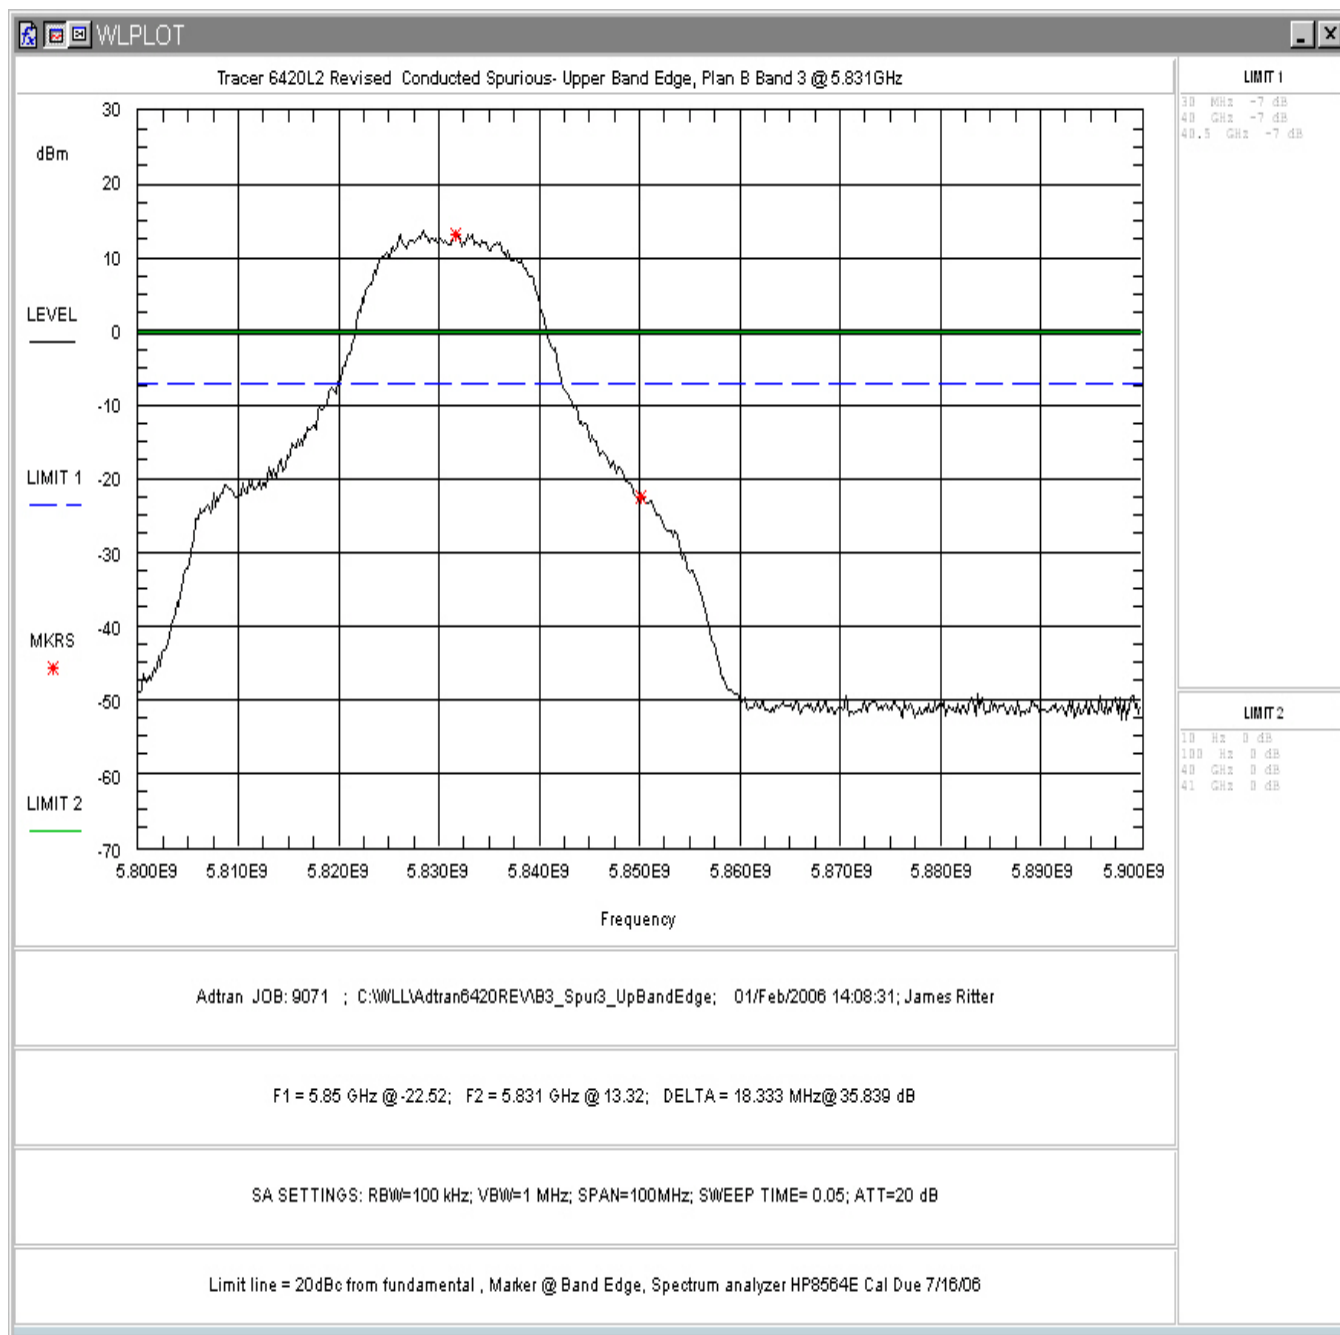


Figure 48. Conducted Spurious Emissions, Plan B Band 3, Upper Band Edge

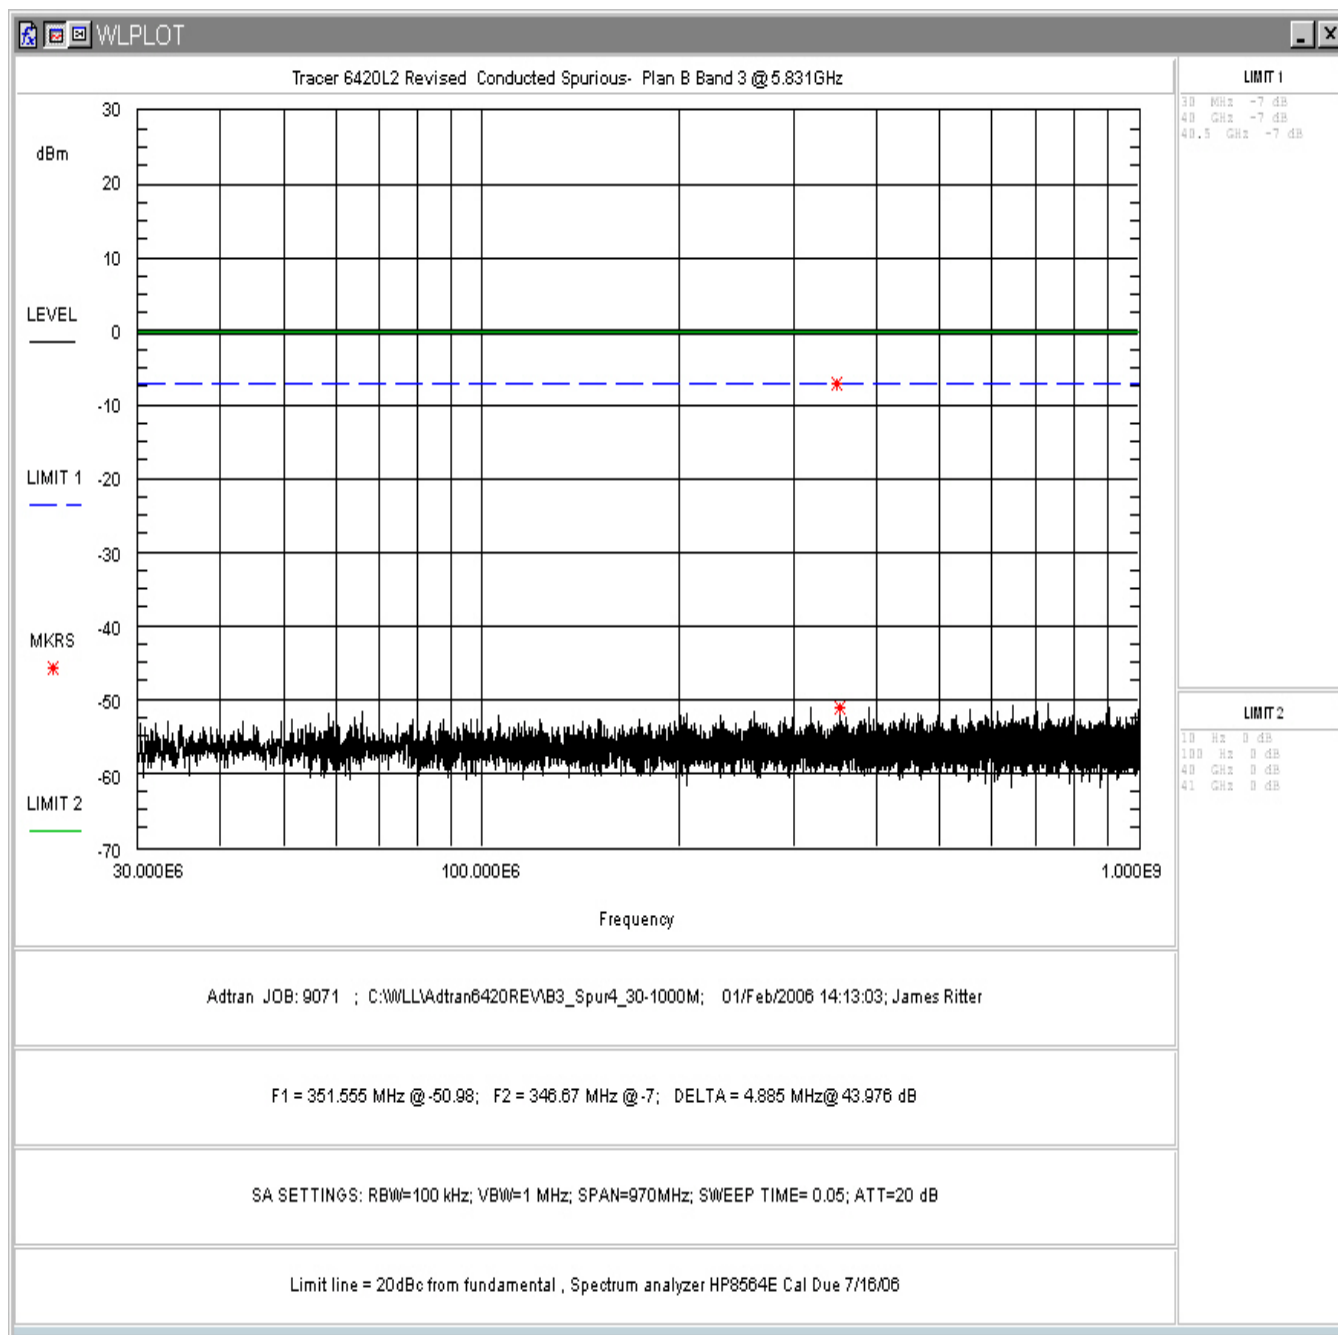


Figure 49. Conducted Spurious Emissions, Plan B Band 3, 30MHz - 1GHz

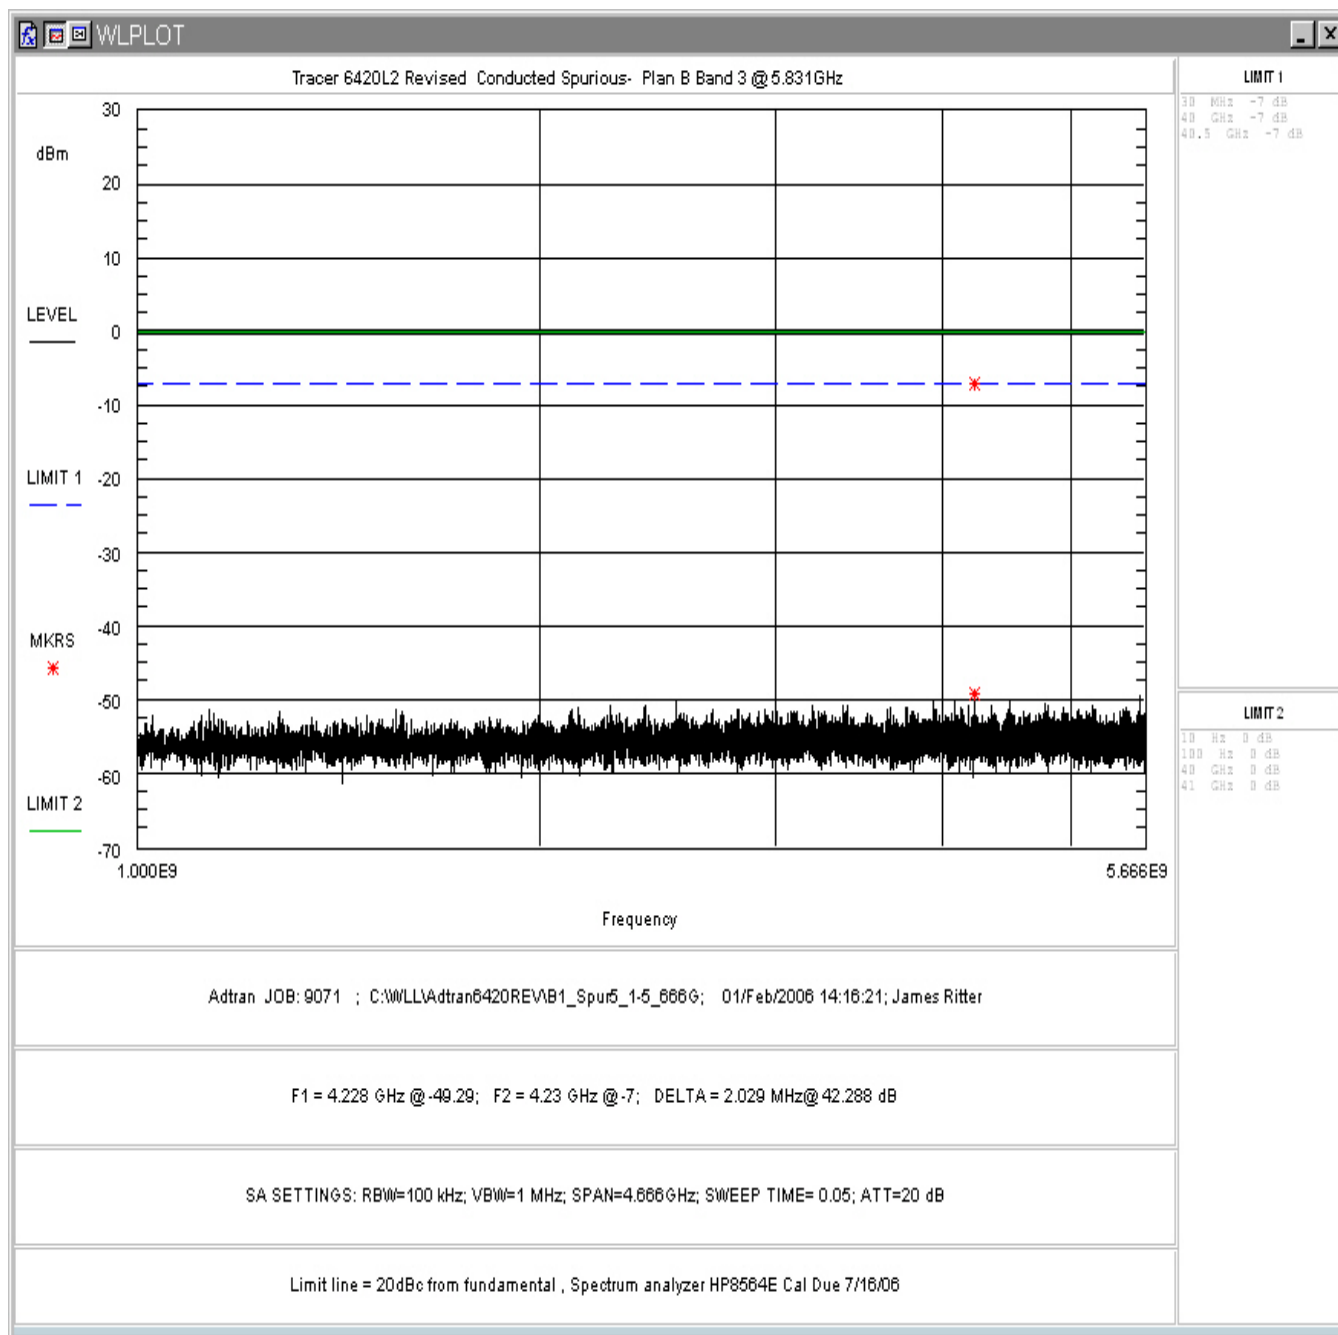


Figure 50. Conducted Spurious Emissions, Plan B Band 3, 1GHz – 5.66GHz

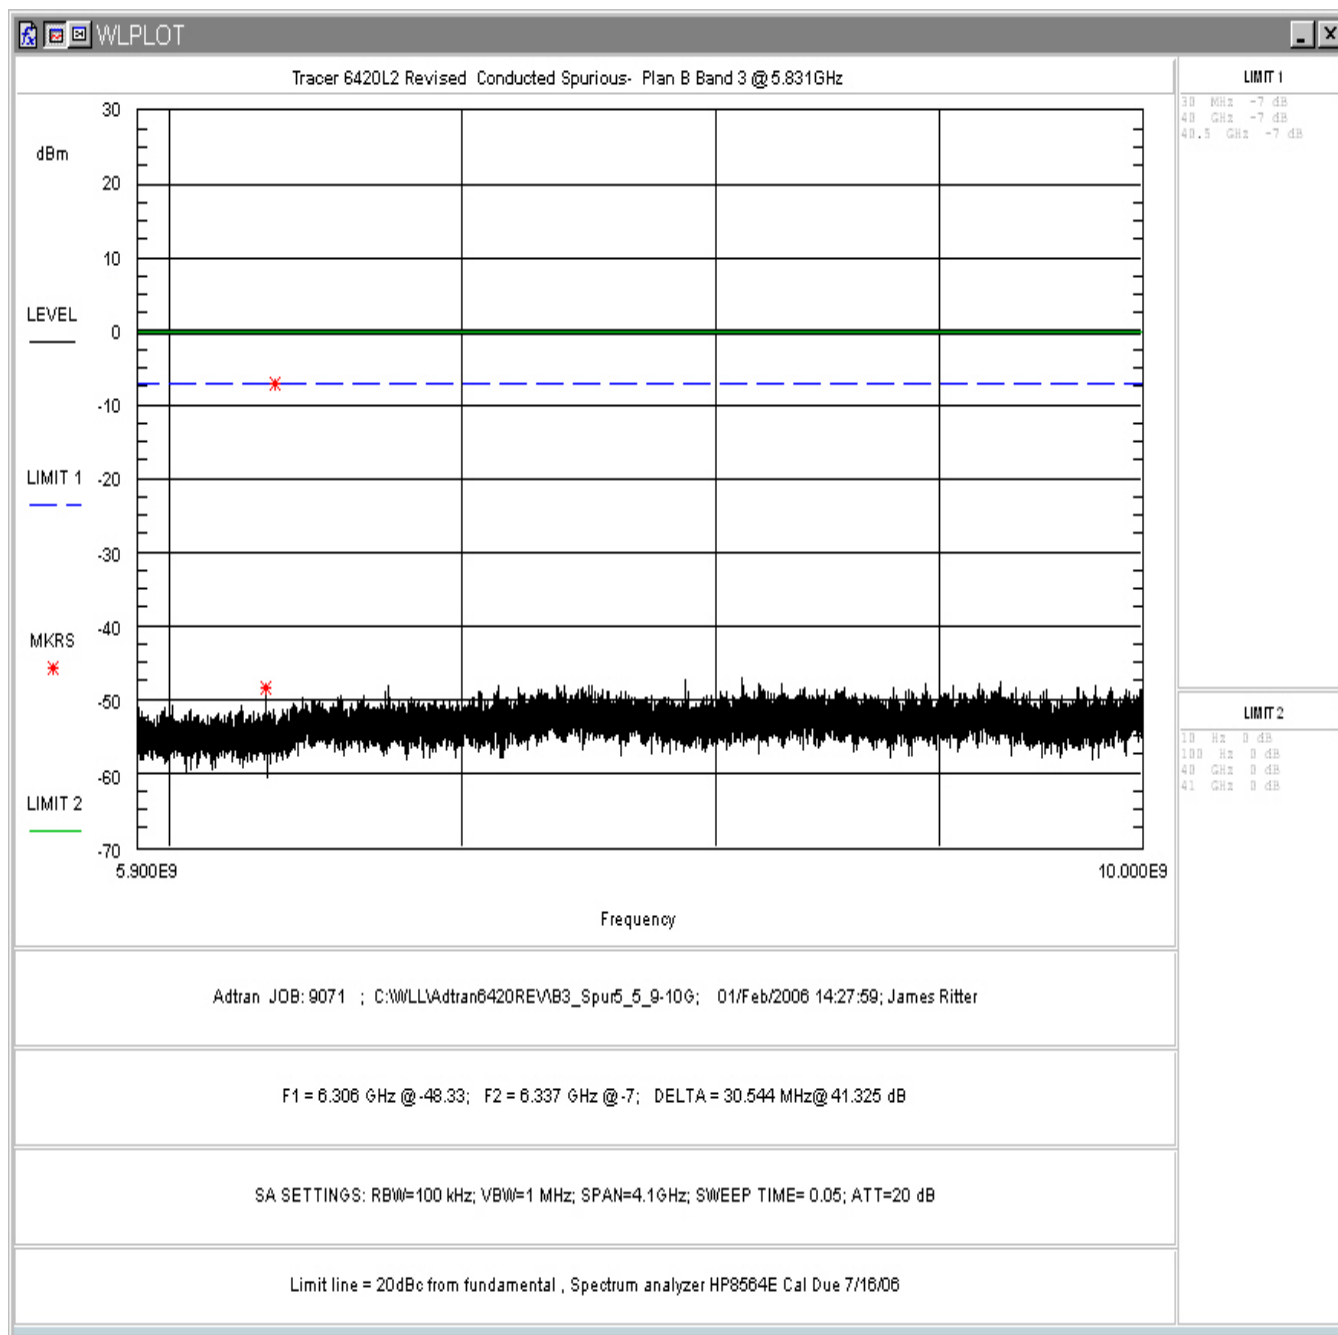


Figure 51. Conducted Spurious Emissions, Plan B Band 3, 5.9 – 10GHz

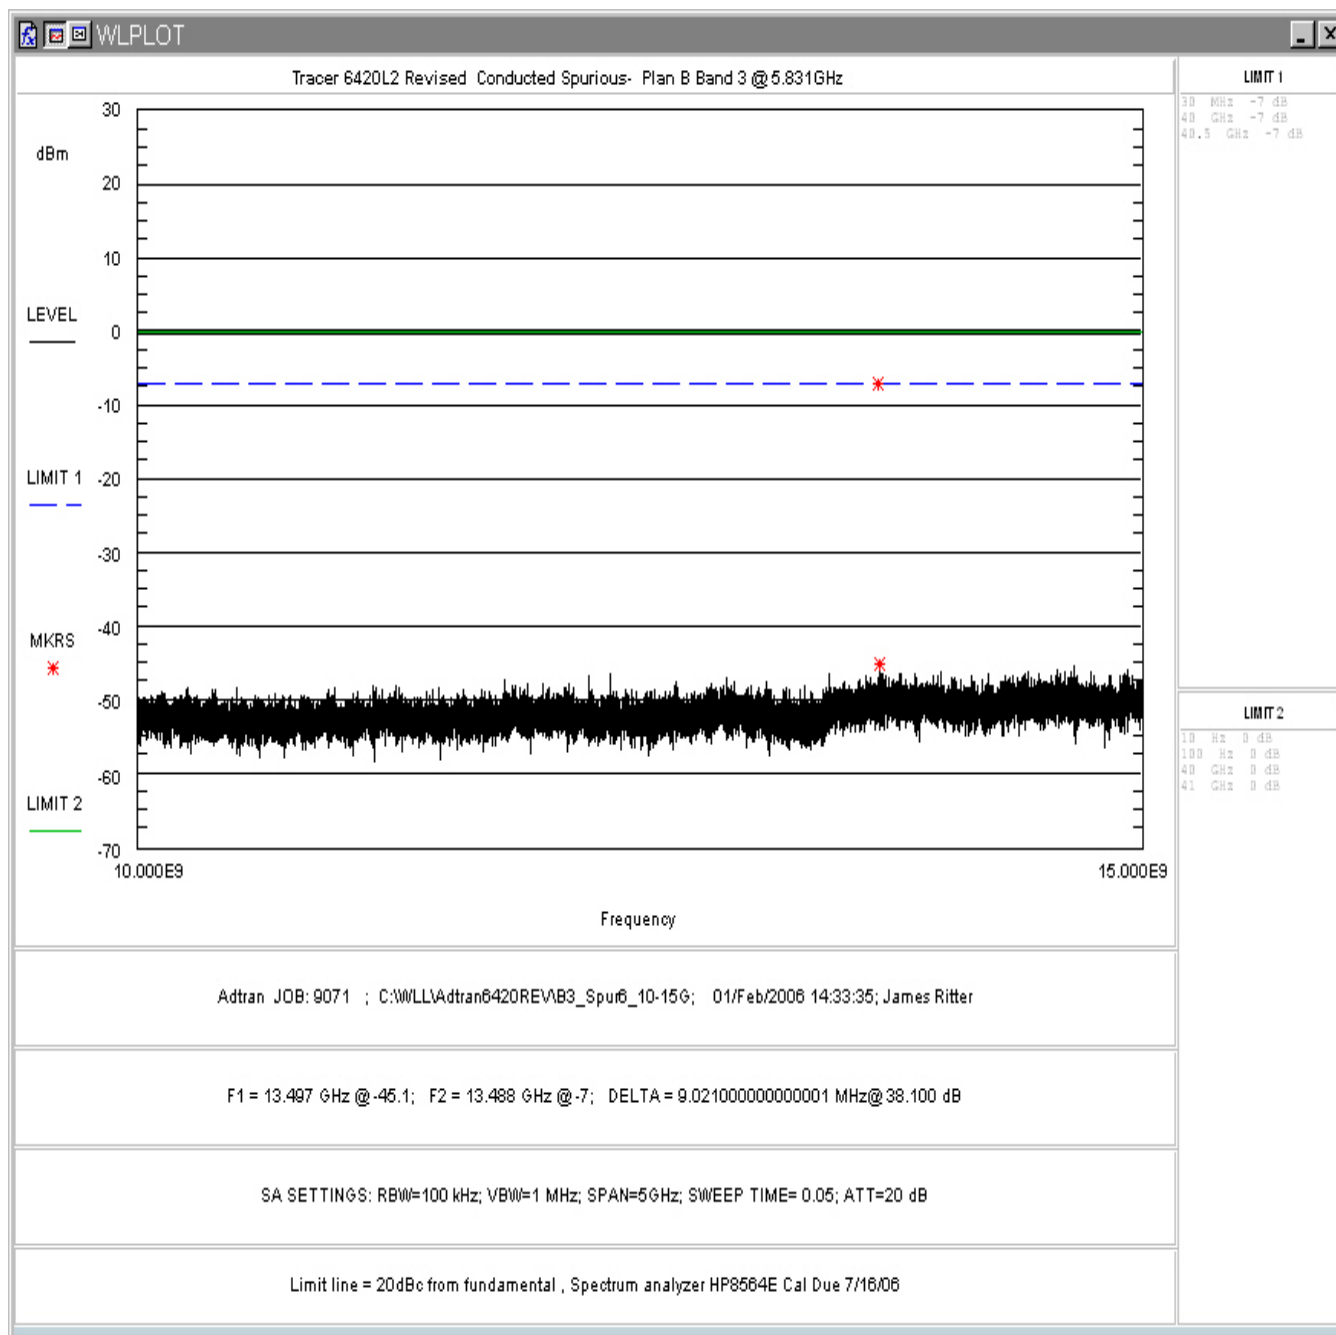


Figure 52. Conducted Spurious Emissions, Plan B Band 3, 10 – 15GHz

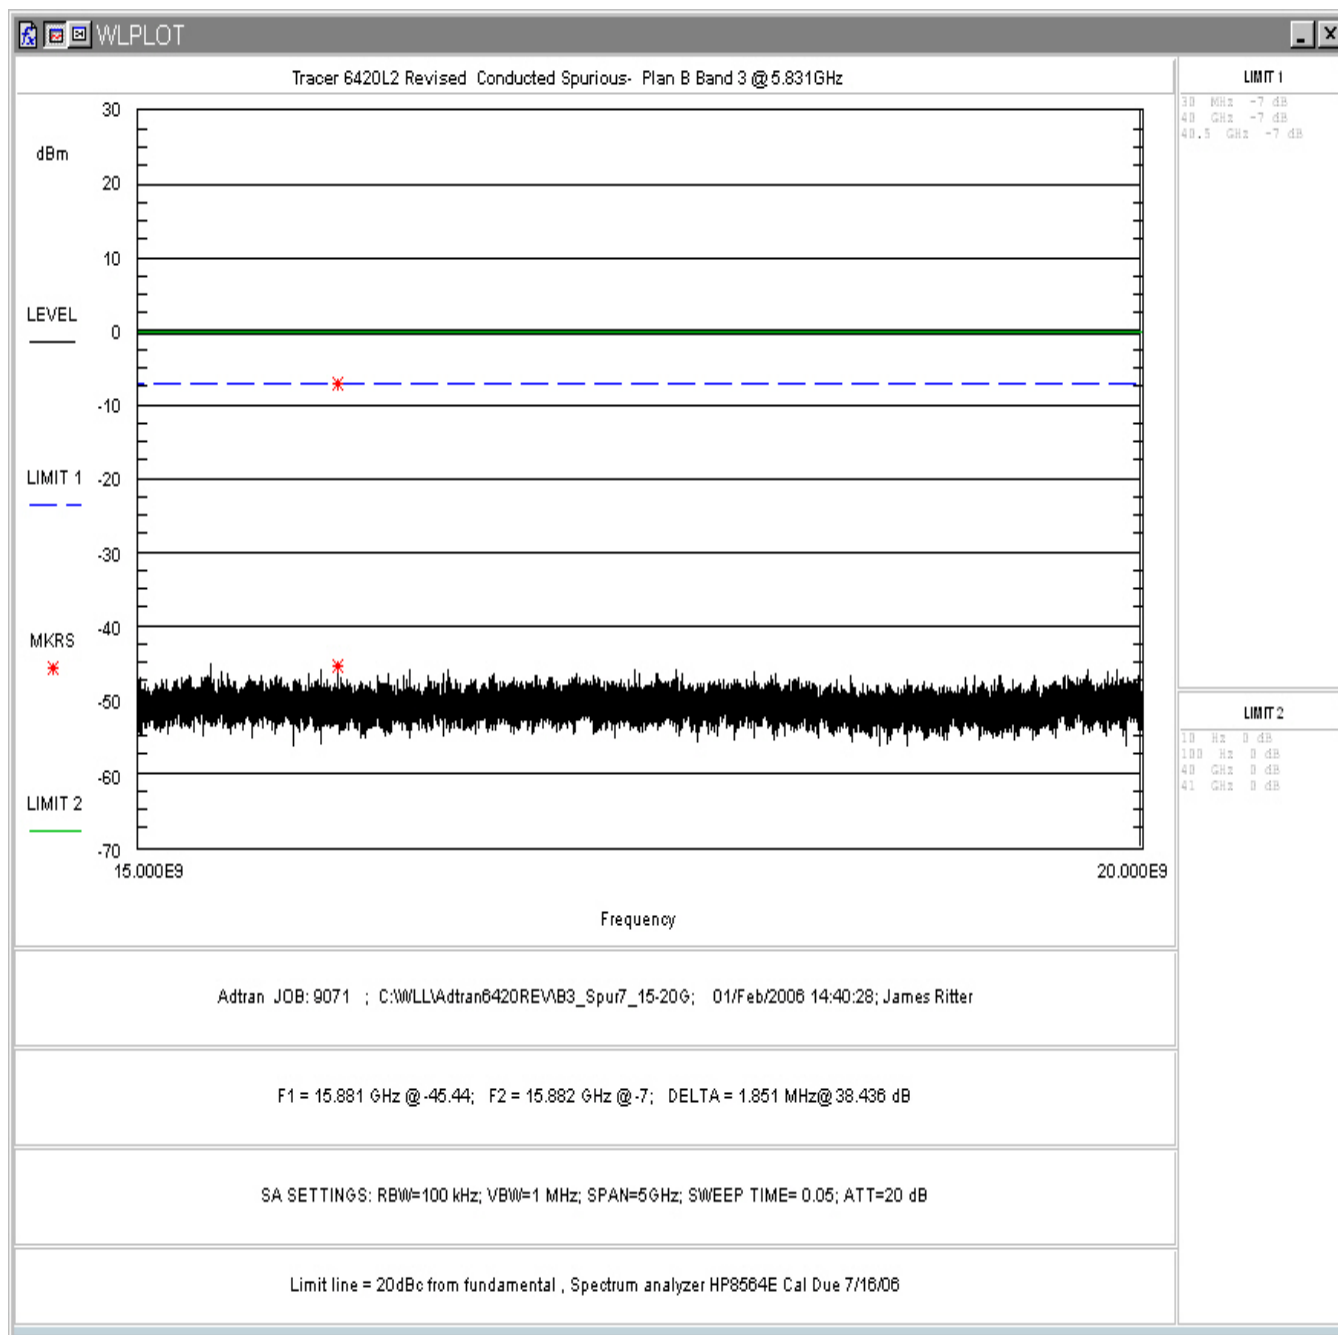


Figure 53. Conducted Spurious Emissions, Plan B Band 3, 15 – 20GHz

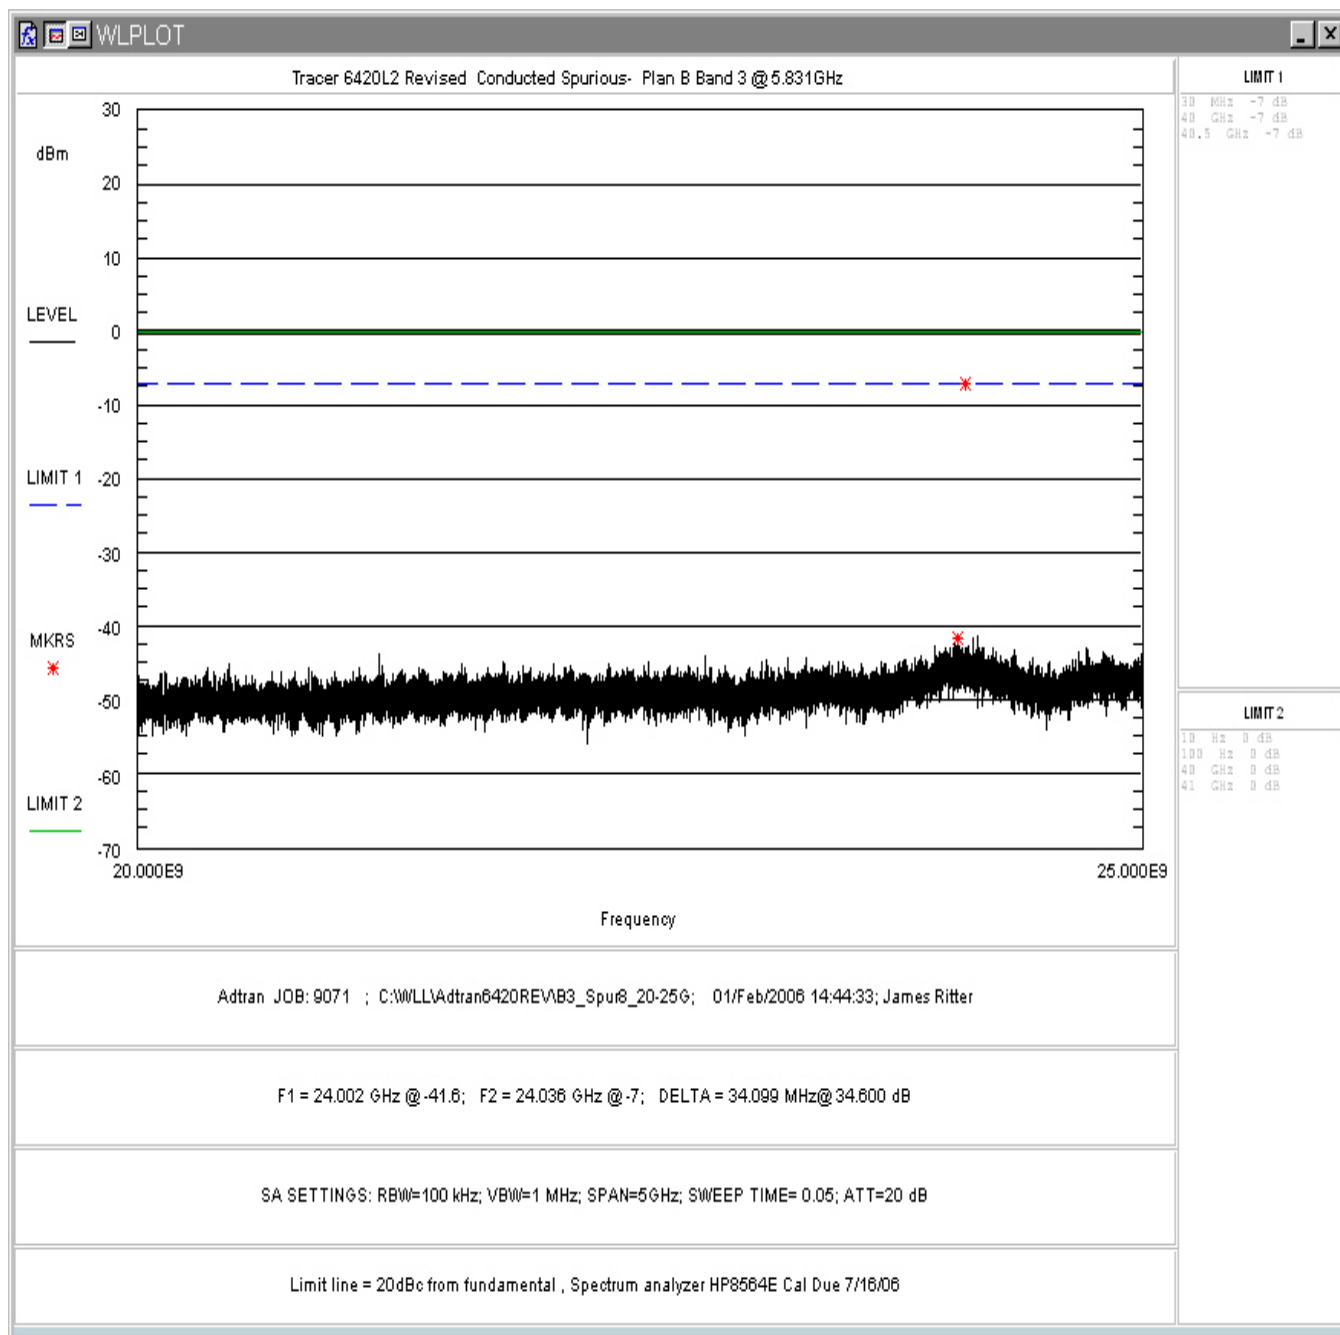


Figure 54. Conducted Spurious Emissions, Plan B Band 3, 20 – 25GHz

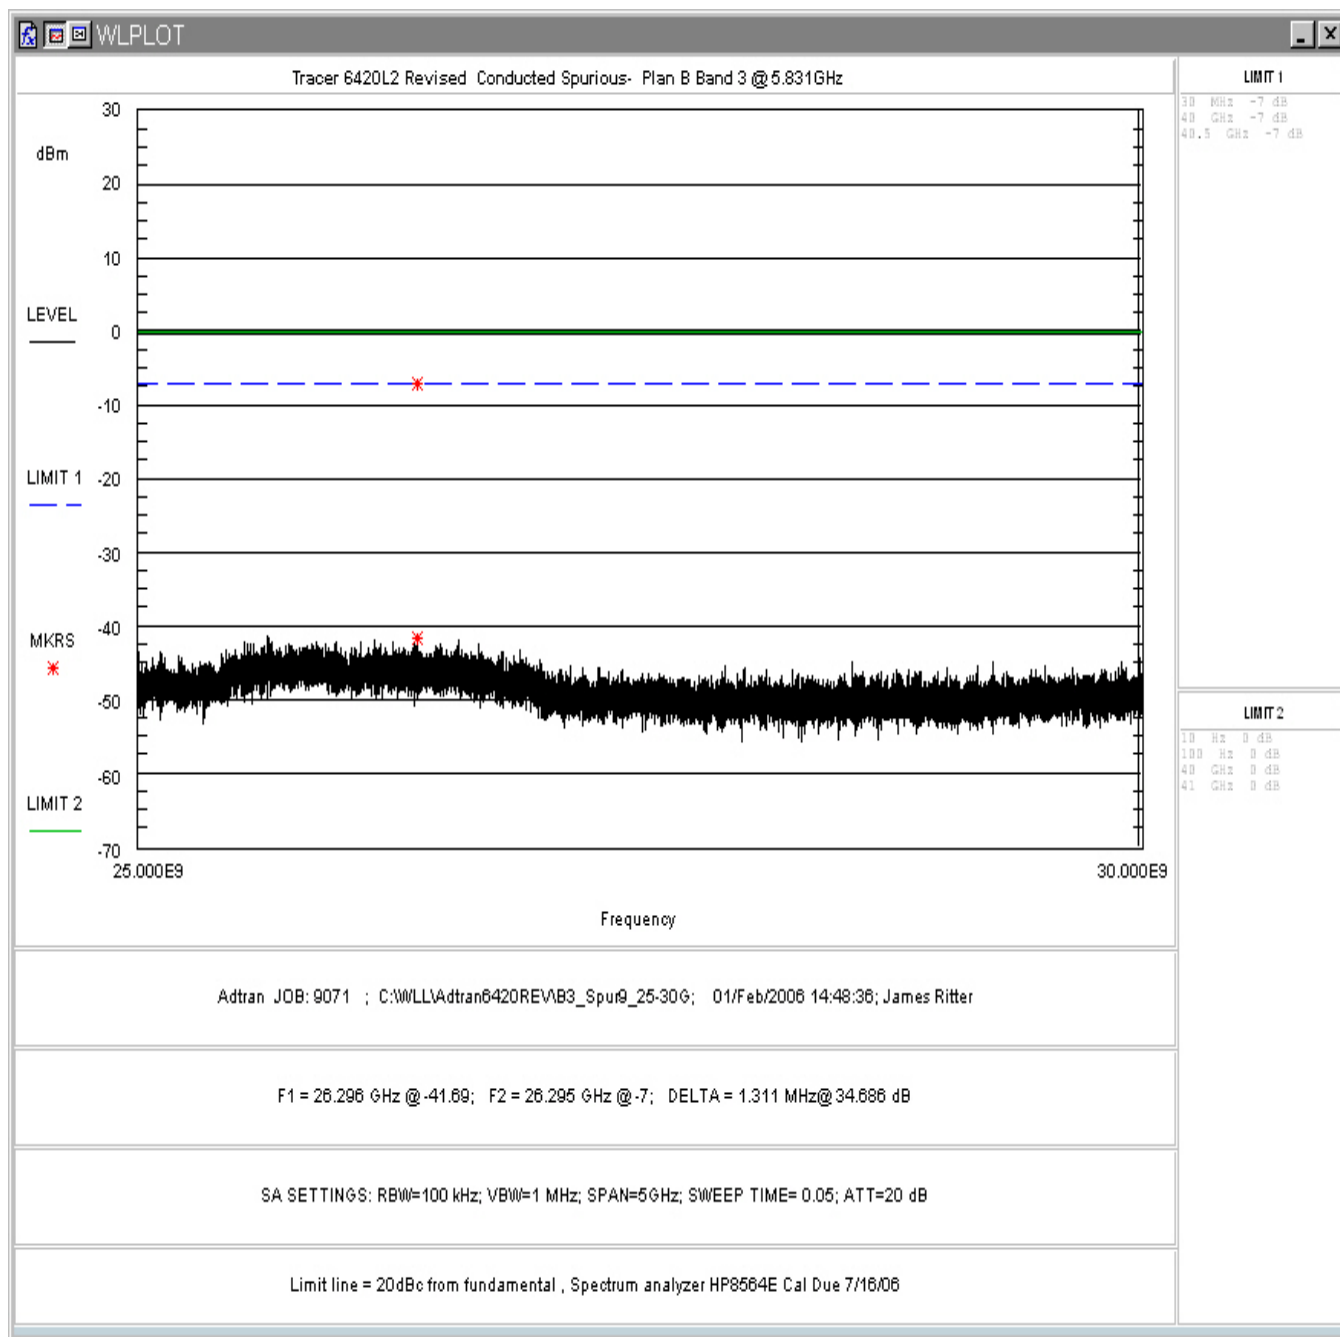


Figure 55. Conducted Spurious Emissions, Plan B Band 3, 25 – 30GHz

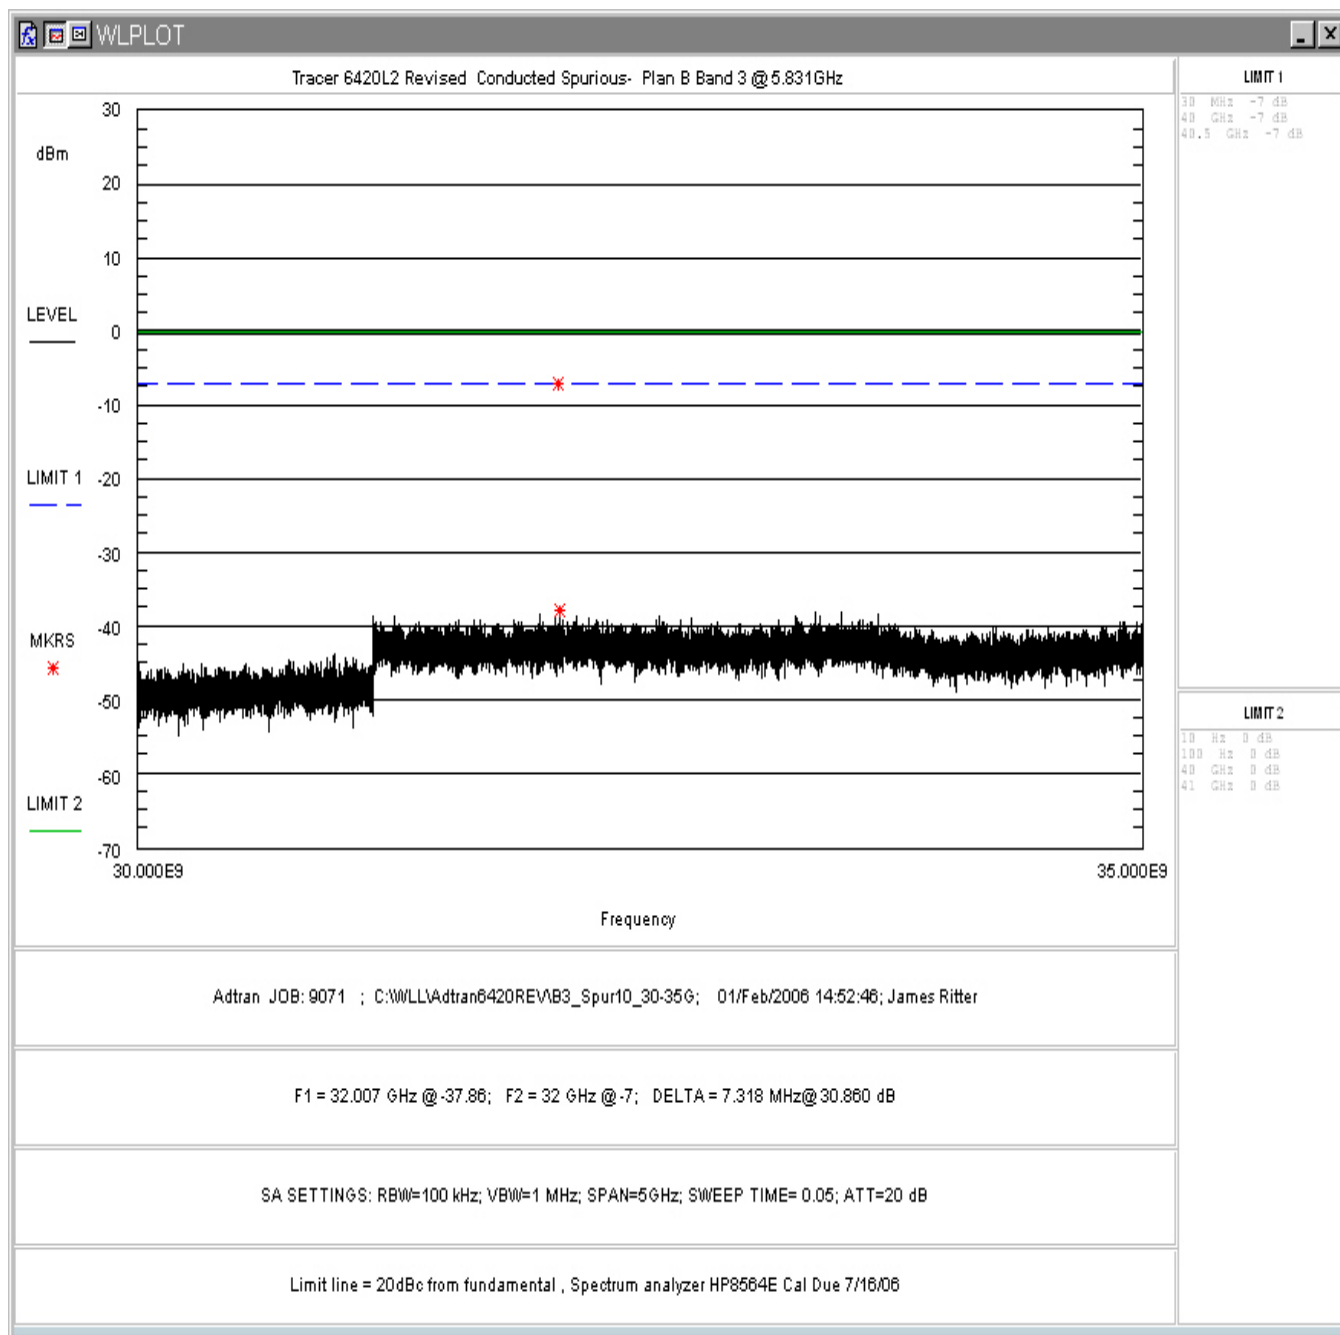


Figure 56. Conducted Spurious Emissions, Plan B Band 3, 30 – 35GHz

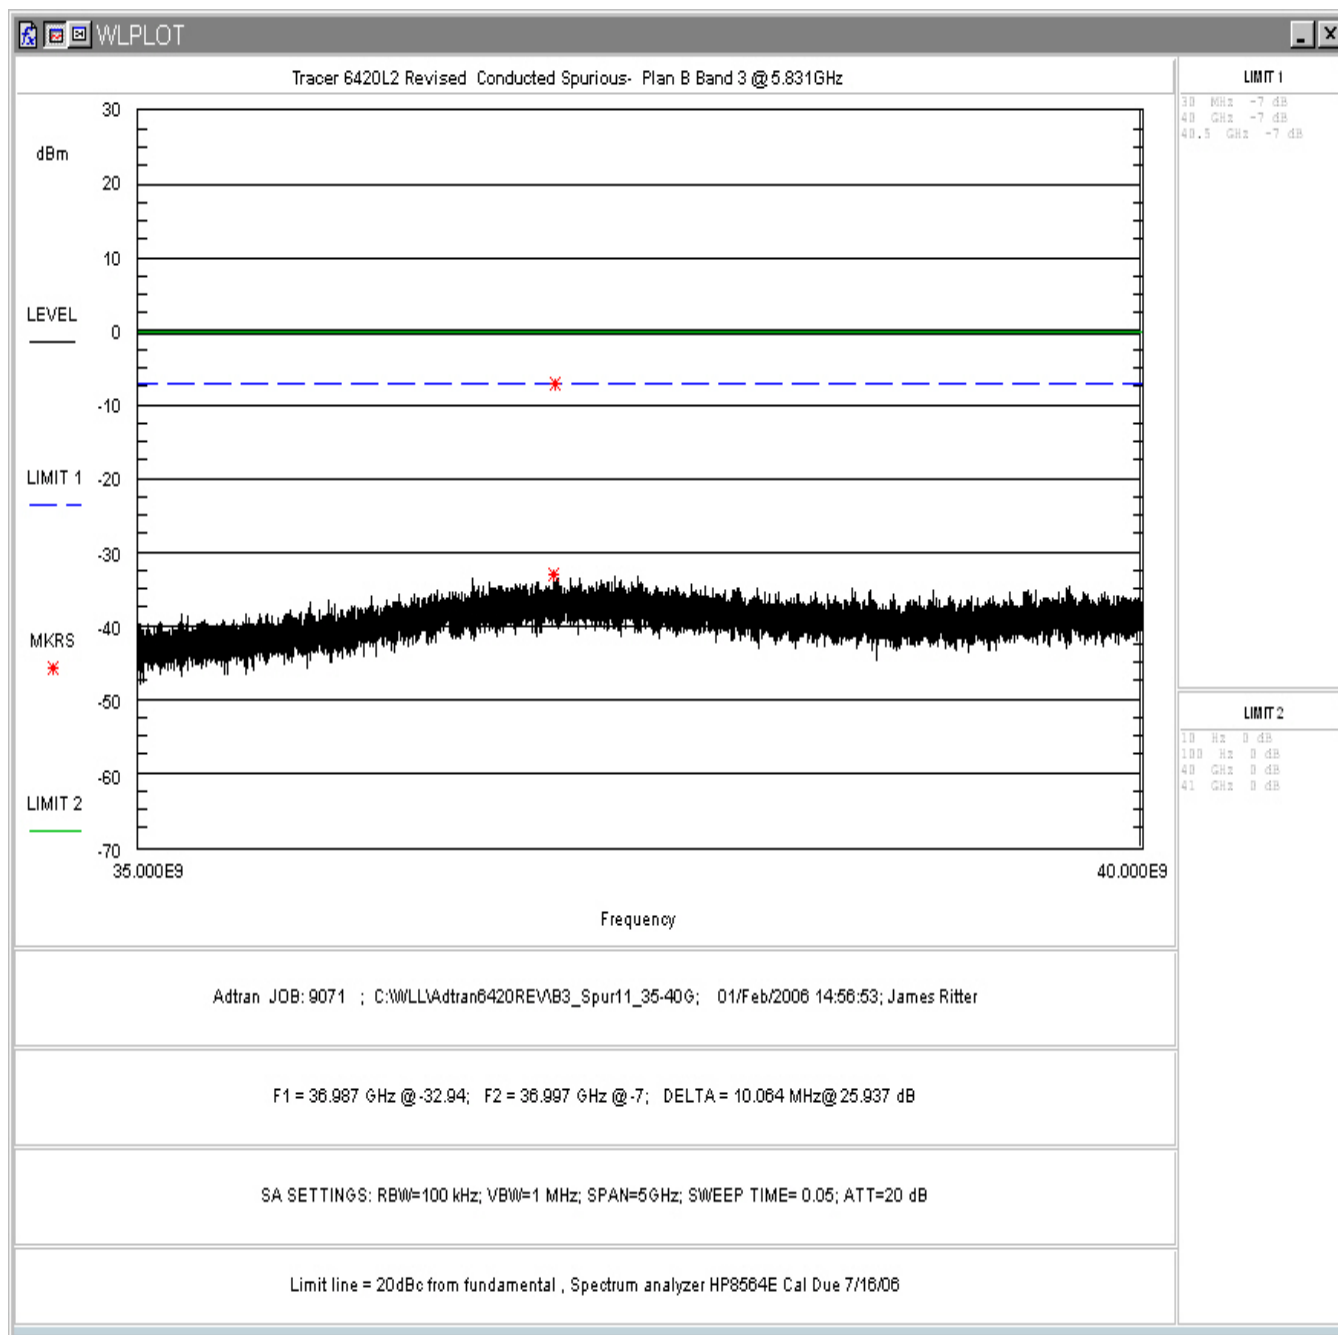


Figure 57. Conducted Spurious Emissions, Plan B Band 3, 35 – 40GHz

4.5 Radiated Spurious Emissions: (FCC Part §15.247(c) and RSS-210 A8.5)

Radiated emissions that fall in the restricted bands must comply with the general emissions limits in 15.209(a) and RSS-210 Table 2.

The emissions were measured using the following resolution bandwidths:

Frequency Range	Resolution Bandwidth	Video Bandwidth
30MHz-1000 MHz	120kHz	>30 kHz
>1000 MHz	1 MHz	<30 Hz (Avg.) 1MHz (Peak)

Harmonic and Spurious emissions that were identified as coming from the EUT were checked in Peak and in Average Mode. It was verified that the peak-to-average ratio did not exceed 20dB.

Peak measurements and average measurements are made. All emissions were determined to have a peak-to-average ratio of less than 20 dB.

4.5.1 Test Procedure

The EUT was placed on motorized turntable for radiated testing on a 3-meter open field test site. The emissions from the EUT were measured continuously at every azimuth by rotating the turntable. Receiving antennas were mounted on an antenna mast to determine the height of maximum emissions. The height of the antenna was varied between 1 and 4 meters. The peripherals were placed on the table in accordance with ANSI C63.4-2003. Cables were varied in position to produce maximum emissions. Both the horizontal and vertical field components were measured.

The EUT was tested in the following configurations and modes:

Antenna	Channel
Dish	A&B

The following is a sample calculation used in the data tables for calculating the final field strength of spurious emissions and comparing these levels to the specified limits.

Sample Calculation:

Spectrum Analyzer Voltage (SA Level): V dBμV
 Antenna Factor (Ant Corr): AFdB/m
 Cable Loss Correction (Cable Corr): CCdB
 Amplifier Gain: GdB
 Electric Field (Corr Level): EdBμV/m = VdBμV + AFdB/m + CCdB - GdB
 To convert to linear units: EμV/m = antilog (EdBμV/m/20)

Data are supplied in the following tables. Testing was performed to 40GHz. No emissions were detected above 12GHz. All detected emissions are reported in the following tables. Both peak and average measurements are listed.

Table 6: Radiated Emission Test Data, Low Frequency Data (<1GHz)

Frequency (MHz)	Pol H/V	Az Deg	Ant. Hght (m)	SA Level (dBμV)	Ant. Corr. (dB/m)	Cable Corr. (dB)	Corr. Level (dBμV/m)	Corr. Level (μV/m)	Limit (μV/m)	Margin dB
34.817	V	180.0	1.0	10.5	17.6	1.4	29.5	29.7	100.0	-10.5
38.910	V	0.0	1.2	17.0	17.0	1.4	35.5	59.4	100.0	-4.5
51.190	V	270.0	1.2	16.0	13.8	1.6	31.4	37.3	100.0	-8.6
63.475	V	0.0	1.4	18.8	9.1	1.8	29.7	30.5	100.0	-10.3
75.780	V	250.0	1.6	21.5	6.7	1.9	30.1	32.0	100.0	-9.9
79.868	V	270.0	1.2	20.4	6.9	1.9	29.2	28.9	100.0	-10.8
84.060	V	290.0	1.3	23.0	7.6	1.9	32.5	42.2	100.0	-7.5
108.530	V	270.0	1.4	19.6	10.2	2.2	32.0	39.7	150.0	-11.5
120.000	V	0.0	1.5	17.7	11.3	2.2	31.2	36.5	150.0	-12.3
125.040	V	270.0	1.4	19.7	11.0	2.3	33.0	44.5	150.0	-10.5
141.300	V	270.0	1.6	19.5	8.7	2.4	30.6	33.8	150.0	-12.9
280.000	V	10.0	1.0	17.7	13.2	3.2	34.1	51.0	200.0	-11.9
338.500	V	180.0	1.2	20.3	14.1	3.6	38.0	79.4	200.0	-8.0
440.000	V	180.0	1.5	19.8	16.0	4.1	39.9	98.6	200.0	-6.1
520.000	V	270.0	1.3	21.1	17.2	4.7	43.0	140.7	200.0	-3.1
560.000	V	0.0	1.5	10.7	18.5	5.1	34.3	52.1	200.0	-11.7
600.000	V	270.0	1.5	15.1	18.4	5.5	39.0	89.4	200.0	-7.0
719.980	V	180.0	1.6	12.1	19.9	5.9	37.9	78.5	200.0	-8.1
840.000	V	270.0	1.5	13.8	21.6	6.5	41.9	123.8	200.0	-4.2
920.000	V	180.0	2.3	7.1	22.3	7.0	36.4	66.2	200.0	-9.6
960.000	V	190.0	2.0	13.7	21.8	7.2	42.7	136.6	500.0	-11.3
999.999	V	0.0	1.6	9.1	22.5	7.4	39.0	89.1	500.0	-15.0
38.910	H	0.0	2.5	12.9	17.0	1.4	31.4	37.1	100.0	-8.6
63.475	H	270.0	3.0	26.3	9.1	1.8	37.2	72.4	100.0	-2.8
75.780	H	200.0	2.6	19.8	6.7	1.9	28.4	26.3	100.0	-11.6
79.868	H	270.0	3.3	23.5	6.9	1.9	32.3	41.2	100.0	-7.7
84.060	H	270.0	3.6	24.0	7.6	1.9	33.5	47.3	100.0	-6.5
108.530	H	190.0	3.5	20.0	10.2	2.2	32.4	41.6	150.0	-11.1
112.633	H	0.0	3.5	19.5	10.8	2.2	32.5	42.0	150.0	-11.1
120.000	H	90.0	3.0	20.2	11.3	2.2	33.7	48.7	150.0	-9.8
125.040	H	200.0	2.5	21.2	11.0	2.3	34.5	52.9	150.0	-9.0
129.020	H	270.0	3.1	20.2	10.5	2.3	33.0	44.8	150.0	-10.5
200.000	H	90.0	1.6	24.2	10.1	2.8	37.1	71.4	150.0	-6.4
225.010	H	0.0	2.0	18.4	12.2	2.9	33.5	47.4	200.0	-12.5
280.000	H	180.0	1.5	25.0	13.2	3.2	41.4	118.1	200.0	-4.6
338.500	H	220.0	1.8	19.9	14.1	3.6	37.6	75.8	200.0	-8.4
340.690	H	190.0	3.0	19.2	14.2	3.6	37.0	70.9	200.0	-9.0
440.000	H	180.0	2.7	20.0	16.0	4.1	40.1	100.9	200.0	-5.9

Frequency (MHz)	Pol H/V	Az Deg	Ant. Hght (m)	SA Level (dBμV)	Ant. Corr. (dB/m)	Cable Corr. (dB)	Corr. Level (dBμV/m)	Corr. Level (μV/m)	Limit (μV/m)	Margin dB
520.000	H	190.0	2.6	19.1	17.2	4.7	41.0	111.8	200.0	-5.1
600.000	H	165.0	2.6	12.7	18.4	5.5	36.6	67.8	200.0	-9.4
719.980	H	280.0	2.7	10.7	19.9	5.9	36.5	66.8	200.0	-9.5
760.000	H	190.0	2.6	14.7	20.6	6.0	41.3	116.3	200.0	-4.7
800.000	H	270.0	2.7	9.0	20.5	6.2	35.7	61.2	200.0	-10.3
840.000	H	165.0	2.5	11.4	21.6	6.5	39.5	93.9	200.0	-6.6
920.000	H	180.0	2.6	11.5	22.3	7.0	40.8	109.8	200.0	-5.2
999.999	H	0.0	2.4	9.8	22.5	7.4	39.7	96.6	500.0	-14.3

Table 7: Radiated Emission Test Data, High Frequency Data: Plan A, Band 1 (5744MHz)

Frequency (MHz)	Pol H/V	Az Deg	Ant. Hght (m)	SA Level (dBμV)	Ant. Corr. (dB/m)	Cable Corr. (dB)	Amp Gain (dB)	Corr. Level (dBμV/m)	Corr. Level (μV/m)	Limit (μV/m)	Margin dB
				AVG.							
1039.876	H	90.0	1.0	40.8	24.5	1.2	36.2	30.3	32.8	500.0	-23.7
1160.370	H	180.0	1.0	39.8	25.2	1.3	36.1	30.2	32.3	500.0	-23.8
1200.270	H	190.0	1.0	40.8	25.4	1.3	36.1	31.5	37.4	500.0	-22.5
1359.980	H	190.0	1.0	45.2	26.1	1.4	35.9	36.8	68.9	500.0	-17.2
1600.130	H	270.0	1.0	50.2	27.1	1.5	35.7	43.0	141.8	500.0	-10.9
1680.130	H	270.0	1.0	40.3	27.4	1.5	35.6	33.6	47.7	500.0	-20.4
2240.100	H	190.0	1.0	39.3	28.9	1.6	35.5	34.3	51.8	500.0	-19.7
11488.000	H	0.0	1.0	32.5	39.4	5.7	35.6	42.0	125.9	500.0	-12.0*
				PEAK							
1039.876	H	90.0	1.0	50.0	24.5	1.2	36.2	39.5	94.5	5000.0	-34.5
1160.370	H	180.0	1.0	50.2	25.2	1.3	36.1	40.6	106.6	5000.0	-33.4
1200.270	H	190.0	1.0	49.5	25.4	1.3	36.1	40.1	101.4	5000.0	-33.9
1359.980	H	190.0	1.0	50.1	26.1	1.4	35.9	41.7	121.6	5000.0	-32.3
1600.130	H	270.0	1.0	55.3	27.1	1.5	35.7	48.2	256.8	5000.0	-25.8
1680.130	H	270.0	1.0	48.7	27.4	1.5	35.6	41.9	125.1	5000.0	-32.0
2240.100	H	190.0	1.0	49.3	28.9	1.6	35.5	44.3	163.4	5000.0	-29.7
11489.000	H	0.0	1.0	41.3	39.4	5.7	35.6	50.8	348.0	5000.0	-23.1*
				AVG.							
1039.876	V	180.0	1.0	38.9	24.5	1.2	36.2	28.4	26.3	500.0	-25.6
1160.370	V	120.0	1.0	39.9	25.2	1.3	36.1	30.2	32.4	500.0	-23.8
1200.270	V	180.0	1.0	47.0	25.4	1.3	36.1	37.6	76.1	500.0	-16.4
1359.980	V	190.0	1.0	46.0	26.1	1.4	35.9	37.6	75.8	500.0	-16.4
1600.130	V	200.0	1.0	43.8	27.1	1.5	35.7	36.7	68.3	500.0	-17.3
1680.130	V	180.0	1.0	40.3	27.4	1.5	35.6	33.6	47.7	500.0	-20.4
2240.100	V	300.0	1.0	36.1	28.9	1.6	35.5	31.1	35.7	500.0	-22.9
11488.000	V	0.0	1.0	32.7	39.4	5.7	35.6	42.2	128.8	500.0	-11.8*
				PEAK							
1039.876	V	180.0	1.0	46.7	24.5	1.2	36.2	36.2	64.4	5000.0	-37.8
1160.370	V	120.0	1.0	50.5	25.2	1.3	36.1	40.9	110.4	5000.0	-33.1
1200.270	V	180.0	1.0	52.5	25.4	1.3	36.1	43.1	143.3	5000.0	-30.9
1359.980	V	190.0	1.0	51.8	26.1	1.4	35.9	43.4	148.3	5000.0	-30.6
1600.130	V	200.0	1.0	51.0	27.1	1.5	35.7	43.9	156.0	5000.0	-30.1
1680.130	V	180.0	1.0	48.1	27.4	1.5	35.6	41.3	116.7	5000.0	-32.6
2240.100	V	300.0	1.0	47.2	28.9	1.6	35.5	42.1	127.8	5000.0	-31.8
11488.000	V	0.0	1.0	43.4	39.4	5.7	35.6	52.9	441.6	5000.0	-21.1*

*= Ambient/Noise floor

Table 8: Radiated Emission Test Data, High Frequency Data: Plan B, Band 1 (5824MHz)

Frequency (MHz)	Pol H/V	Az Deg	Ant. Hght (m)	SA Level (dBμV)	Ant. Corr. (dB/m)	Cable Corr. (dB)	Amp Gain (dB)	Corr. Level (dBμV/m)	Corr. Level (μV/m)	Limit (μV/m)	Margin dB
				AVG.							
1039.876	H	200.0	1.0	41.8	24.5	1.2	36.2	31.3	36.9	500.0	-22.6
1120.100	H	190.0	1.0	45.8	25.0	1.3	36.2	35.9	62.5	500.0	-18.1
1160.340	H	180.0	1.0	44.3	25.2	1.3	36.1	34.7	54.3	500.0	-19.3
1200.270	H	220.0	1.0	42.0	25.4	1.3	36.1	32.6	42.8	500.0	-21.4
1359.980	H	180.0	1.0	40.7	26.1	1.4	35.9	32.3	41.0	500.0	-21.7
1439.800	H	190.0	1.0	47.5	26.5	1.4	35.8	39.5	94.8	500.0	-14.4
11648.000	H	0.0	1.0	32.7	39.5	5.4	35.6	42.0	126.5	500.0	-11.9*
				PEAK							
1039.876	H	200.0	1.0	53.8	24.5	1.2	36.2	43.3	146.3	5000.0	-30.7
1120.100	H	190.0	1.0	52.1	25.0	1.3	36.2	42.2	128.6	5000.0	-31.8
1160.340	H	180.0	1.0	52.0	25.2	1.3	36.1	42.4	131.2	5000.0	-31.6
1200.270	H	220.0	1.0	49.6	25.4	1.3	36.1	40.2	102.6	5000.0	-33.8
1359.980	H	180.0	1.0	49.9	26.1	1.4	35.9	41.5	118.2	5000.0	-32.5
1439.800	H	190.0	1.0	52.7	26.5	1.4	35.8	44.7	172.0	5000.0	-29.3
11648.000	H	0.0	1.0	42.9	39.5	5.4	35.6	52.2	409.4	5000.0	-21.7*
				AVG.							
1039.876	V	0.0	1.0	40.2	24.5	1.2	36.2	29.7	30.5	500.0	-24.3
1120.100	V	125.0	1.0	40.3	25.0	1.3	36.2	30.4	33.2	500.0	-23.6
1160.340	V	165.0	1.0	39.3	25.2	1.3	36.1	29.7	30.5	500.0	-24.3
1200.270	V	165.0	1.0	45.0	25.4	1.3	36.1	35.6	60.4	500.0	-18.4
1359.980	V	270.0	1.0	46.3	26.1	1.4	35.9	37.9	78.8	500.0	-16.1
1439.800	V	180.0	1.0	46.7	26.5	1.4	35.8	38.7	86.2	500.0	-15.3
11648.000	V	0.0	1.0	33.2	39.5	5.4	35.6	42.5	133.5	500.0	-11.5*
				PEAK							
1039.876	V	0.0	1.0	48.7	24.5	1.2	36.2	38.2	81.0	5000.0	-35.8
1120.100	V	125.0	1.0	52.7	25.0	1.3	36.2	42.8	137.3	5000.0	-31.2
1160.340	V	165.0	1.0	49.8	25.2	1.3	36.1	40.2	101.8	5000.0	-33.8
1200.270	V	165.0	1.0	50.8	25.4	1.3	36.1	41.5	118.2	5000.0	-32.5
1359.980	V	270.0	1.0	52.3	26.1	1.4	35.9	43.9	157.1	5000.0	-30.1
1439.800	V	180.0	1.0	51.5	26.5	1.4	35.8	43.5	150.3	5000.0	-30.4
11648.000	V	0.0	1.0	43.8	39.5	5.4	35.6	53.2	455.6	5000.0	-20.8*

*= Ambient/Noise floor

Table 9: Radiated Emission Test Data, High Frequency Data: Plan B, Band 3 (5831MHz)

Frequency (MHz)	Pol H/V	Az Deg	Ant. Hght (m)	SA Level (dBμV)	Ant. Corr. (dB/m)	Cable Corr. (dB)	Amp Gain (dB)	Corr. Level (dBμV/m)	Corr. Level (μV/m)	Limit (μV/m)	Margin dB
				AVG.							
1039.876	H	290.0	1.0	43.0	24.5	1.2	36.2	32.5	42.2	500.0	-21.5
1160.340	H	270.0	1.0	40.2	25.2	1.3	36.1	30.5	33.6	500.0	-23.5
1200.270	H	125.0	1.0	44.5	25.4	1.3	36.1	35.1	57.0	500.0	-18.9
1360.000	H	180.0	1.0	42.3	26.1	1.4	35.9	33.9	49.7	500.0	-20.1
1439.800	H	180.0	1.0	47.8	26.5	1.4	35.8	39.9	98.5	500.0	-14.1
11662.000	H	0.0	1.0	33.0	39.5	5.4	35.6	42.3	130.7	500.0	-11.7*
				PEAK							
1039.876	H	290.0	1.0	49.5	24.5	1.2	36.2	39.0	89.2	5000.0	-35.0
1160.340	H	270.0	1.0	48.9	25.2	1.3	36.1	39.3	91.8	5000.0	-34.7
1200.270	H	125.0	1.0	50.8	25.4	1.3	36.1	41.5	118.2	5000.0	-32.5
1360.000	H	180.0	1.0	50.5	26.1	1.4	35.9	42.1	127.3	5000.0	-31.9
1439.800	H	180.0	1.0	53.7	26.5	1.4	35.8	45.7	193.0	5000.0	-28.3
11662.000	H	0.0	1.0	43.8	39.5	5.4	35.6	53.2	454.9	5000.0	-20.8*
				AVG							
1039.876	V	190.0	1.0	39.8	24.5	1.2	36.2	29.3	29.2	500.0	-24.7
1160.340	V	190.0	1.0	41.0	25.2	1.3	36.1	31.4	37.0	500.0	-22.6
1200.270	V	125.0	1.0	45.1	25.4	1.3	36.1	35.7	61.1	500.0	-18.3
1360.000	V	180.0	1.0	40.2	26.1	1.4	35.9	31.8	38.9	500.0	-22.2
1439.800	V	180.0	1.0	43.5	26.5	1.4	35.8	35.5	59.8	500.0	-18.4
11662.000	V	0.0	1.0	32.1	39.5	5.4	35.6	41.4	117.9	500.0	-12.6*
				PEAK							
1039.876	V	190.0	1.0	47.0	24.5	1.2	36.2	36.5	66.9	5000.0	-37.5
1160.340	V	190.0	1.0	49.1	25.2	1.3	36.1	39.5	94.0	5000.0	-34.5
1200.270	V	125.0	1.0	51.1	25.4	1.3	36.1	41.7	121.9	5000.0	-32.3
1360.000	V	180.0	1.0	49.1	26.1	1.4	35.9	40.7	108.3	5000.0	-33.3
1439.800	V	180.0	1.0	49.8	26.5	1.4	35.8	41.9	124.0	5000.0	-32.1
11662.000	V	0.0	1.0	42.8	39.5	5.4	35.6	52.1	404.0	5000.0	-21.9*

*= Ambient/Noise floor

4.5.2 Test Procedure for 10' Dish Antenna

Guidance provided by the FCC on measurements of the 10' dish antenna was used for performing these measurements. A copy of the e-mail providing the guidance follows the test data.

A receive antenna was placed 10m from the EUT antenna. As the EUT antenna is very large it was determined that maximum emissions would be best detected by moving the receive antenna around the EUT antenna.

Maximum emissions were found at the bore sight of the antenna. Both the horizontal and vertical field components were measured. The restricted bands were scanned for spurious emissions. Additionally, the band edge emissions were measured although they do not fall within a restricted band.

All data collected was interpolated to 3m. The following is a sample calculation used in the data tables for calculating the final field strength of spurious emissions and comparing these levels to the specified limits.

Sample Calculation:

Spectrum Analyzer Voltage (SA Level):	V dB μ V
Antenna Factor (Ant Corr):	AFdB/m
Cable Loss Correction (Cable Corr):	CCdB
Amplifier Gain:	GdB
Distance Correction Factor:	$20 * \text{LOG}(10/3) = 10.45\text{dB}$
Electric Field (Corr Level):	$\text{EdB}\mu\text{V/m} = \text{VdB}\mu\text{V} + \text{AFdB/m} + \text{CCdB} - \text{GdB} + 10.45\text{dB}$
To convert to linear units:	$\text{E}\mu\text{V/m} = \text{antilog}(\text{EdB}\mu\text{V/m}/20)$

4.5.3 Test results

Data are supplied in the following table. Testing was performed to 40GHz. No emissions were detected above 12GHz. All detected emissions are reported in the following tables. Note that bandedge tests were performed here for informational purposes only. These do not fall within the restricted bands. The measurements were made to show the 20dBc requirement is met although this was done at the antenna terminal.

Table 10: Radiated Emissions; 10ft Dish Antenna – Plan A Band 1

Freq	Polarity	Az	Ant. Hght	SA Level	Ant. Corr.	Cable Corr.	Amp Gain	Distance Corr	Corr. Level	Corr. Level	Limit	Margin
(MHz)	H/V	Deg	(m)	(dBμV)	(dB/m)	(dB)	(dB)		(dBμV/m)	(μV/m)	(μV/m)	dB
peak												
5744.0	H	0	1.5	96.4	34	4.4	0	9.5	144.3	16405898	Fundamental	
5744.0	V	0	1.5	81.5	34	4.4	0	9.5	129.4	2951209.2	Fundamental	
11488.0	H	0	1.5	46.9	39.7	6.4	35.6	9.5	66.9	2213.0947	5000.0	-7.1
11488.00	V	0.0	1.5	46.8	39.7	6.4	35.6	9.5	66.8	2187.7616	5000.0	-7.2
5725.00	H	0.0	1.5	59.5	34.0	4.4	0.0	9.5	107.4	234422.88	1640589.8	-16.9
5725.00	V	0.0	1.5	45.5	34.0	4.4	0.0	9.5	93.4	46773.514	295120.9	-16.0
5850.00	H	0.0	1.5	41.1	34.2	4.4	0.0	9.5	89.2	28840.315	1640589.8	-35.1
5850.00	V	0.0	1.5	41.5	34.2	4.4	0.0	9.5	89.6	30199.517	295120.9	-19.8
avg												
5744.00	H	0.0	1.5	82.2	34.0	4.4	0.0	9.5	130.1	3198895.1	Fundamental	
5744.00	V	0.0	1.5	72.4	34.0	4.4	0.0	9.5	120.3	1035142.2	Fundamental	
11488.00	H	0.0	1.5	30.5	39.7	6.4	35.6	9.5	50.5	334.96544	500.0	-3.5
11488.00	V	0.0	1.5	31.2	39.7	6.4	35.6	9.5	51.2	363.07805	500.0	-2.8

a = Ambient/Noise floor

Table 11: Radiated Emissions; 10ft Dish Antenna – Plan B Band 1

Freq	Polarity	Az	Ant. Hght	SA Level	Ant. Corr.	Cable Corr.	Amp Gain	Distance Corr	Corr. Level	Corr. Level	Limit	Margin
(MHz)	H/V	Deg	(m)	(dBμV)	(dB/m)	(dB)	(dB)		(dBμV/m)	(μV/m)	(μV/m)	dB
peak												
5824	H	0	1.5	94.6	34.1	4.4	0	9.5	142.6	13489629	Fundamental	
5824	V	0	1.5	77.3	34.1	4.4	0	9.5	125.3	1840772	Fundamental	
11648	H	0	1.5	45.8	39.8	6.4	35.6	9.5	65.9	1972.4227	5000	-8.1
11648.00	V	0.0	1.5	44.4	39.8	6.4	35.6	9.5	64.5	1678.804	5000.0	-9.5
5725.00	H	0.0	1.5	43.8	34.0	4.4	0.0	9.5	91.7	38459.178	1348962.9	-30.9
5725.00	V	0.0	1.5	41.9	34.0	4.4	0.0	9.5	89.8	30902.954	184077.2	-15.5
5850.00	H	0.0	1.5	55.4	34.2	4.4	0.0	9.5	103.5	149623.57	1348962.9	-19.1
5850.00	V	0.0	1.5	46.1	34.2	4.4	0.0	9.5	94.2	51286.138	184077.2	-11.1
avg												
5824.00	H	0.0	1.5	79.8	34.1	4.4	0.0	9.5	127.8	2454708.9	Fundamental	
5824.00	V	0.0	1.5	66.4	34.1	4.4	0.0	9.5	114.4	524807.46	Fundamental	
11648.00	H	0.0	1.5	30.9	39.8	6.4	35.6	9.5	51	354.81339	500.0	-3.0
11648.00	V	0.0	1.5	31.5	39.8	6.4	35.6	9.5	51.6	380.1894	500.0	-2.4

a = Ambient/Noise floor

Table 12: Radiated Emissions; 10ft Dish Antenna – Plan B Band 3

Freq	Polarity	Az	Ant. Hght	SA Level	Ant. Corr.	Cable Corr.	Amp Gain	Distance Corr	Corr. Level	Corr. Level	Limit	Margin
(MHz)	H/V	Deg	(m)	(dBμV)	(dB/m)	(dB)	(dB)		(dBμV/m)	(μV/m)	(μV/m)	dB
peak												
5831	H	0	1.5	92.9	34.1	4.4	0	9.5	140.9	11091748	Fundamental	
5831	V	0	1.5	76.8	34.1	4.4	0	9.5	124.8	1737800.8	Fundamental	
11662	H	0	1.5	45.1	39.8	6.4	35.6	9.5	65.2	1819.7009	5000	-8.8
11662.00	V	0.0	1.5	42.8	39.8	6.4	35.6	9.5	62.9	1396.3684	5000.0	-11.1
5725.00	H	0.0	1.5	44.1	34.0	4.4	0.0	9.5	92	39810.717	1109174.8	-28.9
5725.00	V	0.0	1.5	41.4	34.0	4.4	0.0	9.5	89.3	29174.27	173780.1	-15.5
5850.00	H	0.0	1.5	67.6	34.2	4.4	0.0	9.5	115.7	609536.9	1109174.8	-5.2
5850.00	V	0.0	1.5	50.7	34.2	4.4	0.0	9.5	98.8	87096.359	173780.1	-6.0
avg												
5831.00	H	0.0	1.5	80.5	34.1	4.4	0.0	9.5	128.5	2660725.1	Fundamental	
5831.00	V	0.0	1.5	65.2	34.1	4.4	0.0	9.5	113.2	457088.19	Fundamental	
11662.00	H	0.0	1.5	31.8	39.8	6.4	35.6	9.5	51.9	393.55008	500.0	-2.1
11662.00	V	0.0	1.5	30.5	39.8	6.4	35.6	9.5	50.6	338.84416	500.0	-3.4

a = Ambient/Noise floor

4.6 AC Powerline Conducted Emissions: (FCC Part §15.207 and RSS-GEN)

The EUT was placed on an 80 cm high 1 x 1.5 m non-conductive table above a ground plane. Power to the EUT was provided through a Solar Corporation 50 Ω /50 μ H Line Impedance Stabilization Network bonded to a 3 x 2 meter ground plane. The LISN has its AC input supplied from a filtered AC power source. Power and data cables were moved about to obtain maximum emissions.

The 50 Ω output of the LISN was connected to the input of the spectrum analyzer and the emissions in the frequency range of 150 kHz to 30 MHz were measured. The detector function was set to quasi-peak, peak, or average as appropriate, and the resolution bandwidth during testing was at least 9 kHz, with all post-detector filtering no less than 10 times the resolution bandwidth for peak measurements.

Data is recorded in the following table.

Table 13: Conducted Emissions Test Data; §15.207

Client:	Symbol	Date:	6/2/2006
Model:	RF1224	Job #:	9197
Tester:	James Ritter		
TEST STANDARD:	FCC Part 15	CLASS:	FCC_B
TEST SITE:	CSITE2_CE	TEST VOLTAGE:	120 VAC
LISN 1:	A_00125	LISN 2:	A_00126

LINE 1 - NEUTRAL

Frequency (MHz)	Level QP (dB μ V)	Cable Loss (dB)	LISN Corr (dB)	Limit QP (dB μ V)	Level Corr (dB μ V)	Margin QP (dB)	Level AVG (dB μ V)	Cable Loss (dB)	Level Corr (dB μ V)	Limit AVG (dB μ V)	Margin AVG (dB)
0.223	36.3	10.2	0.5	62.7	47.0	-15.7	33.4	10.2	44.1	52.7	-8.6
0.350	23.7	10.2	0.3	59.0	34.3	-24.7	20.7	10.2	31.3	49.0	-17.7
0.798	19.6	10.4	0.2	56.0	30.3	-25.7	18.3	10.4	29.0	46.0	-17.0
14.319	20.9	12.0	2.1	60.0	35.0	-25.0	19.5	12.0	33.6	50.0	-16.4
17.826	26.2	12.2	2.8	60.0	41.2	-18.8	25.2	12.2	40.2	50.0	-9.8
20.053	29.3	12.4	3.1	60.0	44.8	-15.2	27.9	12.4	43.4	50.0	-6.6
21.164	25.0	12.4	3.4	60.0	40.8	-19.2	23.6	12.4	39.4	50.0	-10.6
25.620	21.4	12.6	4.4	60.0	38.5	-21.5	19.2	12.6	36.3	50.0	-13.7

LINE 2 Phase

Frequency (MHz)	Level QP (dB μ V)	Cable Loss (dB)	LISN Corr (dB)	Limit QP (dB μ V)	Level Corr (dB μ V)	Margin QP (dB)	Level AVG (dB μ V)	Cable Loss (dB)	Level Corr (dB μ V)	Limit AVG (dB μ V)	Margin AVG (dB)
0.223	38.1	10.2	0.3	62.7	48.5	-14.2	31.3	10.2	41.7	52.7	-11.0
0.350	24.6	10.2	0.2	59.0	35.0	-23.9	19.4	10.2	29.8	49.0	-19.1
0.798	19.3	10.4	0.2	56.0	29.9	-26.1	16.9	10.4	27.5	46.0	-18.5
14.319	22.2	12.0	2.9	60.0	37.1	-22.9	19.8	12.0	34.7	50.0	-15.3
17.826	26.3	12.2	3.7	60.0	42.2	-17.8	24.9	12.2	40.8	50.0	-9.2
20.053	28.3	12.4	4.1	60.0	44.8	-15.2	27.6	12.4	44.1	50.0	-5.9
21.164	25.8	12.4	4.4	60.0	42.6	-17.4	24.6	12.4	41.4	50.0	-8.6
25.620	20.6	12.6	5.4	60.0	38.7	-21.3	18.5	12.6	36.6	50.0	-13.4

