

**FCC PART 15 SUBPART C MEASUREMENT AND TEST REPORT**

**For**

**Gemlink Ltd.**

**Flat 17, 8/F International Plaza, 20 Sheung Yuet Road, Kowloon Bay,  
Kowloon, Hong Kong**

**E.U.T.: HD Sound Bar with Bluetooth Wireless**

**Model Name: ITB105B, B-3319**

**Brand Name: iLIVE, CAWA**

**FCC ID: HDOW189PBT**

**Report Number: NTC1501213F**

**Test Date(s): January 26, 2015 to February 06, 2015**

**Report Date(s): February 06, 2015**

**Prepared by**

**Dongguan Nore Testing Center Co., Ltd.**

**Building D, Gaosheng Science and Technology Park, Hongtu Road,  
Nancheng District, Dongguan City, Guangdong, China**

**Tel: +86-769-22022444**

**Fax: +86-769-22022799**

**Prepared By**

**Approved & Authorized Signer**



**Rose Hu / Engineer**



**Sunm Lv / Q.A. Director**

**Note: This test report is for the customer shown above and their specific product only. It may not be duplicated or used in part without prior written consent from Dongguan Nore Testing Center Co., Ltd. The test results referenced from this report are relevant only to the sample tested.**



## Table of Contents

<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST .....	4
1.2 RELATED SUBMITTAL(S) / GRANT (S).....	5
1.3 TEST METHODOLOGY .....	5
1.4 EQUIPMENT MODIFICATIONS .....	5
1.5 SUPPORT DEVICE .....	5
1.6 TEST FACILITY AND LOCATION.....	6
1.7 SUMMARY OF TEST RESULTS .....	6
<b>2. SYSTEM TEST CONFIGURATION.....</b>	<b>7</b>
2.1 EUT CONFIGURATION .....	7
2.2 SPECIAL ACCESSORIES.....	7
2.3 DESCRIPTION OF TEST MODES .....	7
2.4 EUT EXERCISE .....	7
<b>3. CONDUCTED EMISSIONS TEST .....</b>	<b>8</b>
3.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	8
3.2 TEST CONDITION .....	8
3.3 MEASUREMENT RESULTS.....	8
<b>4. RADIATED EMISSION TEST .....</b>	<b>13</b>
4.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	13
4.2 MEASUREMENT PROCEDURE .....	14
4.3 LIMIT.....	14
4.4 MEASUREMENT RESULTS .....	16
<b>5. CHANNEL SEPARATION TEST.....</b>	<b>19</b>
5.1 MEASUREMENT PROCEDURE .....	19
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	19
5.3 MEASUREMENT RESULTS.....	19
<b>6. 20DB BANDWIDTH.....</b>	<b>25</b>
6.1 MEASUREMENT PROCEDURE .....	25
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	25
6.3 MEASUREMENT RESULTS.....	25
<b>7. HOPPING CHANNEL NUMBER .....</b>	<b>26</b>
7.1 MEASUREMENT PROCEDURE .....	31
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	31
7.3 MEASUREMENT RESULTS.....	31



---

<b>8. TIME OF OCCUPANCY (DWELL TIME)</b> .....	<b>33</b>
8.1 MEASUREMENT PROCEDURE .....	33
8.2 MEASUREMENT RESULTS.....	33
<b>9. MAXIMUM PEAK OUTPUT POWER</b> .....	<b>33</b>
9.1 MEASUREMENT PROCEDURE .....	39
9.2 MEASUREMENT RESULTS.....	39
<b>10. BAND EDGE</b> .....	<b>39</b>
10.1 MEASUREMENT PROCEDURE .....	45
10.2 LIMIT.....	45
10.3 MEASUREMENT RESULTS.....	45
<b>11. ANTENNA APPLICATION</b> .....	<b>45</b>
11.1 ANTENNA REQUIREMENT .....	52
11.2 MEASUREMENT RESULTS.....	52
<b>12. CONDUCTED SPURIOUS EMISSIONS</b> .....	<b>53</b>
12.1 MEASUREMENT PROCEDURE .....	53
12.2. MEASUREMENT RESULTS.....	53
<b>13. TEST EQUIPMENT LIST</b> .....	<b>56</b>

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment under Test

This device is a multi-function BT speaker; it's powered by DC 12V come from Adapter. For more details features, please refer to User's Manual.

Manufacturer	: Guoguang Electric (Zhongshan) Ltd.
Address	: #18 Chigang Road, YongNing Estate, XiaoLan Town, ZhongShan, GuangDong, China
Power Supply	: DC 12V come from adapter Adapter 1: M/N: GQ15-120100-AU Input: AC 100-240V ~ 50/60Hz 0.5A Max Output: DC 12V 1.0A  Adapter 2 M/N: SUN-1200100 Input: AC 100-240V ~ 50/60Hz 0.3A Output: DC 12V 1.0A
Model name	: ITB105B, B-3319
Model Difference Description	: Both of models have the same circuit schematic, construction and critical components except model number, trade mark and silk-screen due to marketing purpose.
BT Version	: 2.1+EDR
Frequency:	: 2402-2480MHz
Modulation	: GFSK, $\pi/4$ -DQPSK, 8DPSK
Number of Channel	: 79
Channel space	: 1MHz
Antenna Type	: PCB
Antenna Gain	: 0 dBi (declared by manufacturer)
Note	: Only one of the model ITB105B was test in this report.

## **1.2 Related Submittal(s) / Grant (s)**

This submittal(s) (test report) is intended for FCC ID: HDOW189PBT filing to comply with Section 15.247 of the FCC Part 15 (2014), Subpart C Rule.

## **1.3 Test Methodology**

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2009) and DA 00-705. Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters.

## **1.4 Equipment Modifications**

Not available for this EUT intended for grant.

## **1.5 Support Device**

None



### 1.6 Test Facility and Location

Listed by FCC, August 02, 2011  
 The Certificate Registration Number is 665078.  
 Listed by Industry Canada, July 01, 2011  
 The Certificate Registration Number is 9743A-1.

Dongguan NTC Co., Ltd.  
 (Full Name: Dongguan Nore Testing Center Co., Ltd.)

Building D, Gaosheng Science and Technology Park, Hongtu Road,  
 Nancheng District, Dongguan City, Guangdong, China  
 (Full Name: Building D, Gaosheng Science & Technology Park,  
 Zhouxi Longxi Road, Nancheng District, Dongguan, Guangdong, China.

### 1.7 Summary of Test Results

FCC Rules	Description Of Test	Result
§15.247(a)(1)	Channel Separation test	Compliant
§15.247(a)(1)	20dB Bandwidth	Compliant
§15.247(a)(1)(iii)	Hopping Channel Number	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(b)	Max Peak output Power test	Compliant
§15.247(d)	Band edge test	Compliant
§15.207 (a)	AC Power Conducted Emission	Compliant
§15.247(d),§15.209, §15.205	Radiated Emission	Compliant
§15.203	Antenna Requirement	Compliant
§15.247(d)	Conducted Spurious Emission	Compliant

---

## 2. System Test Configuration

### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 2.2 Special Accessories

Not available for this EUT intended for grant.

### 2.3 Description of test modes


The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and normal mode is programmed. The Lowest, middle and highest channel were chosen for testing, and all packets DH1, DH3 and DH5 mode in all modulation type GFSK,  $\pi/4$ -DQPSK, 8DPSK were tested.

### 2.4 EUT Exercise

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

### 3. Conducted Emissions Test

#### 3.1 Test SET-UP (Block Diagram of Configuration)

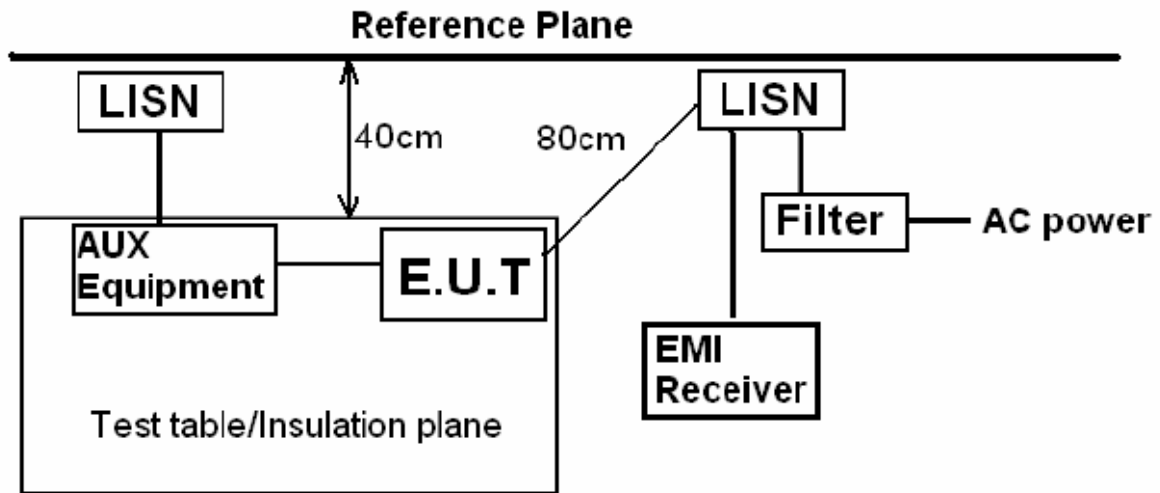

#### 3.2 Test Condition

Test Requirement: FCC Part 15.207

Frequency Range: 150KHz ~ 30MHz

Detector: RBW 9KHz, VBW 30KHz

Operation Mode: BT Mode

#### 3.3 Measurement Results

Please refer to following plots.






**Dongguan NTC Co., Ltd.**  
 Tel: +86-769-22022444 Fax: +86-769-22022799  
 Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Conduction

Test Time: 2015-1-29 16:22:57

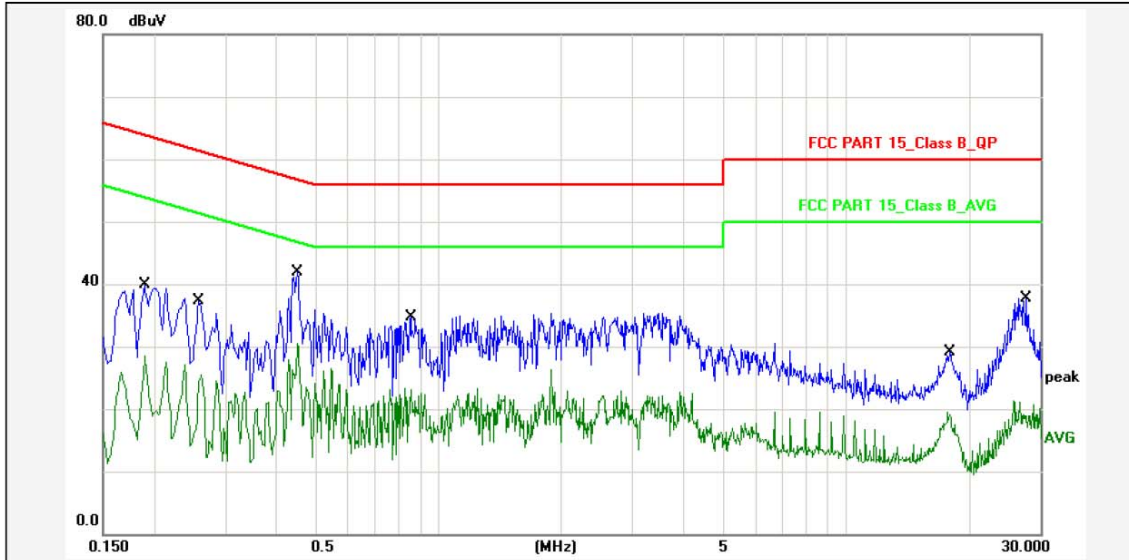

Report No.: ITB105B  
 Test Standard: FCC PART 15\_Class B\_QP  
 Test item: Conducted Emission Phase: L1  
 Applicant: Gemlink Ltd. Temp.( )/Hum.(%): 22(C) / 53 %  
 Product: HD Sound Bar with Bluetooth Wireless Power Rating: AC 120V/60Hz  
 Model No.: ITB105B Test Engineer: Stan  
 Test Mode: BT Mode  
 Remark: Adapter: GQ15-120100-AU

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1900	10.80	26.10	36.90	64.03	-27.13	QP	P	
2	0.1900	10.80	14.60	25.40	54.03	-28.63	AVG	P	
3	0.2580	10.80	23.50	34.30	61.49	-27.19	QP	P	
4	0.2580	10.80	11.70	22.50	51.49	-28.99	AVG	P	
5	0.4500	10.80	28.10	38.90	56.87	-17.97	QP	P	
6	0.4500	10.80	16.70	27.50	46.87	-19.37	AVG	P	
7	0.8540	10.80	20.80	31.60	56.00	-24.40	QP	P	
8	0.8540	10.80	9.40	20.20	46.00	-25.80	AVG	P	
9	18.0299	10.80	15.30	26.10	60.00	-33.90	QP	P	
10	18.0299	10.80	5.60	16.40	50.00	-33.60	AVG	P	
11	27.7180	10.80	23.90	34.70	60.00	-25.30	QP	P	
12	27.7180	10.80	7.40	18.20	50.00	-31.80	AVG	P	


Note: Level=Reading+Factor.  
 Margin=Limit-Level.



**Dongguan NTC Co., Ltd.**  
 Tel: +86-769-22022444 Fax: +86-769-22022799  
 Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Conduction

Test Time: 2015-1-29 16:27:42

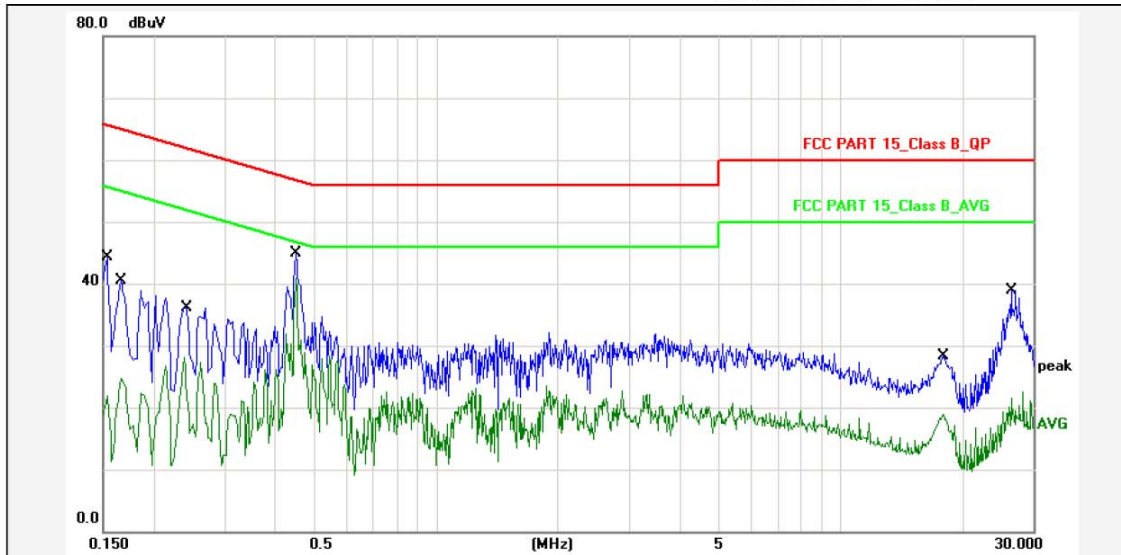

Report No.: ITB105B  
 Test Standard: FCC PART 15\_Class B\_QP  
 Test item: Conducted Emission Phase: N  
 Applicant: Gemlink Ltd. Temp.( )/Hum.(%): 22(C) / 53 %  
 Product: HD Sound Bar with Bluetooth Wireless Power Rating: AC 120V/60Hz  
 Model No.: ITB105B Test Engineer: Stan  
 Test Mode: BT Mode  
 Remark: Adapter: GQ15-120100-AU

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1539	10.80	30.40	41.20	65.78	-24.58	QP	P	
2	0.1539	10.80	8.00	18.80	55.78	-36.98	AVG	P	
3	0.1660	10.80	26.70	37.50	65.15	-27.65	QP	P	
4	0.1660	10.80	10.90	21.70	55.15	-33.45	AVG	P	
5	0.2420	10.80	22.30	33.10	62.02	-28.92	QP	P	
6	0.2420	10.80	14.30	25.10	52.02	-26.92	AVG	P	
7	0.4500	10.80	31.10	41.90	56.87	-14.97	QP	P	
8	0.4500	10.80	27.00	37.80	46.87	-9.07	AVG	P	
9	18.0019	10.80	14.40	25.20	60.00	-34.80	QP	P	
10	18.0019	10.80	5.00	15.80	50.00	-34.20	AVG	P	
11	26.4860	10.80	28.10	38.90	60.00	-21.10	QP	P	
12	26.4860	10.80	7.60	18.40	50.00	-31.60	AVG	P	


Note: Level=Reading+Factor.  
 Margin=Limit-Level.



**Dongguan NTC Co., Ltd.**  
 Tel: +86-769-22022444 Fax: +86-769-22022799  
 Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Conduction

Test Time: 2015-1-29 16:37:49

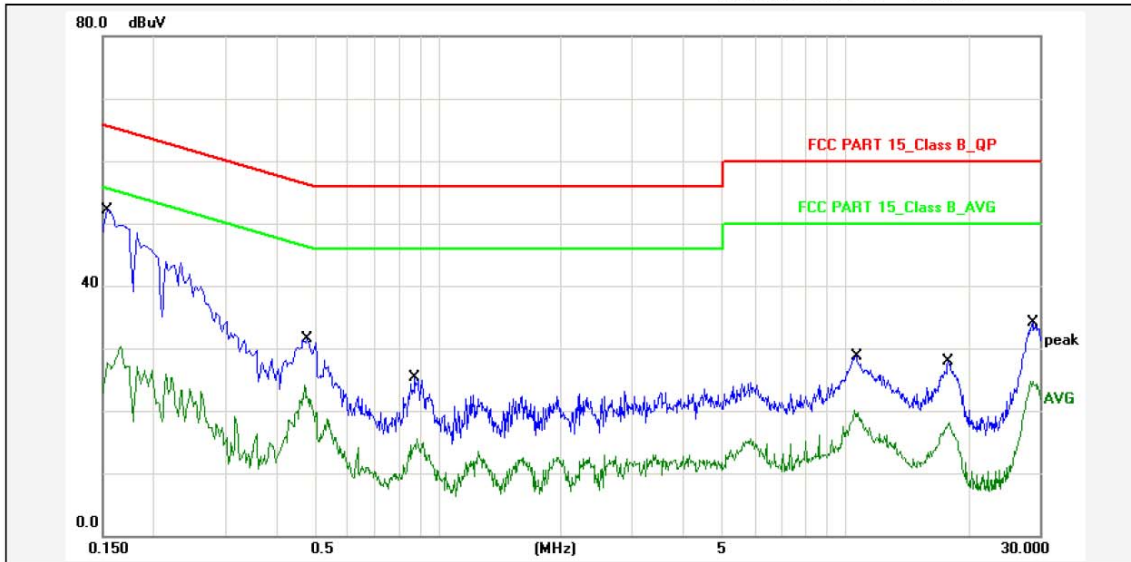

Report No.: ITB105B  
 Test Standard: FCC PART 15\_Class B\_QP  
 Test item: Conducted Emission  
 Applicant: Gemlink Ltd.  
 Product: HD Sound Bar with Bluetooth Wireless  
 Model No.: ITB105B

Phase: N  
 Temp.( )/Hum.(%): 22(C) / 53 %  
 Power Rating: AC 120V/60Hz  
 Test Engineer: Stan

Test Mode: BT Mode  
 Remark: Adapter: SUN-1200100

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1539	10.80	38.30	49.10	65.78	-16.68	QP	P	
2	0.1539	10.80	11.90	22.70	55.78	-33.08	AVG	P	
3	0.4780	10.80	17.80	28.60	56.37	-27.77	QP	P	
4	0.4780	10.80	10.30	21.10	46.37	-25.27	AVG	P	
5	0.8780	10.80	11.50	22.30	56.00	-33.70	QP	P	
6	0.8780	10.80	1.70	12.50	46.00	-33.50	AVG	P	
7	10.6739	10.80	14.80	25.60	60.00	-34.40	QP	P	
8	10.6739	10.80	6.30	17.10	50.00	-32.90	AVG	P	
9	17.9139	10.80	14.10	24.90	60.00	-35.10	QP	P	
10	17.9139	10.80	4.30	15.10	50.00	-34.90	AVG	P	
11	28.8660	10.80	20.30	31.10	60.00	-28.90	QP	P	
12	28.8660	10.80	10.90	21.70	50.00	-28.30	AVG	P	

Note: Level=Reading+Factor.


Margin=Limit-Level.



**Dongguan NTC Co., Ltd.**  
 Tel: +86-769-22022444 Fax: +86-769-22022799  
 Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Conduction

Test Time: 2015-1-29 16:40:41

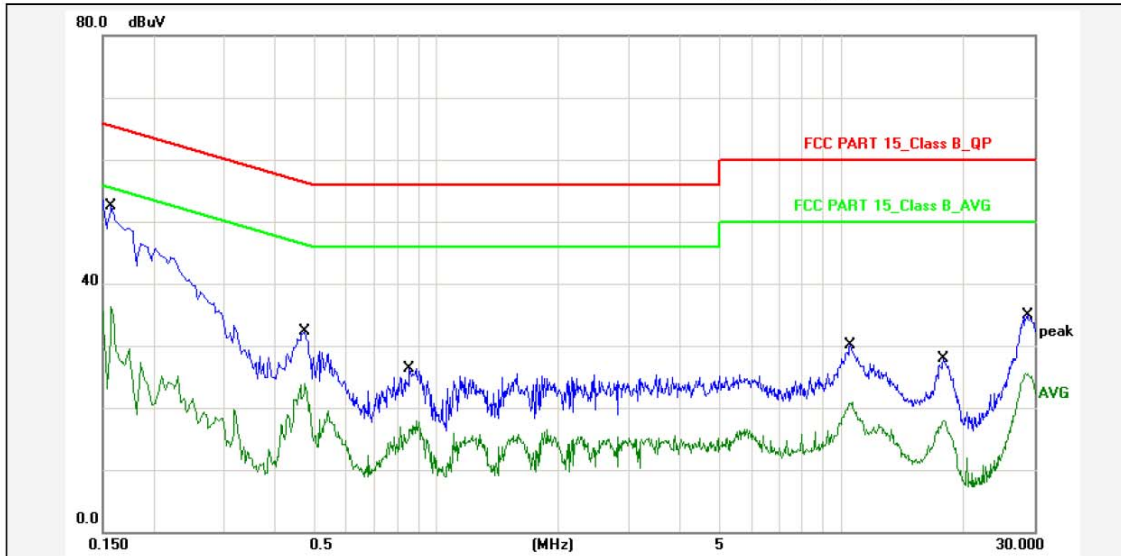

Report No.: ITB105B  
 Test Standard: FCC PART 15\_Class B\_QP  
 Test item: Conducted Emission Phase: L1  
 Applicant: Gemlink Ltd. Temp.( )/Hum.(%): 22(C) / 53 %  
 Product: HD Sound Bar with Bluetooth Wireless Power Rating: AC 120V/60Hz  
 Model No.: ITB105B Test Engineer: Stan  
 Test Mode: BT Mode  
 Remark: Adapter: SUN-1200100


No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1580	10.80	38.60	49.40	65.56	-16.16	QP	P	
2	0.1580	10.80	22.40	33.20	55.56	-22.36	AVG	P	
3	0.4740	10.80	18.40	29.20	56.44	-27.24	QP	P	
4	0.4740	10.80	10.10	20.90	46.44	-25.54	AVG	P	
5	0.8580	10.80	12.50	23.30	56.00	-32.70	QP	P	
6	0.8580	10.80	3.30	14.10	46.00	-31.90	AVG	P	
7	10.5419	10.80	16.30	27.10	60.00	-32.90	QP	P	
8	10.5419	10.80	7.10	17.90	50.00	-32.10	AVG	P	
9	17.9219	10.80	14.10	24.90	60.00	-35.10	QP	P	
10	17.9219	10.80	4.10	14.90	50.00	-35.10	AVG	P	
11	28.7580	10.80	21.00	31.80	60.00	-28.20	QP	P	
12	28.7580	10.80	11.60	22.40	50.00	-27.60	AVG	P	

Note: Level=Reading+Factor.  
 Margin=Limit-Level.


## 4. Radiated Emission Test

### 4.1 Test SET-UP (Block Diagram of Configuration)

#### 4.1.1 Radiated Emission Test Set-Up, Frequency Below 30MHz

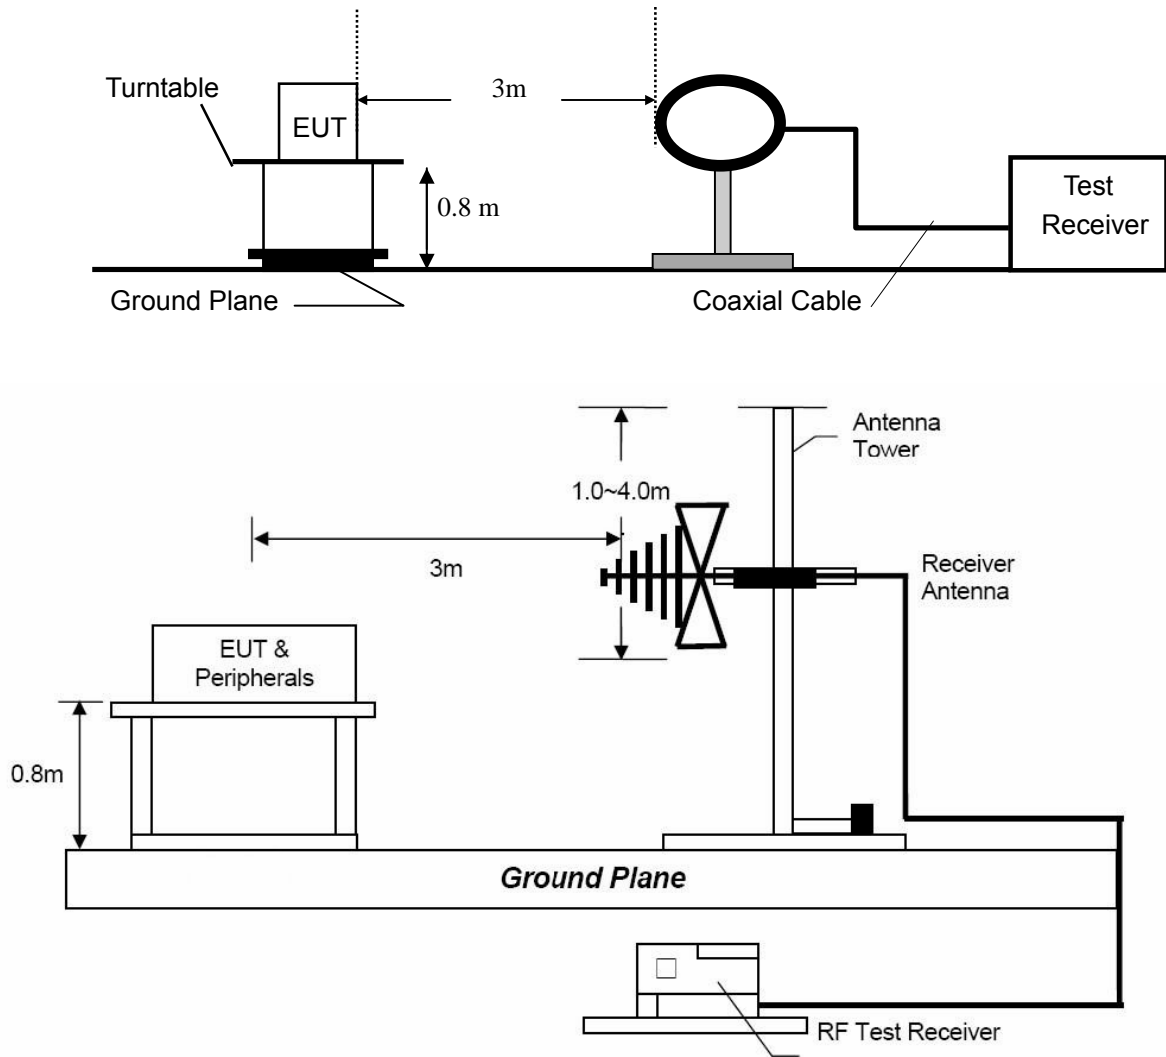

#### 4.1.2 Radiated Emission Test Set-Up, Frequency above 1GHz

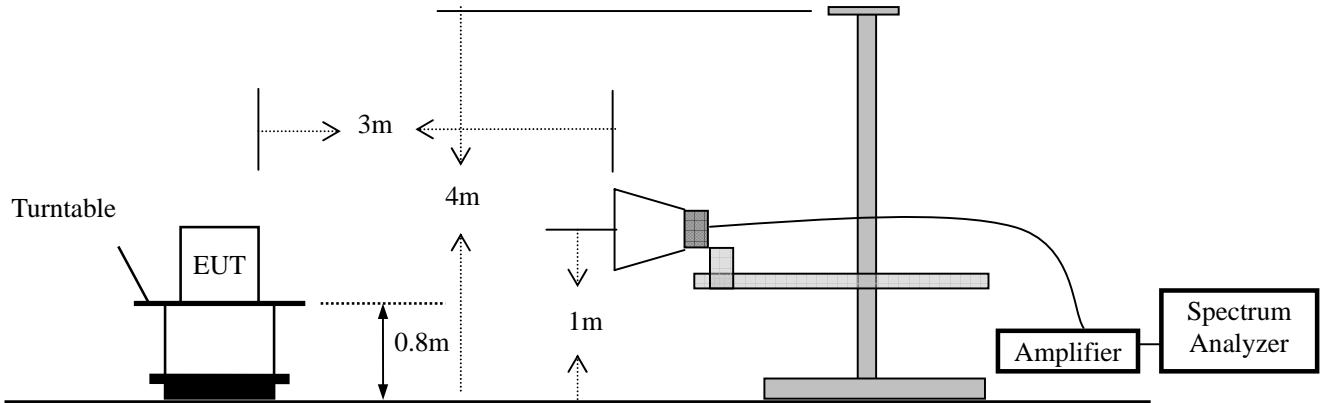

#### 4.2 Measurement Procedure

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.



### 4.3 Limit

Frequency range MHz	Distance Meters	Field Strengths Limit (15.209)
		$\mu\text{V/m}$
0.009 ~ 0.490	300	2400/F(kHz)
0.490 ~ 1.705	30	24000/F(kHz)
1.705 ~ 30	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960	3	500

- Remark :
- (1) Emission level (dB) $\mu\text{V} = 20 \log$  Emission level  $\mu\text{V/m}$
  - (2) The smaller limit shall apply at the cross point between two frequency bands.
  - (3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
  - (4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

#### 4.4 Measurement Results

For Adapter 1: GQ15-120100-AU

Operation Mode: TX (the worst case GFSK, Low channel)  
 Frequency Range: 9KHz~1GHz      Temperature : 22 °C  
 Test Result: PASS      Humidity : 46 %  
 Measured Distance: 3m      Test By: Sance  
 Test Date : February 02, 2015

Freq. (MHz)	Ant.Pol. H/V	Reading Level (dBuV)	Factor (dB/m)	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Margin (dB)	Note
41.6400	V	49.26	-17.06	32.20	40.00	-7.80	QP
125.0600	V	44.80	-15.50	29.30	43.50	-14.20	QP
145.4299	V	47.99	-15.29	32.70	43.50	-10.80	QP
---							
---							
---							
133.7899	H	52.16	-15.46	36.70	43.50	-6.80	QP
144.1600	H	53.59	-15.29	38.30	43.50	-5.20	QP
179.3800	H	53.95	-15.05	38.90	43.50	-4.60	QP
---							
---							
---							

**Other emissions are lower than 10dB below the allowable limit.**

- Note:**
- (1) Emission Level= Reading Level + Factor
  - (2) Factor= Antenna Gain + Cable Loss – Amplifier Gain
  - (3) Measurement uncertainty : ±3.4dB
  - (4) Loop antenna used for the emission below 30MHz.
  - (5) Data of measurement within this frequency range shown “ ---” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.



For Adapter 2: SUN-1200100

Operation Mode: TX (the worst case GFSK, Low channel)  
 Frequency Range: 9KHz~1GHz      Temperature : 22 °C  
 Test Result: PASS      Humidity : 46 %  
 Measured Distance: 3m      Test By: Sance  
 Test Date : February 02, 2015

Freq. (MHz)	Ant.Pol. H/V	Reading Level (dBuV)	Factor (dB/m)	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Margin (dB)	Note
50.3700	V	50.25	-17.05	33.20	40.00	-6.80	QP
123.1200	V	44.71	-15.51	29.20	43.50	-14.30	QP
179.3800	V	46.85	-15.05	31.80	43.50	-11.70	QP
---							
---							
---							
94.0199	H	46.75	-16.06	30.69	43.50	-12.81	QP
144.4600	H	53.21	-15.29	37.92	43.50	-5.58	QP
154.1600	H	54.29	-15.22	39.07	43.50	-4.43	QP
179.3800	H	54.63	-15.05	39.58	43.50	-3.92	QP
---							
---							

**Other emissions are lower than 10dB below the allowable limit.**

- Note:**
- (1) Emission Level= Reading Level + Factor
  - (2) Factor= Antenna Gain + Cable Loss – Amplifier Gain
  - (3) Measurement uncertainty : ±3.4dB
  - (4) Loop antenna used for the emission below 30MHz.
  - (5) Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.



Modulation: GFSK (the worst case)  
 Frequency Range: 1-25GHz Test Date : February 02, 2015  
 Test Result: PASS Temperature : 22 °C  
 Measured Distance: 3m Humidity : 46 %  
 Test By: Sance

Freq. (MHz)	Ant.Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
<b>Operation Mode: TX Mode (Low)</b>										
4804	V	44.00	30.08	14.63	58.63	44.71	74.00	54.00	-15.37	-9.29
7206	V	39.39	25.47	20.68	60.07	46.15	74.00	54.00	-13.93	-7.85
---										
4804	H	42.06	28.60	14.63	56.69	43.23	74.00	54.00	-17.31	-10.77
7206	H	40.39	26.30	20.68	61.07	46.98	74.00	54.00	-12.93	-7.02
---										
<b>Operation Mode: TX Mode (Mid)</b>										
4882	V	45.61	31.39	14.97	60.58	46.36	74.00	54.00	-13.42	-7.64
7323	V	41.50	26.61	20.91	62.41	47.52	74.00	54.00	-11.59	-6.48
---										
4882	H	44.73	30.90	14.97	59.70	45.87	74.00	54.00	-14.30	-8.13
7323	H	41.35	26.12	20.91	62.26	47.03	74.00	54.00	-11.74	-6.97
---										
<b>Operation Mode: TX Mode (High)</b>										
4960	V	42.19	27.84	15.30	57.49	43.14	74.00	54.00	-16.51	-10.86
7440	V	39.85	25.29	21.16	61.01	46.45	74.00	54.00	-12.99	-7.55
---										
4960	H	43.05	29.11	15.30	58.35	44.41	74.00	54.00	-15.65	-9.59
7440	H	40.71	25.77	21.16	61.87	46.93	74.00	54.00	-12.13	-7.07
---										

- Note:**
- (1) All Readings are Peak Value and AV.
  - (2) Emission Level= Reading Level + Factor
  - (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain
  - (4) Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
  - (5) Measurement uncertainty : ±3.7dB.
  - (6) Horn antenna used for the emission over 1000MHz.


## 5. Channel Separation test

### 5.1 Measurement Procedure

Minimum Hopping Channel Carrier Frequency Separation, FCC Rule 15.247(a)(1):

Connect EUT antenna terminal to the spectrum analyzer with a low loss cable, and using the MARKER and Max-Hold function to record the separation of two adjacent channels.

### 5.2 Test SET-UP (Block Diagram of Configuration)




### 5.3 Measurement Results

Modulation:	GFSK, $\pi/4$ -DQPSK, 8DPSK		
RBW:	100KHz	VBW:	300KHz
Packet:	DH5	Spectrum Detector:	PK
Test By:	Sance	Test Date :	Jan. 29, 2015
Temperature :	22 °C	Humidity :	52 %
Test Result:	PASS		


Channel number	Channel frequency (MHz)	Separation Read Value (KHz)	Separation Limit (KHz)
GFSK			
Lowest	2402	1000	>451.9
Middle	2441	1000	>455.1
Highest	2480	1005	>451.9
$\pi/4$ -DQPSK			
Lowest	2402	1000	>782.1
Middle	2441	1000	>778.9
Highest	2480	1000	>778.9
8DPSK			
Lowest	2402	1000	>791.7
Middle	2441	1000	>791.7
Highest	2480	1005	>791.7

### GFSK Lowest Channel

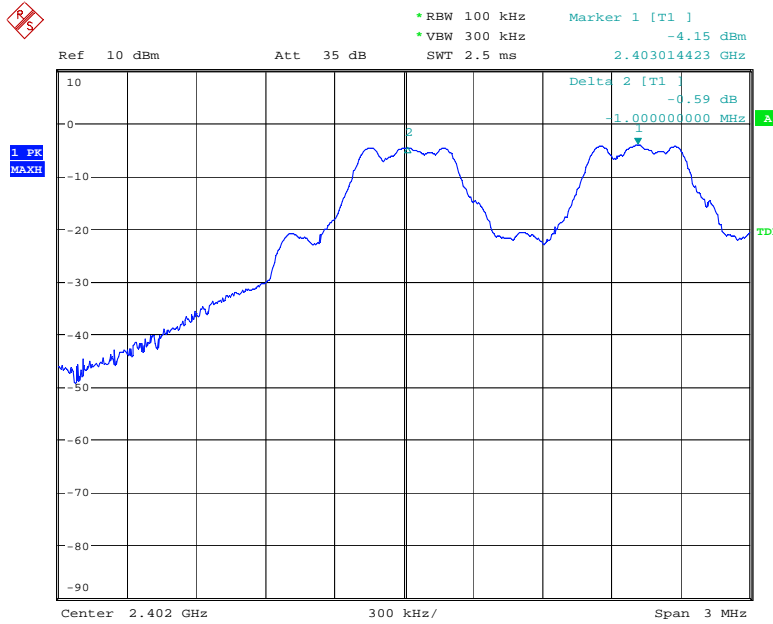


Date: 29.JAN.2015 14:43:23

### GFSK Middle Channel

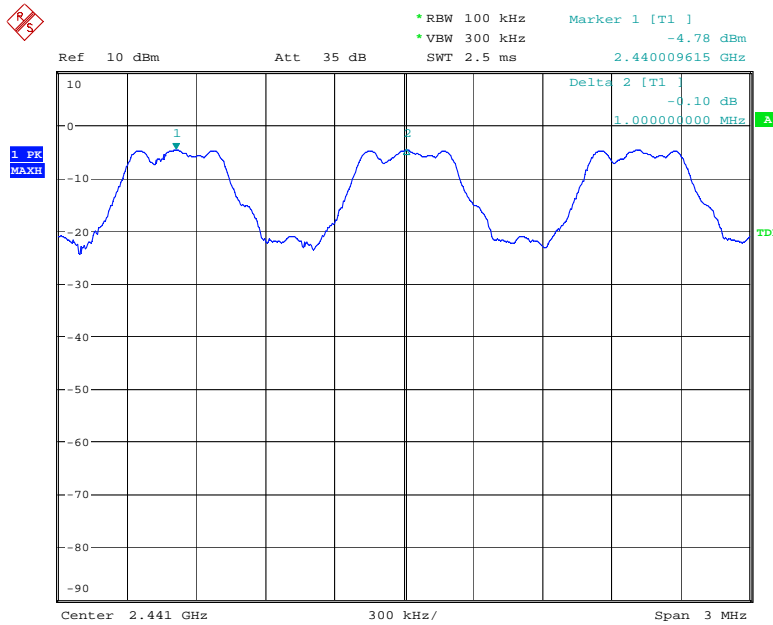


Date: 29.JAN.2015 14:45:50

### GFSK Highest Channel

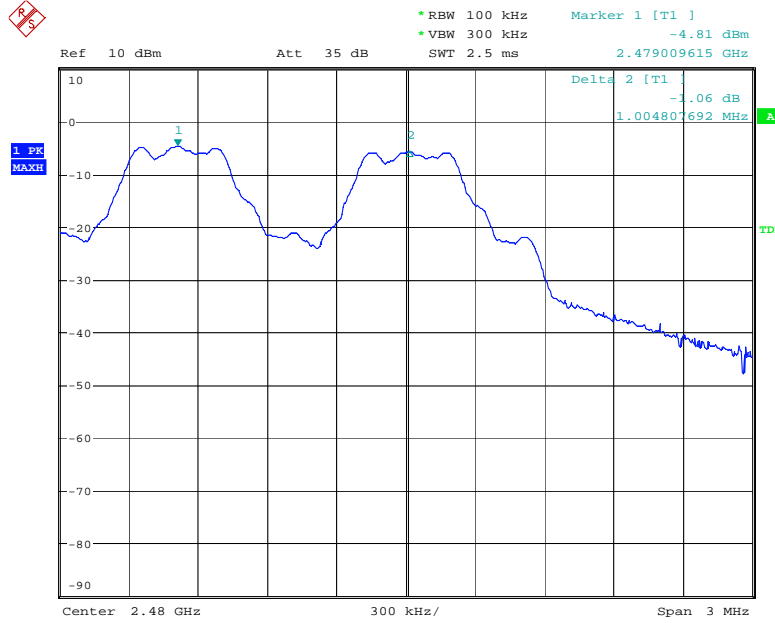


Date: 29.JAN.2015 15:08:53

### $\pi/4$ -DQPSK Lowest Channel

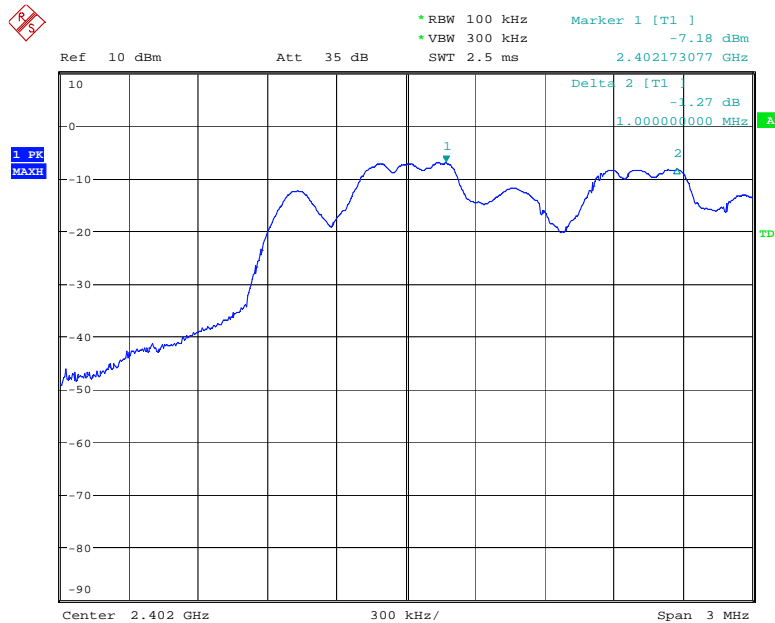


Date: 29.JAN.2015 15:19:55

### $\pi/4$ -DQPSK Middle Channel

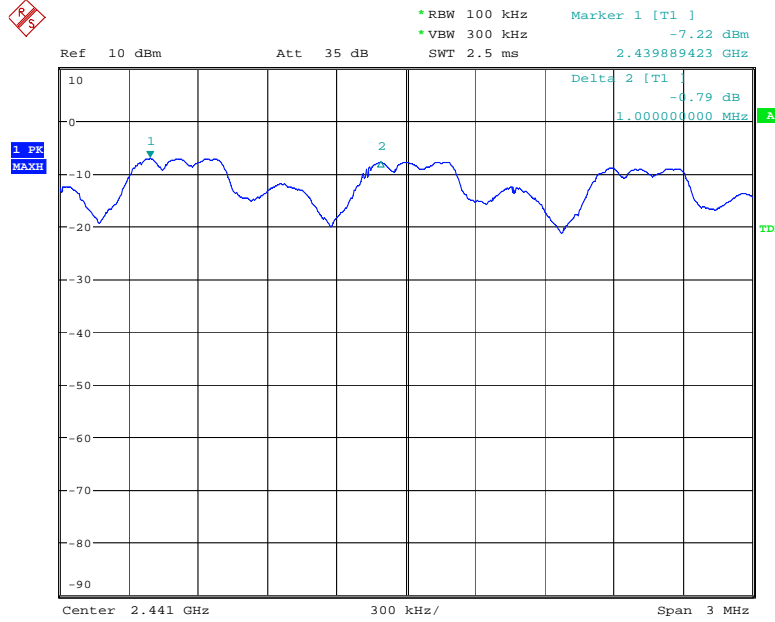


Date: 29.JAN.2015 15:22:58

### $\pi/4$ -DQPSK Highest Channel

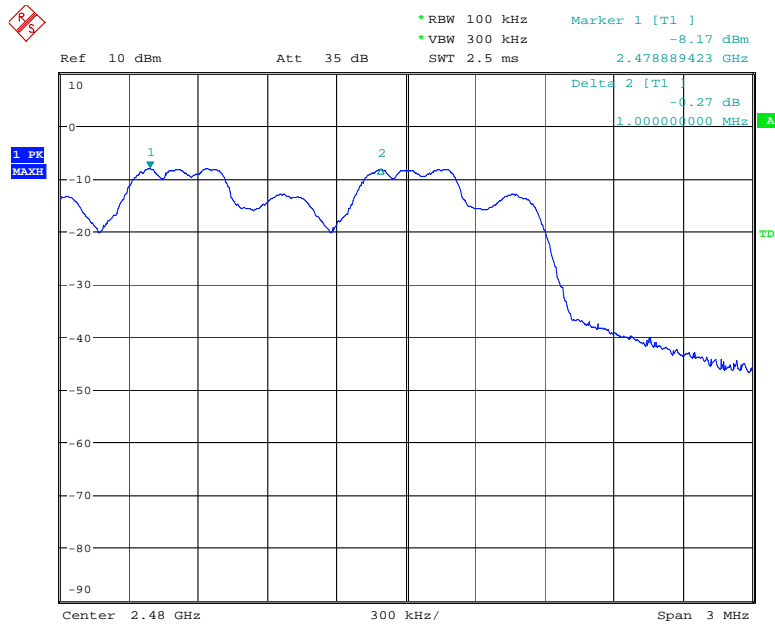


Date: 29.JAN.2015 15:27:25

### 8DPSK Lowest Channel

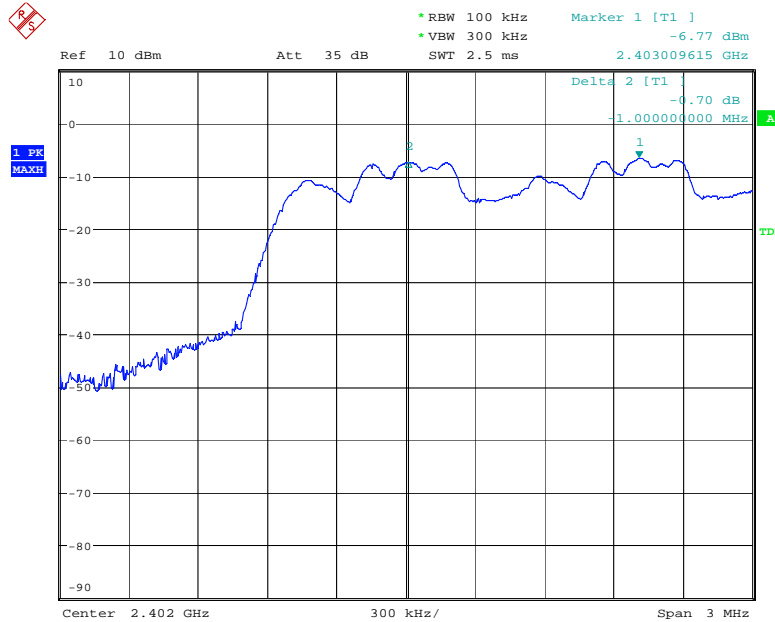


Date: 29.JAN.2015 15:29:26

### 8DPSK Middle Channel

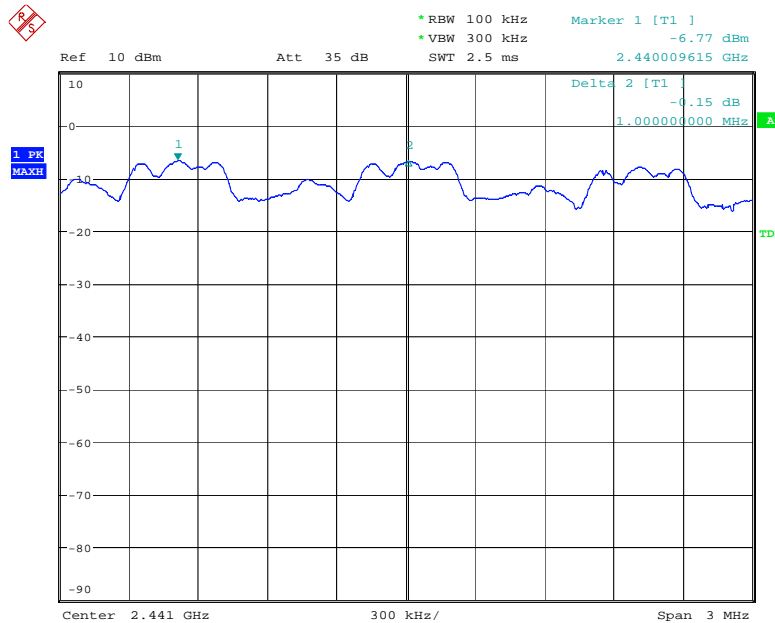

Date: 29.JAN.2015 15:34:08

### 8DPSK Highest Channel

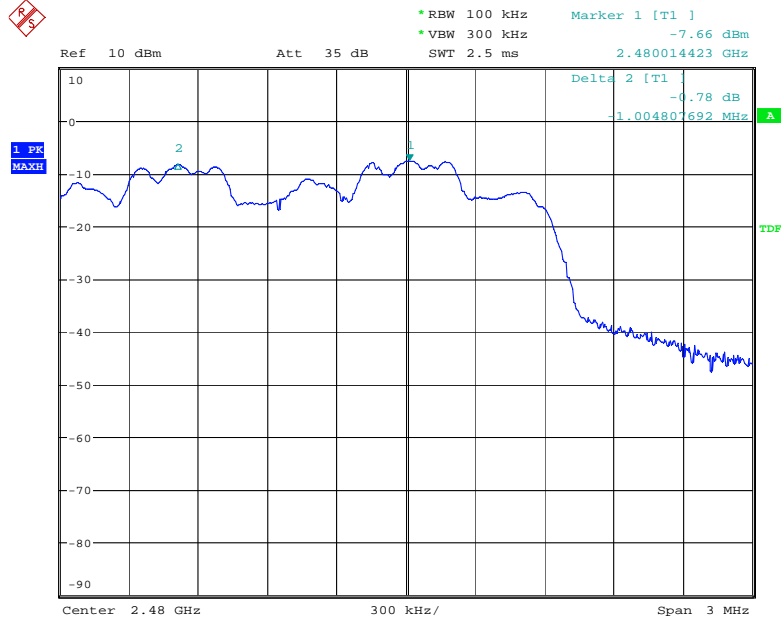

Date: 29.JAN.2015 15:42:35




## 6. 20dB Bandwidth

### 6.1 Measurement Procedure

Maximum 20dB RF Bandwidth, FCC Rule 15.247(a)(1):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was chosen so that the display was a result of the hopping channel modulation. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. Use the spectrum 20dB down delta function to measure the bandwidth.

### 6.2 Test SET-UP (Block Diagram of Configuration)




### 6.3 Measurement Results

Refer to attached data chart.

Modulation:	GFSK, $\pi/4$ -DQPSK, 8DPSK		
RBW:	30KHz	VBW:	100KHz
Packet:	DH5	Spectrum Detector:	PK
Test By:	Sance	Test Date :	Jan. 29, 2015 and Feb. 06, 2015
Temperature :	22 °C	Humidity :	52 %
Test Result:	PASS		


Channel frequency (MHz)	20dB Down BW(kHz)
<b>GFSK</b>	
2402	677.9
2441	682.7
2480	677.9
<b><math>\pi/4</math>-DQPSK</b>	
2402	1173.1
2441	1168.3
2480	1168.3
<b>8DPSK</b>	
2402	1187.5
2441	1187.5
2480	1187.5

### GFSK Lowest Channel

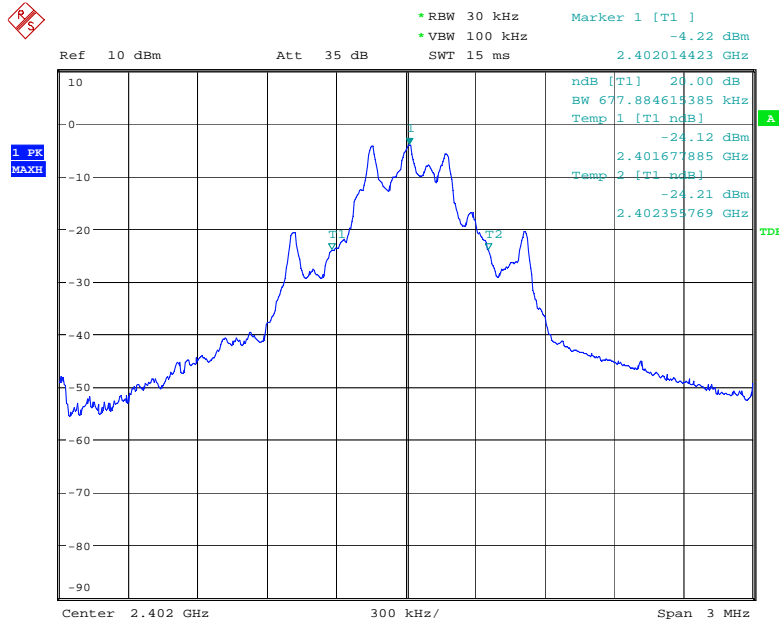


Date: 29.JAN.2015 14:18:22

### GFSK Middle Channel

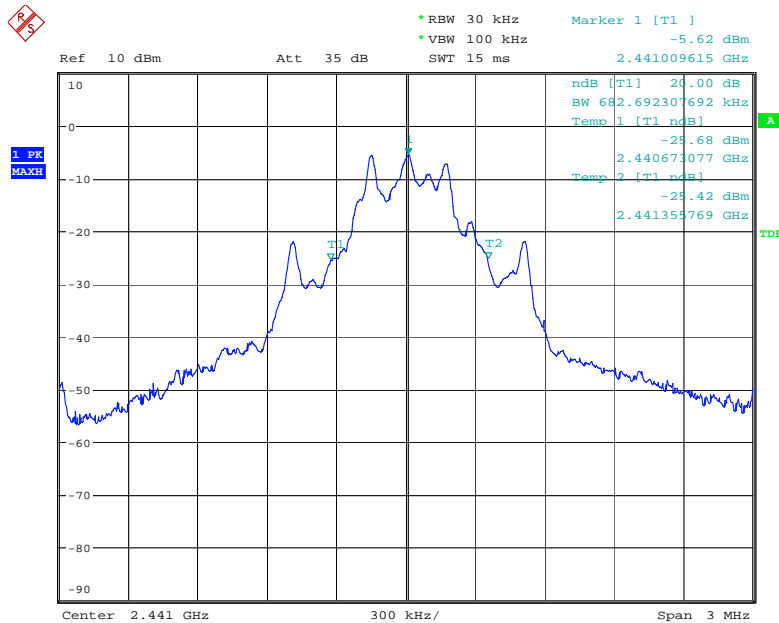


Date: 29.JAN.2015 14:19:13

### GFSK Highest Channel

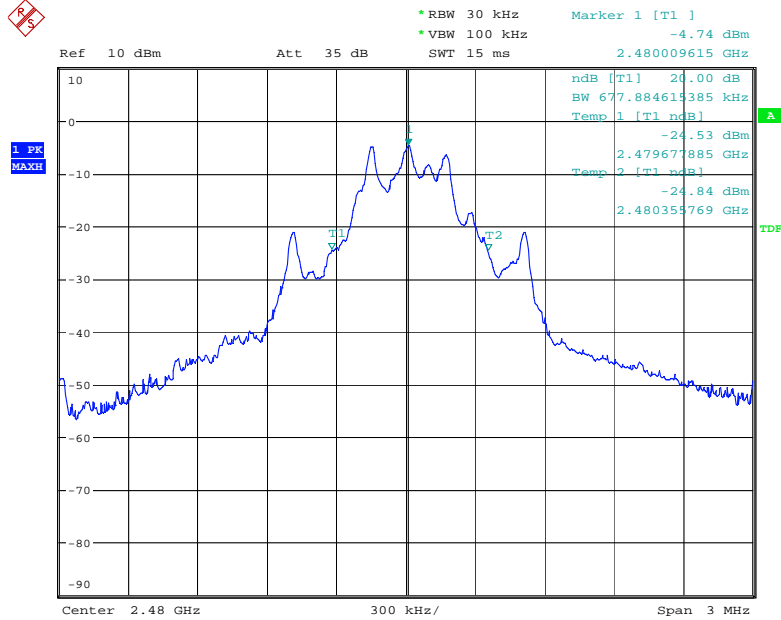


Date: 29.JAN.2015 14:19:55

### $\pi/4$ -DQPSK Lowest Channel

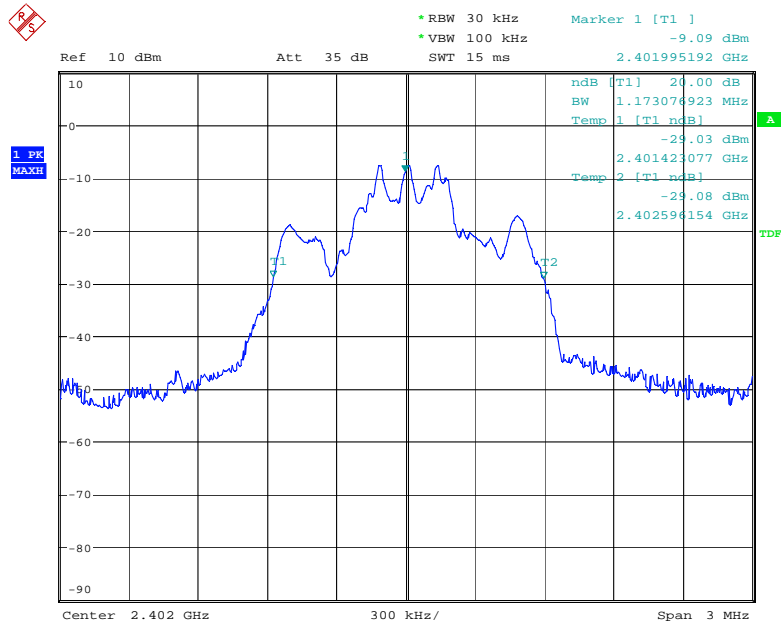


Date: 6.FEB.2015 13:53:09

### $\pi/4$ -DQPSK Middle Channel

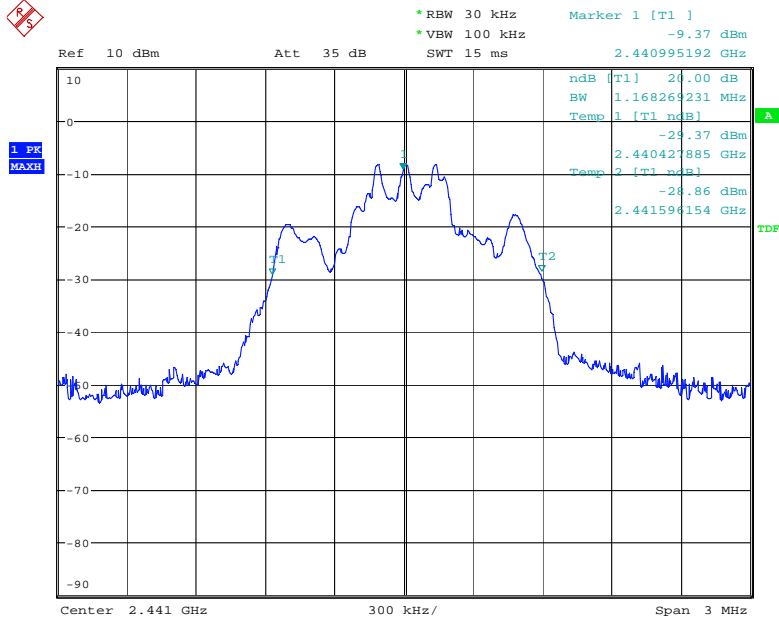


Date: 6.FEB.2015 13:52:28

### $\pi/4$ -DQPSK Highest Channel

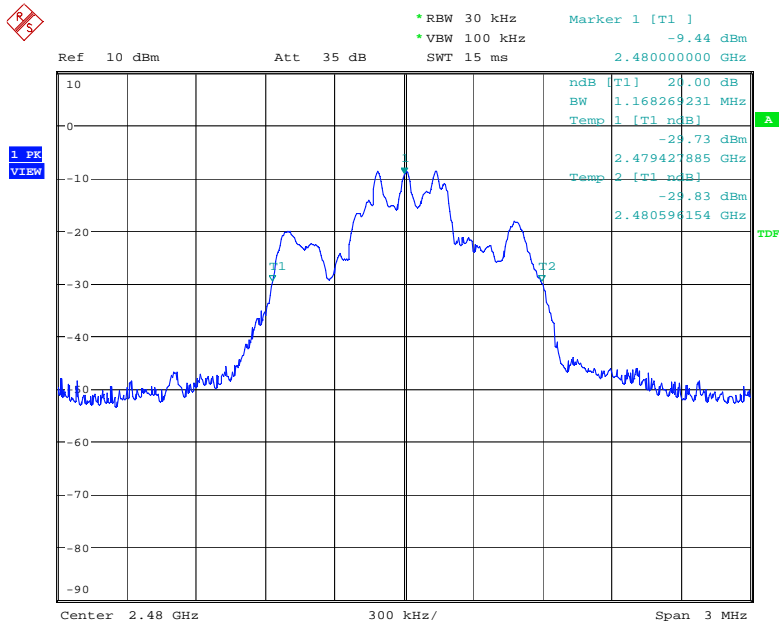


Date: 6.FEB.2015 13:51:43

### 8DPSK Lowest Channel

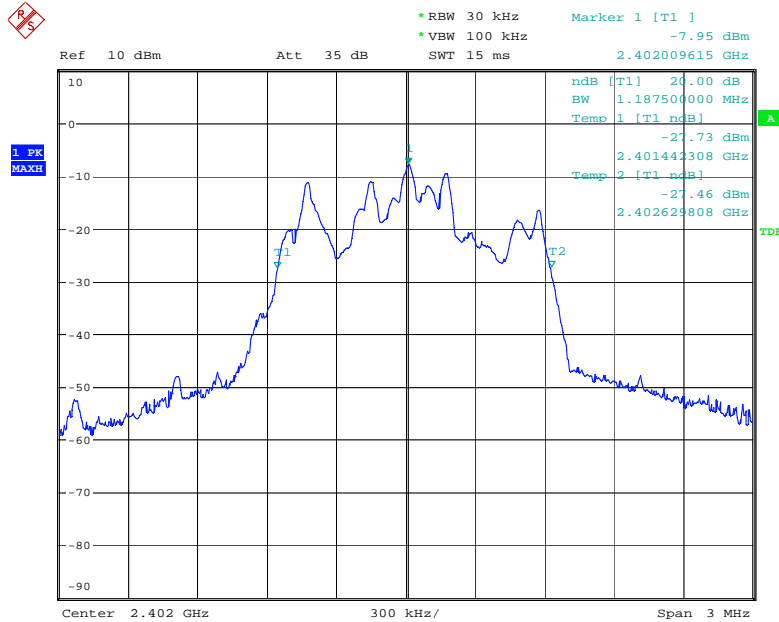


Date: 29.JAN.2015 14:25:02

### 8DPSK Middle Channel

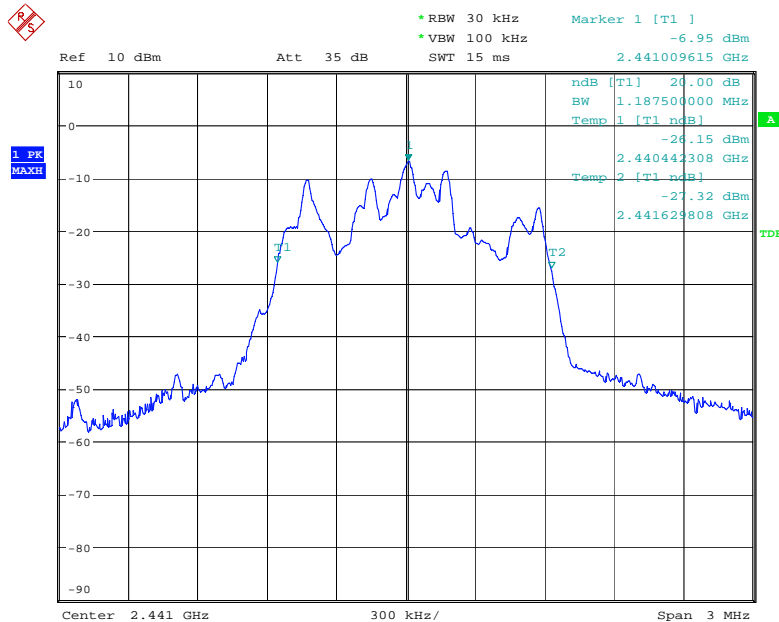

Date: 29.JAN.2015 14:25:56

### 8DPSK Highest Channel

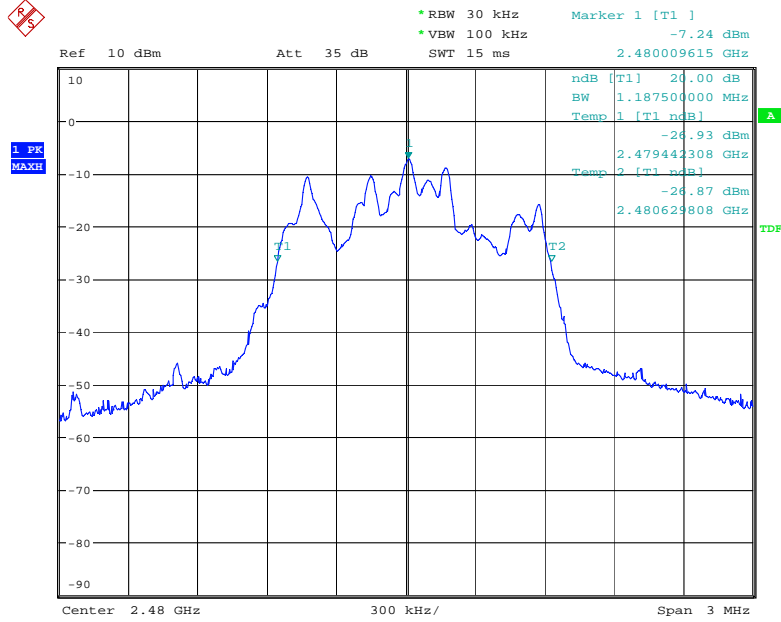

Date: 29.JAN.2015 14:30:53


## 7. Hopping Channel Number

### 7.1 Measurement Procedure

Minimum Number of Hopping Frequencies, FCC Rule 15.247(a)(1)(iii):

Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum, and the spectrum analyzer set to MAX HOLD readings were taken for 3-5 minutes. The channel peaks so recorded were added together, and the total number compared to the minimum number of channels required in the regulation.

### 7.2 Test SET-UP (Block Diagram of Configuration)




### 7.3 Measurement Results

Modulation	GFSK, $\pi/4$ -DQPSK, 8DPSK		
RBW:	100KHz	VBW:	300KHz
Packet:	DH5	Spectrum Detector:	PK
Test By:	Sance	Test Date :	Jan. 29, 2015
Temperature :	22 °C	Humidity :	52 %
Test Result:	PASS		

Hopping Channel Frequency Range	Number of Hopping Channels	Limit
2402-2480	79	$\geq 15$

The worst case: GFSK

### GFSK

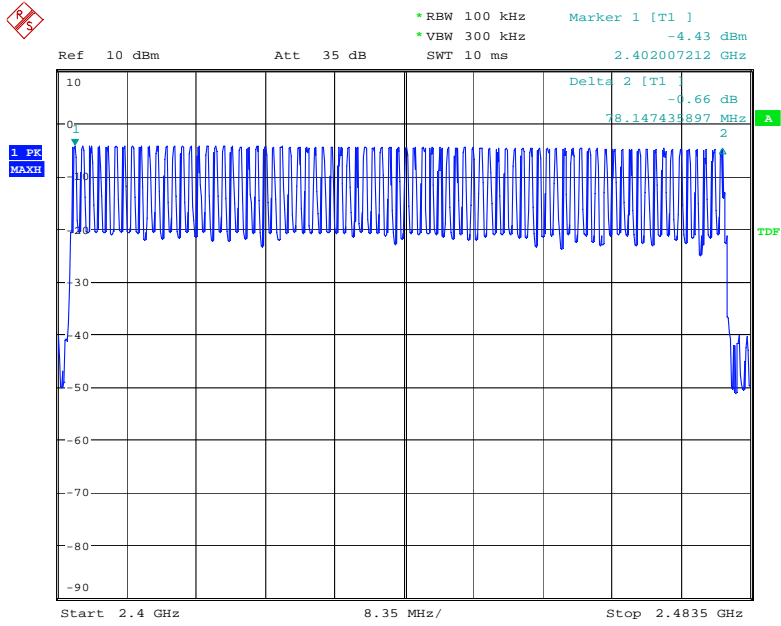

Date: 29.JAN.2015 18:25:58



## 8. Time of Occupancy (Dwell Time)

### 8.1 Measurement Procedure

Average Channel Occupancy Time, FCC Ref:15.247(a)(1)(iii):

Connect EUT antenna terminal to the spectrum analyzer with a low loss cable. The spectrum analyzer center frequency was set to one of the known hopping channels. The Sweep was set to 10 ms, the SPAN was set to Zero SPAN. The time duration of the transmissions so captured was measured with the Marker Delta function

### 8.2 Measurement Results


The maximum number of hopping channels in 31.6s (0.4s/Channel x 79 Channel)

Refer to attached data chart.

Modulation :	GFSK, $\pi/4$ -DQPSK, 8DPSK		
RBW :	1MHz	VBW :	3MHz
Spectrum Detector:	PK	Test By:	Sance
Test Date :	Jan. 29, 2015	Temperature :	22°C
Test Result:	PASS	Humidity :	52 %


Packet	Frequency (MHz)	Result (msec)	Limit (msec)
<b>GFSK</b>			
DH1	2441	$0.497 \text{ (ms)} * (1600 / (2 * 79)) * 31.6 = 159.0$	400
DH3	2441	$1.755 \text{ (ms)} * (1600 / (4 * 79)) * 31.6 = 280.8$	400
DH5	2441	$3.005 \text{ (ms)} * (1600 / (6 * 79)) * 31.6 = 320.5$	400
<b><math>\pi/4</math>-DQPSK</b>			
2-DH1	2441	$0.509 \text{ (ms)} * (1600 / (2 * 79)) * 31.6 = 162.9$	400
2-DH3	2441	$1.763 \text{ (ms)} * (1600 / (4 * 79)) * 31.6 = 282.1$	400
2-DH5	2441	$3.013 \text{ (ms)} * (1600 / (6 * 79)) * 31.6 = 321.4$	400
<b>8DPSK</b>			
3-DH1	2441	$0.505 \text{ (ms)} * (1600 / (2 * 79)) * 31.6 = 161.6$	400
3-DH3	2441	$1.755 \text{ (ms)} * (1600 / (4 * 79)) * 31.6 = 280.8$	400
3-DH5	2441	$3.013 \text{ (ms)} * (1600 / (6 * 79)) * 31.6 = 321.4$	400

### GFSK DH1

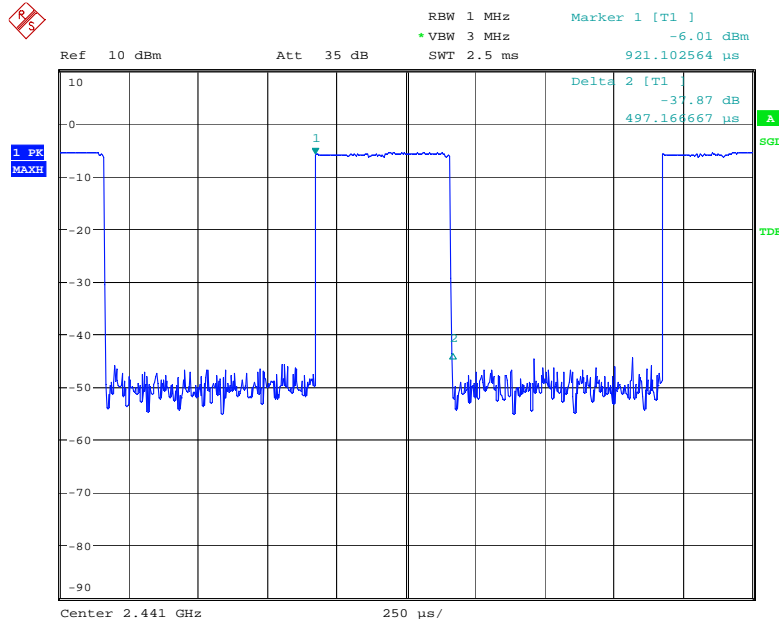


Date: 29.JAN.2015 18:29:22

### GFSK DH3

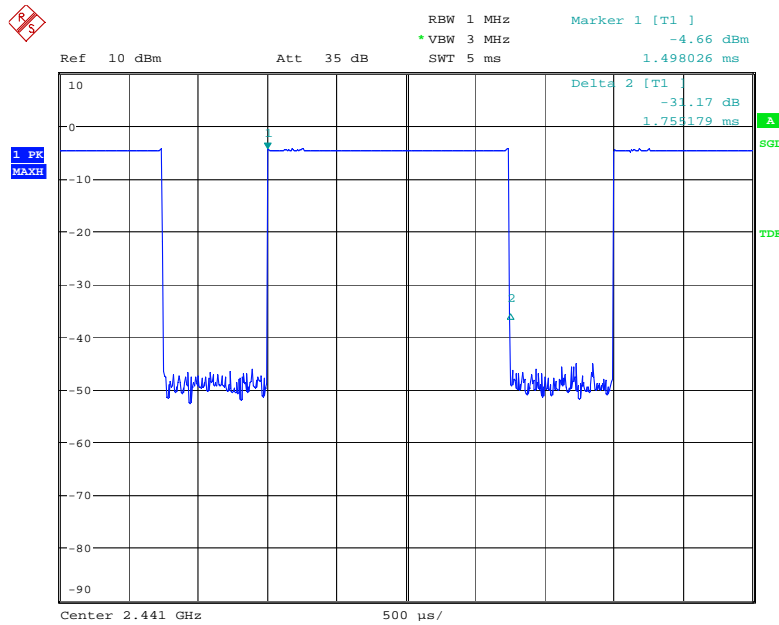


Date: 29.JAN.2015 18:29:45

### GFSK DH5

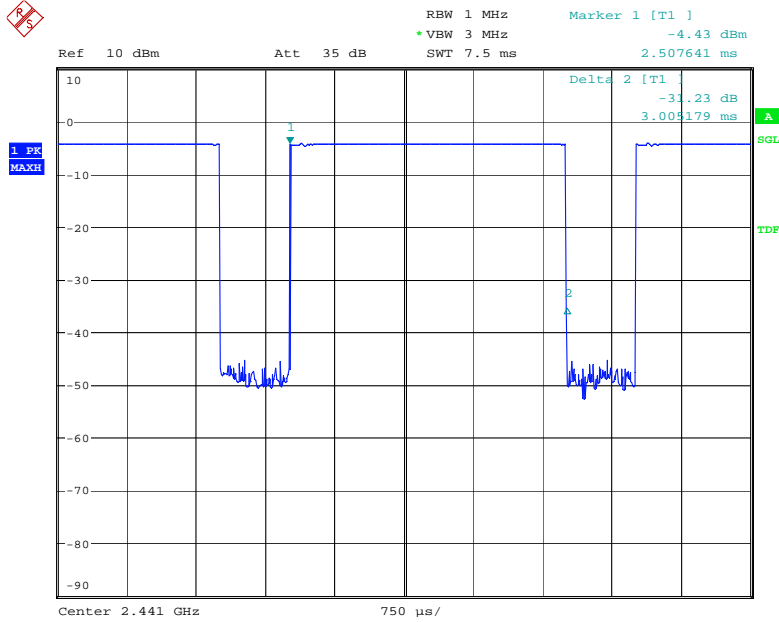


Date: 29.JAN.2015 18:30:10

### $\pi/4$ -DQPSK 2-DH1

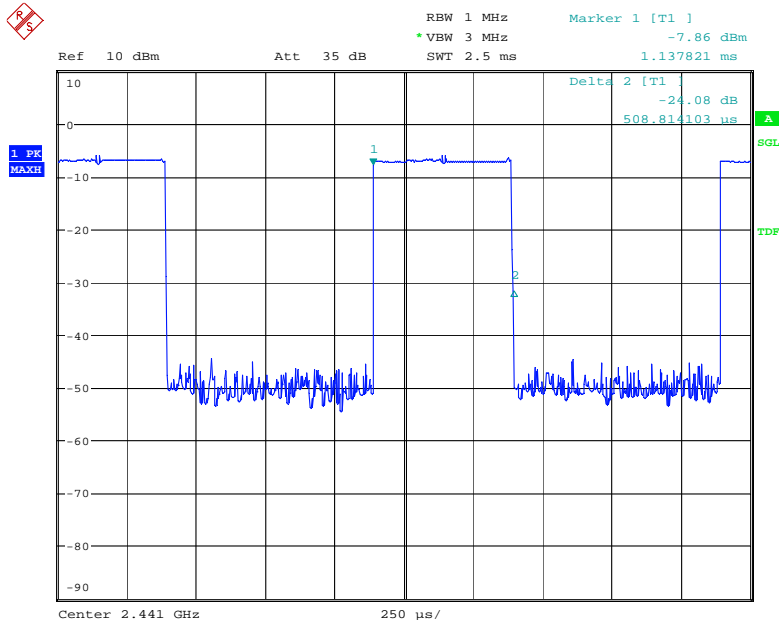


Date: 29.JAN.2015 18:30:33

### $\pi/4$ -DQPSK 2-DH3

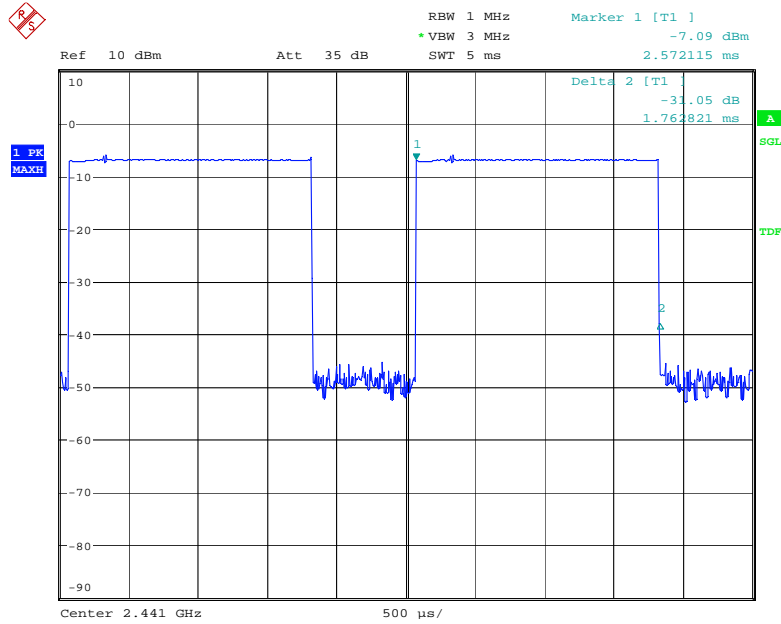


Date: 29.JAN.2015 18:31:01

### $\pi/4$ -DQPSK 2-DH5

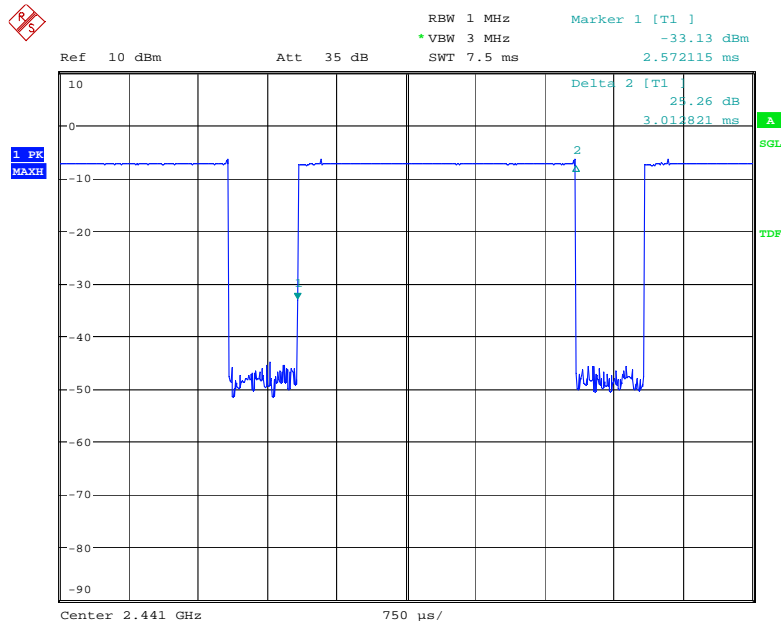


Date: 29.JAN.2015 18:31:23

### 8DPSK 3-DH1

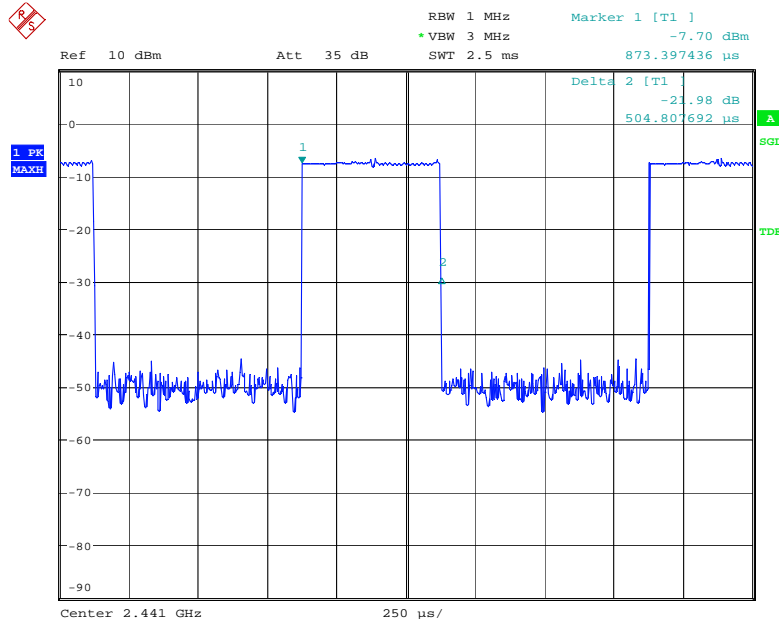


Date: 29.JAN.2015 18:31:50

### 8DPSK 3-DH3

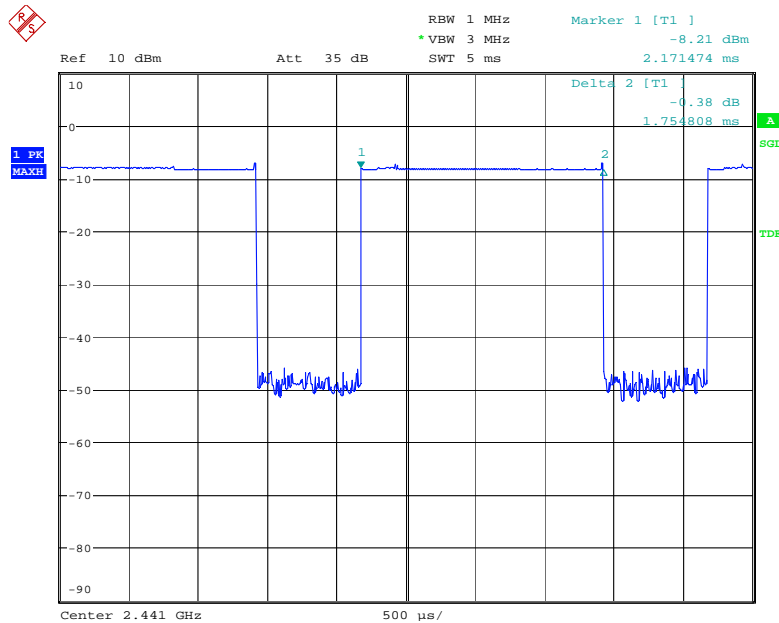

Date: 29.JAN.2015 18:32:10

### 8DPSK 3-DH5

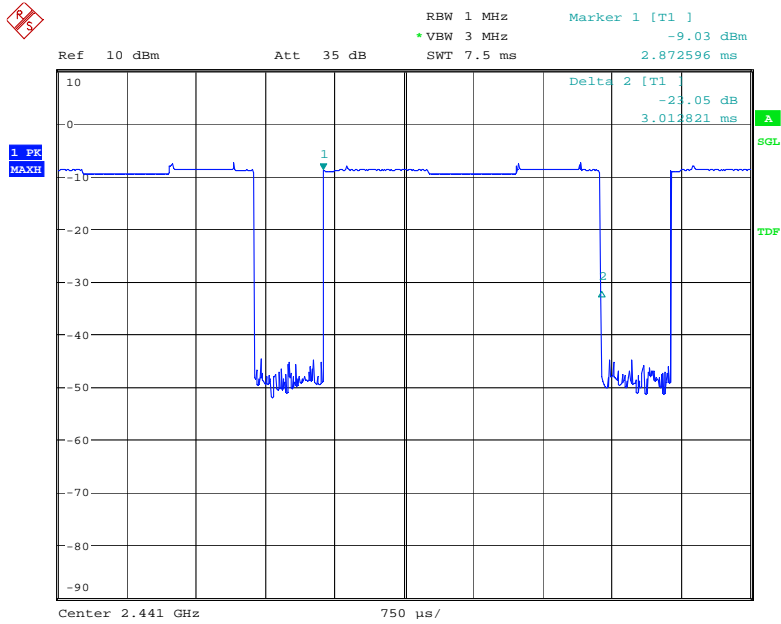

Date: 29.JAN.2015 18:32:42

## 9. MAXIMUM PEAK OUTPUT POWER

### 9.1 Measurement Procedure

Maximum Conducted Output Power at Antenna Terminals, FCC Rules 15.247(b)(1):

Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum. The analyzer was set for RBW > 20dB bandwidth and power was read directly in dBm. Cable loss was considered during this measurement.


### 9.2 Measurement Results

Refer to attached data chart.

Modulation :	GFSK, $\pi/4$ -DQPSK, 8DPSK		
RBW :	3MHz	VBW :	3MHz
Spectrum Detector:	PK	Test Date :	Jan. 29, 2015
Test By:	Sance	Temperature :	22 °C
Test Result:	PASS	Humidity :	52 %


Channel Frequency (MHz)	Cable Loss dB	Peak Power output(mW)	Peak Power output(dBm)	Peak Power Limit(dBm)	Pass/Fail
<b>GFSK</b>					
2402.00	1.5	0.51	-2.92	21	PASS
2441.00	1.5	0.41	-3.92	21	PASS
2480.00	1.5	0.36	-4.39	21	PASS
<b><math>\pi/4</math>-DQPSK</b>					
2402.00	1.5	0.34	-4.66	21	PASS
2441.00	1.5	0.23	-6.37	21	PASS
2480.00	1.5	0.22	-6.50	21	PASS
<b>8DPSK</b>					
2402.00	1.5	0.31	-5.09	21	PASS
2441.00	1.5	0.33	-4.80	21	PASS
2480.00	1.5	0.25	-6.06	21	PASS

### GFSK Lowest Channel

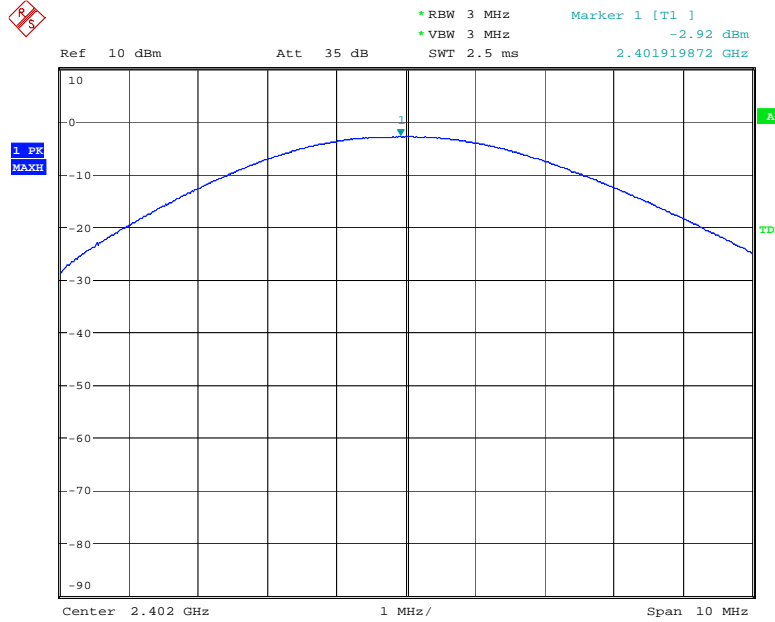

Date: 29.JAN.2015 15:43:09


### GFSK Middle Channel

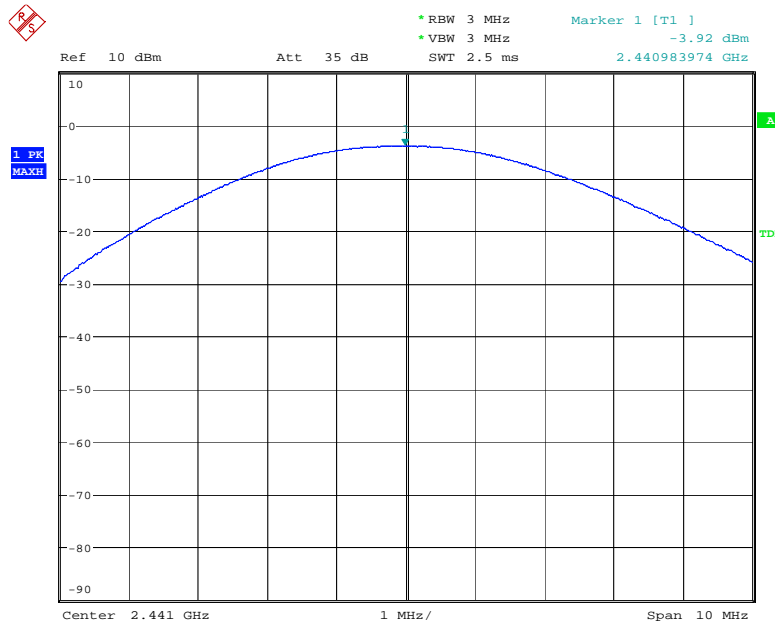

Date: 29.JAN.2015 15:43:21




### GFSK Highest Channel

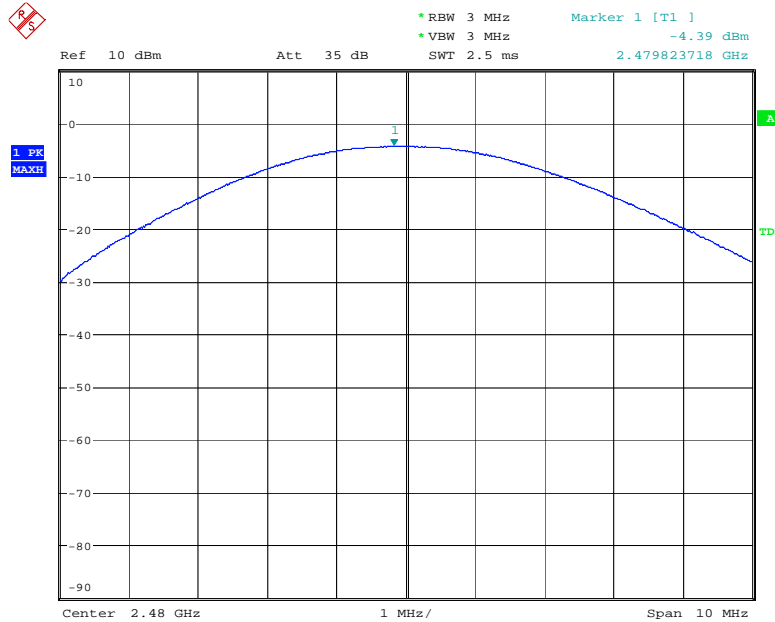


Date: 29.JAN.2015 15:43:32

### $\pi/4$ -DQPSK Lowest Channel

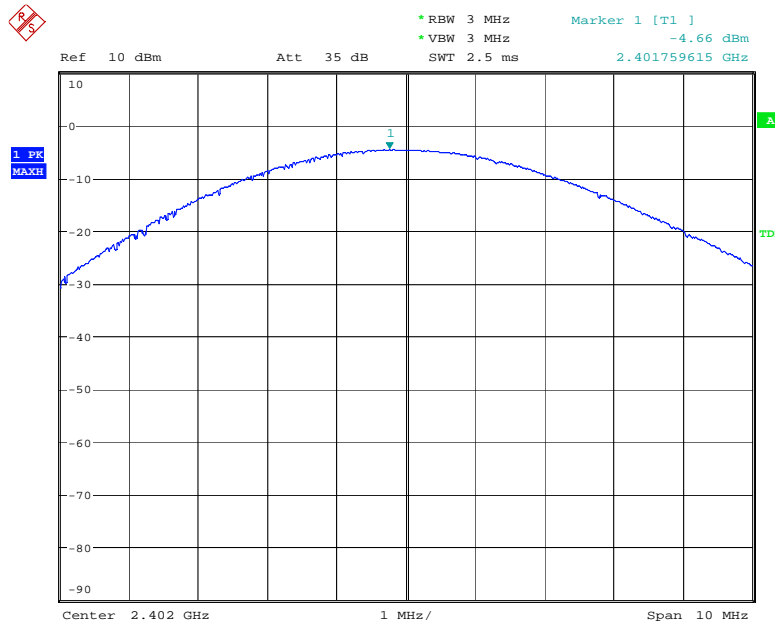


Date: 29.JAN.2015 15:44:03

### $\pi/4$ -DQPSK Middle Channel

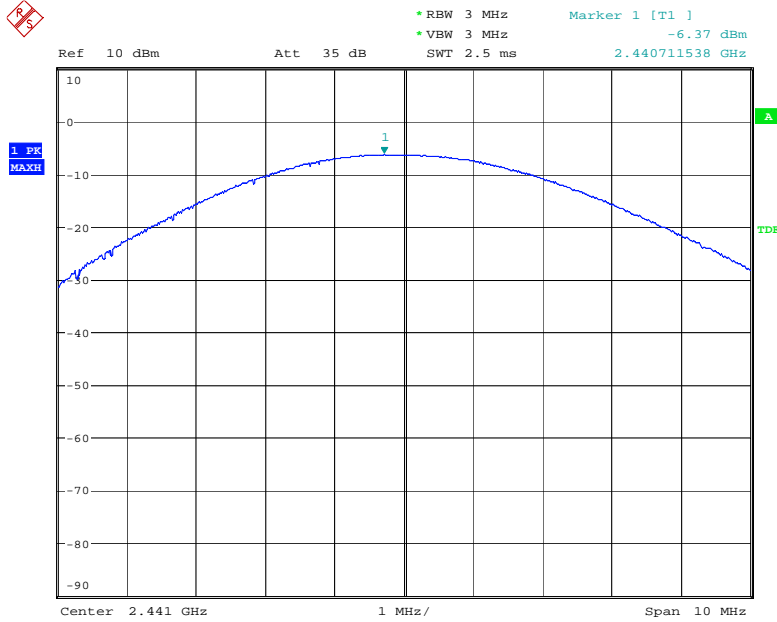


Date: 29.JAN.2015 15:44:51

### $\pi/4$ -DQPSK Highest Channel

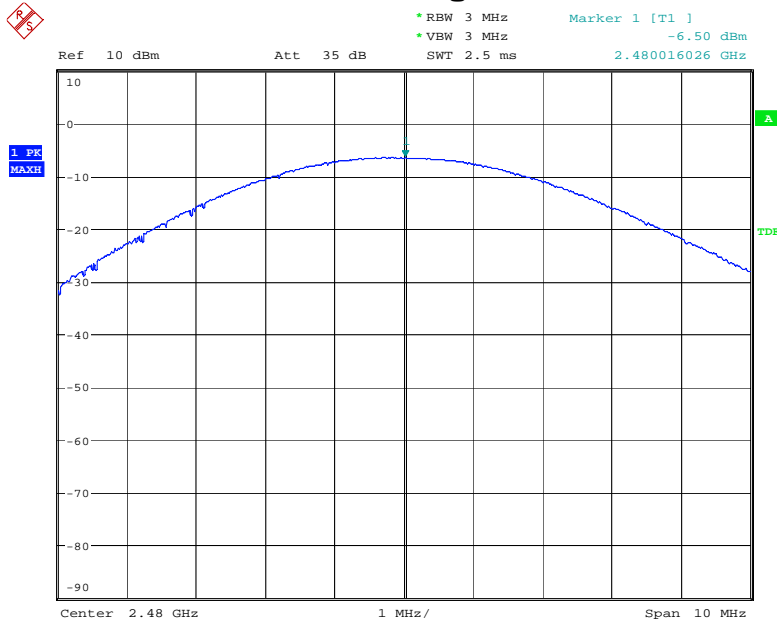


Date: 29.JAN.2015 15:45:32

### 8DPSK Lowest Channel

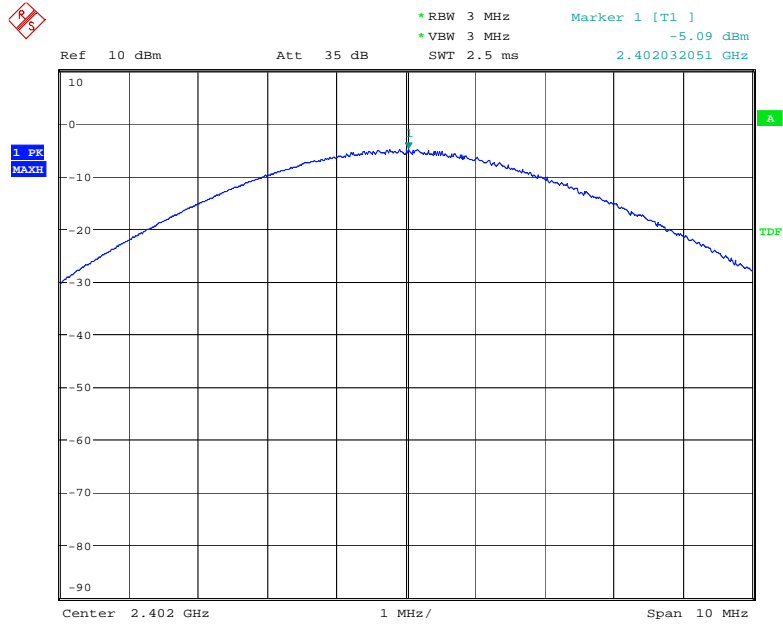


Date: 29.JAN.2015 15:45:52

### 8DPSK Middle Channel

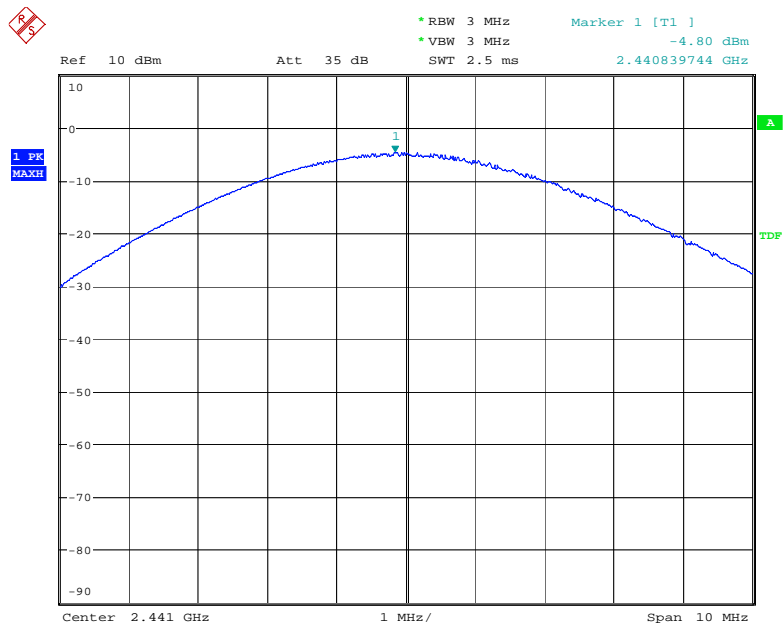

Date: 29.JAN.2015 15:46:13

### 8DPSK Highest Channel

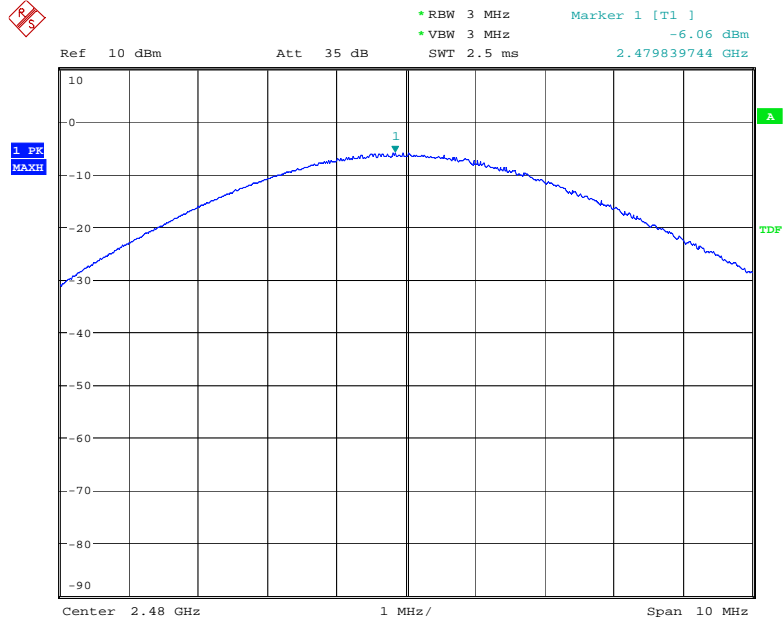

Date: 29.JAN.2015 15:46:30



## 10. Band Edge

### 10.1 Measurement Procedure

Out of Band Conducted Emissions, FCC Rule 15.247(d):

The transmitter output is connected to spectrum analyzer. The resolution bandwidth is set to 100KHz, and the video bandwidth set to 300KHz.

### 10.2 Limit

15.247(d) In any 100KHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 10.3 Measurement Results


Please see below test table and plots.  
 For Radiated Emission  
 The worst case: GFSK

Freq. (MHz)	Ant.Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
2399.450	H	38.50	26.67	8.09	46.59	34.76	74.00	54.00	-17.41	-19.24
2396.670	V	41.76	28.48	8.06	49.82	36.54	74.00	54.00	-24.18	-17.46
2484.820	H	35.23	24.08	8.38	43.61	32.46	74.00	54.00	-30.39	-21.54
2483.990	V	34.85	22.97	8.38	43.23	31.35	74.00	54.00	-30.77	-22.65


- Note:**
- (1) Emission Level= Reading Level + Factor
  - (2) Factor= Antenna Gain + Cable Loss – Amplifier Gain
  - (3) Horn antenna used for the emission over 1000MHz.

For RF Conducted

### GFSK Lowest Channel

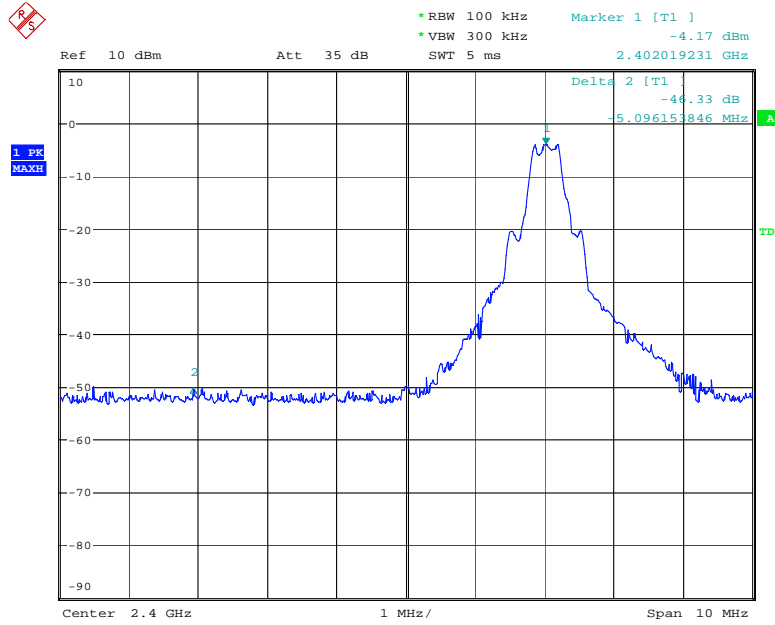


Date: 29.JAN.2015 18:43:29

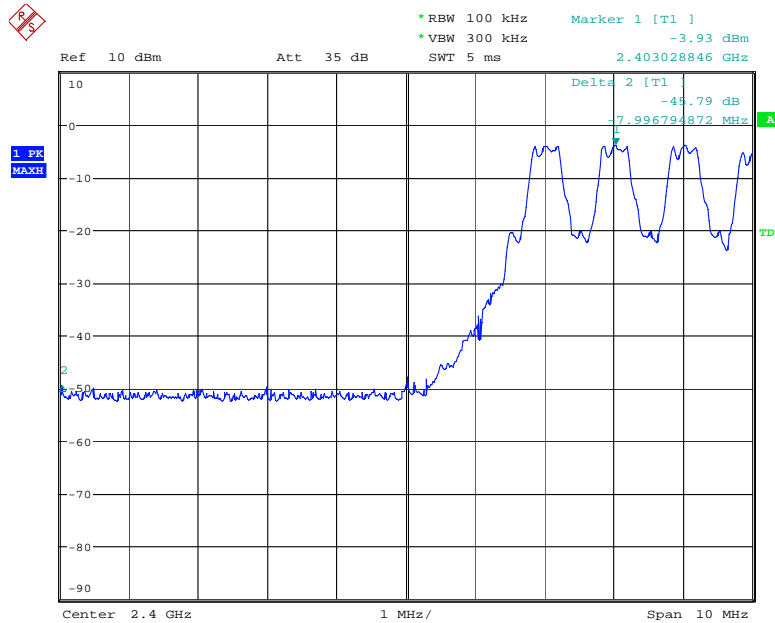


Date: 29.JAN.2015 18:45:37

### GFSK Highest Channel

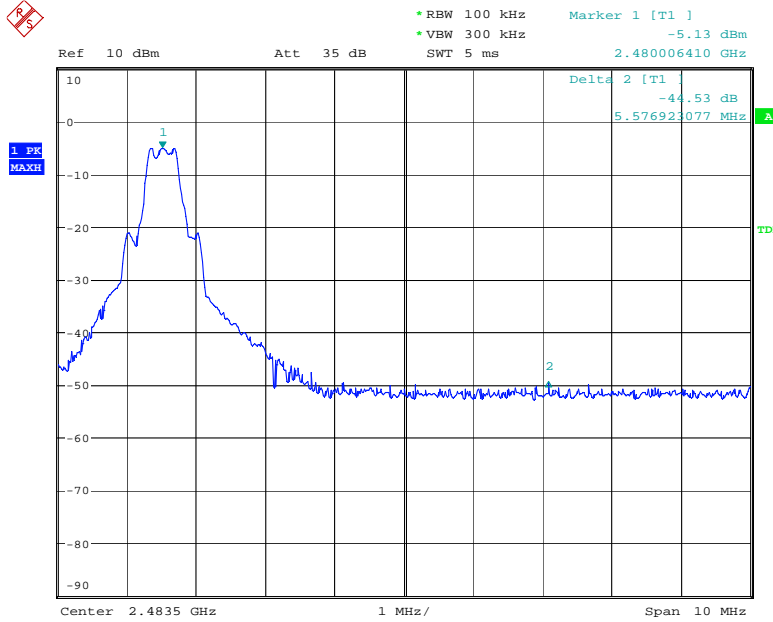


Date: 29.JAN.2015 18:46:30

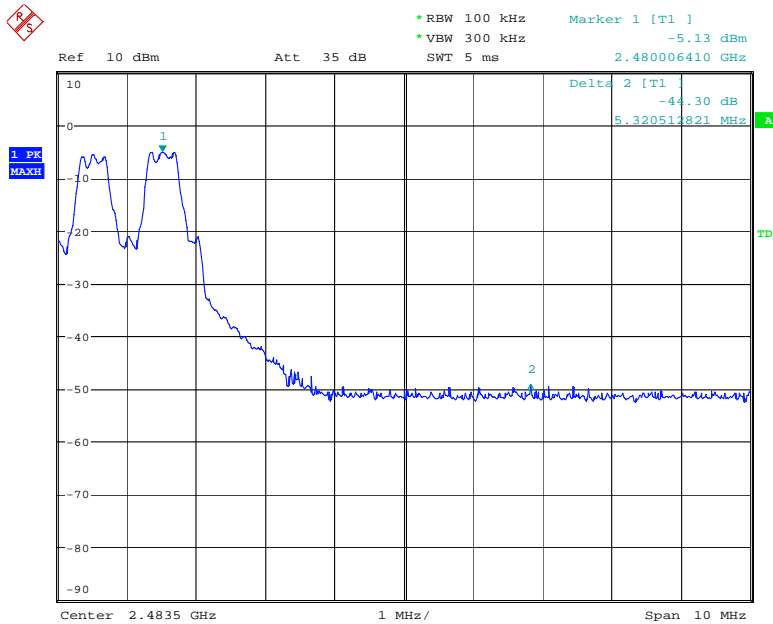


Date: 29.JAN.2015 18:47:19

### $\pi/4$ -DQPSK Lowest Channel

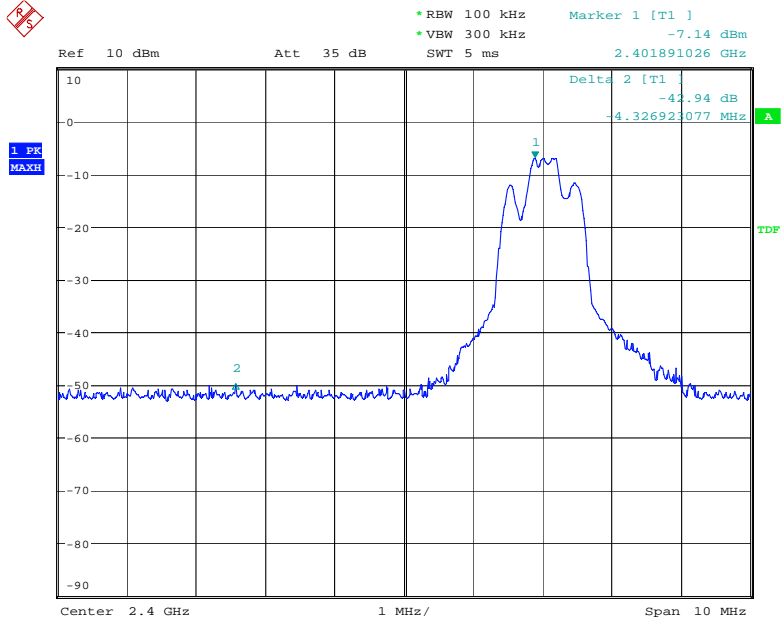


Date: 29.JAN.2015 18:50:24

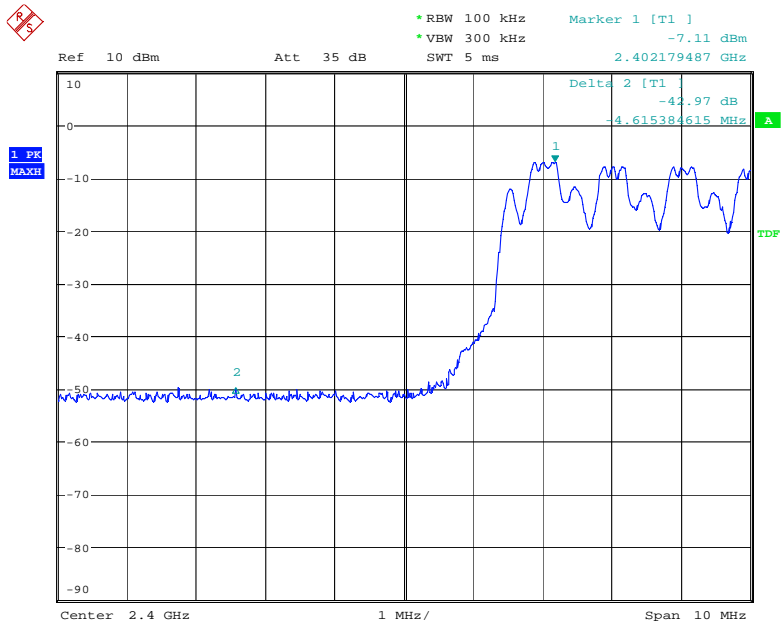


Date: 29.JAN.2015 18:52:13



### $\pi/4$ -DQPSK Highest Channel

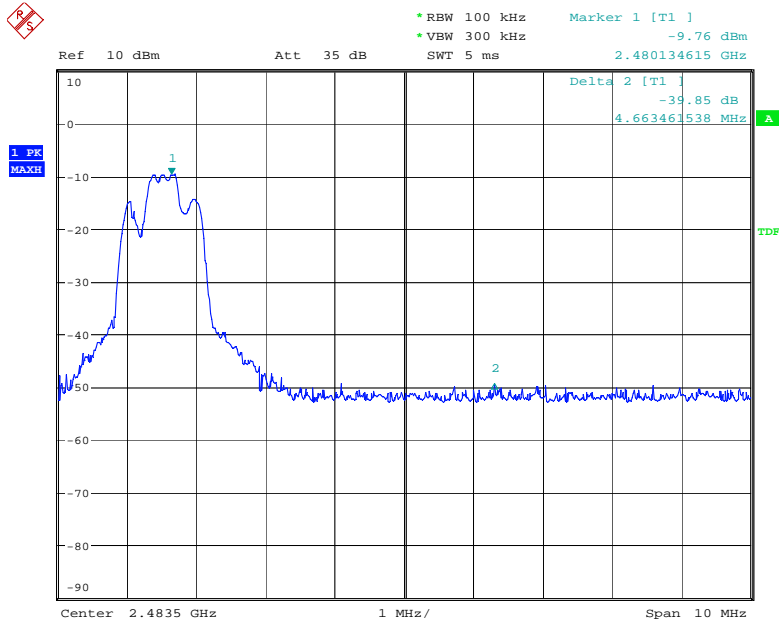


Date: 29.JAN.2015 18:48:15

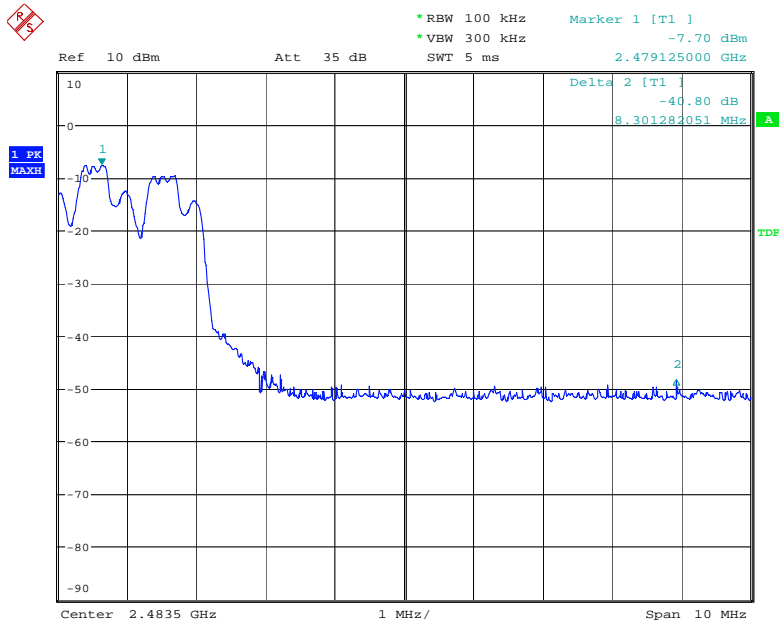


Date: 29.JAN.2015 18:49:05

### 8DPSK Lowest Channel

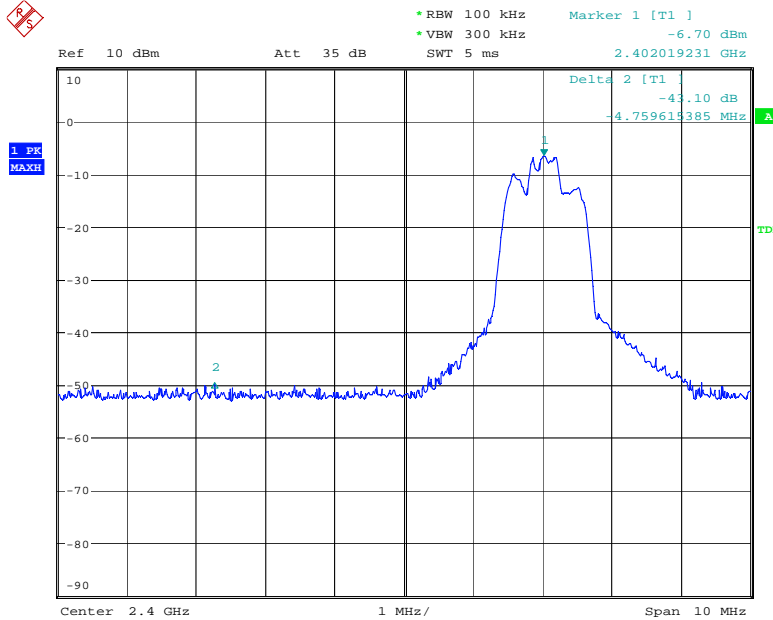


Date: 29.JAN.2015 18:53:40

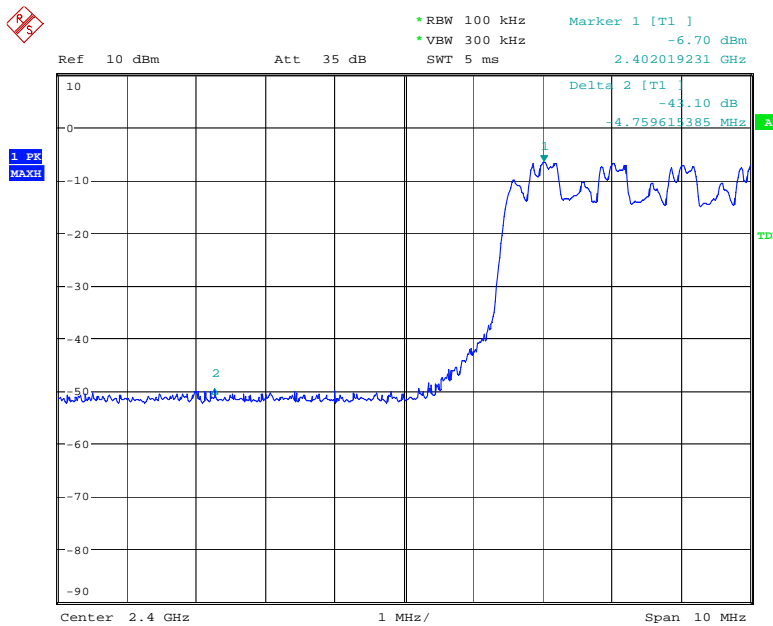


Date: 29.JAN.2015 18:56:29

### 8DPSK Highest Channel

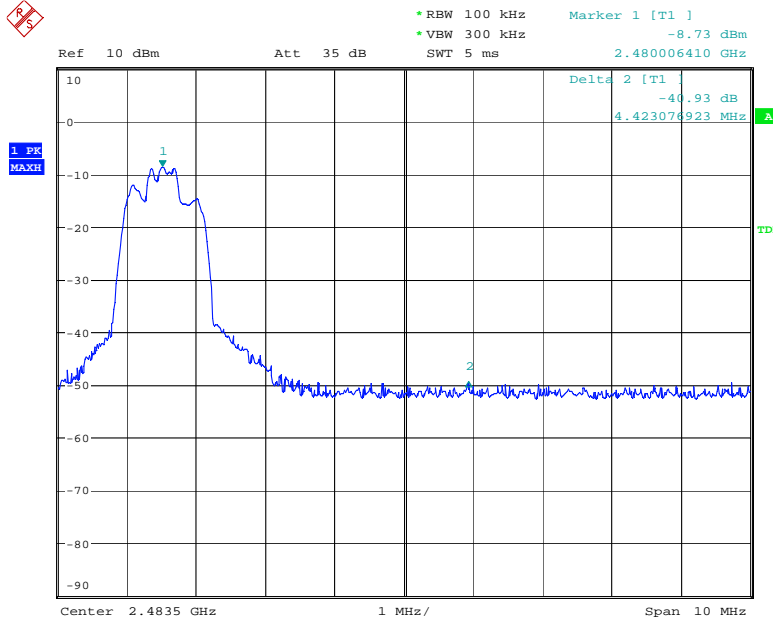

Date: 29.JAN.2015 18:57:37

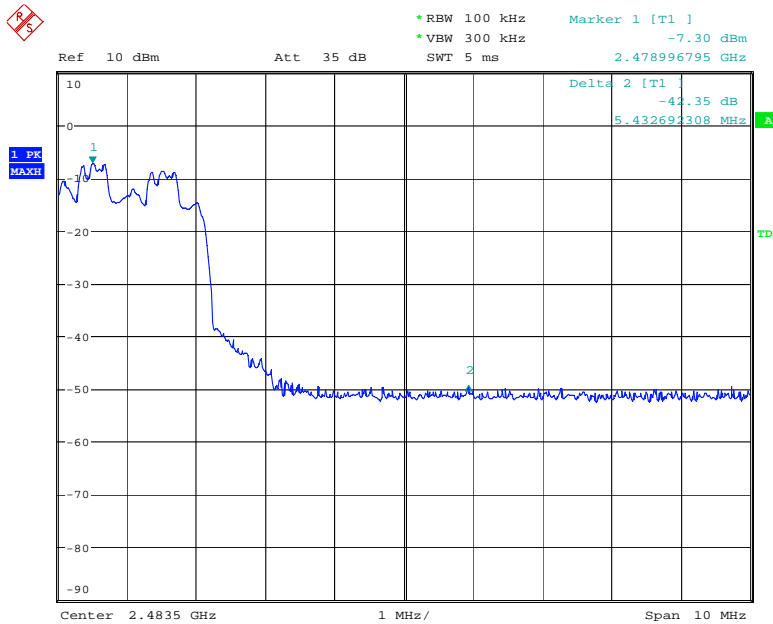

Date: 29.JAN.2015 18:58:21

---

## 11. Antenna Application

### 11.1 Antenna requirement

According to of FCC part 15C section 15.203 and 15.240:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Systems operating in the 2400-2483.5MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 11.2 Measurement Results

The antenna is integrated on the main PCB and no consideration of replacement, and the best case gain of the antenna is 0dBi. So, the antenna is consider meet the requirement.

---

## 12. Conducted Spurious Emissions

### 12.1 Measurement Procedure


Out of Band Conducted Spurious Emissions, FCC Rule 15.247(d):

The transmitter output is connected to spectrum analyzer. All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20dB below the highest level of the desired power in the passband.

### 12.2. Measurement Results

Please refer to following plots, the worst case (GFSK) was shown.


### Lowest Channel

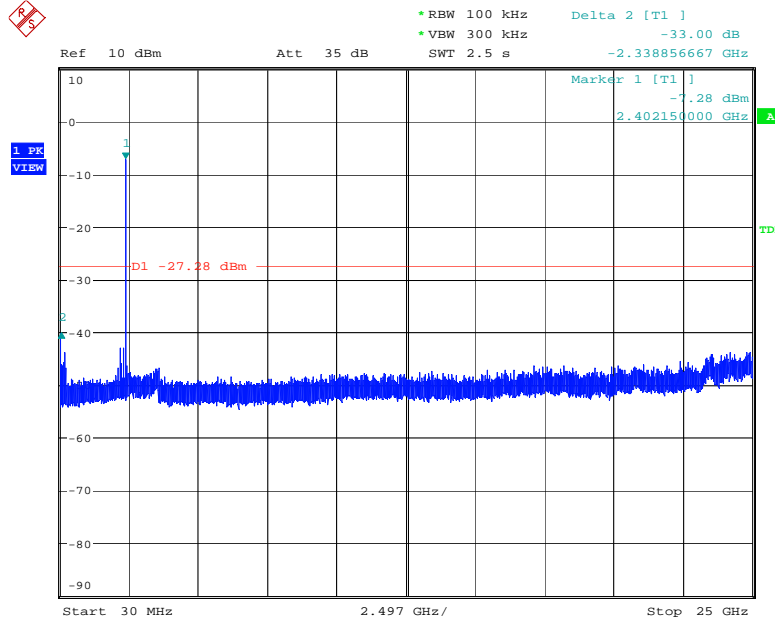

Date: 29.JAN.2015 19:10:28

Note: Sweep points=30001pts


### Middle Channel

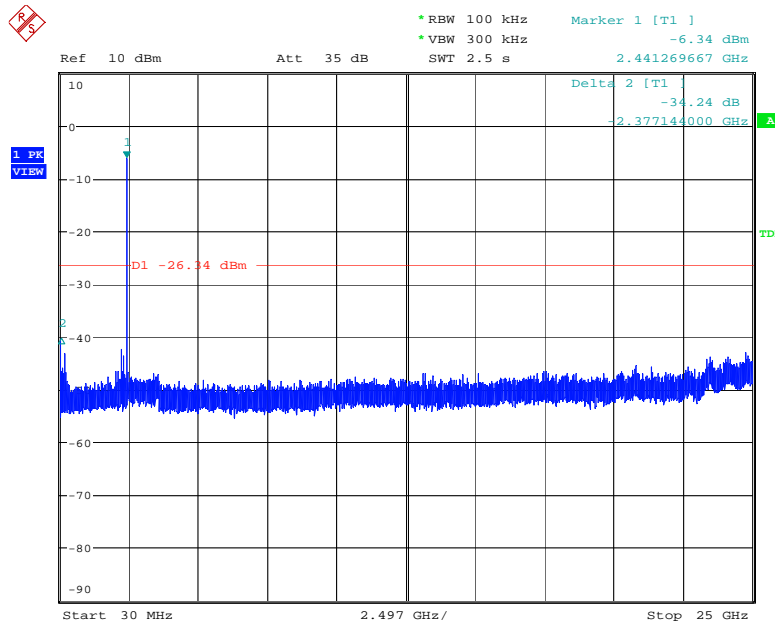

Date: 29.JAN.2015 19:14:41

Note: Sweep points=30001pts

### Highest Channel

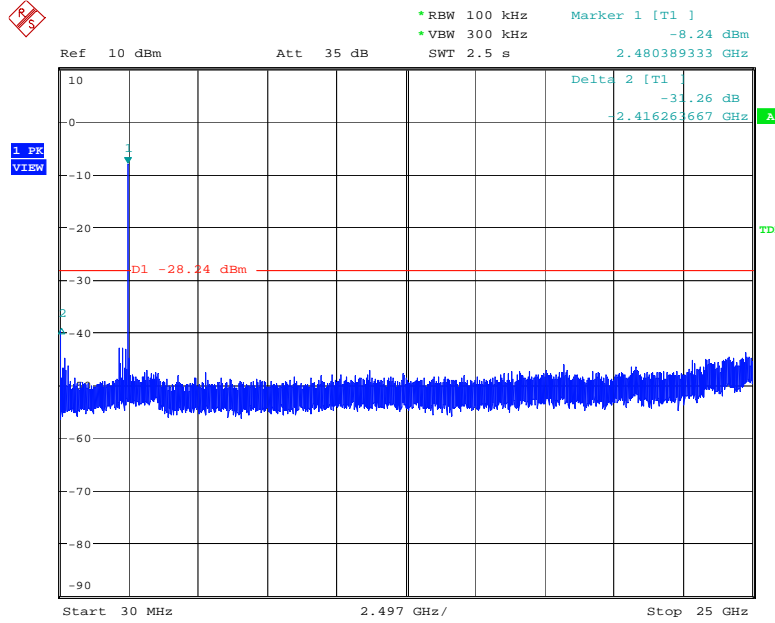

Date: 29.JAN.2015 19:15:23

Note: Sweep points=30001pts

### 13. Test Equipment List

Description	Manufacturer	Model Number	Serial Number	Characteristics	Calibration Date	Calibration Due Date
Test Receiver	Rohde & Schwarz	ESCI7	100837	9KHz~7GHz	Nov. 24, 2014	Nov. 23, 2015
Antenna	Schwarzbeck	VULB9162	9162-010	30MHz~7GHz	Nov. 27, 2014	Nov. 26, 2015
Positioning Controller	UC	UC 3000	N/A	0~360° , 1-4m	N/A	N/A
Color Monitor	SUNSP0	SP-140A	N/A	N/A	N/A	N/A
Single Phase Power Line Filter	SAEMC	PF201A-32	110210	32A	N/A	N/A
3 Phase Power Line Filter	SAEMC	PF401A-200	110318	200A	N/A	N/A
DC Power Filter	SAEMC	PF301A-200	110245	200A	N/A	N/A
Cable	Huber+Suhner	CBL2-NN-1M	22390001	9KHz~7GHz	Nov. 08, 2014	Nov. 07, 2015
Cable	Huber+Suhner	CIL02	N/A	9KHz~7GHz	Nov. 08, 2014	Nov. 07, 2015
RF Cable	Huber+Suhner	SF-104	MY16559/4	9KHz~25GHz	Mar. 08, 2014	Mar. 07, 2015
Power Amplifier	HP	HP 8447D	1145A00203	100KHz~1.3GHz	Nov. 08, 2014	Nov. 07, 2015
Horn Antenna	Schwarzbeck	BBHA9170	9170-372	15GHz~26.5GHz	Oct.24, 2014	Oct.23, 2015
Horn Antenna	Com-Power	AH-118	071078	1GHz~18GHz	Nov. 06, 2014	Nov. 05, 2015
Loop antenna	Daze	ZA30900A	0708	9KHz~30MHz	Oct.11, 2014	Oct.10, 2015
Spectrum Analyzer	Rohde & Schwarz	FSU26	200409/026	20Hz~26.5GHz	Sep. 02, 2014	Sep. 01, 2015
Pre-Amplifier	Agilent	8449B	3008A02964	1GHz~26.5GHz	Nov. 04, 2014	Nov. 03, 2015
L.I.S.N.	Rohde & Schwarz	ENV 216	101317	9KHz~30MHz	Nov. 08, 2014	Nov. 07, 2015

---End of report---