

Test Report S/N:	042503-367HDW
Test Date(s):	May 13-15, 2003
Test Type:	FCC Part 24 EMC Measurements

## DECLARATION OF COMPLIANCE FCC PART 24(E) EMC MEASUREMENTS

### Test Lab

**CELLTECH LABS INC.**  
 Testing and Engineering Services  
 1955 Moss Court  
 Kelowna, B.C.  
 Canada V1Y 9L3  
 Phone: 250-448-7047  
 Fax: 250-448-7046  
 e-mail: info@celltechlabs.com  
 web site: www.celltechlabs.com

### Applicant Information

**DAP TECHNOLOGIES LTD.**  
 955 Place DuFour  
 Vanier, Quebec G1M 3B2  
 Canada

**Rule Part(s):** FCC 47 CFR §24(E), §2; IC RSS-133 Issue 2  
**Test Procedure(s):** FCC 47 CFR §24(E), §2; IC RSS-133 Issue 2; ANSI TIA/EIA-603-A-2001  
**FCC Device Classification:** PCS Licensed Transmitter (PCB)  
**IC Device Classification:** 2GHz Personal Communication Services  
**Device Type:** Rugged Handheld PC with Sierra Wireless AirCard 750 PCS GPRS Modem  
**FCC ID:** HDWAEA306  
**IC Certification No.:** 4609A-AEA306  
**Model(s):** CE8640/LS  
**Tx Frequency Range:** 1850.2 - 1909.8 MHz  
**Max. RF Output Power:** 0.406 Watts EIRP (26.09 dBm)  
**Conducted Power Tested:** 28.6 dBm (1850.2 MHz)  
 28.6 dBm (1880.0 MHz)  
 28.5 dBm (1909.8 MHz)  
**Modulation:** GMSK  
**Emission Designator:** 271KGXW  
**Frequency Tolerance:** 0.1 PPM  
**Antenna Type:** 1/4 Wave  
**Battery Type:** 7.4V Lithium-ion, 2000mAh

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in FCC 47 CFR §24(E), §2, IC RSS-133 Issue 2, and ANSI TIA/EIA-603-A-2001.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc. The results and statements contained in this report pertain only to the device(s) evaluated.



Russell Pipe  
 Senior Compliance Technologist  
 Celltech Labs Inc.



Test Report S/N:	042503-367HDW
Test Date(s):	May 13-15, 2003
Test Type:	FCC Part 24 EMC Measurements

## TABLE OF CONTENTS

<b>1.1</b>	<b>SCOPE</b>	<b>3</b>
<b>2.1</b>	<b>GENERAL INFORMATION - §2.1033(a)</b>	<b>3</b>
<b>MEASUREMENT PROCEDURES &amp; DATA</b>		<b>4-6</b>
<b>3.1</b>	<b>RF Output Power - §2.1046</b>	<b>4</b>
<b>4.1</b>	<b>Spurious Emissions at Antenna Terminal - §2.1051</b>	<b>4</b>
<b>5.1</b>	<b>Radiated Measurement Test Setup</b>	<b>4</b>
<b>6.1</b>	<b>Effective Isotropic Radiated Power Output - §24.232(b)</b>	<b>5</b>
<b>7.1</b>	<b>Field Strength of Spurious Radiation - §2.1053</b>	<b>6-7</b>
<b>8.1</b>	<b>Occupied Bandwidth - §2.1049, §24.238</b>	<b>8</b>
<b>9.1</b>	<b>Frequency Stability / Temperature Variation - §2.1055, §24.235</b>	<b>9</b>
<b>10.1</b>	<b>LIST OF TEST EQUIPMENT</b>	<b>10</b>
<b>11.1</b>	<b>CONCLUSION</b>	<b>11</b>
<b>APPENDIX A - TEST PLOTS</b>		<b>12</b>
<b>APPENDIX B - RADIATED TEST SETUP PHOTOGRAPHS</b>		<b>13</b>

Test Report S/N:	042503-367HDW
Test Date(s):	May 13-15, 2003
Test Type:	FCC Part 24 EMC Measurements

## FCC PART 24(E) EMC MEASUREMENT REPORT

### 1.1 SCOPE

Measurement and determination of electromagnetic emissions (EME) from radio frequency devices for compliance with the technical rules and regulations of the Federal Communications Commission and Industry Canada.

### 2.1 GENERAL INFORMATION - §2.1033(a)

#### APPLICANT

**DAP TECHNOLOGIES LTD.**  
955 Place DuFour  
Vanier, Quebec G1M 3B2  
Canada

<b>FCC ID</b>	HDWAEA306
<b>Model(s)</b>	CE8640/LS
<b>Serial No.</b>	Pre-production
<b>EUT Type</b>	Rugged Handheld PC with Sierra Wireless AirCard 750 PCS GPRS PCMCIA Modem Card
<b>Rule Part(s)</b>	FCC 47 CFR §24(E), §2; IC RSS-133 Issue 2
<b>FCC Classification</b>	PCS Licensed Transmitter (PCB)
<b>IC Classification</b>	2GHz Personal Communication Services
<b>Test Procedure(s)</b>	FCC 47 CFR §24(E), §2; ANSI TIA/EIA-603-A-2001
<b>Tx Frequency Range</b>	1850.20 - 1909.80 MHz
<b>Modulation</b>	GMSK
<b>Max. RF Output Power</b>	0.406 Watts EIRP (26.09 dBm)
<b>RF Conducted Output Power Tested</b>	28.60 dBm (1850.2 MHz) 28.60 dBm (1880.0 MHz) 28.50 dBm (1909.8 MHz)
<b>Emission Designator</b>	271KGXW
<b>Frequency Tolerance</b>	0.1 PPM
<b>Battery Type(s)</b>	7.4V Lithium-ion, 2000mAh
<b>Antenna Type</b>	1/4 Wave (Length: 54 mm)

### 3.1 RF OUTPUT POWER MEASUREMENT - §2.1046

The conducted power was measured with a Gigatronics 8650A Universal Power Meter using burst average power mode. An offset was entered into the power meter to correct for the losses of the attenuator and cable installed before the sensor input. The transmitter terminal was coupled to the power meter and the EUT was placed into test mode via internal software. All subsequent tests were performed using the same tune-up procedures.

Frequency (MHz)	Peak Power (dBm)
1850.2	28.60
1880.0	28.60
1909.8	28.50

### 4.1 SPURIOUS EMISSIONS AT ANTENNA TERMINAL - §2.1051

The EUT was tested in GPRS mode via internal software at a full rated power. An offset was entered into the power meter to correct for all losses of the attenuator and cable installed before the sensor input. The EUT was placed into test mode via internal software. The level of the carrier and the various conducted spurious frequencies were measured by means of a calibrated spectrum analyzer. The resolution bandwidth and video bandwidth were set to 1MHz. The spectrum was scanned from 10MHz to 20GHz at the low, medium, and high channels. The radio transmitter was operating at maximum output power. The antenna output terminal of the EUT was connected to the input of a 50Ω spectrum analyzer through a matched 30dB attenuator and coaxial cable. The reported emissions were below the specified limit of -13dBm. The test plots are shown in Appendix A.

### 5.1 RADIATED MEASUREMENT TEST SETUP

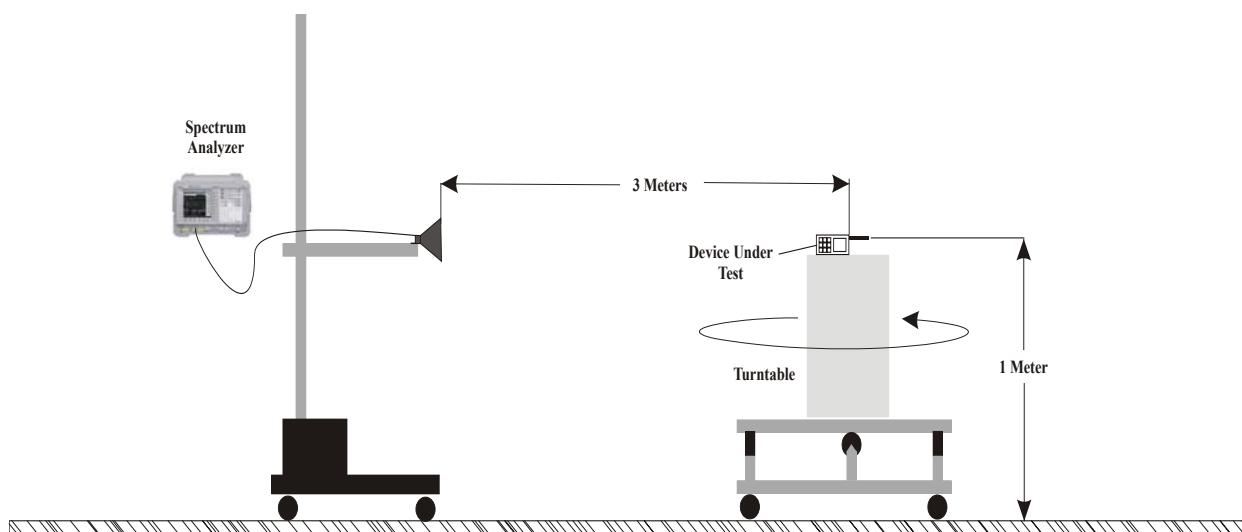


Figure 1. Radiated Measurement Test Setup Diagram

Test Report S/N:	042503-367HDW
Test Date(s):	May 13-15, 2003
Test Type:	FCC Part 24 EMC Measurements

## 6.1 EFFECTIVE ISOTROPIC RADIATED POWER OUTPUT - §24.232(b)

EIRP measurements were performed on a 3-meter open area test site using the Signal Substitution Method in accordance with ANSI TIA/EIA-603-A-2001. The EUT was placed on a turntable 3-meters from the receive antenna and tested in GPRS mode via internal software at a full rated power. The field of maximum intensity was found by rotating the EUT approximately 360 degrees and changing the height of the receive antenna from 1 to 4 meters. Once a peak was found the spectrum analyzer was set to peak hold and the value of the emission was extracted. The field strength was recorded for each channel being tested, and for both EUT antenna polarizations and modes. A standard gain horn antenna was substituted in place of the EUT. The antenna was fed through a directional coupler and the power at the coupler port was monitored. A signal generator and power amplifier controlled the antenna, and the input level of the antenna was adjusted to the same field strength level as the EUT. The feed point for the antenna was then connected to a calibrated power meter and the power adjusted to read the same as the coupler port previously recorded, this is to account for any mismatch in impedance, which may occur at the horn antenna. The conducted power at the antenna feed point was recorded. The forward conducted power for the horn antenna was then determined and the EIRP level was determined by adding the horn forward conducted power and the antenna gain in dB.

Freq. Tuned	EUT Conducted Power	Maximum Field Strength of EUT	Antenna Polariz.	Horn Gain	Horn Forward Conducted Power	EIRP of EUT	
MHz	dBm	dBm	H / V	dBi	dBm	dBm	Watts
1850.20	28.60	-11.61	H	6.67	19.42	26.09	0.406
1880.00	28.60	-12.22	H	6.68	19.28	25.96	0.394
1909.80	28.50	-12.56	H	6.69	19.38	26.07	0.405
1850.20	28.60	-15.23	V	6.67	16.99	23.66	0.232
1880.00	28.60	-14.86	V	6.68	17.96	24.64	0.291
1909.80	28.50	-15.26	V	6.69	17.88	24.57	0.286

Test Report S/N:	042503-367HDW
Test Date(s):	May 13-15, 2003
Test Type:	FCC Part 24 EMC Measurements

## 7.1 FIELD STRENGTH OF SPURIOUS RADIATION - §2.1053

Radiated and harmonic emissions were measured on a 3-meter open area test site using the Signal Substitution Method in accordance with ANSI TIA/EIA-603-A-2001. The EUT was tested in GPRS mode via internal software at a full rated power. The EUT was placed on the turntable with the transmitter transmitting into a non-radiating load. A receiving antenna located 3 meters from the turntable received any signal radiated from the transmitter and its operating accessories. The receiving antenna was varied in height from 1 to 4 meters and the polarization was varied (horizontal and vertical) to determine the worst-case emission level. A standard gain horn antenna was substituted in place of the EUT. A modulated signal was fed through a directional coupler to the antenna and the power at the coupler port was monitored. A signal generator and power amplifier controlled the antenna, and the input level of the antenna was adjusted to the same field strength level as the EUT. The antenna feed point was then connected to a calibrated power meter and the power was adjusted to read the same power at the coupler port previously recorded, to account for any mismatch in impedance which may occur at the horn antenna. The conducted power at the antenna feed point was then recorded. The forward conducted power for the horn antenna was determined by measuring the power at the horn antenna feed point and reproducing the coupler power previously measured. The EIRP level was determined by adding the horn forward conducted power and the horn antenna gain. All spurious emissions from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier were investigated. The test data is shown on pages 7-9.

**Operating Frequency (MHz):** 1850.20  
**Channel:** 512 (Low)  
**EUT Conducted Pwr. (dBm):** 28.60  
**Measured EIRP (dBm):** 26.09  
**Modulation:** GMSK  
**Distance:** 3 Meters  
**Limit:**  $43 + 10 \log (W) = 39.08 \text{ dBc}$

Frequency	Field Strength of Spurious Radiation	Horn Forward Conducted Power	Standard Gain Horn Antenna Gain	POL	EIRP	ERP	dBc
MHz	dBm	dBm	dBi	H/V	dBm	dBm	
3700.40	-92.64	-59.75	6.6	H	-53.15	-55.29	81.38
5550.60	-91.14	-53.34	7.8	H	-45.54	-47.68	73.77
7400.80	-89.94	-53.36	7.8	H	-45.56	-47.70	73.79
9251.00	-89.52	-51.50	7.6	H	-43.90	-46.04	72.13
11101.20	-90.84	-54.48	8.5	H	-45.98	-48.12	74.21
12951.40	-89.77	-51.89	8.8	H	-43.09	-45.23	71.32
14801.60	-85.87	-47.99	9.6	H	-38.39	-40.53	66.62
16651.80	-87.06	-49.23	9.0	H	-40.23	-42.37	68.46
18502.00	-87.05	-50.84	9.3	H	-41.54	-43.68	69.77

Test Report S/N:	042503-367HDW
Test Date(s):	May 13-15, 2003
Test Type:	FCC Part 24 EMC Measurements

## FIELD STRENGTH OF SPURIOUS RADIATION - §2.1053 (Cont.)

**Operating Frequency (MHz):** 1880.00  
**Channel:** 661 (Mid)  
**EUT Conducted Pwr. (dBm):** 28.60  
**Measured EIRP (dBm):** 25.96  
**Modulation:** GMSK  
**Distance:** 3 Meters  
**Limit:**  $43 + 10 \log (W) = 38.95 \text{ dBc}$

Frequency	Field Strength of Spurious Radiation	Horn Forward Conducted Power	Standard Gain Horn Antenna Gain	POL	EIRP	ERP	dBc
	MHz	dBm	dBm	dBi	H/V	dBm	
3760.00	-92.55	-59.66	6.6	H	-53.06	-55.20	81.16
5640.00	-92.81	-55.01	7.8	H	-47.21	-49.35	75.31
7520.00	-89.27	-52.69	7.8	H	-44.89	-47.03	72.99
9400.00	-90.69	-52.67	7.6	H	-45.07	-47.21	73.17
11280.00	-90.55	-54.19	8.5	H	-45.69	-47.83	73.79
13160.00	-89.66	-51.78	8.8	H	-42.98	-45.12	71.08
15040.00	-87.22	-49.34	9.6	H	-39.74	-41.88	67.84
16920.00	-87.30	-49.47	9.0	H	-40.47	-42.61	68.57
18800.00	-88.35	-52.14	9.3	H	-42.84	-44.98	70.94

**Operating Frequency (MHz):** 1909.80  
**Channel:** 810 (High)  
**EUT Conducted Pwr. (dBm):** 28.50  
**Measured EIRP (dBm):** 26.07  
**Modulation:** GMSK  
**Distance:** 3 Meters  
**Limit:**  $43 + 10 \log (W) = 39.07 \text{ dBc}$

Frequency	Field Strength of Spurious Radiation	Horn Forward Conducted Power	Standard Gain Horn Antenna Gain	POL	EIRP	ERP	dBc
	MHz	dBm	dBm	dBi	H/V	dBm	
3819.60	-92.67	-59.78	6.6	H	-53.18	-55.32	81.39
5729.40	-92.00	-54.20	7.8	H	-46.40	-48.54	74.61
7639.20	-88.18	-51.60	7.8	H	-43.80	-45.94	72.01
9549.00	-90.67	-52.65	7.6	H	-45.05	-47.19	73.26
11458.80	-90.15	-53.79	8.5	H	-45.29	-47.43	73.50
13368.60	-86.58	-48.70	8.8	H	-39.90	-42.04	68.11
15278.40	-87.52	-49.64	9.6	H	-40.04	-42.18	68.25
17188.20	-87.75	-49.92	9.0	H	-40.92	-43.06	69.13
19098.00	-88.57	-52.36	9.3	H	-43.06	-45.20	71.27

Test Report S/N:	042503-367HDW
Test Date(s):	May 13-15, 2003
Test Type:	FCC Part 24 EMC Measurements

## 8.1 OCCUPIED BANDWIDTH - §2.1049, §24.238

The EUT was placed into test mode via internal software at a full rated power. The EUT was connected to the input of a  $50\Omega$  spectrum analyzer through a matched 30dB attenuator. For PCS and GPRS mode the resolution bandwidth and video bandwidth were set to 3kHz. The EUT was operating at maximum output power. Data were taken for low, mid and high frequencies. The table below lists the  $-26\text{ dBc}$  occupied bandwidths. Spectrum analyzer plots for 99% power and  $-26\text{ dBc}$  occupied bandwidths are shown in Appendix A.

Frequency	-26 dBc Bandwidth
1850.2 MHz	295
1880.0 MHz	295
1909.8 MHz	292

Specified Limits:

### §24.238

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (d) The measurements of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.
- (e) When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.

## 9.1 FREQUENCY STABILITY / TEMPERATURE VARIATION - \$2.1055, \$24.235

The minimum frequency stability shall be  $\pm 150\text{Hz}$  referenced to a received carrier frequency. This meets the requirement for operational accuracy of 0.00005% for digital mode. An HP 53181A Frequency Counter was used to measure the error in the fundamental frequency. The transmitter was set to maximum power at the center frequency of the band. The EUT was tested inside the temperature chamber.

The frequency stability of the transmitter was measured by:

1. Temperature: The temperature was varied from  $-30^\circ\text{C}$  to  $+60^\circ\text{C}$  at intervals no more than  $10^\circ\text{C}$  throughout the temperature range using an environmental chamber. A period of time sufficient to stabilize all of the components in the equipment was allowed prior to each frequency measurement.
2. Primary Supply Voltage: The primary supply voltage was set at the specified nominal rating and reduced to the battery operating endpoint specified by the manufacturer. The voltage was measured at the terminals of the power supply or at the input to the cable normally provided with the equipment.

Test Date: 5/15/2003


Carrier Frequency (GHz): 1.88

Channel: 661

Mode: GPRS

Deviation Limit (PPM): 0.1

Temperature ( $^\circ\text{C}$ )	Voltage (%)	Power (VDC)	Carrier Frequency Deviation		Specification	
			(Hz)	(PPM)	Lower Limit (PPM)	Upper Limit (PPM)
+20 (Ref)	100	7.4	-2.51	-0.001	0.1	-0.1
-30	100	7.4	-6.81	-0.004	0.1	-0.1
-20	100	7.4	3.05	0.002	0.1	-0.1
-10	100	7.4	-7.18	-0.004	0.1	-0.1
0	100	7.4	1.45	0.001	0.1	-0.1
+10	100	7.4	-8.34	-0.004	0.1	-0.1
+20	100	7.4	1.29	0.001	0.1	-0.1
+30	100	7.4	-4.41	-0.002	0.1	-0.1
+40	100	7.4	2.38	0.001	0.1	-0.1
+50	100	7.4	4.72	0.003	0.1	-0.1
+60	100	7.4	-6.42	-0.003	0.1	-0.1
+20	Endpoint	6.1	3.79	0.002	0.1	-0.1

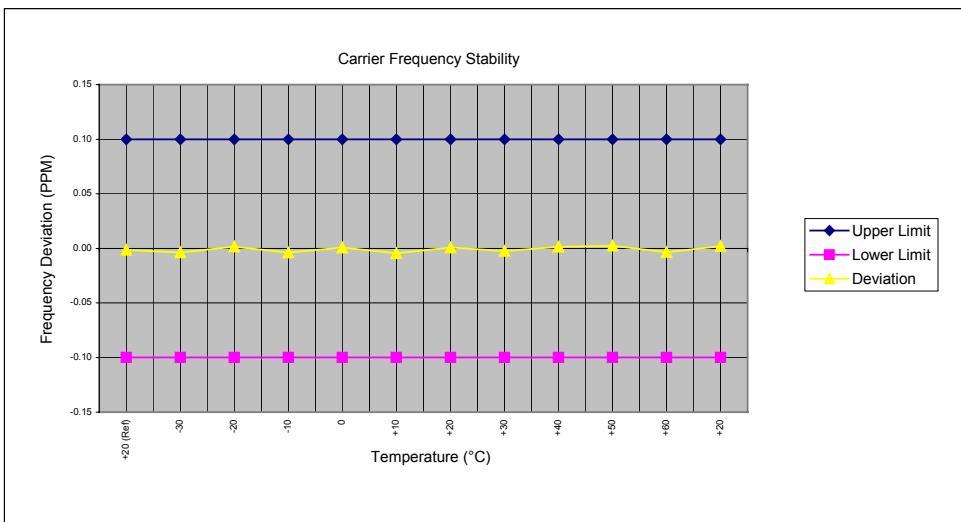

### Time Period and Procedure:

1. The carrier frequency of the transmitter was measured at room temperature ( $25^\circ\text{C}$  to  $27^\circ\text{C}$  to provide a reference).
2. The equipment was subjected to an overnight "soak" at  $-30^\circ\text{C}$  without any power applied.
3. After the overnight "soak" at  $-30^\circ\text{C}$ , the measurement of the carrier frequency of the transmitter was made within a three-minute interval after applying power to the transmitter.
4. Frequency measurements were made at  $10^\circ\text{C}$  intervals up to  $+60^\circ\text{C}$ , then back to room temperature. A minimum period of one hour was provided to allow stabilization of the equipment at each temperature level.

Test Report S/N:	042503-367HDW
Test Date(s):	May 13-15, 2003
Test Type:	FCC Part 24 EMC Measurements

## 10.1 TEST EQUIPMENT LIST

Equipment Type	Model	Serial No.	Calibration Due Date
HP Signal Generator	8648D (9kHz-4.0GHz)	3847A00611	Feb 2004
Rohde & Schwarz Signal Generator	SMR40 (10MHz-40GHz)	835537/022	Nov 2003
Gigatronics Power Meter	8652A	1835272	Feb 2004
Gigatronics Power Sensor	80701A (0.05-18GHz)	1833535	Feb 2004
Gigatronics Power Sensor	80701A (0.05-18GHz)	1833542	Feb 2004
Amplifier Research Power Amp.	5S1G4 (5W, 800MHz-4.2GHz)	26235	N/A
Microwave System Amplifier	HP 83017A (0.5-26.5GHz)	3123A00587	N/A
Network Analyzer	HP 8753E (30kHz-3GHz)	US38433013	Feb 2004
Audio Analyzer	HP 8903B	3729A18691	Nov 2003
Modulation Analyzer	HP 8901A	3749A07154	July 2003
Frequency Counter	HP 53181A (3GHz)	3736A05175	May 2004
DC Power Supply	HP E3611A	KR83015294	N/A
Multi-Device Controller	EMCO 2090	9912-1484	N/A
Mini Mast	EMCO 2075	0001-2277	N/A
Turntable	EMCO 2080-1.2/1.5	0002-1002	N/A
Double Ridged Horn Antenna	ETS 3115 (1-18GHz)	6267	Oct. 2003
Double Ridged Horn Antenna	ETS 3115 (1-18GHz)	6276	Oct. 2003
Horn Antenna	Chase BBHA 9120-A (0.7-4.8GHz)	9120A-239	Sept 2003
Horn Antenna	Chase BBHA 9120-A (0.7-4.8GHz)	9120A-240	Sept 2003
Roberts Dipoles	Compliance Design (2 sets) 3121C		June 2003
Spectrum Analyzer	HP 8594E	3543A02721	Feb 2004
Spectrum Analyzer	HP E4408B	US39240170	Nov 2003
Shielded Screen Room	Lindgren R.F. 18W-2/2-0	16297	N/A
Environmental Chamber	ESPEC ECT-2 (Temperature/Humidity)	0510154-B	Feb 2004

Test Report S/N:	042503-367HDW
Test Date(s):	May 13-15, 2003
Test Type:	FCC Part 24 EMC Measurements

## 11.1 CONCLUSION


The data in this measurement report shows that the DAP TECHNOLOGIES LTD. Model: CE8640/LS FCC ID: HDWAEA306 Rugged Handheld PC with Sierra Wireless AirCard 750 PCS GPRS PCMCIA Modem Card complies with the requirements of FCC Rule Parts §24(E) and §2.

Test Report S/N:	042503-367HDW
Test Date(s):	May 13-15, 2003
Test Type:	FCC Part 24 EMC Measurements

## APPENDIX A - TEST PLOTS

**hp** 14:19:28 May 13, 2003  
DAP FCC ID: HDWAE A306 COND SPURS CH 512  
Ref 28.6 dBm Atten 10 dB

Mkr1 2.338 GHz  
-26.4 dBm

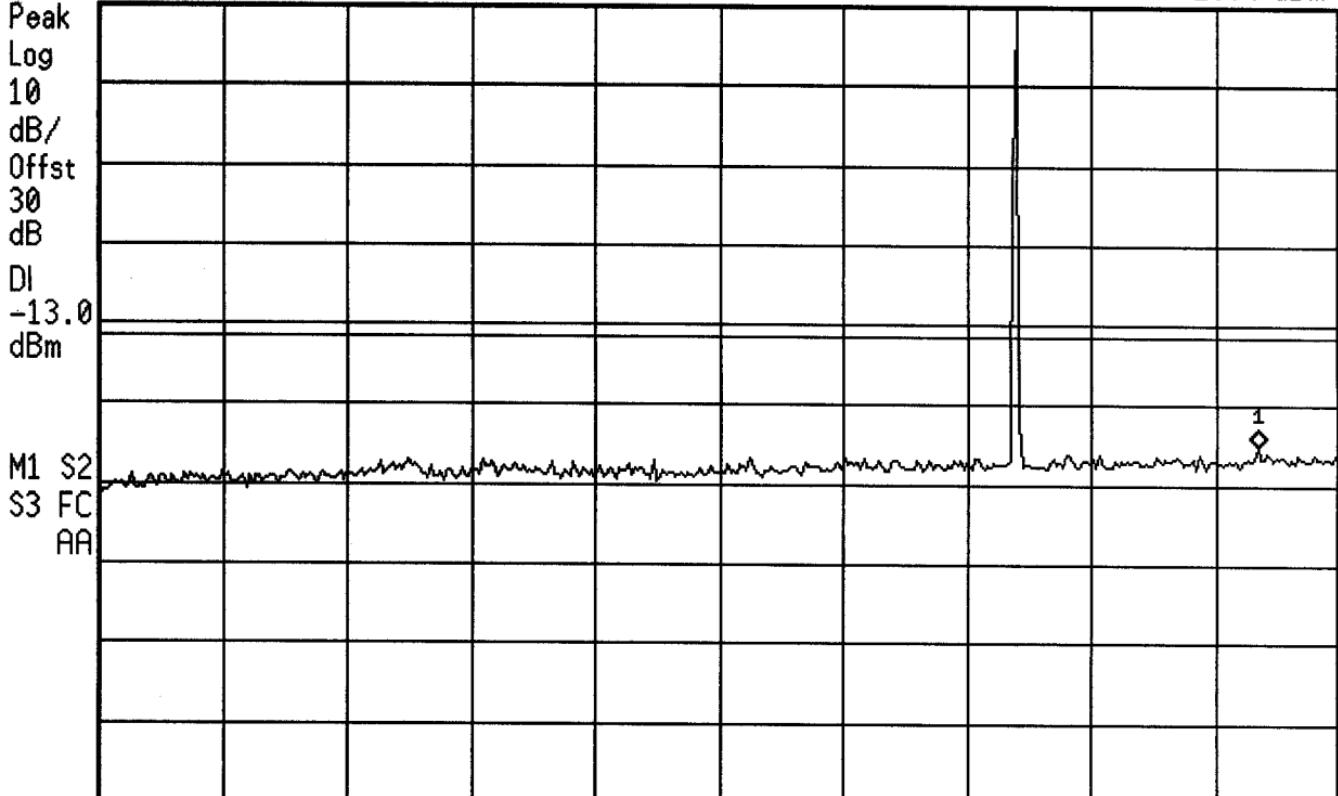


Start 10 MHz  
#Res BW 1 MHz

VBW 1 MHz

Stop 2.5 GHz  
Sweep 6.225 ms

**hp**

14:20:46 May 13, 2003

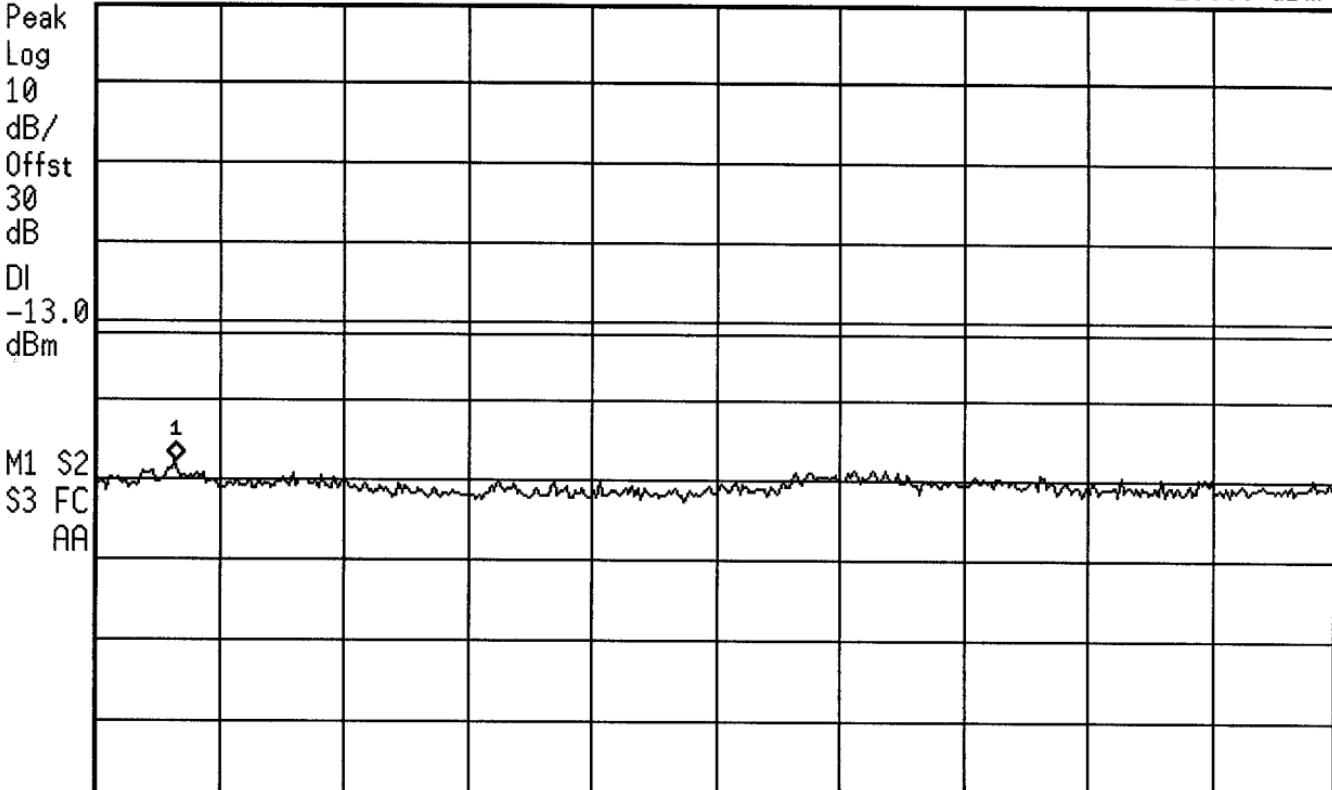
DAP FCC ID: HDWAEA306 COND SPURS CH 512  
Ref 28.6 dBm Atten 10 dBMkr1 2.988 GHz  
-28.99 dBmStart 2.5 GHz  
#Res BW 1 MHz

VBW 1 MHz

Stop 10 GHz  
Sweep 18.75 ms

**hp** 14:21:56 May 13, 2003  
DAP FCC ID: HDWAE A306 COND SPURS CH 512  
Ref 28.6 dBm Atten 10 dB

Mkr1 14.20 GHz  
-27.48 dBm

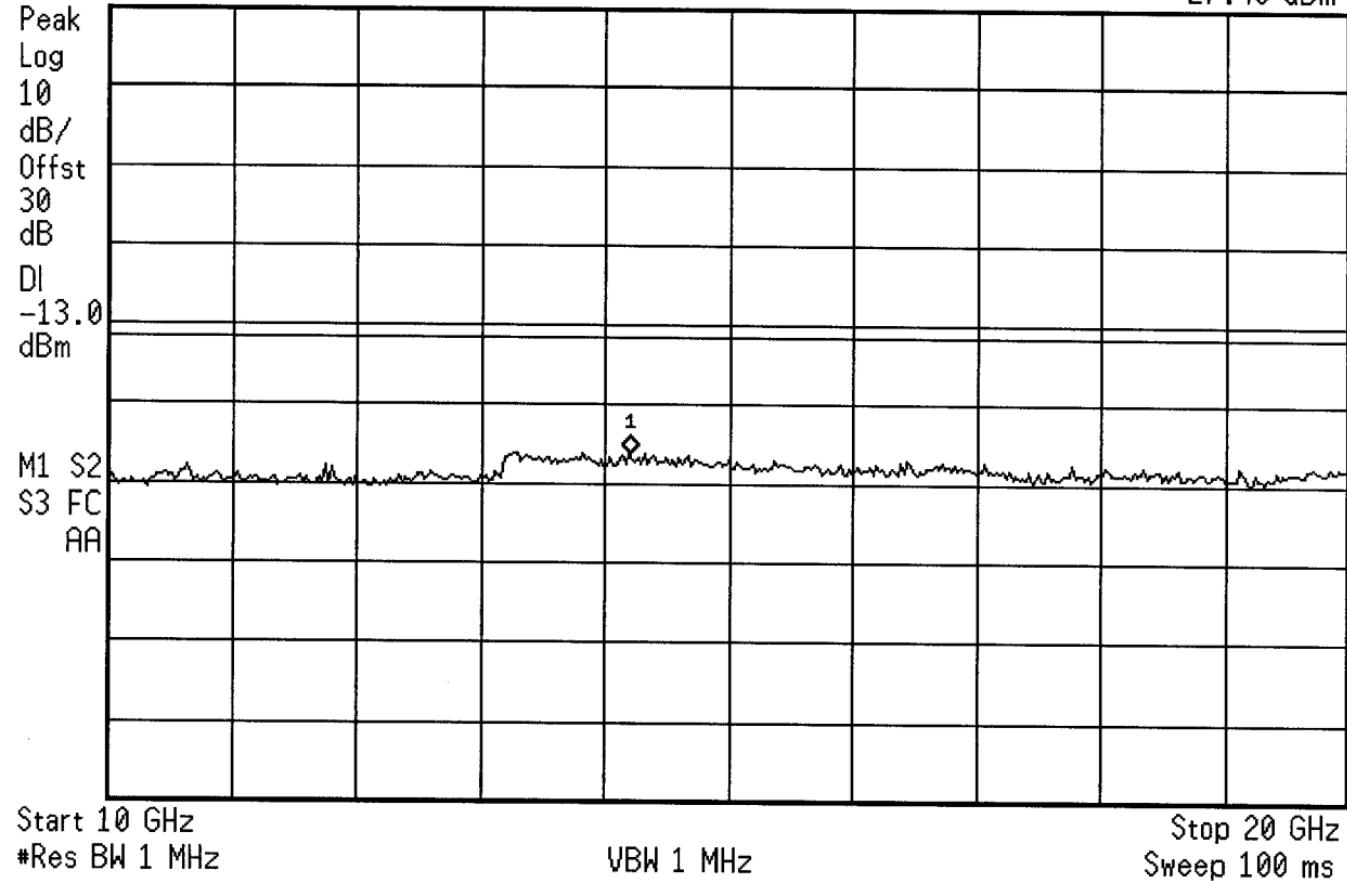

**hp**

14:23:24 May 13, 2003

DAP FCC ID: HDWAE A306 COND SPURS CH 661

Ref 28.6 dBm

Atten 10 dB

Mkr1 2.344 GHz  
-26.59 dBm

Peak

Log

10

dB/

Offst

30

dB

DI

-13.0

dBm

M1 S2

S3 FC

AA

Start 10 MHz


#Res BW 1 MHz

VBW 1 MHz

Stop 2.5 GHz

Sweep 6.225 ms

1

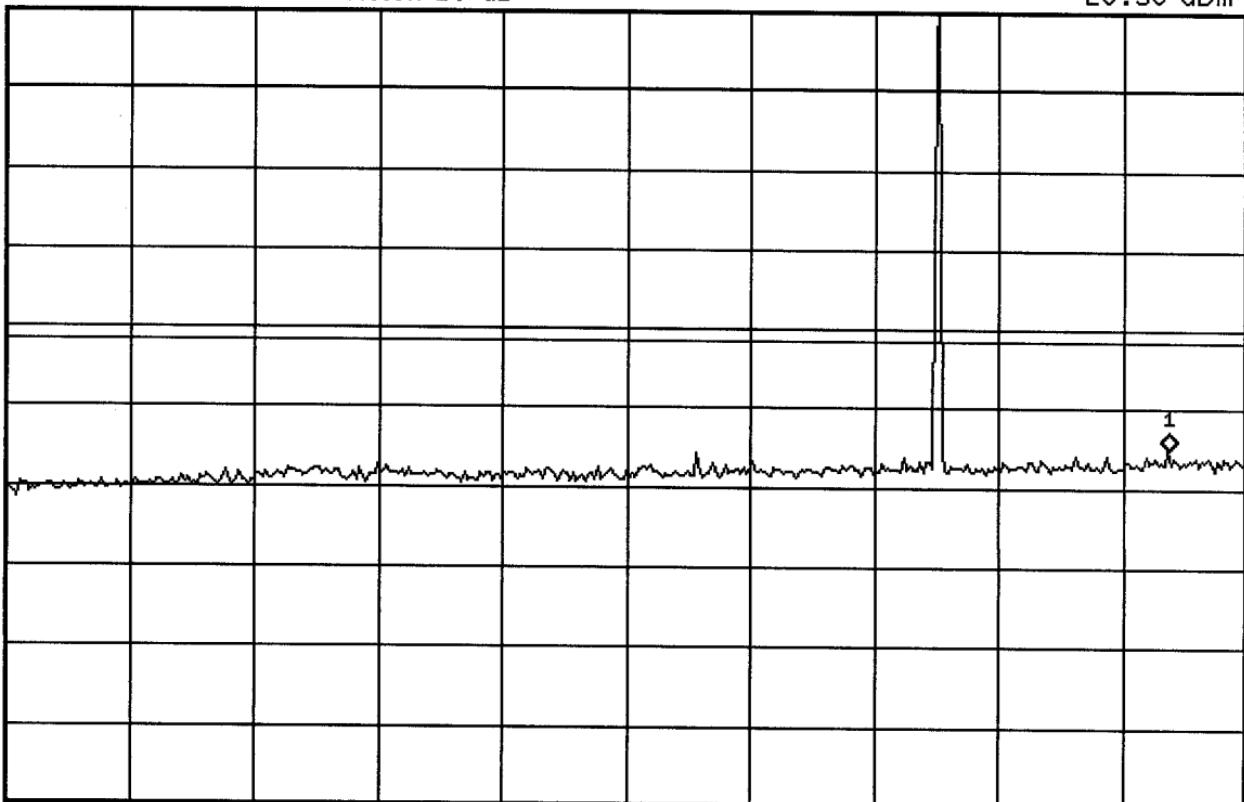

**hp**

14:24:18 May 13, 2003

DAP FCC ID: HDWAE A306 COND SPURS CH 661

Ref 28.6 dBm

Atten 10 dB

Mkr1 2.819 GHz  
-28.89 dBm

Peak

Log

10

dB/

Offst

30

dB

DI

-13.0

dBm

M1 S2

1

S3 FC

AA

Start 2.5 GHz

\*Res BW 1 MHz

VBW 1 MHz

Stop 10 GHz

Sweep 18.75 ms

**hp**

14:24:52 May 13, 2003

DAP FCC ID: HDWAE A306 COND SPURS CH 661

Ref 28.6 dBm

Atten 10 dB

Mkr1 14.00 GHz

-26.57 dBm

Peak

Log

10

dB/

Offst

30

dB

DI


-13.0

dBm

M1 S2

S3 FC

AA

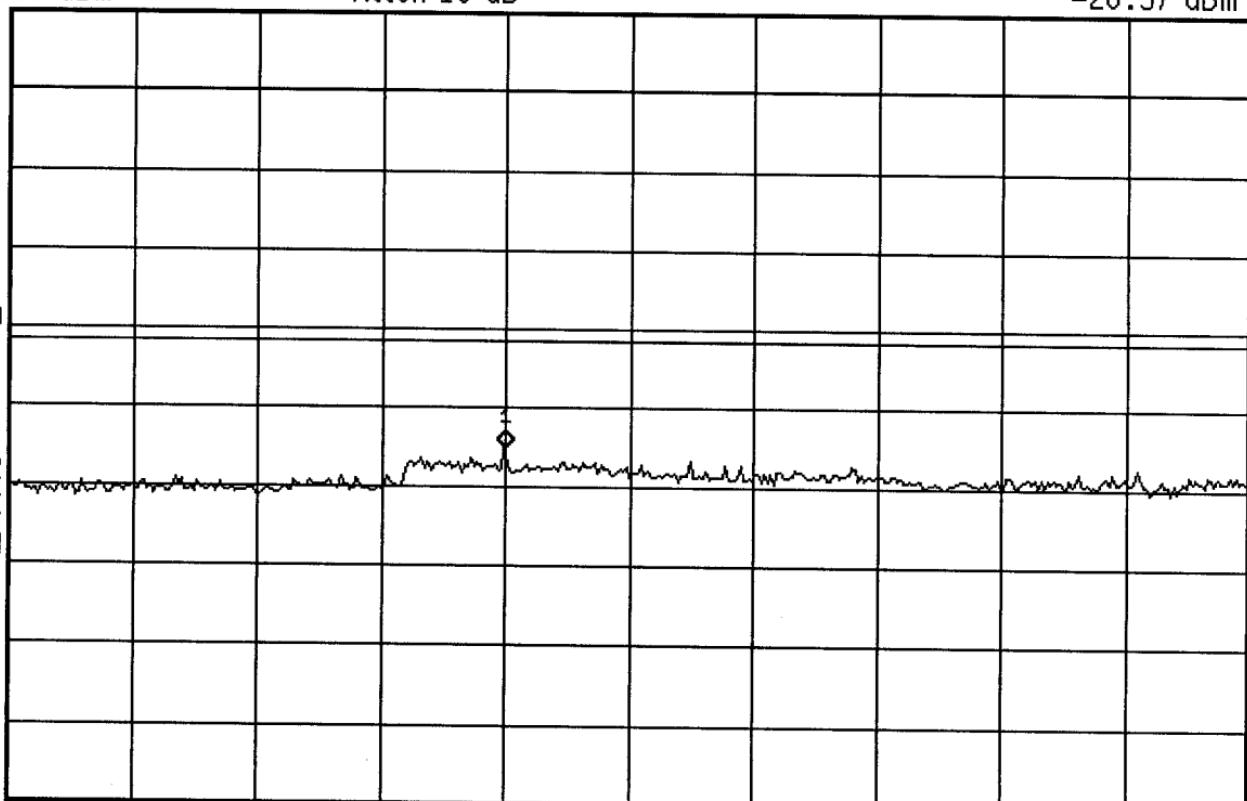

Start 10 GHz

#Res BW 1 MHz


VBW 1 MHz

Stop 20 GHz

Sweep 100 ms

**hp** 14:27:16 May 13, 2003  
DAP FCC ID: HDWAEA306 COND SPURS CH 810  
Ref 28.5 dBm Atten 10 dB

Mkr1 2.158 GHz  
-26.82 dBm

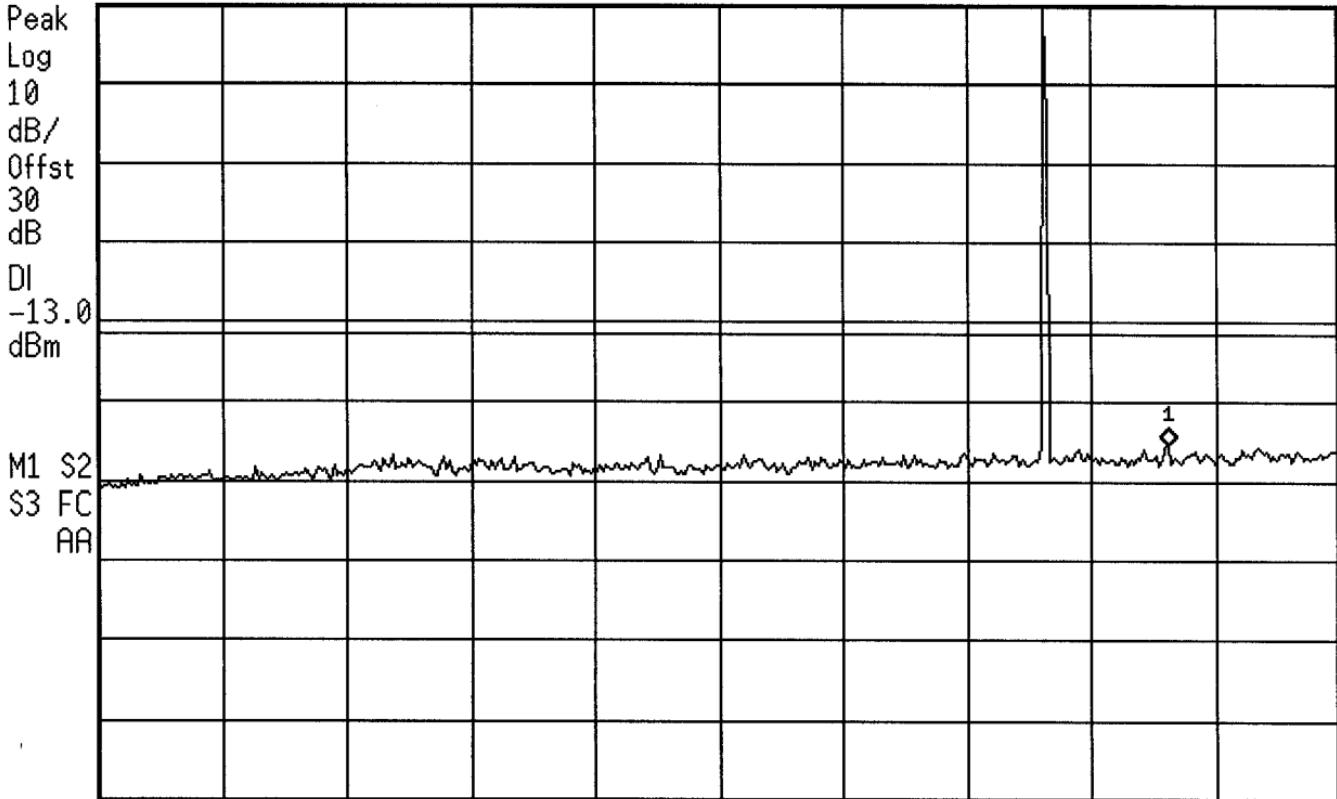

Start 10 MHz  
\*Res BW 1 MHz

VBW 1 MHz

Stop 2.5 GHz  
Sweep 6.225 ms

**hp**

14:38:30 May 13, 2003

DAP FCC ID: HDWAE A306 COND SPURS CH 810  
Ref 28.5 dBm Atten 10 dBMkr1 2.988 GHz  
-28.93 dBm

Peak

Log

10

dB/

Offst

30

dB

DI


-13.0

dBm

M1 S2

S3 FC

AA

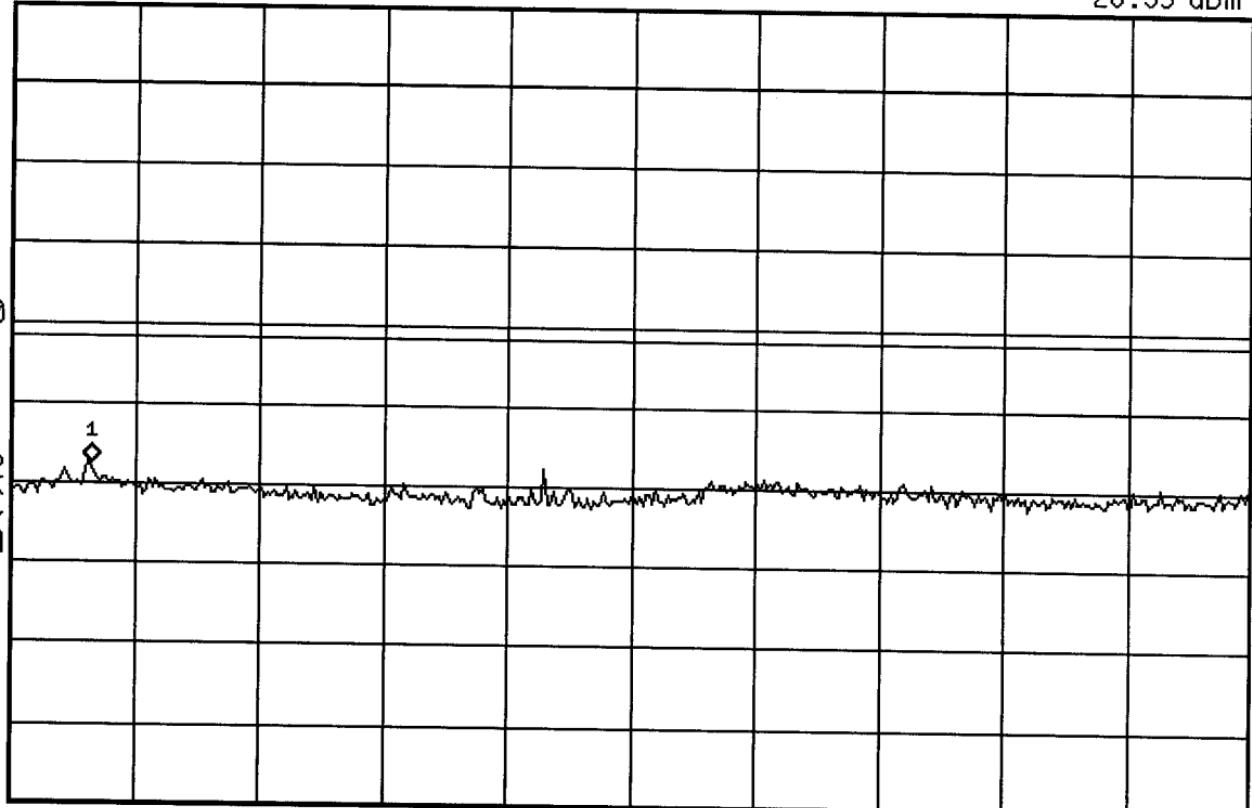Start 2.5 GHz  
#Res BW 1 MHz

VBW 1 MHz

Stop 10 GHz  
Sweep 18.75 ms

**hp**

14:39:22 May 13, 2003

DAP FCC ID: HDWAE A306 COND SPURS CH 810  
Ref 28.5 dBm Atten 10 dBMkr1 14.43 GHz  
-27.65 dBm

Peak

Log

10

dB/

Offst

30

dB

DI


-13.0

dBm

M1 S2

S3 FC

AA

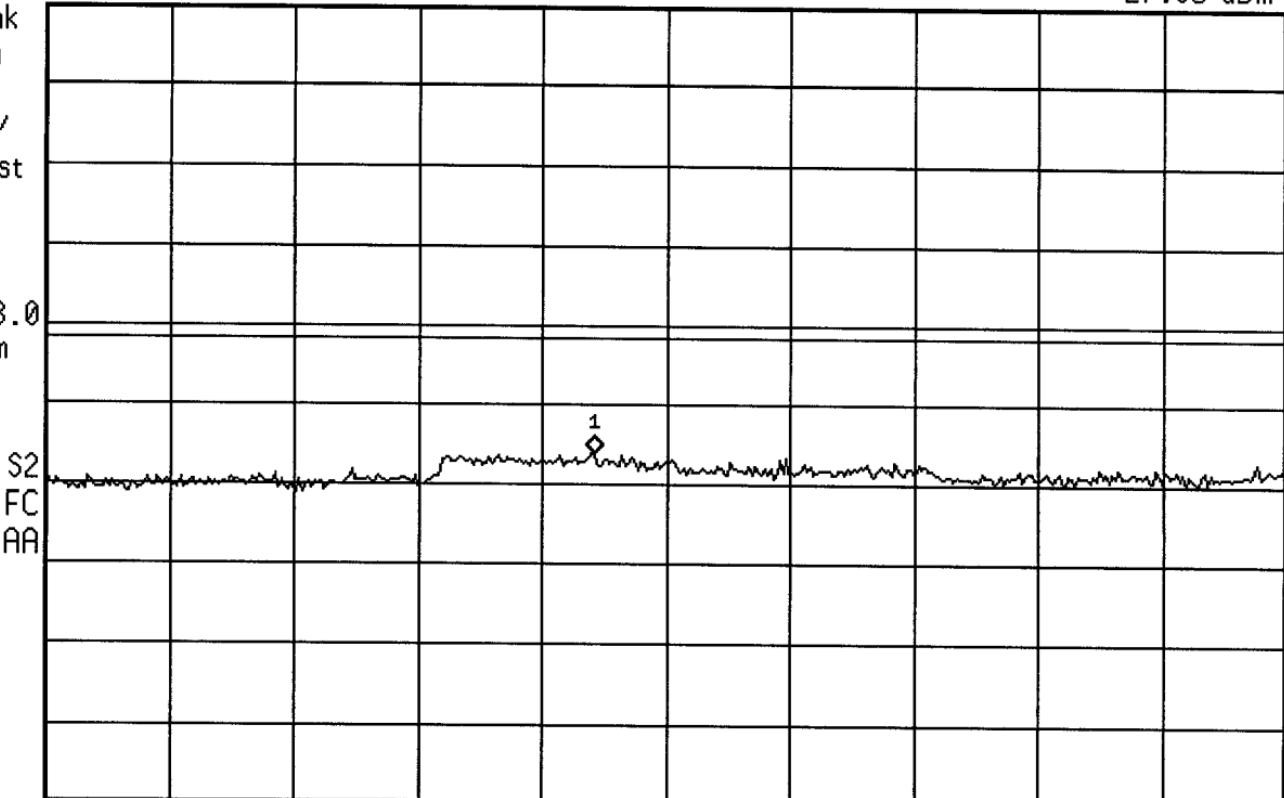Start 10 GHz  
#Res BW 1 MHz

VBW 1 MHz

Stop 20 GHz  
Sweep 100 ms



14:50:03 May 13, 2003

DAP FCC ID: HDWAE A306 RECEIVER SPURS

Ref -48.5 dBm

Atten 5 dB

Mkr1 1.93289 GHz  
-55.99 dBm

Peak

Log

10

dB/

Offst

30

dB

DI


-13.0

dBm

M1 S2

S3 FC

AA

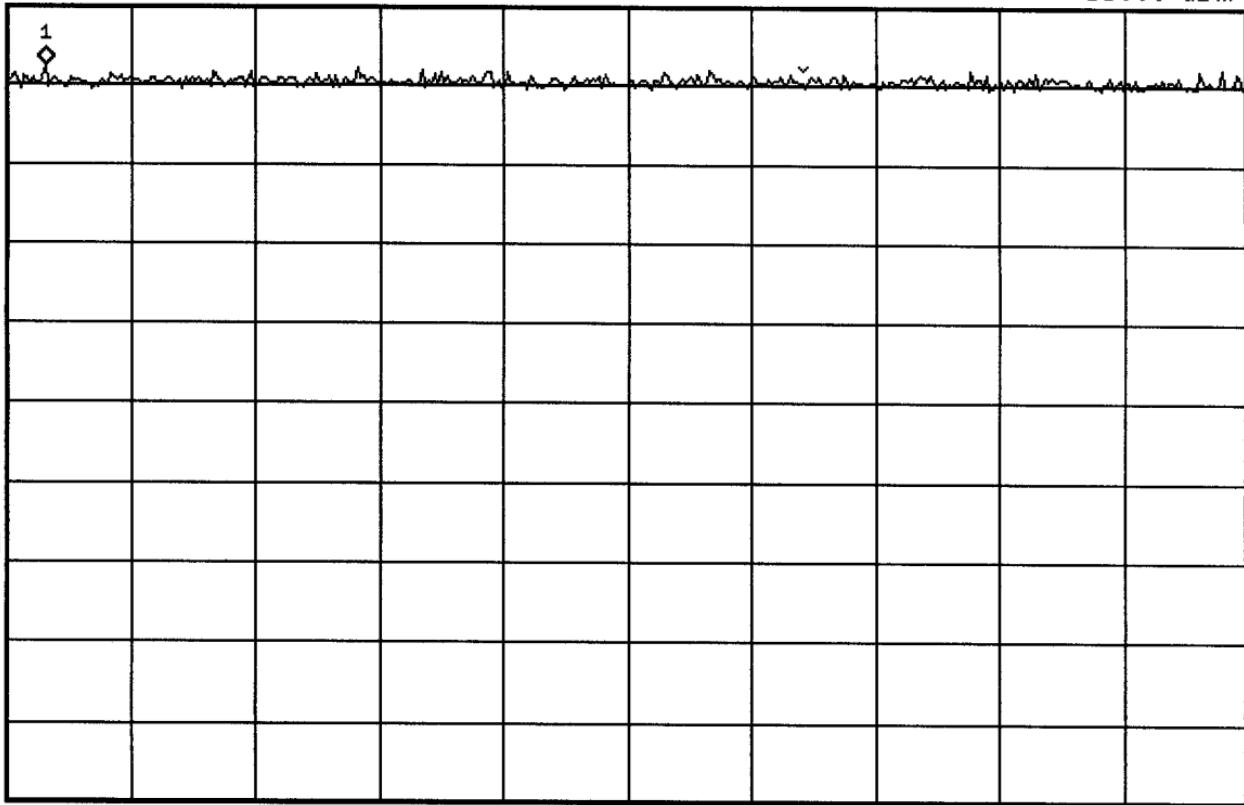Start 1.931 GHz  
#Res BW 30 kHz

VBW 30 kHz

Stop 1.989 GHz  
#Sweep 2 s



14:25:17 May 13, 2003

DAP FCC ID: HDWAEA306 PCS GPRS MODE CH 512  
Ref 28.6 dBm Atten 10 dB

(-26 dBc) bandwidth = 295 kHz

Peak

Log

10

dB/

0ffst

30

dB

DI


-13.0

dBm

W1 S2

S3 FC

AA

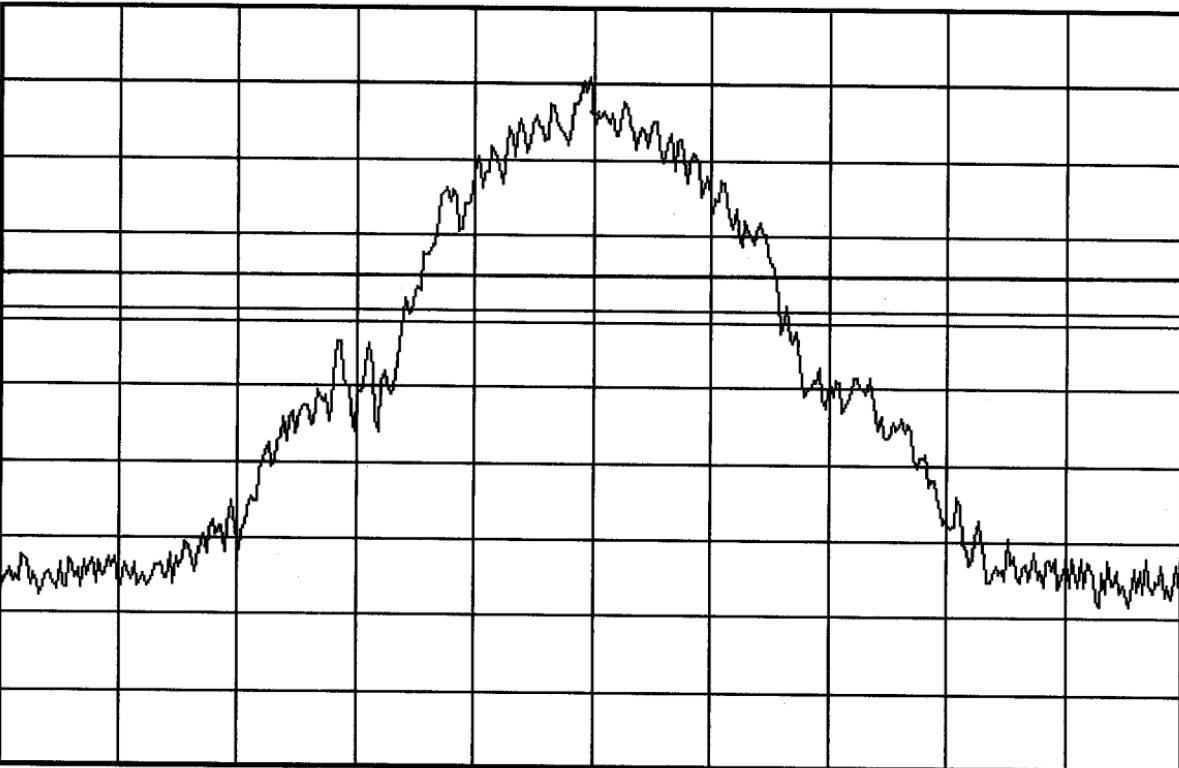

Center 1.85 GHz

#Res BW 3 kHz

#VBW 3 kHz

Span 1 MHz

#Sweep 2 s

**hp**

14:57:02 May 13, 2003

DAP FCC ID: HDWAEA306 PCS GPRS MODE CH 661

Ref 28.6 dBm

(-26 dBc) bandwidth = 295 kHz

Atten 10 dB

Peak

Log

10

dB/

0ffst

30

dB

DI


-13.0

dBm

W1 S2

S3 FS

AA

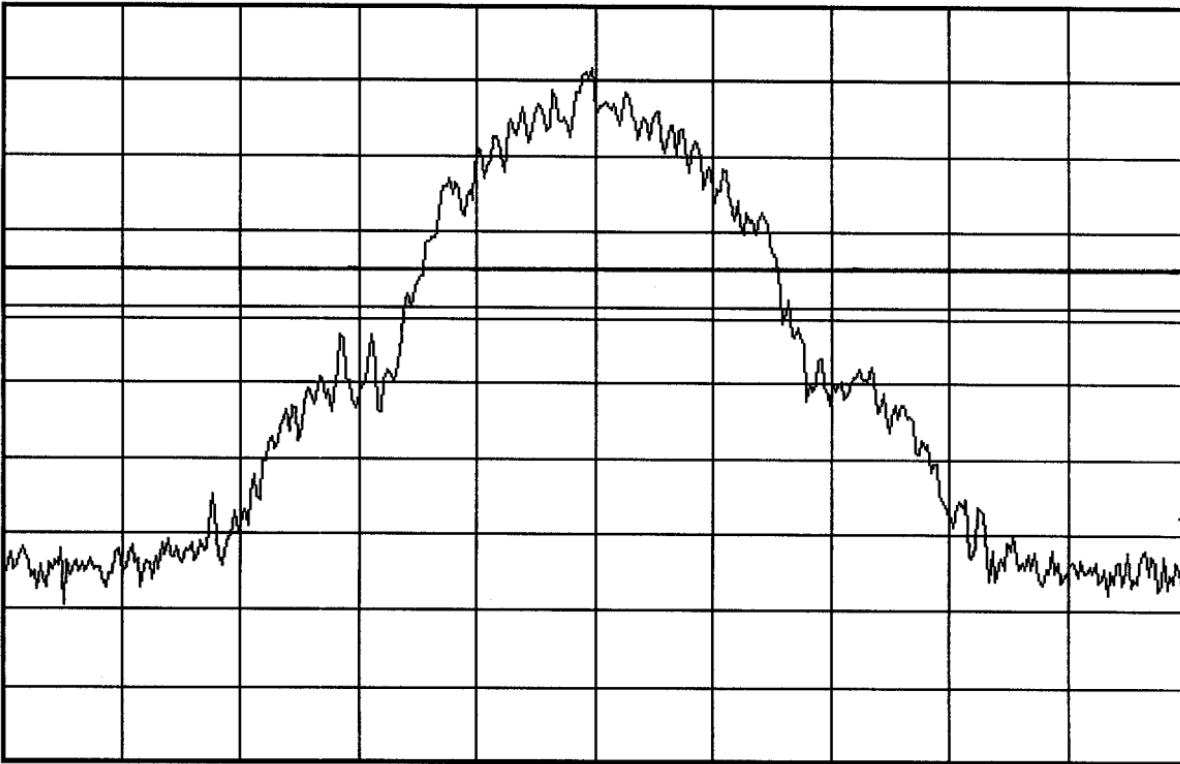

Center 1.88 GHz

#Res BW 3 kHz


VBW 3 kHz

Span 1 MHz

#Sweep 2 s


**hp** 15:01:13 May 13, 2003  
DAP FCC ID: HDWAE A306 PCS GPRS MODE CH 810  
Ref 28.5 dBm Atten 10 dB

(-26 dBc) bandwidth = 292 kHz

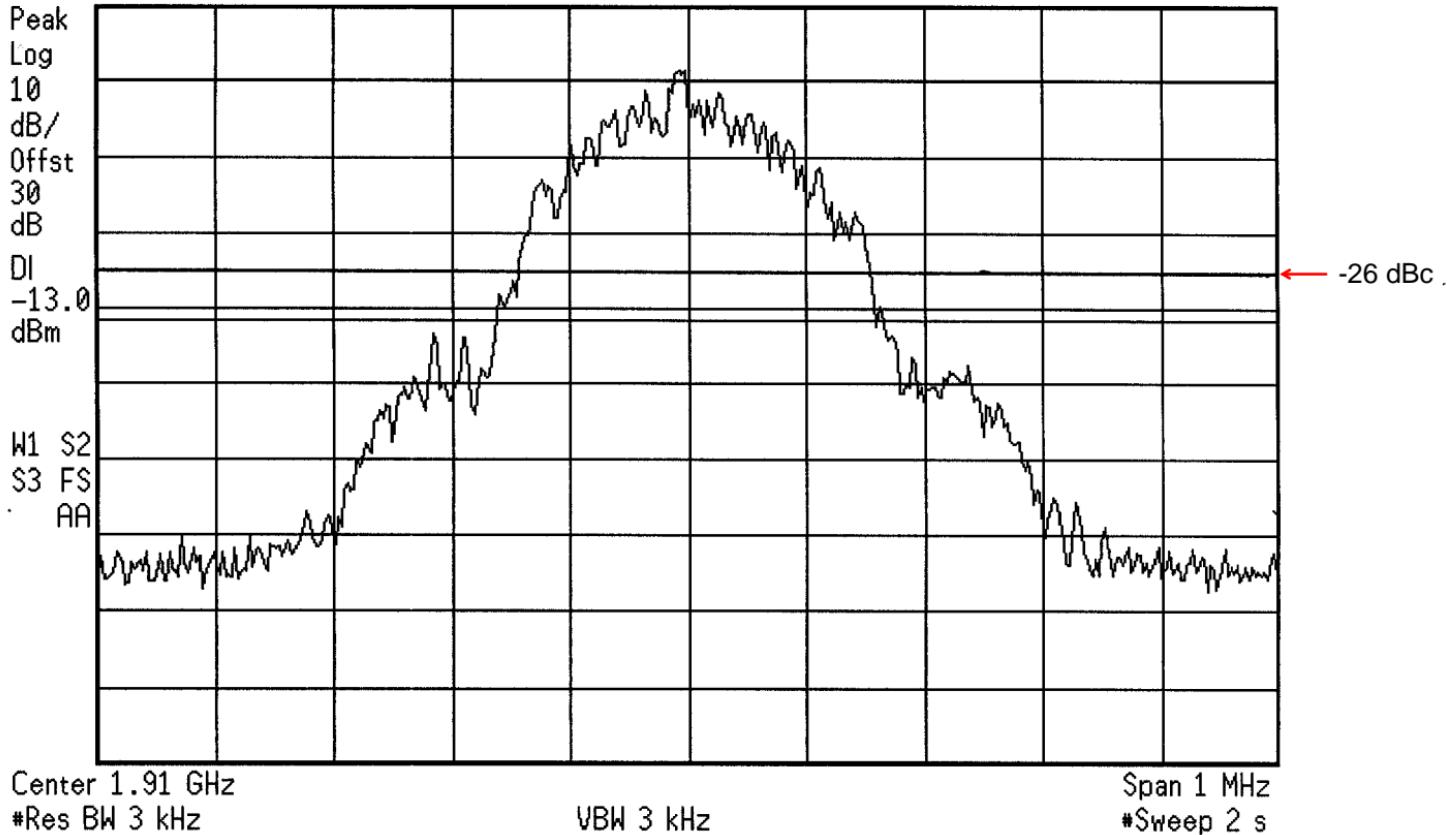

**hp** 15:07:56 May 13, 2003  
DAP FCC ID: HDWAEA306 OCCUPIED BANDWIDTH  
Ref 28.6 dBm Atten 10 dB

▲ Mkr1 250 kHz  
-3.439 dB

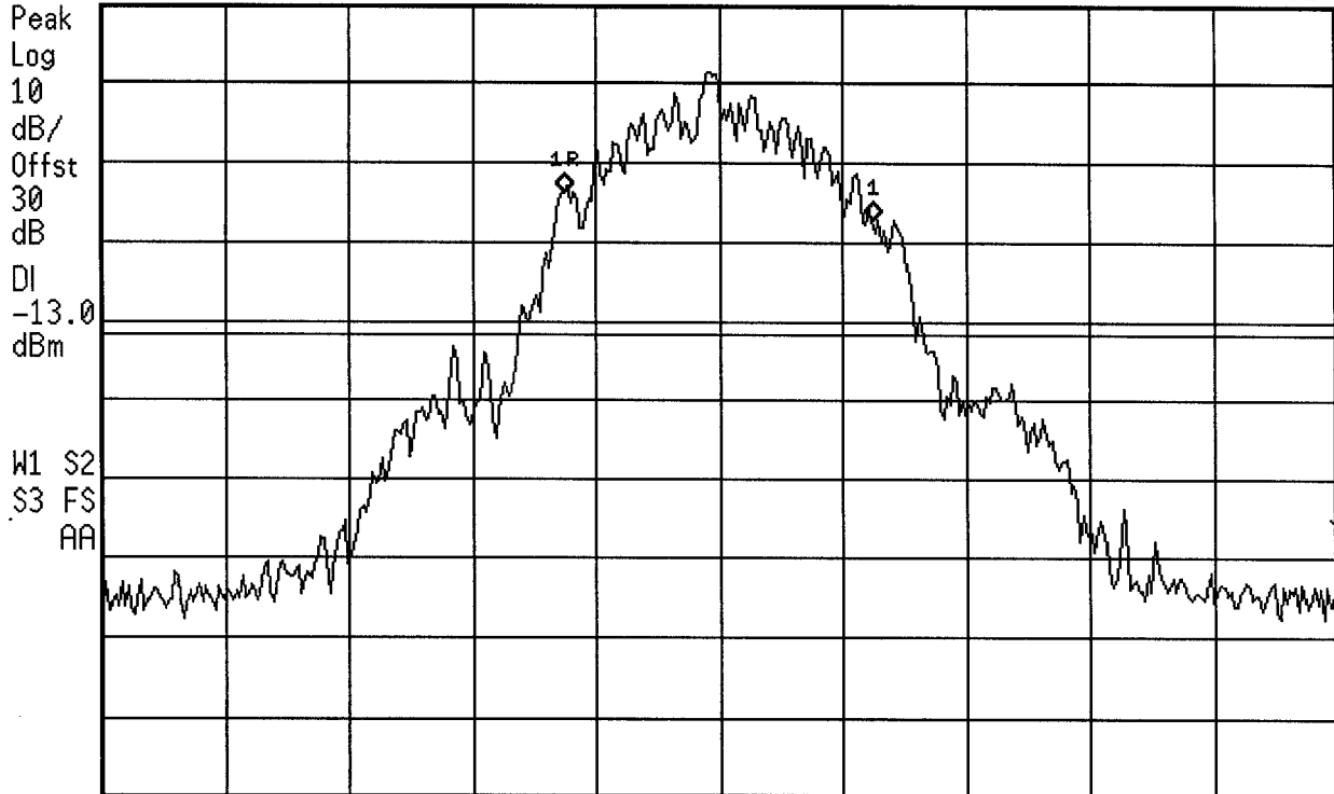

Center 1.88 GHz  
#Res BW 3 kHz

VBW 3 kHz

Span 1 MHz  
#Sweep 2 s



15:11:21 May 13, 2003

DAP FCC ID: HDWAE A306 BAND EDGE LOW CH

Ref 28.6 dBm

Atten 10 dB

Mkr1 1.850013 GHz  
-15.02 dBm

Peak

Log

10

dB/

Offset

30

dB

DI


-13.0

dBm

W1 S2

S3 FS

AA

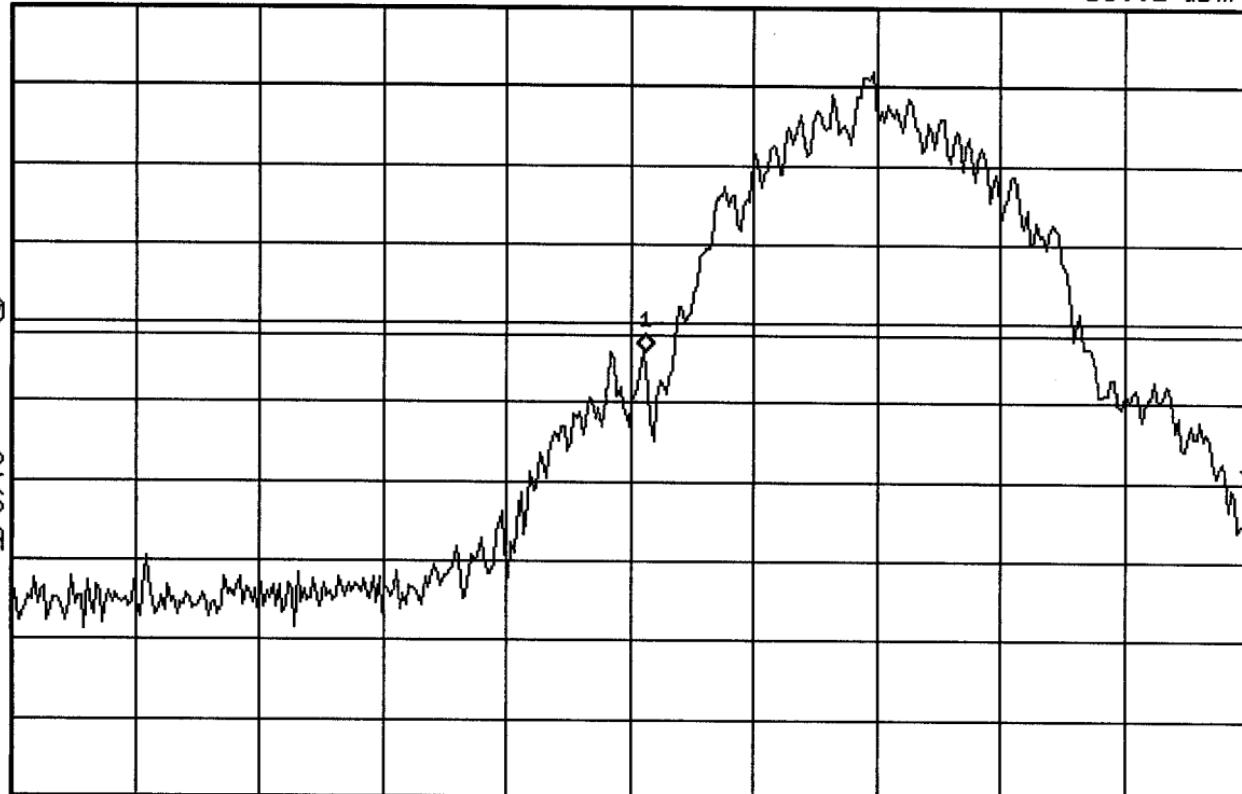

Center 1.85 GHz

#Res BW 3 kHz


VBW 3 kHz

Span 1 MHz

#Sweep 2 s

**hp** 15:13:47 May 13, 2003  
DAP FCC ID: HDWAEA306 BAND EDGE HIGH CH  
Ref 28.6 dBm Atten 10 dB

Mkr1 1.910038 GHz  
-19.56 dBm

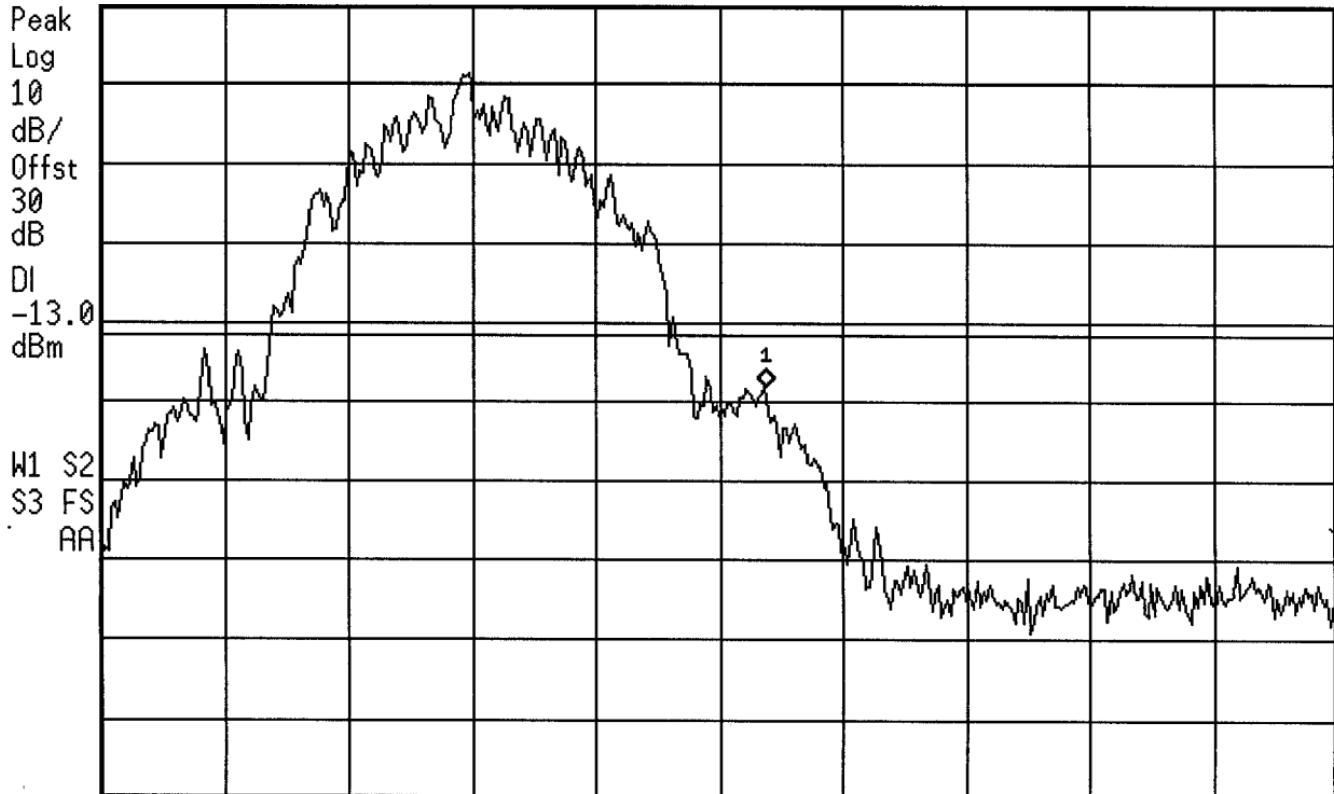

Center 1.91 GHz  
#Res BW 3 kHz

VBW 3 kHz

Span 1 MHz  
#Sweep 2 s

**[hp]** 10:03:40 May 13, 2003

DAP HDWAEA306 BLOCK A LOWER EDGE

Ref 28.6 dBm

Atten 10 dB

Mkr1 1.849985 GHz

-15.85 dBm

Peak

Log

10

dB/

Offst

31

dB

DI

-13.0


dBm

5

W1 S2

S3 FS

AA

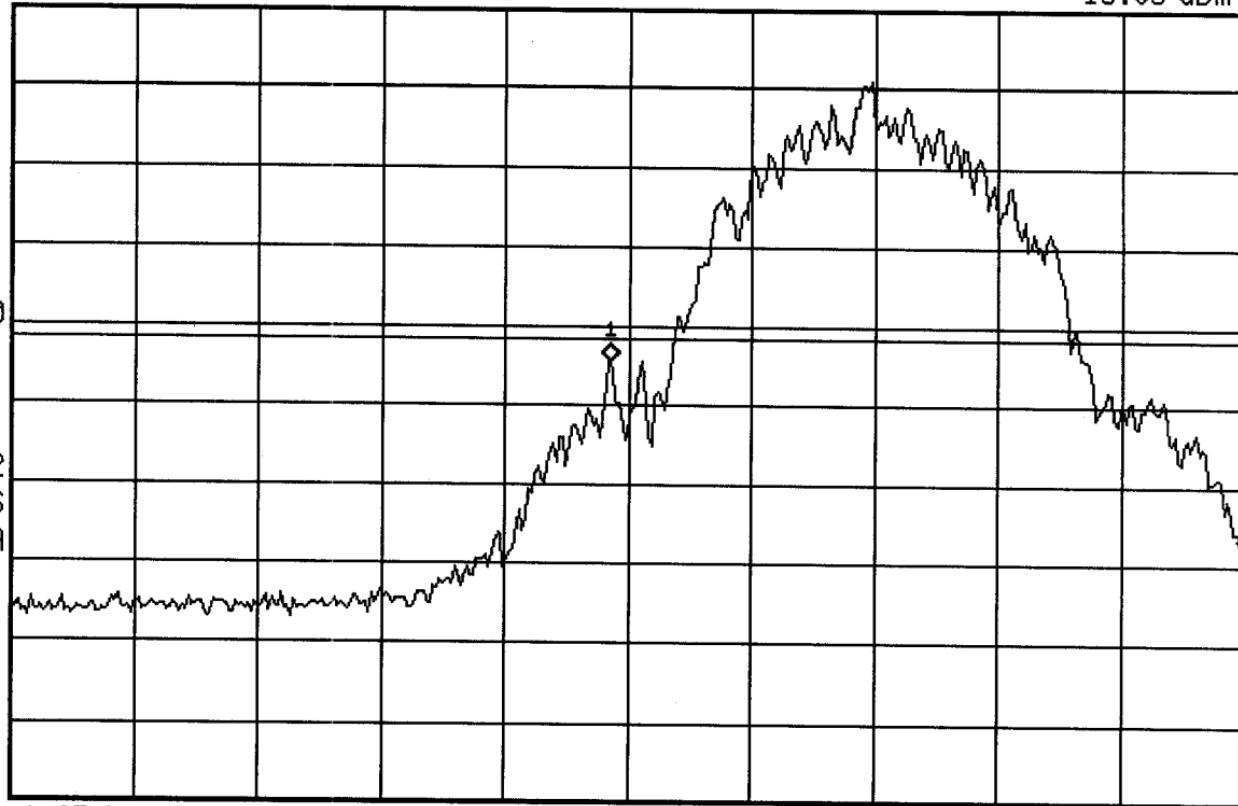

Center 1.85 GHz

#Res BW 3 kHz

VBW 3 kHz

Span 1 MHz

#Sweep 2 s

**hp** 10:19:31 May 13, 2003  
DAP HDWAEA306 BLOCK A UPPER EDGE  
Ref 28.6 dBm

Mkr1 1.864990 GHz  
-19.4 dBm

Peak

Log

10

dB/

Offst

31

dB

DI

-13.0


dBm

5

W1 S2

S3 FC

AA

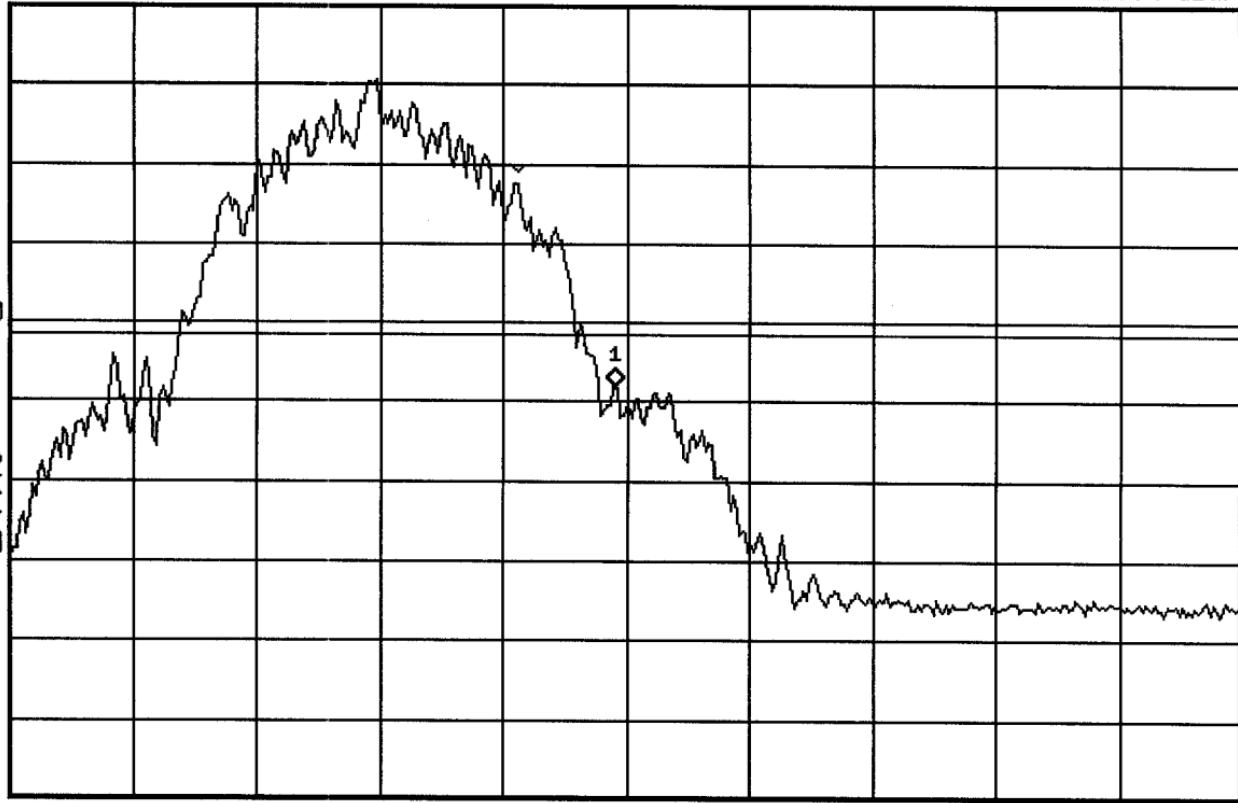

Center 1.865 GHz

#Res BW 3 kHz

VBW 3 kHz

Span 1 MHz

#Sweep 2 s

**hp** 10:55:18 May 13, 2003  
DAP HDWAEA306 BLOCK B LOWER EDGE  
Ref 28.6 dBm Atten 10 dB

Mkr1 1.869985 GHz  
-15.67 dBm

Peak  
Log  
10  
dB/  
Offst  
31  
dB  
DI  
-13.0  
dBm

W1 S2  
S3 FS  
AA

Center 1.87 GHz  
#Res BW 3 kHz

VBW 3 kHz


Span 1 MHz  
#Sweep 2 s

**[hp]** 11:49:16 May 13, 2003  
DAP HDWAEA306 BLOCK B UPPER EDGE  
Ref 28.6 dBm Atten 10 dB

Mkr1 1.884990 GHz  
-20.51 dBm

Peak  
Log  
10  
dB/  
Offst  
31  
dB  
DI  
-13.0  
dBm

W1 S2  
S3 FS  
AA

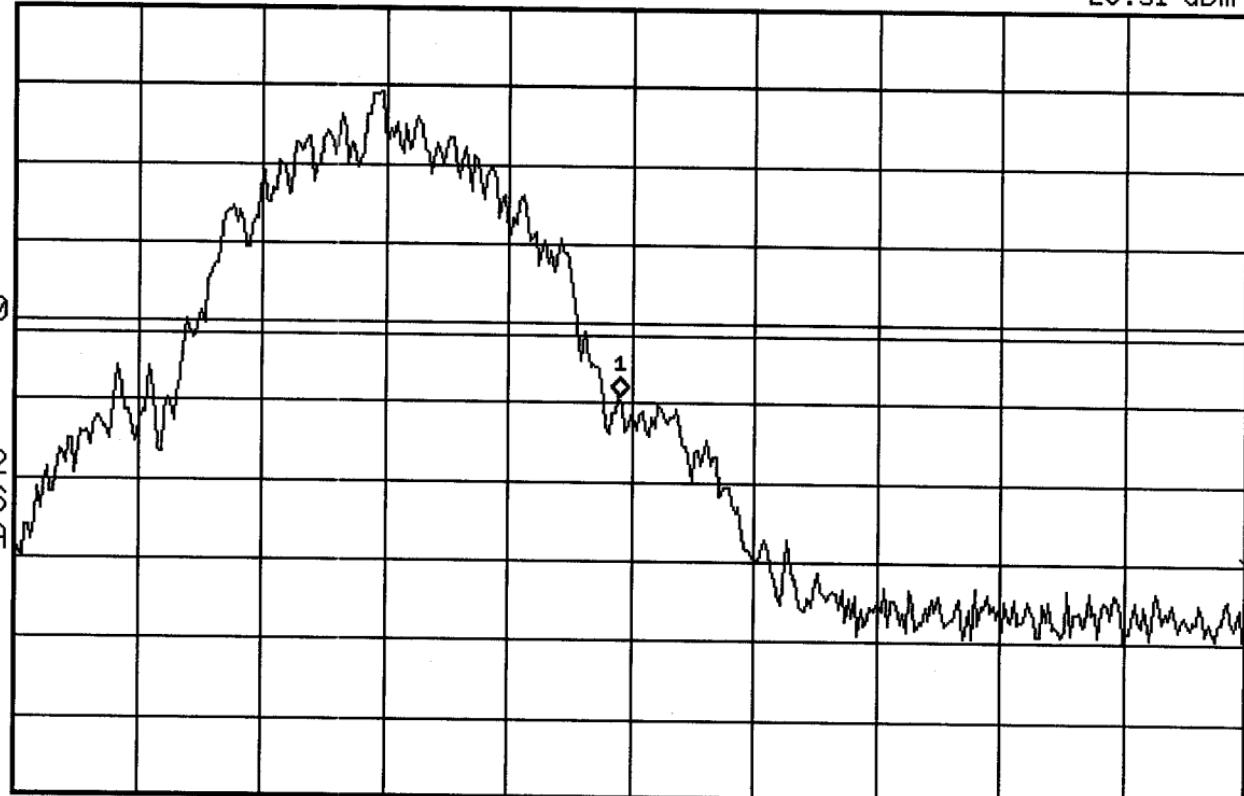

Center 1.885 GHz  
#Res BW 3 kHz

VBW 3 kHz

Span 1 MHz  
#Sweep 2 s

**[hp]** 11:57:55 May 13, 2003  
DAP HDWAEA306 BLOCK C LOWER EDGE  
Ref 28.5 dBm Atten 10 dB

Mkr1 1.895010 GHz  
-17.11 dBm

Peak

Log

10

dB/

Offst

31

dB

DI


-13.0

dBm

W1 S2

S3 FS

AA

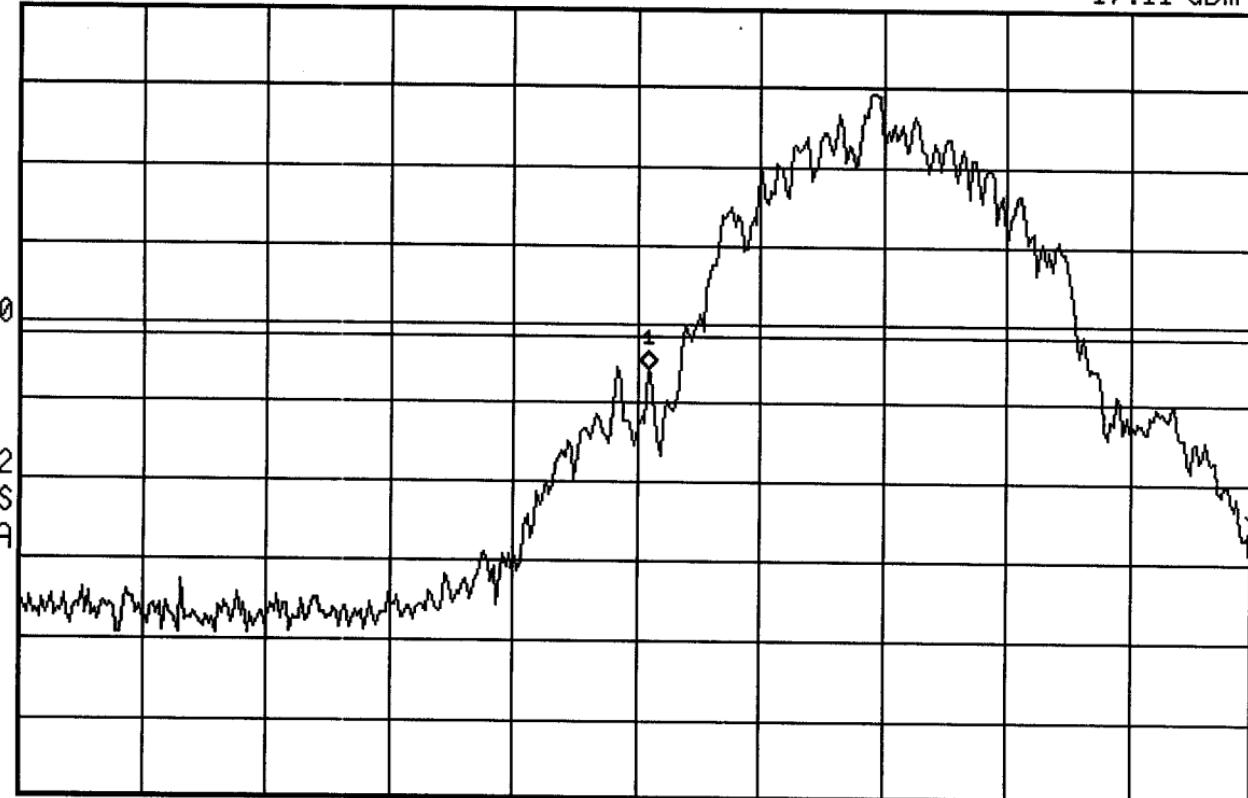

Center 1.895 GHz

#Res BW 3 kHz

VBW 3 kHz

Span 1 MHz

#Sweep 2 s

**hp** 12:10:19 May 13, 2003  
DAP HDWAEA306 BLOCK C UPPER EDGE  
Ref 28.5 dBm

Atten 10 dB

Mkr1 1.909990 GHz  
-20.16 dBm

Peak


Log

10  
dB/  
Offset

31  
dB  
DI

-13.0  
dBm

W1 S2  
S3 FS  
AA

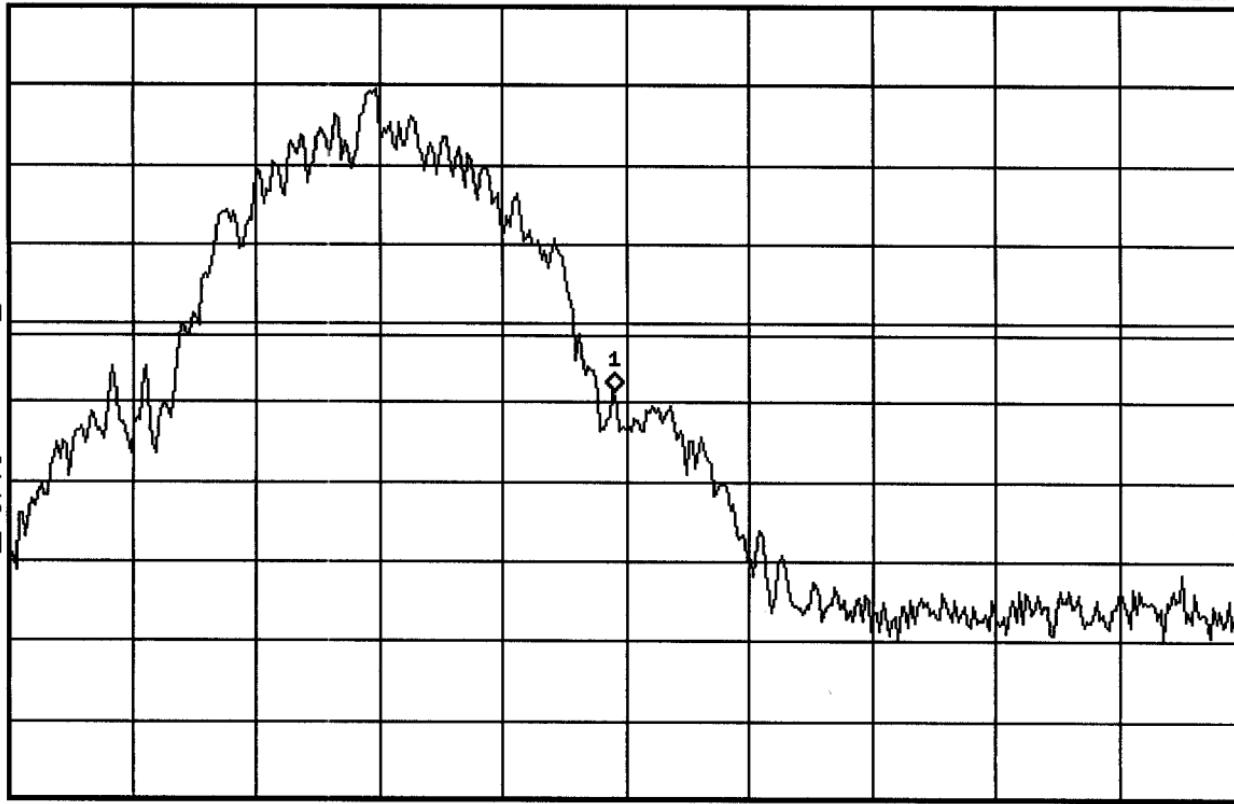

Center 1.91 GHz  
#Res BW 3 kHz

VBW 3 kHz

Span 1 MHz  
#Sweep 2 s

**(hp)** 12:17:15 May 13, 2003

DAP HDWAEA306 BLOCK D LOWER EDGE

Ref 28.6 dBm

Atten 10 dB

Mkr1 1.864985 GHz

-17.12 dBm

Peak

Log

10

dB/

Offst

31

dB

DI

-13.0

dBm

W1 S2

S3 FS

AA


Center 1.865 GHz

#Res BW 3 kHz

VBW 3 kHz

Span 1 MHz

#Sweep 2 s

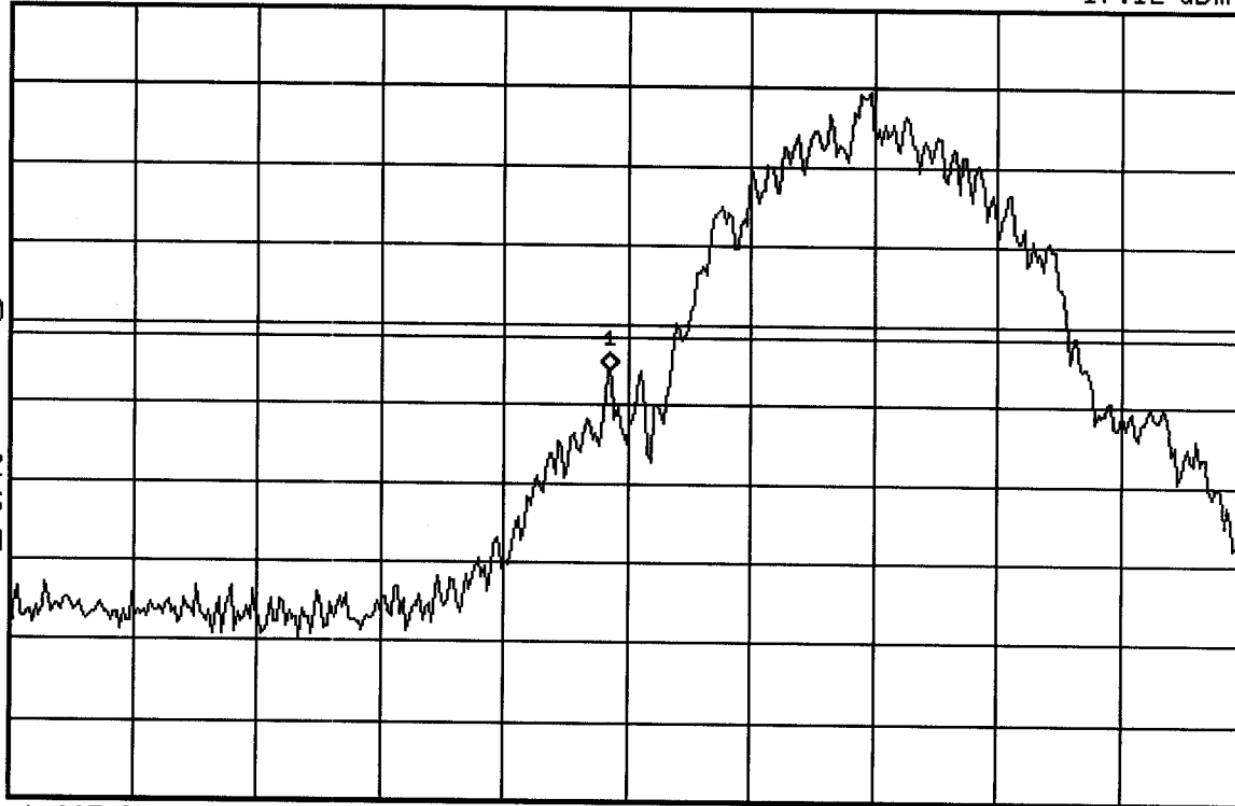

**[hp]** 12:25:46 May 13, 2003  
DAP HDWAEA306 BLOCK D UPPER EDGE  
Ref 28.6 dBm

Atten 10 dB

Mkr1 1.869993 GHz  
-19.93 dBm

Peak

Log

10

dB/

Offst

31

dB

DI


-13.0

dBm

W1 S2

S3 FS

AA

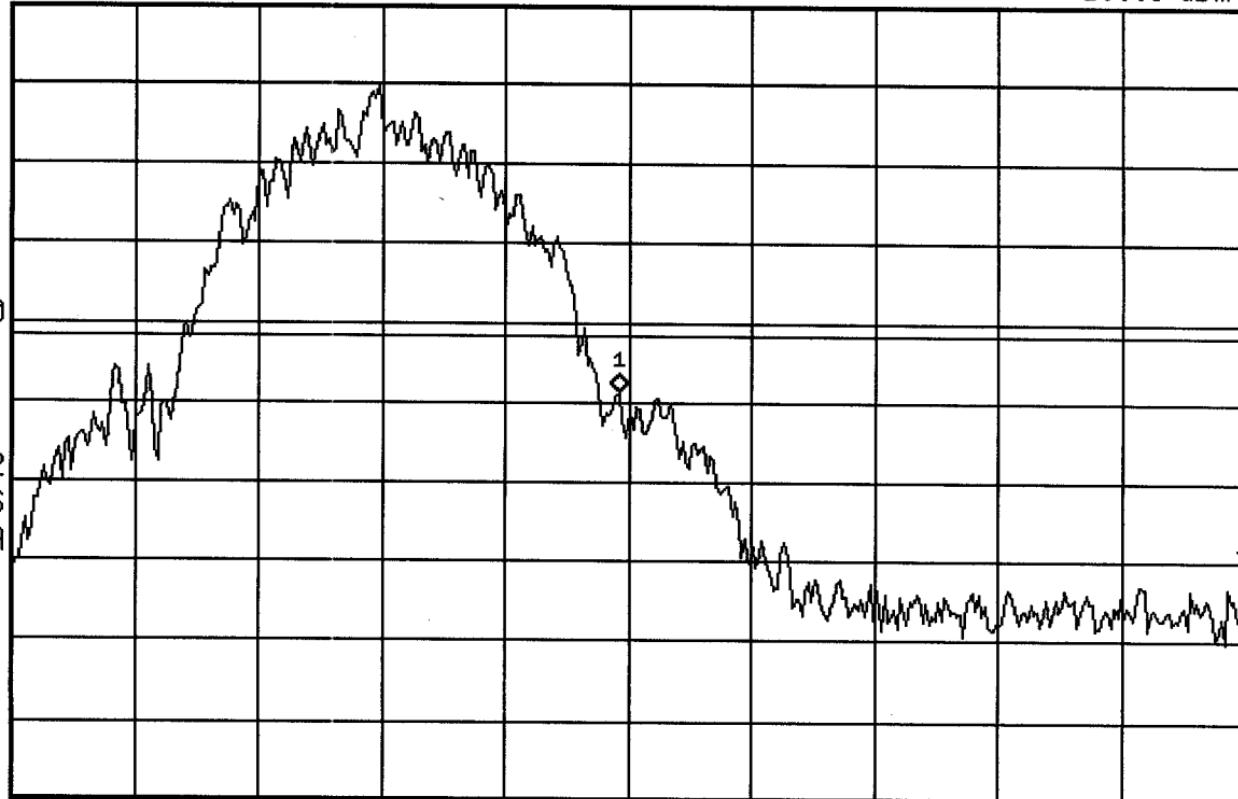

Center 1.87 GHz

#Res BW 3 kHz

VBW 3 kHz

Span 1 MHz

#Sweep 2 s



12:32:19 May 13, 2003

DAP HDWAEA306 BLOCK E LOWER EDGE

Ref 28.6 dBm

Atten 10 dB

Mkr1 1.884985 GHz

-16.9 dBm

Peak

Log

10

dB/

Offst

31

dB

DI


-13.0

dBm

W1 S2

S3 FS

AA

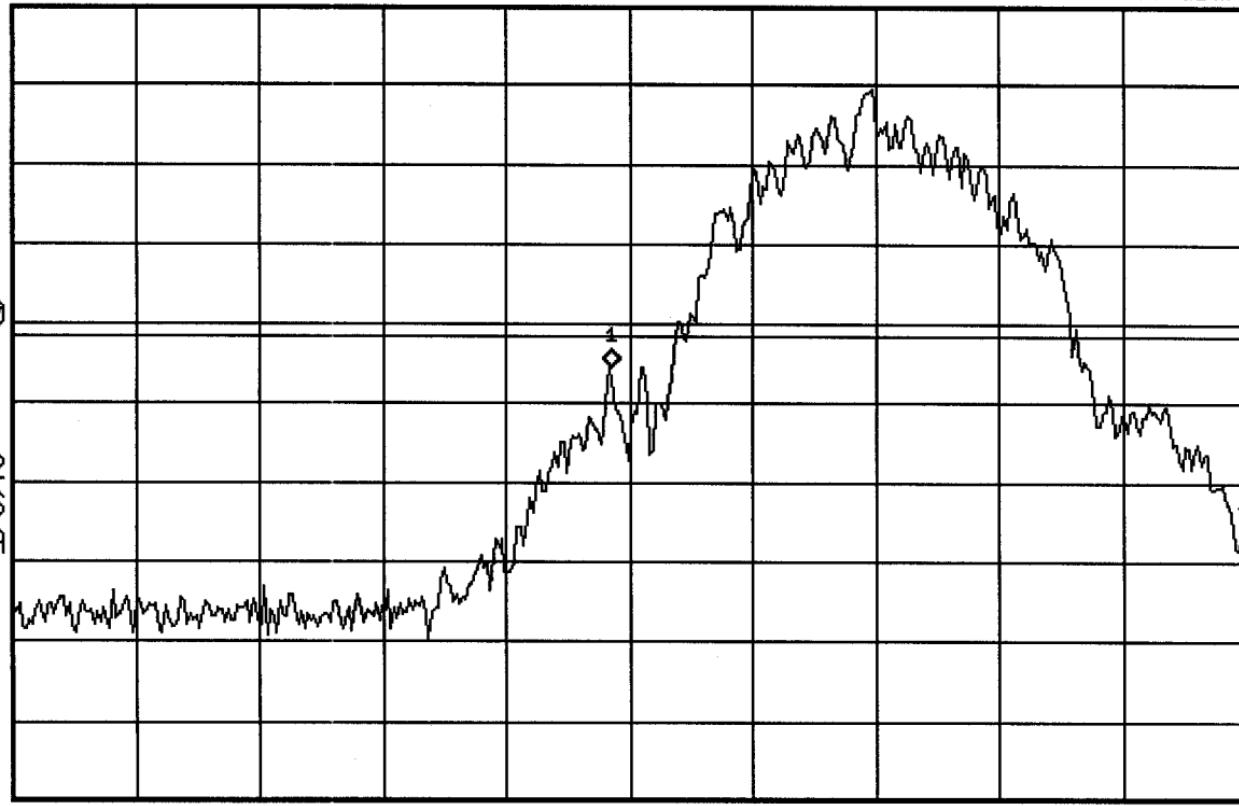

Center 1.885 GHz

#Res BW 3 kHz

VBW 3 kHz

Span 1 MHz

#Sweep 2 s

**(hp)** 12:41:55 May 13, 2003

DAP HDWAEA306 BLOCK E UPPER EDGE

Ref 28.5 dBm

Atten 10 dB

Mkr1 1.889990 GHz

-20.33 dBm

Peak

Log

10

dB/

Offst

31

dB

DI


-13.0

dBm

W1 S2

S3 FS

AA

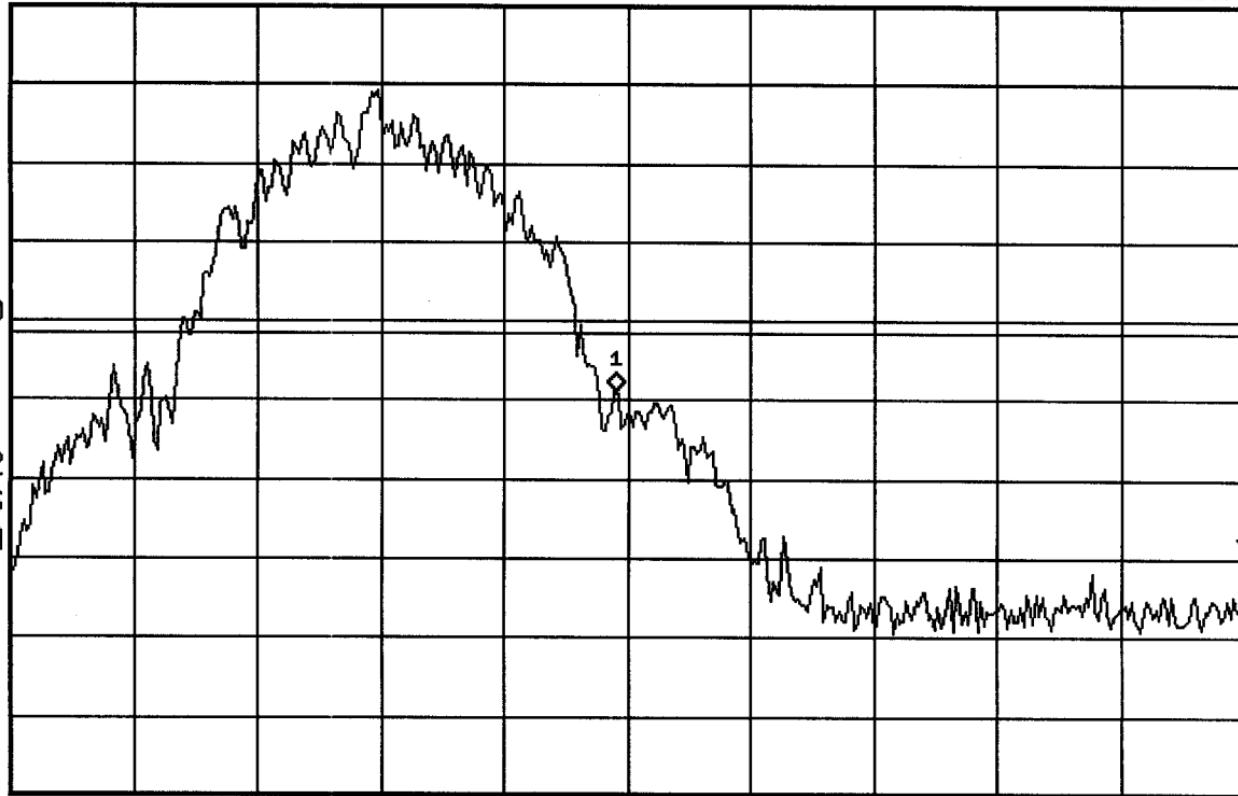

Center 1.89 GHz

#Res BW 3 kHz

VBW 3 kHz

Span 1 MHz

#Sweep 2 s

**hp** 12:54:42 May 13, 2003  
DAP HDWAEA306 BLOCK F LOWER EDGE  
Ref 28.5 dBm

Mkr1 1.889985 GHz  
-16.83 dBm

Peak

Log

10

dB/

Offst

31

dB

DI


-13.0

dBm

W1 S2

S3 FS

AA

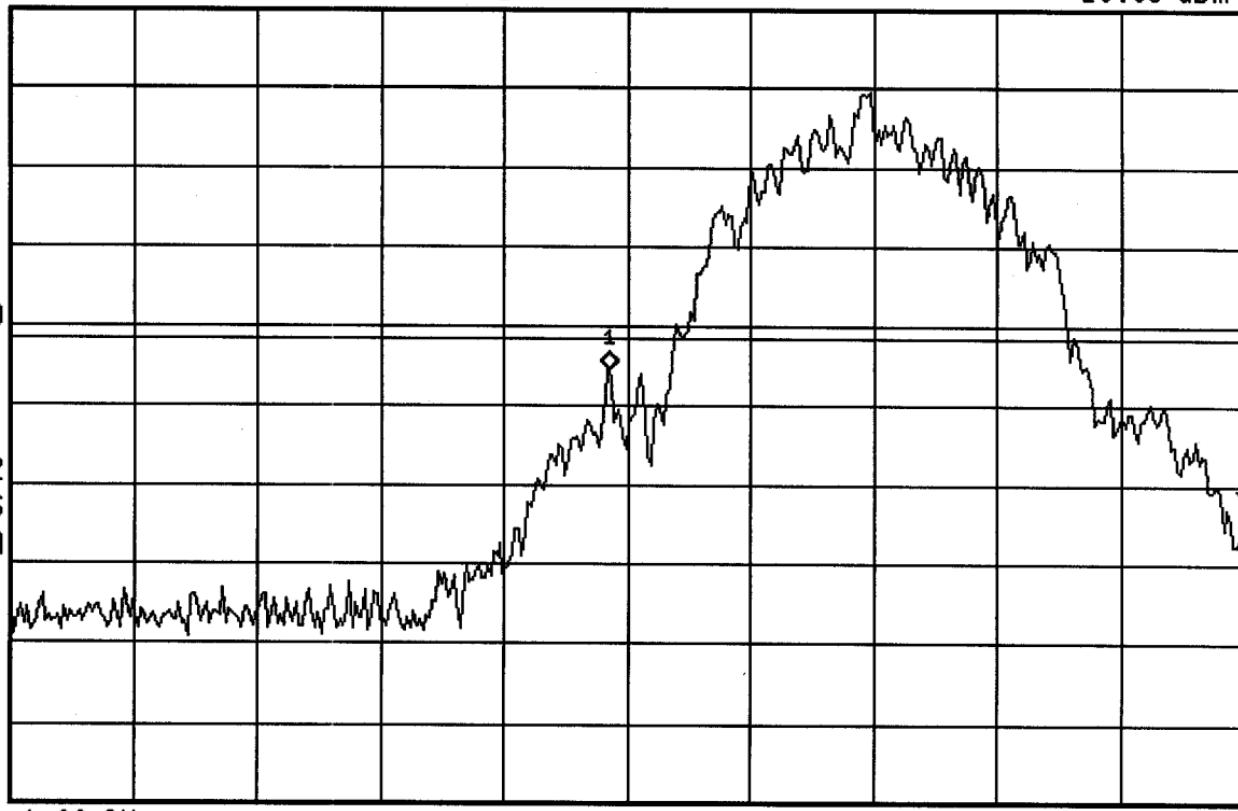

Center 1.89 GHz  
#Res BW 3 kHz

VBW 3 kHz

Span 1 MHz  
#Sweep 2 s

**hp** 13:10:16 May 13, 2003  
DAP HDWAEA306 BLOCK F UPPER EDGE  
Ref 28.5 dBm

Mkr1 1.894990 GHz  
-19.65 dBm

Peak

Log

10

dB/

Offst

31

dB

DI


-13.0

dBm

W1 S2

S3 FS

AA

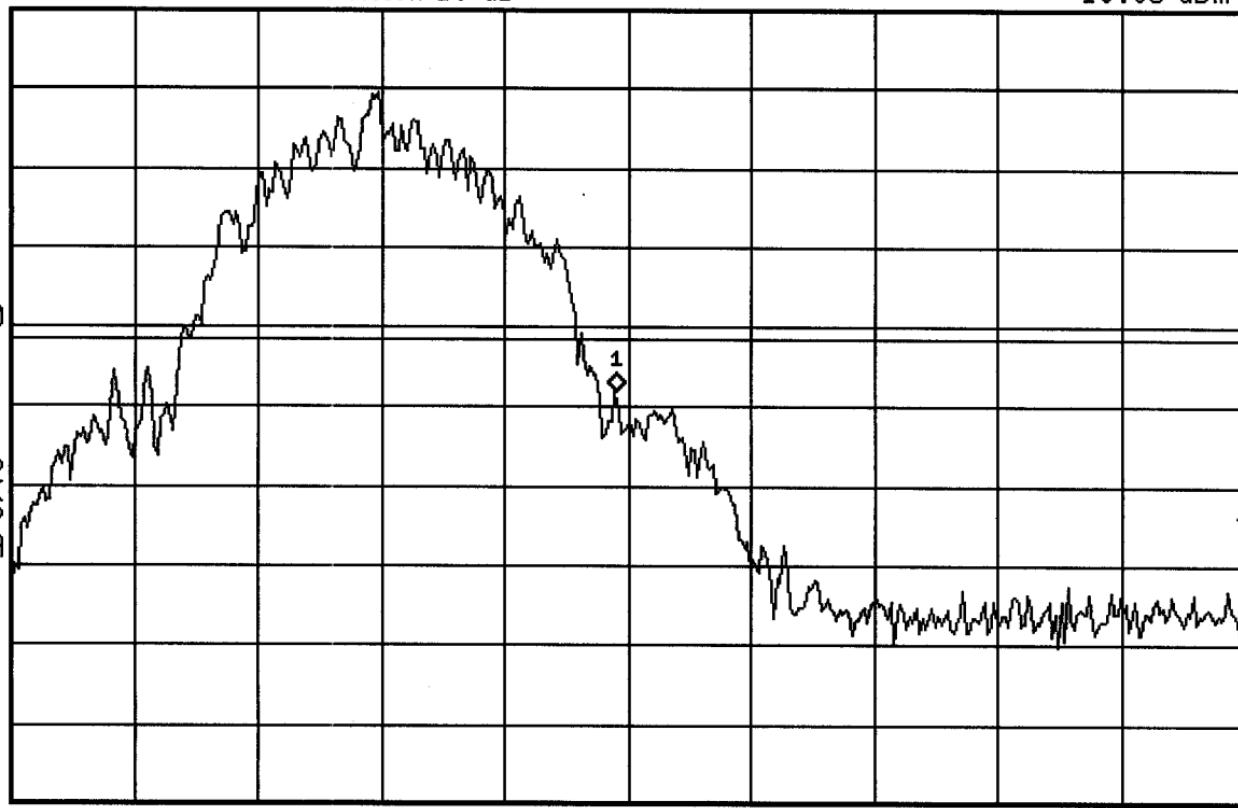

Center 1.895 GHz  
#Res BW 3 kHz

Span 1 MHz  
VBW 3 kHz

#Sweep 2 s