

Test Report S/N:	042503-369HDW
Test Date(s):	May 14-16, 2003
Test Type:	FCC Part 22/24 EMC Measurements

DECLARATION OF COMPLIANCE FCC PART 24(E) & 22.901(d) EMC MEASUREMENTS

<u>Test Lab</u>	<u>Applicant Information</u>
CELLTECH LABS INC. Testing and Engineering Services 1955 Moss Court Kelowna, B.C. Canada V1Y 9L3 Phone: 250-448-7047 Fax: 250-448-7046 e-mail: info@celltechlabs.com web site: www.celltechlabs.com	DAP TECHNOLOGIES LTD. 955 Place DuFour Vanier, Quebec G1M 3B2 Canada
FCC Rule Part(s):	47 CFR §24(E), §22.901(d), §2
IC Rule Part(s):	RSS-133 Issue 2, RSS-129 Issue 2
Test Procedure(s):	FCC 47 CFR §24(E), §22.901(d), §2; ANSI TIA/EIA-603-A-2001
FCC Device Classification:	PCS Licensed Transmitter (PCB)
IC Device Classification:	2GHz Personal Communication Services (RSS-133 Issue 2) 800MHz CDMA Cellular Transmitter (RSS-129 Issue 2)
Device Type:	Rugged Handheld PC with Sierra Wireless AirCard 555/550 Dual-Band PCS/Cellular CDMA PCMCIA Modem Card
FCC ID:	HDWAEA307
IC ID:	4609A-AEA307
Model(s):	CE8640/LS
Tx Frequency Range:	1851.25 - 1908.75 MHz (PCS CDMA) 824.70 - 848.31 MHz (Cellular CDMA)
Max. RF Output Power:	0.105 Watts EIRP (PCS CDMA) 0.224 Watts ERP (Cellular CDMA)
Max. Conducted Pwr. Tested:	23.0 dBm (PCS CDMA) 23.0 dBm (Cellular CDMA)
Emission Designator(s):	1M25F9W
Frequency Tolerance(s):	150 Hz (PCS CDMA) 300 Hz (Cellular CDMA)
Antenna Type:	Unity Gain
Battery Type:	7.4V Lithium-ion, 2000mAh

This wireless portable device has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in FCC 47 CFR §24(E), §22.901(d), §2, and ANSI TIA/EIA-603-A-2001.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc. The results and statements contained in this report pertain only to the device(s) evaluated.



Russell Pipe
Senior Compliance Technologist
Celltech Labs Inc.



TABLE OF CONTENTS

1.1	SCOPE	3
2.1	GENERAL INFORMATION - §2.1033(a)	3
MEASUREMENT PROCEDURES & DATA		4-13
3.1	RF Output Power - §2.1046	4
4.1	Spurious Emissions at Antenna Terminal - §2.1051	4
5.1	Emission Designator - §2.202	4
6.1	Occupied Bandwidth - §2.1049, §22.917, §24.238	5
7.1	Effective Isotropic Radiated Power Output - §24.232(b)	6
8.1	Effective Radiated Power Output - §22.913	7
9.1	Field Strength of Spurious Radiation - §2.1053	8-11
10.1	Radiated Measurement Test Setup	11
11.1	Frequency Stability / Temperature Variation - §2.1055, §24.235	12-13
12.1	LIST OF TEST EQUIPMENT	14
13.1	CONCLUSION	15
APPENDIX A - TEST PLOTS		16
APPENDIX B - RADIATED TEST SETUP PHOTOGRAPHS		17

FCC PARTS 24(E) & 22.901(d) EMC MEASUREMENT REPORT

1.1 SCOPE

Measurement and determination of electromagnetic emissions (EME) from radio frequency devices for compliance with the technical rules and regulations of the Federal Communications Commission and Industry Canada.

2.1 GENERAL INFORMATION - §2.1033(a)

APPLICANT

DAP TECHNOLOGIES LTD.
955 Place DuFour
Vanier, Quebec G1M 3B2
Canada

FCC ID	HDWAEA307
Model(s)	CE8640/LS
Serial No.	Pre-production unit
EUT Type	Rugged Handheld PC with Sierra Wireless AirCard 555/550 Dual-Band PCS/Cellular CDMA PCMCIA Modem Card
Rule Part(s)	FCC 47 CFR §24(E), §22.901(d), §2 IC RSS-133 Issue 2, RSS-129 Issue 2
FCC Classification	PCS Licensed Transmitter (PCB)
IC Classification	2GHz Personal Communication Services (RSS-133 Issue 2) 800MHz CDMA Cellular Transmitter (RSS-129 Issue 2)
Tx Frequency Range	1851.25 - 1908.75 MHz (PCS CDMA) 824.70 - 848.31 MHz (Cellular CDMA)
Max. RF Output Power	0.105 Watts EIRP (PCS CDMA) 0.224 Watts ERP (Cellular CDMA)
Max. RF Conducted Output Power Tested	23.0 dBm (PCS CDMA) 23.0 dBm (Cellular CDMA)
Emission Designator	1M25F9W
Frequency Tolerance	150 Hz (PCS CDMA) 300 Hz (Cellular CDMA)
Battery Type(s)	7.4V Lithium-ion, 2000mAh
Antenna Type	Unity Gain (Length: 101 mm)

MEASUREMENT PROCEDURES & DATA

3.1 RF OUTPUT POWER MEASUREMENT - §2.1046

The peak conducted power levels were measured with a Gigatronics 8650A Universal Power Meter using modulated average power mode. An offset was entered into the power meter to correct for the losses of the attenuator and cable installed before the sensor input. The transmitter terminal was coupled to the power meter and the EUT was placed into test mode via internal software. All subsequent tests were performed using the same tune-up procedures.

Frequency (MHz)	Peak Power (dBm)
824.70	23.0
835.89	23.0
848.31	23.0
1851.25	23.0
1880.00	23.0
1908.75	23.0

4.1 SPURIOUS EMISSIONS AT ANTENNA TERMINAL - §2.1051

The EUT was placed in test mode via internal software in the "always up" power control mode. An offset was entered into the power meter to correct for all losses of the attenuator and cable installed before the sensor input. The EUT was placed into test mode via internal software. The level of the carrier and the various conducted spurious frequencies were measured by means of a calibrated spectrum analyzer. The resolution bandwidth and video bandwidth were set to 1MHz. The spectrum was scanned from 10MHz to 20GHz at the low, mid, and high channels. The radio transmitter was operating at maximum output power. The antenna output terminal of the EUT was connected to the input of a 50Ω spectrum analyzer through a matched 30dB attenuator and coaxial cable. The reported emissions were below the specified limit of -13dBm. The test plots are shown in Appendix A.

5.1 EMISSION DESIGNATOR - §2.202

CDMA BW = 1.25 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination Audio/Data Transmission

Test Report S/N:	042503-369HDW
Test Date(s):	May 14-16, 2003
Test Type:	FCC Part 22/24 EMC Measurements

6.1 OCCUPIED BANDWIDTH - §2.1049, §22.917, §24.238

The EUT was placed in test mode via internal software in the “always up” power control mode. The EUT was connected to the input of a 50Ω spectrum analyzer through a matched 30dB attenuator. For both PCS and cellular CDMA modes the resolution bandwidth and video bandwidth were set to 30kHz. The EUT was operating at maximum output power.

Specified Limits:

§22.917

- (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.
- (b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
- (c) Alternative out of band emission limit. Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas, in lieu of that set forth in this section, pursuant to a private contractual arrangement of all affected licensees and applicants. In this event, each party to such contract shall maintain a copy of the contract in their station files and disclose it to prospective assignees or transferees and, upon request, to the FCC.
- (d) Interference caused by out of band emissions. If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.

§24.238

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (d) The measurements of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.
- (e) When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.

7.1 EFFECTIVE ISOTROPIC RADIATED POWER OUTPUT - §24.232(b)

EIRP measurements were performed using the Signal Substitution Method in accordance with ANSI TIA/EIA-603-A-2001 on a 3-meter open area test site. The EUT was placed on a turntable 3-meters from the receive antenna and placed into test mode via internal software in the "always up" power control mode. The field of maximum intensity was found by rotating the EUT approximately 360 degrees and changing the height of the receive antenna from 1 to 4 meters. Once a peak was found the spectrum analyzer was set to peak hold and the value of the emission was extracted. The field strength was recorded for each channel being tested, and for both EUT antenna polarizations. A standard gain horn antenna was substituted in place of the EUT. A CDMA signal was fed through a directional coupler to the antenna and the power at the coupler port was monitored. A signal generator and power amplifier controlled the antenna, and the input level of the antenna was adjusted to the same field strength level as the EUT. The feed point for the antenna was then connected to a calibrated power meter and the power adjusted to read the same as the coupler port previously recorded, this is to account for any mismatch in impedance, which may occur at the horn antenna. The conducted power at the antenna feed point was recorded. The forward conducted power for the horn antenna was determined by measuring the power at the horn antenna feed point and reproducing the coupler power previously measured. The EIRP level was determined by adding the horn forward conducted power and the horn antenna gain.

Freq. Tuned		EUT Conducted Power	Maximum Field Strength of EUT	Antenna Polariz.	Horn Gain	Horn Forward Conducted Power	EIRP of EUT Horn Gain + Horn Forward Conducted Power	
MHz	dBm	dBm	H/V	dBi	dBm	dBm	Watts	
1851.25	23.0	-19.53	H	6.67	11.34	18.01	0.063	
1880.00	23.0	-18.55	H	6.68	12.73	19.41	0.087	
1908.75	23.0	-18.29	H	6.69	13.52	20.21	0.105	
1851.25	23.0	-23.95	V	6.67	8.70	15.37	0.034	
1880.00	23.0	-22.10	V	6.68	11.15	17.83	0.061	
1908.75	23.0	-21.63	V	6.69	11.96	18.65	0.073	

8.1 EFFECTIVE RADIATED POWER OUTPUT - §22.913

ERP measurements were performed using the Signal Substitution Method in accordance with ANSI TIA/EIA-603-A-2001 on a 3-meter open area test site. The EUT was placed on a turntable 3-meters from the receive antenna and placed into test mode via internal software in the "always up" power control mode. The field of maximum intensity was found by rotating the EUT approximately 360 degrees and changing the height of the receive antenna from 1 to 4 meters. Once a peak was found the spectrum analyzer was set to peak hold and the value of the emission was extracted. The field strength was recorded for each channel being tested, and for both EUT antenna polarizations. A half-wave dipole antenna was substituted in place of the EUT. A CDMA signal was fed through a directional coupler to the dipole antenna and the power at the coupler port was monitored. A signal generator and power amplifier controlled the antenna, and the input level of the antenna was adjusted to the same field strength level as the EUT. The feed point for the antenna was then connected to a calibrated power meter and the power adjusted to read the same as the coupler port previously recorded. This was to account for any mismatch in impedance, which may occur at the dipole antenna. The conducted power at the antenna feed point was recorded. The forward conducted power for the dipole antenna was determined by measuring the power at the dipole antenna feed point and reproducing the coupler power previously measured. The ERP level was determined by adding the dipole forward conducted power and the dipole antenna gain.

Freq. Tuned	EUT Conducted Power	Maximum Field Strength of EUT	Antenna Polariz.	Dipole Gain	Dipole Forward Conducted Power	ERP of EUT Dipole Gain + Dipole Forward Conducted Power	
MHz	dBm	dBm	H/V	dBd	dBm	dBm	Watts
824.70	23.0	-12.81	H	-1.44	20.96	19.52	0.090
835.89	23.0	-15.21	H	-1.34	19.74	18.40	0.069
848.31	23.0	-13.69	H	-1.24	19.87	18.63	0.073
824.70	23.0	-14.44	V	-1.44	23.48	22.04	0.160
835.89	23.0	-18.67	V	-1.34	22.41	21.07	0.128
848.31	23.0	-15.39	V	-1.24	24.74	23.50	0.224

9.1 FIELD STRENGTH OF SPURIOUS RADIATION - §2.1053

Radiated spurious emissions were measured on a 3-meter open area test site using the Signal Substitution Method in accordance with ANSI TIA/EIA-603-A-2001. The EUT was placed into test mode via internal software in the "always up" power control mode. The EUT was placed on the turntable with the transmitter transmitting into a non-radiating load. A receiving antenna located 3 meters from the turntable received any signal radiated from the transmitter and its operating accessories. The receiving antenna was varied in height from 1 to 4 meters and the polarization was varied (horizontal and vertical) to determine the worst-case emission level. A standard gain horn antenna was substituted in place of the EUT. A CDMA signal was fed through a directional coupler to the antenna and the power at the coupler port was monitored. A signal generator and power amplifier controlled the antenna, and the input level of the antenna was adjusted to the same field strength level as the EUT. The feed point for the antenna was then connected to a calibrated power meter and the power was adjusted to read the same power at the coupler port previously recorded, this is to account for any mismatch in impedance, which may occur at the horn antenna. The conducted power at the antenna feed point was then recorded. The forward conducted power for the horn antenna was determined by measuring the power at the horn antenna feed point and reproducing the coupler power previously measured. The EIRP level was determined by adding the horn forward conducted power and the horn antenna gain. All spurious emissions from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier were investigated.

Operating Frequency (MHz):	1851.25
Channel:	25 (Low)
EUT Conducted Pwr. (dBm):	23.0
Measured EIRP (dBm):	18.01
Mode:	PCS CDMA
Distance:	3 Meters
Limit:	$43 + 10 \log (W) = 31.00 \text{ dBc}$

Frequency	Field Strength of Spurious Radiation	Horn Forward Conducted Power	Standard Gain Horn Antenna Gain	POL	EIRP	ERP	dBc
MHz	dBm	dBm	dBi	H/V	dBm	dBm	
3702.50	-92.31	-59.42	6.6	H	-52.82	-54.96	72.97
5553.75	-92.35	-54.55	7.8	H	-46.75	-48.89	66.90
7405.00	-90.46	-53.88	7.8	H	-46.08	-48.22	66.23
9256.25	-90.17	-52.15	7.6	H	-44.55	-46.69	64.70
11107.50	-90.03	-53.67	8.5	H	-45.17	-47.31	65.32
12958.75	-90.81	-52.93	8.8	H	-44.13	-46.27	64.28
14810.00	-87.64	-49.76	9.6	H	-40.16	-42.30	60.31
16661.25	-88.22	-50.39	9.0	H	-41.39	-43.53	61.54
18512.50	-87.49	-51.28	9.3	H	-41.98	-44.12	62.13

FIELD STRENGTH OF SPURIOUS RADIATION - §2.1053 (Cont.)

Operating Frequency (MHz): 1880.00
Channel: 600 (Mid)
EUT Conducted Pwr. (dBm): 23.0
Measured EIRP (dBm): 19.41
Mode: PCS CDMA
Distance: 3 Meters
Limit: $43 + 10 \log (W) = 32.40 \text{ dBc}$

Frequency	Field Strength of Spurious Radiation	Horn Forward Conducted Power	Standard Gain Horn Antenna Gain	POL	EIRP	ERP	dBc
MHz	dBm	dBm	dBi	H/V	dBm	dBm	
3760.00	-92.31	-59.42	6.6	H	-52.82	-54.96	74.37
5640.00	-92.35	-54.55	7.8	H	-46.75	-48.89	68.30
7520.00	-90.46	-53.88	7.8	H	-46.08	-48.22	67.63
9400.00	-90.17	-52.15	7.6	H	-44.55	-46.69	66.10
11280.00	-90.03	-53.67	8.5	H	-45.17	-47.31	66.72
13160.00	-90.81	-52.93	8.8	H	-44.13	-46.27	65.68
15040.00	-87.64	-49.76	9.6	H	-40.16	-42.30	61.71
16920.00	-88.22	-50.39	9.0	H	-41.39	-43.53	62.94
18800.00	-87.49	-51.28	9.3	H	-41.98	-44.12	63.53

Operating Frequency (MHz): 1908.75
Channel: 1175 (High)
EUT Conducted Pwr. (dBm): 23.0
Measured EIRP (dBm): 20.21
Mode: PCS CDMA
Distance: 3 Meters
Limit: $43 + 10 \log (W) = 33.21 \text{ dBc}$

Frequency	Field Strength of Spurious Radiation	Horn Forward Conducted Power	Standard Gain Horn Antenna Gain	POL	EIRP	ERP	dBc
MHz	dBm	dBm	dBi	H/V	dBm	dBm	
3817.50	-89.34	-56.45	6.6	H	-49.85	-51.99	72.20
5726.25	-93.68	-55.88	7.8	H	-48.08	-50.22	70.43
7635.00	-91.12	-54.54	7.8	H	-46.74	-48.88	69.09
9543.75	-91.07	-53.05	7.6	H	-45.45	-47.59	67.80
11452.50	-89.69	-53.33	8.5	H	-44.83	-46.97	67.18
13361.25	-87.43	-49.55	8.8	H	-40.75	-42.89	63.10
15270.00	-86.55	-48.67	9.6	H	-39.07	-41.21	61.42
17178.75	-88.93	-51.10	9.0	H	-42.10	-44.24	64.45
19087.50	-88.93	-52.72	9.3	H	-43.42	-45.56	65.77

FIELD STRENGTH OF SPURIOUS RADIATION - §2.1053 (Cont.)

Operating Frequency (MHz): 824.70
Channel: 1013 (Low)
EUT Conducted Pwr. (dBm): 23.0
Measured ERP (dBm): 22.04
Mode: Cellular CDMA
Distance: 3 Meters
Limit: $43 + 10 \log (W) = 35.04 \text{ dBc}$

Frequency	Field Strength of Spurious Radiation	Horn Forward Conducted Power	Standard Gain Horn Antenna Gain	POL	EIRP	ERP	dBc
	MHz	dBm	dBm	dBi	H/V	dBm	
1649.40	-88.25	-55.36	6.6	V	-48.76	-50.90	72.94
2474.10	-89.53	-51.73	7.8	V	-43.93	-46.07	68.11
3298.80	-91.57	-54.99	7.8	V	-47.19	-49.33	71.37
4123.50	-92.17	-54.15	7.6	V	-46.55	-48.69	70.73
4948.20	-91.46	-55.10	8.5	V	-46.60	-48.74	70.78
5772.90	-90.80	-52.92	8.8	V	-44.12	-46.26	68.30
6597.60	-90.18	-52.30	9.6	V	-42.70	-44.84	66.88
7422.30	-89.19	-51.36	9.0	V	-42.36	-44.50	66.54
8247.00	-89.32	-53.11	9.3	V	-43.81	-45.95	67.99

Operating Frequency (MHz): 835.89
Channel: 363 (Mid)
EUT Conducted Pwr. (dBm): 23.0
Measured ERP (dBm): 21.07
Mode: Cellular CDMA
Distance: 3 Meters
Limit: $43 + 10 \log (W) = 34.07 \text{ dBc}$

Frequency	Field Strength of Spurious Radiation	Horn Forward Conducted Power	Standard Gain Horn Antenna Gain	POL	EIRP	ERP	dBc
	MHz	dBm	dBm	dBi	H/V	dBm	
1671.78	-87.20	-54.31	6.6	V	-47.71	-49.85	70.92
2507.67	-90.86	-53.06	7.8	V	-45.26	-47.40	68.47
3343.56	-93.33	-56.75	7.8	V	-48.95	-51.09	72.16
4179.45	-92.53	-54.51	7.6	V	-46.91	-49.05	70.12
5015.34	-91.83	-55.47	8.5	V	-46.97	-49.11	70.18
5851.23	-91.59	-53.71	8.8	V	-44.91	-47.05	68.12
6687.12	-92.00	-54.12	9.6	V	-44.52	-46.66	67.73
7523.01	-88.54	-50.71	9.0	V	-41.71	-43.85	64.92
8358.90	-90.63	-54.42	9.3	V	-45.12	-47.26	68.33

FIELD STRENGTH OF SPURIOUS RADIATION - §2.1053 (Cont.)

Operating Frequency (MHz): 848.31
Channel: 777 (High)
EUT Conducted Pwr. (dBm): 23.0
Measured ERP (dBm): 23.50
Mode: Cellular CDMA
Distance: 3 Meters
Limit: $43 + 10 \log (W) = 36.50 \text{ dBc}$

Frequency	Field Strength of Spurious Radiation	Horn Forward Conducted Power	Standard Gain Horn Antenna Gain	POL	EIRP	ERP	dBc
MHz	dBm	dBm	dBi	H/V	dBm	dBm	
1696.62	-89.21	-56.32	6.6	V	-49.72	-51.86	75.36
2544.93	-91.25	-53.45	7.8	V	-45.65	-47.79	71.29
3393.24	-90.61	-54.03	7.8	V	-46.23	-48.37	71.87
4241.55	-92.54	-54.52	7.6	V	-46.92	-49.06	72.56
5089.86	-91.72	-55.36	8.5	V	-46.86	-49.00	72.50
5938.17	-93.18	-55.30	8.8	V	-46.50	-48.64	72.14
6786.48	-89.71	-51.83	9.6	V	-42.23	-44.37	67.87
7634.79	-90.84	-53.01	9.0	V	-44.01	-46.15	69.65
8483.10	-91.46	-55.25	9.3	V	-45.95	-48.09	71.59

10.1 RADIATED MEASUREMENT TEST SETUP

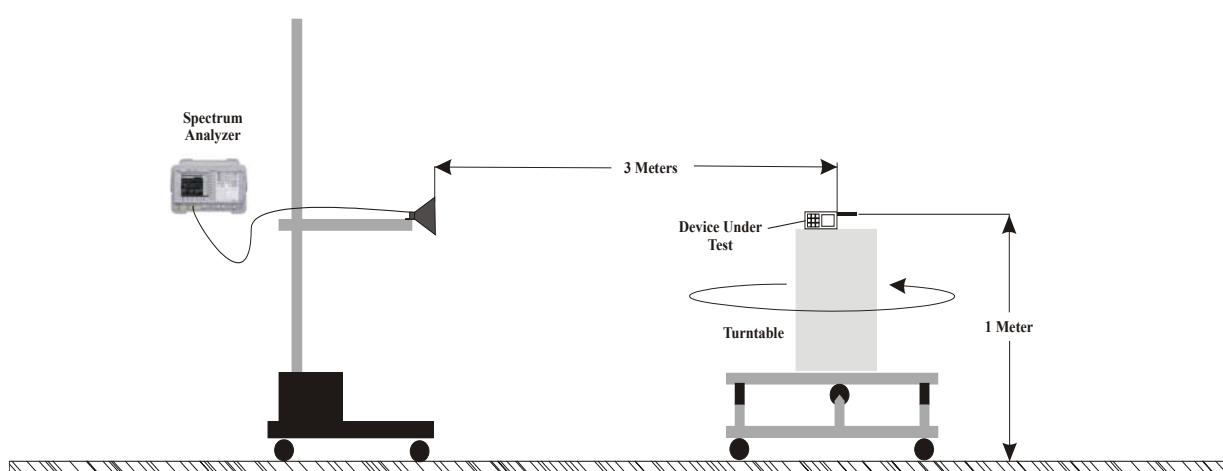


Figure 1. Radiated Measurement Test Setup Diagram - Horn Antenna

11.1 FREQUENCY STABILITY / TEMPERATURE VARIATION - §2.1055, §24.235

The minimum frequency stability shall be $\pm 300\text{Hz}$ (Cellular CDMA) and $\pm 150\text{Hz}$ (PCS CDMA) referenced to a received carrier frequency. This meets the requirement for operational accuracy of 0.00005% for digital mode. An HP 53181A Frequency Counter was used to measure the error in the fundamental frequency. The transmitter was set to maximum power at the center frequency of the band. The EUT was placed inside the temperature chamber.

Measurement Method:

The frequency stability of the transmitter was measured by:

- Temperature:** The temperature was varied from -30°C to $+60^{\circ}\text{C}$ at intervals no more than 10°C throughout the temperature range using an environmental chamber. A period of time sufficient to stabilize all of the components in the equipment was allowed prior to each frequency measurement.
- Primary Supply Voltage:** The primary supply voltage was set at the specified nominal rating and reduced to the battery operating endpoint specified by the manufacturer. The voltage was measured at the terminals of the power supply or at the input to the cable normally provided with the equipment.


Carrier Frequency (GHz): 1.88

Channel: 600

Mode: PCS CDMA

Deviation Limit (PPM): 0.08

Temperature ($^{\circ}\text{C}$)	Voltage (%)	Power (VDC)	Carrier Frequency Deviation		Specification	
			(Hz)	(PPM)	Lower Limit (PPM)	Upper Limit (PPM)
+20 (Ref)	100	7.4	8.63	0.005	0.08	-0.08
-30	100	7.4	4.39	0.002	0.08	-0.08
-20	100	7.4	-5.41	-0.003	0.08	-0.08
-10	100	7.4	-6.23	-0.003	0.08	-0.08
0	100	7.4	1.19	0.001	0.08	-0.08
+10	100	7.4	4.33	0.002	0.08	-0.08
+20	100	7.4	6.59	0.004	0.08	-0.08
+30	100	7.4	-1.82	-0.001	0.08	-0.08
+40	100	7.4	-4.38	-0.002	0.08	-0.08
+50	100	7.4	4.91	0.003	0.08	-0.08
+60	100	7.4	-2.42	-0.001	0.08	-0.08
+20	Battery Endpoint	6.1	3.77	0.002	0.08	-0.08

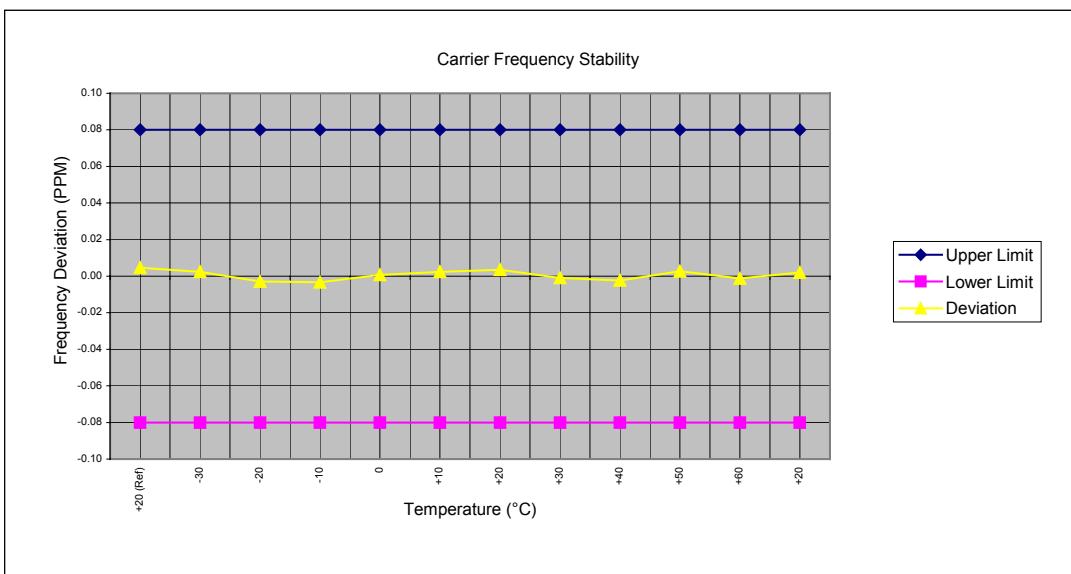

FREQUENCY STABILITY / TEMPERATURE VARIATION - §2.1055, §24.235 (Cont.)


Carrier Frequency (MHz): 835.89

Channel: 363

Mode: Cellular CDMA

Deviation Limit (PPM): 0.359

Temperature (°C)	Voltage (%)	Power (VDC)	Carrier Frequency Deviation		Specification	
			(Hz)	(PPM)	Lower Limit (PPM)	Upper Limit (PPM)
+20 (Ref)	100	7.4	4.48	0.005	0.359	-0.359
-30	100	7.4	-2.30	-0.003	0.359	-0.359
-20	100	7.4	-6.55	-0.008	0.359	-0.359
-10	100	7.4	3.81	0.005	0.359	-0.359
0	100	7.4	4.25	0.005	0.359	-0.359
+10	100	7.4	-2.02	-0.002	0.359	-0.359
+20	100	7.4	3.83	0.005	0.359	-0.359
+30	100	7.4	2.91	0.003	0.359	-0.359
+40	100	7.4	-1.69	-0.002	0.359	-0.359
+50	100	7.4	-4.18	-0.005	0.359	-0.359
+60	100	7.4	2.01	0.002	0.359	-0.359
+20	Battery Endpoint	6.1	-2.96	-0.004	0.359	-0.359

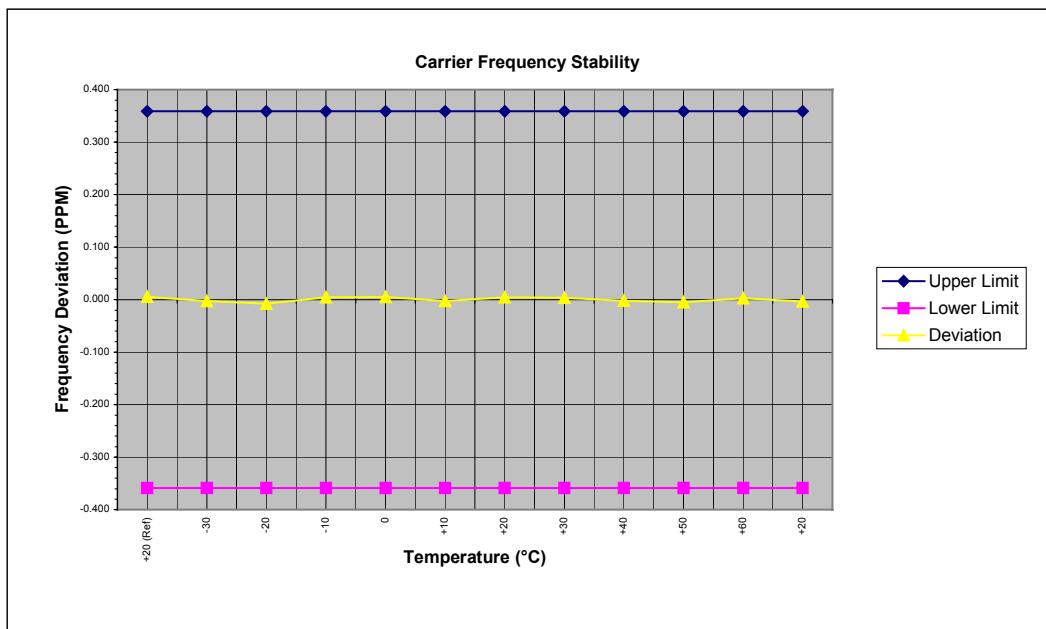

Time Period and Procedure:

1. The carrier frequency of the transmitter was measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment was subjected to an overnight "soak" at -30°C without any power applied.
3. After the overnight "soak" at -30°C, the measurement of the carrier frequency of the transmitter was made within a three-minute interval after applying power to the transmitter.
4. Frequency measurements were made at 10°C intervals up to +60°C, then back to room temperature. A minimum period of one hour was provided to allow stabilization of the equipment at each temperature level.

12.1 TEST EQUIPMENT LIST

TEST EQUIPMENT LIST

Equipment Type	Model	Serial No.	Calibration Due Date
HP Signal Generator	8648D (9kHz-4.0GHz)	3847A00611	Feb 2004
Rohde & Schwarz Signal Generator	SMR40 (10MHz-40GHz)	835537/022	Nov 2003
Gigatronics Power Meter	8652A	1835272	Feb 2004
Gigatronics Power Sensor	80701A (0.05-18GHz)	1833535	Feb 2004
Gigatronics Power Sensor	80701A (0.05-18GHz)	1833542	Feb 2004
Amplifier Research Power Amp.	5S1G4 (5W, 800MHz-4.2GHz)	26235	N/A
Microwave System Amplifier	HP 83017A (0.5-26.5GHz)	3123A00587	N/A
Network Analyzer	HP 8753E (30kHz-3GHz)	US38433013	Feb 2004
Audio Analyzer	HP 8903B	3729A18691	Nov 2003
Modulation Analyzer	HP 8901A	3749A07154	July 2003
Frequency Counter	HP 53181A (3GHz)	3736A05175	May 2004
DC Power Supply	HP E3611A	KR83015294	N/A
Multi-Device Controller	EMCO 2090	9912-1484	N/A
Mini Mast	EMCO 2075	0001-2277	N/A
Turntable	EMCO 2080-1.2/1.5	0002-1002	N/A
Double Ridged Horn Antenna	ETS 3115 (1-18GHz)	6267	Oct. 2003
Double Ridged Horn Antenna	ETS 3115 (1-18GHz)	6276	Oct. 2003
Horn Antenna	Chase BBHA 9120-A (0.7-4.8GHz)	9120A-239	Sept 2003
Horn Antenna	Chase BBHA 9120-A (0.7-4.8GHz)	9120A-240	Sept 2003
Roberts Dipoles	Compliance Design (2 sets) 3121C		June 2004
Spectrum Analyzer	HP 8594E	3543A02721	Feb 2004
Spectrum Analyzer	HP E4408B	US39240170	Nov 2003
Shielded Screen Room	Lindgren R.F. 18W-2/2-0	16297	N/A
Environmental Chamber	ESPEC ECT-2 (Temperature/Humidity)	0510154-B	Feb 2004

Test Report S/N:	042503-369HDW
Test Date(s):	May 14-16, 2003
Test Type:	FCC Part 22/24 EMC Measurements

13.1 CONCLUSION

The data in this measurement report shows that the DAP TECHNOLOGIES LTD. Model: CE8640/LS FCC ID: HDWAEA307 Rugged Handheld PC with Sierra Wireless AirCard 555/550 Dual-Band PCS/Cellular CDMA PCMCIA Modem Card complies with the requirements of FCC Rule Parts §24(E), §22.901(d) and §2.

Test Report S/N:	042503-369HDW
Test Date(s):	May 14-16, 2003
Test Type:	FCC Part 22/24 EMC Measurements

APPENDIX A - TEST PLOTS

EMC TEST PLOTS - PCS CDMA Mode

- 1. Conducted Spurious Emissions**
- 2. Receiver Spurious Emissions**
- 3. Occupied Bandwidth**
- 4. Band Edge**
- 5. Block Edge**

hp 09:42:43 May 14, 2003
DAP HDWAEA307 COND SPURS CH 25
Ref 23 dBm Atten 5 dB

Mkr1 2.376 GHz
-26.8 dBm

Peak

Log

10

dB/

Offst

30

dB

DI


-13.0

dBm

M1 S2

S3 FC

AA

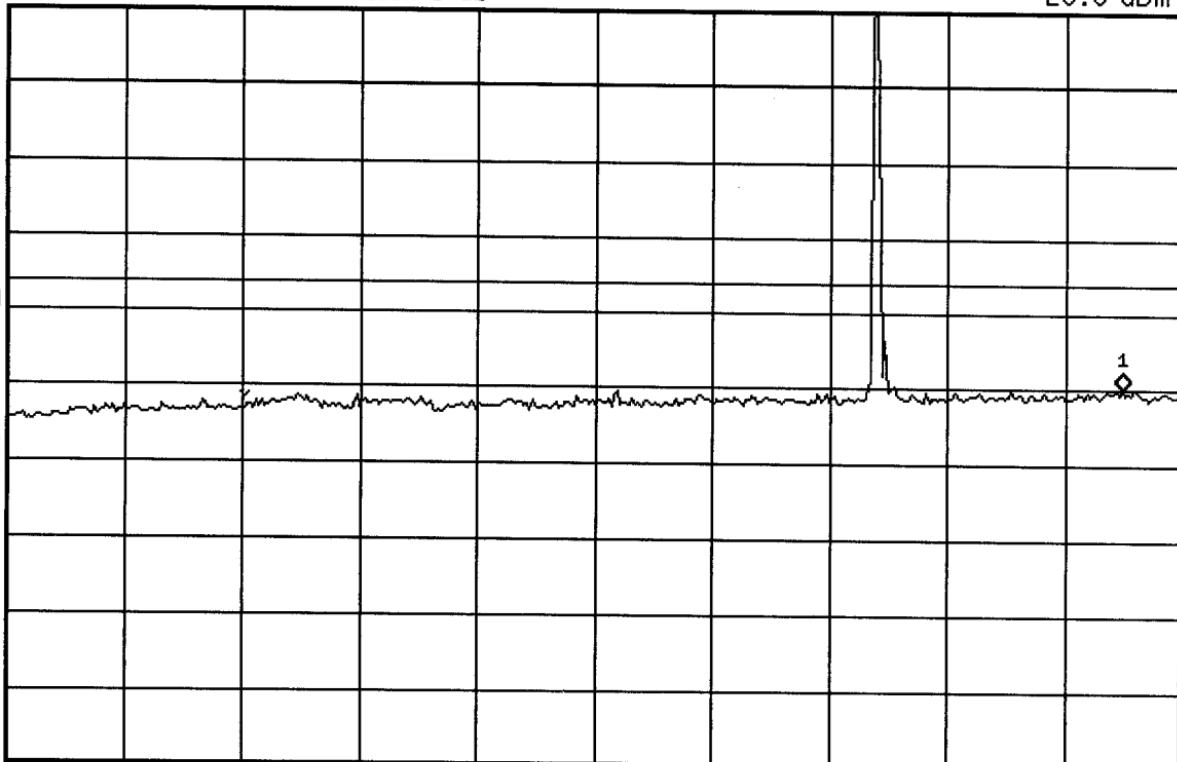

Start 10 MHz

#Res BW 3 MHz

VBW 3 MHz

Stop 2.5 GHz

#Sweep 2 s

[hp]

09:44:24 May 14, 2003

DAP HDWAE307 COND SPURS CH 25

Ref 23 dBm

Atten 5 dB

Mkr1 3.700 GHz

-24.71 dBm

Peak

Log

10

dB/

Offset

30

dB

DI


-13.0

dBm

M1 S2

S3 FC

AA

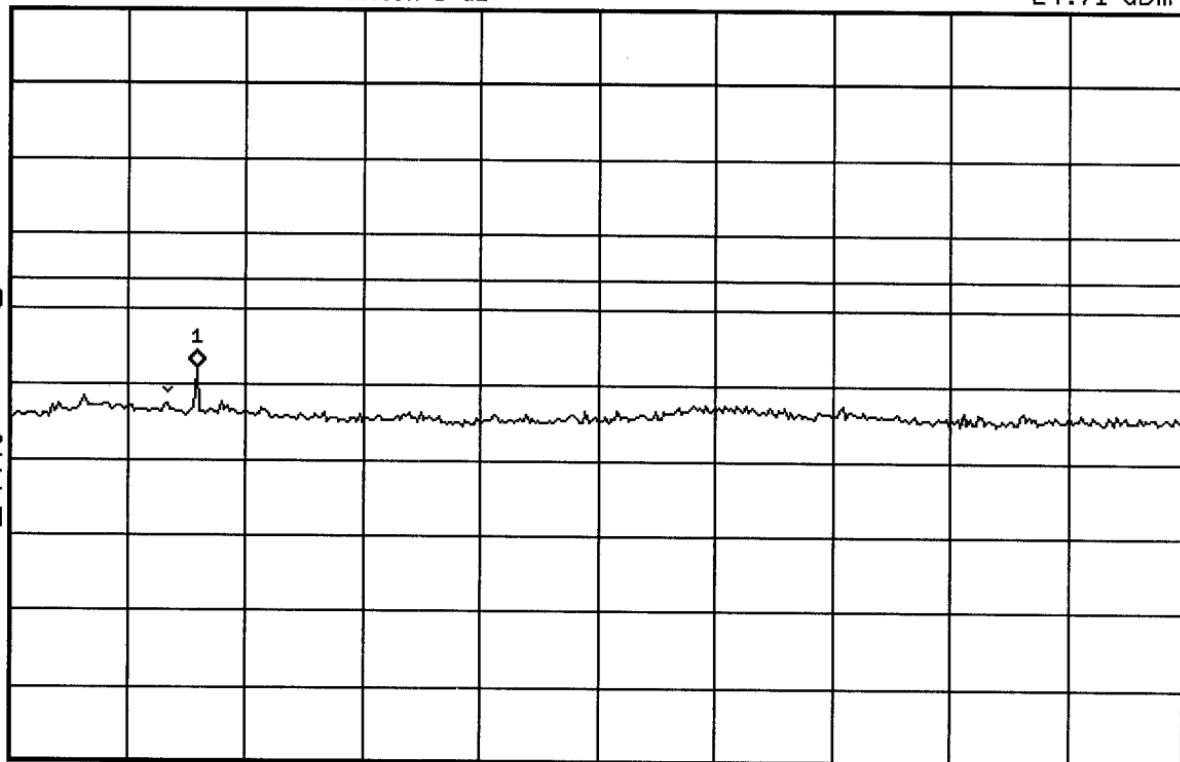

Start 2.5 GHz

#Res BW 3 MHz


VBW 3 MHz

Stop 10 GHz

#Sweep 2 s

[hp] 10:07:38 May 14, 2003
DAP HDWAEA307 COND SPURS CH 25
Ref 23 dBm Atten 5 dB

Mkr1 13.48 GHz
-27.06 dBm

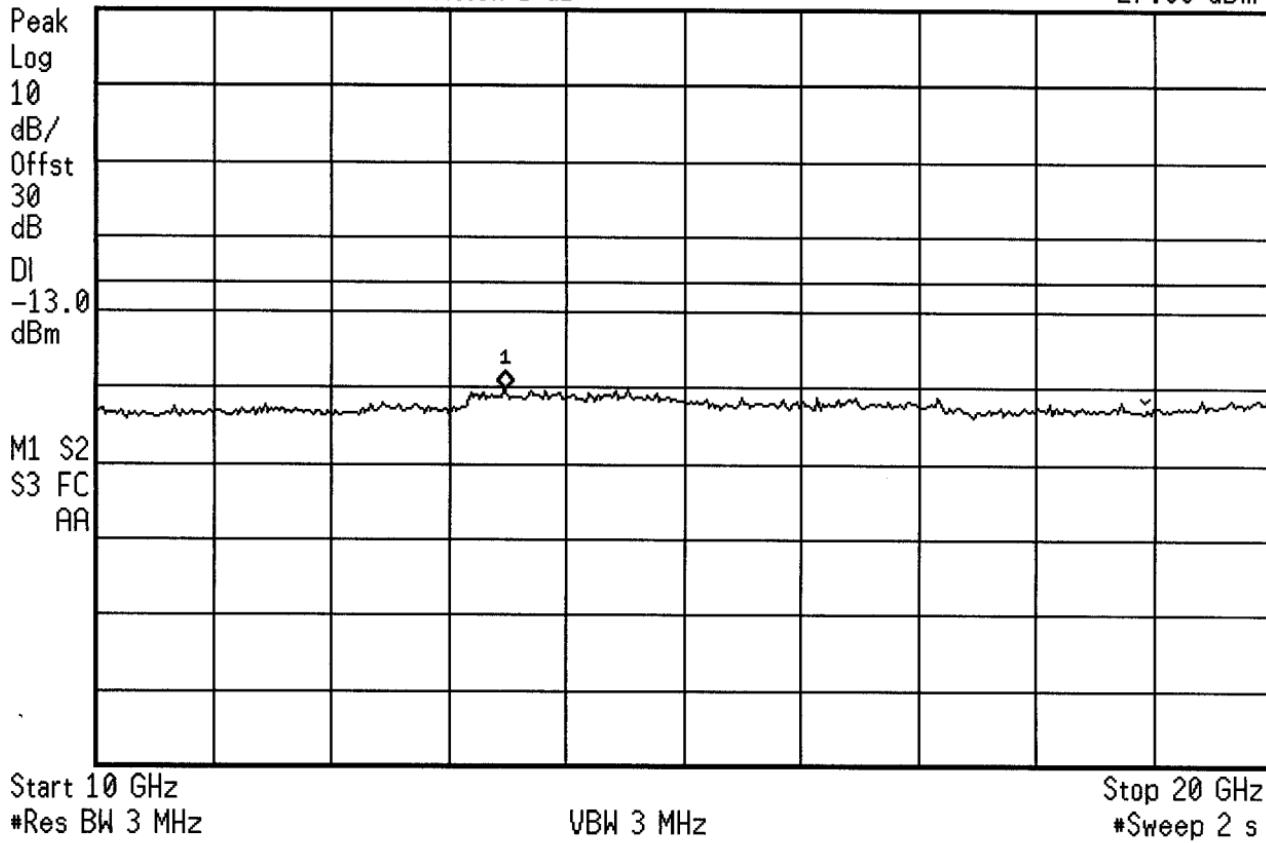

[hp] 10:11:19 May 14, 2003

DAP HDWAEA307 COND SPURS CH 600

Ref 23 dBm

Atten 5 dB

Mkr1 2.500 GHz

-27.27 dBm

Peak

Log

10

dB/

Offst

30

dB

DI

-13.0


dBm

>

M1 S2

S3 FC

AA

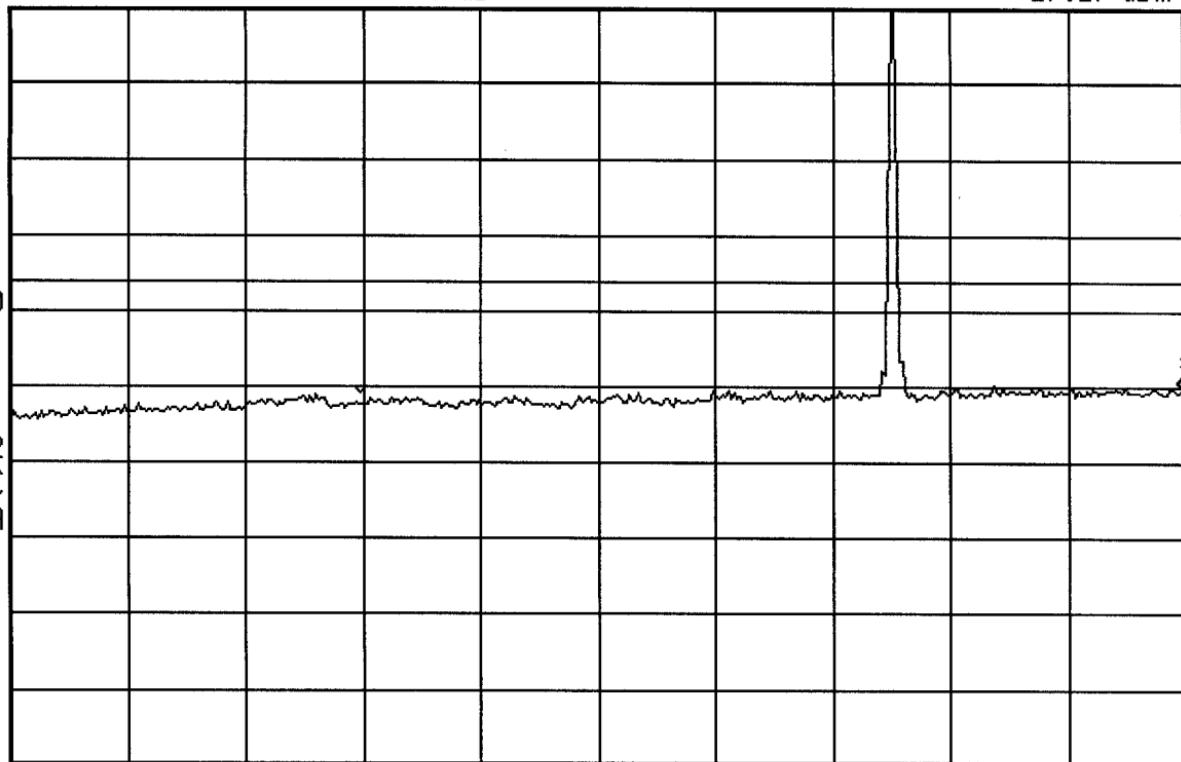

Start 10 MHz

#Res BW 3 MHz


VBW 3 MHz

Stop 2.5 GHz

#Sweep 2 s

hp 10:12:44 May 14, 2003
DAP HDWAEA307 COND SPURS CH 600
Ref 23 dBm Atten 5 dB

Mkr1 3.756 GHz
-18.89 dBm

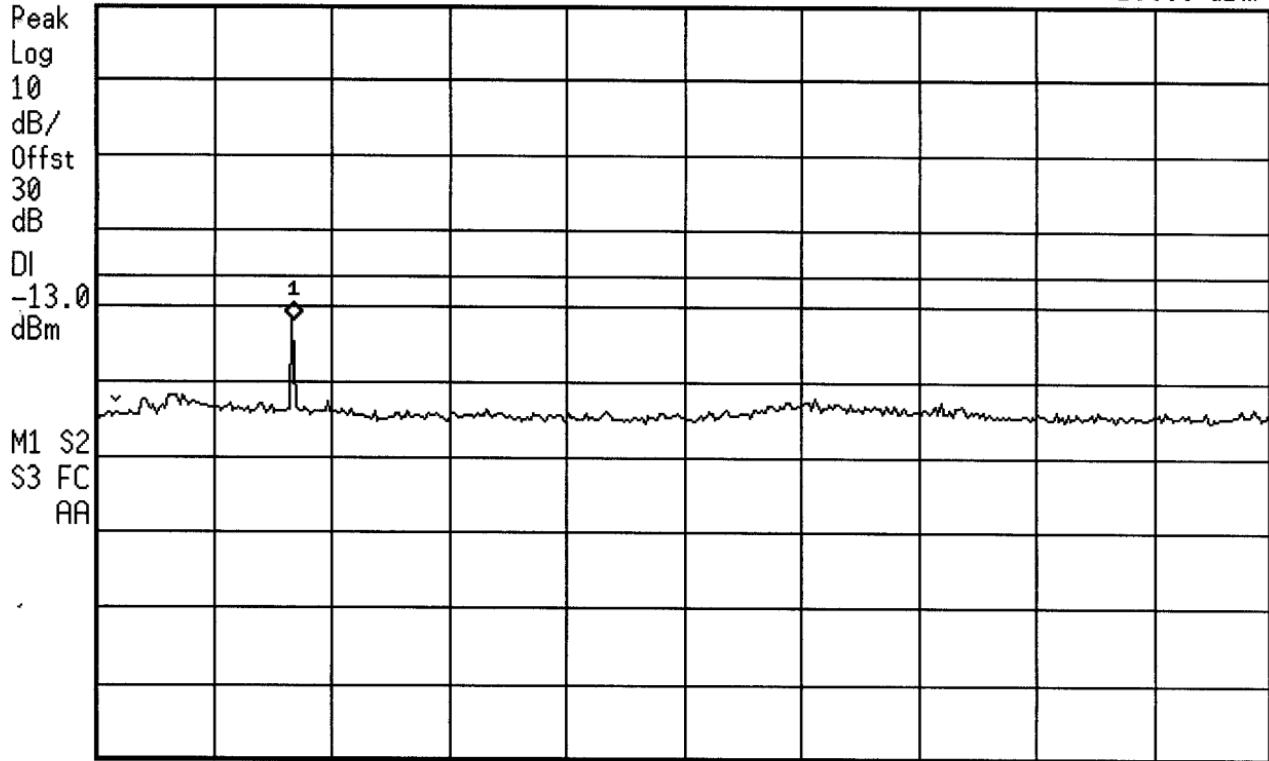

Start 2.5 GHz
#Res BW 3 MHz

VBW 3 MHz

Stop 10 GHz
#Sweep 2 s

[hp] 10:14:09 May 14, 2003
DAP HDWAEA307 COND SPURS CH 600
Ref 23 dBm Atten 5 dB

Mkr1 13.85 GHz
-28.3 dBm

Peak
Log

10
dB/
Offst

30
dB

Bl
-13.0
dBm


M1 S2
S3 FC

AA

Start 10 GHz
#Res BW 3 MHz

VBW 3 MHz

Stop 20 GHz
#Sweep 2 s

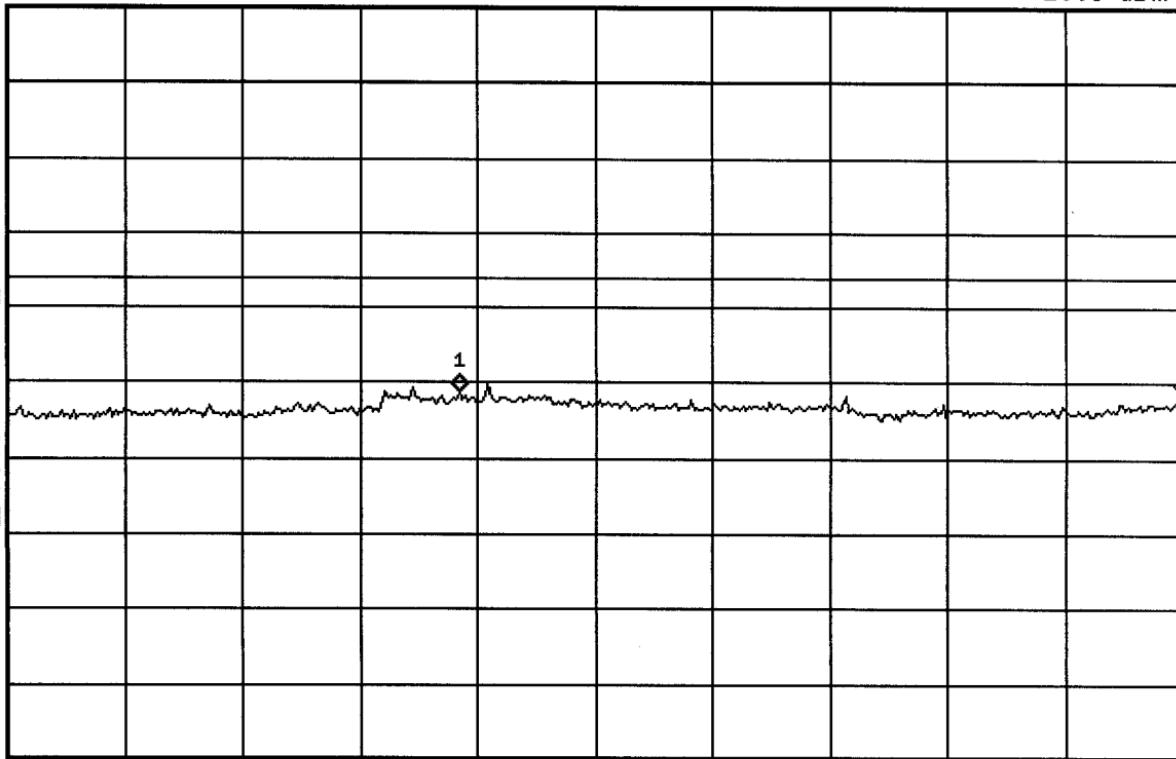

hp 10:20:43 May 14, 2003
DAP HDWAEA307 COND SPURS CH 1175
Ref 23 dBm Atten 5 dB

Mkr1 2.313 GHz
-26.25 dBm

Peak

Log

10

dB/

Offst

30

dB

DI

-13.0

dBm

M1 S2

S3 FC

AA

Start 10 MHz


#Res BW 3 MHz

VBW 3 MHz

Stop 2.5 GHz

#Sweep 2 s

1

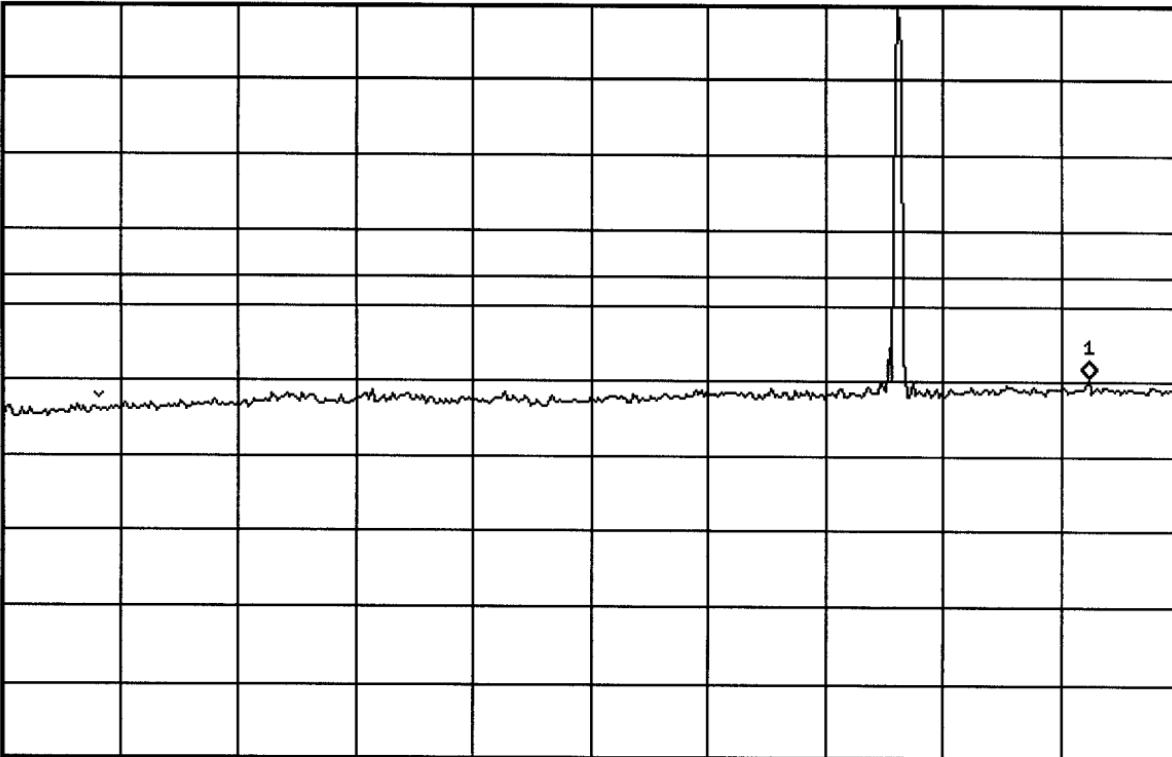

[hp] 10:19:11 May 14, 2003
DAP HDWAEA307 COND SPURS CH 1175
Ref 23 dBm Atten 5 dB

Mkr1 3.813 GHz
-14.9 dBm

Peak

Log

10

dB/

Offst

30

dB

DI


-13.0

dBm

M1 S2

S3 FC

AA

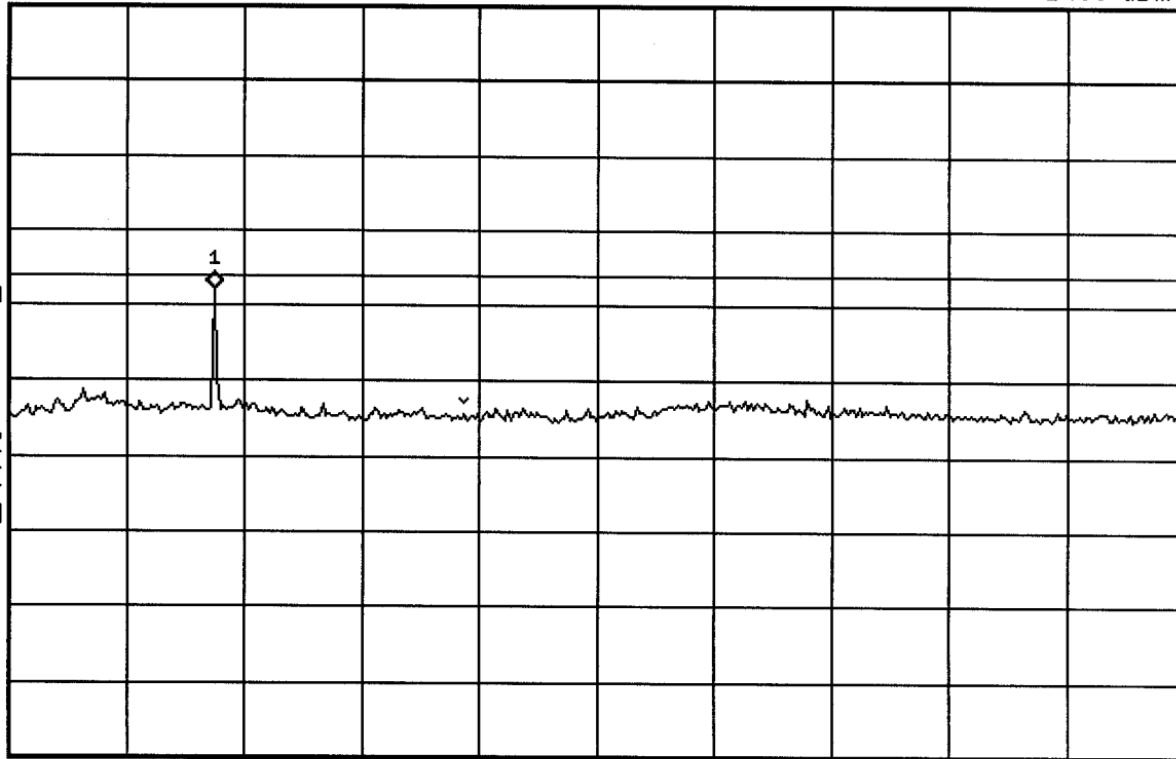

Start 2.5 GHz
*Res BW 3 MHz

VBW 3 MHz

Stop 10 GHz
#Sweep 2 s

hp 10:17:33 May 14, 2003
DAP HDWAEA307 COND SPURS CH 1175
Ref 23 dBm Atten 5 dB

Mkr1 13.23 GHz
-28.44 dBm


Peak
Log

10
dB/
Offst

30
dB

DI
-13.0
dBm

M1 S2
S3 FC
AA

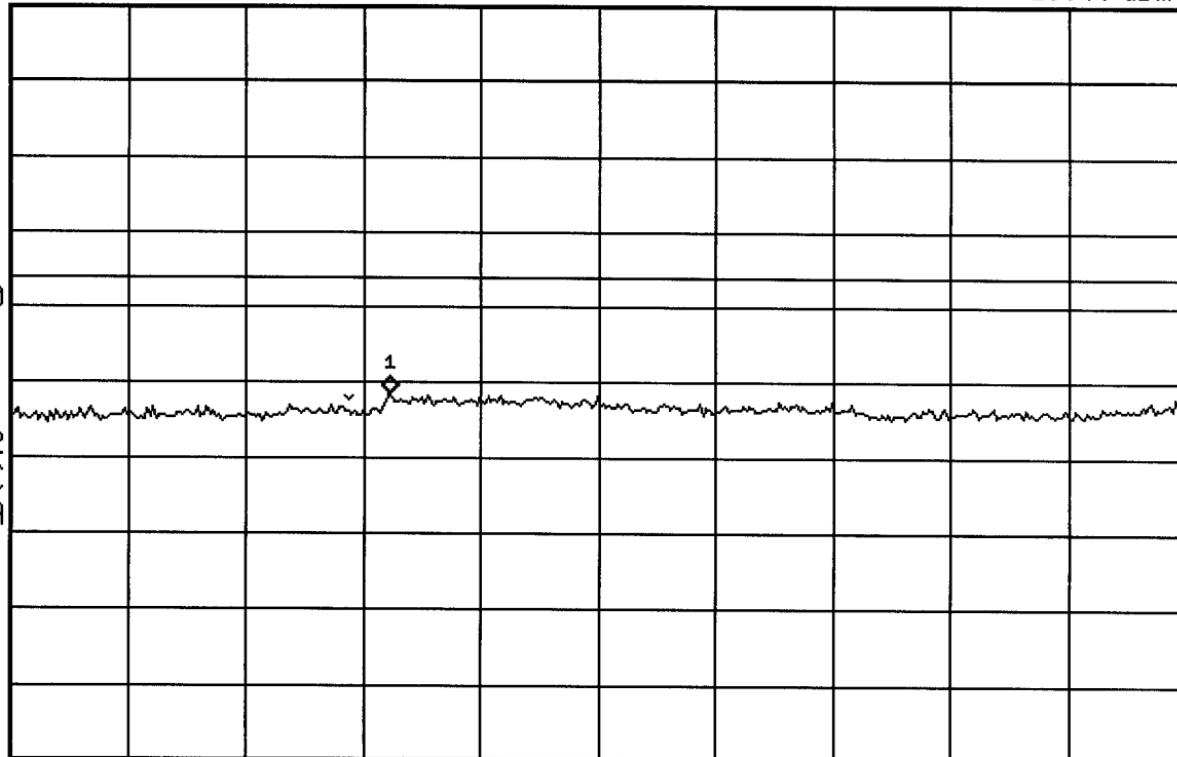

Start 10 GHz
#Res BW 3 MHz

VBW 3 MHz

Stop 20 GHz
#Sweep 2 s

hp 10:26:58 May 14, 2003

DAP HDWAEA307 RECEIVER SPIURS

Ref -49 dBm

Atten 5 dB

Mkr1 1.93289 GHz

-56.99 dBm

Peak

Log

10

dB/

Offst

30

dB

1

M1 S2

S3 FC

AA

Start 1.931 GHz

*Res BW 30 kHz

VBW 30 kHz

Stop 1.989 GHz

*Sweep 2 s

hp 11:17:31 May 16, 2003

DAP HDWAEA307 PCS CDMA CH 25

Ref 23 dBm

Atten 5 dB

▲ Mkr1 1.400 MHz

-1.68 dB

Peak

Log

10

dB/

Offst

30

dB

DI


-13.0

dBm

W1 S2

S3 FS

AA

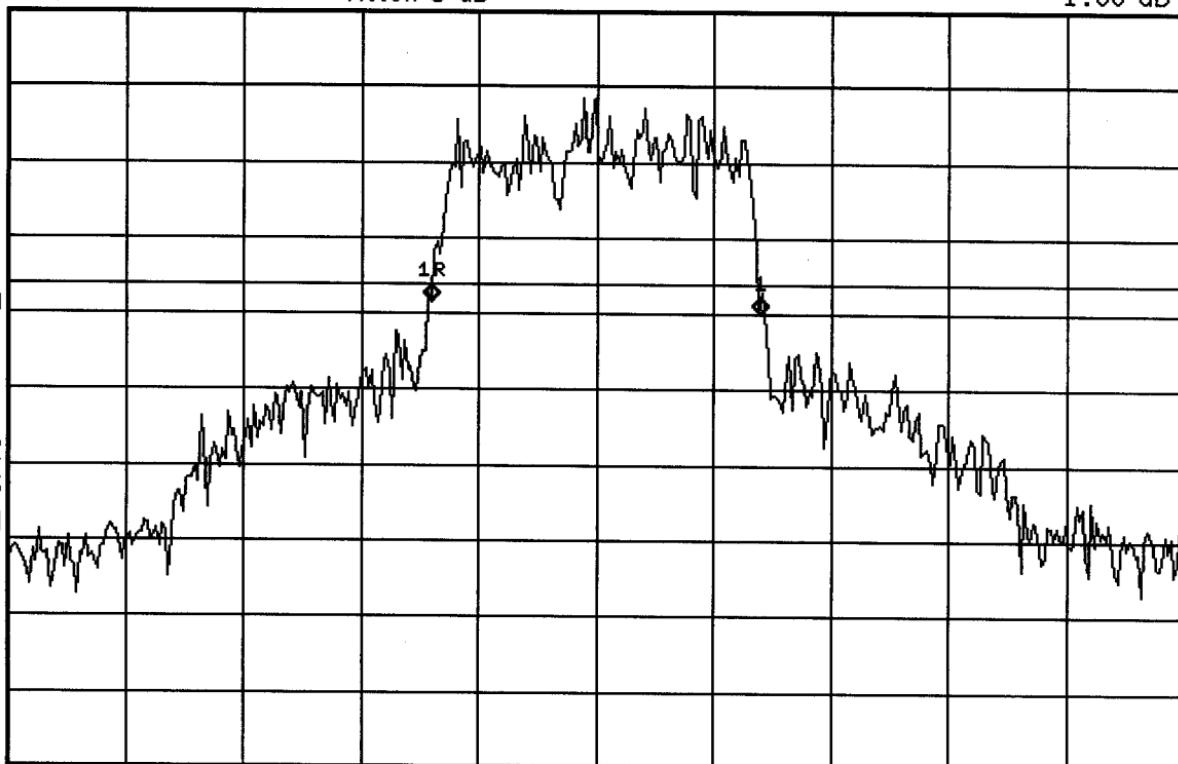

Center 1.851 GHz

*Res BW 30 kHz

*VBW 30 kHz

Span 5 MHz

Sweep 13.89 ms



11:28:56 May 16, 2003

DAP HDWAEA307 PCS CDMA CH 600

Ref 23 dBm

Atten 5 dB

△ Mkr1 1.400 MHz
0.554 dB

Peak

Log

10

dB/

Offst

30

dB

DI

-13.0

dBm

W1 S2

S3 FS

AA


Center 1.88 GHz

*Res BW 30 kHz

*VBW 30 kHz

Span 5 MHz

Sweep 13.89 ms

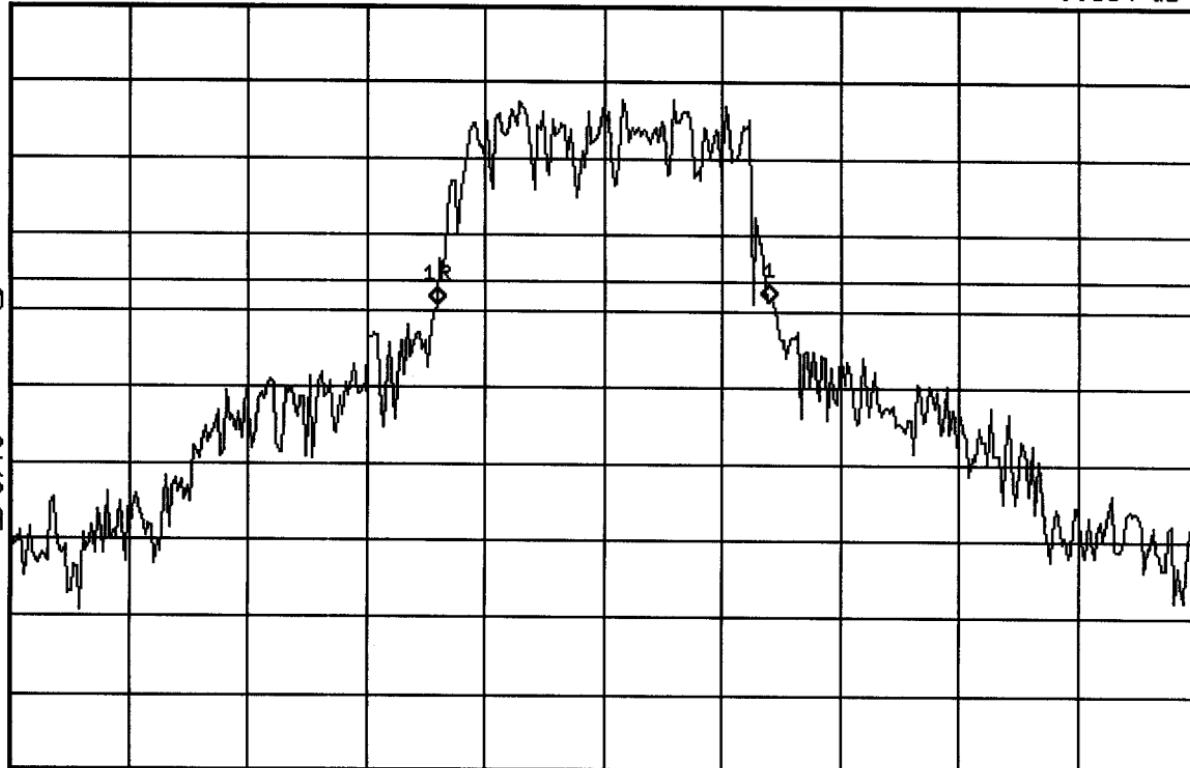



11:36:44 May 16, 2003

DAP HDWAEA307 PCS CDMA CH 1175

Ref 23 dBm

Atten 5 dB

△ Mkr1 1.400 MHz
0.16 dB

Peak

Log

10

dB/

Offst

30

dB

DI


-13.0

dBm

W1 S2

S3 FS

AA

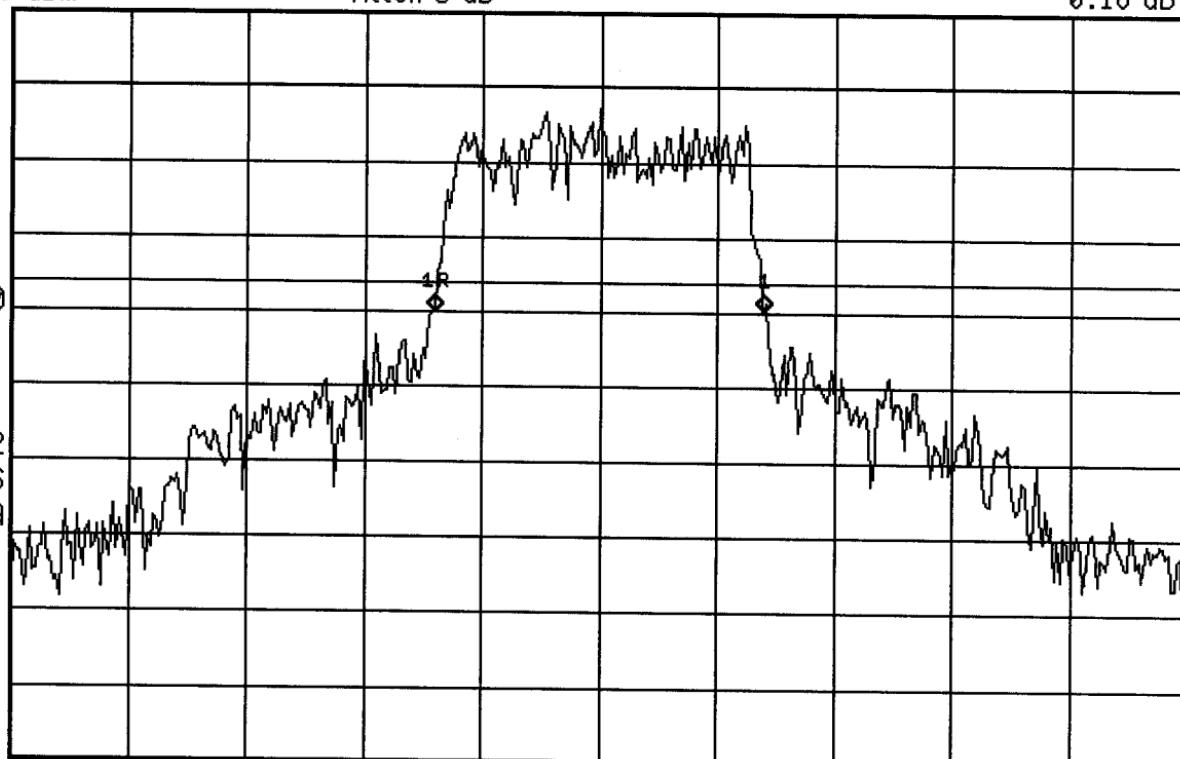

Center 1.909 GHz

#Res BW 30 kHz

*VBW 30 kHz

Span 5 MHz

Sweep 13.89 ms


hp 11:48:52 May 16, 2003

DAP HDWAEA307 PCS CDMA CH 1175

Ref 23 dBm

Atten 5 dB

Samp
Log
10
dB/
Offset
30
dB

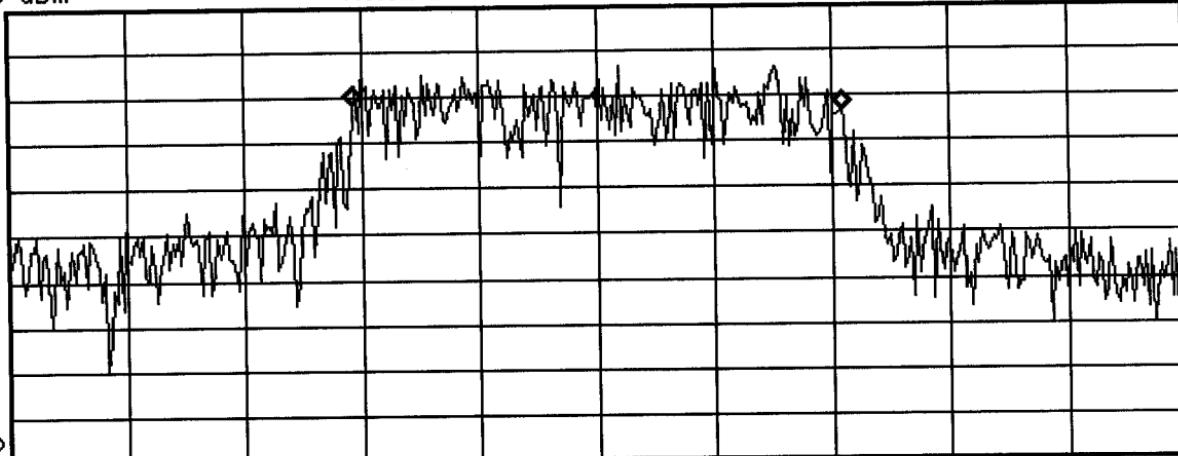

W1 S2

Center 1.909 GHz

*Res BW 30 kHz

*VBW 300 kHz

Span 3 MHz

Sweep 9.167 ms

Occupied Bandwidth Results (idle)

Occupied Bandwidth
1.249 MHz

Occ BW % Pwr 99.00 %

Transmit Freq Error 5.016 kHz

hp 11:55:23 May 16, 2003

DAP HDWAEA307 BAND EDGE LOW CH

Ref 23 dBm

Atten 5 dB

Peak

Log

10

dB/

0ffst

30

dB

DI

-13.0

dBm

W1 S2

S3 FS

AA


Center 1.85 GHz

#Res BW 30 kHz

*VBW 30 kHz

Span 5 MHz

Sweep 13.89 ms

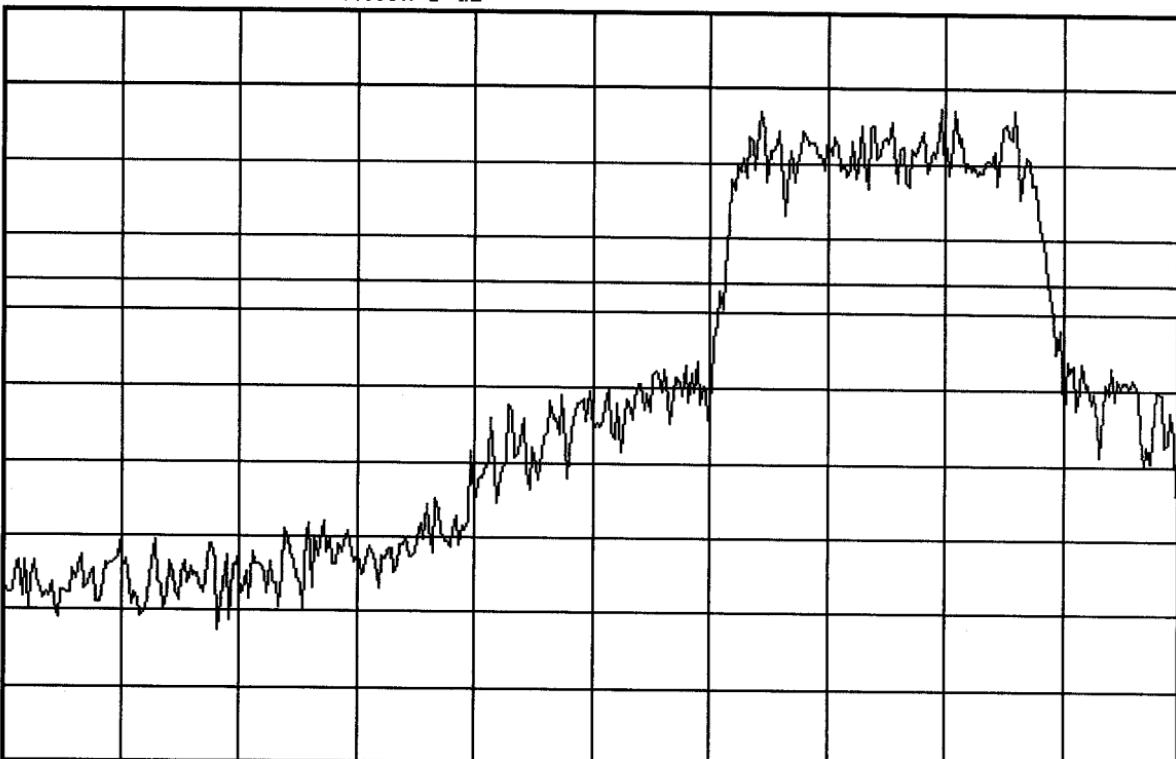

hp 13:43:34 May 16, 2003

DAP HDWAEA3073 AND EDGE HIGH CH

Ref 23 dBm

Atten 5 dB

Peak

Log

10

dB/

Offst

30

dB

DI


-13.0

dBm

W1 S2

S3 FS

AA

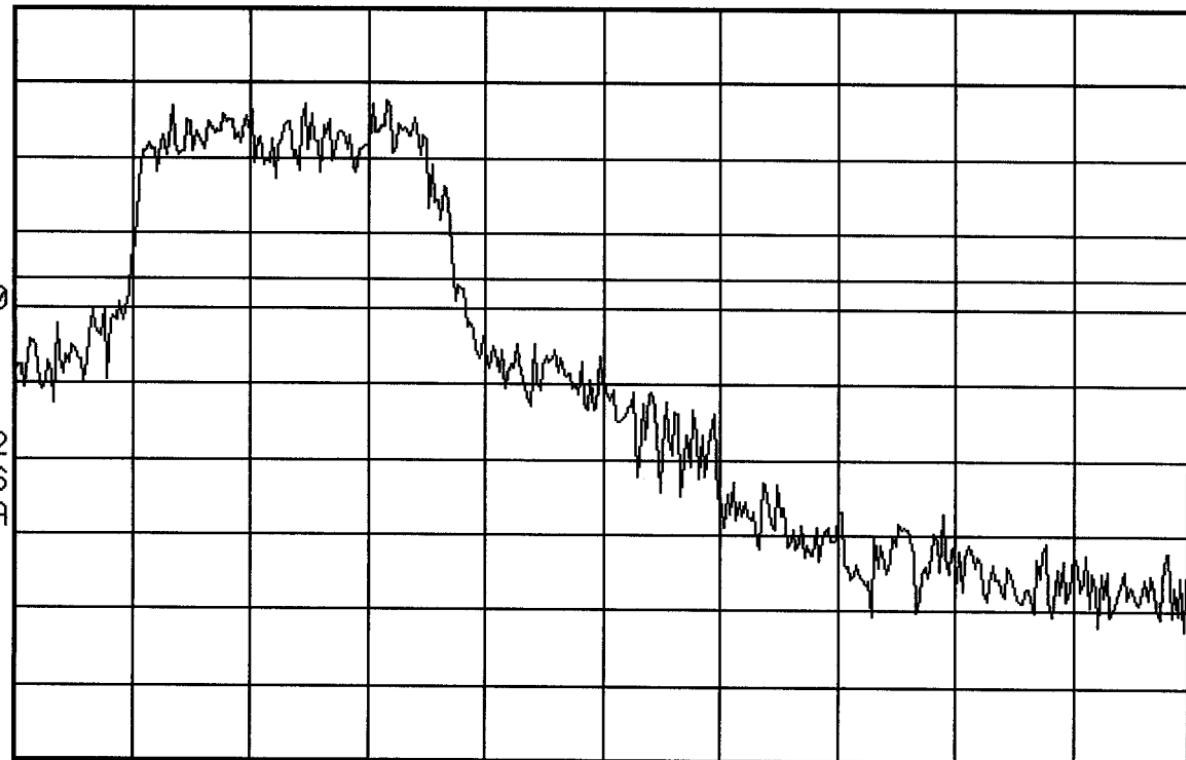

Center 1.91 GHz

*Res BW 30 kHz

*VBW 30 kHz

Span 5 MHz

Sweep 13.89 ms

hp 10:08:16 May 16, 2003

DAP HDWAEA307 PCS BLOCK 1 LOWER EDGE

Ref 23 dBm

Atten 5 dB

Mkr1 1.85270 GHz
-17.92 dBm

Peak

Log

10

dB/

0ffst

30

dB

DI


-13.0

dBm

W1 S2

S3 FS

AA

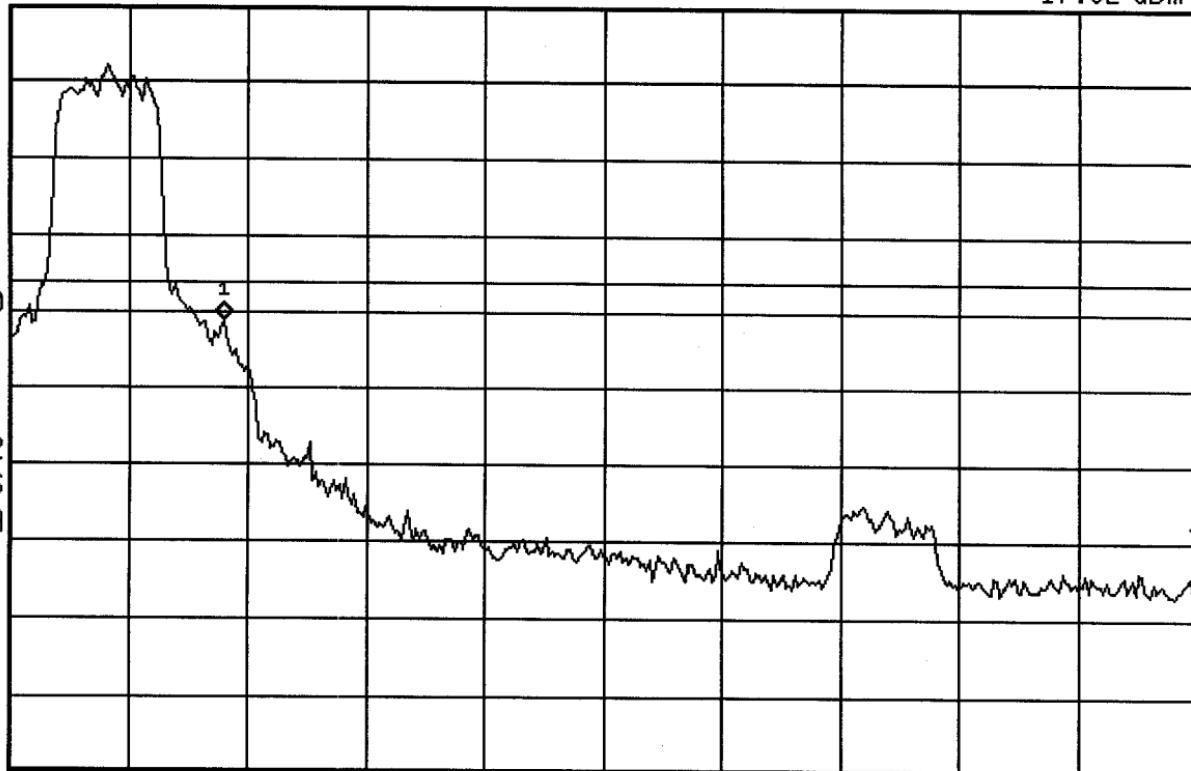

Start 1.85 GHz

#Res BW 30 kHz


VBW 30 kHz

Stop 1.865 GHz

#Sweep 2 s

hp 11:16:07 May 16, 2003
DAP HDWAEA307 PCS BLOCK 1 UPPER EDGE
Ref 23 dBm Atten 5 dB

Mkr1 1.86286 GHz
-14.17 dBm

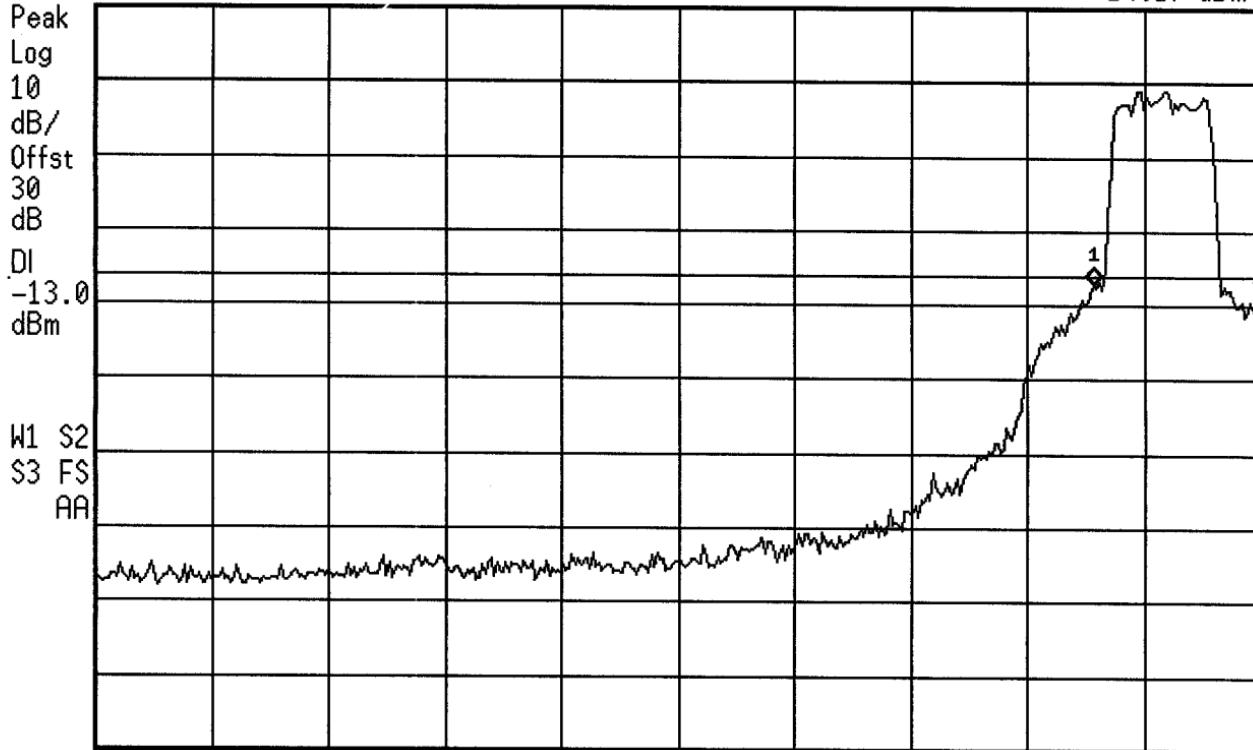

Start 1.85 GHz
#Res BW 30 kHz

VBW 30 kHz

Stop 1.865 GHz
#Sweep 2 s

[hp] 10:35:30 May 16, 2003

DAP HDWAE307 PCS BLOCK 2 LOWER EDGE
Ref 23 dBm Atten 5 dB

Mkr1 1.867060 GHz
-14.33 dBm




Start 1.865 GHz
#Res BW 30 kHz

VBW 30 kHz

Stop 1.87 GHz
#Sweep 2 s

hp 10:39:00 May 16, 2003
DAP HDWAEA307 PCS BLOCK 2 UPPER EDGE
Ref 23 dBm Atten 5 dB

Mkr1 1.867764 GHz
-14.82 dBm

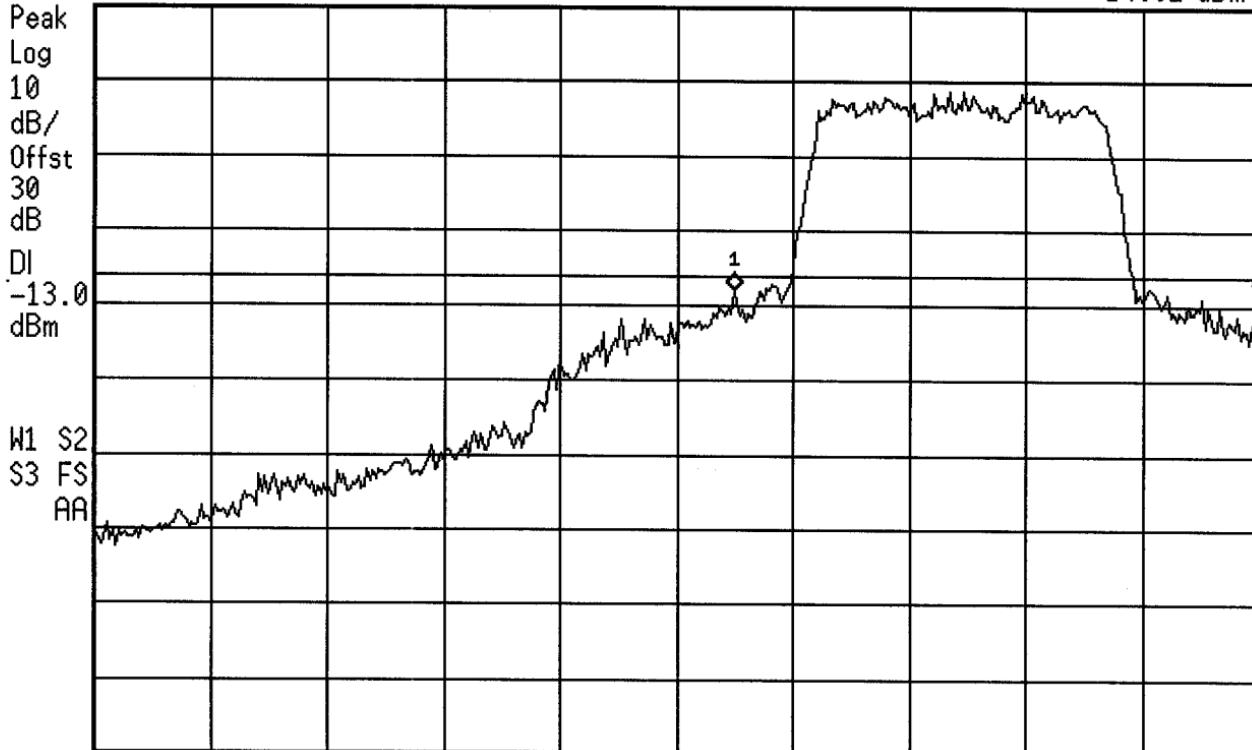

Start 1.865 GHz
#Res BW 30 kHz

VBW 30 kHz

Stop 1.87 GHz
#Sweep 2 s

[hp] 10:44:09 May 16, 2003

DAP HDWAEA307 PCS BLOCK 3 LOWER EDGE
Ref 23 dBm Atten 5 dB

Mkr1 1.87225 GHz
-17.1 dBm

Peak

Log

10

dB/

Offst

30

dB

DI


-13.0

dBm

W1 S2

S3 FS

AA

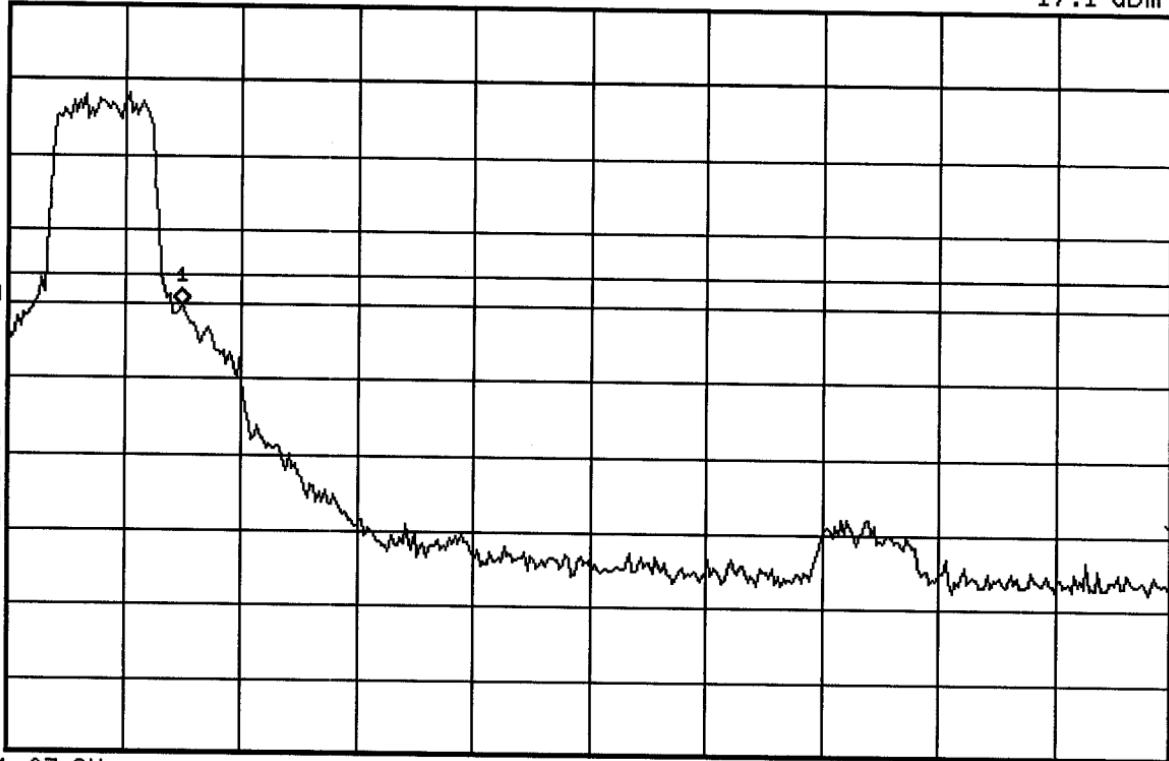

Start 1.87 GHz
#Res BW 30 kHz

VBW 30 kHz

Stop 1.885 GHz
#Sweep 2 s

hp 10:48:11 May 16, 2003

DAP HDWAEA307 PCS BLOCK 3 UPPER EDGE

Ref 23 dBm

Atten 5 dB

Mkr1 1.88290 GHz

-14.7 dBm

Peak

Log

10

dB/

Offst

30

dB

DI

-13.0

dBm

W1 S2

S3 FS

AA


Start 1.87 GHz

#Res BW 30 kHz

VBW 30 kHz


Stop 1.885 GHz

#Sweep 2 s

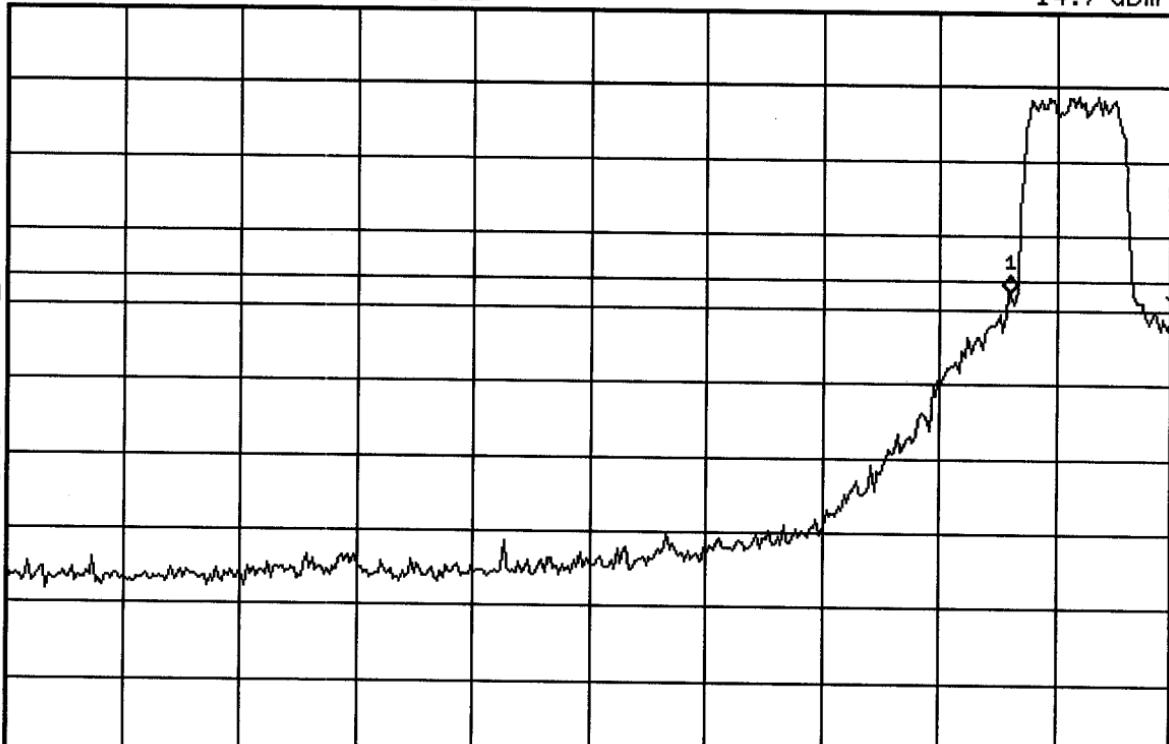

[hp] 10:53:02 May 16, 2003
DAP HDWAEA307 PCS BLOCK 4 LOWER EDGE
Ref 23 dBm Atten 5 dB

Mkr1 1.887063 GHz
-14.69 dBm

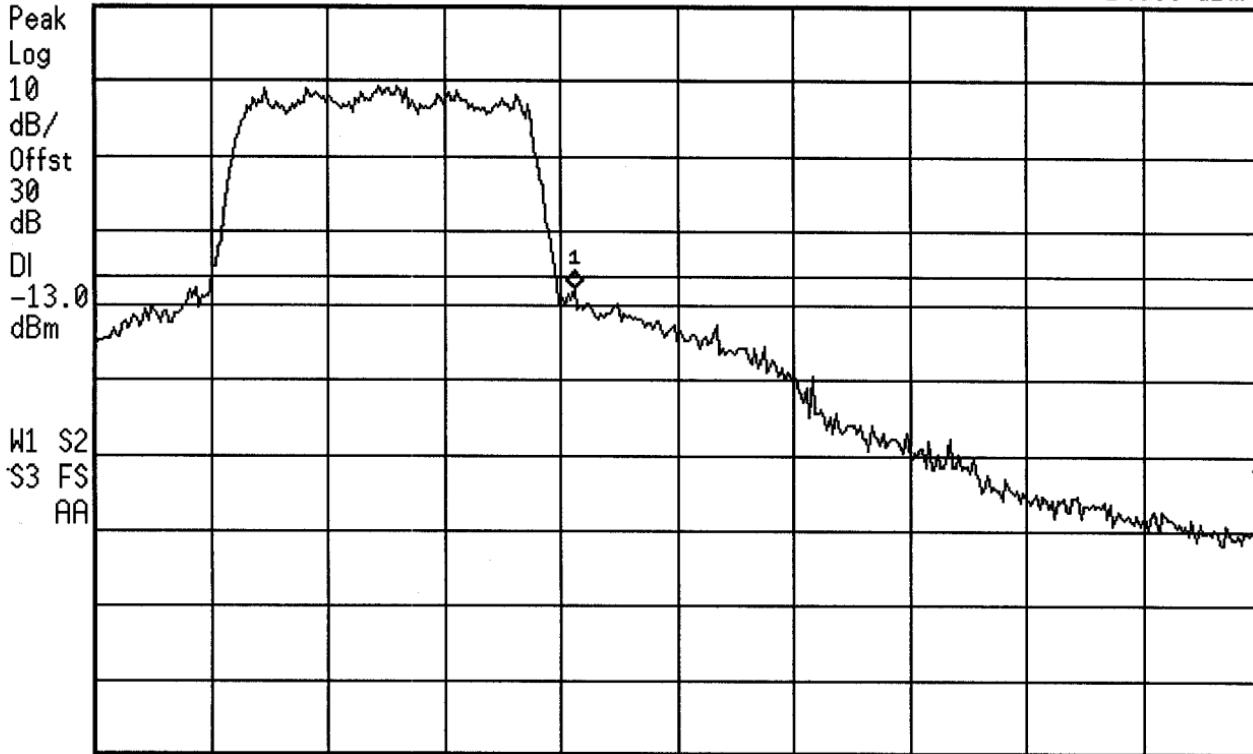

Start 1.885 GHz
*Res BW 30 kHz

VBW 30 kHz

Stop 1.89 GHz
#Sweep 2 s

hp 10:55:35 May 16, 2003

DAP HDWAEA307 PCS BLOCK 4 UPPER EDGE
Ref 23 dBm Atten 5 dB

Mkr1 1.887950 GHz
-13.84 dBm

Peak

Log

10

dB/
Offst

30

dB

DI


-13.0

dBm

W1 S2

S3 FS

AA

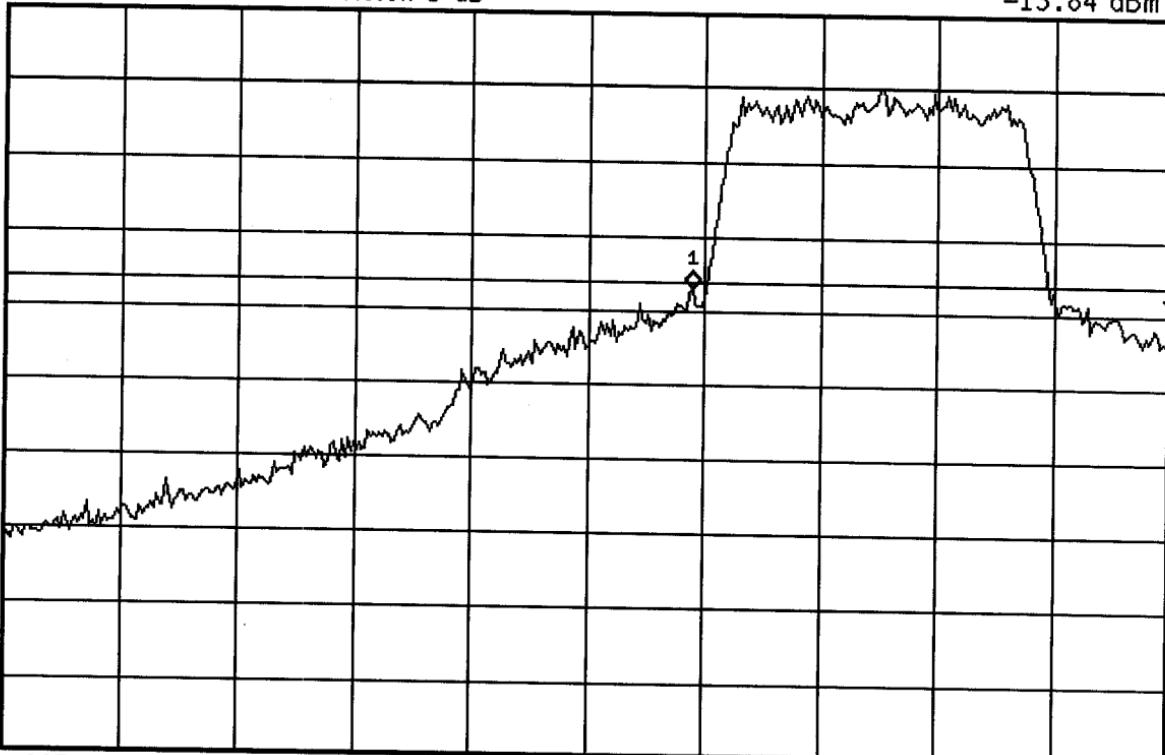


Start 1.885 GHz
*Res BW 30 kHz

VBW 30 kHz

Stop 1.89 GHz
#Sweep 2 s

hp 10:58:55 May 16, 2003
DAP HDWAEA307 PCS BLOCK 5 LOWER EDGE
Ref 23 dBm Atten 5 dB

Mkr1 1.892050 GHz
-16.09 dBm

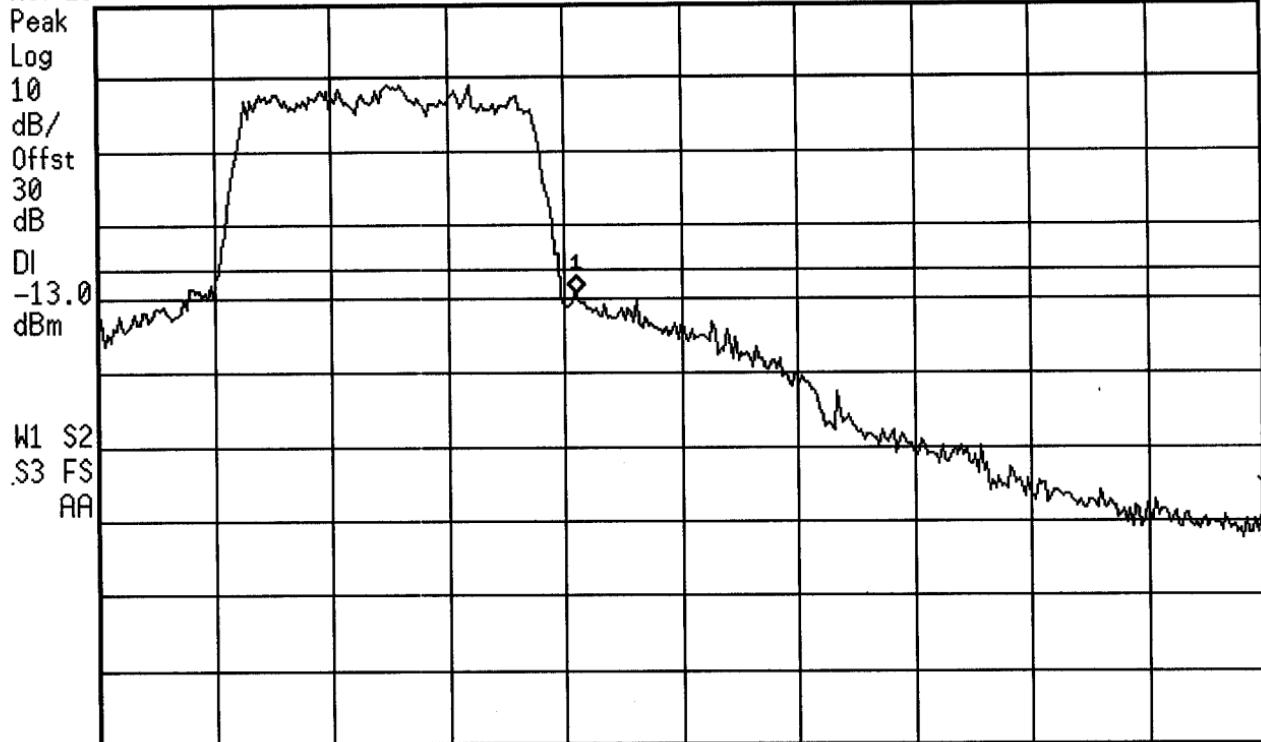


Start 1.89 GHz
#Res BW 30 kHz

VBW 30 kHz

Stop 1.895 GHz
#Sweep 2 s

hp 11:06:46 May 16, 2003
DAP HDWAEA307 PCS BLOCK 5 UPPER EDGE
Ref 23 dBm Atten 5 dB

Mkr1 1.892925 GHz
-17.25 dBm

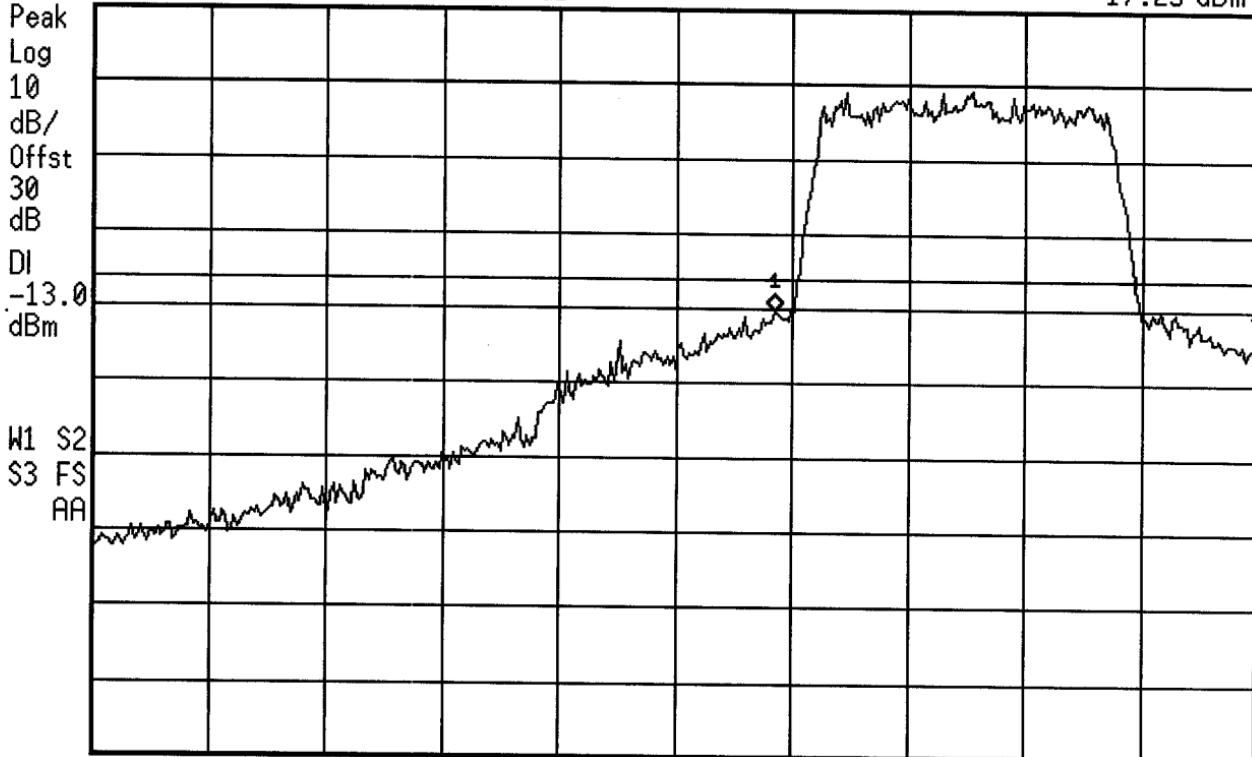


Start 1.89 GHz
#Res BW 30 kHz

VBW 30 kHz

Stop 1.895 GHz
#Sweep 2 s

hp 11:10:00 May 16, 2003
DAP HDWAEA307 PCS BLOCK 6 LOWER EDGE
Ref 23 dBm Atten 5 dB

Mkr1 1.89725 GHz
-17.38 dBm

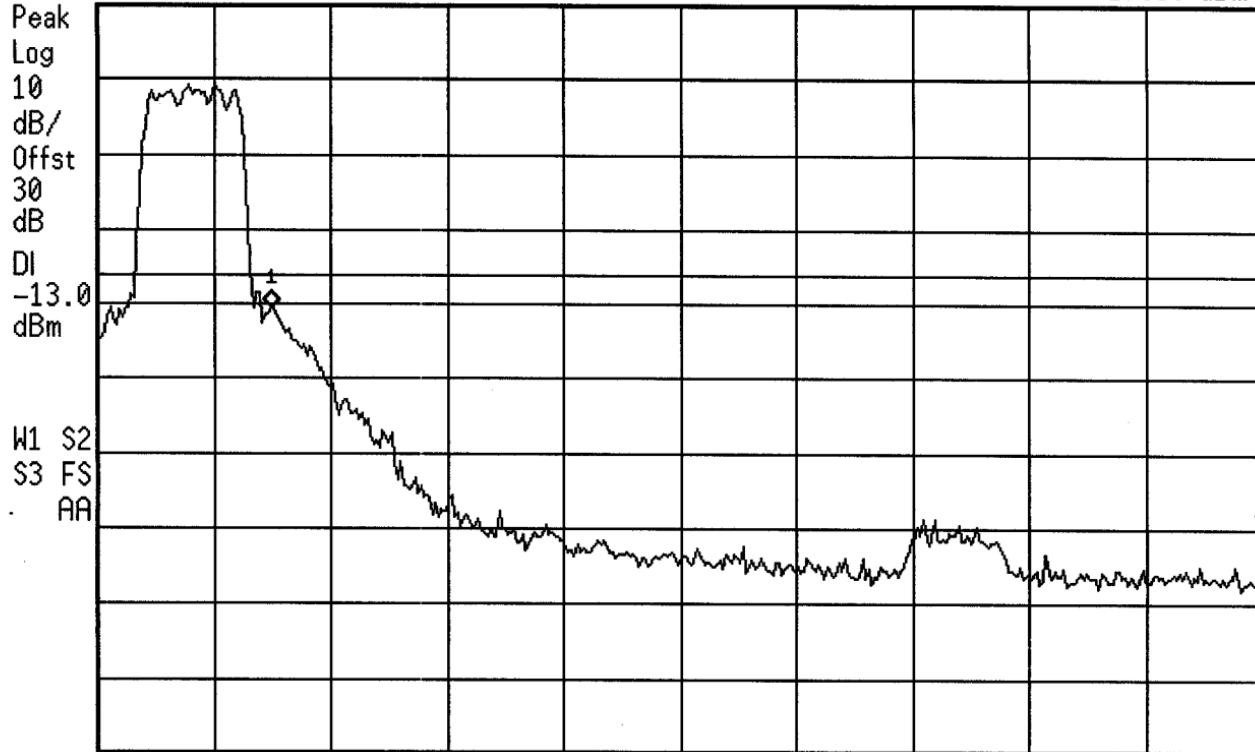


Start 1.895 GHz
*Res BW 30 kHz

VBW 30 kHz

Stop 1.91 GHz
#Sweep 2 s

hp 11:12:33 May 16, 2003
DAP HDWAEA307 PCS BLOCK 6 UPPER EDGE
Ref 23 dBm Atten 5 dB

Mkr1 1.90775 GHz
-19.59 dBm

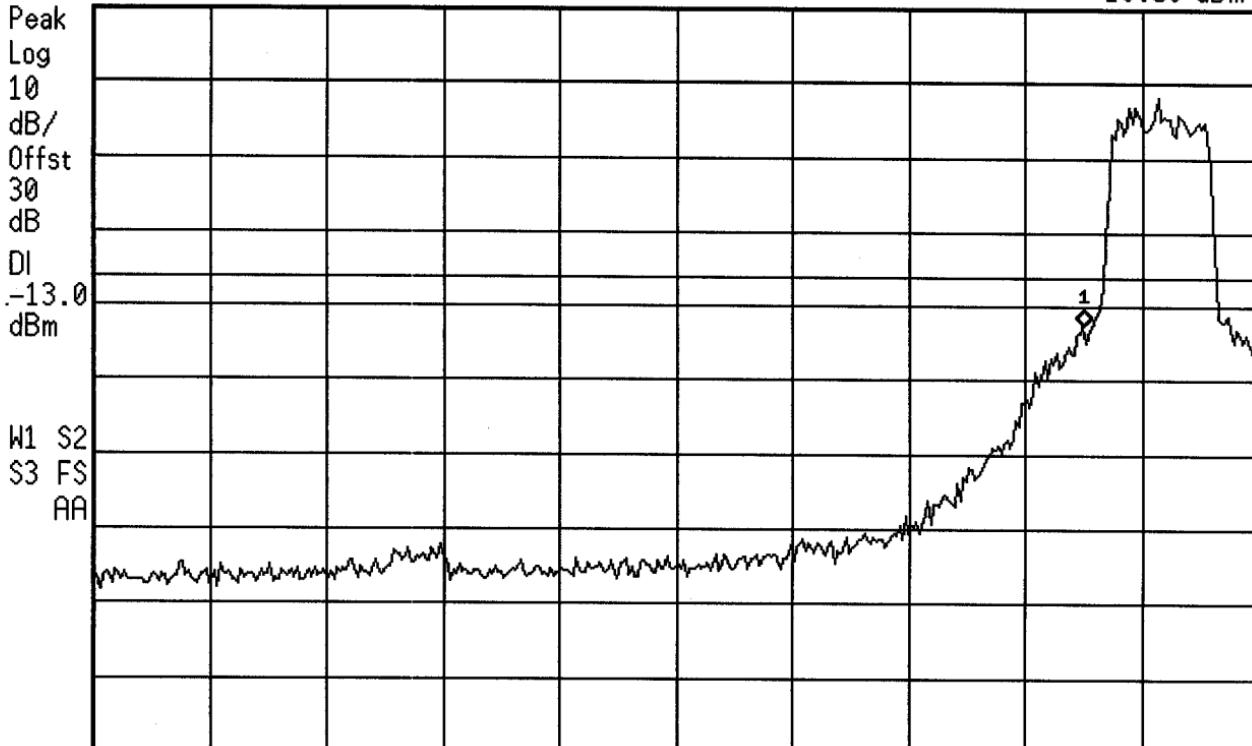

Start 1.895 GHz
#Res BW 30 kHz

VBW 30 kHz


Stop 1.91 GHz
#Sweep 2 s

EMC TEST PLOTS - Cellular CDMA Mode

1. Conducted Spurious Emissions
2. Receiver Spurious Emissions
3. Occupied Bandwidth
4. Band Edge
5. Block Edge

[hp] 16:22:03 May 14, 2003
DAP HDWAEA307 COND SPURS CH 1013
Ref 23 dBm Atten 5 dB

Mkr1 2.407 GHz
-26.59 dBm

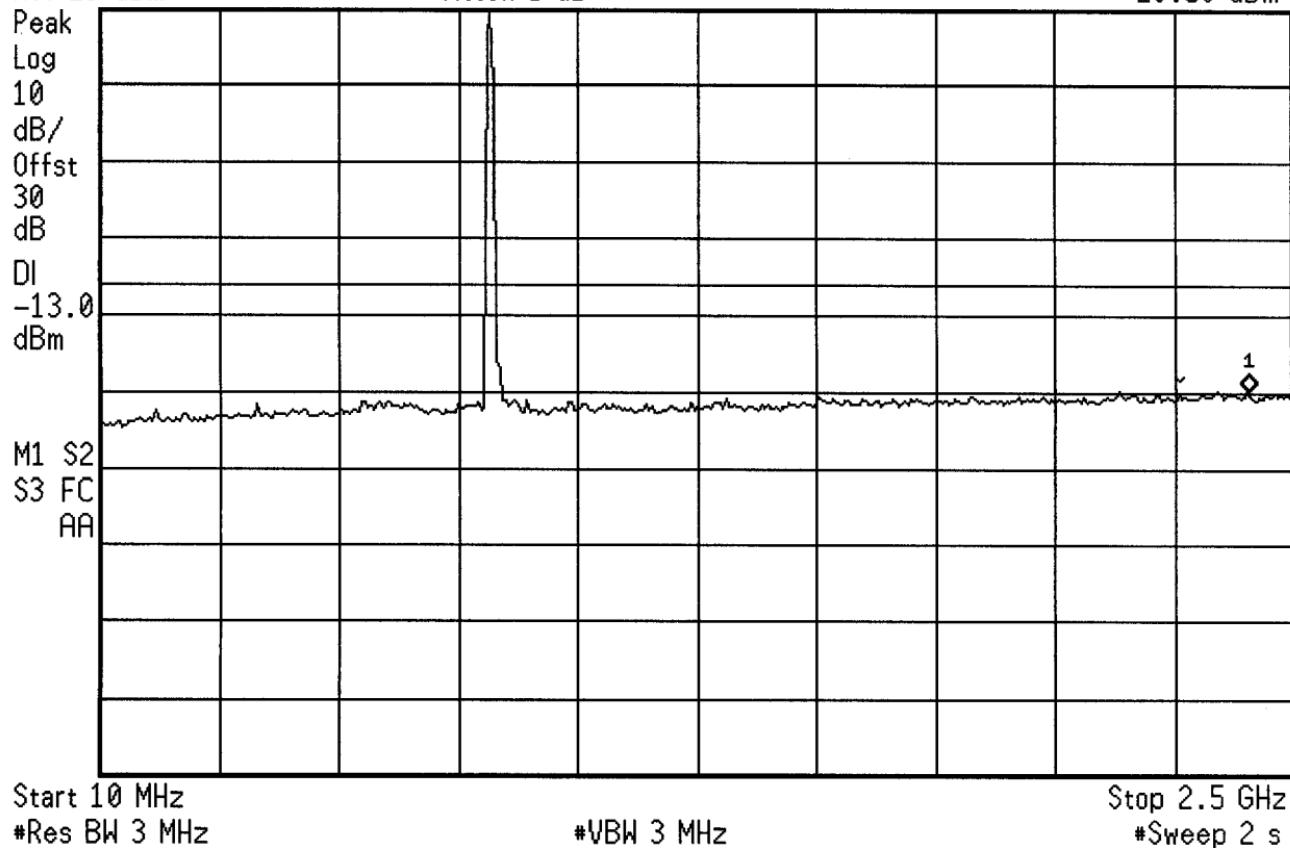


hp 16:23:10 May 14, 2003
DAP HDWAEA307 COND SPURS CH 1013
Ref 23 dBm Atten 5 dB

Mkr1 2.988 GHz
-27.49 dBm

Peak
Log
10
dB/
Offst
30
dB
DI
-13.0
dBm

M1 S2
S3 FC
AA

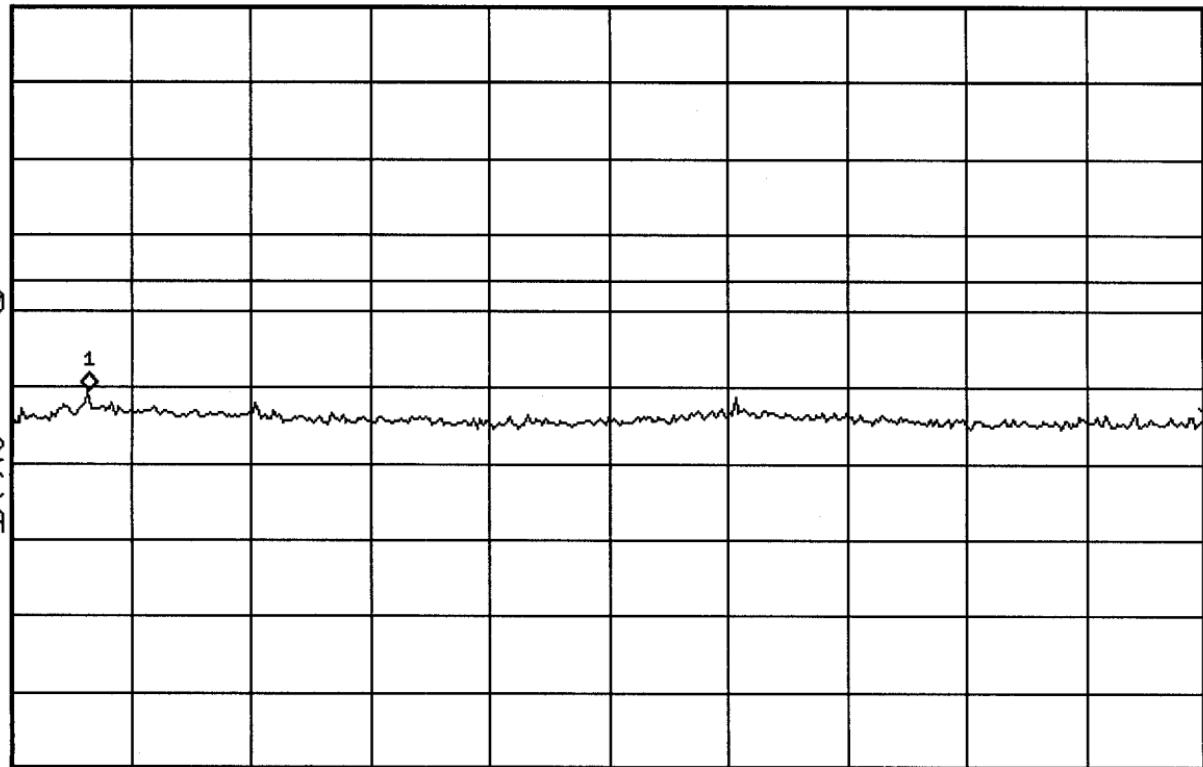


Start 2.5 GHz
#Res BW 3 MHz

#VBW 3 MHz

Stop 10 GHz
#Sweep 2 s

hp 16:24:38 May 14, 2003
DAP HDWAEA307 COND SPURS CH 1013
Ref 23 dBm Atten 5 dB

Mkr1 13.23 GHz
-27.75 dBm

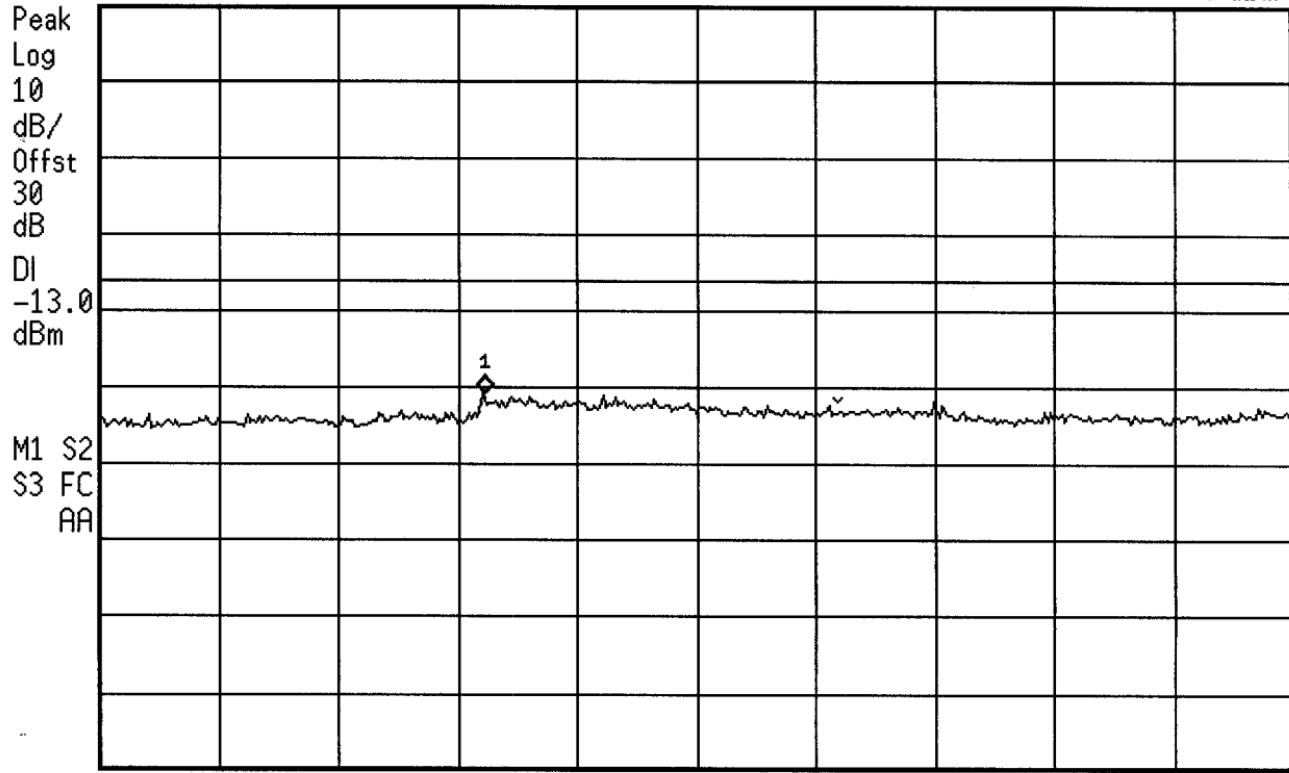


Start 10 GHz
#Res BW 3 MHz

#VBW 3 MHz

Stop 20 GHz
#Sweep 2 s

[hp] 16:29:18 May 14, 2003
DAP HDWAEA307 COND SPURS CH 363
Ref 23 dBm Atten 5 dB

Mkr1 2.488 GHz
-27.04 dBm

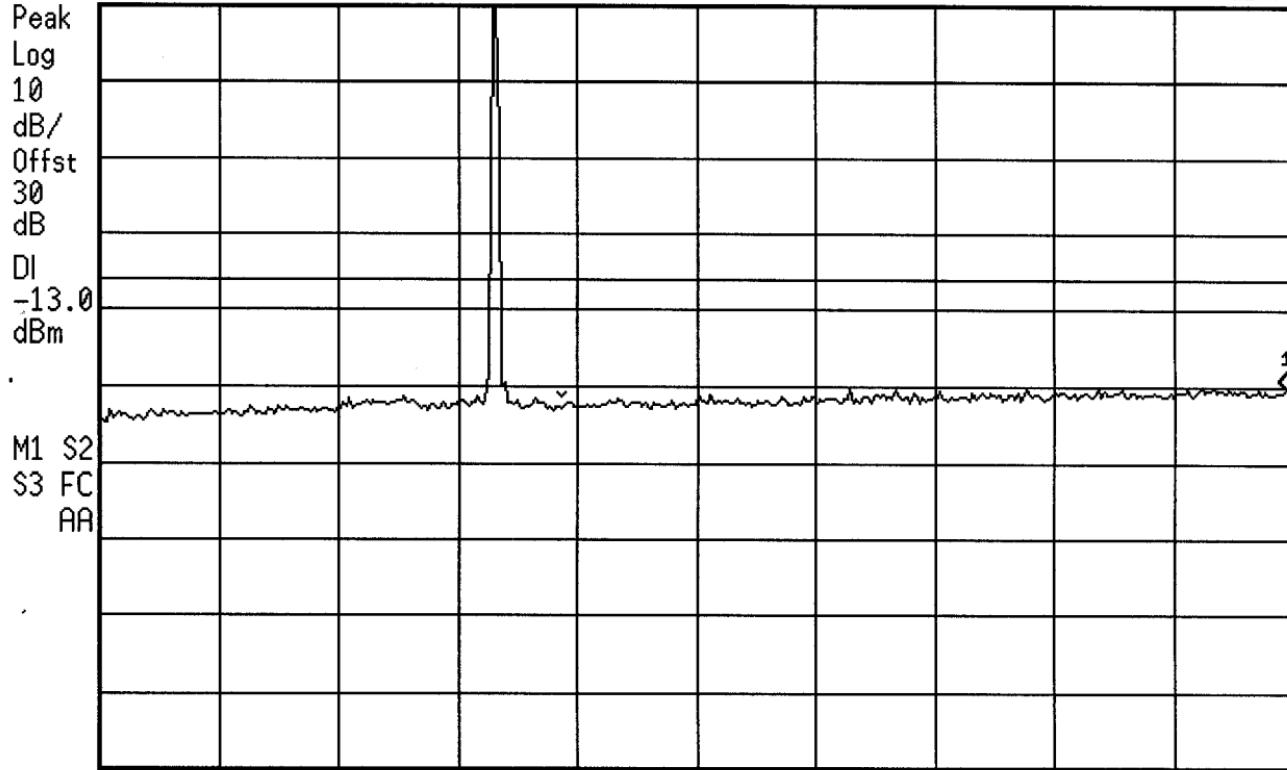


Start 10 MHz
*Res BW 3 MHz

*VBW 3 MHz

Stop 2.5 GHz
#Sweep 2 s

hp 16:27:23 May 14, 2003
DAP HDWAEA307 COND SPURS CH 363
Ref 23 dBm Atten 5 dB

Mkr1 2.988 GHz
-28.49 dBm

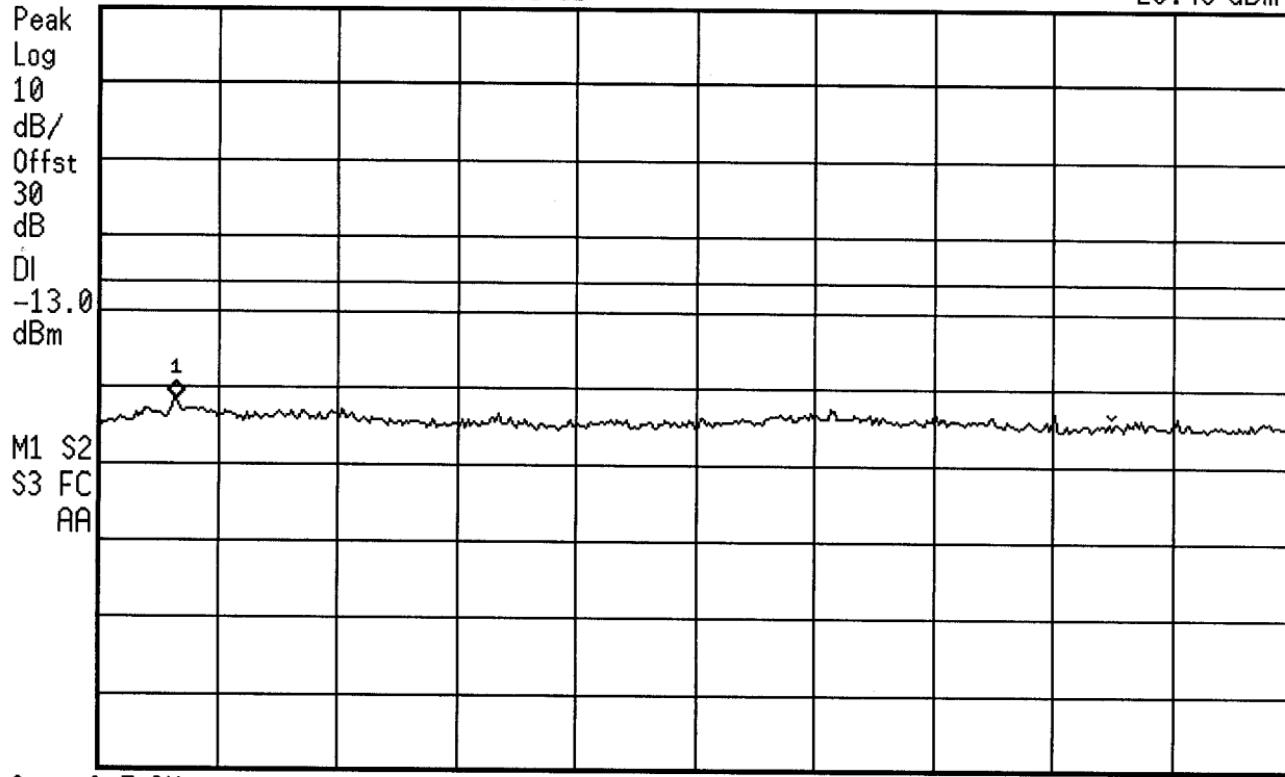

Start 2.5 GHz
#Res BW 3 MHz

#VBW 3 MHz

Stop 10 GHz
#Sweep 2 s



16:26:19 May 14, 2003

DAP HDWAEA307 COND SPURS CH 363

Ref 23 dBm

Atten 5 dB

Mkr1 13.43 GHz

-27.62 dBm

Peak

Log

10

dB/

Offst

30

dB

DI


-13.0

dBm

M1 S2

S3 FC

AA

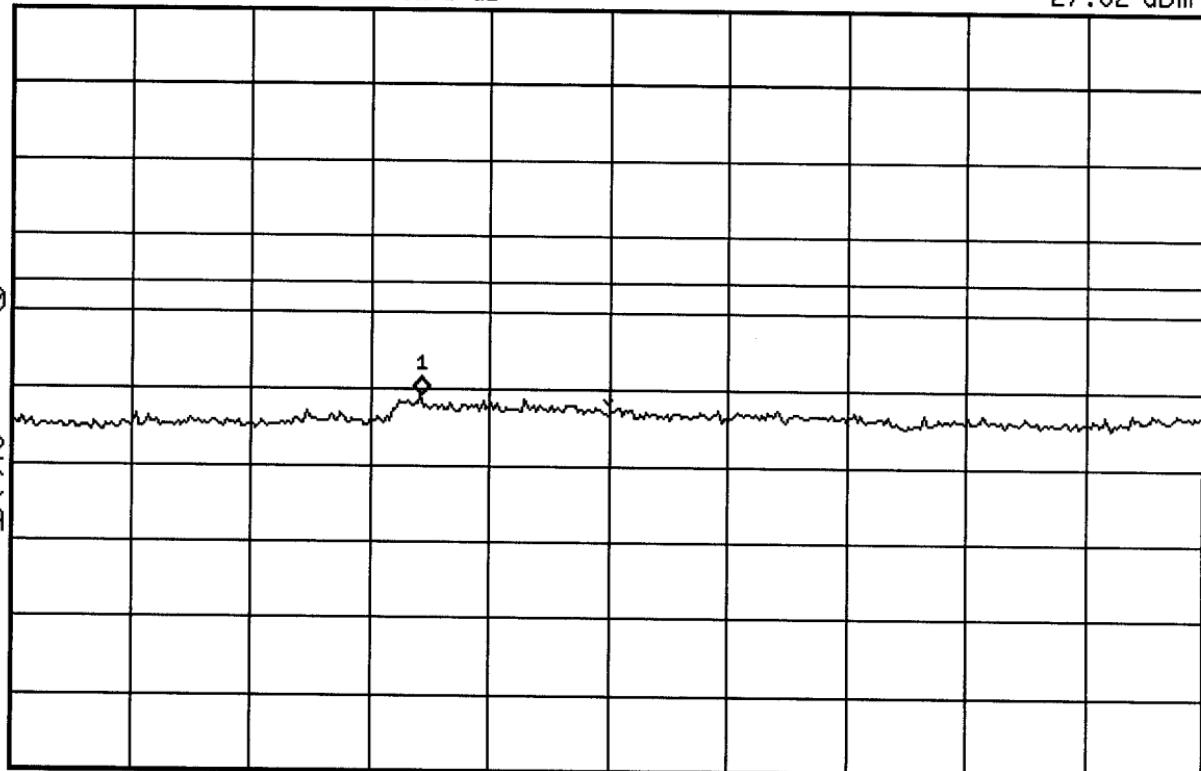

Start 10 GHz

#Res BW 3 MHz


#VBW 3 MHz

Stop 20 GHz

#Sweep 2 s

hp 16:31:14 May 14, 2003
DAP HDWAEA307 COND SPURS CH 777
Ref 23 dBm Atten 5 dB

Mkr1 2.170 GHz
-26.84 dBm

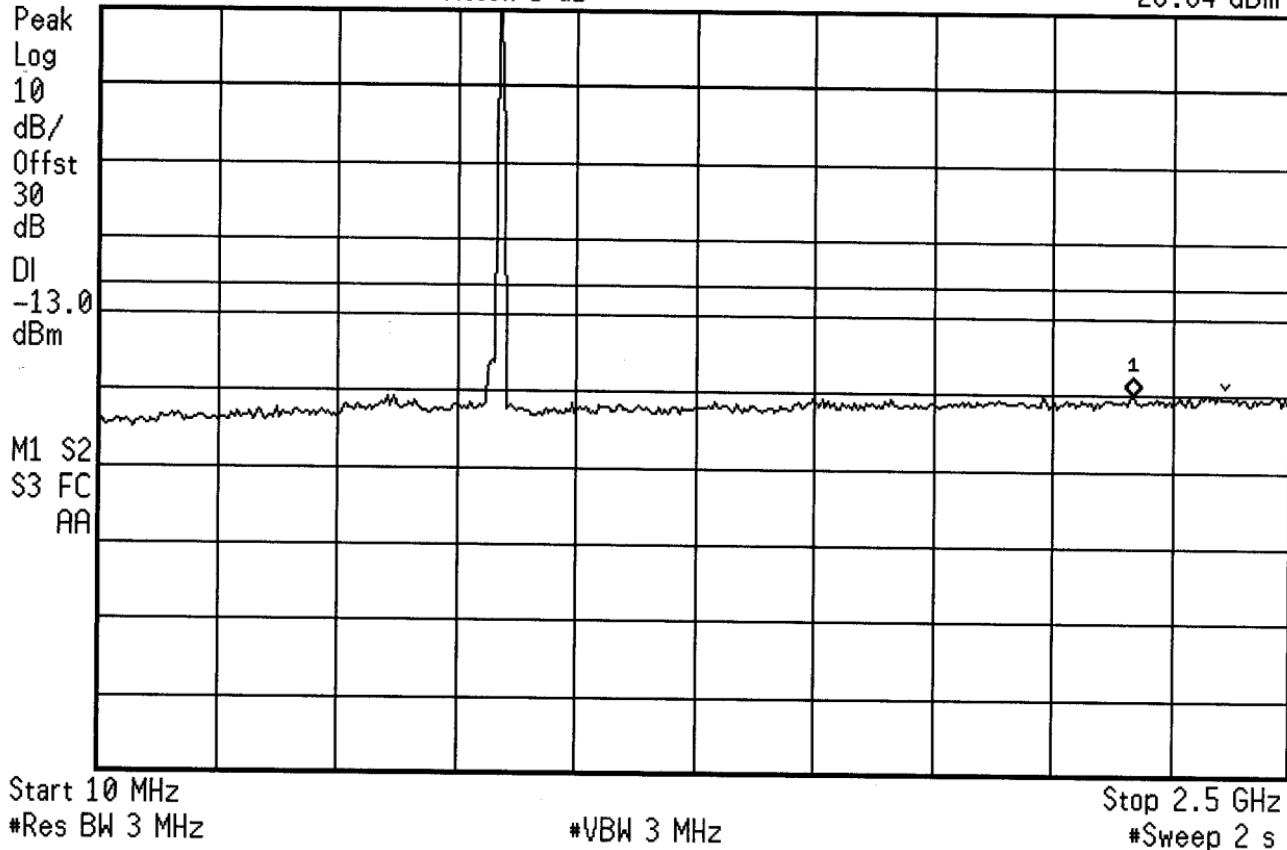


hp 16:32:31 May 14, 2003
DAP HDWAEA307 COND SPURS CH 777
Ref 23 dBm Atten 5 dB

Mkr1 2.988 GHz
-28.47 dBm

Peak
Log
10
dB/
Offst
30
dB
DI
-13.0
dBm

M1 S2
S3 FC
AA

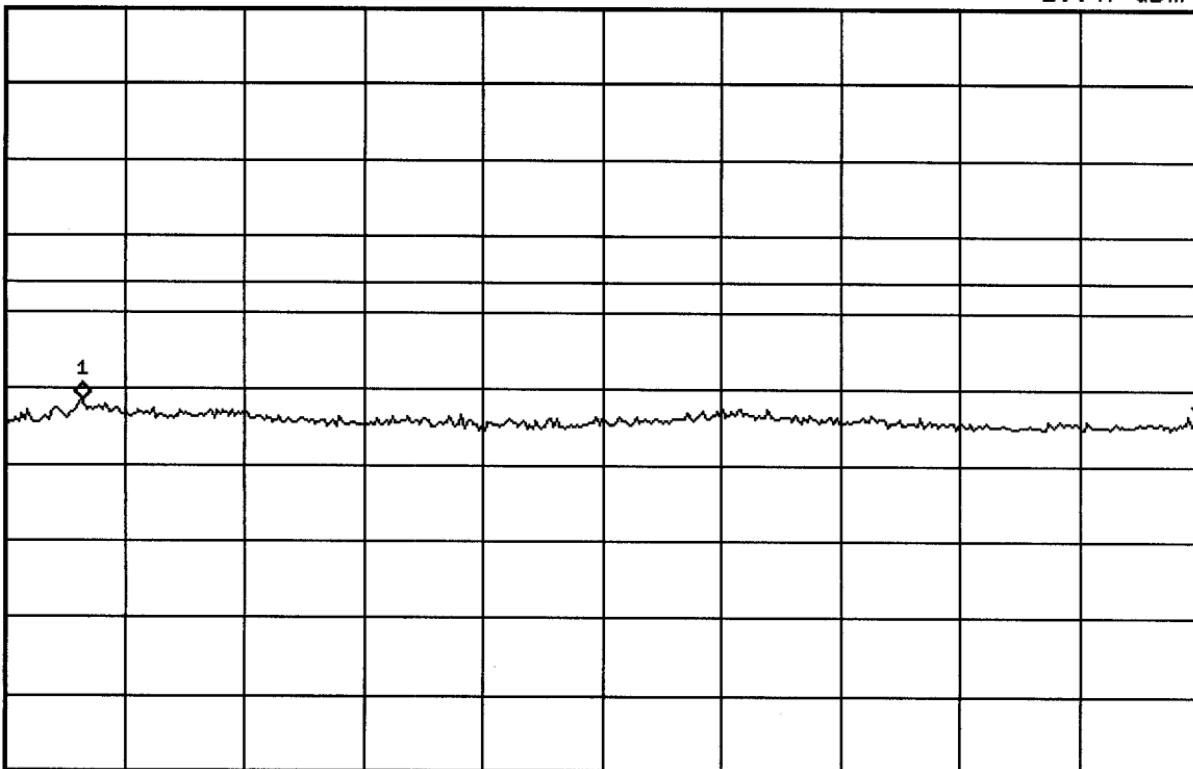


Start 2.5 GHz
#Res BW 3 MHz

*VBW 3 MHz

Stop 10 GHz
#Sweep 2 s

[hp] 16:33:51 May 14, 2003
DAP HDWAEA307 COND SPURS CH 777
Ref 23 dBm Atten 5 dB

Mkr1 14.50 GHz
-27.24 dBm

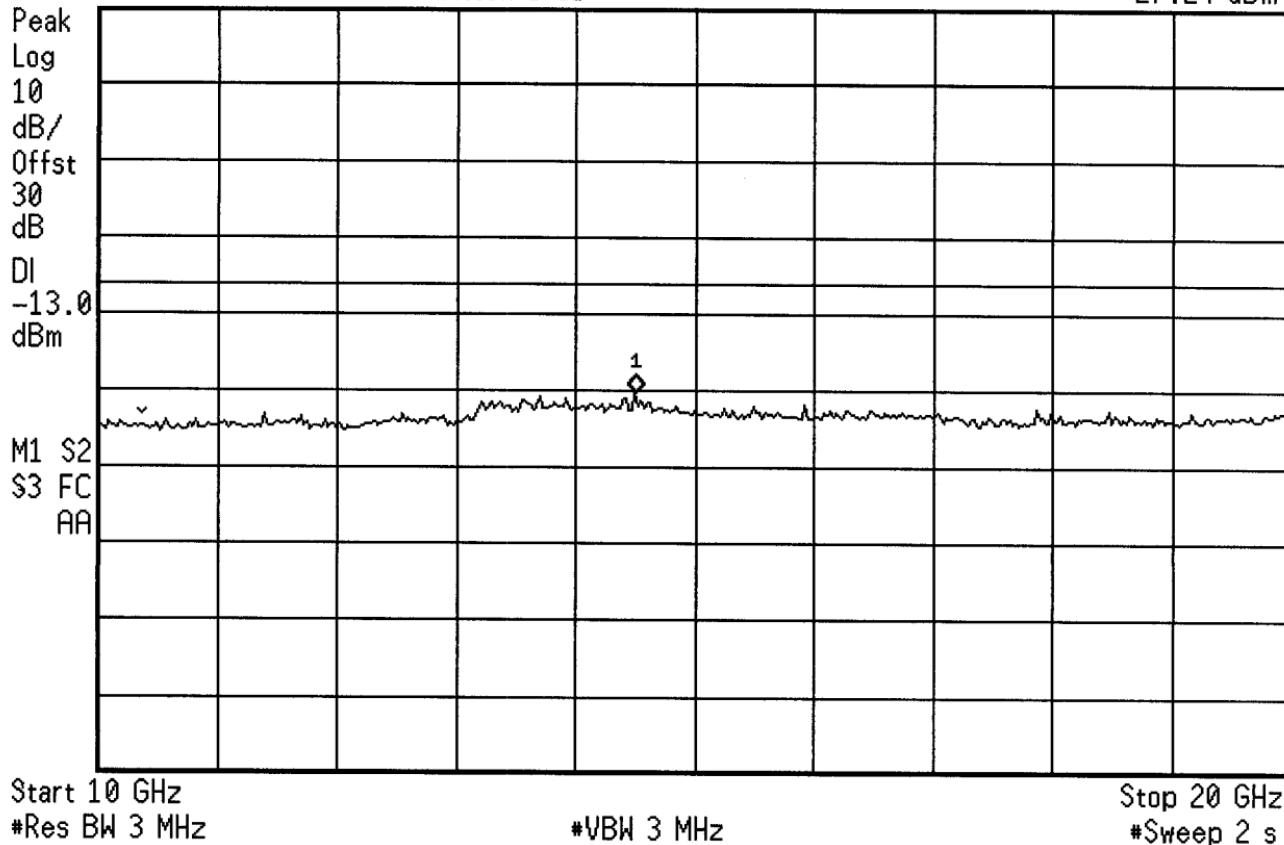



16:37:19 May 14, 2003

DAP HDWAEA307 RECEIVER SPURS

Ref -50 dBm

Atten 5 dB

Mkr1 868.56 MHz

-58.23 dBm

Peak

Log

10

dB/

0ffst

30

dB

.

M1 S2

S3 FC

AA

Start 864 MHz


#Res BW 30 kHz

#VBW 30 kHz

Stop 896 MHz

#Sweep 2 s

1

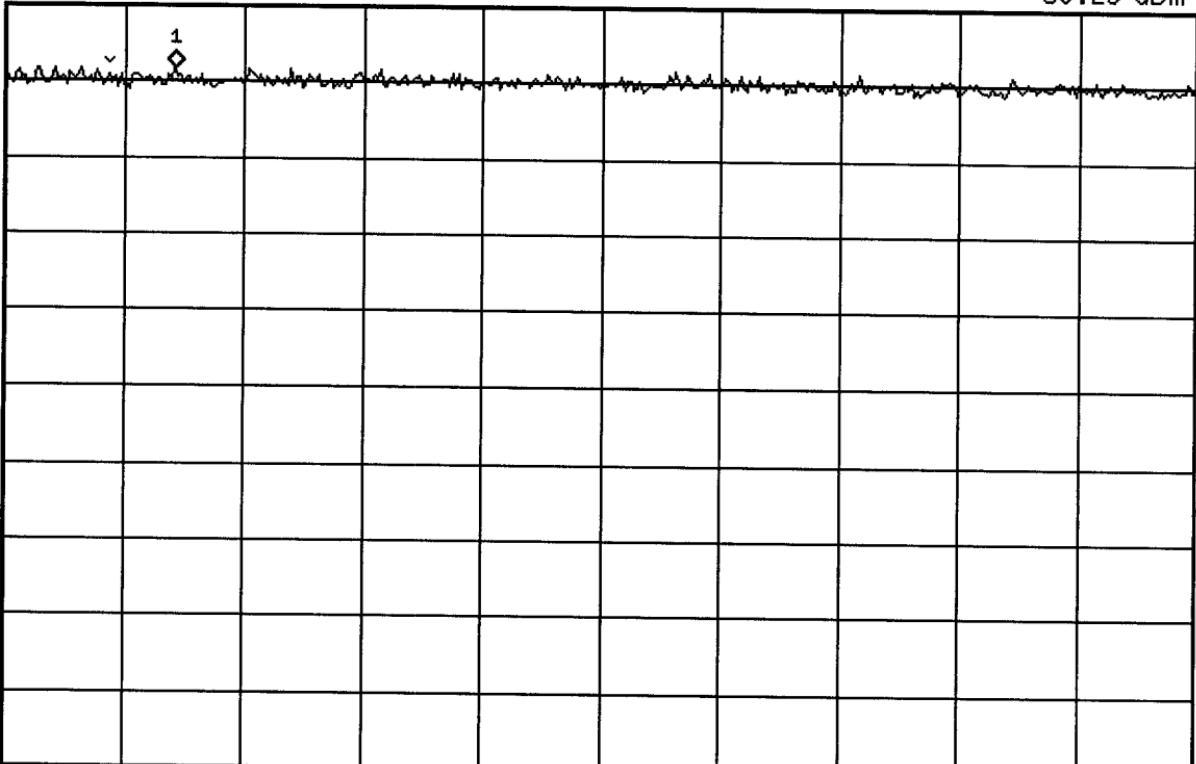

hp

17:04:12 May 14, 2003

DAP HDWAEA307 CELLULAR CDMA CH 1013

Ref 23 dBm

Atten 5 dB

△ Mkr1 1.400 MHz

0.086 dB

Peak

Log

10

dB/

Offst

30

dB

DI

-13.0

dBm


W1

S2

S3

FSM

AA

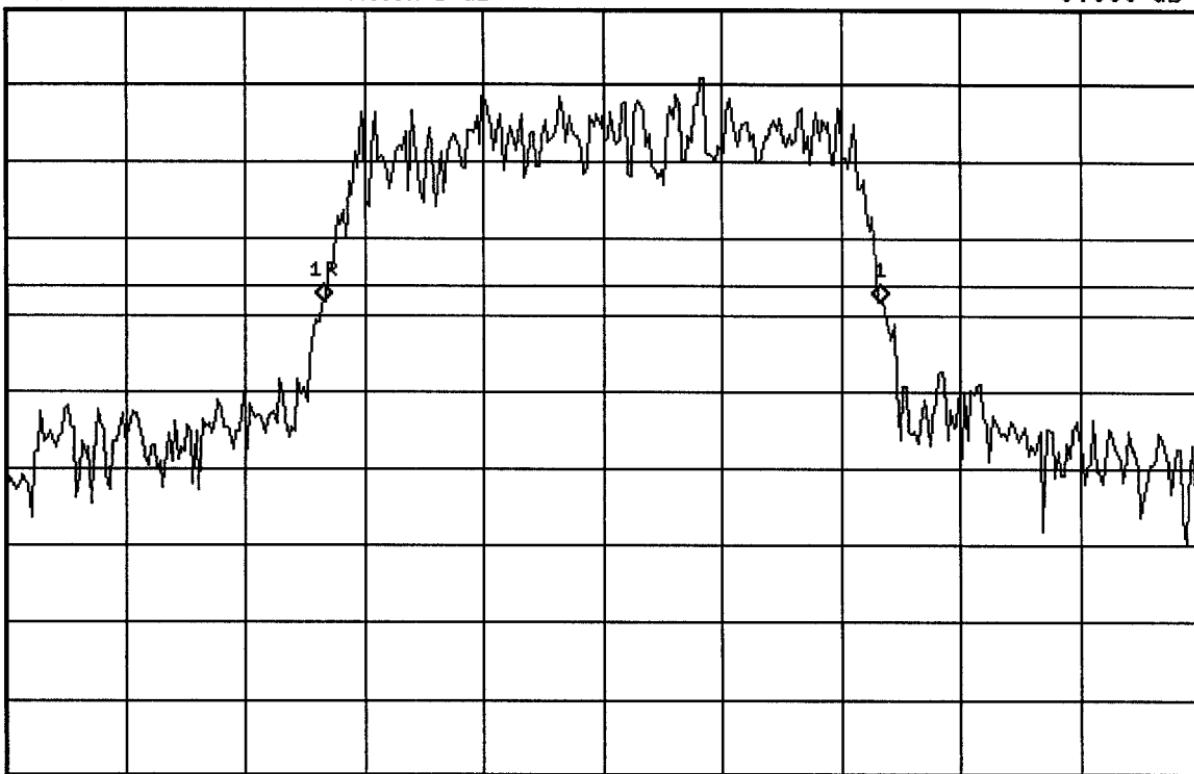

Center 824.7 MHz

#Res BW 30 kHz

#VBW 30 kHz

Span 3 MHz

Sweep 9.167 ms



17:08:03 May 14, 2003

DAP HDWAEA307 CELLULAR CDMA CH 363

Ref 23 dBm

Atten 5 dB

▲ Mkr1 1.400 MHz

-0.061 dB

Peak

Log

10

dB/

Offst

30

dB

DI


-13.0

dBm

W1 S2

S3 FS

AA

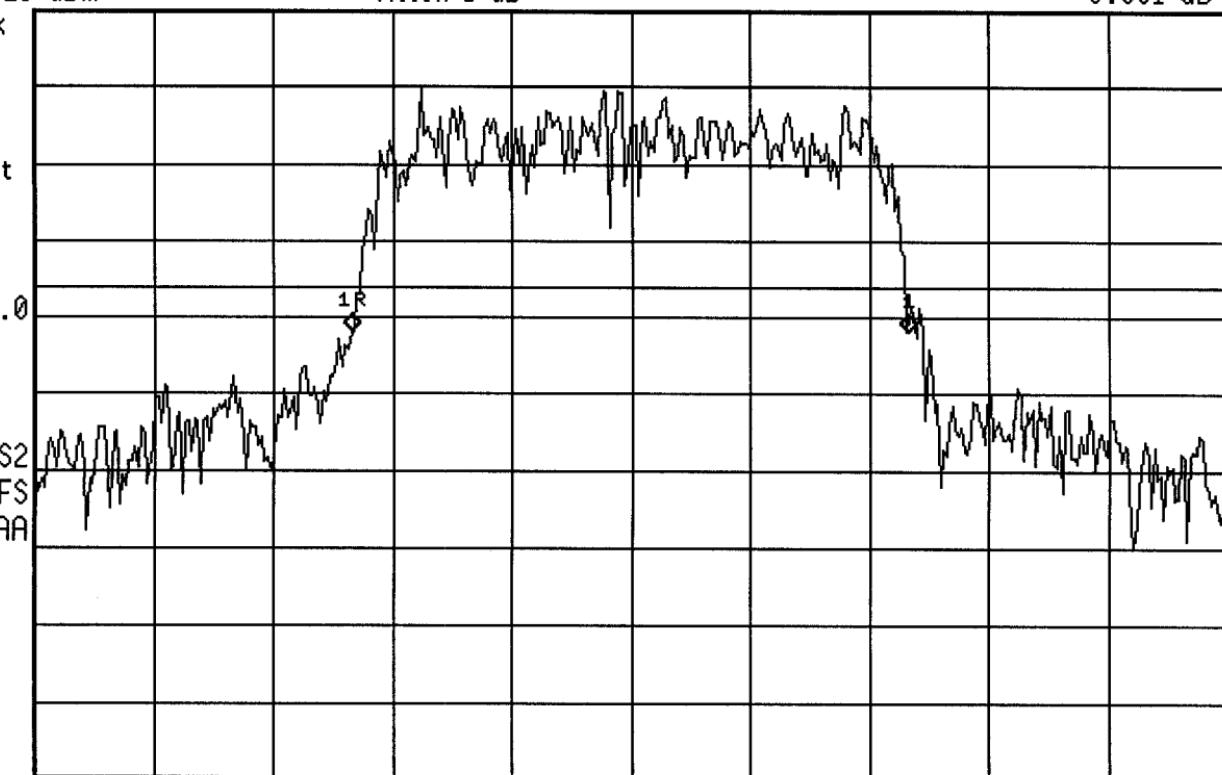

Center 835.9 MHz

*Res BW 30 kHz

*VBW 30 kHz

Span 3 MHz

Sweep 9.167 ms



17:10:41 May 14, 2003

DAP HDWAEA307 CELLULAR CDMA CH 777
Ref 23 dBm Atten 5 dB


▲ Mkr1 1.400 MHz
0.439 dB

Peak
Log
10

dB/
Offst
30
dB

DI
-13.0
dBm

W1 S2
S3 FS
AA

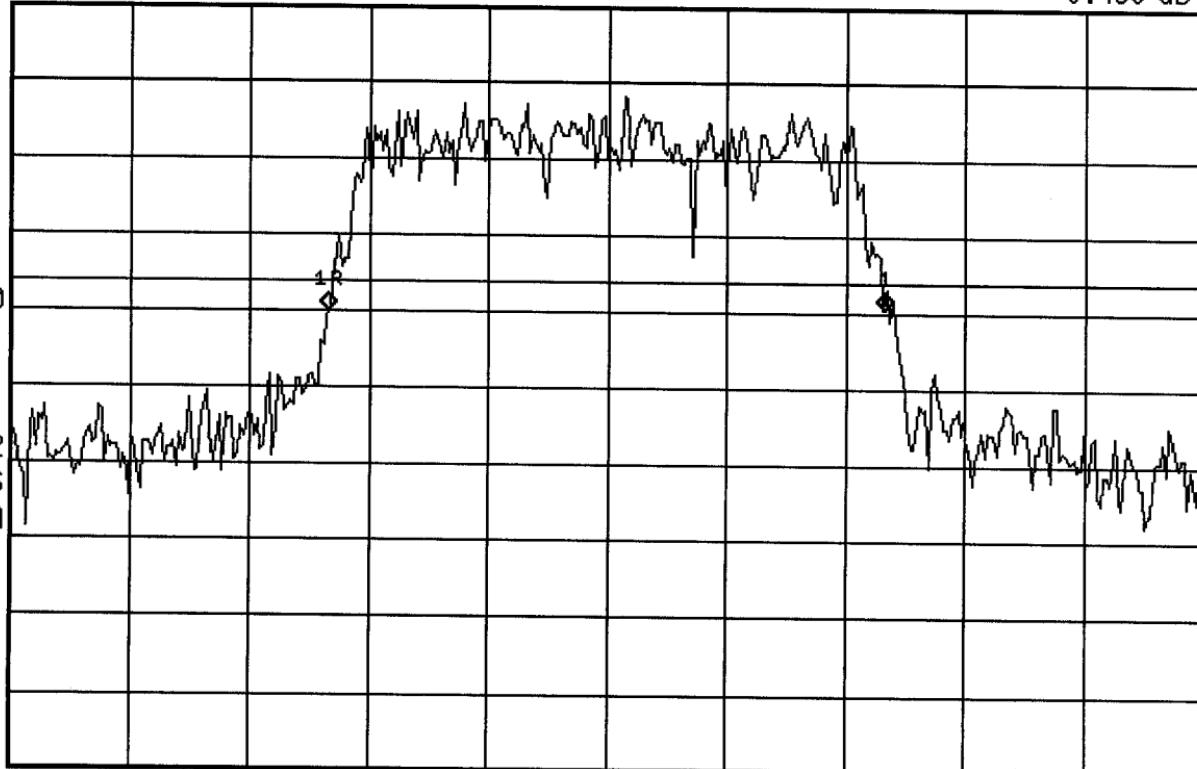

Center 848.3 MHz
*Res BW 30 kHz

#VBW 30 kHz

Span 3 MHz
Sweep 9.167 ms

hp 16:41:23 May 14, 2003

DAP HDWAEA307 OCCUPIED BANDWIDTH

Ref 23 dBm

Atten 5 dB

Samp

Log

10

dB/

Offst

30

dB

dB

W1 S2

Center 835.9 MHz

#Res BW 30 kHz

*VBW 300 kHz

Span 3 MHz

Sweep 9.167 ms

Occupied Bandwidth Results (idle)

Occupied Bandwidth

Occ BW % Pwr 99.00 %

1.258 MHz

Transmit Freq Error 3.453 kHz

hp 10:32:33 May 16, 2003

DAP HDWAEA307 BAND EDGE CDMA LOW CH

Ref 23 dBm

Atten 5 dB

Peak

Log

10

dB/

0ffst

30

dB

DI

-13.0

dBm


W1

S2

S3

FS

AA

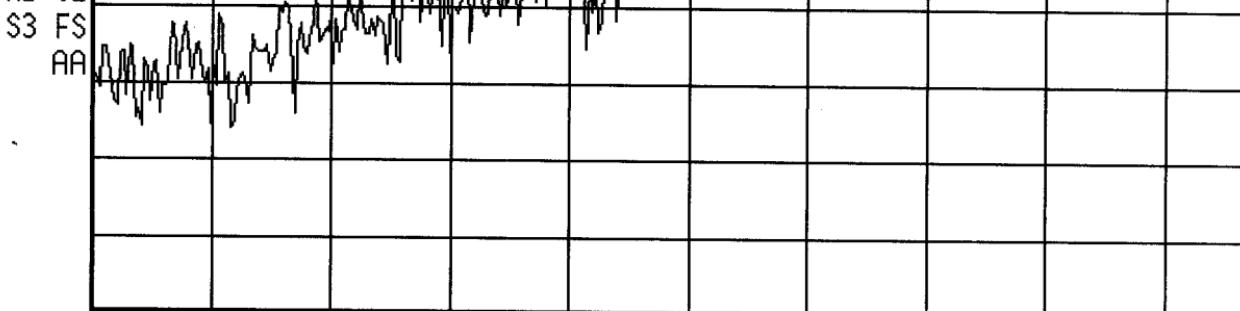

Center 824 MHz

#Res BW 30 kHz

*VBW 30 kHz

Span 3 MHz

Sweep 9.167 ms

hp 10:38:22 May 16, 2003
DAP HDWAEA307 BAND EDGE CDMA HIGH CH
Ref 23 dBm Atten 5 dB

Peak

Log

10

dB/

Offst

30

dB

DI


-13.0

dBm

W1 S2

S3 FS

- AA

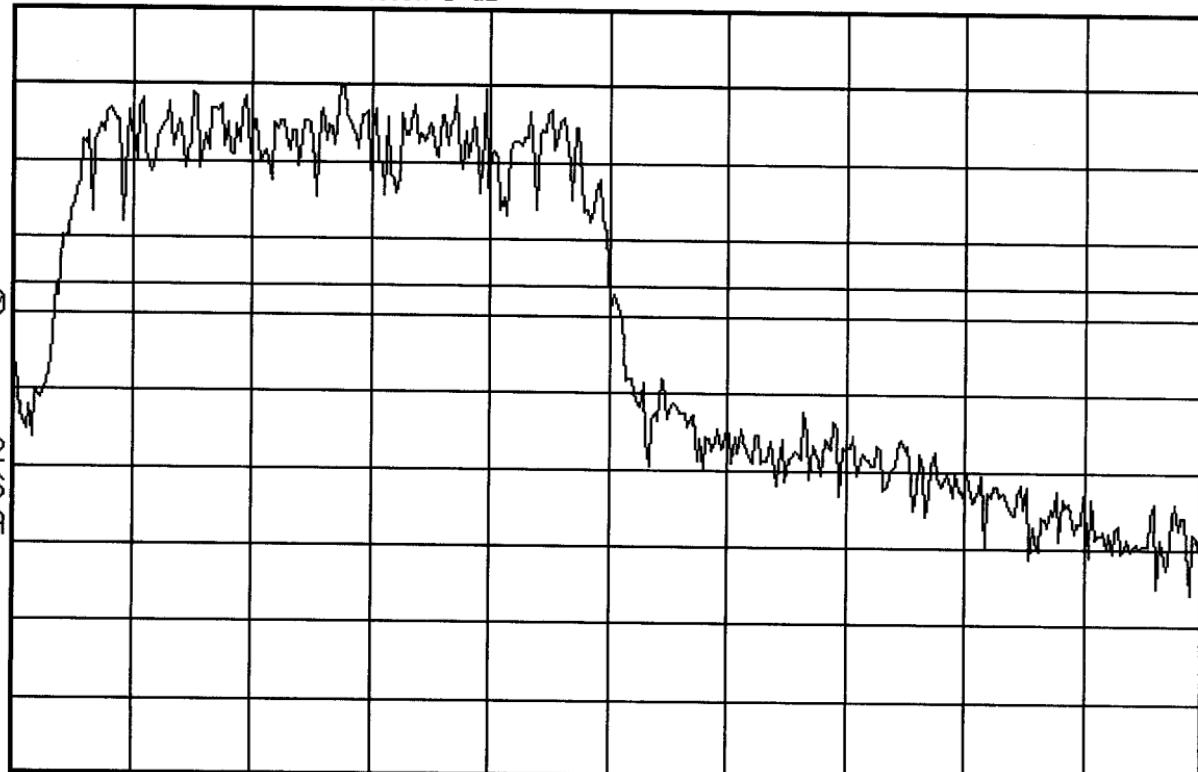

Center 849 MHz
#Res BW 30 kHz

*VBW 30 kHz

Span 3 MHz
Sweep 9.167 ms

[hp]

08:48:44 May 16, 2003

DAP HDWAEA307 CELLULAR BLOCK 1 LOWER EDGE
Ref 23 dBm

Atten 5 dB

Mkr1 825.68 MHz
-17.25 dBm

Peak

Log

10

dB/

Offst

30

dB

DI


-13.0

dBm

W1 S2

S3 FS

AA

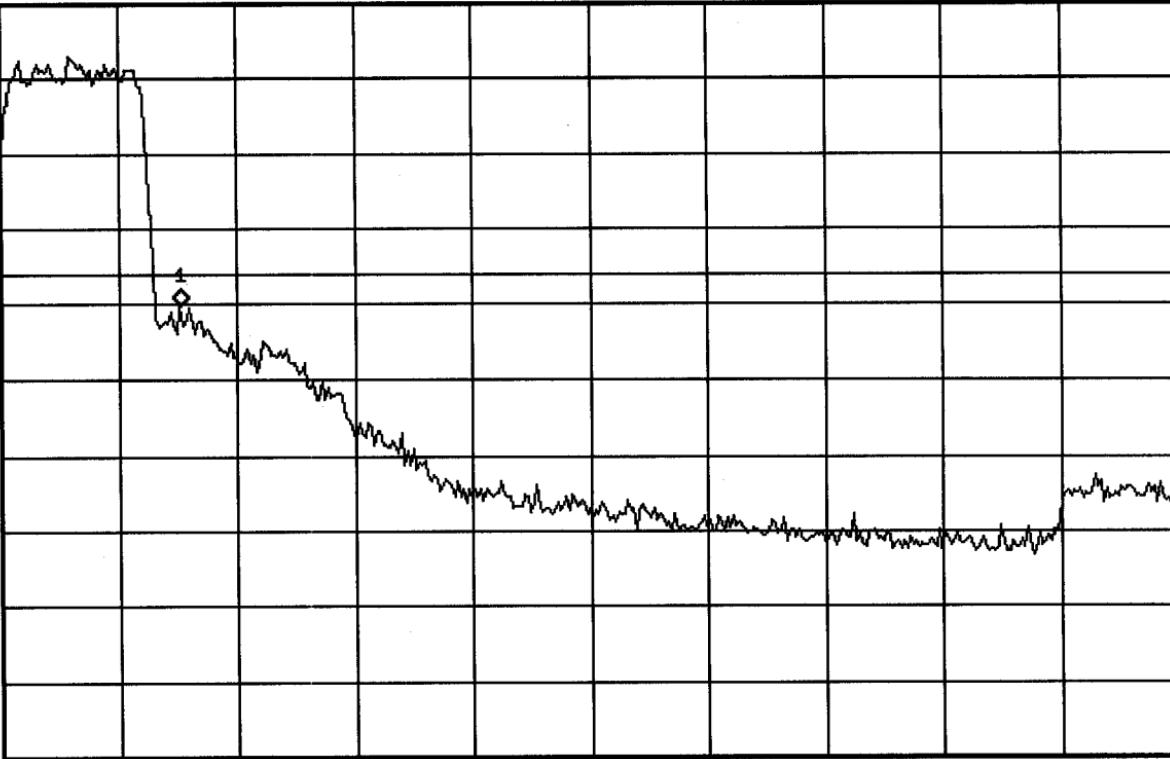

Start 824 MHz

#Res BW 30 kHz

VBW 30 kHz

Stop 835 MHz

#Sweep 2 s

hp 08:54:27 May 16, 2003

DAP HDWAEA307 CELLULAR BLOCK 1 UPPER EDGE

Ref 23 dBm

Atten 5 dB

Mkr1 833.43 MHz

-16.85 dBm

Peak

Log

10

dB/

Offst

30

dB

DI


-13.0

dBm

W1 S2

S3 FS

AA

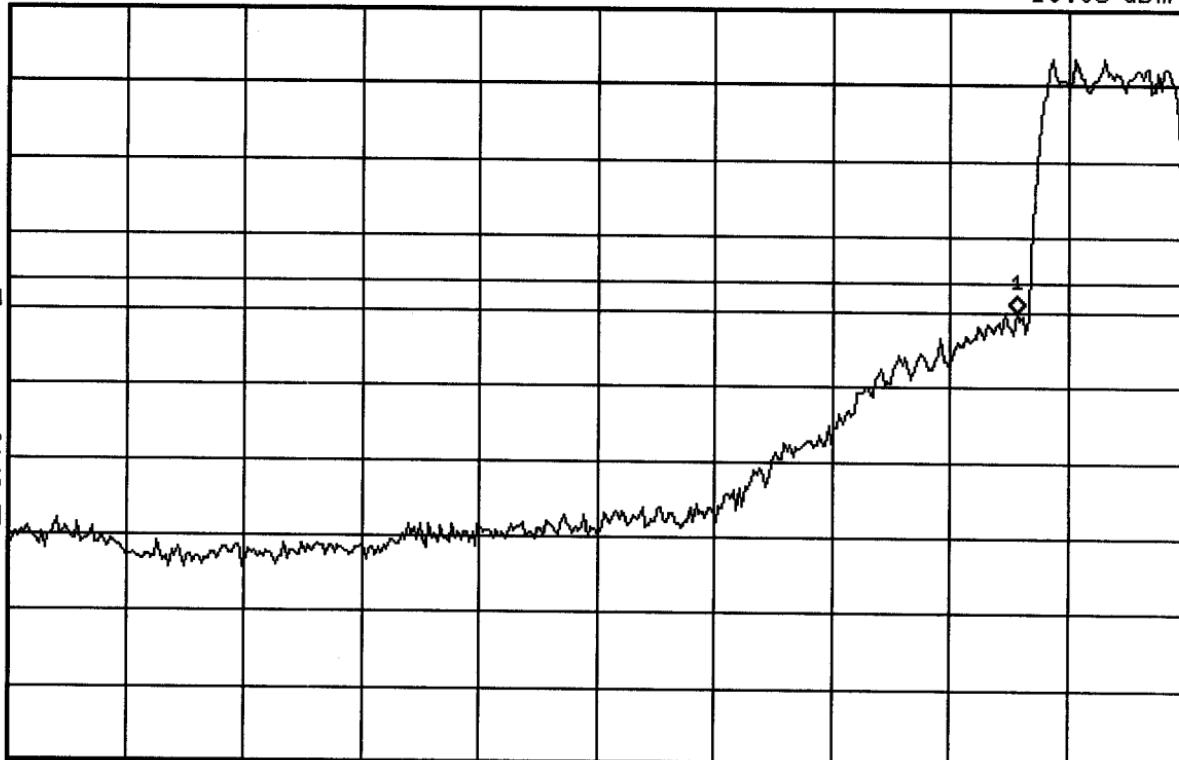

Start 824 MHz

*Res BW 30 kHz

VBW 30 kHz

Stop 835 MHz

*Sweep 2 s

hp 08:59:42 May 16, 2003

DAP HDWAEA307 CELLULAR BLOCK 2 LOWER EDGE

Ref 23 dBm

Atten 5 dB

Mkr1 836.53 MHz

-18.02 dBm

Peak

Log

10

dB/

Offst

30

dB

DI


-13.0

dBm

W1 S2

S3 FS

AA

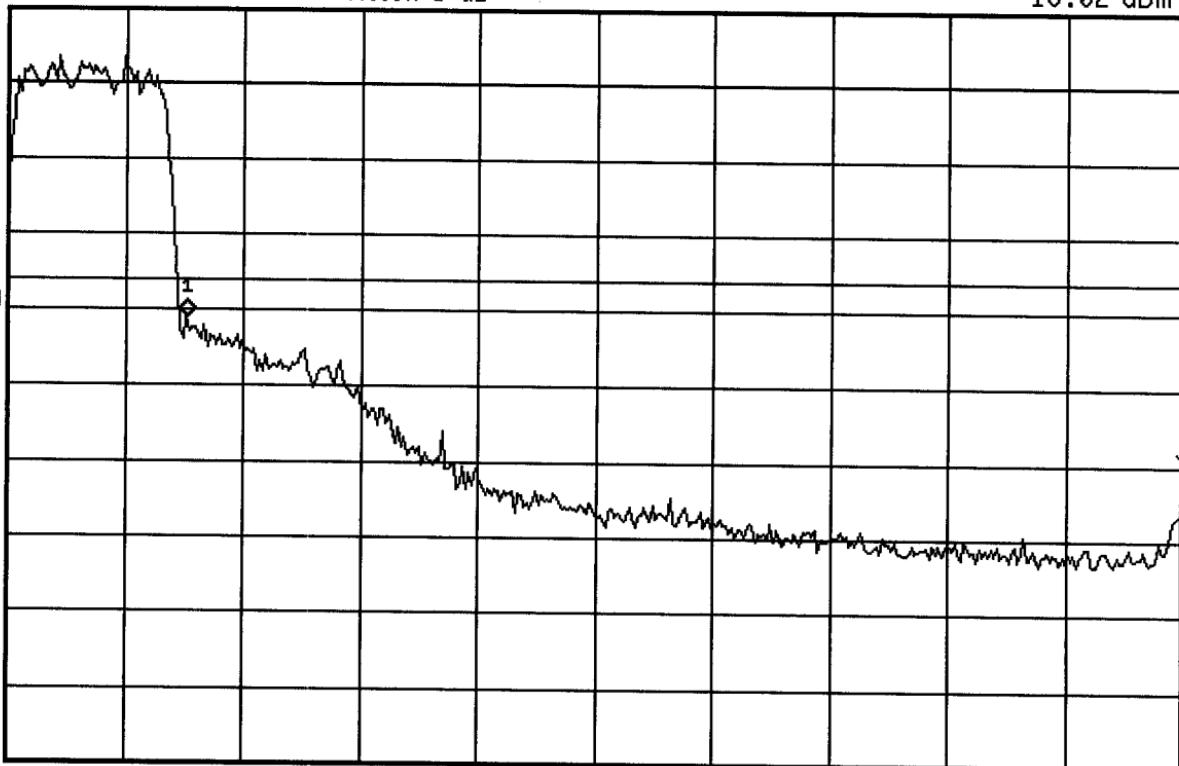

Start 835 MHz

#Res BW 30 kHz

VBW 30 kHz

Stop 845 MHz

#Sweep 2 s



09:10:00 May 16, 2003

DAP HDWAEA307 CELLULAR BLOCK 2 UPPER EDGE

Ref 23 dBm

Atten 5 dB

Mkr1 843.18 MHz

-21.86 dBm

Peak

Log

10

dB/

0ffst

30

dB

DI

-13.0

dBm

W1 S2

\$3 FS

AA


Start 835 MHz

#Res BW 30 kHz

VBW 30 kHz

Stop 845 MHz

#Sweep 2 s

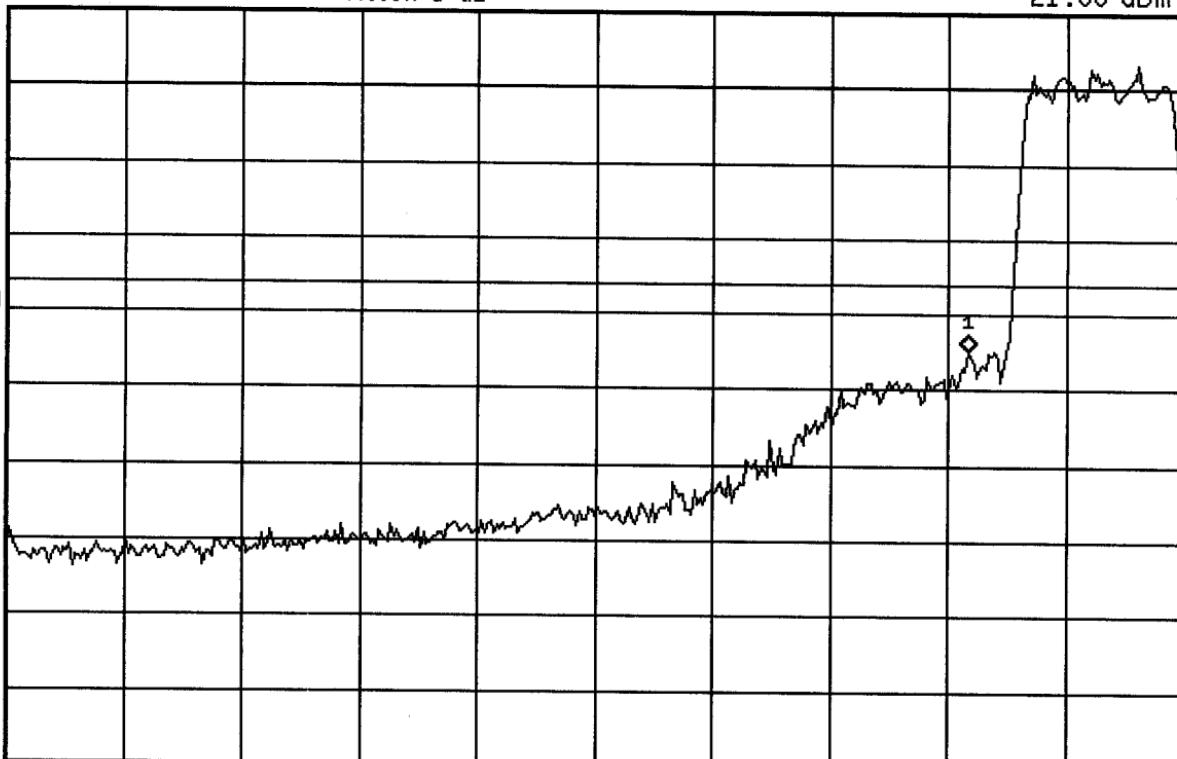



09:20:11 May 16, 2003

DAP HDWAEA307 CELLULAR BLOCK 3 LOWER EDGE

Ref 23 dBm

Atten 5 dB

Mkr1 846.493 MHz

-18.95 dBm

Peak

Log

10

dB/

0ffst

30

dB

DI


-13.0

dBm

W1 S2

S3 FS

AA

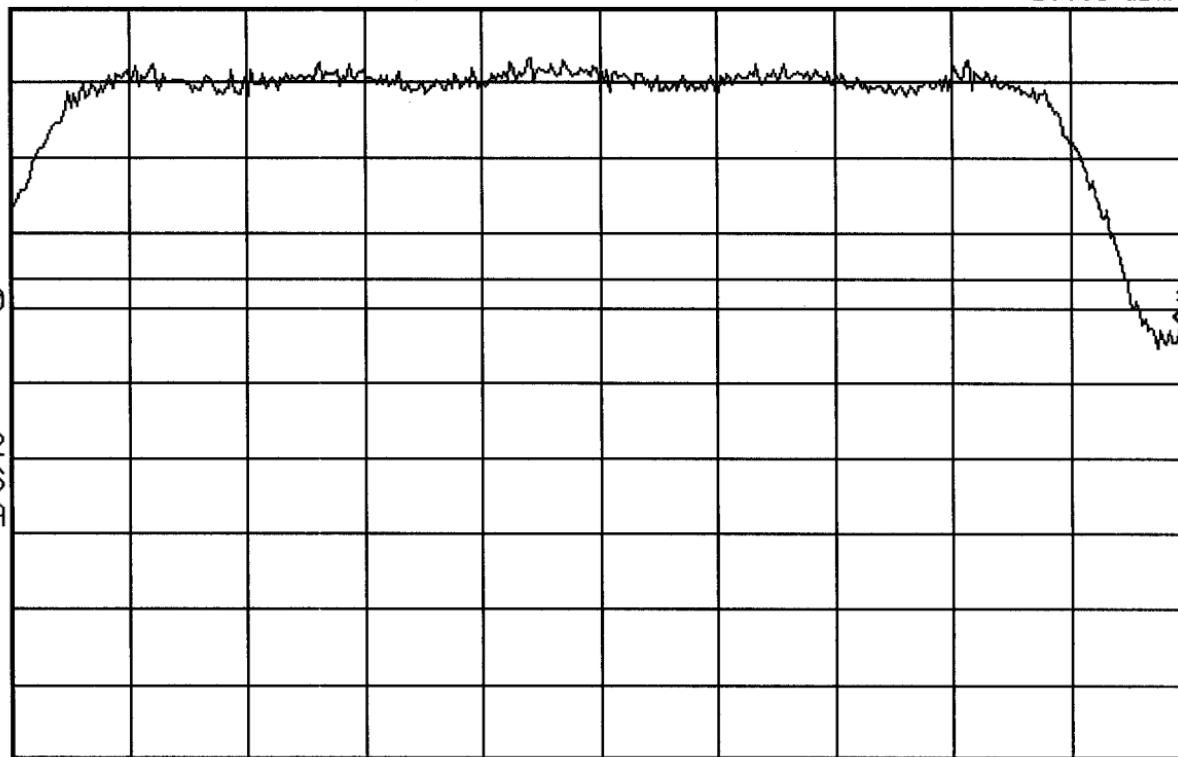

Start 845 MHz

#Res BW 30 kHz

VBW 30 kHz

Stop 846.5 MHz

#Sweep 2 s

hp 09:32:05 May 16, 2003

DAP HDWAEA307 CELLULAR BLOCK 3 UPPER EDGE

Ref 23 dBm

Atten 5 dB

Mkr1 845.026 MHz

-18.55 dBm

Peak

Log

10

dB/

Offst

30

dB

DI

-13.0


dBm

1

W1 S2

S3 FS

AA

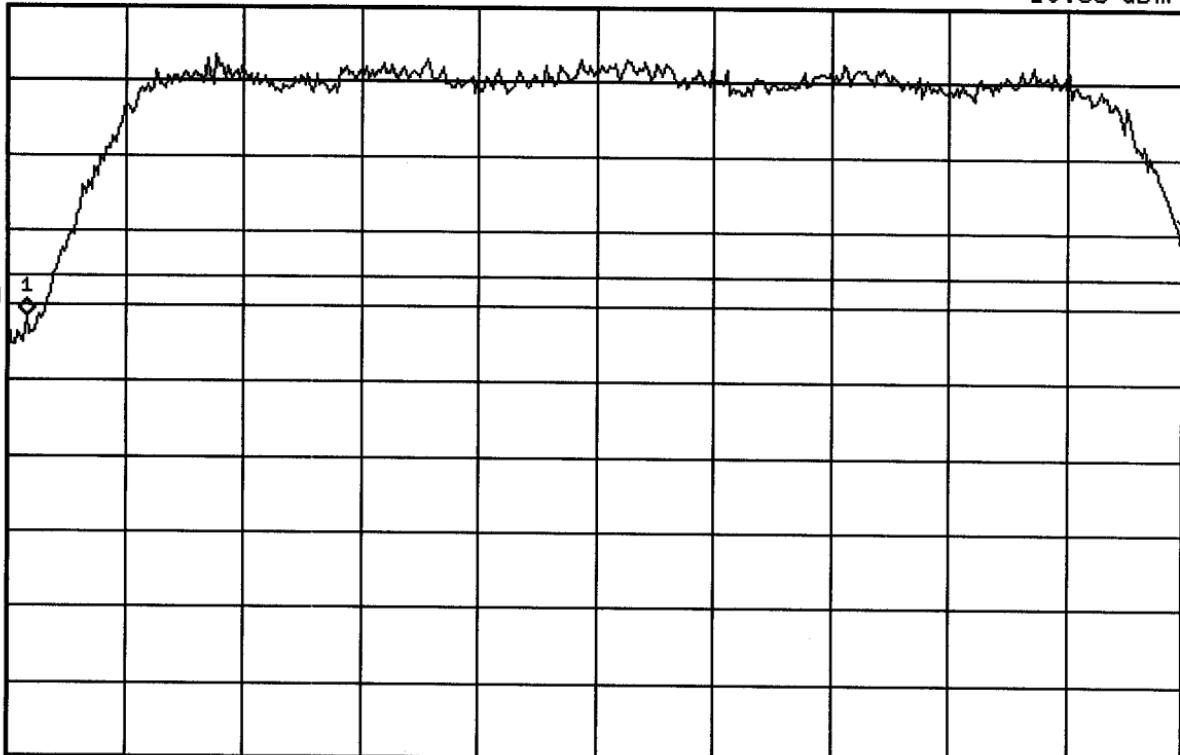

Start 845 MHz

#Res BW 30 kHz

VBW 30 kHz

Stop 846.5 MHz

#Sweep 2 s

hp 09:43:53 May 16, 2003

DAP HDWAEA307 CELLULAR BLOCK 4 LOWER EDGE

Ref 23 dBm

Atten 5 dB

Mkr1 848.044 MHz

-16.47 dBm

Peak

Log

10

dB/

Offst

30

dB

DI

-13.0

dBm

W1 S2

S3 FS

AA


Start 846.5 MHz

#Res BW 30 kHz

VBW 30 kHz

Stop 849 MHz

#Sweep 2 s

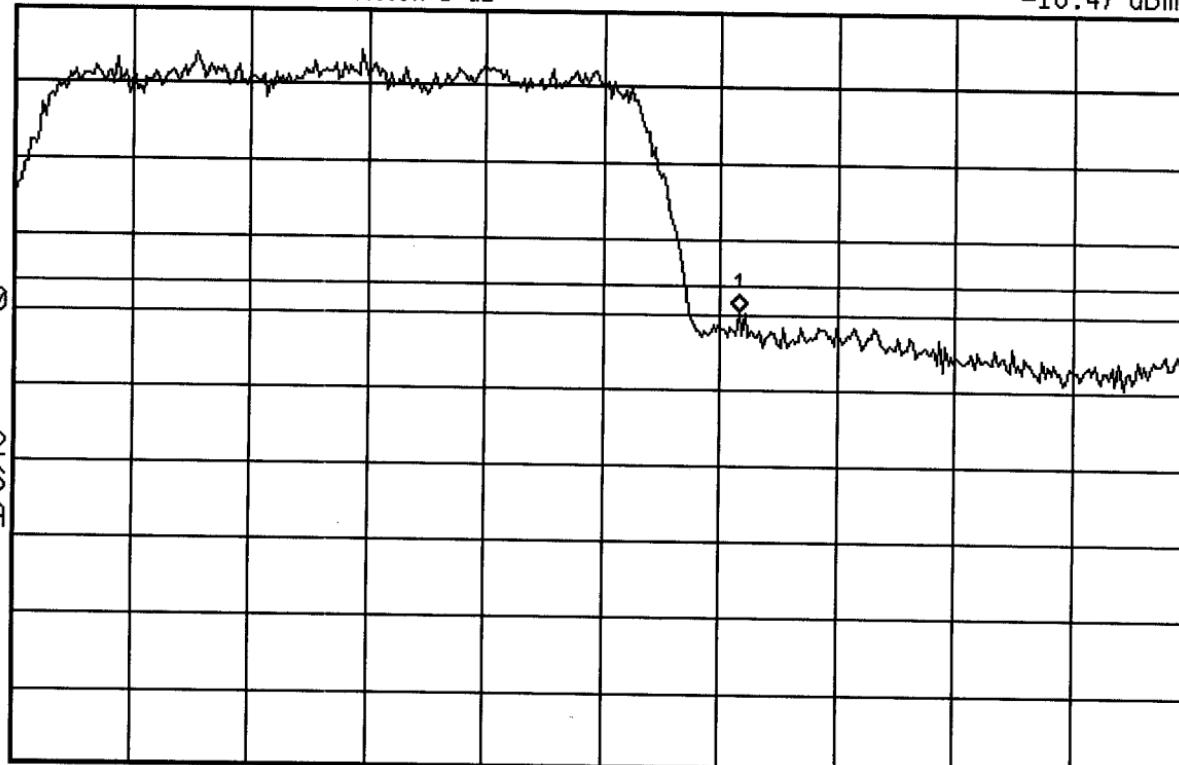



09:46:37 May 16, 2003

DAP HDWAEA307 CELLULAR BLOCK 4 UPPER EDGE

Ref 23 dBm

Atten 5 dB

Mkr1 847.525 MHz

-17.73 dBm

Peak

Log

10

dB/

0ffst

30

dB

DI


-13.0

dBm

W1 S2

S3 FS

AA

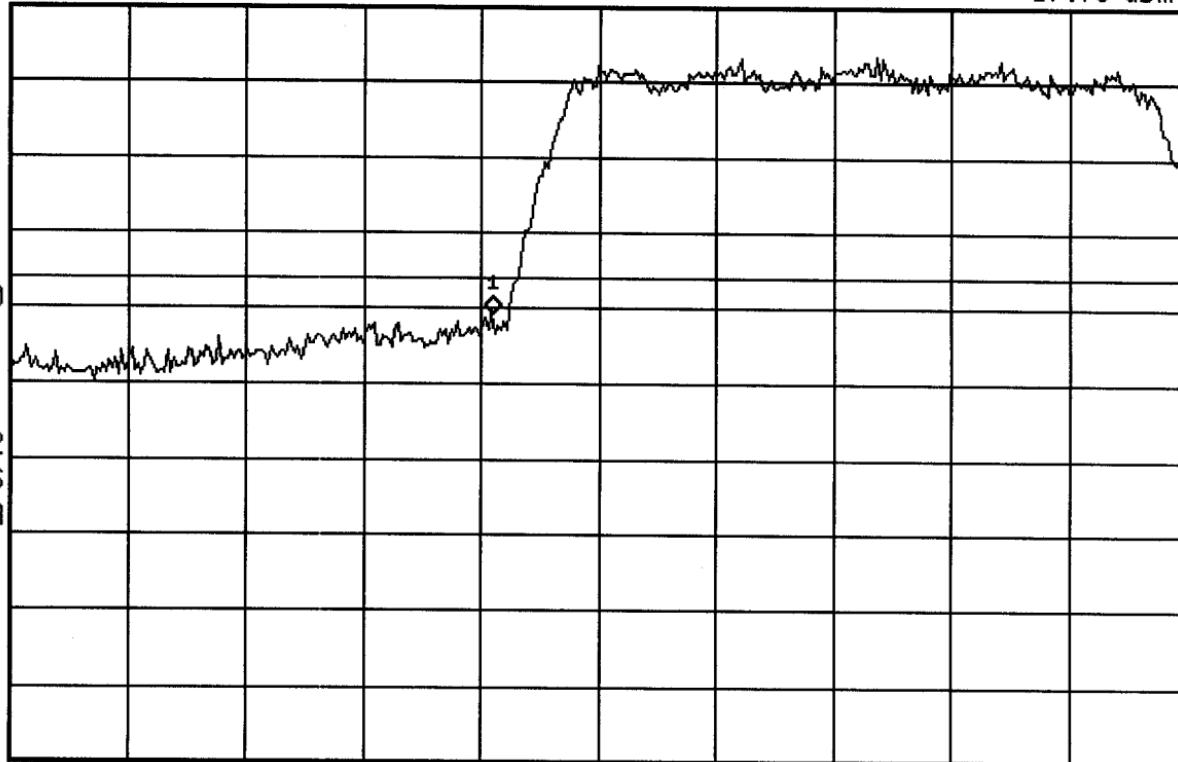

Start 846.5 MHz

#Res BW 30 kHz

VBW 30 kHz

Stop 849 MHz

#Sweep 2 s