




Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11b Tx CH06, 2437MHz+Adapter 2
Power : 18

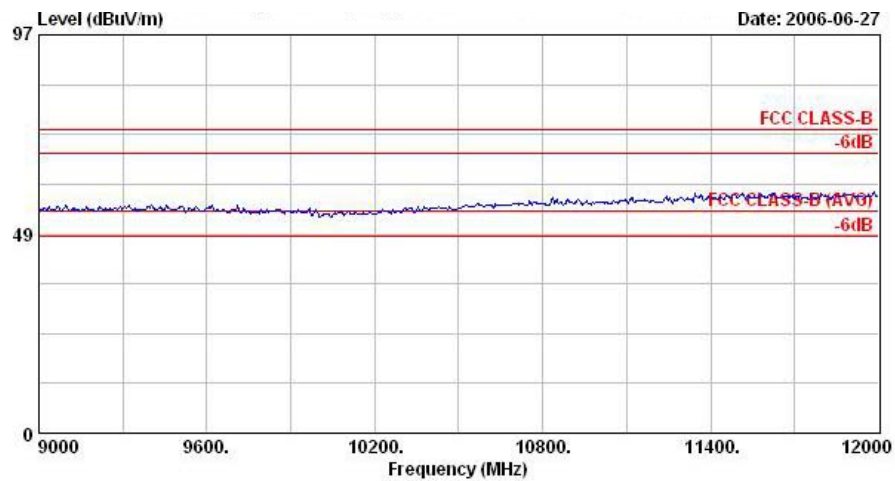


Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11b Tx CH06, 2437MHz+Adapter 2
Power : 18

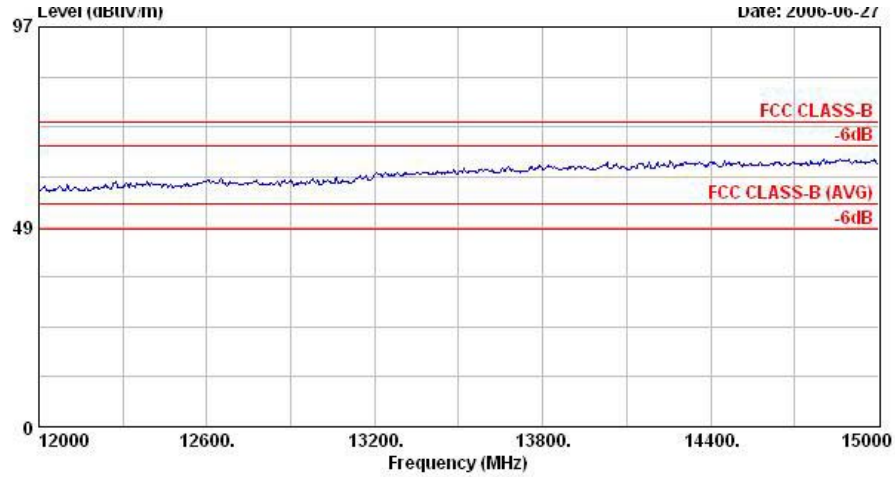


Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11b Tx CH06, 2437MHz+Adapter 2
Power : 18

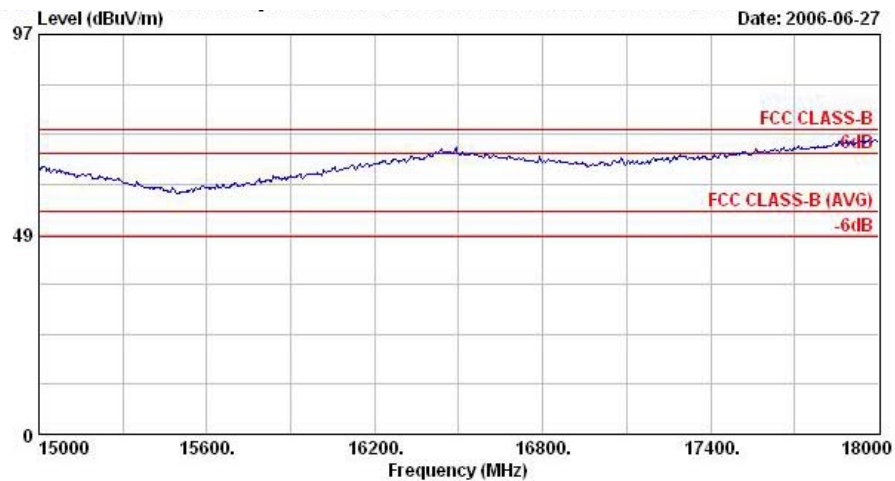

Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11b Tx CH06, 2437MHz+Adapter 2
Power : 18

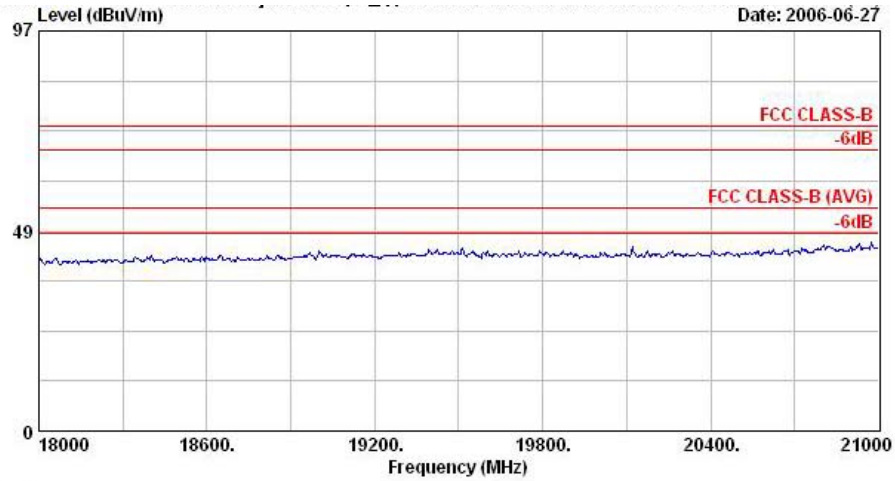

Site : 03CH06-HY
Condition : SHF-EHF HORN HORIZONTAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11b Tx CH06, 2437MHz+Adapter 2
Power : 18

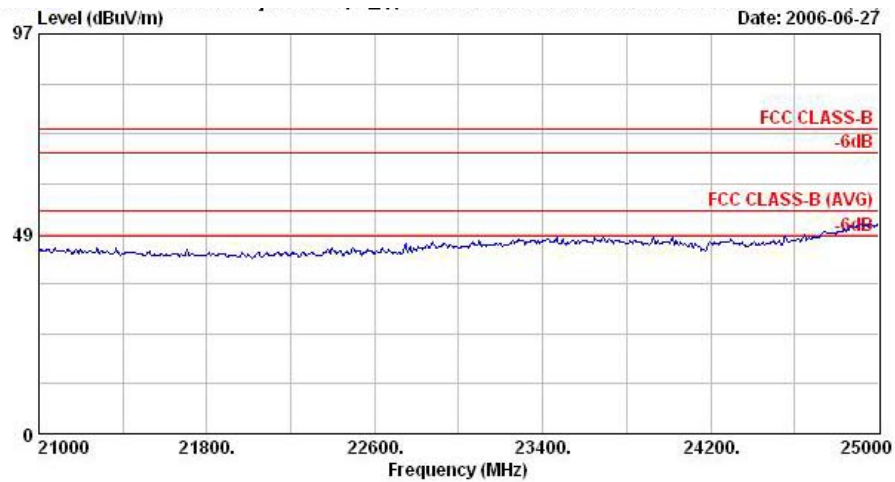


Site : 03CH06-HY
Condition : SHF-EHF HORN HORIZONTAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11b Tx CH06, 2437MHz+Adapter 2
Power : 18




- Polarization : Vertical

■ The test that passed at minimum margin was marked by the frame in the following table.

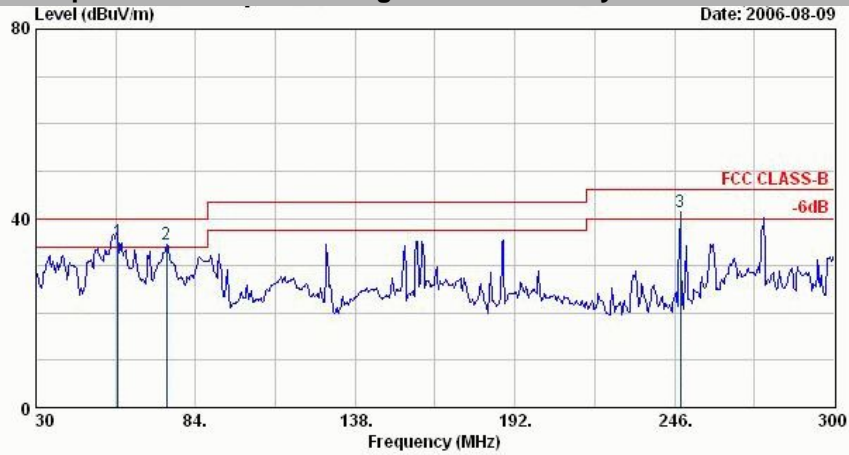

Site : 03CH06-HY
 Condition : BI-LOG-2004-1122 VERTICAL
 EUT : WLAN Access Point
 Power : 120Vac/60Hz
 Model : FR 661605-02
 Memo : 11b Tx_CH06,2437MHz+Adaptor 2
 Power : 19


	Freq	Level	Over Limit		ReadAntenna	Cable	Preamp	Ant	Table	Remark
			Limit	Line						
	MHz	dBUV/m	dB	dBUV/m	dBUV	dB	dB	cm	deg	
1 @	57.81	35.17	-4.83	40.00	55.40	7.21	1.20	28.64	100	252 QP
2 !	74.28	34.35	-5.65	40.00	54.97	6.63	1.45	28.70	400	0 Peak
3 @	247.89	41.19	-4.81	46.00	55.66	11.59	2.93	28.99	400	0 Peak





FCC TEST REPORT


Report No. : FR661605-02

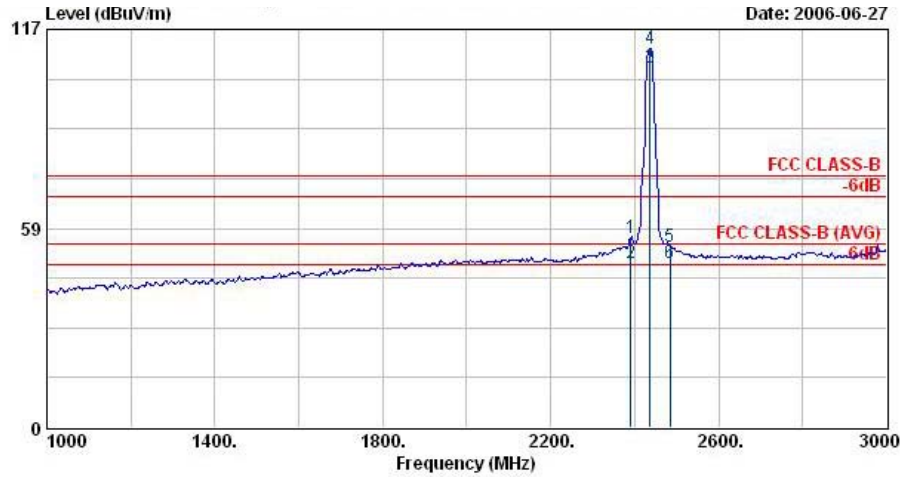

Site : 03CH06-HY
 Condition : HF-ANT-060410 VERTICAL
 EUT : WLAN Access Point
 Power : 120Vac/60Hz
 Model : FR 661605-02
 Memo : 11b Tx CH06, 2437MHz+Adapter 2
 Power : 18


	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2390.00	55.72	-18.28	74.00	56.65	30.26	4.26	35.46	100	0	Peak
2 !	2390.00	48.08	-5.92	54.00	49.02	30.26	4.26	35.46	100	50	Average
3 @	2437.00	105.50			106.40	30.28	4.29	35.47	100	50	Average
4 @	2437.00	111.27			112.17	30.28	4.29	35.47	100	0	Peak
5	2483.50	52.93	-21.07	74.00	53.79	30.29	4.36	35.51	100	0	Peak
6 !	2483.50	48.45	-5.55	54.00	49.31	30.29	4.36	35.51	100	50	Average

Remark: #3 and #4 Fundamental Signal

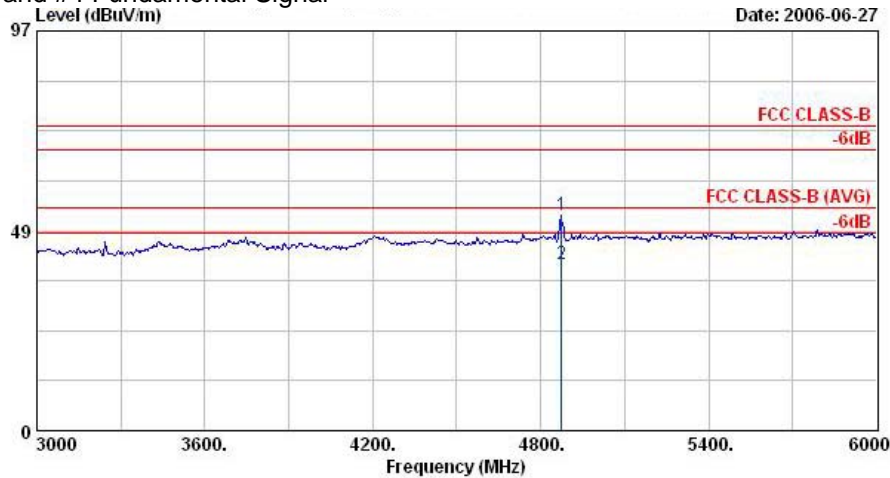


Site : 03CH06-HY
 Condition : HF-ANT-060410 VERTICAL
 EUT : WLAN Access Point
 Power : 120Vac/60Hz
 Model : FR 661605-02
 Memo : 11b Tx CH06, 2437MHz+Adapter 2
 Power : 18


	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	4874.00	52.13	-21.87	74.00	48.85	33.14	6.30	36.16	100	360	Peak
2	4874.00	40.24	-13.76	54.00	36.96	33.14	6.30	36.16	100	25	Average

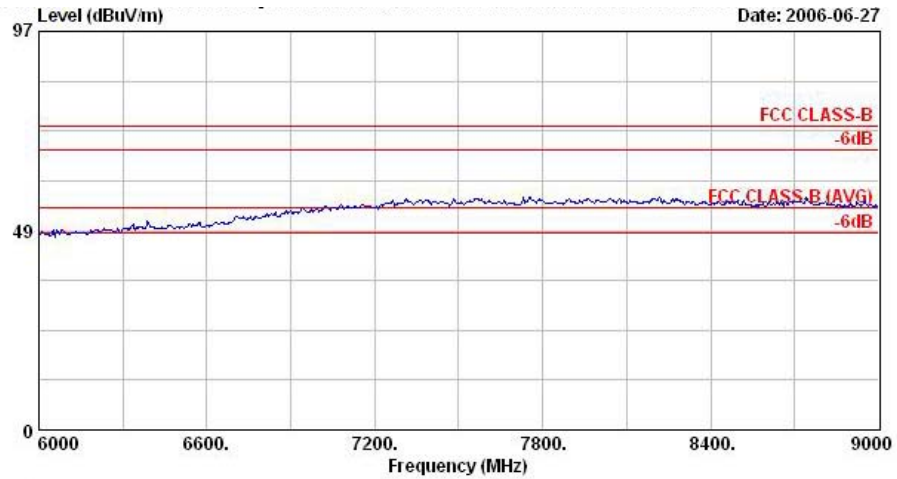


Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11b Tx CH06, 2437MHz+Adapter 2
Power : 18

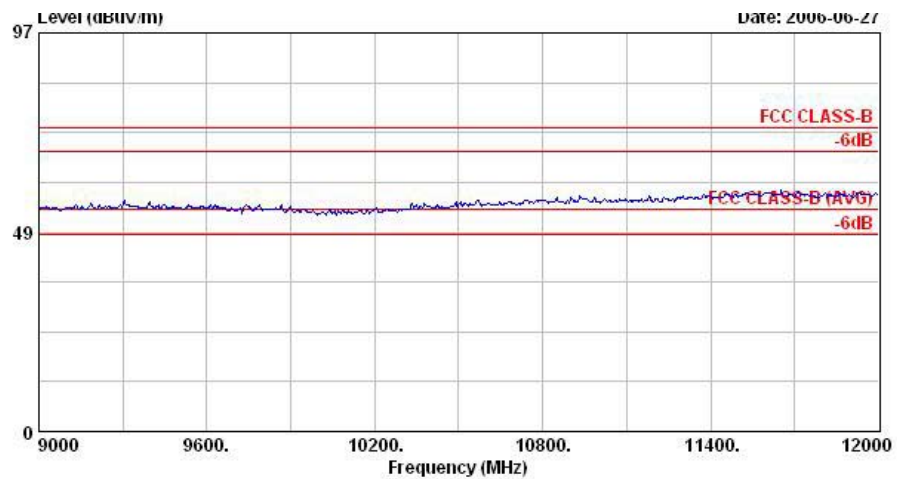


Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11b Tx CH06, 2437MHz+Adapter 2
Power : 18

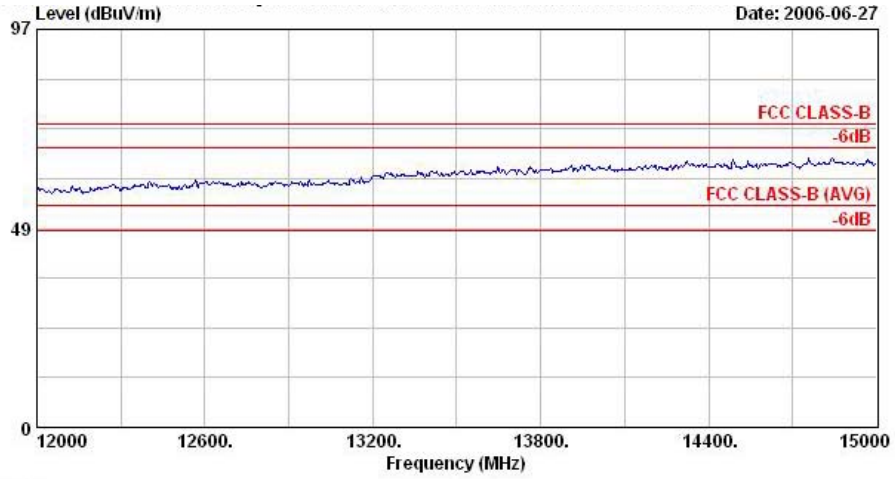


Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11b Tx CH06, 2437MHz+Adapter 2
Power : 18

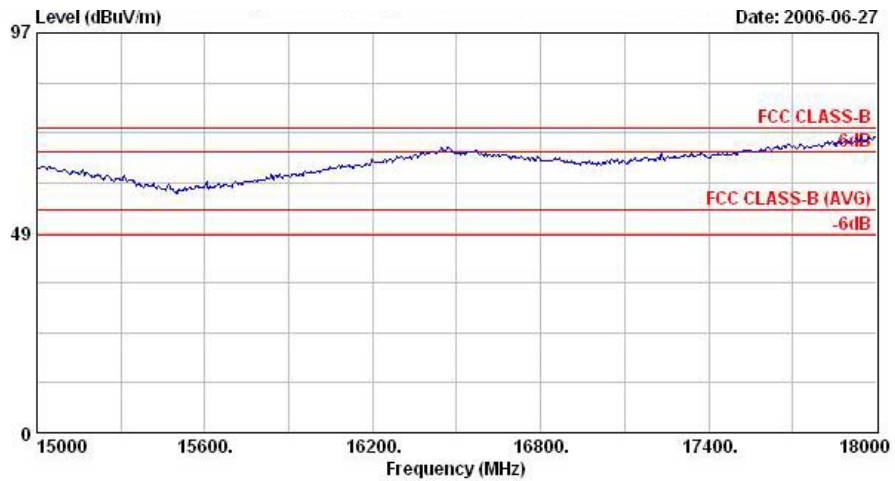

Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11b Tx CH06, 2437MHz+Adapter 2
Power : 18

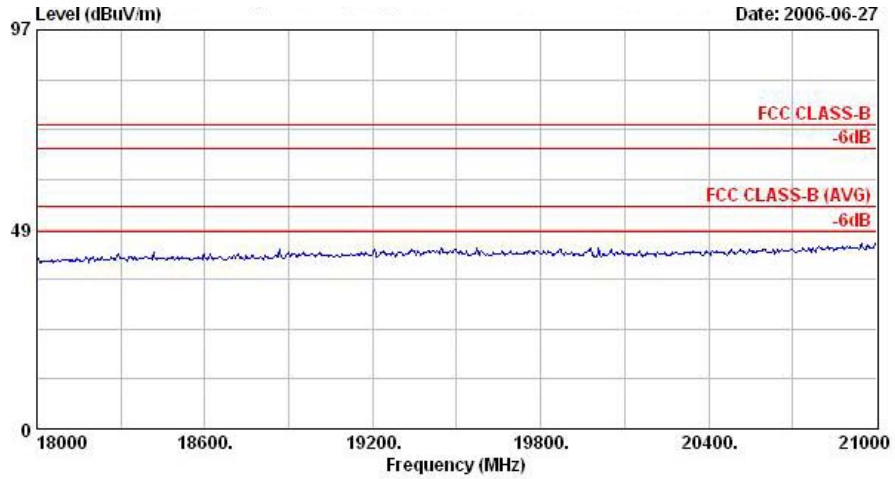

Site : 03CH06-HY
Condition : SHF-EHF HORN VERTICAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11b Tx CH06, 2437MHz+Adapter 2
Power : 18

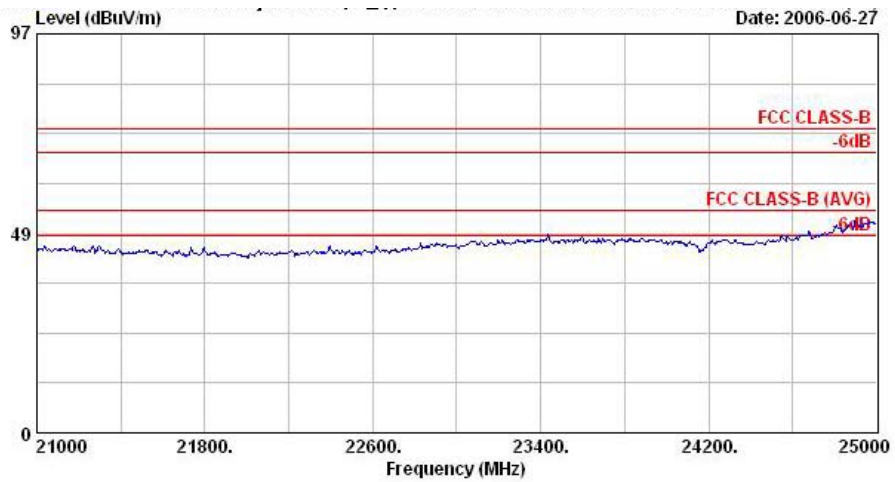


Site : 03CH06-HY
Condition : SHF-EHF HORN VERTICAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11b Tx CH06, 2437MHz+Adapter 2
Power : 18



- Test Mode : Mode 4
- Polarization : Horizontal


The test that passed at minimum margin was marked by the frame in the following table.

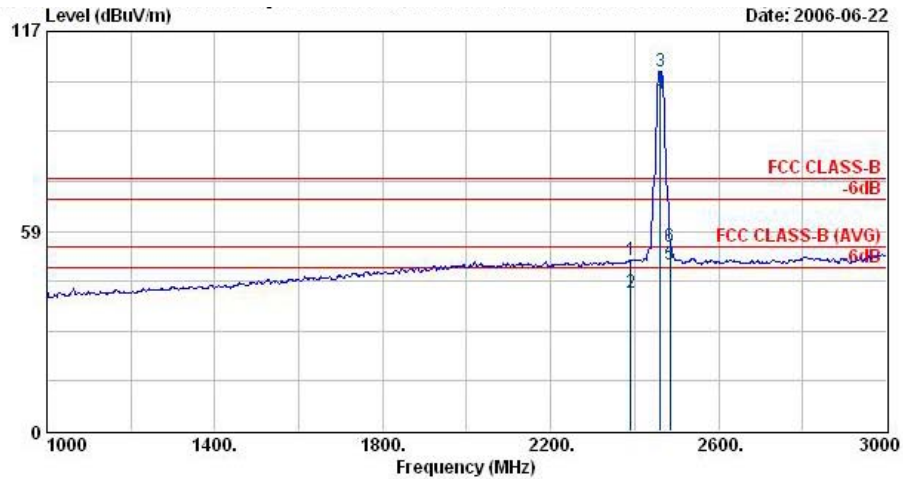


Site : 03CH06-HY
 Condition : HF-ANT-060410 HORIZONTAL
 EUT : WLAN Access Point
 Power : 120Vac/60Hz
 Model : FR 661605-02
 Memo : 11b Tx CH11, 2462MHz+Adapter 2
 Power : 18

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table		
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark
1 @	2390.00	49.91	-24.09	74.00	50.84	30.26	4.26	35.46	100	360	Peak
2 @	2390.00	40.39	-13.61	54.00	41.33	30.26	4.26	35.46	100	134	Average
3 @	2462.00	105.14			106.02	30.29	4.33	35.49	100	360	Peak
4 @	2462.00	98.76			99.64	30.29	4.33	35.49	100	134	Average
5 @	2483.50	48.64	-5.36	54.00	49.50	30.29	4.36	35.51	100	134	Average
6 @	2483.50	53.75	-20.25	74.00	54.61	30.29	4.36	35.51	100	360	Peak


Remark: #3 and #4 Fundamental Signal

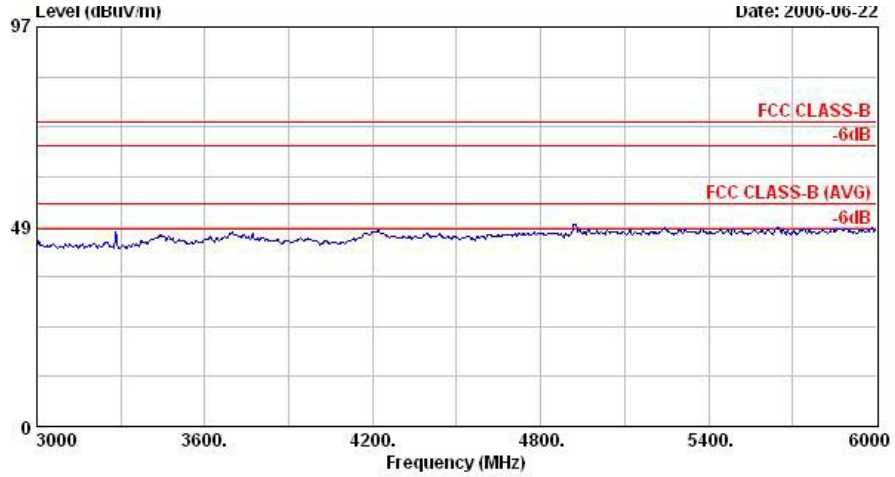


Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11b Tx CH11, 2462MHz+Adapter 2
Power : 18

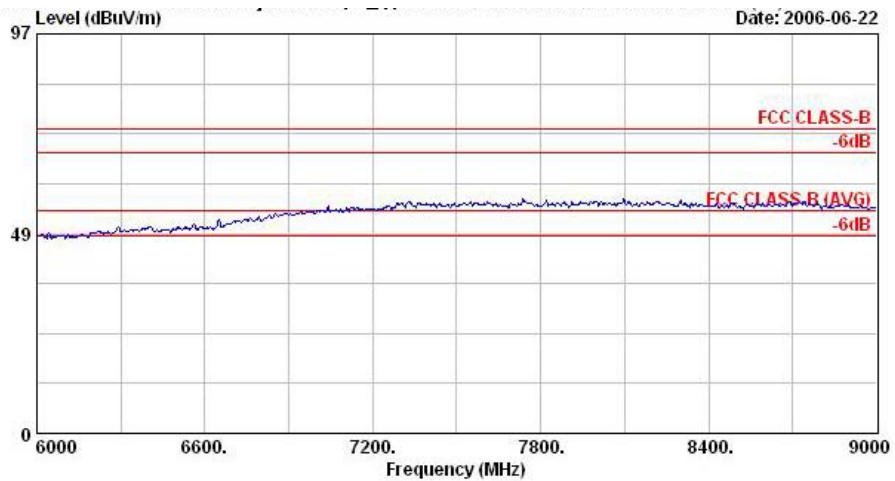


Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11b Tx CH11, 2462MHz+Adapter 2
Power : 18

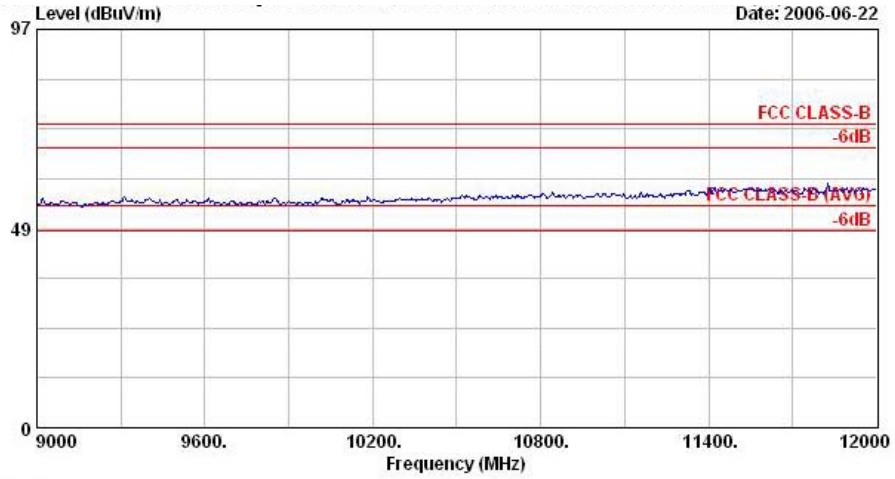

Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11b Tx CH11, 2462MHz+Adapter 2
Power : 18

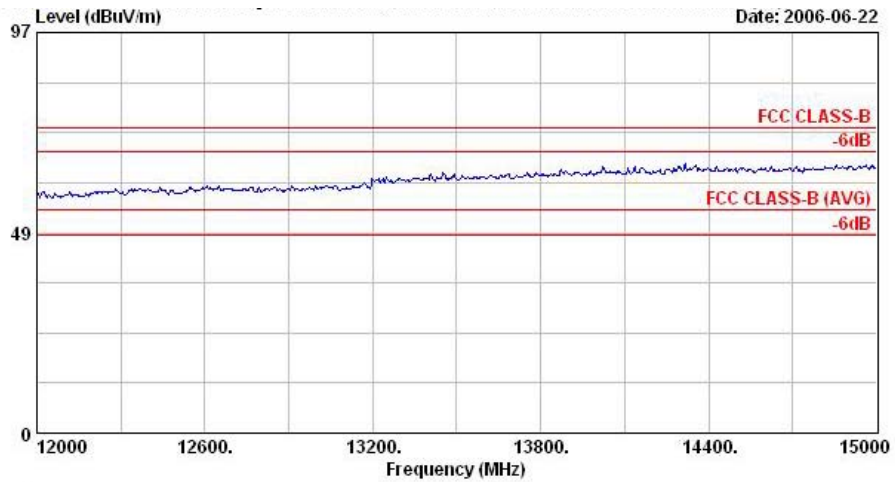

Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11b Tx CH11, 2462MHz+Adapter 2
Power : 18

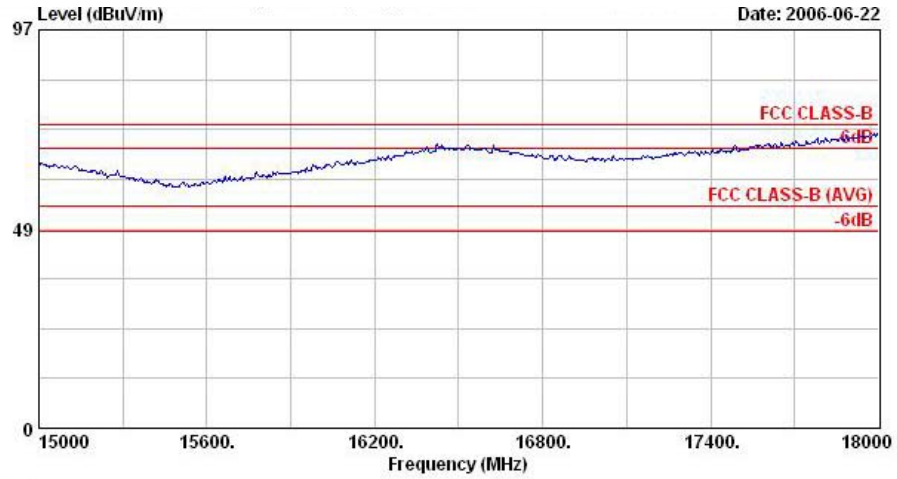


Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11b Tx CH11, 2462MHz+Adapter 2
Power : 18



• Polarization : Vertical


■ The test that passed at minimum margin was marked by the frame in the following table.

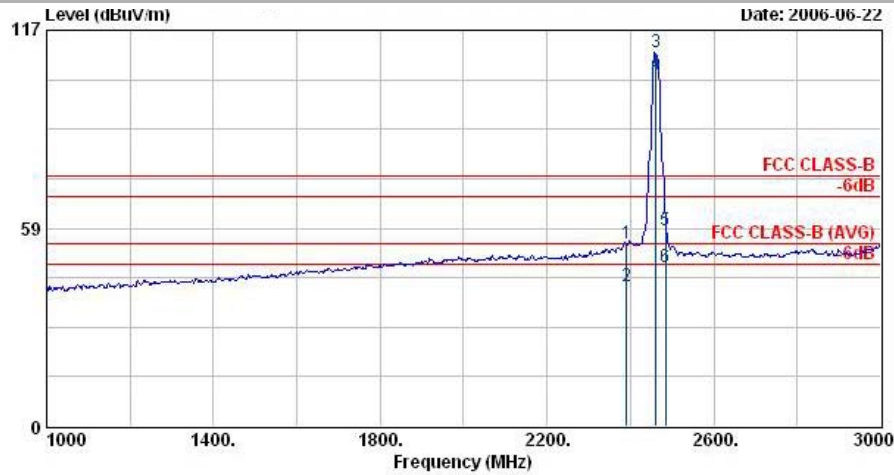

Site : 03CH06-HY
 Condition : HF-ANT-060410 VERTICAL
 EUT : WLAN Access Point
 Power : 120Vac/60Hz
 Model : FR 661605-02
 Memo : 11b Tx CH11, 2462MHz+Adapter 2
 Power : 18


	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	2390.00	54.01	-19.99	74.00	54.95	30.26	4.26	35.46	100	360	Peak
2 @	2390.00	41.27	-12.73	54.00	42.21	30.26	4.26	35.46	100	42	Average
3 @	2462.00	110.41			111.29	30.29	4.33	35.49	100	360	Peak
4 @	2462.00	104.02			104.90	30.29	4.33	35.49	100	42	Average
5 @	2483.50	57.98	-16.02	74.00	58.84	30.29	4.36	35.51	100	360	Peak
6 @	2483.50	47.09	-6.91	54.00	47.95	30.29	4.36	35.51	100	42	Average

Remark: #3 and #4 Fundamental Signal

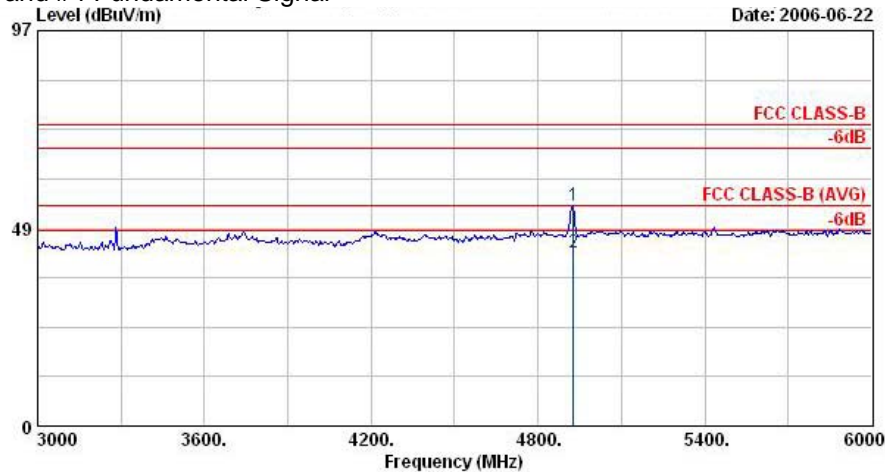


Site : 03CH06-HY
 Condition : HF-ANT-060410 VERTICAL
 EUT : WLAN Access Point
 Power : 120Vac/60Hz
 Model : FR 661605-02
 Memo : 11b Tx CH11, 2462MHz+Adapter 2
 Power : 18


	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	4926.00	54.27	-19.73	74.00	50.77	33.34	6.36	36.21	200	360	Peak
2 @	4926.00	42.37	-11.63	54.00	38.88	33.34	6.36	36.21	100	179	Average

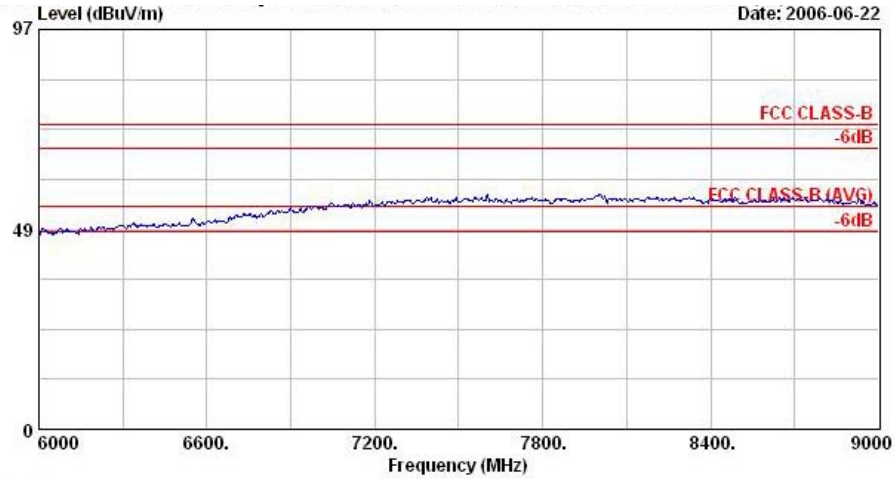


Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11b Tx CH11, 2462MHz+Adapter 2
Power : 18

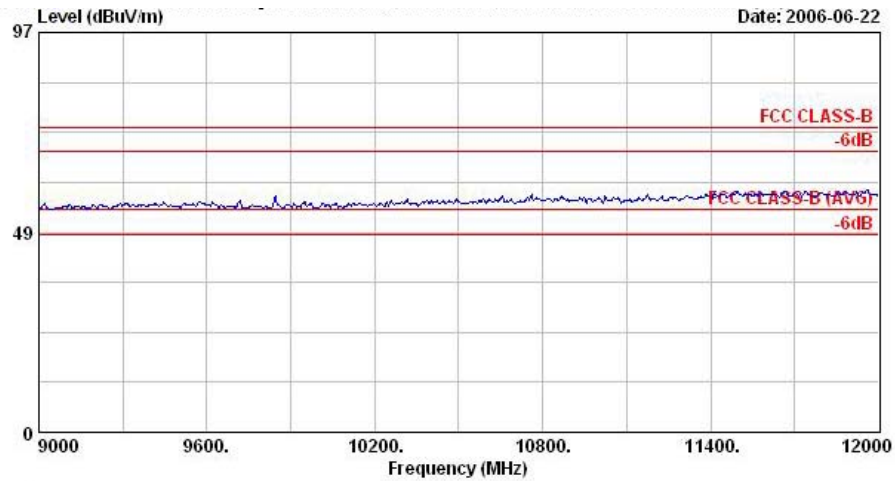

Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11b Tx CH11, 2462MHz+Adapter 2
Power : 18

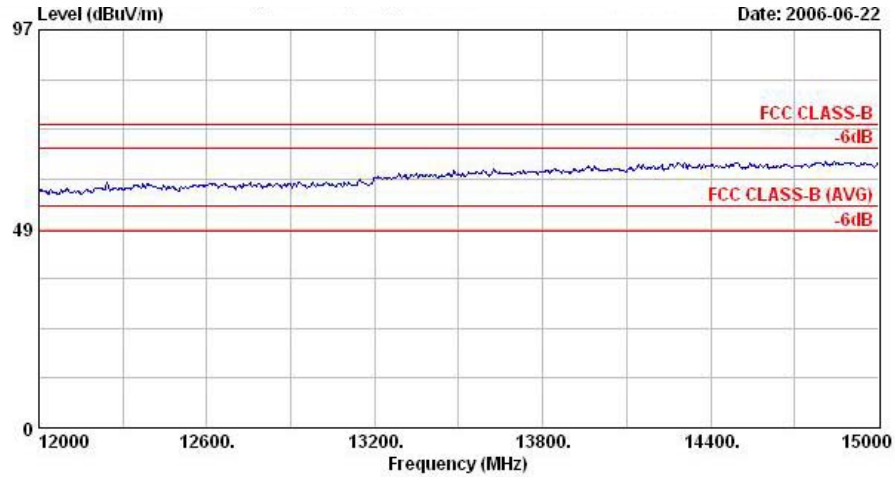

Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11b Tx CH11, 2462MHz+Adapter 2
Power : 18

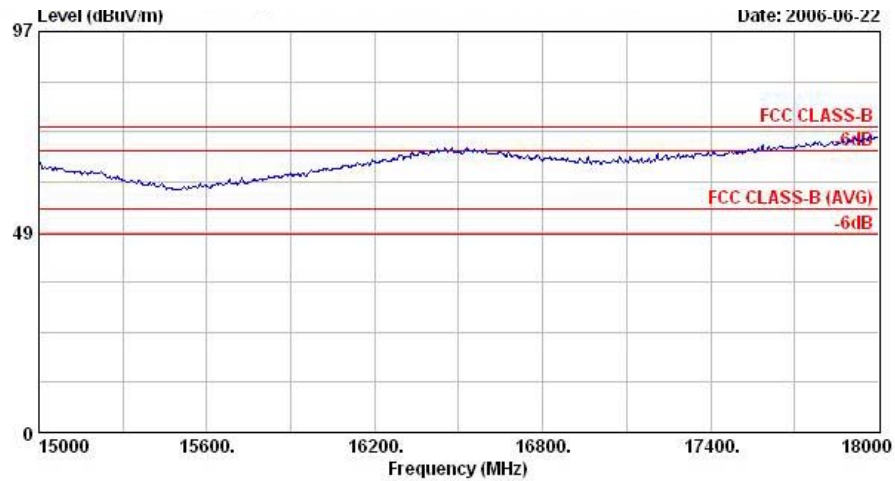


Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11b Tx CH11, 2462MHz+Adapter 2
Power : 18



- Test Mode : Mode 5
- Polarization : Horizontal


The test that passed at minimum margin was marked by the frame in the following table.

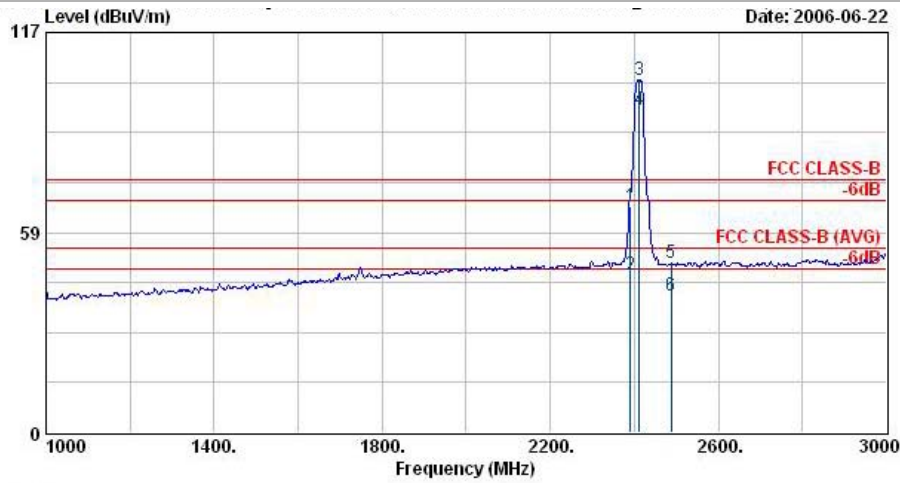

Site : 03CH06-HY
 Condition : HF-ANT-060410 HORIZONTAL
 EUT : WLAN Access Point
 Power : 120Vac/60Hz
 Model : FR 661605-02
 Memo : 11g Tx_CH01, 2412MHz+Adapter 2
 Power : 15

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	Loss	Factor	Pos	Pos	Remark
					dB	dB		cm	deg	
1	2390.00	65.99	-8.01	74.00	66.93	30.26	4.26	35.46	100	0 Peak
2	2390.00	46.29	-7.71	54.00	47.23	30.26	4.26	35.46	100	131 Average
3 @	2412.00	103.07			104.00	30.27	4.26	35.46	100	0 Peak
4 @	2412.00	94.40			95.33	30.27	4.26	35.46	100	131 Average
5	2488.00	49.43	-24.57	74.00	50.29	30.30	4.36	35.51	100	0 Peak
6	2488.00	40.03	-13.97	54.00	40.88	30.30	4.36	35.51	100	131 Average

Remark: #3 and #4 Fundamental Signal

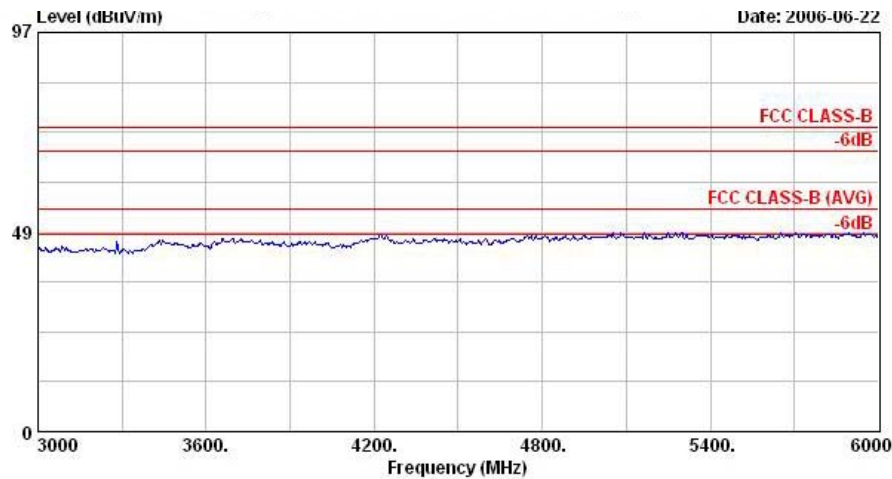


Site : 03CH06-HY
 Condition : HF-ANT-060410 HORIZONTAL
 EUT : WLAN Access Point
 Power : 120Vac/60Hz
 Model : FR 661605-02
 Memo : 11g Tx_CH01, 2412MHz+Adapter 2
 Power : 15




FCC TEST REPORT


Report No. : FR661605-02

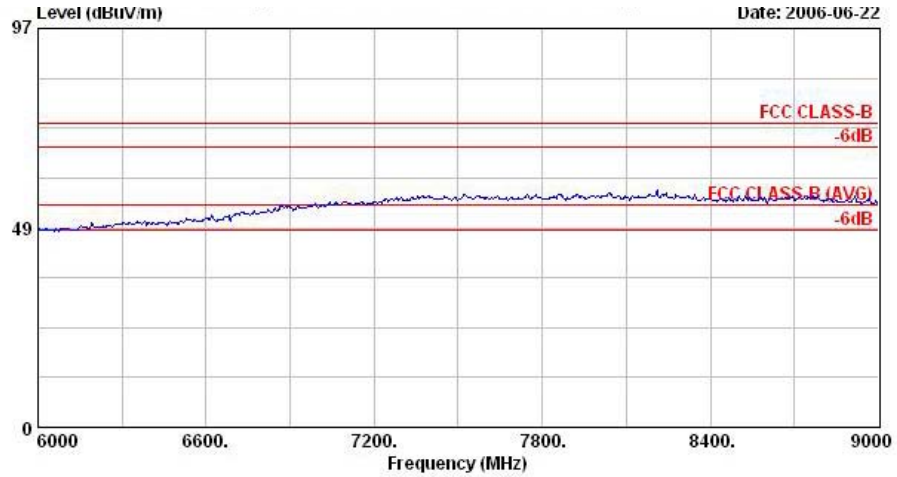


Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11g Tx_CH01, 2412MHz+Adapter 2
Power : 15

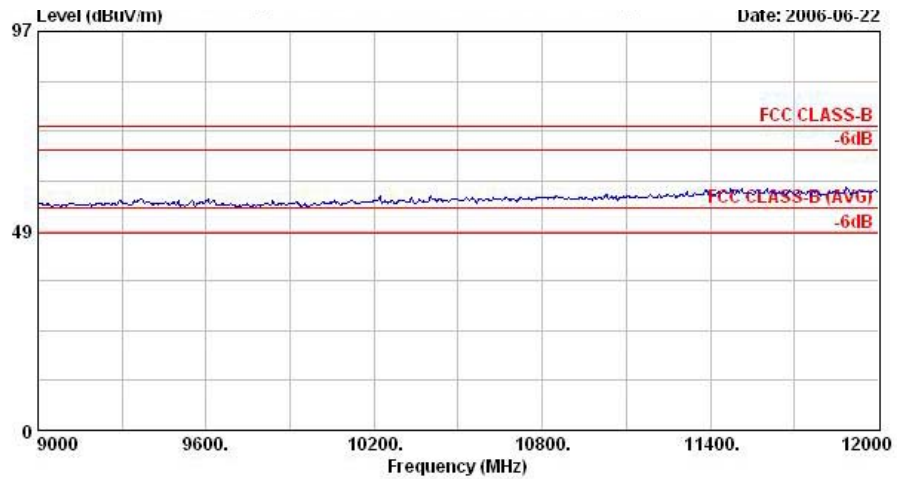

Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11g Tx_CH01, 2412MHz+Adapter 2
Power : 15

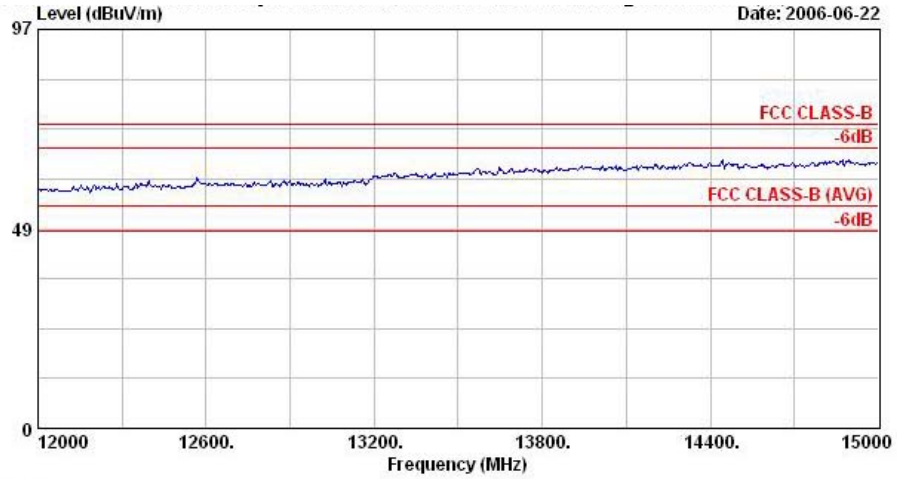

Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11g Tx_CH01, 2412MHz+Adapter 2
Power : 15

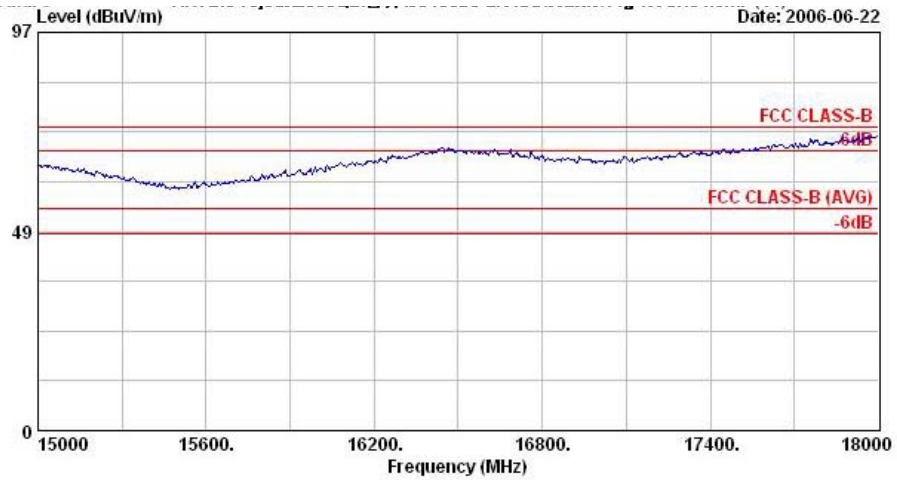


Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11g Tx_CH01, 2412MHz+Adapter 2
Power : 15



- Polarization : Vertical


The test that passed at minimum margin was marked by the frame in the following table.

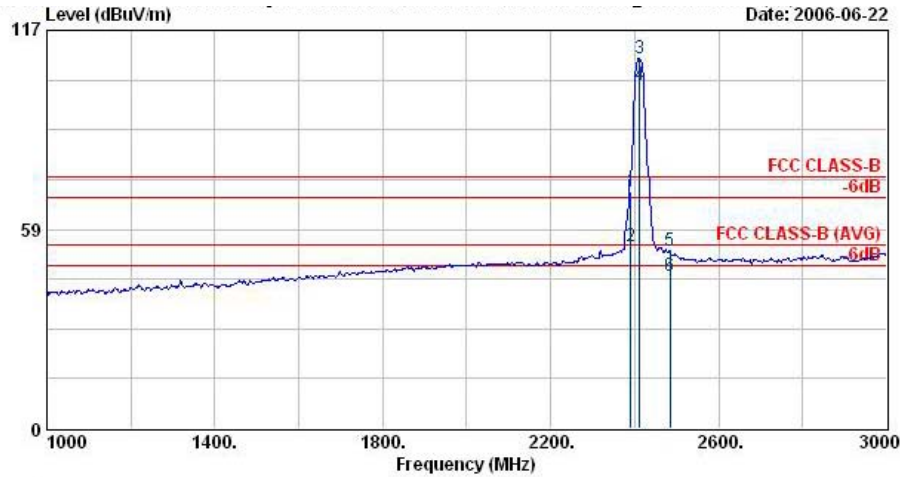


Site : 03CH06-HY
 Condition : HF-ANT-060410 VERTICAL
 EUT : WLAN Access Point
 Power : 120Vac/60Hz
 Model : FR 661605-02
 Memo : 11g Tx_CH01, 2412MHz+Adapter 2
 Power : 15

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table		
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	2390.00	69.50	-4.50	74.00	70.44	30.26	4.26	35.46	100	360	Peak
2 @	2390.00	53.49	-0.51	54.00	54.43	30.26	4.26	35.46	100	27	Average
3 @	2412.00	108.87			109.80	30.27	4.26	35.46	100	360	Peak
4 @	2412.00	100.97			101.90	30.27	4.26	35.46	100	27	Average
5	2484.00	52.41	-21.59	74.00	53.27	30.29	4.36	35.51	100	360	Peak
6	2484.00	44.60	-9.40	54.00	45.46	30.29	4.36	35.51	100	27	Average


Remark: #3 and #4 Fundamental Signal

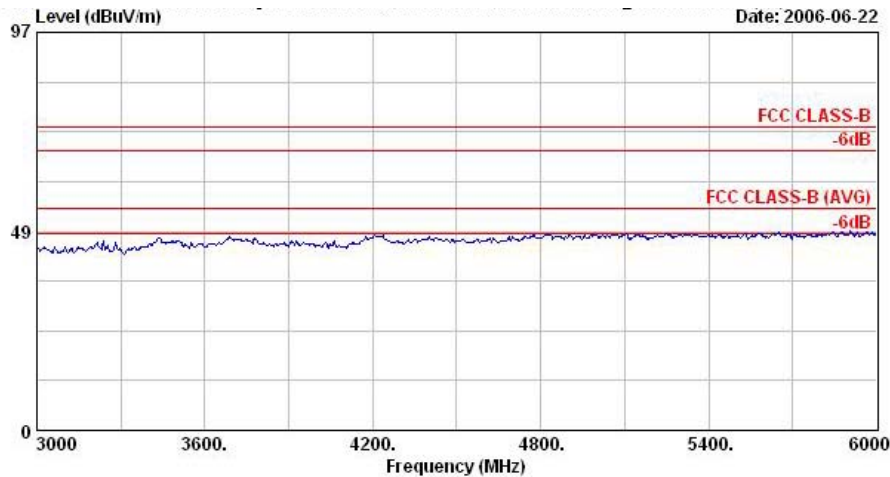


Site : 03CH06-HY
 Condition : HF-ANT-060410 VERTICAL
 EUT : WLAN Access Point
 Power : 120Vac/60Hz
 Model : FR 661605-02
 Memo : 11g Tx_CH01, 2412MHz+Adapter 2
 Power : 15

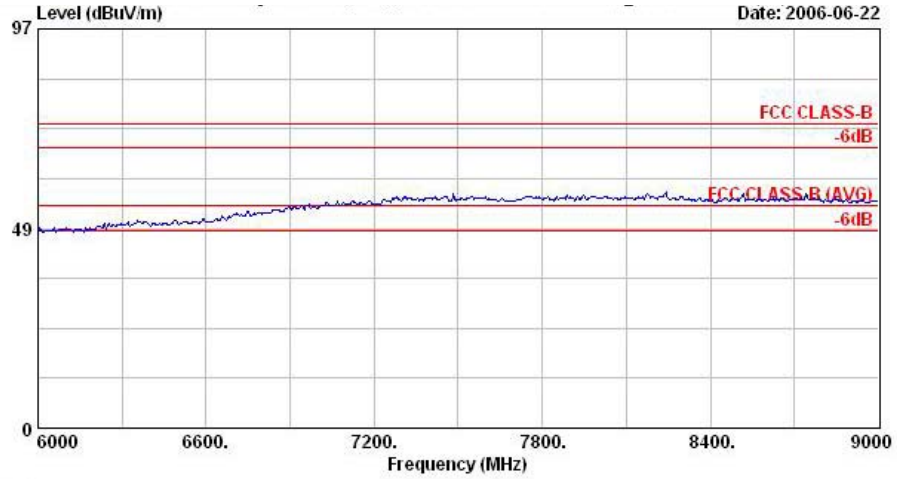


Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11g Tx_CH01, 2412MHz+Adapter 2
Power : 15

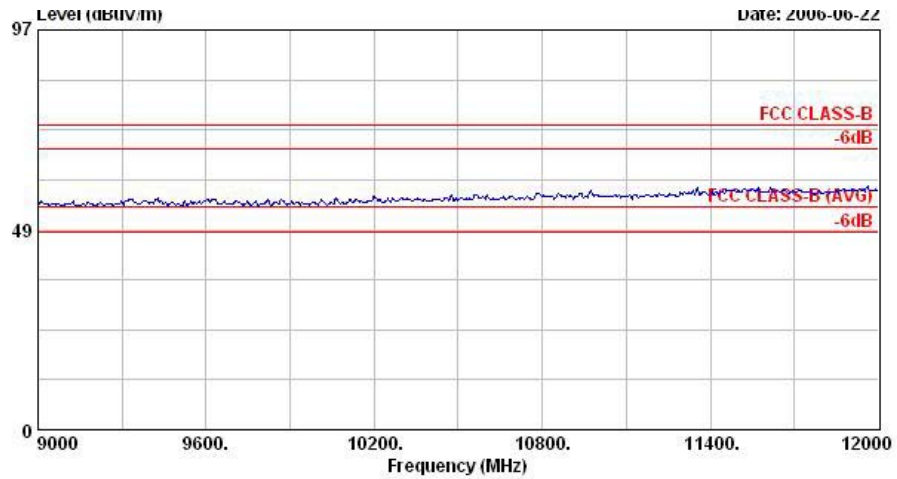

Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11g Tx_CH01, 2412MHz+Adapter 2
Power : 15

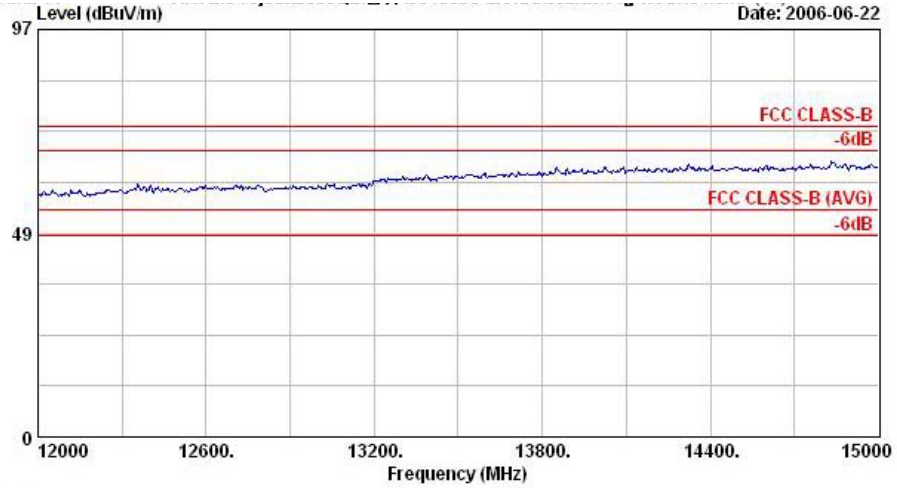

Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11g Tx_CH01, 2412MHz+Adapter 2
Power : 15

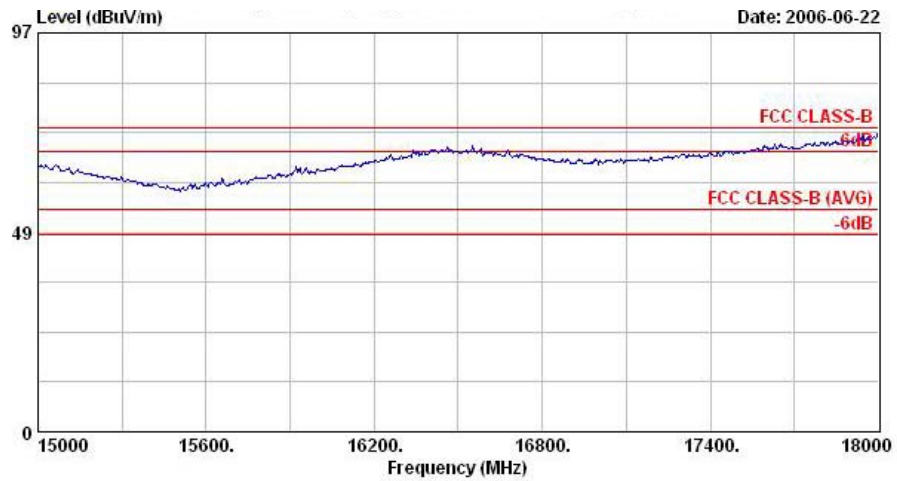


Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11g Tx_CH01, 2412MHz+Adapter 2
Power : 15




- Test Mode : Mode 6
- Polarization : Horizontal

The test that passed at minimum margin was marked by the frame in the following table.

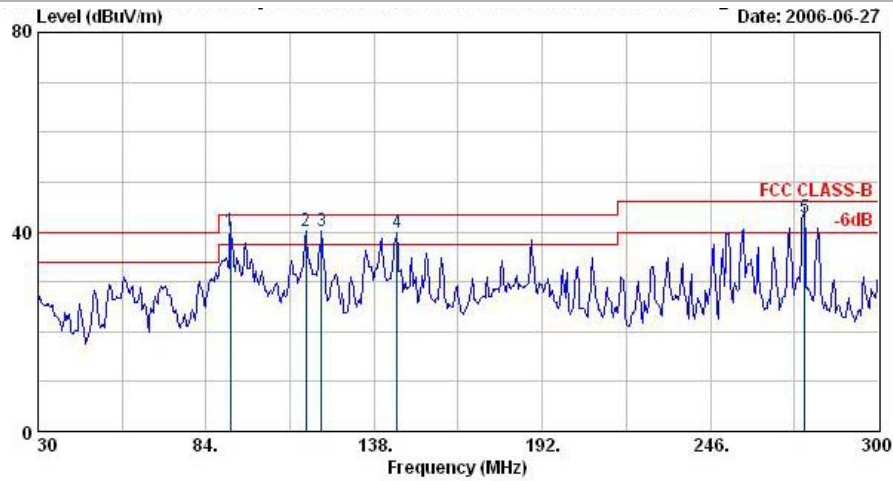


Site : 03CH06-HY
 Condition : BI-LOG-2004-1122 HORIZONTAL
 EUT : WLAN Access Point
 Power : 120Vac/60Hz
 Model : FR 661605-02
 Memo : 11g Tx_CH06, 2437MHz+Adapter 2
 Power : 18

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level Factor	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB	dB	cm	deg	
1 !	91.83	40.29	-3.21	43.50	58.11	9.32	1.68	28.82	100	18 QP
2 !	116.13	40.23	-3.27	43.50	54.87	12.38	1.87	28.89	400	0 Peak
3 !	120.99	40.24	-3.26	43.50	54.55	12.66	1.93	28.90	400	0 Peak
4 !	145.29	39.93	-3.57	43.50	56.69	9.85	2.21	28.82	400	0 Peak
5 @	276.24	42.92	-3.08	46.00	55.90	12.92	3.04	28.94	100	67 QP

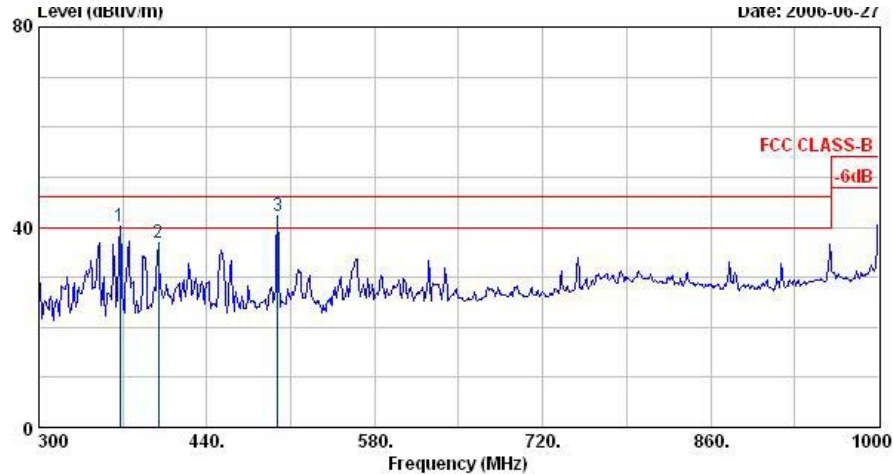

Site : 03CH06-HY
 Condition : BI-LOG-2004-1122 HORIZONTAL
 EUT : WLAN Access Point
 Power : 120Vac/60Hz
 Model : FR 661605-02
 Memo : 11g Tx_CH06, 2437MHz+Adapter 2
 Power : 18


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 !	367.90	40.06	-5.94	46.00	50.47	14.93	3.72	29.06	100	0	Peak
2	399.40	37.00	-9.00	46.00	46.35	15.87	3.91	29.13	100	0	Peak
3 !	498.80	42.11	-3.89	46.00	49.65	17.10	4.18	28.82	100	0	Peak

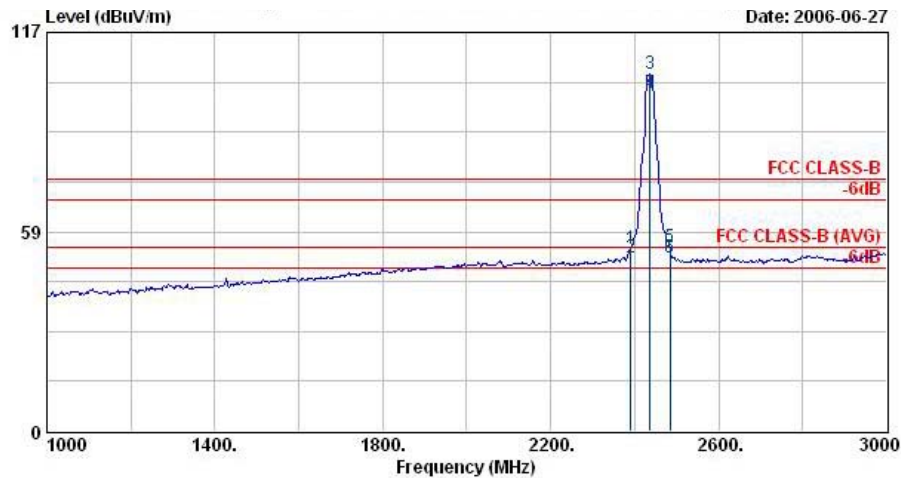


Site : 03CH06-HY
 Condition : HF-ANT-060410 HORIZONTAL
 EUT : WLAN Access Point
 Power : 120Vac/60Hz
 Model : FR 661605-02
 Memo : 11g Tx_CH06, 2437MHz+Adapter 2
 Power : 18

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2390.00	53.59	-20.41	74.00	54.52	30.26	4.26	35.46	100	360	Peak
2 @	2390.00	50.95	-3.05	54.00	51.89	30.26	4.26	35.46	100	252	Average
3 @	2437.00	104.68			105.59	30.27	4.29	35.47	100	360	Peak
4 @	2437.00	99.30			100.20	30.28	4.29	35.47	100	252	Average
5	2483.50	54.05	-19.95	74.00	54.91	30.29	4.36	35.51	100	360	Peak
6 @	2483.50	51.07	-2.93	54.00	51.93	30.29	4.36	35.51	100	252	Average


Remark: #3 and #4 Fundamental Signal

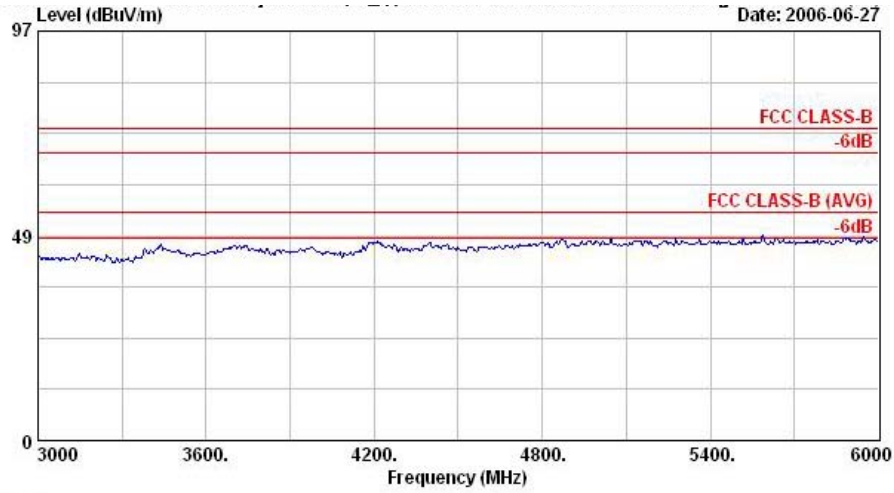


Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11g Tx_CH06, 2437MHz+Adapter 2
Power : 18

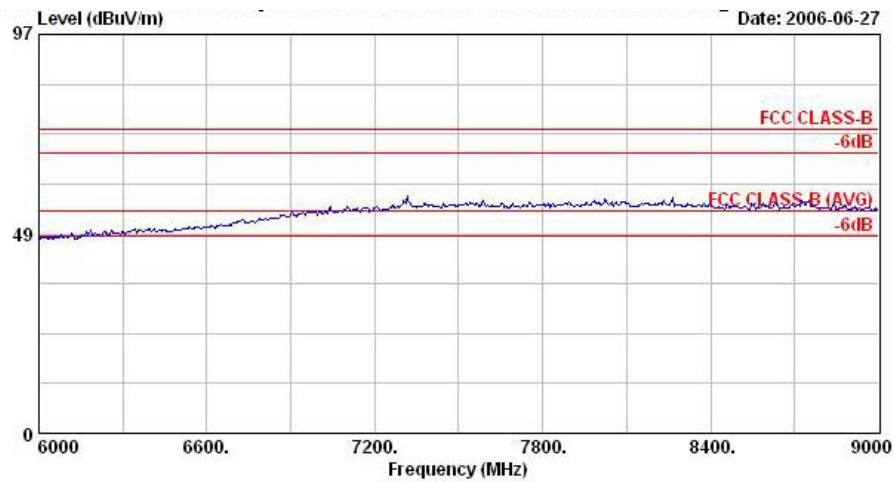


Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11g Tx_CH06, 2437MHz+Adapter 2
Power : 18

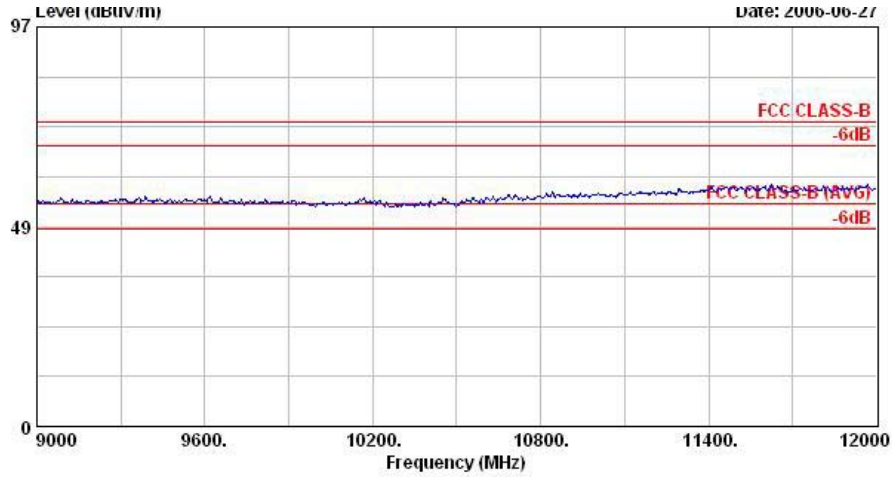


Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11g Tx_CH06, 2437MHz+Adapter 2
Power : 18

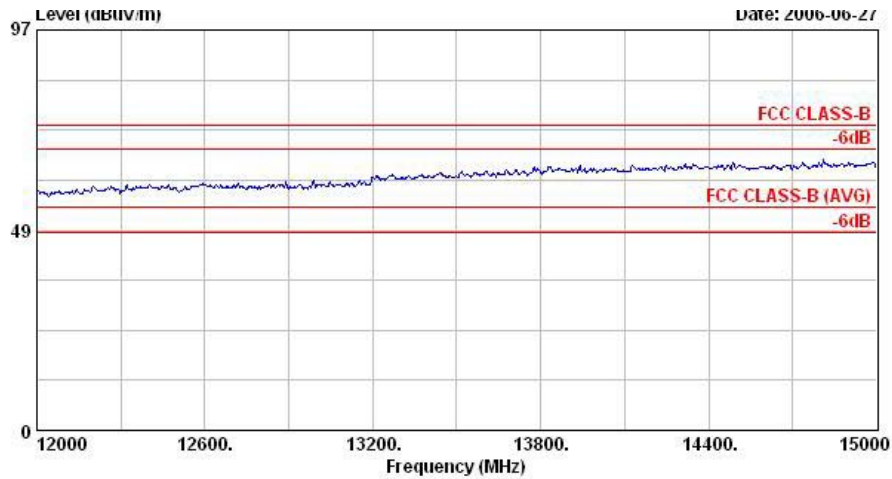


Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11g Tx_CH06, 2437MHz+Adapter 2
Power : 18

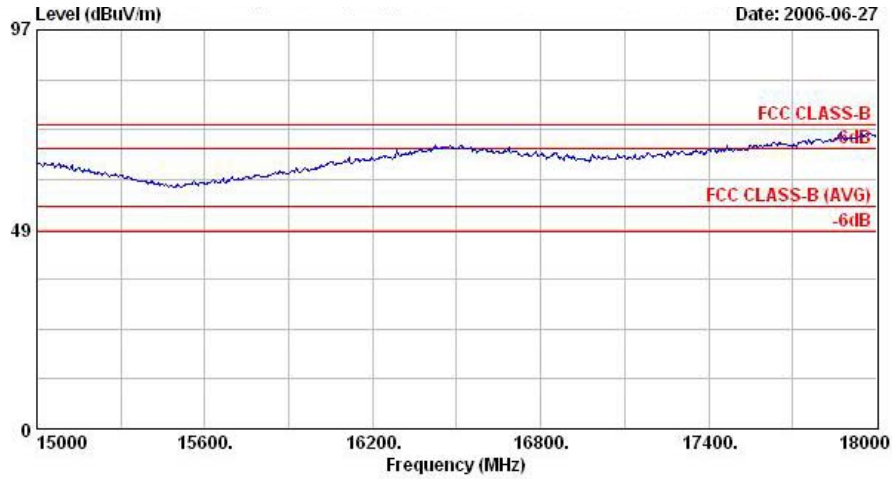

Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11g Tx_CH06, 2437MHz+Adapter 2
Power : 18

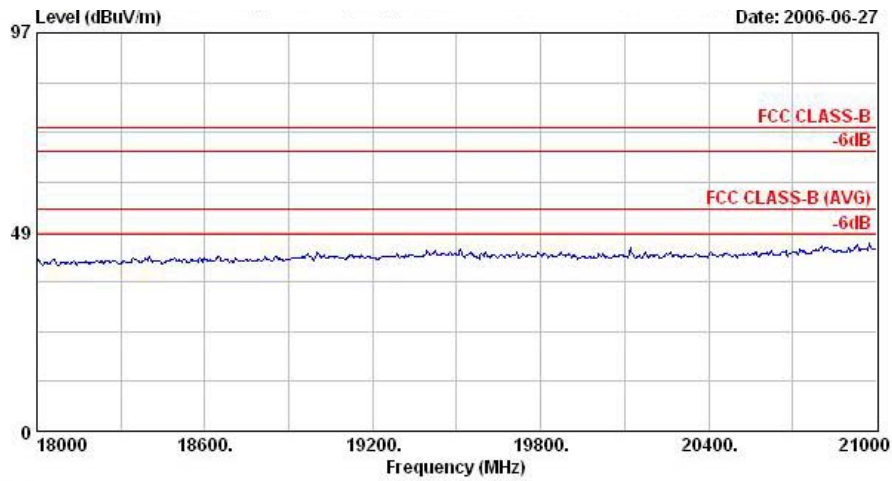

Site : 03CH06-HY
Condition : SHF-EHF HORN HORIZONTAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11g Tx_CH06, 2437MHz+Adapter 2
Power : 18

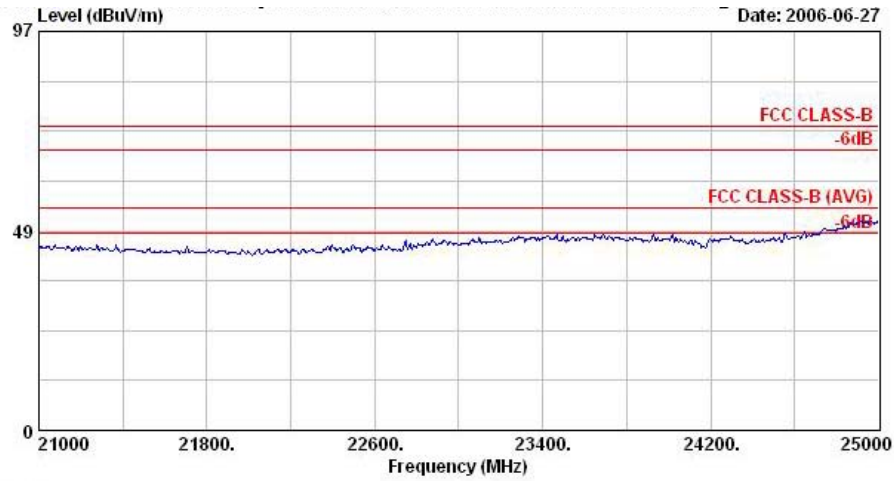


Site : 03CH06-HY
Condition : SHF-EHF HORN HORIZONTAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11g Tx_CH06, 2437MHz+Adapter 2
Power : 18




▪ Polarization : Vertical

■ The test that passed at minimum margin was marked by the frame in the following table.

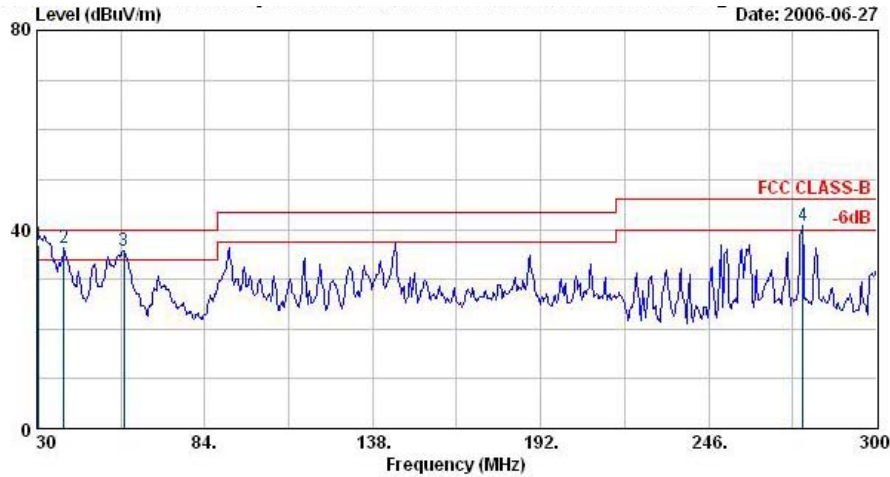

Site : 03CH06-HY
 Condition : BI-LOG-2004-1122 VERTICAL
 EUT : WLAN Access Point
 Power : 120Vac/60Hz
 Model : FR 661605-02
 Memo : 11g Tx_CH06, 2437MHz+Adapter 2
 Power : 18

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	Remark
1	30.54	36.81	-3.19	40.00	46.10	18.40	0.93	28.62	100	359 QP
2	38.64	36.36	-3.64	40.00	48.51	15.28	1.23	28.66	400	0 Peak
3	58.08	35.70	-4.30	40.00	55.93	7.21	1.20	28.64	400	0 Peak
4	276.24	40.67	-5.33	46.00	53.65	12.92	3.04	28.94	400	0 Peak

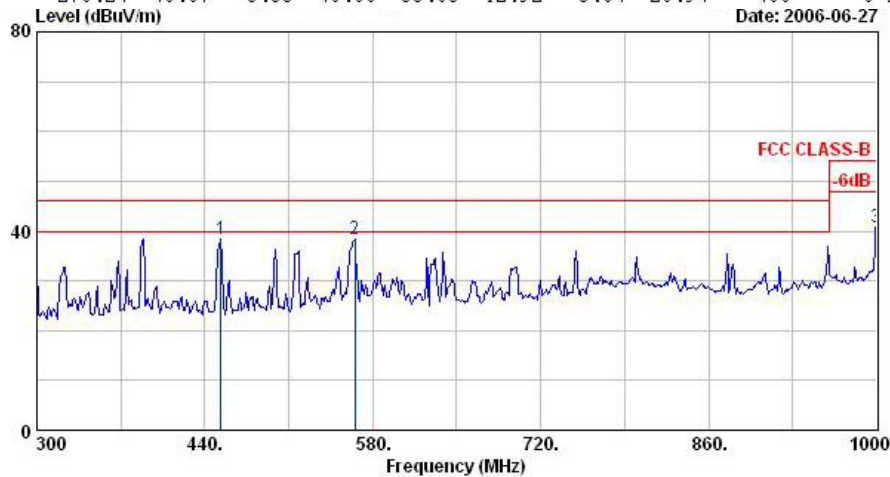


Site : 03CH06-HY
 Condition : BI-LOG-2004-1122 VERTICAL
 EUT : WLAN Access Point
 Power : 120Vac/60Hz
 Model : FR 661605-02
 Memo : 11g Tx_CH06, 2437MHz+Adapter 2
 Power : 18

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	Remark
1	453.30	38.23	-7.77	46.00	46.57	16.45	4.02	28.81	100	0 Peak
2	565.30	38.28	-7.72	46.00	44.37	18.46	4.45	29.00	100	0 Peak
3	1000.00	40.76	-13.24	54.00	40.33	22.97	6.24	28.79	100	0 Peak



FCC TEST REPORT


Report No. : FR661605-02

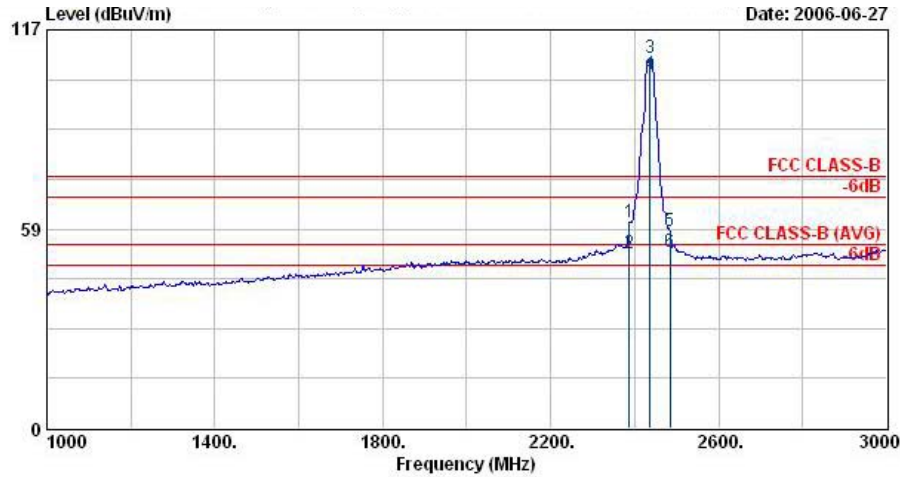

Site : 03CH06-HY
 Condition : HF-ANT-060410 VERTICAL
 EUT : WLAN Access Point
 Power : 120Vac/60Hz
 Model : FR 661605-02
 Memo : 11g Tx_CH06, 2437MHz+Adapter 2
 Power : 18


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	2388.00	60.64	-13.36	74.00	61.59	30.26	4.23	35.44	100	360 Peak
2 @	2388.00	51.22	-2.78	54.00	52.17	30.26	4.23	35.44	100	55 Average
3 @	2437.00	108.92			109.82	30.28	4.29	35.47	100	360 Peak
4 @	2437.00	104.10			105.00	30.28	4.29	35.47	100	55 Average
5	2483.50	57.83	-16.17	74.00	58.69	30.29	4.36	35.51	100	360 Peak
6 @	2483.50	51.73	-2.27	54.00	52.59	30.29	4.36	35.51	100	55 Average

Remark: #3 and #4 Fundamental Signal

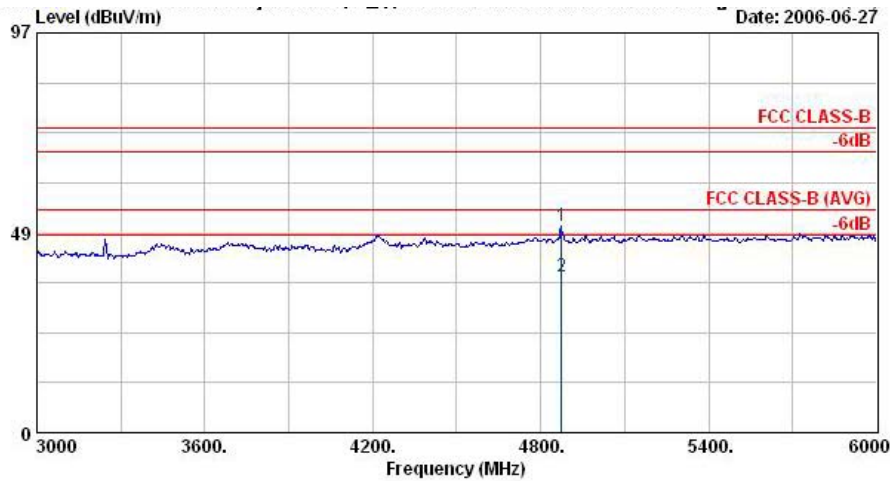


Site : 03CH06-HY
 Condition : HF-ANT-060410 VERTICAL
 EUT : WLAN Access Point
 Power : 120Vac/60Hz
 Model : FR 661605-02
 Memo : 11g Tx_CH06, 2437MHz+Adapter 2
 Power : 18


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	4874.00	50.23	-23.77	74.00	46.95	33.14	6.30	36.16	100	360 Peak
2	4874.00	37.92	-16.08	54.00	34.64	33.14	6.30	36.16	100	14 Average

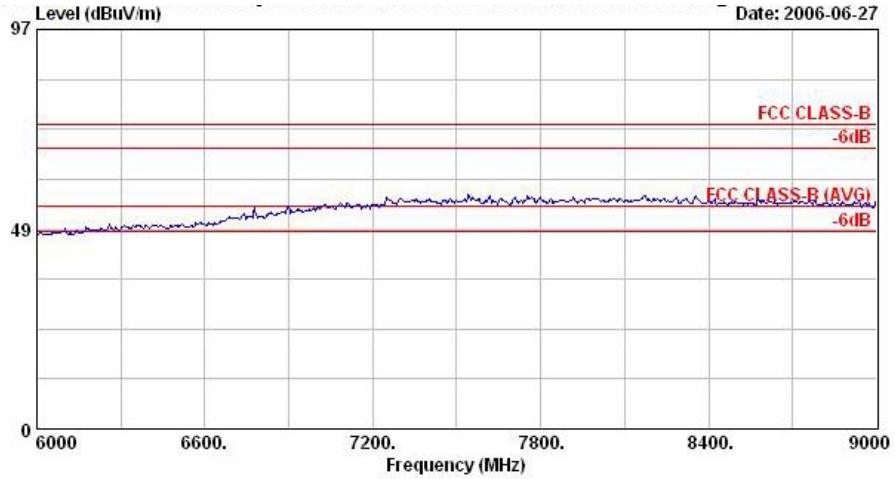


Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11g Tx_CH06, 2437MHz+Adapter 2
Power : 18

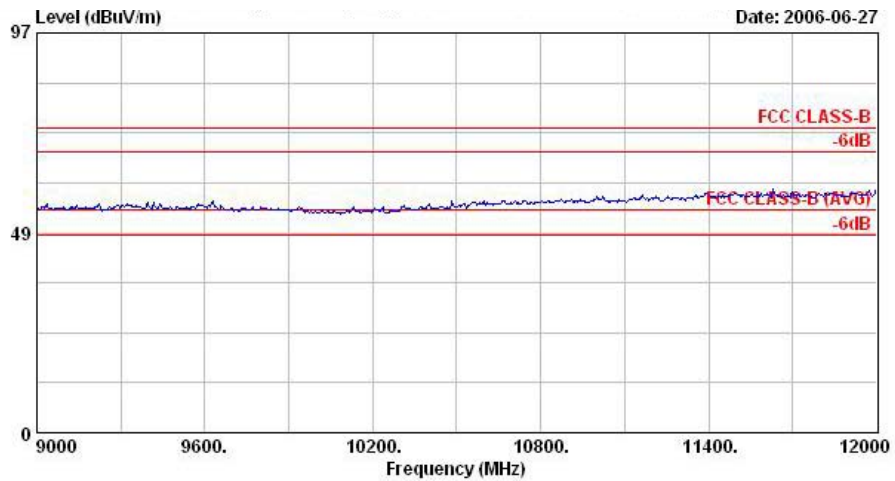


Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11g Tx_CH06, 2437MHz+Adapter 2
Power : 18

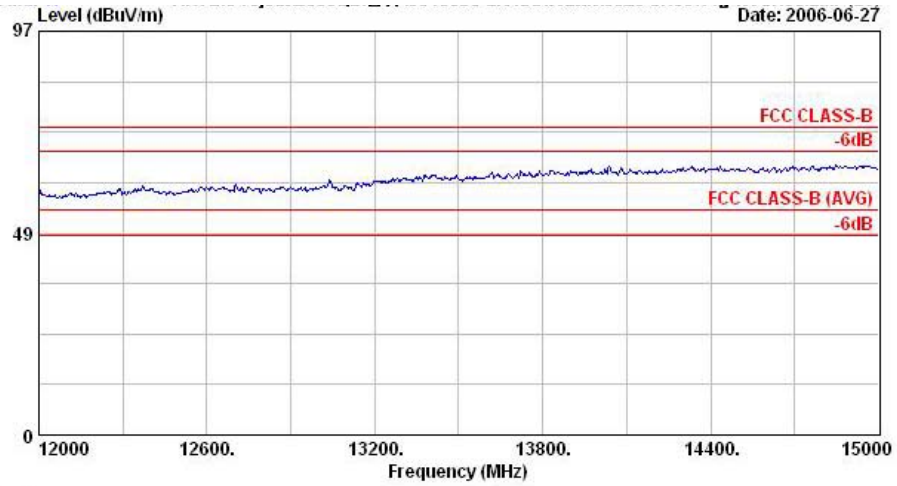


Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11g Tx_CH06, 2437MHz+Adapter 2
Power : 18

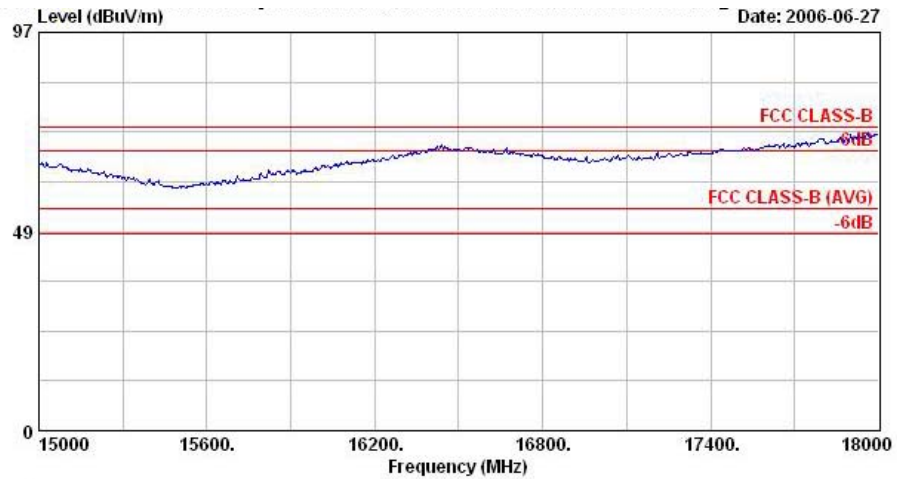

Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11g Tx_CH06, 2437MHz+Adapter 2
Power : 18

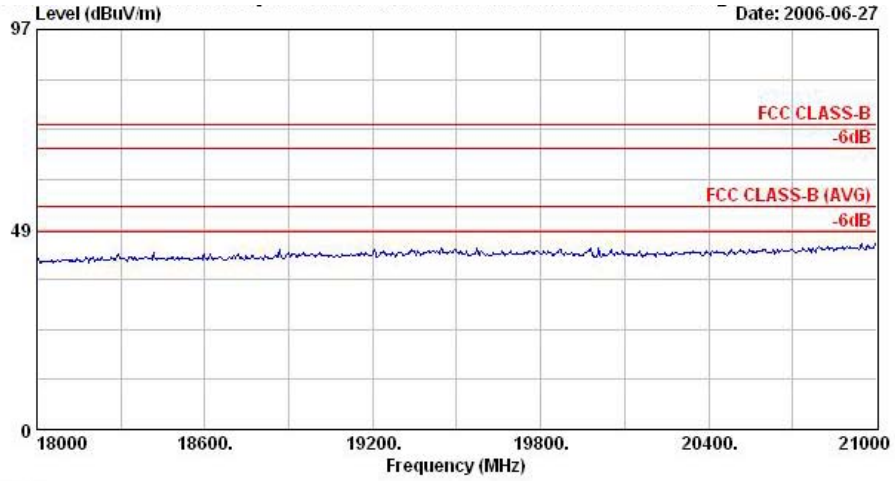

Site : 03CH06-HY
Condition : SHF-EHF HORN VERTICAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11g Tx_CH06, 2437MHz+Adapter 2
Power : 18

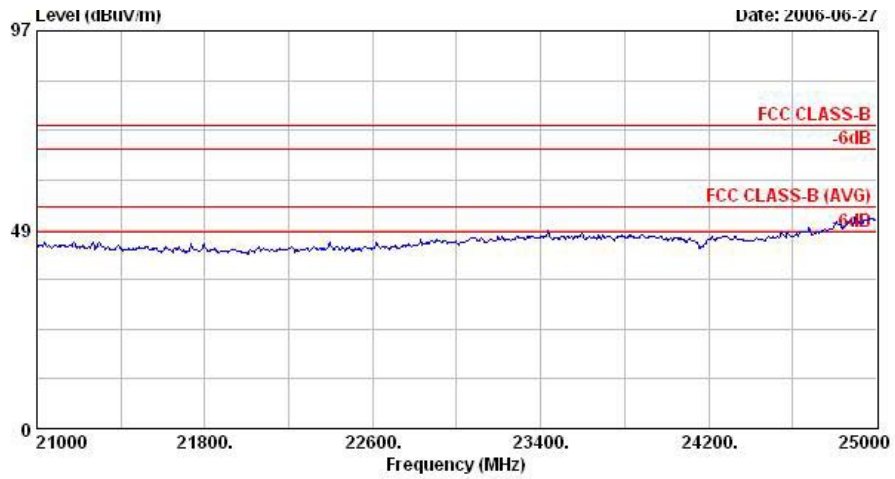


Site : 03CH06-HY
Condition : SHF-EHF HORN VERTICAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11g Tx_CH06, 2437MHz+Adapter 2
Power : 18



- Test Mode : Mode 7
- Polarization : Horizontal


The test that passed at minimum margin was marked by the frame in the following table.

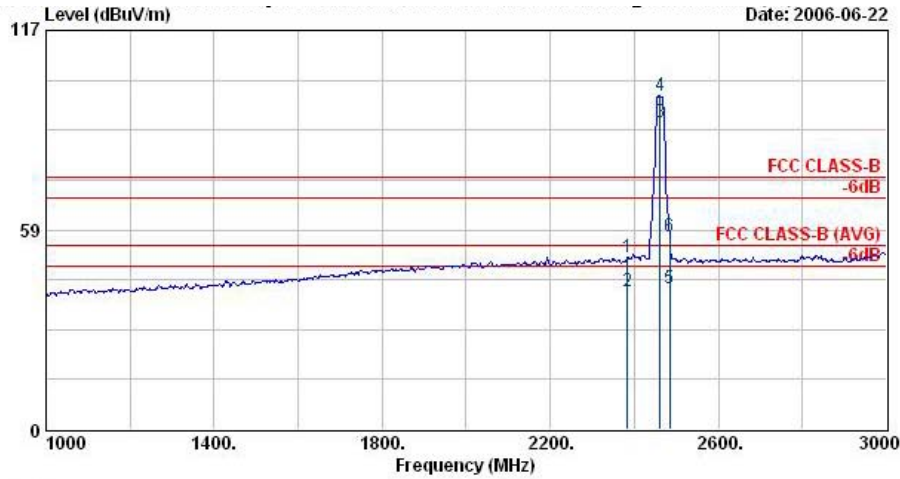

Site : 03CH06-HY
 Condition : HF-ANT-060410 HORIZONTAL
 EUT : WLAN Access Point
 Power : 120Vac/60Hz
 Model : FR 661605-02
 Memo : 11g Tx_CH11, 2462MHz+Adapter 2
 Power : 15

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	2384.00	50.65	-23.35	74.00	51.60	30.25	4.23	35.44	100	360	Peak
2 @	2384.00	40.24	-13.76	54.00	41.20	30.25	4.23	35.44	100	133	Average
3 @	2462.00	90.03			90.91	30.29	4.33	35.49	100	133	Average
4 @	2462.00	97.76			98.64	30.29	4.33	35.49	100	360	Peak
5 @	2483.50	41.40	-12.60	54.00	42.26	30.29	4.36	35.51	100	133	Average
6 @	2483.50	56.53	-17.47	74.00	57.39	30.29	4.36	35.51	100	360	Peak

Remark: #3 and #4 Fundamental Signal

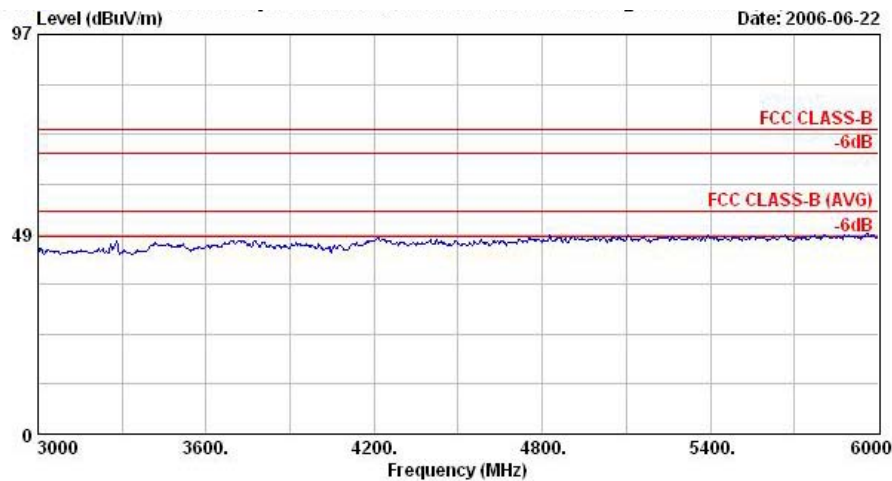


Site : 03CH06-HY
 Condition : HF-ANT-060410 HORIZONTAL
 EUT : WLAN Access Point
 Power : 120Vac/60Hz
 Model : FR 661605-02
 Memo : 11g Tx_CH11, 2462MHz+Adapter 2
 Power : 15




FCC TEST REPORT


Report No. : FR661605-02

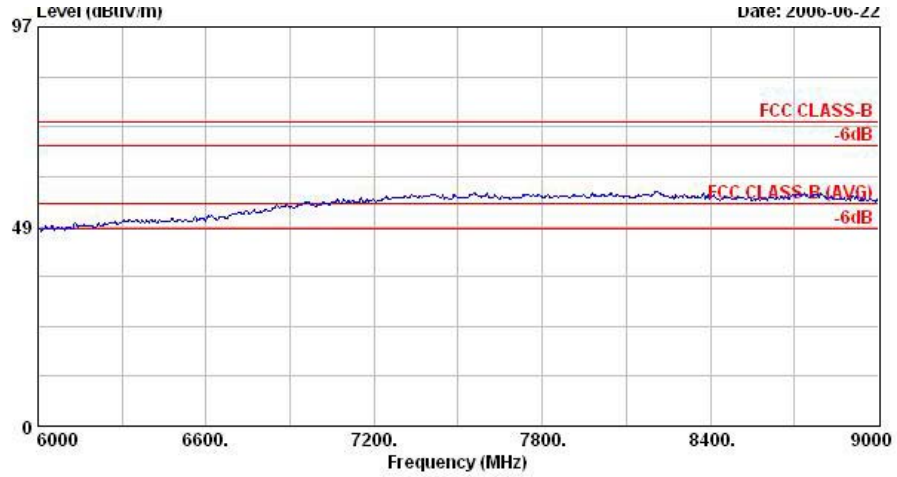


Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11g Tx_CH11, 2462MHz+Adapter 2
Power : 15

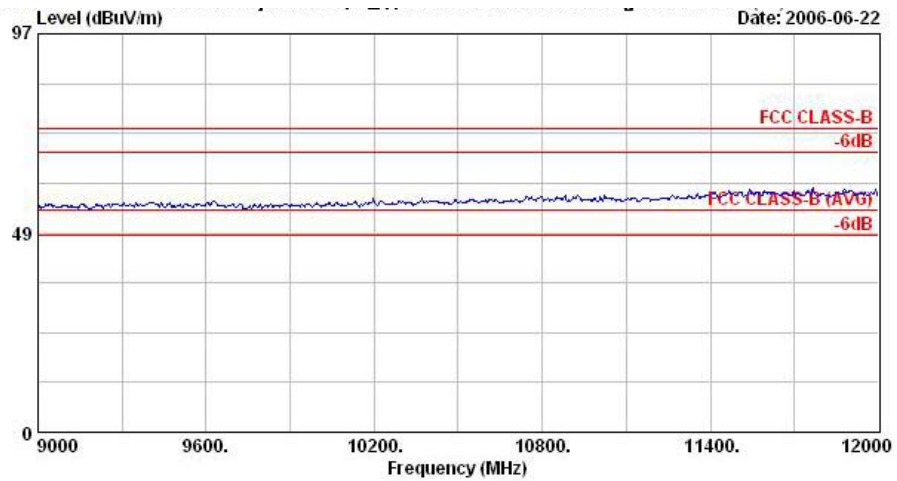

Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11g Tx_CH11, 2462MHz+Adapter 2
Power : 15

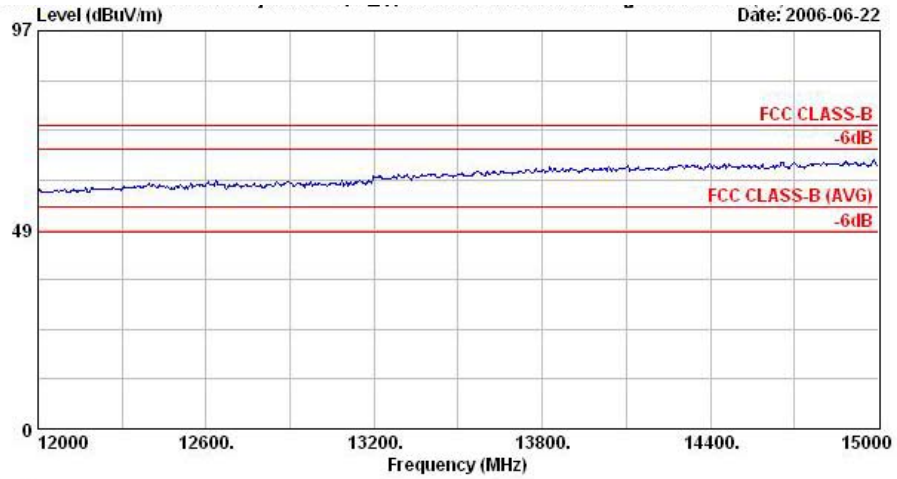

Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11g Tx_CH11, 2462MHz+Adapter 2
Power : 15

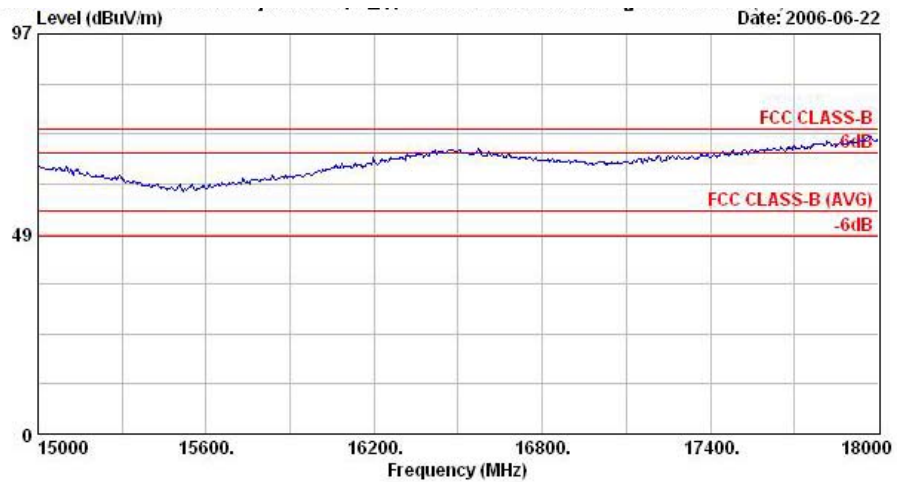


Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11g Tx_CH11, 2462MHz+Adapter 2
Power : 15



- Polarization : Vertical


■ The test that passed at minimum margin was marked by the frame in the following table.

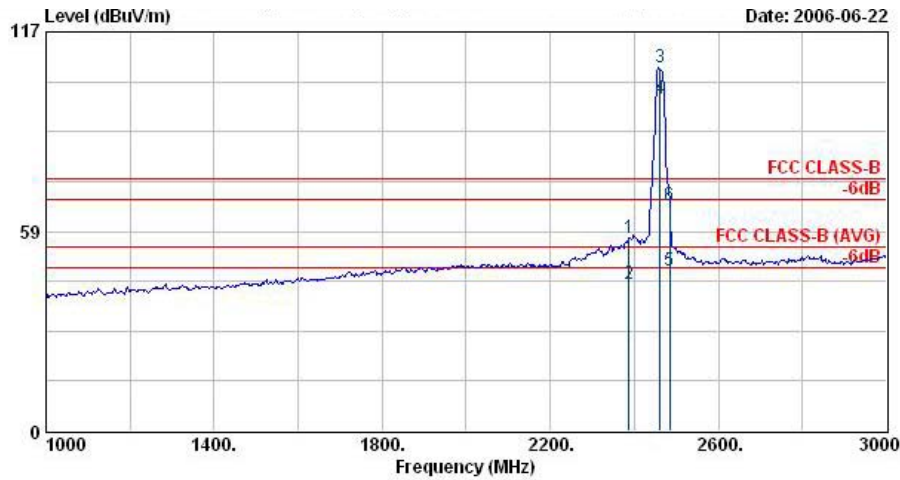


Site : 03CH06-HY
 Condition : HF-ANT-060410 VERTICAL
 EUT : WLAN Access Point
 Power : 120Vac/60Hz
 Model : FR 661605-02
 Memo : 11g Tx_CH11, 2462MHz+Adapter 2
 Power : 15

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB	dB	cm	deg	
1 @	2388.00	56.61	-17.39	74.00	57.56	30.26	4.23 35.44	100	0	Peak
2 @	2388.00	42.92	-11.08	54.00	43.87	30.26	4.23 35.44	100	44	Average
3 @	2462.00	106.55			107.43	30.29	4.33 35.49	100	0	Peak
4 @	2462.00	97.39			98.27	30.29	4.33 35.49	100	44	Average
5 @	2483.50	46.83	-7.17	54.00	47.69	30.29	4.36 35.51	100	44	Average
6 @	2483.50	66.26	-7.74	74.00	67.12	30.29	4.36 35.51	100	0	Peak


Remark: #3 and #4 Fundamental Signal

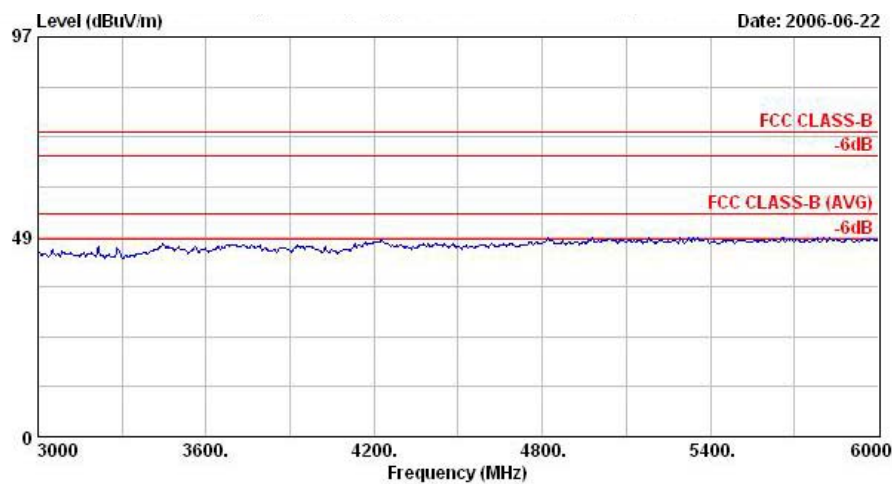


Site : 03CH06-HY
 Condition : HF-ANT-060410 VERTICAL
 EUT : WLAN Access Point
 Power : 120Vac/60Hz
 Model : FR 661605-02
 Memo : 11g Tx_CH11, 2462MHz+Adapter 2
 Power : 15

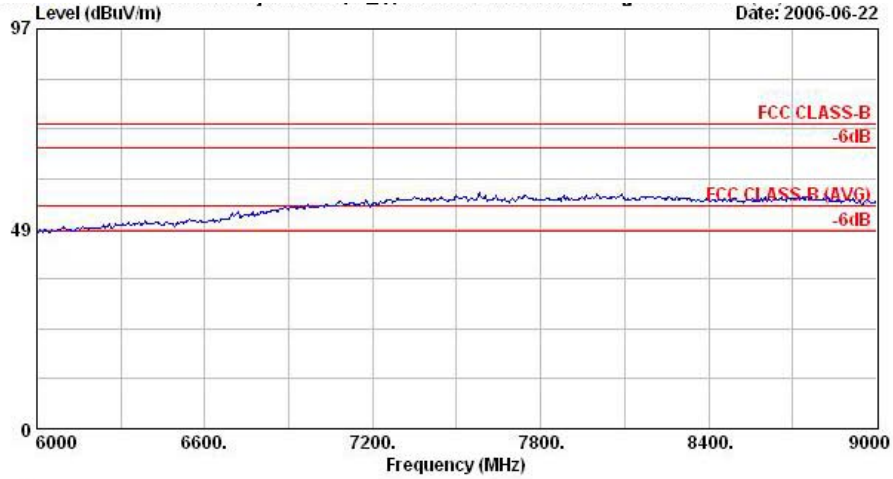


Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11g Tx_CH11, 2462MHz+Adapter 2
Power : 15

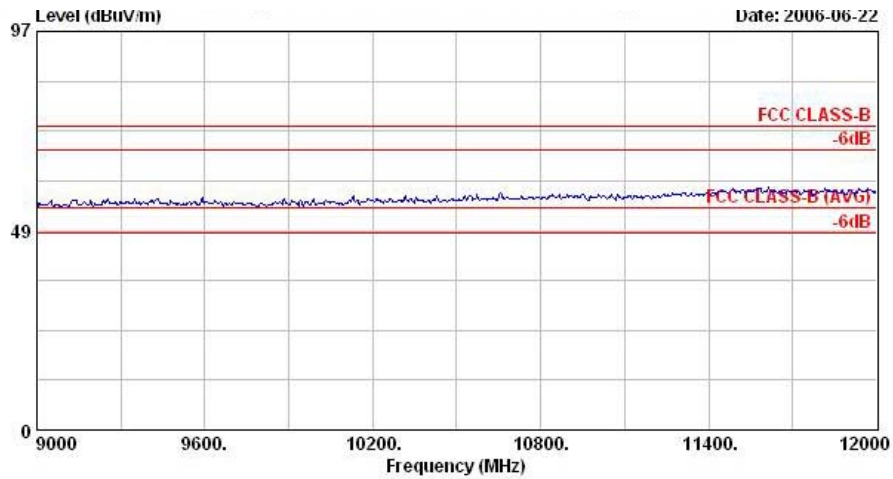

Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11g Tx_CH11, 2462MHz+Adapter 2
Power : 15

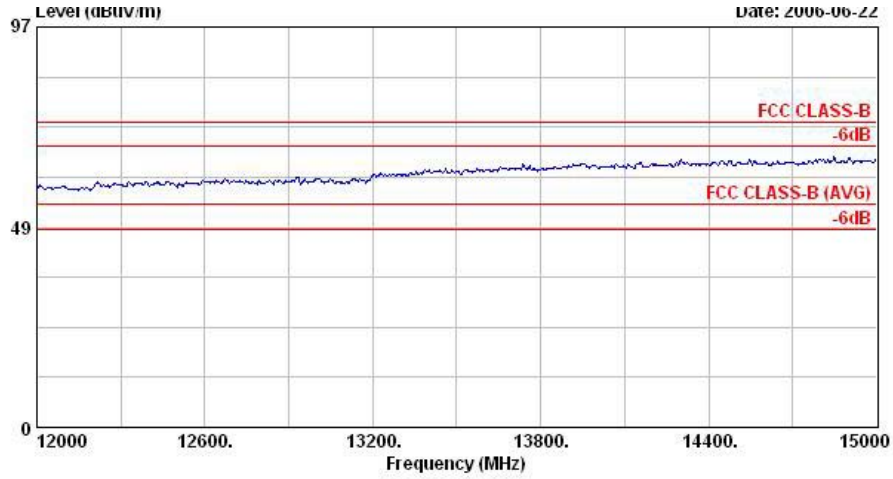

Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11g Tx_CH11, 2462MHz+Adapter 2
Power : 15

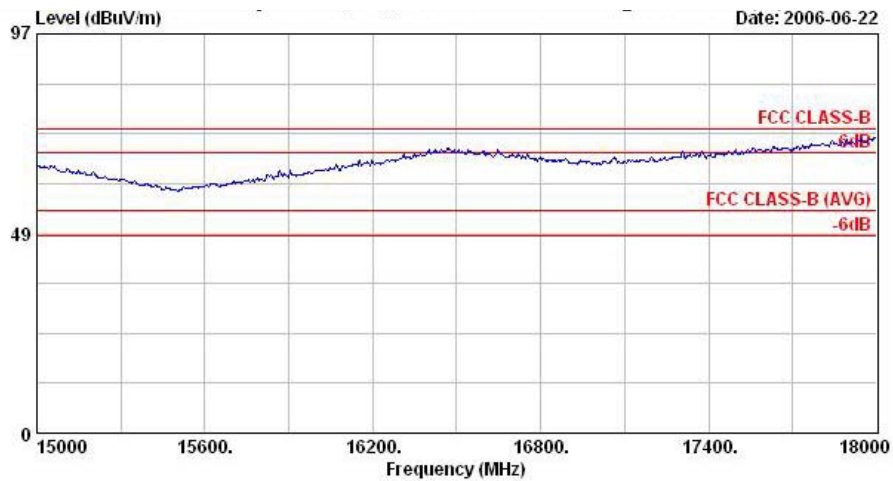

Site : 03CH06-HY
Condition : HF-ANT-060410 VERTICAL
EUT : WLAN Access Point
Power : 120Vac/60Hz
Model : FR 661605-02
Memo : 11g Tx_CH11, 2462MHz+Adapter 2
Power : 15

Remark: There is no more obvious spurious emission except the listings above.



5.8 Antenna Requirements

5.12.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no other antenna except assembled by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

5.12.2 Antenna Connected Construction

The antenna used in this product is Dipole antenna. There is no connector on antenna port and it is considered to meet antenna requirement of FCC.

5.12.3 Antenna Gain

The antenna gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



6. List of Measuring Equipments Used

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Feb. 22, 2006	Feb. 22, 2007	Conduction (CO01-HY)
LISN	MessTec	NNB-2/16Z	2001/004	9kHz – 30MHz	Apr. 28, 2006	Apr. 28, 2007	Conduction (CO01-HY)
LISN (Support Unit)	MessTec	NNB-2/16Z	2001/009	9kHz – 30MHz	Apr. 19, 2006	Apr. 19, 2007	Conduction (CO01-HY)
EMI Filter	LINDGREN	LRE-2060	1004	< 450Hz	N/A	N/A	Conduction (CO01-HY)
EMI Filter	LINDGREN	N6006	201052	0 – 60Hz	N/A	N/A	Conduction (CO01-HY)
RF Cable-CON	Suhner Switzerland	RG223/U	CB029	9kHz – 30MHz	Dec. 22, 2005	Dec. 22, 2006	Conduction (CO01-HY)
Spectrum analyzer	Agilent	E4408B	MY44211030	9KHz-26.5GHz	Jul. 24, 2006	Jul. 24, 2007	Radiation (03CH06-HY)
Receiver	R&S	ESCS30	100356	9KHz-2.75GHz	Jun. 26, 2006	Jun. 25, 2007	Radiation (03CH06-HY)
Controller	CT	SC100	N/A	N/A	N/A	N/A	Radiation (03CH06-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2885	30MHz -2GHz	Nov. 21, 2004	Nov. 20, 2006	Radiation (03CH06-HY)
Horn Antenna	Com-Power	AH118	071025	1G-18G	Feb. 1, 2005	Jan. 31, 2007	Radiation (03CH06-HY)
SHF-EHF Horn	SCHWARZBECK	BBHA 9170	9170-249	14G - 40G	Jul. 20, 2006	Jul. 20, 2007	Radiation (03CH06-HY)
HF Amplifier	MITEQ	AFS44	973248	0.1G - 26.5G	Dec. 17, 2005	Dec. 17, 2006	Radiation (03CH06-HY)
Amplifier	MITEQ	AMF-6F	997165	26G - 40G	Jul. 20, 2006	Jul. 20, 2007	Radiation (03CH06-HY)
Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	N/A	Radiation (03CH06-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	N/A	Radiation (03CH06-HY)



7. Uncertainty Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Contribution	Uncertainty of x_i		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.10	Normal(k=2)	0.05
Cable loss	0.10	Normal(k=2)	0.05
AMN insertion loss	2.50	Rectangular	0.63
Receiver Spec	1.50	Rectangular	0.43
Site imperfection	1.39	Rectangular	0.80
Mismatch	+0.34/-0.35	U-shape	0.24
combined standard uncertainty Uc(y)	1.13		
Measuring uncertainty for a level of confidence of 95% U=2Uc(y)	2.26		

Uncertainty of Radiated Emission Measurement (30MHz ~ 1000MHz)

Contribution	Uncertainty of x_i		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.41	Normal(k=2)	0.21
Antenna factor calibration	0.83	Normal(k=2)	0.42
Cable loss calibration	0.25	Normal(k=2)	0.13
Pre Amplifier Gain calibration	0.27	Normal(k=2)	0.14
RCV/SPA specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site imperfection	1.43	Rectangular	0.83
Mismatch	+0.39/-0.41	U-shaped	0.28
combined standard uncertainty Uc(y)	1.27		
Measuring uncertainty for a level of confidence of 95% U=2Uc(y)	2.54		



Uncertainty of Radiated Emission Measurement (1GHz ~ 40GHz)

Contribution	Uncertainty of x_i		$u(x_i)$	C_i	$C_i * u(x_i)$
	dB	Probability Distribution			
Receiver reading	±0.10	Normal(k=1)	0.10	1	0.10
Antenna factor calibration	±1.70	Normal(k=2)	0.85	1	0.85
Cable loss calibration	±0.50	Normal(k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20 \log(1 - \Gamma_1 * \Gamma_2 * \Gamma_3)$	+0.34/-0.35	U-shaped	0.244	1	0.244
Combined standard uncertainty $U_c(y)$	2.36				
Measuring uncertainty for a level of confidence of 95% $U = 2U_c(y)$	4.72				